

FCC TEST REPORT

FCC ID:2A9XM-GT40

Report Number..... : ZKT-230105L0157E-1

Date of Test..... Jan. 05 to Jan. 11, 2023

Date of issue : Jan. 11, 2023

Total number of pages 68

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Hailan Electronic Co., Ltd.

Address : 201, Plant 2, No. A3, 4th Industry Zone, Heshuikou Community, Matian Str., Guangming Dist., Shenzhen, China

Manufacturer's name : Shenzhen Hailan Electronic Co., Ltd.

Address : 201, Plant 2, No. A3, 4th Industry Zone, Heshuikou Community, Matian Str., Guangming Dist., Shenzhen, China

Test specification:Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0**Test Report Form(s) Originator** : ZKT Testing**Master TRF** : Dated: 2023-01-05

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : ALL IN ONE PC

Trademark : N/A

Model/Type reference : GT40, PG238W-TGLN, PP238W-TGLN, GT40W, GT40B, GT70, GT70W, GT70B, G40T, GT40PRO, GT70PRO

Ratings..... : AC100-240V,50/60Hz

Testing procedure and testing location:

Testing Laboratory: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature): Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature): Lake Xie



Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD.....	13
4.1.4 TEST SETUP.....	14
4.1.5 EUT OPERATING CONDITIONS.....	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS.....	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD.....	18
4.2.4 TEST SETUP.....	18
4.2.5 EUT OPERATING CONDITIONS.....	19
4.2.6 TEST RESULTS	20
5.RADIATED BAND EMISSIONMEASUREMENT	31
5.1 TEST REQUIREMENT:.....	31
5.2 TEST PROCEDURE	31
5.3 DEVIATION FROM TEST STANDARD	31
5.4 TEST SETUP	32
5.5 EUT OPERATING CONDITIONS.....	32
5.6 TEST RESULT	33
6.POWER SPECTRAL DENSITY TEST	35
6.1 APPLIED PROCEDURES / LIMIT.....	35
6.2 TEST PROCEDURE	35
6.3 DEVIATION FROM STANDARD	35
6.4 TEST SETUP	35
6.5 EUT OPERATION CONDITIONS.....	35

6.6 TEST RESULT	36
7. CHANNEL BANDWIDTH	52
7.1 APPLIED PROCEDURES / LIMIT.....	52
7.2 TEST PROCEDURE	52
7.3 DEVIATION FROM STANDARD.....	52
7.4 TEST SETUP	52
7.5 EUT OPERATION CONDITIONS.....	52
7.6 TEST RESULT	53
8. PEAK OUTPUT POWER TEST	59
8.1 APPLIED PROCEDURES/LIMIT.....	59
8.2 TEST PROCEDURE	59
8.3 DEVIATION FROM STANDARD.....	59
8.4 TEST SETUP	59
8.5 EUT OPERATION CONDITIONS.....	59
8.6 TEST RESULT	60
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	63
9.1 APPLICABLE STANDARD.....	63
9.2 TEST PROCEDURE	63
9.3 DEVIATION FROM STANDARD.....	63
9.4 TEST SETUP	63
9.5 EUT OPERATION CONDITIONS.....	63
9.6 TEST RESULTS	63
10. ANTENNA REQUIREMENT.....	67
11. TEST SETUP PHOTO	68
12. EUT CONSTRUCTIONAL DETAILS.....	68

1. VERSION

Report No.	Version	Description	Approved
ZKT-230105L0157E-1	Rev.01	Initial issue of report	Jan. 11, 2023

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Spurious Emission (Conducted) / Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	ALL IN ONE PC
Model No.:	GT40, PG238W-TGLN, PP238W-TGLN, GT40W, GT40B, GT70, GT70W, GT70B, G40T, GT40PRO, GT70PRO
Model Different.:	All the same except colour and model name.
Serial No.:	N/A
Hardware Version:	HV1.0
Software Version:	SV1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(GT400)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPCB antenna
Antenna gain:	Antenna 1: 3.19dBi Antenna 2: 3.19dBi
Power supply:	DC19V from adapter, AC 120V/60Hz for adapter
SWITCHING POWER ADAPTER:	Model: FSP120-ABBN3 Input: 100-240V~,1.8A, 50-60Hz Output: 19V---6.32A 120.0W
Battery:	N/A
Note1: Directional Gain=3.19dBi+10log(2)=6.2dBi	
Note2: The EUT 802.11n (20) and 802.11n(40) is support MIMO mode.	

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	Realtek Test Tool
Power level setup	<8dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	ALL IN ONE PC	N/A	GT40	N/A	EUT
E-2	Adapter	N/A	FSP120-ABBN3		

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0M	DC Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronic S	EM330 Amplifier	060747	Oct. 18, 2022	Oct. 17, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 22, 2022	Oct. 21, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 22, 2022	Oct. 21, 2023
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESC13	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

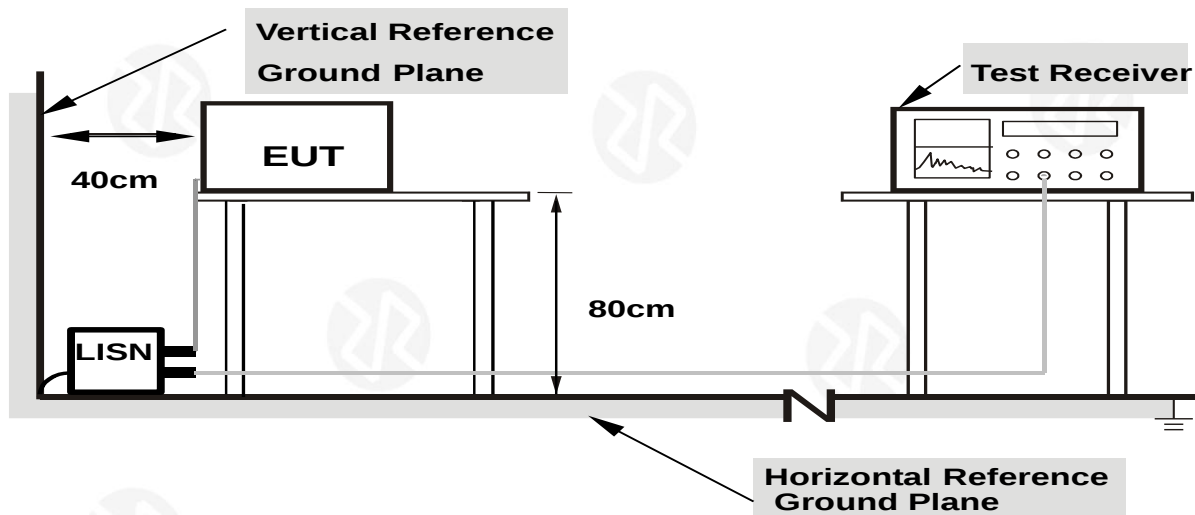

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

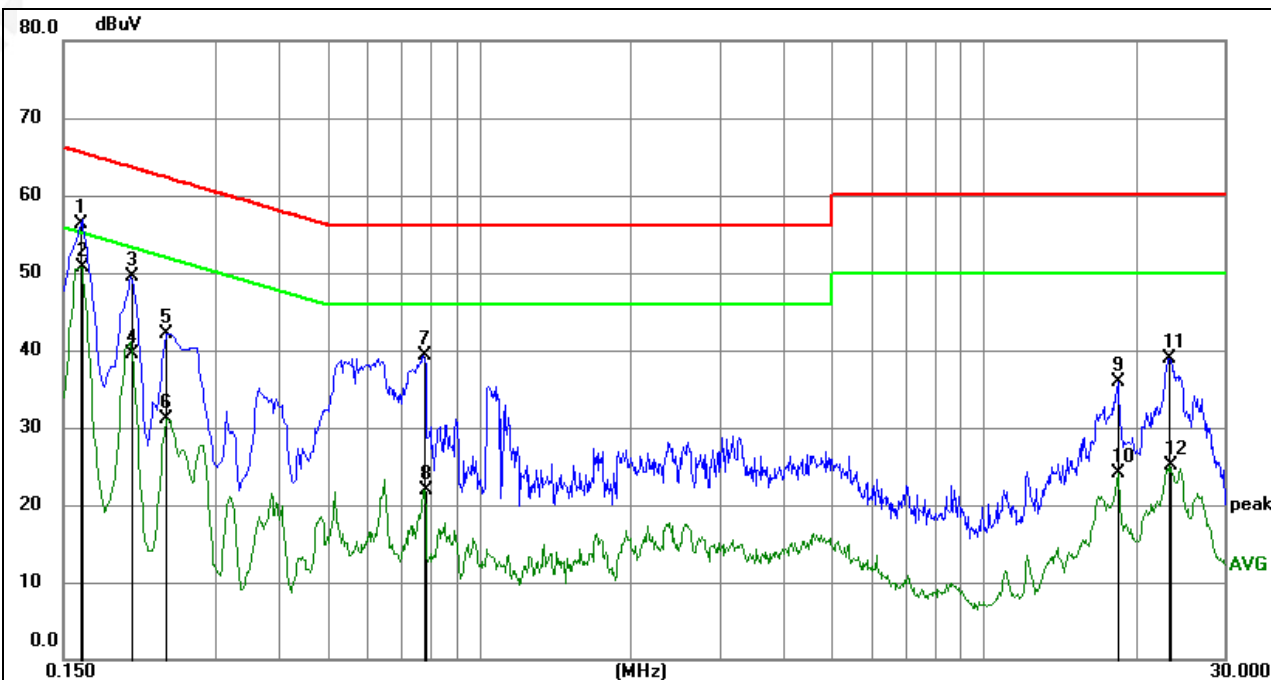


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1624	43.55	12.74	56.29	65.34	-9.05	QP	P
2	0.1635	38.06	12.71	50.77	55.28	-4.51	AVG	P
3	0.2040	37.65	11.90	49.55	63.45	-13.90	QP	P
4	0.2050	27.55	11.90	39.45	53.41	-13.96	AVG	P
5	0.2400	30.30	11.73	42.03	62.10	-20.07	QP	P
6	0.2400	19.40	11.73	31.13	52.10	-20.97	AVG	P
7	0.7755	28.73	10.48	39.21	56.00	-16.79	QP	P
8	0.7799	11.42	10.48	21.90	46.00	-24.10	AVG	P
9	18.4875	26.24	9.65	35.89	60.00	-24.11	QP	P
10	18.4875	14.49	9.65	24.14	50.00	-25.86	AVG	P
11	23.2529	29.10	9.89	38.99	60.00	-21.01	QP	P
12	23.4375	15.27	9.89	25.16	50.00	-24.84	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

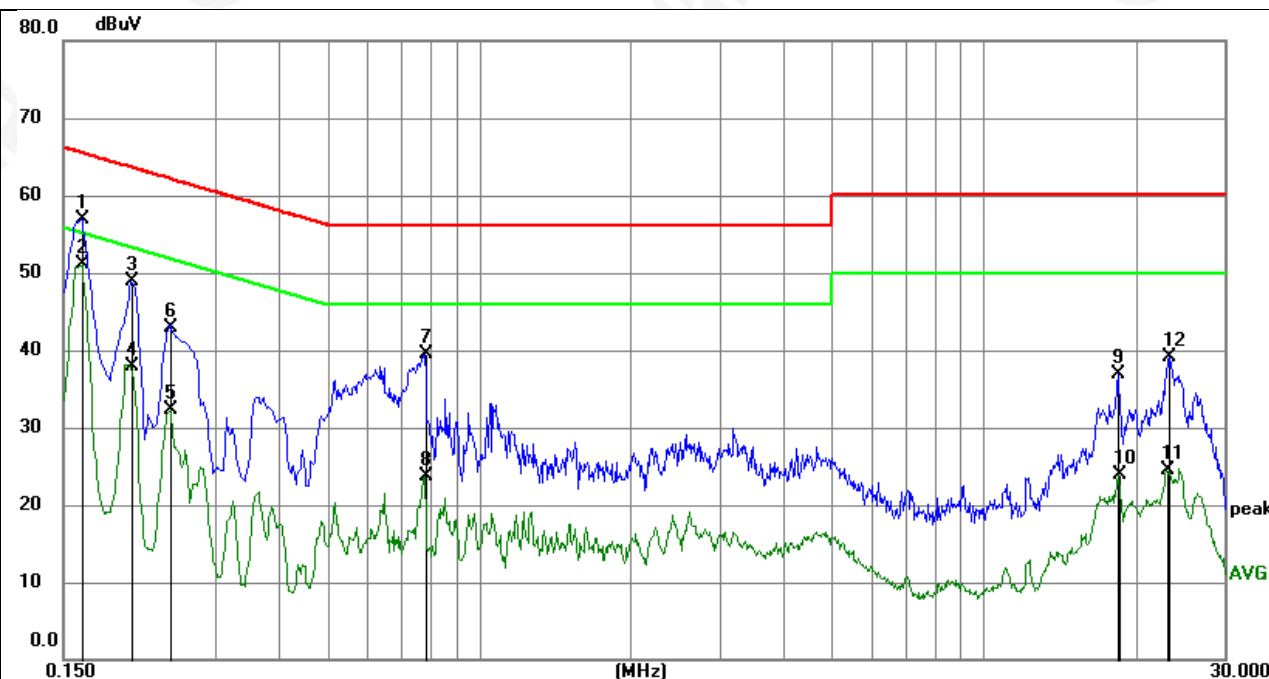

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1635	44.26	12.71	56.97	65.28	-8.31	QP	P
2	0.1635	38.30	12.71	51.01	55.28	-4.27	AVG	P
3	0.2040	36.94	11.90	48.84	63.45	-14.61	QP	P
4	0.2040	26.05	11.90	37.95	53.45	-15.50	AVG	P
5	0.2445	20.65	11.71	32.36	51.94	-19.58	AVG	P
6	0.2455	31.22	11.71	42.93	61.91	-18.98	QP	P
7	0.7799	29.07	10.48	39.55	56.00	-16.45	QP	P
8	0.7799	13.26	10.48	23.74	46.00	-22.26	AVG	P
9	18.5235	27.17	9.65	36.82	60.00	-23.18	QP	P
10	18.5505	14.23	9.66	23.89	50.00	-26.11	AVG	P
11	23.1044	14.57	9.89	24.46	50.00	-25.54	AVG	P
12	23.2935	29.26	9.89	39.15	60.00	-20.85	QP	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

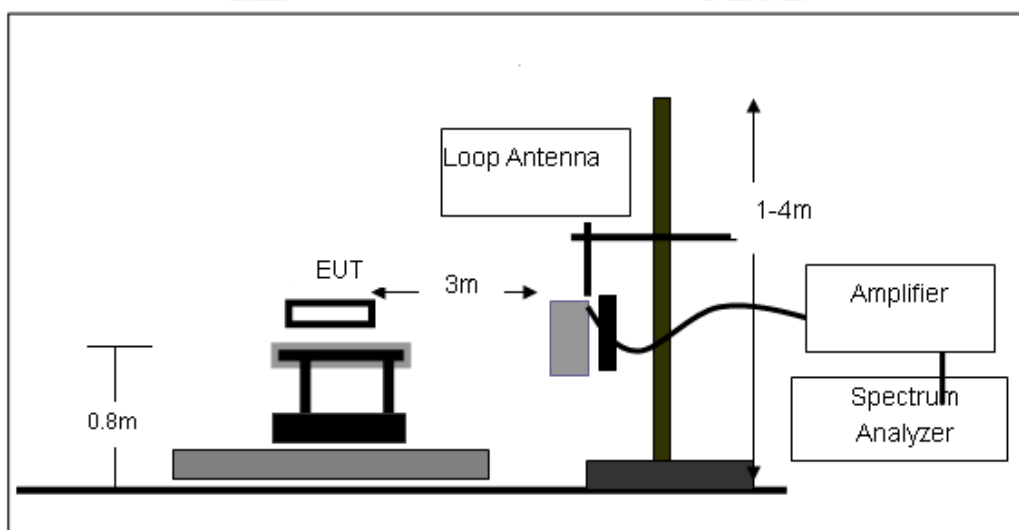

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

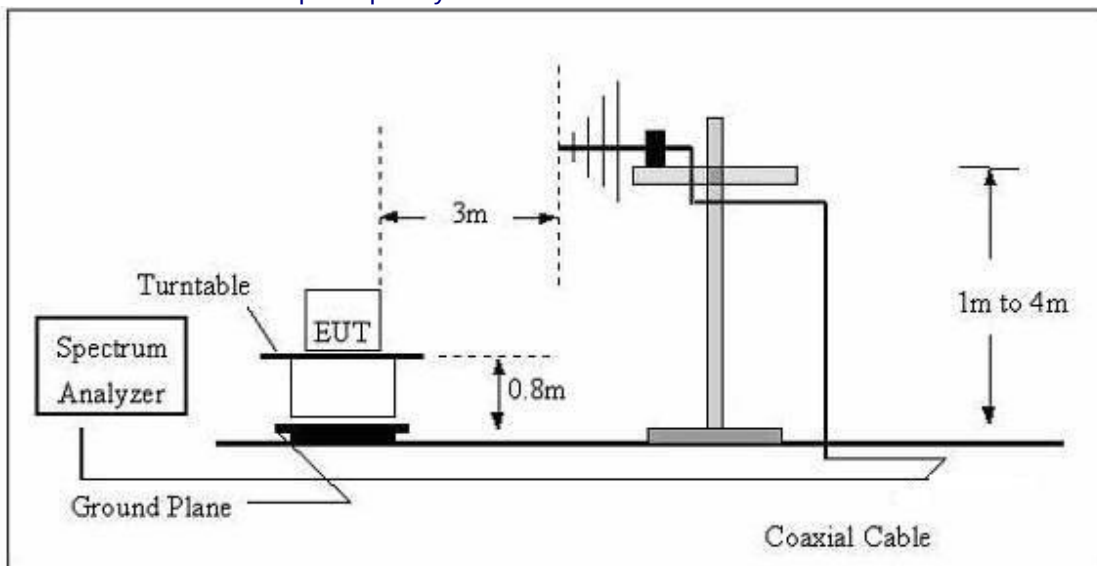

(C) Radiated Emission Test-Up Frequency Above 1GHz

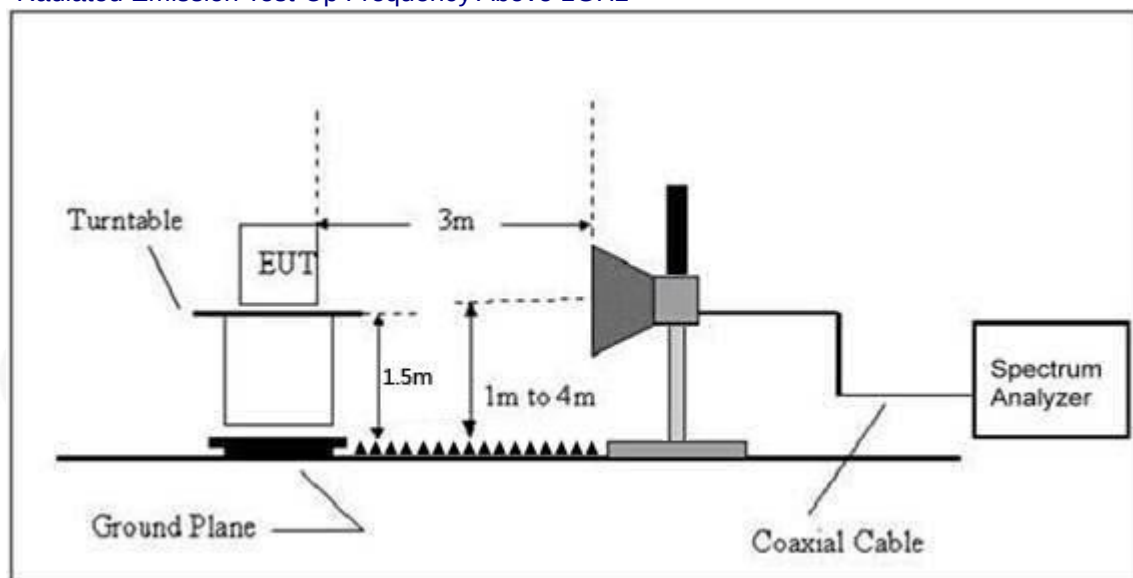

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

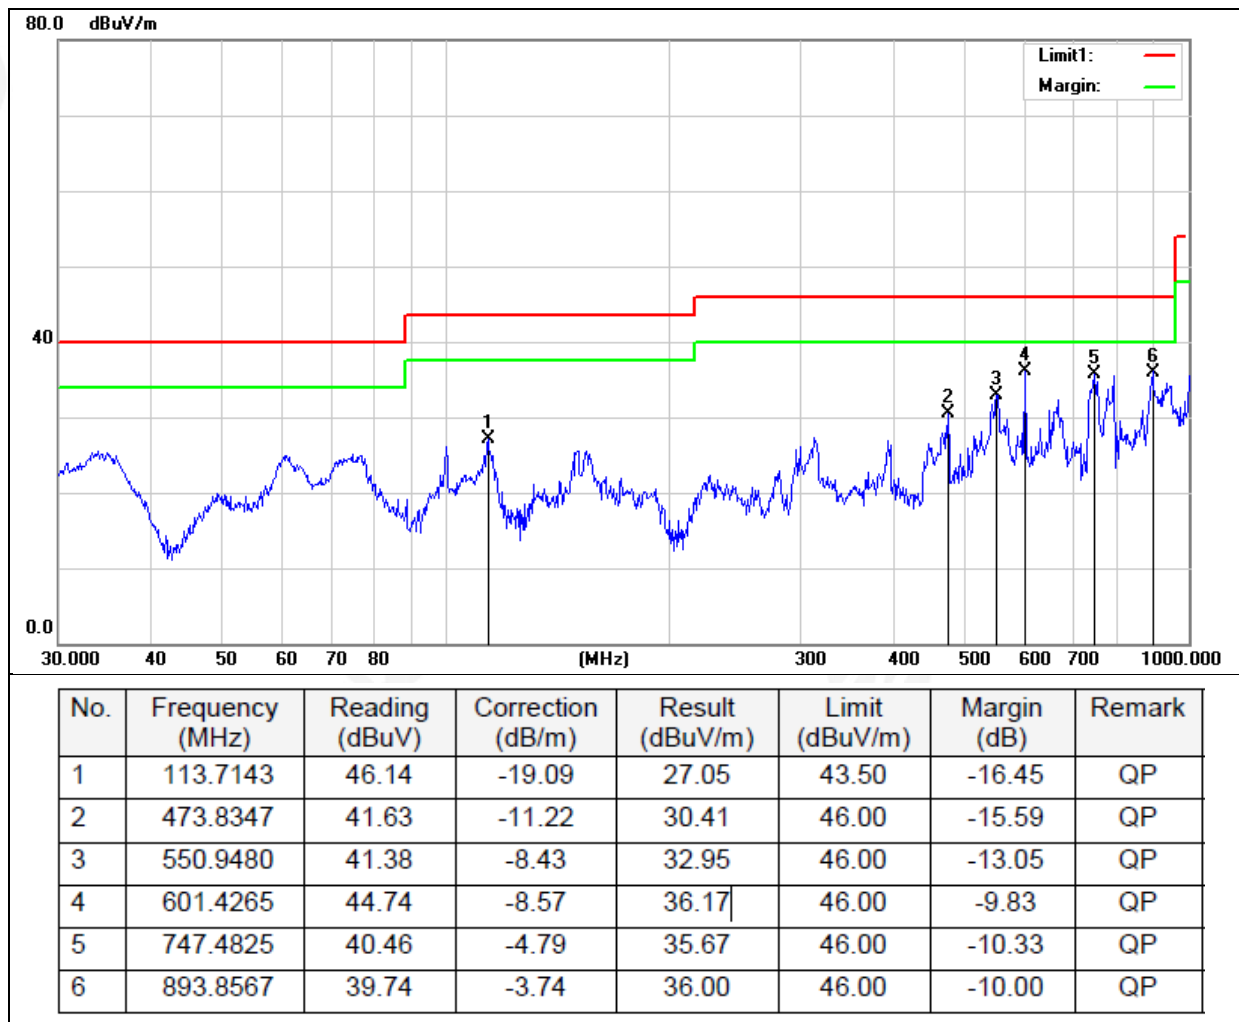

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

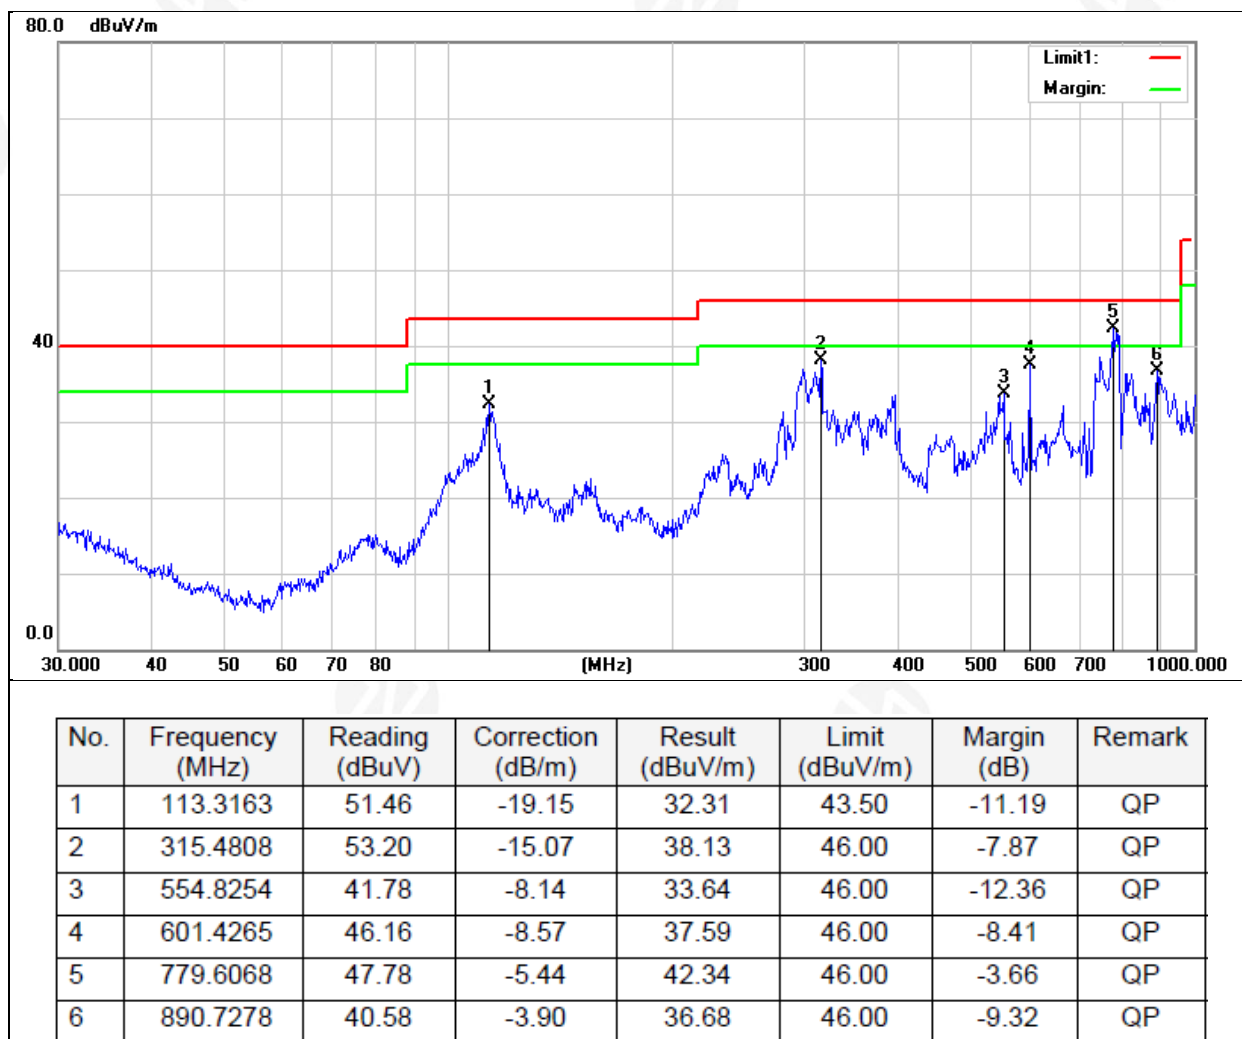

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b mode

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.62	30.55	5.77	31.12	56.96	74.00	-17.04	PK
V	4824.00	30.48	30.55	5.77	31.12	36.82	54.00	-17.18	AV
V	7236.00	48.71	30.33	6.32	36.00	60.70	74.00	-13.30	PK
V	7236.00	31.19	30.33	6.32	36.00	43.18	54.00	-10.82	AV
V	9648.00	49.21	30.85	7.45	37.14	62.95	74.00	-11.05	PK
V	9648.00	31.09	30.85	7.45	37.14	44.83	54.00	-9.17	AV
V	12060.00	44.31	31.02	8.99	39.10	61.38	74.00	-12.62	PK
V	12060.00	27.09	31.02	8.99	39.10	44.16	54.00	-9.84	AV
H	4824.00	50.96	30.55	5.77	31.12	57.30	74.00	-16.70	PK
H	4824.00	30.81	30.55	5.77	31.12	37.15	54.00	-16.85	AV
H	7236.00	49.60	30.33	6.32	36.00	61.59	74.00	-12.41	PK
H	7236.00	30.86	30.33	6.32	36.00	42.85	54.00	-11.15	AV
H	9648.00	49.60	30.85	7.45	37.14	63.34	74.00	-10.66	PK
H	9648.00	30.86	30.85	7.45	37.14	44.60	54.00	-9.40	AV
H	12060.00	44.60	31.02	8.99	39.10	61.67	74.00	-12.33	PK
H	12060.00	25.86	31.02	8.99	39.10	42.93	54.00	-11.07	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	50.43	30.55	5.77	31.45	57.10	74.00	-16.90	PK
V	4874.00	31.32	30.55	5.77	31.45	37.99	54.00	-16.01	AV
V	7311.00	48.96	30.33	6.32	36.10	61.05	74.00	-12.95	PK
V	7311.00	31.00	30.33	6.32	36.10	43.09	54.00	-10.91	AV
V	9748.00	49.03	30.85	7.45	36.50	62.13	74.00	-11.87	PK
V	9748.00	31.00	30.85	7.45	36.50	44.10	54.00	-9.90	AV
V	12185.00	43.93	31.02	8.99	39.11	61.01	74.00	-12.99	PK
V	12185.00	24.57	31.02	8.99	39.11	41.65	54.00	-12.35	AV
H	4874.00	51.79	30.55	5.77	31.45	58.46	74.00	-15.54	PK
H	4874.00	31.35	30.55	5.77	31.45	38.02	54.00	-15.98	AV
H	7311.00	52.50	30.33	6.32	36.10	64.59	74.00	-9.41	PK
H	7311.00	31.13	30.33	6.32	36.10	43.22	54.00	-10.78	AV
H	9748.00	52.50	30.85	7.45	36.50	65.60	74.00	-8.40	PK
H	9748.00	31.13	30.85	7.45	36.50	44.23	54.00	-9.77	AV
H	12185.00	45.98	31.02	8.99	39.11	63.06	74.00	-10.94	PK
H	12185.00	25.13	31.02	8.99	39.11	42.21	54.00	-11.79	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	51.09	30.55	5.77	31.79	58.10	74.00	-15.90	PK
V	4924.00	32.63	30.55	5.77	31.79	39.64	54.00	-14.36	AV
V	7386.00	53.60	30.33	6.32	36.21	65.80	74.00	-8.20	PK
V	7386.00	32.95	30.33	6.32	36.21	45.15	54.00	-8.85	AV
V	9848.00	53.60	30.85	7.45	36.50	66.70	74.00	-7.30	PK
V	9848.00	33.44	30.85	7.45	36.50	46.54	54.00	-7.46	AV
V	12310.00	45.60	31.02	8.99	39.15	62.72	74.00	-11.28	PK
V	12310.00	27.84	31.02	8.99	39.15	44.96	54.00	-9.04	AV
H	4924.00	51.15	30.55	5.77	31.79	58.16	74.00	-15.84	PK
H	4924.00	32.79	30.55	5.77	31.79	39.80	54.00	-14.20	AV
H	7386.00	52.77	30.33	6.32	36.21	64.97	74.00	-9.03	PK
H	7386.00	33.11	30.33	6.32	36.21	45.31	54.00	-8.69	AV
H	9848.00	53.37	30.85	7.45	36.50	66.47	74.00	-7.53	PK
H	9848.00	32.81	30.85	7.45	36.50	45.91	54.00	-8.09	AV
H	12310.00	47.27	31.02	8.99	39.15	64.39	74.00	-9.61	PK
H	12310.00	26.20	31.02	8.99	39.15	43.32	54.00	-10.68	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.75	30.55	5.77	31.12	58.09	74.00	-15.91	PK
V	4824.00	31.51	30.55	5.77	31.12	37.85	54.00	-16.15	AV
V	7236.00	49.54	30.33	6.32	36.00	61.53	74.00	-12.47	PK
V	7236.00	32.46	30.33	6.32	36.00	44.45	54.00	-9.55	AV
V	9648.00	49.54	30.85	7.45	37.14	63.28	74.00	-10.72	PK
V	9648.00	32.02	30.85	7.45	37.14	45.76	54.00	-8.24	AV
V	12060.00	46.64	31.02	8.99	39.10	63.71	74.00	-10.29	PK
V	12060.00	27.92	31.02	8.99	39.10	44.99	54.00	-9.01	AV
H	4824.00	52.09	30.55	5.77	31.12	58.43	74.00	-15.57	PK
H	4824.00	31.94	30.55	5.77	31.12	38.28	54.00	-15.72	AV
H	7236.00	50.84	30.33	6.32	36.00	62.83	74.00	-11.17	PK
H	7236.00	32.15	30.33	6.32	36.00	44.14	54.00	-9.86	AV
H	9648.00	50.86	30.85	7.45	37.14	64.60	74.00	-9.40	PK
H	9648.00	32.17	30.85	7.45	37.14	45.91	54.00	-8.09	AV
H	12060.00	45.89	31.02	8.99	39.10	62.96	74.00	-11.04	PK
H	12060.00	25.18	31.02	8.99	39.10	42.25	54.00	-11.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	49.65	30.55	5.77	31.45	56.32	74.00	-17.68	PK
V	4874.00	30.50	30.55	5.77	31.45	37.17	54.00	-16.83	AV
V	7311.00	48.25	30.33	6.32	36.10	60.34	74.00	-13.66	PK
V	7311.00	30.36	30.33	6.32	36.10	42.45	54.00	-11.55	AV
V	9748.00	48.33	30.85	7.45	36.50	61.43	74.00	-12.57	PK
V	9748.00	29.59	30.85	7.45	36.50	42.69	54.00	-11.31	AV
V	12185.00	45.36	31.02	8.99	39.11	62.44	74.00	-11.56	PK
V	12185.00	23.70	31.02	8.99	39.11	40.78	54.00	-13.22	AV
H	4874.00	50.92	30.55	5.77	31.45	57.59	74.00	-16.41	PK
H	4874.00	30.87	30.55	5.77	31.45	37.54	54.00	-16.46	AV
H	7311.00	51.62	30.33	6.32	36.10	63.71	74.00	-10.29	PK
H	7311.00	30.44	30.33	6.32	36.10	42.53	54.00	-11.47	AV
H	9748.00	51.82	30.85	7.45	36.50	64.92	74.00	-9.08	PK
H	9748.00	30.25	30.85	7.45	36.50	43.35	54.00	-10.65	AV
H	12185.00	46.07	31.02	8.99	39.11	63.15	74.00	-10.85	PK
H	12185.00	25.38	31.02	8.99	39.11	42.46	54.00	-11.54	AV

Page 20 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	49.34	30.55	5.77	31.79	56.35	74.00	-17.65	PK
V	4924.00	30.81	30.55	5.77	31.79	37.82	54.00	-16.18	AV
V	7386.00	51.25	30.33	6.32	36.21	63.45	74.00	-10.55	PK
V	7386.00	31.15	30.33	6.32	36.21	43.35	54.00	-10.65	AV
V	9848.00	51.60	30.85	7.45	36.50	64.70	74.00	-9.30	PK
V	9848.00	31.59	30.85	7.45	36.50	44.69	54.00	-9.31	AV
V	12310.00	44.55	31.02	8.99	39.15	61.67	74.00	-12.33	PK
V	12310.00	26.77	31.02	8.99	39.15	43.89	54.00	-10.11	AV
H	4924.00	49.83	30.55	5.77	31.79	56.84	74.00	-17.16	PK
H	4924.00	31.09	30.55	5.77	31.79	38.10	54.00	-15.90	AV
H	7386.00	50.62	30.33	6.32	36.21	62.82	74.00	-11.18	PK
H	7386.00	31.42	30.33	6.32	36.21	43.62	54.00	-10.38	AV
H	9848.00	51.50	30.85	7.45	36.50	64.60	74.00	-9.40	PK
H	9848.00	31.31	30.85	7.45	36.50	44.41	54.00	-9.59	AV
H	12310.00	45.52	31.02	8.99	39.15	62.64	74.00	-11.36	PK
H	12310.00	24.36	31.02	8.99	39.15	41.48	54.00	-12.52	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.79	30.55	5.77	31.12	58.13	74.00	-15.87	PK
V	4824.00	31.59	30.55	5.77	31.12	37.93	54.00	-16.07	AV
V	7236.00	48.68	30.33	6.32	36.00	60.67	74.00	-13.33	PK
V	7236.00	32.59	30.33	6.32	36.00	44.58	54.00	-9.42	AV
V	9648.00	49.88	30.85	7.45	37.14	63.62	74.00	-10.38	PK
V	9648.00	31.96	30.85	7.45	37.14	45.70	54.00	-8.30	AV
V	12060.00	45.68	31.02	8.99	39.10	62.75	74.00	-11.25	PK
V	12060.00	27.03	31.02	8.99	39.10	44.10	54.00	-9.90	AV
H	4824.00	51.93	30.55	5.77	31.12	58.27	74.00	-15.73	PK
H	4824.00	31.78	30.55	5.77	31.12	38.12	54.00	-15.88	AV
H	7236.00	50.88	30.33	6.32	36.00	62.87	74.00	-11.13	PK
H	7236.00	32.09	30.33	6.32	36.00	44.08	54.00	-9.92	AV
H	9648.00	50.80	30.85	7.45	37.14	64.54	74.00	-9.46	PK
H	9648.00	32.01	30.85	7.45	37.14	45.75	54.00	-8.25	AV
H	12060.00	44.93	31.02	8.99	39.10	62.00	74.00	-12.00	PK
H	12060.00	26.12	31.02	8.99	39.10	43.19	54.00	-10.81	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	50.70	30.55	5.77	31.45	57.37	74.00	-16.63	PK
V	4874.00	31.59	30.55	5.77	31.45	38.26	54.00	-15.74	AV
V	7311.00	48.56	30.33	6.32	36.10	60.65	74.00	-13.35	PK
V	7311.00	31.42	30.33	6.32	36.10	43.51	54.00	-10.49	AV
V	9748.00	49.61	30.85	7.45	36.50	62.71	74.00	-11.29	PK
V	9748.00	31.59	30.85	7.45	36.50	44.69	54.00	-9.31	AV
V	12185.00	46.51	31.02	8.99	39.11	63.59	74.00	-10.41	PK
V	12185.00	25.52	31.02	8.99	39.11	42.60	54.00	-11.40	AV
H	4874.00	51.99	30.55	5.77	31.45	58.66	74.00	-15.34	PK
H	4874.00	31.72	30.55	5.77	31.45	38.39	54.00	-15.61	AV
H	7311.00	52.72	30.33	6.32	36.10	64.81	74.00	-9.19	PK
H	7311.00	31.50	30.33	6.32	36.10	43.59	54.00	-10.41	AV
H	9748.00	52.87	30.85	7.45	36.50	65.97	74.00	-8.03	PK
H	9748.00	31.50	30.85	7.45	36.50	44.60	54.00	-9.40	AV
H	12185.00	45.50	31.02	8.99	39.11	62.58	74.00	-11.42	PK
H	12185.00	26.58	31.02	8.99	39.11	43.66	54.00	-10.34	AV

Page 20 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.16	30.55	5.77	31.79	58.17	74.00	-15.83	PK
V	4924.00	32.36	30.55	5.77	31.79	39.37	54.00	-14.63	AV
V	7386.00	53.40	30.33	6.32	36.21	65.60	74.00	-8.40	PK
V	7386.00	33.08	30.33	6.32	36.21	45.28	54.00	-8.72	AV
V	9848.00	53.50	30.85	7.45	36.50	66.60	74.00	-7.40	PK
V	9848.00	33.50	30.85	7.45	36.50	46.60	54.00	-7.40	AV
V	12310.00	46.40	31.02	8.99	39.15	63.52	74.00	-10.48	PK
V	12310.00	25.64	31.02	8.99	39.15	42.76	54.00	-11.24	AV
H	4924.00	51.18	30.55	5.77	31.79	58.19	74.00	-15.81	PK
H	4924.00	32.85	30.55	5.77	31.79	39.86	54.00	-14.14	AV
H	7386.00	52.67	30.33	6.32	36.21	64.87	74.00	-9.13	PK
H	7386.00	33.31	30.33	6.32	36.21	45.51	54.00	-8.49	AV
H	9848.00	53.37	30.85	7.45	36.50	66.47	74.00	-7.53	PK
H	9848.00	33.30	30.85	7.45	36.50	46.40	54.00	-7.60	AV
H	12310.00	47.27	31.02	8.99	39.15	64.39	74.00	-9.61	PK
H	12310.00	26.21	31.02	8.99	39.15	43.33	54.00	-10.67	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844.00	49.80	30.55	5.77	31.14	56.16	74.00	-17.84	PK
V	4844.00	30.99	30.55	5.77	31.14	37.35	54.00	-16.65	AV
V	7266.00	52.04	30.33	6.32	36.09	64.12	74.00	-9.88	PK
V	7266.00	31.85	30.33	6.32	36.09	43.93	54.00	-10.07	AV
V	9688.00	52.12	30.85	7.45	37.16	65.88	74.00	-8.12	PK
V	9688.00	32.10	30.85	7.45	37.16	45.86	54.00	-8.14	AV
V	12110.00	44.67	31.02	8.99	39.15	61.79	74.00	-12.21	PK
V	12110.00	25.36	31.02	8.99	39.15	42.48	54.00	-11.52	AV
H	4844.00	50.05	30.55	5.77	31.14	56.41	74.00	-17.59	PK
H	4844.00	31.52	30.55	5.77	31.14	37.88	54.00	-16.12	AV
H	7266.00	51.32	30.33	6.32	36.09	63.40	74.00	-10.60	PK
H	7266.00	32.00	30.33	6.32	36.09	44.08	54.00	-9.92	AV
H	9688.00	51.99	30.85	7.45	37.16	65.75	74.00	-8.25	PK
H	9688.00	31.57	30.85	7.45	37.16	45.33	54.00	-8.67	AV
H	12110.00	44.04	31.02	8.99	39.15	61.16	74.00	-12.84	PK
H	12110.00	24.88	31.02	8.99	39.15	42.00	54.00	-12.00	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	50.61	30.55	5.77	31.45	57.28	74.00	-16.72	PK
V	4874.00	31.77	30.55	5.77	31.45	38.44	54.00	-15.56	AV
V	7311.00	52.55	30.33	6.32	36.10	64.64	74.00	-9.36	PK
V	7311.00	32.45	30.33	6.32	36.10	44.54	54.00	-9.46	AV
V	9748.00	52.99	30.85	7.45	36.50	66.09	74.00	-7.91	PK
V	9748.00	32.75	30.85	7.45	36.50	45.85	54.00	-8.15	AV
V	12185.00	45.86	31.02	8.99	39.11	62.94	74.00	-11.06	PK
V	12185.00	26.69	31.02	8.99	39.11	43.77	54.00	-10.23	AV
H	4874.00	50.57	30.55	5.77	31.45	57.24	74.00	-16.76	PK
H	4874.00	32.70	30.55	5.77	31.45	39.37	54.00	-14.63	AV
H	7311.00	52.10	30.33	6.32	36.10	64.19	74.00	-9.81	PK
H	7311.00	32.26	30.33	6.32	36.10	44.35	54.00	-9.65	AV
H	9748.00	52.72	30.85	7.45	36.50	65.82	74.00	-8.18	PK
H	9748.00	32.76	30.85	7.45	36.50	45.86	54.00	-8.14	AV
H	12185.00	47.82	31.02	8.99	39.11	64.90	74.00	-9.10	PK
H	12185.00	26.69	31.02	8.99	39.11	43.77	54.00	-10.23	AV

Page 66 of 66

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	49.36	30.55	5.77	31.69	56.27	74.00	-17.73	PK
V	4904.00	30.30	30.55	5.77	31.69	37.21	54.00	-16.79	AV
V	7356.00	50.99	30.33	6.32	36.15	63.13	74.00	-10.87	PK
V	7356.00	30.93	30.33	6.32	36.15	43.07	54.00	-10.93	AV
V	9808.00	51.69	30.85	7.45	37.32	65.61	74.00	-8.39	PK
V	9808.00	31.35	30.85	7.45	37.32	45.27	54.00	-8.73	AV
V	12260.00	45.20	31.02	8.99	39.13	62.30	74.00	-11.70	PK
V	12260.00	24.28	31.02	8.99	39.13	41.38	54.00	-12.62	AV
H	4904.00	49.04	30.55	5.77	31.69	55.95	74.00	-18.05	PK
H	4904.00	31.44	30.55	5.77	31.69	38.35	54.00	-15.65	AV
H	7356.00	50.62	30.33	6.32	36.15	62.76	74.00	-11.24	PK
H	7356.00	31.70	30.33	6.32	36.15	43.84	54.00	-10.16	AV
H	9808.00	51.25	30.85	7.45	37.32	65.17	74.00	-8.83	PK
H	9808.00	31.09	30.85	7.45	37.32	45.01	54.00	-8.99	AV
H	12260.00	44.24	31.02	8.99	39.13	61.34	74.00	-12.66	PK
H	12260.00	26.10	31.02	8.99	39.13	43.20	54.00	-10.80	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.RADIATED BAND EMISSIONMEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

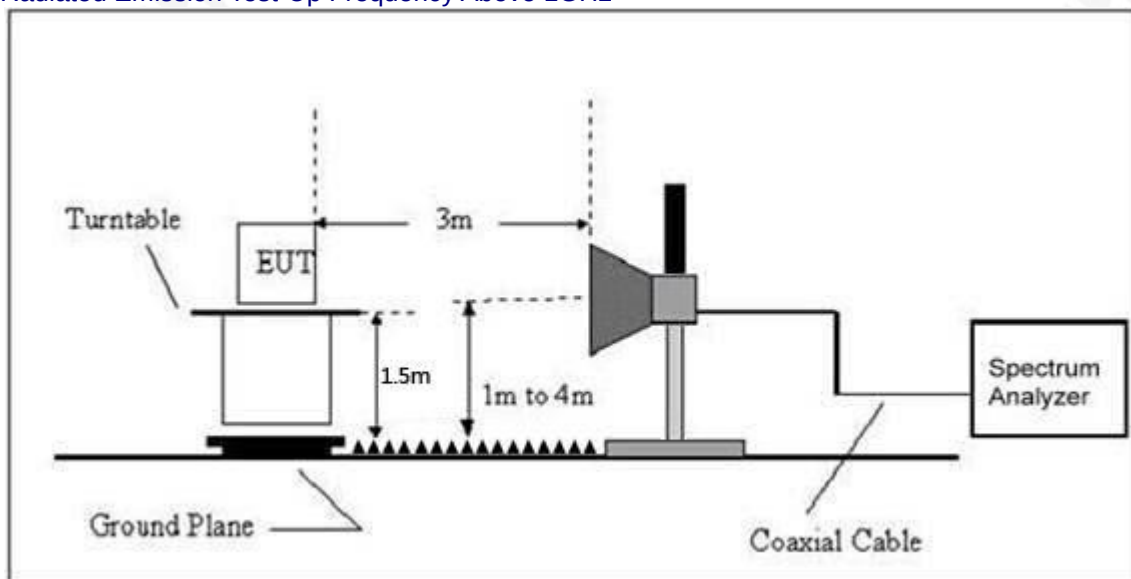

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	59.79	30.22	4.85	27.59	62.01	74.00	PK	PASS
	H	2390.00	40.57	30.22	4.85	27.59	42.79	54.00	AV	PASS
	H	2400.00	61.52	30.22	4.85	27.58	63.73	74.00	PK	PASS
	H	2400.00	40.23	30.22	4.85	27.58	42.44	54.00	AV	PASS
	V	2390.00	59.61	30.22	4.85	27.59	61.83	74.00	PK	PASS
	V	2390.00	41.48	30.22	4.85	27.59	43.70	54.00	AV	PASS
	V	2400.00	61.37	30.22	4.85	27.58	63.58	74.00	PK	PASS
	V	2400.00	40.30	30.22	4.85	27.58	42.51	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.57	30.22	4.85	27.40	60.60	74.00	PK	PASS
	H	2485.50	39.61	30.22	4.85	27.40	41.64	54.00	AV	PASS
	H	2483.50	60.08	30.22	4.85	27.40	62.11	74.00	PK	PASS
	H	2485.50	40.19	30.22	4.85	27.40	42.22	54.00	AV	PASS
	V	2483.50	59.38	30.22	4.85	27.40	61.41	74.00	PK	PASS
	V	2485.50	41.00	30.22	4.85	27.40	43.03	54.00	AV	PASS
	V	2483.50	59.77	30.22	4.85	27.40	61.80	74.00	PK	PASS
	V	2485.50	40.46	30.22	4.85	27.40	42.49	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	57.44	30.22	4.85	27.59	59.66	74.00	PK	PASS
	H	2390.00	39.80	30.22	4.85	27.59	42.02	54.00	AV	PASS
	H	2400.00	59.60	30.22	4.85	27.58	61.81	74.00	PK	PASS
	H	2400.00	39.70	30.22	4.85	27.58	41.91	54.00	AV	PASS
	V	2390.00	57.82	30.22	4.85	27.59	60.04	74.00	PK	PASS
	V	2390.00	39.60	30.22	4.85	27.59	41.82	54.00	AV	PASS
	V	2400.00	57.09	30.22	4.85	27.58	59.30	74.00	PK	PASS
	V	2400.00	48.61	30.22	4.85	27.58	50.82	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.98	30.22	4.85	27.40	61.01	74.00	PK	PASS
	H	2485.50	40.71	30.22	4.85	27.40	42.74	54.00	AV	PASS
	H	2483.50	60.81	30.22	4.85	27.40	62.84	74.00	PK	PASS
	H	2485.50	40.91	30.22	4.85	27.40	42.94	54.00	AV	PASS
	V	2483.50	58.88	30.22	4.85	27.40	60.91	74.00	PK	PASS
	V	2485.50	40.81	30.22	4.85	27.40	42.84	54.00	AV	PASS
	V	2483.50	60.86	30.22	4.85	27.40	62.89	74.00	PK	PASS
	V	2485.50	40.98	30.22	4.85	27.40	43.01	54.00	AV	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	59.26	30.22	4.85	27.59	61.48	74.00	PK	PASS
	H	2390.00	41.12	30.22	4.85	27.59	43.34	54.00	AV	PASS
	H	2400.00	61.66	30.22	4.85	27.58	63.87	74.00	PK	PASS
	H	2400.00	41.07	30.22	4.85	27.58	43.28	54.00	AV	PASS
	V	2390.00	59.13	30.22	4.85	27.59	61.35	74.00	PK	PASS
	V	2390.00	41.08	30.22	4.85	27.59	43.30	54.00	AV	PASS
	V	2400.00	61.50	30.22	4.85	27.58	63.71	74.00	PK	PASS
	V	2400.00	43.26	30.22	4.85	27.58	45.47	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.09	30.22	4.85	27.40	60.12	74.00	PK	PASS
	H	2485.50	40.02	30.22	4.85	27.40	42.05	54.00	AV	PASS
	H	2483.50	59.83	30.22	4.85	27.40	61.86	74.00	PK	PASS
	H	2485.50	39.90	30.22	4.85	27.40	41.93	54.00	AV	PASS
	V	2483.50	58.12	30.22	4.85	27.40	60.15	74.00	PK	PASS
	V	2485.50	39.87	30.22	4.85	27.40	41.90	54.00	AV	PASS
	V	2483.50	60.35	30.22	4.85	27.40	62.38	74.00	PK	PASS

	V	2485.50	39.70	30.22	4.85	27.40	41.73	54.00	AV	PASS
802.11n40	LowChannel 2422MHz									
	H	2390.00	58.56	30.22	4.85	27.59	60.78	74.00	PK	PASS
	H	2390.00	40.44	30.22	4.85	27.59	42.66	54.00	AV	PASS
	H	2400.00	60.76	30.22	4.85	27.58	62.97	74.00	PK	PASS
	H	2400.00	40.40	30.22	4.85	27.58	42.61	54.00	AV	PASS
	V	2390.00	58.37	30.22	4.85	27.59	60.59	74.00	PK	PASS
	V	2390.00	40.46	30.22	4.85	27.59	42.68	54.00	AV	PASS
	V	2400.00	60.52	30.22	4.85	27.58	62.73	74.00	PK	PASS
	V	2400.00	40.38	30.22	4.85	27.58	42.59	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	57.88	30.22	4.85	27.40	59.91	74.00	PK	PASS
	H	2485.50	39.81	30.22	4.85	27.40	41.84	54.00	AV	PASS
	H	2483.50	59.38	30.22	4.85	27.40	61.41	74.00	PK	PASS
	H	2485.50	39.69	30.22	4.85	27.40	41.72	54.00	AV	PASS
	V	2483.50	57.81	30.22	4.85	27.40	59.84	74.00	PK	PASS
	V	2485.50	39.59	30.22	4.85	27.40	41.62	54.00	AV	PASS
	V	2483.50	60.16	30.22	4.85	27.40	62.19	74.00	PK	PASS
	V	2485.50	47.22	30.22	4.85	27.40	49.25	74.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

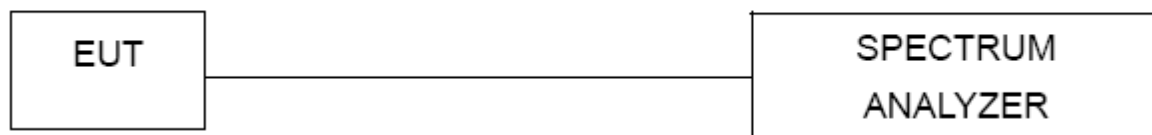

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


6.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		


ANT1			
Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-18.354	8	PASS
2437 MHz	-20.449	8	PASS
2462 MHz	-17.357	8	PASS

ANT2			
Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-10.526	8	PASS
2437 MHz	-11.744	8	PASS
2462 MHz	-11.867	8	PASS


TX CH01-ANT1

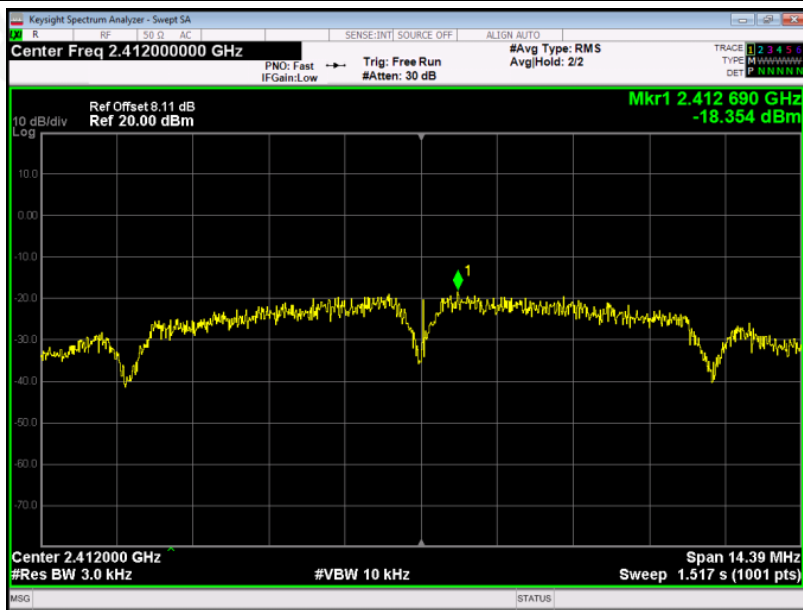


TX CH06-ANT1

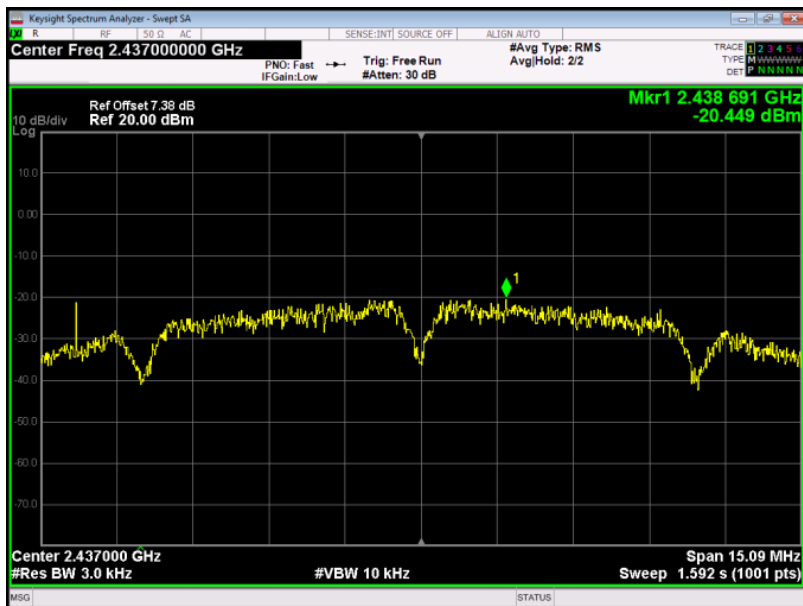


TX CH11-ANT1

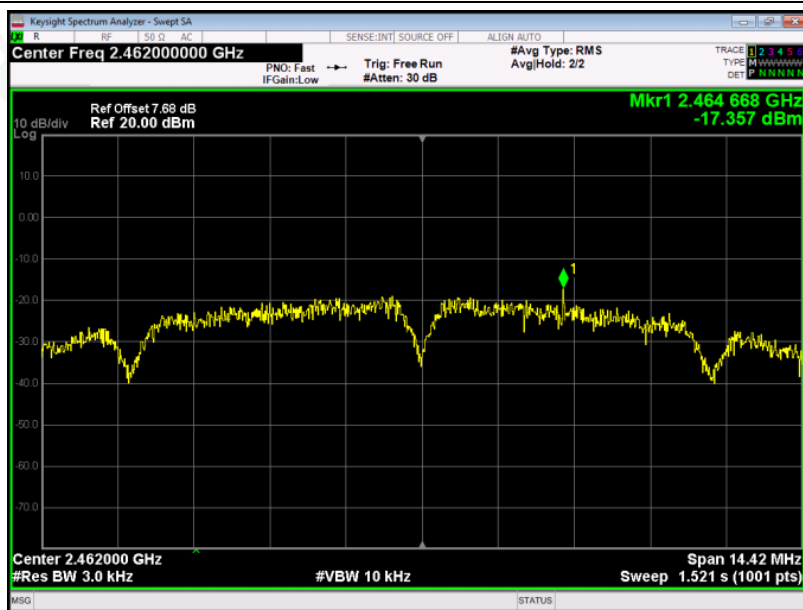


TX CH01-ANT2

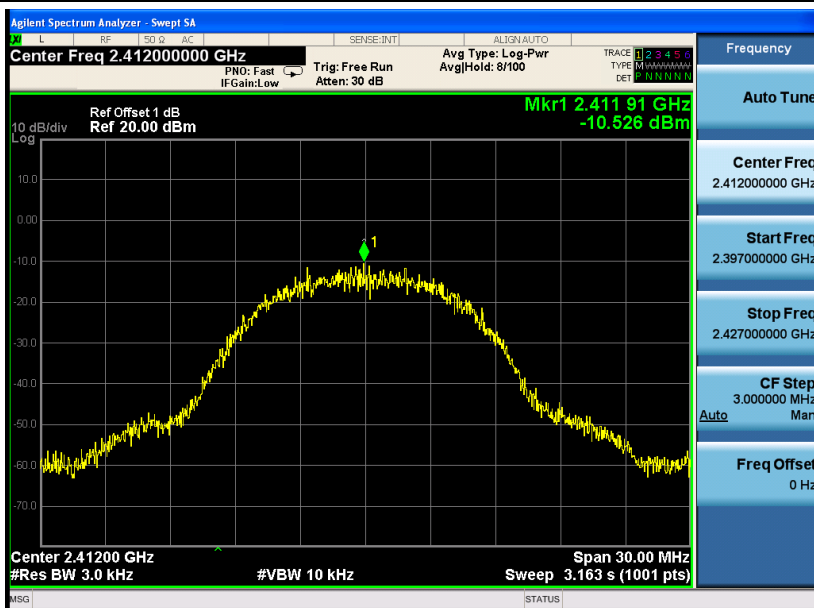

TX CH06-ANT2

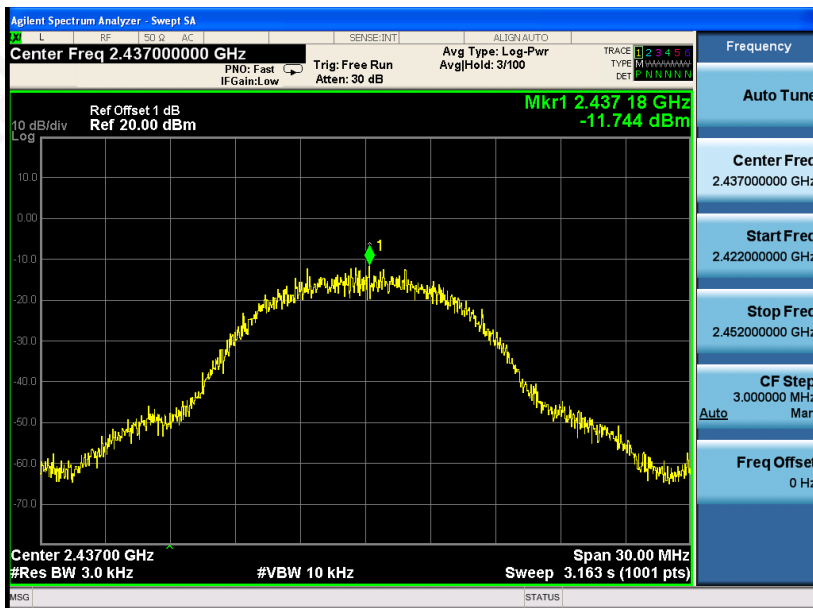

TX CH11-ANT2

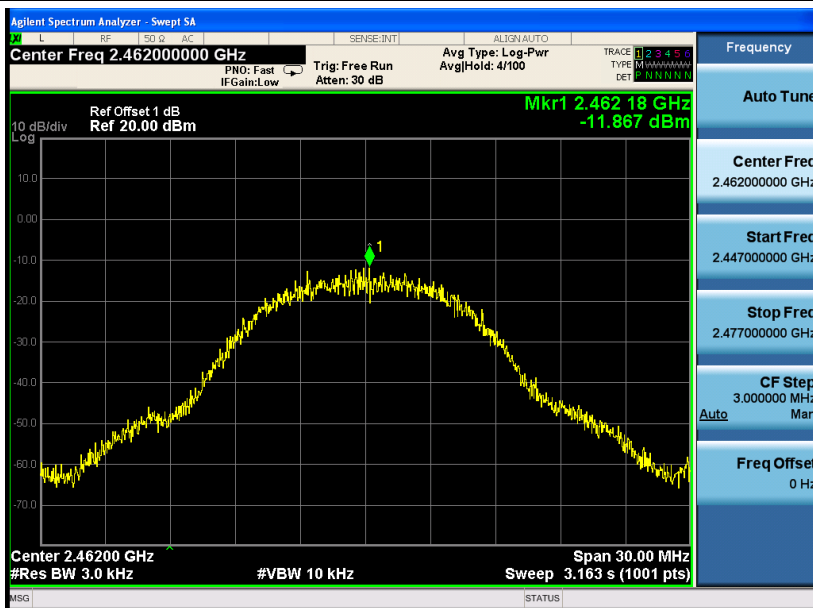


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode		


ANT1			
Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-21.106	8	PASS
2437 MHz	-23.018	8	PASS
2462 MHz	-21.733	8	PASS

ANT2			
Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-14.338	8	PASS
2437 MHz	-14.706	8	PASS
2462 MHz	-15.500	8	PASS


TX CH01-ANT1

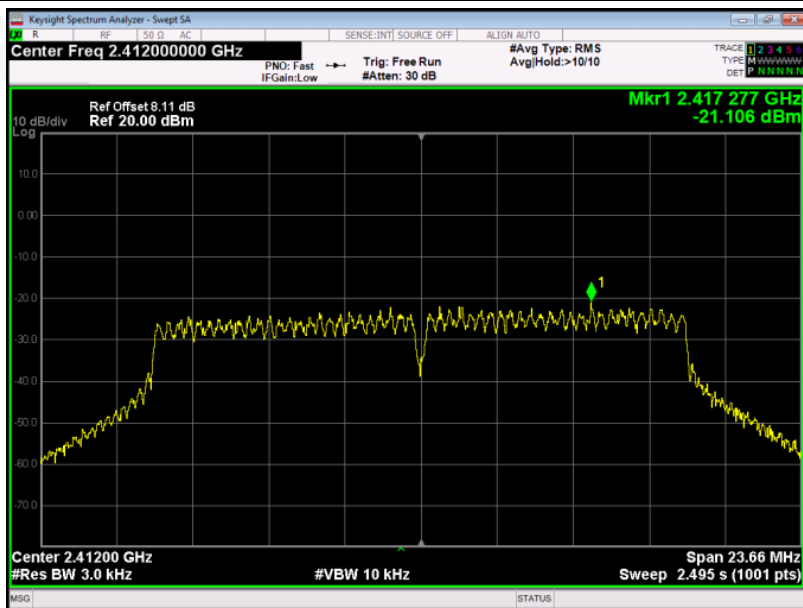


TX CH06-ANT1

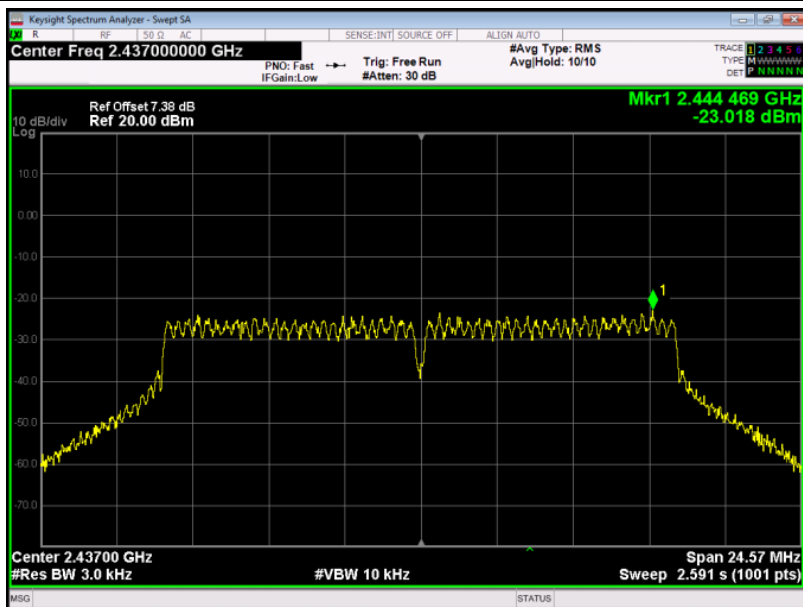


TX CH11-ANT1

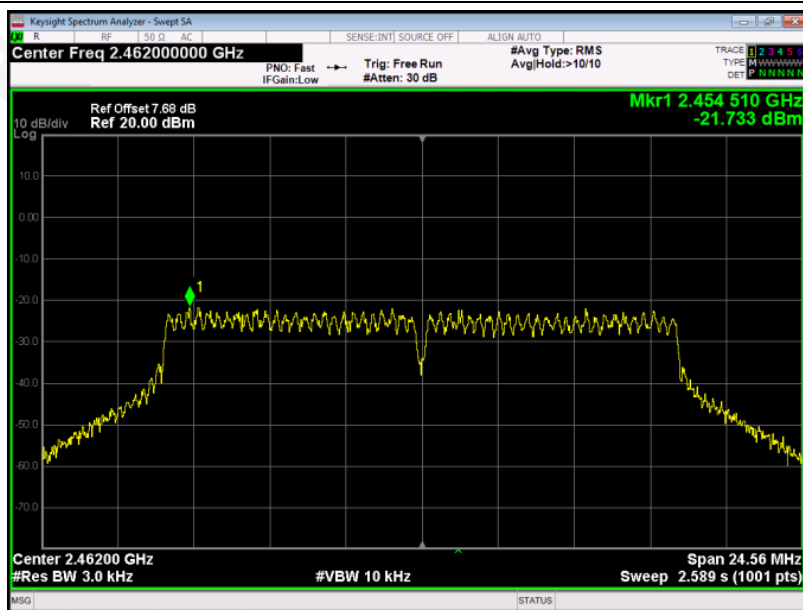


TX CH01-ANT2

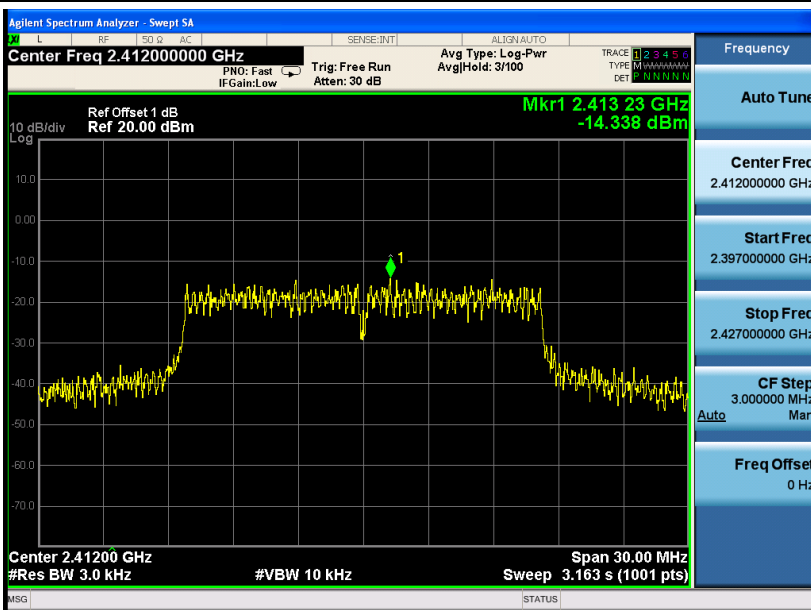

TX CH06-ANT2

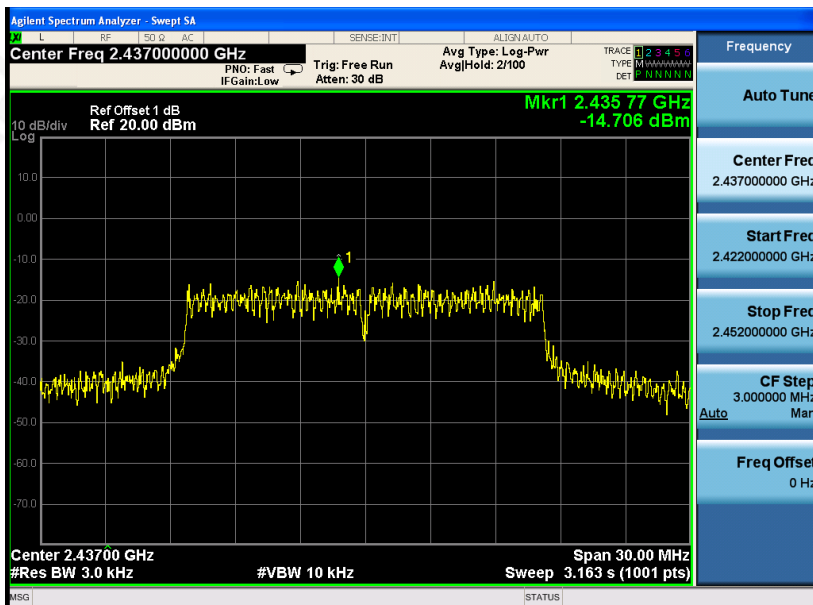


TX CH11-ANT2

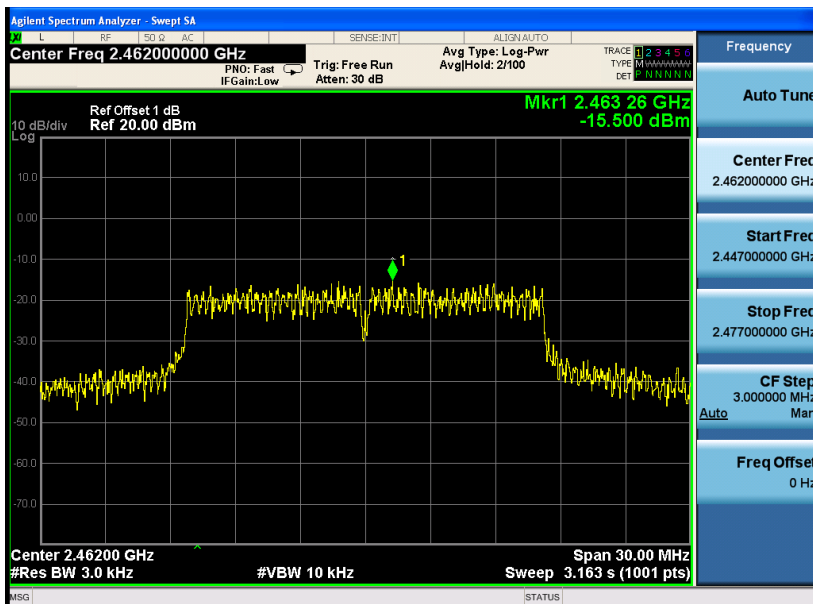


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)		Power Spectral Density (mW)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
(MHz)	ANT1	ANT2	ANT1	ANT2	/	/	/
2412 MHz	-23.477	-14.041	0.004	0.039	-13.665	8	PASS
2437 MHz	-24.812	-14.931	0.003	0.032	-14.559	8	PASS
2462 MHz	-23.553	-14.595	0.004	0.034	-14.202	8	PASS


TX CH01-ANT1

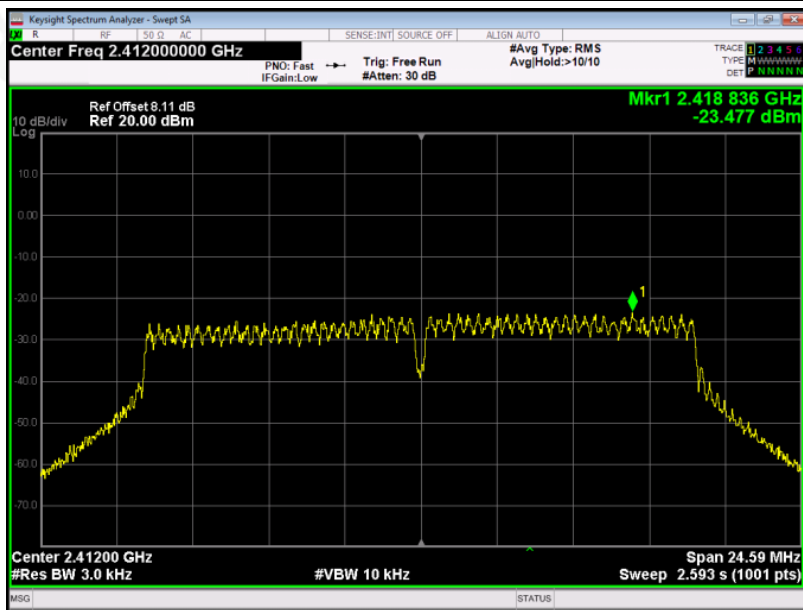


TX CH06-ANT1

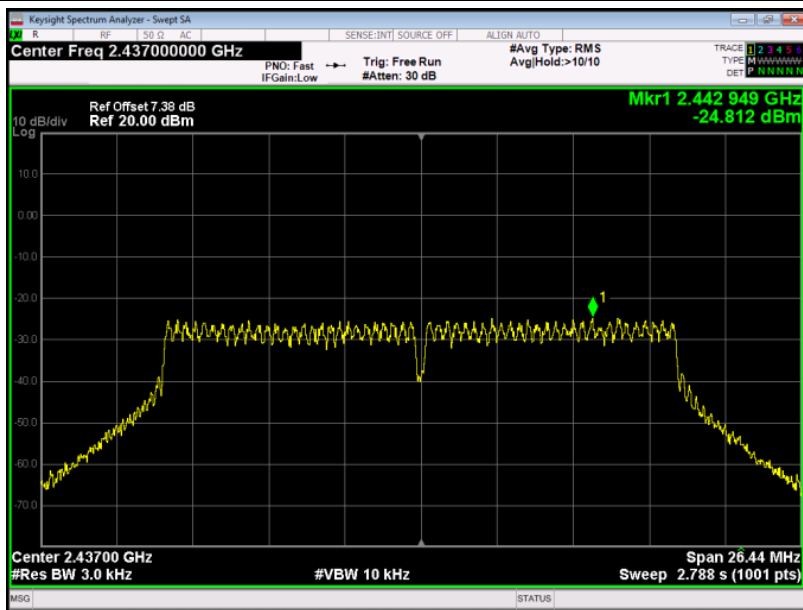


TX CH11-ANT1

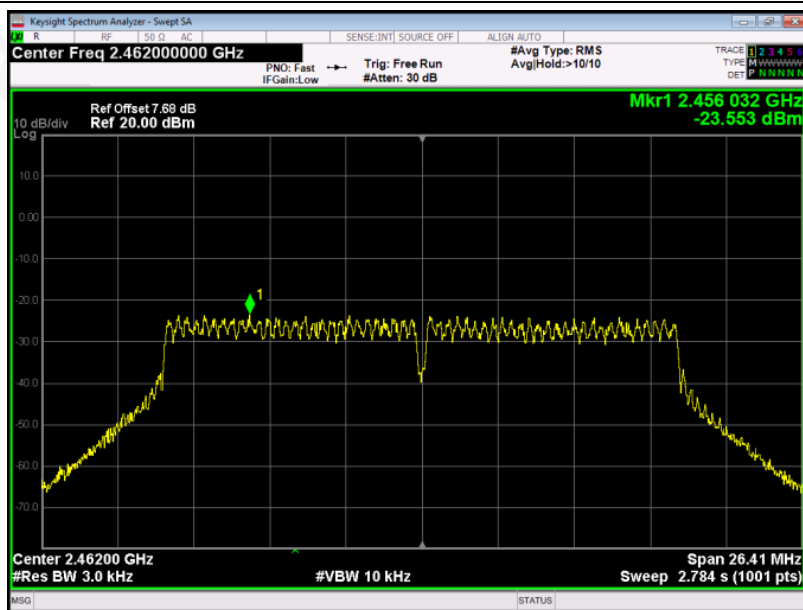


TX CH01-ANT2

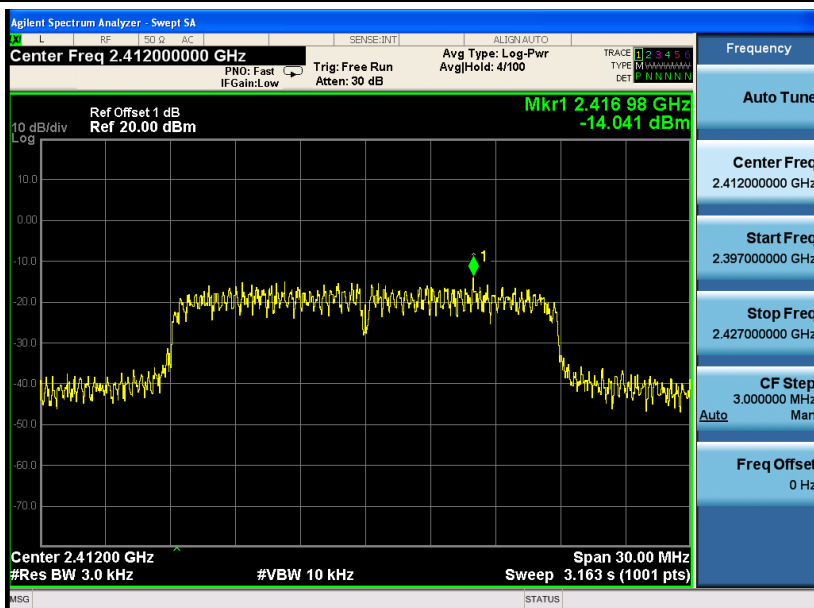

TX CH06-ANT2

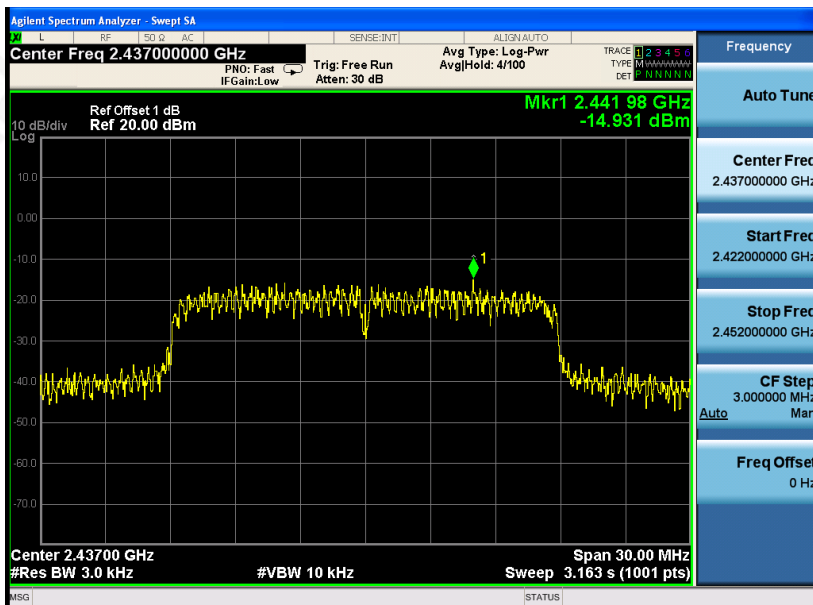


TX CH11-ANT2

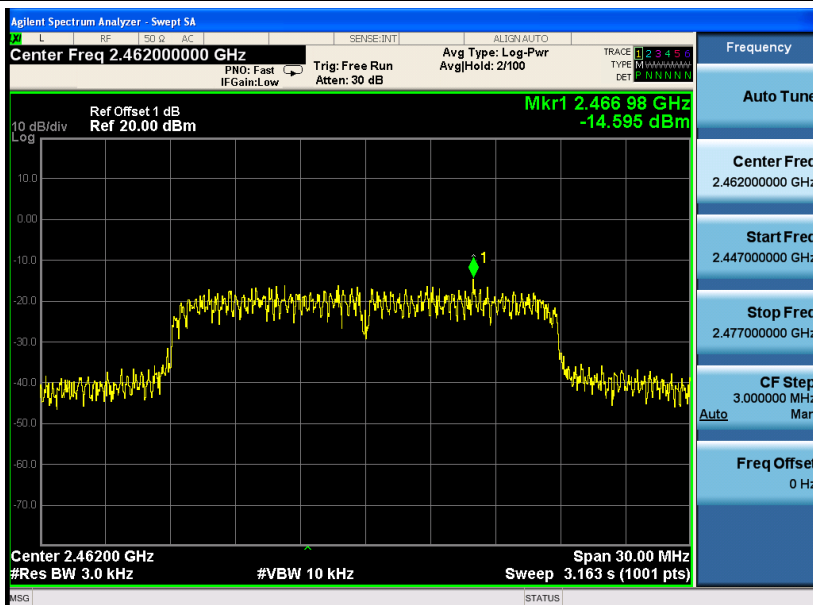


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)		Power Spectral Density (mW)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
(MHz)	ANT1	ANT2	ANT1	ANT2	/	/	/
2412 MHz	-26.224	-18.236	0.002	0.015	-17.696	8	PASS
2437 MHz	-27.093	-17.973	0.002	0.016	-17.447	8	PASS
2462 MHz	-26.552	-19.290	0.002	0.012	-18.539	8	PASS


TX CH03-ANT1

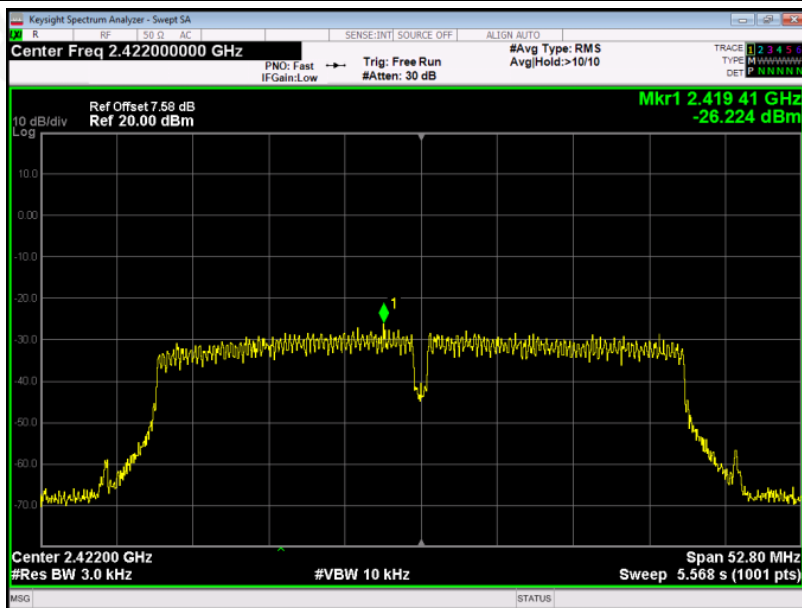


TX CH06-ANT1

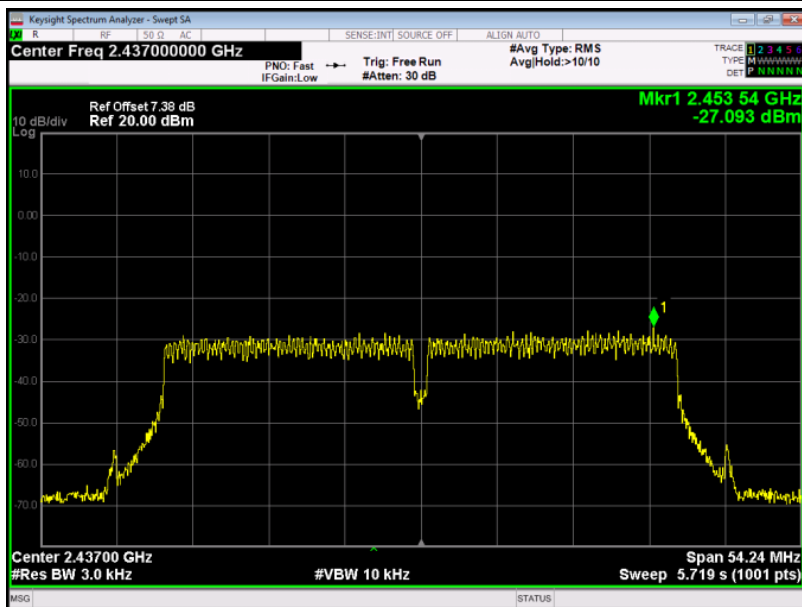


TX CH09-ANT1

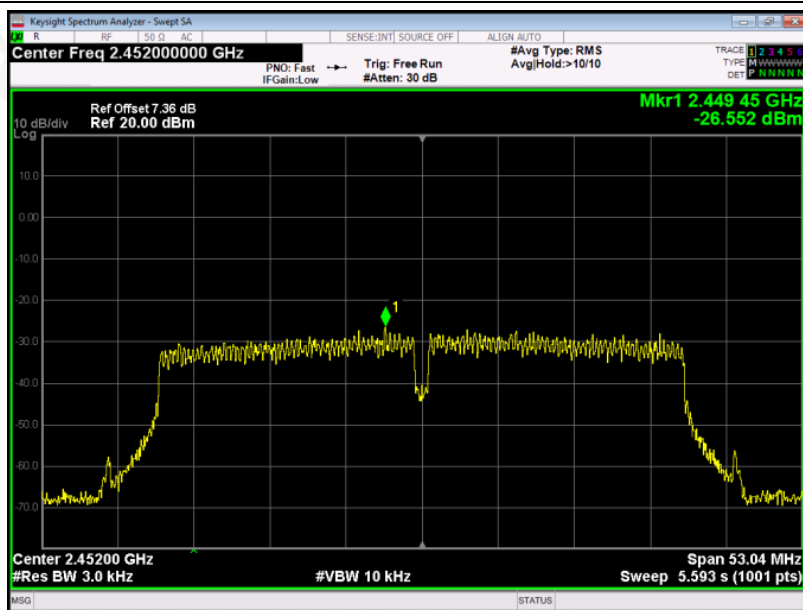


TX CH03-ANT2

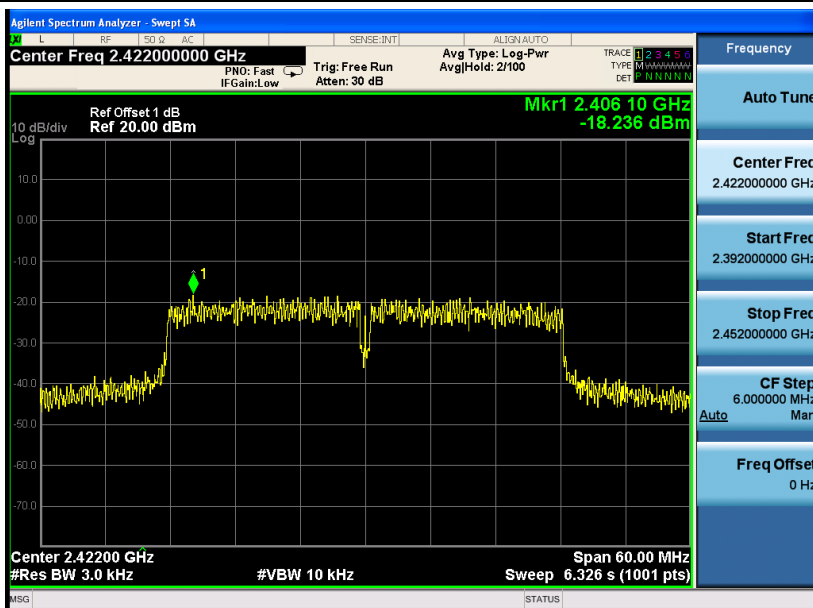

TX CH06-ANT2

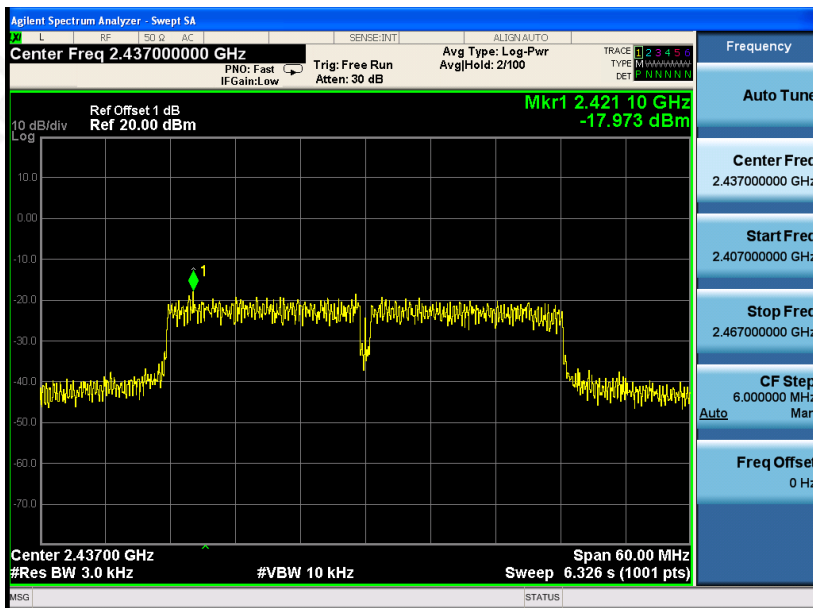

TX CH09-ANT2

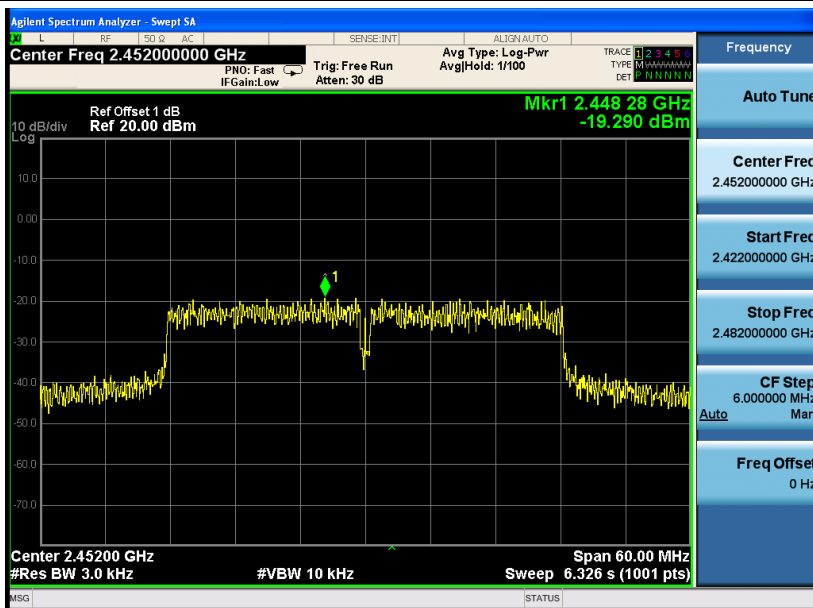

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode-ANT1		



	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b	2412	9.59	>500	Pass
	2437	10.06	>500	Pass
	2462	9.616	>500	Pass
802.11g	2412	15.78	>500	Pass
	2437	16.38	>500	Pass
	2462	16.37	>500	Pass
802.11n20	2412	16.39	>500	Pass
	2437	17.63	>500	Pass
	2462	17.61	>500	Pass
802.11n40	2422	35.20	>500	Pass
	2437	36.16	>500	Pass
	2452	35.36	>500	Pass

Test plot as follows:



802.11b

802.11g



Lowest channel

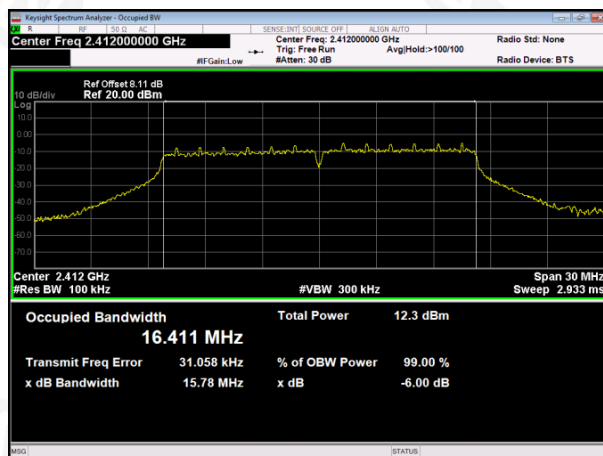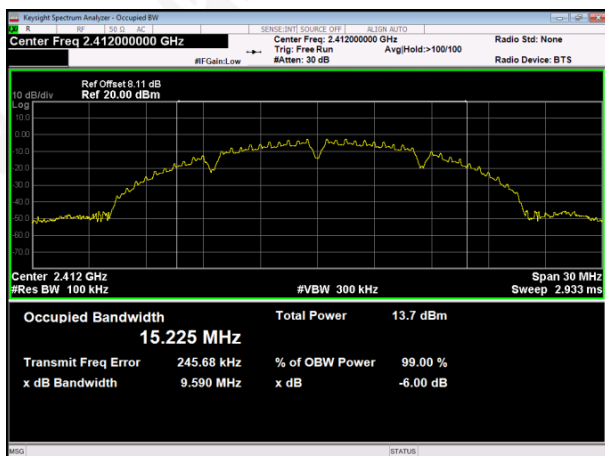

Middle channel

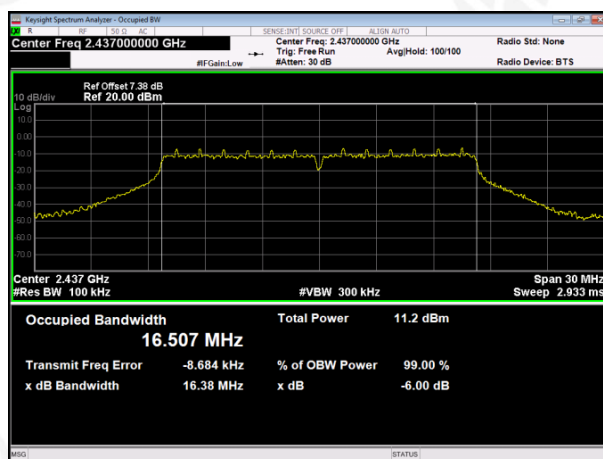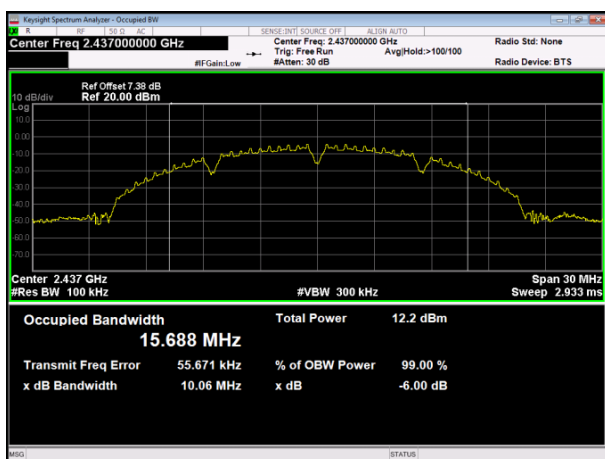



Highest channel

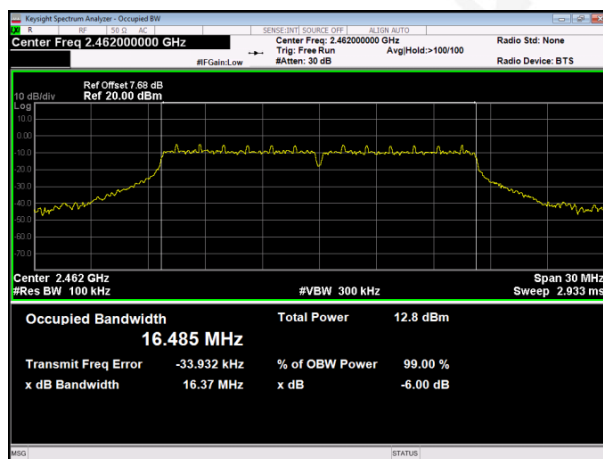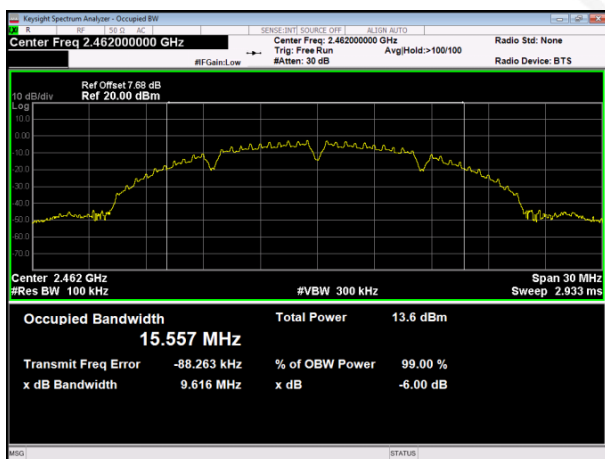



802.11n20

801.11n40



Lowest channel

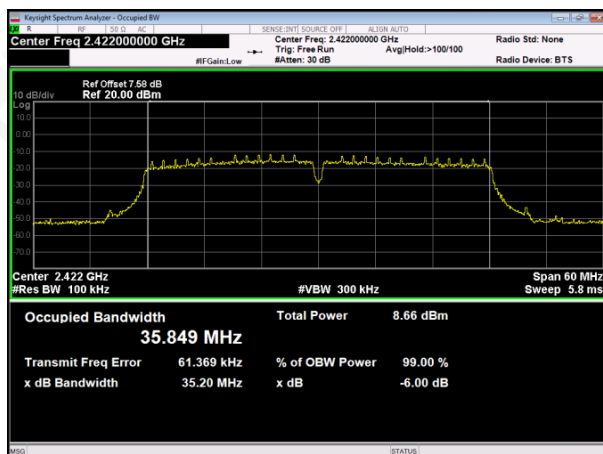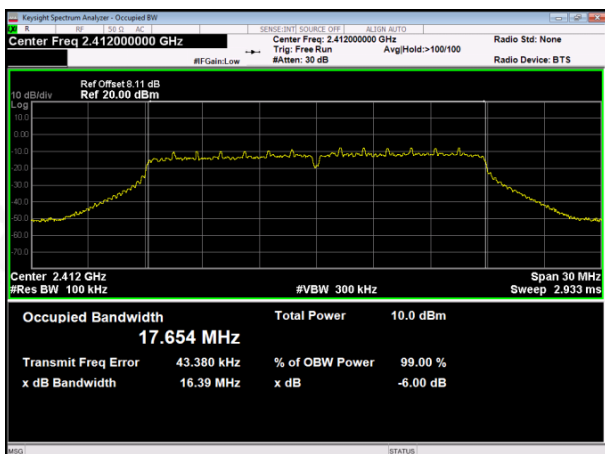

Middle channel

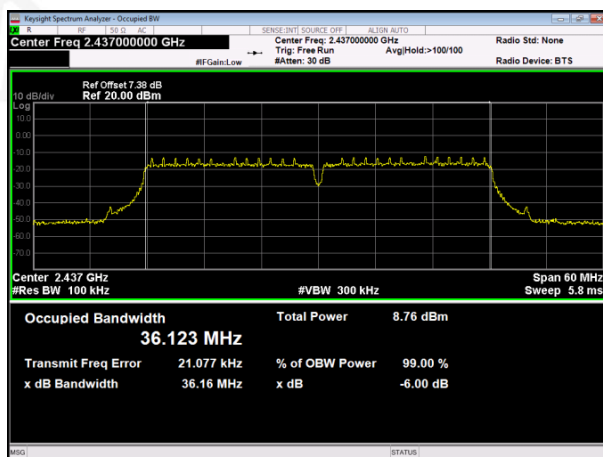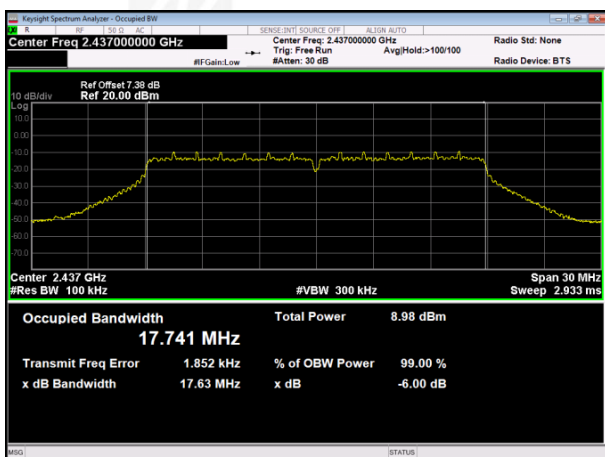

Highest channel

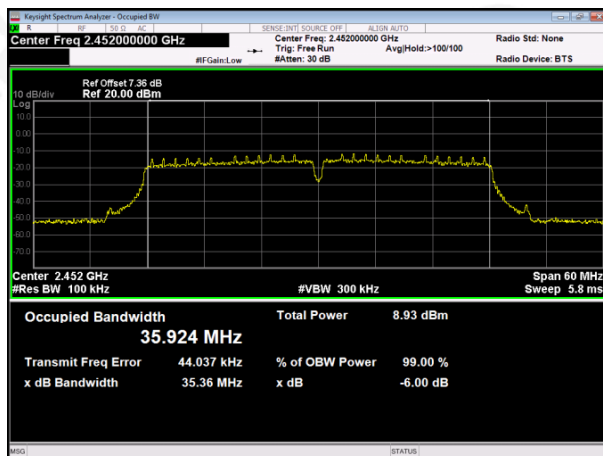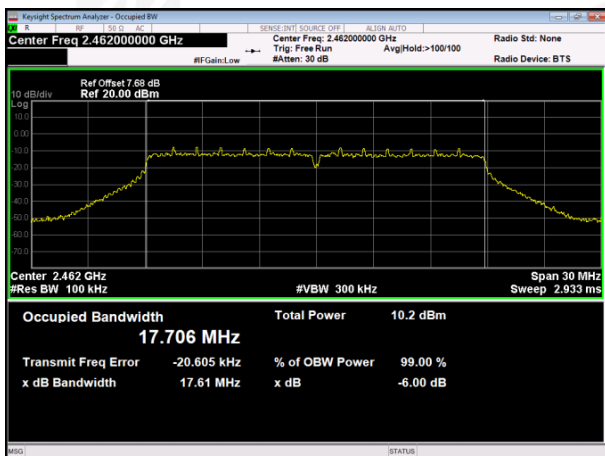

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode-ANT1		



	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b	2412	8.766	>500	Pass
	2437	8.745	>500	Pass
	2462	7.590	>500	Pass
802.11g	2412	16.12	>500	Pass
	2437	16.32	>500	Pass
	2462	16.34	>500	Pass
802.11n20	2412	16.34	>500	Pass
	2437	16.11	>500	Pass
	2462	16.37	>500	Pass
802.11n40	2422	35.56	>500	Pass
	2437	35.43	>500	Pass
	2452	35.42	>500	Pass

Test plot as follows:



802.11b

802.11g



Lowest channel

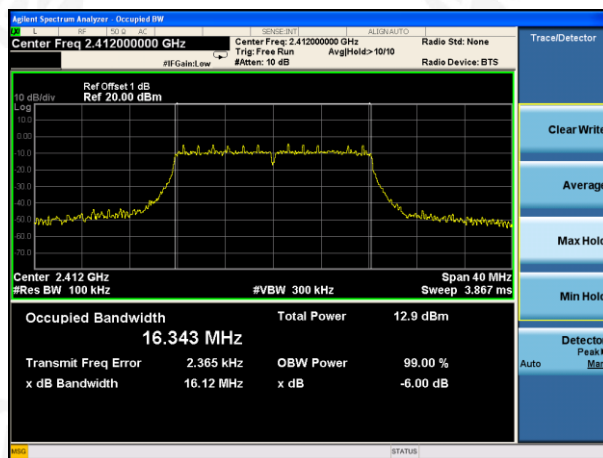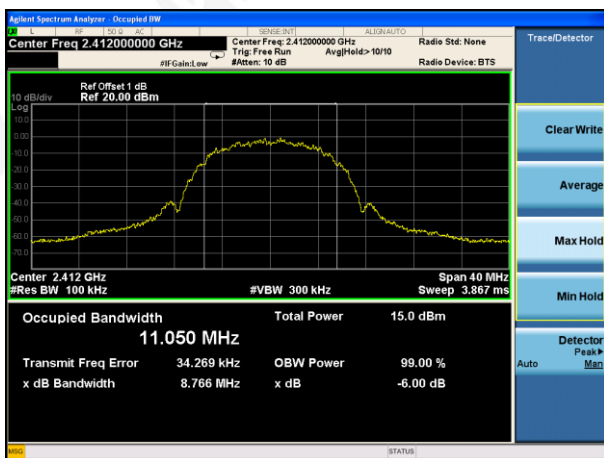

Middle channel

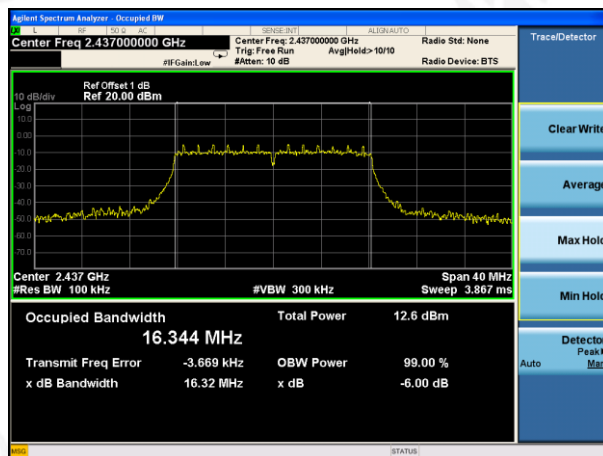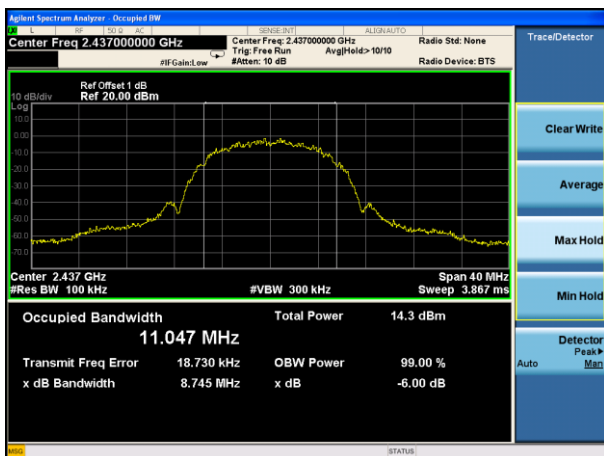



Highest channel

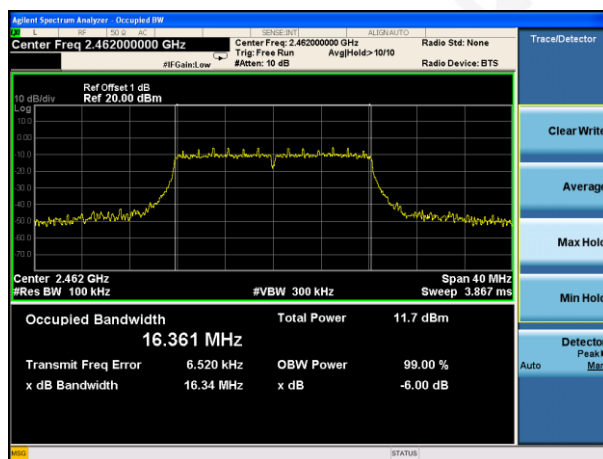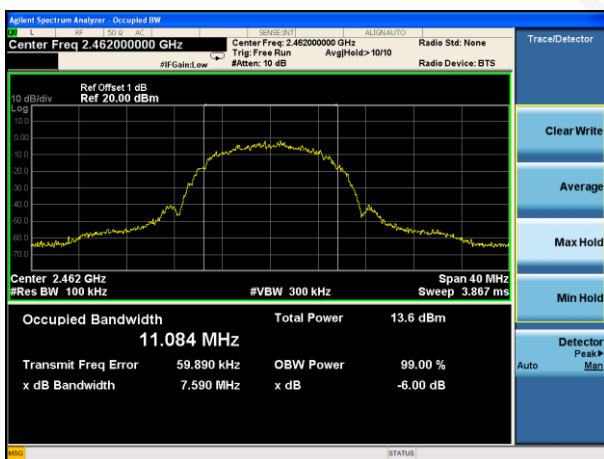



802.11n20

801.11n40



Lowest channel

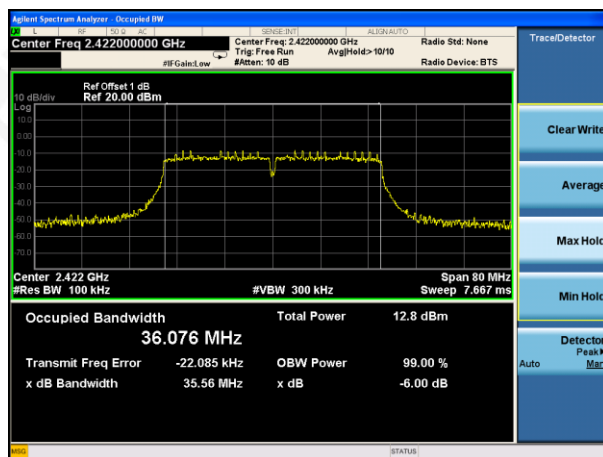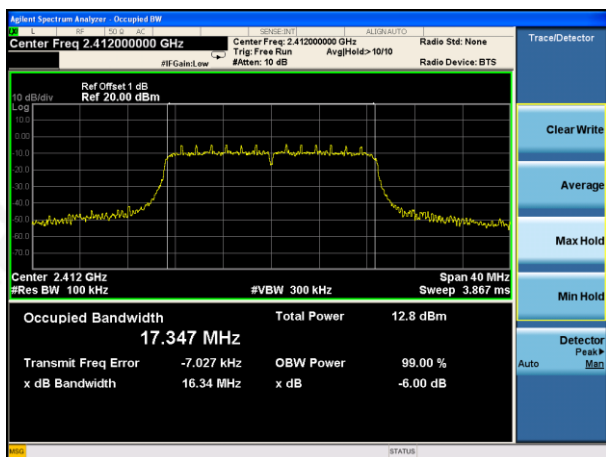

Middle channel

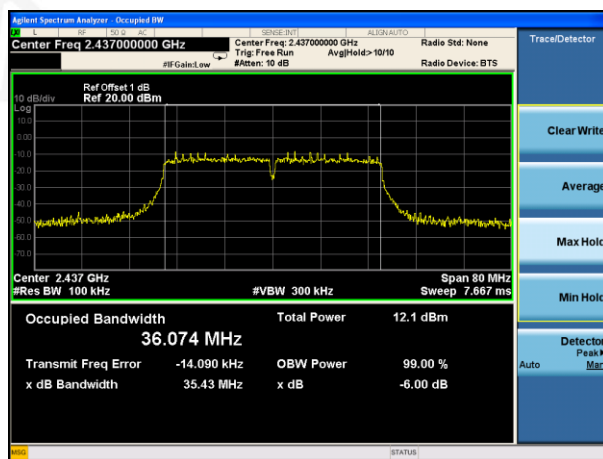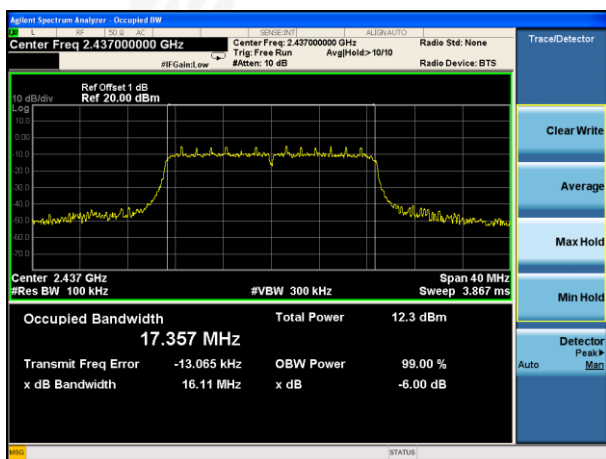

Highest channel

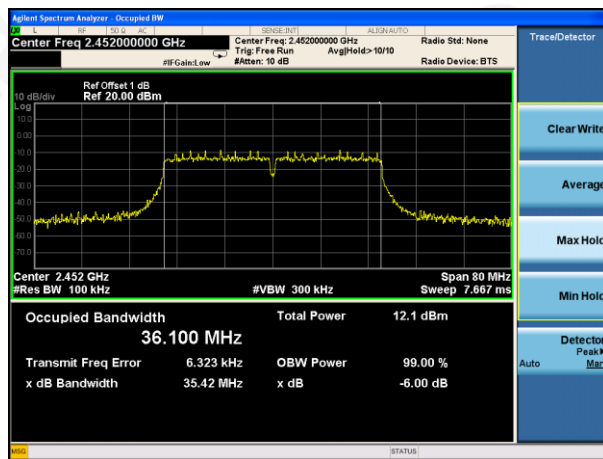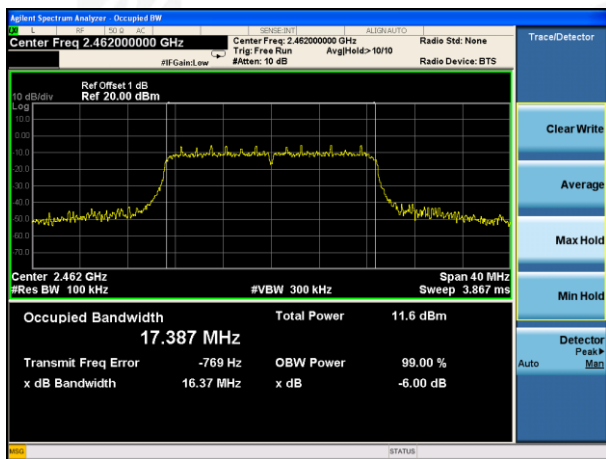

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz


Test CH	Peak Output Power (dBm)		Limit(dBm)	Result
	802.11b	802.11g		
Lowest	15.535	13.928	30.00	Pass
Middle	15.208	13.664		
Highest	15.671	13.270		

Test CH	Peak Output Power (dBm)								Total power(dBm)	
	802.11n(HT20) (dBm)		802.11n(HT40) (dBm)		802.11n(HT20) (mW)		802.11n(HT40) (mW)		802.11n (HT20) (dBm)	802.11n (HT40) (dBm)
/	ANT1	ANT2	ANT1	ANT2	ANT1	ANT2	ANT1	ANT2	/	/
Lowest	12.218	4.228	10.216	5.370	16.665	2.647	10.510	3.443	12.858	11.447
Middle	12.964	4.712	10.754	5.261	19.788	2.959	11.896	3.358	13.569	11.834
Highest	12.085	4.556	10.773	5.284	16.162	2.855	11.948	3.376	12.791	11.854

	Frequency	Output Power	Antenna gain	EIRP
	(MHz)	(dBm)	(dBi)	(dBm)
802.11b	Lowest	15.535	6.2	21.735
	Middle	15.208	6.2	21.408
	Highest	15.671	6.2	21.871
802.11g	Lowest	13.928	6.2	20.128
	Middle	13.664	6.2	19.864
	Highest	13.270	6.2	19.47
802.11n20	Lowest	12.858	6.2	19.058
	Middle	13.569	6.2	19.769
	Highest	12.791	6.2	18.991
802.11n40	Lowest	11.447	6.2	17.647
	Middle	11.834	6.2	18.034
	Highest	11.854	6.2	18.054


Duty Cyclcy:

802.11b

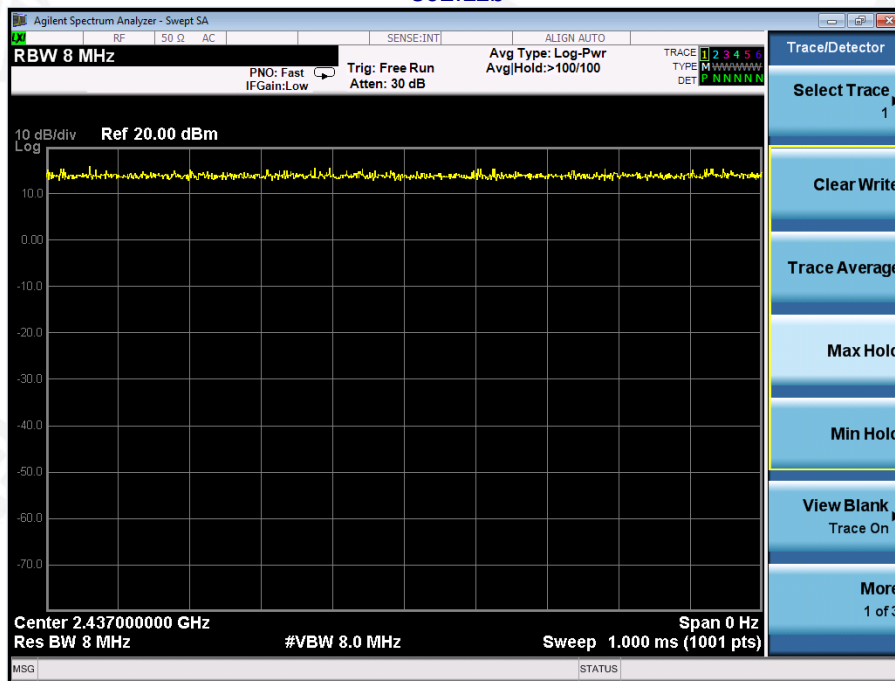


Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11g

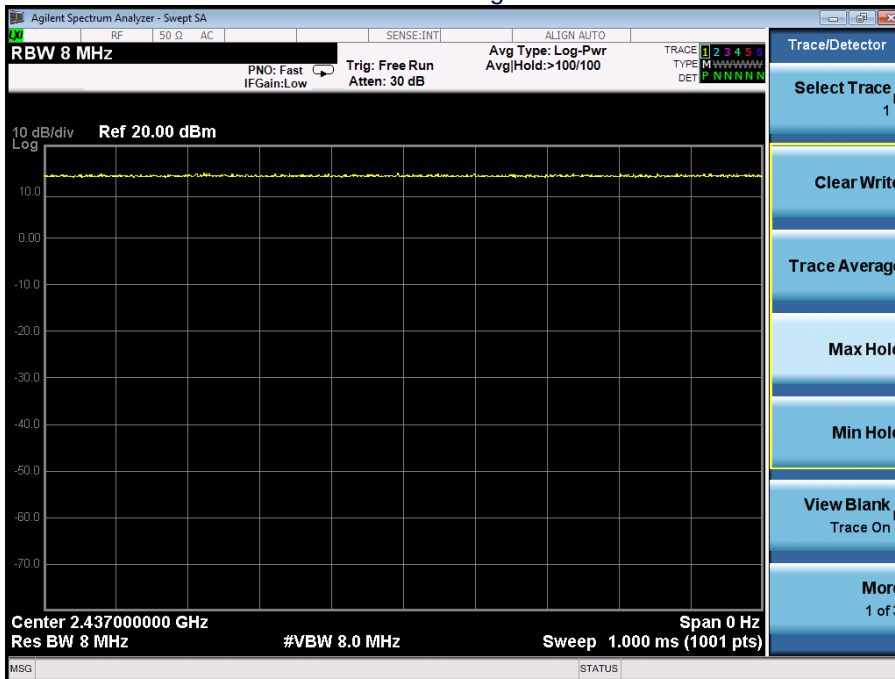


Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11n20

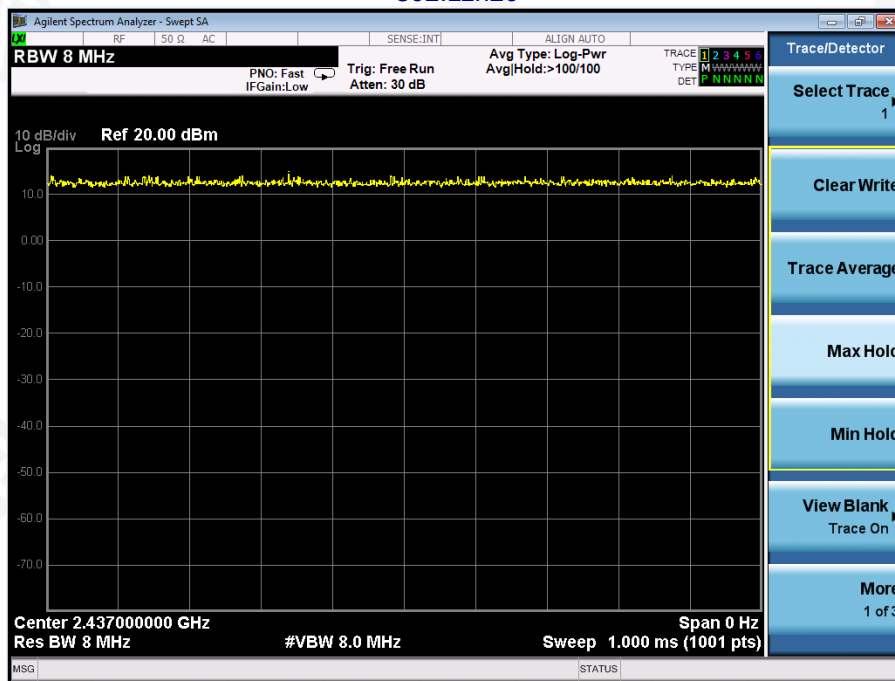

Ton	Tp	Duty cycly(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

802.11n40

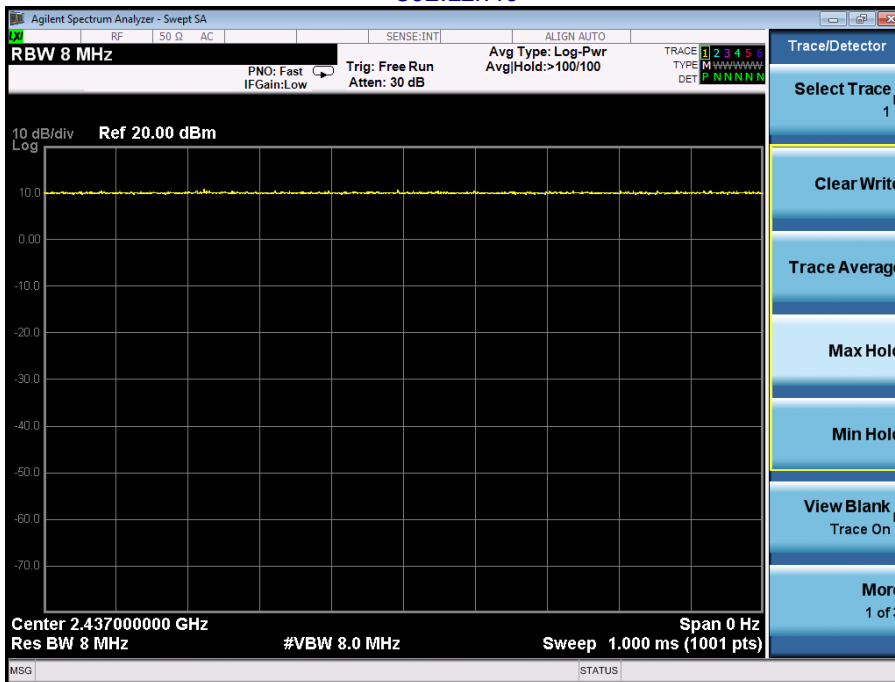

Ton	Tp	Duty cycly(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in only ANT1 transmits and only ANT2 transmits, found the worst case is ANT1 transmit and report the data.


Test plot as follows:

Test mode:

802.11b

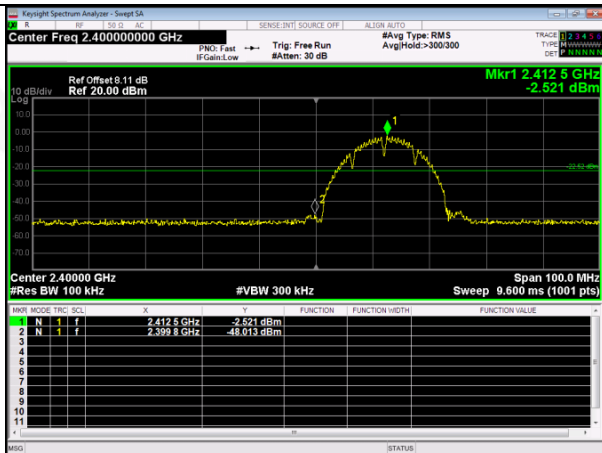


Lowest channel

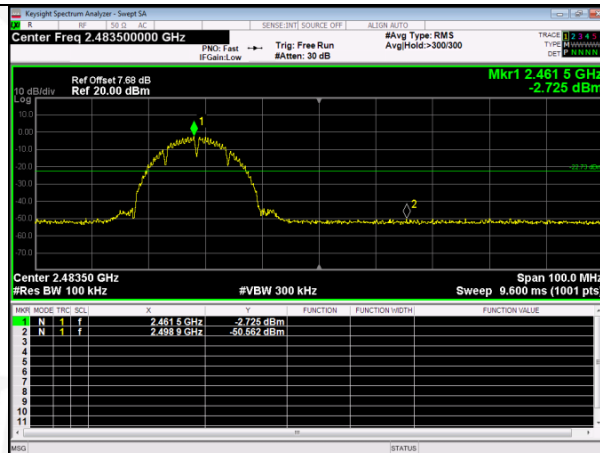


Highest channel

Test mode:

802.11g

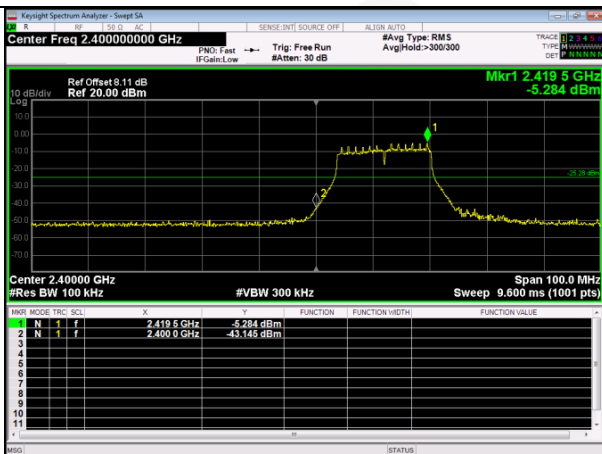


Lowest channel

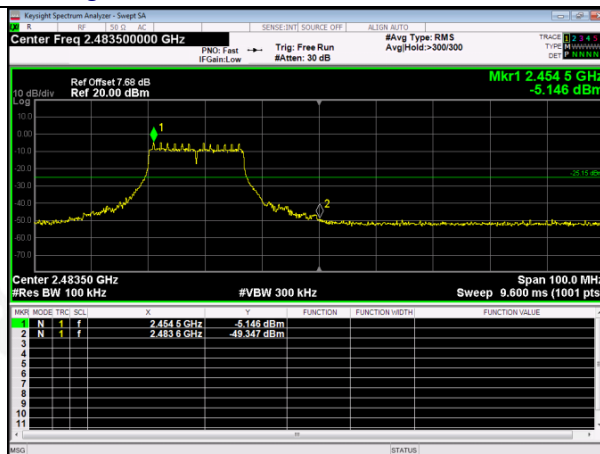


Highest channel

Test mode:

802.11n(HT20)

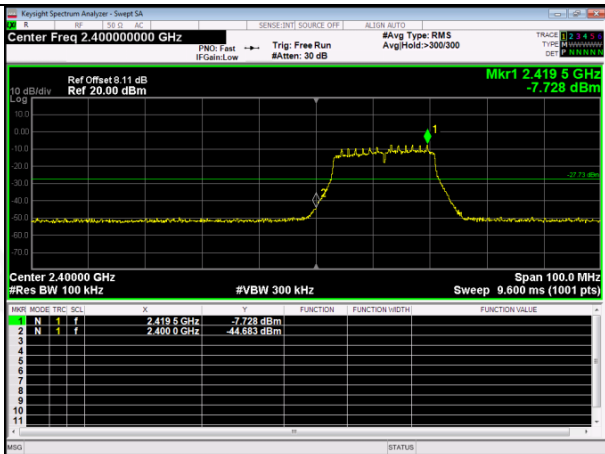


Lowest channel

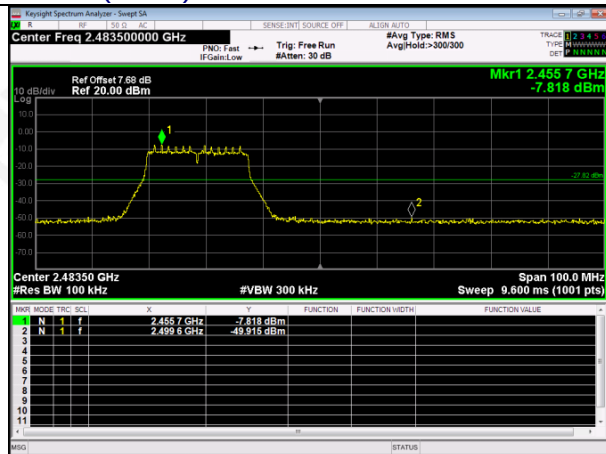


Highest channel

Test mode:

802.11n(HT40)

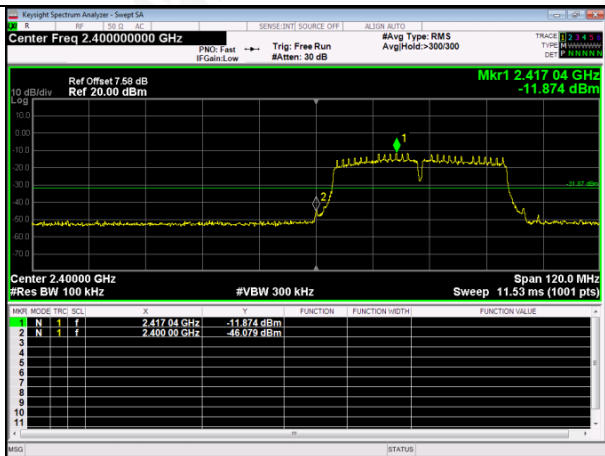

Lowest channel

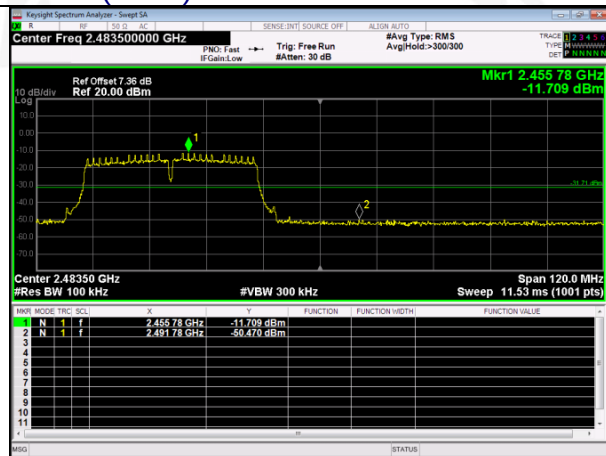


Highest channel

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in only ANT1 transmits and only ANT2 transmits, found the worst case is ANT1 transmit and report the data.


Test plot as follows:

IEEE 802.11b-The Worst case


Lowest channel

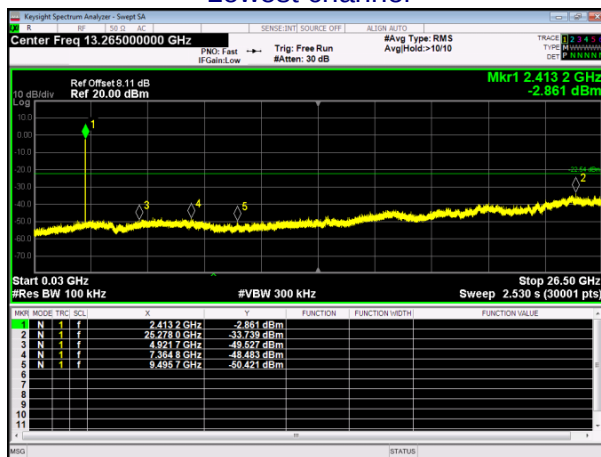

Middle channel

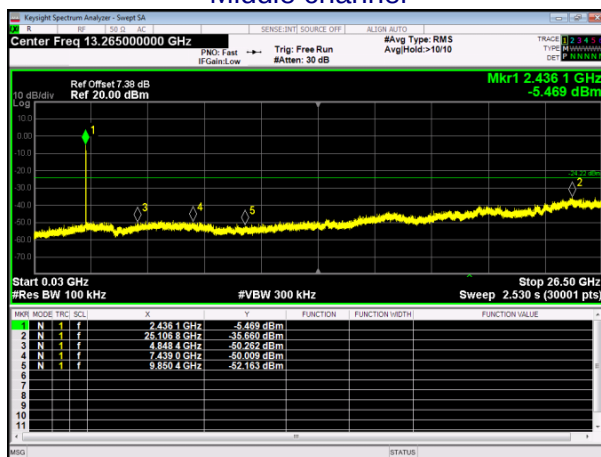

Highest channel

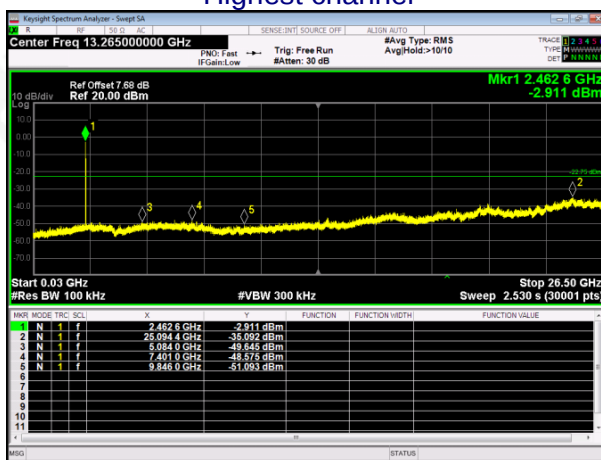

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antennas are FPCB antenna, the best case gain of the antennas are 3.19dBi, reference to the appendix II for details	

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****