



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

Test Report

Report No.: CQASZ20180800042E-01

Applicant: Seal Electronics Asia Limited

Address of Applicant: Room B, 14/F Wah Hen Commercial Centre, 383 Hennessy Road, Wan Chai, Hong Kong, China

Manufacturer: Seal Electronics Asia Limited

Address of Manufacturer: Room B, 14/F Wah Hen Commercial Centre, 383 Hennessy Road, Wan Chai, Hong Kong

Equipment Under Test (EUT):

Product: Wireless Electronic Pet Fence System

Model No.: KD661C, SDF-661

Test Model No.: KD661C

Brand Name: N/A

FCC ID: 2AA4I-1242018

Standards: 47 CFR Part 15, Subpart C

Date of Test: 2018-08-15 to 2018-08-24

Date of Issue: 2018-08-24

Test Result : PASS*

Tested By:

Tiny You

(Tiny You)

Reviewed By:

Aaron Ma

(Aaron Ma)

Approved By:

James

(James)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.



Shenzhen Huaxia Testing Technology Co., Ltd

Report No.: CQASZ20180800042E-01

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20180800042E-01	Rev.01	Initial report	2018-08-24

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10 (2013)	PASS
20dB Bandwidth	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.231 (a)	ANSI C63.10 (2013)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 TEST LOCATION	8
4.6 TEST FACILITY	8
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
4.8 DEVIATION FROM STANDARDS	9
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
4.11 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA.....	11
5.1 ANTENNA REQUIREMENT.....	11
5.2 CONDUCTED EMISSIONS	12
5.3 SPURIOUS EMISSIONS	16
5.3.1 <i>Duty Cycle</i>	16
5.3.2 <i>Spurious Emissions</i>	18
5.4 20dB BANDWIDTH	31
5.5 DWELL TIME	33
6 PHOTOGRAPHS - EUT TEST SETUP	36
6.1 CONDUCTED EMISSION.....	36
6.2 RADIATED EMISSION.....	36
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	38

4 General Information

4.1 Client Information

Applicant:	Seal Electronics Asia Limited
Address of Applicant:	Room B, 14/F Wah Hen Commercial Centre, 383 Hennessy Road, Wan Chai, Hong Kong
Manufacturer:	Seal Electronics Asia Limited
Address of Manufacturer:	Room B, 14/F Wah Hen Commercial Centre, 383 Hennessy Road, Wan Chai, Hong Kong

4.2 General Description of EUT

Name:	Wireless Electronic Pet Fence System
Model No.:	KD661C, SDF-661
Test Model No.:	KD661C
Trade Mark:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Sample Type:	Portable production
Operation Frequency:	428.5-430.5MHZ
Channel Numbers:	3
Modulation Type:	GFSK
Antenna Type:	integral antenna
Antenna Gain:	0dBi
Power Supply:	Adapter: Input: 100~240V 0.3A 50-60Hz Output: DC 5V 1A Li-ion battery, DC3.7V 2500mAh

Note:

All model: KD661C, SDF-661

Only the model KD661C was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	428.5MHz	2	429.5MHz	3	430.5MHz		

Note:

In section 15.31(m), regards to the operating frequency less than over 10 MHz, the lowest frequency, and the highest frequency of channel were selected to perform the test, and the selected channel

see below:

Channel	Frequency
The lowest channel (CH1)	428.5MHz
The highest channel (CH3)	430.5MHz

4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

Power Setting:

Transmitter Signal Level	Remote Control Range
10	25 M
20	50 M
30	65 M
40	80 M
50	95 M
60	115 M
70	140 M
80	170 M
90	230 M
100	500 M

Remark: Test with maximum power, set to 100.

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/24
2	Spectrum analyzer	R&S	FSU26	CQA-038	2018/9/24
3	Preamplifier	MIITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/24
4	Preamplifier	MIITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/9/24
5	Loop antenna	ZHINAN	ZN30900A	CQA-087	2019/3/21
6	Bilog Antenna	R&S	HL562	CQA-011	2018/9/24
7	Horn Antenna	R&S	HF906	CQA-012	2018/9/24
9	Coax cable (9KHz~40GHz)	CQA	RE-low-01	CQA-077	2018/9/24
10	Coax cable (9KHz~40GHz)	CQA	RE-high-02	CQA-078	2018/9/24
11	Antenna Connector	CQA	RFC-01	CQA-080	2018/9/24
12	RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/24
13	Power Sensor	Anritsu	MA2411B	CQA-089	2018/9/24
14	Wideband Peak Power Meter	Anritsu	ML2495A	CQA-090	2018/9/24
15	Power divider	CQA	PWD-2533-02-SMA-79	CQA-067	2018/9/29
16	EMI Test Receiver	R&S	ESPI3	CQA-005	2018/9/24
17	LISN	R&S	ENV216	CQA-003	2018/9/24
18	Coaxial cable (9KHz~300MHz)	CQA	N/A	CQA-C009	2018/10/17

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
	
The antenna is integral antenna. The best case gain of the antenna is 0dBi.	

5.2 Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
Test Procedure:	5-30	60	50
	* Decreases with the logarithm of the frequency.		
	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		

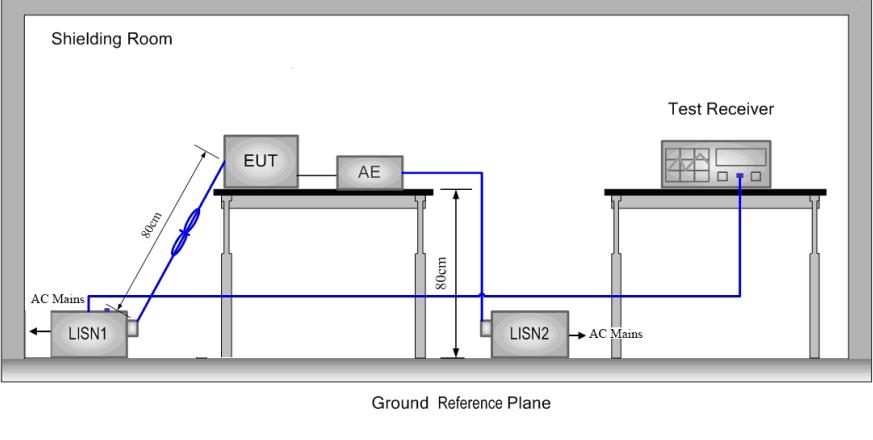Test Setup:	 <p>The diagram illustrates the test setup within a 'Shielding Room'. A 'EUT' (Equipment Under Test) is connected to an 'AE' (Antenna Equipment) and a 'Test Receiver'. The 'EUT' and 'AE' are positioned on a table. The 'Test Receiver' is connected to the 'AE' and is also on a table. Two LISNs (Line Impedance Selection Network) are connected to the AC Mains. LISN1 is connected to the 'EUT' and LISN2 is connected to the 'Test Receiver'. The distance between the LISNs is 80cm. The height of the 'EUT' and 'AE' from the 'Ground Reference Plane' is 80cm. The 'Test Receiver' is connected to the AC Mains.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

90.0 dBuV

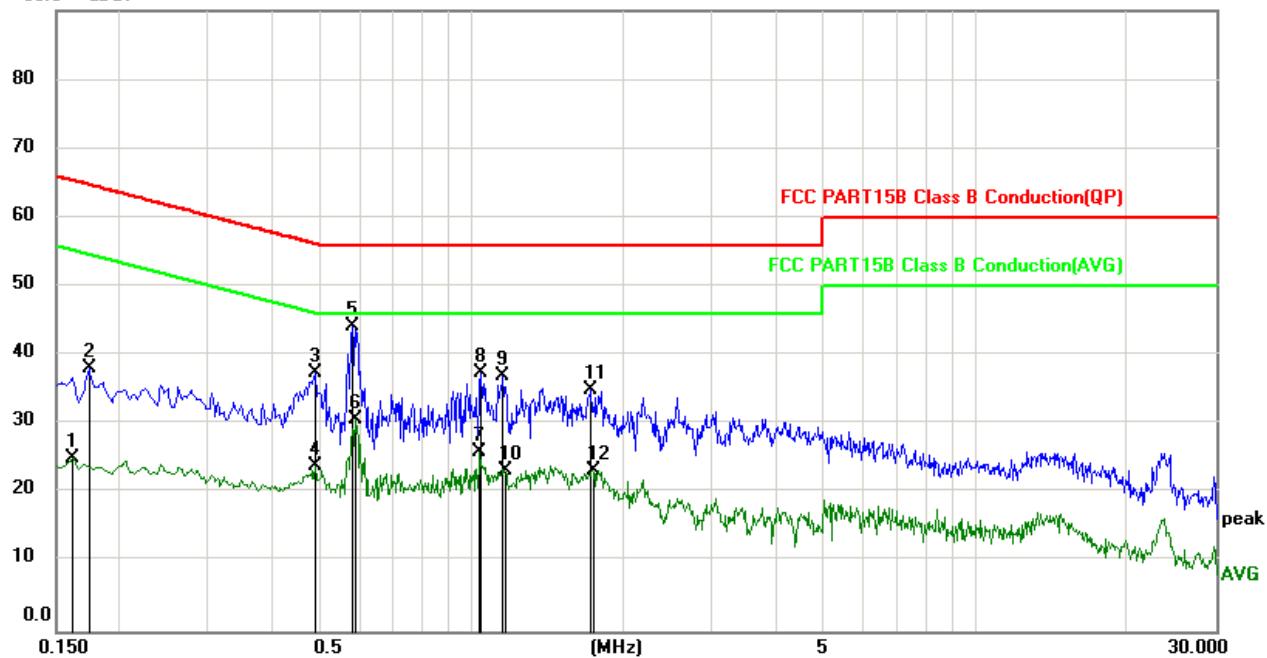


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	15.46	9.73	25.19	55.36	-30.17	Avg	
2		0.1740	28.49	9.73	38.22	64.77	-26.55	peak	
3		0.4900	27.81	9.74	37.55	56.17	-18.62	peak	
4		0.4900	14.17	9.74	23.91	46.17	-22.26	Avg	
5	*	0.5820	34.37	9.74	44.11	56.00	-11.89	peak	
6		0.5899	21.06	9.74	30.80	46.00	-15.20	Avg	
7		1.0380	16.15	9.75	25.90	46.00	-20.10	Avg	
8		1.0460	27.67	9.75	37.42	56.00	-18.58	peak	
9		1.1539	27.30	9.75	37.05	56.00	-18.95	peak	
10		1.1619	13.48	9.75	23.23	46.00	-22.77	Avg	
11		1.7260	25.22	9.76	34.98	56.00	-21.02	peak	
12		1.7380	13.46	9.76	23.22	46.00	-22.78	Avg	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

90.0 dBuV

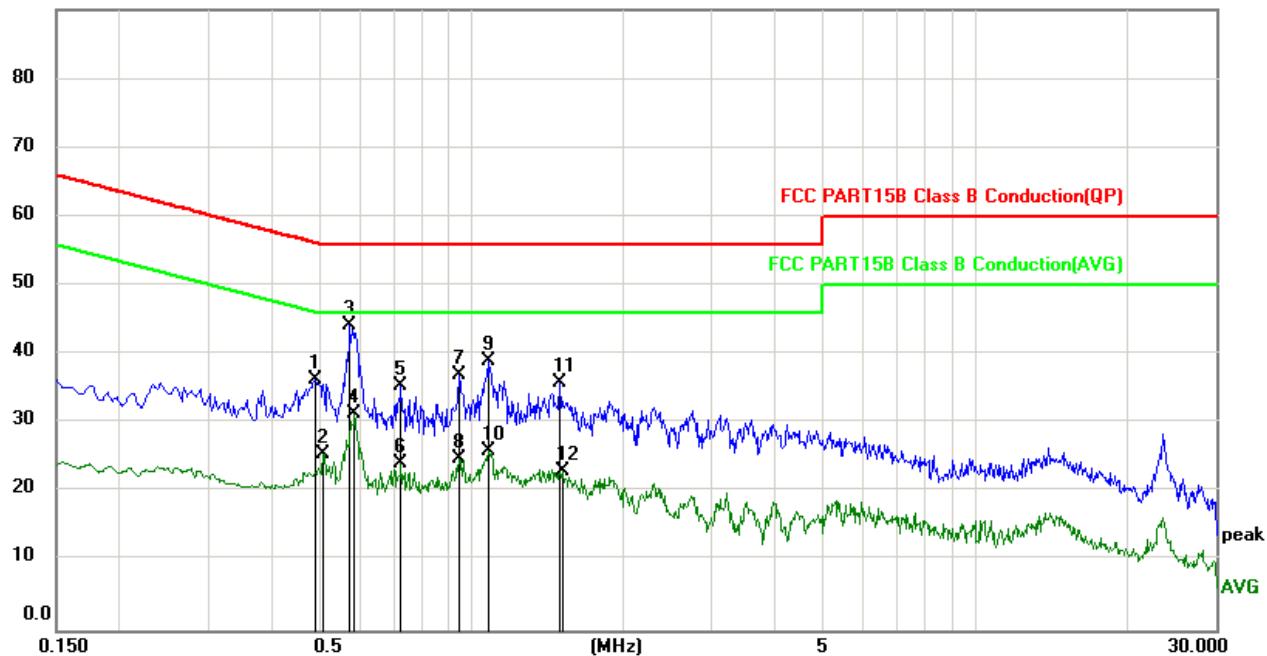


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dBuV	dB		
1	0.4900	26.53	9.74	36.27	56.17	-19.90	peak	
2	0.5100	15.87	9.74	25.61	46.00	-20.39	AVG	
3 *	0.5740	34.58	9.74	44.32	56.00	-11.68	peak	
4	0.5860	21.55	9.74	31.29	46.00	-14.71	AVG	
5	0.7260	25.64	9.74	35.38	56.00	-20.62	peak	
6	0.7260	14.45	9.74	24.19	46.00	-21.81	AVG	
7	0.9460	27.28	9.75	37.03	56.00	-18.97	peak	
8	0.9460	15.05	9.75	24.80	46.00	-21.20	AVG	
9	1.0820	29.31	9.75	39.06	56.00	-16.94	peak	
10	1.0820	16.26	9.75	26.01	46.00	-19.99	AVG	
11	1.5020	26.09	9.75	35.84	56.00	-20.16	peak	
12	1.5140	13.22	9.76	22.98	46.00	-23.02	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Spurious Emissions


5.3.1 Duty Cycle

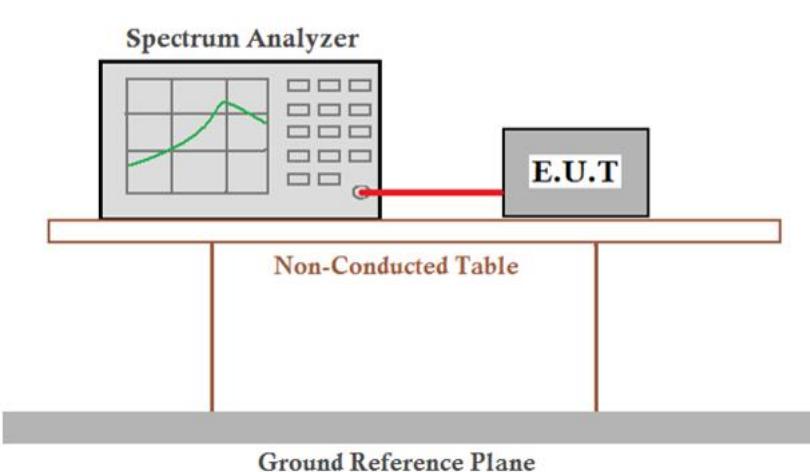Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	N/A
Test Mode:	Transmitting mode
Test Results:	Pass

Test frequency (MHz)	T period (ms)	T on time (ms)	Duty cycle
428.5	29.101	8.013	0.275
430.5	25.263	7.853	0.311


Test plot as follows:

Test frequency 428.5MHz

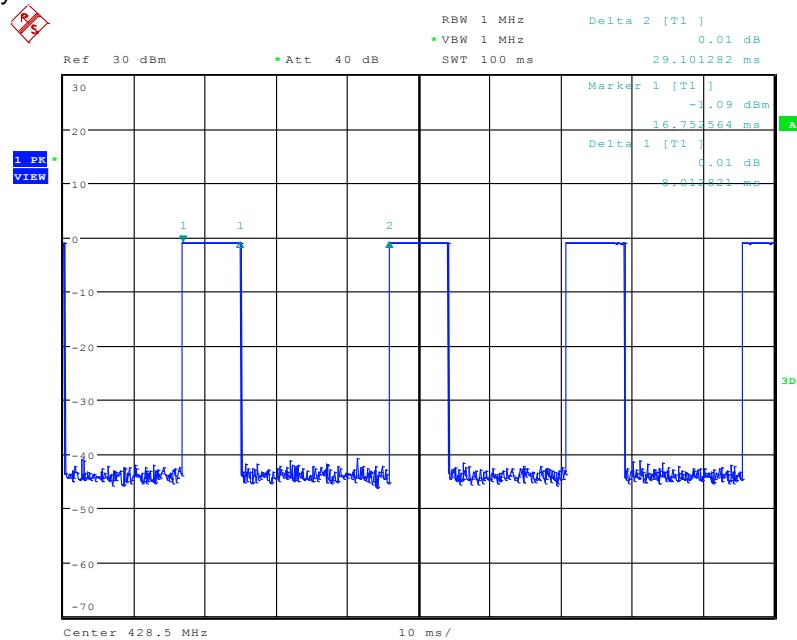

Date: 22.AUG.2018 15:52:11

Test frequency 430.5MHz

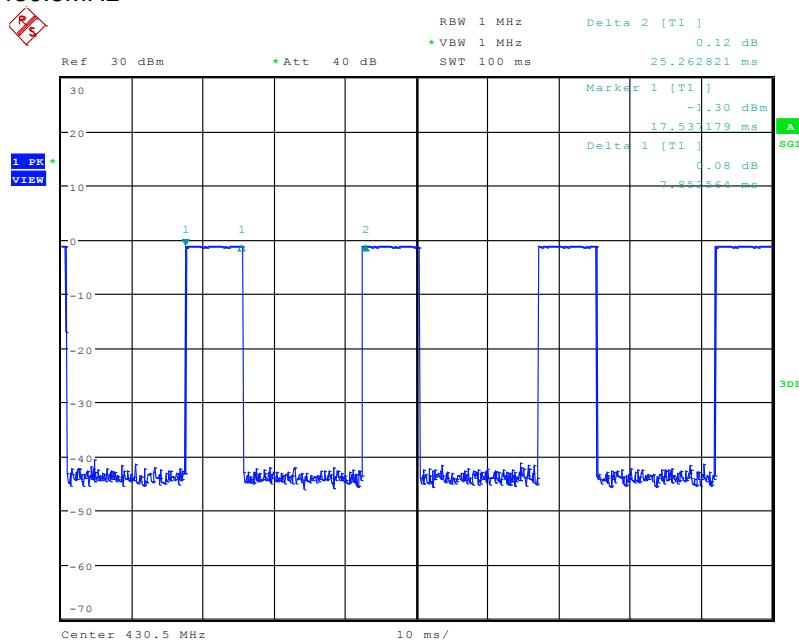

Date: 22.AUG.2018 16:06:38

5.3.2 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi- peak	3
	88MHz-216MHz	150	43.5	Quasi- peak	3
	216MHz-960MHz	200	46.0	Quasi- peak	3
	960MHz-1GHz	500	54.0	Quasi- peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
		80.6		Average Value	
		100.6		Peak Value	
		80.7		Average Value	
	430.5MHz	100.7		Peak Value	
Remark: 428.5 MHz limit = 41.6667 * 428.5 – 7083.33333= 10770.85 uV/m= 80.6 dBuV/m 430.5 MHz limit = 41.6667 * 430.5 – 7083.33333= 10854.18 uV/m= 80.7 dBuV/m					

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</p>
Test Setup:	

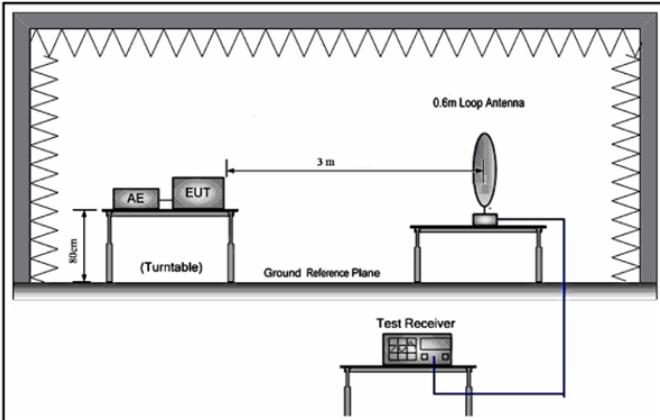


Figure 1. Below 30MHz

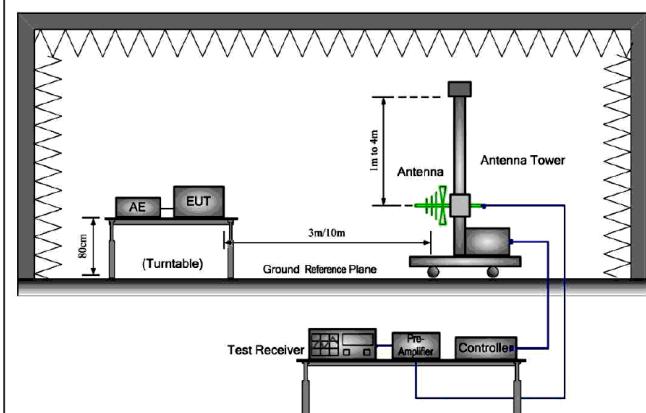


Figure 2. 30MHz to 1GHz

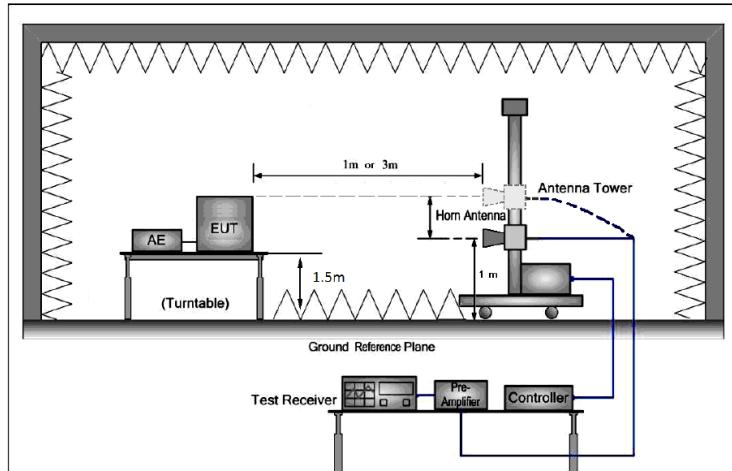


Figure 3. Above 1 GHz

Test Mode:	Transmitting mode
Test Results:	Pass

Measurement Data
5.3.2.1 Field Strength Of The Fundamental Signal

Test frequency 428.5MHz

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	T on time =8.013ms
	T period =29.101ms
	PDCF= -11.21

Antenna polarization: Horizontal						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
428.5	71.0	15.16	86.16	100.6	-22.64	Peak
428.5	-	-	74.95	80.6	--5.85	Average

Antenna polarization: Vertical						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
428.5	57.27	15.16	72.43	100.6	-36.37	Peak
428.5	-	-	61.22	80.6	-19.58	Average

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Test frequency 430.5MHz

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	T on time =7.853ms
	T period =25.263ms
	PDCF= -10.14

Antenna polarization: Horizontal						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
430.5	63.15	15.16	78.31	100.7	-30.49	Peak
430.5	-	-	68.17	80.7	-12.63	Average

Antenna polarization: Vertical						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
430.5	54.08	15.16	69.24	100.7	-39.56	Peak
430.5	-	-	59.1	80.7	-21.7	Average

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

5.3.2.2 Spurious Emissions

9KHz-30MHz


9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


Below 1GHz (30MHz-1GHz)

Test frequency 428.5MHz

Horizontal

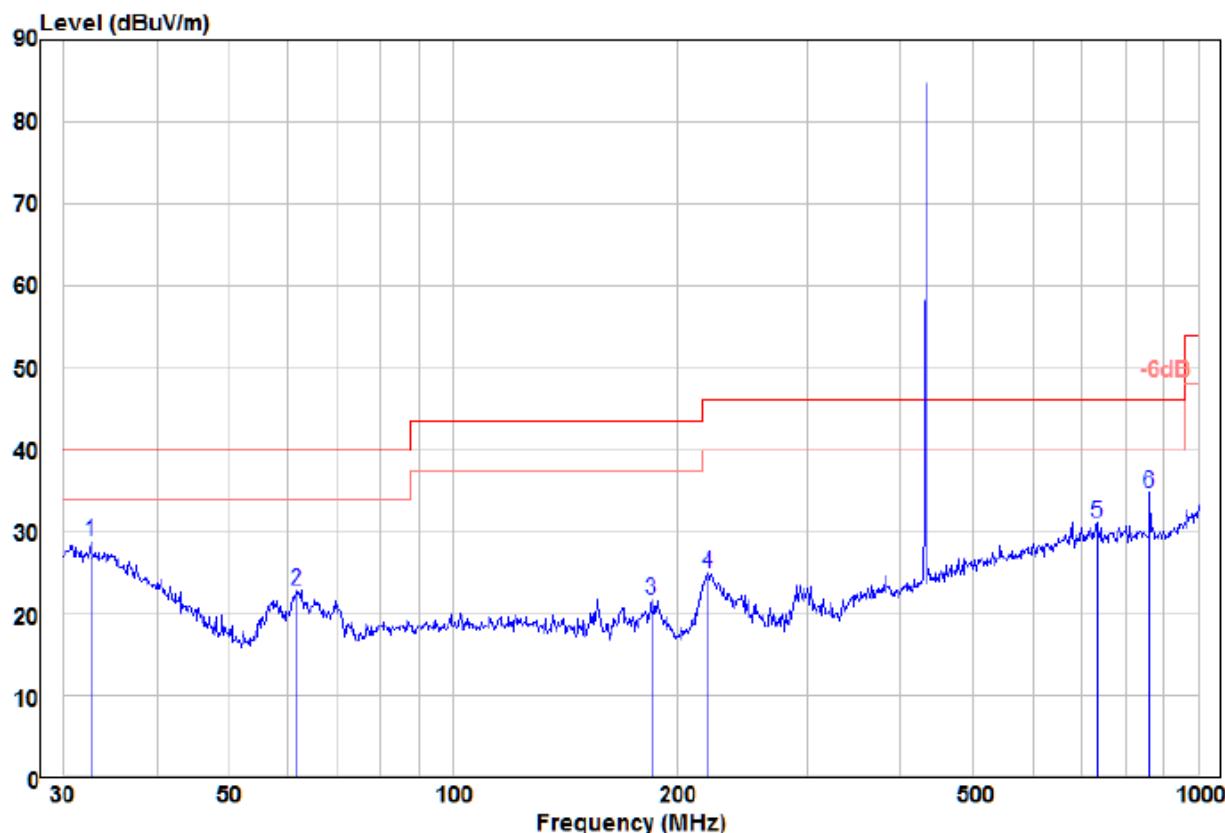


Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase
	Level	Factor	Level				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	32.63	10.08	18.70	28.78	40.00	-11.22	Peak HORIZONTAL
2	61.78	17.27	5.65	22.92	40.00	-17.08	Peak HORIZONTAL
3	184.49	13.43	8.23	21.66	43.50	-21.84	Peak HORIZONTAL
4	219.84	15.07	9.91	24.98	46.00	-21.02	Peak HORIZONTAL
5	731.92	11.12	20.03	31.15	46.00	-14.85	Peak HORIZONTAL
6 pp	863.06	14.34	20.47	34.81	46.00	-11.19	Peak HORIZONTAL

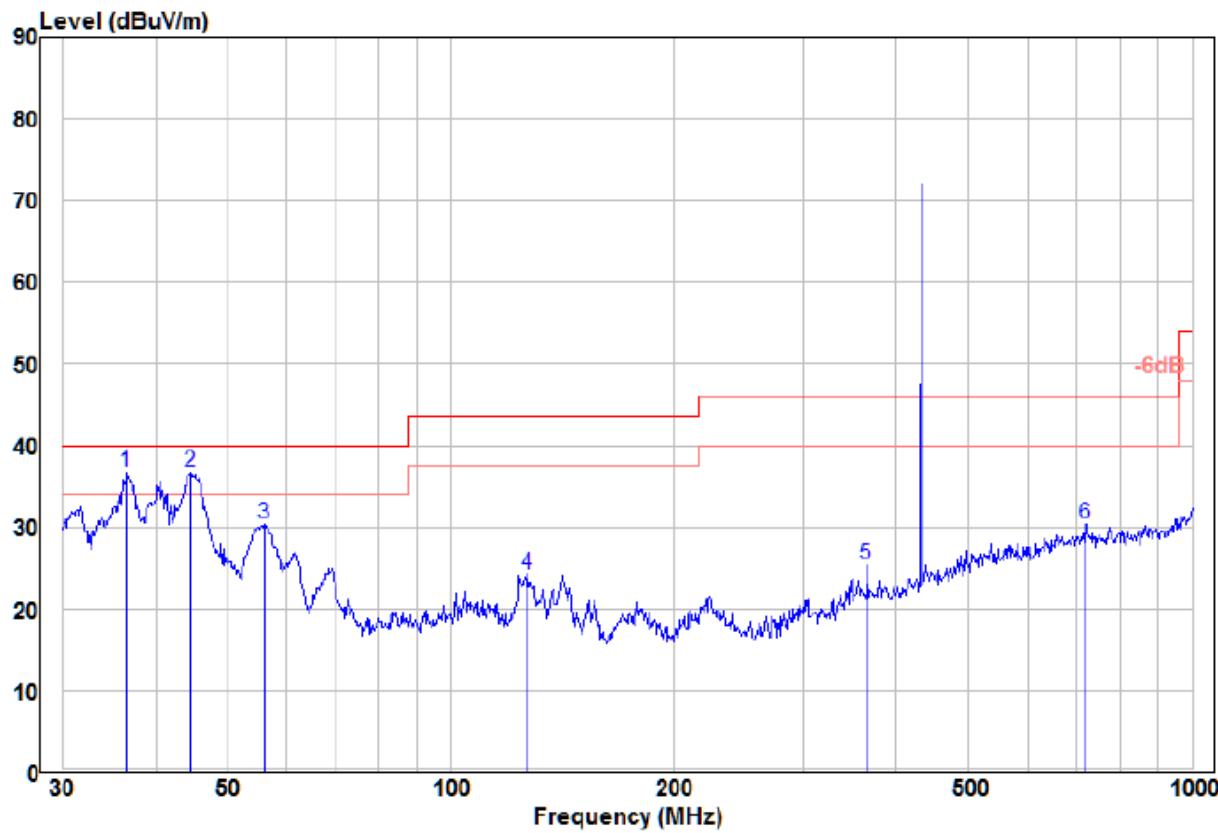
Vertical


Freq	Read		Level	Limit	Over	Pol/Phase	
	MHz	dB _{uV}	dB/m	dB _{uV/m}	Line	Limit	Remark
1 pp	36.64	19.29	17.35	36.64	40.00	-3.36	Peak VERTICAL
2 !	44.59	24.45	12.16	36.61	40.00	-3.39	Peak VERTICAL
3	56.00	23.46	6.83	30.29	40.00	-9.71	Peak VERTICAL
4	127.22	13.92	10.29	24.21	43.50	-19.29	Peak VERTICAL
5	364.26	11.58	13.72	25.30	46.00	-20.70	Peak VERTICAL
6	719.20	10.50	19.89	30.39	46.00	-15.61	Peak VERTICAL

Test frequency 430.5MHz

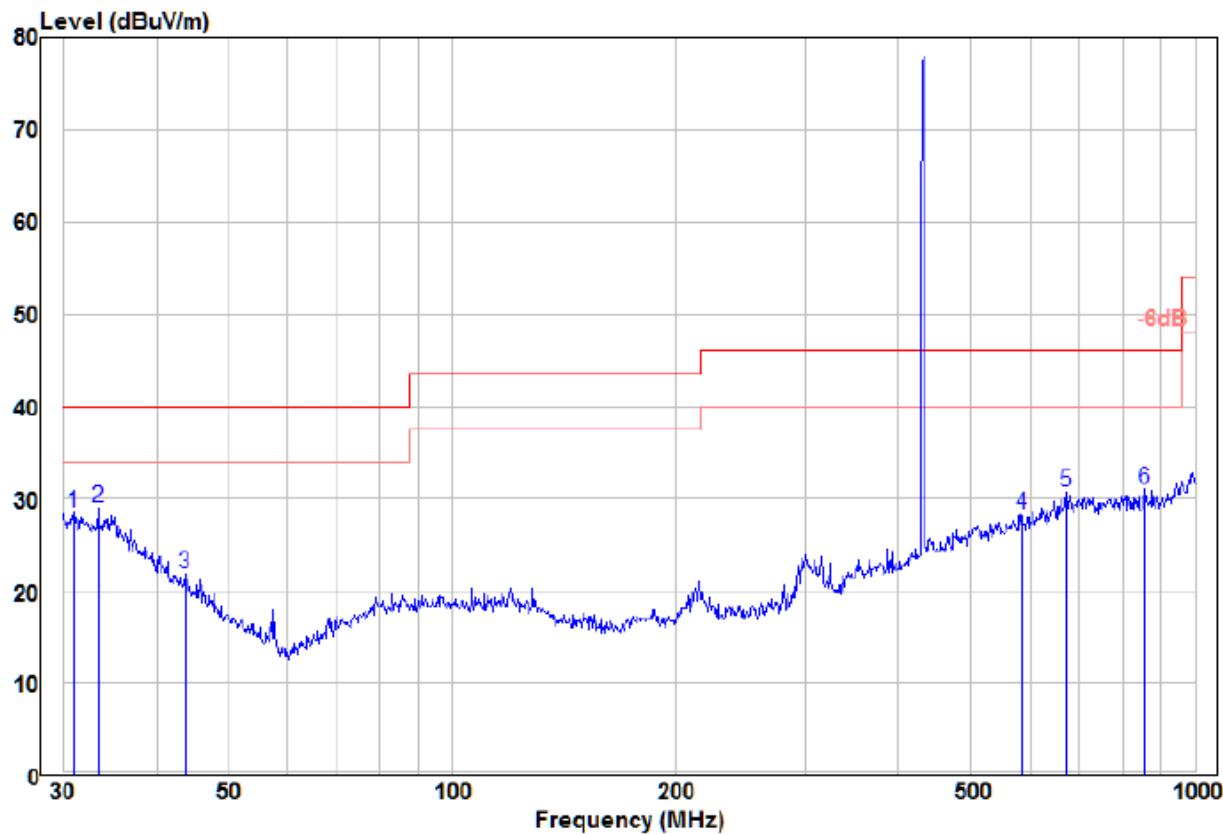Horizontal


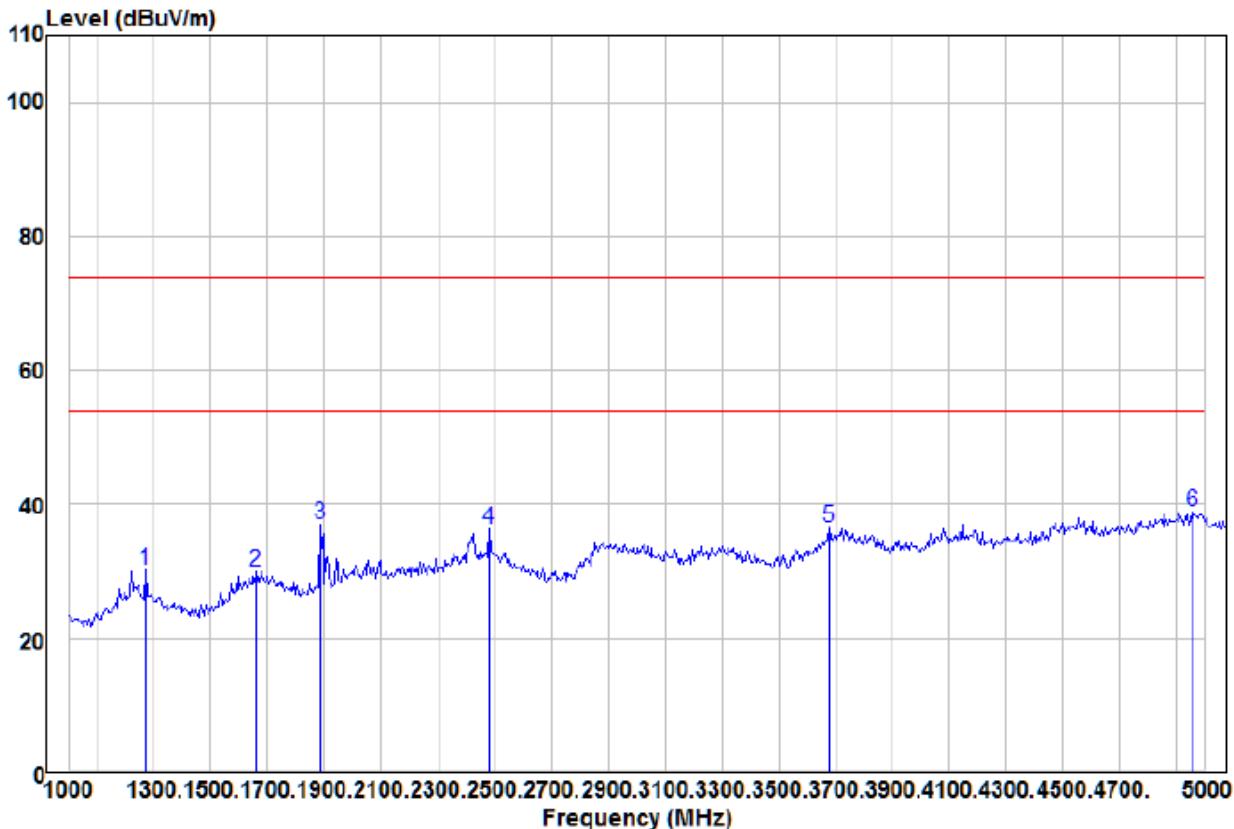
Freq	Read		Factor	Limit Level	Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV		dB/m	dBuV/m	dBuV/m	dB	
1	30.96	9.70	18.83	28.53	40.00	-11.47	Peak	HORIZONTAL
2 pp	33.44	10.39	18.63	29.02	40.00	-10.98	Peak	HORIZONTAL
3	43.78	9.18	12.66	21.84	40.00	-18.16	Peak	HORIZONTAL
4	585.41	10.28	17.99	28.27	46.00	-17.73	Peak	HORIZONTAL
5	671.02	11.23	19.54	30.77	46.00	-15.23	Peak	HORIZONTAL
6	857.28	10.52	20.46	30.98	46.00	-15.02	Peak	HORIZONTAL

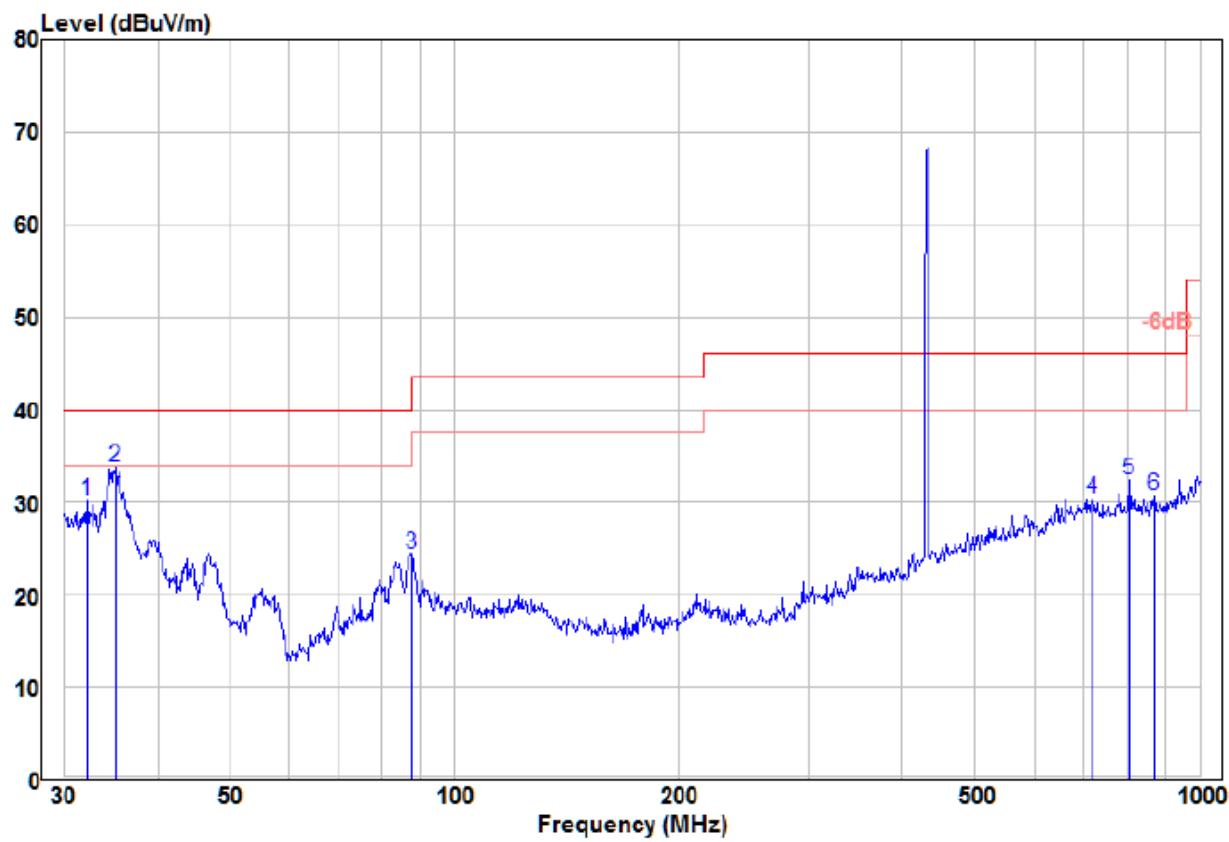Vertical


Freq	Read			Limit		Over Limit	Remark	Pol/Phase
	MHz	dB _{UV}	dB/m	dB _{UV} /m	dB _{UV} /m			
1	32.17	11.50	18.74	30.24	40.00	-9.76	Peak	VERTICAL
2 pp	35.12	15.44	18.42	33.86	40.00	-6.14	Peak	VERTICAL
3	87.84	14.36	10.07	24.43	40.00	-15.57	Peak	VERTICAL
4	719.66	10.53	19.90	30.43	46.00	-15.57	Peak	VERTICAL
5	804.94	11.81	20.69	32.50	46.00	-13.50	Peak	VERTICAL
6	869.36	10.18	20.48	30.66	46.00	-15.34	Peak	VERTICAL


Above 1GHz(1GHz-5GHz)

Test frequency 428.5MHz

Horizontal


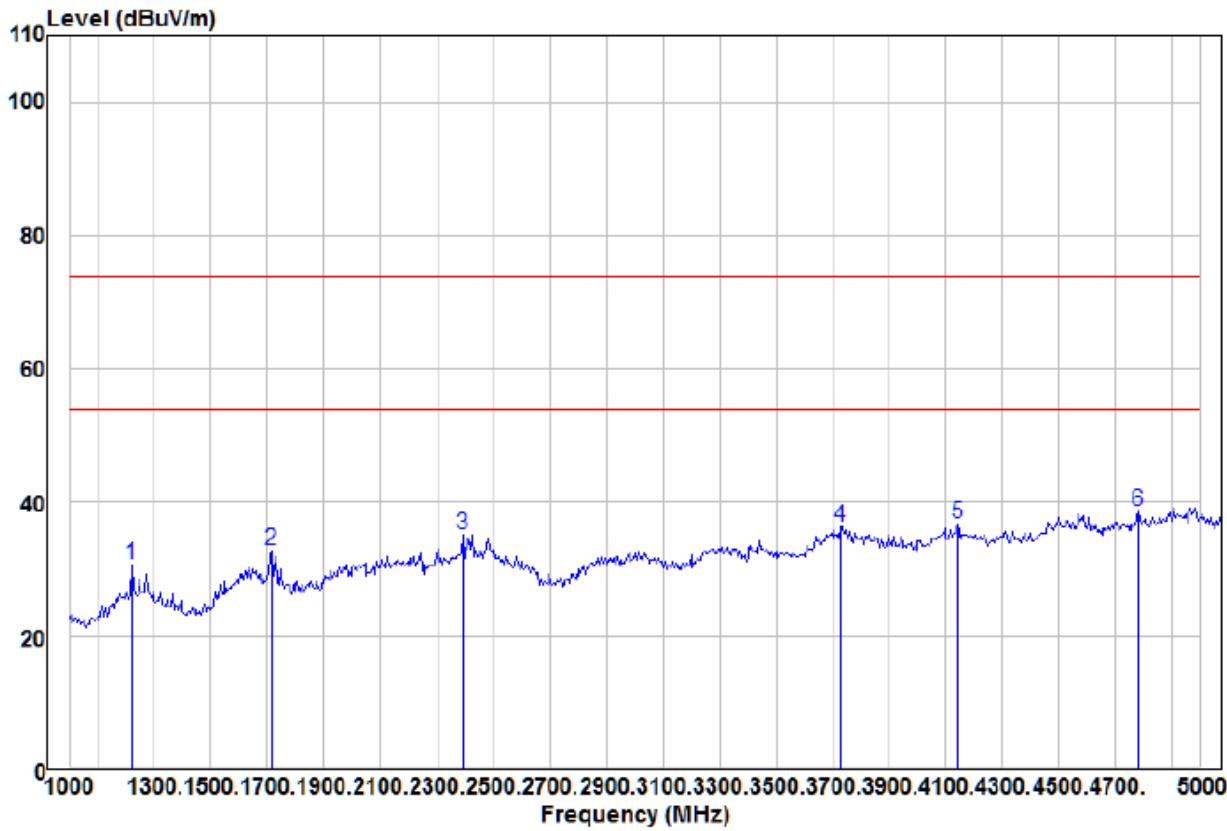
Freq	Read		Limit		Over Line Limit	Over Line Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m				
1	1270.00	47.30	-17.03	30.27	74.00	-43.73	Peak	HORIZONTAL
2	1660.00	44.87	-14.86	30.01	74.00	-43.99	Peak	HORIZONTAL
3	1885.00	49.87	-12.71	37.16	74.00	-36.84	Peak	HORIZONTAL
4	2480.00	47.64	-11.28	36.36	74.00	-37.64	Peak	HORIZONTAL
5	3680.00	45.29	-8.67	36.62	74.00	-37.38	Peak	HORIZONTAL
6 pp	4965.00	43.16	-4.23	38.93	74.00	-35.07	Peak	HORIZONTAL

Vertical:

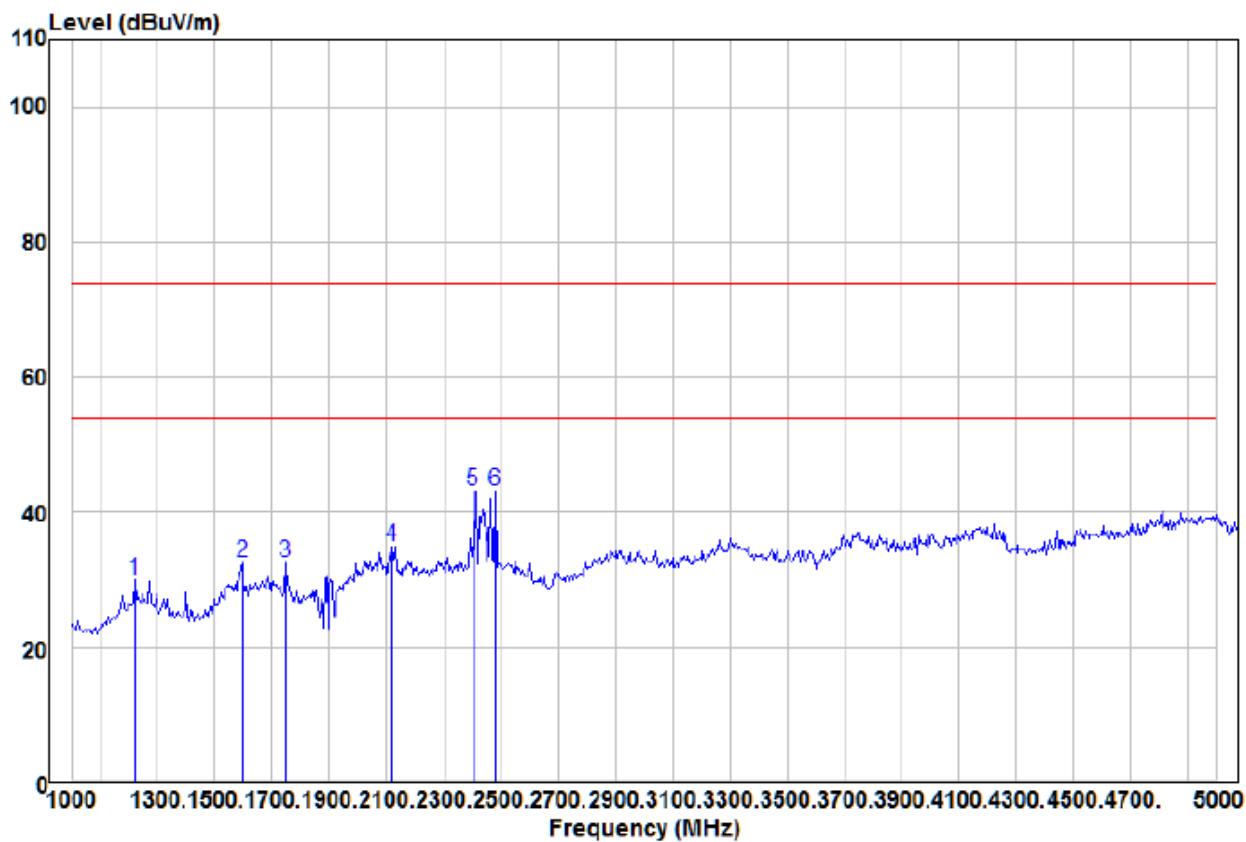


Freq	Read			Limit	Over	Pol/Phase	
	Level	Factor	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1220.00	47.27	-17.27	30.00	74.00	-44.00	Peak VERTICAL
2	1595.00	48.28	-15.64	32.64	74.00	-41.36	Peak VERTICAL
3	1745.00	46.53	-13.86	32.67	74.00	-41.33	Peak VERTICAL
4	2120.00	46.97	-12.05	34.92	74.00	-39.08	Peak VERTICAL
5 pp	2405.00	53.94	-10.72	43.22	74.00	-30.78	Peak VERTICAL
6	2480.00	54.33	-11.28	43.05	74.00	-30.95	Peak VERTICAL

Test frequency 430.5MHz

Horizontal


Freq	Read			Limit	Over	Remark	Pol/Phase
	Level	Factor	Level				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 1220.00	47.94	-17.27	30.67	74.00	-43.33	Peak	HORIZONTAL
2 1715.00	46.69	-13.86	32.83	74.00	-41.17	Peak	HORIZONTAL
3 2390.00	45.49	-10.21	35.28	74.00	-38.72	Peak	HORIZONTAL
4 3730.00	44.73	-8.33	36.40	74.00	-37.60	Peak	HORIZONTAL
5 4145.00	44.69	-7.78	36.91	74.00	-37.09	Peak	HORIZONTAL
6 pp 4785.00	42.83	-4.11	38.72	74.00	-35.28	Peak	HORIZONTAL

Vertical:

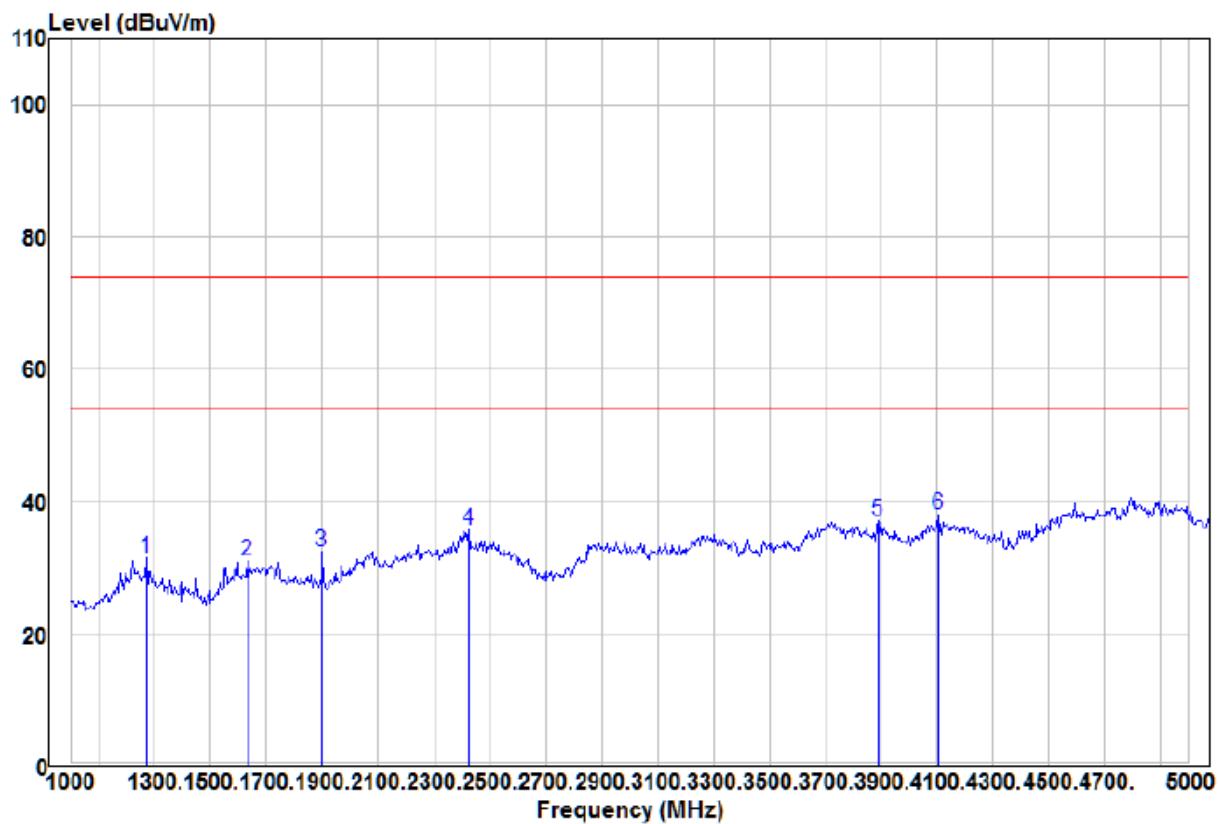


Freq	Read		Limit Level	Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1270.00	48.49	-17.03	31.46	74.00	-42.54	Peak VERTICAL
2	1630.00	46.20	-15.22	30.98	74.00	-43.02	Peak VERTICAL
3	1900.00	45.23	-12.86	32.37	74.00	-41.63	Peak VERTICAL
4	2425.00	46.58	-10.92	35.66	74.00	-38.34	Peak VERTICAL
5	3890.00	44.95	-7.86	37.09	74.00	-36.91	Peak VERTICAL
6 pp	4110.00	45.71	-7.81	37.90	74.00	-36.10	Peak VERTICAL

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) The disturbance above 5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits. Specified above by more than 20dB under any condition of modulation. So, only the peak measurements were show in the report.

5.4 20dB Bandwidth

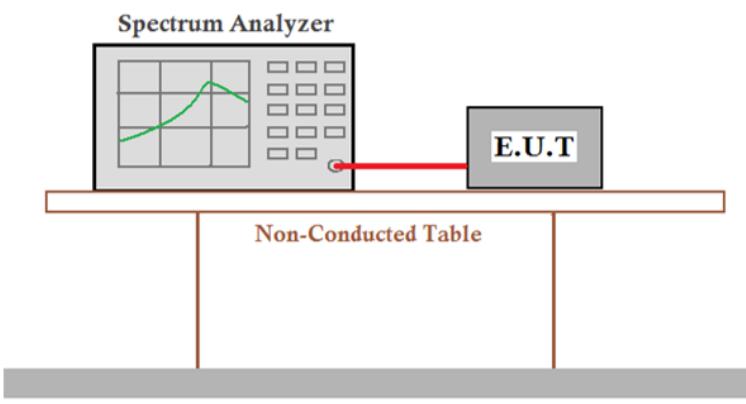
Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Setup:	
Test Mode:	Transmitting mode
Test Results:	Pass

Measurement Data

Test frequency(MHz)	20dB bandwidth (MHz)	Limit (MHz)	Results
428.5	0.1202	1.0713	Pass
430.5	0.1234	1.0763	Pass


Test plot as follows:

Test frequency:428.5MHz

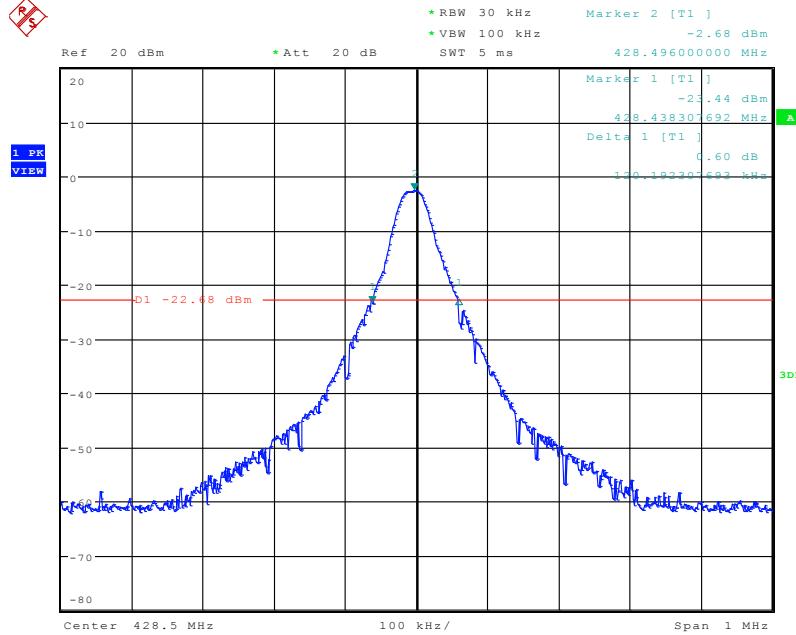


Date: 21.AUG.2018 17:46:29

Test frequency:430.5MHz

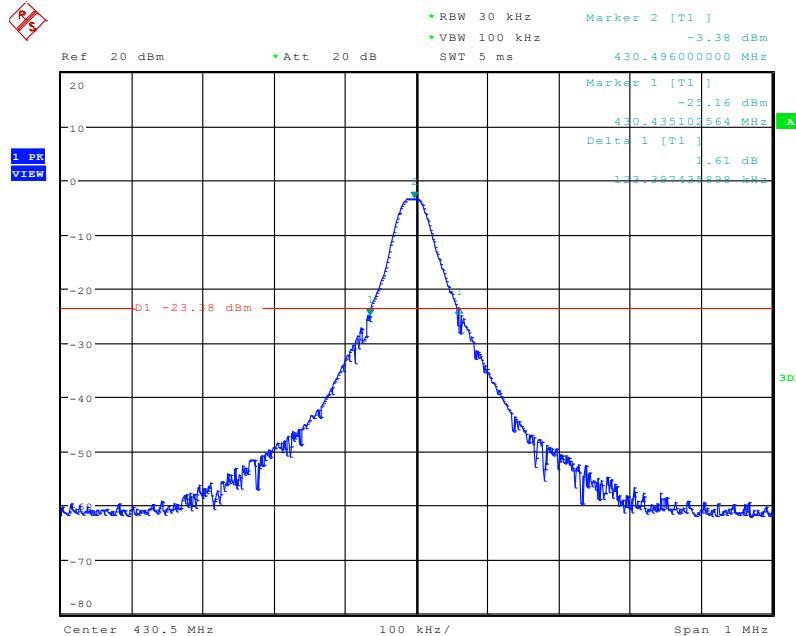

Date: 21.AUG.2018 18:01:15

5.5 Dwell time

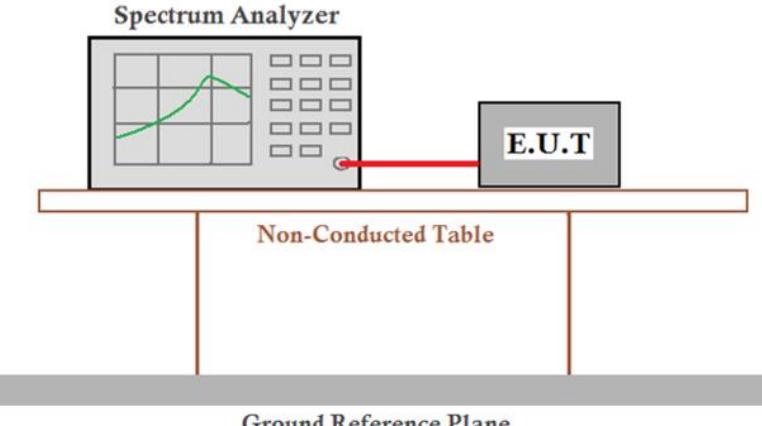Test Requirement:	47 CFR Part 15C Section 15.231 (a)
Test Method:	ANSI C63.10:2013
Test Setup:	
Test Mode:	Transmitting mode
Test Results:	Pass

Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66~40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.

The EUT meets the requirements of this section.

2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

EUT transmits automatically after activation.


3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

Test frequency(MHz)	Test item	Limit (MHz)	Results
428.5	Transmitting time	≤5S	0.008077S
430.5	Transmitting time	≤5S	0.008077S


Test plot as follows:

Test frequency:428.5MHz

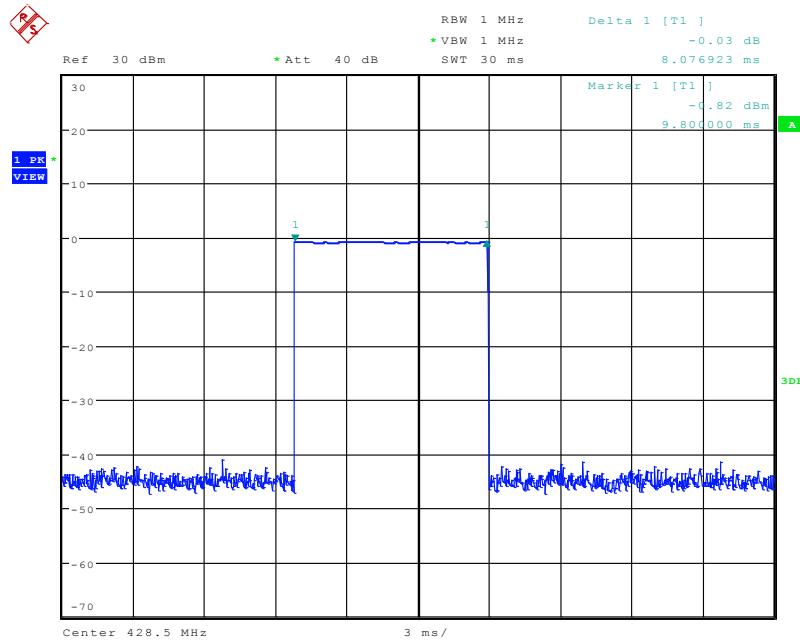

Date: 22.AUG.2018 15:58:35

Test frequency:430.5MHz

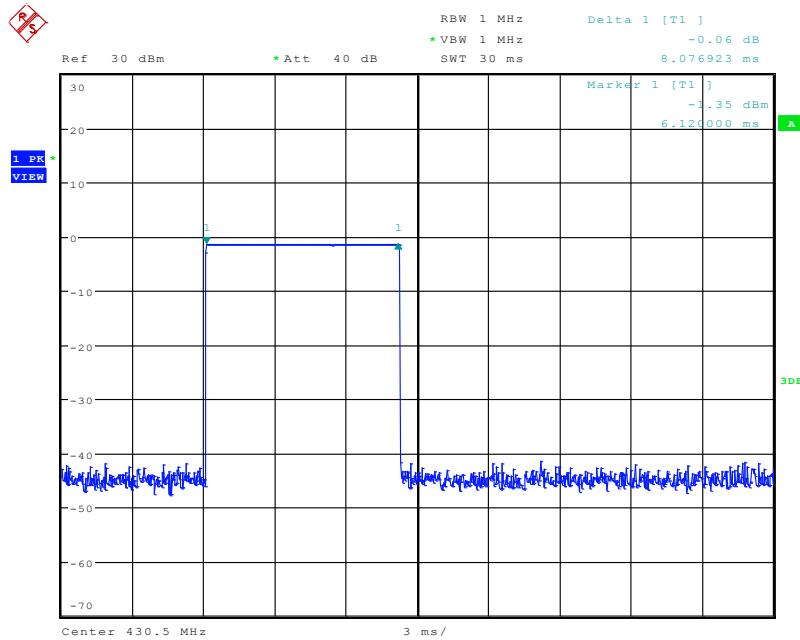

Date: 22.AUG.2018 16:09:18

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.


5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.

6 Photographs - EUT Test Setup

6.1 Conducted Emission

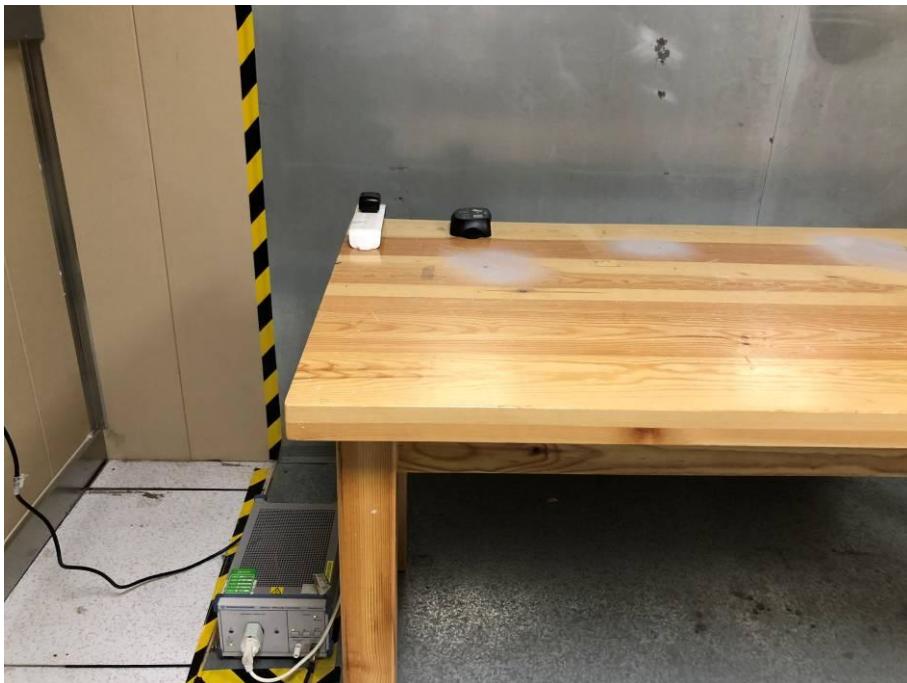

6.2 Radiated Emission

9kHz~30MHz:



30MHz~1GHz:




Above 1GHz:





7 Photographs - EUT Constructional Details



Test model No.: KD661C

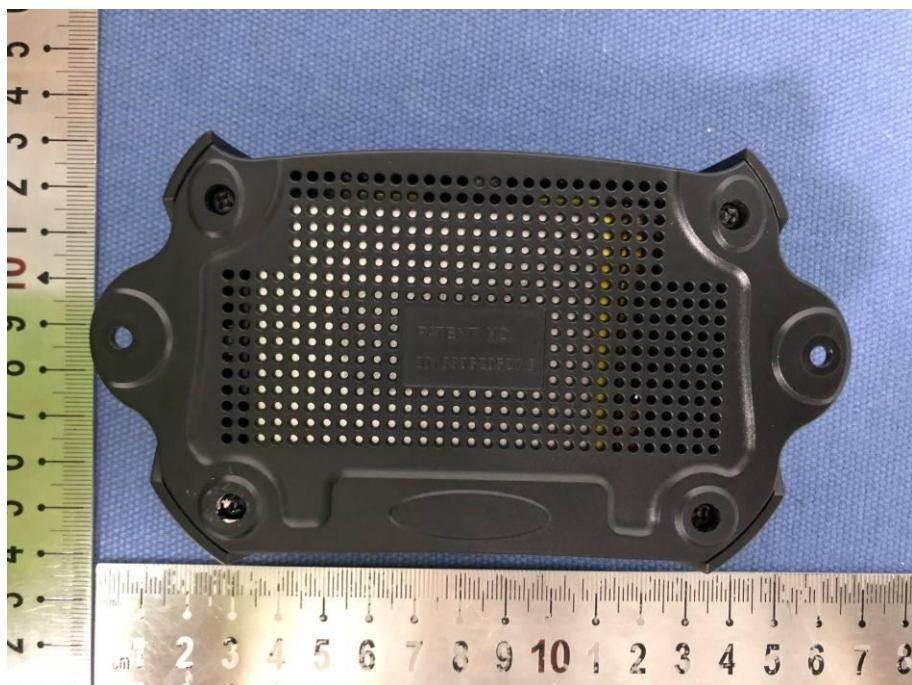





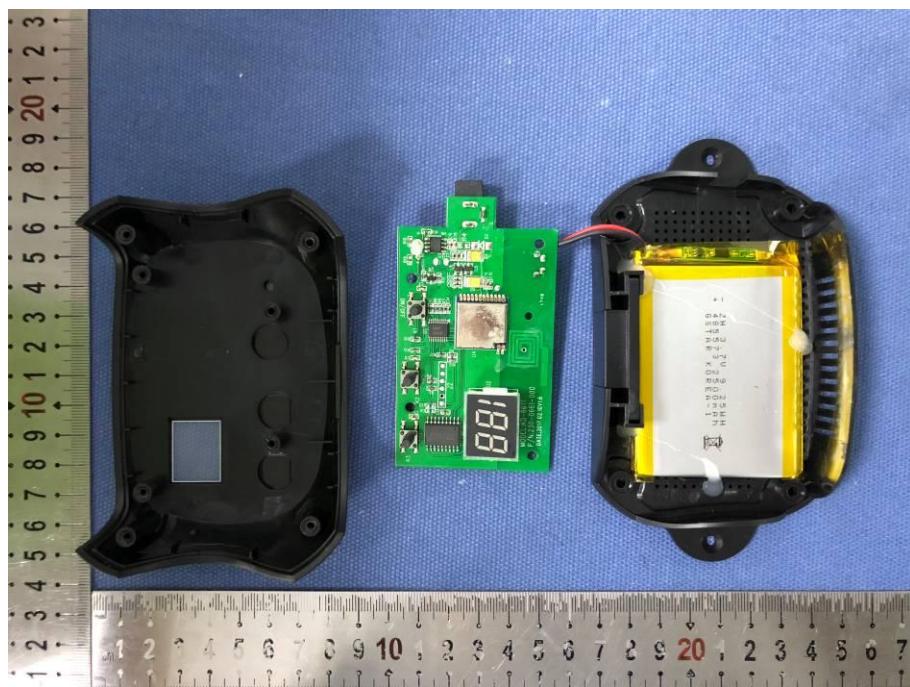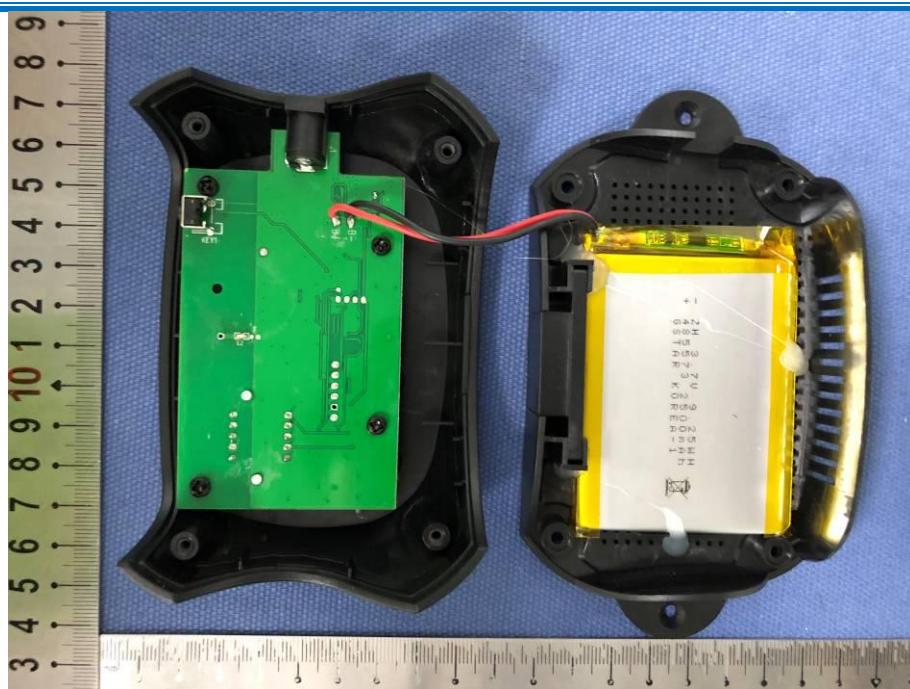

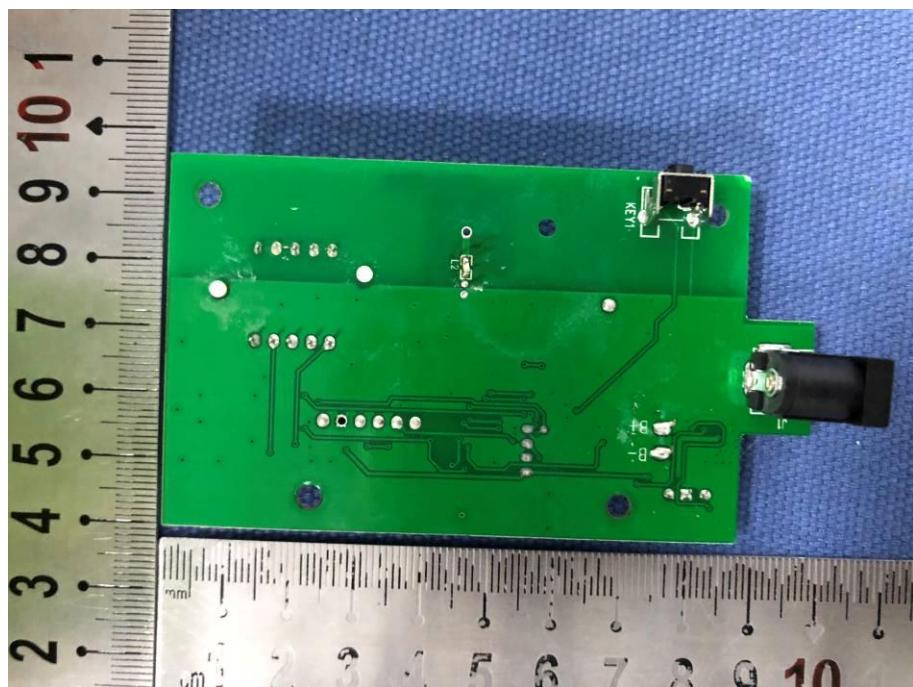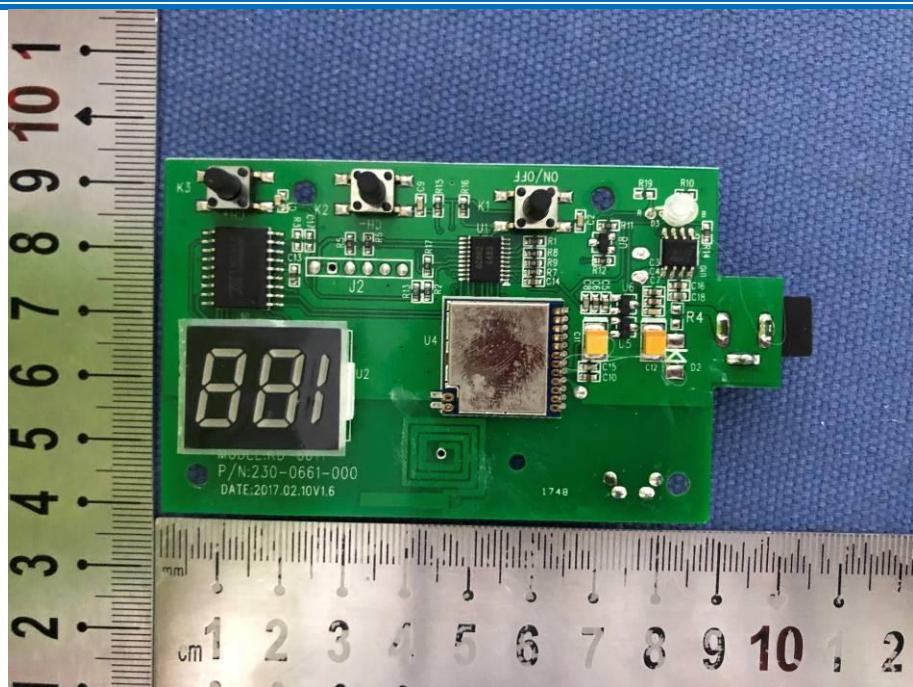



END OF THE REPORT