



FCC Radio Test Report

FCC ID: 2AA6ZCR3

This report concerns: Original Grant

Project No. : 2312G007
Equipment : Router
Brand Name : CaptionCall
Test Model : CR3
Series Model : N/A
Applicant : CaptionCall.LLC
Address : 4215 Riverboat Road Salt Lake City, Utah 84123
Manufacturer : Suga Electronics(Dongguan)Co.,Ltd
Address : Suga High-tech Industrial Park,No 8, Fulong Road, Sanzhong, Qingxi Town, Dongguan, Guangdong
Factory : Hunan Fullriver Information Technology Co.,Ltd
Address : No. 666, Wangcheng Street, Wangcheng Economic and Technological Development Zone, Changsha City, Hunan Province, P.R. China
Date of Receipt : Dec. 04, 2023
Date of Test : Dec. 05, 2023 ~ Jan. 16, 2024
Issued Date : Feb. 22, 2024
Report Version : R00
Test Sample : Engineering Sample No.: SSL20231204301-1 for conducted, SSL20231204301 for radiated.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by

Grani Zhou

Grani Zhou

Approved by

Steven Lu

Steven Lu

Room 108, Building 2, No. 1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong 523000 China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 DUTY CYCLE	14
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.6 SUPPORT UNITS	16
4 . AC POWER LINE CONDUCTED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATION CONDITIONS	18
4.6 TEST RESULTS	18
5 . RADIATED EMISSIONS	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	21
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	23
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	23
5.8 TEST RESULTS - ABOVE 1000 MHZ	23
6 . BANDWIDTH	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24

Table of Contents

	Page
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . MAXIMUM OUTPUT POWER	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . CONDUCTED SPURIOUS EMISSIONS	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULTS	26
9 . POWER SPECTRAL DENSITY	27
9.1 LIMIT	27
9.2 TEST PROCEDURE	27
9.3 DEVIATION FROM STANDARD	27
9.4 TEST SETUP	27
9.5 EUT OPERATION CONDITIONS	27
9.6 TEST RESULTS	27
10 . MEASUREMENT INSTRUMENTS LIST	28
11 . EUT TEST PHOTO	30
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	35
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	38
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	43
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	46
APPENDIX E - BANDWIDTH	83
APPENDIX F - MAXIMUM OUTPUT POWER	90

Table of Contents**Page****APPENDIX G - CONDUCTED SPURIOUS EMISSIONS****97****APPENDIX H - POWER SPECTRAL DENSITY****110**

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2312G007	R00	Original Report.	Feb. 22, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of NVLAP:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For other Conducted Items:

Room 108, Building 2, No. 1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong 523000.

BTL's Registration Number for FCC: 568794

BTL's Designation Number for FCC: CN5041

For Conducted Emissions, Radiated Emissions and Output Power Items:

No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong 523792.

BTL's Registration Number for FCC: 162128

BTL's Designation Number for FCC: CN5042

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{,}}(\text{dB})$
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{,}}(\text{dB})$
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{,}}(\text{dB})$
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	$U_{\text{,}}(\text{dB})$
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	$U_{\text{,}}(\text{dB})$
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	50%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-9kHz to 30 MHz	22°C	48%	AC 120V/60Hz	Hayden Chen
Radiated Emissions-30MHz to 1000MHz	24°C	46%	AC 120V/60Hz	Allen Tong
Radiated Emissions-Above 1000MHz	23~25°C	42~45%	AC 120V/60Hz	Berton Luo Max Wang
Bandwidth	23°C	52%	DC 12V	Tember Zhuang
Maximum Output Power	20~22°C	46~58%	DC 12V	Gene Yang
Conducted Spurious Emissions	23°C	52%	DC 12V	Tember Zhuang
Power Spectral Density	23°C	52%	DC 12V	Tember Zhuang

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Router
Brand Name	CaptionCall
Test Model	CR3
Series Model	N/A
Model Difference(s)	N/A
HVIN	V1.1
FVIN	v421_D231114
Power Source	DC voltage supplied from AC adapter. Model: F12L46-120100SPAU
Power Rating	I/P: 100-240V~ 50/60Hz 0.3A O/P: 12.0V === 1.0A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps
Maximum Output Power	IEEE 802.11b: 29.21 dBm (0.8337 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20) CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	SLEing®	SLEingA200330070-C05	Dipole	N/A	5.13
2	SLEing®	SLEingA200330280	Dipole	N/A	5.13

Note:

- 1) This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=5.13.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 5.13 + 10\log(2/1)\text{dBi} = 8.14\text{dBi}$.
Then, the power spectral density limit is $8 - (8.14 - 6) = 5.86$.
- 2) The antenna gain is provided by the manufacturer.

4. Table for Antenna Configuration:

Operating Mode / TX Mode	2TX
IEEE 802.11b	V(Ant. 1 + Ant. 2)
IEEE 802.11g	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V(Ant. 1 + Ant. 2)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09
Mode 7	TX B Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX B Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 7	TX B Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX B Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (5) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.


3.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	QATool_Dbg 0.0.2.15		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	17.5	18	17.5
IEEE 802.11g	15	18.5	14.5
IEEE 802.11n(HT20)	14.5	18.5	15
IEEE 802.11ax(HE20)	13.5	18.5	14
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	12.5	17	14
IEEE 802.11ax(HE40)	12.5	16.5	13.5


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.

IEEE 802.11b

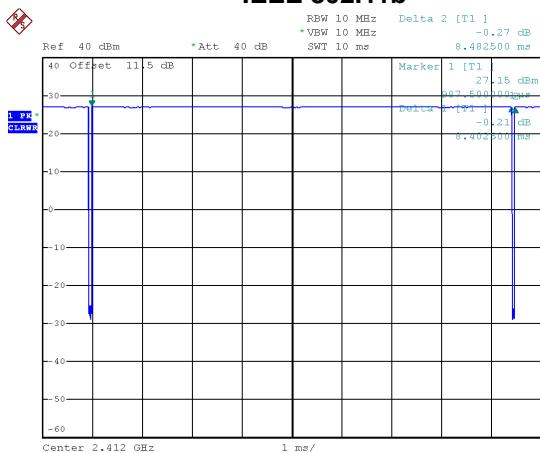


IEEE 802.11g

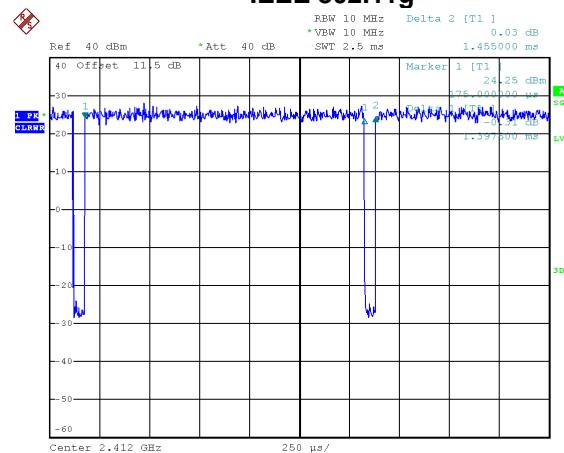


Date: 8.DEC.2023 12:24:14

Duty cycle = 8.403 ms / 8.483 ms = 99.06%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

IEEE 802.11n(HT20)

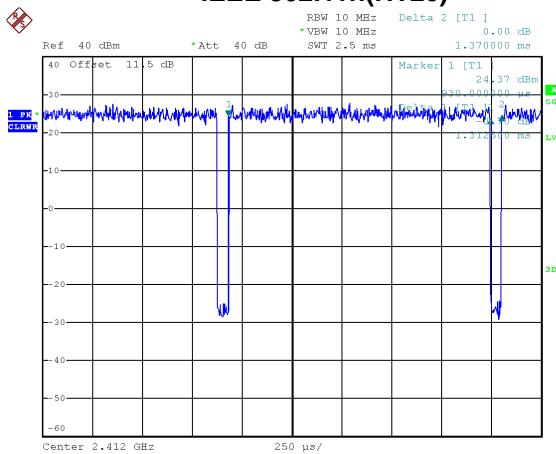

IEEE 802.11n(HT40)


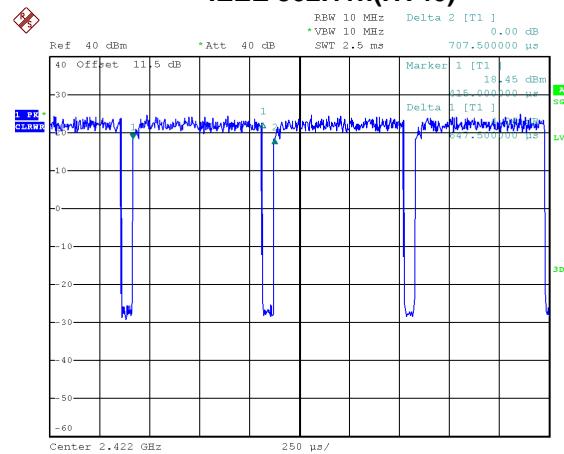


Date: 8.DEC.2023 12:27:19

Duty cycle = 1.313 ms / 1.370 ms = 95.80%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.19$

Date: 8.DEC.2023 12:28:11

Duty cycle = 0.648 ms / 0.708 ms = 91.52%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.38$

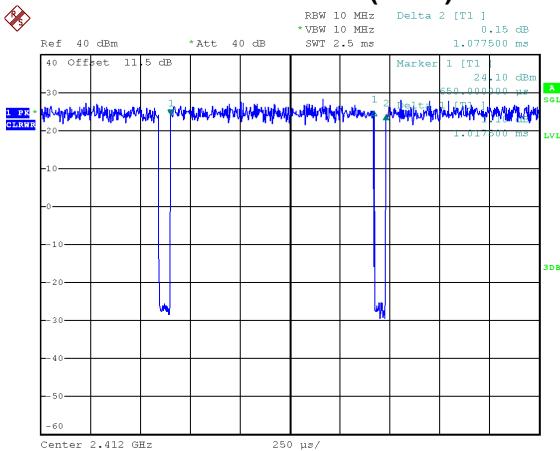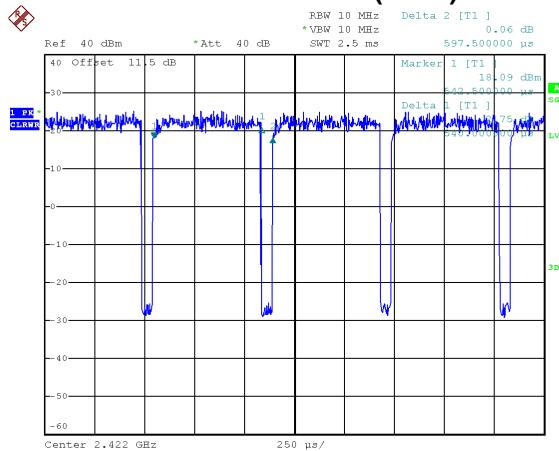IEEE 802.11ax(HE20)

IEEE 802.11ax(HE40)


Date: 8.DEC.2023 12:29:30

Duty cycle = 1.018 ms / 1.078 ms = 94.43%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.25$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 716 Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 762 Hz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1544 Hz.


For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 983 Hz.

For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1852 Hz.

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

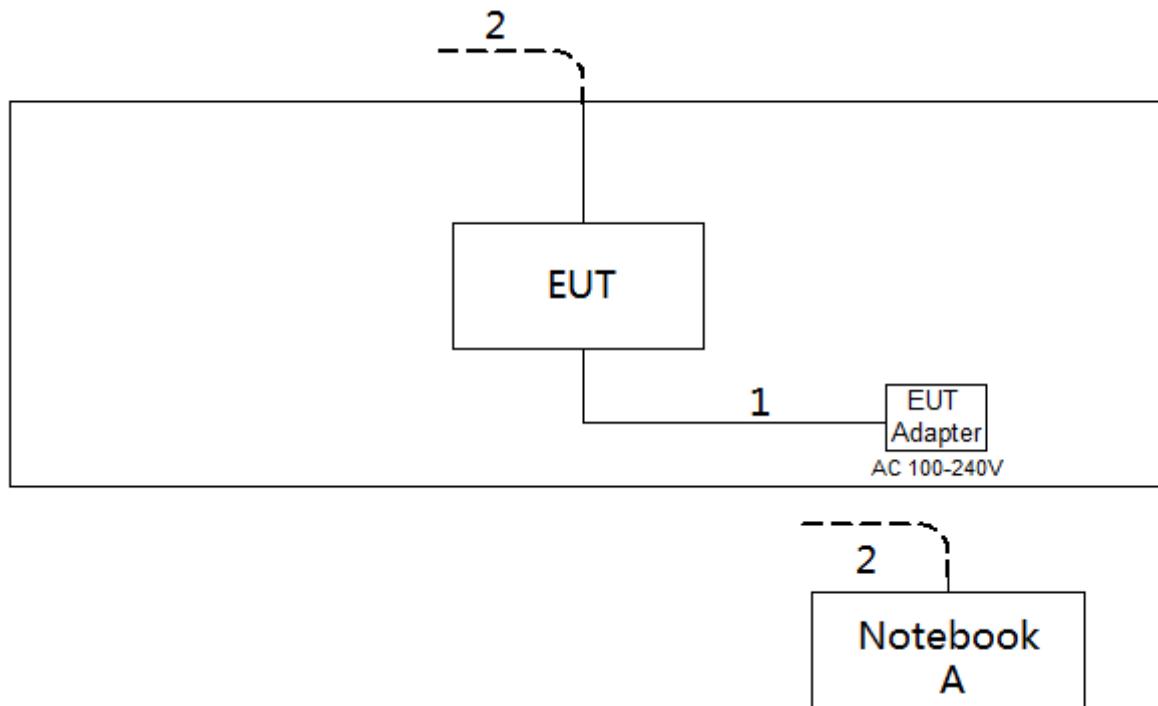

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

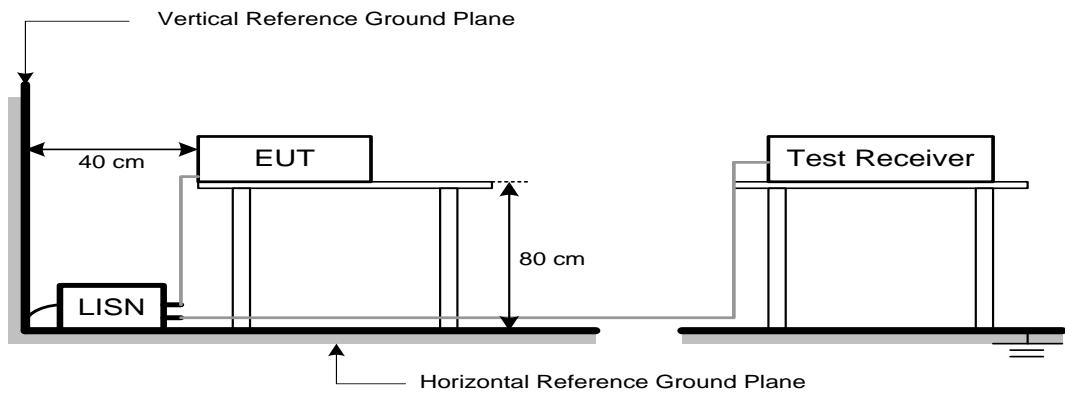

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dB _{UV} /m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB_{UV}/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.


5.4 TEST SETUP

9 kHz to 30 MHz

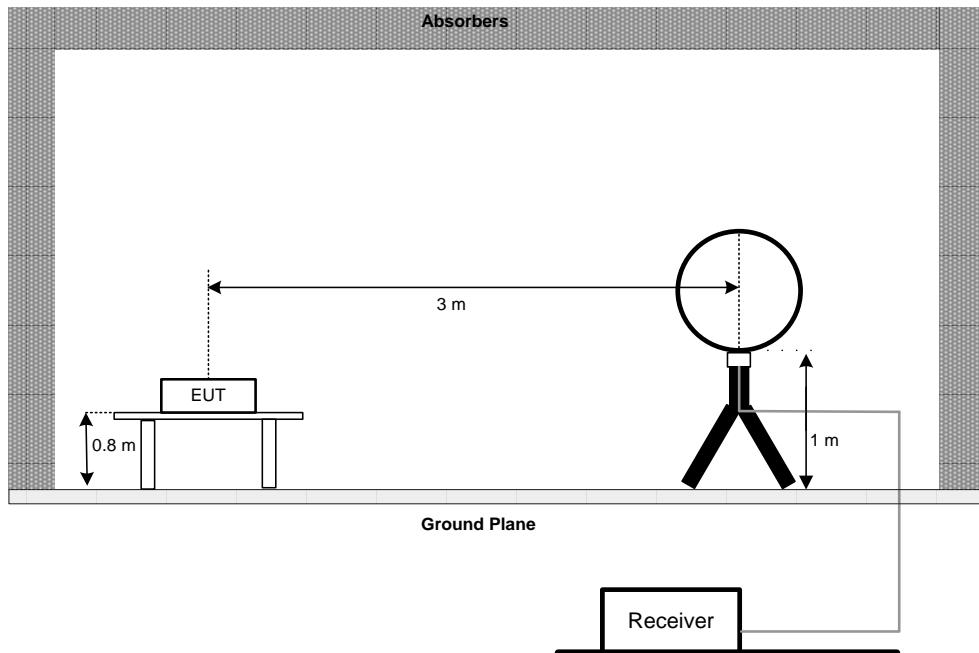

30 MHz to 1 GHz

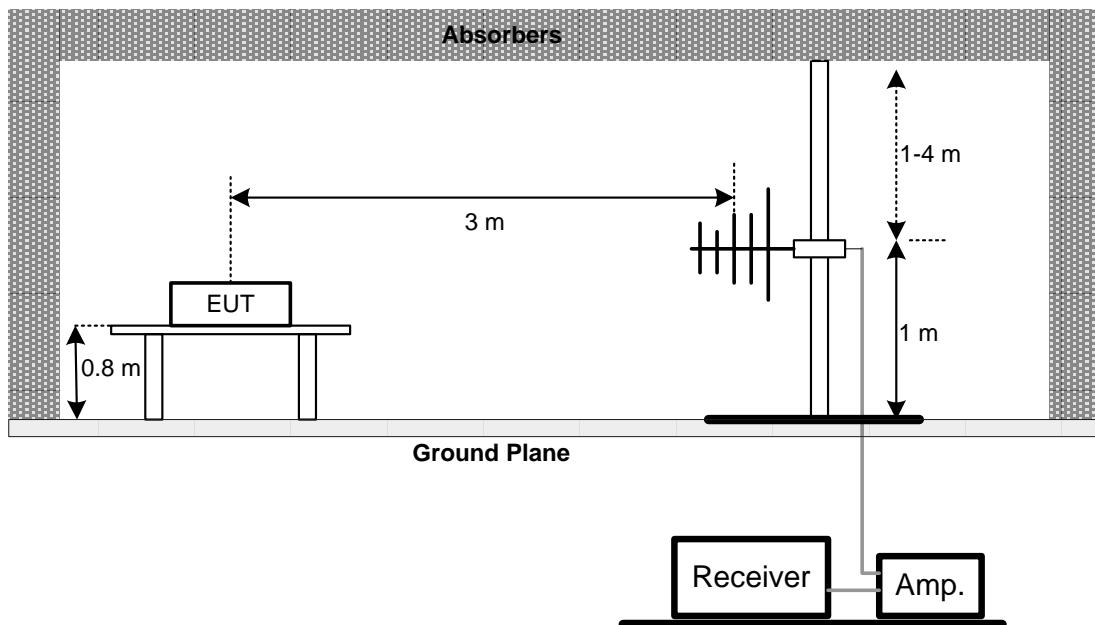

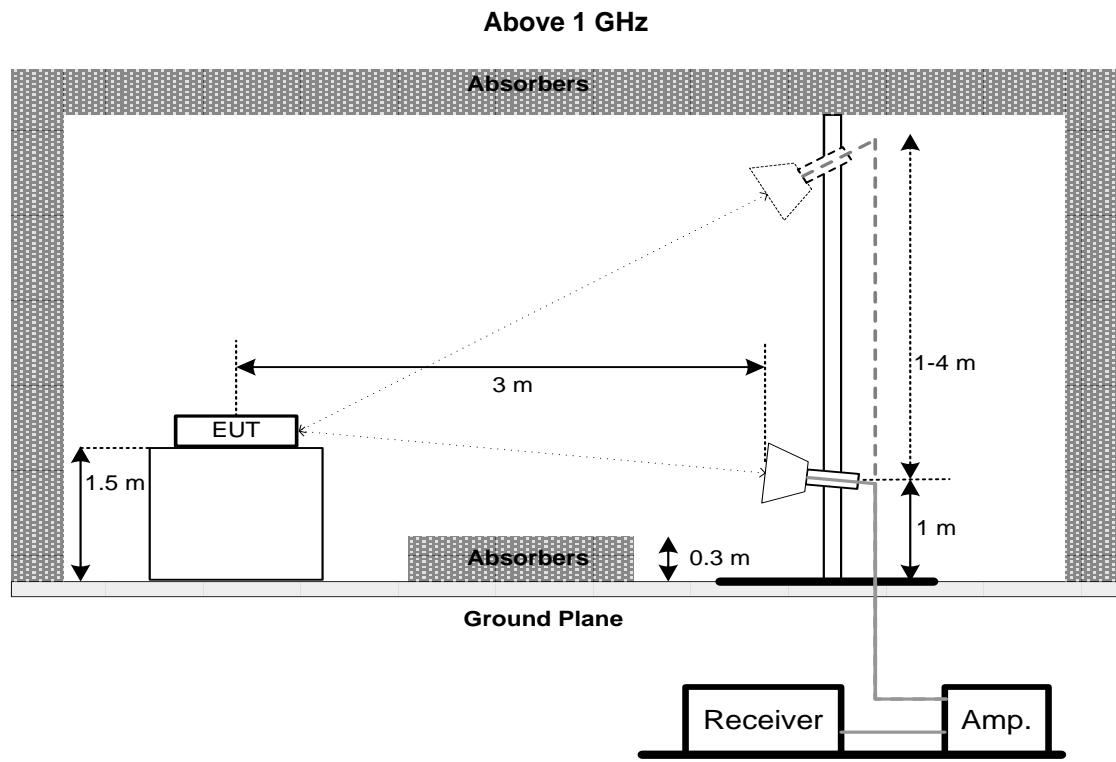

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

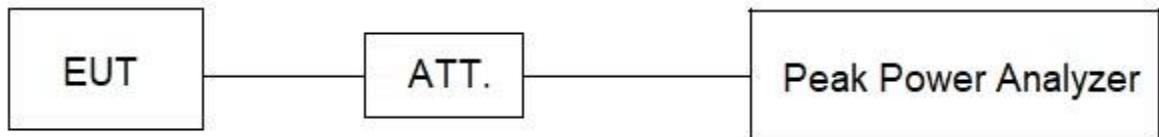

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz (20 MHz) / 60 MHz (40 MHz)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR3	103027	Jun. 16, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Jan. 07, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Apr. 01, 2024
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Jan. 07, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 10, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chamber room	ETS	9*6*6	N/A	Jul. 11, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1461	Nov. 28, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Nov. 28, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980863	Nov. 17, 2024
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jul. 04, 2024
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jul. 04, 2024
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jul. 04, 2024
7	Receiver	Agilent	N9038A	MY52130039	Jan. 07, 2024
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 17, 2024

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan. 07, 2024
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Nov. 17, 2024
3	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Jun. 16, 2024
4	Double Ridged Guide Antenna	ETS	3115	75789	May 31, 2024
5	Cable	RegalWay	A81-SMAMSMAM-12.5M	N/A	Aug. 08, 2024
6	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Aug. 08, 2024
7	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Aug. 08, 2024
8*	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330-K	619413	Jul. 06, 2024
9	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 26, 2024
10	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 26, 2024
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 20, 2024
12	966 Chamber room	CM	9*6*6	N/A	May 17, 2024
13	Positioning Controller	MF	MF-7802	N/A	N/A
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A



Bandwidth & Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	Jun. 16, 2024
2	Attenuator	RegalWay	RWA-201-S-10	N/A	Sep. 26, 2024
3	Digital Multimeter	FLUKE	15B PRO	59056240WS	Sep. 25, 2024
4	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
5	Attenuator	RegalWay	RWA-201-S-6	N/A	Sep. 26, 2024
6	Temperature Chamber	ESPEC CORP	SU-242	93018736	Jul. 07, 2024
7	DC Power Supply	ITECH	IT6332C	8034160117673300	May 10, 2024



Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Jun. 17, 2024
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jun. 17, 2024
3	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

11. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

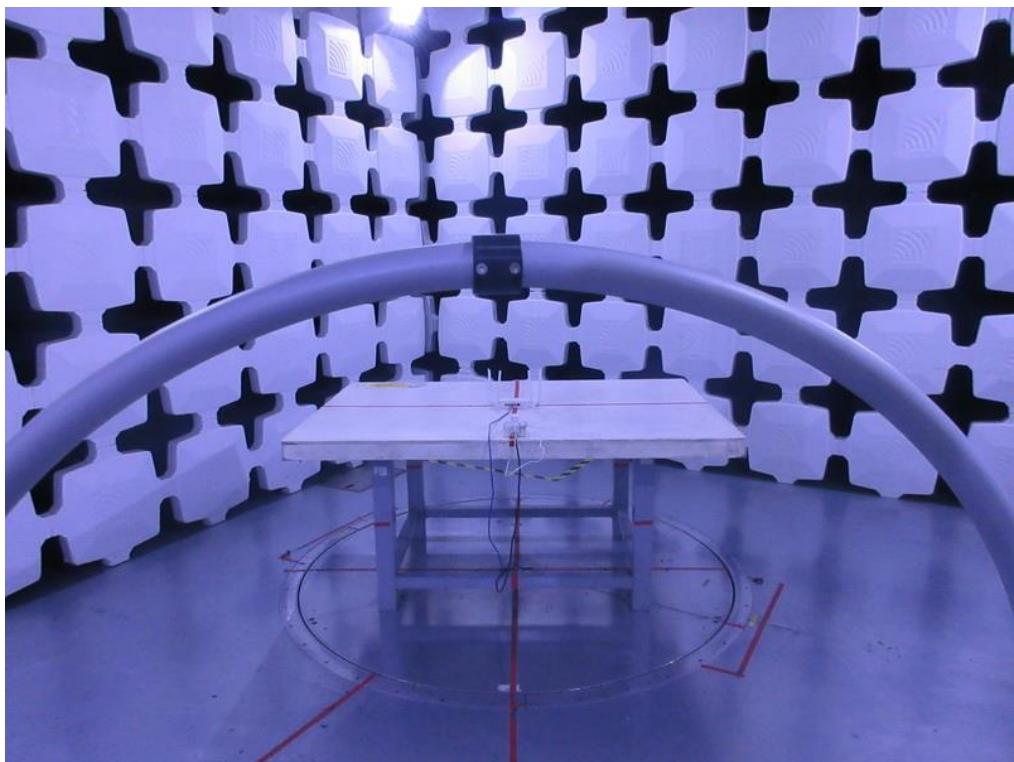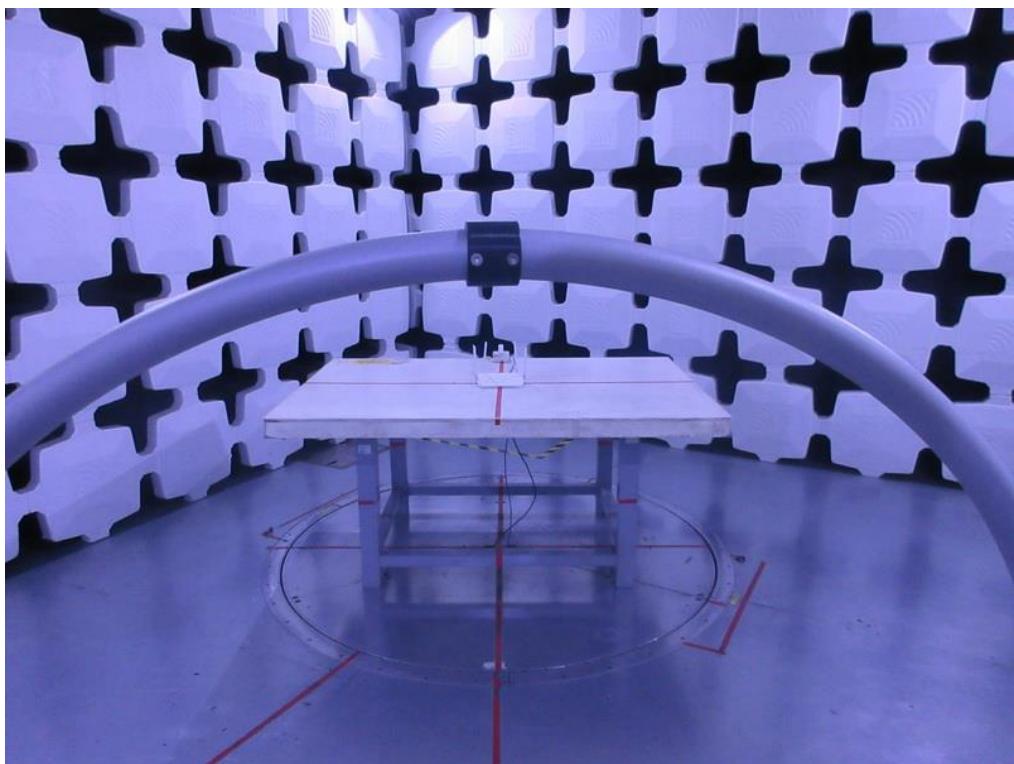Radiated Emissions Test Photos**9 kHz to 30 MHz**

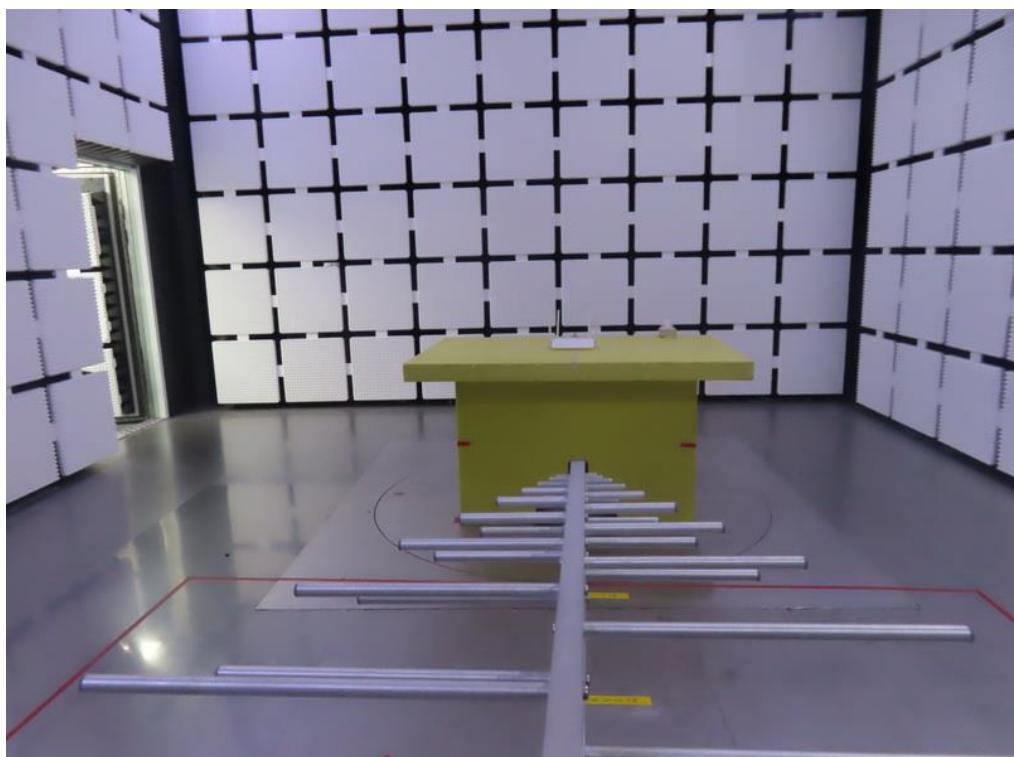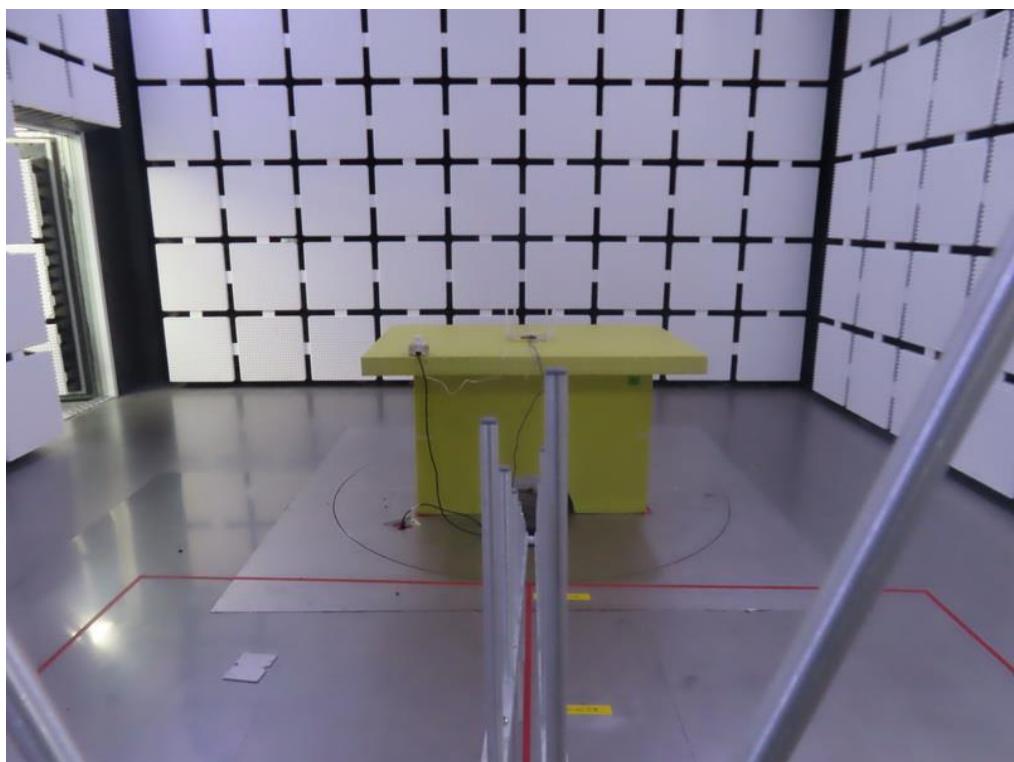
Radiated Emissions Test Photos**30 MHz to 1 GHz**

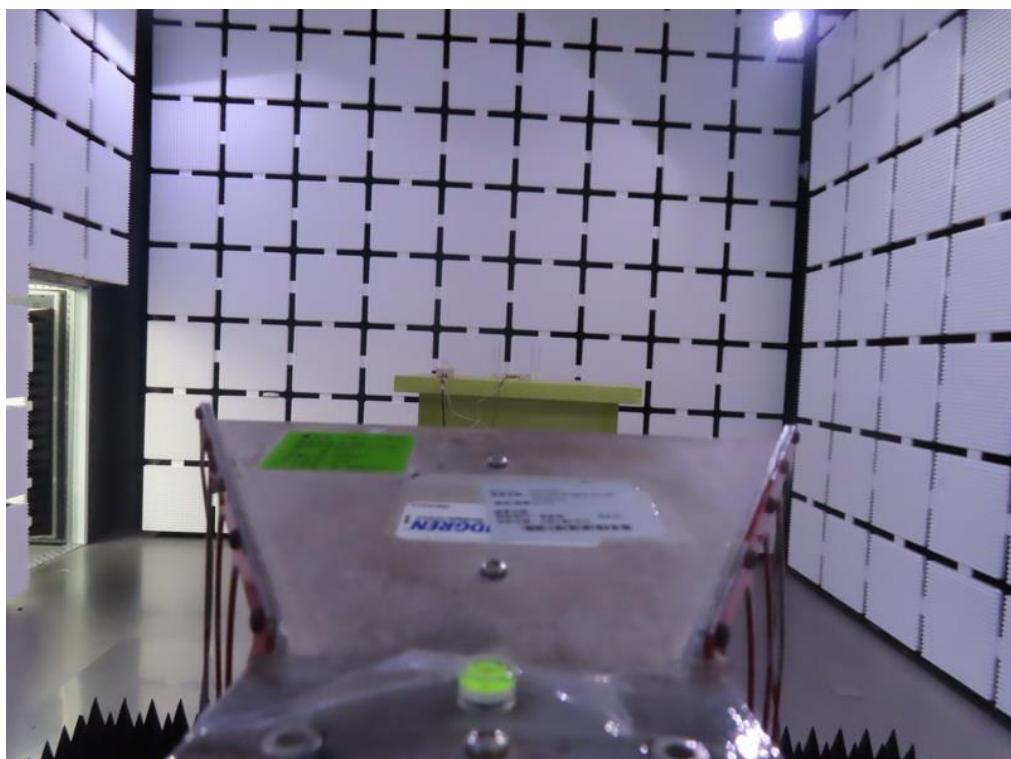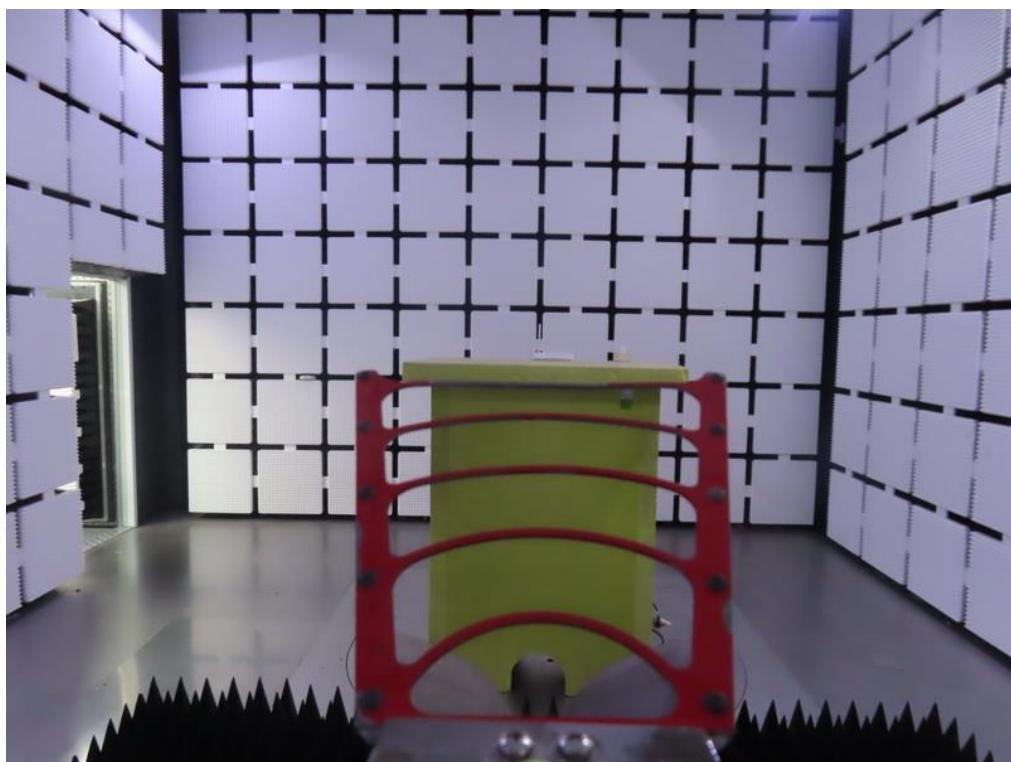Radiated Emissions Test Photos**Above 1 GHz**

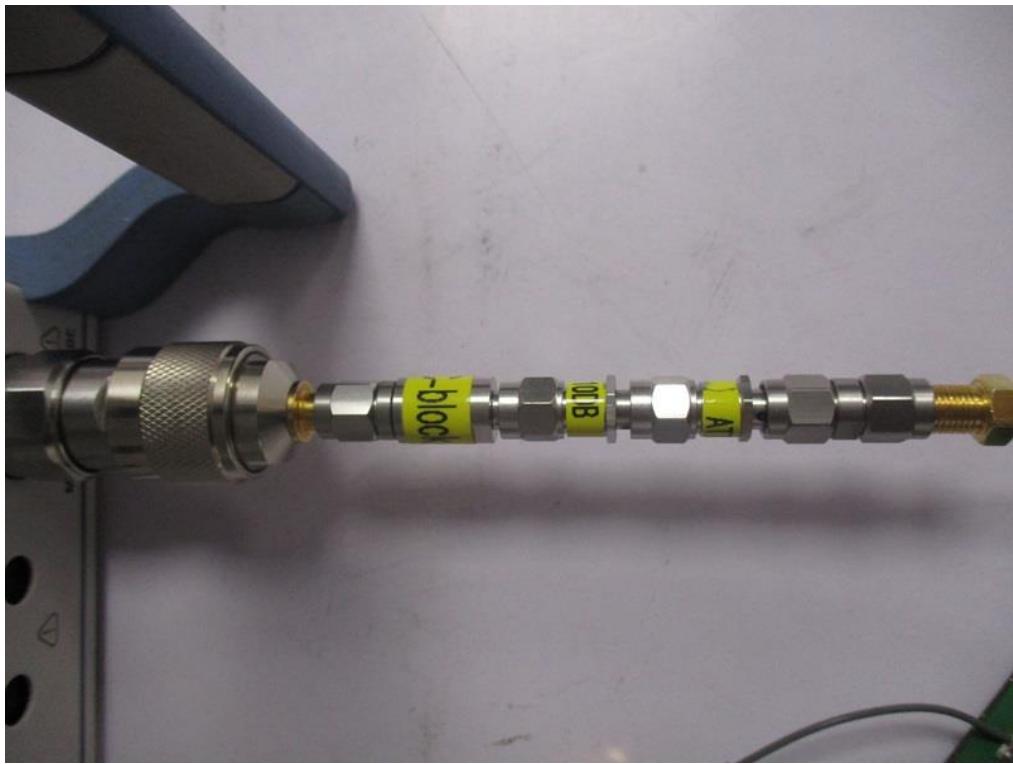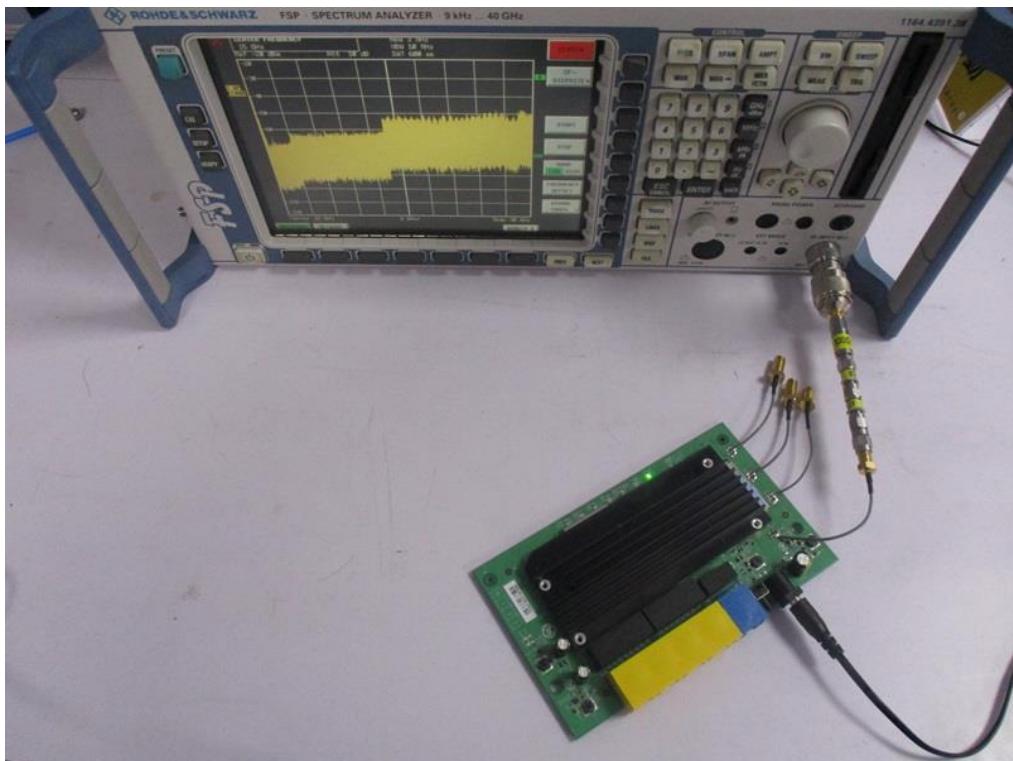Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX B Mode Channel 06	Phase	Line
-----------	----------------------	-------	------

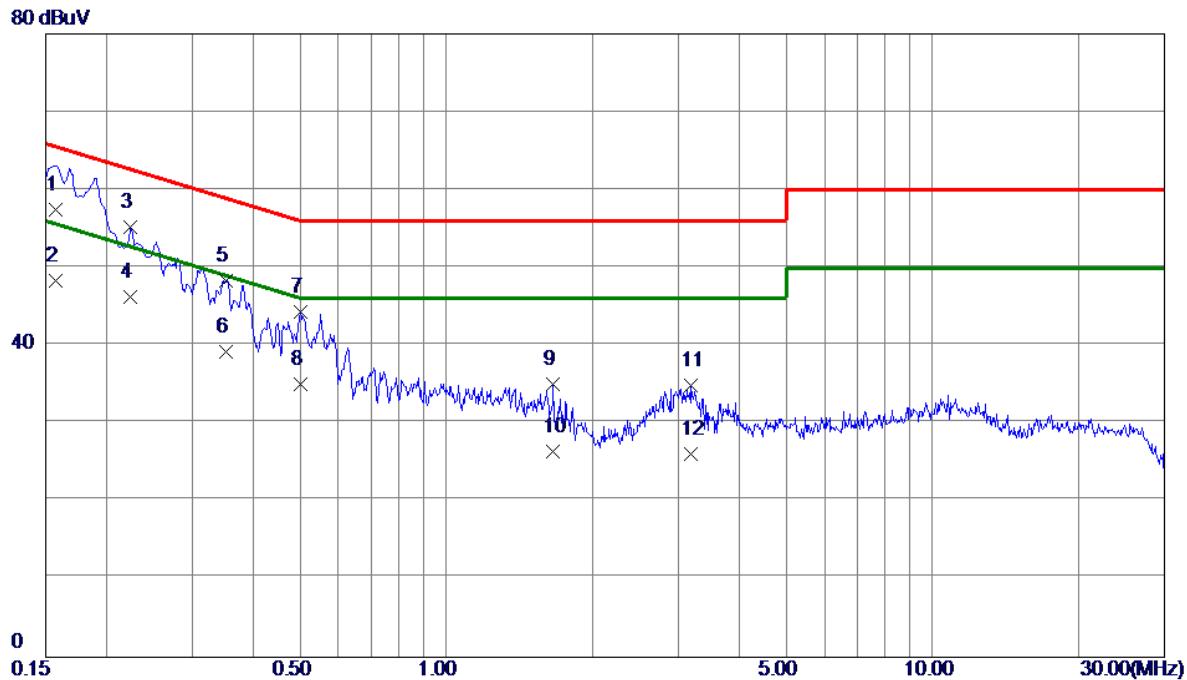


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dB	Margin dB	Margin	
							Detector	Comment
1	0.1568	47.81	9.68	57.49	65.63	-8.14	QP	
2	0.1568	38.61	9.68	48.29	55.63	-7.34	AVG	
3	0.2243	45.50	9.68	55.18	62.66	-7.48	QP	
4 *	0.2243	36.50	9.68	46.18	52.66	-6.48	AVG	
5	0.3525	38.69	9.68	48.37	58.90	-10.53	QP	
6	0.3525	29.50	9.68	39.18	48.90	-9.72	AVG	
7	0.5010	34.61	9.70	44.31	56.00	-11.69	QP	
8	0.5010	25.40	9.70	35.10	46.00	-10.90	AVG	
9	1.6575	25.23	9.75	34.98	56.00	-21.02	QP	
10	1.6575	16.70	9.75	26.45	46.00	-19.55	AVG	
11	3.1808	25.05	9.80	34.85	56.00	-21.15	QP	
12	3.1808	16.29	9.80	26.09	46.00	-19.91	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Phase	Neutral
-----------	----------------------	-------	---------

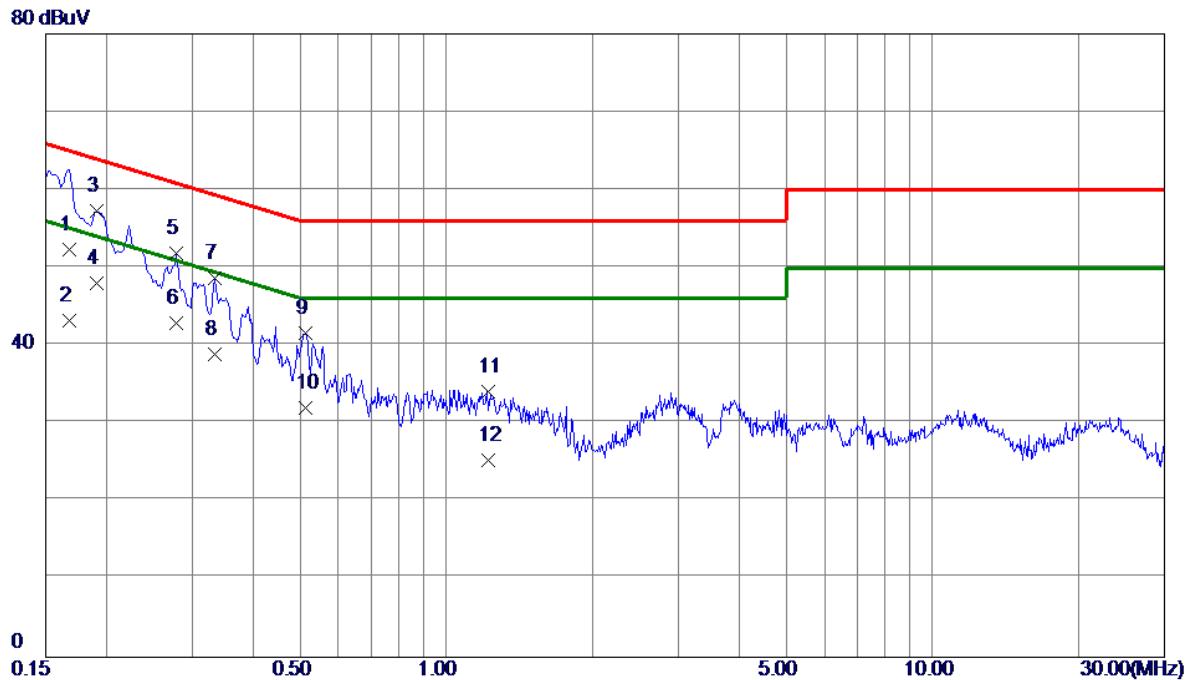


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Margin	
							Detector	Comment
1	0.1680	42.70	9.66	52.36	65.06	-12.70	QP	
2	0.1680	33.60	9.66	43.26	55.06	-11.80	AVG	
3	0.1905	47.61	9.65	57.26	64.01	-6.75	QP	
4 *	0.1905	38.40	9.65	48.05	54.01	-5.96	AVG	
5	0.2782	42.11	9.66	51.77	60.87	-9.10	QP	
6	0.2782	33.20	9.66	42.86	50.87	-8.01	AVG	
7	0.3344	38.96	9.65	48.61	59.34	-10.73	QP	
8	0.3344	29.30	9.65	38.95	49.34	-10.39	AVG	
9	0.5144	31.99	9.66	41.65	56.00	-14.35	QP	
10	0.5144	22.40	9.66	32.06	46.00	-13.94	AVG	
11	1.2164	24.37	9.71	34.08	56.00	-21.92	QP	
12	1.2164	15.60	9.71	25.31	46.00	-20.69	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

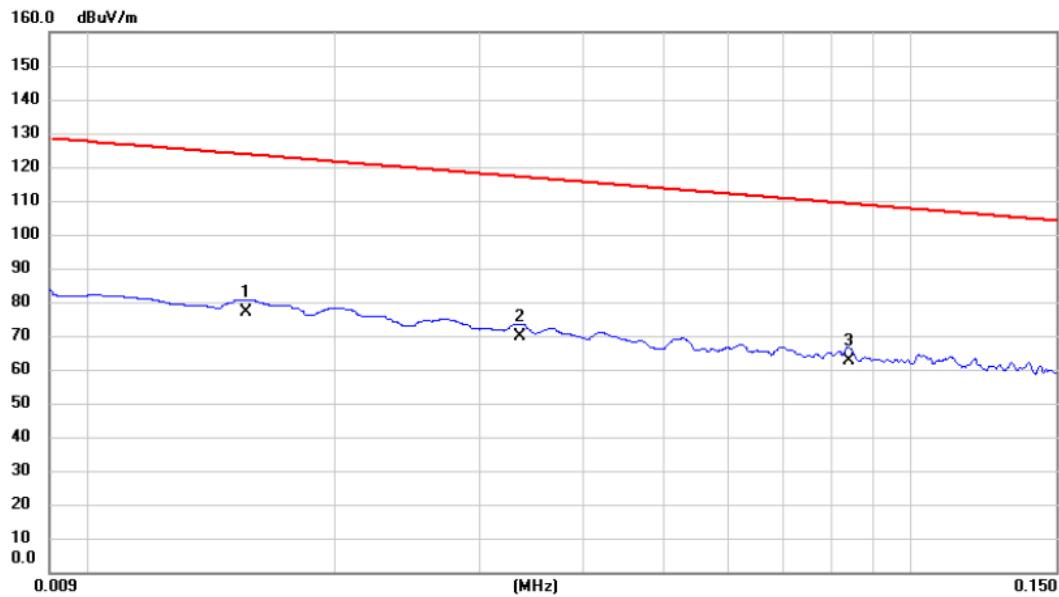


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.0156	56.35	20.59	76.94	123.74	-46.80	AVG
2		0.0335	49.84	19.80	69.64	117.10	-47.46	AVG
3	*	0.0840	42.65	19.88	62.53	109.12	-46.59	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

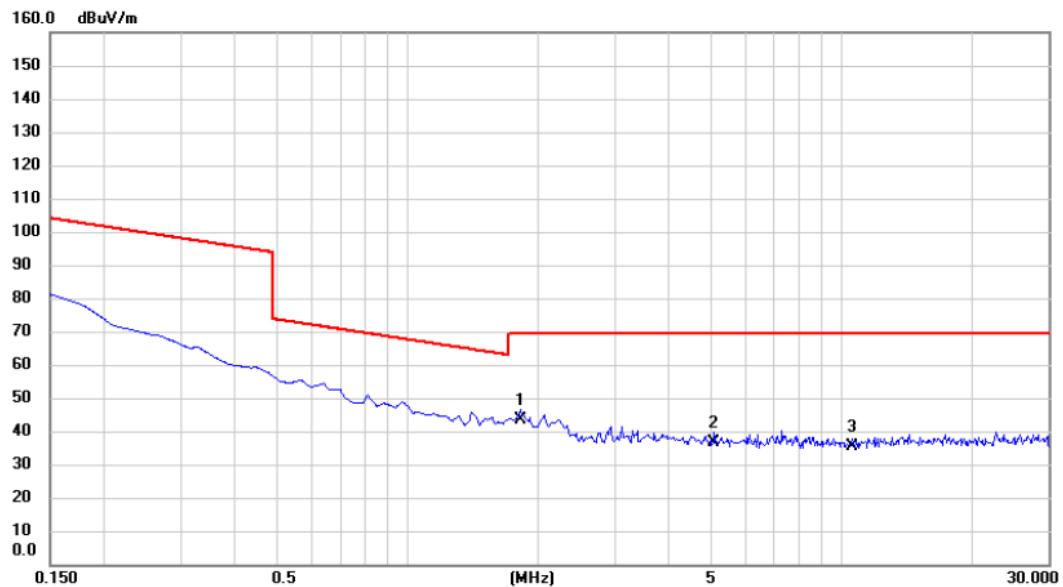


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	1.8216	23.65	19.81	43.46	69.54	-26.08	QP	
2		5.0901	16.85	19.95	36.80	69.54	-32.74	QP	
3		10.5527	15.22	20.22	35.44	69.54	-34.10	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

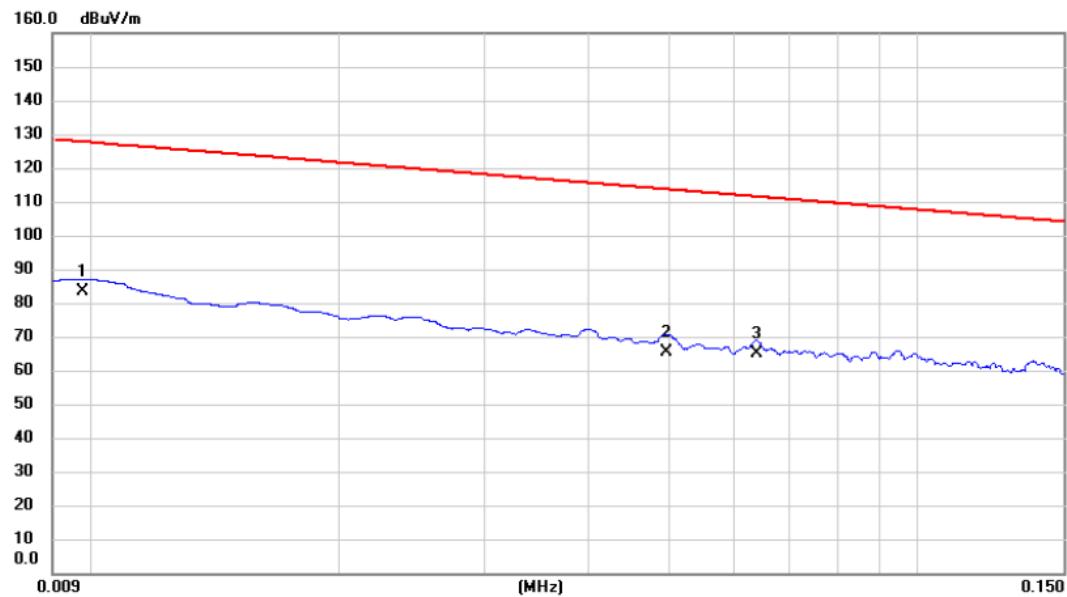


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	0.0098	62.51	20.84	83.35	127.78	-44.43	AVG
2		0.0497	45.68	19.80	65.48	113.68	-48.20	AVG
3		0.0638	45.32	19.85	65.17	111.51	-46.34	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

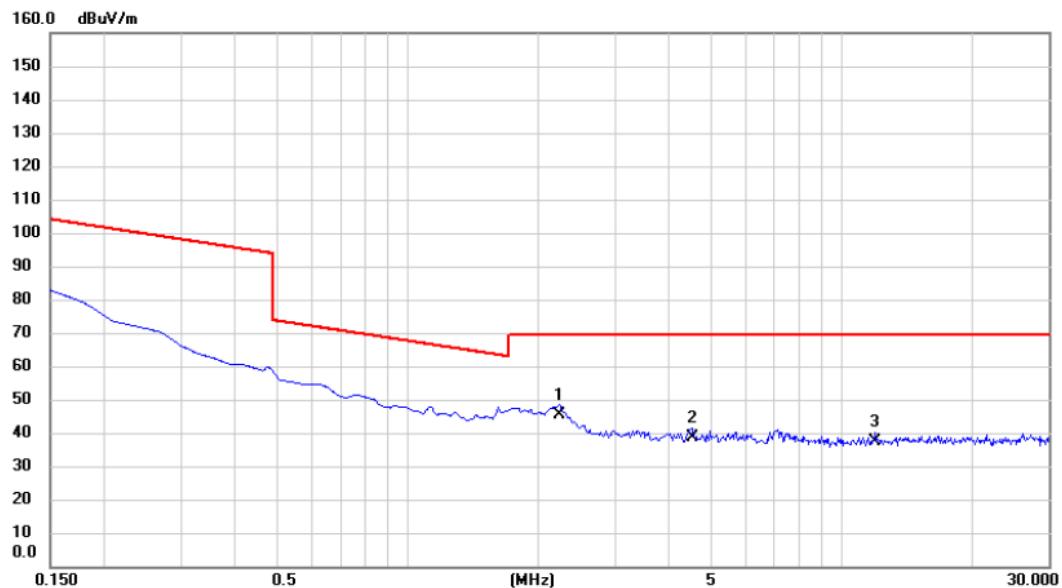

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	2.2395	25.63	19.81	45.44	69.54	-24.10	QP
2		4.5230	18.68	19.94	38.62	69.54	-30.92	QP
3		11.9557	17.25	20.23	37.48	69.54	-32.06	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Vertical
-----------	----------------------	--------------	----------

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	37.7599	44.51	-11.71	32.80	40.00	-7.20	Peak		
2	140.5800	47.36	-11.57	35.79	43.50	-7.71	Peak		
3 *	250.1900	51.30	-12.09	39.21	46.00	-6.79	Peak		
4	499.9650	42.81	-5.97	36.84	46.00	-9.16	Peak		
5	550.4050	42.79	-5.15	37.64	46.00	-8.36	Peak		
6	973.3250	41.02	0.65	41.67	54.00	-12.33	Peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Horizontal
-----------	----------------------	--------------	------------

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	139.1250	42.38	-11.67	30.71	43.50	-12.79	Peak		
2 *	250.1900	51.36	-12.09	39.27	46.00	-6.73	Peak		
3	547.4950	39.60	-5.21	34.39	46.00	-11.61	Peak		
4	622.6700	40.50	-3.36	37.14	46.00	-8.86	Peak		
5	749.7400	40.58	-1.68	38.90	46.00	-7.10	Peak		
6	987.8750	42.86	0.87	43.73	54.00	-10.27	Peak		


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

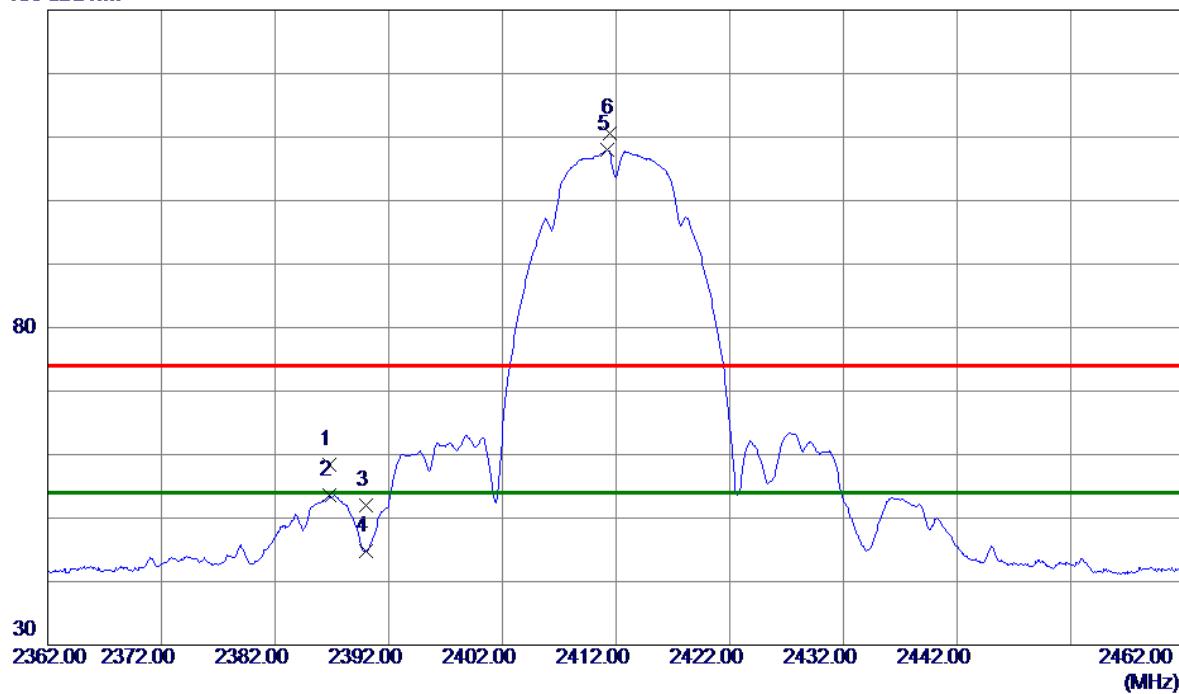


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2386.8000	52.20	6.17	58.37	74.00	-15.63	Peak		
2	2386.8000	47.47	6.17	53.64	54.00	-0.36	AVG		
3	2390.0000	45.76	6.17	51.93	74.00	-22.07	Peak		
4	2390.0000	38.60	6.17	44.77	54.00	-9.23	AVG		
5 *	2411.2000	101.73	6.18	107.91	54.00	53.91	AVG	No Limit	
6	2411.5000	104.33	6.18	110.51	74.00	36.51	Peak	No Limit	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

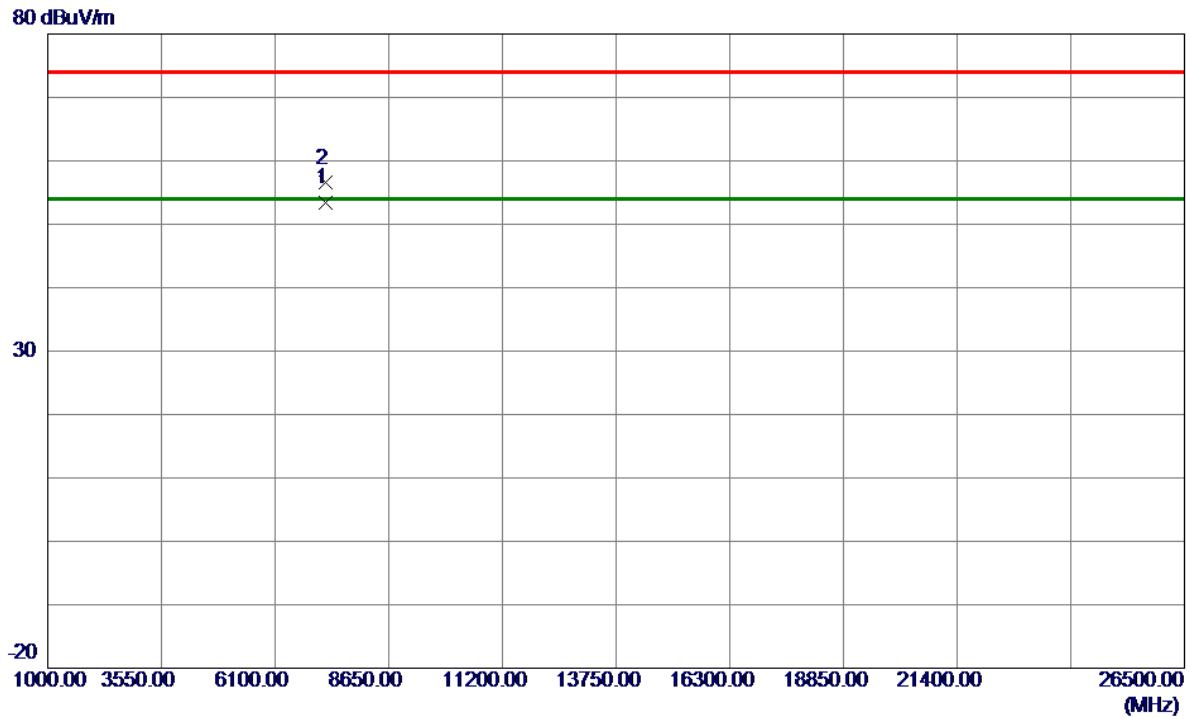


No.	Freq. MHz	Reading Level dB _{uV/m}	Correct Factor dB	Measure ment dB _{uV/m}	Limit dB _{uV/m}	Margin dB	Detector	Comment
1 *	7234.2500	47.82	5.66	53.48	54.00	-0.52	AVG	
2	7235.1000	50.84	5.66	56.50	74.00	-17.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

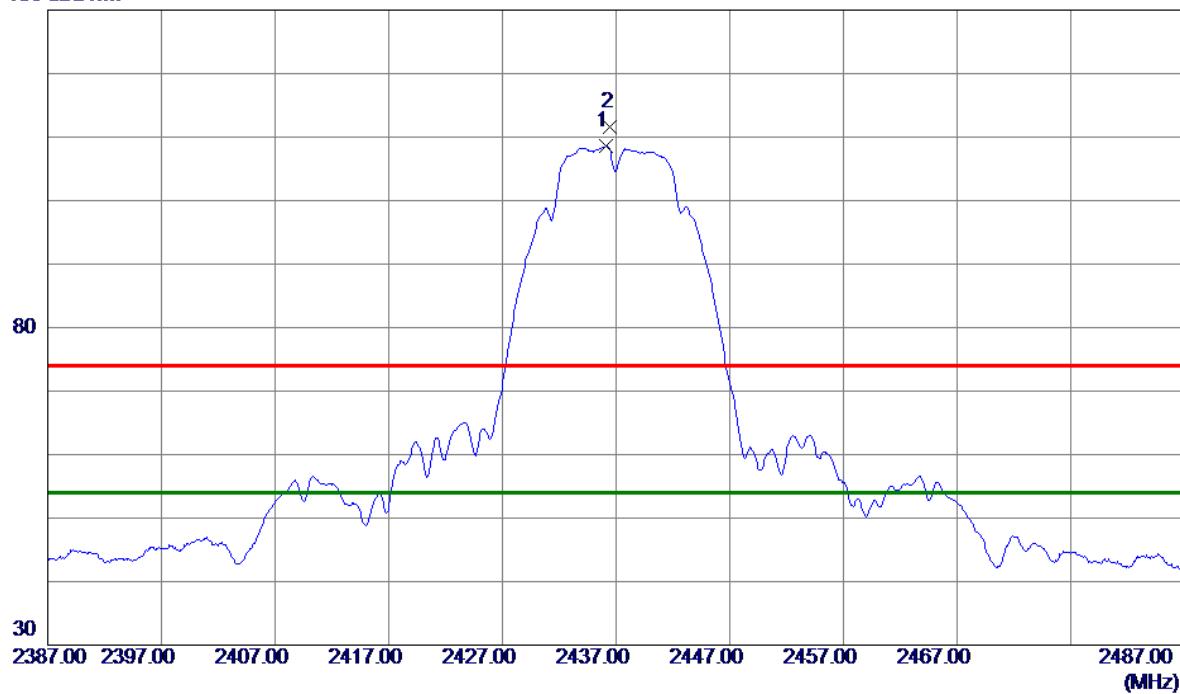


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	2436.1500	102.37	6.20	108.57	54.00	54.57	AVG	No Limit
2	2436.5000	105.41	6.20	111.61	74.00	37.61	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

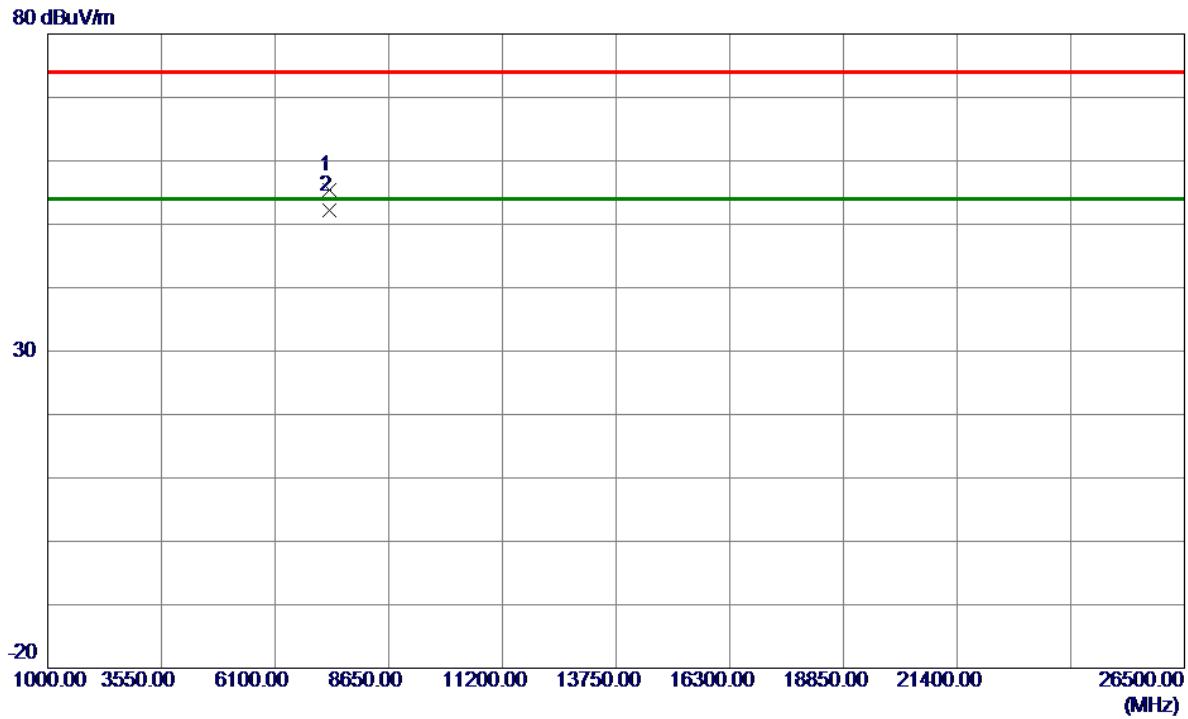


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB _{UV} /m	dB	dB _{UV} /m	dB			
1	7311.9250	49.84	5.62	55.46	74.00	-18.54	Peak	
2 *	7312.2500	46.53	5.62	52.15	54.00	-1.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

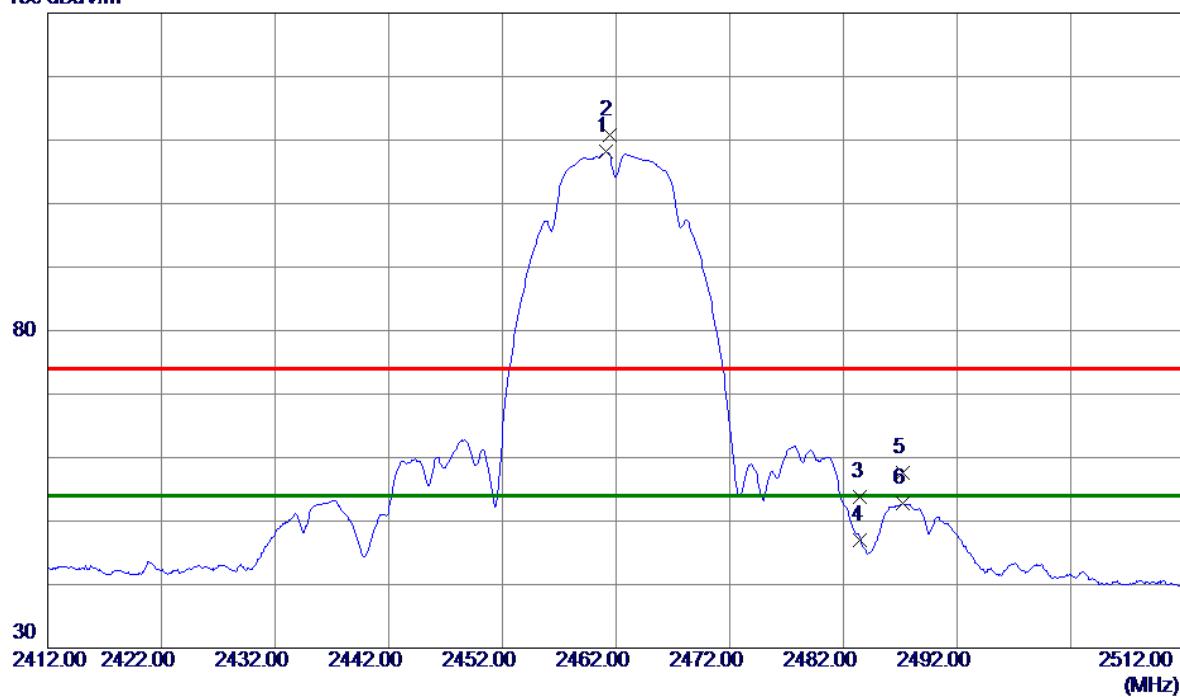


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1 *	2461.1500	101.93	6.21	108.14	54.00	54.14	AVG	No Limit	
2	2461.4500	104.67	6.21	110.88	74.00	36.88	Peak	No Limit	
3	2483.5000	47.57	6.23	53.80	74.00	-20.20	Peak		
4	2483.5000	40.86	6.23	47.09	54.00	-6.91	AVG		
5	2487.2000	51.29	6.23	57.52	74.00	-16.48	Peak		
6	2487.2000	46.52	6.23	52.75	54.00	-1.25	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

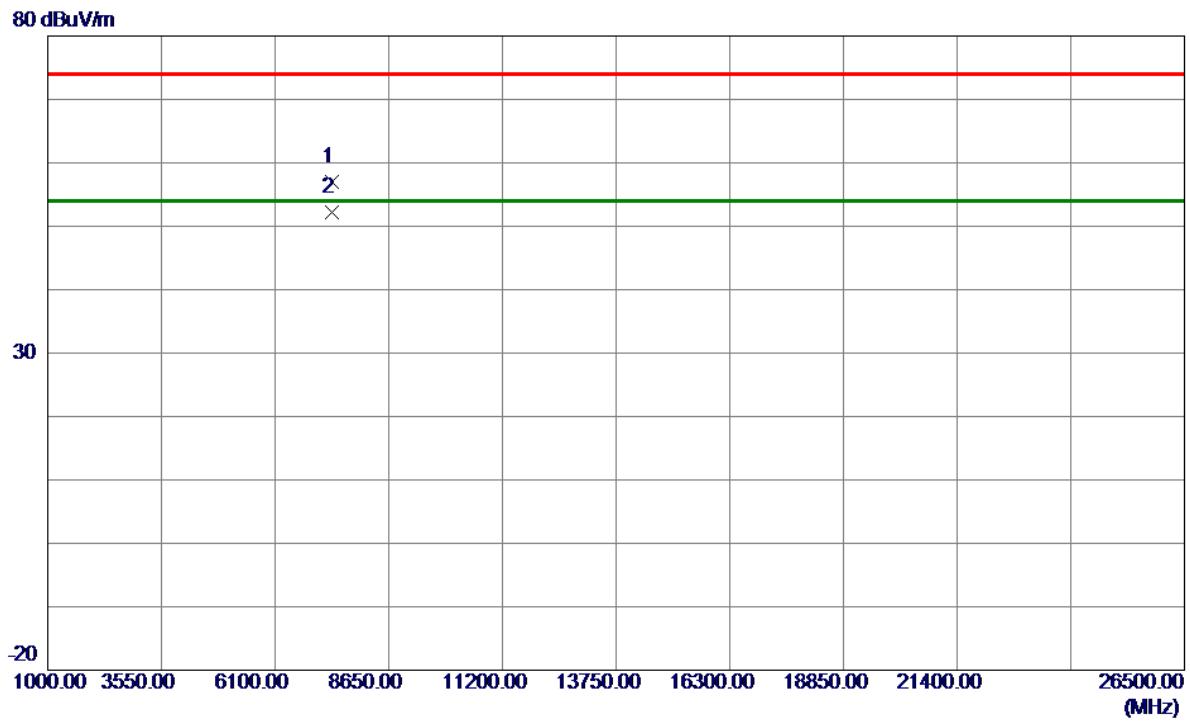


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB _{uV/m}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1	7386.8500	51.35	5.58	56.93	74.00	-17.07	Peak	
2 *	7387.5500	46.54	5.58	52.12	54.00	-1.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

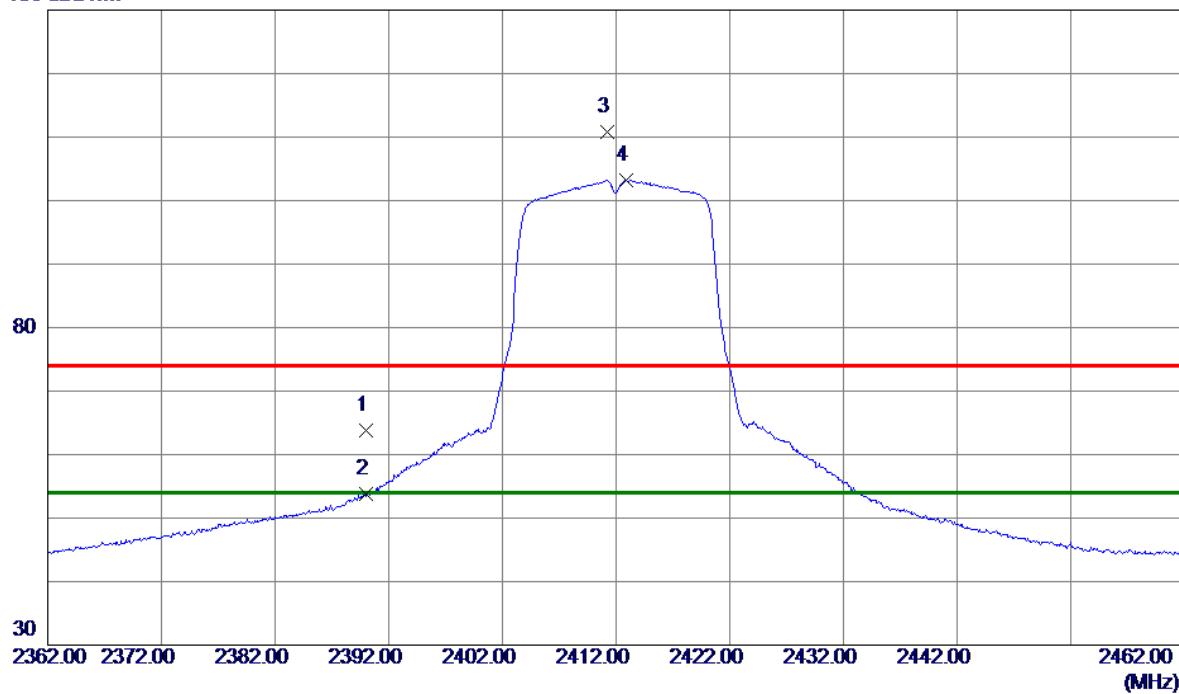


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	2390.000	57.69	6.17	63.86	74.00	-10.14	Peak	
2	2390.000	47.68	6.17	53.85	54.00	-0.15	AVG	
3	2411.250	104.62	6.18	110.80	74.00	36.80	Peak	No Limit
4 *	2412.900	97.09	6.18	103.27	54.00	49.27	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

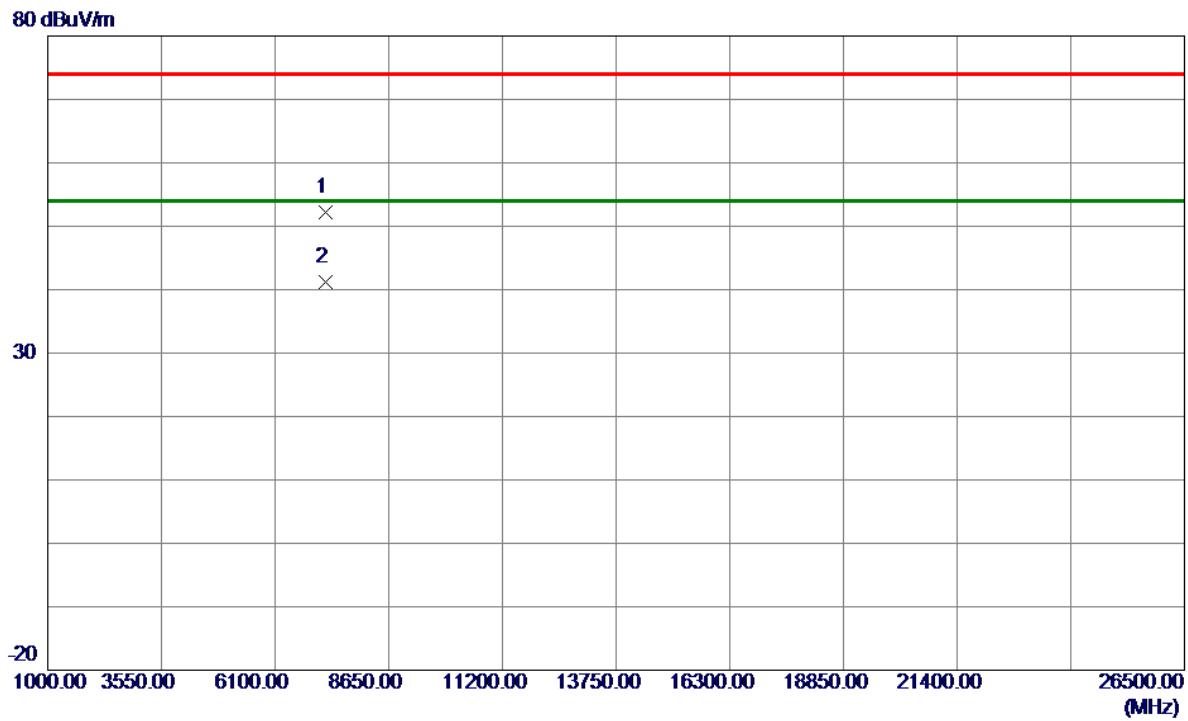


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB _{uV/m}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1	7229.2500	46.56	5.66	52.22	74.00	-21.78	Peak	
2 *	7235.1500	35.46	5.66	41.12	54.00	-12.88	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

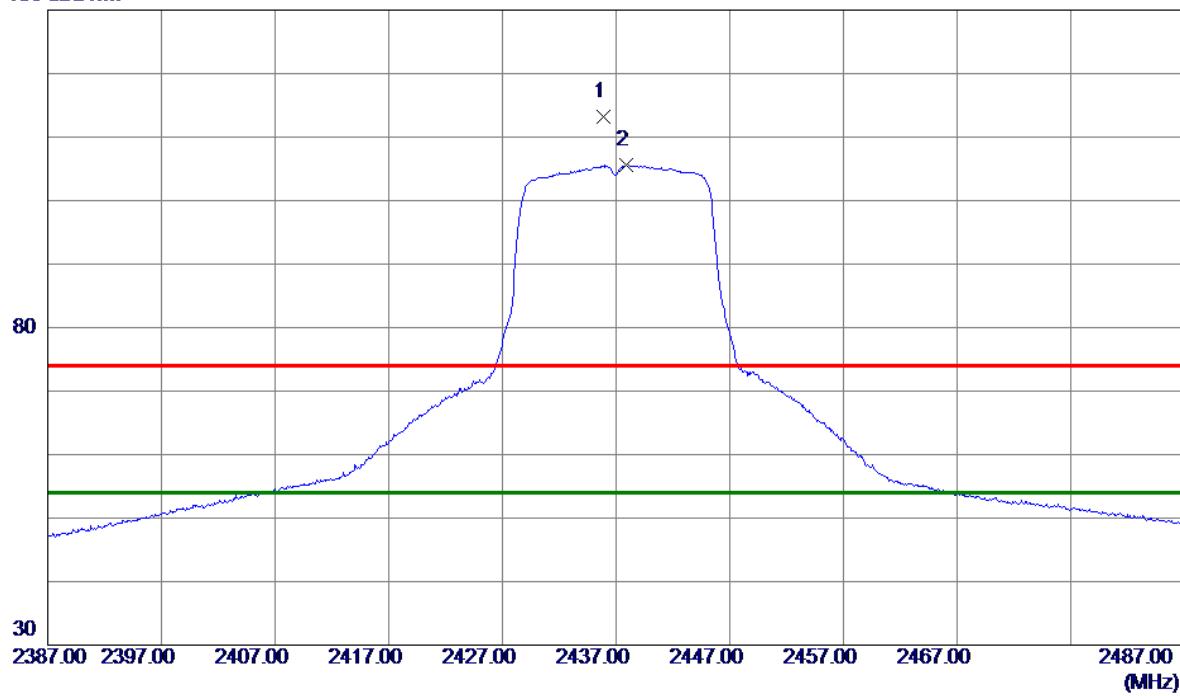


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
						dB	Detector	Comment
1	2435.9000	106.91	6.20	113.11	74.00	39.11	Peak	No Limit
2 *	2437.8500	99.42	6.20	105.62	54.00	51.62	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

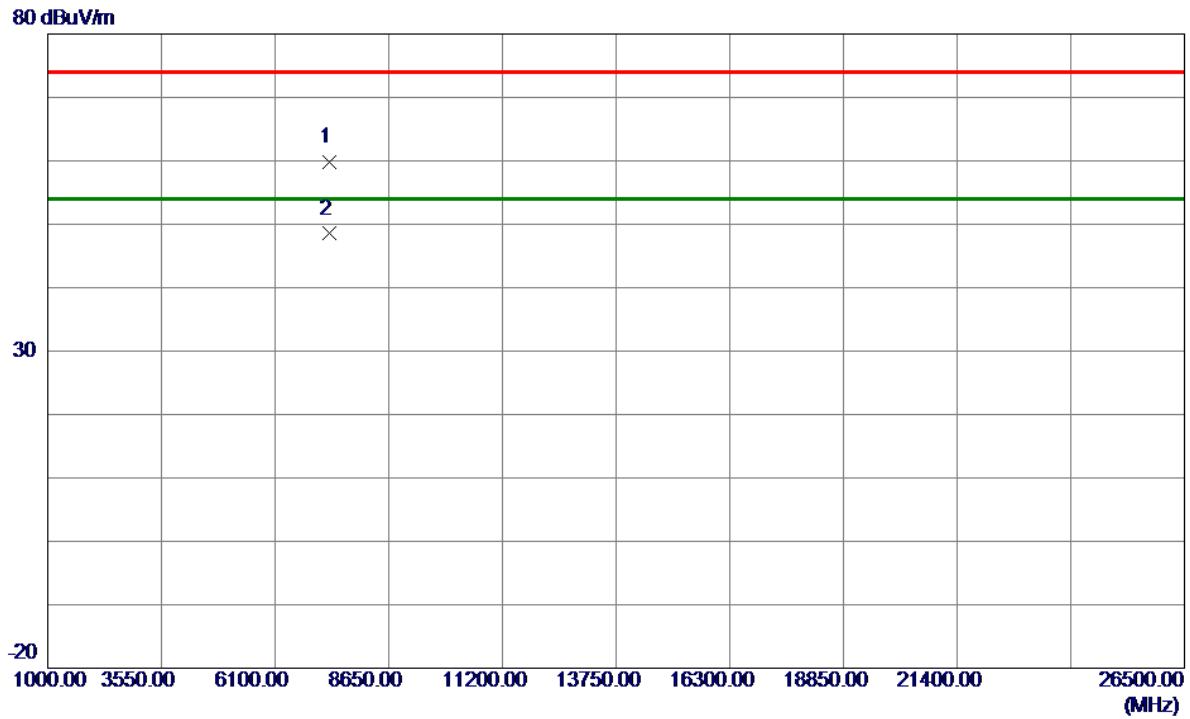


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB _{uV/m}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1	7309.3500	54.21	5.62	59.83	74.00	-14.17	Peak	
2 *	7310.0000	42.88	5.62	48.50	54.00	-5.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

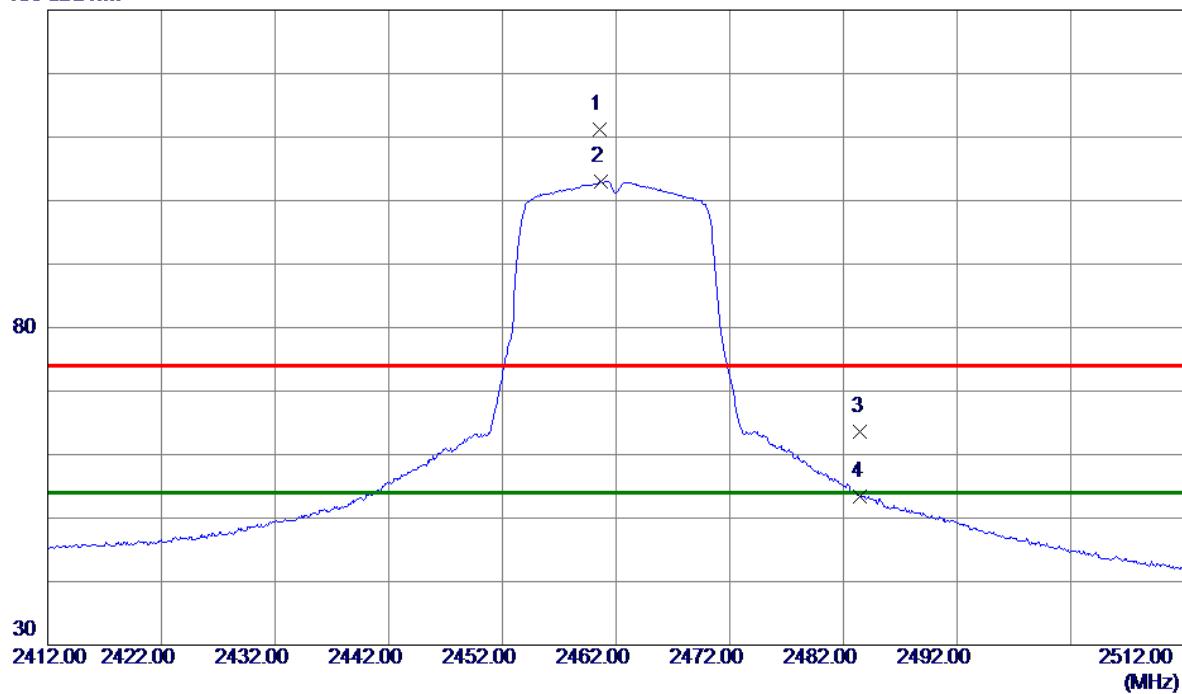


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2460.5500	104.99	6.21	111.20	74.00	37.20	Peak	No Limit	
2 *	2460.6500	96.85	6.21	103.06	54.00	49.06	AVG	No Limit	
3	2483.5000	57.41	6.23	63.64	74.00	-10.36	Peak		
4	2483.5000	47.11	6.23	53.34	54.00	-0.66	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

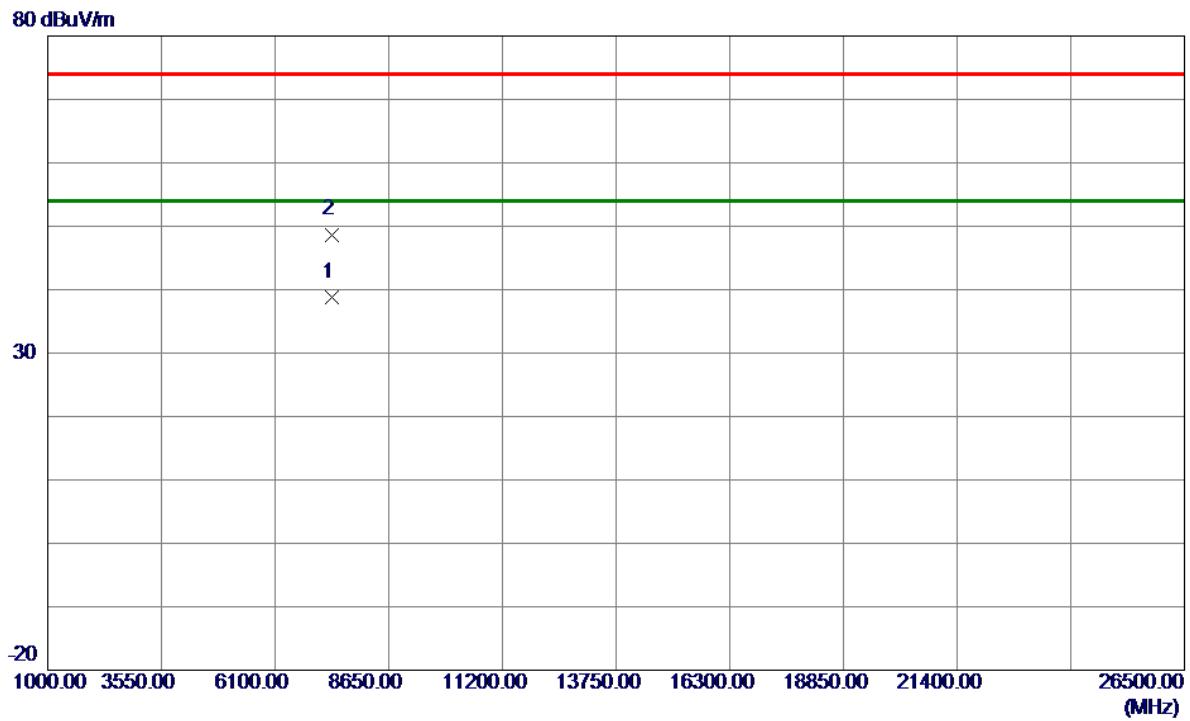


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB _{uV/m}	dB	dB _{uV/m}	dB _{uV/m}	dB		
1 *	7384.9500	33.29	5.59	38.88	54.00	-15.12	AVG	
2	7385.6500	43.12	5.58	48.70	74.00	-25.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

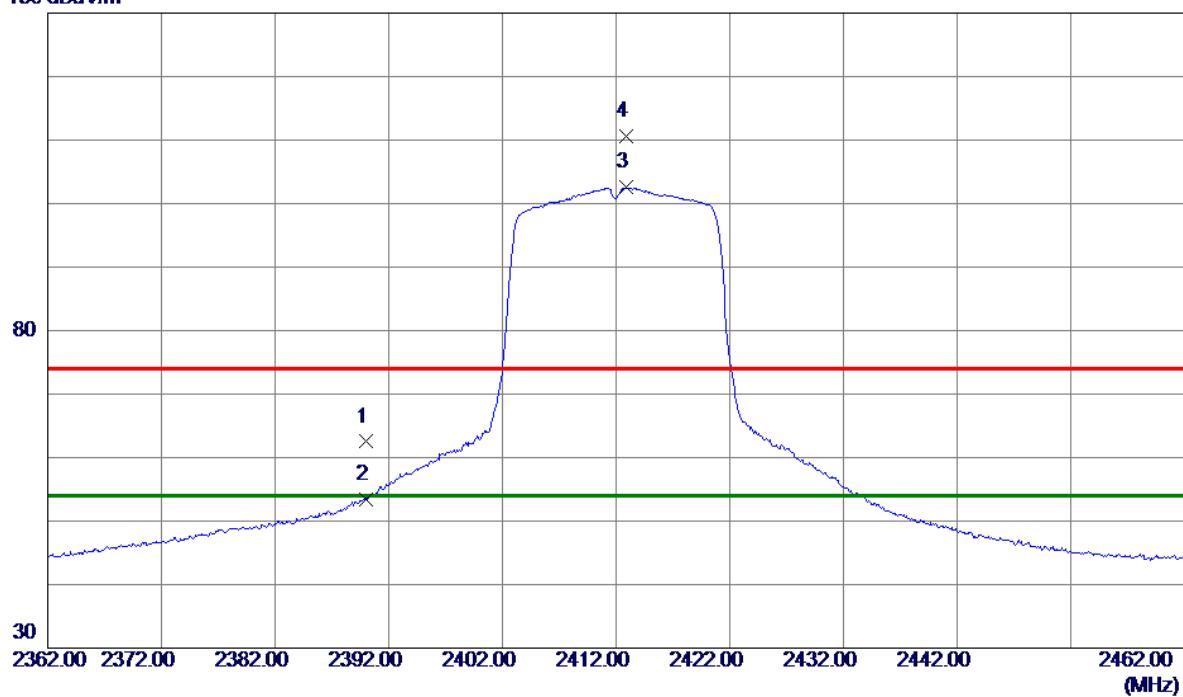


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2390.000	56.33	6.17	62.50	74.00	-11.50	Peak	
2	2390.000	47.32	6.17	53.49	54.00	-0.51	AVG	
3 *	2412.850	96.41	6.18	102.59	54.00	48.59	AVG	No Limit
4	2412.900	104.38	6.18	110.56	74.00	36.56	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

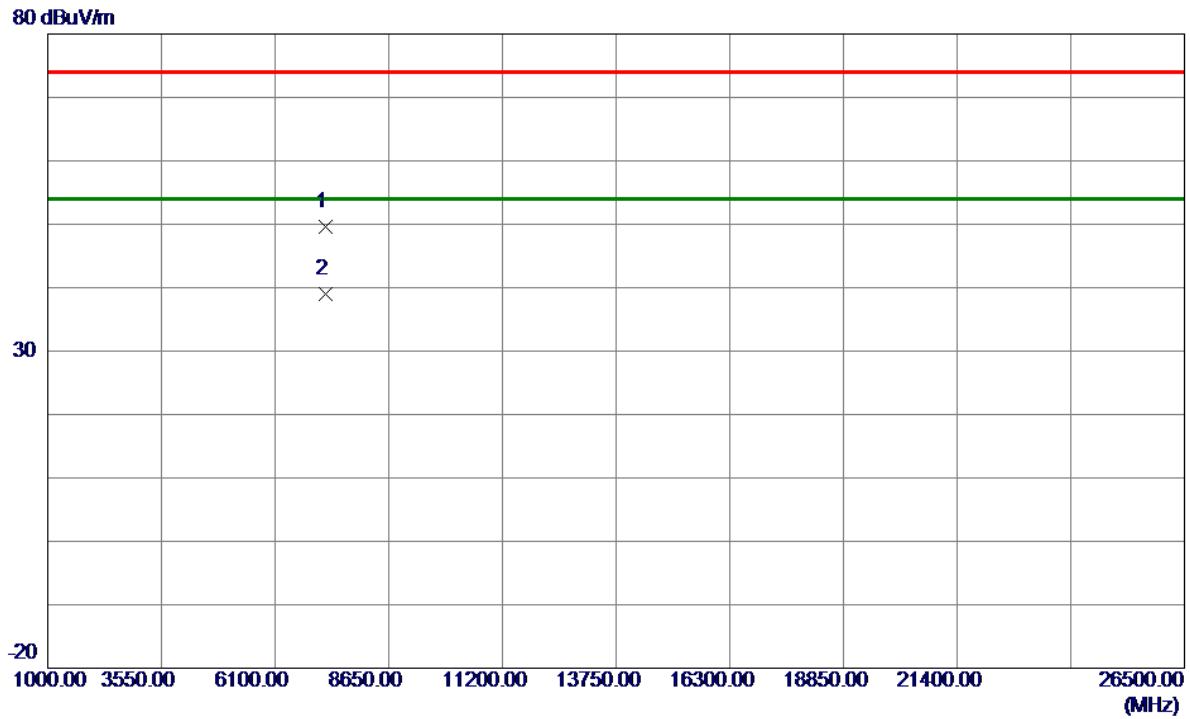


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	d μ V/m	dB	d μ V/m	dB			
1	7235.4000	44.02	5.66	49.68	74.00	-24.32	Peak	
2 *	7235.5500	33.39	5.66	39.05	54.00	-14.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

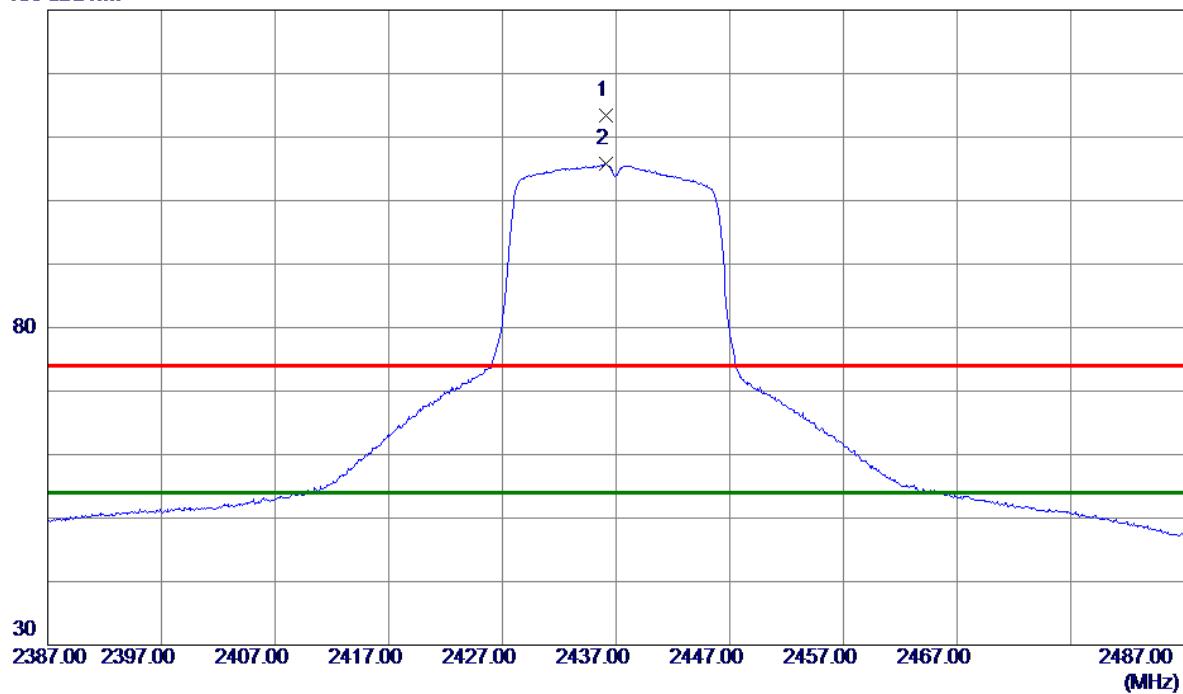


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
						dB	Detector	Comment
1	2436.1000	107.19	6.20	113.39	74.00	39.39	Peak	No Limit
2 *	2436.1500	99.60	6.20	105.80	54.00	51.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

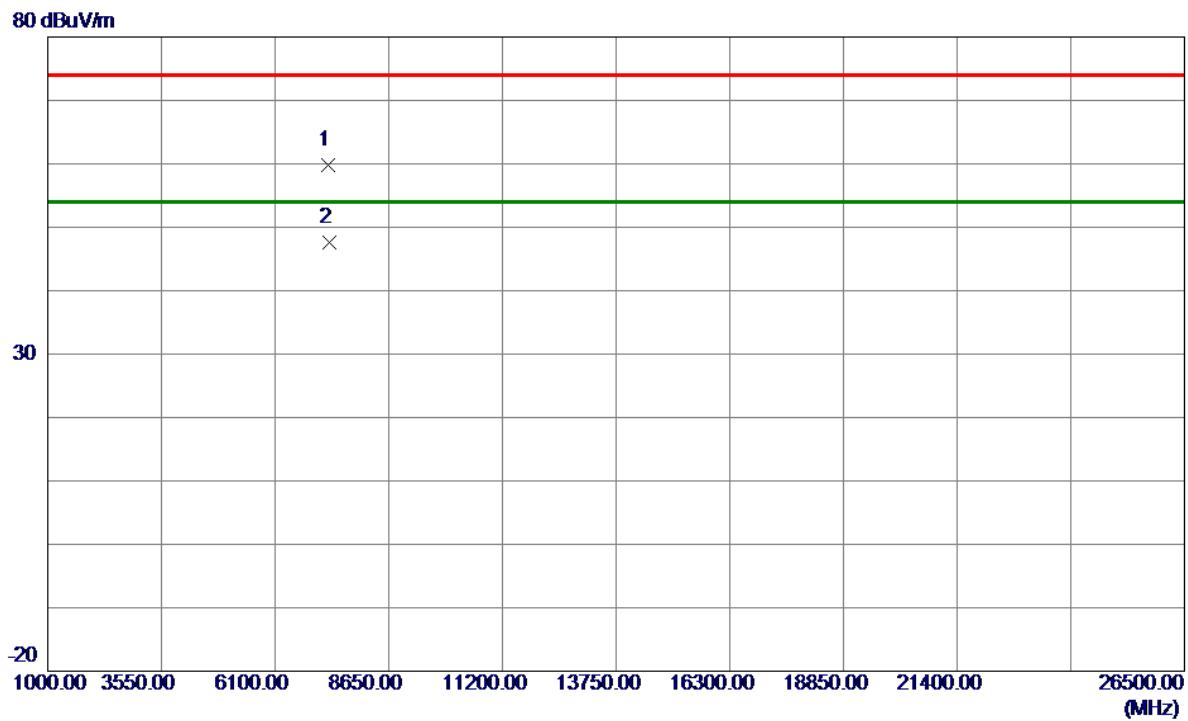


No.	Freq. MHz	Reading Level dB μ V/m	Correct Factor dB	Measure ment dB μ V/m	Limit dB μ V/m	Margin dB	Detector	
							Detector	Comment
1	7302.7500	54.15	5.62	59.77	74.00	-14.23	Peak	
2 *	7305.2000	42.02	5.62	47.64	54.00	-6.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

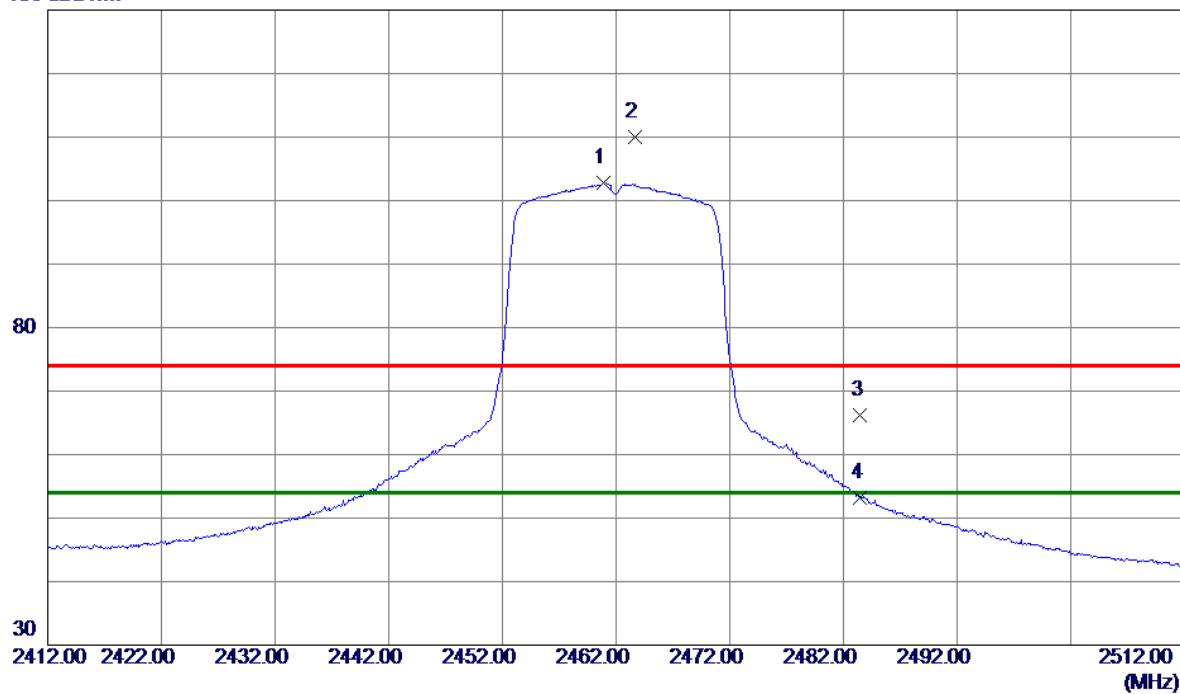


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		Comment
						dBuV/m	dB	
1 *	2460.8500	96.54	6.21	102.75	54.00	48.75	AVG	No Limit
2	2463.7000	103.70	6.22	109.92	74.00	35.92	Peak	No Limit
3	2483.5000	59.97	6.23	66.20	74.00	-7.80	Peak	
4	2483.5000	46.97	6.23	53.20	54.00	-0.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

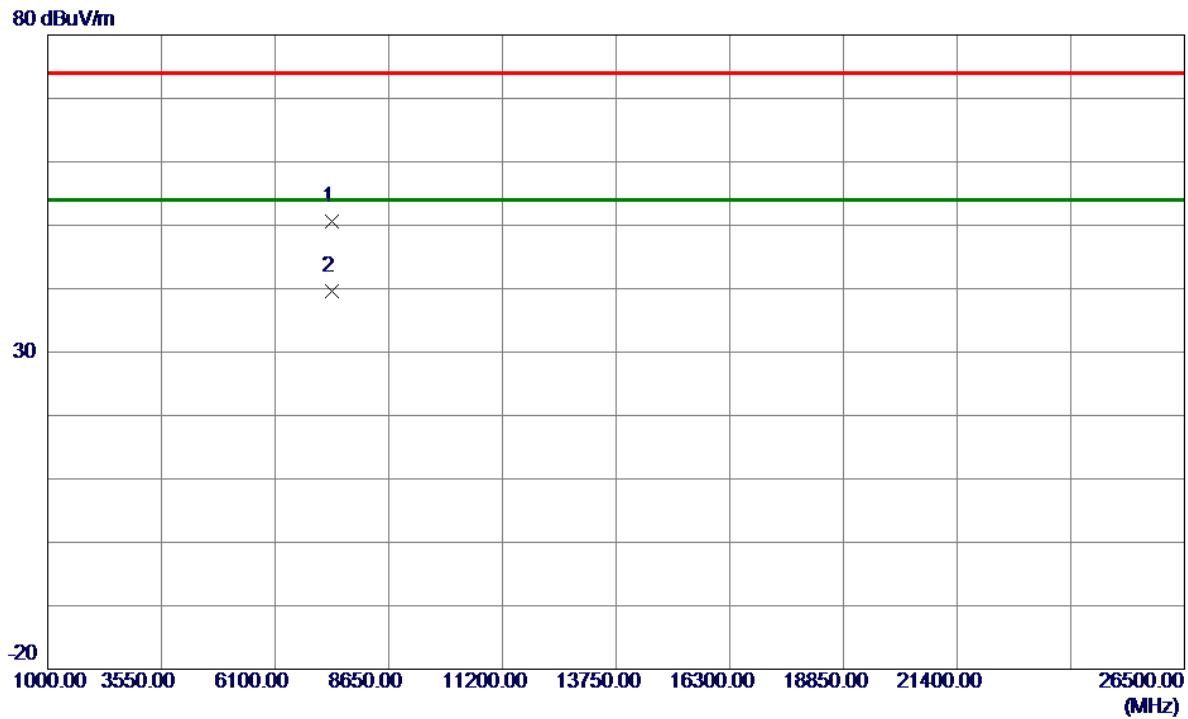


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dB μ V/m	dB	dB μ V/m	dB			
1	7380.5000	44.92	5.59	50.51	74.00	-23.49	Peak	
2 *	7385.5000	33.95	5.58	39.53	54.00	-14.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

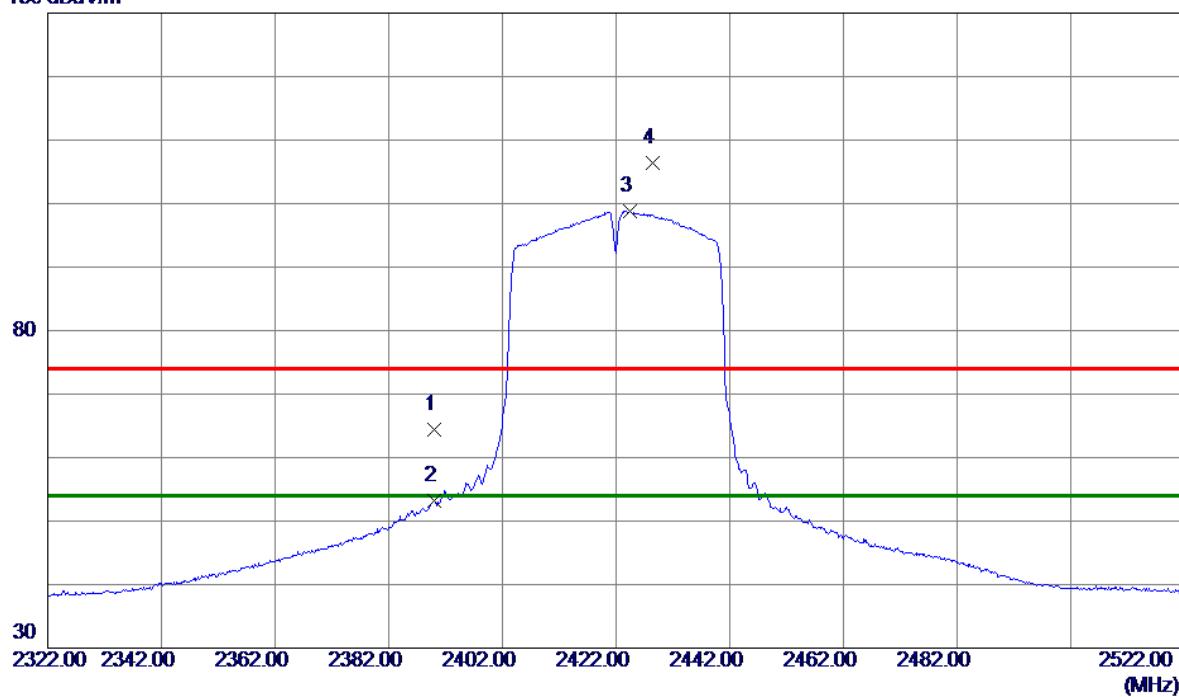


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	58.22	6.17	64.39	74.00	-9.61	Peak		
2	2390.0000	47.11	6.17	53.28	54.00	-0.72	AVG		
3 *	2424.5000	92.68	6.19	98.87	54.00	44.87	AVG	No Limit	
4	2428.5000	100.22	6.19	106.41	74.00	32.41	Peak	No Limit	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

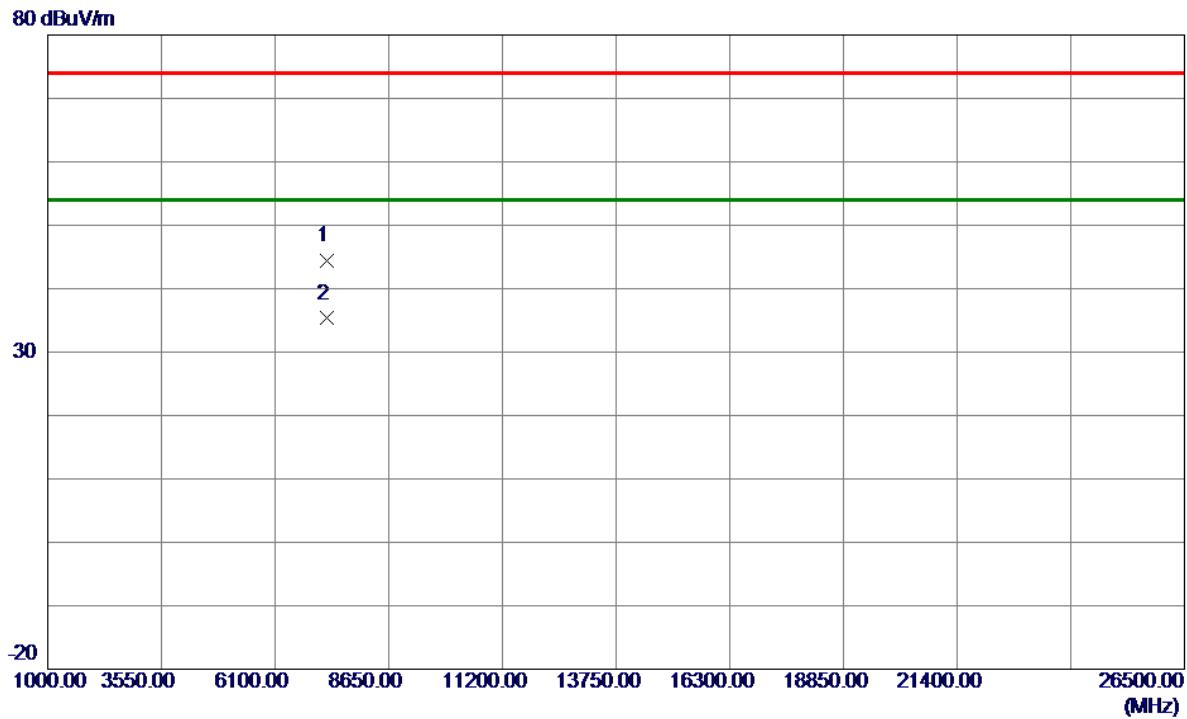


No.	Freq. MHz	Reading Level dB μ V/m	Correct Factor dB	Measure ment dB μ V/m	Limit dB μ V/m	Margin dB	Detector	
							Detector	Comment
1	7256.8000	38.66	5.65	44.31	74.00	-29.69	Peak	
2 *	7269.3000	29.66	5.64	35.30	54.00	-18.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

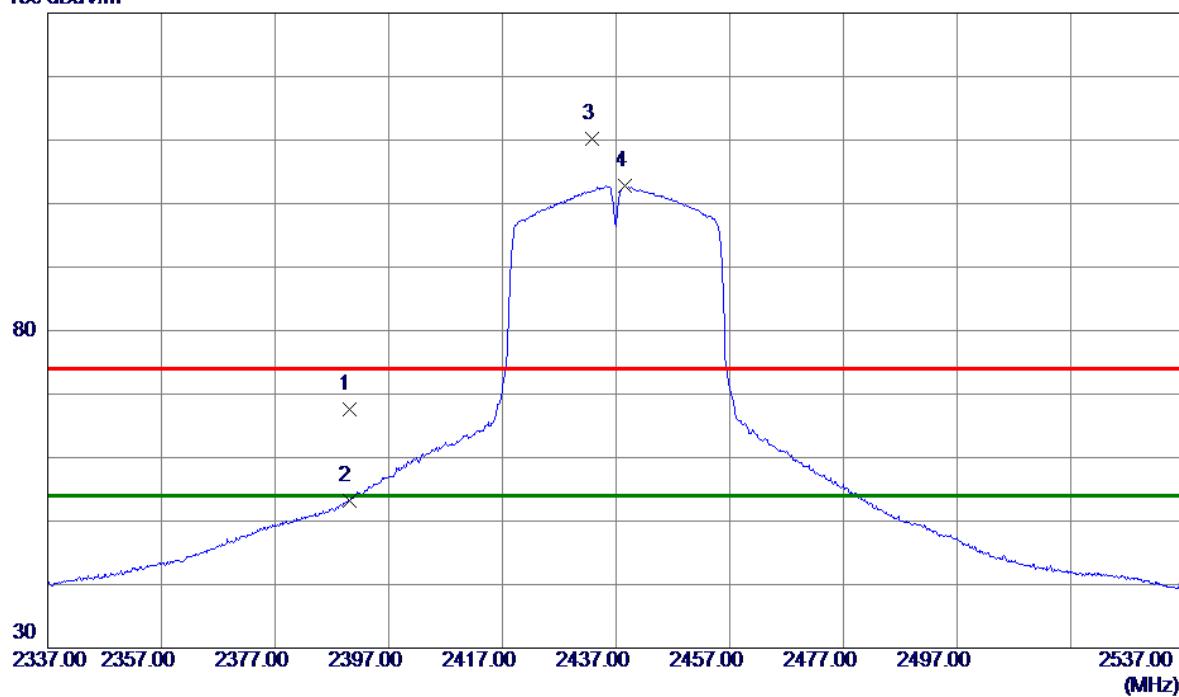


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	2390.0000	61.44	6.17	67.61	74.00	-6.39	Peak	
2	2390.0000	47.02	6.17	53.19	54.00	-0.81	AVG	
3	2432.7000	103.96	6.20	110.16	74.00	36.16	Peak	No Limit
4 *	2438.5000	96.58	6.20	102.78	54.00	48.78	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

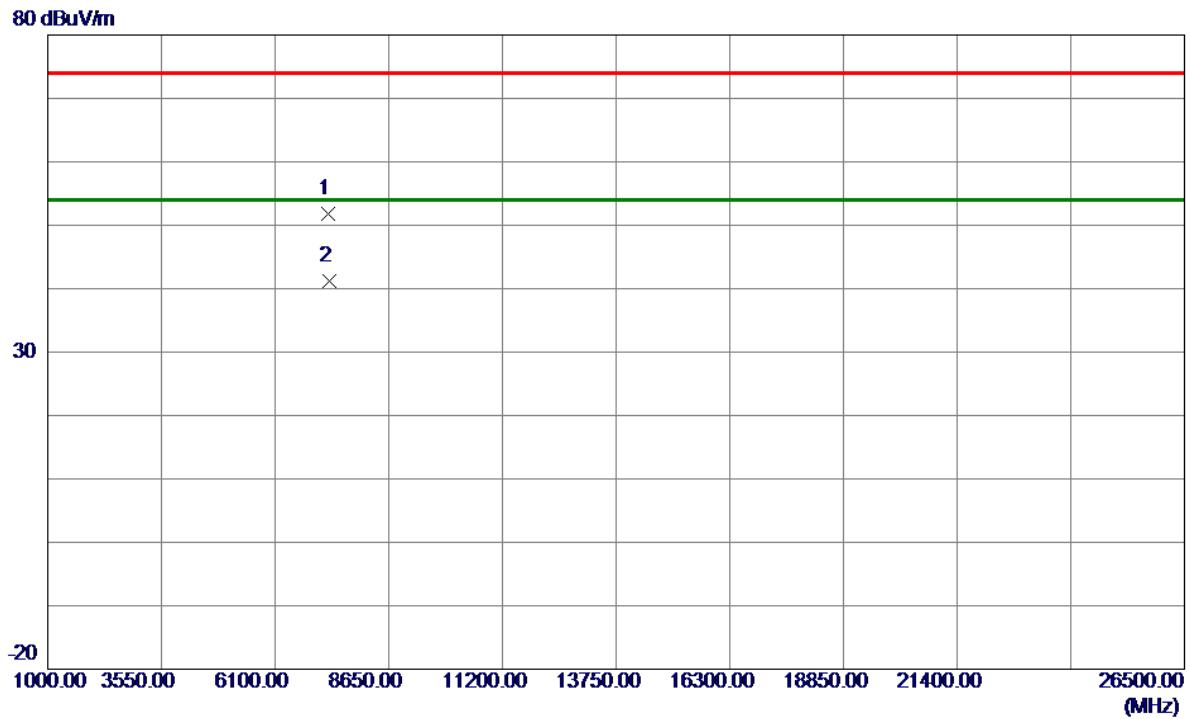


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dB μ V/m	dB μ V/m	dB		
1	7303.1500	46.20	5.62	51.82	74.00	-22.18	Peak	
2 *	7310.3500	35.59	5.62	41.21	54.00	-12.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

130 dBuV/m

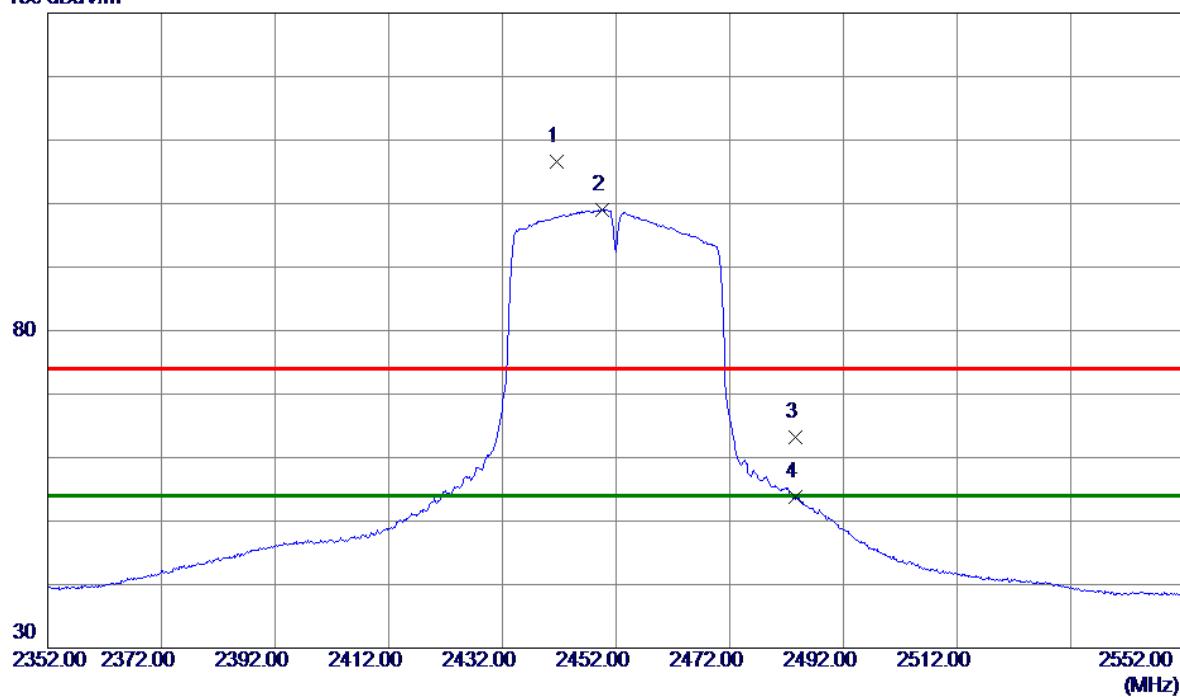


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2441.6000	100.47	6.20	106.67	74.00	32.67	Peak	No Limit
2 *	2449.6000	92.86	6.21	99.07	54.00	45.07	AVG	No Limit
3	2483.5000	57.01	6.23	63.24	74.00	-10.76	Peak	
4	2483.5000	47.51	6.23	53.74	54.00	-0.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

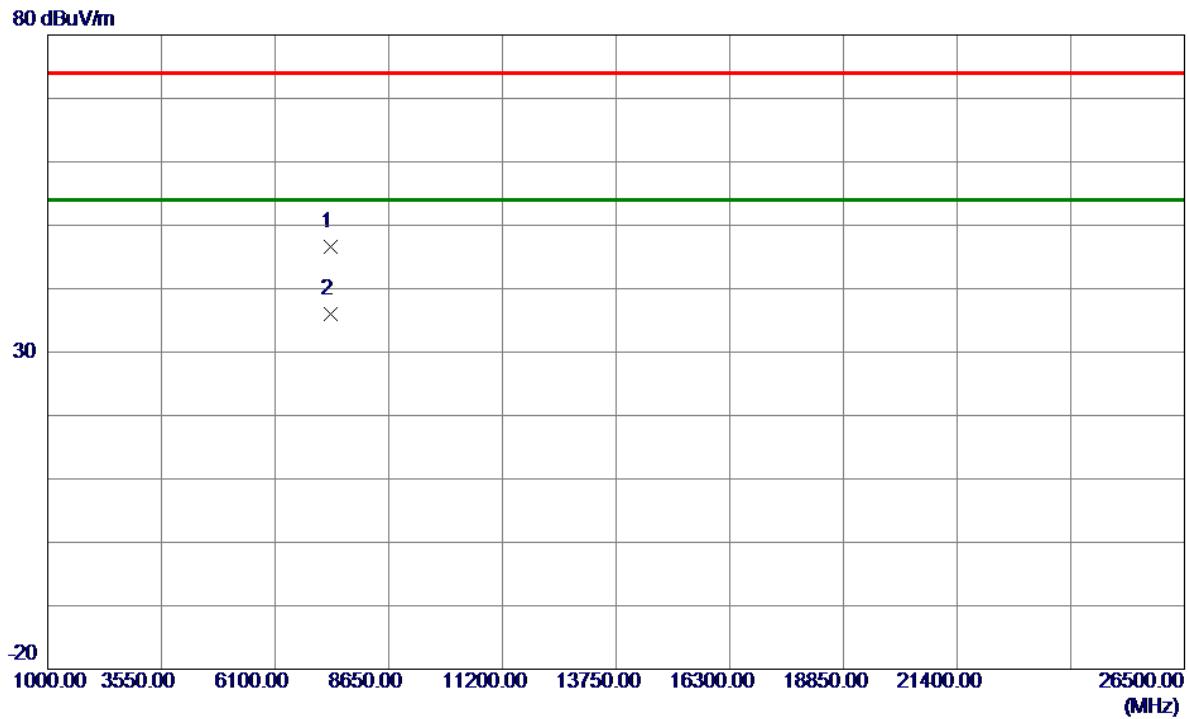


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	d μ V/m	dB	d μ V/m	dB	Detector	Comment
1	7354.1500	40.93	5.60	46.53	74.00	-27.47	Peak
2 *	7356.6000	30.41	5.60	36.01	54.00	-17.99	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

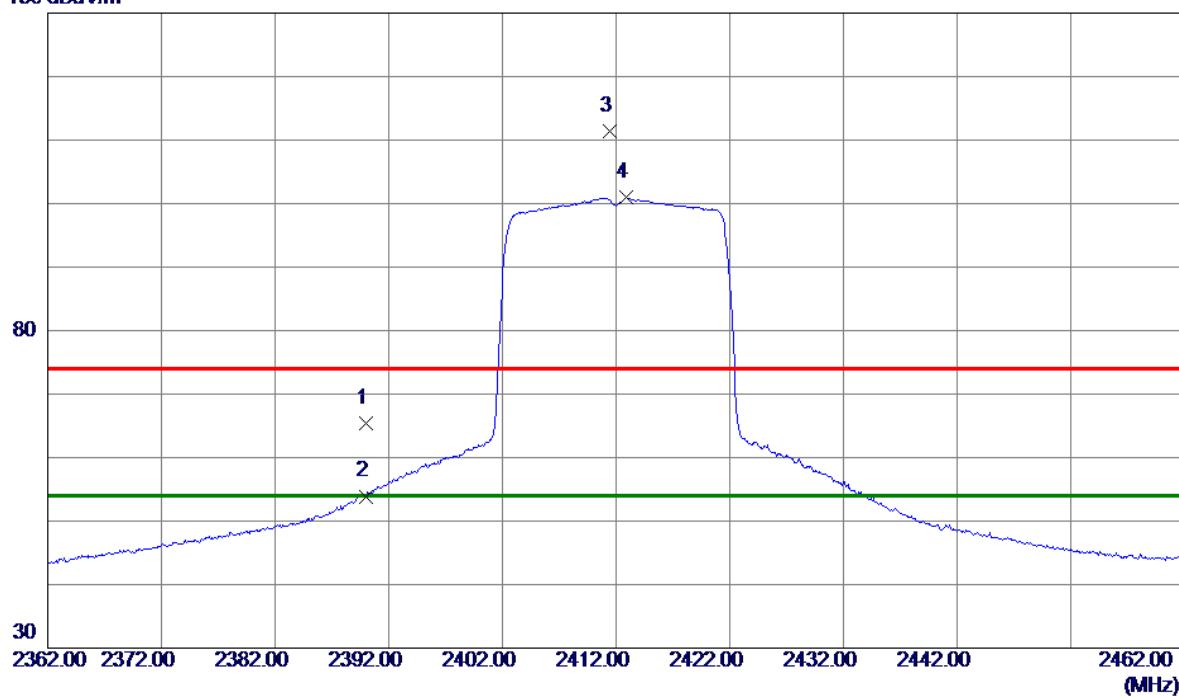


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Comment						
							MHz	dBuV/m	dB	dBuV/m	dB	Detector	
1	2390.0000	59.31	6.17	65.48	74.00	-8.52	Peak						
2	2390.0000	47.73	6.17	53.90	54.00	-0.10	AVG						
3	2411.4500	105.27	6.18	111.45	74.00	37.45	Peak	No Limit					
4 *	2412.8500	94.73	6.18	100.91	54.00	46.91	AVG	No Limit					

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

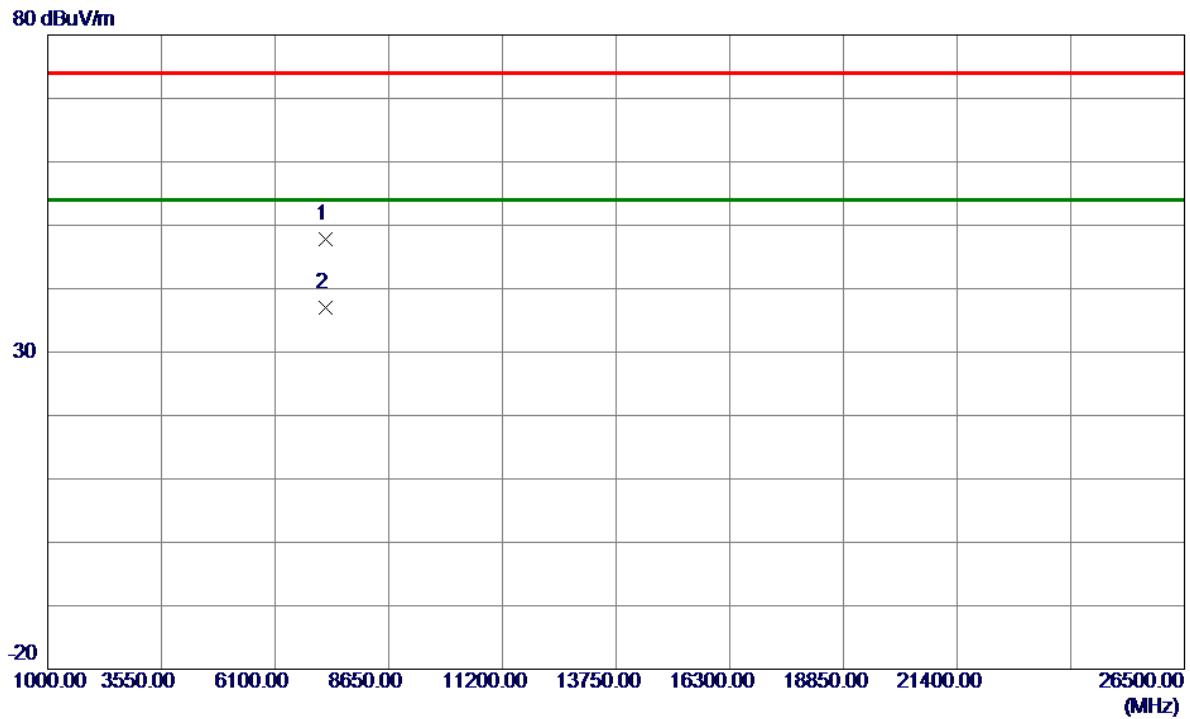


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	d μ V/m	dB	d μ V/m	dB	Detector	Comment
1	7232.9000	42.11	5.66	47.77	74.00	-26.23	Peak
2 *	7235.5500	31.41	5.66	37.07	54.00	-16.93	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

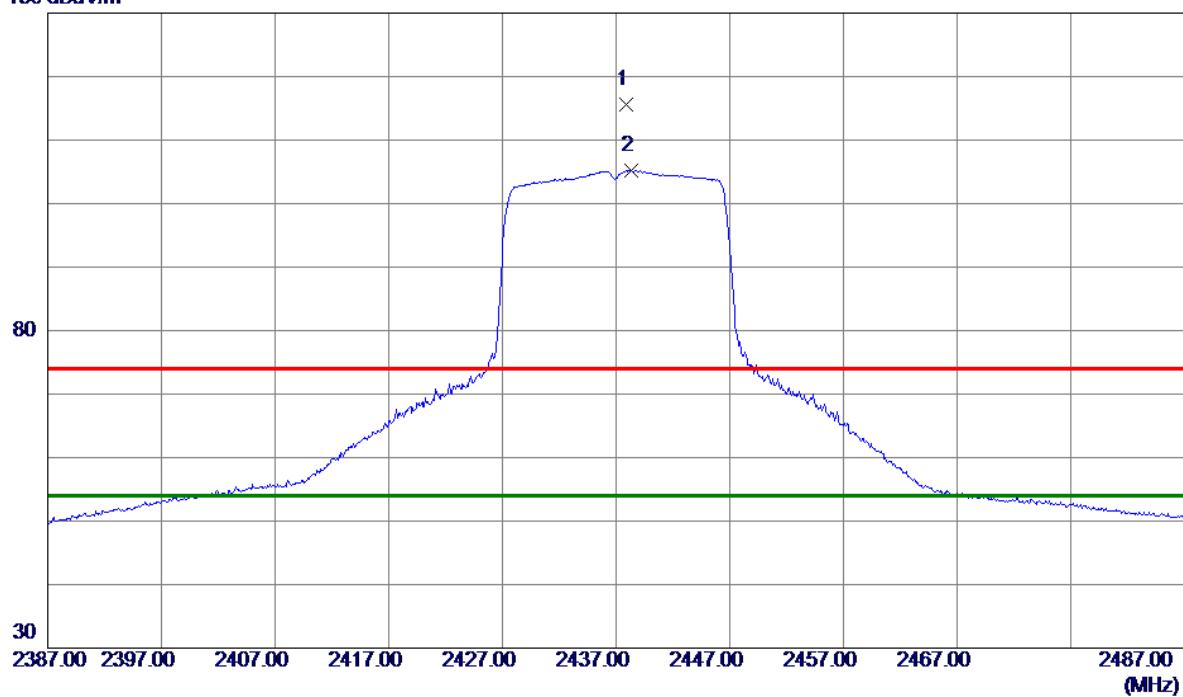


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	2437.9000	109.39	6.20	115.59	74.00	41.59	Peak	No Limit
2 *	2438.3000	99.05	6.20	105.25	54.00	51.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

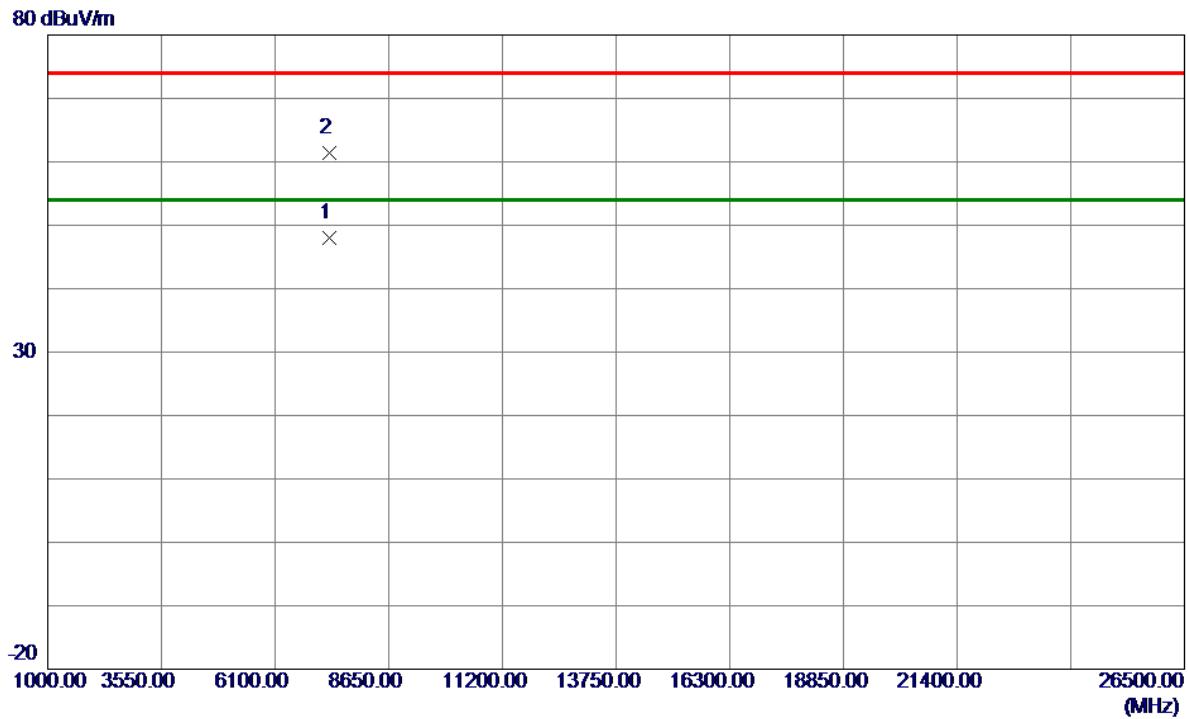


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dB μ V/m	dB μ V/m	dB		
1 *	7306.5500	42.46	5.62	48.08	54.00	-5.92	AVG	
2	7313.8500	55.77	5.62	61.39	74.00	-12.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

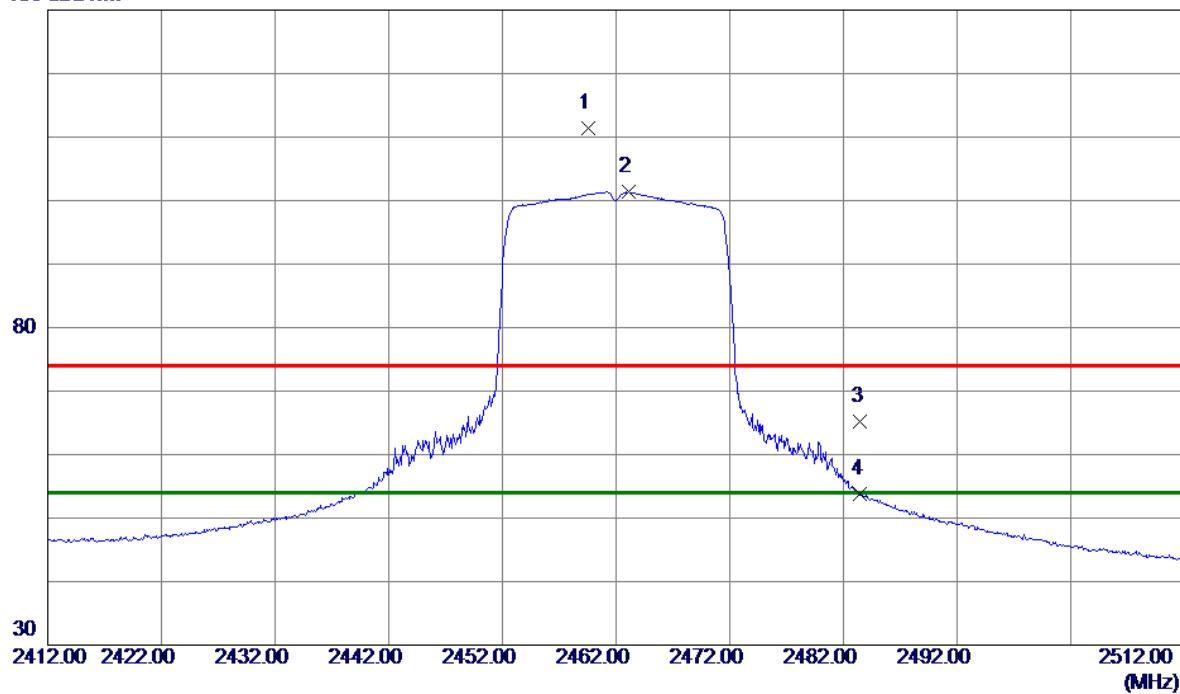


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2459.6000	105.26	6.21	111.47	74.00	37.47	Peak	No Limit
2 *	2463.1000	95.13	6.22	101.35	54.00	47.35	AVG	No Limit
3	2483.5000	58.89	6.23	65.12	74.00	-8.88	Peak	
4	2483.5000	47.51	6.23	53.74	54.00	-0.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

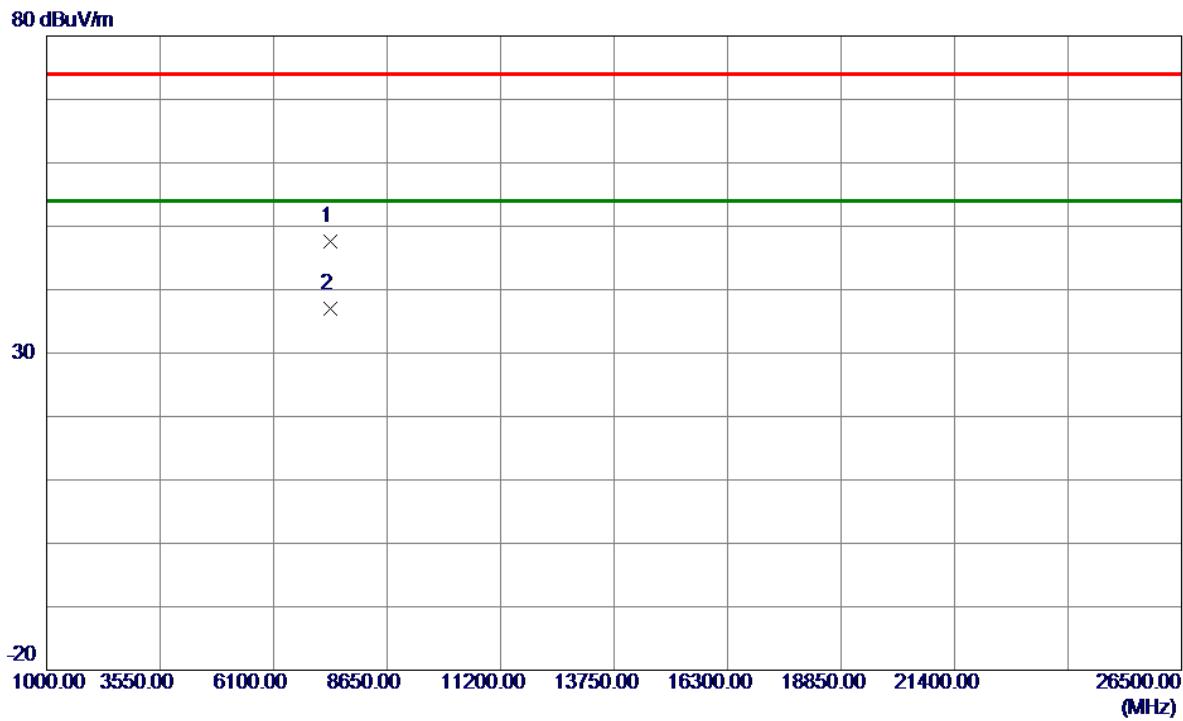


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	d μ V/m	dB	d μ V/m	dB			
1	7383.0000	41.93	5.59	47.52	74.00	-26.48	Peak	
2 *	7388.0000	31.49	5.58	37.07	54.00	-16.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

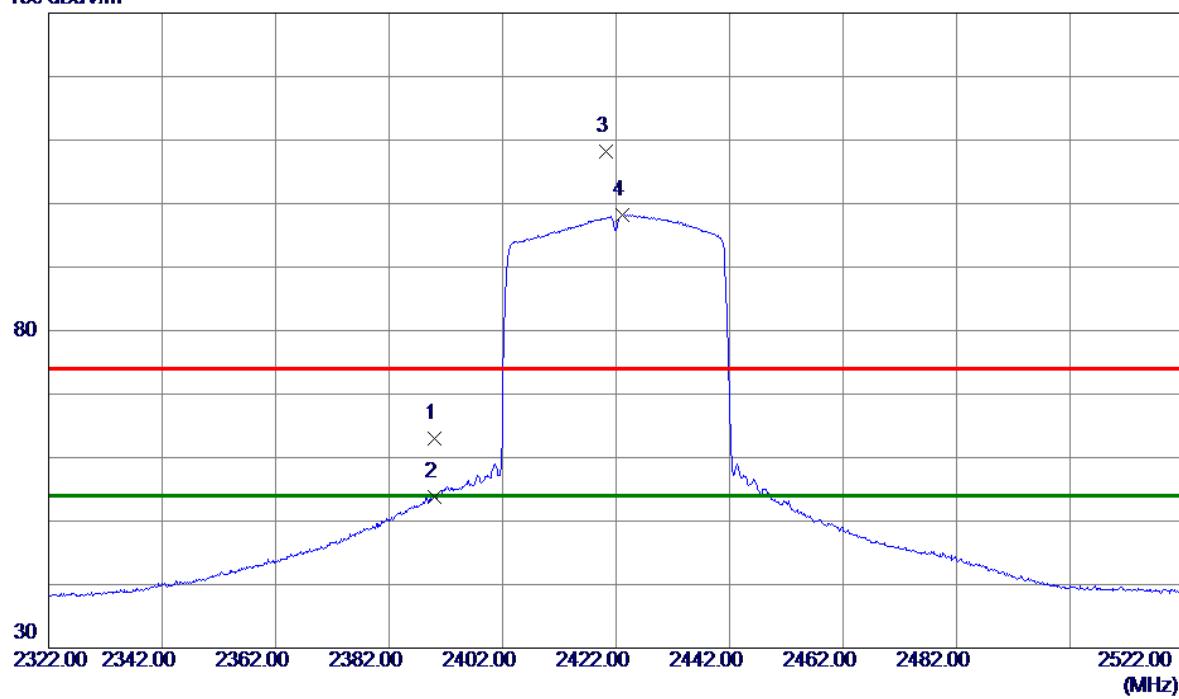


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2390.000	56.89	6.17	63.06	74.00	-10.94	Peak	
2	2390.000	47.72	6.17	53.89	54.00	-0.11	AVG	
3	2420.300	102.07	6.19	108.26	74.00	34.26	Peak	No Limit
4 *	2423.100	92.07	6.19	98.26	54.00	44.26	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

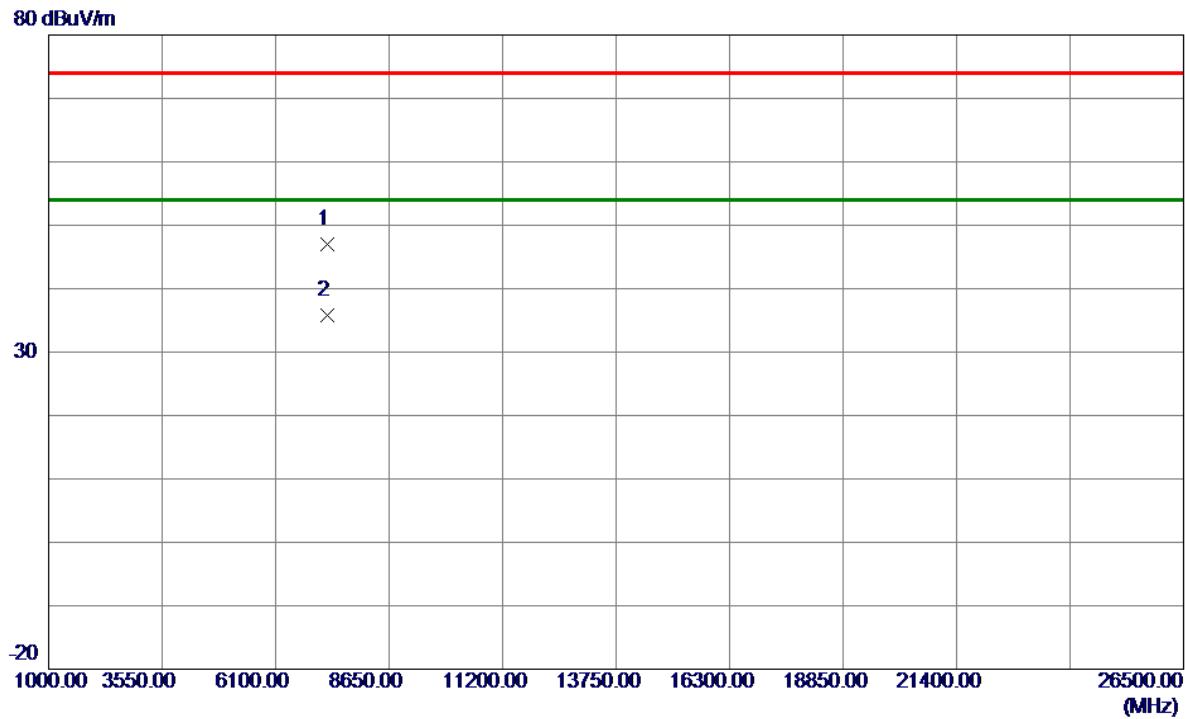


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	d μ V/m	dB	d μ V/m	dB	Detector	Comment
1	7260.5000	41.43	5.64	47.07	74.00	-26.93	Peak
2 *	7270.3000	30.08	5.64	35.72	54.00	-18.28	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

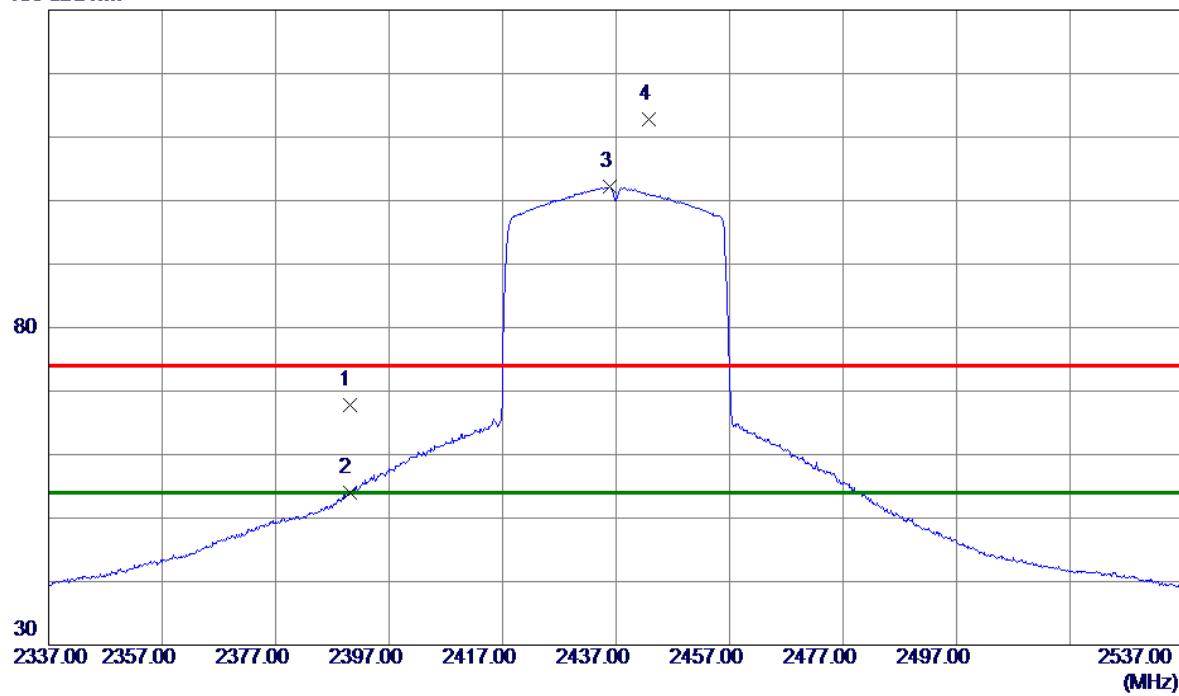


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
							1 2 3 4
1	2390.0000	61.59	6.17	67.76	74.00	-6.24	Peak
2	2390.0000	47.77	6.17	53.94	54.00	-0.06	AVG
3 *	2435.9000	95.92	6.20	102.12	54.00	48.12	AVG
4	2442.7000	106.57	6.20	112.77	74.00	38.77	Peak No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

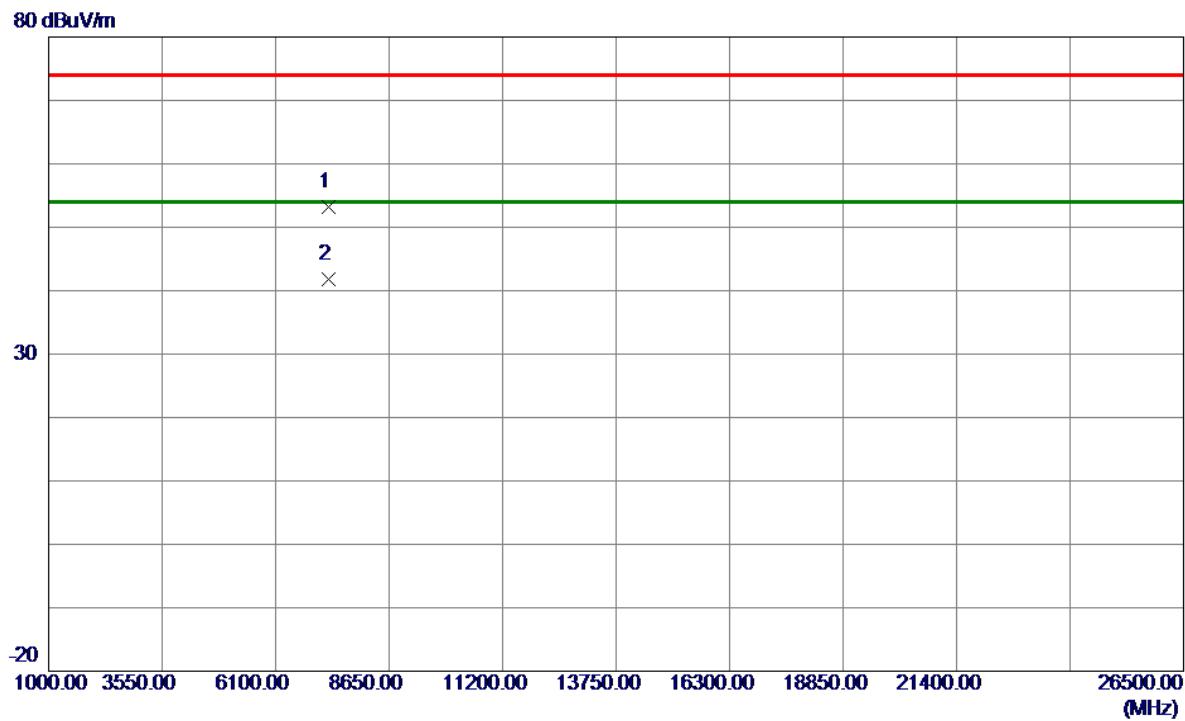


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dB μ V/m	dB	dB μ V/m	dB	Detector	Comment
1	7301.1000	47.63	5.63	53.26	74.00	-20.74	Peak
2 *	7301.5000	36.14	5.63	41.77	54.00	-12.23	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

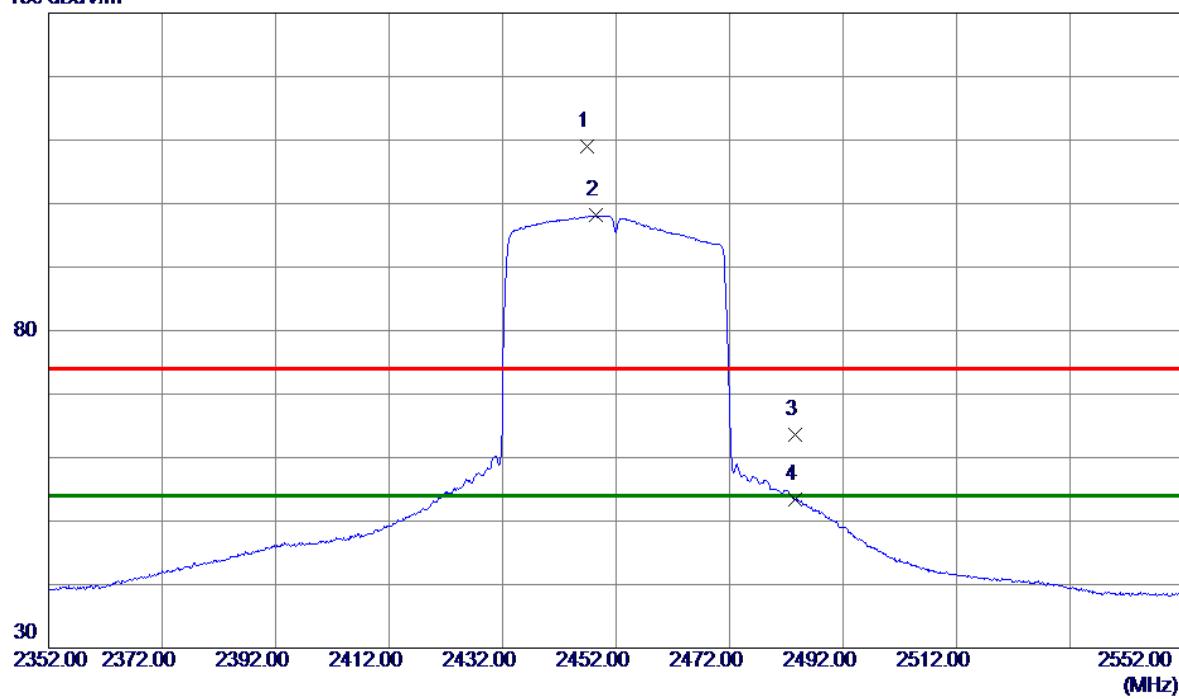


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	2446.8000	102.75	6.20	108.95	74.00	34.95	Peak	No Limit
2 *	2448.5000	91.90	6.21	98.11	54.00	44.11	AVG	No Limit
3	2483.5000	57.44	6.23	63.67	74.00	-10.33	Peak	
4	2483.5000	47.08	6.23	53.31	54.00	-0.69	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

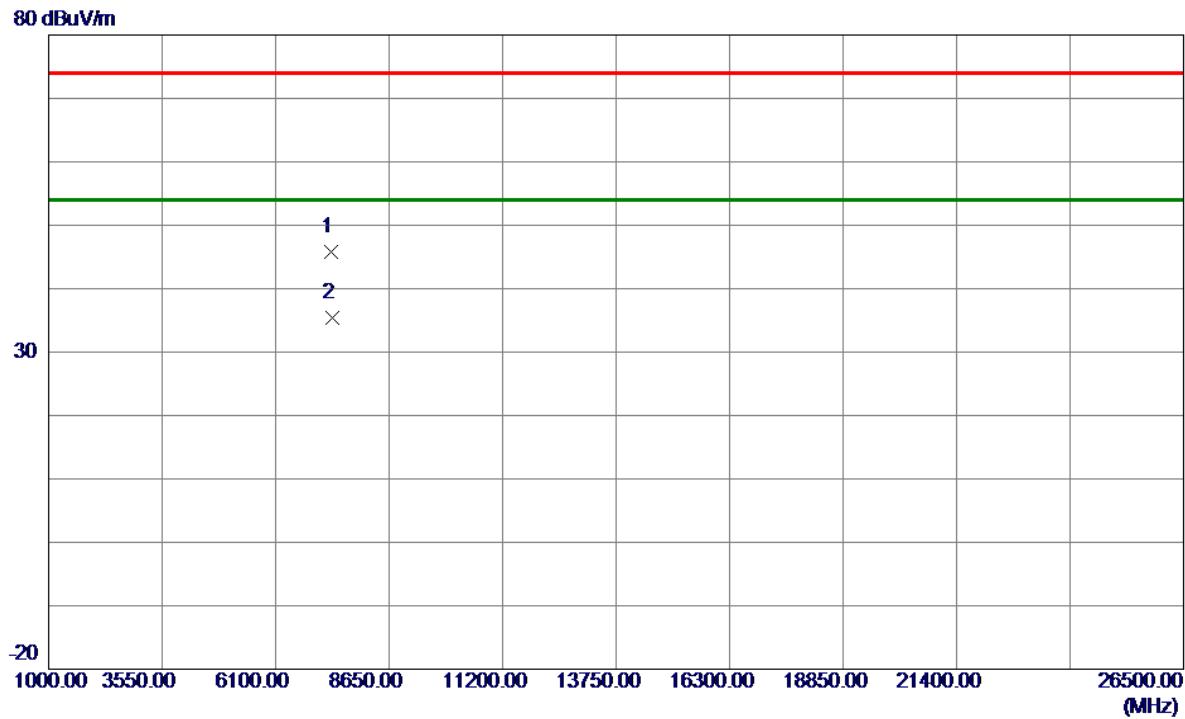

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	d μ V/m	dB	d μ V/m	dB	Detector	Comment
1	7346.1000	40.13	5.60	45.73	74.00	-28.27	Peak
2 *	7368.8500	29.85	5.59	35.44	54.00	-18.56	AVG

REMARKS:



- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode TX B Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	8.080	13.200	0.5	Complies
06	2437	8.120	12.960	0.5	Complies
11	2462	8.090	13.040	0.5	Complies




CH01

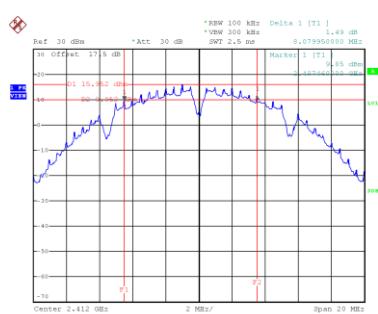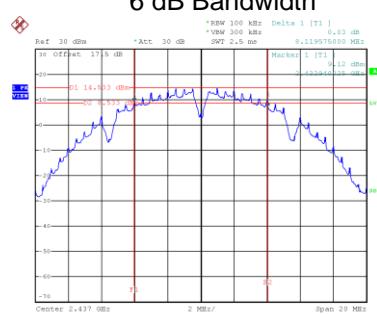CH06
6 dB Bandwidth

CH11





99 % Occupied Bandwidth

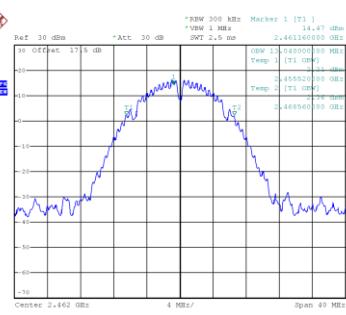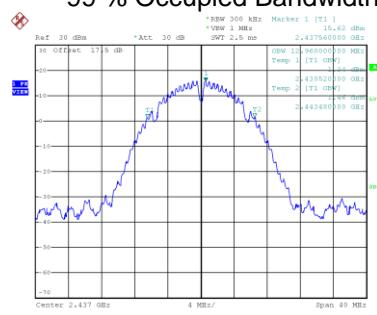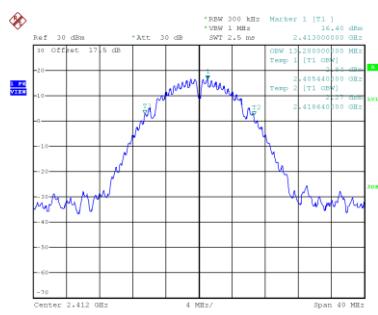


Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.340	16.880	0.5	Complies
06	2437	15.710	16.960	0.5	Complies
11	2462	15.200	16.800	0.5	Complies

CH01

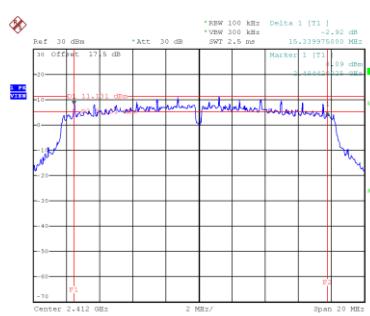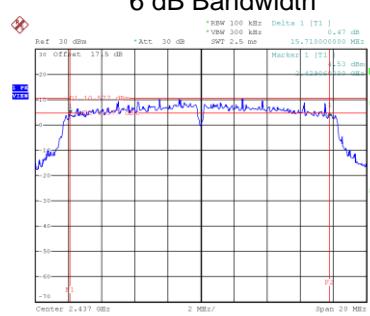CH06
6 dB Bandwidth

CH11


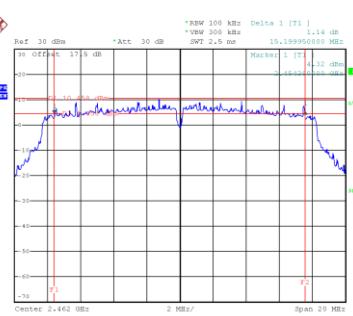


Date: 8.DEC.2023 12:46:14

Date: 8.DEC.2023 12:47:47

Date: 8.DEC.2023 12:49:10

99 % Occupied Bandwidth

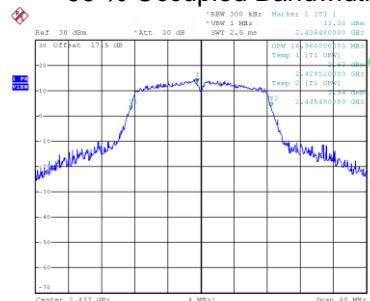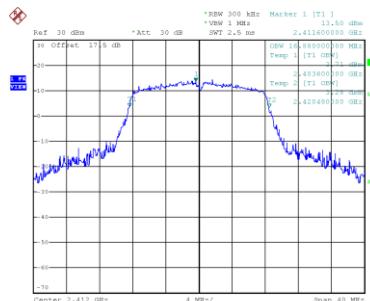

Date: 8.DEC.2023 12:46:22


Date: 8.DEC.2023 12:47:56

Date: 8.DEC.2023 12:49:27

Test Mode TX N(HT20) Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.070	18.000	0.5	Complies
06	2437	16.559	18.000	0.5	Complies
11	2462	15.100	17.920	0.5	Complies

CH01

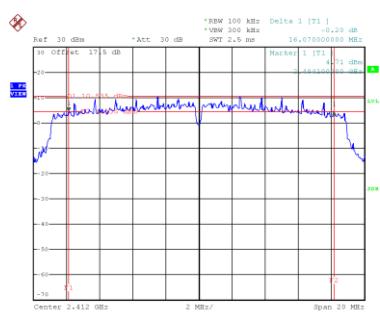


Date: 8.DEC.2023 14:01:36

CH06
6 dB Bandwidth

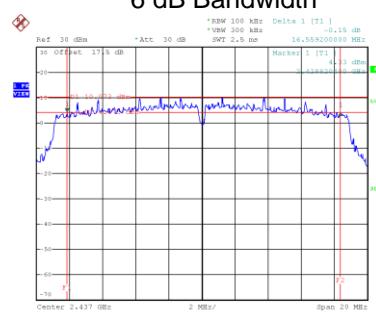


Date: 8.DEC.2023 14:03:10

CH11

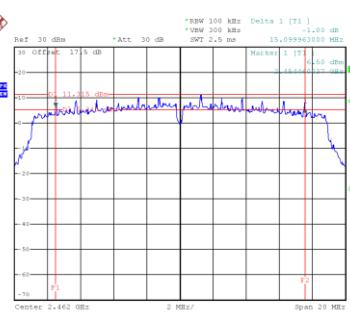


Date: 8.DEC.2023 14:04:42


99 % Occupied Bandwidth

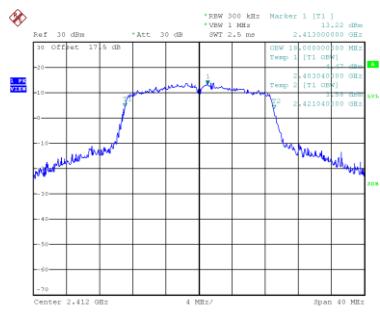

Date: 8.DEC.2023 14:01:45

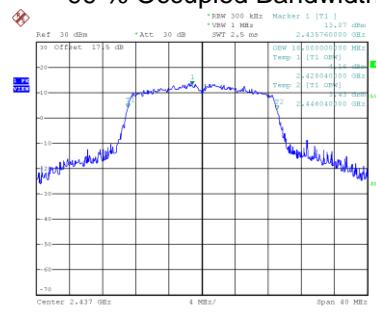


Date: 8.DEC.2023 14:03:19

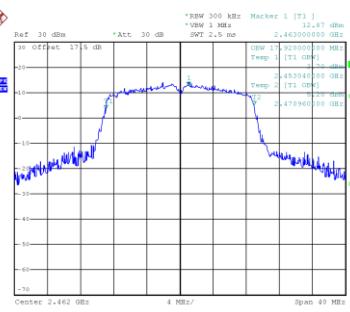


Date: 8.DEC.2023 14:04:51


Test Mode		TX N(HT40) Mode			
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	35.209	36.800	0.5	Complies
06	2437	35.120	36.800	0.5	Complies
09	2452	35.200	36.800	0.5	Complies

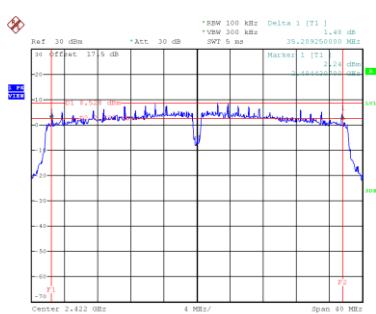


Date: 8.DEC.2023 14:06:30

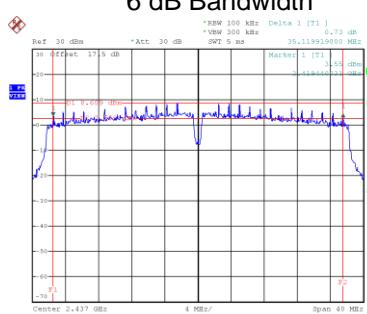


Date: 8.DEC.2023 14:07:59

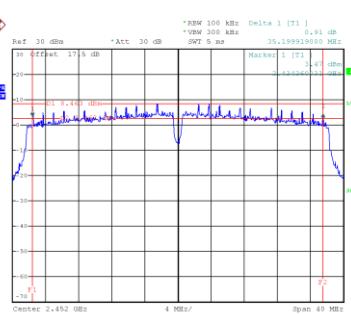


Date: 8.DEC.2023 14:09:29

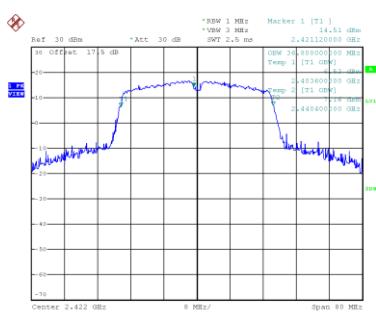

Date: 8.DEC.2023 14:06:39

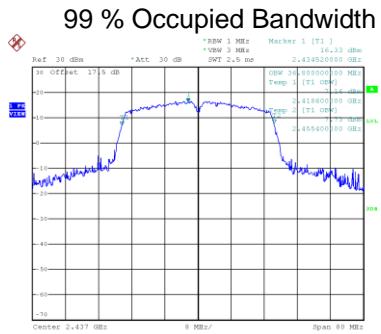

Date: 8.DEC.2023 14:08:08

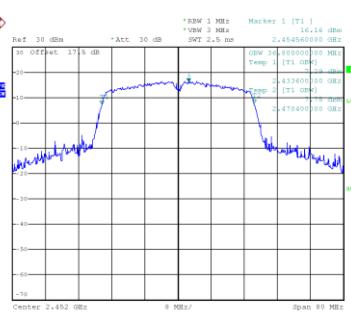


Date: 8.DEC.2023 14:09:38


Test Mode TX AX(HE20) Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	18.380	18.960	0.5	Complies
06	2437	17.999	19.120	0.5	Complies
11	2462	17.990	19.040	0.5	Complies

CH01

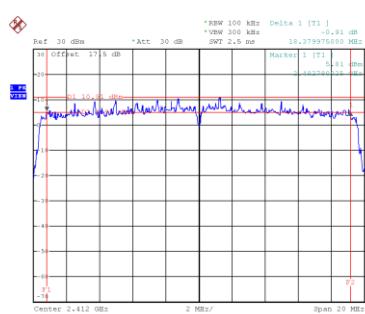


Date: 8.DEC.2023 14:11:14

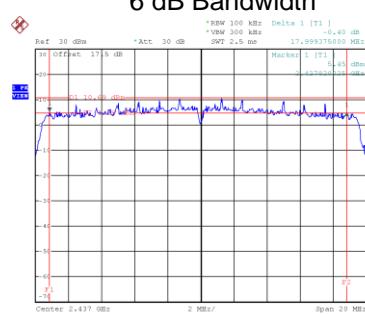CH06
6 dB Bandwidth


Date: 8.DEC.2023 14:13:18

CH11

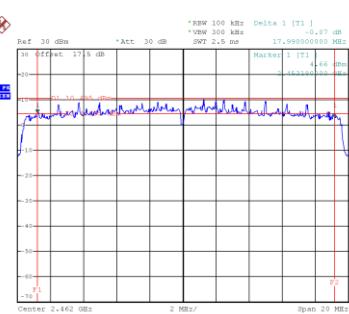


Date: 8.DEC.2023 14:14:49


99 % Occupied Bandwidth

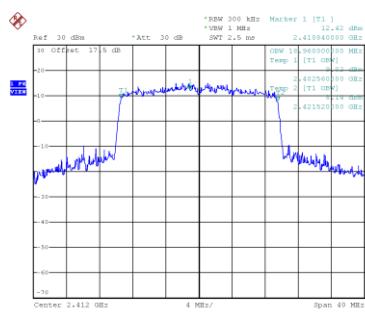

Date: 8.DEC.2023 14:11:53

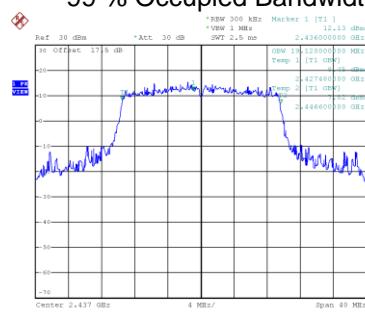




Date: 8.DEC.2023 14:13:27

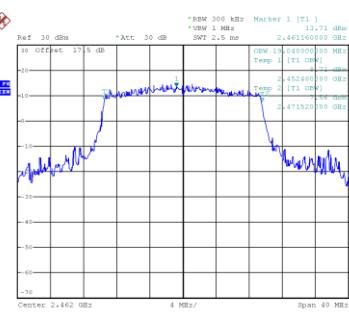

Date: 8.DEC.2023 14:14:57

Test Mode TX AX(HE40) Mode



Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	37.280	38.240	0.5	Complies
06	2437	37.040	38.560	0.5	Complies
09	2452	36.800	38.400	0.5	Complies

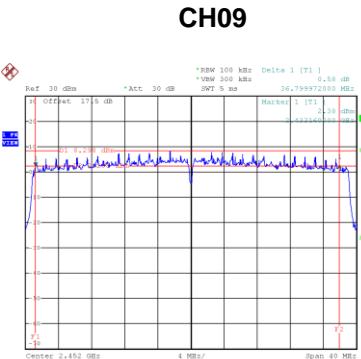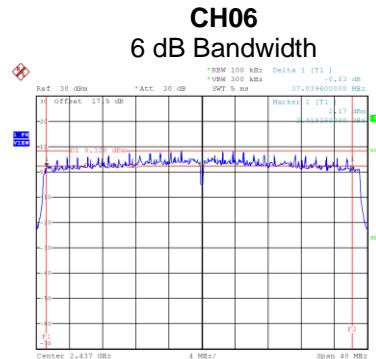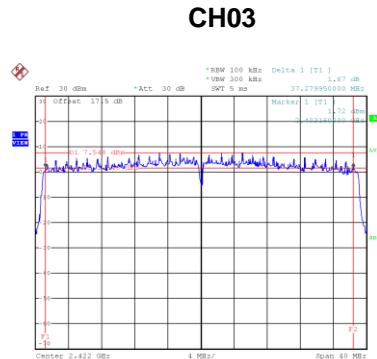

Date: 8.DEC.2023 14:16:30

Date: 8.DEC.2023 14:17:56

Date: 8.DEC.2023 14:20:54

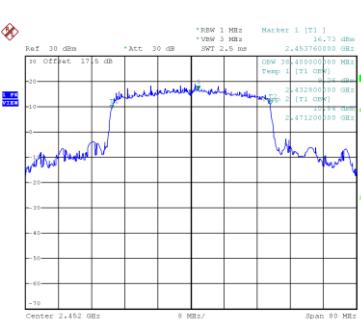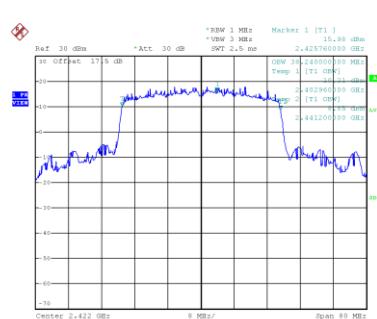

Date: 8.DEC.2023 14:16:38

Date: 8.DEC.2023 14:18:05

Date: 8.DEC.2023 14:21:03

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	26.08	0.00	26.08	30.00	1.0000	Complies
06	2437	26.18	0.00	26.18	30.00	1.0000	Complies
11	2462	25.84	0.00	25.84	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.93	0.00	25.93	30.00	1.0000	Complies
06	2437	26.21	0.00	26.21	30.00	1.0000	Complies
11	2462	25.91	0.00	25.91	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	29.02	30.00	1.0000	Complies
06	2437	29.21	30.00	1.0000	Complies
11	2462	28.89	30.00	1.0000	Complies

Test Mode TX G Mode_Ant. 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.36	0.18	21.54	30.00	1.0000	Complies
06	2437	24.51	0.18	24.69	30.00	1.0000	Complies
11	2462	25.14	0.18	25.32	30.00	1.0000	Complies

Test Mode TX G Mode_Ant. 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.97	0.18	22.15	30.00	1.0000	Complies
06	2437	24.46	0.18	24.64	30.00	1.0000	Complies
11	2462	25.11	0.18	25.29	30.00	1.0000	Complies

Test Mode TX G Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.86	30.00	1.0000	Complies
06	2437	27.67	30.00	1.0000	Complies
11	2462	28.31	30.00	1.0000	Complies

Test Mode TX N(HT20) Mode_Ant. 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.38	0.19	22.57	30.00	1.0000	Complies
06	2437	22.92	0.19	23.11	30.00	1.0000	Complies
11	2462	23.94	0.19	24.13	30.00	1.0000	Complies

Test Mode TX N(HT20) Mode_Ant. 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.48	0.19	22.67	30.00	1.0000	Complies
06	2437	23.02	0.19	23.21	30.00	1.0000	Complies
11	2462	24.13	0.19	24.32	30.00	1.0000	Complies

Test Mode TX N(HT20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.63	30.00	1.0000	Complies
06	2437	26.17	30.00	1.0000	Complies
11	2462	27.23	30.00	1.0000	Complies

Test Mode TX N(HT40) Mode_Ant. 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.01	0.38	22.39	30.00	1.0000	Complies
06	2437	22.12	0.38	22.50	30.00	1.0000	Complies
09	2452	22.03	0.38	22.41	30.00	1.0000	Complies

Test Mode TX N(HT40) Mode_Ant. 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	21.44	0.38	21.82	30.00	1.0000	Complies
06	2437	21.57	0.38	21.95	30.00	1.0000	Complies
09	2452	22.07	0.38	22.45	30.00	1.0000	Complies

Test Mode TX N(HT40) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	25.13	30.00	1.0000	Complies
06	2437	25.25	30.00	1.0000	Complies
09	2452	25.45	30.00	1.0000	Complies

Test Mode TX AX(HE20) Mode_Ant. 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.84	0.25	24.09	30.00	1.0000	Complies
06	2437	25.05	0.25	25.30	30.00	1.0000	Complies
11	2462	24.92	0.25	25.17	30.00	1.0000	Complies

Test Mode TX AX(HE20) Mode_Ant. 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.76	0.25	24.01	30.00	1.0000	Complies
06	2437	25.08	0.25	25.33	30.00	1.0000	Complies
11	2462	24.89	0.25	25.14	30.00	1.0000	Complies

Test Mode TX AX(HE20) Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	27.06	30.00	1.0000	Complies
06	2437	28.32	30.00	1.0000	Complies
11	2462	28.16	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.79	0.44	23.23	30.00	1.0000	Complies
06	2437	22.46	0.44	22.90	30.00	1.0000	Complies
09	2452	22.54	0.44	22.98	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.71	0.44	23.15	30.00	1.0000	Complies
06	2437	22.86	0.44	23.30	30.00	1.0000	Complies
09	2452	22.23	0.44	22.67	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	26.20	30.00	1.0000	Complies
06	2437	26.11	30.00	1.0000	Complies
09	2452	25.84	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS