

# EMC TEST REPORT No. 130400722SHA-001

Applicant : Du-hope international group

NO.199 Jian Ye Road, Oriental Perfect Building,

Nanjing, China

Manufacturer : Du-hope international group

NO.199 Jian Ye Road, Oriental Perfect Building,

Nanjing, China

Equipment : Remote controller

Type/Model : DHGR1

#### **SUMMARY**

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2011):** Radio Frequency Devices

**ANSI C63.4 (2003):** American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

**RSS-210 Issue 8 (December 2010):** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

**RSS-Gen Issue 3 (December 2010):** General Requirements and Information for the Certification of Radiocommunication Equipment

Date of issue: June 4, 2013

Kudman Zhao

Prepared by: Reviewed by:

Endman Zhao (*Project Engineer*) Daniel Zhao (*Reviewer*)



# **Description of Test Facility**

Name: Intertek Testing Services Limited Shanghai

Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597

IC Assigned Code: 2042B-1

Name of contact: Steve Li Tel: +86 21 64956565 ext. 214 Fax: +86 21 54262335 ext. 214





## Content

St	JMMARY	1
D	ESCRIPTION OF TEST FACILITY	2
1.	GENERAL INFORMATION	4
	1.1 Applicant Information	4
	1.2 Identification of the EUT	4
	1.3 Technical specification	
	1.4 Mode of operation during the test / Test peripherals used	5
2.		
	2.1 Instrument list	6
	2.2 Test Standard	6
3.	FUNDAMENTAL & SPURIOUS EMISSION & RESTRICT BAND RADIATED EMISSION	8
	3.1 Test limit	8
	3.2 Test Configuration	9
	3.3 Test procedure and test setup	9
	3.4 Test protocol	10
4.	DEACTIVATING TIME	11
	4.1 Test limit	11
	4.2 Test Configuration	12
	4.3 Test procedure and test setup	12
	4.4 Test protocol	12
5.	POWER LINE CONDUCTED EMISSION	13
	5.1 Limit	13
	5.2 Test configuration	13
	5.3 Test procedure and test set up	
	5.4 Test protocol	15
6.	EMISSION BANDWIDTH	16
	6.1 Test limit	16
	6.2 Test Configuration	16
	6.3 Test procedure and test setup	16
	6.4 Test protocol	17
7.	OCCUPIED BANDWIDTH	18
	7.1 Test limit	18
	7.2 Test Configuration	18
	7.3 Test procedure and test setup	18
	7.4 Test protocol	19



### 1. General Information

### 1.1 Applicant Information

Applicant: Du-hope international group

NO.199 Jian Ye Road, Oriental Perfect Building,

Nanjing, China

Manufacturer: Nanjing Ripo Power Tools CO., Ltd

NO.10 Zhong Cui Road, Jiang ning Economic & Technological Development Zone, Nanjing, China

Sample received date: April 1, 2013 Sample Identification No : 0130514-49-001

Date of test : April 1 ~ May 2, 2013

#### 1.2 Identification of the EUT

Equipment: Remote controller

Type/model: DHGR1

FCC ID: 2AACQ-DHGR1 IC: 11116A-DHGR1



#### 1.3 Technical specification

Operation Frequency Band: 433.92MHz

Modulation: ASK

Antenna Designation: Integral antenna, non-user removable.

Gain of Antenna: 1.2dBi

Rating: Battery: DC 12V

Working frequency: 433.92MHz

Description of EUT: There is one model only.

The EUT transmits RF signal to control the working

condition of the corresponding receiver.

Channel Description: There is one channel only, namely 433.92MHz.

#### 1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

For the EUT is handheld device, it was set up and tested in three axes (X, Y and Z). The three axes were tested one by one while the test receiver worked as "max hold" continuously and the highest reading among the whole test procedure was recorded.



## 2. Test Specification

#### 2.1 Instrument list

Equipment	Typo	Manu.	Internal no.	Cal. Date	Due date
Equipment	Type				
Test Receiver	ESIB 26	R&S	EC 3045	2012-10-21	2013-10-20
Semi-anechoic	-	Albatross	EC 3048	2013-5-21	2013-5-20
chamber		project			
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2013-5-16	2015-5-15
Horn antenna	HF 906	R&S	EC 3049	2013-5-13	2015-5-12
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2013-4-12	2014-4-11
Test Receiver	ESCS 30	R&S	EC 2107	2012-10-21	2013-10-20
A.M.N.	ESH2-Z5	R&S	EC 3119	2013-1-9	2014-1-8
A.M.N.	ESH3-Z5	R&S	EC 2109	2013-1-10	2014-1-9
High Pass Filter	WHKX	Wainwright	EC4297-1	2013-2-8	2014-2-7
_	1.0/15G-10SS				
High Pass Filter	WHKX	Wainwright	EC4297-2	2013-2-8	2014-2-7
_	2.8/18G-12SS				
High Pass Filter	WHKX	Wainwright	EC4297-3	2013-2-8	2014-2-7
	7.0/1.8G-8SS				
Band Reject	WRCGV	Wainwright	EC4297-4	2013-2-8	2014-2-7
Filter	2400/2483-				
	2390/2493-				
	35/10SS				
Test Receiver	FSV40	R&S	/	2012-10-21	2013-10-20
Power	ZN2PD2-63	Mini-	815	2012-12-3	2013-12-2
Splitter/Combiner		Circuits			

#### 2.2 Test Standard

47CFR Part 15 (2011): Radio Frequency Devices

ANSI C63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8 (December 2010): Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 3 (December 2010): General Requirements and Information for the Certification of Radiocommunication Equipment



## 2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Fundamental & spurious	15.231(b)	RSS-210 Issue 8	Pass
emission		Annex A1.1.2	
Restrict band radiated	15.205	RSS-210 Issue 8	Pass
emission		Clause 2.2	
Power line conducted	15.207	RSS-Gen Issue 3	NA
emission		Clause 7.2.4	
Emission bandwidth	15.231(c)	RSS-210 Issue 8	Pass
		Annex A1.1.3	
Deactivating time	15.231(a)(1)	RSS-210 Issue 8	Pass
		Annex A1.1.1	
Occupied bandwidth	-	RSS-Gen Issue 3	Tested
		Clause 4.6.1	



### 3. Fundamental & Spurious Emission & Restrict band radiated emission

**Test result:** PASS

#### 3.1 Test limit

**3.1.1** The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:

Fundamental Frequency (MHz)	Fundamental limit (uV/m)	Spurious limit (uV/m)
<u>40.66 – 40.70</u>	2250	225
$\boxed{}70 - 130$	1250	125
□130 - 174	1250 to 3750	125 to 375
<u> </u>	3750	375
260 - 470	3750 to 12500	375 to 1250
Above 470	12500	1250

The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(Frequency) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(Frequency) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

For that the EUT use fundamental frequency of 433.92MHz, after calculation, the limit is:


Fundamental limit =  $41.6667 * 433.92 - 7083.3333 = 10996.68 \text{ uV/m} = 80.80dBuV/m}$ Spurious limit = 81 - 20 = 60.80dBuV/m

3.1.2 The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3



#### 3.2 Test Configuration

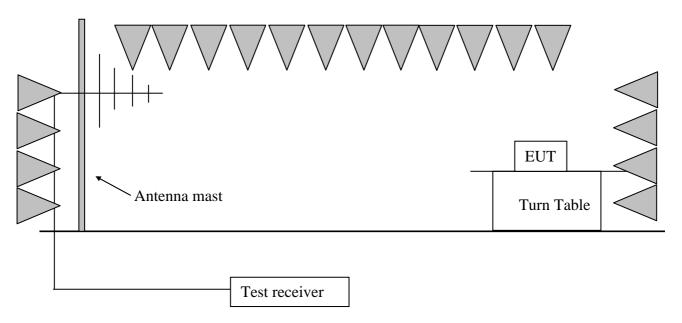

#### 3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier and high pass filter is equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz) RBW = 1MHz, VBW = 3MHz (>1GHz for PK)



#### 3.4 Test protocol

Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Emission Type	Limit (dBuV/m)	Margin	Detector
Н	136.91	14.70	18.60	Restrict	43.50	24.90	PK
Н	325.47	15.90	30.00	Spurious	60.80	30.80	PK
Н	434.32	19.10	75.10	Fundamental	80.80	5.70	PK
Н	409.39	18.40	28.70	Restrict	46.00	17.30	PK
Н	867.81	23.60	54.10	Spurious	60.80	6.70	PK
Н	2170.34	-8.10	52.40	Spurious	60.80	8.40	PK
Н	2603.21	-7.10	52.40	Spurious	60.80	8.40	PK
Н	3036.07	-6.20	52.20	Spurious	60.80	8.60	PK
V	113.58	14.90	17.70	Restrict	43.50	25.80	PK
V	325.47	15.90	31.80	Spurious	60.80	29.00	PK
V	434.33	19.10	71.70	Fundamental	80.80	9.10	PK
V	406.33	18.30	22.90	Restrict	46.00	23.10	PK
V	867.81	24.00	47.00	Spurious	60.80	13.80	PK
V	2603.21	-7.10	52.00	Spurious	60.80	8.80	PK
V	3036.07	-6.20	56.50	Spurious	60.80	4.30	PK

Remark: 1.Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

- 2. Corrected Reading = Original Receiver Reading + Correct Factor
- 3. Margin = limit Corrected Reading
- 4. If PK reading is less than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = 30.20 + 2.00 - 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.



#### 4. **Deactivating time**


**Test result: PASS** 

4.1	Test	limit
-----	------	-------

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
(5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.



### **4.2 Test Configuration**

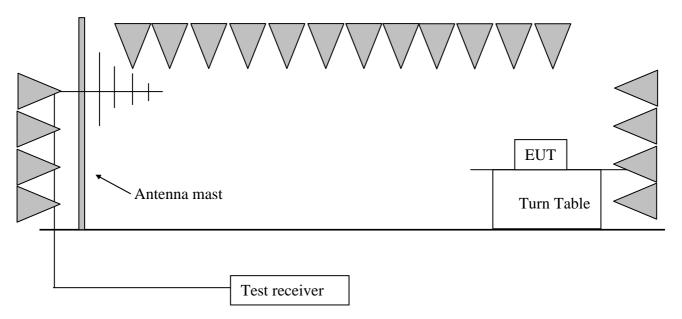

#### 4.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

#### 4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: 100ms. As a result, the EUT complies with the limit of 5s' deactivating time.




## 5. Power line conducted emission

Test result: NA

#### **5.1** Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)				
,	QP	AV			
0.15-0.5	66 to 56*	56 to 46 *			
0.5-5	56	46			
5-30	60	50			
* Decreases with the logarithm of the frequency.					

## **5.2** Test configuration

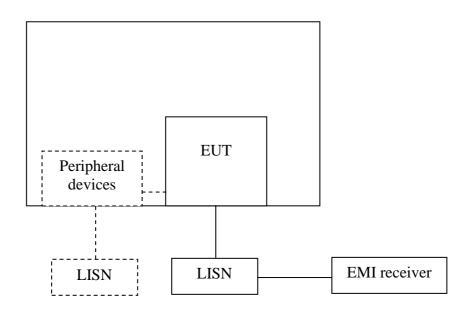

- For table top equipment, wooden support is 0.8m height table
- For floor standing equipment, wooden support is 0.1m height rack.



#### 5.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a  $50\Omega/50uH$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\Omega/50uH$  coupling impedance with  $50\Omega$  termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.



### 5.4 Test protocol

Power line: L

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
	(dD)	QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	_	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).

- 2. Margin (dB) = Limit Corrected Reading.
- 3. If the margin higher than 20dB, it would be marked as \*.

Power line: N

Frequency	Correct Factor	Corrected Reading		Limit		Margin	
	(dB)	(dBu	(V)	(dBuV)		(d	B)
		QP	AV	QP	AV	QP	AV
-	-	ı	ı	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).

- 2. Margin (dB) = Limit Corrected Reading.
- 3. If the margin higher than 20dB, it would be marked as \*.



#### 6. Emission Bandwidth


**Test Status: Pass** 

#### 6.1 Test limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = 0.25% \* 433.92MHz = 1085kHz

#### **6.2 Test Configuration**

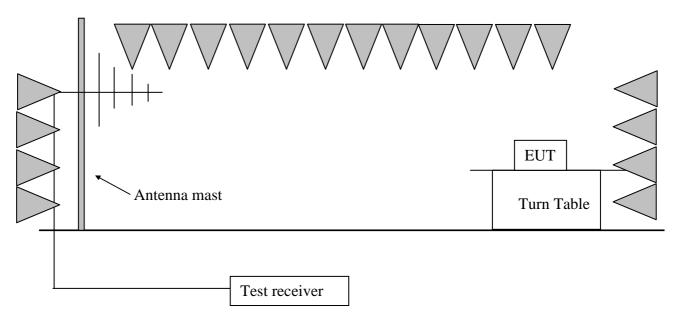

#### **6.3** Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The central frequency of test receiver was set near the operating frequency of EUT.



The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.

## **6.4 Test protocol**

Temperature : 25 °C Relative Humidity : 55 %

Channel	Emission Bandwidth (kHz)	Limit (kHz)
1	84	1085




## 7. Occupied Bandwidth

**Test Status: Tested** 

#### 7.1 Test limit

None

## 7.2 Test Configuration

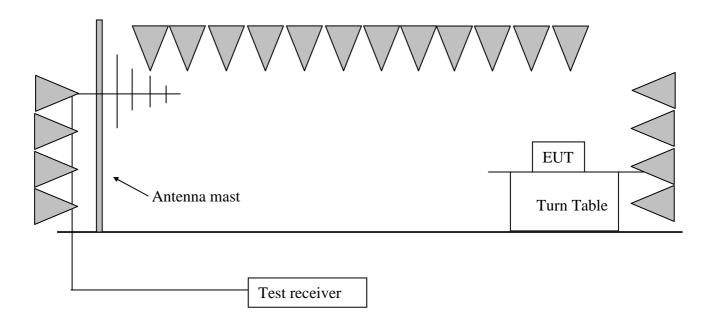

### 7.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.



## 7.4 Test protocol

 $\begin{array}{cccc} \text{Temperature} & : & 25 \, ^{\circ}\text{C} \\ \text{Relative Humidity} & : & 55 \, \% \\ \end{array}$ 

Channel	Occupied Bandwidth (kHz)
1	429