

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com

Report No.: SZEM130400206901

Page: 1 of 26

FCC REPORT

Application No. : SZEM1304002069RF
Applicant: Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd
Manufacturer: Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd
Factory: Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd
Product Name: Hotel Lock
Model No.(EUT): HZ-69531
Operation Frequency: 13.56MHz
FCC ID: 2AAE0HZ-69531
Standards: 47 CFR Part 15, Subpart C (2012)
Date of Receipt: 2013-05-13
Date of Test: 2013-05-24 to 2013-07-16
Date of Issue: 2013-08-07

| | |
|----------------------|---------------|
| Test Result : | PASS * |
|----------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Contents

| | Page |
|---|----------|
| 1 COVER PAGE | 1 |
| 2 CONTENTS..... | 2 |
| 3 TEST SUMMARY | 3 |
| 4 GENERAL INFORMATION | 4 |
| 4.1 CLIENT INFORMATION | 4 |
| 4.2 GENERAL DESCRIPTION OF E.U.T. | 4 |
| 4.3 TEST ENVIRONMENT AND MODES | 4 |
| 4.4 DESCRIPTION OF SUPPORT UNITS | 5 |
| 4.5 TEST LOCATION | 5 |
| 4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 5 |
| 4.7 TEST FACILITY..... | 5 |
| 4.8 EQUIPMENT LIST | 6 |
| 5 TEST RESULT & MEASUREMENT DATA..... | 7 |
| 5.1 ANTENNA REQUIRMENT | 7 |
| 5.2 RADIATED EMISSIONS..... | 7 |
| 5.3 FREQUENCY TOLERANCE | 12 |
| 5.4 OCCUPIED BANDWIDTH | 13 |


3 Test Summary

| Test Item | Section in CFR 47 | Result |
|---|-----------------------------------|--------|
| Radiated Emission | Section 15.209;15.225(a)(b)(c)(d) | Pass |
| Conducted Emission (150KHz to 30MHz) | 15.207 | N/A |
| Frequency Tolerance | Section 15.225(e) | Pass |
| Occupied Bandwidth | Section 15.215 | Pass |

Remark: Pass: The EUT complies with the essential requirements in the standard.

Pass: The EUT complies with the essential requirements in the standard.

The EUT passed the all tests after modification. See picture below:

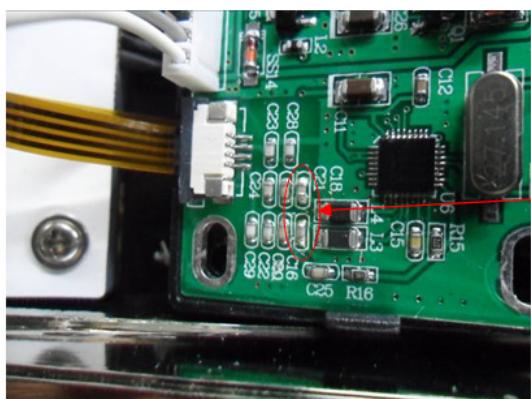

Change the two capacitors
(C16 and C18) to 68pF

4 General Information

4.1 Client Information

| | |
|--------------------------|--|
| Applicant: | Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd |
| Address of Applicant: | Eastern Industrial Park, Lishui Town, Nanhai District, Foshan City, Guangdong, China |
| Manufacturer: | Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd |
| Address of Manufacturer: | Eastern Industrial Park, Lishui Town, Nanhai District, Foshan City, Guangdong, China |
| Factory: | Foshan Hulton Hardware and Bathware Manufacturing Co., Ltd |
| Address of Factory: | Eastern Industrial Park, Lishui Town, Nanhai District, Foshan City, Guangdong, China |

4.2 General Description of E.U.T.

| | |
|----------------------|---|
| Product Name: | Hotel Lock |
| Model No.: | HZ-69531 |
| Trade Mark: | Hulton |
| Operation Frequency: | 13.56MHz |
| Modulation type: | ASK |
| Power Supply: | 6.0V DC (1.5V * 4"AA" Size Batteries) |
| Test Voltage: | DC 6.0V (1.5V * 4"AA" Size New Batteries) |
| Power Cord: | -N/A- |

4.3 Test Environment and Modes

| Operating Environment: | |
|------------------------|------------------------------------|
| Temperature: | 23.0 °C |
| Humidity: | 48 % RH |
| Atmospheric Pressure: | 1005 mbar |
| Test mode: | |
| Transmitting mode: | Keep the EUT in transmitting mode. |

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
518057
Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594
No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.8 Equipment List

| RE in Chamber | | | | | |
|---------------|---------------------------------|------------------------------------|-----------|---------------|---------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) |
| 1 | 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 2014-06-10 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESIB26 | SEL0023 | 2014-05-16 |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A |
| 4 | Coaxial cable | SGS | N/A | SEL0027 | 2014-05-29 |
| 5 | Coaxial cable | SGS | N/A | SEL0189 | 2014-05-29 |
| 6 | Coaxial cable | SGS | N/A | SEL0121 | 2014-05-29 |
| 7 | Coaxial cable | SGS | N/A | SEL0178 | 2014-05-29 |
| 8 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0015 | 2013-10-24 |
| 9 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0006 | 2013-10-24 |
| 10 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 2014-05-16 |
| 11 | Pre-Amplifier (0.1-26.5GHz) | Compliance Directions Systems Inc. | PAP-0126 | SEL0168 | 2013-10-24 |
| 12 | Barometer | ChangChun | DYM3 | SEL0088 | 2014-05-24 |
| 13 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2013-10-24 |
| 14 | Humidity/ Temperature Indicator | Shanghai Qixiang | ZJ1-2B | SEL0103 | 2013-10-24 |
| 15 | Signal Generator | Rohde & Schwarz | SMY01 | SEL0155 | 2013-10-24 |
| 16 | Signal Generator (10M-27GHz) | Rohde & Schwarz | SMR27 | SEL0067 | 2014-05-16 |
| 17 | Loop Antenna | Beijing Daze | ZN30401 | SEL0203 | 2014-06-04 |

Note: The calibration interval is one year, all the instruments are valid.

5 Test Result & Measurement Data

5.1 Antenna Requirement

| | |
|---|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. | |

5.2 Radiated Emissions

| | |
|------------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.225 |
| Test Method: | ANSI C63.10: 2009 |
| Measurement Distance: | 3m (Semi-Anechoic Chamber) |
| Requirements: | <ul style="list-style-type: none">(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15.848 microvolts/meter at 30 meters.(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209. |
| Detector: | 0.009MHz to 30MHz QP RBW=9KHz VBW=30KHz 30MHz to 1000MHz QP RBW=100KHz VBW=300KHz |

| | |
|--------------------------|--|
| Test Procedure: | <ol style="list-style-type: none">1. The EUT is placed on a turntable, which is 0.8m above ground plane.2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.6. Repeat above procedures until the measurements for all frequencies are complete.7. The limit 1.705MHz to 30MHz in clause 4.3 are specified at 30 meters, and measurements were made at 10 meters, the limit is translated to 10 meters by using a formula as follows: $\text{Limit}_{10m} = \text{Limit}_{30m} + 40\log(30m/10)$ |
| Test Instruments: | Refer to section 4.8 for details |
| Test Result: | The unit does meet the FCC Part 15 C Section 15.225 requirements. |

1.705-30MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4: 2009, section 8.2.1. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Measurement Data

Intentional emission

| Test Frequency (MHz) | Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) |
|----------------------|----------------------|-----------------------|-------------|
| 13.56 | 46.66 | 104 | -57.34 |

Remark: 1. The EUT was tested at 10m in field chamber.


2. The EUT modulation type is ASK modulation, and duty is 100%.



30MHz-1GHz

Horizontal

Data: 60

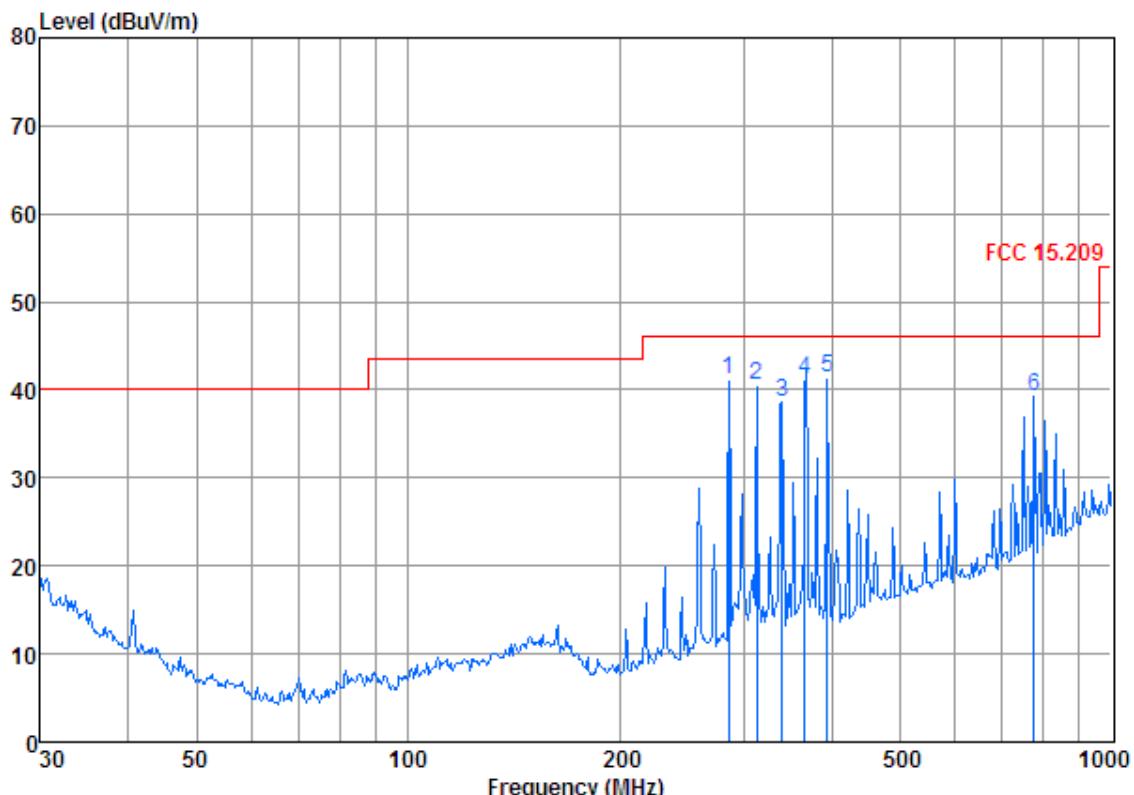

Condition: FCC 15.209 3m 3142C NEW HORIZONTAL


Job No. : 2069RF

Mode : TX mode

| Freq | Cable | Antenna | Preamp | Read | Limit | Line | Over | |
|------|---------|---------|--------|-------|-------|--------|--------|-------|
| | Loss | Factor | Factor | Level | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 285.978 | 1.84 | 9.23 | 26.44 | 56.52 | 41.15 | 46.00 | -4.85 |
| 2 | 313.276 | 1.94 | 9.88 | 26.50 | 55.30 | 40.62 | 46.00 | -5.38 |
| 3 | 340.782 | 2.03 | 10.50 | 26.73 | 52.81 | 38.61 | 46.00 | -7.39 |
| 4 | 366.515 | 2.11 | 11.04 | 26.91 | 55.00 | 41.24 | 46.00 | -4.76 |
| 5 | 394.855 | 2.19 | 11.59 | 27.09 | 54.62 | 41.31 | 46.00 | -4.69 |
| 6 | 776.878 | 3.14 | 17.92 | 27.32 | 45.61 | 39.35 | 46.00 | -6.65 |

Vertical

Data: 61

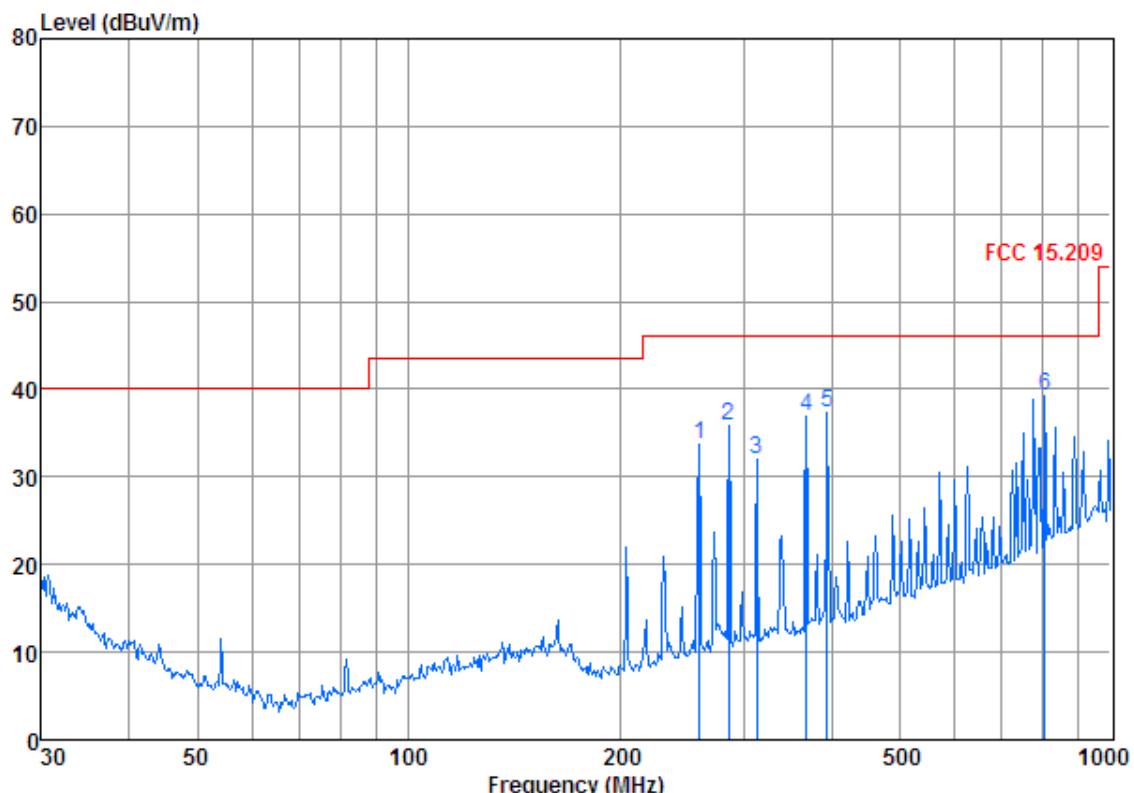

Condition: FCC 15.209 3m 3142C NEW VERTICAL

Job No. : 2069RF

Mode : TX mode

| Freq | Cable | Antenna | Preamp | Read | Limit | Over | | |
|------|---------|---------|--------|-------|-------|--------|--------|--------|
| | Loss | Factor | Factor | Level | Level | Line | Limit | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 259.234 | 1.72 | 8.90 | 26.51 | 49.64 | 33.75 | 46.00 | -12.25 |
| 2 | 285.978 | 1.84 | 9.23 | 26.44 | 51.23 | 35.86 | 46.00 | -10.14 |
| 3 | 313.276 | 1.94 | 9.88 | 26.50 | 46.62 | 31.94 | 46.00 | -14.06 |
| 4 | 368.112 | 2.11 | 11.17 | 26.93 | 50.64 | 36.99 | 46.00 | -9.01 |
| 5 | 394.855 | 2.19 | 11.59 | 27.09 | 50.64 | 37.33 | 46.00 | -8.67 |
| 6 | 804.603 | 3.22 | 18.73 | 27.27 | 44.63 | 39.31 | 46.00 | -6.69 |

9k-30MHz @10m

Vertical:

| Frequency (MHz) | Transducer (dB) | Receiver QP Reading (dB μ A/m) | Receiver QP Level (dB μ A/m) | Limit (dB μ V/m) | Over Limit (dB) |
|--------------------|--------------------|---|---|-------------------------|--------------------|
| 13.110 | 9.70 | 25.80 | 35.50 | 49.5 | -14.00 |
| 13.410 | 9.70 | 26.20 | 35.90 | 60.5 | -24.60 |
| 13.553 | 9.70 | 27.54 | 37.24 | 70.5 | -33.26 |
| 13.567 | 9.70 | 25.72 | 35.42 | 70.5 | -35.08 |
| 13.710 | 9.70 | 23.55 | 33.25 | 60.5 | -27.25 |
| 14.010 | 9.70 | 26.90 | 36.60 | 49.5 | -12.90 |
| 2.563 | 5.60 | 27.76 | 33.36 | 49.5 | -16.14 |
| 10.301 | 10.20 | 24.07 | 34.27 | 49.5 | -15.23 |
| 28.360 | 20.00 | 13.28 | 33.28 | 49.5 | -16.22 |

Horizontal:

| Frequency (KHz) | Transducer (dB) | Receiver QP Reading (dB μ A/m) | Receiver QP Level (dB μ A/m) | Limit (dB μ A/m) | Over Limit (dB) |
|--------------------|--------------------|---|---|-------------------------|--------------------|
| 13.110 | 9.70 | 24.51 | 34.21 | 49.5 | -15.29 |
| 13.410 | 9.70 | 24.55 | 34.25 | 60.5 | -26.25 |
| 13.553 | 9.70 | 25.83 | 35.53 | 70.5 | -34.97 |
| 13.567 | 9.70 | 28.62 | 38.32 | 70.5 | -32.18 |
| 13.710 | 9.70 | 27.43 | 37.13 | 60.5 | -23.37 |
| 14.010 | 9.70 | 26.44 | 36.14 | 49.5 | -13.36 |
| 2.563 | 5.60 | 27.37 | 32.97 | 49.5 | -16.53 |
| 10.301 | 10.20 | 23.18 | 33.38 | 49.5 | -16.12 |
| 28.360 | 20.00 | 14.21 | 34.21 | 49.5 | -15.29 |

Remark: The disturbance 9kHz to 1.705MHz was very low, and no obvious signal can be found.



5.3 Frequency Tolerance

| | |
|-------------------------------|--|
| Test Requirement: | FCC Part 15 C Section 15.225(e) |
| Test Method: | ANSI C63.10: 2009 |
| Frequency Range: | Operation within the band 13.110-14.010 MHz |
| Requirements: | The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery. |
| Method of Measurement: | The EUT was placed in an environmental test chamber and powered such that control element received normal voltage and the transmitter provided maximum RF output. |
| Test Result: | The unit does meet the FCC Part 15 C Section 15.225(e) requirements. |

| Test Frequency: 13.56MHz | | | Temperature:20°C | |
|--------------------------|----------------------|--------------------|------------------|--------|
| Supply Voltage (V) DC | Test Result (MHz) | Deviation (kHz) | Limit (kHz) | Result |
| 6 V | 13.5610800 | 1.0800 | +/-1.3560 | Pass |

| Test Frequency: 13.56MHz | | | Voltage:DC 6V | |
|--------------------------|----------------------|--------------------|----------------|--------|
| Temperature (°C) | Test Result (MHz) | Deviation (kHz) | Limit (kHz) | Result |
| -20 | 13.5610780 | 1.0780 | +/-1.3560 | Pass |
| -10 | 13.5610780 | 1.0780 | +/-1.3560 | |
| 0 | 13.5610800 | 1.0780 | +/-1.3560 | |
| 10 | 13.5610800 | 1.0800 | +/-1.3560 | |
| 20 | 13.5610800 | 1.0800 | +/-1.3560 | |
| 30 | 13.5610800 | 1.0800 | +/-1.3560 | |
| 40 | 13.5610820 | 1.0820 | +/-1.3560 | |
| 50 | 13.5610820 | 1.0820 | +/-1.3560 | |

5.4 Occupied Bandwidth

| | |
|-------------------------------|---|
| Test Requirement: | FCC Part 15 C Section 15.215 (C) |
| Test Method: | ANSI C63.10: 2009 |
| Frequency Range: | Operation within the band 13.110 – 14.010 MHz |
| Requirements: | Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation. |
| Method of Measurement: | The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. |
| Test Result: | The unit does meet the FCC Part 15 C Section 15.215 requirements. |

The graph as below: represents the emissions take for this device.

