



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2



Certificate # 2951.01

## TEST REPORT

Applicant:	CORSAIR MEMORY, Inc.
Address:	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Manufacturer or Supplier	CORSAIR MEMORY, Inc.
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA
Product:	Wireless Gaming Controller
Brand Name:	Scuf
Model:	RGC0004
Additional Model & Model Difference	N/A
Date of tests:	Jun 08, 2025 ~ Jun. 22, 2025

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.249

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Andrew Sha Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department

Date: Aug. 08, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT .....	6
3.2 DESCRIPTION OF TEST MODES .....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
3.4 DESCRIPTION OF SUPPORT UNITS .....	9
3.5 CONFIGURATION OF SYSTEM UNDER TEST .....	10
3.6 DUTY CYCLE OF TESET SIGNAL.....	11
<b>4. TEST TYPES AND RESULTS.....</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT .....	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES .....	13
4.1.4 DEVIATION FROM TEST STANDARD .....	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS.....	14
4.1.7 TEST RESULTS .....	15
4.2 RADIATED EMISSION MEASUREMENT .....	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES .....	19
4.2.4 DEVIATION FROM TEST STANDARD .....	19
4.2.5 TEST SETUP.....	20
4.2.6 EUT OPERATING CONDITIONS .....	21
4.2.7 TEST RESULTS .....	22
4.3 20DB BANDWIDTH MEASUREMENT .....	29
4.3.1 LIMITS OF 20DB BANDWIDTH MEASUREMENT .....	29
4.3.2 4.2.2 TEST INSTRUMENTS.....	29
4.3.3 TEST PROCEDURE.....	30
4.3.4 DEVIATION FROM TEST STANDARD .....	30
4.3.5 TEST SETUP.....	30
4.3.6 EUT OPERATING CONDITIONS .....	30
4.3.7 TEST RESULTS .....	31



**BUREAU  
VERITAS**

**Test Report No.: RF2505WDG0228-2**

<b>5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>33</b>
<b>6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>34</b>



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2505WDG0228-2	Original release	Aug. 08, 2025



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	PASS	Compliant
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9KHz ~ 30MHz	3.36dB
Radiated emissions	9KHz ~ 30MHz	2.48dB
	30MHz ~ 1GHz	4.32dB
	1GHz ~ 18GHz	5.76dB
	18GHz ~ 40GHz	4.50dB
	20dB Bandwidth	1.132x10 <sup>-4</sup> %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless Gaming Controller
<b>MODEL NO.</b>	RGC0004
<b>ADDITIONAL MODEL</b>	N/A
<b>FCC ID</b>	2AAFM-RGC0004
<b>NOMINAL VOLTAGE</b>	DC 5V from USB host unit or DC 3.7V from Li-ion battery
<b>MODULATION TECHNOLOGY</b>	GFSK
<b>OPERATING FREQUENCY</b>	2402-2480MHz
<b>ANTENNA TYPE</b>	Ceramic Antenna, 1.8dBi Gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB cable: Shielded, Detachable, 2.0m

#### NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2505WDG0228-2) for detailed product photo.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### 3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following mode.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	√	√	√	-	DC 5V powered by Adapter
B	-	-	-	√	DC 5V from Notebook

Where

**RE<1G:** Radiated Emission below 1GHz

**RE≥1G:** Radiated Emission above 1GHz

**PLC:** Power Line Conducted Emission

**BW:** 20db bandwidth

Following channel(s) was (were) selected for the test as listed below.

TESTED CHANNEL	TESTED FREQUENCY
Low	2402 MHz
Middle	2441 MHz
High	2480 MHz



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### Channel List

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	21	2423	42	2444	63	2465
1	2404	22	2424	43	2445	64	2466
2	2406	23	2425	44	2446	65	2467
3	2408	24	2426	45	2447	66	2468
4	2410	25	2427	46	2448	67	2469
5	2412	26	2428	47	2449	68	2470
6	2414	27	2429	48	2450	69	2471
7	2416	28	2430	49	2451	70	2472
8	2418	29	2431	50	2452	71	2473
9	2420	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		

Note: The more detailed channel, please refer to the product specifications

### TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 55%RH	DC 5V from Adapter	Ludius
BW	25deg. C, 56%RH	DC 5V from Notebook	Vincent
PLC	25deg. C, 55%RH	DC 5V from Adapter	Summer



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.249**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Provided
1	Notebook	DELL	Latitude 5420	127710614	Lab
2	Adapter	N/A	C120A2400500PI	N/A	Lab
3	Dongle	Scuf	RGC0007	N/A	Client

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.0m; DC Line: Unshielded, Detachable 1.5m.




BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2


### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

#### For Conducted Emission Test

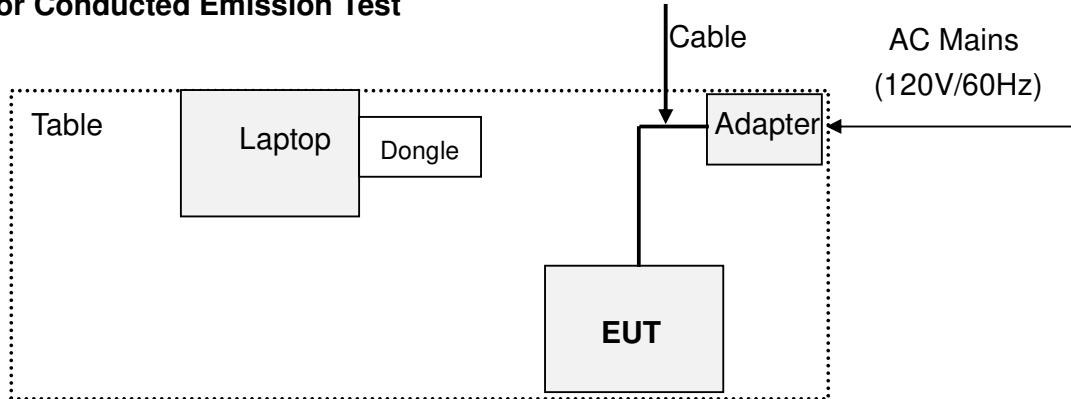

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### For Radiated Emission Test

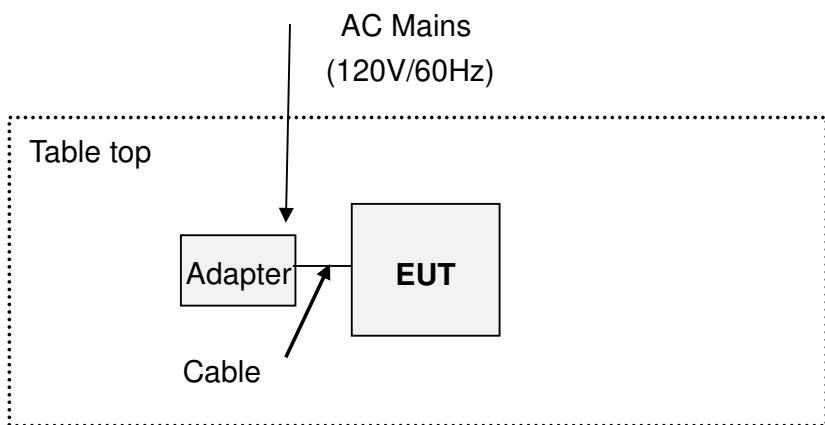

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU  
VERITAS


Test Report No.: RF2505WDG0228-2

### 3.6 DUTY CYCLE OF TESET SIGNAL

Tp = 1.25217ms; Ton = 0.36712ms

Duty Cycle = Ton / Tp \* 100% = 0.36712 / 1.25217  $\approx$  29.32%

AV factor=20 log (Duty cycle) = 20Log(29.32%)  $\approx$  -10.66dB

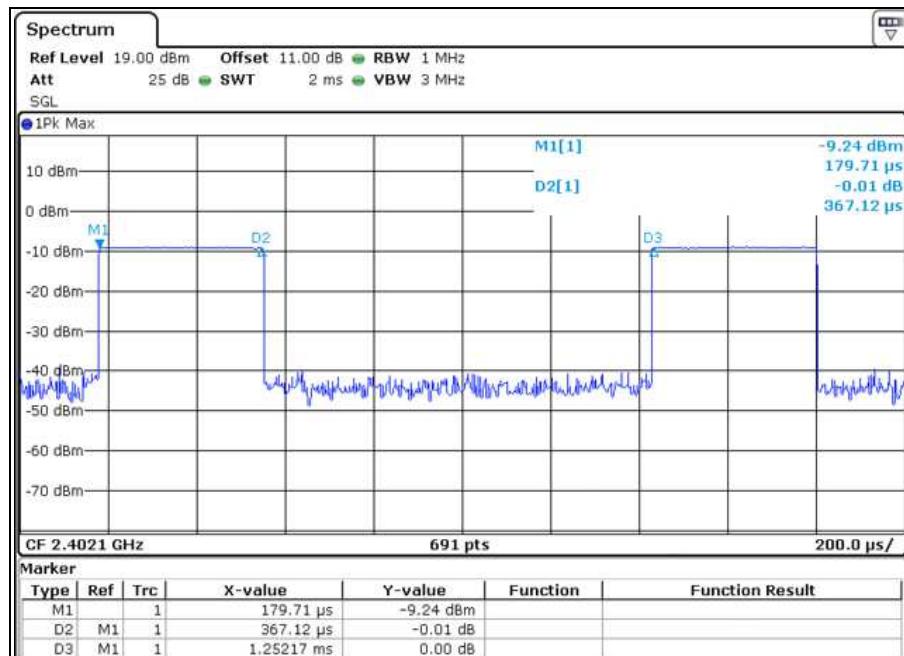



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Oct. 10, 25
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Oct. 10, 25
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Oct. 09, 25
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 10, 25
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

#### NOTES:

1. The test was performed in shielded room 553.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.



#### 4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

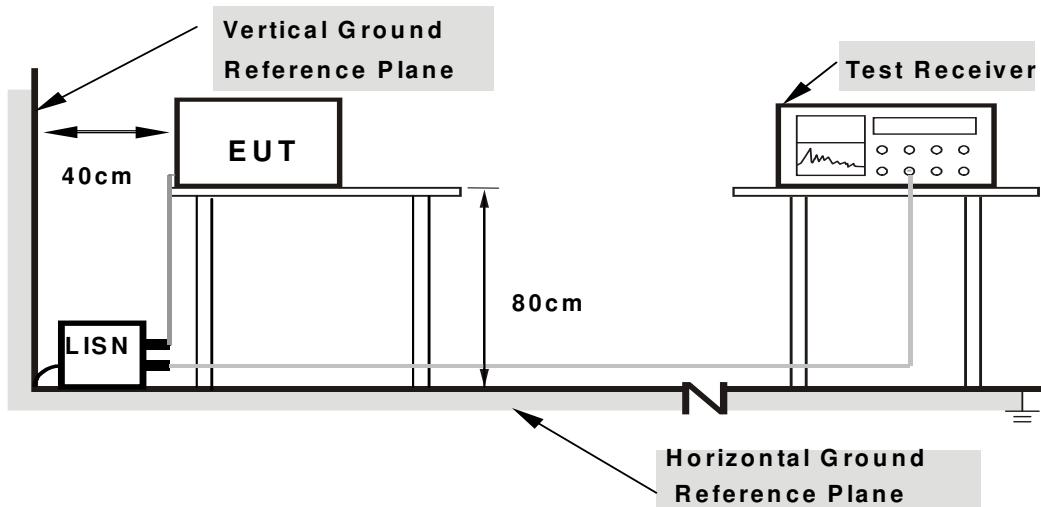

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

#### 4.1.7 TEST RESULTS

##### CONDUCTED WORST-CASE DATA:

PHASE		Line		6dB BANDWIDTH		9kHz	
-------	--	------	--	---------------	--	------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.22425	9.73	7.95	-2.77	17.68	6.96	62.66	52.66	-44.98	-45.70
2	0.52385	9.69	18.48	2.18	28.17	11.87	56.00	46.00	-27.83	-34.13
3	0.83592	9.70	9.42	-3.11	19.12	6.59	56.00	46.00	-36.88	-39.41
4	1.28891	9.74	9.04	-3.28	18.78	6.46	56.00	46.00	-37.22	-39.54
5	12.06825	10.48	9.34	-1.93	19.82	8.55	60.00	50.00	-40.18	-41.45
6	13.61625	10.59	12.19	-2.14	22.78	8.45	60.00	50.00	-37.22	-41.55

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

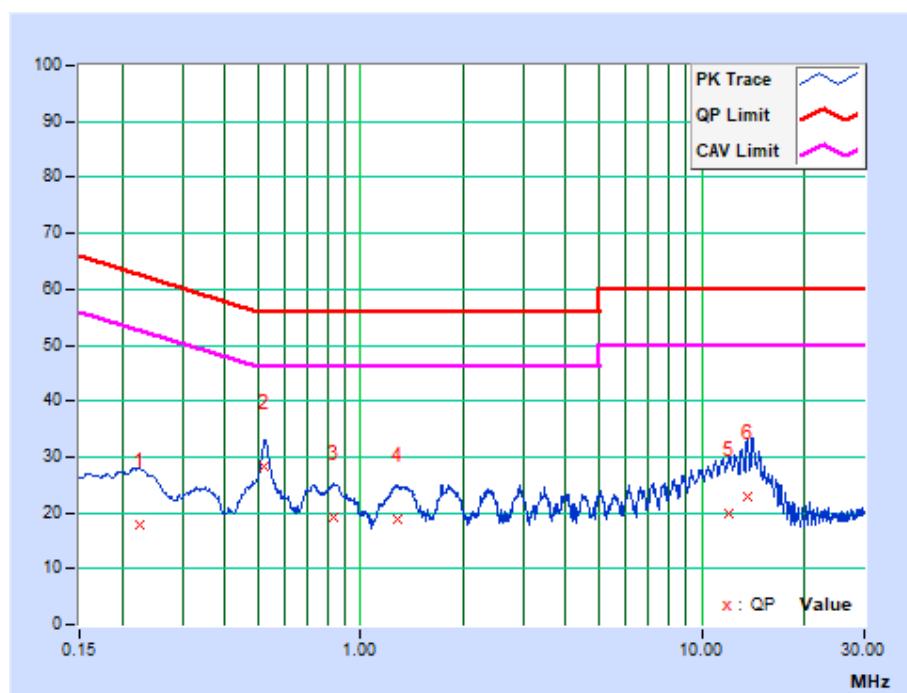



BUREAU  
VERITAS


Test Report No.: RF2505WDG0228-2

PHASE	Neutral	6dB BANDWIDTH		9kHz	
-------	---------	---------------	--	------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.34064	9.81	13.44	-0.81	23.25	9.00	59.19	49.19	-35.94	-40.19
2	0.52523	9.83	23.99	6.27	33.82	16.10	56.00	46.00	-22.18	-29.90
3	0.84035	9.86	14.38	-0.87	24.24	8.99	56.00	46.00	-31.76	-37.01
4	1.36961	9.91	13.87	-1.03	23.78	8.88	56.00	46.00	-32.22	-37.12
5	1.83118	9.94	14.07	-0.89	24.01	9.05	56.00	46.00	-31.99	-36.95
6	14.09665	10.65	15.83	-0.13	26.48	10.52	60.00	50.00	-33.52	-39.48

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

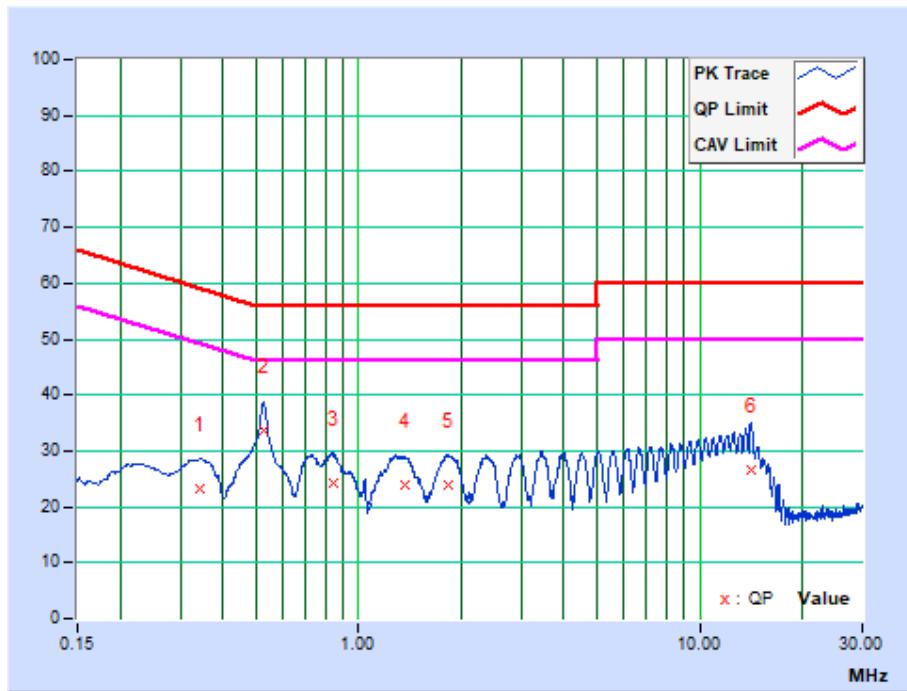



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

#### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Oct. 10, 25
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 07, 26
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	Apr. 13, 26
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Feb. 21, 26
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 25, 25
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	0085519	Oct. 19, 25
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 12, 26
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 17, 26
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Feb. 21, 26
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 28 25
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

**NOTE:**

1. The test was performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.
4. The FCC Site Registration No. is 749762. Designation Number: CN1174.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Other wise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. Average value =PK Emission +AV Factor.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




BUREAU  
VERITAS


Test Report No.: RF2505WDG0228-2

#### 4.2.5 TEST SETUP

##### Below 30MHz test setup

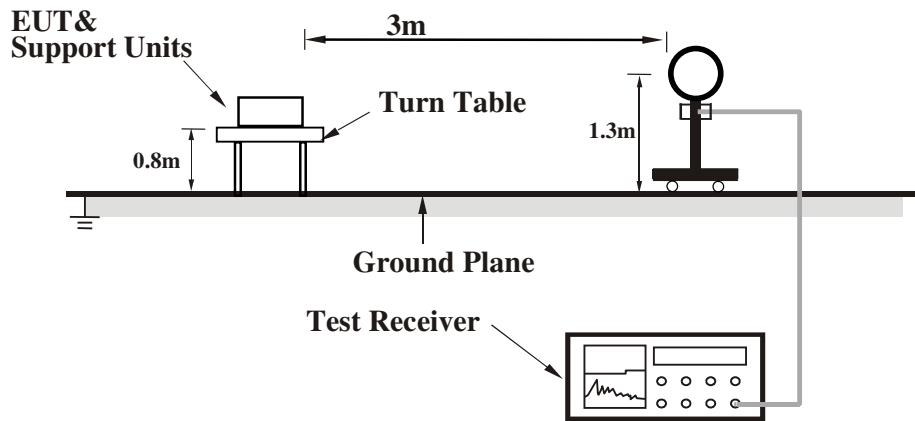

##### Below 1GHz test setup

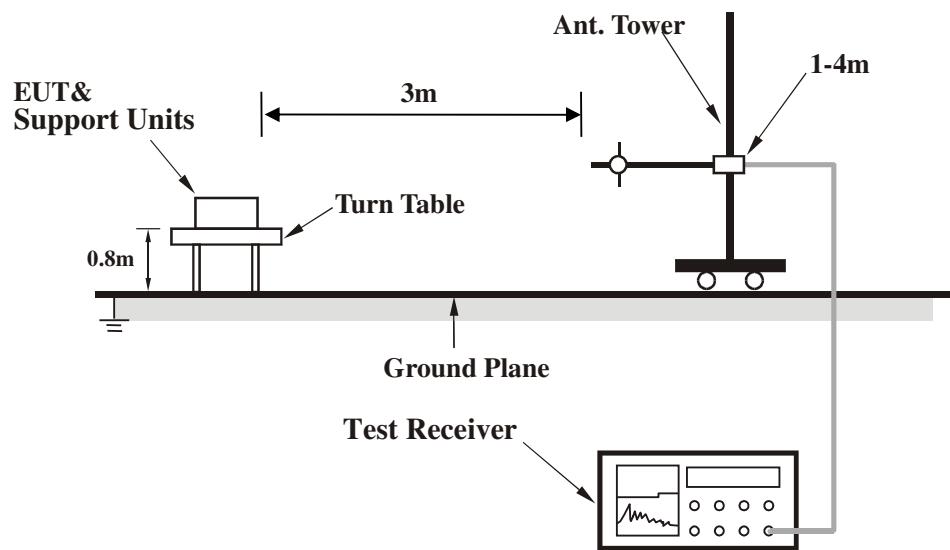


**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### Above 1GHz test setup

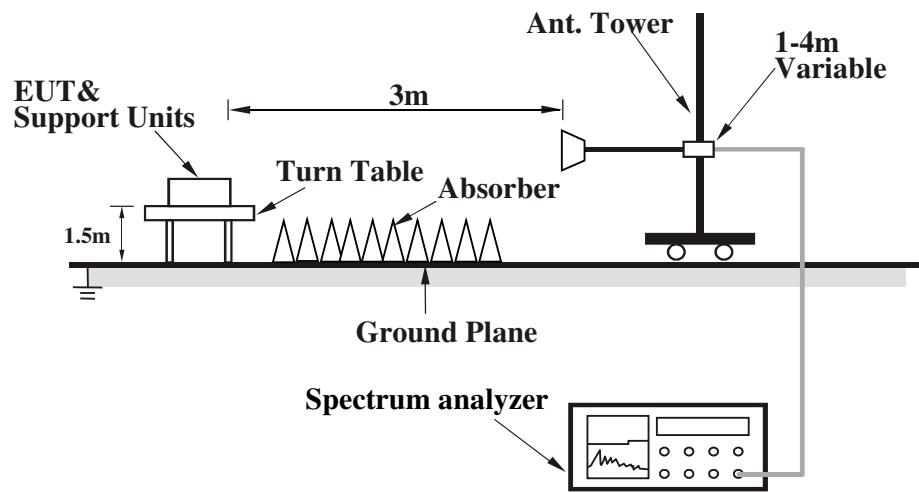

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

- c) Turned on the power of all equipment.
- d) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

#### 4.2.7 TEST RESULTS


##### BELOW 1GHz WORST-CASE DATA:

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	27.07 QP	40.00	-12.93	1.92	141	46.04	-18.97
2	89.07	21.53 QP	43.50	-21.97	1.78	127	44.59	-23.06
3	176.12	29.95 QP	43.50	-13.55	1.62	111	47.90	-17.95
4	227.42	25.08 QP	46.00	-20.92	2.06	155	43.48	-18.40
5	333.12	38.33 QP	46.00	-7.67	1.44	94	52.84	-14.51
6	589.62	24.70 QP	46.00	-21.30	2.21	170	32.92	-8.22

##### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

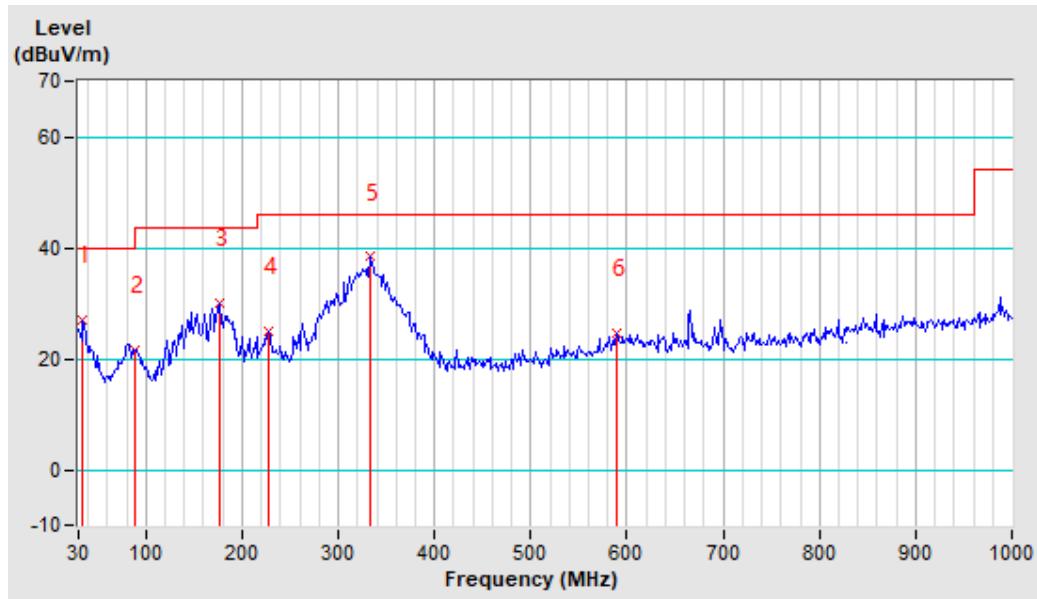



BUREAU  
VERITAS


Test Report No.: RF2505WDG0228-2

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	33.57 QP	40.00	-6.43	1.20	163	52.64	-19.07
2	50.21	34.11 QP	40.00	-5.89	1.00	90	51.71	-17.60
3	143.48	24.55 QP	43.50	-18.95	1.40	182	41.44	-16.89
4	322.24	32.70 QP	46.00	-13.30	1.54	196	47.43	-14.73
5	344.01	33.49 QP	46.00	-12.51	1.67	209	47.76	-14.27
6	581.84	22.84 QP	46.00	-23.16	1.04	145	31.28	-8.44

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

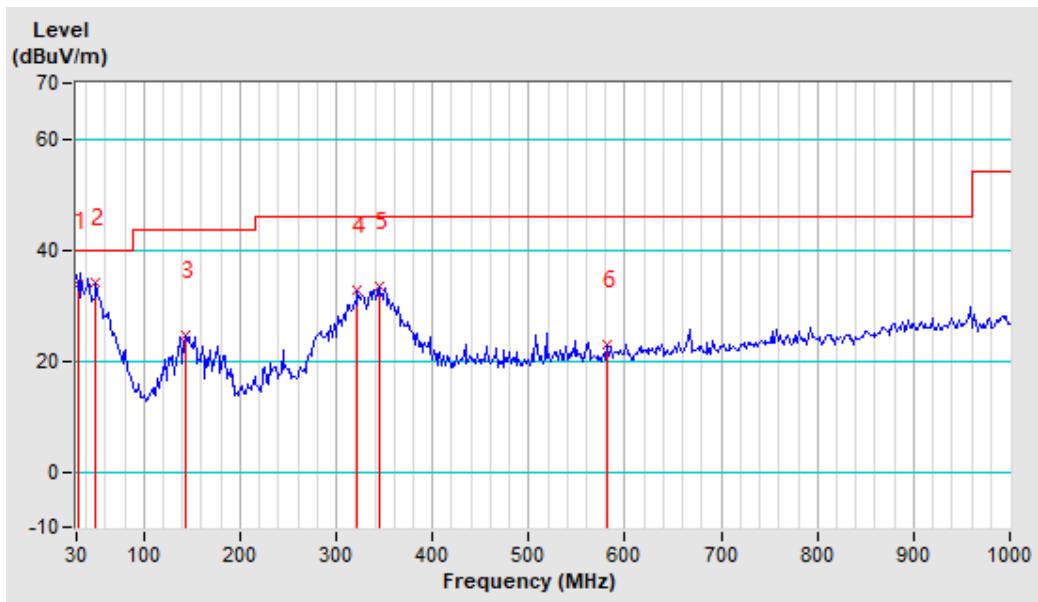

BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## ABOVE 1GHz WORST-CASE DATA:

CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	60.72 PK	74.00	-13.28	1.72 H	106	57.81	2.91
2	2400.00	50.06 AV	54.00	-3.94	1.72 H	106	47.15	2.91
3	*2402.00	87.35 PK	114.00	-26.65	1.35 H	156	84.44	2.91
4	*2402.00	76.69 AV	94.00	-17.31	1.35 H	156	73.78	2.91
5	4804.00	50.91 PK	74.00	-23.09	1.91 H	125	43.94	6.97
6	4804.00	40.25 AV	54.00	-13.75	1.91 H	125	33.28	6.97
7	7206.00	53.69 PK	74.00	-20.31	1.69 H	103	42.86	10.83
8	7206.00	43.03 AV	54.00	-10.97	1.69 H	103	32.20	10.83

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	59.49 PK	74.00	-14.51	1.49 V	183	56.58	2.91
2	2400.00	48.83 AV	54.00	-5.17	1.49 V	183	45.92	2.91
3	*2402.00	86.41 PK	114.00	-27.59	1.41 V	175	83.50	2.91
4	*2402.00	75.75 AV	94.00	-18.25	1.41 V	175	72.84	2.91
5	4804.00	51.53 PK	74.00	-22.66	1.34 V	168	44.37	6.97
6	4804.00	40.68 AV	54.00	-13.32	1.34 V	168	33.71	6.97
7	7206.00	53.74 PK	74.00	-20.26	1.74 V	108	42.91	10.83
8	7206.00	43.08 AV	54.00	-10.92	1.74 V	108	32.25	10.83

## REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. Average value =PK Emission +20\*log (duty cycle)Where the duty factor is calculated from following formula:  $20 \log (\text{Duty cycle}) = 20 \log(29.32\%) \approx -10.66 \text{dB}$ , Please see page 11 for plotted duty.




BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### Band edge Plot


#### 2402MHz Horizontal

Level  
(dBuV/m)

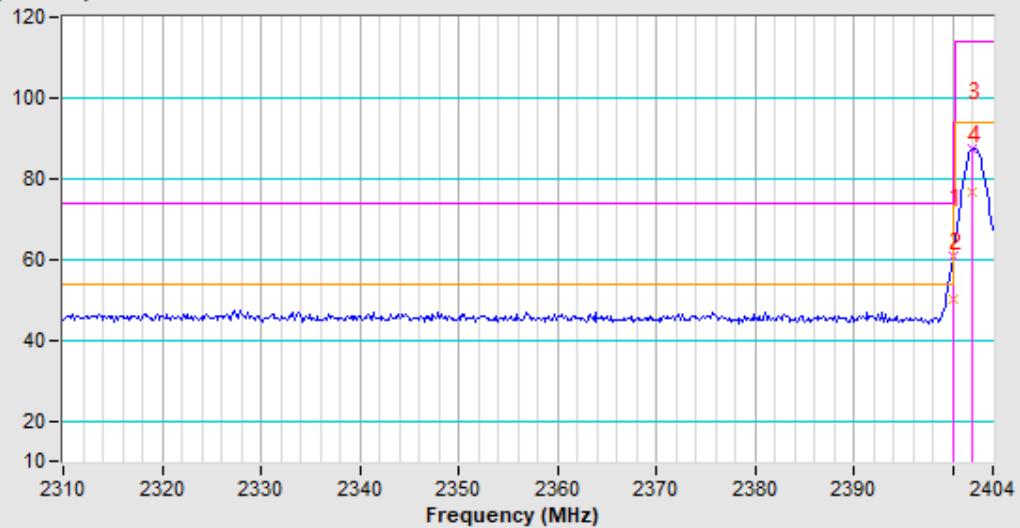

#### 2402MHz Vertical

Level  
(dBuV/m)

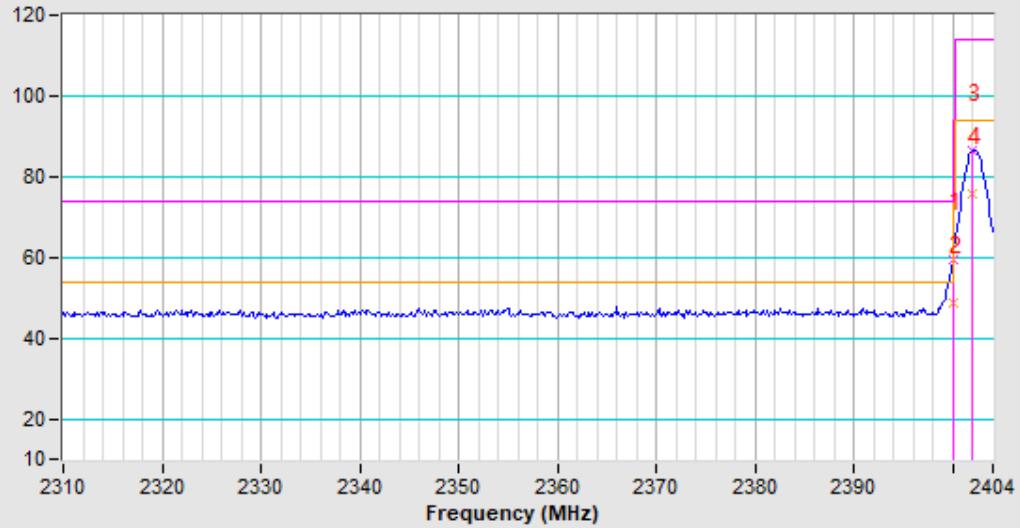

BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	87.11 PK	114.00	-26.89	1.56 H	84	84.09	3.02
2	*2441.00	76.45 AV	94.00	-17.55	1.56 H	84	73.43	3.02
3	4882.00	51.20 PK	74.00	-22.80	1.20 H	165	44.01	7.19
4	4882.00	40.54 AV	54.00	-13.46	1.20 H	165	33.35	7.19
5	7323.00	54.36 PK	74.00	-19.64	1.36 H	170	43.15	11.21
6	7323.00	43.70 AV	54.00	-10.30	1.36 H	170	32.49	11.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	85.40 PK	114.00	-28.60	1.40 V	174	82.38	3.02
2	*2441.00	74.74 AV	94.00	-19.26	1.40 V	174	71.72	3.02
3	4882.00	51.82 PK	74.00	-22.18	1.82 V	116	44.63	7.19
4	4882.00	41.16 AV	54.00	-12.84	1.82 V	116	33.97	7.19
5	7323.00	54.11 PK	74.00	-19.89	1.10 V	145	42.90	11.21
6	7323.00	43.45 AV	54.00	-10.55	1.10 V	145	32.24	11.21

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. Average value =PK Emission +20\*log (duty cycle)Where the duty factor is calculated from following formula:  $20 \log (\text{Duty cycle}) = 20\log(29.32\%) \approx -10.66\text{dB}$ , Please see page 11 for plotted duty.

BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

CHANNEL	TX High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	86.57 PK	114.00	-27.43	1.57 H	191	83.43	3.14
2	*2480.00	75.91 AV	94.00	-18.09	1.57 H	191	72.77	3.14
3	2483.50	46.74 PK	74.00	-27.26	1.74 H	108	43.58	3.16
4	2483.50	36.08 AV	54.00	-17.92	1.74 H	108	32.92	3.16
5	4960.00	52.01 PK	74.00	-21.99	1.01 H	135	44.60	7.41
6	4960.00	41.35 AV	54.00	-12.65	1.01 H	135	33.94	7.41
7	7440.00	54.31 PK	74.00	-19.69	1.31 H	16	42.70	11.61
8	7440.00	43.65 AV	54.00	-10.35	1.31 H	16	32.04	11.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	83.30 PK	114.00	-30.70	1.30 V	165	80.16	3.14
2	*2480.00	72.64 AV	94.00	-21.36	1.30 V	165	69.50	3.14
3	2483.50	45.85 PK	74.00	-28.15	1.85 V	119	42.69	3.16
4	2483.50	35.19 AV	54.00	-18.81	1.85 V	119	32.03	3.16
5	4960.00	51.74 PK	74.00	-22.26	1.74 V	108	44.33	7.41
6	4960.00	41.08 AV	54.00	-12.92	1.74 V	108	33.67	7.41
7	7440.00	54.28 PK	74.00	-19.72	1.28 V	162	42.67	11.61
8	7440.00	43.62 AV	54.00	-10.38	1.28 V	162	32.01	11.61

**REMARK:**


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. Average value =PK Emission +20\*log (duty cycle)Where the duty factor is calculated from following formula:  $20 \log (\text{Duty cycle}) = 20 \log(29.32\%) \approx -10.66 \text{dB}$ , Please see page 11 for plotted duty.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### Band edge Plot

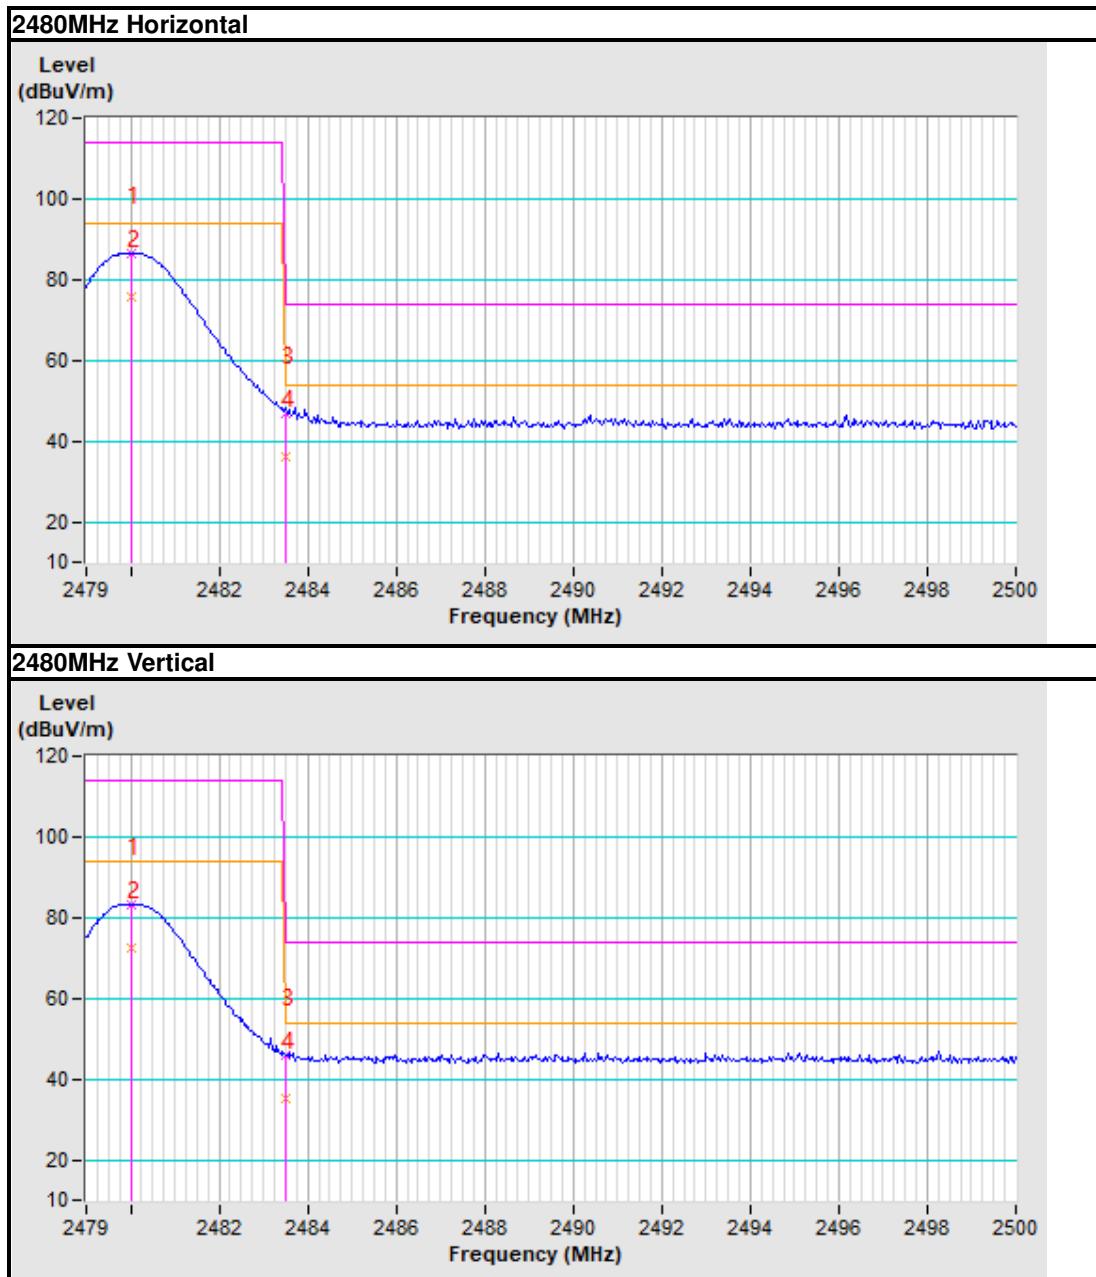



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## 4.3 20dB BANDWIDTH MEASUREMENT

### 4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 07, 26
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 25
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 07, 25
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Oct. 09, 25
Signal Generator	Agilent	N5183A	MY50140980	Jul. 11, 25
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 25
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

#### NOTE:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2


#### 4.3.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

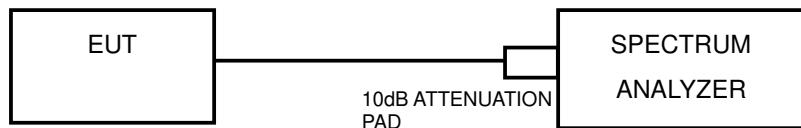

#### 4.3.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

#### 4.3.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2402	0.8944
Middle	2441	0.8987
High	2480	0.8944

##### Test Data: Low channel

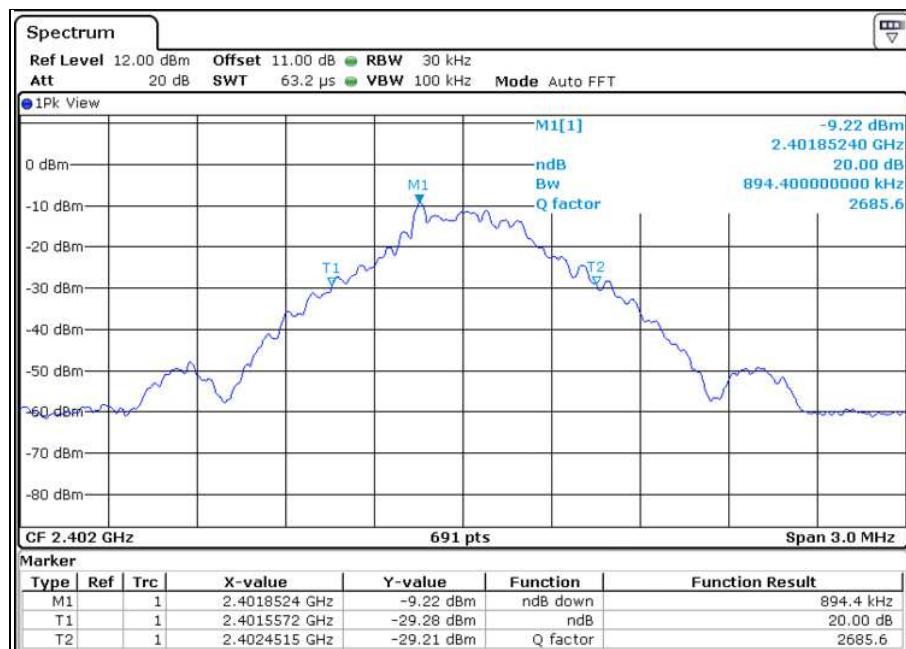





BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

### Test Data: Middle channel

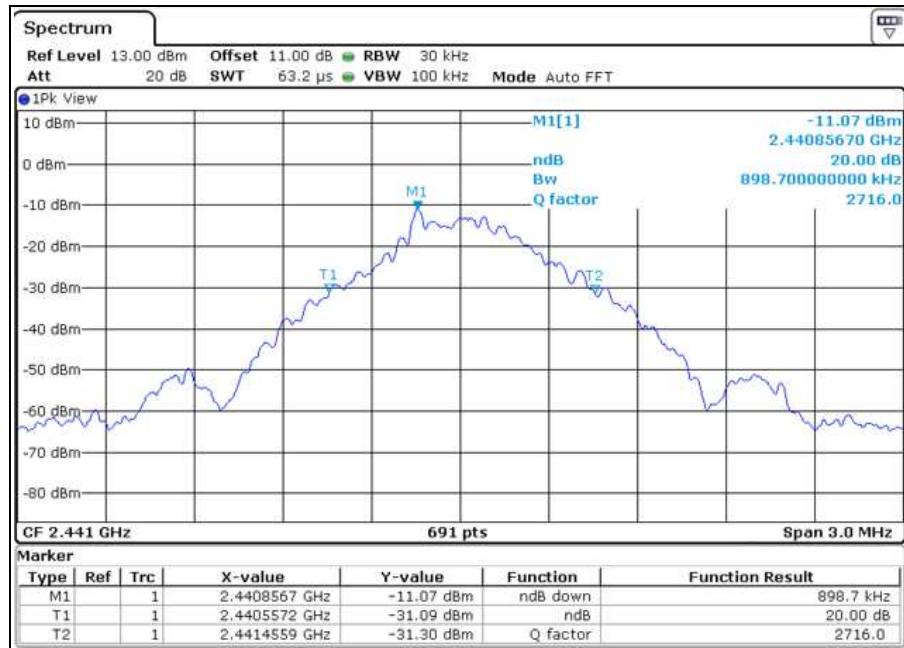

### Test Data: High channel

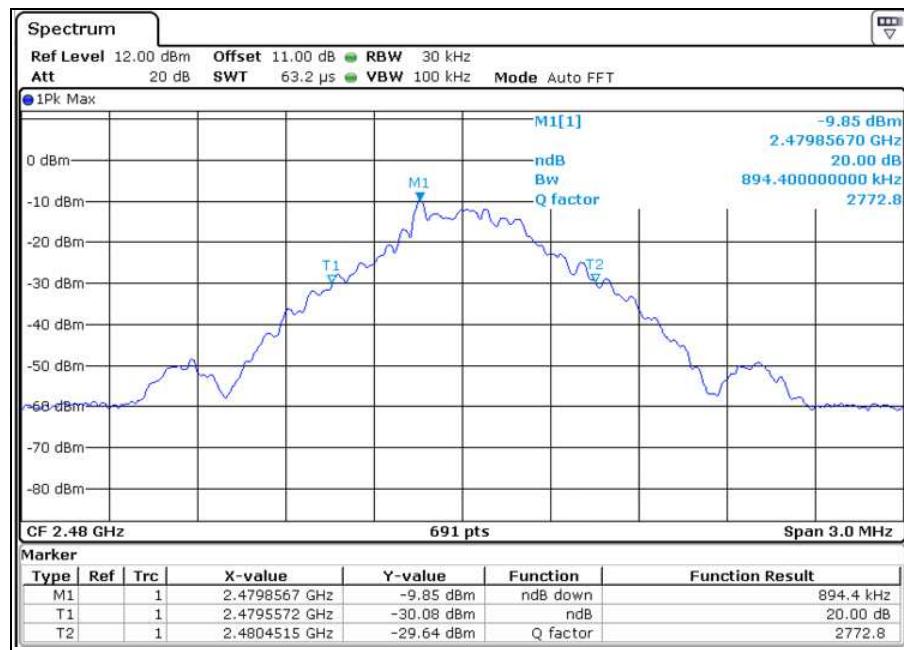



BUREAU  
VERITAS

Test Report No.: RF2505WDG0228-2

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**Test Report No.: RF2505WDG0228-2**

## **6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**