

APPLICATION CERTIFICATION
On Behalf of
Shenzhen Dolphin Electronic Co., Ltd

Bluetooth speaker
Model No.: TB-BTS10

FCC ID: 2AAK2-BTS10

Prepared for : Shenzhen Dolphin Electronic Co., Ltd
Address : Building 8, Fuqiao Third Industrial Zone, Fuyong Town,
Baoan District, Shenzhen, China
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20131374
Date of Test : June 29-July 1, 2013
Date of Report : July 4, 2013

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Special Accessory and Auxiliary Equipment	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty.....	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode.....	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	16
6.6. Test Result	16
7. NUMBER OF HOPPING FREQUENCY TEST	20
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement	20
7.4. Operating Condition of EUT	20
7.5. Test Procedure	21
7.6. Test Result	21
8. DWELL TIME TEST	23
8.1. Block Diagram of Test Setup.....	23
8.2. The Requirement For Section 15.247(a)(1)(iii).....	23
8.3. EUT Configuration on Measurement	23
8.4. Operating Condition of EUT	23
8.5. Test Procedure	24
8.6. Test Result	24
9. MAXIMUM PEAK OUTPUT POWER TEST	28
9.1. Block Diagram of Test Setup.....	28
9.2. The Requirement For Section 15.247(b)(1).....	28
9.3. EUT Configuration on Measurement	28
9.4. Operating Condition of EUT	28
9.5. Test Procedure	29
9.6. Test Result	29

10. BAND EDGE COMPLIANCE TEST	33
10.1. Block Diagram of Test Setup.....	33
10.2. The Requirement For Section 15.247(d)	33
10.3. EUT Configuration on Measurement	33
10.4. Operating Condition of EUT	34
10.5. Test Procedure	34
10.6. Test Result	35
11. RADIATED SPURIOUS EMISSION TEST	46
11.1. Block Diagram of Test Setup.....	46
11.2. The Limit For Section 15.247(d)	47
11.3. Restricted bands of operation	47
11.4. Configuration of EUT on Measurement	48
11.5. Operating Condition of EUT	48
11.6. Test Procedure	48
11.7. The Field Strength of Radiation Emission Measurement Results	49
12. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	70
12.1. Block Diagram of Test Setup.....	70
12.2. The Requirement For Section 15.247(d)	70
12.3. EUT Configuration on Measurement	70
12.4. Operating Condition of EUT	71
12.5. Test Procedure	71
12.6. Test Result	71
13. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	75
13.1. Block Diagram of Test Setup.....	75
13.2. The Emission Limit	75
13.3. Configuration of EUT on Measurement	76
13.4. Operating Condition of EUT	76
13.5. Test Procedure	76
13.6. Power Line Conducted Emission Measurement Results	77
14. ANTENNA REQUIREMENT.....	80
14.1. The Requirement	80
14.2. Antenna Construction	80

Test Report Certification

Applicant : Shenzhen Dolphin Electronic Co., Ltd
Manufacturer : Shenzhen Dolphin Electronic Co., Ltd
EUT Description : Bluetooth speaker
(A) MODEL NO.: TB-BTS10
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 3.7V ("Li-ion" Battery).

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : June 29-July 1, 2013

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Bluetooth speaker
Model Number	:	TB-BTS10
Frequency Band	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain	:	3dBi
Rating	:	DC 3.7V (“Li-ion” Battery)
Applicant	:	Shenzhen Dolphin Electronic Co., Ltd
Address	:	Building 8, Fuqiao Third Industrial Zone, Fuyong Town, Baoan District, Shenzhen, China
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd
Address	:	Building 8, Fuqiao Third Industrial Zone, Fuyong Town, Baoan District, Shenzhen, China
Date of sample received	:	June 26, 2013
Date of Test	:	June 29-July 1, 2013

1.2. Special Accessory and Auxiliary Equipment

N/A

1.3. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen
		Listed by FCC
		The Registration Number is 752051
		Listed by Industry Canada
		The Registration Number is 5077A-2
		Accredited by China National Accreditation Committee for Laboratories
		The Certificate Registration Number is L3193
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 12, 2013	Jan. 11, 2014
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 12, 2013	Jan. 11, 2014
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 12, 2013	Jan. 11, 2014
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 12, 2013	Jan. 11, 2014
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Feb. 06, 2013	Feb. 05, 2014
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Feb. 06, 2013	Feb. 05, 2014
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 12, 2013	Jan. 11, 2014
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 12, 2013	Jan. 11, 2014

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

3.2.Configuration and peripherals



Setup: Transmitting mode

(EUT: Bluetooth speaker)


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: “N/A” means “Not applicable”.

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: Bluetooth speaker)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX(Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.6. Test Result

PASS.

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX	Test Engineer:	Bob


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.918	N/A
Middle	2441	0.912	N/A
High	2480	0.900	N/A


Note: N/A: 1) The 20 dB bandwidth of the hopping channel is not limit.


2) The data of 20 dB bandwidth of the hopping channel is limit of carrier frequencies separated

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

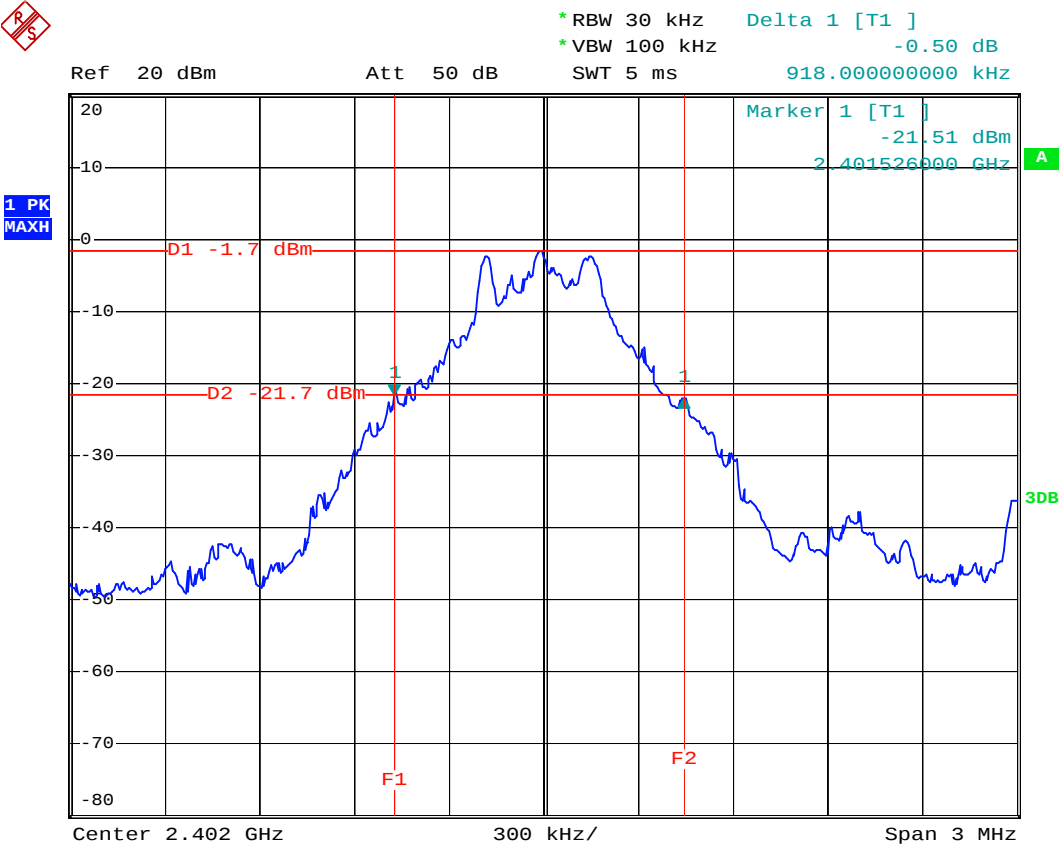

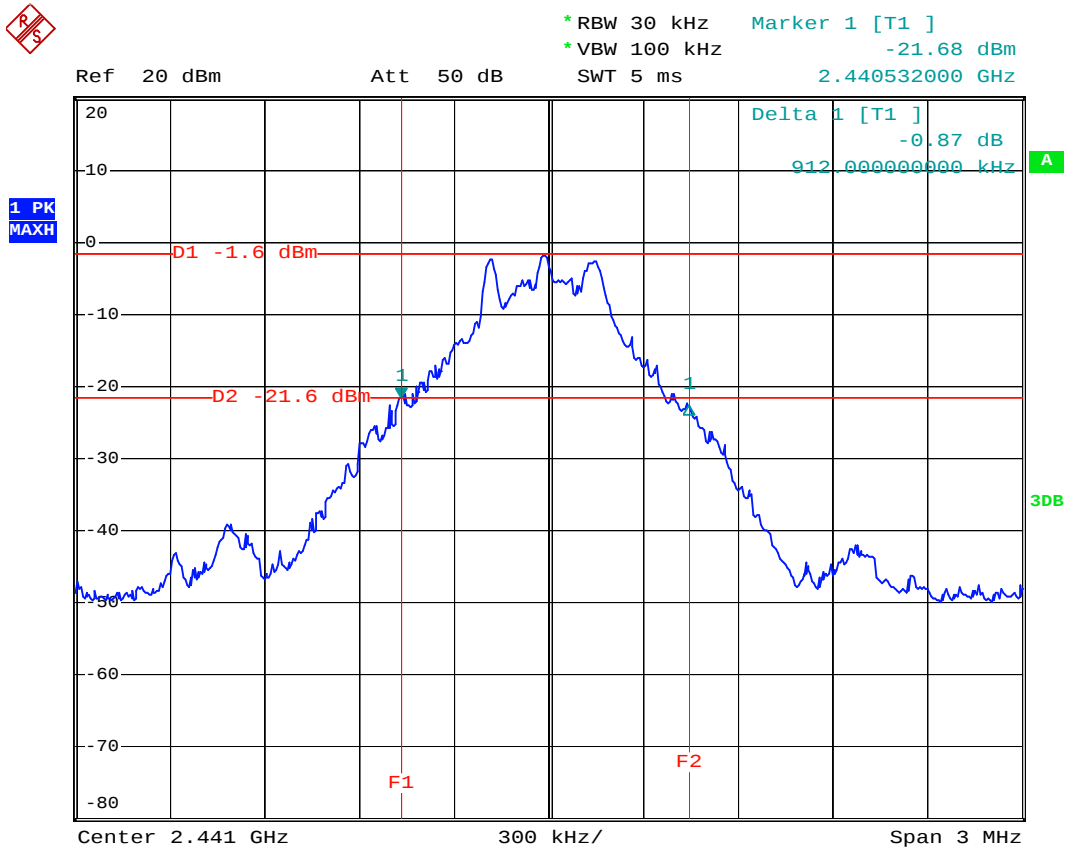

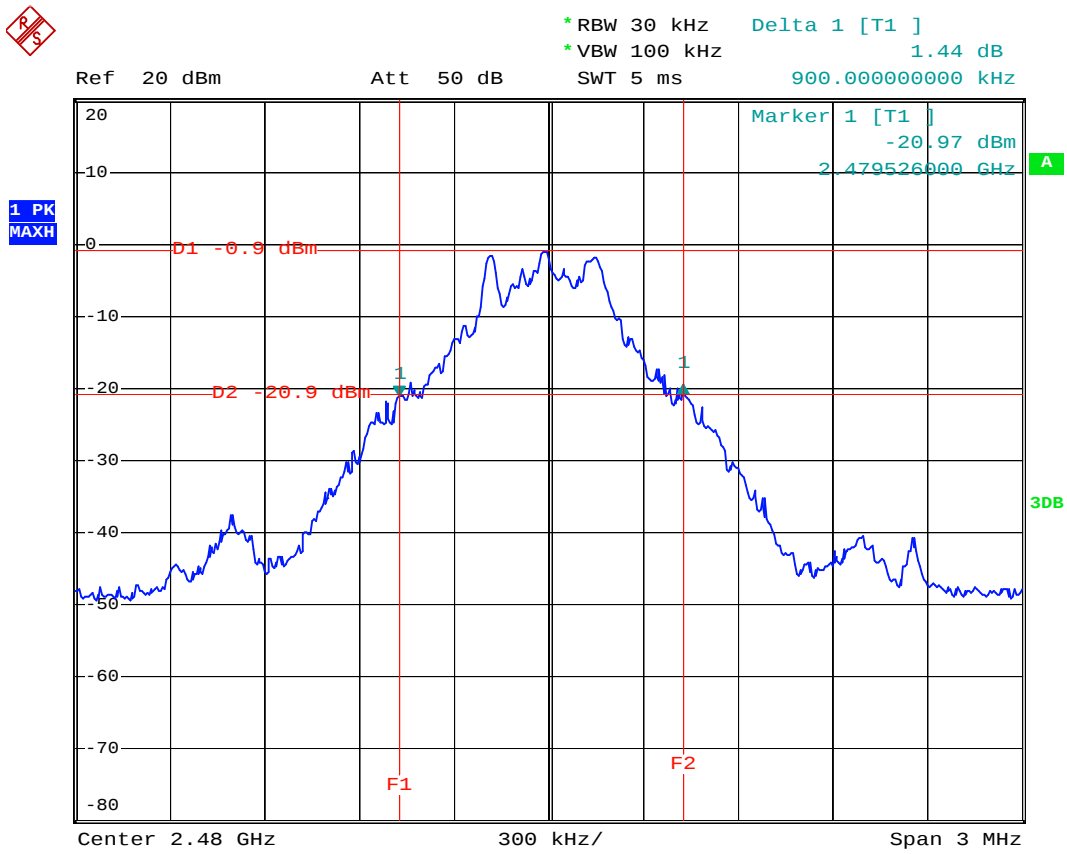

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: Bluetooth speaker)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz. Adjust Span to 3 MHz.

6.5.3. Set the adjacent channel of the EUT maxhold another trace.

6.5.4. Measurement the channel separation

6.6. Test Result


PASS.


Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	Hopping	Test Engineer:	Bob


Channel	Channel Frequency (MHz)	Channel separation (MHz)	Limit
Low	2402	1.002	> the 20 dB bandwidth of the hopping channel (0.918MHz) or 25kHz (whichever is greater)
Middle	2441	1.008	> the 20 dB bandwidth of the hopping channel (0.912MHz) or 25kHz (whichever is greater)
High	2480	1.020	> the 20 dB bandwidth of the hopping channel (0.900MHz) or 25kHz (whichever is greater)

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

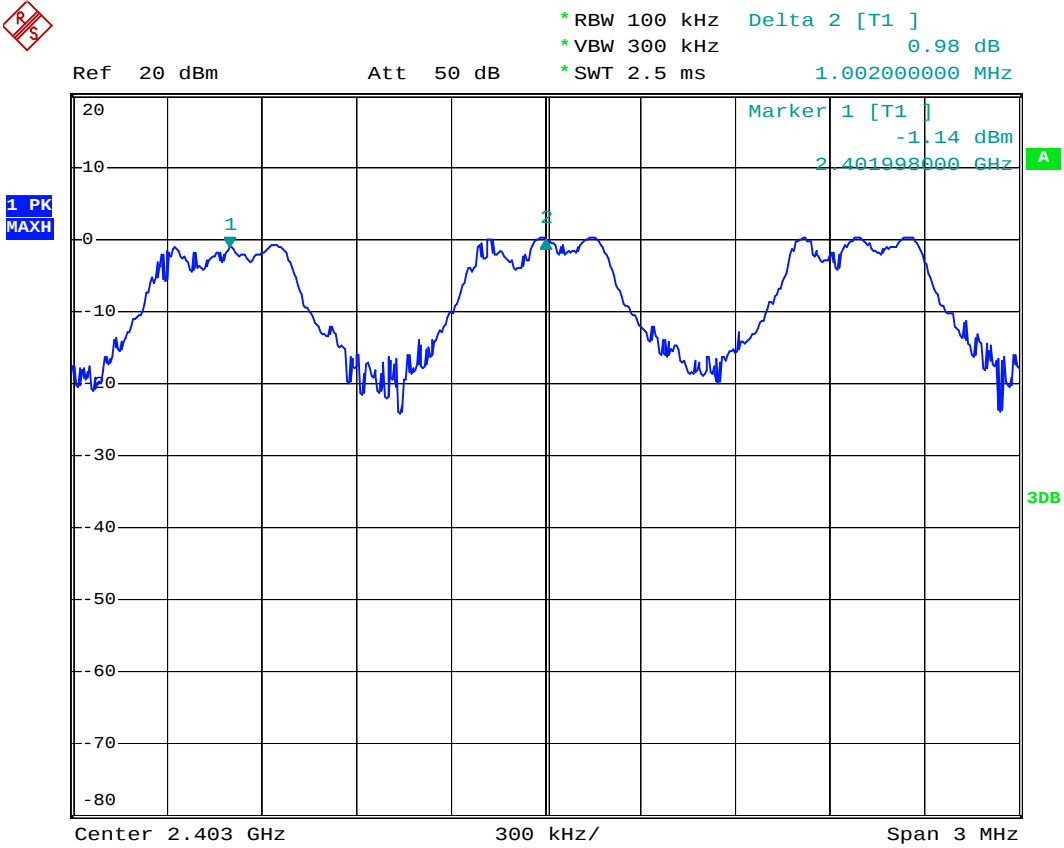


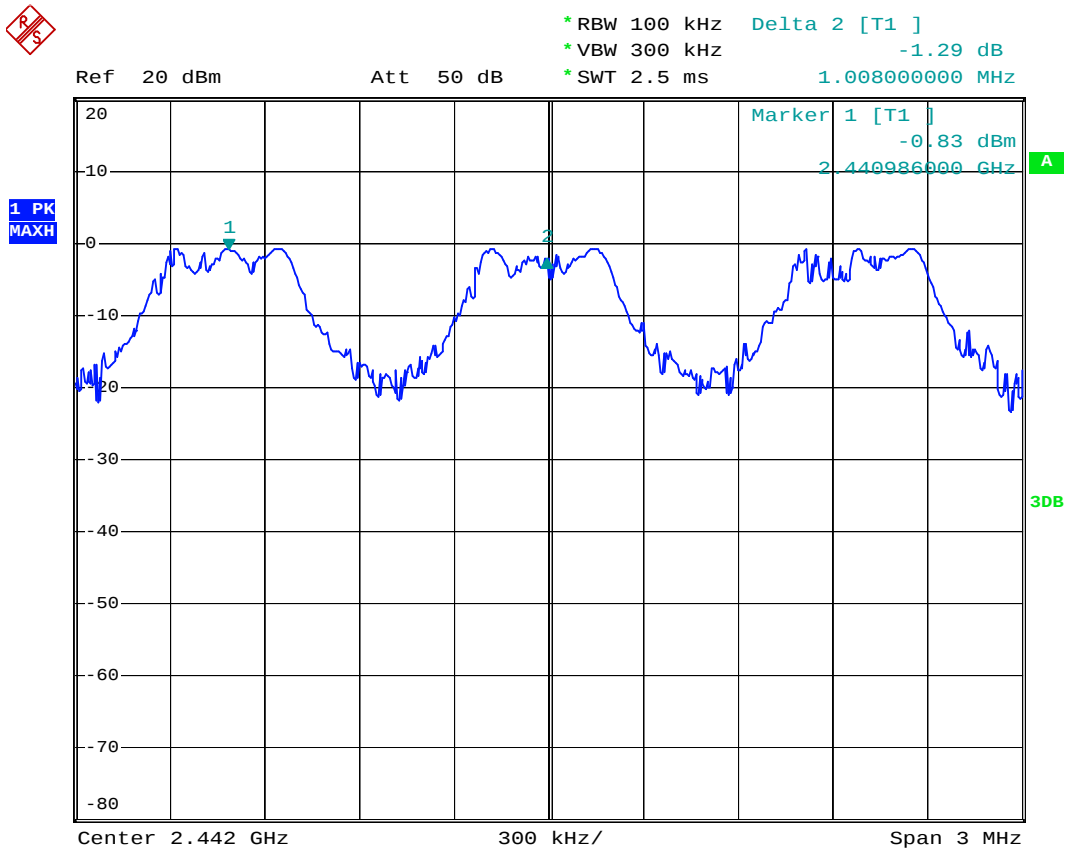

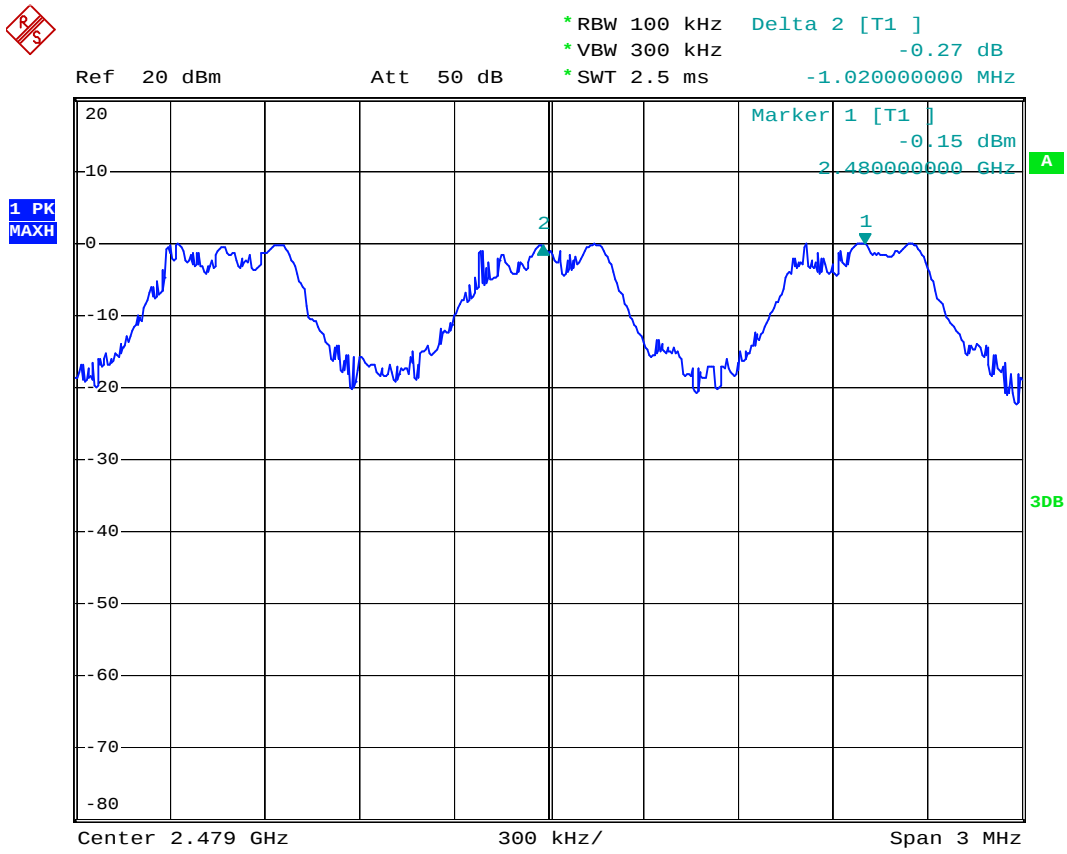

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: Bluetooth speaker)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as RBW=300kHz, VBW=300kHz.

7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result


PASS.

Date of Test:	<u>June 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Bluetooth speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>TB-BTS10</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Bob</u>

Total number of hopping channel	Measurement result (CH)	Limit (CH)
	79	>15


The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

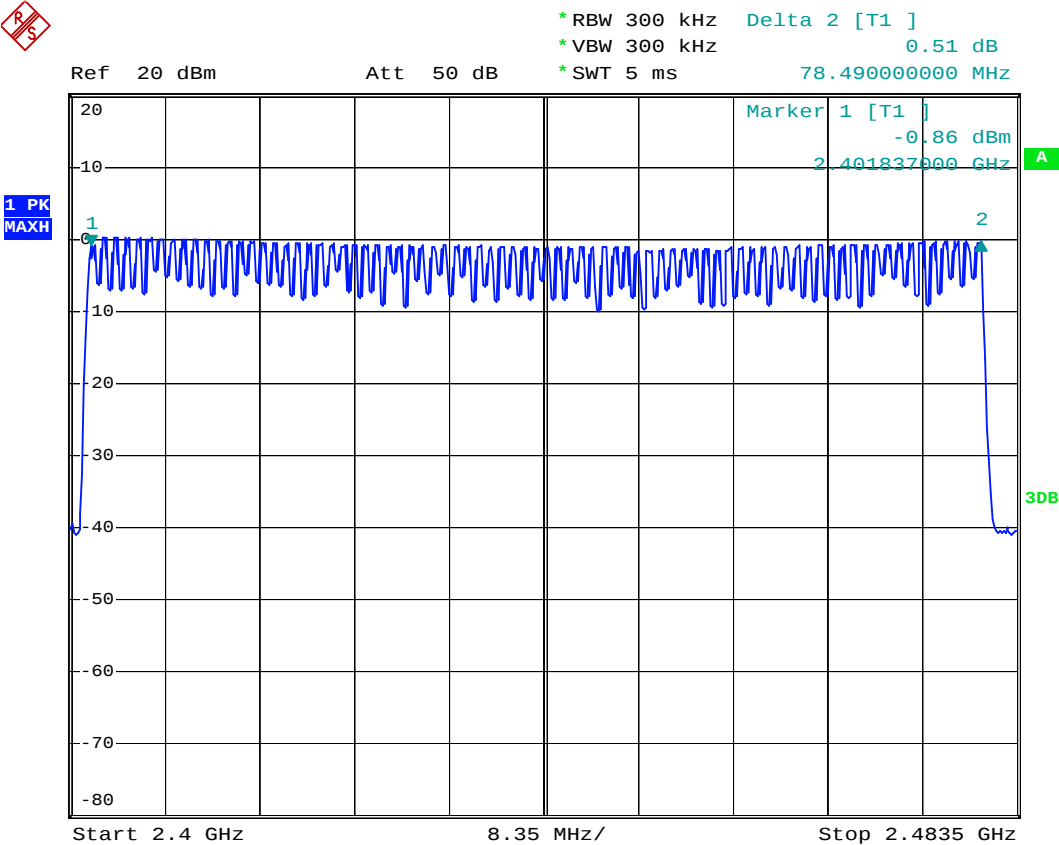

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: Bluetooth speaker)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=31.6s. Get the burst (in 31.6s.).

8.5.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=2ms. Get the pulse time.

8.5.5. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

PASS.

Date of Test:	<u>June 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Bluetooth speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>TB-BTS10</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Bob</u>



A period transmit time = $0.4 \times 79 = 31.6$



Dwell time = pulse time $\times$ burst (in 31.6 sec.)



Channel	Channel Frequency (MHz)	Pulse Time (ms)	Burst (in 31.6 sec.)	Dwell Time (ms)	Limit (ms)
Low	2402	320	0.424	135.68	400
Middle	2441	317	0.424	134.41	400
High	2480	322	0.436	140.39	400

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

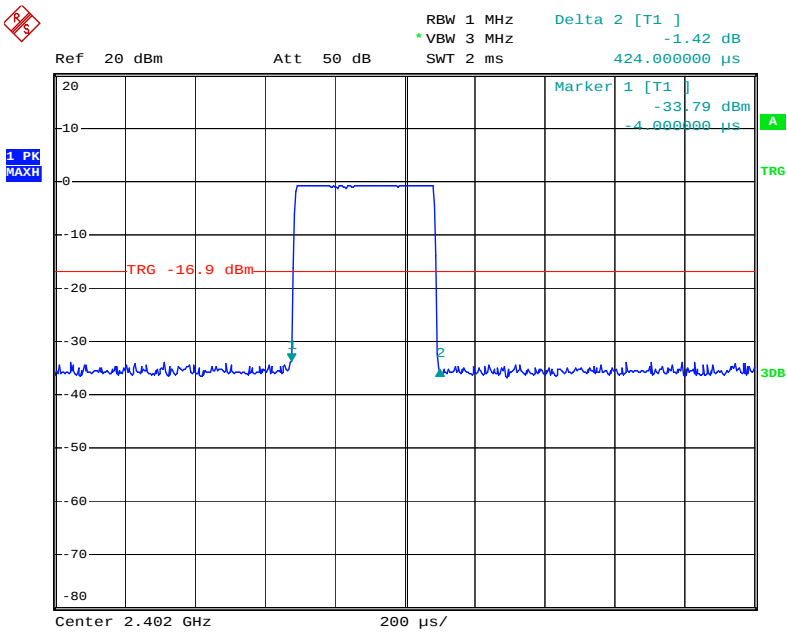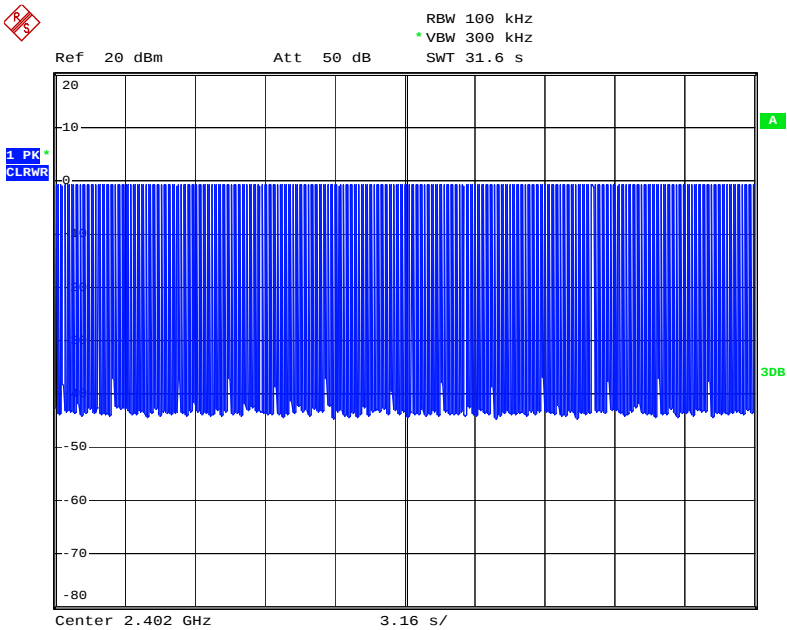


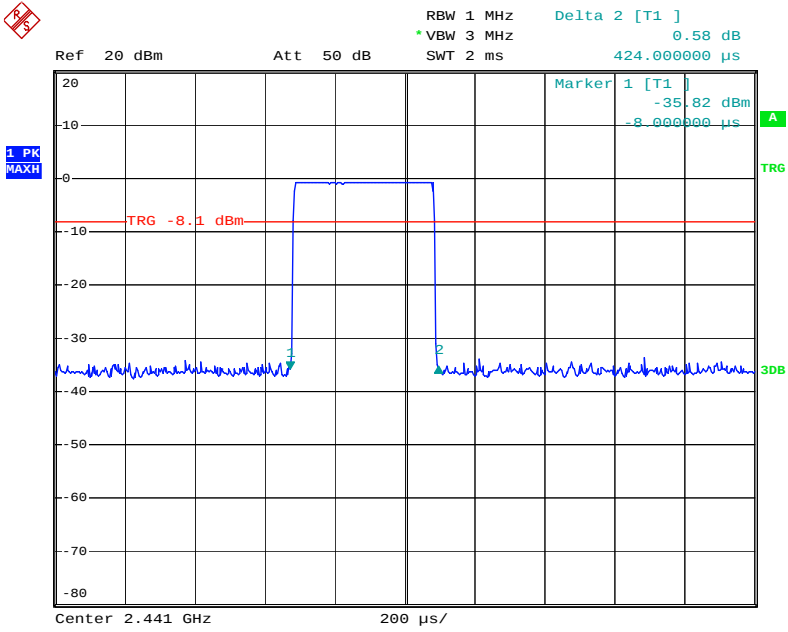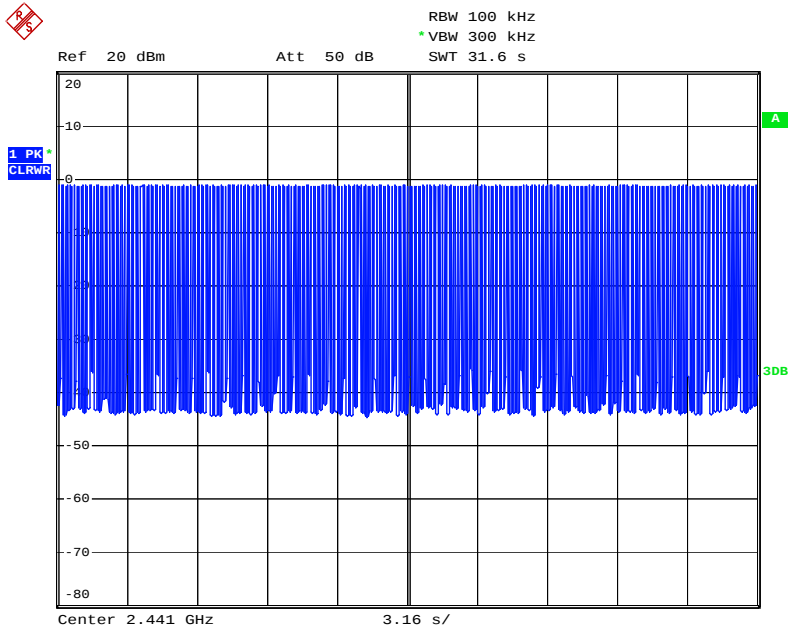

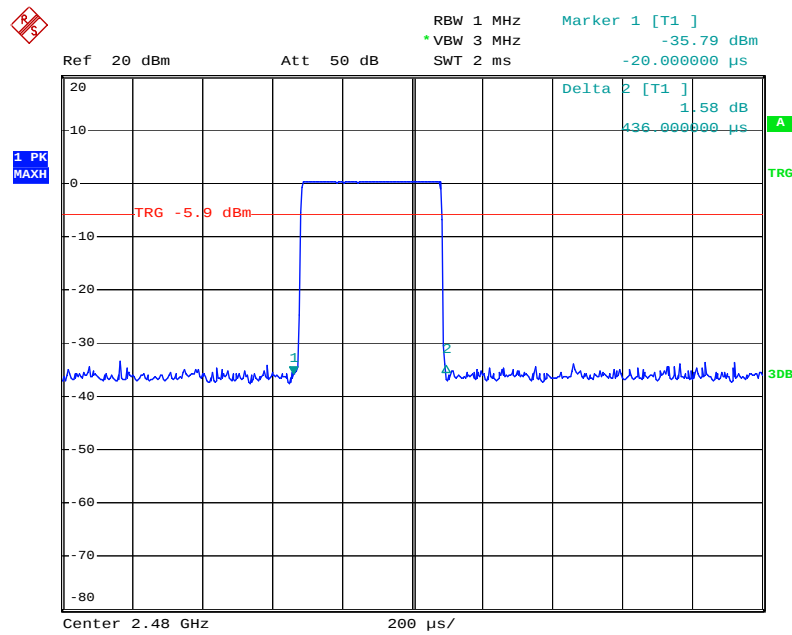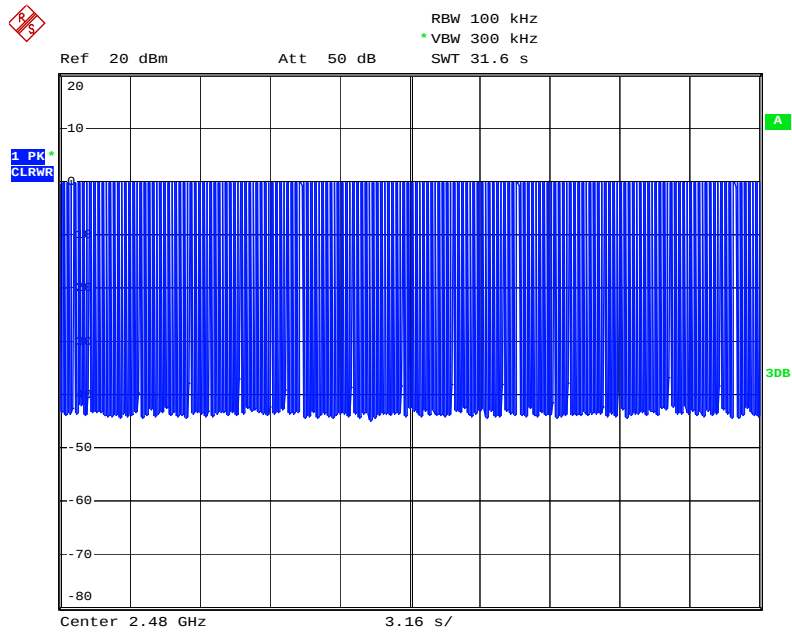

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: Bluetooth speaker)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.3.1. Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

9.5.3. Measurement the maximum peak output power.

9.6. Test Result

PASS.

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX	Test Engineer:	Bob


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2402	-0.61	0.87	30 dBm / 1 W
Middle	2441	-0.66	0.86	30 dBm / 1 W
High	2480	0.06	1.01	30 dBm / 1 W


The spectrum analyzer plots are attached as below.


"Spectrum analyzer" is R/S



1 PK
MAXH

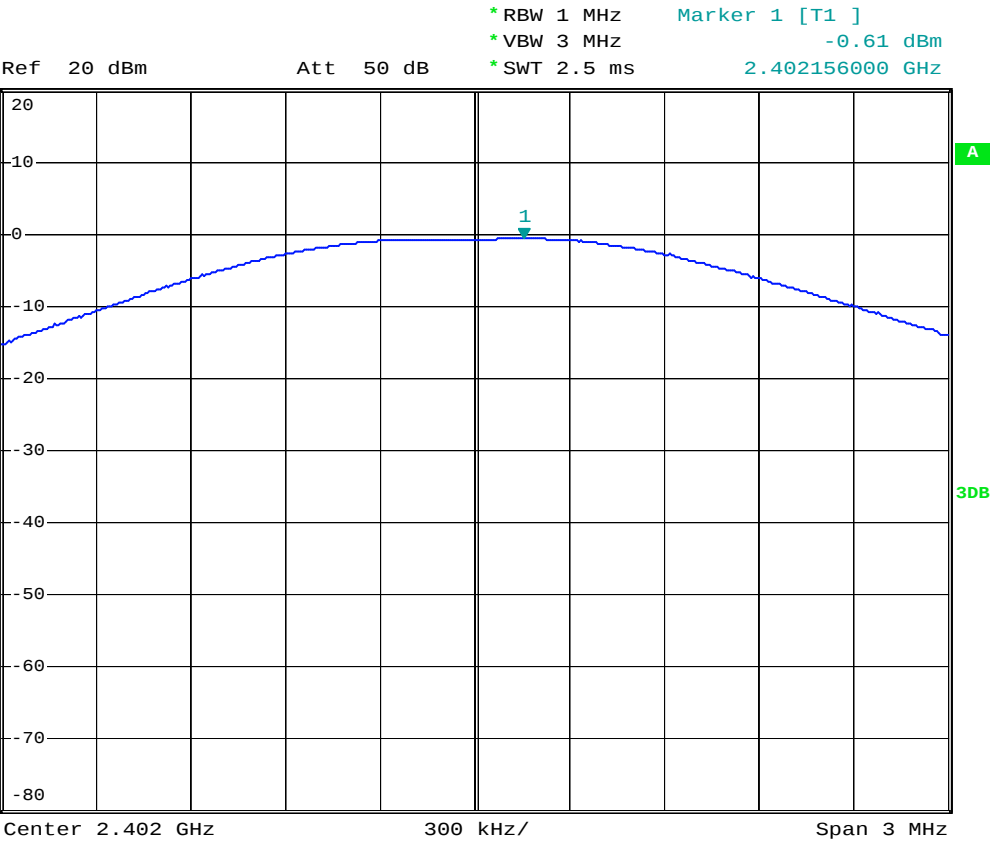


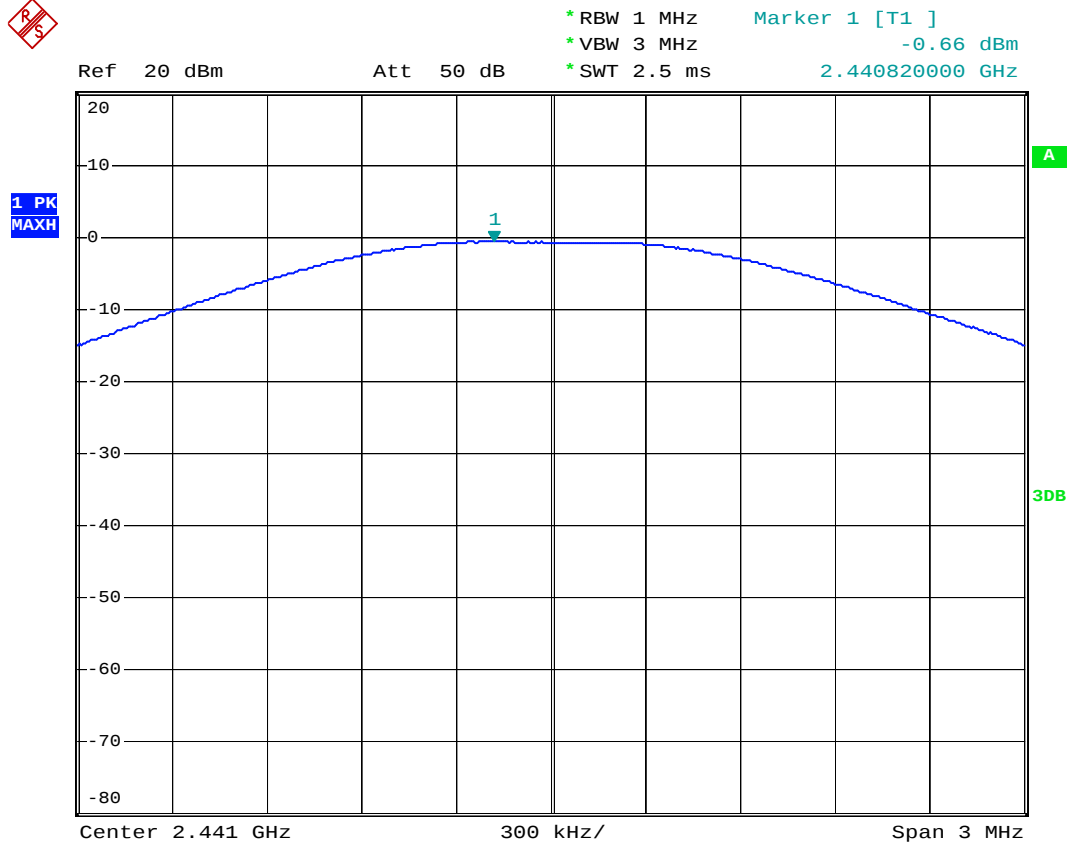

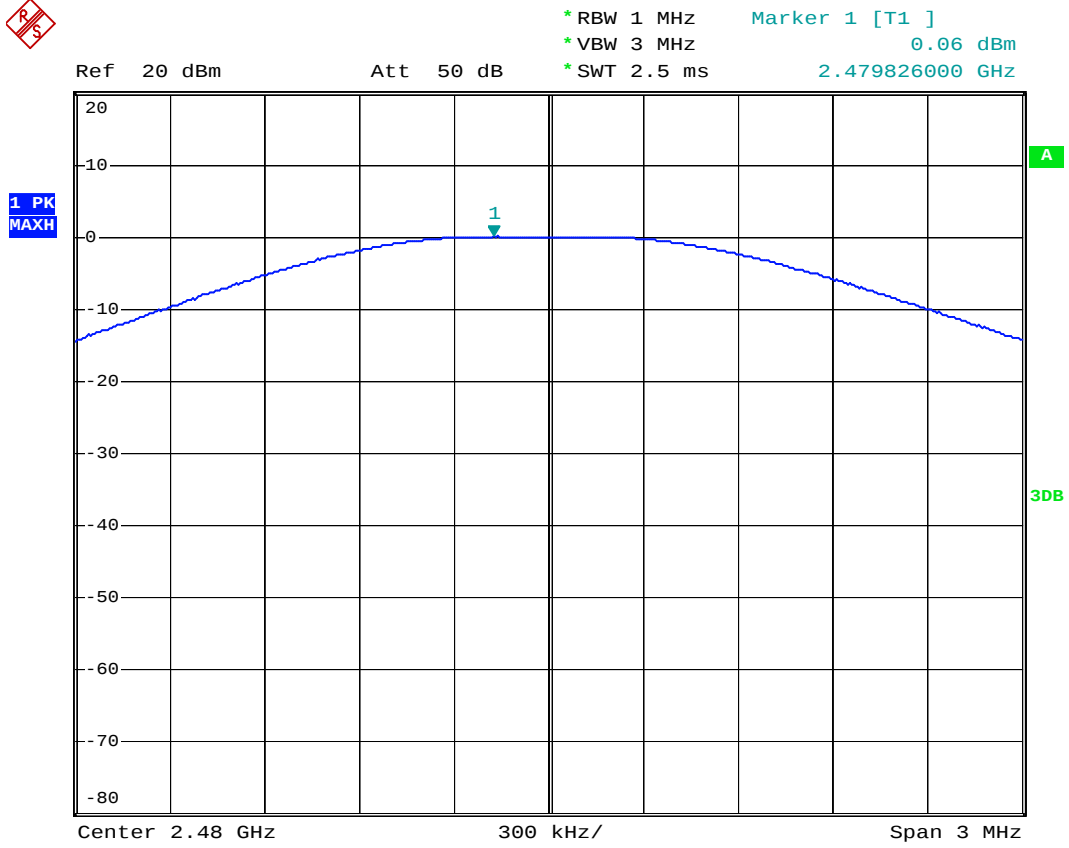

10.BAND EDGE COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: Bluetooth speaker)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.Blutetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

10.5.Test Procedure

Conducted Band Edge:

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 300kHz and VBW to 1MHz.

Radiate Band Edge:

10.5.3.The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

10.5.4.The turntable was rotated for 360 degrees to determine the position of maximum emission level.

10.5.5.EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

10.5.6.Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

10.5.7.The band edges was measured and recorded.

10.6. Test Result

Pass

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (Hopping off)	Test Engineer:	Bob

Conducted test


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	37.74	> 20dBc
2480	38.25	> 20dBc


Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (Hopping on)	Test Engineer:	Bob


Conducted test


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	36.69	> 20dBc
2480	37.69	> 20dBc

"Spectrum analyzer" is R/S

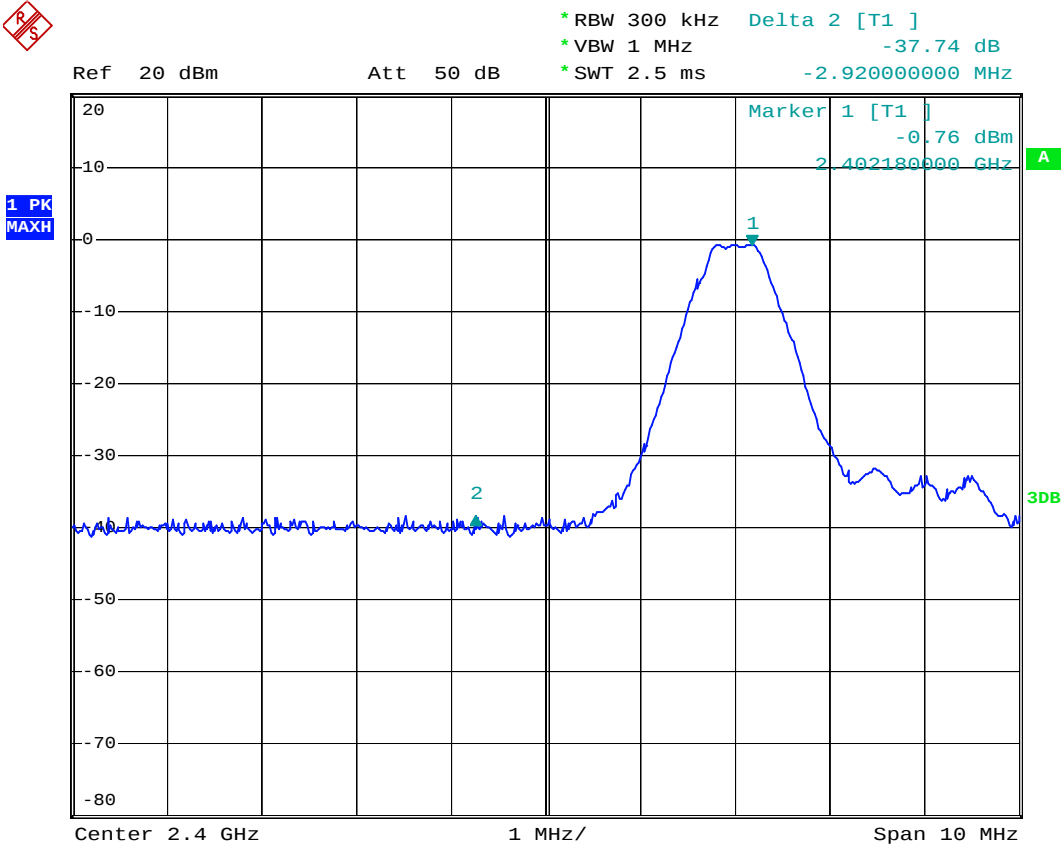

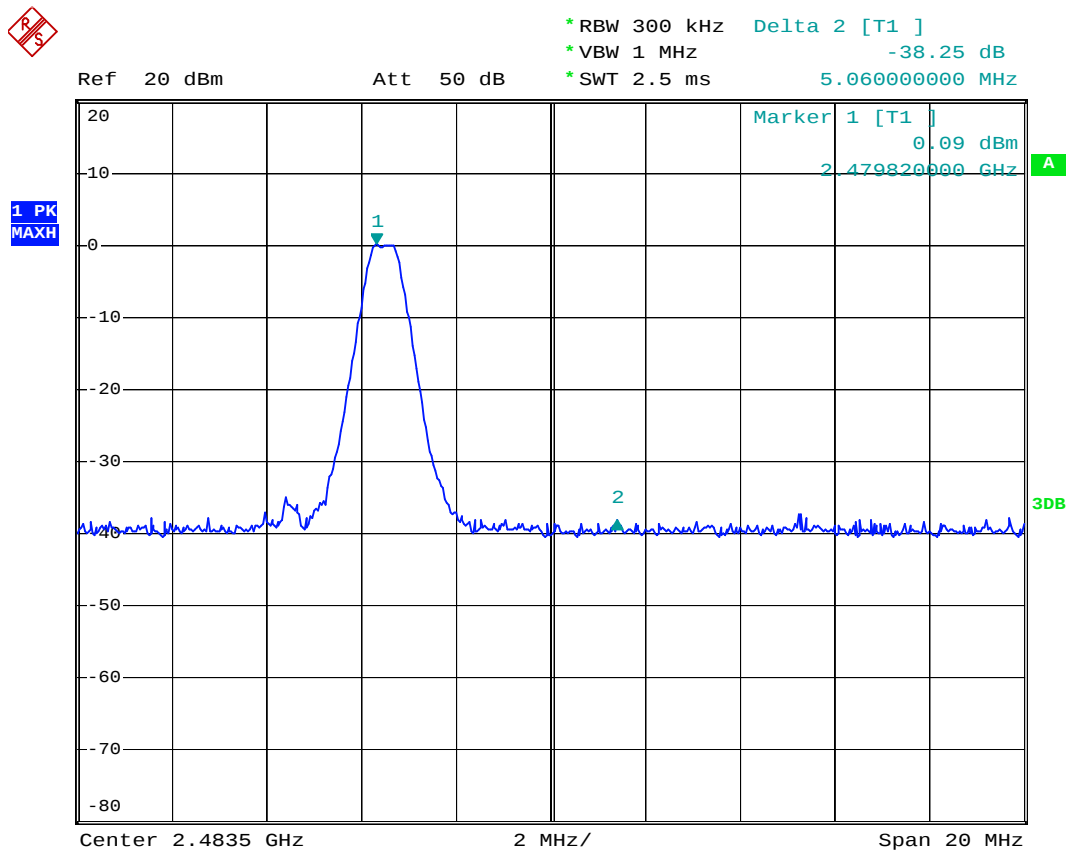

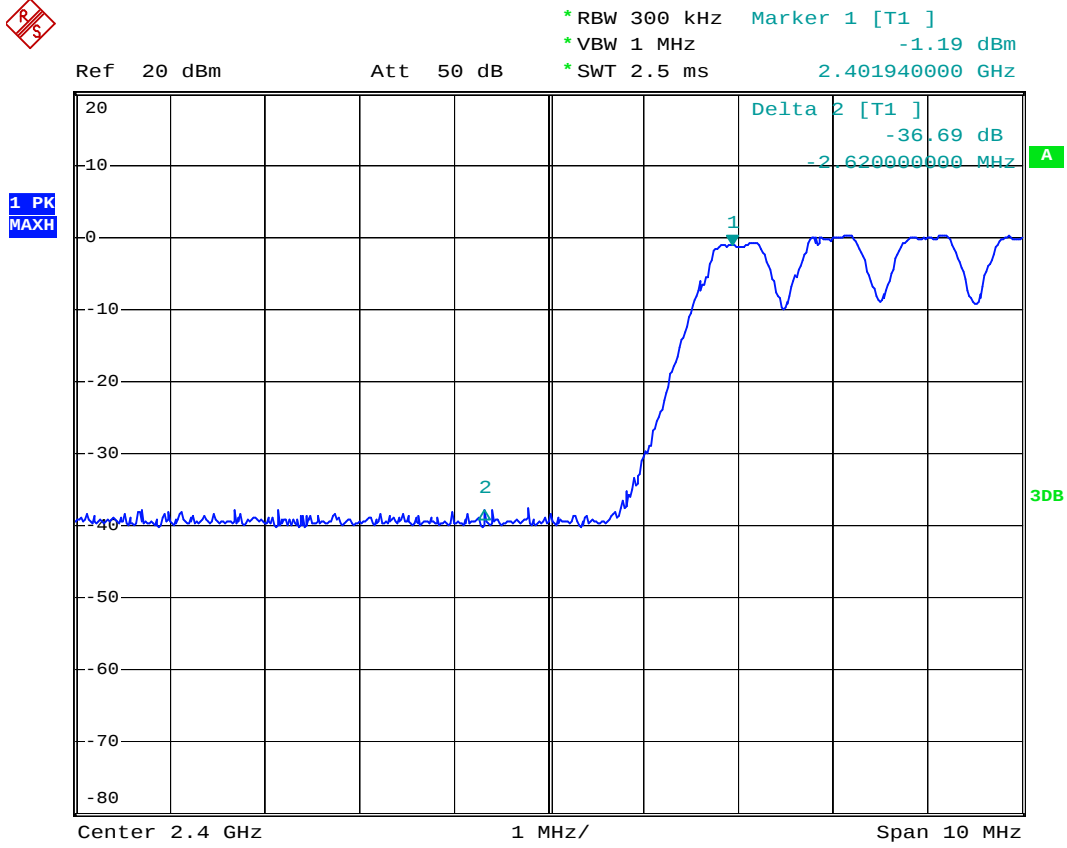

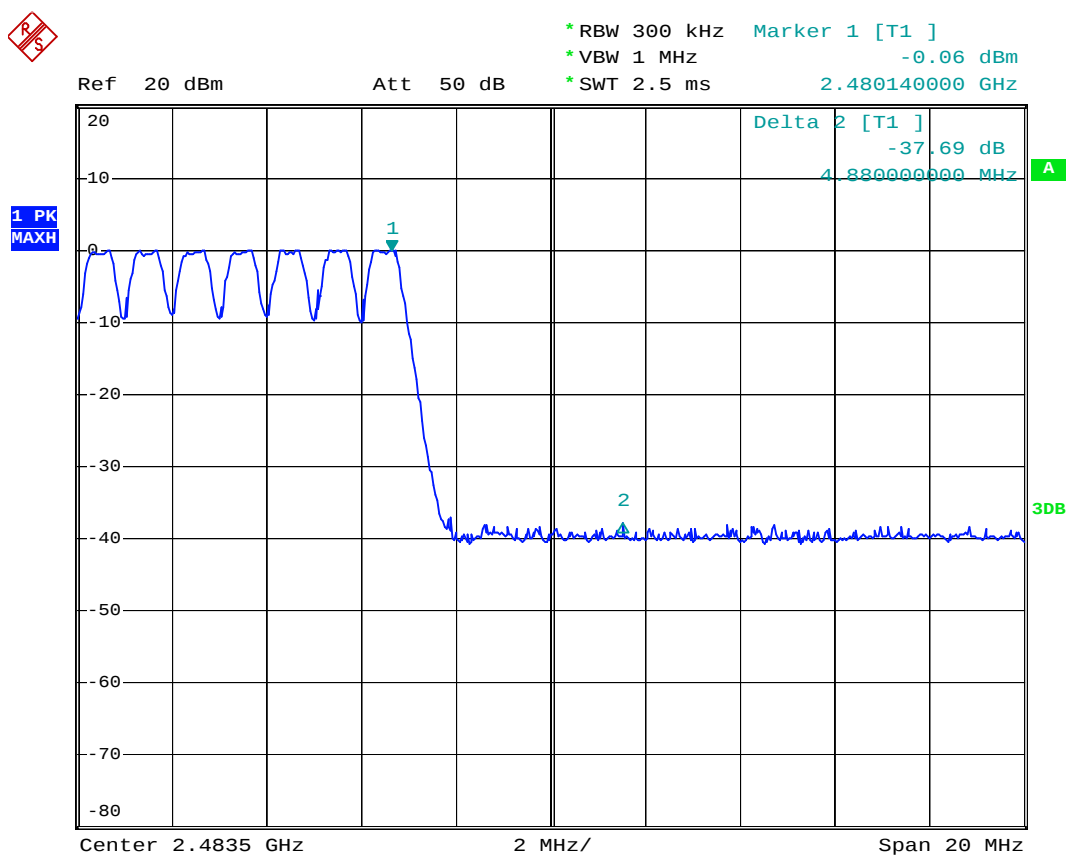

Radiated Band Edge Result

Date of Test: June 29, 2013

Temperature: 25°C

EUT: Bluetooth speaker

Humidity: 50%

Model No.: TB-BTS10

Power Supply: DC 3.7V

Test Mode: TX (2402MHz)

Test Engineer: Kai

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	38.92	44.81	-7.81	31.11	37.00	54.00	74.00	-22.89	-37.00	Vertical
2371.773	41.71	47.48	-7.64	34.07	39.84	54.00	74.00	-19.93	-34.16	Vertical
2390.000	40.02	45.49	-7.53	32.49	37.96	54.00	74.00	-21.51	-36.04	Vertical
2310.000	37.25	43.87	-7.81	29.44	36.06	54.00	74.00	-24.56	-37.94	Horizontal
2380.073	41.36	47.22	-7.59	33.77	39.63	54.00	74.00	-20.23	-34.37	Horizontal
2390.000	37.99	43.50	-7.53	30.46	35.97	54.00	74.00	-23.54	-38.03	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (2480MHz)	Test Engineer:	Kai

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	38.91	44.28	-7.37	31.54	36.91	54.00	74.00	-22.46	-37.09	Vertical
2494.324	41.02	46.16	-7.39	33.63	38.77	54.00	74.00	-20.37	-35.23	Vertical
2500.000	37.39	43.74	-7.40	29.99	36.34	54.00	74.00	-24.01	-37.66	Vertical
2483.500	40.15	45.39	-7.37	32.78	38.02	54.00	74.00	-21.22	-35.98	Horizontal
2489.723	39.61	45.40	-7.39	32.22	38.01	54.00	74.00	-21.78	-35.99	Horizontal
2500.000	37.99	43.63	-7.40	30.59	36.23	54.00	74.00	-23.41	-37.77	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2773

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Bluetooth speaker

Mode: TX 2402MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2013/06/29

Time: 13:35:23

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20131374

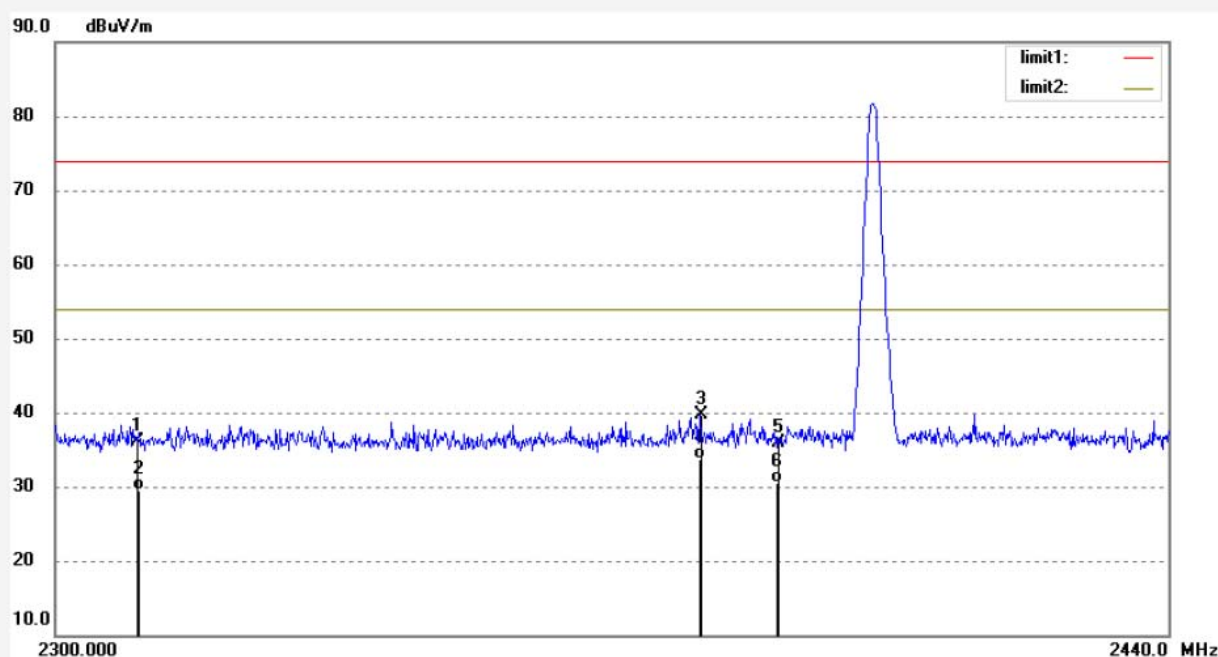

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	43.87	-7.81	36.06	74.00	-37.94	peak			
2	2310.000	37.25	-7.81	29.44	54.00	-24.56	AVG			
3	2380.073	47.22	-7.59	39.63	74.00	-34.37	peak			
4	2380.073	41.36	-7.59	33.77	54.00	-20.23	AVG			
5	2390.000	43.50	-7.53	35.97	74.00	-38.03	peak			
6	2390.000	37.99	-7.53	30.46	54.00	-23.54	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2774

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Bluetooth speaker

Mode: TX 2402MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 2013/06/29

Time: 13:39:35

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20131374

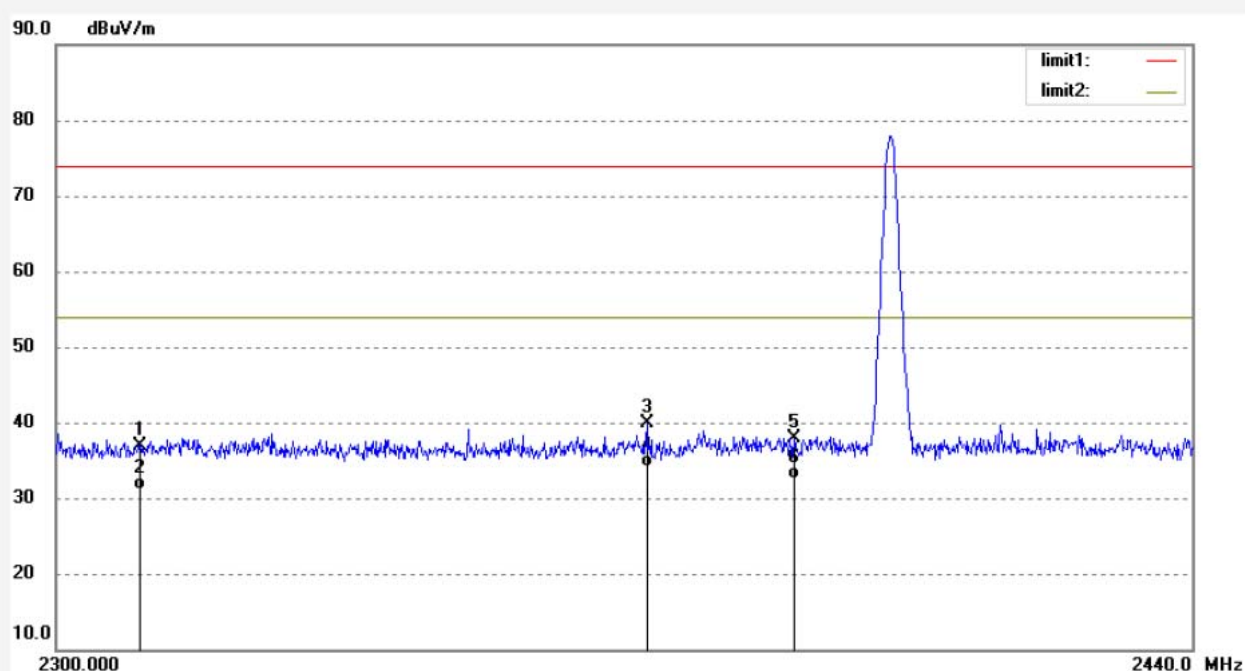

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.81	-7.81	37.00	74.00	-37.00	peak			
2	2310.000	38.92	-7.81	31.11	54.00	-22.89	AVG			
3	2371.773	47.48	-7.64	39.84	74.00	-34.16	peak			
4	2371.773	41.71	-7.64	34.07	54.00	-19.93	AVG			
5	2390.000	45.49	-7.53	37.96	74.00	-36.04	peak			
6	2390.000	40.02	-7.53	32.49	54.00	-21.51	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2775

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Bluetooth speaker

Mode: TX 2480MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 2013/06/29

Time: 13:42:54

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20131374

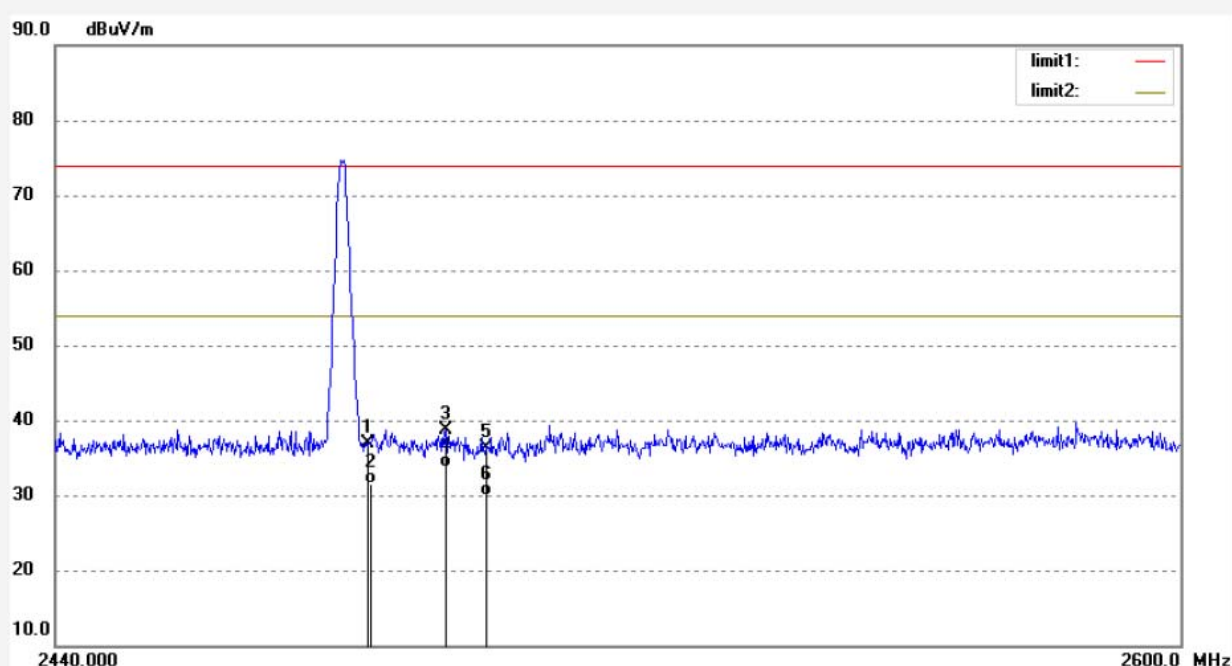

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.28	-7.37	36.91	74.00	-37.09	peak			
2	2483.500	38.91	-7.37	31.54	54.00	-22.46	AVG			
3	2494.324	46.16	-7.39	38.77	74.00	-35.23	peak			
4	2494.324	41.02	-7.39	33.63	54.00	-20.37	AVG			
5	2500.000	43.74	-7.40	36.34	74.00	-37.66	peak			
6	2500.000	37.39	-7.40	29.99	54.00	-24.01	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2776

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Bluetooth speaker

Mode: TX 2480MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2013/06/29

Time: 13:47:19

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20131374

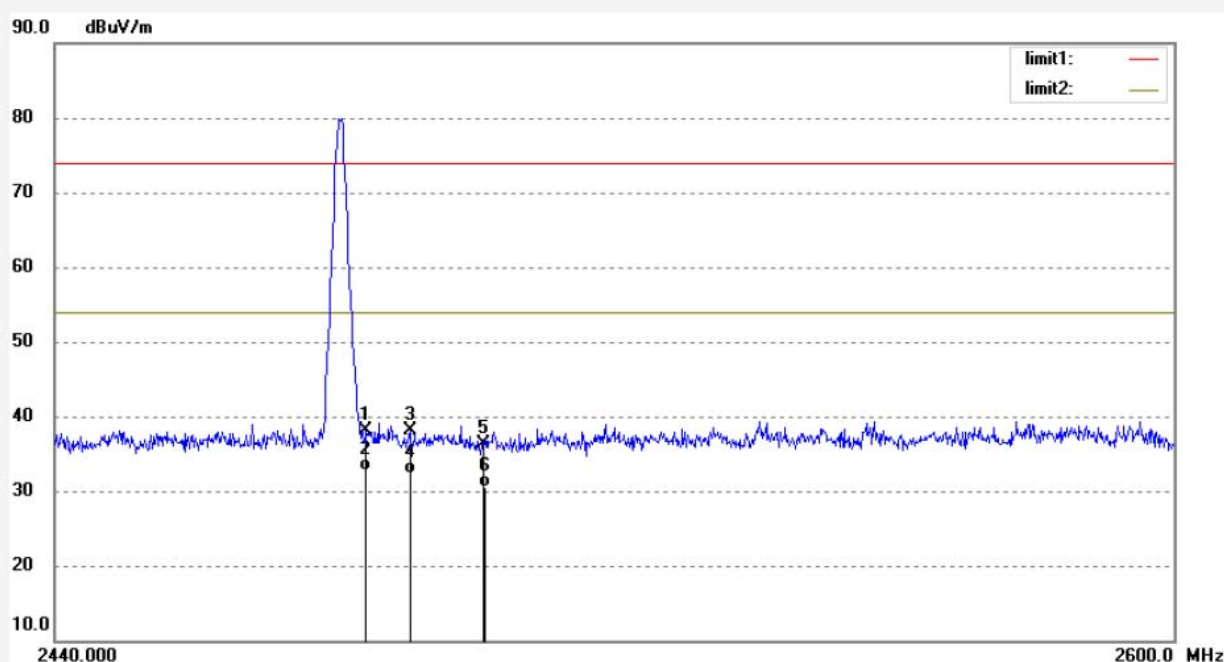

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.39	-7.37	38.02	74.00	-35.98	peak			
2	2483.500	40.15	-7.37	32.78	54.00	-21.22	AVG			
3	2489.725	45.40	-7.39	38.01	74.00	-35.99	peak			
4	2489.725	39.61	-7.39	32.22	54.00	-21.78	AVG			
5	2500.000	43.63	-7.40	36.23	74.00	-37.77	peak			
6	2500.000	37.99	-7.40	30.59	54.00	-23.41	AVG			

11.RADIATED SPURIOUS EMISSION TEST

11.1.Block Diagram of Test Setup


11.1.1.Block diagram of connection between the EUT and simulators



Setup: Transmitting mode

(EUT: Bluetooth speaker)

11.1.2.Semi-Anechoic Chamber Test Setup Diagram

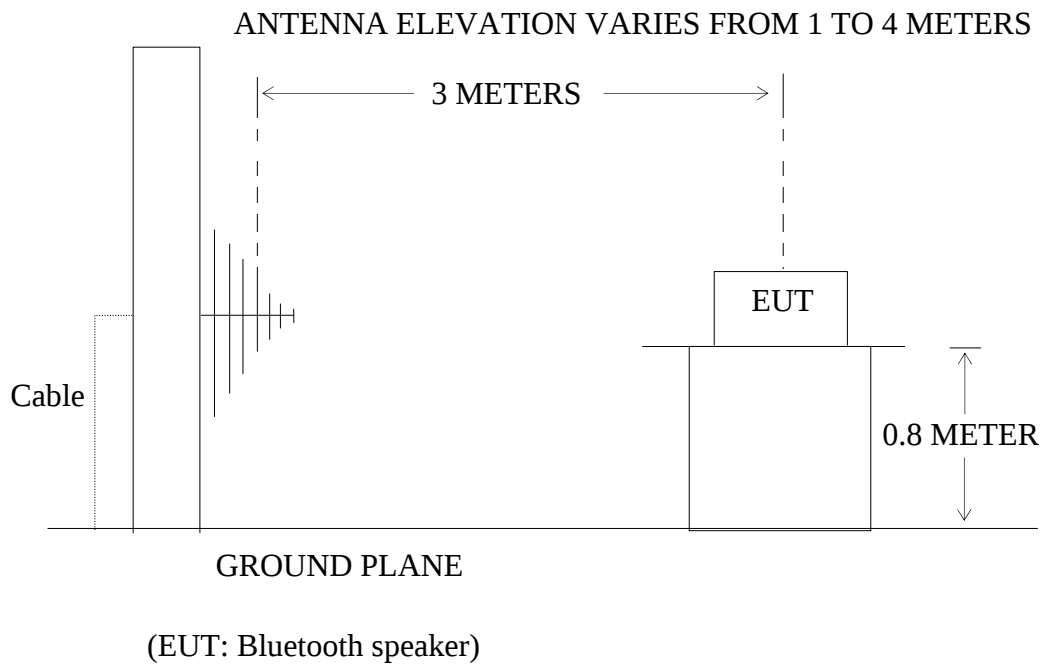

11.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.Restricted bands of operation

11.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

11.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.1. Bluetooth speaker (EUT)

Model Number : TB-BTS10
 Serial Number : N/A
 Manufacturer : Shenzhen Dolphin Electronic Co., Ltd

11.5. Operating Condition of EUT

11.5.1. Setup the EUT and simulator as shown as Section 11.1.

11.5.2. Turn on the power of all equipment.

11.5.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

11.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

11.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (2402MHz)	Test Engineer:	Bob

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
211.5264	46.75	-20.00	26.75	43.50	-16.75	Vertical
426.5210	43.55	-15.27	28.28	46.50	-18.22	Vertical
576.6443	40.86	-12.21	28.65	46.50	-17.85	Vertical
211.5264	54.30	-20.00	34.30	43.50	-9.20	Horizontal
266.6089	49.91	-18.81	31.10	46.50	-15.40	Horizontal
408.9460	40.84	-15.48	25.36	-46.50	-21.14	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (2441MHz)	Test Engineer:	Bob

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
207.1226	42.73	-20.04	22.69	43.50	-20.81	Vertical
262.8955	41.33	-18.98	22.35	46.50	-24.15	Vertical
513.6331	40.71	-13.63	27.08	46.50	-19.42	Vertical
213.0150	53.54	-19.98	33.56	43.50	-9.94	Horizontal
266.6089	49.17	-18.81	30.36	46.50	-16.14	Horizontal
408.9460	41.72	-15.48	26.24	46.50	-20.26	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	June 29, 2013	Temperature:	25°C
EUT:	Bluetooth speaker	Humidity:	50%
Model No.:	TB-BTS10	Power Supply:	DC 3.7V
Test Mode:	TX (2480MHz)	Test Engineer:	Bob

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
208.5803	45.33	-20.03	25.30	43.50	-18.20	Vertical
268.4853	44.94	-18.74	26.20	46.50	-20.30	Vertical
614.2142	39.99	-11.38	28.61	46.50	-17.89	Vertical
209.3129	52.53	-20.02	32.51	43.50	-10.99	Horizontal
269.4284	47.69	-18.71	28.98	46.50	-17.52	Horizontal
408.9460	40.38	-15.48	24.90	46.50	-21.60	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #132

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2402MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 13/06/29/

Time: 10/49/27

Engineer Signature: STAR

Distance: 3m

Note: Report No.: ATE20131374

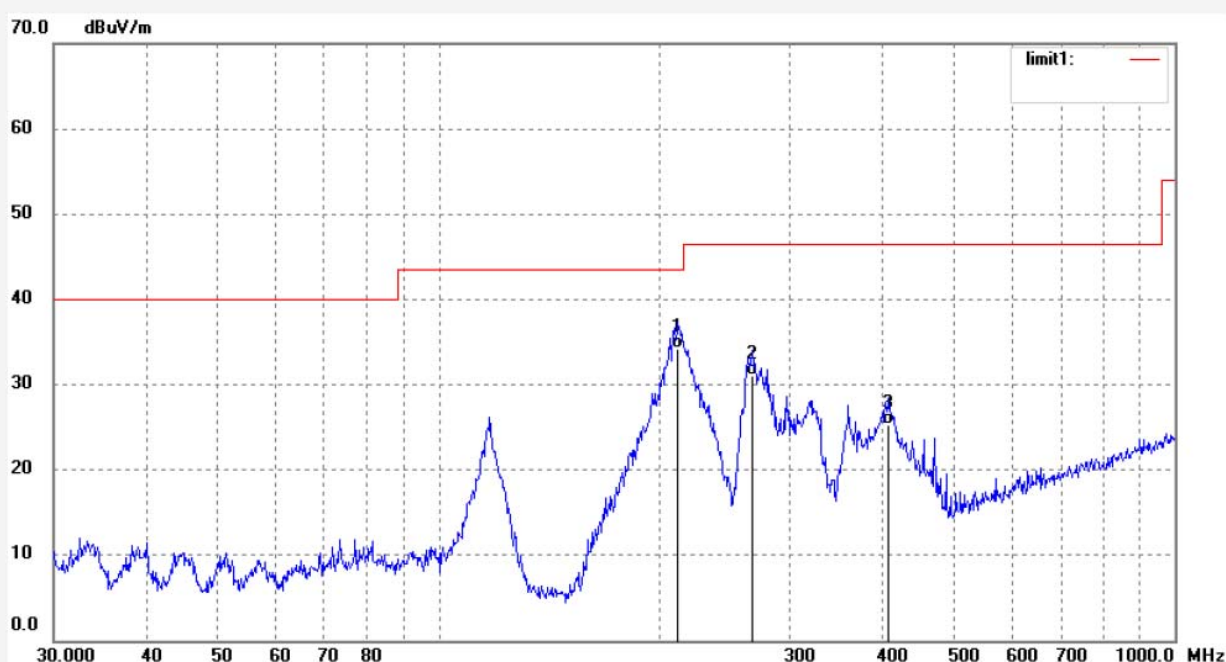

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	211.5264	54.30	-20.00	34.30	43.50	-9.20	QP			
2	266.6089	49.91	-18.81	31.10	46.50	-15.40	QP			
3	408.9460	40.84	-15.48	25.36	46.50	-21.14	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #133

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2402MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 13/06/29/

Time: 10/52/23

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

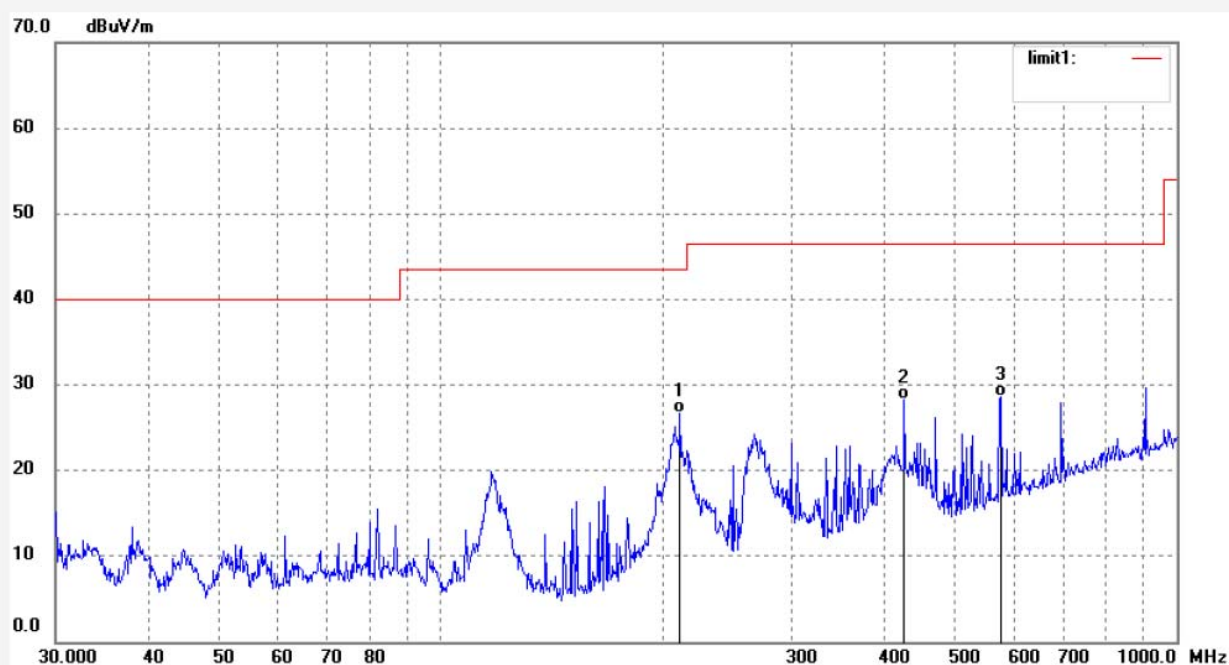

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	211.5264	46.75	-20.00	26.75	43.50	-16.75	QP			
2	426.5210	43.55	-15.27	28.28	46.50	-18.22	QP			
3	576.6443	40.86	-12.21	28.65	46.50	-17.85	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #138	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 13/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 11/12/26
EUT: Bluetooth speaker	Engineer Signature: STAR
Mode: TX 2402MHz	Distance: 3m
Model: TB-BTS10	
Manufacturer: Dolphin	

Note: Report No.:ATE20131374

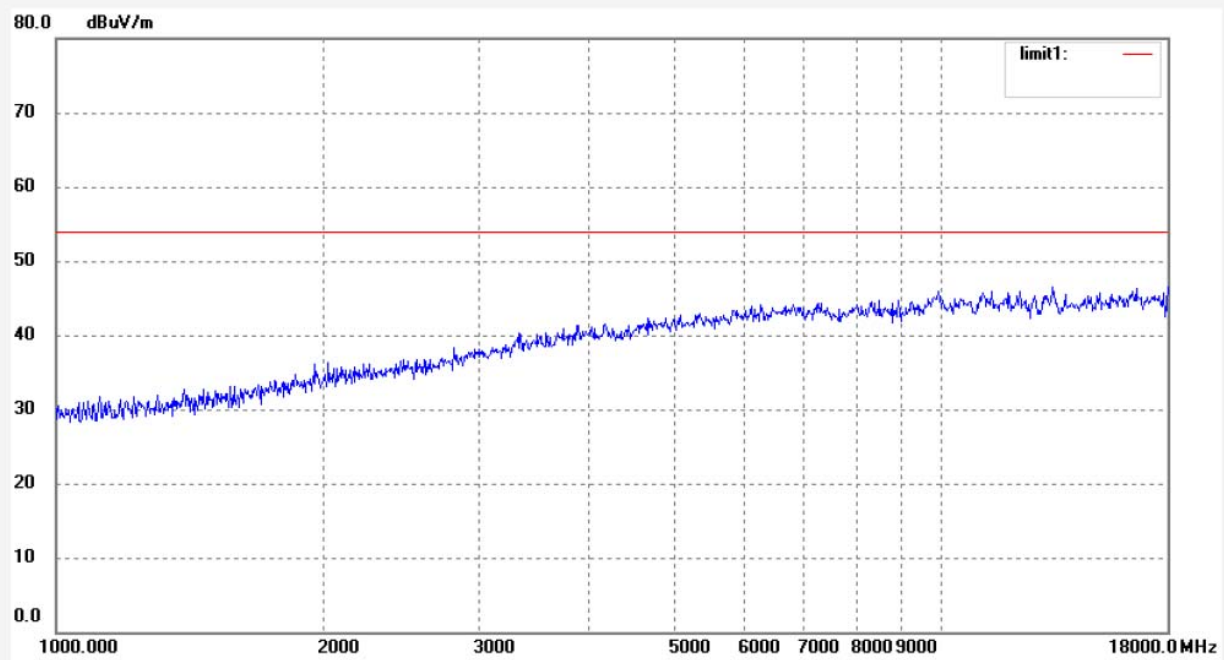

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #139
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2402MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Horizontal
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/15/03
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131374

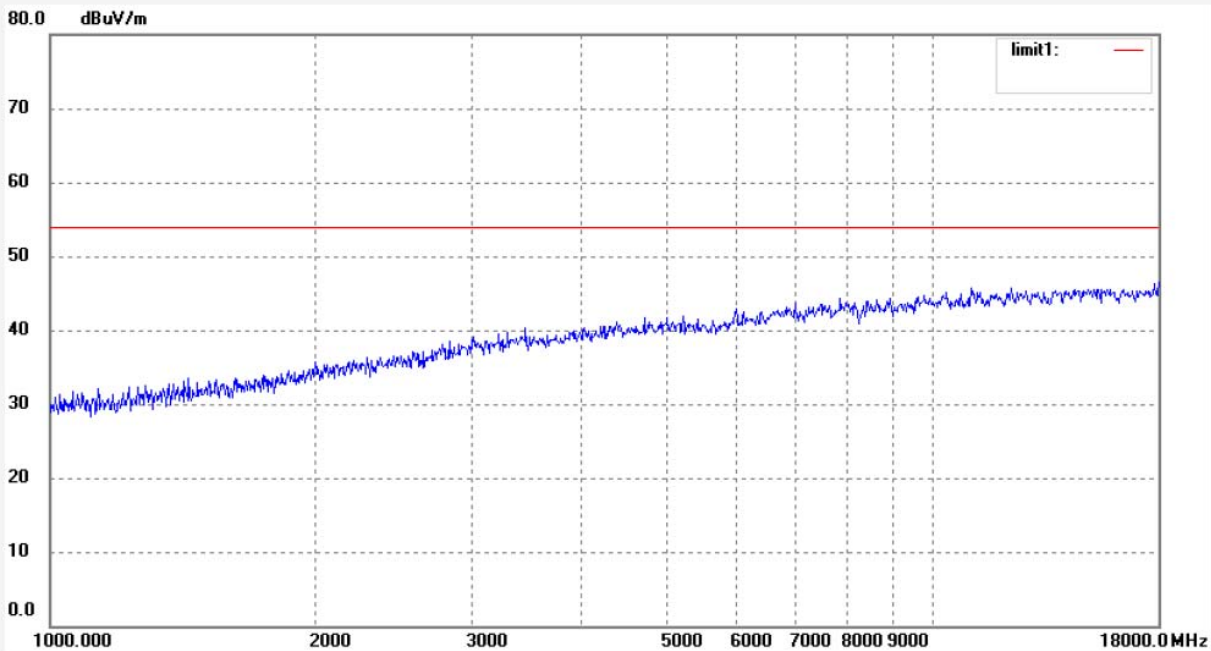

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tnp #145
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: Bluetooth speaker
 Mode: TX 2402MHz
 Model: TB-BTS10
 Manufacturer: Dolphin

Polarization: Vertical
 Power Source: DC 3.7V
 Date: 13/06/29/
 Time: 11/32/17
 Engineer Signature: STAR
 Distance: 3m

Note: Report No.: ATE20131374

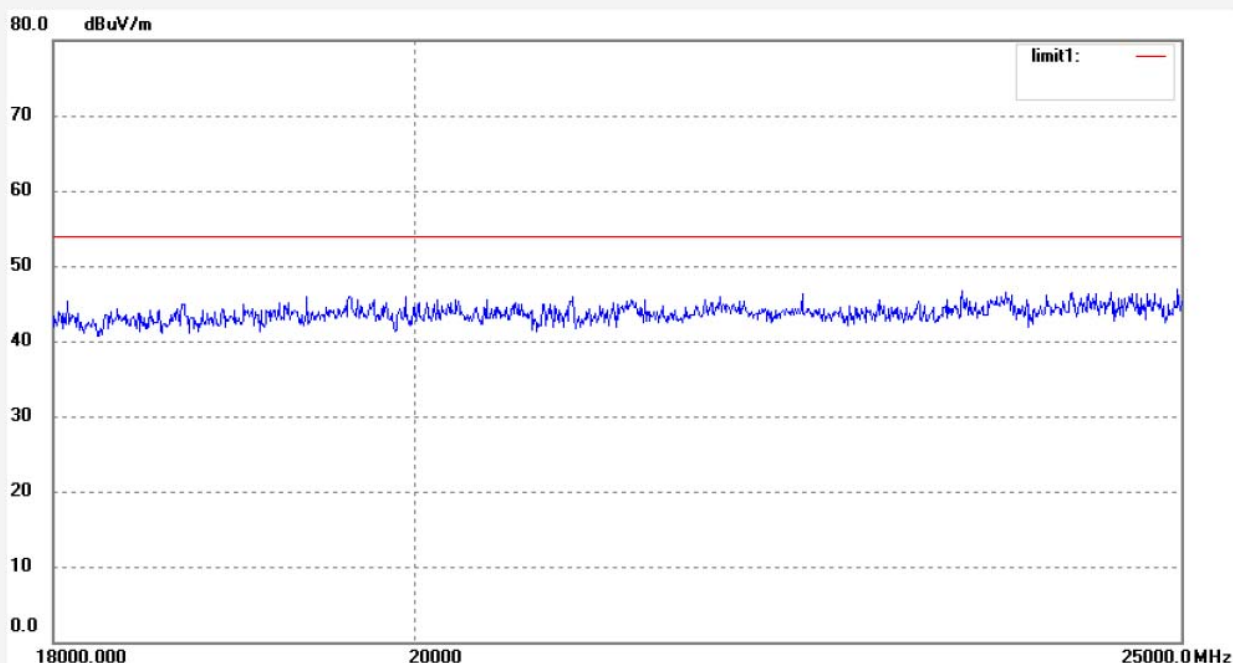

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #146
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2402MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Horizontal
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/36/17
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131374

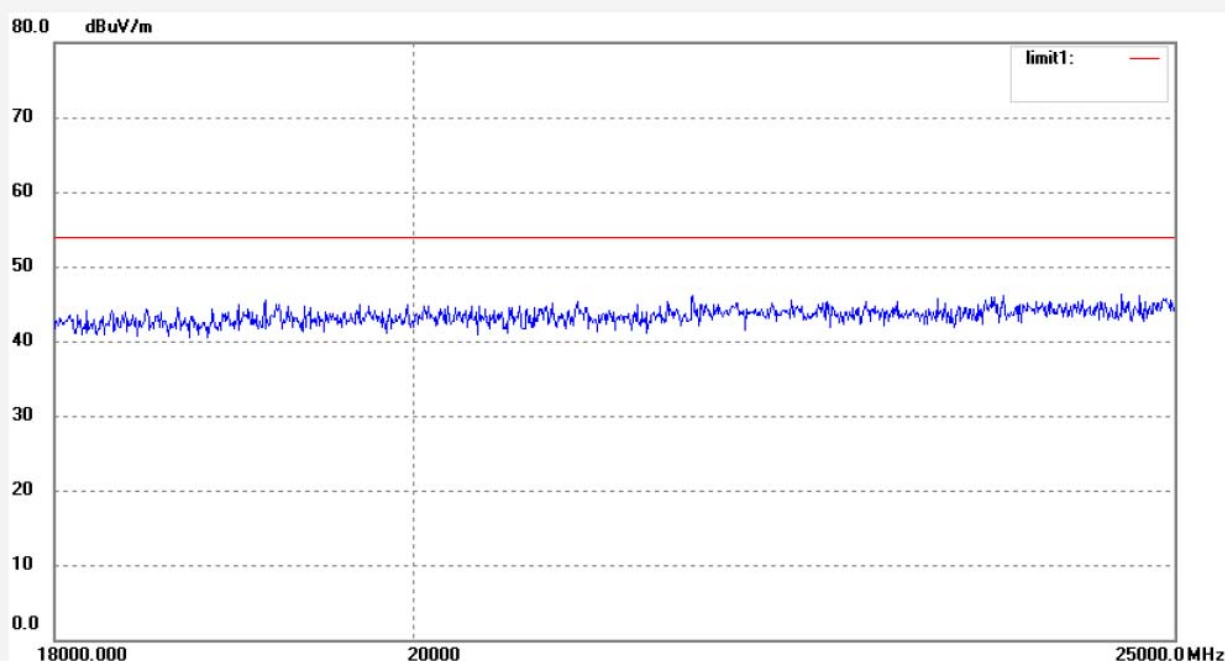

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #134

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2441MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 13/06/29/

Time: 10/57/56

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

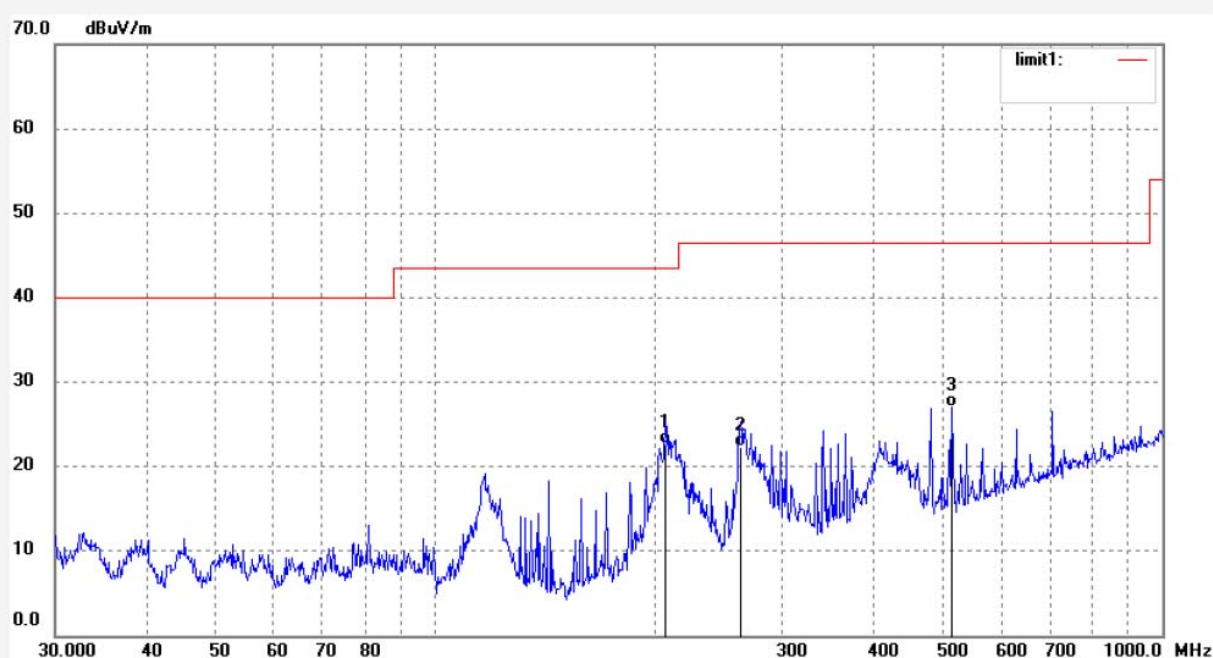

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	207.1226	42.73	-20.04	22.69	43.50	-20.81	QP			
2	262.8955	41.33	-18.98	22.35	46.50	-24.15	QP			
3	513.6331	40.71	-13.63	27.08	46.50	-19.42	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #135

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2441MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/02/37

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

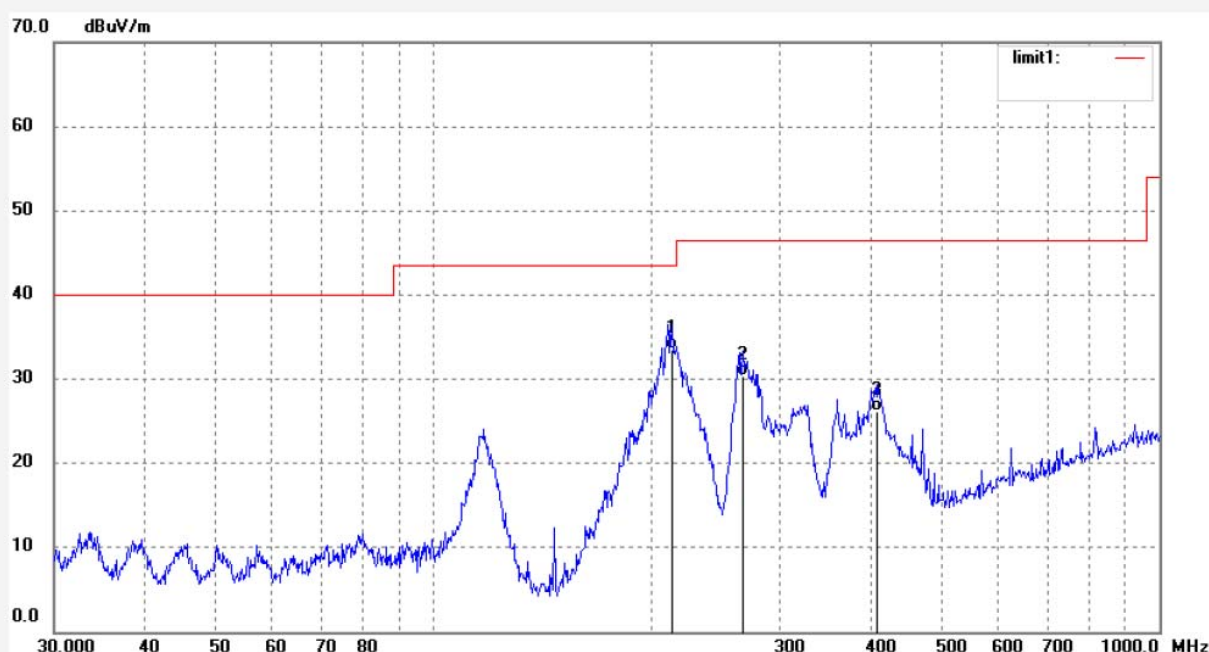

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.0150	53.54	-19.98	33.56	43.50	-9.94	QP			
2	266.6089	49.17	-18.81	30.36	46.50	-16.14	QP			
3	408.9460	41.72	-15.48	26.24	46.50	-20.26	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #140
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2441MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Horizontal
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/18/55
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131374

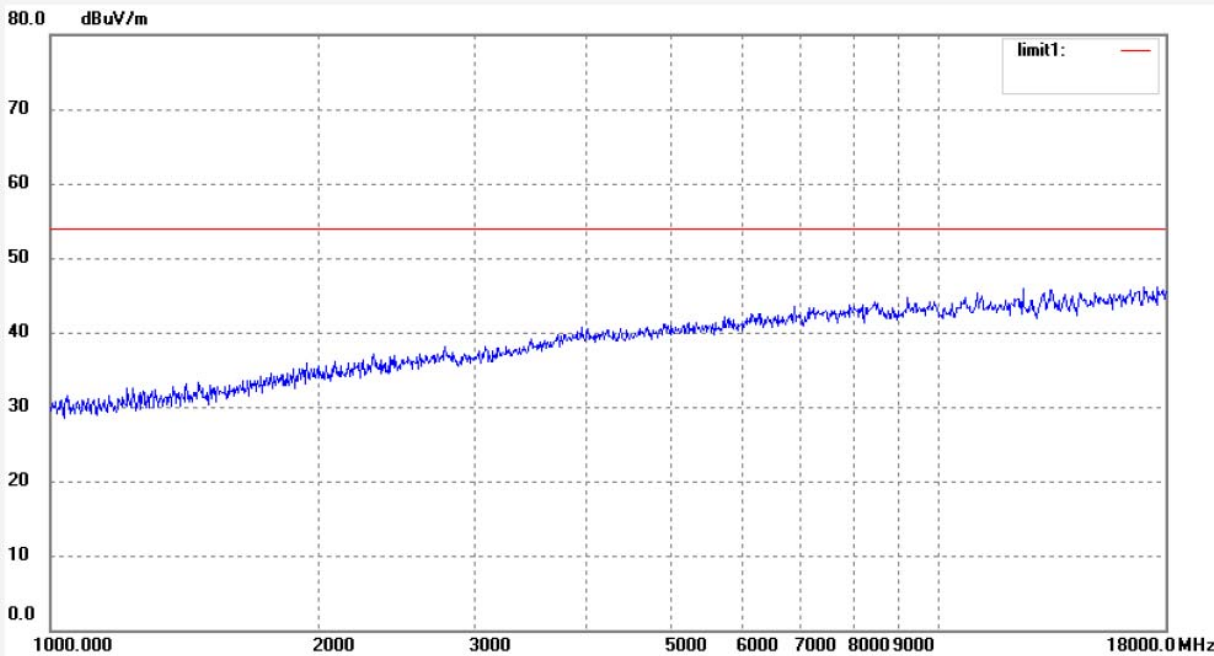

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #141
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2441MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Vertical
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/22/02
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131374

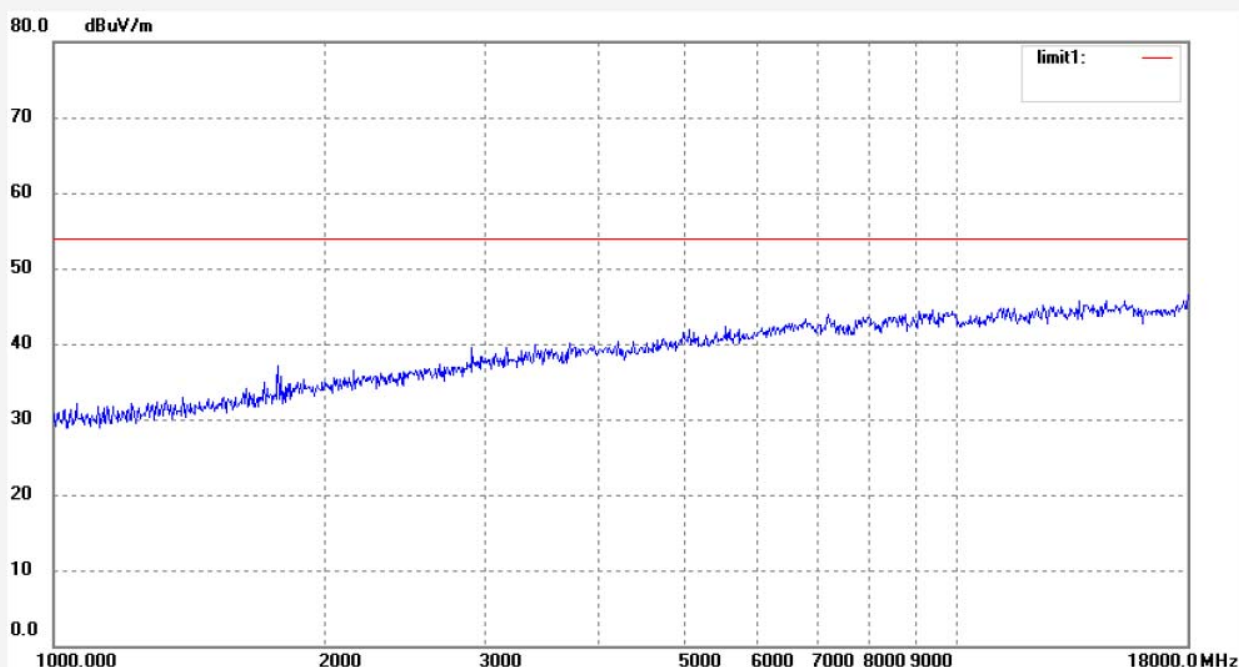

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #147

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2441MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/40/11

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

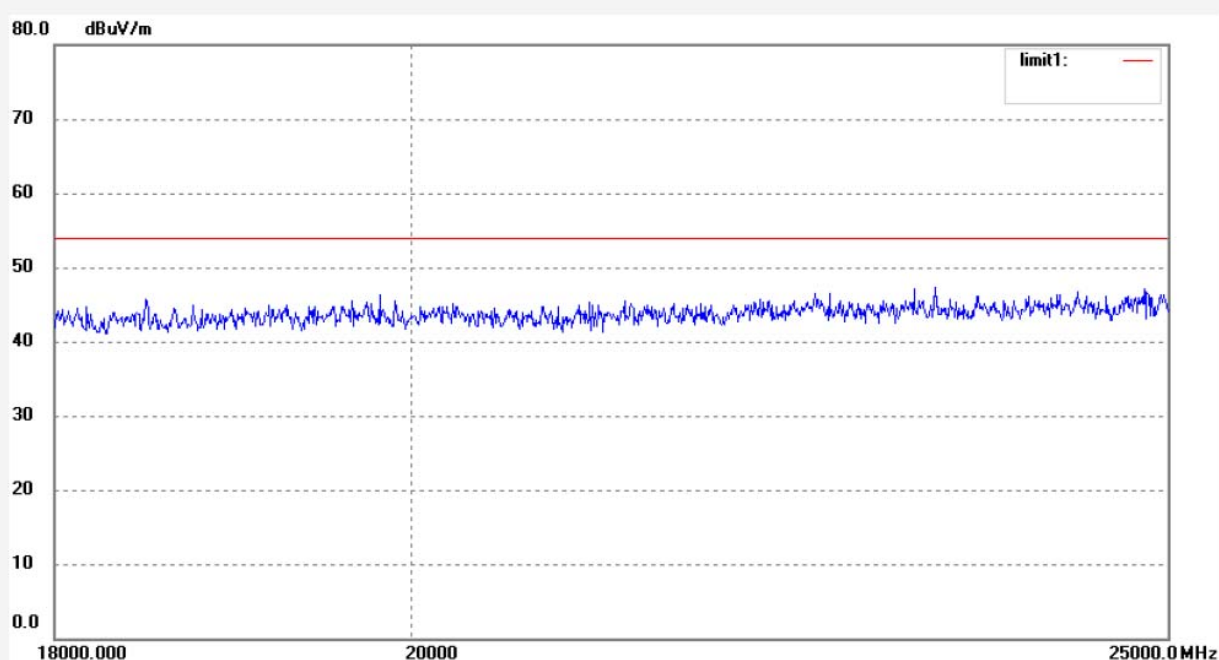

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #148

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2441MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/44/44

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

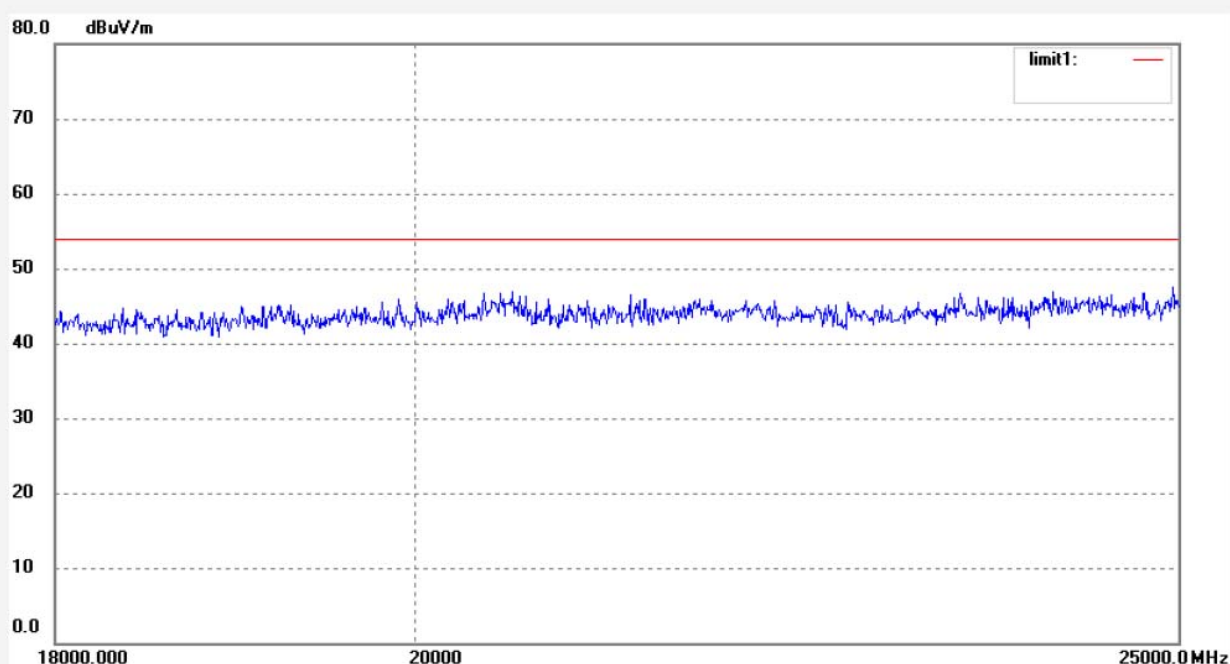

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #136

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2480MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Horizontal

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/05/12

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

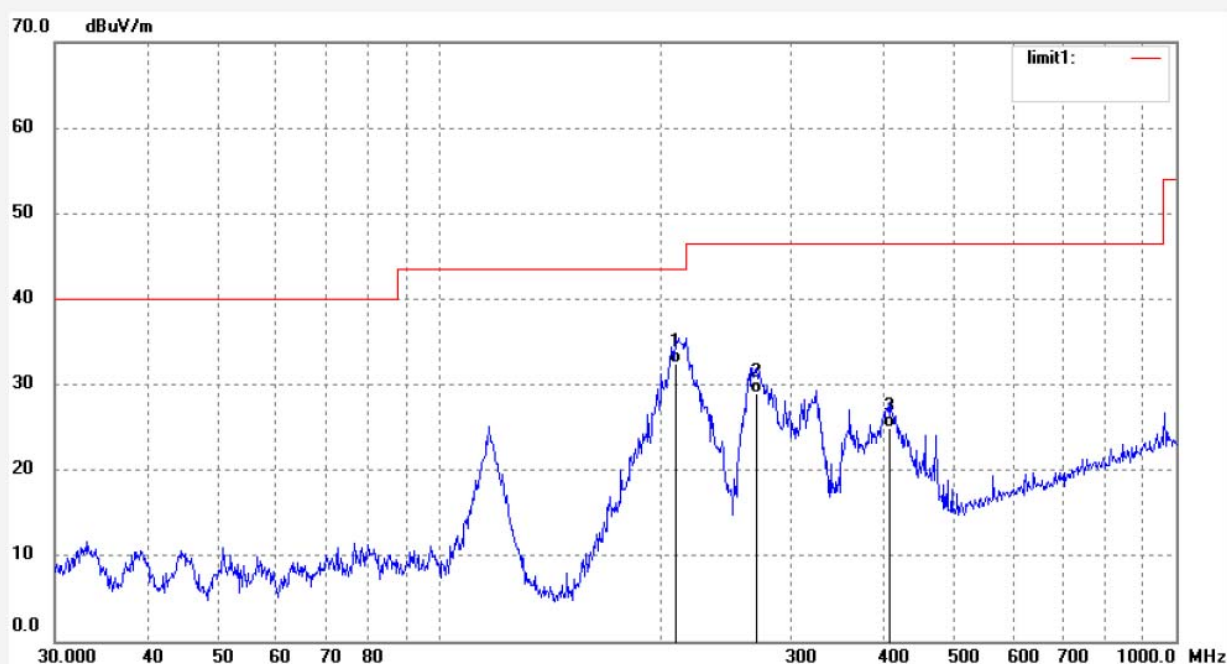

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	209.3129	52.53	-20.02	32.51	43.50	-10.99	QP			
2	269.4284	47.69	-18.71	28.98	46.50	-17.52	QP			
3	408.9460	40.38	-15.48	24.90	46.50	-21.60	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #137
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2480MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Vertical
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/09/56
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131374

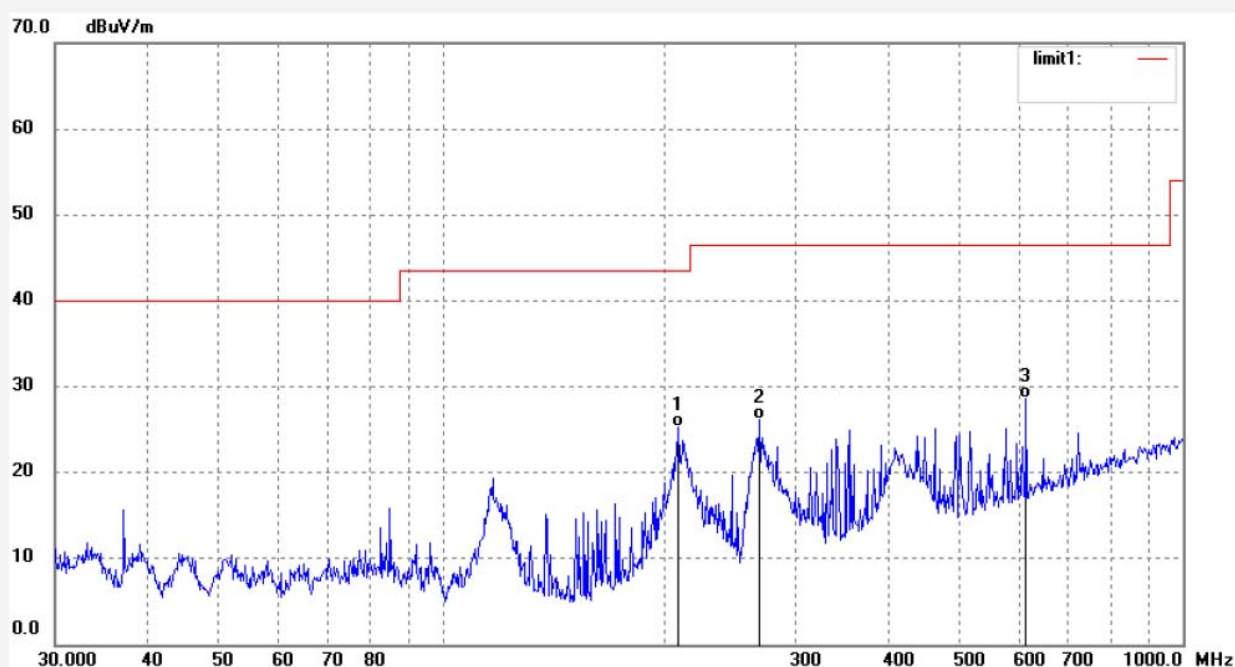

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	208.5803	45.33	-20.03	25.30	43.50	-18.20	QP			
2	268.4853	44.94	-18.74	26.20	46.50	-20.30	QP			
3	614.2142	39.99	-11.38	28.61	46.50	-17.89	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #142

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2480MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/25/01

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

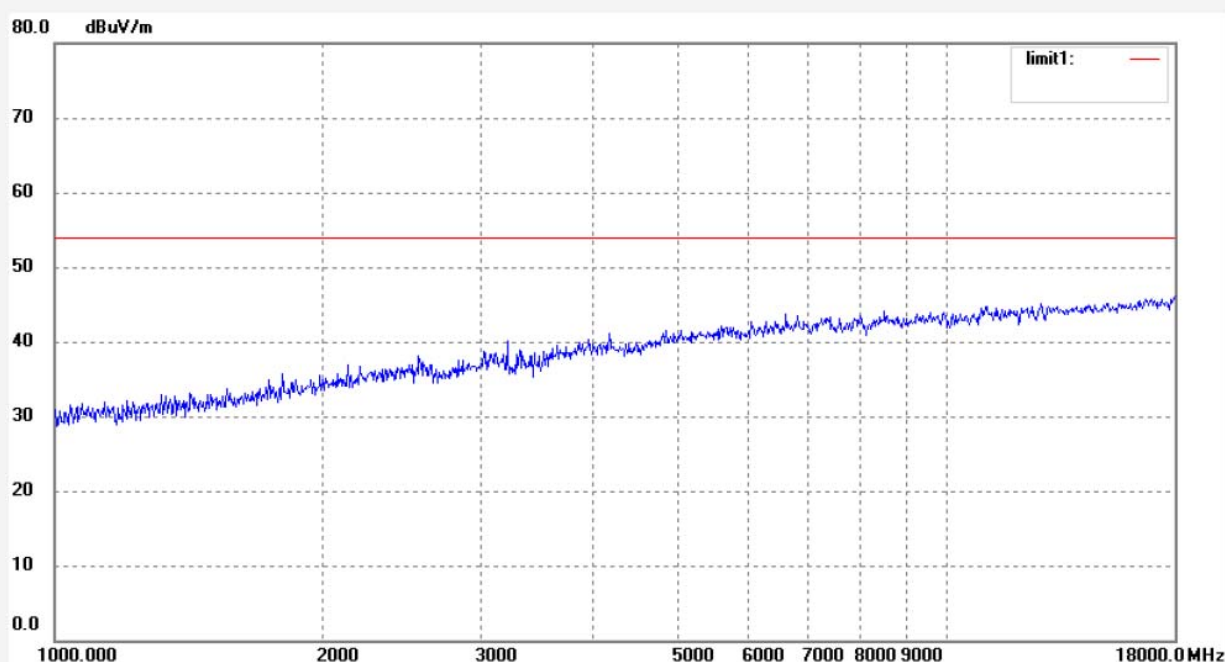

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR_tmp #144	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 13/06/29/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 11/29/01
EUT: Bluetooth speaker	Engineer Signature: STAR
Mode: TX 2480MHz	Distance: 3m
Model: TB-BTS10	
Manufacturer: Dolphin	

Note: Report No.:ATE20131374

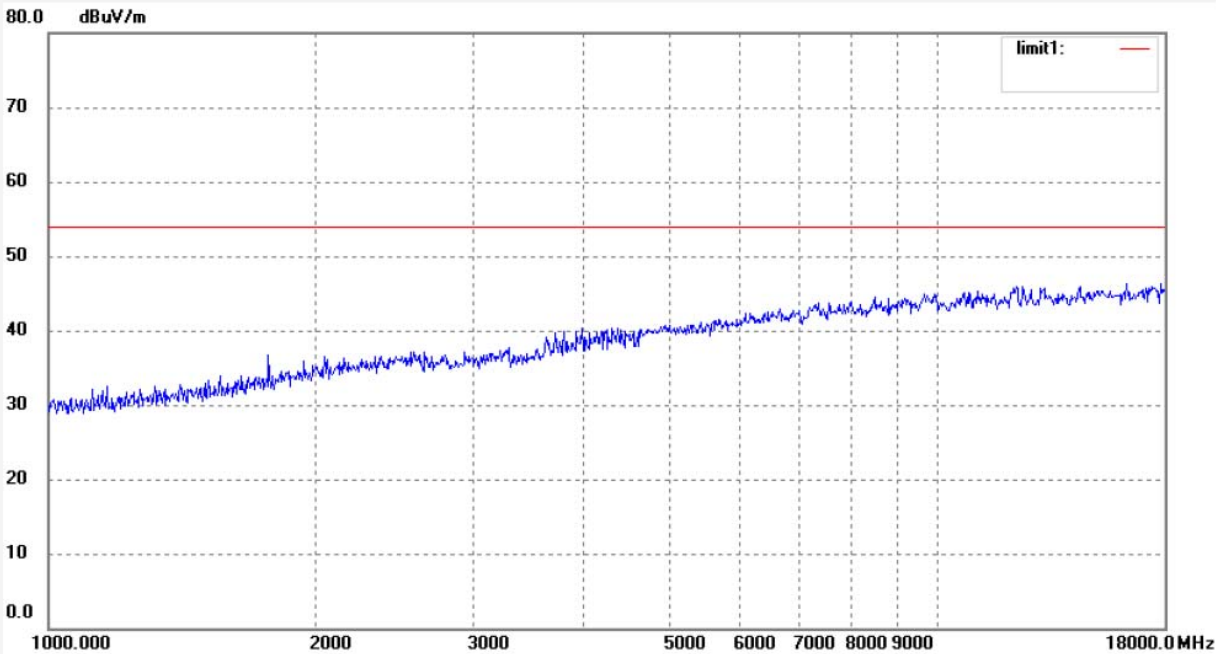

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #149

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth speaker

Mode: TX 2480MHz

Model: TB-BTS10

Manufacturer: Dolphin

Polarization: Vertical

Power Source: DC 3.7V


Date: 13/06/29/

Time: 11/47/49

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20131374

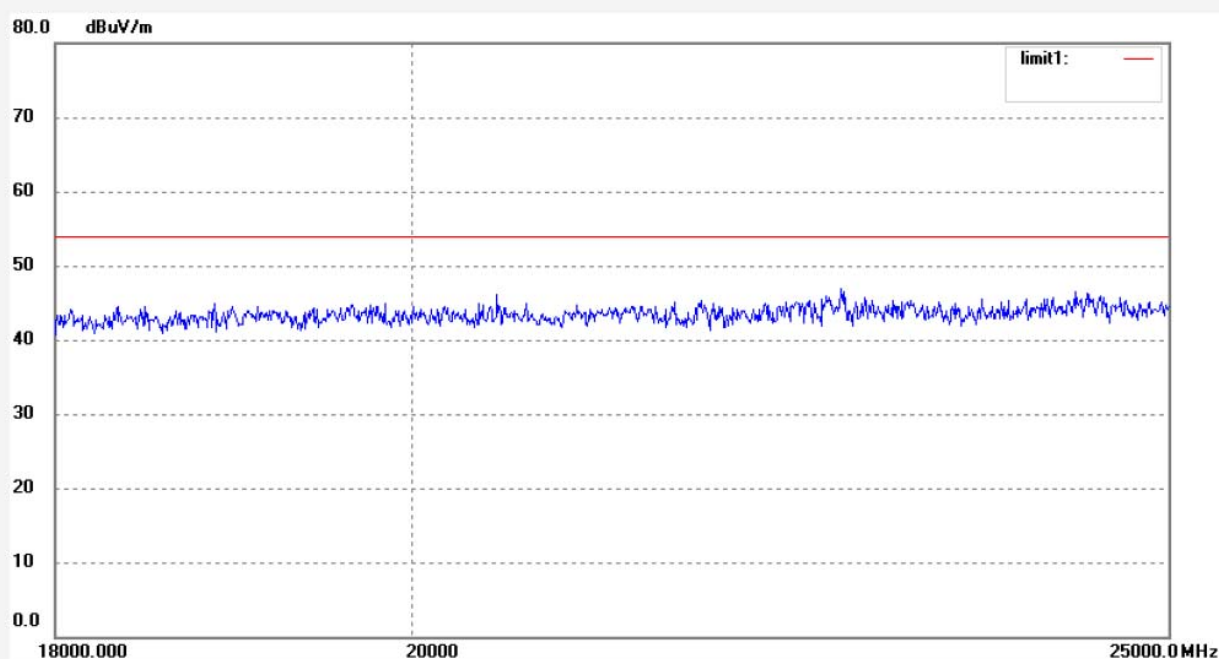

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR_tmp #150
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Bluetooth speaker
Mode: TX 2480MHz
Model: TB-BTS10
Manufacturer: Dolphin

Polarization: Horizontal
Power Source: DC 3.7V
Date: 13/06/29/
Time: 11/50/43
Engineer Signature: STAR
Distance: 3m


Note: Report No.:ATE20131374

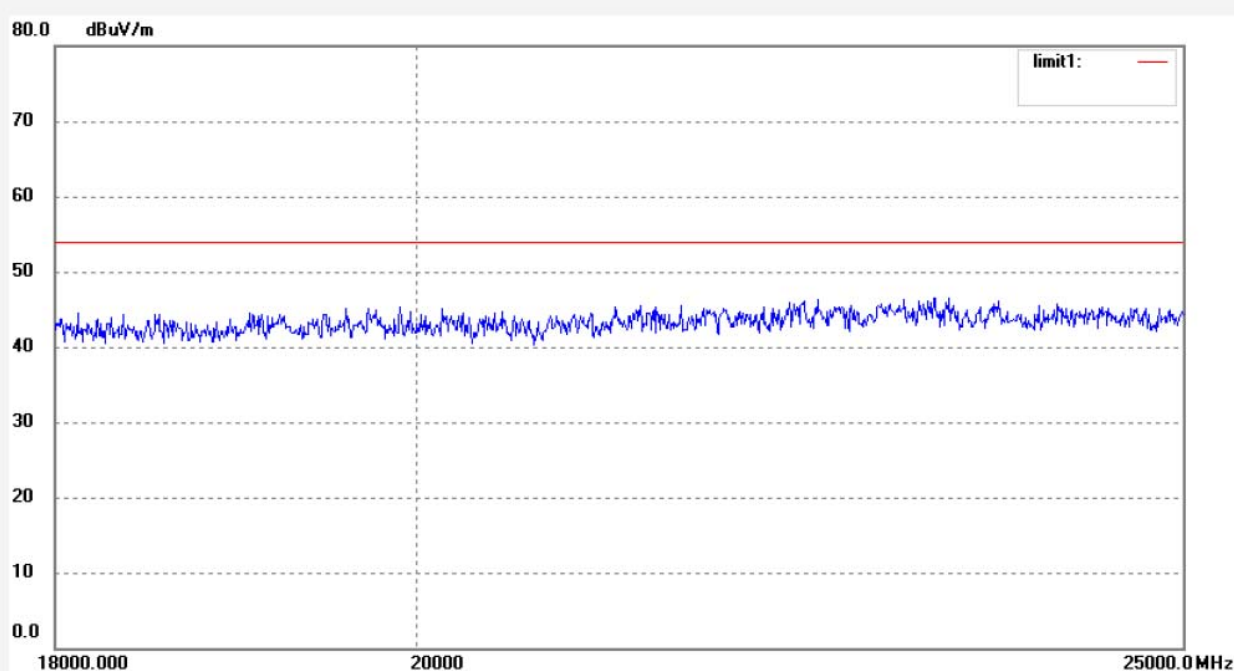

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

12.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

12.1.Block Diagram of Test Setup



(EUT: Bluetooth speaker)

12.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

12.3.EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.3.1.Bluetooth speaker (EUT)

Model Number	:	TB-BTS10
Serial Number	:	N/A
Manufacturer	:	Shenzhen Dolphin Electronic Co., Ltd

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 12.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

12.5.Test Procedure

12.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

12.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


12.5.3.The Conducted Spurious Emission was measured and recorded.

12.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


"Spectrum analyzer" is [Agilent](#)
TX 2402GHz (30MHz-1GHz)

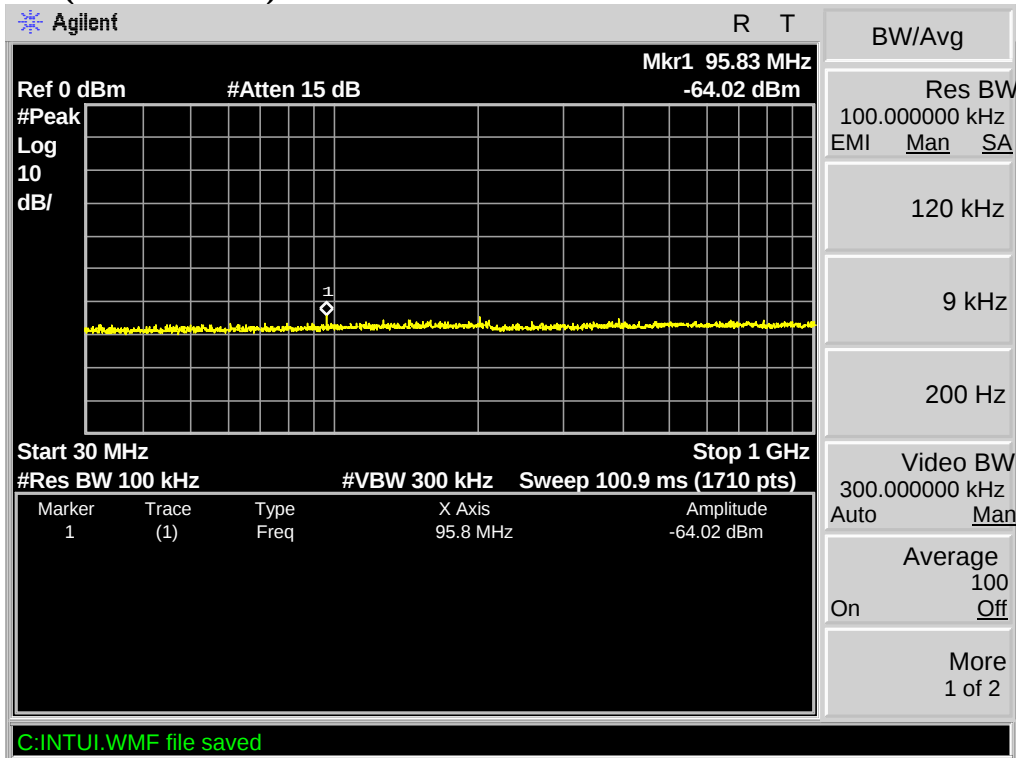


(1GHz-25GHz)

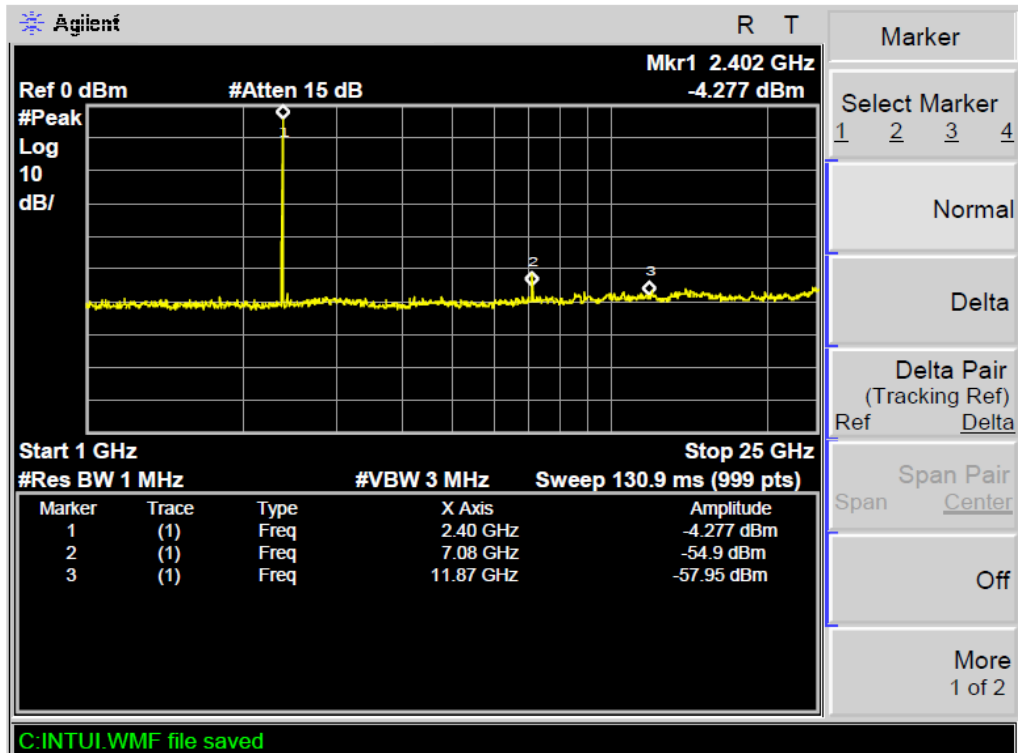


TX 2441GHz (30MHz-1GHz)

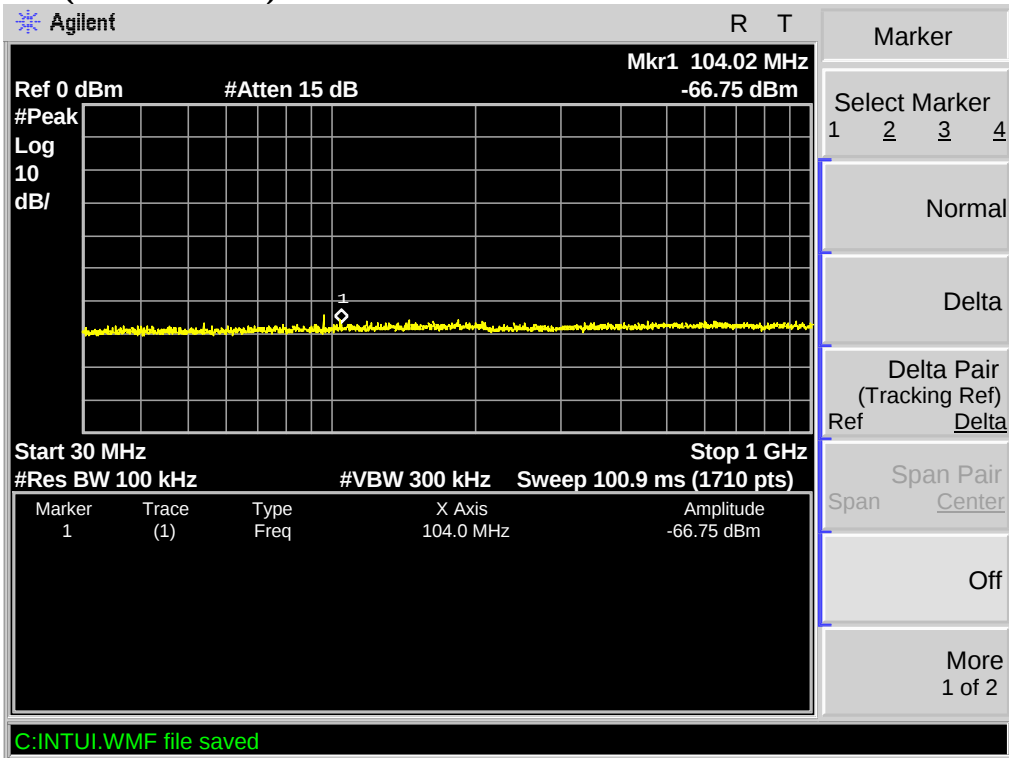


(1GHz-25GHz)

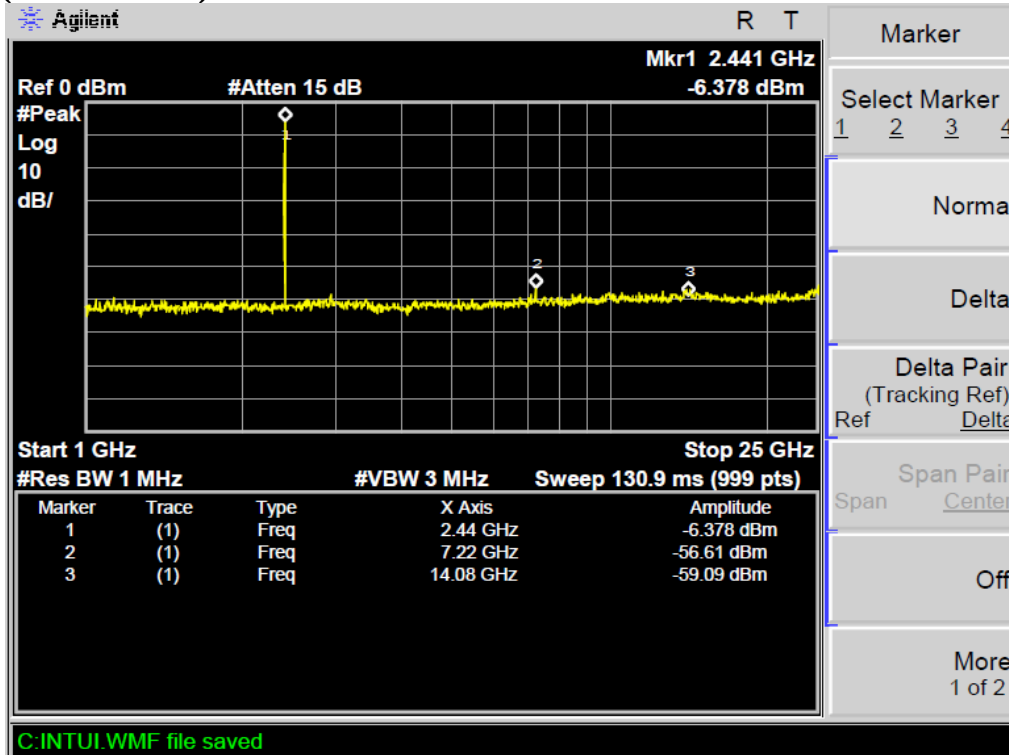

TX 2480GHz (30MHz-1GHz)

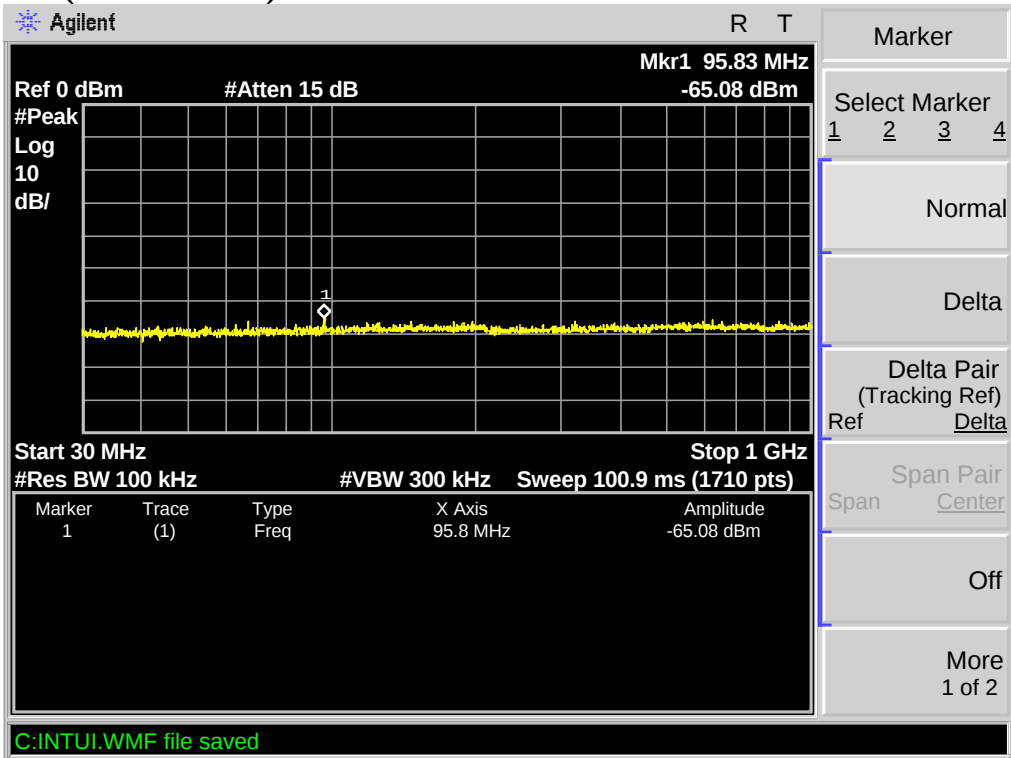

(1GHz-25GHz)

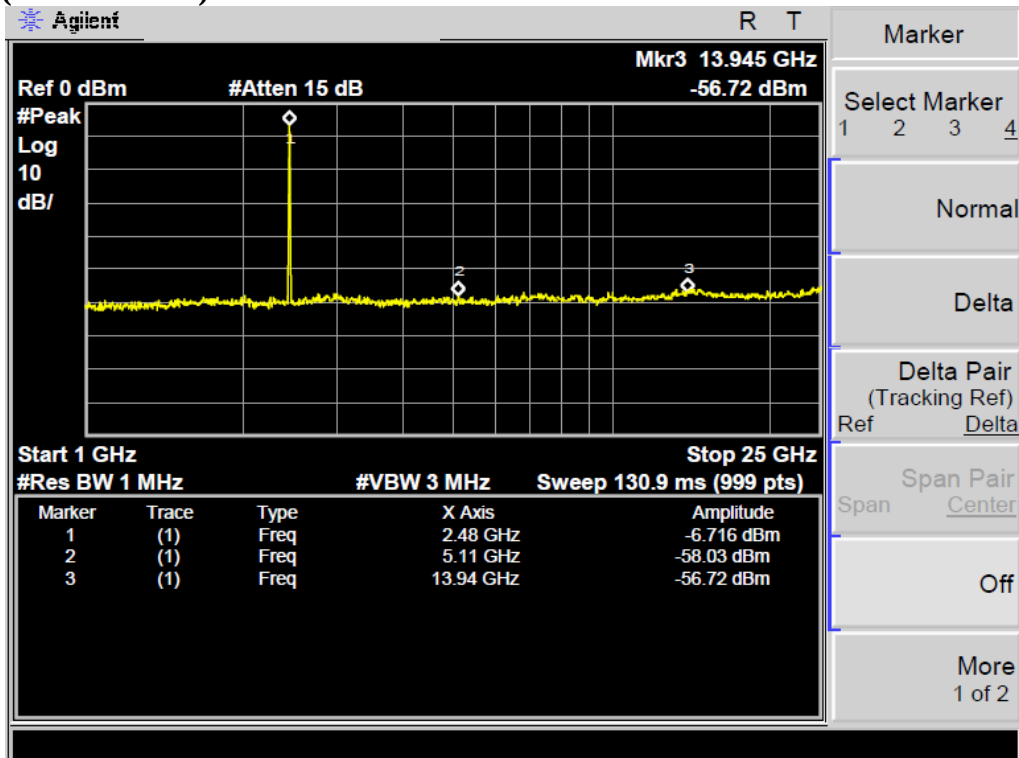

13.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)


13.1.Block Diagram of Test Setup

13.1.1.Block diagram of connection between the EUT and simulators



(EUT: Bluetooth speaker)

13.1.2.Shielding Room Test Setup Diagram

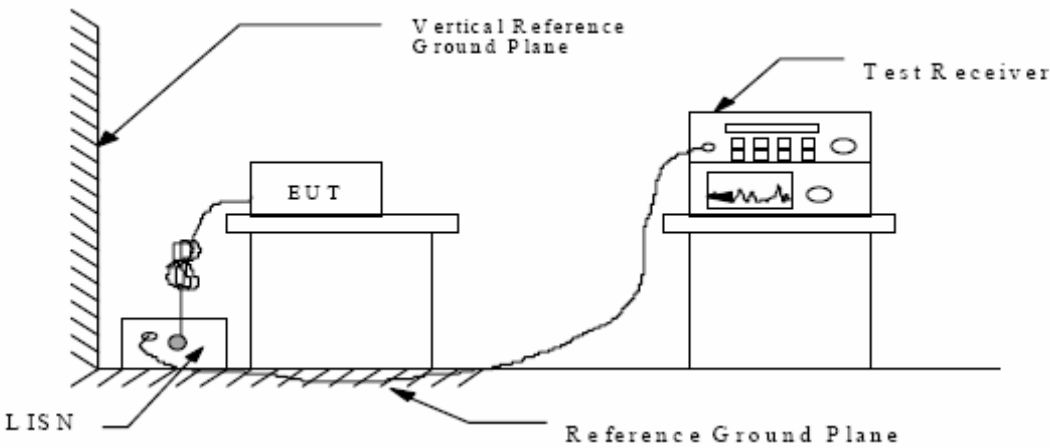

(EUT: Bluetooth speaker)

13.2.The Emission Limit

13.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

13.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

13.3.1. Bluetooth speaker (EUT)

Model Number : TB-BTS10
Serial Number : N/A
Manufacturer : Shenzhen Dolphin Electronic Co., Ltd

13.4. Operating Condition of EUT

13.4.1. Setup the EUT and simulator as shown as Section 13.1.

13.4.2. Turn on the power of all equipment.

13.4.3. Let the EUT work in (Charging + Tx) mode measure it.

13.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

13.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>June 27, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Bluetooth speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>TB-BTS10</u>	Power Supply:	<u>AC 120V/ 60Hz</u>
Test Mode:	<u>Charging + Tx</u>	Test Engineer:	<u>Kai</u>

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.175269	53.40	65	-11.3	QP	Neutral
0.304059	41.30	60	-18.8	QP	
3.256746	37.40	56	-18.6	QP	
0.175269	39.90	55	-14.8	AV	
0.301641	27.00	50	-23.2	AV	
2.532561	30.60	46	-15.4	AV	
0.173183	52.10	65	-12.7	QP	Live
0.239296	43.20	62	-18.9	QP	
3.349036	37.90	56	-18.1	QP	
0.174571	40.10	55	-14.6	AV	
0.239296	32.60	52	-19.5	AV	
2.743053	31.70	46	-14.3	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Bluetooth Speaker M/N:TB-BTS10
 Manufacturer: Dolphin
 Operating Condition: Charging+TX
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20131374
 Start of Test: 6/27/2013 / 3:09:17PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

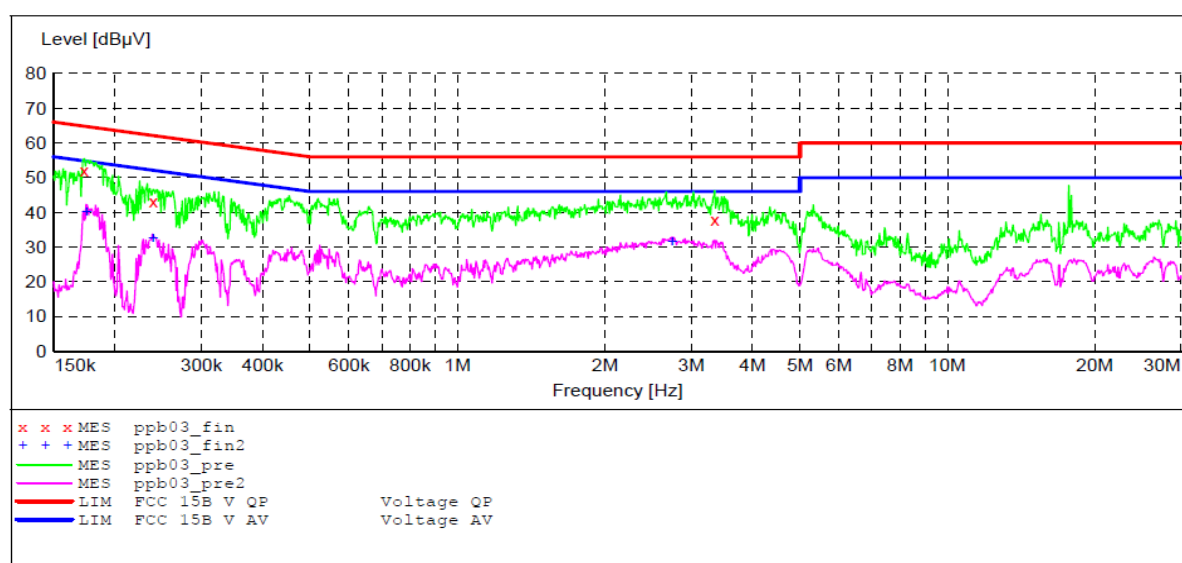**MEASUREMENT RESULT: "ppb03_fin"**

6/27/2013 3:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.173183	52.10	11.6	65	12.7	QP	L1	GND
0.239296	43.20	11.9	62	18.9	QP	L1	GND
3.349036	37.90	12.3	56	18.1	QP	L1	GND

MEASUREMENT RESULT: "ppb03_fin2"

6/27/2013 3:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174571	40.10	11.6	55	14.6	AV	L1	GND
0.239296	32.60	11.9	52	19.5	AV	L1	GND
2.743053	31.70	12.3	46	14.3	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Bluetooth Speaker M/N:TB-BTS10
 Manufacturer: Dolphin
 Operating Condition: Charging+TX
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20131374
 Start of Test: 6/27/2013 / 3:15:00PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

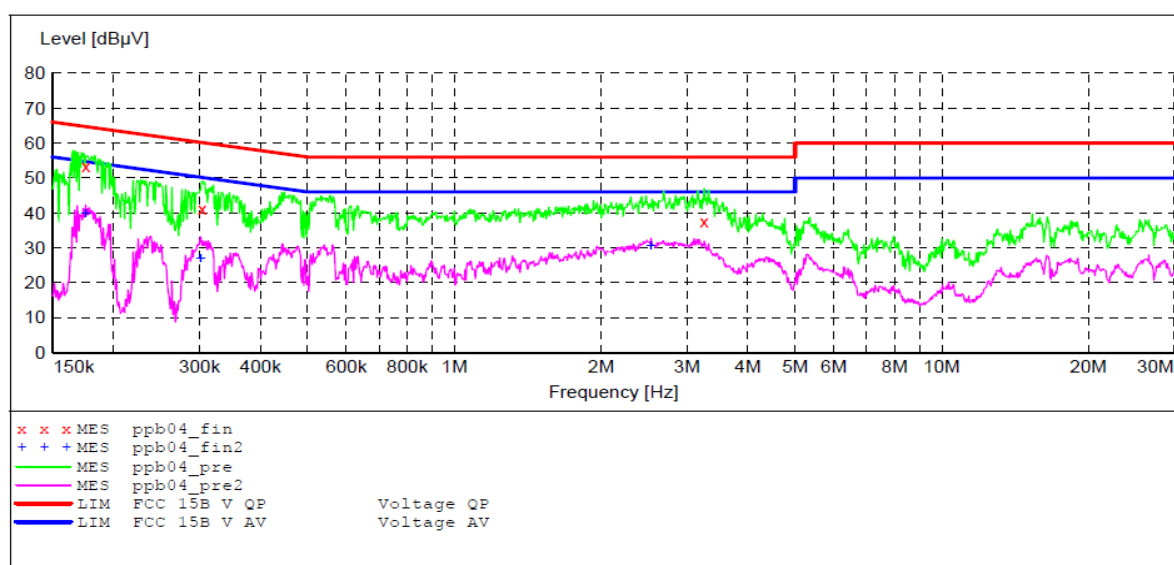**MEASUREMENT RESULT: "ppb04_fin"**

6/27/2013 3:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.175269	53.40	11.6	65	11.3	QP	N	GND
0.304059	41.30	12.1	60	18.8	QP	N	GND
3.256746	37.40	12.3	56	18.6	QP	N	GND

MEASUREMENT RESULT: "ppb04_fin2"

6/27/2013 3:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.175269	39.90	11.6	55	14.8	AV	N	GND
0.301641	27.00	12.1	50	23.2	AV	N	GND
2.532561	30.60	12.4	46	15.4	AV	N	GND


14.ANTENNA REQUIREMENT

14.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

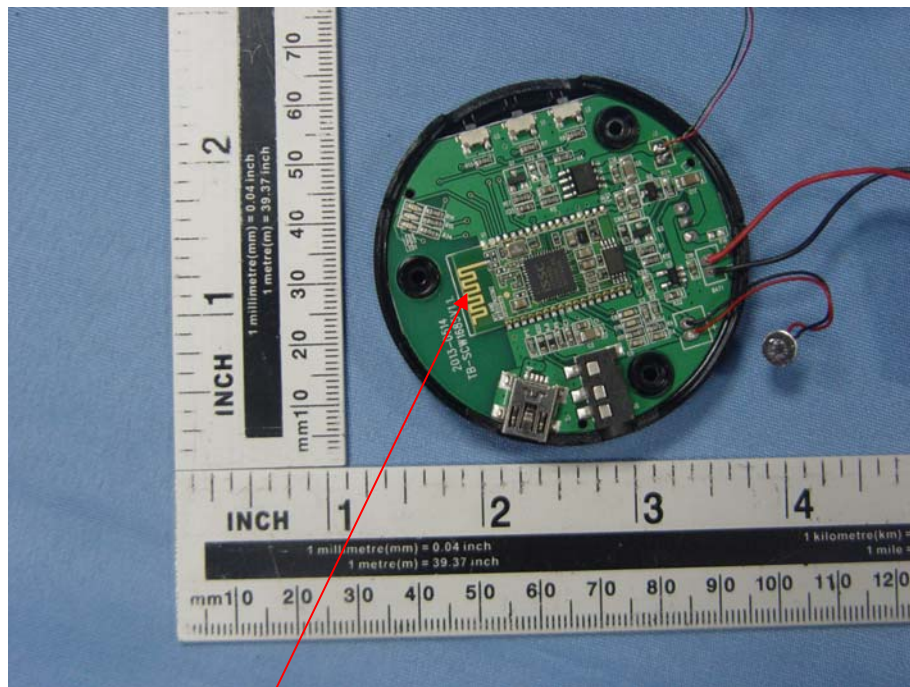

Antenna