

**CETECOM™****CETECOM ICT Services**  
consulting - testing - certification >>>

## TEST REPORT

**Test report no.: 1-5518/12-01-06-B****DAkkS**  
Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / GermanyPhone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing:  
Radio Communications & Compatibility Testing (RCT)

### Applicant

**Game Technologies S.A.**ul. Plac W. Andersa 3  
61-894 Poznan / POLANDPhone: -/-  
Fax: -/-  
Contact: Michal Bak  
e-mail: [michal.bak@game-technologies.com](mailto:michal.bak@game-technologies.com)  
Phone: +48 721 07 00 07

### Manufacturer

**Game Technologies S.A.**ul. Plac W. Andersa 3  
61-894 Poznan / POLAND**47 CFR Part 15**

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

**RSS - 210 Issue 8**

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item


**Kind of test item:** Wireless controller**Model name:** D60B1**FCC ID:** 2AANB1009180183**IC:** 11254A-1009180183Frequency: DTS band 2400 MHz to 2483.5 MHz  
(lowest channel 00 – 2402 MHz;  
highest channel 39 – 2480 MHz)

Technology tested: Bluetooth®, LE

Antenna: Integrated antenna

Power supply: 3.7 V DC by battery

Temperature range: +5°C to +35°C

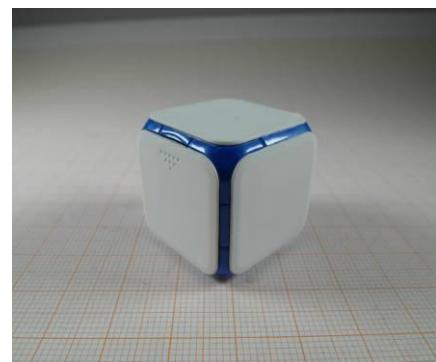

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**Test report authorised:**Tobias Wittenmeier  
Expert**Test performed:**Marco Bertolino  
Testing Manager

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
3	Test standard/s .....	3
4	Test environment.....	4
5	Test item.....	4
5.1	Additional information .....	4
6	Test laboratories sub-contracted .....	4
7	Description of the test setup .....	5
7.1	Radiated measurements chamber F.....	5
7.2	Radiated measurements chamber C .....	6
7.3	Radiated measurements 12.75 GHz to 26 GHz .....	7
7.4	AC conducted .....	8
7.5	Conducted measurements .....	9
8	Summary of measurement results .....	10
9	Additional comments .....	11
10	RSP100 test report cover sheet / performance test data .....	12
11	Measurement results .....	13
11.1	Antenna gain .....	13
11.2	Power spectral density.....	14
11.3	Carrier frequency separation.....	17
11.4	Number of hopping channels .....	19
11.5	Time of occupancy (dwell time).....	21
11.6	Spectrum bandwidth of a FHSS system – 6 dB bandwidth.....	22
11.7	Spectrum bandwidth of a FHSS system – 20 dB bandwidth.....	25
11.8	Maximum output power.....	28
11.9	Band edge compliance conducted .....	31
11.10	Band edge compliance radiated.....	33
11.11	TX spurious emissions conducted .....	35
11.12	TX spurious emissions radiated.....	38
11.13	RX spurious emissions radiated .....	49
11.14	Spurious emissions radiated < 30 MHz .....	53
11.15	Spurious emissions conducted < 30 MHz .....	55
12	Test equipment and ancillaries used for tests .....	58
13	Observations .....	59
Annex A	Document history .....	60
Annex B	Further information.....	60
Annex C	Accreditation Certificate .....	61

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2013-07-15
Date of receipt of test item:	2013-10-07
Start of test:	2013-10-07
End of test:	2013-10-11
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	01.10.2012	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 8	01.12.2010	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

## 4 Test environment

Temperature:	$T_{\text{nom}}$	+22 °C during room temperature tests
	$T_{\text{max}}$	+35 °C during high temperature tests
	$T_{\text{min}}$	+5 °C during low temperature tests
Relative humidity content:		+60 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	$V_{\text{nom}}$	3.7 V DC by battery
	$V_{\text{max}}$	4.2 V
	$V_{\text{min}}$	3.0 V

## 5 Test item

Kind of test item	:	Wireless controller
Type identification	:	D60B1
S/N serial number	:	No information available!
HW hardware status	:	1.1
SW software status	:	1.1.5
Frequency band [MHz]	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 00 – 2402 MHz; highest channel 39 – 2480 MHz)
Type of radio transmission	:	FHSS
Use of frequency spectrum	:	
Type of modulation	:	GFSK
Number of channels	:	40
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by battery
Temperature range	:	+5°C to +35 °C

### 5.1 Additional information

Test setup- and EUT-photos are included in test reports: 1-5518/12-01-01-AnnexA  
 1-5518/12-01-01-AnnexB  
 1-5518/12-01-01-AnnexD


## 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

### 7.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

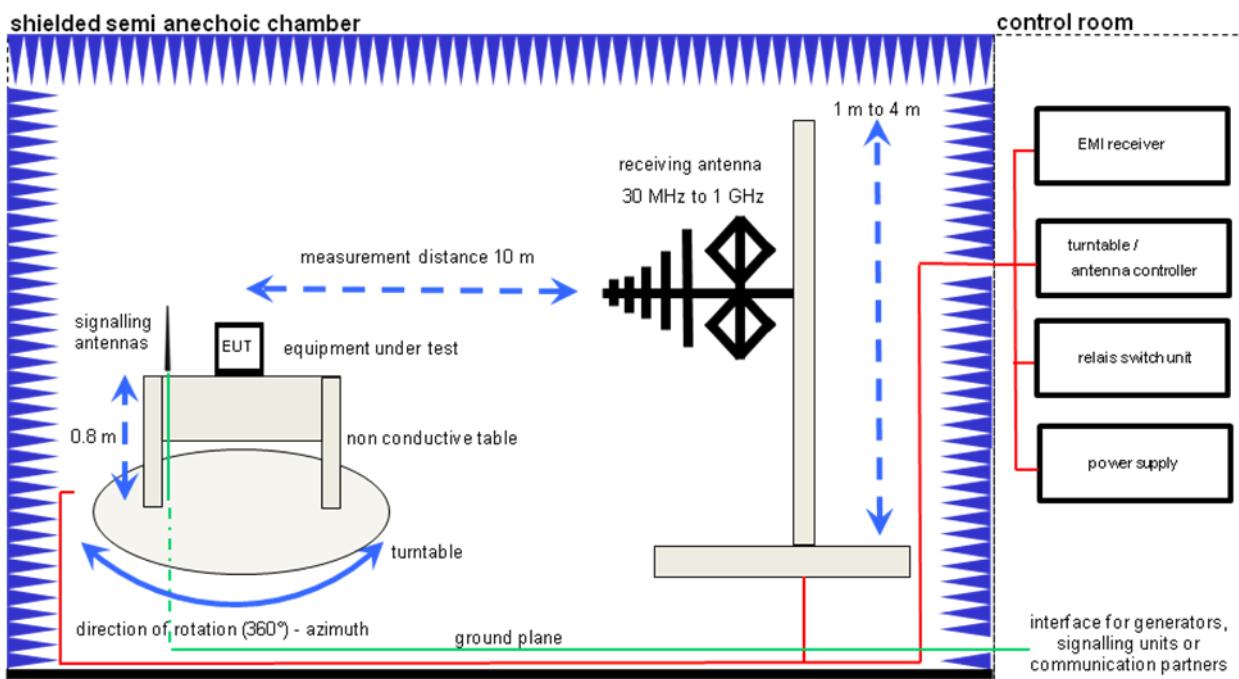

#### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60V/dc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

## 7.2 Radiated measurements chamber C

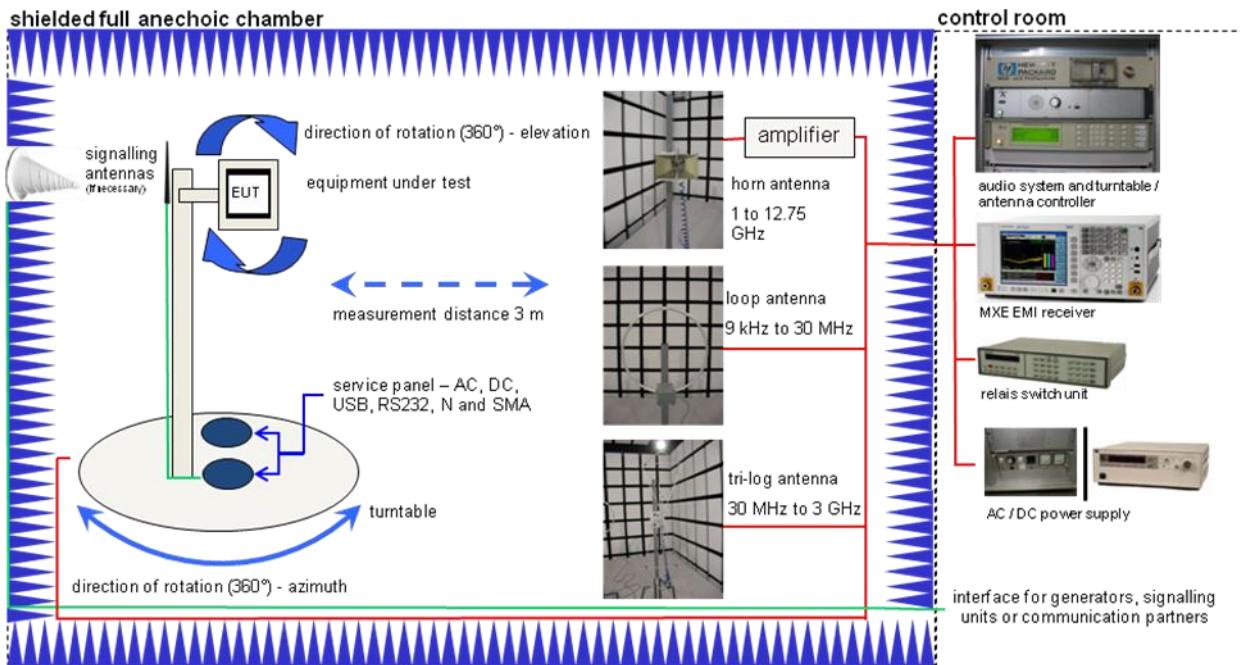

### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26.5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516


### 7.3 Radiated measurements 12.75 GHz to 26 GHz



#### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516


## 7.4 AC conducted

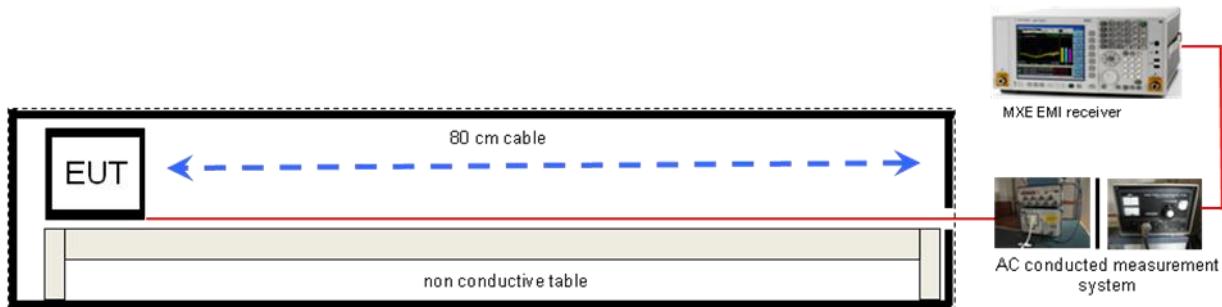

### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrnntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

## 7.5 Conducted measurements

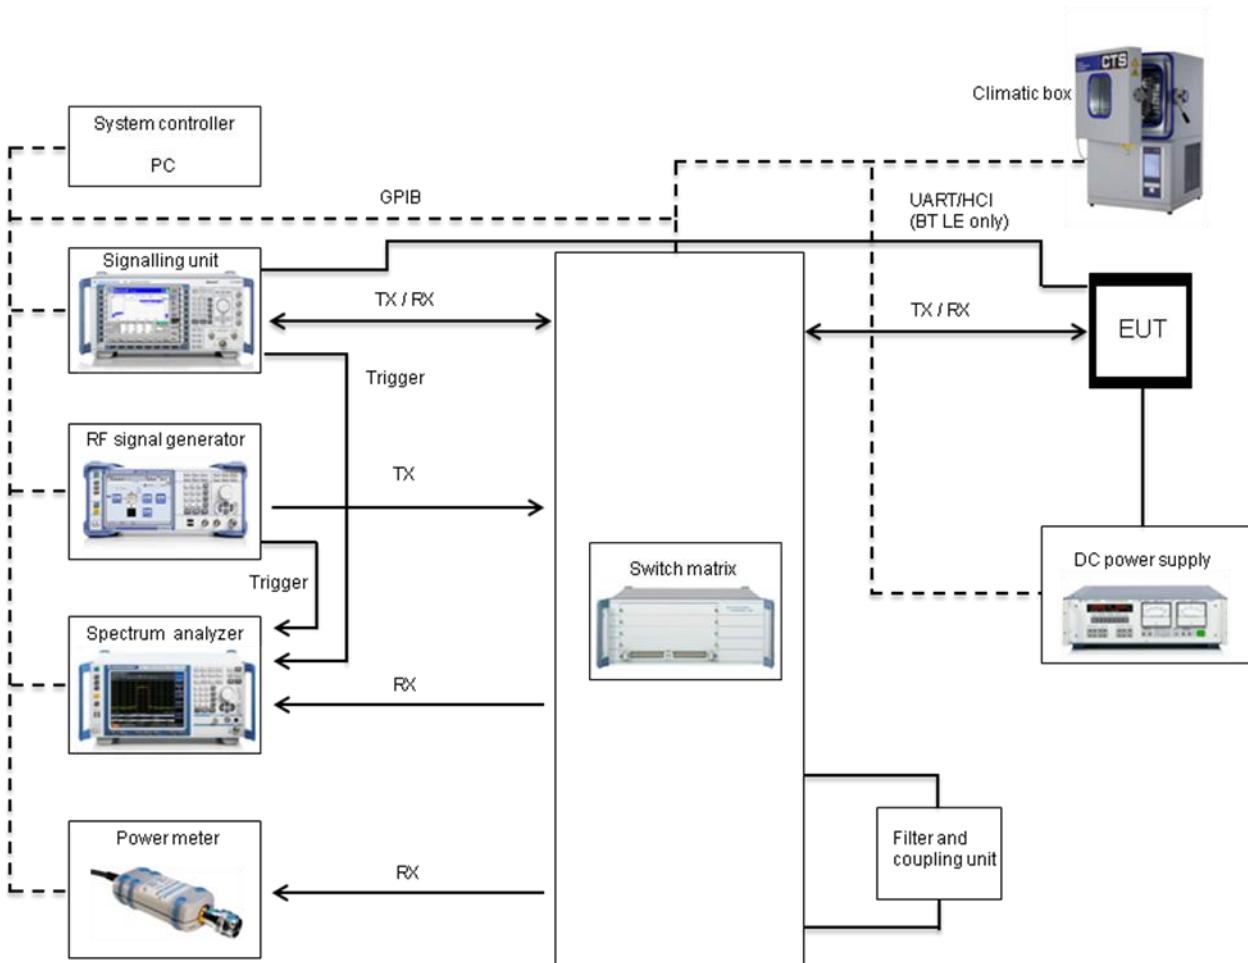

### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch / Control Unit	3488A	HP Meßtechnik		300001691
Power Supply DC	NGPE 40/40	R&S	388	400000078
DC-Blocker	8143	Inmet Corp.	none	300002842
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35	R&S	100185	300003416
Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575

## 8 Summary of measurement results



**No deviations from the technical specifications were ascertained**



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2013-12-02	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210 / A8.1(b)	Carrier frequency separation	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210 / A8.1(d)	Number of hopping channels	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) (iii) RSS 210 / A8.3(1)	Time of occupancy (dwell time)	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 6 dB bandwidth	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210	Spectrum bandwidth of a FHSS system 20 dB bandwidth	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1) RSS-210 / A8.4(2)	Maximum output power	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

**Note:** NA = Not Applicable; NP = Not Performed

## 9 Additional comments

The Bluetooth® word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by Cetecom ICT Services GmbH is under license.

Reference documents: None

Special test descriptions: None

Configuration descriptions: TX tests: were performed with LE packets (37 byte payload) and static PRBS pattern.  
RX/Standby tests: BT enabled, TX Idle

Test mode:

- Bluetooth LE Test mode enabled  
(EUT is controlled over CBT)
- Special software is used.  
EUT is transmitting pseudo random data by itself

## 10 RSP100 test report cover sheet / performance test data

<b>Test report number</b>	:	1-5518/12-01-06-B
<b>Equipment model number</b>	:	D60B1
<b>Certification number</b>	:	11254A-1009180183
<b>Manufacturer (complete address)</b>	:	Game Technologies S.A. ul. Plac W. Andersa 3 61-894 Poznan / POLAND
<b>Tested to radio standards specification no.</b>	:	RSS 210, Issue 8, Annex 8
<b>Open area test site IC No.</b>	:	IC 3462C-1
<b>Frequency range</b>	:	lowest channel 2402 MHz, highest channel 2480 MHz
<b>RF-power [mW] (max.)</b>	:	Cond.: 1.99 mW (GFSK modulation) EIRP: 0.42 mW (GFSK modulation)
<b>Occupied bandwidth (99%-BW) [kHz]</b>	:	1138 (GFSK modulation)
<b>Type of modulation</b>	:	GFSK
<b>Emission designator (TRC-43)</b>	:	1M14FXD (GFSK modulation)
<b>Antenna information</b>	:	Integrated chip antenna
<b>Transmitter spurious (worst case)</b>	:	49.5 dB $\mu$ V/m @ 4804 MHz @ 3 m (Peak)

**ATTESTATION:**

## **DECLARATION OF COMPLIANCE:**

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

### Laboratory manager:

2013-12-02 Marco Bertolino  
Date Name Signature

## 11 Measurement results

### 11.1 Antenna gain

#### Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth® devices, the GFSK modulation is used.

#### Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max hold

#### Limits:

FCC	IC
Antenna Gain	
6 dBi	

#### Results:

$T_{\text{nom}}$	$V_{\text{nom}}$	lowest channel 2402 MHz	middle channel 2440 MHz	highest channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		2.99	2.78	2.98
Radiated power [dBm] Measured with GFSK modulation		-3.78	-4.90	-4.48
Gain [dBi] Calculated		-6.77	-7.68	-7.46

**Result: Passed**

## 11.2 Power spectral density

### Description:

Measurement of the power spectral density of a digital modulated system.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 kHz
Video bandwidth:	3 kHz
Span:	$\geq$ EBW
Trace-Mode:	Max Hold

### Limits:


FCC	IC
Power Spectral Density	
For digitally modulated systems the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	

### Results:


Modulation	Power spectral density		
	2402 MHz	2440 MHz	2480 MHz
[dBm / 3kHz]	-11.83	-12.48	-11.98
Measurement uncertainty	$\pm 1.5$ dB		

## Plots:

### Plot 1: lowest channel

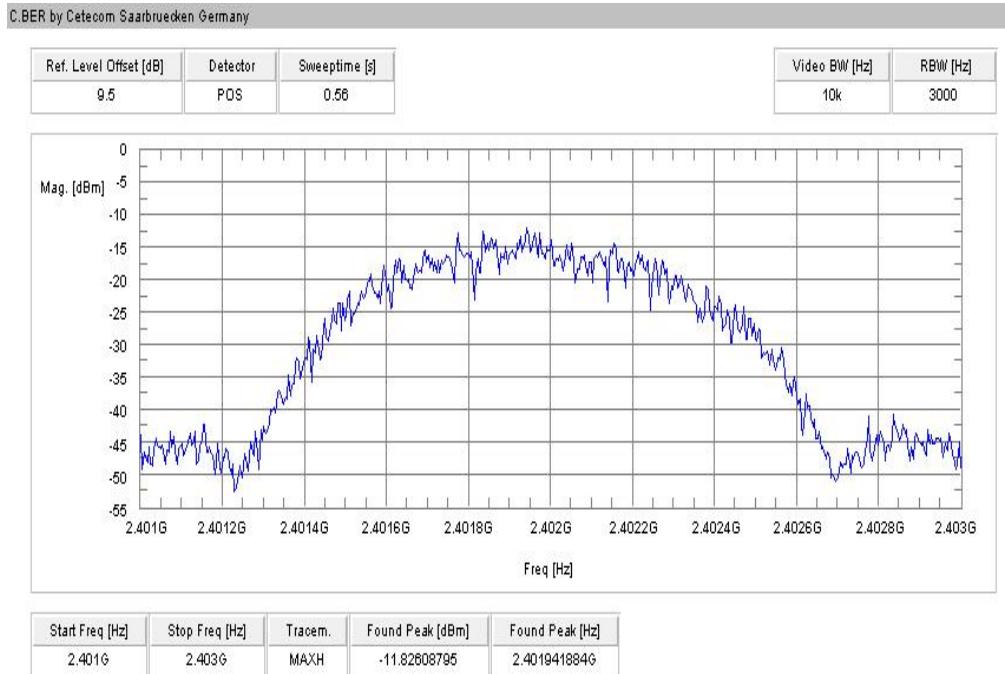


### Plot 2: mid channel

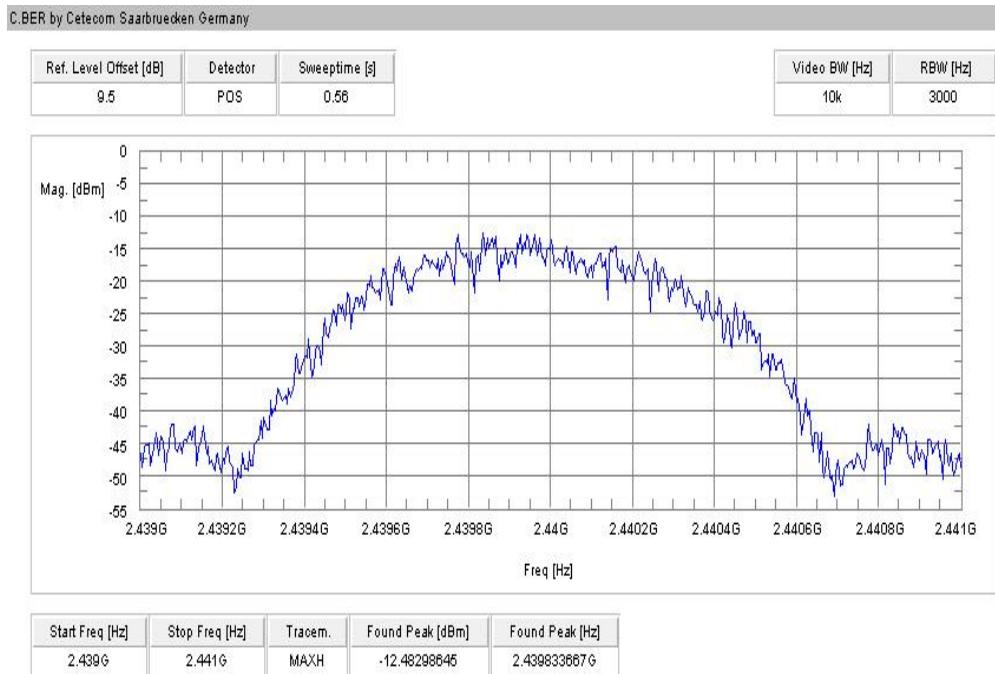

**Plot 3: highest channel**

C.BER by Cetecom Saarbruecken Germany

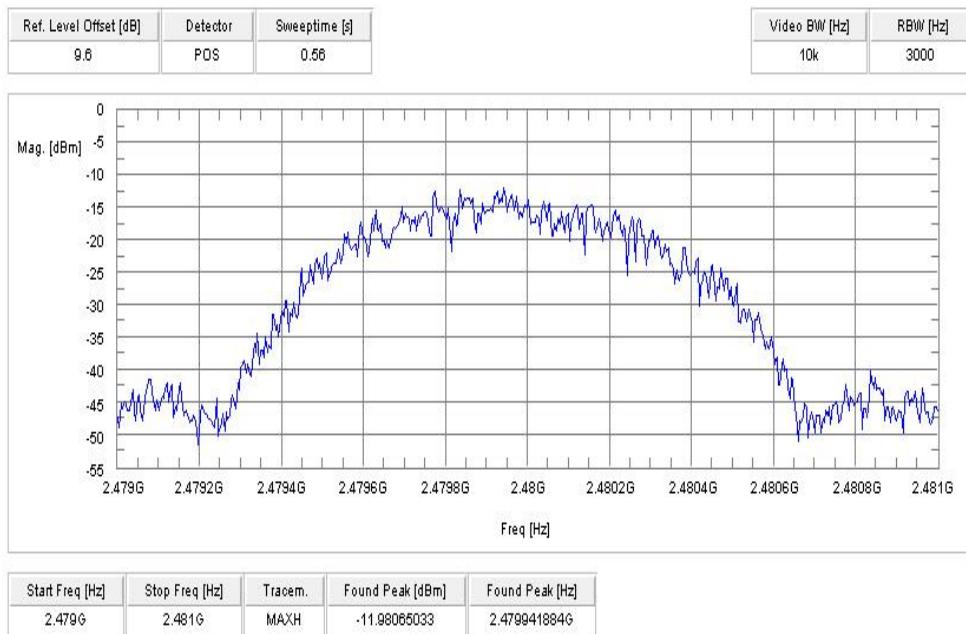

### 11.3 Carrier frequency separation

#### Description:

Measurement of the carrier frequency separation of a hopping system. We use GFSK modulation to show compliance. EUT in hopping mode.

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	100 kHz
Span:	4 MHz
Trace-Mode:	Max Hold


#### Limits:

FCC	IC
Carrier Frequency Separation	
Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater.	

#### Result:

Carrier frequency separation	~ 2 MHz
------------------------------	---------

**Result: Passed**

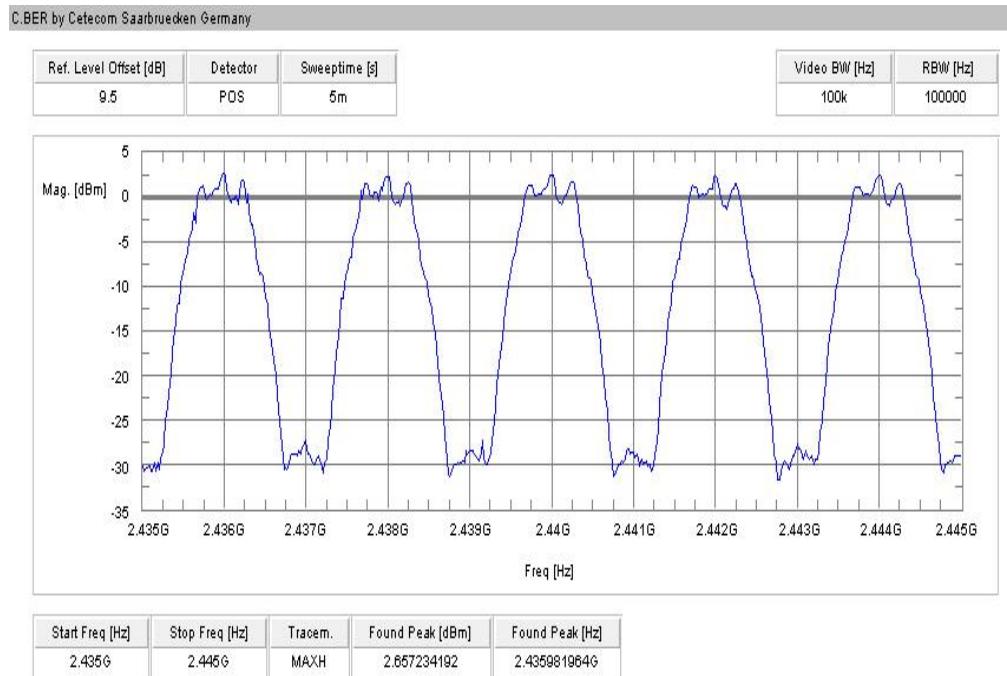**Plot:****Plot 1: Carrier Frequency Separation**

## 11.4 Number of hopping channels

### Description:

Measurement of the total number of used hopping channels. The number of hopping channels is constant for all modulation-modes. We use GFSK modulation to show compliance. EUT in hopping mode.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	500 kHz
Video bandwidth:	500 kHz
Span:	Plot 1: 2400 – 2445 MHz Plot 2: 2445 – 2485 MHz
Trace-Mode:	Max Hold


### Limits:

FCC	IC
Number of hopping channels	
At least 15 non overlapping hopping channels	

### Result:

Number of hopping channels	40
----------------------------	----

**Result:** **Passed**

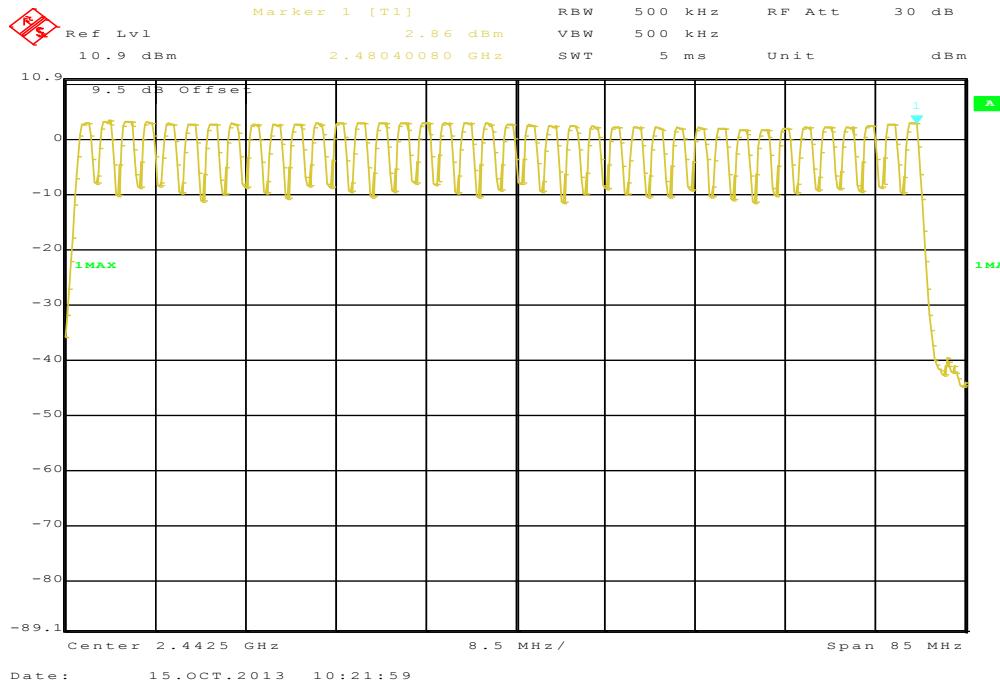**Plots:****Plot 1: Number of hopping channels**

## 11.5 Time of occupancy (dwell time)

### Measurement:

Measuring/calculation of the pulse width in data transmit mode on one hopping channel for a Bluetooth® LE device.

### Measurement parameters:

Detector: Peak  
 Video bandwidth: 1 MHz  
 Resolution bandwidth: 1 MHz  
 Span: Zero Span  
 Trace: Video triggered

### For Bluetooth® LE devices:

Time slot length:	625us
Number of channels:	40
Number of time slots per second:	1600/s
Max. number of transmissions per channel in 1 s:	1600/s / 40 = 40
Max. number of transmissions per channel in 16 s:	40 × 16 = 640
Period:	Number of channels × 0.4s = 16s

Under normal test conditions only


400 ms within in a period

### Results:

Dwell time = standard test packet pulse width\*) × number of transmission per channel in 15.6 seconds

Packet type	standard test packet pulse width [ms]	number of hops in 16 sec	calculated dwell time [ms]
Data Transmit mode	0.376	640	241

\*) For Bluetooth® LE devices no measurements are mandatory due to the fixed requirements of the Bluetooth® Core Specification. The standard test packet is defined as:

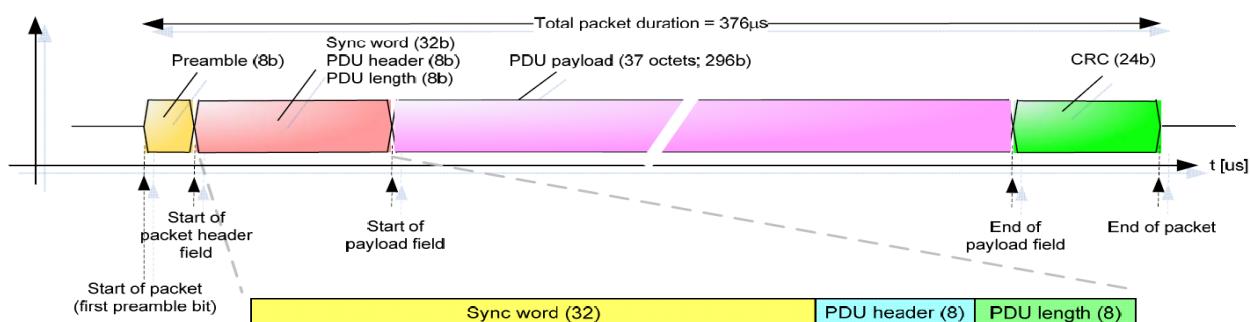

**Result: Passed**

## 11.6 Spectrum bandwidth of a FHSS system – 6 dB bandwidth

### Description:

Measurement of the 6 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	2 s
Resolution bandwidth:	20 kHz
Video bandwidth:	100 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
Spectrum bandwidth of a FHSS system – 6 dB bandwidth	
> 500 kHz	

### Results:

Modulation	6 dB BANDWIDTH [kHz]		
	2402 MHz	2440 MHz	2480 MHz
GFSK	649	637	643
Measurement uncertainty	± 20 kHz		

**Result:** Passed


## Plots:

### Plot 1: lowest channel



### Plot 2: mid channel

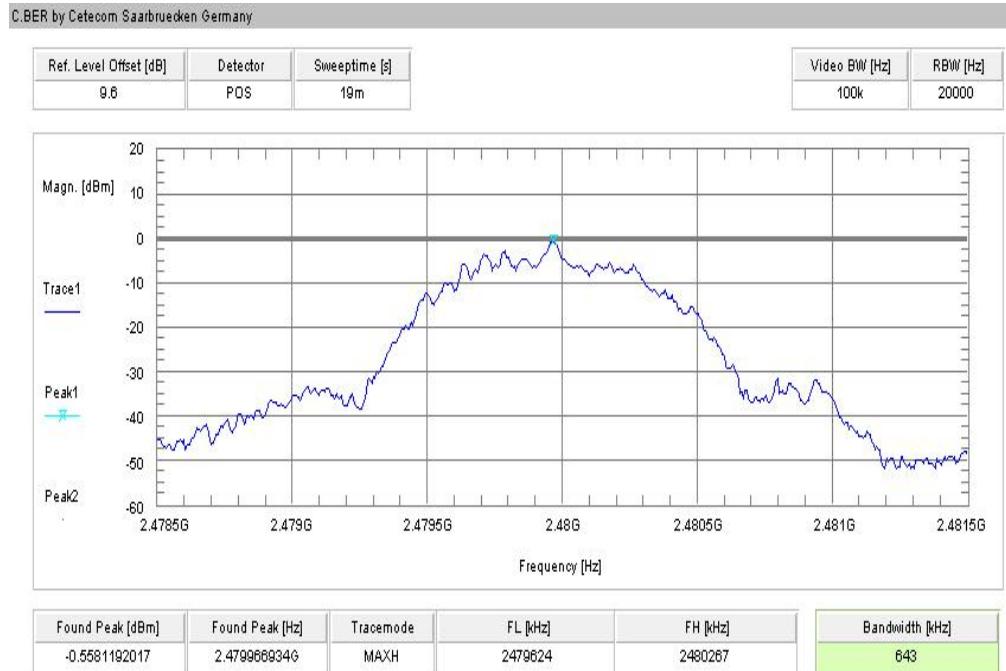

**Plot 3: highest channel**


## 11.7 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

### Description:

Measurement of the 20 dB bandwidth of the modulated signal. The measurement is performed according to the "Measurement Guidelines" (DA 00-705, March 30, 2000). EUT in single channel mode.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	2 s
Resolution bandwidth:	30 kHz
Video bandwidth:	100 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
Spectrum bandwidth of a FHSS system – 20 dB bandwidth	
Bandwidth < 3/2 * Channel spacing	

### Results:

Modulation	20 dB BANDWIDTH [kHz]		
	2402 MHz	2440 MHz	2480 MHz
GFSK	1138	1130	1114
Measurement uncertainty	± 30 kHz		

Result: **Passed**

## Plots:

### Plot 1: lowest channel



### Plot 2: mid channel



### Plot 3: highest channel



## 11.8 Maximum output power

### Description:

Measurement of the maximum output power conducted and radiated. EUT in single channel mode.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	10 MHz
Span:	6 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
Maximum output power	
[Conducted: 0.125 W – antenna gain max. 6 dBi] Systems using more than 75 hopping channels: Conducted: 1.0 W – antenna gain max. 6 dBi	

### Results:

Modulation	Maximum output power conducted [dBm]		
	2402 MHz	2440 MHz	2480 MHz
GFSK	2.99	2.78	2.98
Measurement uncertainty	± 1.5 dB		


Modulation	Maximum output power radiated - EIRP [dBm]		
	2402 MHz	2440 MHz	2480 MHz
GFSK	-3.78	-4.90	-4.48
Measurement uncertainty	± 3 dB		

\*) - Values calculated with antenna gain

**Result:** Passed


## Plots:

### Plot 1: lowest channel

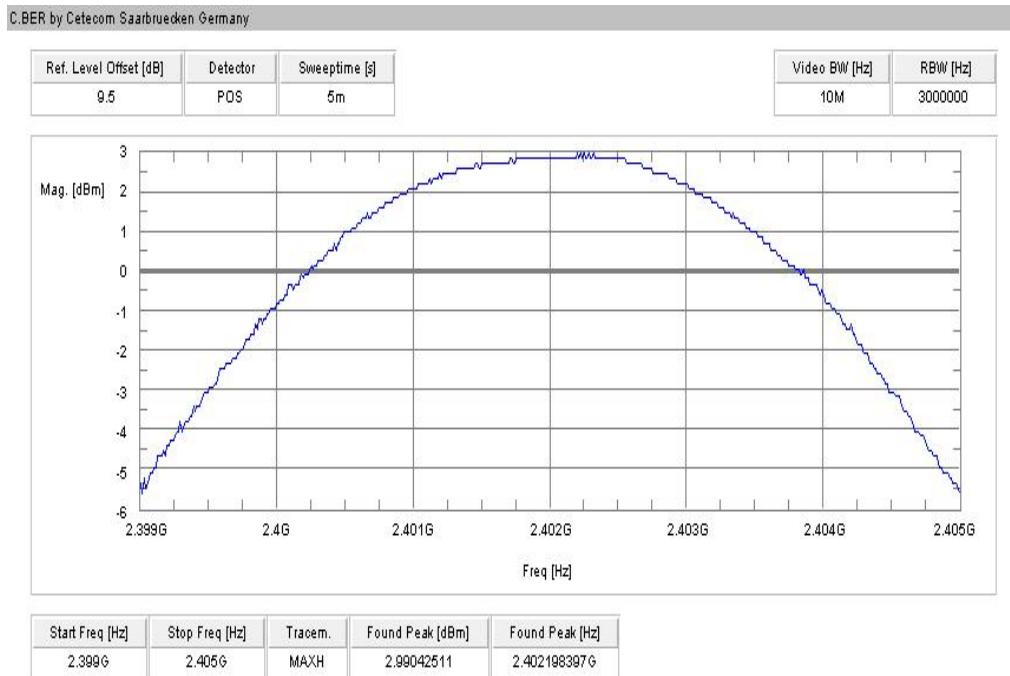

### Plot 2: mid channel

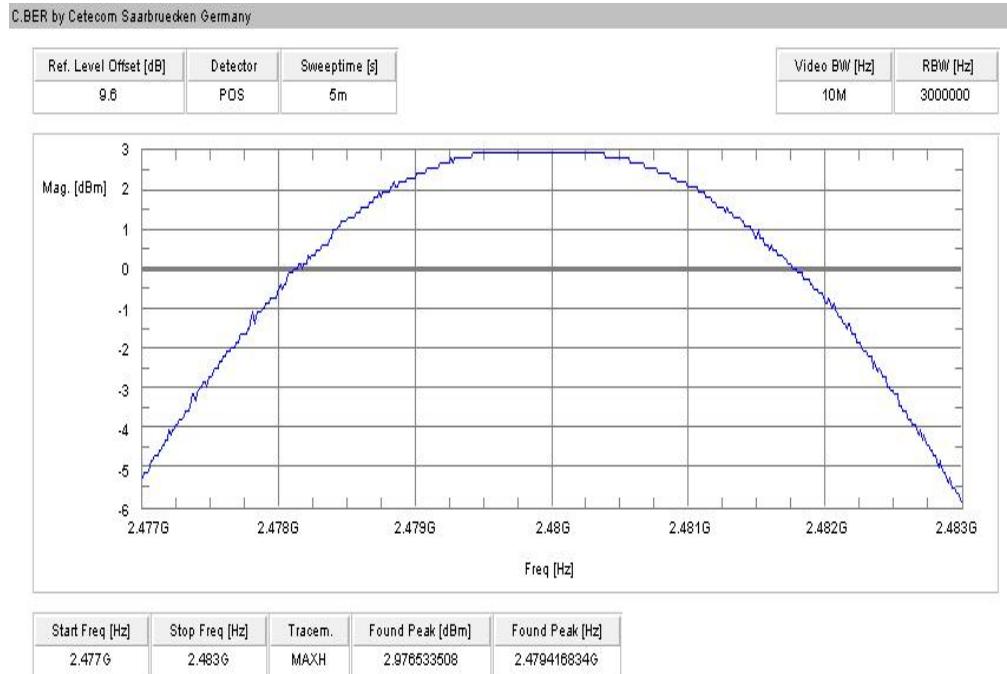

**Plot 3: highest channel**

## 11.9 Band edge compliance conducted

### Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel and hopping mode. The measurement is repeated for all modulations.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	100 kHz
Span:	Lower Band Edge: 2395 – 2405 MHz Upper Band Edge: 2478 – 2489 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC
Band edge compliance conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	


### Result:

Scenario	Band edge compliance conducted [dB]
	GFSK
Modulation	
Lower band edge – hopping off	> 20 dB
Upper band edge – hopping off	> 20 dB
Measurement uncertainty	± 1.5 dB


**Result: Passed**

## Plots:

### Plot 1: Lower band edge – hopping off

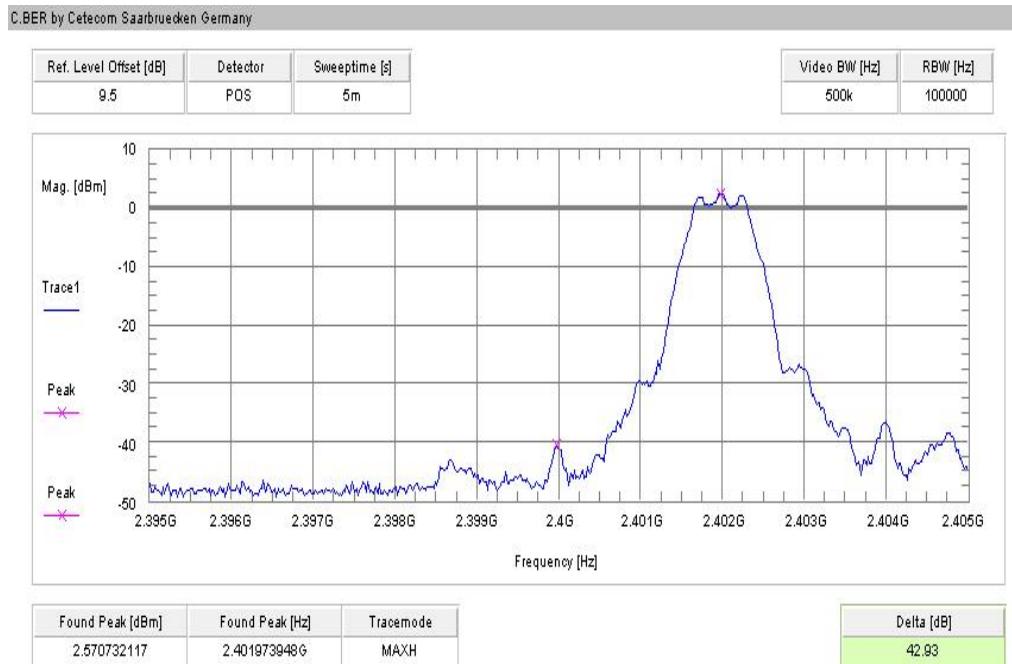

### Plot 2: Upper band edge – hopping off

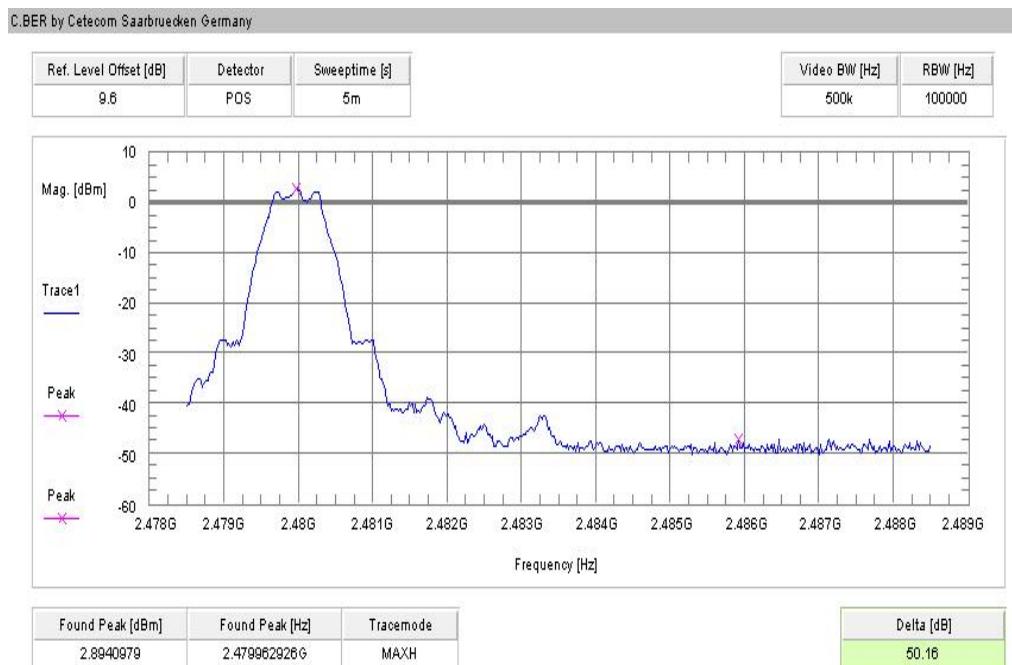

## 11.10 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 39 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Span:	Lower Band: 2300 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold



### Limits:

FCC	IC
Band edge compliance radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dB $\mu$ V/m AVG	

### Result:

Scenario	Band edge compliance radiated [dB $\mu$ V/m]
	GFSK
Modulation	
Lower restricted band	< 54 (see plot 1)
Upper restricted band	< 54 (see plot 2)
Measurement uncertainty	± 3 dB

Result: Passed

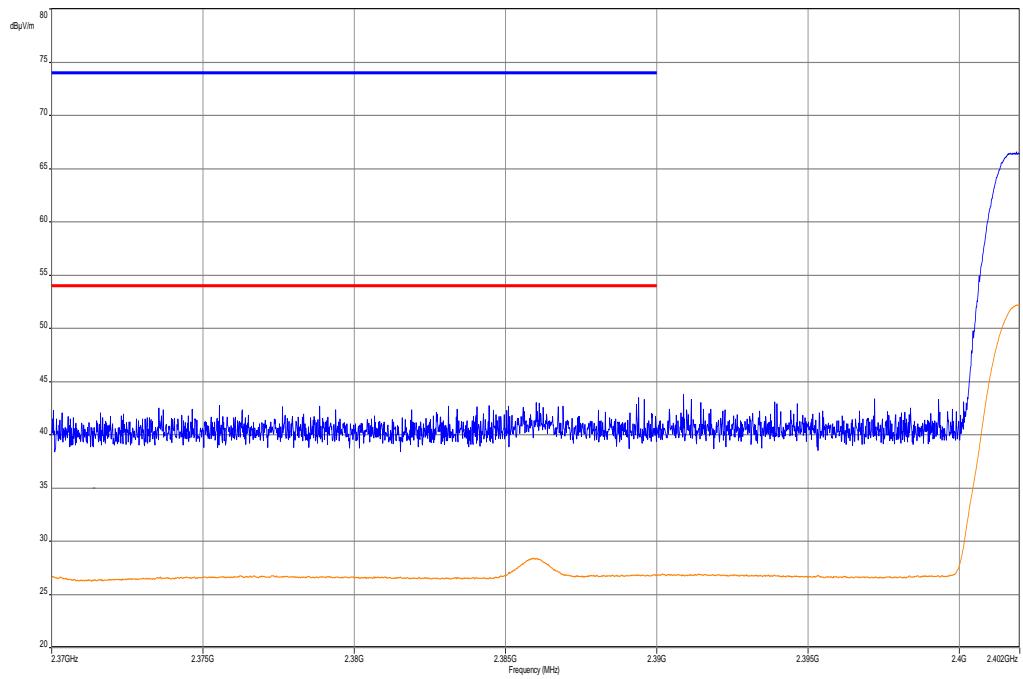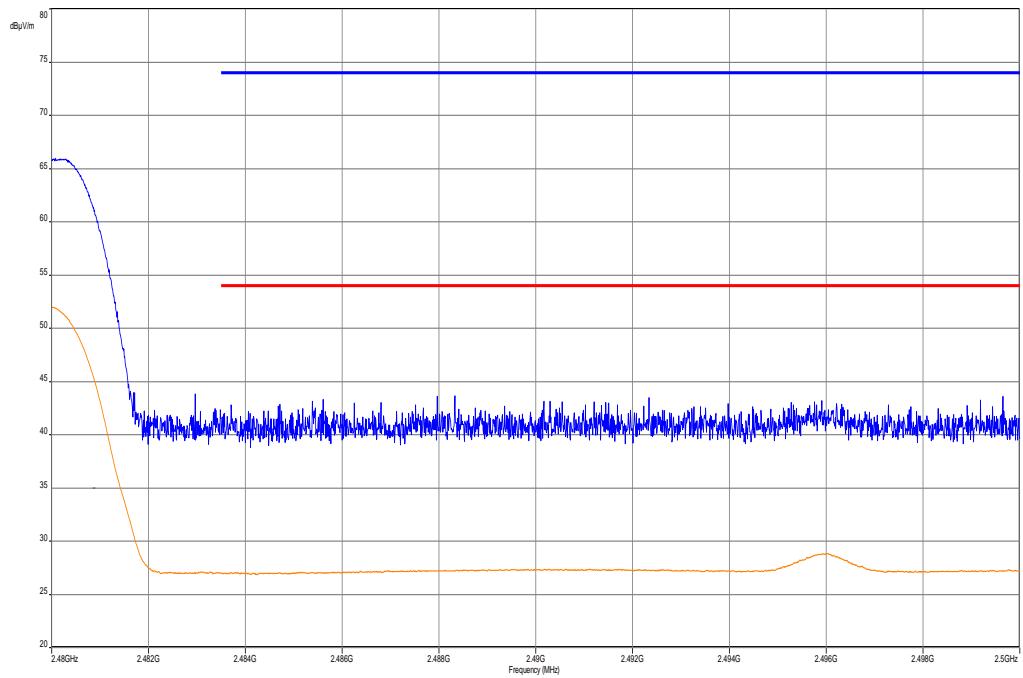**Plots:****Plot 1: Lower restricted band****Plot 2: Upper restricted band**

## 11.11 TX spurious emissions conducted

### Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 19 and channel 39. The measurement is repeated for all modulations.

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz or 500 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold



### Limits:


FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

### Results:

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		2.77	30 dBm		Operating frequency
<i>No peaks found! All detected emissions are more than 20 dB below the limit!</i>			-20 dBc		complies
2440		2.81	30 dBm		Operating frequency
<i>No peaks found! All detected emissions are more than 20 dB below the limit!</i>			-20 dBc		complies
2480		3.00	30 dBm		Operating frequency
<i>No peaks found! All detected emissions are more than 20 dB below the limit!</i>			-20 dBc		complies
Measurement uncertainty				± 3 dB	

**Result:** Passed

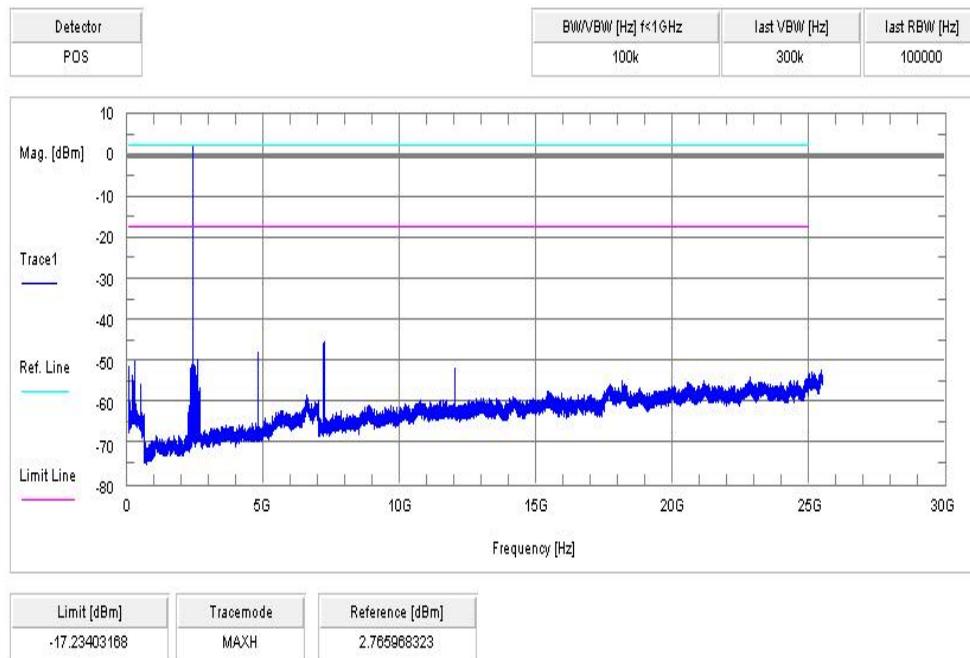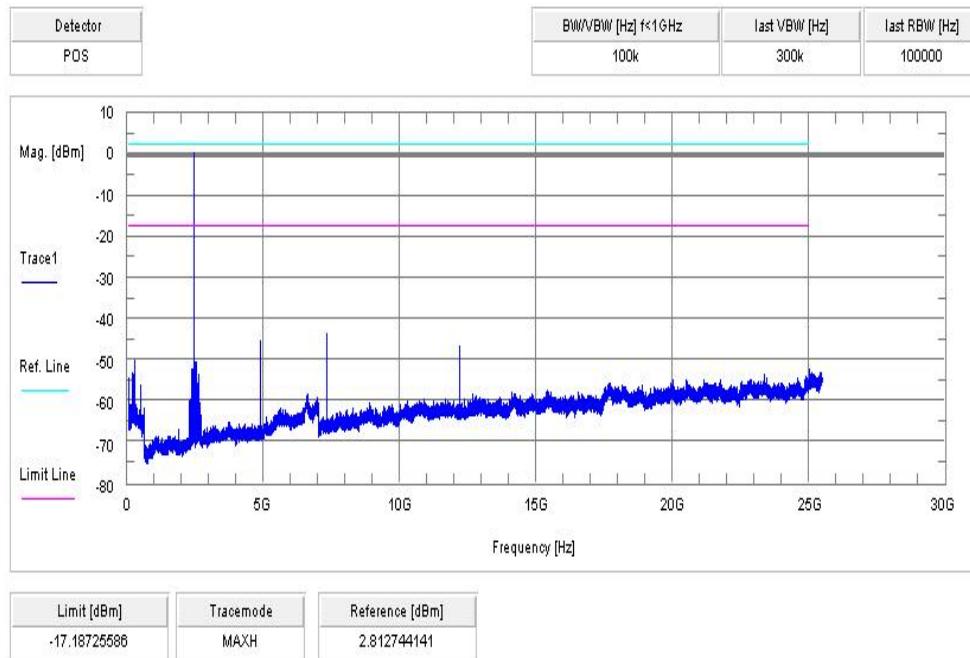**Plots:**
**Plot 1: lowest channel**

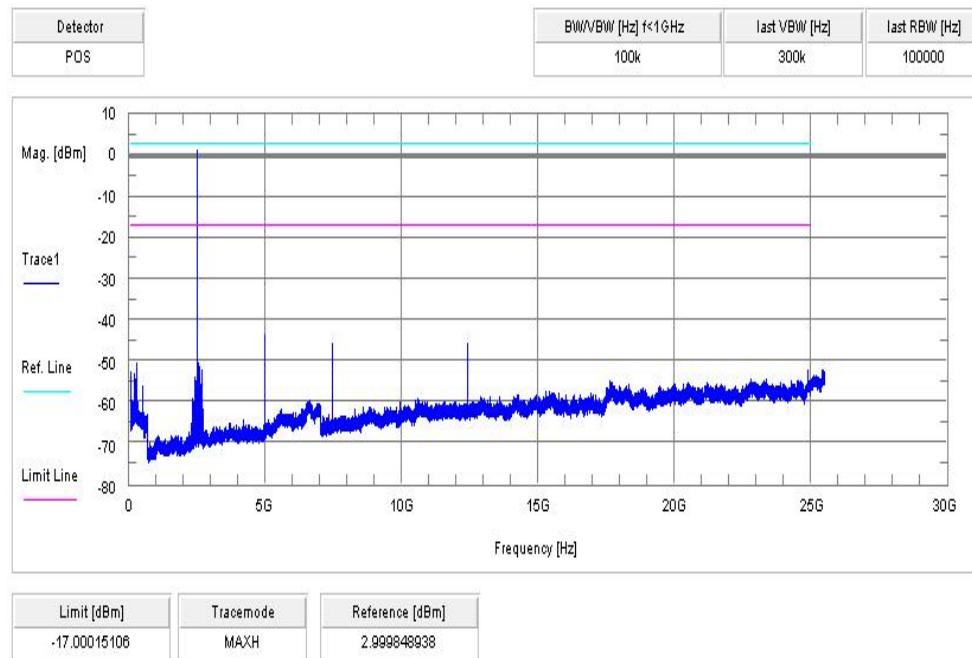**Plot 2: middle channel**


**Plot 3: highest channel**

## 11.12 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 19 and channel 39. The measurement is performed in the mode with the highest output power.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation:	GFSK

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

### Limits:

FCC	IC															
TX spurious emissions radiated																
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
§15.209																
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (dB<math>\mu</math>V/m)</th> <th>Measurement distance</th> </tr> </thead> <tbody> <tr> <td>30 - 88</td> <td>30.0</td> <td>10</td> </tr> <tr> <td>88 - 216</td> <td>33.5</td> <td>10</td> </tr> <tr> <td>216 - 960</td> <td>36.0</td> <td>10</td> </tr> <tr> <td>Above 960</td> <td>54.0</td> <td>3</td> </tr> </tbody> </table>		Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance	30 - 88	30.0	10	88 - 216	33.5	10	216 - 960	36.0	10	Above 960	54.0	3
Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance														
30 - 88	30.0	10														
88 - 216	33.5	10														
216 - 960	36.0	10														
Above 960	54.0	3														

**Results:**

TX spurious emissions radiated [dB $\mu$ V/m]								
2402 MHz			2440 MHz			2480 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
Measurement uncertainty			$\pm 3$ dB					

**Result: Passed**

## Plots:


Plot 1: 30 MHz to 1 GHz, lowest channel, vertical & horizontal polarization

## Common Information

EUT: D60B1  
 Serial Number: unknown  
 Test Description: FCC part 15 class B  
 Operating Conditions: BT LE TX Ch. 0  
 Operator Name: Hennemann  
 Comment: battery powered

## Scan Setup: STAN\_Fin [EMI radiated]


Hardware Setup:	Electric Field (NOS)				
Receiver:	[ESCI 3]				
Level Unit:	dB $\mu$ V/m				
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

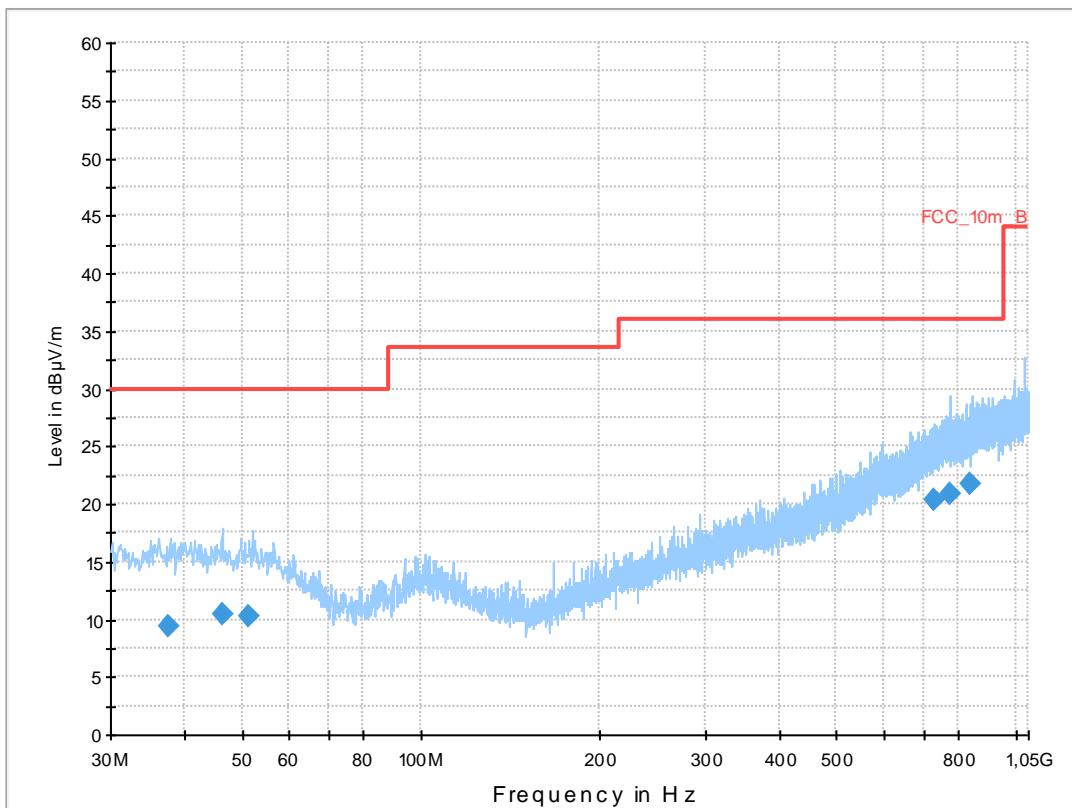

## Final Result 1


Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
37.606050	9.4	1000.0	120.000	170.0	V	88.0	13.2	20.6	30.0	
46.286400	10.4	1000.0	120.000	98.0	V	260.0	13.3	19.6	30.0	
51.358050	10.3	1000.0	120.000	119.0	V	-10.0	13.2	19.7	30.0	
729.163350	20.4	1000.0	120.000	170.0	V	171.0	23.2	15.6	36.0	
777.655500	20.9	1000.0	120.000	170.0	H	190.0	23.7	15.2	36.0	
841.367850	21.7	1000.0	120.000	170.0	H	190.0	24.4	14.3	36.0	


**Plot 2: 1 GHz to 12.75 GHz, lowest channel, vertical & horizontal polarization**

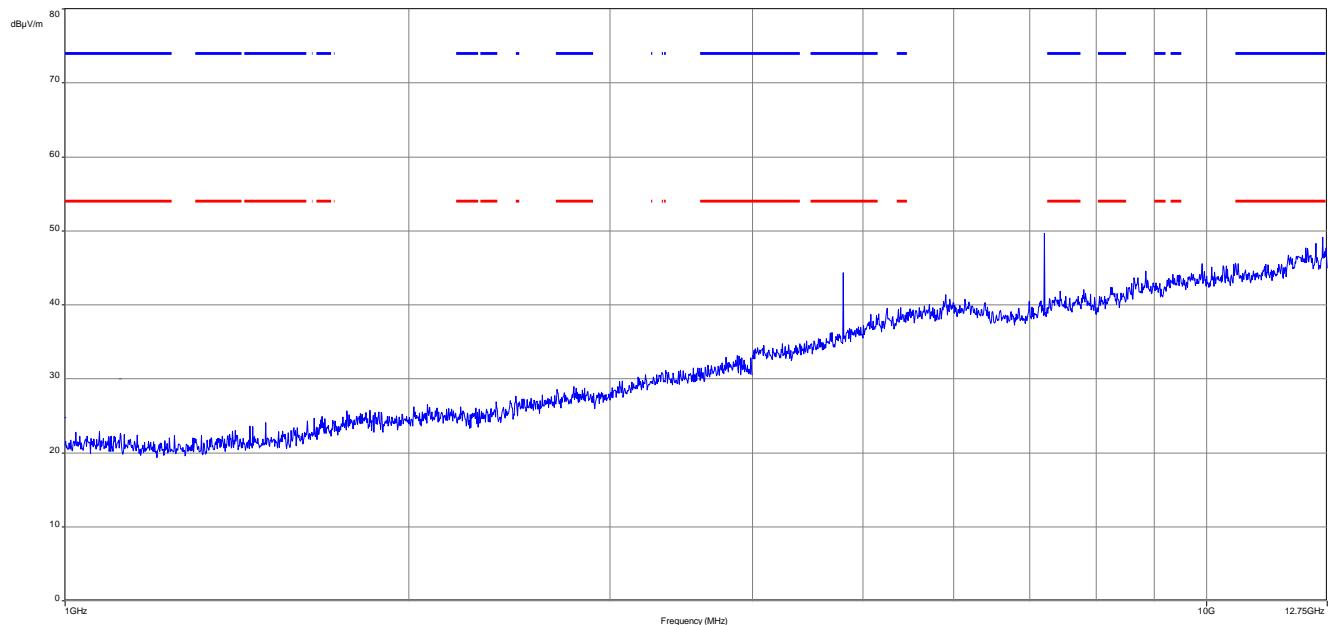

Carrier suppressed with a 2.4 GHz-band rejection filter.

**Plot 3: 12 GHz to 18 GHz, lowest channel, vertical & horizontal polarization**

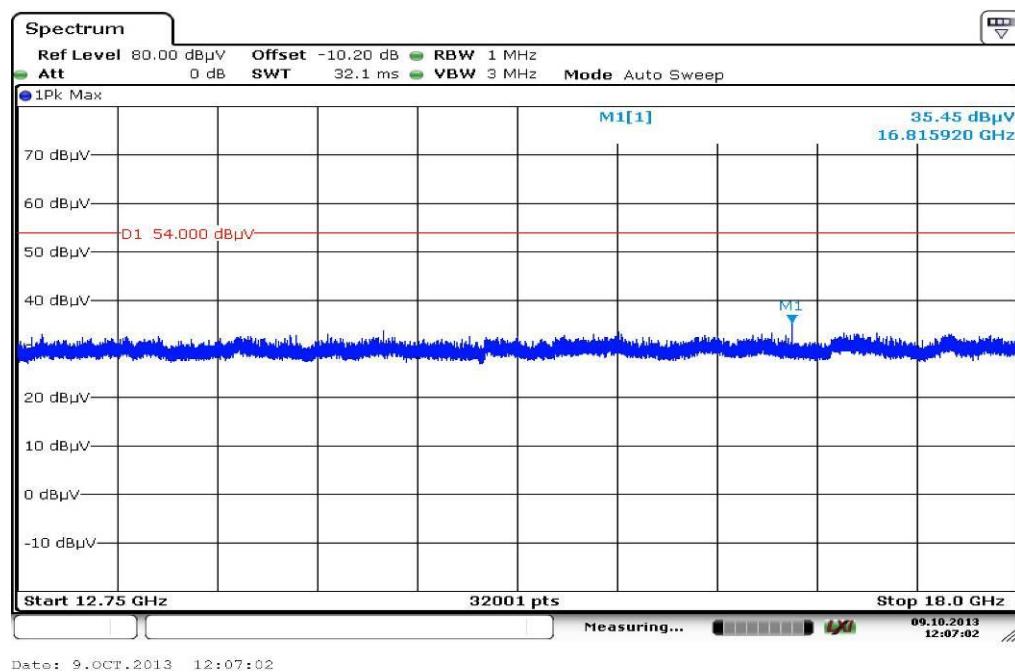

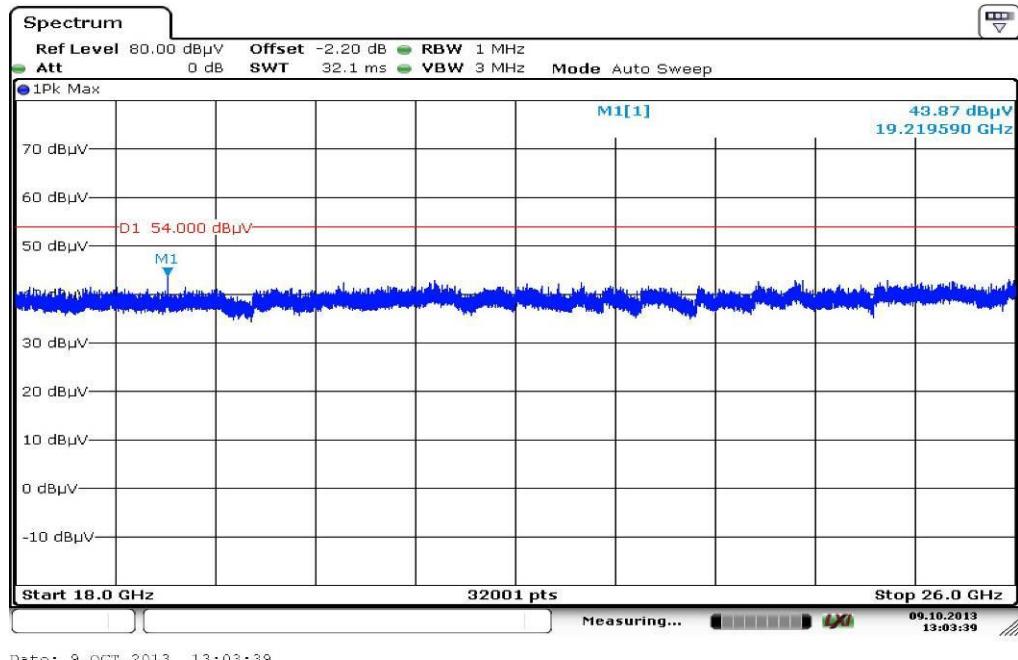**Plot 4:** 18 GHz to 25 GHz, lowest channel, vertical & horizontal polarization


Plot 5: 30 MHz to 1 GHz, mid channel, vertical & horizontal polarization

## Common Information

EUT: D60B1  
 Serial Number: unknown  
 Test Description: FCC part 15 class B  
 Operating Conditions: BT LE TX Ch. 19  
 Operator Name: Hennemann  
 Comment: battery powered


## Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)				
Receiver:	[ESCI 3]				
Level Unit:	dB $\mu$ V/m				
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

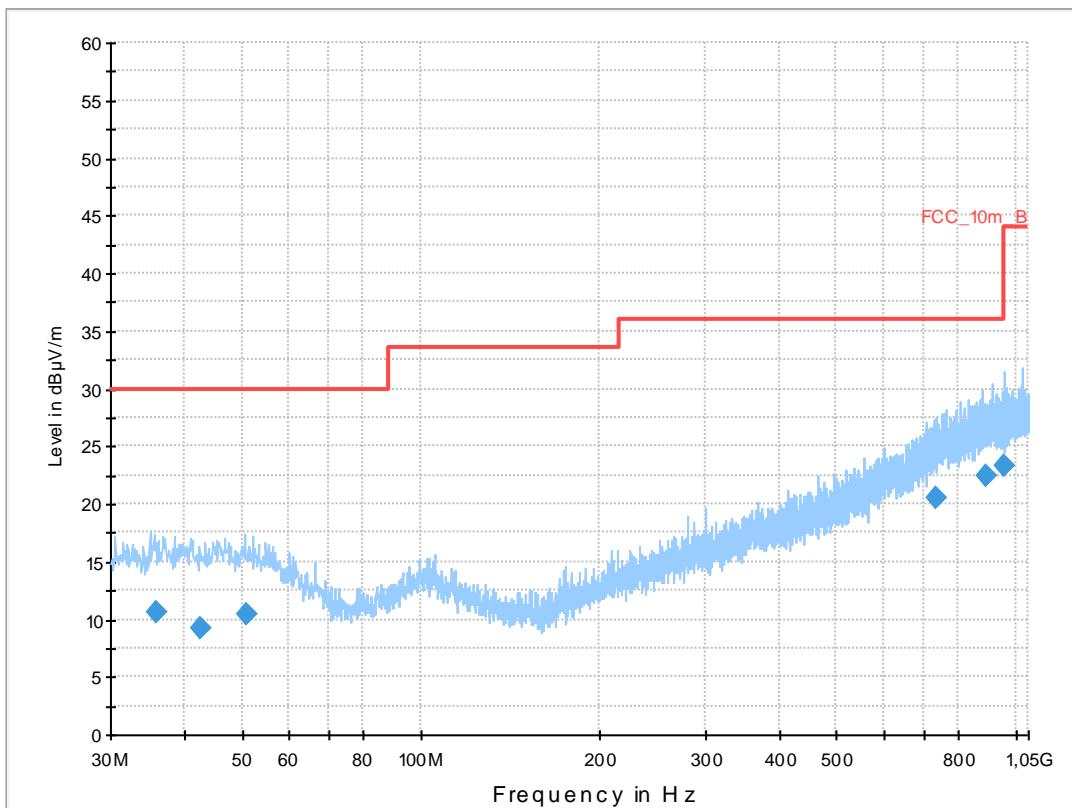



## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimut h (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
35.797050	10.6	1000.0	120.000	170.0	V	280.0	13.1	19.4	30.0	
42.541800	9.3	1000.0	120.000	170.0	H	90.0	13.3	20.7	30.0	
50.905200	10.4	1000.0	120.000	170.0	V	100.0	13.3	19.6	30.0	
732.694500	20.6	1000.0	120.000	170.0	V	-3.0	23.3	15.4	36.0	
892.404150	22.5	1000.0	120.000	145.0	H	10.0	25.1	13.5	36.0	
959.972100	23.3	1000.0	120.000	122.0	V	190.0	25.4	12.7	36.0	

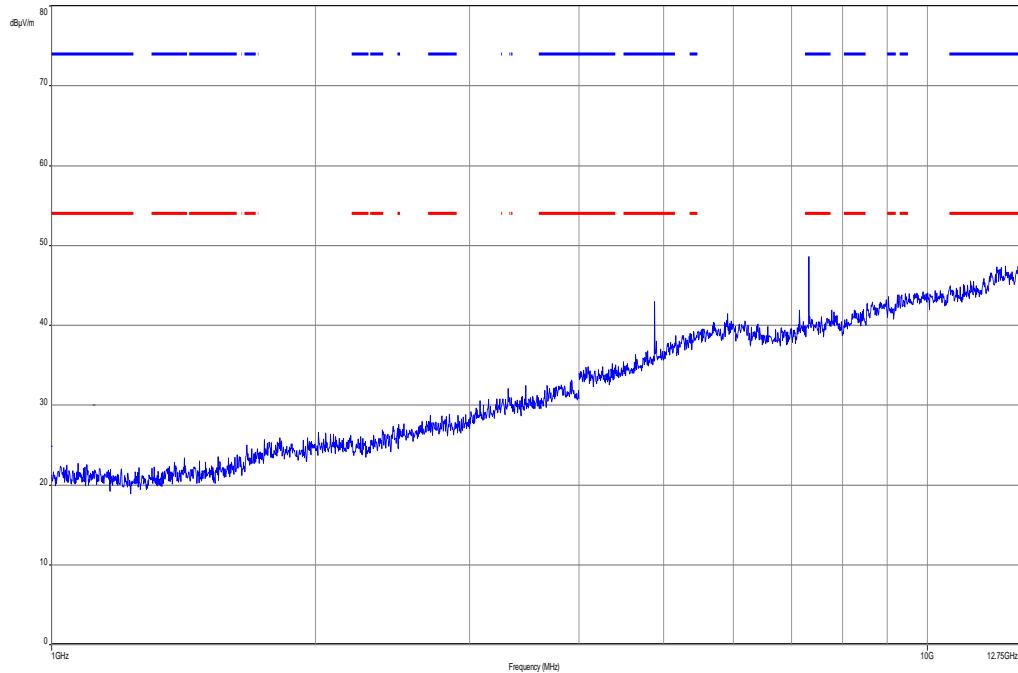**Plot 6:** 1 GHz to 12.75 GHz, mid channel, vertical & horizontal polarization

Carrier suppressed with a 2.4 GHz-band rejection filter.

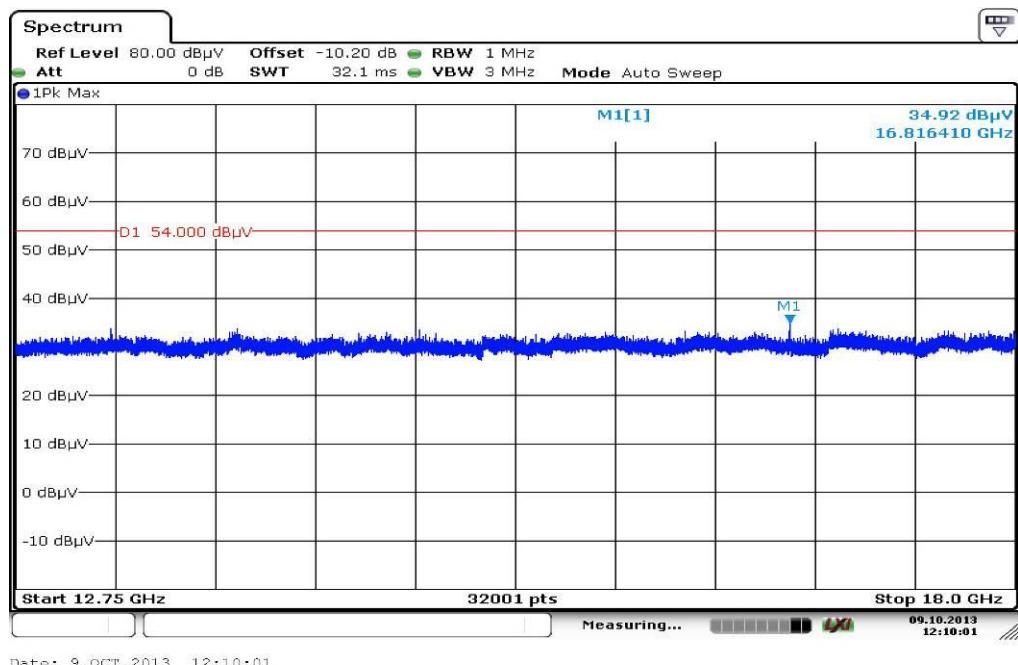**Plot 7:** 12 GHz to 18 GHz, mid channel, vertical & horizontal polarization

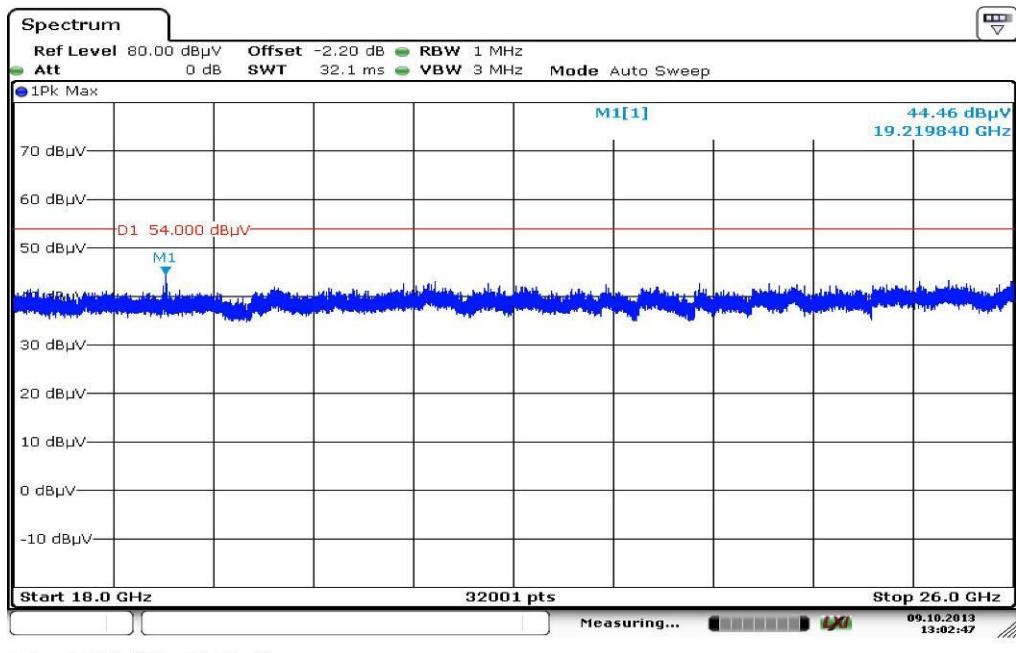**Plot 8:** 18 GHz to 25 GHz, mid channel, vertical & horizontal polarization


Plot 9: 30 MHz to 1 GHz, highest channel, vertical & horizontal polarization

## Common Information

EUT: D60B1  
 Serial Number: unknown  
 Test Description: FCC part 15 class B  
 Operating Conditions: BT LE TX Ch. 39  
 Operator Name: Hennemann  
 Comment: battery powered

## Scan Setup: STAN\_Fin [EMI radiated]


Hardware Setup:	Electric Field (NOS)				
Receiver:	[ESCI 3]				
Level Unit:	dB $\mu$ V/m				
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

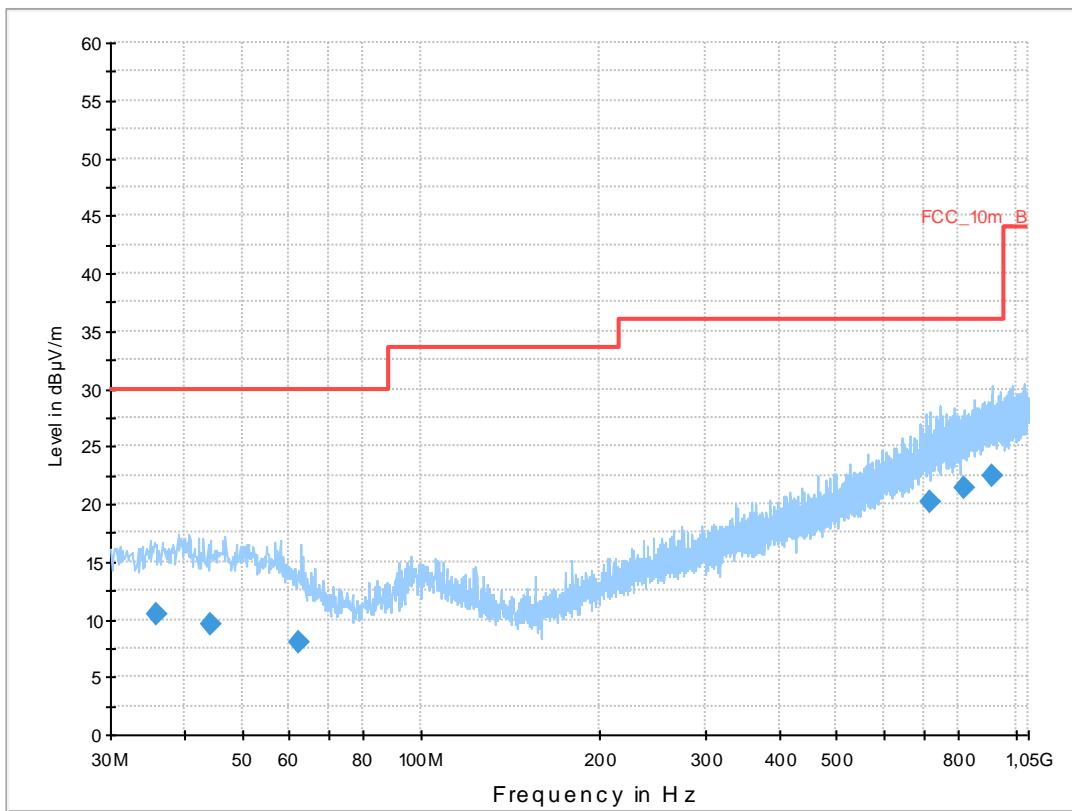

## Final Result 1


Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimut h (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
35.862300	10.5	1000.0	120.000	104.0	H	-9.0	13.1	19.5	30.0	
44.117250	9.5	1000.0	120.000	170.0	H	190.0	13.3	20.5	30.0	
62.198250	8.0	1000.0	120.000	170.0	V	280.0	11.1	22.0	30.0	
716.577150	20.2	1000.0	120.000	170.0	V	190.0	22.9	15.8	36.0	
817.768200	21.3	1000.0	120.000	170.0	V	-10.0	24.1	14.7	36.0	
914.603700	22.5	1000.0	120.000	132.0	H	280.0	25.2	13.5	36.0	

**Plot 10: 1 GHz to 12.75 GHz, highest channel, vertical & horizontal polarization**

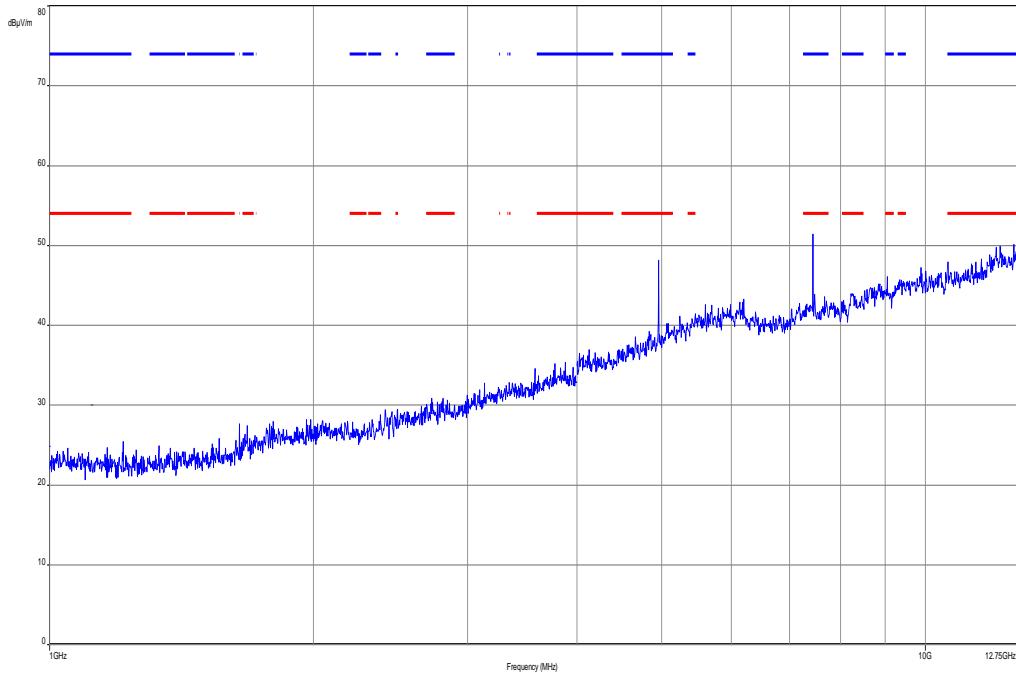


Carrier suppressed with a 2.4 GHz-band rejection filter.

**Plot 11: 12 GHz to 18 GHz, highest channel, vertical & horizontal polarization**

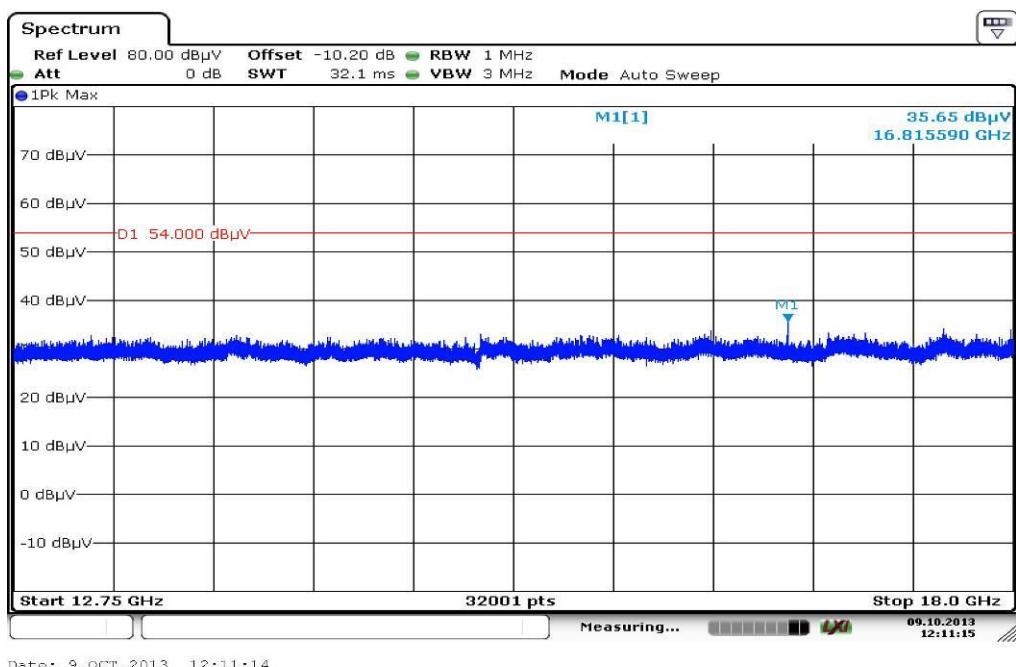

Date: 9.OCT.2013 12:11:14

09.10.2013  
12:11:15

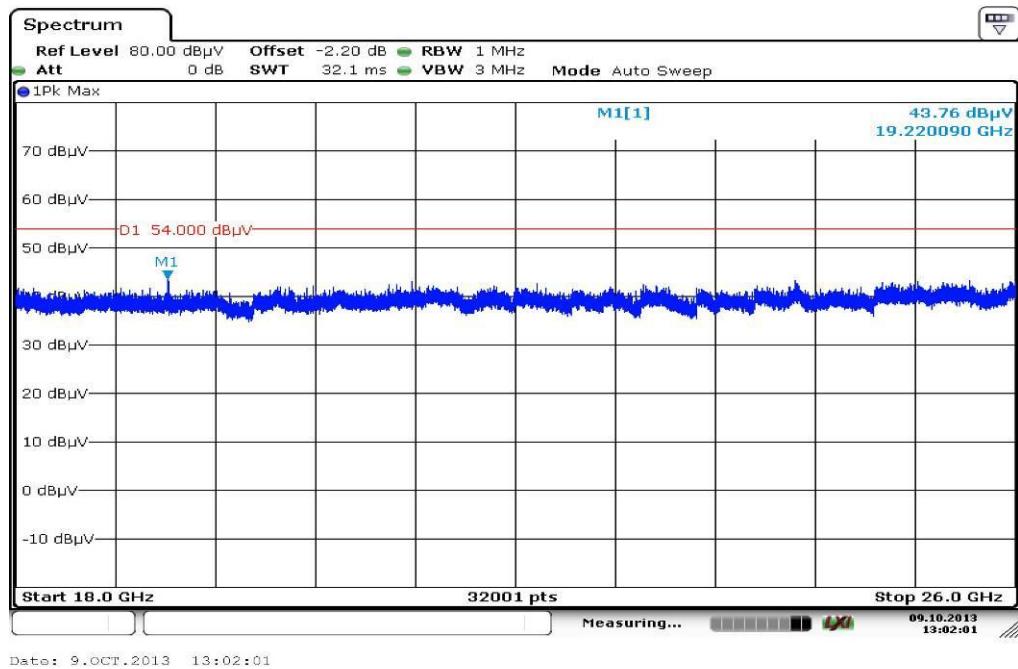**Plot 12:** 18 GHz to 25 GHz, highest channel, vertical & horizontal polarization

## 11.13 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode. The EUT is detached so all oscillators are active.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

### Limits:

FCC	IC	
RX Spurious Emissions Radiated		
Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

### Results:

RX spurious emissions radiated [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.		
Measurement uncertainty		±3 dB

**Result:** Passed

## Plots:


Plot 1: 30 MHz to 1 GHz, RX / idle – mode, vertical & horizontal polarization

## Common Information

EUT: D60B1  
 Serial Number: unknown  
 Test Description: FCC part 15 C class B  
 Operating Conditions: BT RX  
 Operator Name: Hennemann  
 Comment: battery powered

## Scan Setup: STAN\_Fin [EMI radiated]


Hardware Setup:	Electric Field (NOS) [ESCI 3]				
Receiver:	dBrV/m				
Level Unit:					
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

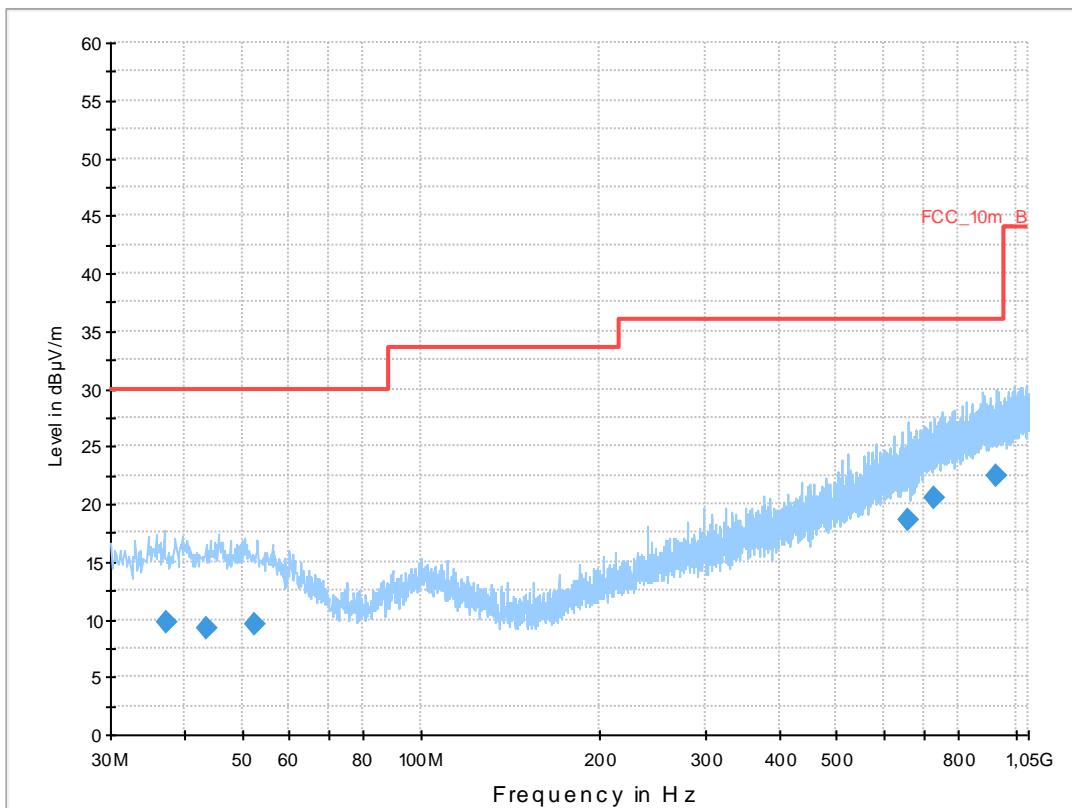


## Final Result 1

Frequency (MHz)	QuasiPeak (dBrV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimut h (deg)	Corr. (dB)	Margin (dB)	Limit (dBrV/m)	Comment
37.159350	9.8	1000.0	120.000	170.0	H	260.0	13.2	20.2	30.0	
43.694550	9.3	1000.0	120.000	120.0	V	80.0	13.3	20.7	30.0	
52.611900	9.5	1000.0	120.000	170.0	V	265.0	13.1	20.5	30.0	
658.393650	18.7	1000.0	120.000	170.0	H	280.0	21.3	17.4	36.0	
730.877400	20.5	1000.0	120.000	170.0	H	10.0	23.2	15.5	36.0	
926.926500	22.5	1000.0	120.000	170.0	V	170.0	25.3	13.5	36.0	

**Plot 2: 1 GHz to 12.75 GHz, RX / idle – mode, vertical & horizontal polarization**

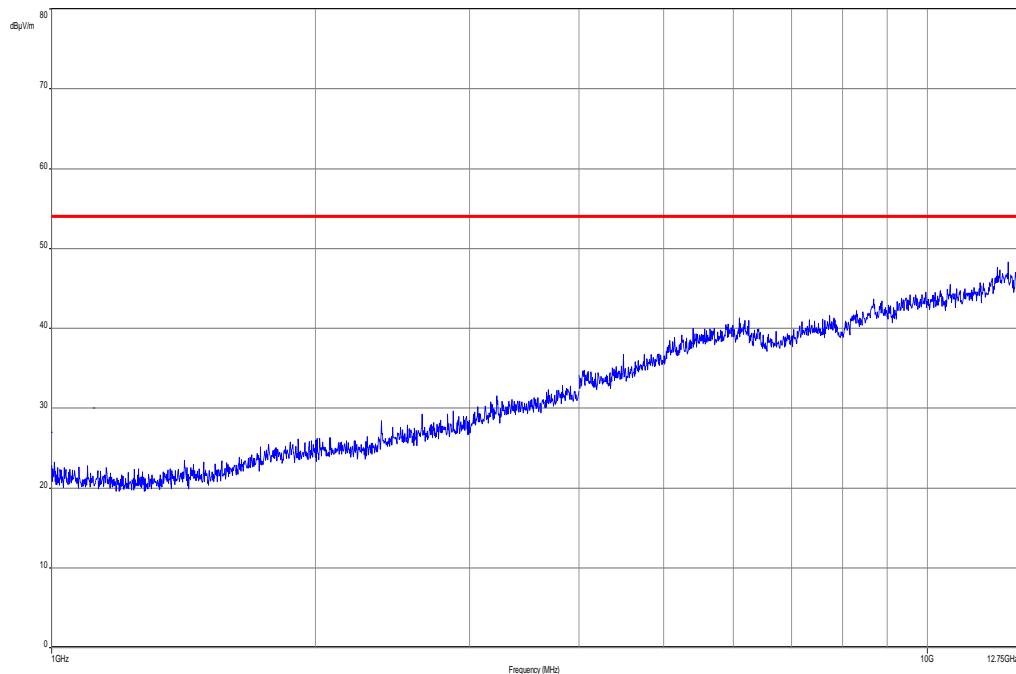


**Plot 3: 12 GHz to 18 GHz, RX / idle – mode, vertical & horizontal polarization**

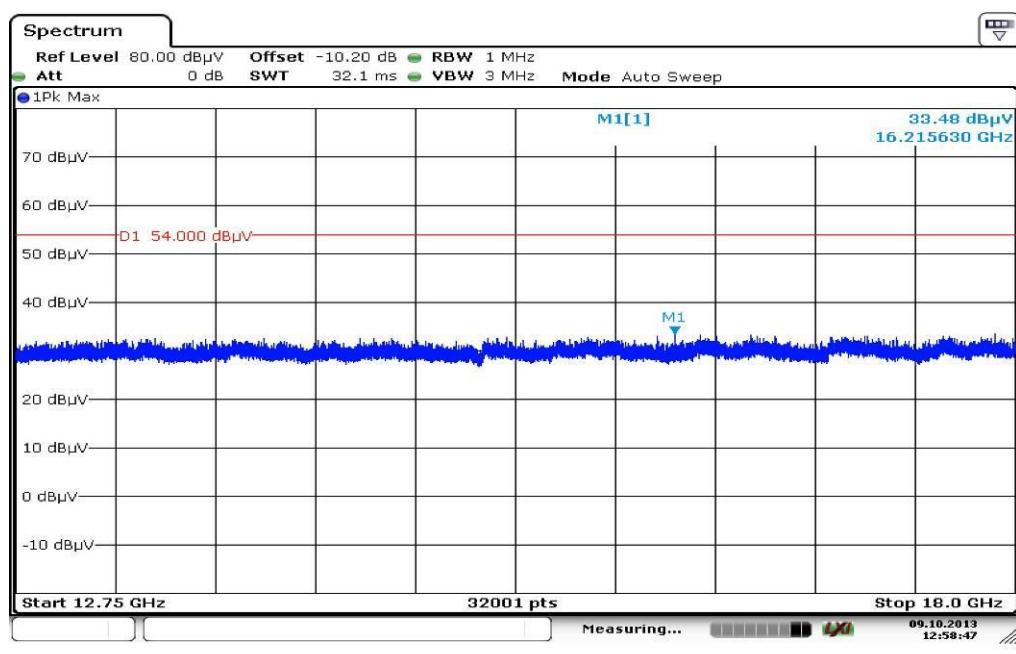

Date: 9.OCT.2013 12:58:47

09.10.2013  
12:58:47

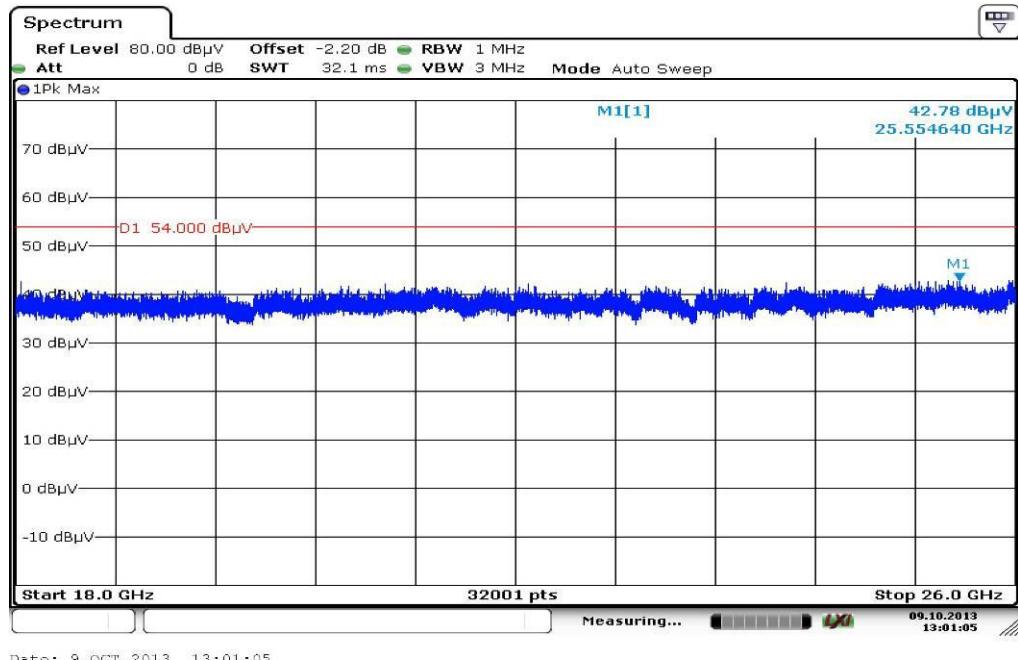**Plot 4: 18 GHz to 25 GHz, RX / idle – mode, vertical & horizontal polarization**

## 11.14 Spurious emissions radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 19. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 39 will be measured too. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold



### Limits:

FCC		IC
TX spurious emissions radiated < 30 MHz		
Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

### Results:

TX spurious emissions radiated < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found!		
Measurement uncertainty		± 3 dB

**Result:** Passed

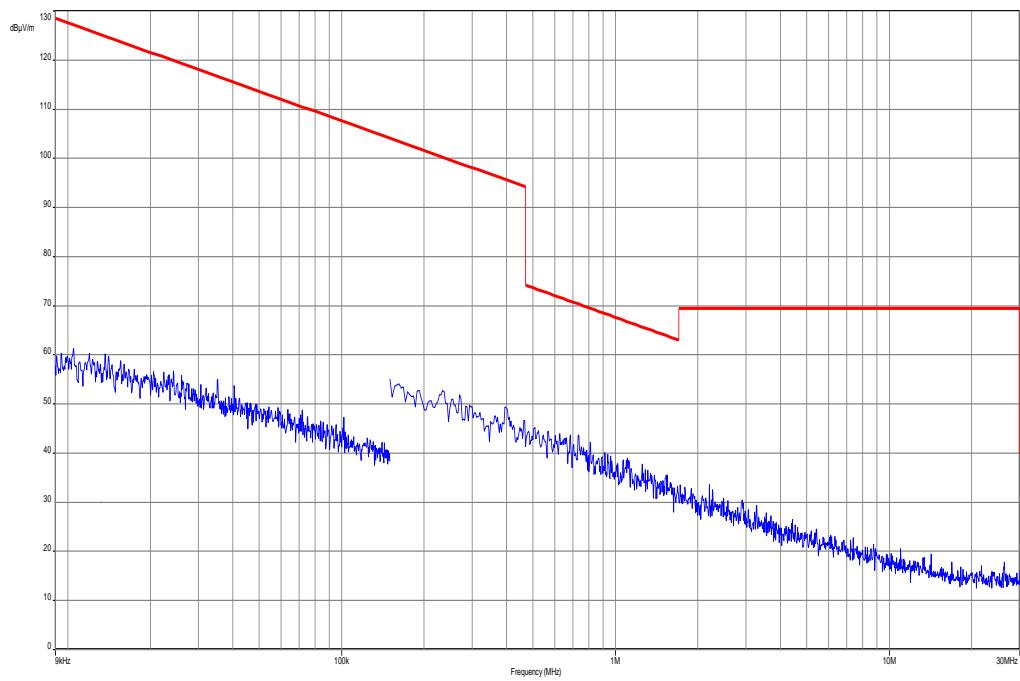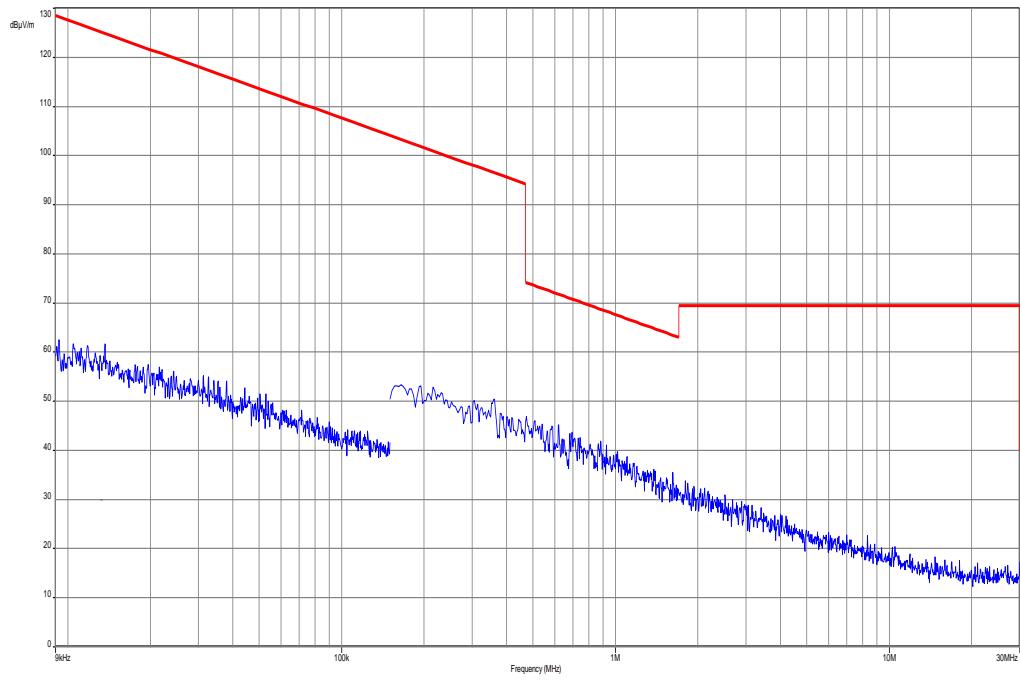**Plot:****Plot 1: 9 kHz to 30 MHz, TX mode****Plot 2: 9 kHz to 30 MHz, RX mode**

## 11.15 Spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 19. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 39 will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak / average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:



FCC		IC
TX spurious emissions conducted < 30 MHz		
Frequency (MHz)	Quasi-peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency


### Results:

TX spurious emissions conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks found!		
Measurement uncertainty		± 3 dB


**Result: Passed**

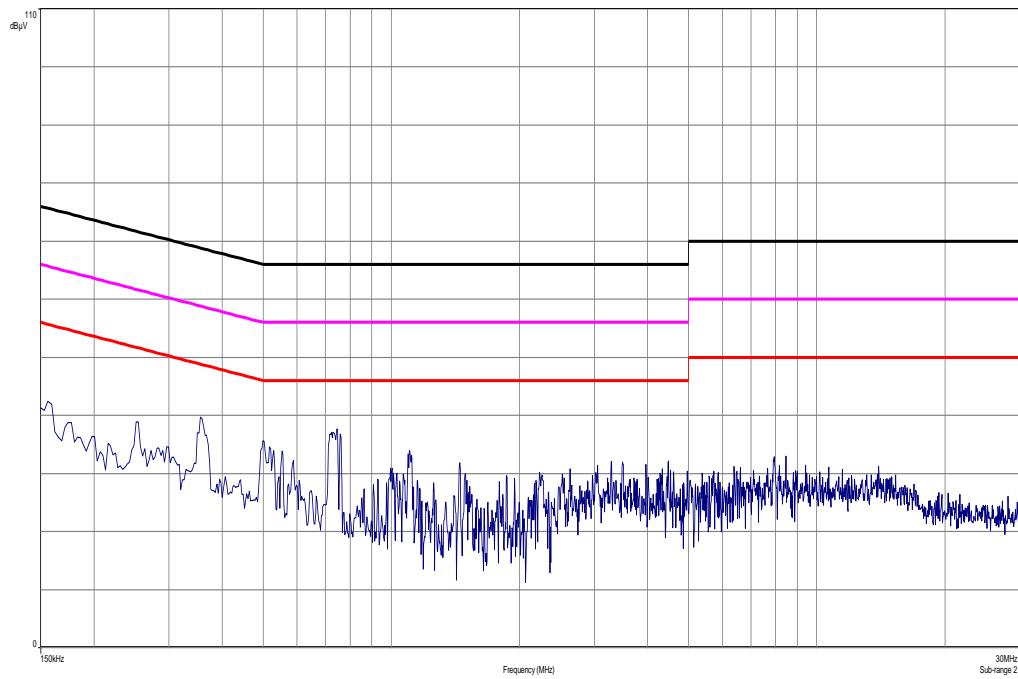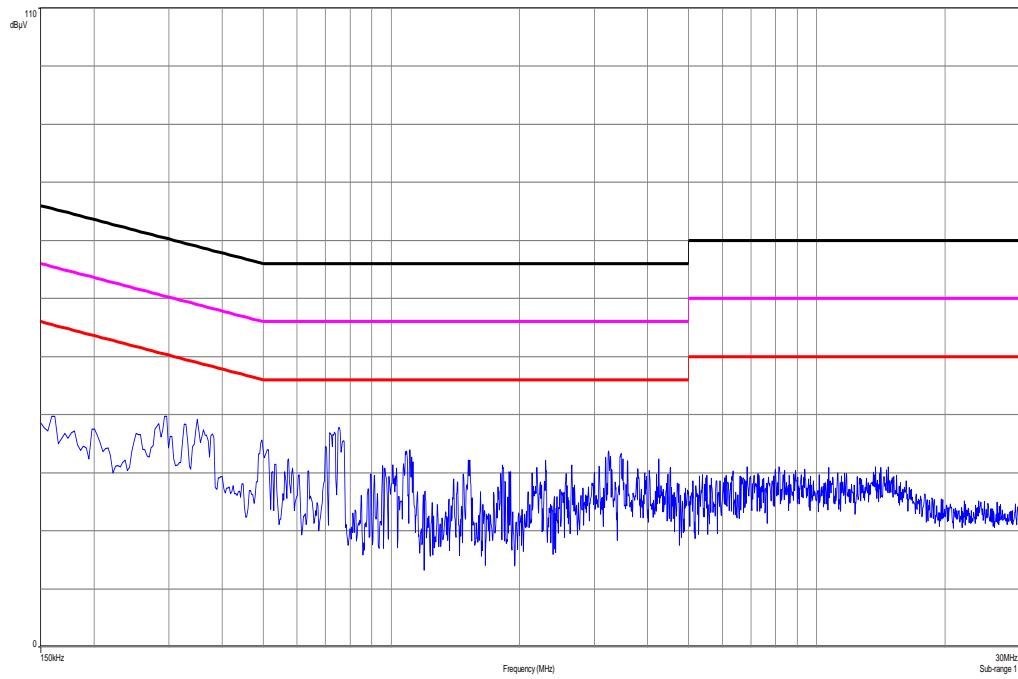**Plots:****Plot 1:** 150 kHz to 30 MHz, TX mode, phase line**Plot 2:** 150 kHz to 30 MHz, TX mode, neutral line

**Plot 3: 150 kHz to 30 MHz, RX mode, phase line**

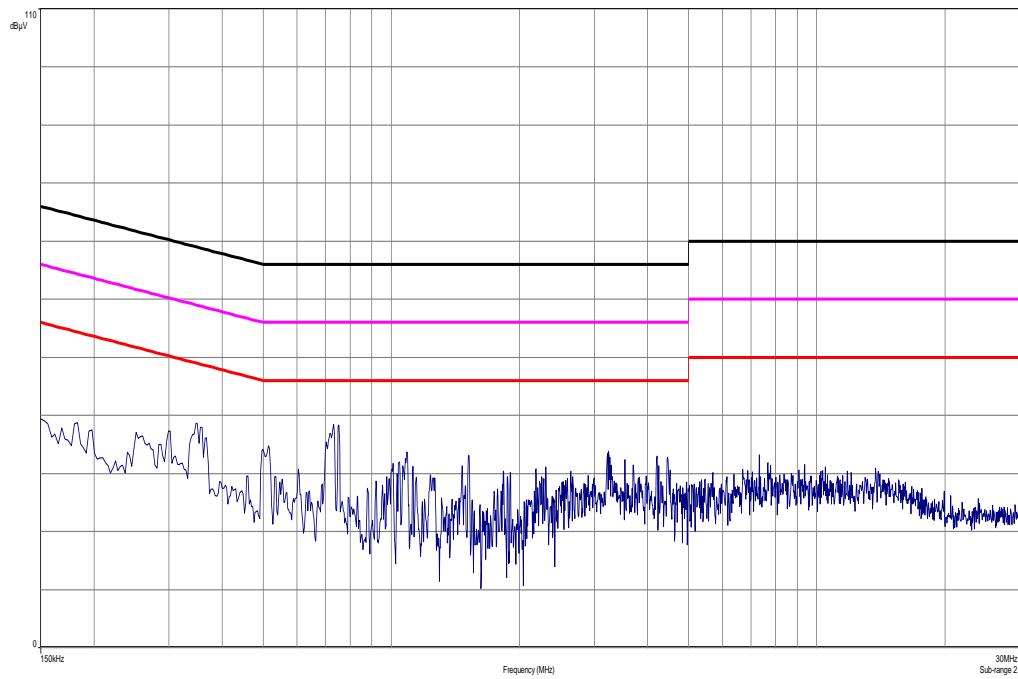

**Plot 4: 150 kHz to 30 MHz, RX mode, neutral line**

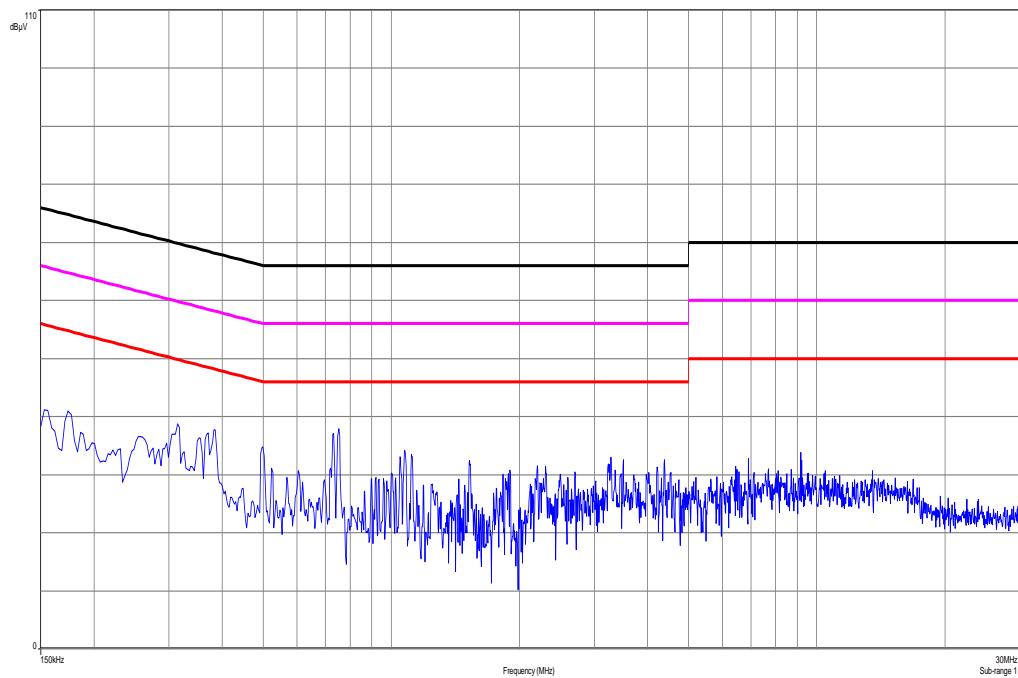

## 12 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzerberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.01.2013	09.01.2014
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	14.07.2011	14.01.2014
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	12.04.2012	12.04.2014
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2014
12	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vlKI!	08.05.2013	08.05.2015
13	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
14	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
15	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2012	06.01.2014
16	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	9	Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155	ne		
18	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
19	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
20	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
21	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
22	n. a.	TRILOG Broadband	VULB9163	Schwarzbeck	371	300003854	vlKI!	14.10.2011	14.10.2014

		Test-Antenna 30 MHz - 3 GHz						
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologi es	MY51210197	300004405	k	21.02.2013
24	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne	
25	n. a.	Power Supply DC 40/40	NGPE	R&S	388	400000078	vlkl!	21.08.2012
26	n. a.	Switch / Control Unit	SSCU	R&S	338864/003	300002681- 0006	ne	
27	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681- 0009	Ve	21.08.2012
28	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne	
29	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev	
30	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	22.08.2012
31	11b	Microwave System Amplifier, 0.5- 26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev	
32	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne	
33	A027	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486	ne	

#### Agenda: Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vlkl! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress

### 13 Observations

No observations exceeding those reported with the single test cases have been made.

## Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-10-22
A	New EUT name	2013-11-28
B	RSP100 change	2013-12-02

## Annex B Further information

### Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

## Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Bescheinigt gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium  
CETECOM ICT Services GmbH  
Untertrükheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen  
durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL  
VoIP und DECT  
Akustik  
Funk einschließlich WLAN  
Short Range Devices (SRD)  
RFID  
WiMax und Richtfunk  
Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)  
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive  
Produktsicherheit  
SAR und Hearing Aid Compatibility (HAC)  
Umweltsimulation  
Smart Card Terminals  
Bluetooth  
Wi-Fi- Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der  
Akkreditierungsnr. D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der  
Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013  
Seite 1 von 80 auf der Rückseite

Im Auftrag  
Dr. Wolfgang (FH) Axel Egner  
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Gartenstraße 6  
60594 Frankfurt am Main

Standort Braunschweig  
Rundesallee 100  
38116 Braunschweig

Die ausgewiesene Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen  
Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate  
Weiterverbreitung des Deckblattes durch die umsichtig genannte Konformitätsbewertungsstelle in  
unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,  
die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom  
31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments  
und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung  
im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30).

Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der  
European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und  
der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen  
erkennen Ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.nu](http://www.iaf.nu)

### Note:

The current certificate including annex is published on our website (see link below) or may be received  
from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>