



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

DGL Group LTD.

195 Raritan Center Parkway Edison, NJ 08837

FCC ID: 2AANZ17KR

Report Type: Original Report	Product Name: Travel Bass wireless LED Speaker
Report Number: RSZ200708002-00B	
Report Date: 2020-07-30	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	29
APPLICABLE STANDARD	29

TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44
FCC §15.247(d) - BAND EDGES TESTING	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	47

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Travel Bass wireless LED Speaker
EUT Model:	DG-17KR-BLK
Operation Frequency:	2402-2480MHz
Maximum Output Power (Conducted):	0.27 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	DC 3.7V from Battery or DC 5V from USB port
Serial Number:	RSZ200708002-RF -S1
EUT Received Date:	2020.7.14
EUT Received Status:	Good

Objective

This report is prepared on behalf of **DGL Group LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AANZ17KR
FCC Part 15B JAB submissions with FCC ID: 2AANZ17KR

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software: 'BT_Tool V1.0.9' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

Test Software Version	BT_Tool V1.0.9		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	7	7	7
$\pi/4$ -DQPSK	7	7	7
8DPSK	7	7	7

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
IPRO	Adapter	NTR-S01	190725003
USB Flash Disk	Kingston	32G	249633
GlocalMe	Smartphone	P3S18	3089d47dfb40
Keenion	Microphone	Un-known	MIC-001
SanDisk	TF card	4G	249520

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Audio Cable	No	No	1	EUT	Smartphone
USB Cable	No	No	1	Adapter	EUT
Audio Cable	No	No	1	EUT	Microphone

Block Diagram of Test Setup

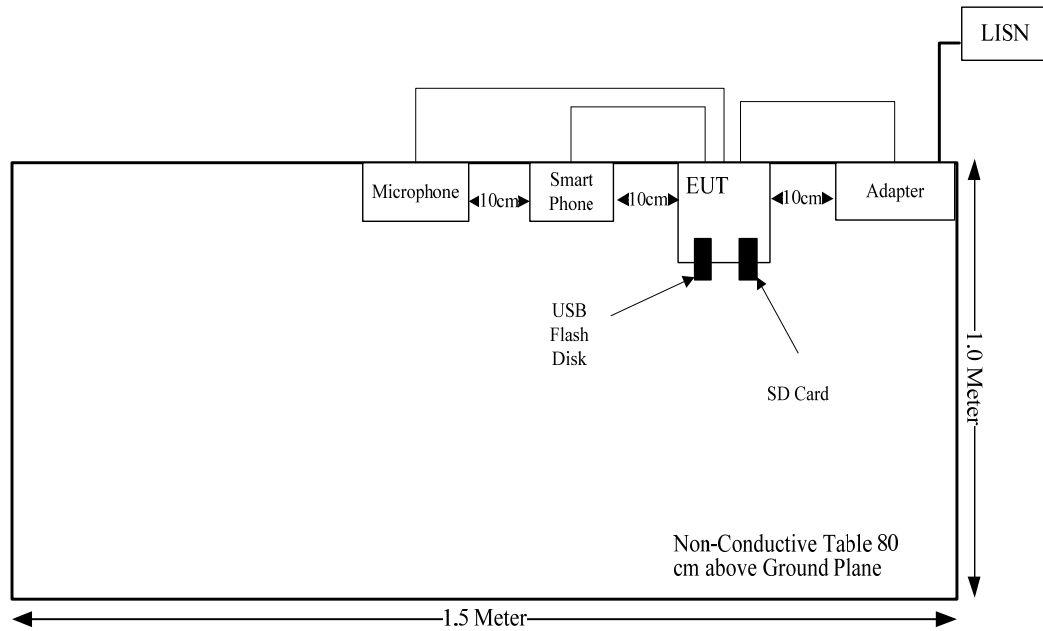

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliance
FCC §15.247(a)(1)	Channel separation	Compliance
FCC §15.247(a)(1)	20 dB bandwidth	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
FCC §15.247(b)(1)	Peak output power measurement	Compliance
FCC §15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	-0.68	0.86	1	1.26	20.00	0.0002	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal PCB antenna arrangement for BT/BLE, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
BLE	50	-0.68 dBi/2.4~2.5GHz

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	100.8kPa
Test by:	Barry Yang
Test Date:	2020-07-29

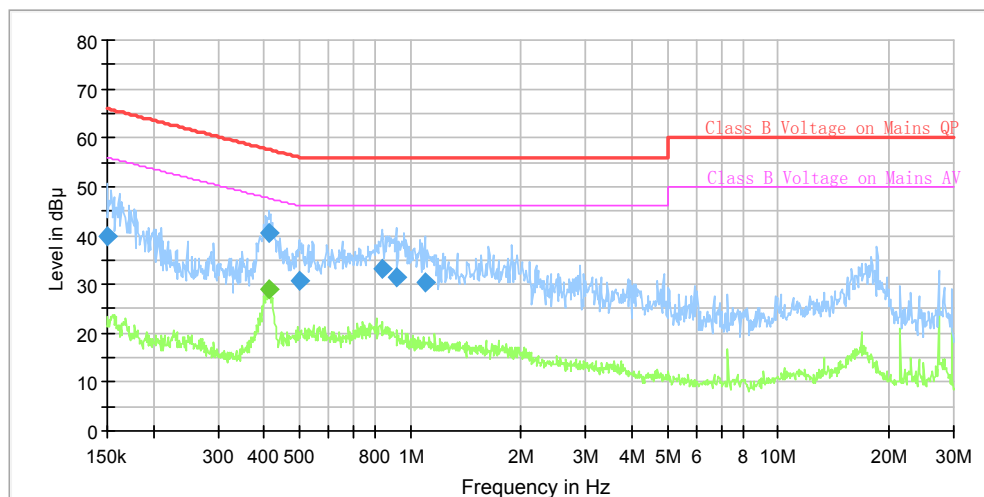Test Result: Compliance*Test Mode: Transmitting***AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	39.91	---	66.00	26.09	9.000	L1	9.7
0.412859	---	29.10	47.59	18.49	9.000	L1	9.7
0.412859	40.37	---	57.59	17.22	9.000	L1	9.7
0.499013	30.79	---	56.02	25.23	9.000	L1	9.7
0.834097	33.04	---	56.00	22.96	9.000	L1	9.7
0.912443	31.33	---	56.00	24.67	9.000	L1	9.7
1.097362	30.33	---	56.00	25.67	9.000	L1	9.7

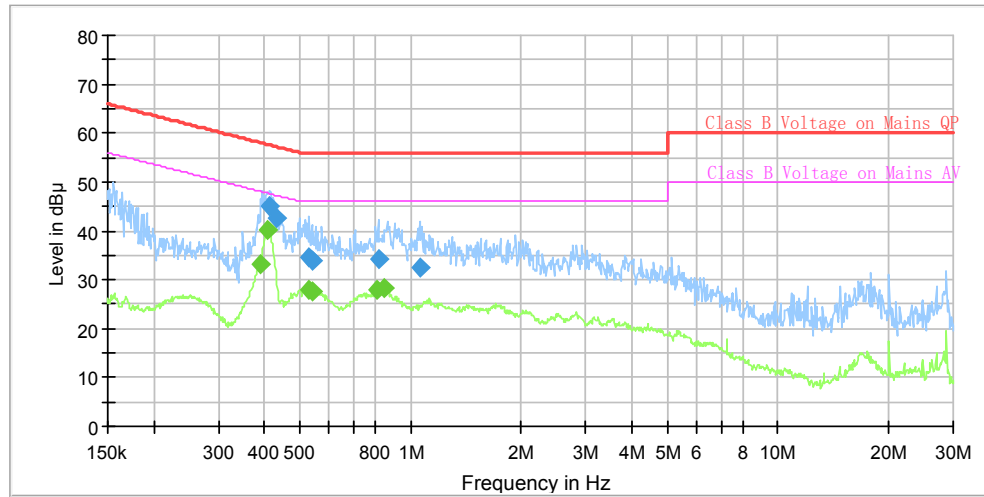AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.388874	---	33.34	48.09	14.75	9.000	N	9.6
0.408761	---	40.11	47.67	7.56	9.000	N	9.6
0.414923	45.18	---	57.55	12.37	9.000	N	9.6
0.433973	42.49	---	57.18	14.69	9.000	N	9.6
0.527156	---	28.04	46.00	17.96	9.000	N	9.6
0.529791	34.46	---	56.00	21.54	9.000	N	9.6
0.537778	33.97	---	56.00	22.03	9.000	N	9.6
0.537778	---	27.68	46.00	18.32	9.000	N	9.6
0.809506	---	27.79	46.00	18.21	9.000	N	9.6
0.817621	34.20	---	56.00	21.80	9.000	N	9.6
0.846671	---	28.14	46.00	17.86	9.000	N	9.6
1.059711	32.47	---	56.00	23.53	9.000	N	9.6

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-05-09	2021-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2020-06-16	2021-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2020-06-16	2021-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	29°C	28.3°C
Relative Humidity:	60%	58%
ATM Pressure:	100.2kPa	99.9kPa
Tester:	Daniel Liang	Joker Chen
Test Date:	2020-07-15	2020-07-19

Test Mode: Transmitting

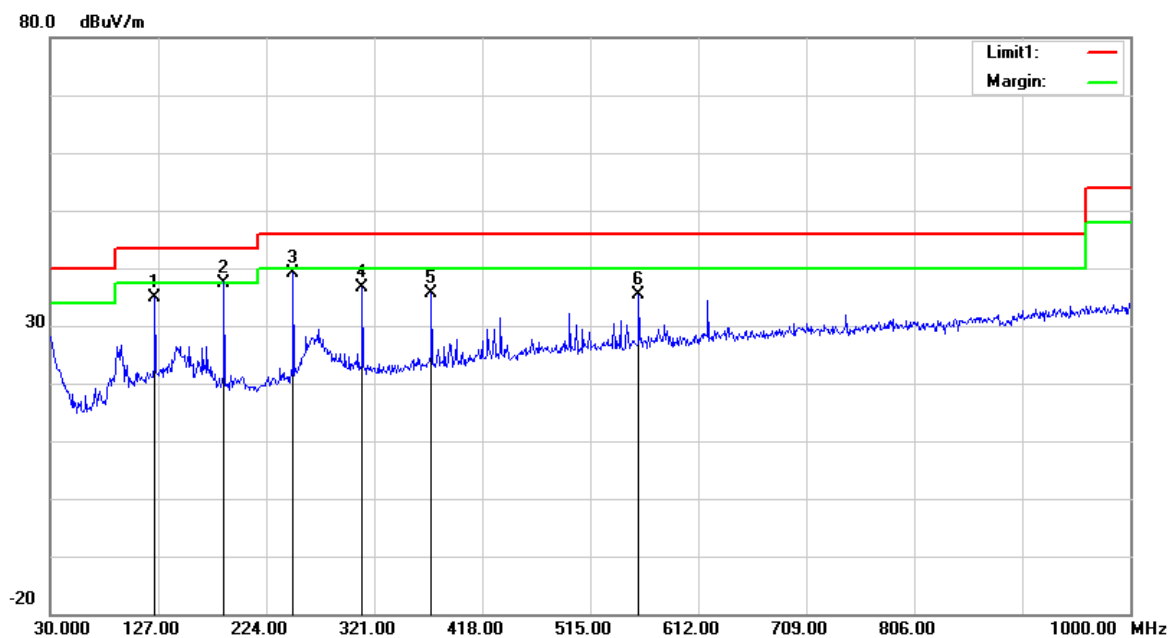1) 30MHz-1GHz (BDR High channel was the worst)**Horizontal:**

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
124.0900	39.58	peak	-4.75	34.83	43.50	8.67
186.1700	44.65	peak	-7.15	37.50	43.50	6.00
248.2500	45.05	peak	-5.87	39.18	46.00	6.82
310.3300	40.18	peak	-3.49	36.69	46.00	9.31
372.4100	38.26	peak	-2.68	35.58	46.00	10.42
558.6500	35.06	peak	0.31	35.37	46.00	10.63

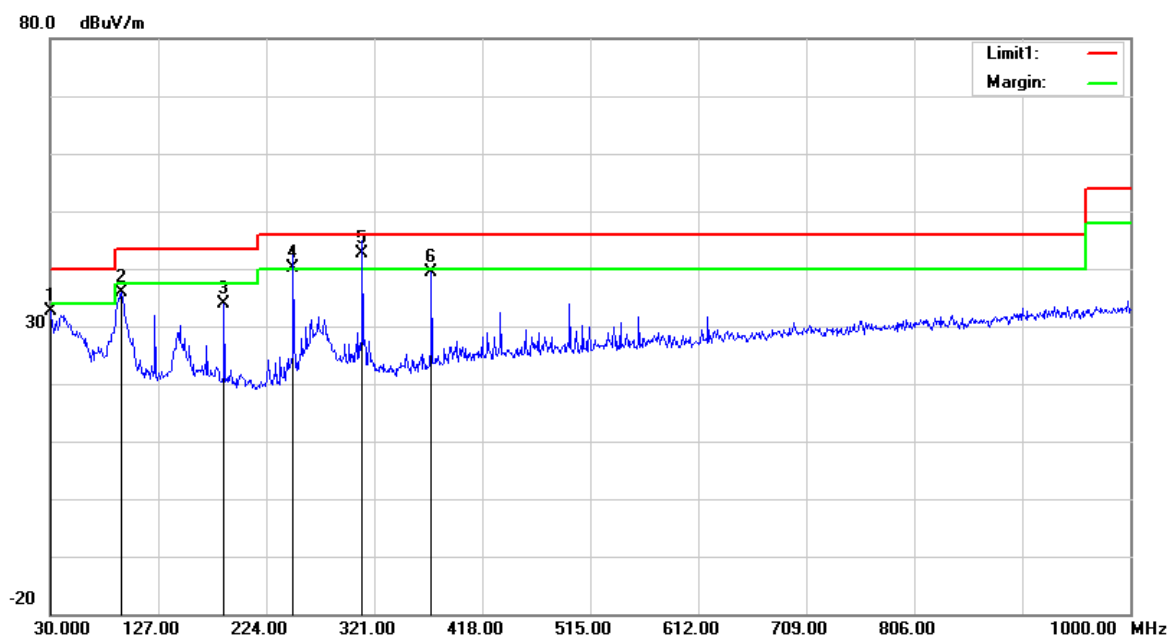Vertical:




Frequency (MHz)	Receiver Reading (dB μ V)	Remark	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	31.10	peak	1.46	32.56	40.00	7.44
94.0200	46.50	peak	-10.66	35.84	43.50	7.66
186.1700	41.10	peak	-7.15	33.95	43.50	9.55
248.2500	46.05	QP	-5.87	40.18	46.00	5.82
310.3300	46.10	QP	-3.49	42.61	46.00	3.39
372.4100	42.04	peak	-2.68	39.36	46.00	6.64

2)1GHz-25GHz:*BDR Mode(GFSK) was the worst*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	60.21	PK	H	28.10	1.80	0.00	90.11	N/A	N/A
2402.00	59.83	AV	H	28.10	1.80	0.00	89.73	N/A	N/A
2402.00	60.98	PK	V	28.10	1.80	0.00	90.88	N/A	N/A
2402.00	60.66	AV	V	28.10	1.80	0.00	90.56	N/A	N/A
2390.00	25.75	PK	V	28.08	1.80	0.00	55.63	74.00	18.37
2390.00	14.67	AV	V	28.08	1.80	0.00	44.55	54.00	9.45
4804.00	36.41	PK	V	32.91	3.17	25.60	46.89	74.00	27.11
4804.00	28.24	AV	V	32.91	3.17	25.60	38.72	54.00	15.28
7206.00	35.96	PK	V	35.74	4.82	25.60	50.92	74.00	23.08
7206.00	27.14	AV	V	35.74	4.82	25.60	42.10	54.00	11.90
Middle Channel: 2441 MHz									
2441.00	60.13	PK	H	28.18	1.82	0.00	90.13	N/A	N/A
2441.00	59.77	AV	H	28.18	1.82	0.00	89.77	N/A	N/A
2441.00	60.67	PK	V	28.18	1.82	0.00	90.67	N/A	N/A
2441.00	60.28	AV	V	28.18	1.82	0.00	90.28	N/A	N/A
4882.00	35.64	PK	V	33.06	3.27	25.66	46.31	74.00	27.69
4882.00	27.30	AV	V	33.06	3.27	25.66	37.97	54.00	16.03
7323.00	35.17	PK	V	36.04	4.62	25.73	50.10	74.00	23.90
7323.00	26.10	AV	V	36.04	4.62	25.73	41.03	54.00	12.97
High Channel: 2480 MHz									
2480.00	59.94	PK	H	28.26	1.84	0.00	90.04	N/A	N/A
2480.00	59.70	AV	H	28.26	1.84	0.00	89.80	N/A	N/A
2480.00	60.54	PK	V	28.26	1.84	0.00	90.64	N/A	N/A
2480.00	60.17	AV	V	28.26	1.84	0.00	90.27	N/A	N/A
2483.50	26.77	PK	V	28.27	1.84	0.00	56.88	74.00	17.12
2483.50	15.46	AV	V	28.27	1.84	0.00	45.57	54.00	8.43
4960.00	36.43	PK	V	33.22	3.23	25.63	47.25	74.00	26.75
4960.00	27.46	AV	V	33.22	3.23	25.63	38.28	54.00	15.72
7440.00	34.28	PK	V	36.34	4.41	25.85	49.18	74.00	24.82
7440.00	25.10	AV	V	36.34	4.41	25.85	40.00	54.00	14.00




Worst plots (GFSK Low channel was the worst)
Horizontal

Fundamental
Test with Band
Rejection Filter

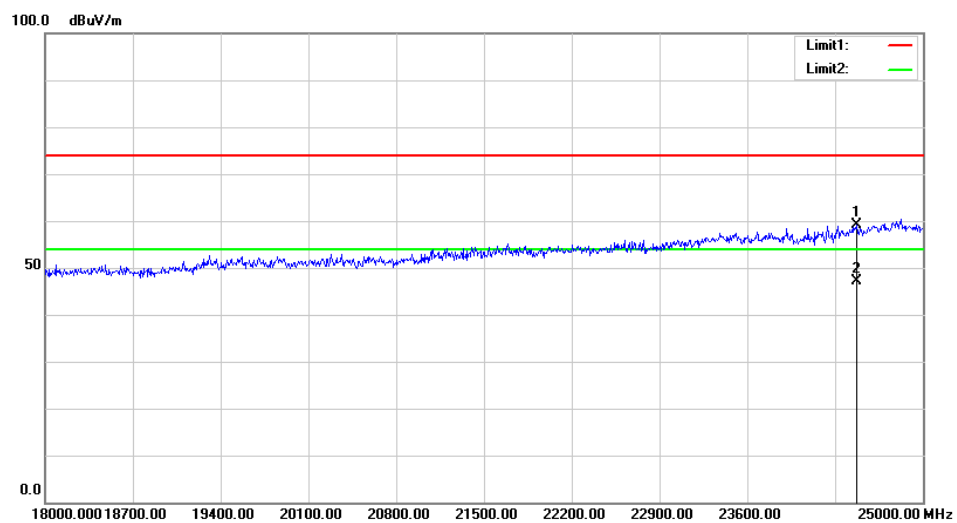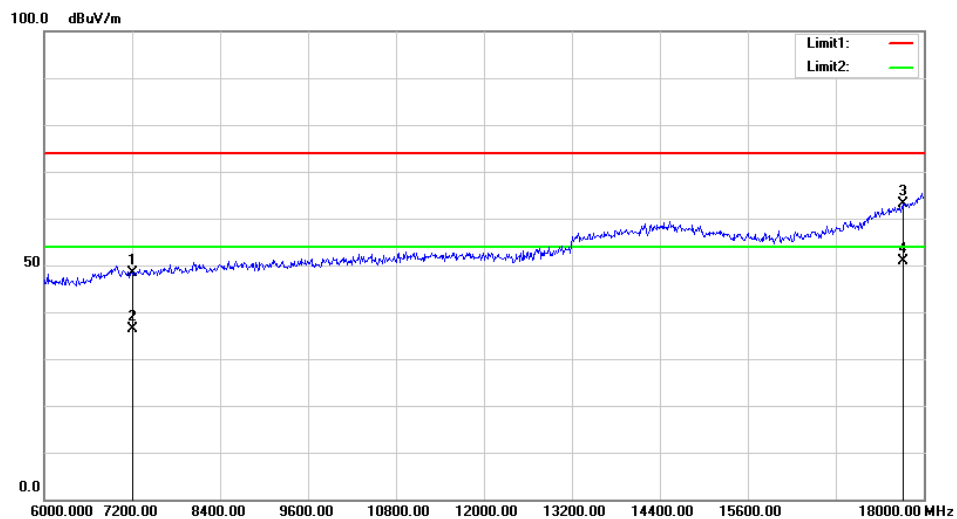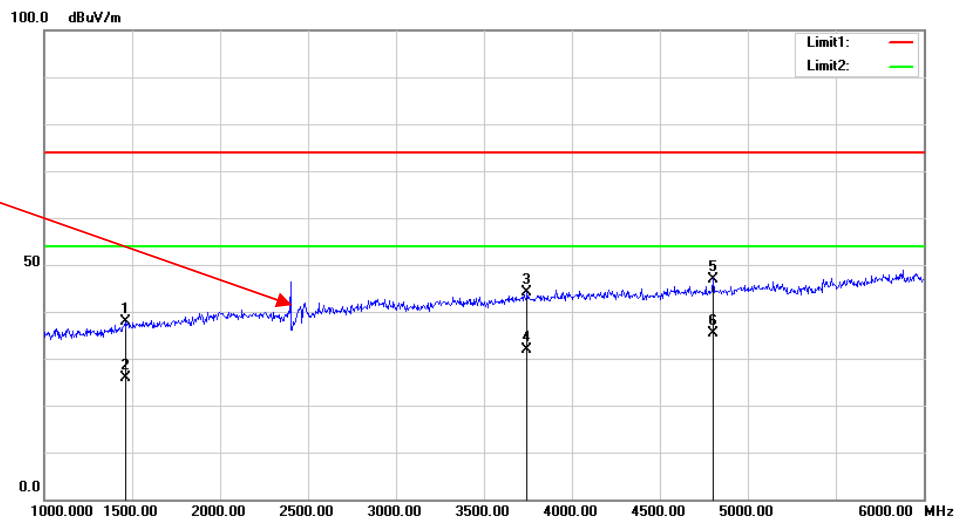

Vertical

Fundamental
Test with Band
Rejection Filter

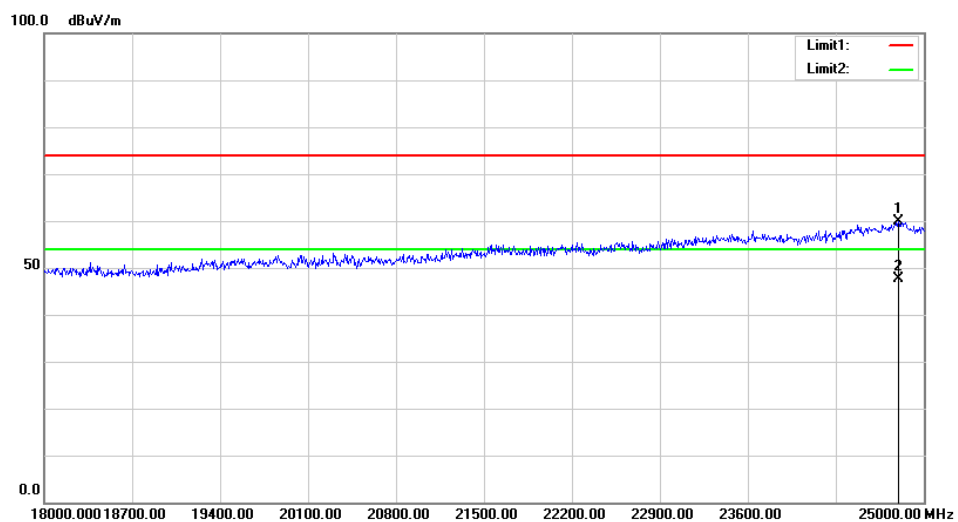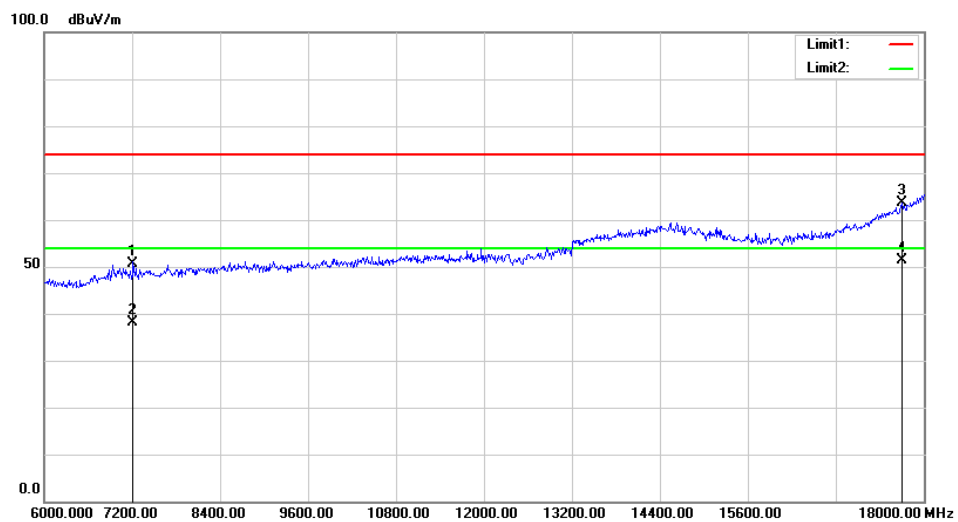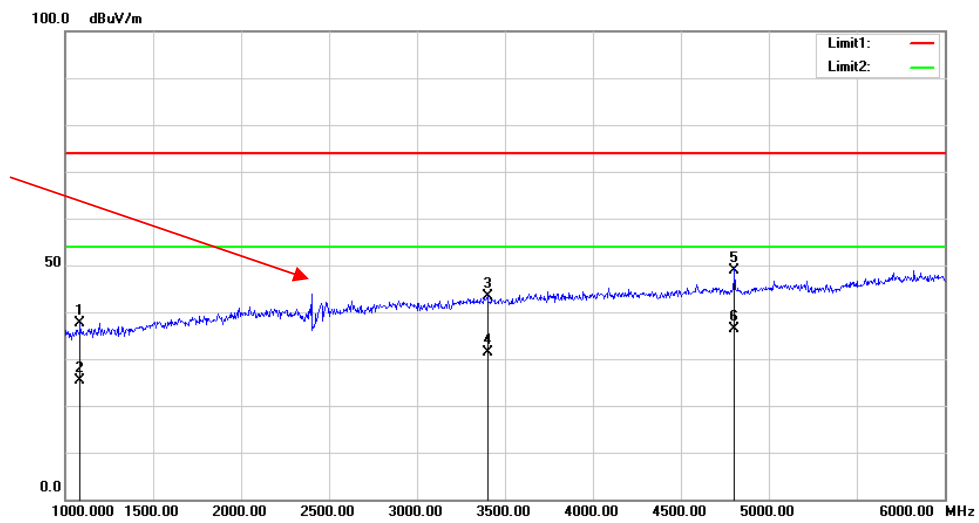

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Vern Shen
Test Date:	2020-07-17

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.002	0.59
	Middle	2441	1.008	0.6
	High	2480	1.002	0.6
EDR ($\pi/4$ -DQPSK)	Low	2402	0.996	0.86
	Middle	2441	0.996	0.87
	High	2480	1.002	0.86
EDR (8DPSK)	Low	2402	1.002	0.81
	Middle	2441	1.002	0.82
	High	2480	1.002	0.83


Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

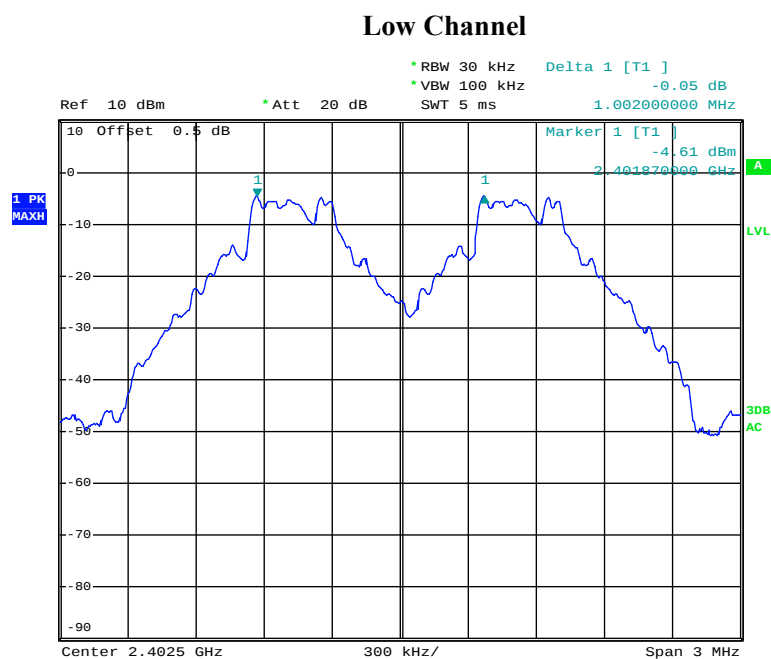


Date: 17.JUL.2020 19:07:50

Middle Channel

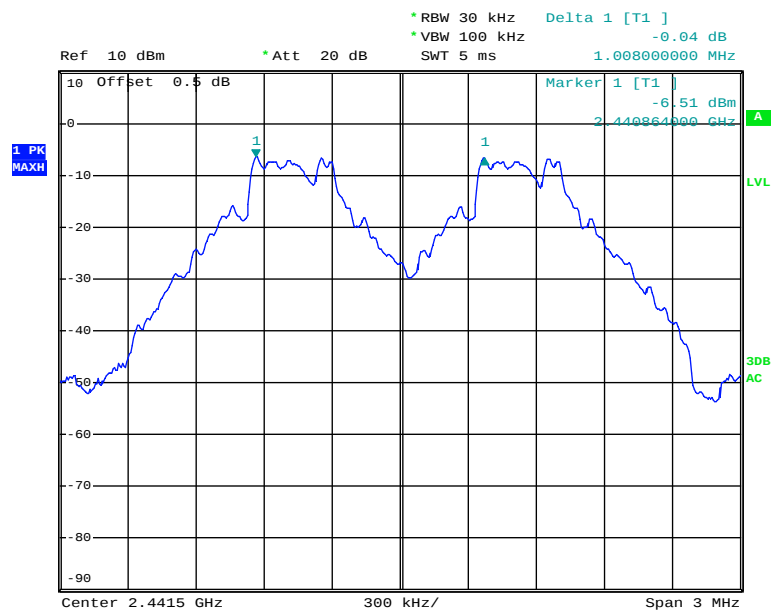


Date: 17.JUL.2020 19:54:43


High Channel

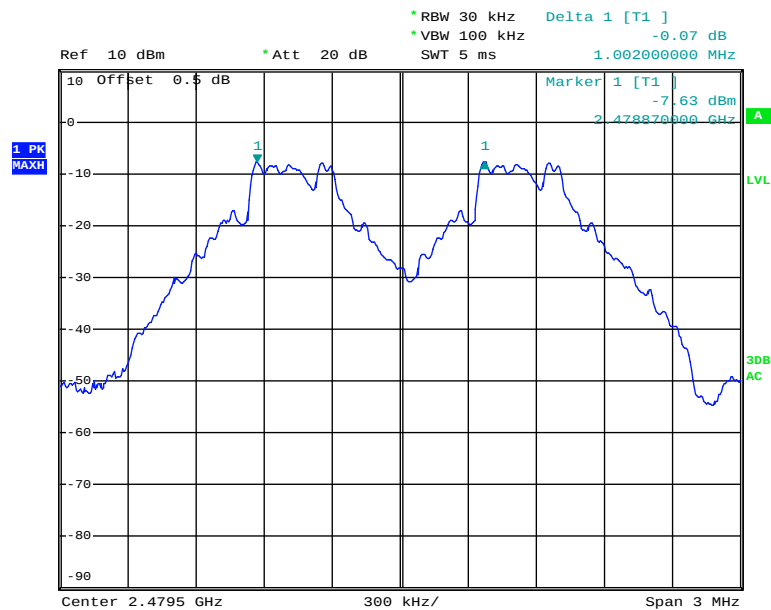

Date: 17.JUL.2020 19:56:37

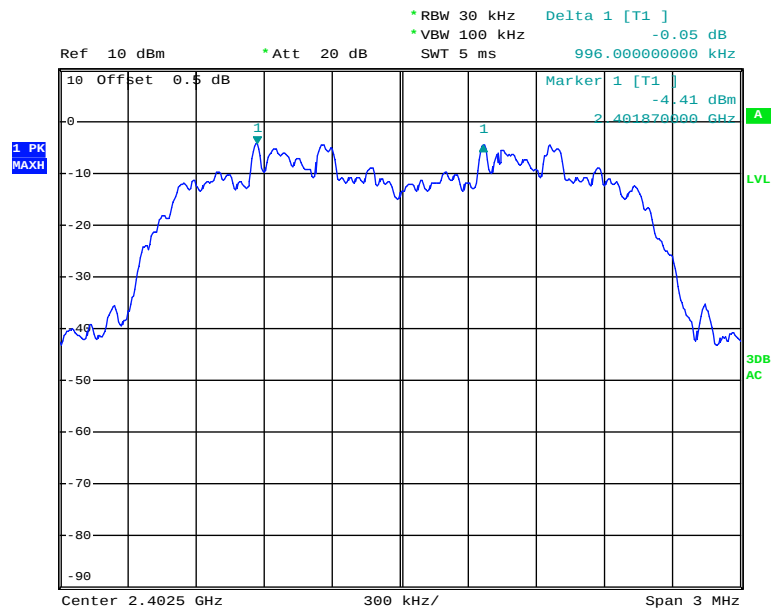
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 17.JUL.2020 19:46:46

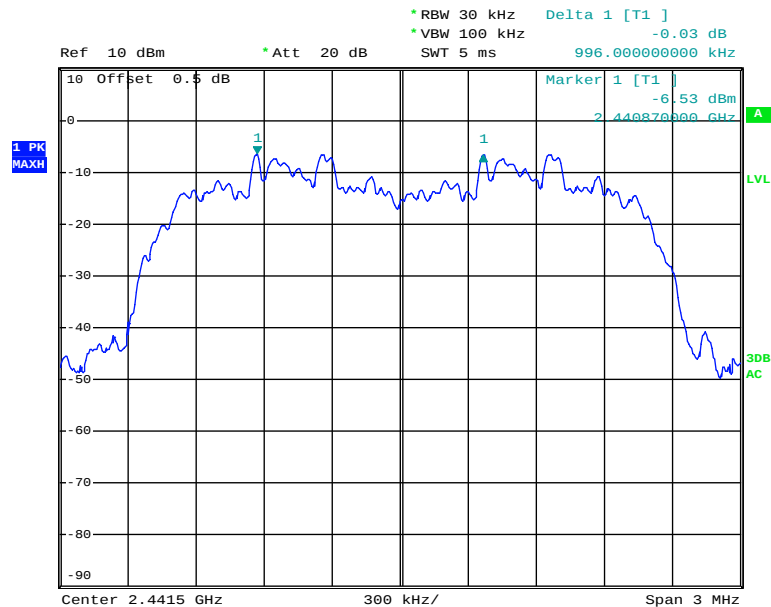Middle Channel

Date: 17.JUL.2020 19:52:59


High Channel

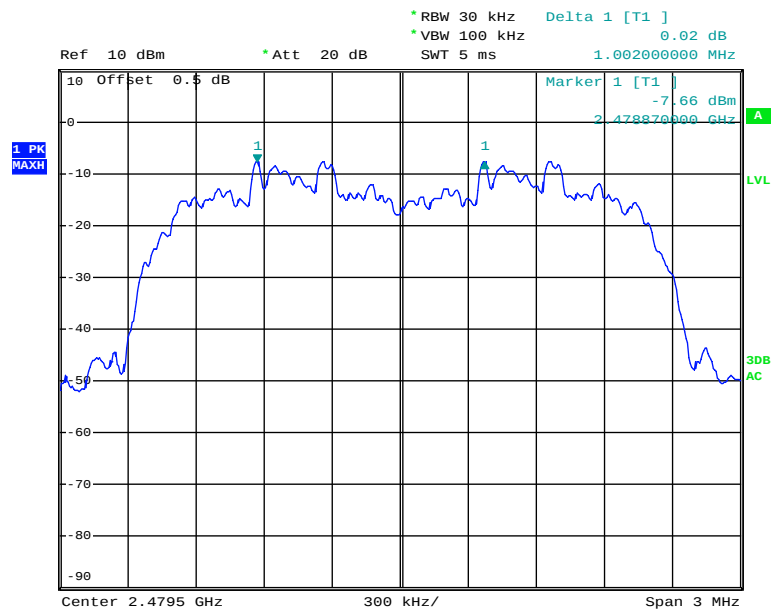

Date: 17.JUL.2020 20:00:26


EDR Mode (8DPSK):

Low Channel

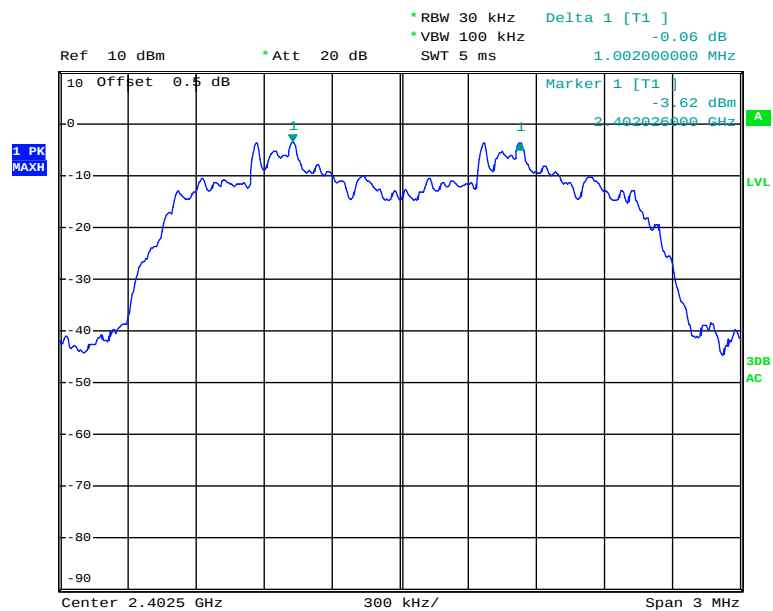


Date: 17.JUL.2020 19:48:28

Middle Channel

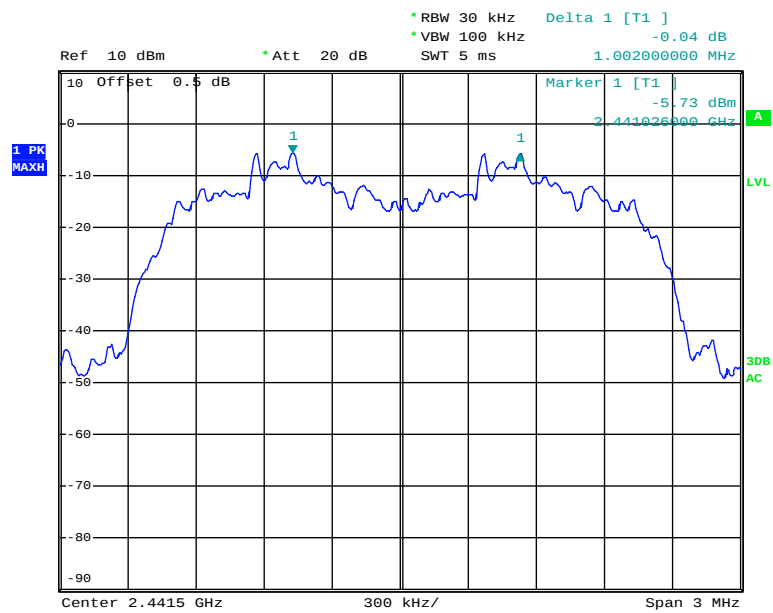

Date: 17.JUL.2020 19:50:27

High Channel

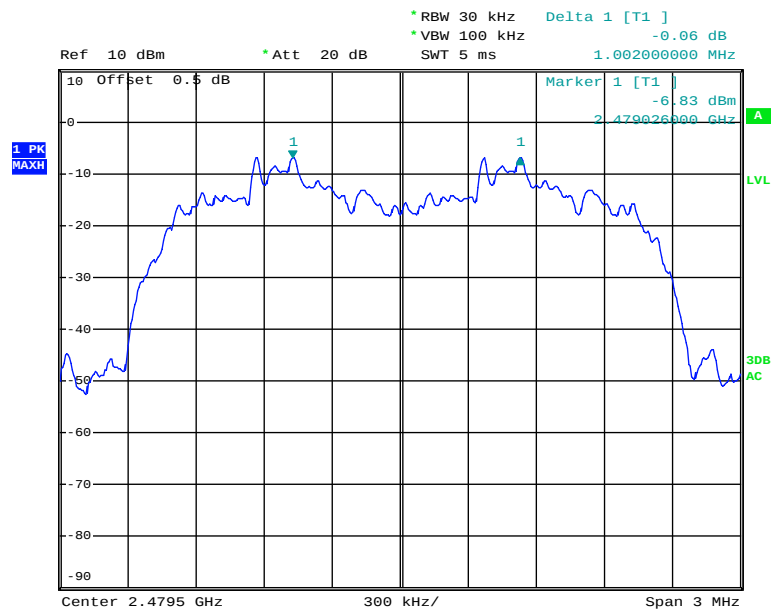

Date: 17.JUL.2020 20:02:06

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Joker Chen
Test Date:	2020-07-17

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.892
	Middle	2441	0.900
	High	2480	0.900
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.296
	Middle	2441	1.300
	High	2480	1.296
EDR Mode (8DPSK)	Low	2402	1.220
	Middle	2441	1.228
	High	2480	1.244

BDR Mode (GFSK):


Low Channel

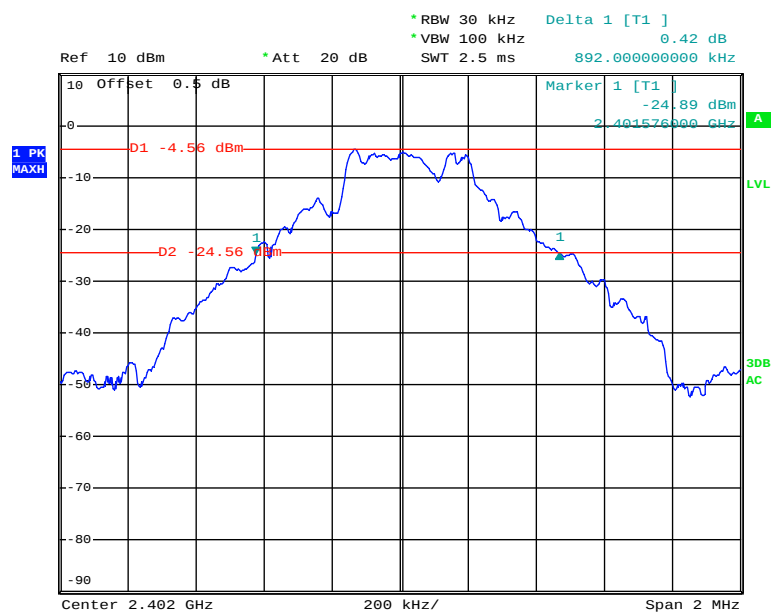


Date: 17.JUL.2020 19:06:30

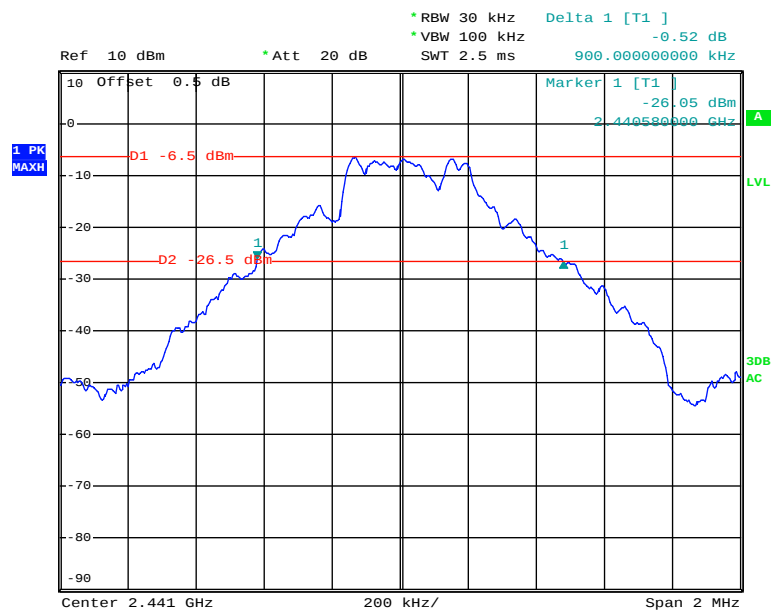Middle Channel


Date: 17.JUL.2020 19:53:51

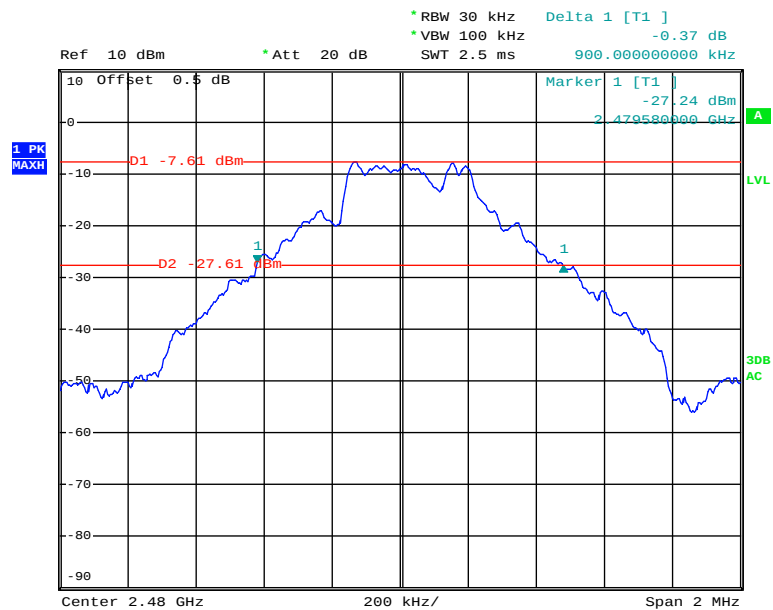High Channel

Date: 17.JUL.2020 19:55:30

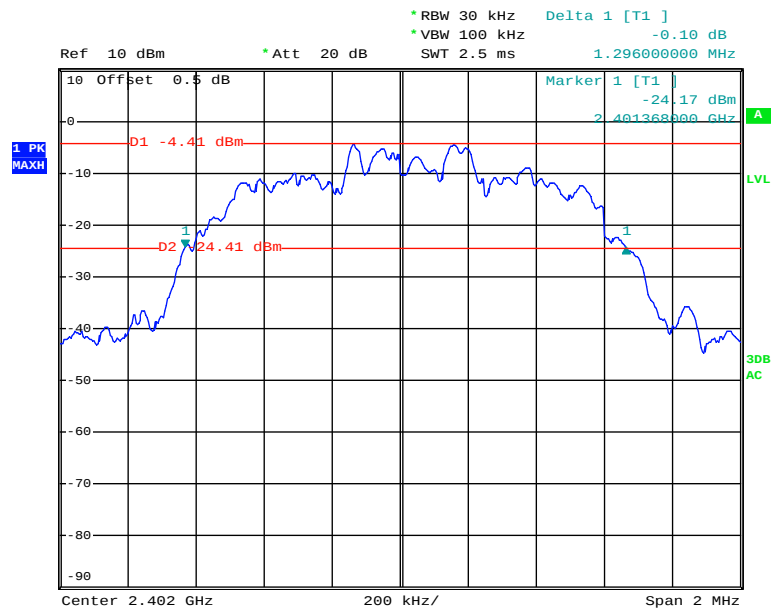
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 17.JUL.2020 19:45:37

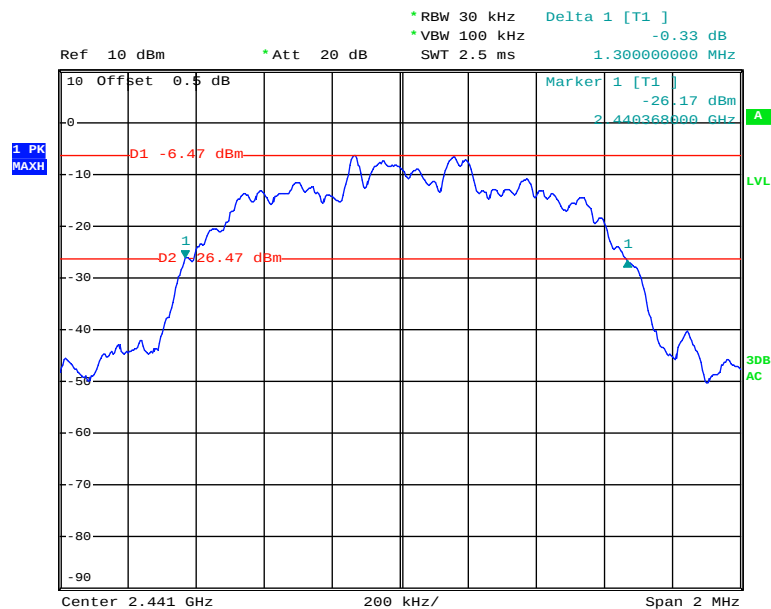Middle Channel

Date: 17.JUL.2020 19:52:11


High Channel

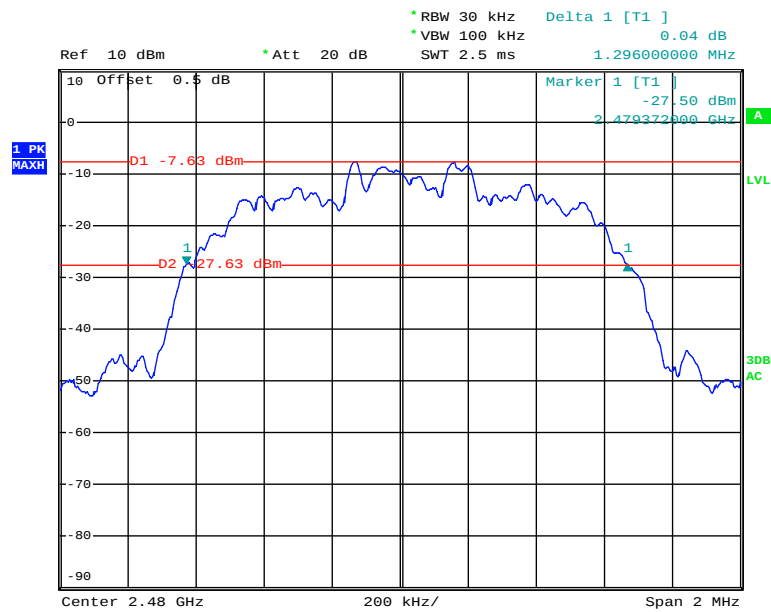

Date: 17.JUL.2020 19:57:13


EDR Mode (8DPSK):

Low Channel

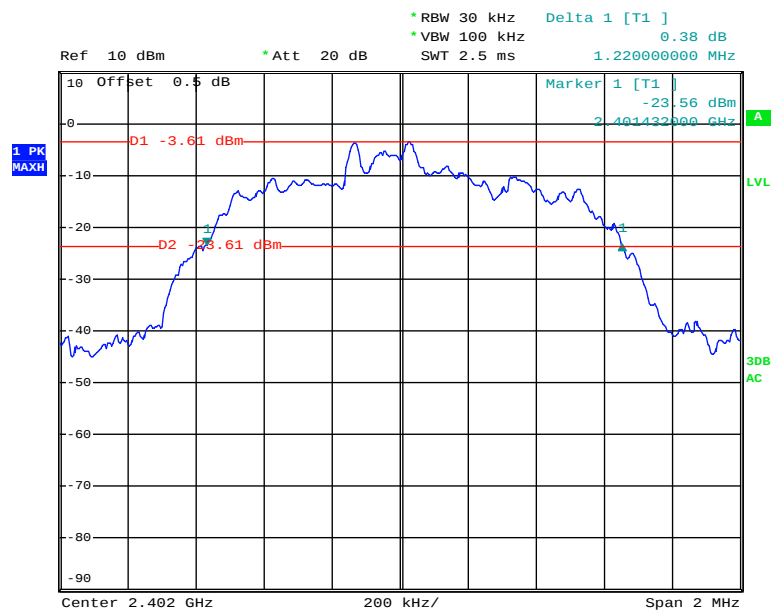


Date: 17.JUL.2020 19:47:22

Middle Channel

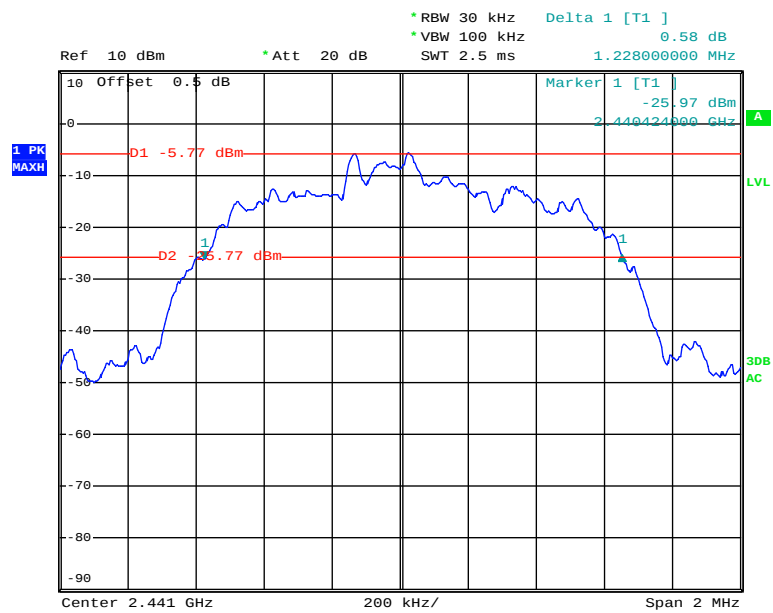

Date: 17.JUL.2020 19:49:05

High Channel

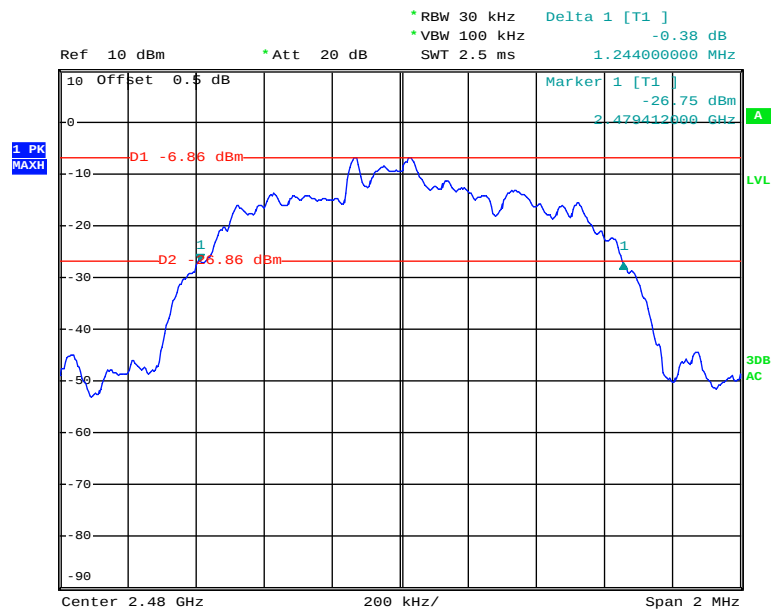

Date: 17.JUL.2020 20:00:59

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Joker Chen
Test Date:	2020-07-17

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

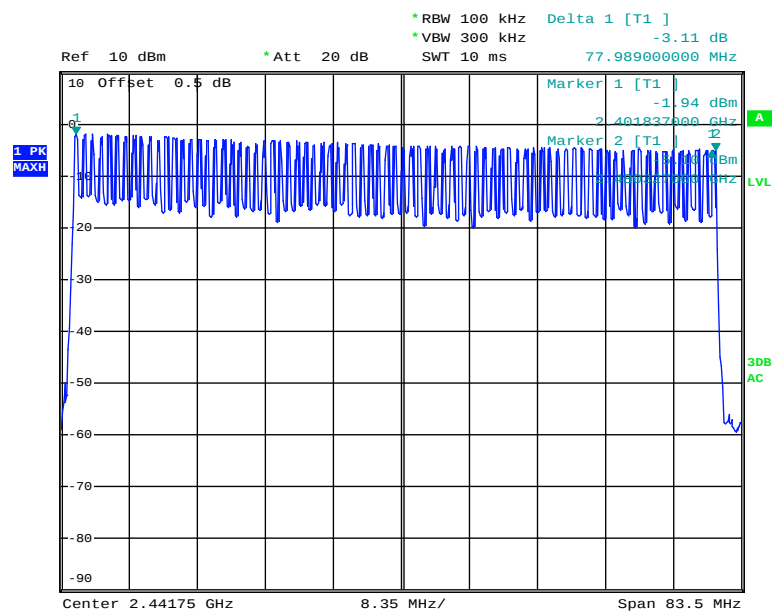BDR Mode (GFSK)


Date: 17.JUL.2020 20:13:09

EDR Mode ($\pi/4$ -DQPSK)

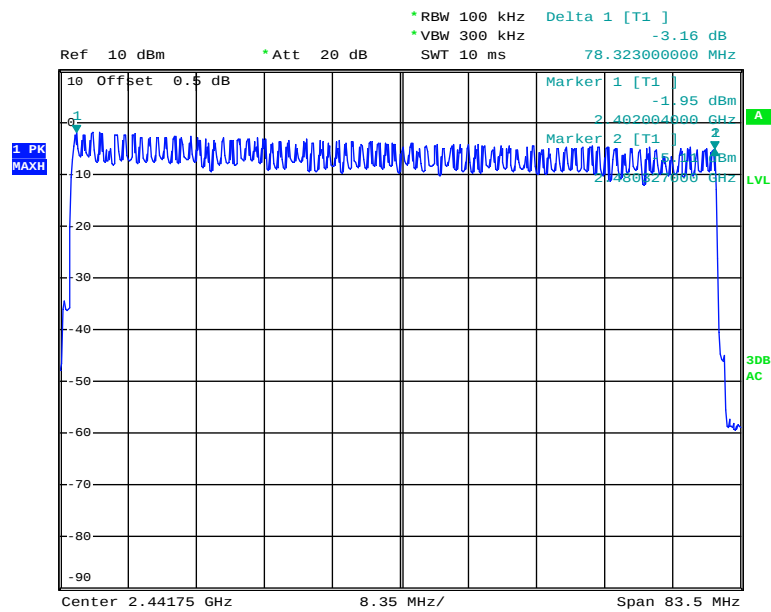

Date: 17.JUL.2020 20:08:48

EDR Mode (8DPSK)

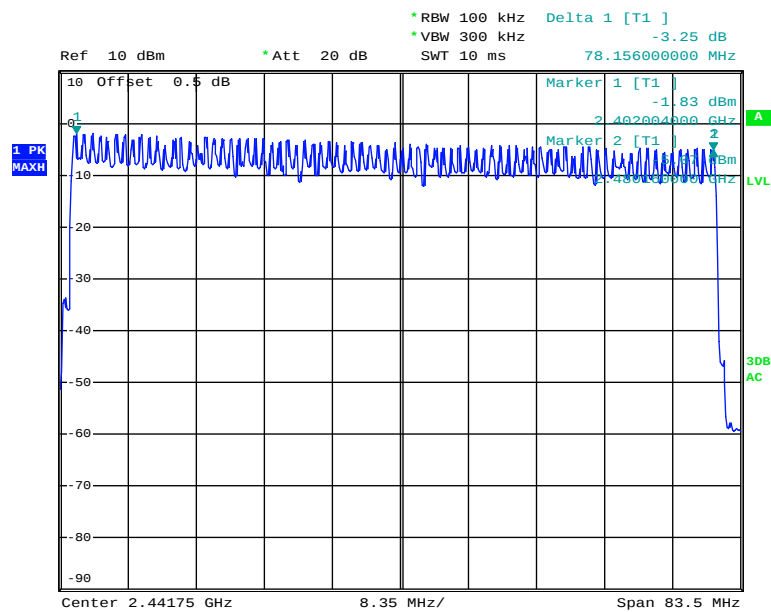

Date: 17.JUL.2020 20:05:26

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Joker Chen
Test Date:	2020-07-17

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Packet type	Channel	Frequency (MHz)	Puse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.414	0.132	0.4
	DH3	Middle	2441	1.706	0.273	
	DH5	Middle	2441	2.946	0.314	
$\pi/4$ DQPSK	2DH1	Middle	2441	0.420	0.134	
	2DH3	Middle	2441	1.706	0.273	
	2DH5	Middle	2441	2.956	0.315	
8DPSK	3DH1	Middle	2441	0.428	0.137	
	3DH3	Middle	2441	1.706	0.273	
	3DH5	Middle	2441	2.946	0.314	
Note: DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s						

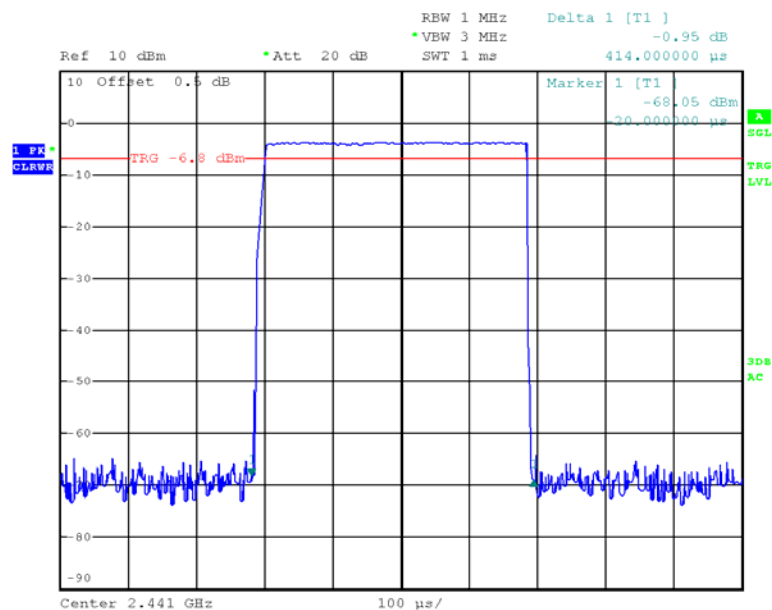*BDR Mode (GFSK):***DH1: Middle Channel**


Date: 17.JUL.2020 20:58:44

DH3: Middle Channel

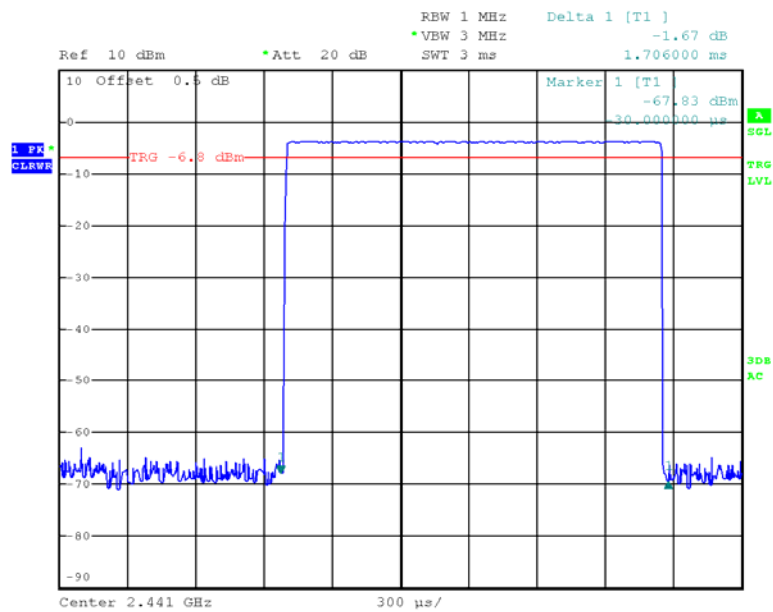


Date: 17.JUL.2020 21:22:00


DH5: Middle Channel

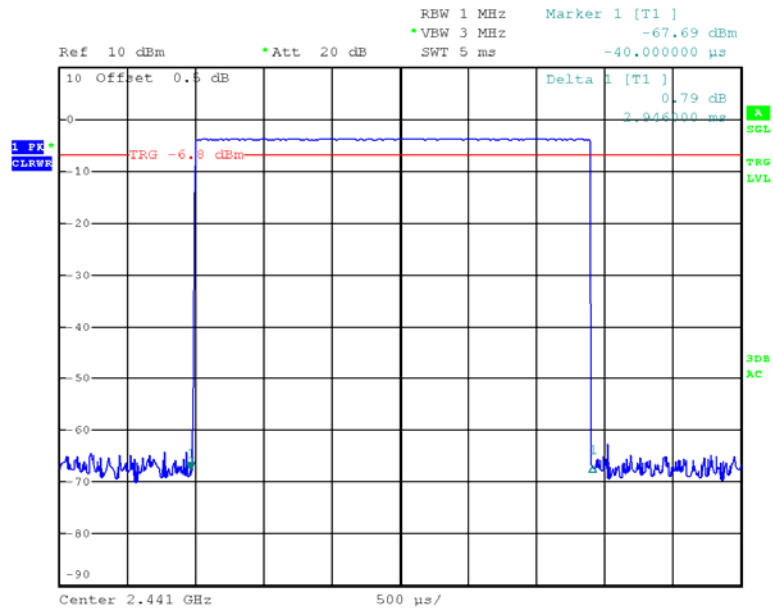


Date: 17.JUL.2020 21:22:35

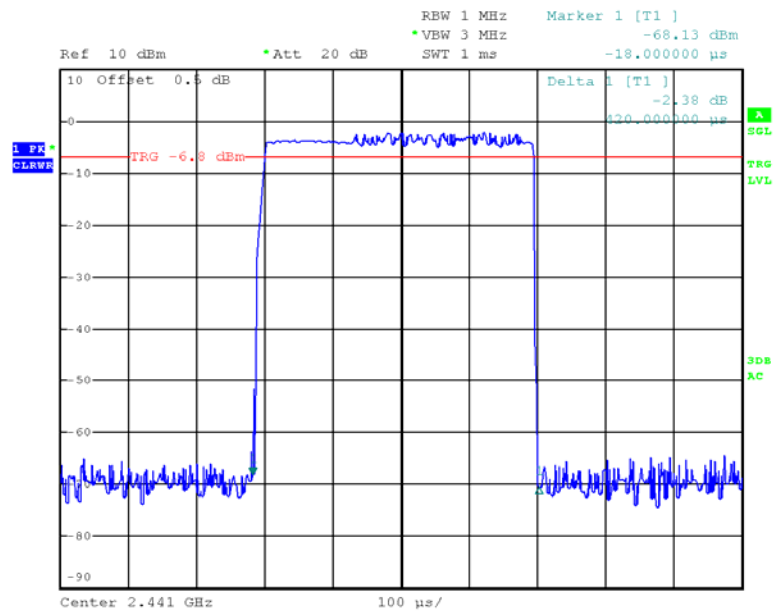*EDR Mode ($\pi/4$ -DQPSK):***2DH1: Middle Channel**


Date: 17.JUL.2020 21:10:14

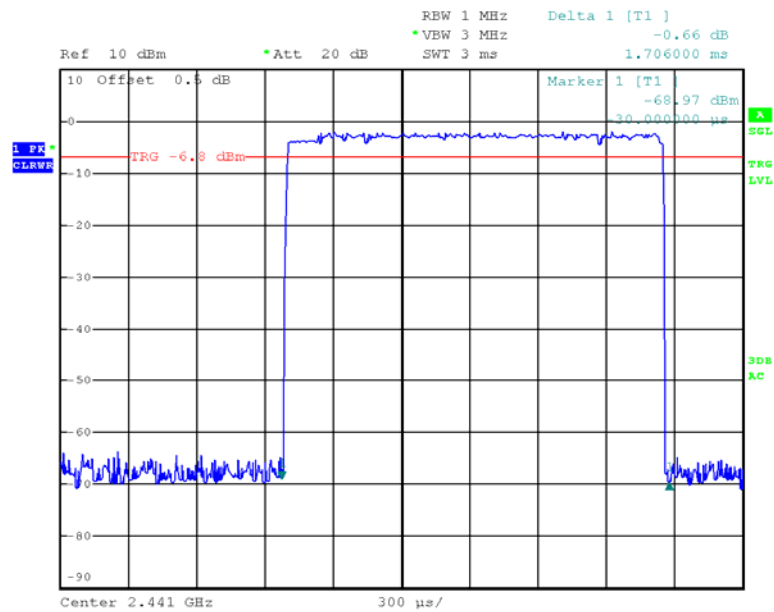2DH3: Middle Channel


Date: 17.JUL.2020 21:20:54

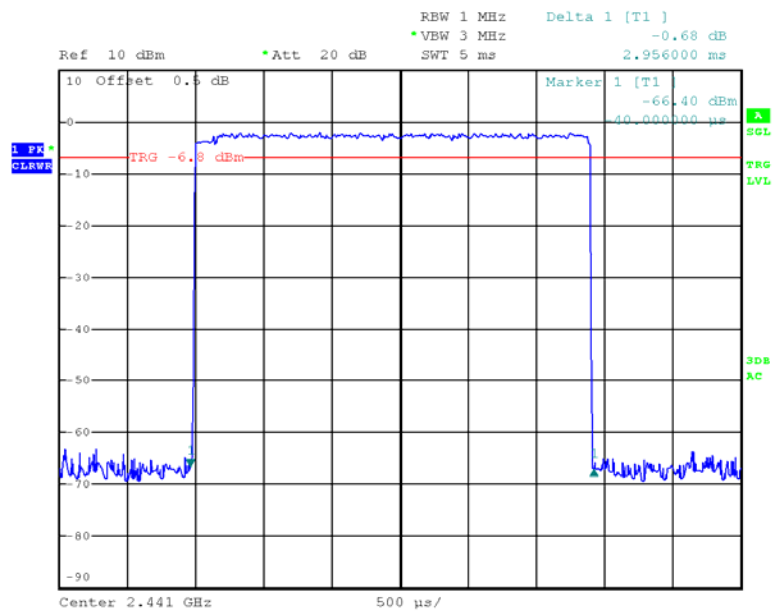2DH5: Middle Channel


Date: 17.JUL.2020 21:23:01

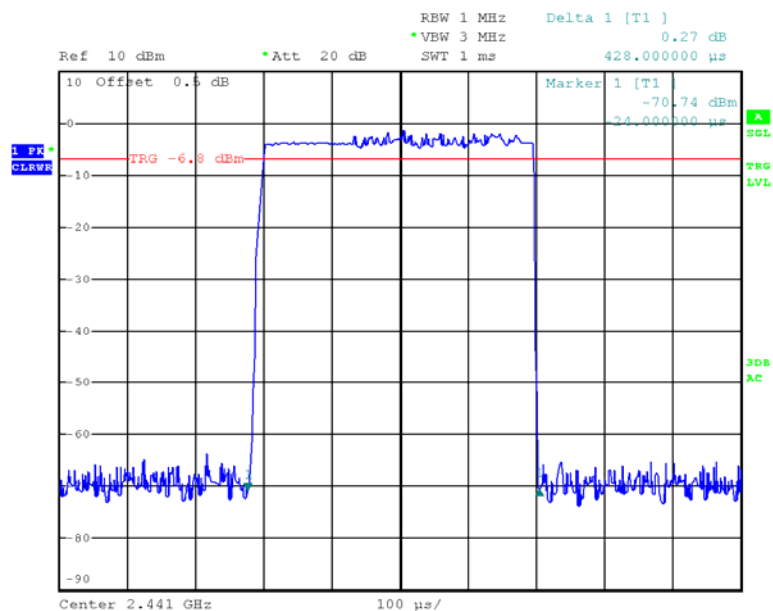*EDR Mode (8DPSK):***3DH1: Middle Channel**

Date: 17.JUL.2020 21:11:00

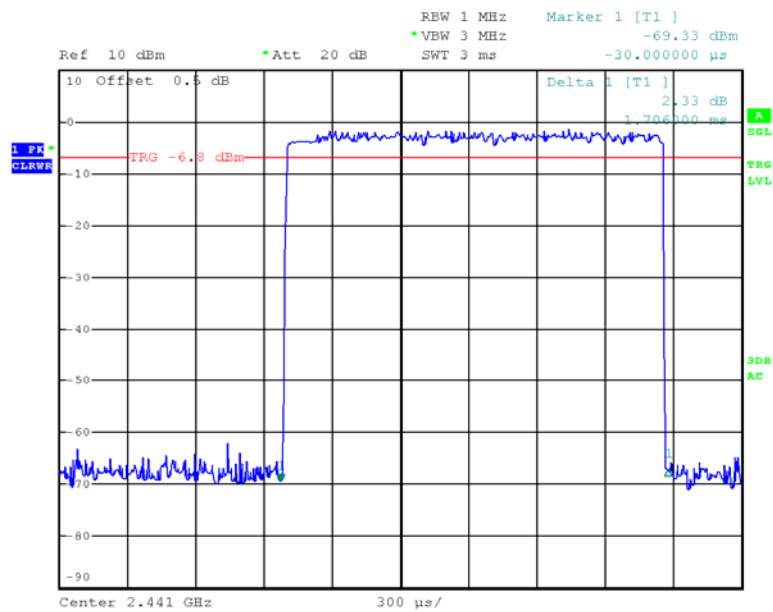3DH3: Middle Channel

Date: 17.JUL.2020 21:20:18

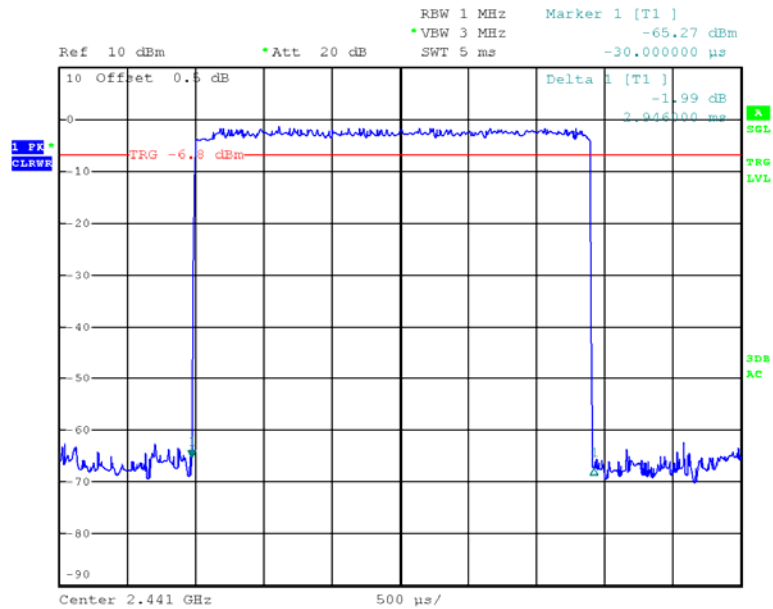3DH5: Middle Channel

Date: 17.JUL.2020 21:23:33

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Joker Chen
Test Date:	2020-07-17

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	-1.51	21
	2441	-3.63	21
	2480	-4.82	21
EDR Mode ($\pi/4$ -DQPSK)	2402	-0.01	21
	2441	-1.95	21
	2480	-3.05	21
EDR Mode (8DPSK)	2402	0.27	21
	2441	-1.48	21
	2480	-2.62	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.5 °C
Relative Humidity:	60 %
ATM Pressure:	100.1 kPa
Test by:	Joker Chen
Test Date:	2020-07-17

Test Result: Compliance

Single Channel Mode,
BDR Mode (GFSK):

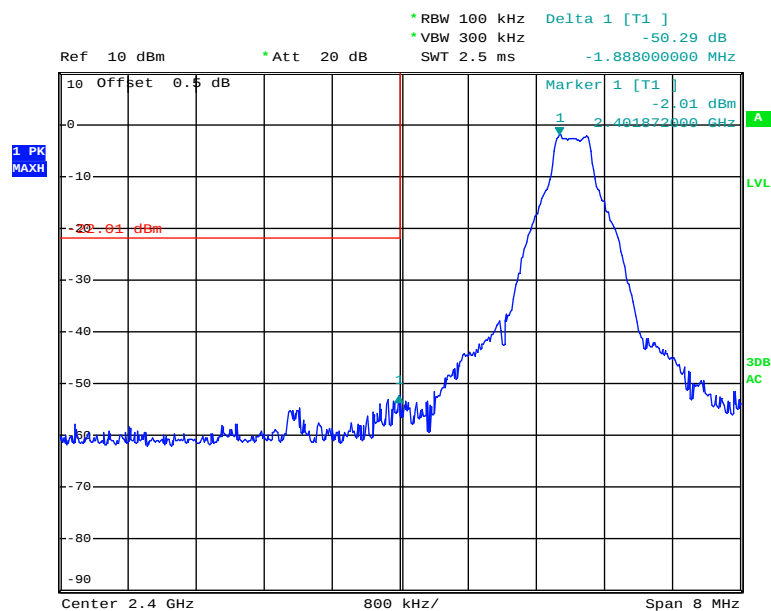Band Edge, Left Side

Date: 17.JUL.2020 19:06:58

[illegible]

EDR Mode ($\pi/4$ -DQPSK):

1 PK
MAXH

Ref 10 dBm * Att 20 dB Delta 1 [T1] -42.32 dB
* RBW 100 kHz VBW 300 kHz SWT 2.5 ms -2.640000000 MHz

10 Offset 0.5 dB


Marker 1 [T1] -1.93 dBm 12.402208000 GHz

-20.93 dBm


3dB
AC

Center 2.4 GHz 800 kHz/ Span 8 MHz


Page 48 of 53

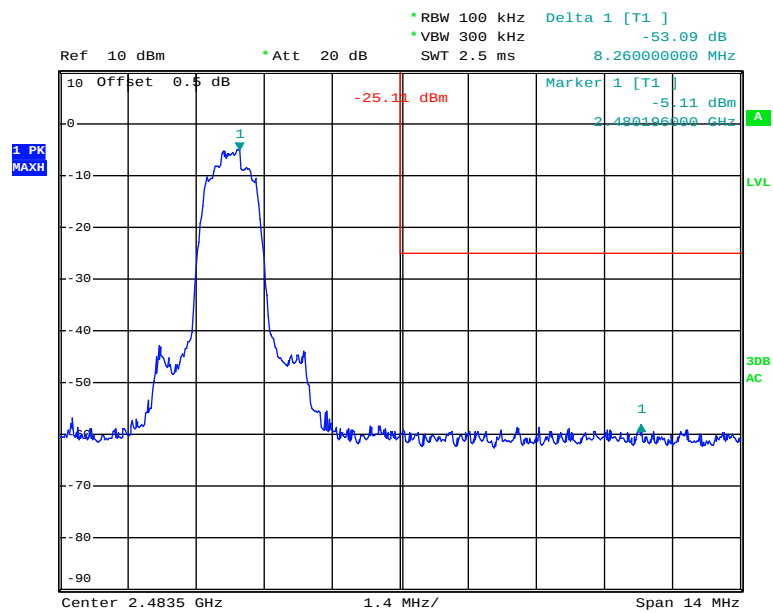Band Edge, Right Side

Date: 17.JUL.2020 19:57:38

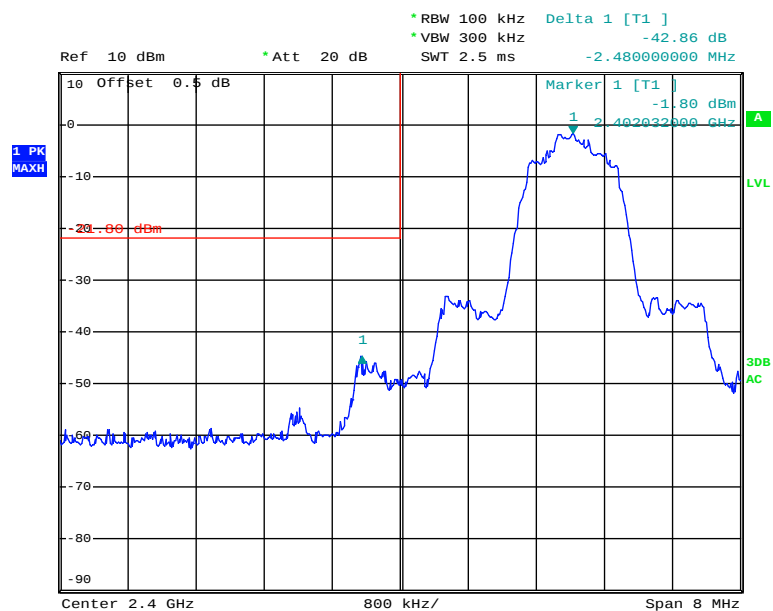
*EDR Mode (8DPSK):***Band Edge, Left Side**

Date: 17.JUL.2020 19:47:47

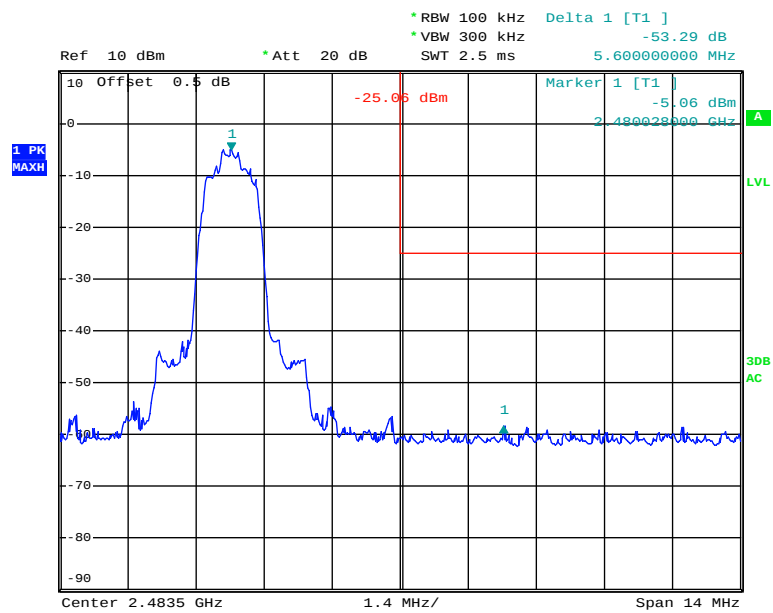
Band Edge, Right Side

Date: 17.JUL.2020 20:01:24


*Hopping Mode,
BDR Mode (GFSK):*

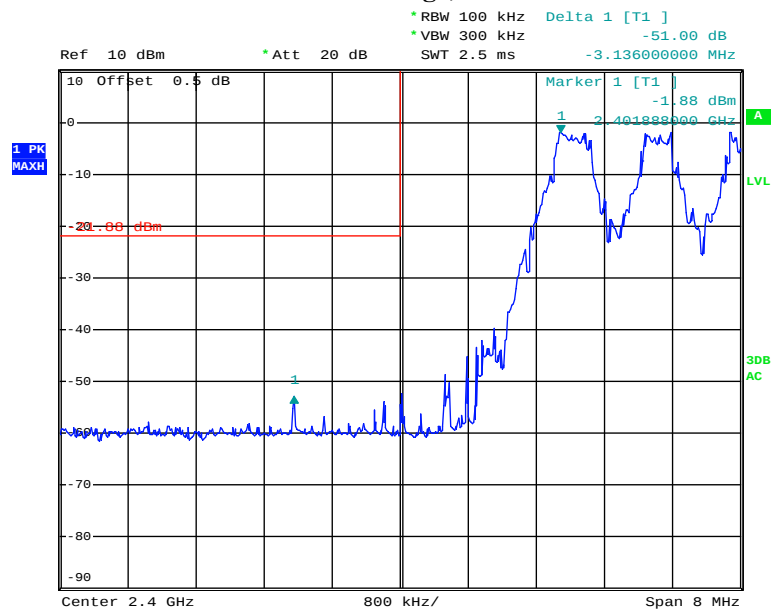Band Edge, Left Side

Date: 17.JUL.2020 20:24:41

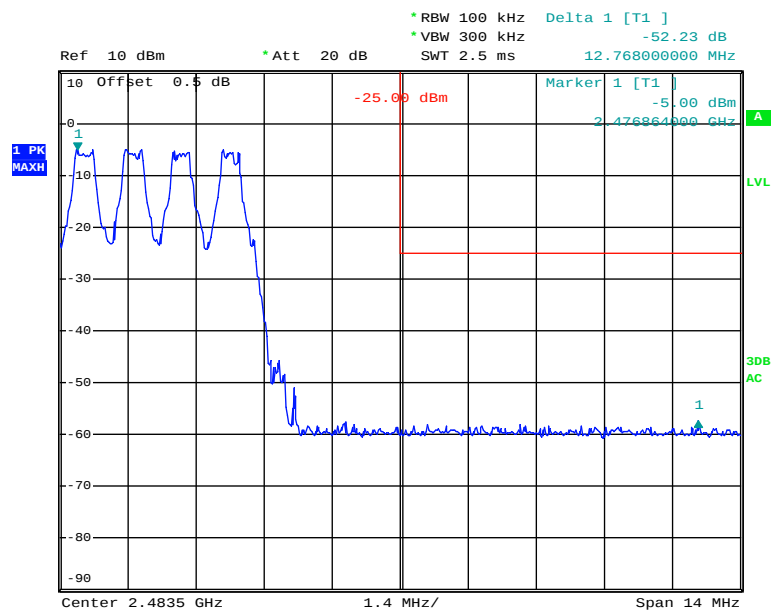
Band Edge, Right Side

Date: 17.JUL.2020 20:27:38

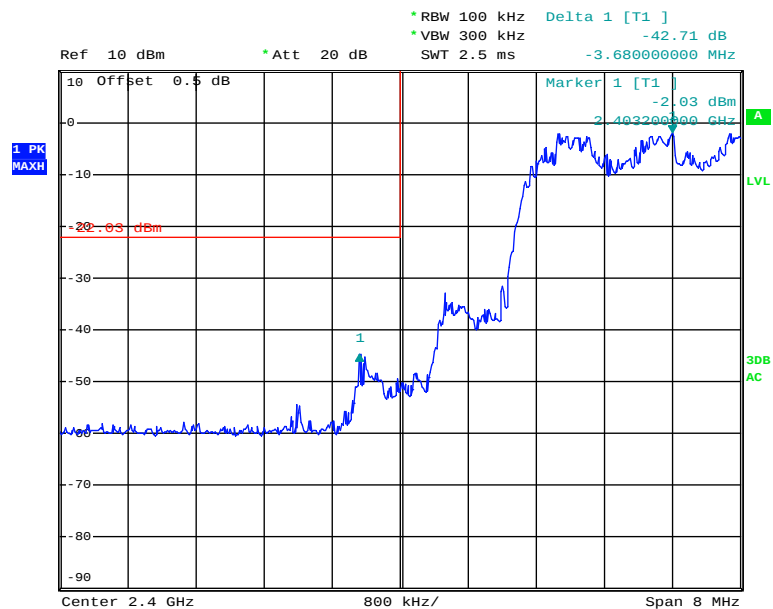*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**

Date: 17.JUL.2020 20:34:09


Band Edge, Right Side

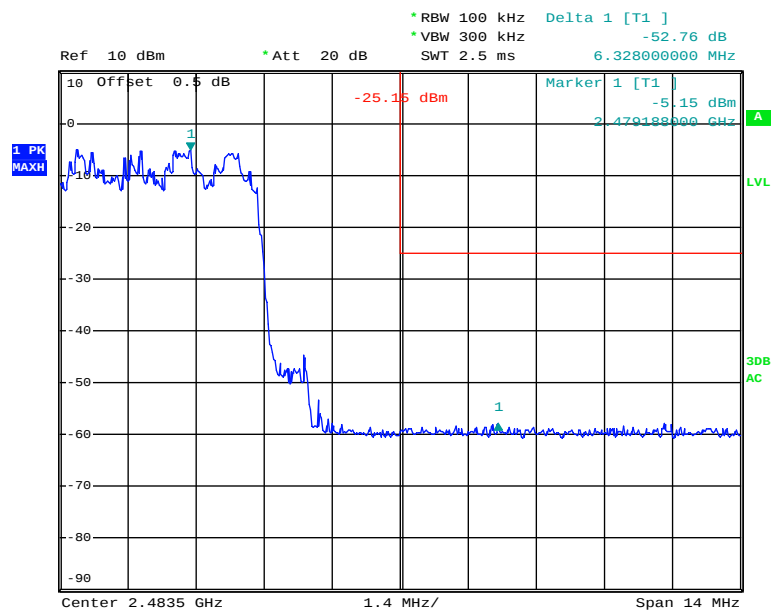

Date: 17.JUL.2020 20:31:12


EDR Mode (8DPSK):

Band Edge, Left Side

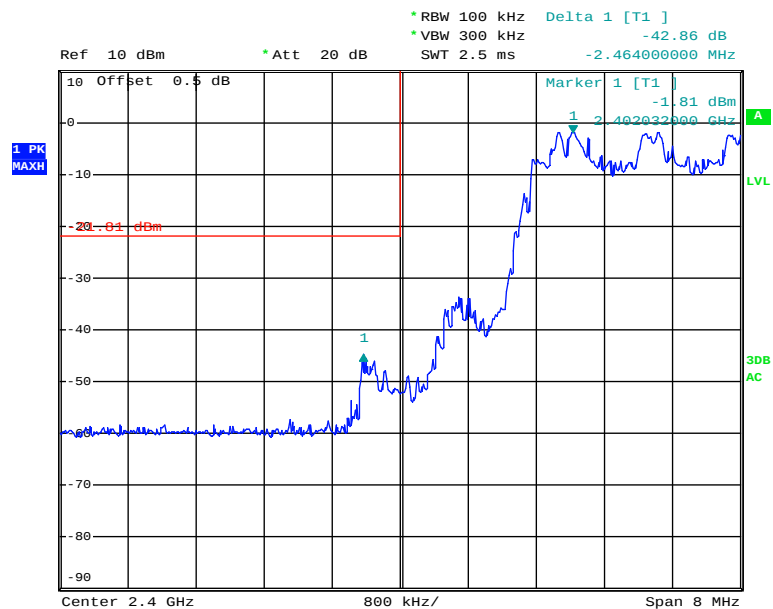

Date: 17.JUL.2020 20:36:21

Band Edge, Right Side

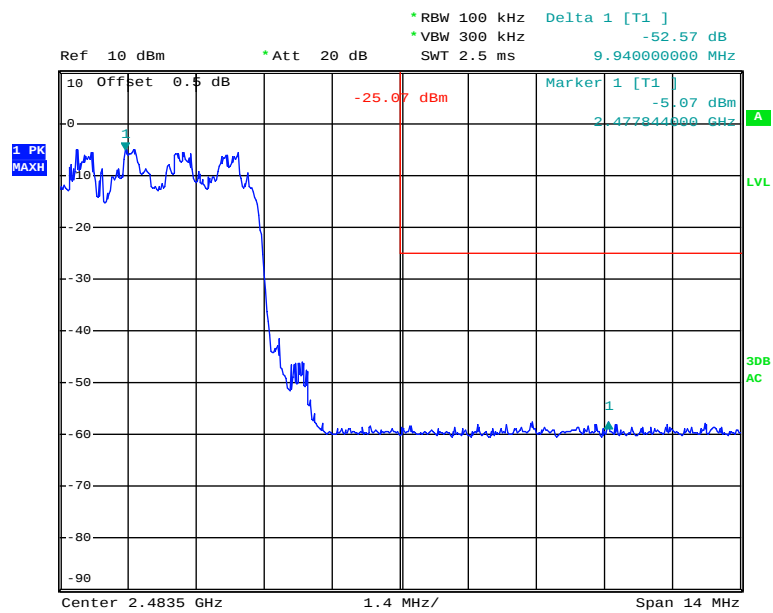

Date: 17.JUL.2020 20:42:17

***** END OF REPORT *****