

Report No.: SZEM130700417702

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 43

FCC REPORT

Application No: SZEM1307004177RF

Applicant: InfoMotion Sports Technologies Inc.

Manufacturer: SEA Electronics Ltd
Factory: SEA Electronics Ltd

Product Name: 94Fifty Smart Sensor Basketball

Model No.(EUT): TBBX001

FCC ID: 2AARZ-TBBX001

Standards: 47 CFR Part 15, Subpart C (2012)

Date of Receipt: 2013-07-31

Date of Test: 2013-08-27 to 2013-09-22

Date of Issue: 2013-09-28

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM130700417702

Page: 2 of 43

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM130700417702

Page: 3 of 43

3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	ST SUMMARY	2
3		ONTENTS	
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT	
	4.4 4.5	DESCRIPTION OF SUPPORT UNITS	
	4.5 4.6	TEST LOCATION TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	EQUIPMENT LIST	8
5	TE	ST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna Requirement	10
	5.2	CONDUCTED PEAK OUTPUT POWER	
	5.3	6DB OCCUPY BANDWIDTH	
	5.4	Power Spectral Density	
	5.5 5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.6 5.7	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.8	RADIATED Spurious Emission	
		8.1 Spurious Emissions	
	5.9	BAND EDGE (RADIATED EMISSION)	33
6	PH	HOTOGRAPHS - EUT TEST SETUP	43
	6.1	RADIATED EMISSION	43
	6.2	RADIATED SPURIOUS EMISSION	43
7	РН	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	43



Report No.: SZEM130700417702

Page: 4 of 43

4 General Information

4.1 Client Information

Applicant:	InfoMotion Sports Technologies Inc.
Address of Applicant:	6625 Dublin Center Dr.Dublin, OHIO 43017, USA
Manufacturer:	SEA Electronics Ltd
Address of Manufacturer:	Unit G-F, 10/F, Blk A, Lianjian Bldg, Chanping Railway Station, Dongguan , Guangdong
Factory:	SEA Electronics Ltd
Address of Factory:	Unit G-F, 10/F, Blk A, Lianjian Bldg, Chanping Railway Station, Dongguan , Guangdong

4.2 General Description of EUT

Name:	94Fifty Smart Sensor Basketball
Model No.:	TBBX001
Trade Mark:	94Fifty
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Number of Channel:	40
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Test Power Grade:	15 (manufacturer declare)
Test Software of EUT:	94Fifty Basketball (manufacturer declare)
Antenna Type	Integral
Antenna Gain	-0.5dBi
Power Supply:	3.7V 240mAh Li-polymer Battery Pack
Test Voltage:	DC 3.7V battery fully charged



Report No.: SZEM130700417702

Page: 5 of 43

Operation I	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2440MHz	
The Highest channel	2480MHz	



Report No.: SZEM130700417702

Page: 6 of 43

4.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1000mbar	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Tablet PC	ASUS	N/A

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM130700417702

Page: 7 of 43

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130700417702

Page: 8 of 43

4.10 Equipment List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04



Report No.: SZEM130700417702

Page: 9 of 43

	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24		
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29		
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29		
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16		
8	Band filter	amideon	82346	SEL0094	2014-05-16		
9	POWER METER	R&S	NRVS	SEL0144	2013-10-24		
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16		
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24		

Note: The calibration interval is one year, all the instruments are valid.





Report No.: SZEM130700417702

Page: 10 of 43

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.5dBi.

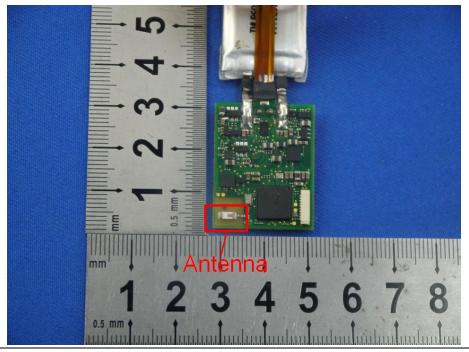




Report No.: SZEM130700417702

Page: 11 of 43

5.2 Conducted Peak Output Power

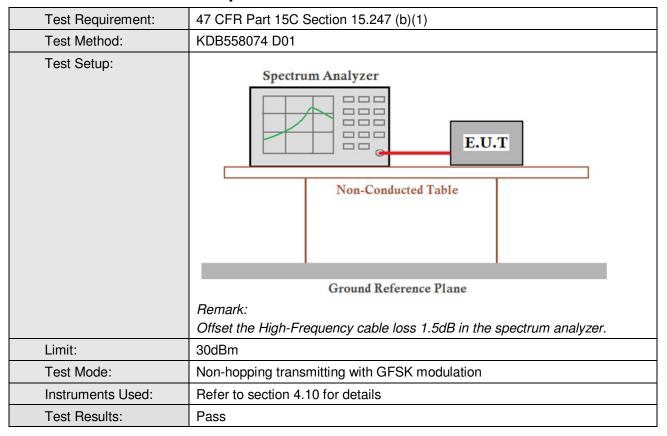

Measurement Data

mododiomont Bata					
GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.39	30.00	Pass		
Middle	0.62	30.00	Pass		
Highest	0.33	30.00	Pass		




Report No.: SZEM130700417702


Page: 12 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

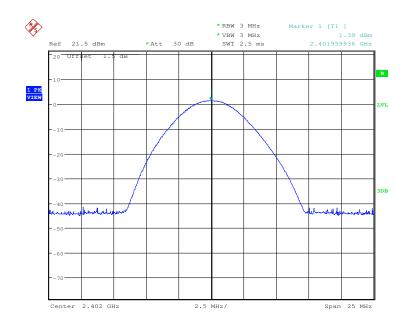



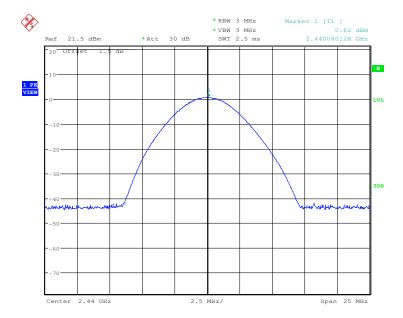




Report No.: SZEM130700417702

Page: 13 of 43

Test mode: GFSK Test channel: Highest

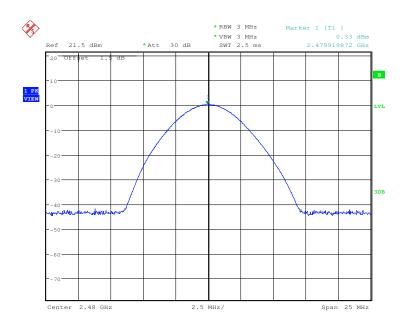




Report No.: SZEM130700417702

Page: 14 of 43

5.3 6dB Occupy Bandwidth

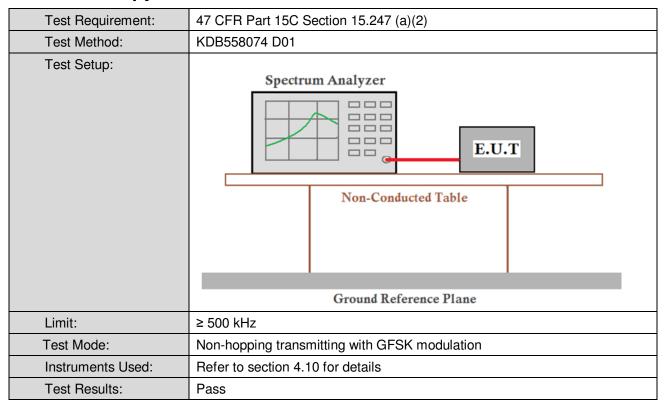

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz) Limit (kHz)		Result
Lowest	663.461538461	≥500	Pass
Middle	663.461538461	≥500	Pass
Highest	668.269230769	≥500	Pass




Report No.: SZEM130700417702


Page: 15 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

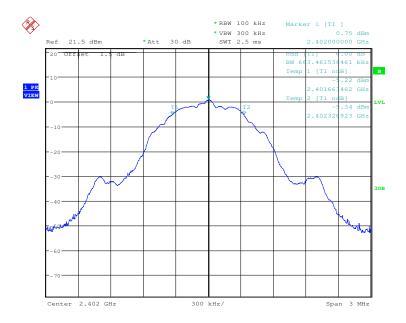



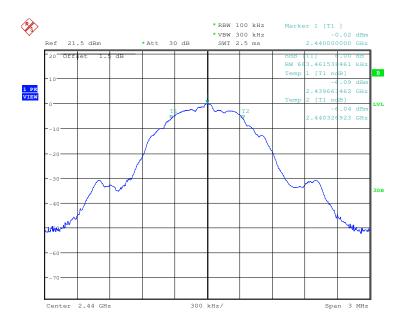




Report No.: SZEM130700417702

Page: 16 of 43

Test mode: GFSK Test channel: Highest

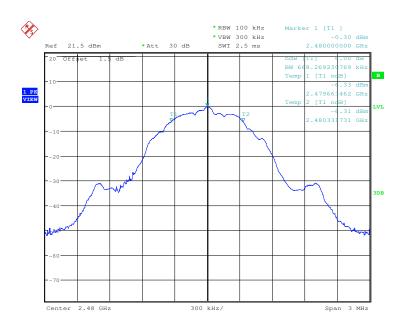




Report No.: SZEM130700417702

Page: 17 of 43

5.4 Power Spectral Density

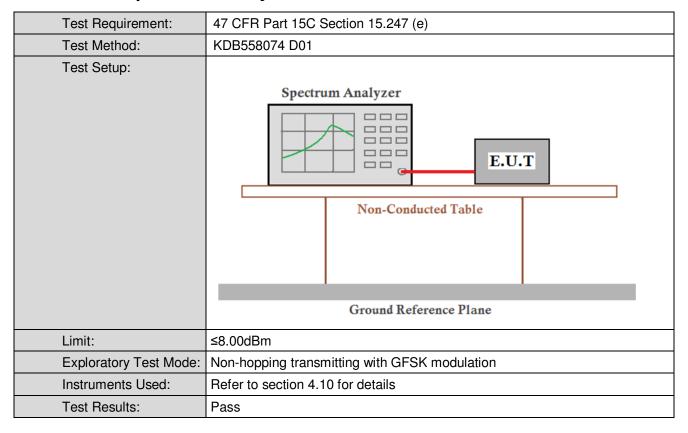

Measurement Data

GFSK mode									
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result						
Lowest	1.62	≤8.00	Pass						
Middle	1.63	≤8.00	Pass						
Highest	1.08	≤8.00	Pass						




Report No.: SZEM130700417702


Page: 18 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

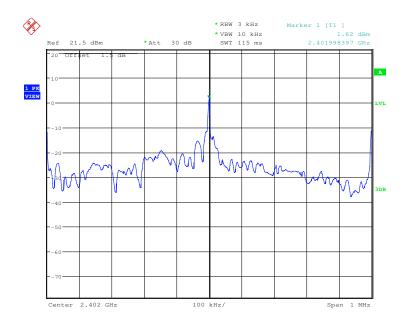



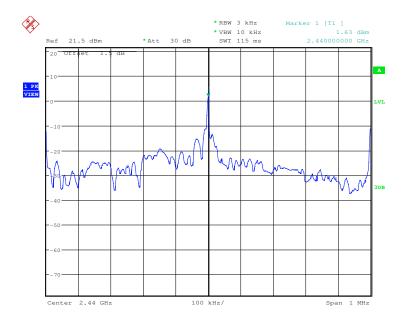




Report No.: SZEM130700417702

Page: 19 of 43

Test mode: GFSK Test channel: Highest

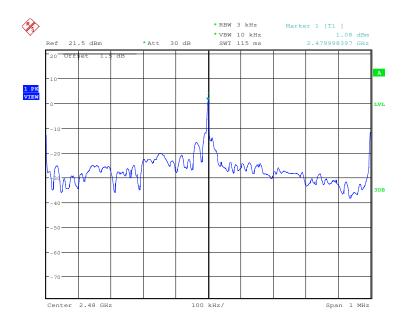






Report No.: SZEM130700417702

Page: 20 of 43

5.5 Band-edge for RF Conducted Emissions

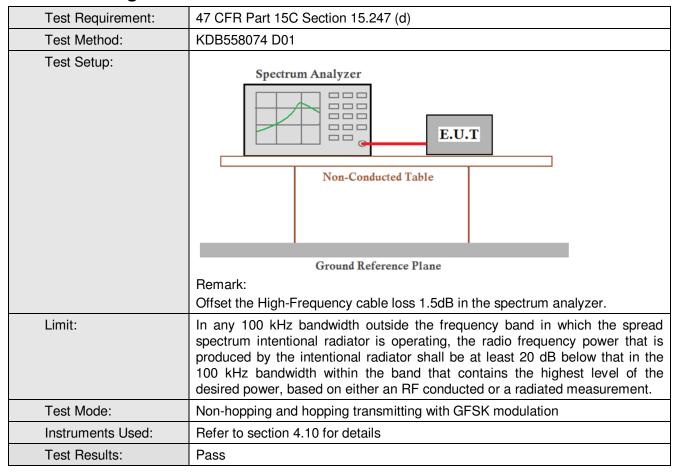




Report No.: SZEM130700417702


Page: 21 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest

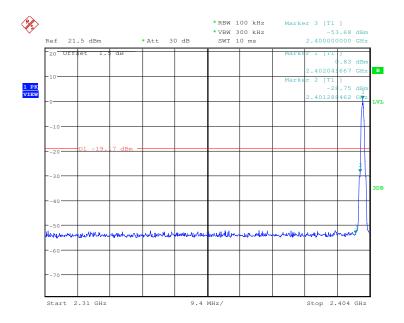

Test mode: GFSK Test channel: Highest

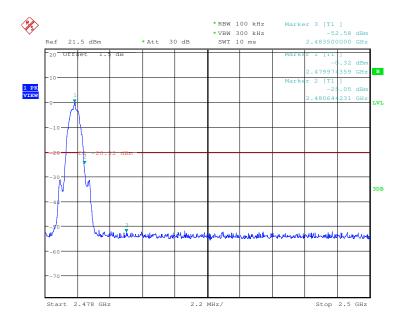



Report No.: SZEM130700417702

Page: 22 of 43

5.6 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Non-hopping transmitting with GFSK modulation					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					




Report No.: SZEM130700417702

Page: 23 of 43

Test mode: GFSK Test channel: Lowest

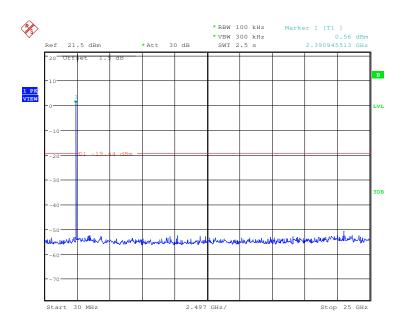



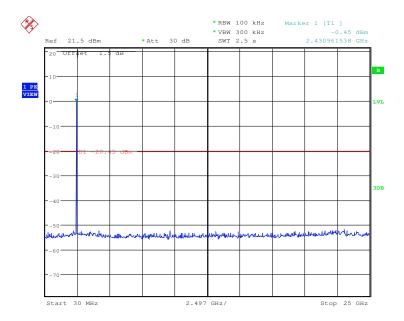




Report No.: SZEM130700417702

Page: 24 of 43

Test mode: GFSK Test channel: Highest

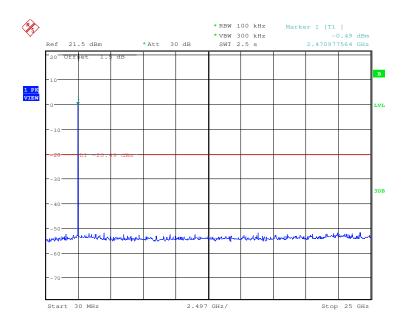



Report No.: SZEM130700417702

Page: 25 of 43

5.7 Pseudorandom Frequency Hopping Sequence

Test Requirement:


47 CFR Part 15C Section 15.247 (a)(1) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM130700417702

Page: 26 of 43


5.8 Radiated Spurious Emission

5.8.1 Spurious Emissions									
Test Requirement:	47 CFR Part 15C Section	on 1	5.209 and 15	.205					
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance	: 3m	n (Semi-Anech	noic Cham	bei	r)			
Receiver Setup:	Frequency		Detector	RBW	'	VBW	Remark		
	0.009MHz-0.090MH	Z	Peak	10kHz	<u>z</u>	30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	<u>z</u>	30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	Z	30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	Z	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	Z	30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	<u>-</u>	3MHz	Peak		
	Above IGHZ		Peak	1MHz	<u>'</u>	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (n		
	0.009MHz-0.490MHz	2	400/F(kHz)	-			300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-		-	30		
	1.705MHz-30MHz		30	-		-	30		
	30MHz-88MHz		100	40.0	Q	uasi-peak	3		
	88MHz-216MHz		150	43.5	Q	uasi-peak	3		
	216MHz-960MHz		200	46.0	Q	uasi-peak	3		
	960MHz-1GHz	60MHz-1GHz 500		54.0	Q	uasi-peak	3		
	Above 1GHz 500		54.0		Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								
Test Setup:	•		•						



Report No.: SZEM130700417702

Page: 27 of 43






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)



Report No.: SZEM130700417702

Page: 28 of 43

	 h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM130700417702

Page: 29 of 43

Radiated Emission below 1GHz						
30MHz~1GHz (QP)						
Test mode:	Transmitting	Vertical				



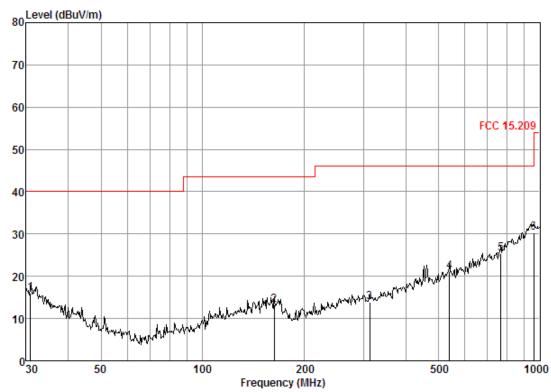

Condition: FCC 15.209 3m 3142C VERTICAL

Job No. : 4177RF Mode : TX mode

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4	30. 85 163. 18 313. 28 539. 48	1.94 2.64	9.50 9.88 14.70	27.63	29. 22 28. 46 31. 32	13. 21 13. 78 21. 03	46.00 46.00	-30. 29 -32. 22 -24. 97
5 6	766.06 958.79	3.11 3.66	18. 23 21. 10	27.33 26.51		25.38 30.34	46.00 46.00	






Report No.: SZEM130700417702

Page: 30 of 43

Test mode:	Transmitting	Horizontal
------------	--------------	------------

Data: 79

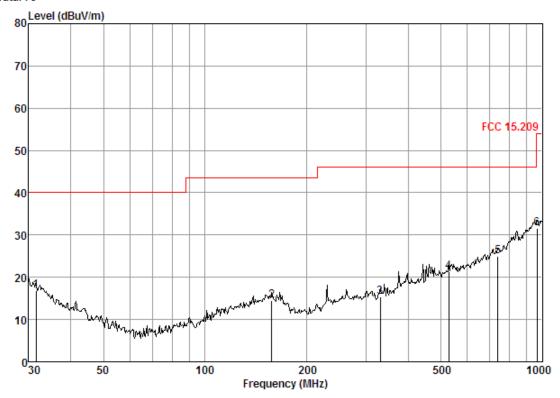

Condition: FCC 15.209 3m 3142C HORIZONTAL

Job No. : 4177RF Mode : TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	d₿	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5	31.51 157.56 331.35 528.25 739.66 965.54	0.60 1.33 2.00 2.63 3.03 3.67	16.73 9.55 10.34 14.18 17.80 21.13	27. 35 26. 87 26. 64 27. 65 27. 37 26. 47	26.84 30.39 29.69 32.17 31.44 33.17	16.82 14.40 15.39 21.33 24.90 31.50	43.50 46.00 46.00 46.00	-23.18 -29.10 -30.61 -24.67 -21.10 -22.50



Report No.: SZEM130700417702

Page: 31 of 43

Transmitter Emission above 1GHz								
Test mode:	4	GFSK	Test	channel:	Lowest	Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.000	7.44	34.70	41.63	49.53	50.04	74	-23.96	Vertical
5617.407	7.81	35.09	41.25	49.19	50.84	74	-23.16	Vertical
6347.466	8.10	36.12	40.63	49.08	52.67	74	-21.33	Vertical
7206.000	8.72	35.88	39.87	47.26	51.99	74	-22.01	Vertical
9608.000	9.68	37.30	37.80	44.27	53.45	74	-20.55	Vertical
10587.850	10.27	38.33	37.69	42.10	53.01	74	-20.99	Vertical
3672.110	6.00	33.41	40.80	47.85	46.46	74	-27.54	Horizontal
4804.000	7.44	34.70	41.63	48.33	48.84	74	-25.16	Horizontal
6478.053	8.14	36.26	40.51	48.44	52.33	74	-21.67	Horizontal
7206.000	8.72	35.88	39.87	47.80	52.53	74	-21.47	Horizontal
9608.000	9.68	37.30	37.80	44.12	53.30	74	-20.70	Horizontal
10453.950	10.17	38.24	37.64	42.71	53.48	74	-20.52	Horizontal

Test mode:		GFSK	Tes	t channel:	Middle	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3738.129	6.11	33.49	40.84	47.69	46.45	74	-27.55	Vertical
4880.000	7.48	34.59	41.68	47.90	48.29	74	-25.71	Vertical
5631.725	7.82	35.09	41.24	47.96	49.63	74	-24.37	Vertical
7320.000	8.87	35.93	39.77	48.04	53.07	74	-20.93	Vertical
9760.000	9.74	37.46	37.66	43.06	52.60	74	-21.40	Vertical
10480.590	10.19	38.28	37.65	42.76	53.58	74	-20.42	Vertical
3588.939	5.88	33.30	40.73	48.21	46.66	74	-27.34	Horizontal
4880.000	7.48	34.59	41.68	48.42	48.81	74	-25.19	Horizontal
5560.500	7.79	34.98	41.30	48.59	50.06	74	-23.94	Horizontal
7320.000	8.87	35.93	39.77	47.43	52.46	74	-21.54	Horizontal
9760.000	9.74	37.46	37.66	43.44	52.98	74	-21.02	Horizontal
10453.950	10.17	38.24	37.64	42.92	53.69	74	-20.31	Horizontal



Report No.: SZEM130700417702

Page: 32 of 43

Test mode:		GFSK	Tes	t channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3776.385	6.16	33.53	40.87	47.61	46.43	74	-27.57	Vertical
4960.000	7.53	34.46	41.74	47.06	47.31	74	-26.69	Vertical
6696.010	8.21	36.11	40.31	48.54	52.55	74	-21.45	Vertical
7440.000	9.01	35.98	39.67	47.07	52.39	74	-21.61	Vertical
9920.000	9.81	37.63	37.53	43.09	53.00	74	-21.00	Vertical
11140.850	10.67	38.47	37.92	41.55	52.77	74	-21.23	Vertical
3738.129	6.11	33.49	40.84	48.00	46.76	74	-27.24	Horizontal
4960.000	7.53	34.46	41.74	48.57	48.82	74	-25.18	Horizontal
6696.010	8.21	36.11	40.31	48.54	52.55	74	-21.45	Horizontal
7440.000	9.01	35.98	39.67	46.49	51.81	74	-22.19	Horizontal
9920.000	9.81	37.63	37.53	43.07	52.98	74	-21.02	Horizontal
10999.950	10.56	38.50	37.86	42.61	53.81	74	-20.19	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance range 9kHz~30MHz and 13GHz~25GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM130700417702

Page: 33 of 43

5.9 Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1011	54.0	Average Value					
	Above 1GHz	74.0	Peak Value					
		•	<u>, </u>					
Test Setup:								






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

_		
Toot	Procedure	•
1651	FIUCEOINE	

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest



Report No.: SZEM130700417702

Page: 34 of 43

	channel g. Test the EUT in the lowest channel, the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.		
Test Mode:	Non-hopping transmitting mode with GFSK modulation		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		




Report No.: SZEM130700417702

Page: 35 of 43

Test plot as follows:

Band edge (Radiate	ed Emission)					
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical

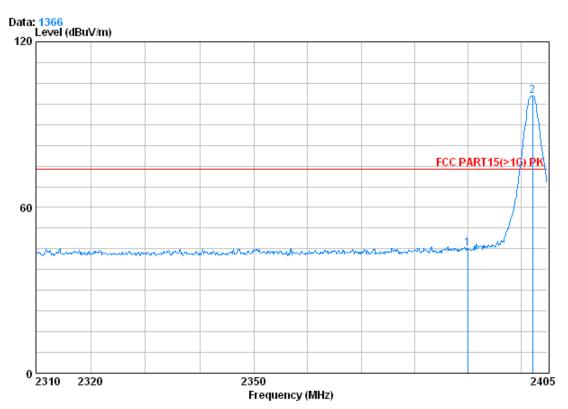

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4177RF Mode : 2402 Bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	49.62	45.27	74.00	-28.73
2	0	2402.245	2.98	32.51	39.86	104.86	100.49	74.00	26.49



Report No.: SZEM130700417702

Page: 36 of 43

Test mode: GFSK Test channel: Lowest Remark: Peak Horizontal

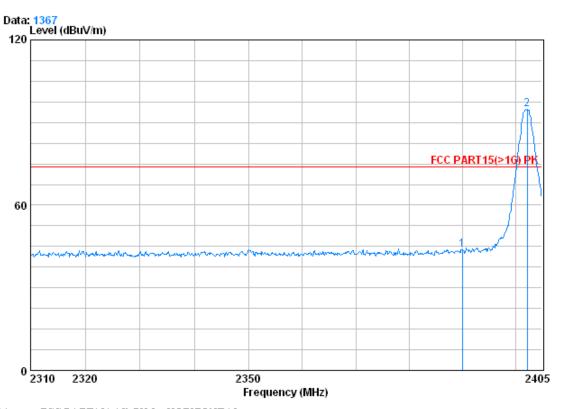

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4177RF

Mode : 2402 Bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	48.28	43.93	74.00	-30.07
_									
2	X	2402.245	2.98	32.51	39.86	99.06	94.69	74.00	20.69



Report No.: SZEM130700417702

Page: 37 of 43

		Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Vertical
--	--	------------	------	---------------	--------	---------	---------	----------

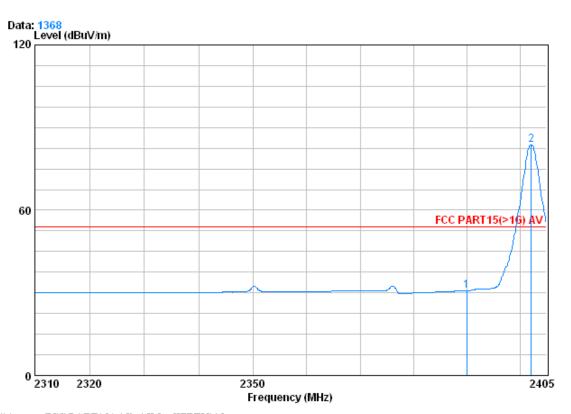

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 4177RF Mode : 2402 Bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	35.12	30.77	54.00	-23.23
2	0	2402.150	2.98	32.51	39.86	88.20	83.84	54.00	29.84



Report No.: SZEM130700417702

Page: 38 of 43

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
------------	------	---------------	--------	---------	---------	------------

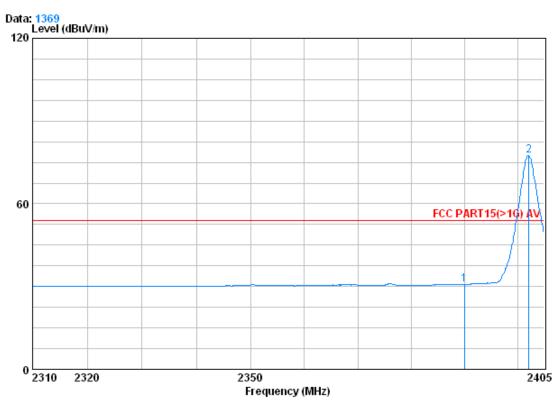

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 4177RF

Mode : 2402 Bandedge


			Cable	lntenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
				·			·	·	
1		2390.000	2.98	32.51	39.85	35.18	30.82	54.00	-23.18
_									
2	X	2402.150	2.98	32.51	39.86	81.79	77.42	54.00	23.42



Report No.: SZEM130700417702

Page: 39 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
------------	------	---------------	---------	---------	------	----------

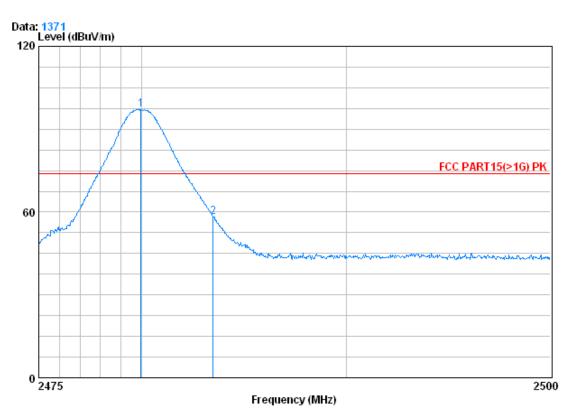

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4177RF

Mode : 2480 Bandedge

		Freq		CableAntenna Loss Factor				Limit Level Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.975	3.03	32.67	39.92	101.18	96.96	74.00	22.96
- 2		2483.500	3.03	32.67	39.92	62 . 51	58.29	74.00	-15.71






Report No.: SZEM130700417702

Page: 40 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
------------	------	---------------	---------	---------	------	------------

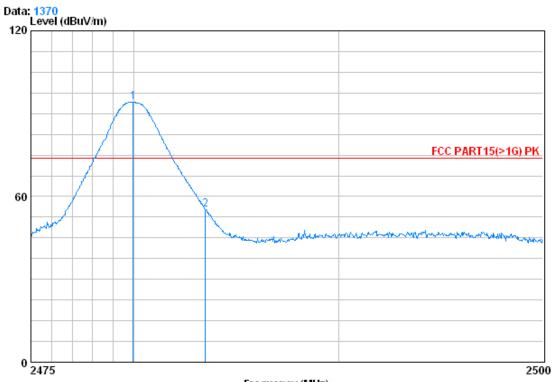

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4177RF Mode : 2480 Bandedge


			CableAntenna		Preamp Read		Limit		Over	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	X	2479.975	3.03	32.67	39.92	98.24	94.02	74.00	20.02	
2		2483.500	3.03	32.67	39.92	59.51	55.29	74.00	-18.71	



Report No.: SZEM130700417702

Page: 41 of 43

Test mode: GFSK Test channel: Lowest Remark: Average Vertical

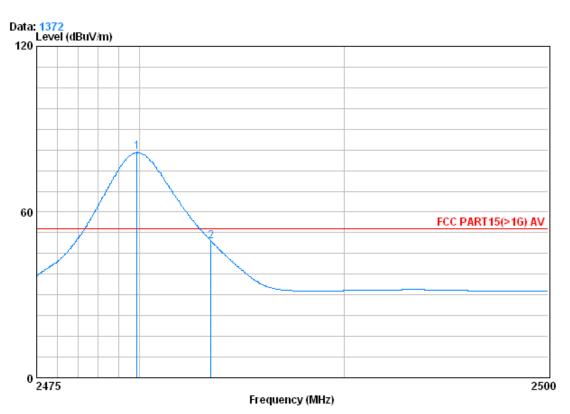

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 4177RF

Mode : 2480 Bandedge


			CableAntenna		Preamp	Read	Limit		Over
		Freq	Loss Factor		Factor Level		Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	0	2479.875 2483.500			39.92 39.92				



Report No.: SZEM130700417702

Page: 42 of 43

Test	t mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
------	---------	------	---------------	--------	---------	---------	------------

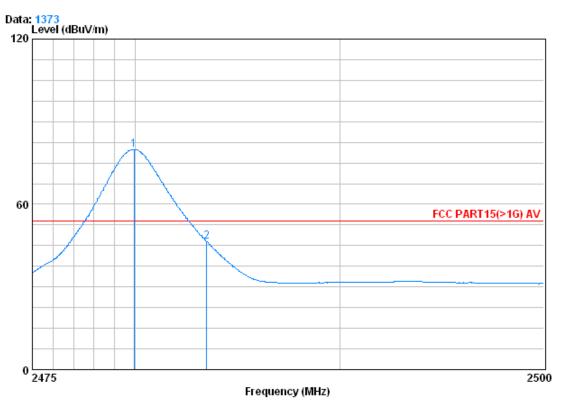

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 4177RF

Mode : 2480 Bandedge

	CableAntenna		Preamp	p Read		Limit	Over
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
2479.950	3.03	32.67	39.92	84.16	79.94	54.00	25.94
2483.500	3.03	32.67	39.92	50.57	46.36	54.00	-7.64

Note:

1 X 2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700417702

Page: 43 of 43

6 Photographs - EUT Test Setup (Test model No.: TBBX001)

6.1 Radiated Emission



6.2 Radiated Spurious Emission



7 Photographs - EUT Constructional Details

Refer to Report No. SZEM130700417701 for EUT external and internal photos.