

# TEST REPORT

|  |   |
|--|---|
| <b>FCC ID.</b> .....                         | 2AAS9-L0001S  |
| <b>Test Report No.</b> .....                 | TCT220228E904   |
| <b>Date of issue</b> .....                   | Mar. 23, 2022   |
| <b>Testing laboratory</b> .....              | SHENZHEN TONGCE TESTING LAB   |
| <b>Testing location/ address:</b>            | TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China |
| <b>Applicant's name</b> .....                | BROWAN COMMUNICATIONS INCORPORATION   |
| <b>Address</b> .....                         | No.15-1, Zhonghua Rd., Hsinchu Industrial Park, Hukou, Hsinchu Hsien, Taiwan, 303   |
| <b>Manufacturer's name</b> .....             | BROWAN COMMUNICATIONS INCORPORATION   |
| <b>Address</b> .....                         | No.15-1, Zhonghua Rd., Hsinchu Industrial Park, Hukou, Hsinchu Hsien, Taiwan, 303   |
| <b>Standard(s)</b> .....                     | FCC CFR Title 47 Part 15 Subpart C Section 15.249<br>ANSI C63.10:2013   |
| <b>Product Name</b> .....                    | MerryIoT Hotspot Miner V1   |
| <b>Trade Mark</b> .....                      | BROWAN, MerryIoT  |
| <b>Model/Type reference</b> .....            | L0001, L0001-1, L0001-2, L0001-S, L0001-Max, L0001-PRO  |
| <b>Rating(s)</b> .....                       | DC 12V  |
| <b>Date of receipt of test item</b> .....    | Feb. 28, 2022   |
| <b>Date (s) of performance of test</b> ..... | Feb. 28, 2022 - Mar. 23, 2022   |
| <b>Tested by (+signature)</b> .....          | Brews XU  |
| <b>Check by (+signature)</b> .....           | Beryl ZHAO  |
| <b>Approved by (+signature)</b> :            | Tomsin  |

## General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## Table of Contents

|   |          |
|---|----------|
| <b>1. General Product Information .....</b>       | <b>3</b> |
| 1.1. EUT description .....                        | 3        |
| 1.2. Model(s) list.....                           | 3        |
| <b>2. Test Result Summary .....</b>               | <b>5</b> |
| <b>3. General Information.....</b>                | <b>6</b> |
| 3.1. Test Environment and Mode.....               | 6        |
| 3.2. Description of Support Units.....            | 6        |
| <b>4. Facilities and Accreditations .....</b>     | <b>7</b> |
| 4.1. Facilities .....                             | 7        |
| 4.2. Location .....                               | 7        |
| 4.3. Measurement Uncertainty.....                 | 7        |
| <b>5. Test Results and Measurement Data .....</b> | <b>8</b> |
| 5.1. Antenna Requirement .....                    | 8        |
| 5.2. Conducted Emission.....                      | 9        |
| 5.3. Radiated Emission Measurement .....          | 17       |
| 5.4. 20dB Occupied Bandwidth .....                | 43       |

### Appendix A: Photographs of Test Setup

### Appendix B: Photographs of EUT

## 1. General Product Information

### 1.1. EUT description

|                                    |  |
|------------------------------------|--|
| <b>Product Name</b> .....          | MerryIoT Hotspot Miner V1  |
| <b>Model/Type reference</b> .....  | L0001  |
| <b>Sample Number</b> .....         | TCT211019E025-0101   |
| <b>Operation Frequency</b> .....   | 125K: 922.0MHz~924.6MHz<br>250K: 921.8MHz~924.5MHz<br>FSK: 921.8MHz~924.8MHz |
| <b>Number of Channel</b> .....     | 125K: 14<br>250K: 10<br>FSK: 16  |
| <b>Modulation Technology</b> ..... | LoRa(DIY frequencies) AS923  |
| <b>Antenna Type</b> .....          | External Antenna   |
| <b>Antenna Gain</b> .....          | 0.61dBi  |
| <b>Rating(s)</b> .....             | DC 12V   |

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

| No.          | Model No.                                       | Tested with                         |
|--------------|---|-------------------------------------|
| 1            | L0001   | <input checked="" type="checkbox"/> |
| Other models | L0001-1, L0001-2, L0001-S, L0001-Max, L0001-PRO | <input type="checkbox"/>            |

Note: L0001 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names and trade mark. So the test data of L0001 can represent the remaining models.

### 1.3. Operation Frequency

LoRa(DIY frequencies) AS923-125K

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1       | 922.0MHz  | 5       | 922.8MHz  | 9       | 923.6MHz  | 13      | 924.4MHz  |
| 2       | 922.2MHz  | 6       | 923.0MHz  | 10      | 923.8MHz  | 14      | 924.6MHz  |
| 3       | 922.4MHz  | 7       | 923.2MHz  | 11      | 924.0MHz  |         |           |
| 4       | 922.6MHz  | 8       | 923.4MHz  | 12      | 924.2MHz  |         |           |

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 922.0MHz  |
| The Middle channel  | 923.2MHz  |
| The Highest channel | 924.6MHz  |

LoRa(DIY frequencies) AS923- 250K

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1       | 921.8MHz  | 4       | 922.7MHz  | 7       | 923.6MHz  | 10      | 924.5MHz  |
| 2       | 922.1MHz  | 5       | 923.0MHz  | 8       | 923.9MHz  |         |           |
| 3       | 922.4MHz  | 6       | 923.3MHz  | 9       | 924.2MHz  |         |           |

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 921.8MHz  |
| The Middle channel  | 923.0MHz  |
| The Highest channel | 924.5MHz  |

LoRa(DIY frequencies) AS923- FSK

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1       | 921.8MHz  | 5       | 922.6MHz  | 9       | 923.4MHz  | 13      | 924.2MHz  |
| 2       | 922.0MHz  | 6       | 922.8MHz  | 10      | 923.6MHz  | 14      | 924.4MHz  |
| 3       | 922.2MHz  | 7       | 923.0MHz  | 11      | 923.8MHz  | 15      | 924.6MHz  |
| 4       | 922.4MHz  | 8       | 923.2MHz  | 12      | 924.0MHz  | 16      | 924.8MHz  |

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 921.8MHz  |
| The Middle channel  | 923.2MHz  |
| The Highest channel | 924.8MHz  |

## 2. Test Result Summary

| Requirement                      | CFR 47 Section           | Result |
|----------------------------------|--------------------------|--------|
| Antenna Requirement              | §15.203                  | PASS   |
| AC Power Line Conducted Emission | §15.207                  | PASS   |
| Field Strength of Fundamental    | §15.249 (a)              | PASS   |
| Spurious Emissions               | §15.249 (a) (d)/ §15.209 | PASS   |
| Band Edge                        | §15.249 (d)/ §15.205     | PASS   |
| 20dB Occupied Bandwidth          | §15.215 (c)              | PASS   |

**Note:**

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. General Information

#### 3.1. Test Environment and Mode

| Operating Environment:   |  |                   |
|--|--|-------------------|
| Condition  | Conducted Emission   | Radiated Emission |
| Temperature:   | 25 °C  | 24 °C             |
| Humidity:  | 55 % RH  | 45 % RH           |
| Atmospheric Pressure:  | 1010 mbar  | 1010 mbar         |
| Test Mode:   |  |                   |
| Engineering mode:  | Keep the EUT in continuous transmitting by select channel and modulations. |                   |
| The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case( Z axis) are shown in Test Results of the following pages. |  |                   |

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No.       | FCC ID | Trade Name |
|-----------|-----------|------------------|--------|------------|
| Adapter   | JD-050200 | 2012010907576735 | /      | /          |

##### Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                    | MU            |
|-----|---|---------------|
| 1   | Conducted Emission                      | $\pm 3.10$ dB |
| 2   | RF power, conducted                     | $\pm 0.12$ dB |
| 3   | Spurious emissions, conducted           | $\pm 0.11$ dB |
| 4   | All emissions, radiated(<1 GHz)         | $\pm 4.56$ dB |
| 5   | All emissions, radiated(1 GHz - 18 GHz) | $\pm 4.22$ dB |
| 6   | All emissions, radiated(18 GHz- 40 GHz) | $\pm 4.36$ dB |

## 5. Test Results and Measurement Data

### 5.1. Antenna Requirement

|   |   |
|---|---|
| <b>Standard requirement:</b>  | FCC Part15 C Section 15.203   |
| 15.203 requirement:<br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |   |
| <b>E.U.T Antenna:</b>   |   |
| <b>E.U.T Antenna:</b>   | The EUT antenna is external antenna which permanently attached, and the best case gain of the antenna is 0.61dBi. |
|   |   |

## 5.2. Conducted Emission

### 5.2.1. Test Specification

| <b>Test Requirement:</b> | FCC Part15 C Section 15.207  |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
|--------------------------|--|--------------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| <b>Test Method:</b>      | ANSI C63.10:2013   |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Frequency Range:</b>  | 150 kHz to 30 MHz  |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Receiver setup:</b>   | RBW=9 kHz, VBW=30 kHz, Sweep time=auto   |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Limits:</b>           | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range<br/>(MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>  | Frequency range<br>(MHz) | Limit (dBuV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range<br>(MHz) | Limit (dBuV)   |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                          | Quasi-peak   | Average                  |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5                 | 66 to 56*  | 56 to 46*                |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                    | 56   | 46                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                     | 60   | 50                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Test Setup:</b>       | <p style="text-align: center;"><b>Reference Plane</b></p> <p><i>Remark:</i><br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p>  |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Test Mode:</b>        | Transmitting mode  |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Test Procedure:</b>   | <ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol> |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |
| <b>Test Result:</b>      | PASS   |                          |              |  |            |         |          |           |           |       |    |    |      |    |    |

**5.2.2. Test Instruments**


| Conducted Emission Shielding Room Test Site (843) |                     |           |               |                 |
|---|---------------------|-----------|---------------|-----------------|
| Equipment   | Manufacturer        | Model     | Serial Number | Calibration Due |
| EMI Test Receiver                                 | R&S                 | ESCI3     | 100898        | Jul. 07, 2022   |
| Line Impedance Stabilisation Newtork(LISN)        | Schwarzbeck         | NSLK 8126 | 8126453       | Mar. 11, 2022   |
| Line-5  | TCT                 | CE-05     | N/A           | Jul. 07, 2022   |
| EMI Test Software                                 | Shurples Technology | EZ-EMC    | N/A           | N/A             |

### 5.2.3. Test data

Please refer to following diagram for individual

LoRa(DIY frequencies) AS923- 125K

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

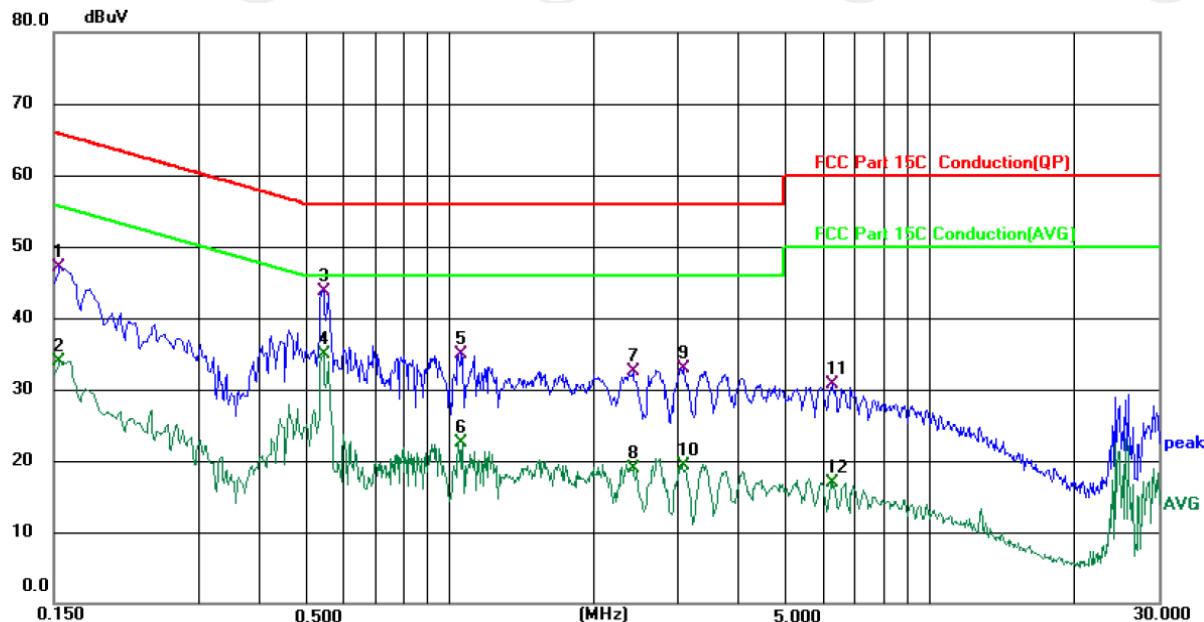

Site 844 Shielding Room

Phase: **L1**

Temperature: 23.5 (°C)

Humidity: 53 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over     |         |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|----------|---------|
|     |     |              |                          |                         |                          |               | Detector | Comment |
| 1   |     | 0.1539       | 37.48                    | 9.59                    | 47.07                    | 65.79         | -18.72   | QP      |
| 2   |     | 0.1539       | 24.33                    | 9.59                    | 33.92                    | 55.79         | -21.87   | AVG     |
| 3   |     | 0.5460       | 34.02                    | 9.71                    | 43.73                    | 56.00         | -12.27   | QP      |
| 4 * |     | 0.5460       | 25.19                    | 9.71                    | 34.90                    | 46.00         | -11.10   | AVG     |
| 5   |     | 1.0620       | 25.25                    | 9.75                    | 35.00                    | 56.00         | -21.00   | QP      |
| 6   |     | 1.0620       | 12.85                    | 9.75                    | 22.60                    | 46.00         | -23.40   | AVG     |
| 7   |     | 2.4100       | 22.61                    | 9.87                    | 32.48                    | 56.00         | -23.52   | QP      |
| 8   |     | 2.4100       | 9.02                     | 9.87                    | 18.89                    | 46.00         | -27.11   | AVG     |
| 9   |     | 3.0900       | 22.93                    | 9.88                    | 32.81                    | 56.00         | -23.19   | QP      |
| 10  |     | 3.0900       | 9.50                     | 9.88                    | 19.38                    | 46.00         | -26.62   | AVG     |
| 11  |     | 6.3060       | 20.80                    | 9.81                    | 30.61                    | 60.00         | -29.39   | QP      |
| 12  |     | 6.3060       | 7.12                     | 9.81                    | 16.93                    | 50.00         | -33.07   | AVG     |

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

QP. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

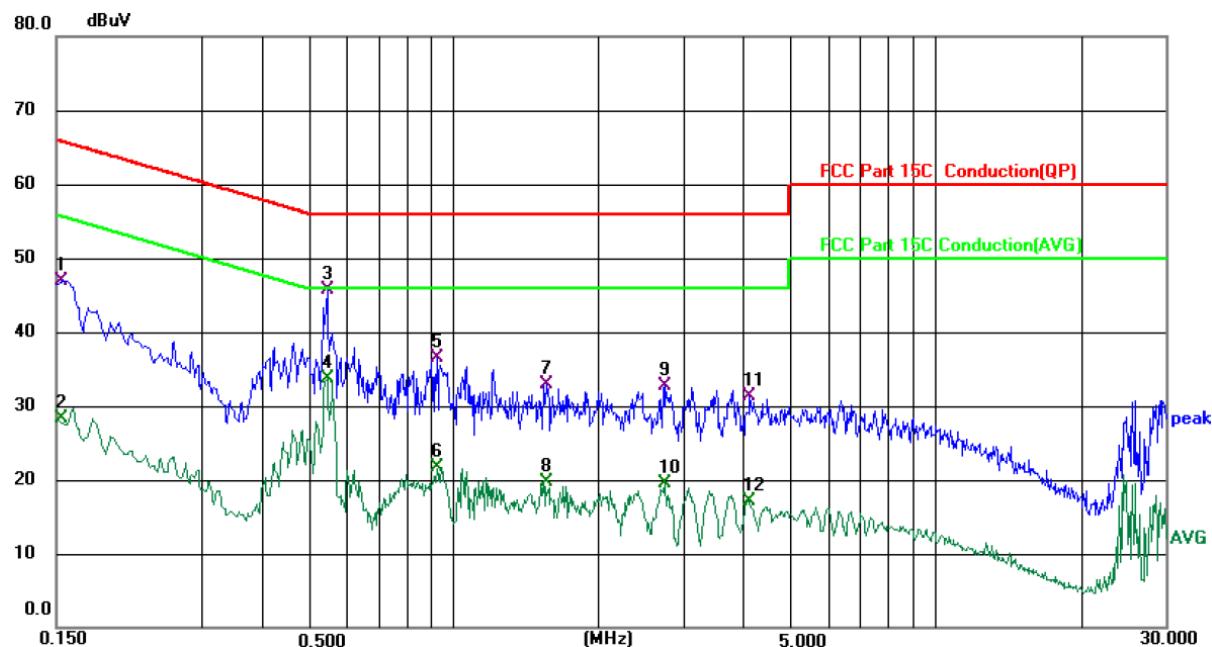

Site 844 Shielding Room

Phase: *N*

Temperature: 23.5 (°C)

Humidity: 53 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

| No. | Mk.    | Freq.<br>MHz | Reading<br>Level<br>dB $\mu$ V | Correct<br>Factor<br>dB | Measure-<br>ment<br>dB $\mu$ V | Limit<br>dB $\mu$ V | Over     |         |
|-----|--------|--------------|--------------------------------|-------------------------|--------------------------------|---------------------|----------|---------|
|     |        |              |                                |                         |                                |                     | Detector | Comment |
| 1   | 0.1539 | 37.23        | 9.68                           | 46.91                   | 65.79                          | -18.88              | QP       |         |
| 2   | 0.1539 | 18.59        | 9.68                           | 28.27                   | 55.79                          | -27.52              | AVG      |         |
| 3 * | 0.5460 | 36.03        | 9.71                           | 45.74                   | 56.00                          | -10.26              | QP       |         |
| 4   | 0.5460 | 23.96        | 9.71                           | 33.67                   | 46.00                          | -12.33              | AVG      |         |
| 5   | 0.9260 | 26.86        | 9.74                           | 36.60                   | 56.00                          | -19.40              | QP       |         |
| 6   | 0.9260 | 11.92        | 9.74                           | 21.66                   | 46.00                          | -24.34              | AVG      |         |
| 7   | 1.5620 | 23.08        | 9.76                           | 32.84                   | 56.00                          | -23.16              | QP       |         |
| 8   | 1.5620 | 10.04        | 9.76                           | 19.80                   | 46.00                          | -26.20              | AVG      |         |
| 9   | 2.7419 | 22.85        | 9.78                           | 32.63                   | 56.00                          | -23.37              | QP       |         |
| 10  | 2.7419 | 9.75         | 9.78                           | 19.53                   | 46.00                          | -26.47              | AVG      |         |
| 11  | 4.1300 | 21.49        | 9.79                           | 31.28                   | 56.00                          | -24.72              | QP       |         |
| 12  | 4.1300 | 7.39         | 9.79                           | 17.18                   | 46.00                          | -28.82              | AVG      |         |

**Note1:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

Q.P. = Quasi-Peak AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**LoRa(DIY frequencies) AS923- 250K**

**Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)**

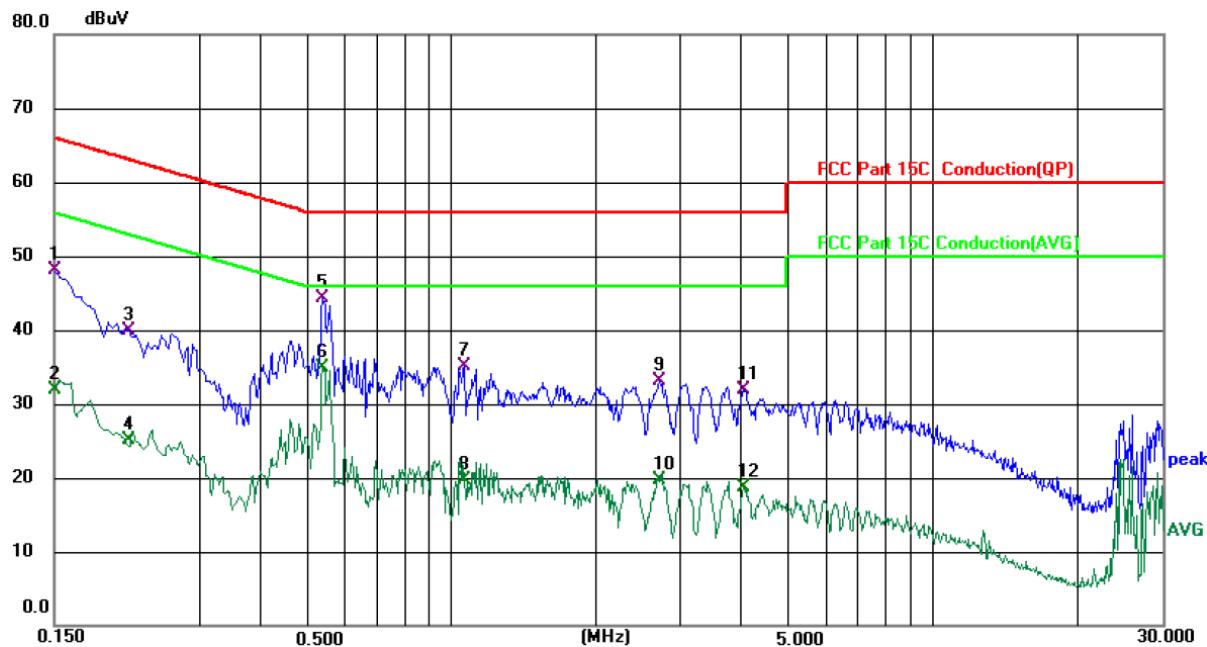

Site 844 Shielding Room

Phase: *L1*

Temperature: 23.5 (°C)

Humidity: 53 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over   | Detector | Comment |
|-----|-----|--------------|------------------|-------------------|------------------|-------|--------|----------|---------|
|     |     |              | dBuV             | dB                | dBuV             | dB    |        |          |         |
| 1   |     | 0.1500       | 38.57            | 9.58              | 48.15            | 66.00 | -17.85 | QP       |         |
| 2   |     | 0.1500       | 22.24            | 9.58              | 31.82            | 56.00 | -24.18 | AVG      |         |
| 3   |     | 0.2128       | 30.41            | 9.55              | 39.96            | 63.10 | -23.14 | QP       |         |
| 4   |     | 0.2128       | 15.63            | 9.55              | 25.18            | 53.10 | -27.92 | AVG      |         |
| 5   |     | 0.5420       | 34.58            | 9.71              | 44.29            | 56.00 | -11.71 | QP       |         |
| 6 * |     | 0.5420       | 25.24            | 9.71              | 34.95            | 46.00 | -11.05 | AVG      |         |
| 7   |     | 1.0700       | 25.26            | 9.75              | 35.01            | 56.00 | -20.99 | QP       |         |
| 8   |     | 1.0700       | 9.94             | 9.75              | 19.69            | 46.00 | -26.31 | AVG      |         |
| 9   |     | 2.7139       | 23.18            | 9.88              | 33.06            | 56.00 | -22.94 | QP       |         |
| 10  |     | 2.7139       | 9.90             | 9.88              | 19.78            | 46.00 | -26.22 | AVG      |         |
| 11  |     | 4.0700       | 21.94            | 9.88              | 31.82            | 56.00 | -24.18 | QP       |         |
| 12  |     | 4.0700       | 8.80             | 9.88              | 18.68            | 46.00 | -27.32 | AVG      |         |

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) - Limits (dB $\mu$ V)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

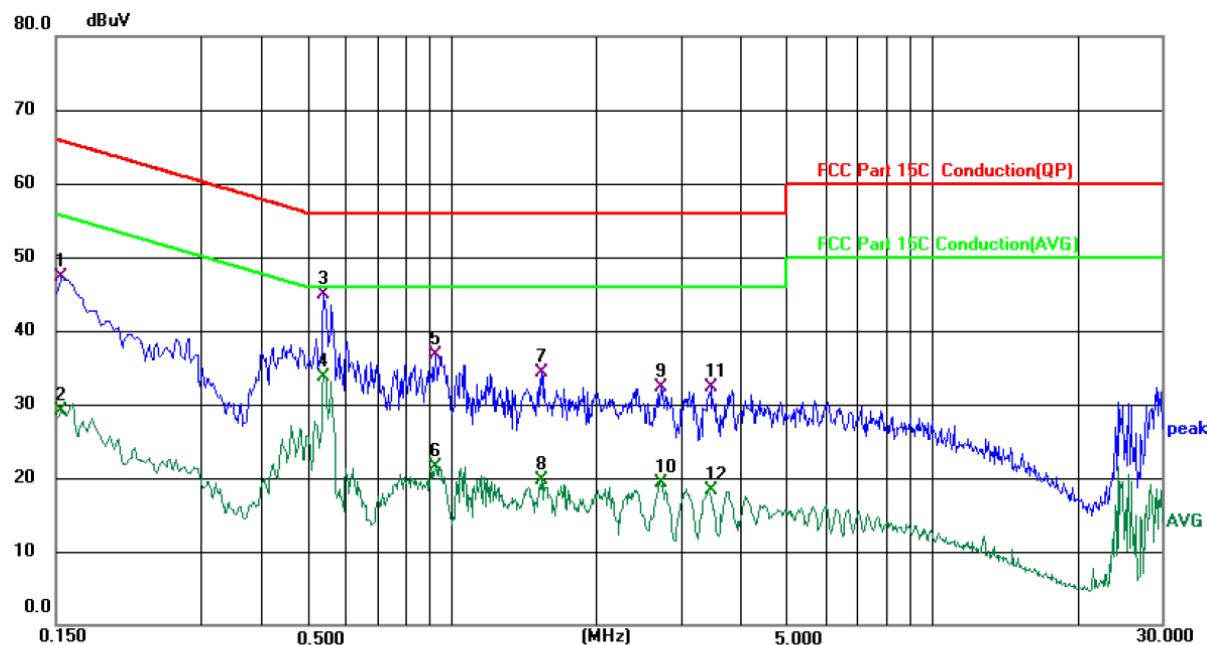

Site 844 Shielding Room Phase: **N** Temperature: 23.5 (°C) Humidity: 53 %

Limit: FCC Part 15C Conduction(QP) Power: AC 120 V/60 Hz

| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over     | Comment |
|-----|-----|--------------|------------------|-------------------|------------------|-------|----------|---------|
|     |     |              | dBuV             | dB                | dBuV             | dB    | Detector |         |
| 1   |     | 0.1539       | 37.67            | 9.68              | 47.35            | 65.79 | -18.44   | QP      |
| 2   |     | 0.1539       | 19.37            | 9.68              | 29.05            | 55.79 | -26.74   | AVG     |
| 3 * |     | 0.5420       | 35.16            | 9.71              | 44.87            | 56.00 | -11.13   | QP      |
| 4   |     | 0.5420       | 23.93            | 9.71              | 33.64            | 46.00 | -12.36   | AVG     |
| 5   |     | 0.9260       | 26.99            | 9.74              | 36.73            | 56.00 | -19.27   | QP      |
| 6   |     | 0.9260       | 11.72            | 9.74              | 21.46            | 46.00 | -24.54   | AVG     |
| 7   |     | 1.5420       | 24.48            | 9.76              | 34.24            | 56.00 | -21.76   | QP      |
| 8   |     | 1.5420       | 9.87             | 9.76              | 19.63            | 46.00 | -26.37   | AVG     |
| 9   |     | 2.7219       | 22.61            | 9.78              | 32.39            | 56.00 | -23.61   | QP      |
| 10  |     | 2.7219       | 9.52             | 9.78              | 19.30            | 46.00 | -26.70   | AVG     |
| 11  |     | 3.4660       | 22.62            | 9.78              | 32.40            | 56.00 | -23.60   | QP      |
| 12  |     | 3.4660       | 8.55             | 9.78              | 18.33            | 46.00 | -27.67   | AVG     |

**Note1:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

Q.P. = Quasi-Peak AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

LoRa(DIY frequencies) AS923- FSK

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

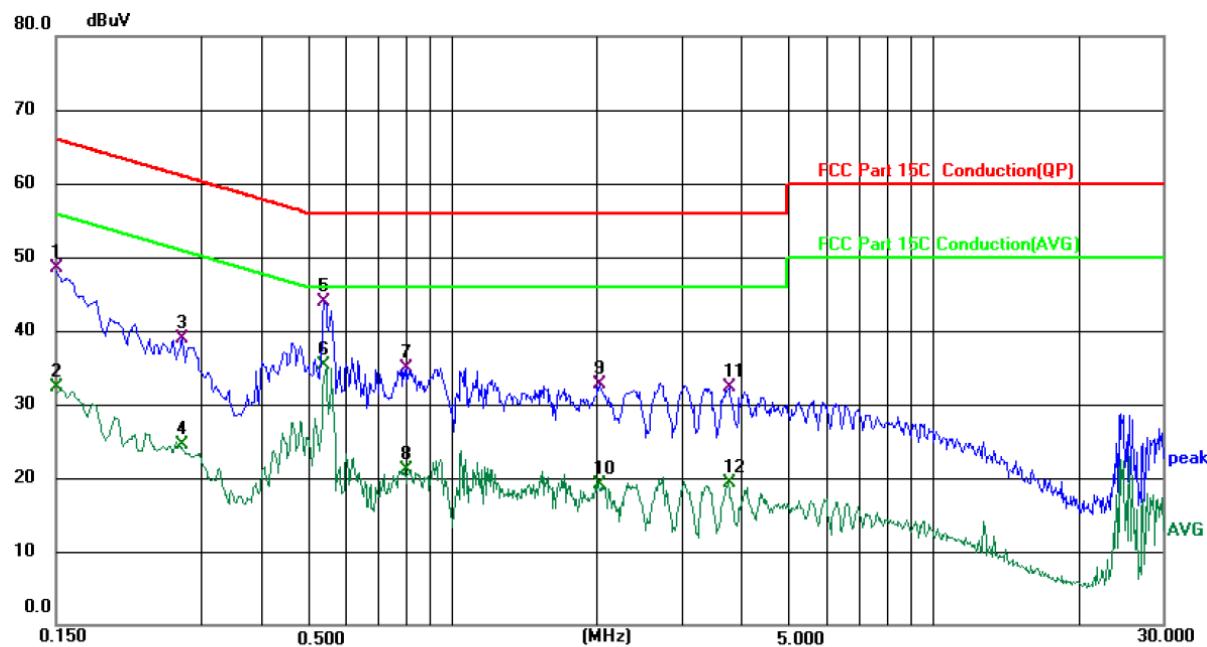

Site 844 Shielding Room

Phase: **L1**

Temperature: 23.5 (°C)

Humidity: 53 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

| No. | Mk.    | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit  | Over     | Comment |
|-----|--------|--------------|------------------|-------------------|------------------|--------|----------|---------|
|     |        |              | dBuV             | dB                | dBuV             | dB     | Detector |         |
| 1   | 0.1500 | 38.89        | 9.58             | 48.47             | 66.00            | -17.53 | QP       |         |
| 2   | 0.1500 | 22.71        | 9.58             | 32.29             | 56.00            | -23.71 | AVG      |         |
| 3   | 0.2740 | 29.31        | 9.58             | 38.89             | 61.00            | -22.11 | QP       |         |
| 4   | 0.2740 | 15.01        | 9.58             | 24.59             | 51.00            | -26.41 | AVG      |         |
| 5   | 0.5420 | 34.18        | 9.71             | 43.89             | 56.00            | -12.11 | QP       |         |
| 6 * | 0.5420 | 25.69        | 9.71             | 35.40             | 46.00            | -10.60 | AVG      |         |
| 7   | 0.8059 | 25.26        | 9.74             | 35.00             | 56.00            | -21.00 | QP       |         |
| 8   | 0.8059 | 11.31        | 9.74             | 21.05             | 46.00            | -24.95 | AVG      |         |
| 9   | 2.0259 | 22.84        | 9.87             | 32.71             | 56.00            | -23.29 | QP       |         |
| 10  | 2.0259 | 9.27         | 9.87             | 19.14             | 46.00            | -26.86 | AVG      |         |
| 11  | 3.7660 | 22.32        | 9.89             | 32.21             | 56.00            | -23.79 | QP       |         |
| 12  | 3.7660 | 9.33         | 9.89             | 19.22             | 46.00            | -26.78 | AVG      |         |

**Note:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Margin (dB) = Measurement (dB $\mu$ V) - Limits (dB $\mu$ V)

QP. = Quasi-Peak

AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

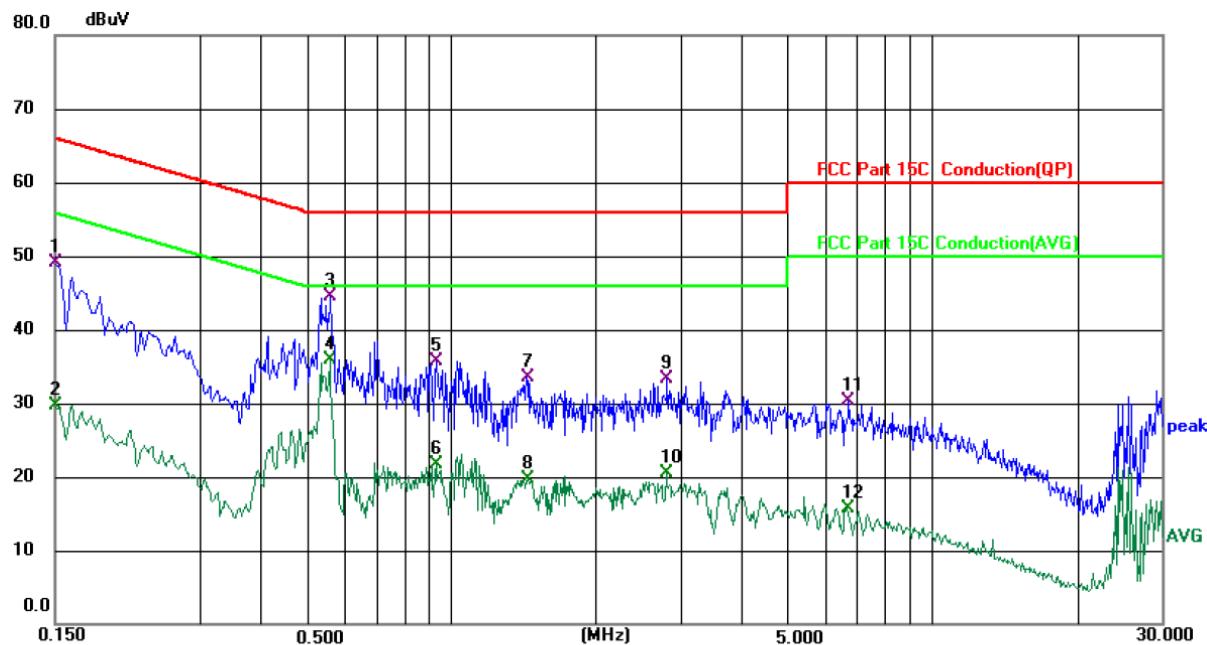

Site 844 Shielding Room

Phase: **N**

Temperature: 23.5 (°C)

Humidity: 53 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dB $\mu$ V | Correct<br>Factor<br>dB | Measure-<br>ment<br>dB $\mu$ V | Limit<br>dB $\mu$ V | Over     |         |
|-----|-----|--------------|--------------------------------|-------------------------|--------------------------------|---------------------|----------|---------|
|     |     |              |                                |                         |                                |                     | Detector | Comment |
| 1   |     | 0.1500       | 39.37                          | 9.68                    | 49.05                          | 66.00               | -16.95   | QP      |
| 2   |     | 0.1500       | 19.96                          | 9.68                    | 29.64                          | 56.00               | -26.36   | AVG     |
| 3   |     | 0.5620       | 34.85                          | 9.72                    | 44.57                          | 56.00               | -11.43   | QP      |
| 4 * |     | 0.5620       | 26.09                          | 9.72                    | 35.81                          | 46.00               | -10.19   | AVG     |
| 5   |     | 0.9300       | 26.05                          | 9.74                    | 35.79                          | 56.00               | -20.21   | QP      |
| 6   |     | 0.9300       | 12.03                          | 9.74                    | 21.77                          | 46.00               | -24.23   | AVG     |
| 7   |     | 1.4339       | 23.78                          | 9.75                    | 33.53                          | 56.00               | -22.47   | QP      |
| 8   |     | 1.4339       | 10.02                          | 9.75                    | 19.77                          | 46.00               | -26.23   | AVG     |
| 9   |     | 2.8179       | 23.61                          | 9.78                    | 33.39                          | 56.00               | -22.61   | QP      |
| 10  |     | 2.8179       | 10.66                          | 9.78                    | 20.44                          | 46.00               | -25.56   | AVG     |
| 11  |     | 6.7300       | 20.49                          | 9.72                    | 30.21                          | 60.00               | -29.79   | QP      |
| 12  |     | 6.7300       | 6.02                           | 9.72                    | 15.74                          | 50.00               | -34.26   | AVG     |

**Note1:**

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard

Margin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

Q.P. = Quasi-Peak AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


## 5.3. Radiated Emission Measurement

### 5.3.1. Test Specification


|   |  |                    |        |                  |                  |  |  |  |  |
|---|--|--------------------|--------|------------------|------------------|--|--|--|--|
| <b>Test Requirement:</b>                                | FCC Part15 C Section 15.209  |                    |        |                  |                  |  |  |  |  |
| <b>Test Method:</b>                                     | ANSI C63.10:2013   |                    |        |                  |                  |  |  |  |  |
| <b>Frequency Range:</b>                                 | 9 kHz to 25 GHz  |                    |        |                  |                  |  |  |  |  |
| <b>Measurement Distance:</b>                            | 3 m  |                    |        |                  |                  |  |  |  |  |
| <b>Antenna Polarization:</b>                            | Horizontal & Vertical  |                    |        |                  |                  |  |  |  |  |
| <b>Receiver Setup:</b>                                  | Frequency  | Detector           | RBW    | VBW              | Remark           |  |  |  |  |
|   | 9kHz- 150kHz   | Quasi-peak         | 200Hz  | 1kHz             | Quasi-peak Value |  |  |  |  |
|   | 150kHz- 30MHz  | Quasi-peak         | 9kHz   | 30kHz            | Quasi-peak Value |  |  |  |  |
|   | 30MHz-1GHz   | Quasi-peak         | 120kHz | 300kHz           | Quasi-peak Value |  |  |  |  |
|   | Above 1GHz   | Peak               | 1MHz   | 3MHz             | Peak Value       |  |  |  |  |
|   |  | Peak               | 1MHz   | 10Hz             | Average Value    |  |  |  |  |
| <b>Limit(Field strength of the fundamental signal):</b> | Frequency  | Limit (dBuV/m @3m) |        | Remark           |                  |  |  |  |  |
|   | 902MHz-928MHz  | 94.00              |        | Quasi-peak Value |                  |  |  |  |  |
| <b>Limit(Spurious Emissions):</b>                       | Frequency  | Limit (dBuV/m @3m) |        | Remark           |                  |  |  |  |  |
|   | 0.009-0.490  | 2400/F(KHz)        |        | Quasi-peak Value |                  |  |  |  |  |
|   | 0.490-1.705  | 24000/F(KHz)       |        | Quasi-peak Value |                  |  |  |  |  |
|   | 1.705-30   | 30                 |        | Quasi-peak Value |                  |  |  |  |  |
|   | 30MHz-88MHz  | 40.0               |        | Quasi-peak Value |                  |  |  |  |  |
|   | 88MHz-216MHz   | 43.5               |        | Quasi-peak Value |                  |  |  |  |  |
|   | 216MHz-960MHz  | 46.0               |        | Quasi-peak Value |                  |  |  |  |  |
|   | 960MHz-1GHz  | 54.0               |        | Quasi-peak Value |                  |  |  |  |  |
|   | Above 1GHz   | 54.0               |        | Average Value    |                  |  |  |  |  |
|   |  | 74.0               |        | Peak Value       |                  |  |  |  |  |
| <b>Limit (band edge) :</b>                              | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.   |                    |        |                  |                  |  |  |  |  |
| <b>Test Procedure:</b>                                  | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> </ol> |                    |        |                  |                  |  |  |  |  |

4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

For radiated emissions below 30MHz

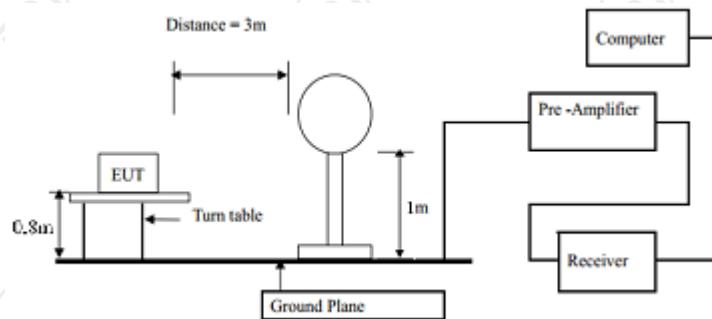


30MHz to 1GHz

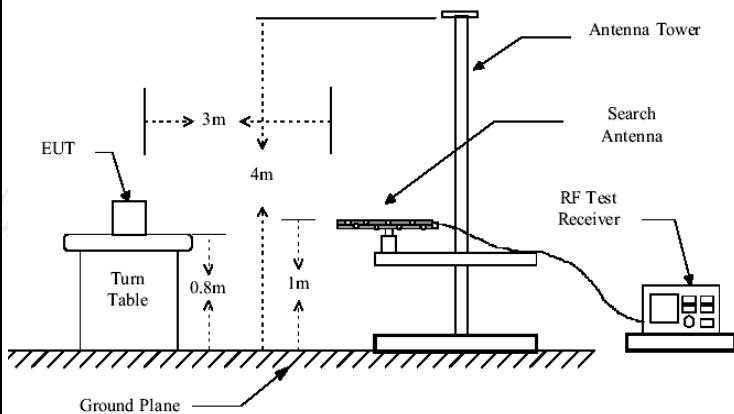

Above 1GHz

(The diagram below shows the test setup that is utilized to make the measurements for emission from 1GHz to the tenth harmonic of the highest fundamental frequency or to 40GHz emissions, whichever is lower.)

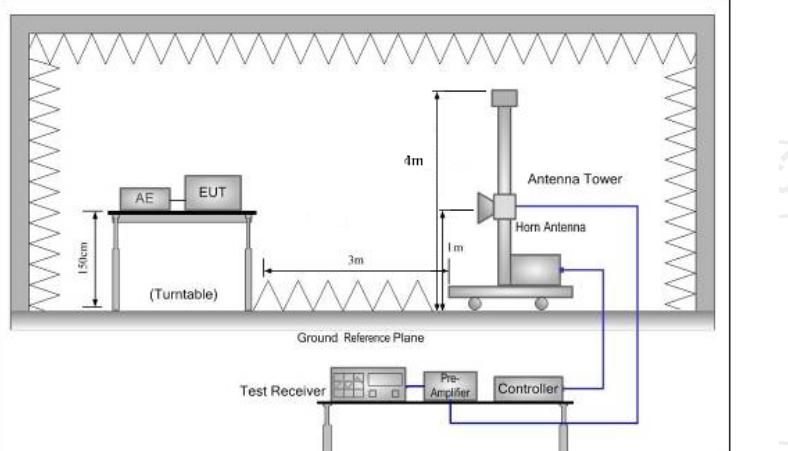**Test results:**

PASS

### 5.3.2. Test Instruments

| Radiated Emission Test Site (966) |                     |               |                 |                 |
|-----------------------------------|---------------------|---------------|-----------------|-----------------|
| Name of Equipment                 | Manufacturer        | Model         | Serial Number   | Calibration Due |
| EMI Test Receiver                 | R&S                 | ESIB7         | 100197          | Jul. 07, 2022   |
| Spectrum Analyzer                 | R&S                 | FSQ40         | 200061          | Jul. 07, 2022   |
| Pre-amplifier                     | SKET                | LNPA_0118G-45 | SK2021012 102   | Mar. 11, 2022   |
| Pre-amplifier                     | SKET                | LNPA_1840G-50 | SK2021092 03500 | Apr. 08, 2022   |
| Pre-amplifier                     | HP                  | 8447D         | 2727A05017      | Jul. 07, 2022   |
| Loop antenna                      | ZHINAN              | ZN30900A      | 12024           | Sep. 05, 2022   |
| Broadband Antenna                 | Schwarzbeck         | VULB9163      | 340             | Sep. 04, 2022   |
| Horn Antenna                      | Schwarzbeck         | BBHA 9120D    | 631             | Sep. 04, 2022   |
| Horn Antenna                      | Schwarzbeck         | BBHA 9170     | 00956           | Apr. 10, 2023   |
| Antenna Mast                      | Keleto              | RE-AM         | N/A             | N/A             |
| Coaxial cable                     | SKET                | RC_DC18G-N    | N/A             | Apr. 08, 2022   |
| Coaxial cable                     | SKET                | RC-DC18G-N    | N/A             | Apr. 08, 2022   |
| Coaxial cable                     | SKET                | RC-DC40G-N    | N/A             | Jul. 07, 2022   |
| EMI Test Software                 | Shurples Technology | EZ-EMC        | N/A             | N/A             |

### 5.3.3. Test Data

#### Field Strength of Fundamental:

##### LoRa(DIY frequencies) AS923- 125K

| Frequency (MHz) | Emission QP (dBuV/m) | Horizontal /Vertical | Limits QP (dBuV/m) | Margin (dB) |
|-----------------|----------------------|----------------------|--------------------|-------------|
| 922.0           | 84.65                | H                    | 94                 | -9.35       |
| 922.0           | 89.63                | V                    | 94                 | -4.37       |
| 923.2           | 84.37                | H                    | 94                 | -9.63       |
| 923.2           | 89.49                | V                    | 94                 | -4.51       |
| 924.6           | 84.20                | H                    | 94                 | -9.8        |
| 924.6           | 89.23                | V                    | 94                 | -4.77       |

##### LoRa(DIY frequencies) AS923- 250K

| Frequency (MHz) | Emission QP (dBuV/m) | Horizontal /Vertical | Limits QP (dBuV/m) | Margin (dB) |
|-----------------|----------------------|----------------------|--------------------|-------------|
| 921.8           | 83.38                | H                    | 94                 | -10.62      |
| 921.8           | 89.37                | V                    | 94                 | -4.63       |
| 923.0           | 83.81                | H                    | 94                 | -10.19      |
| 923.0           | 89.57                | V                    | 94                 | -4.43       |
| 924.5           | 84.22                | H                    | 94                 | -9.78       |
| 924.5           | 89.79                | V                    | 94                 | -4.21       |

##### LoRa(DIY frequencies) AS923- FSK

| Frequency (MHz) | Emission QP (dBuV/m) | Horizontal /Vertical | Limits QP (dBuV/m) | Margin (dB) |
|-----------------|----------------------|----------------------|--------------------|-------------|
| 921.8           | 80.36                | H                    | 94                 | -13.64      |
| 921.8           | 87.04                | V                    | 94                 | -6.96       |
| 923.2           | 80.70                | H                    | 94                 | -13.3       |
| 923.2           | 87.11                | V                    | 94                 | -6.89       |
| 924.8           | 80.21                | H                    | 94                 | -13.79      |
| 924.8           | 87.27                | V                    | 94                 | -6.73       |


**Note:**

1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.
2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.
3. For fundamental frequency,  $RBW > 20dB BW$ ,  $VBW > RBW$ , PK detector is for PK value, RMS detector is for AV value.

**LoRa(DIY frequencies) AS923- 125K**

**Frequency Range (30MHz-1GHz)**

Horizontal:

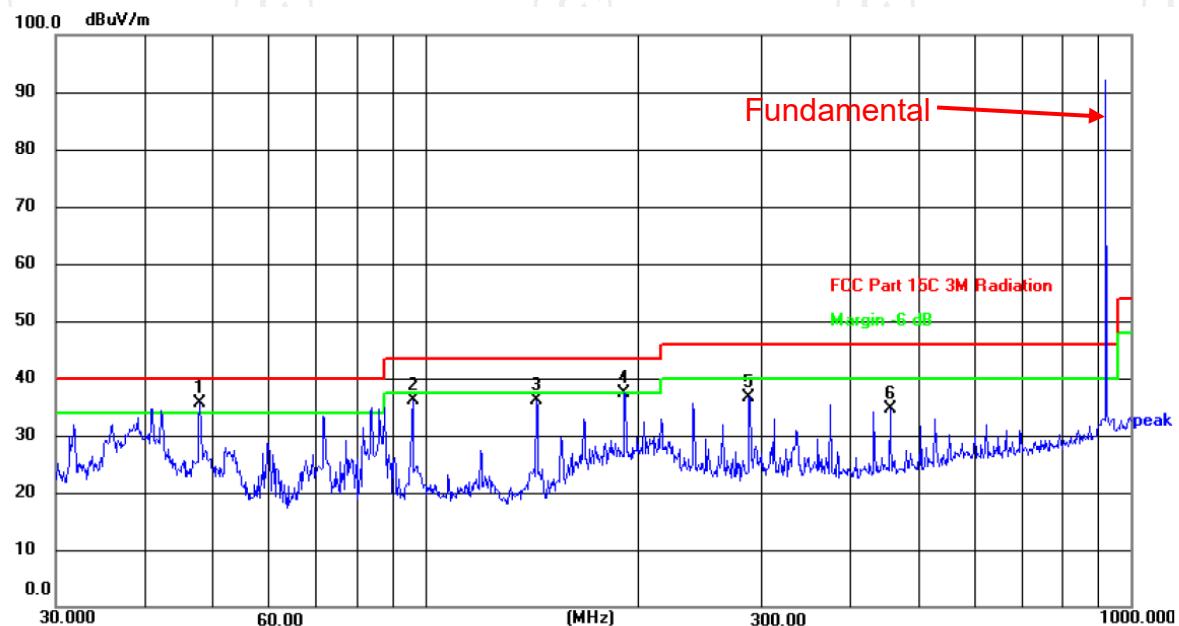

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 47.9940         | 47.98          | -12.30        | 35.68          | 40.00          | -4.32       | peak     | P   |        |
| 2   | 96.0986         | 50.83          | -14.72        | 36.11          | 43.50          | -7.39       | peak     | P   |        |
| 3   | 143.8295        | 52.25          | -16.11        | 36.14          | 43.50          | -7.36       | peak     | P   |        |
| 4   | 191.7450        | 51.45          | -13.96        | 37.49          | 43.50          | -6.01       | peak     | P   |        |
| 5   | 287.9904        | 48.14          | -11.47        | 36.67          | 46.00          | -9.33       | peak     | P   |        |
| 6   | 455.9058        | 44.09          | -9.58         | 34.51          | 46.00          | -11.49      | peak     | P   |        |

Vertical:

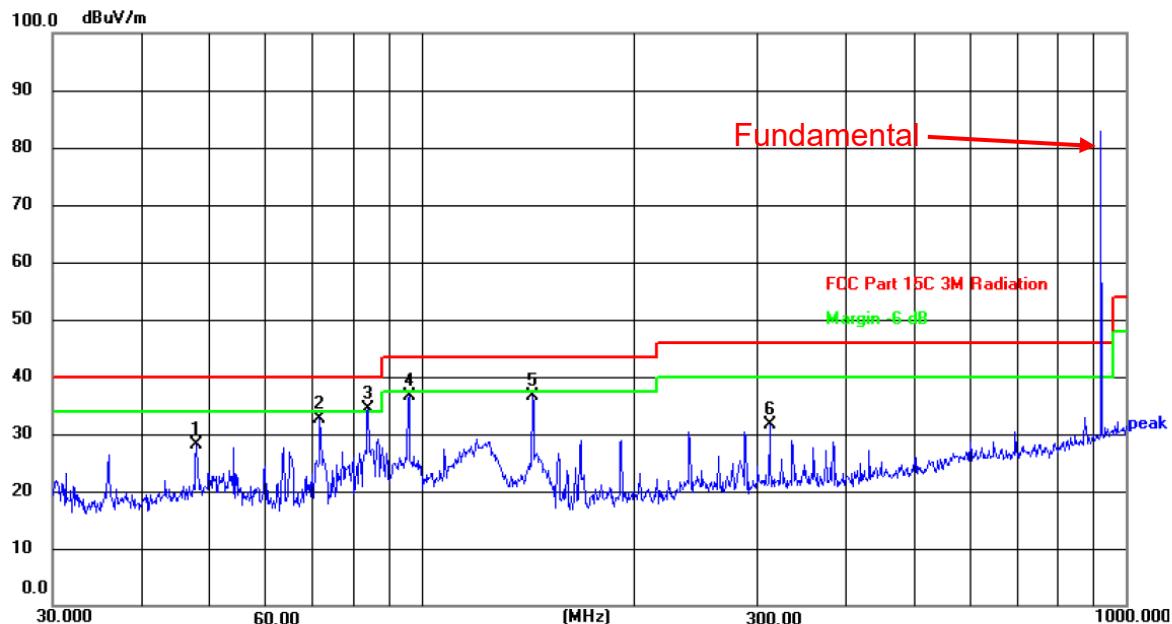


Site Polarization: **Vertical** Temperature: 24(°C)  
 Limit: FCC Part 15C 3M Radiation Power: AC 120 V/60 Hz Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 47.9940         | 40.51          | -12.30        | 28.21          | 40.00          | -11.79      | peak     | P   |        |
| 2   | 71.8320         | 48.35          | -15.83        | 32.52          | 40.00          | -7.48       | peak     | P   |        |
| 3 * | 84.1100         | 50.45          | -15.99        | 34.46          | 40.00          | -5.54       | peak     | P   |        |
| 4   | 96.0986         | 51.47          | -14.72        | 36.75          | 43.50          | -6.75       | peak     | P   |        |
| 5   | 143.8295        | 52.76          | -16.11        | 36.65          | 43.50          | -6.85       | peak     | P   |        |
| 6   | 312.1794        | 42.68          | -11.07        | 31.61          | 46.00          | -14.39      | peak     | P   |        |

**LoRa(DIY frequencies) AS923- 250K**

Frequency Range (30MHz-1GHz)

Horizontal:

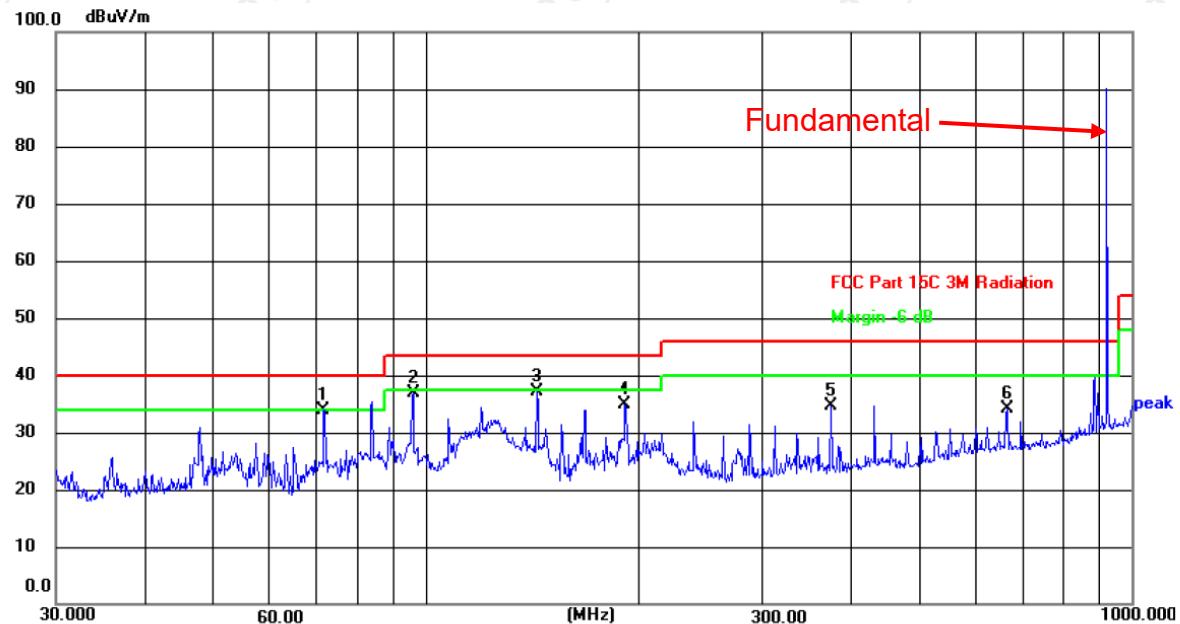

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 71.8320         | 49.79          | -15.83        | 33.96          | 40.00          | -6.04       | peak     | P   |        |
| 2   | 96.0986         | 51.54          | -14.72        | 36.82          | 43.50          | -6.68       | peak     | P   |        |
| 3   | 143.8295        | 53.36          | -16.11        | 37.25          | 43.50          | -6.25       | peak     | P   |        |
| 4   | 191.7450        | 48.77          | -13.96        | 34.81          | 43.50          | -8.69       | peak     | P   |        |
| 5   | 375.9385        | 45.28          | -10.58        | 34.70          | 46.00          | -11.30      | peak     | P   |        |
| 6   | 665.8035        | 40.58          | -6.39         | 34.19          | 46.00          | -11.81      | peak     | P   |        |

Vertical:

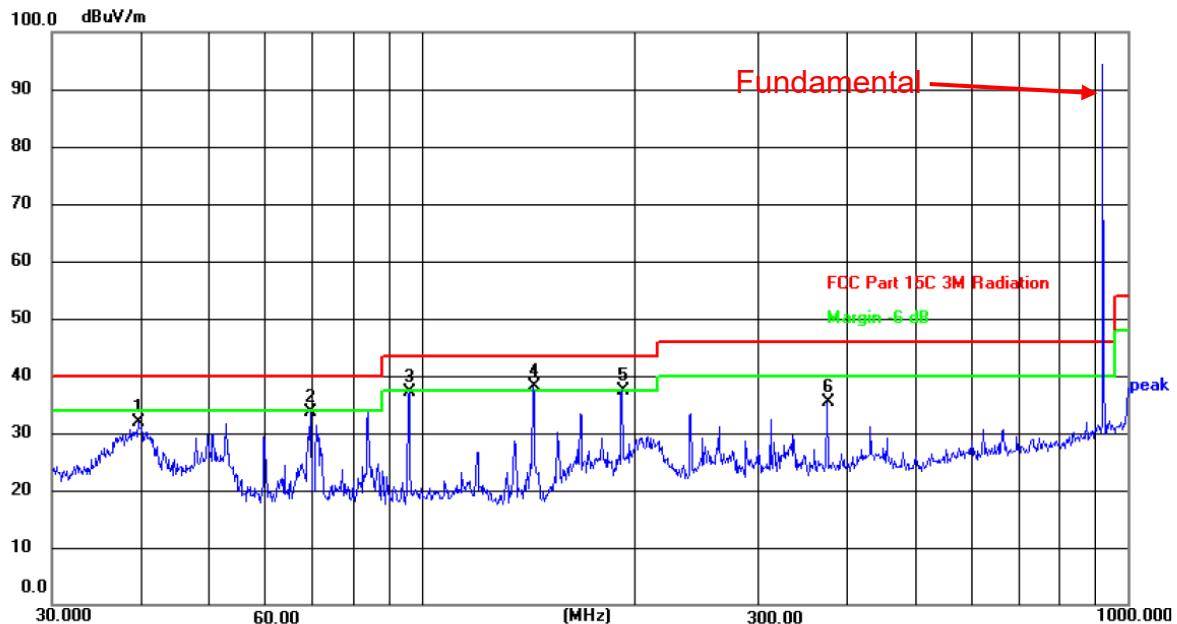

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz


Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 39.7146         | 45.60          | -13.62        | 31.98          | 40.00          | -8.02       | peak     | P   |        |
| 2   | 69.6005         | 49.40          | -15.74        | 33.66          | 40.00          | -6.34       | peak     | P   |        |
| 3   | 96.0986         | 51.93          | -14.72        | 37.21          | 43.50          | -6.29       | peak     | P   |        |
| 4 * | 143.8295        | 54.20          | -16.11        | 38.09          | 43.50          | -5.41       | peak     | P   |        |
| 5   | 192.4186        | 51.38          | -13.91        | 37.47          | 43.50          | -6.03       | peak     | P   |        |
| 6   | 375.9385        | 45.90          | -10.58        | 35.32          | 46.00          | -10.68      | peak     | P   |        |

**LoRa(DIY frequencies) AS923- FSK**

Frequency Range (30MHz-1GHz)

Horizontal:

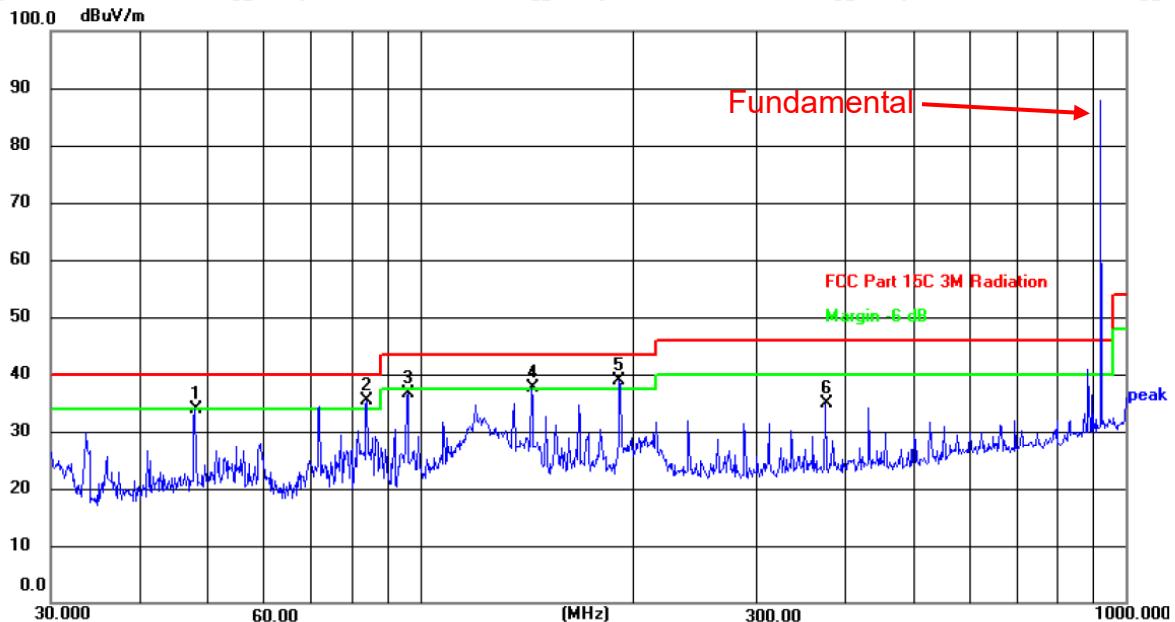

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 47.9940         | 46.08          | -12.30        | 33.78          | 40.00          | -6.22       | peak     | P   |        |
| 2 * | 84.1100         | 51.31          | -15.99        | 35.32          | 40.00          | -4.68       | peak     | P   |        |
| 3   | 96.0986         | 51.43          | -14.72        | 36.71          | 43.50          | -6.79       | peak     | P   |        |
| 4 ! | 143.8295        | 53.63          | -16.11        | 37.52          | 43.50          | -5.98       | peak     | P   |        |
| 5 ! | 191.7450        | 52.77          | -13.96        | 38.81          | 43.50          | -4.69       | peak     | P   |        |
| 6   | 375.9385        | 45.42          | -10.58        | 34.84          | 46.00          | -11.16      | peak     | P   |        |

Vertical:

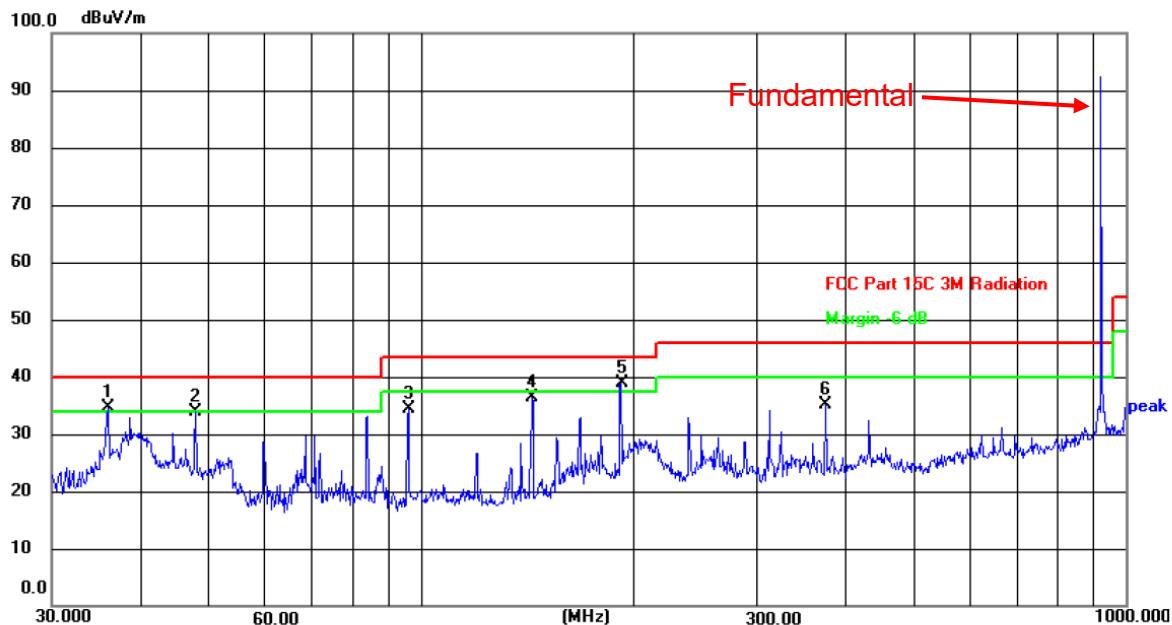

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 ! | 36.0007         | 48.91          | -14.26        | 34.65          | 40.00          | -5.35       | peak     | P   |        |
| 2   | 47.9940         | 46.14          | -12.30        | 33.84          | 40.00          | -6.16       | peak     | P   |        |
| 3   | 96.0986         | 49.15          | -14.72        | 34.43          | 43.50          | -9.07       | peak     | P   |        |
| 4   | 143.8295        | 52.39          | -16.11        | 36.28          | 43.50          | -7.22       | peak     | P   |        |
| 5 * | 192.4186        | 52.68          | -13.91        | 38.77          | 43.50          | -4.73       | peak     | P   |        |
| 6   | 375.9385        | 45.80          | -10.58        | 35.22          | 46.00          | -10.78      | peak     | P   |        |

**LoRa(DIY frequencies) AS923- 125K**

**Above 1GHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1844               | H                | 51.48                           | ---                           | -3.94                          | 47.54                  | ---                  | 74                           | 54                         | -6.46          |
| 2766               | H                | 46.05                           | ---                           | 0.52                           | 46.57                  | ---                  | 74                           | 54                         | -7.43          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1844               | V                | 49.27                           | ---                           | -3.94                          | 45.33                  | ---                  | 74                           | 54                         | -8.67          |
| 2766               | V                | 42.53                           | ---                           | 0.52                           | 43.05                  | ---                  | 74                           | 54                         | -10.95         |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**Middle channel: 923.2MHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1846.4             | H                | 51.84                           | ---                           | -3.98                          | 47.86                  | ---                  | 74                           | 54                         | -6.14          |
| 2769.6             | H                | 45.10                           | ---                           | 0.57                           | 45.67                  | ---                  | 74                           | 54                         | -8.33          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1846.4             | V                | 51.72                           | ---                           | -3.98                          | 47.74                  | ---                  | 74                           | 54                         | -6.26          |
| 2769.6             | V                | 44.36                           | ---                           | 0.57                           | 44.93                  | ---                  | 74                           | 54                         | -9.07          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**High channel: 924.6MHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1849.2             | H                | 52.91                           | ---                           | -3.98                          | 48.93                  | ---                  | 74                           | 54                         | -5.07          |
| 2773.8             | H                | 47.64                           | ---                           | 0.57                           | 48.21                  | ---                  | 74                           | 54                         | -5.79          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1849.2             | V                | 51.23                           | ---                           | -3.98                          | 47.25                  | ---                  | 74                           | 54                         | -6.75          |
| 2773.8             | V                | 45.40                           | ---                           | 0.57                           | 45.97                  | ---                  | 74                           | 54                         | -8.03          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

**LoRa(DIY frequencies) AS923- 250K**

**Above 1GHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1843.6             | H                | 50.82                           | ---                           | -3.94                          | 46.88                  | ---                  | 74                           | 54                         | -7.12          |
| 2765.4             | H                | 45.37                           | ---                           | 0.52                           | 45.89                  | ---                  | 74                           | 54                         | -8.11          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1843.6             | V                | 48.19                           | ---                           | -3.94                          | 44.25                  | ---                  | 74                           | 54                         | -9.75          |
| 2765.4             | V                | 41.75                           | ---                           | 0.52                           | 42.27                  | ---                  | 74                           | 54                         | -11.73         |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**Middle channel: 923.0MHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1846               | H                | 50.26                           | ---                           | -3.98                          | 46.28                  | ---                  | 74                           | 54                         | -7.72          |
| 2769               | H                | 44.58                           | ---                           | 0.57                           | 45.15                  | ---                  | 74                           | 54                         | -8.85          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1846               | V                | 52.02                           | ---                           | -3.98                          | 48.04                  | ---                  | 74                           | 54                         | -5.96          |
| 2769               | V                | 43.68                           | ---                           | 0.57                           | 44.25                  | ---                  | 74                           | 54                         | -9.75          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**High channel: 924.5MHz**

| Frequency<br>(MHz) | Ant. Pol.<br>H/V | Peak<br>reading<br>(dB $\mu$ V) | AV<br>reading<br>(dB $\mu$ V) | Correction<br>Factor<br>(dB/m) | Emission Level         |                      | Peak limit<br>(dB $\mu$ V/m) | AV limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------|---------------------------------|-------------------------------|--------------------------------|------------------------|----------------------|------------------------------|----------------------------|----------------|
|                    |                  |                                 |                               |                                | Peak<br>(dB $\mu$ V/m) | AV<br>(dB $\mu$ V/m) |                              |                            |                |
| 1849.0             | H                | 51.91                           | ---                           | -3.98                          | 47.93                  | ---                  | 74                           | 54                         | -6.07          |
| 2773.5             | H                | 46.34                           | ---                           | 0.57                           | 46.91                  | ---                  | 74                           | 54                         | -7.09          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |
| 1849.0             | V                | 51.26                           | ---                           | -3.98                          | 47.28                  | ---                  | 74                           | 54                         | -6.72          |
| 2773.5             | V                | 45.70                           | ---                           | 0.57                           | 46.27                  | ---                  | 74                           | 54                         | -7.73          |
| ---                | ---              | ---                             | ---                           | ---                            | ---                    | ---                  | ---                          | ---                        | ---            |

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

**LoRa(DIY frequencies) AS923- FSK**

**Above 1GHz**

| Frequency (MHz) | Ant. Pol. H/V | Peak reading (dB $\mu$ V) | AV reading (dB $\mu$ V) | Correction Factor (dB/m) | Emission Level      |                   | Peak limit (dB $\mu$ V/m) | AV limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------|---------------------------|-------------------------|--------------------------|---------------------|-------------------|---------------------------|-------------------------|-------------|
|                 |               |                           |                         |                          | Peak (dB $\mu$ V/m) | AV (dB $\mu$ V/m) |                           |                         |             |
| 1843.6          | H             | 52.37                     | ---                     | -3.94                    | 48.43               | ---               | 74                        | 54                      | -5.57       |
| 2765.4          | H             | 47.14                     | ---                     | 0.52                     | 47.66               | ---               | 74                        | 54                      | -6.34       |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |
| 1843.6          | V             | 48.08                     | ---                     | -3.94                    | 44.14               | ---               | 74                        | 54                      | -9.86       |
| 2765.4          | V             | 43.61                     | ---                     | 0.52                     | 44.13               | ---               | 74                        | 54                      | -9.87       |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |

**Middle channel: 923.2MHz**

| Frequency (MHz) | Ant. Pol. H/V | Peak reading (dB $\mu$ V) | AV reading (dB $\mu$ V) | Correction Factor (dB/m) | Emission Level      |                   | Peak limit (dB $\mu$ V/m) | AV limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------|---------------------------|-------------------------|--------------------------|---------------------|-------------------|---------------------------|-------------------------|-------------|
|                 |               |                           |                         |                          | Peak (dB $\mu$ V/m) | AV (dB $\mu$ V/m) |                           |                         |             |
| 1846.4          | H             | 51.75                     | ---                     | -3.98                    | 47.77               | ---               | 74                        | 54                      | -6.23       |
| 2769.6          | H             | 46.28                     | ---                     | 0.57                     | 46.85               | ---               | 74                        | 54                      | -7.15       |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |
| 1846.4          | V             | 52.93                     | ---                     | -3.98                    | 48.95               | ---               | 74                        | 54                      | -5.05       |
| 2769.6          | V             | 45.56                     | ---                     | 0.57                     | 46.13               | ---               | 74                        | 54                      | -7.87       |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |

**High channel: 924.8MHz**

| Frequency (MHz) | Ant. Pol. H/V | Peak reading (dB $\mu$ V) | AV reading (dB $\mu$ V) | Correction Factor (dB/m) | Emission Level      |                   | Peak limit (dB $\mu$ V/m) | AV limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------|---------------------------|-------------------------|--------------------------|---------------------|-------------------|---------------------------|-------------------------|-------------|
|                 |               |                           |                         |                          | Peak (dB $\mu$ V/m) | AV (dB $\mu$ V/m) |                           |                         |             |
| 1849.6          | H             | 53.60                     | ---                     | -3.98                    | 49.62               | ---               | 74                        | 54                      | -4.38       |
| 2774.4          | H             | 47.82                     | ---                     | 0.57                     | 48.39               | ---               | 74                        | 54                      | -5.61       |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |
| 1849.6          | V             | 50.16                     | ---                     | -3.98                    | 46.18               | ---               | 74                        | 54                      | -7.82       |
| 2774.4          | V             | 42.73                     | ---                     | 0.57                     | 43.30               | ---               | 74                        | 54                      | -10.70      |
| ---             | ---           | ---                       | ---                     | ---                      | ---                 | ---               | ---                       | ---                     | ---         |

**Note:**


1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB $\mu$ V/m)-Average limit (dB $\mu$ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

**Band Edge Requirement**

**LoRa(DIY frequencies) AS923- 125K**

Lowest channel 922.0:

Horizontal:

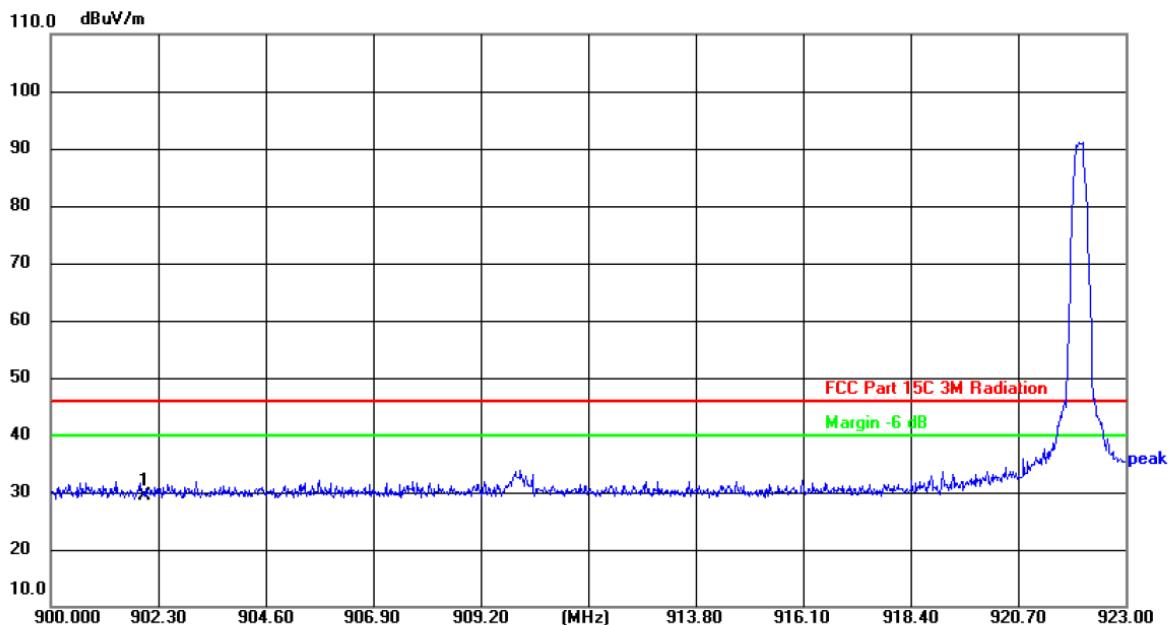

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 32.46          | -3.16         | 29.30          | 46.00          | -16.70      | peak     | P   |        |

Vertical:

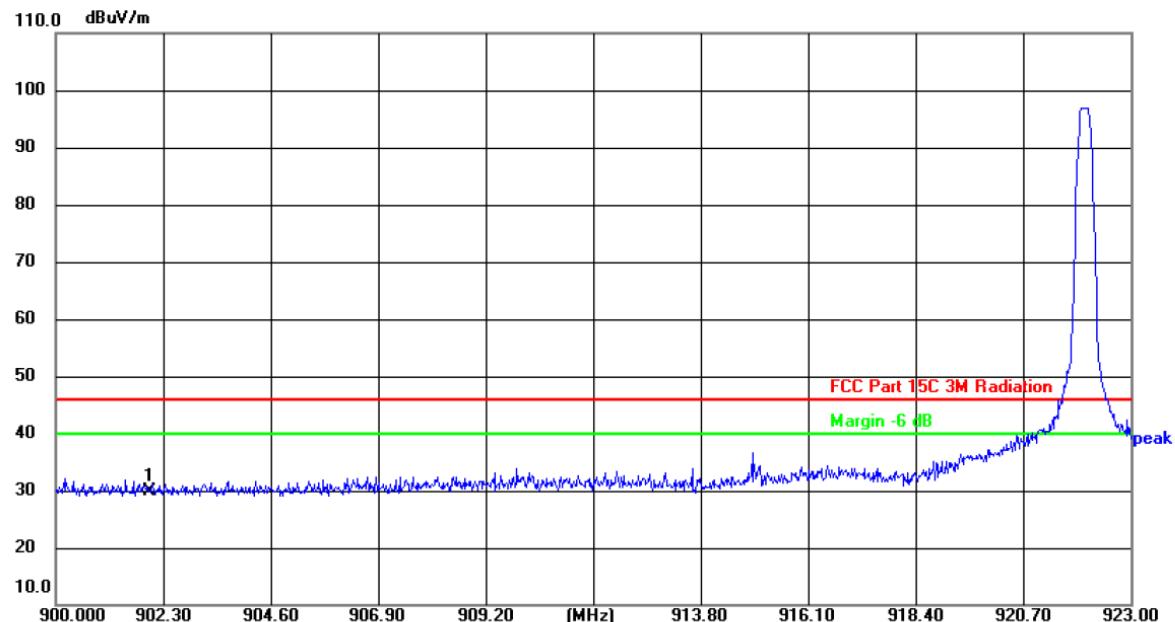

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation


Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 33.15          | -3.16         | 29.99          | 46.00          | -16.01      | peak     | P   |        |

Highest channel 924.6:

Horizontal:

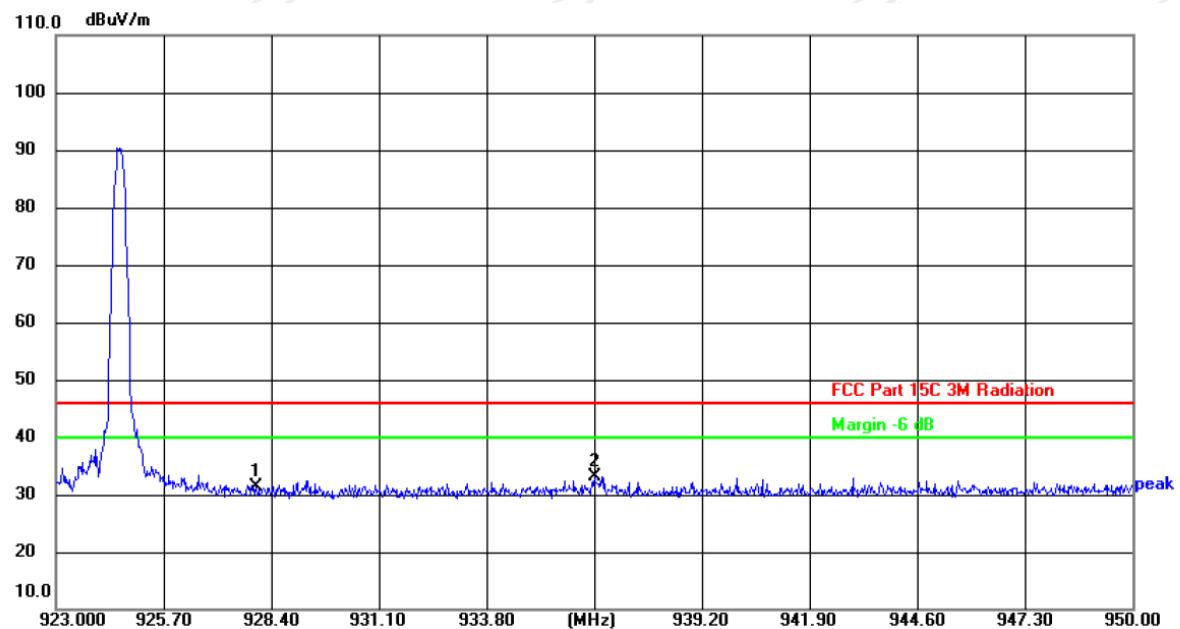

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 34.12          | -2.78         | 31.34          | 46.00          | -14.66      | peak     | P   |        |
| 2 * | 936.5000        | 35.83          | -2.60         | 33.23          | 46.00          | -12.77      | peak     | P   |        |

Vertical:

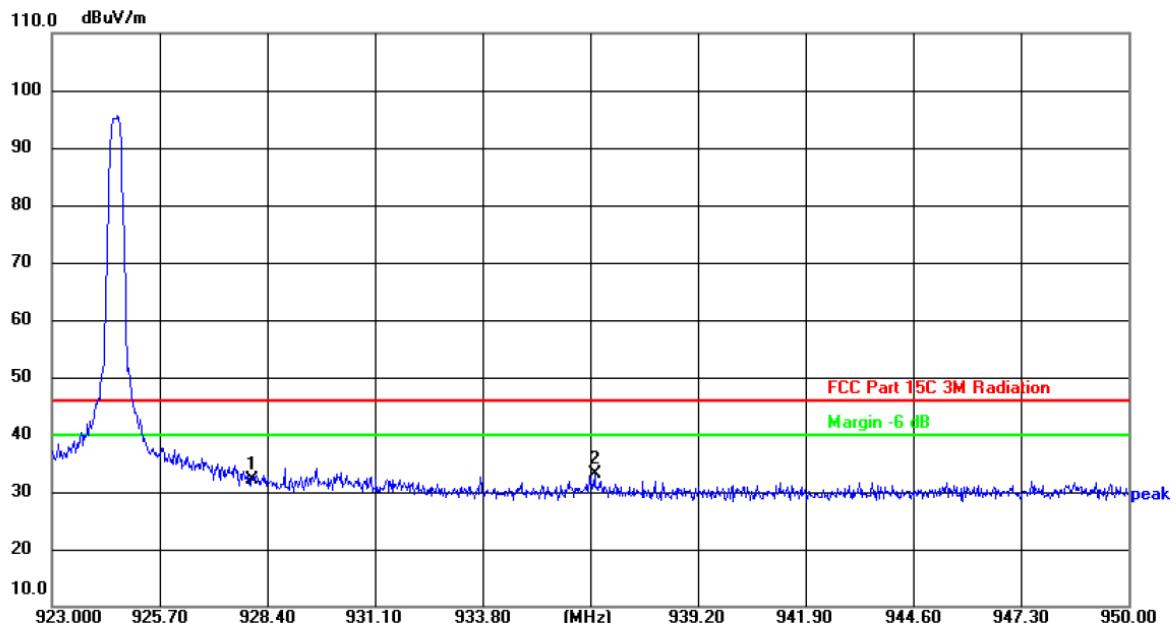

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz


Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 34.93          | -2.78         | 32.15          | 46.00          | -13.85      | peak     | P   |        |
| 2 * | 936.6079        | 35.79          | -2.59         | 33.20          | 46.00          | -12.80      | peak     | P   |        |

**LoRa(DIY frequencies) AS923- 250K**

Lowest channel 921.8:

Horizontal:

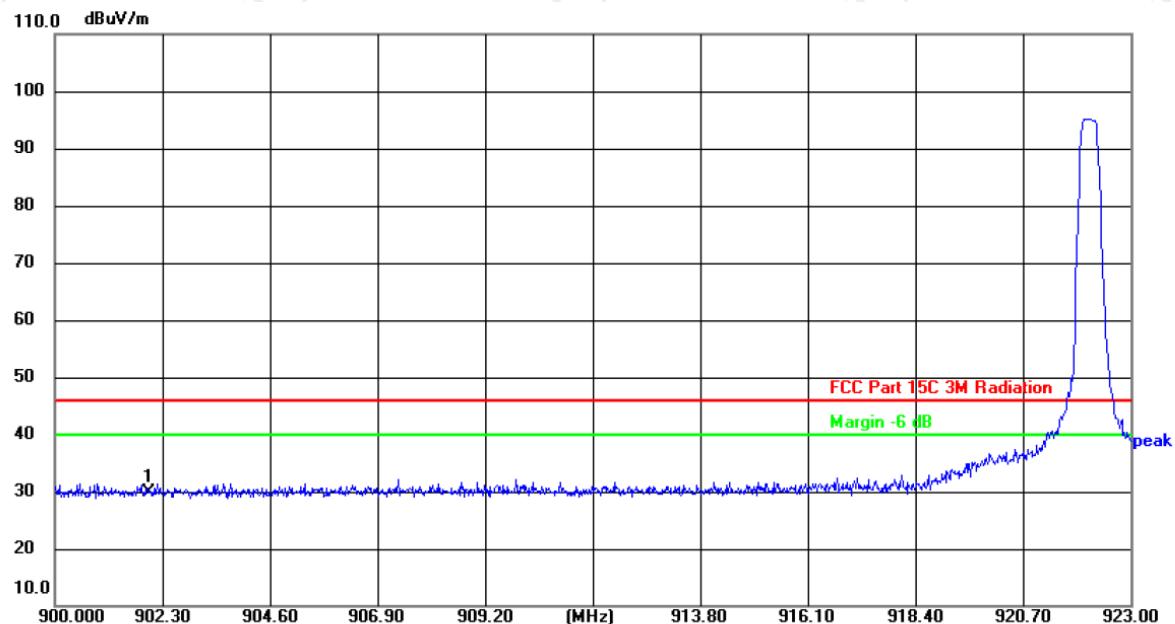

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 33.02          | -3.16         | 29.86          | 46.00          | -16.14      | peak     | P   |        |

Vertical:

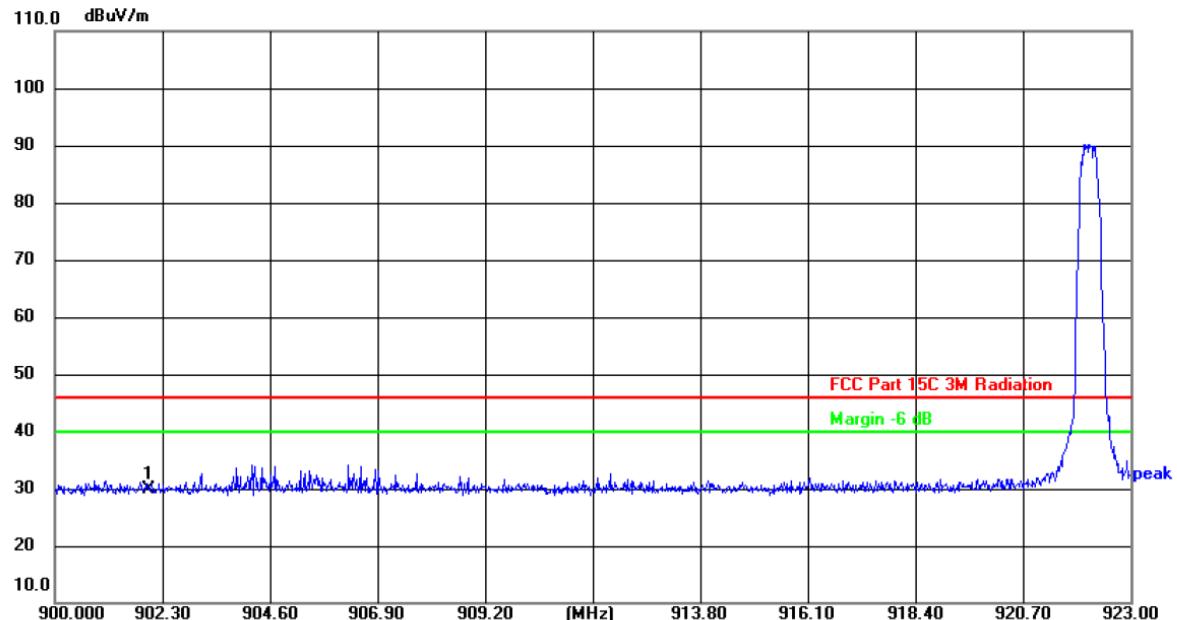

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation


Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 33.04          | -3.16         | 29.88          | 46.00          | -16.12      | peak     | P   |        |

Highest channel 924.5:

Horizontal:

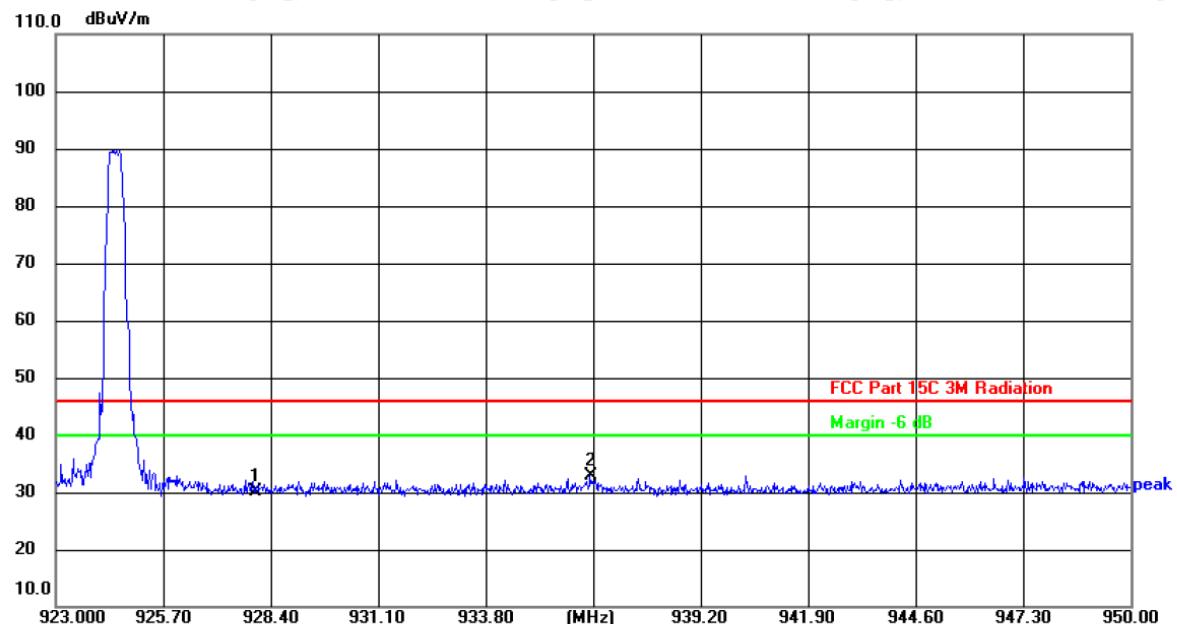

Site

 Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 32.93          | -2.78         | 30.15          | 46.00          | -15.85      | peak     | P   |        |
| 2 * | 936.4190        | 35.47          | -2.60         | 32.87          | 46.00          | -13.13      | peak     | P   |        |

Vertical:

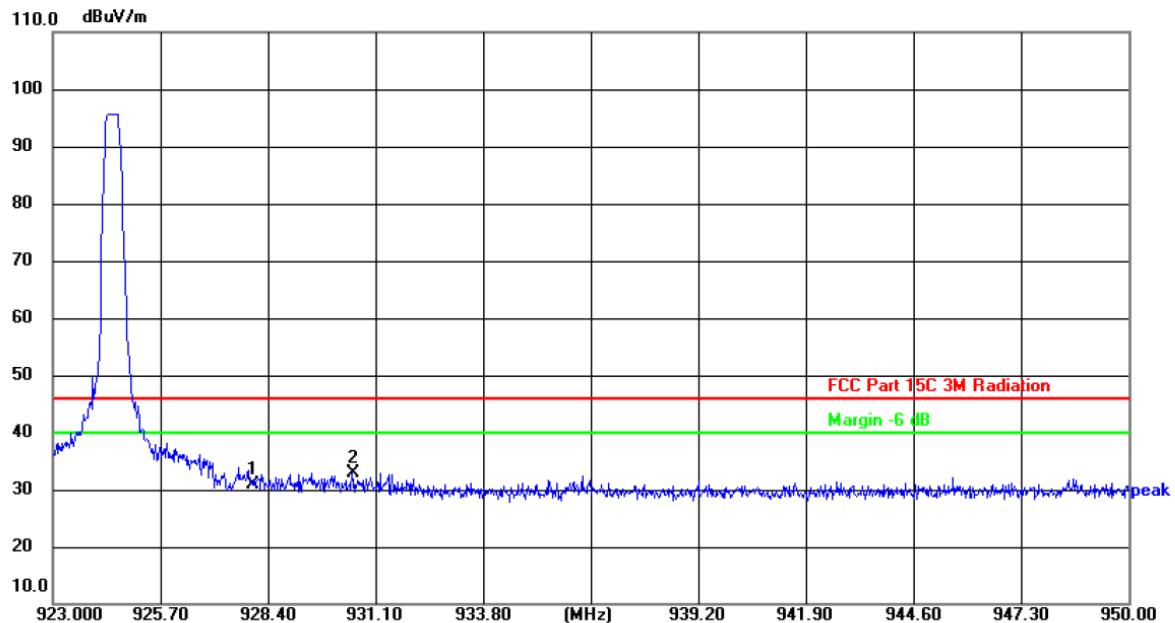

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz


Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 33.60          | -2.78         | 30.82          | 46.00          | -15.18      | peak     | P   |        |
| 2 * | 930.5060        | 35.64          | -2.72         | 32.92          | 46.00          | -13.08      | peak     | P   |        |

**LoRa(DIY frequencies) AS923- FSK**

Lowest channel 921.8:

Horizontal:

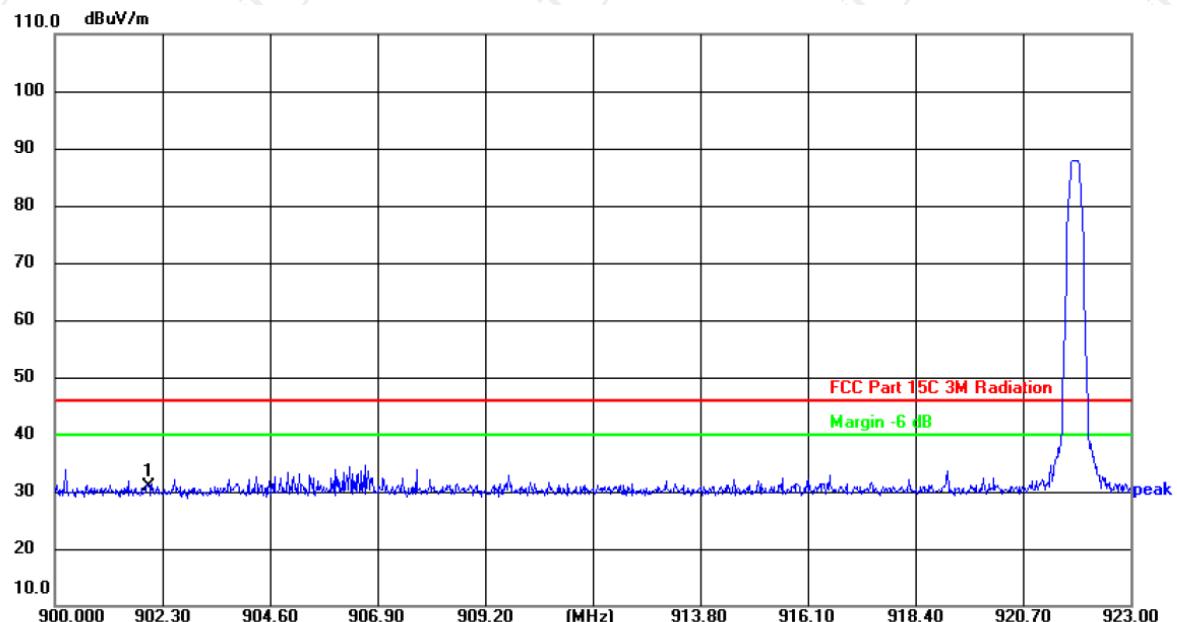

Site

Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 33.97          | -3.16         | 30.81          | 46.00          | -15.19      | peak     | P   |        |

Vertical:

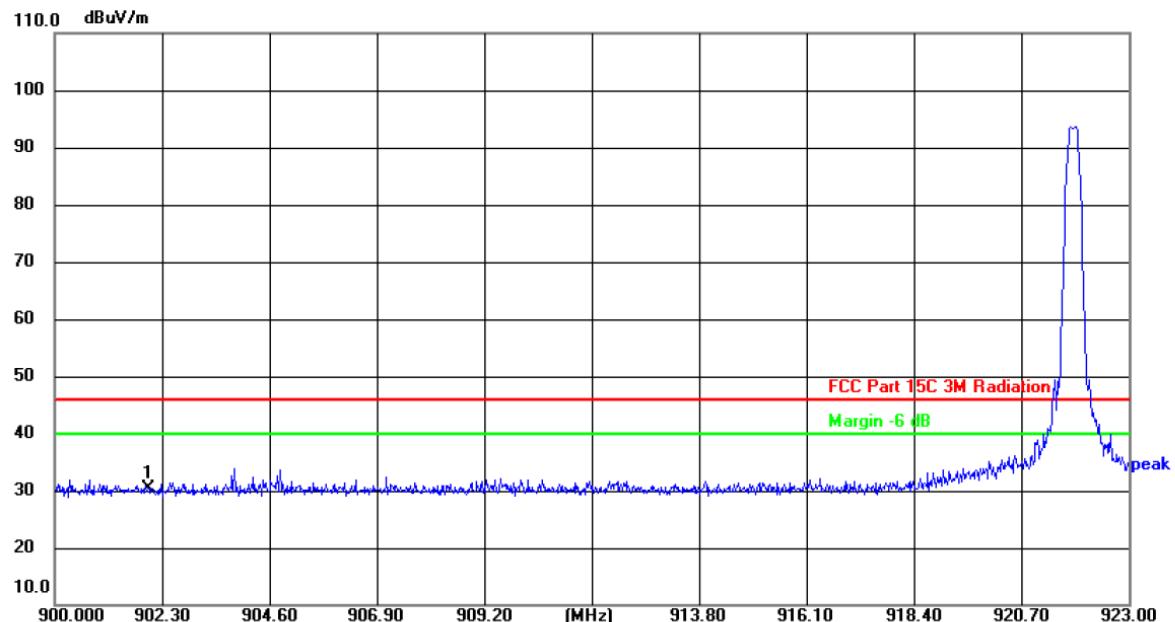

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation


Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 902.0000        | 33.47          | -3.16         | 30.31          | 46.00          | -15.69      | peak     | P   |        |

Highest channel 924.8:

Horizontal:

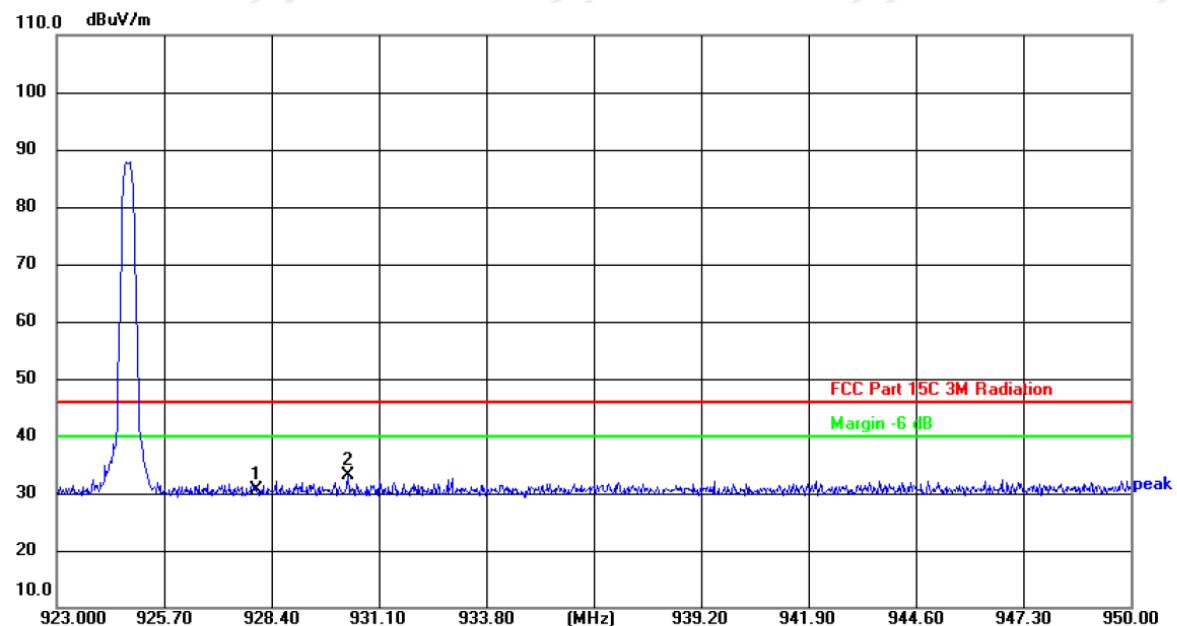

Site

 Polarization: **Horizontal**

Temperature: 24(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 33.52          | -2.78         | 30.74          | 46.00          | -15.26      | peak     | P   |        |
| 2 * | 930.3170        | 35.94          | -2.73         | 33.21          | 46.00          | -12.79      | peak     | P   |        |

Vertical:

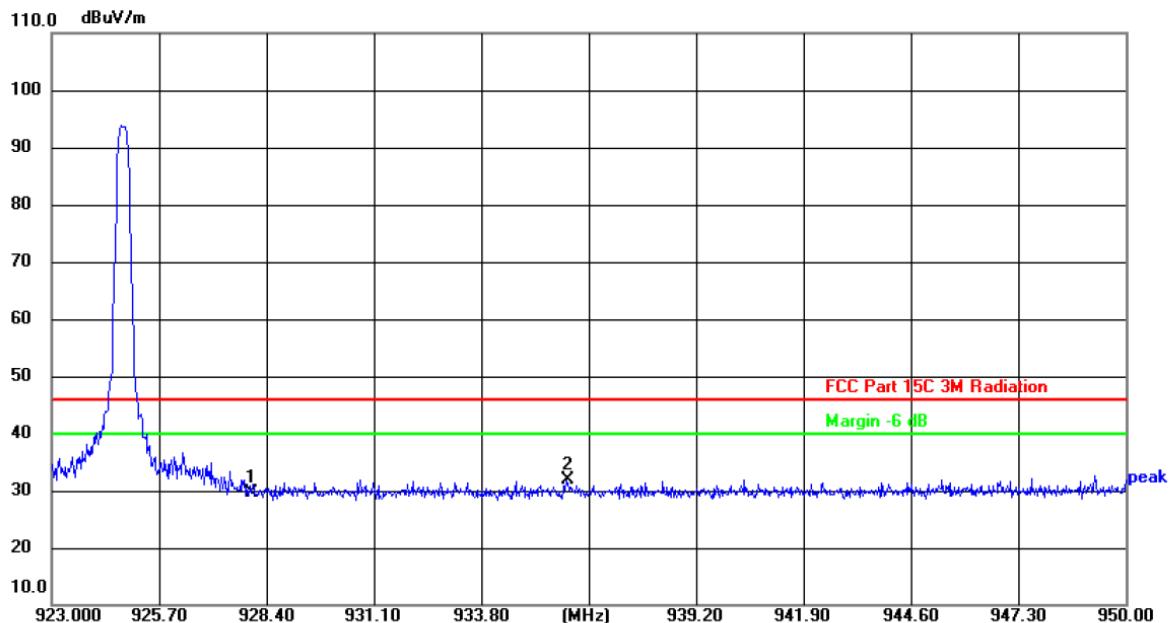

Site

 Polarization: **Vertical**

Temperature: 24(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 52 %

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 928.0000        | 32.30          | -2.78         | 29.52          | 46.00          | -16.48      | peak     | P   |        |
| 2 * | 935.9330        | 34.52          | -2.61         | 31.91          | 46.00          | -14.09      | peak     | P   |        |

## 5.4. 20dB Occupied Bandwidth

### 5.4.1. Test Specification

|                          |  |
|--------------------------|--|
| <b>Test Requirement:</b> | FCC Part15 C Section 15.215(c)   |
| <b>Test Method:</b>      | ANSI C63.10:2013   |
| <b>Limit:</b>            | N/A  |
|                          | <ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.<br/>Span = approximately 2 to 3 times the 20 dB bandwidth,<br/>centered on a hopping channel; RBW<math>\geq</math>1% of the 20 dB bandwidth;<br/>VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol> |
| <b>Test setup:</b>       |  <p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) via a grey cable. The analyzer has a digital display and two control knobs. The EUT is a simple rectangular device with a single circular port for connection.</p>   |
| <b>Test Mode:</b>        | Transmitting mode with modulation  |
| <b>Test results:</b>     | PASS   |

### 5.4.2. Test Instruments

| Equipment         | Manufacturer | Model | Serial Number | Calibration Due |
|-------------------|--------------|-------|---------------|-----------------|
| Spectrum Analyzer | R&S          | FSU   | 200054        | Jul. 18, 2022   |

#### 5.4.3. Test data

##### LoRa(DIY frequencies) AS923- 125K

| Test Channel | 20dB Occupy Bandwidth (kHz) | Limit | Conclusion |
|--------------|-----------------------------|-------|------------|
| 922.0MHz     | 136.5                       | ---   | PASS       |
| 923.2MHz     | 136.8                       | ---   | PASS       |
| 924.6MHz     | 133.3                       | ---   | PASS       |

##### LoRa(DIY frequencies) AS923- 250K

| Test Channel | 20dB Occupy Bandwidth (kHz) | Limit | Conclusion |
|--------------|-----------------------------|-------|------------|
| 921.8MHz     | 273.9                       | ---   | PASS       |
| 923.0MHz     | 269.7                       | ---   | PASS       |
| 924.5MHz     | 270.4                       | ---   | PASS       |

##### LoRa(DIY frequencies) AS923- FSK

| Test Channel | 20dB Occupy Bandwidth (kHz) | Limit | Conclusion |
|--------------|-----------------------------|-------|------------|
| 921.8MHz     | 154.1                       | ---   | PASS       |
| 923.2MHz     | 154.0                       | ---   | PASS       |
| 924.8MHz     | 153.8                       | ---   | PASS       |

Test plots as follows:

## LoRa(DIY frequencies) AS923- 125K

### Lowest channel



### Middle channel



### Highest channel



## LoRa(DIY frequencies) AS923- 250K

### Lowest channel



### Middle channel



### Highest channel



## LoRa(DIY frequencies) AS923- FSK

### Lowest channel



### Middle channel



### Highest channel



## Appendix A: Photographs of Test Setup

Refer to the test report No. TCT220228E901

## Appendix B: Photographs of EUT

Refer to the test report No. TCT220228E901

\*\*\*\*\***END OF REPORT**\*\*\*\*\*