

**EMC TEST REPORT**

**FCC 47 CFR Part 15B  
Industry Canada RSS-Gen**

**Electromagnetic compatibility - Unintentional radiators**

**Report Reference No.** .....: G0M-1308-3097-EF01-V01

**Testing Laboratory** .....: Eurofins Product Service GmbH

Address .....: Storkower Str. 38c  
15526 Reichenwalde  
Germany

Accreditation .....



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01  
FCC Filed Test Laboratory, Reg.-No.: 96970  
IC OATS Filing assigned code: 3470A

**Applicant's name** .....: inmotiotec GmbH

Address .....: Oberregauer Straße 48  
4844 Regau  
AUSTRIA

**Test specification:**

Standard .....: 47 CFR Part 15 Subpart B  
RSS-Gen, Issue 3, 2010-12  
ANSI C63.4:2009

**Equipment under test (EUT):**

Product description	Basisstation	
Model No.	LPM Basisstation Ser.1	
Additional Models	None	
Hardware version	H2.3	
Firmware / Software version	fcc0	
Contains	FCC-ID: 2AATD-PREMIUMBSV23	IC: N/A
<b>Test result</b>	<b>Passed</b>	

---

Test Report No.: G0M-1308-3097-EF01-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Possible test case verdicts:**

- not applicable to test object .....: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item .....: 2013-09-11

Date (s) of performance of tests .....: 2014-11-21

Compiled by .....: Antje Bartusch

Tested by (+ signature).....: Andreas Pflug



Approved by (+ signature) .....: Marcus Klein



Date of issue .....: 2014-12-04

Total number of pages .....: 27

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-04	Initial Release	

---



## REPORT INDEX


<b>1 EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1 Photos – Equipment external	6
1.2 Photos – Equipment internal	8
1.3 Photos – Test setup	10
1.4 Supporting Equipment Used During Testing	11
1.5 Input / Output Ports	11
1.6 Operating Modes and Configurations	12
1.7 Test Equipment Used During Testing	13
1.8 Sample emission level calculation	14
<b>2 RESULT SUMMARY</b>	<b>15</b>
<b>3 TEST CONDITIONS AND RESULTS</b>	<b>16</b>
3.1 Test Conditions and Results – Radiated emissions	16
3.2 Test Conditions and Results – AC power line conducted emissions	24

## 1 Equipment (Test item) Description



<b>Description</b>	Basisstation
<b>Model</b>	LPM Basisstation Ser.1
<b>Additional Models</b>	None
<b>Serial number</b>	None
<b>Hardware version</b>	H2.3
<b>Software / Firmware version</b>	fcc0
<b>Contains FCC-ID</b>	2AATD-PREMIUMBSV23
<b>Contains IC</b>	N/A
<b>Power supply</b>	120 VAC
<b>AC/DC-Adaptor</b>	None
<b>Manufacturer</b>	Abatec Group AG Oberregauerstraße 48 4844 Regau Austria
<b>Highest emission frequency</b>	Fmax [MHz] = 110
<b>Device classification</b>	Class B
<b>Equipment type</b>	Tabletop
<b>Number of tested samples</b>	1

## 1.1 Photos – Equipment external

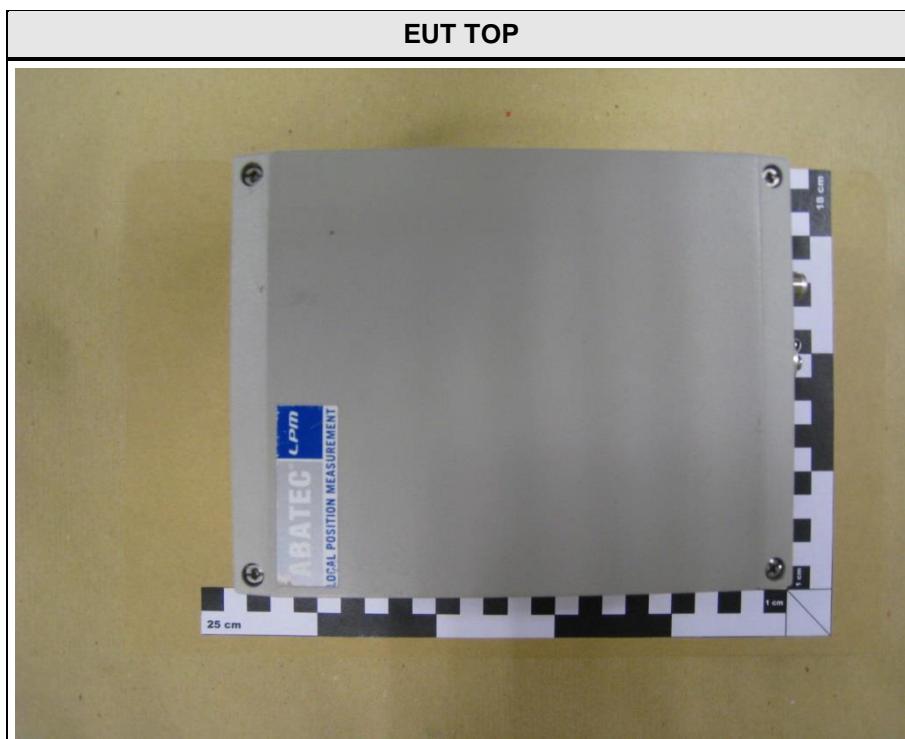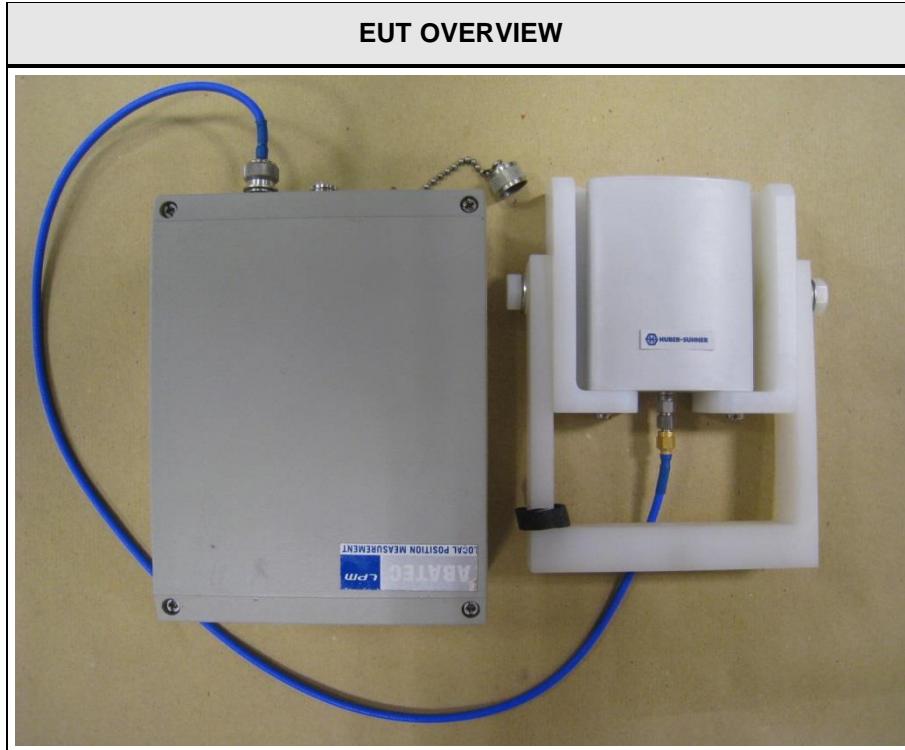


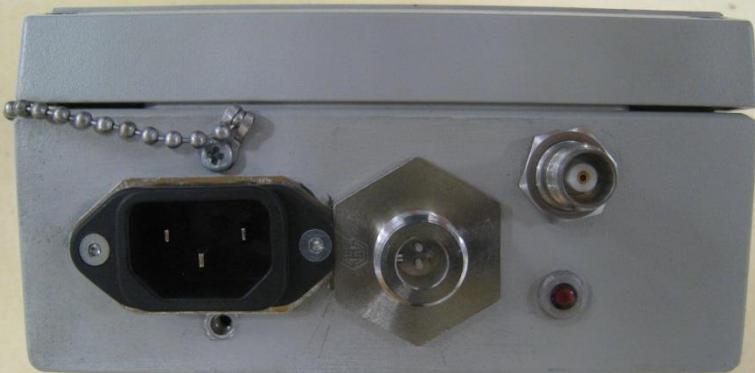**EUT CONNECTORS****ANTENNA1 TOP**


## 1.2 Photos – Equipment internal

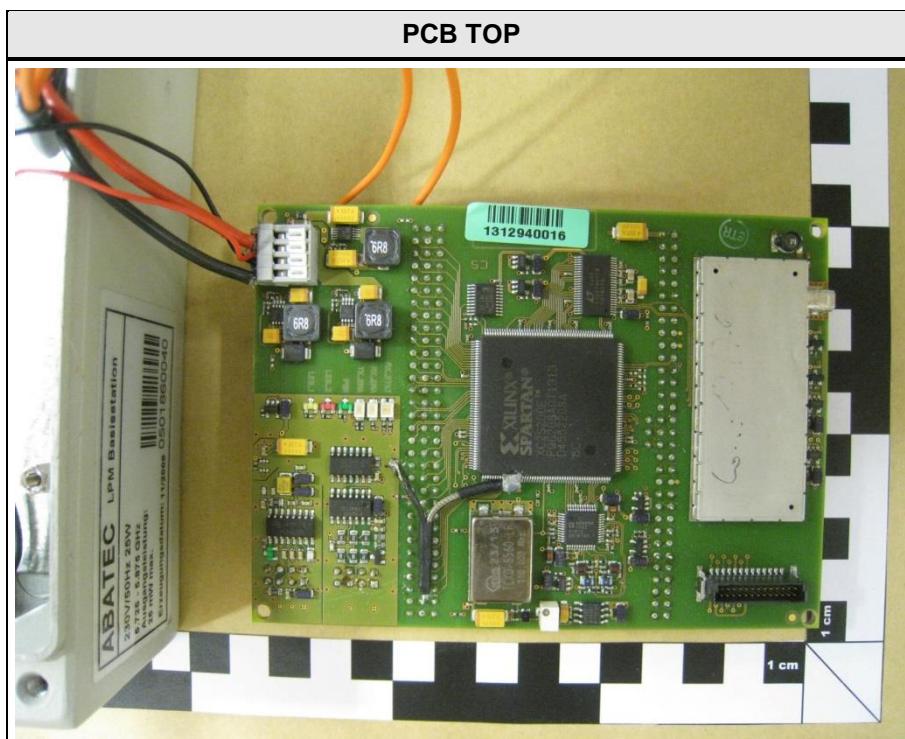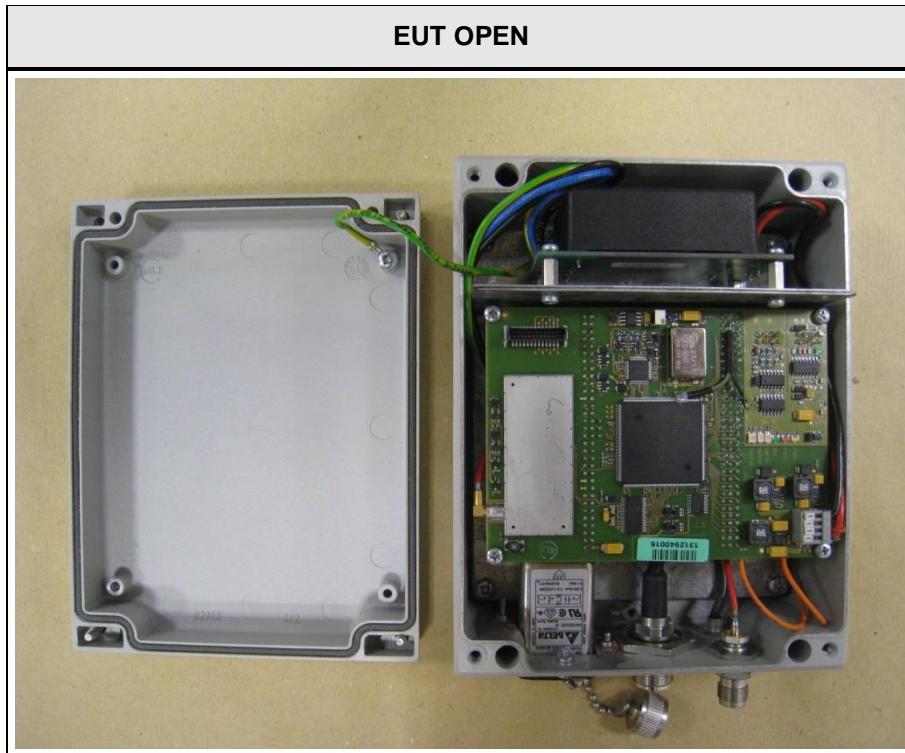


PCB BOTTOM

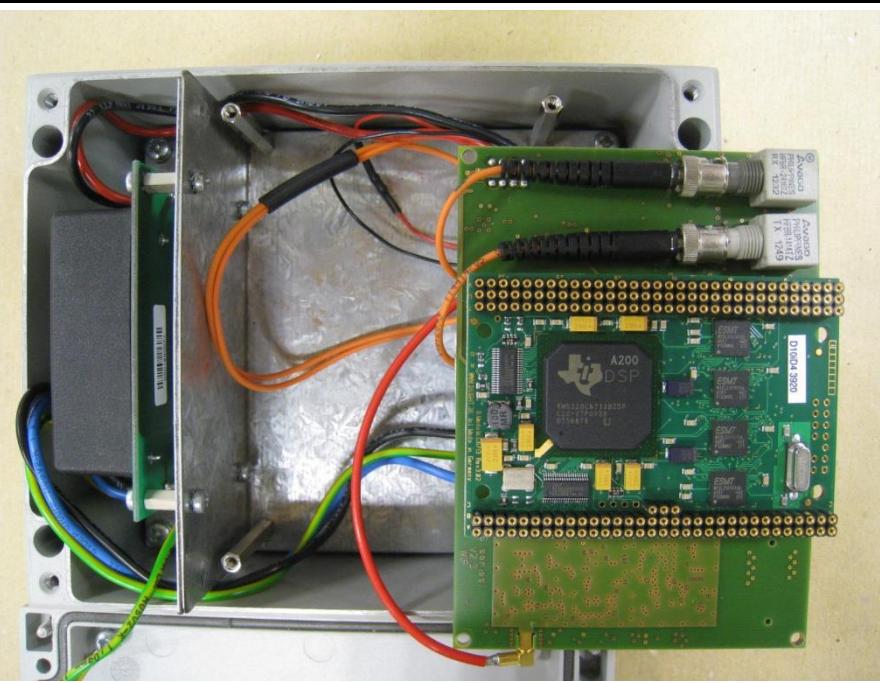

PCB RF-PART

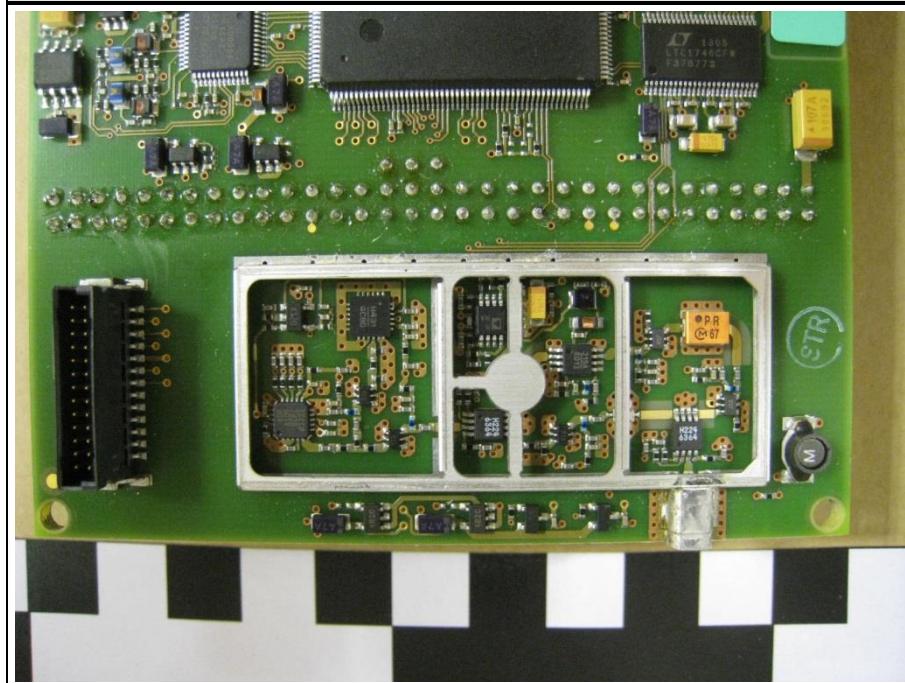

### 1.3 Photos – Test setup

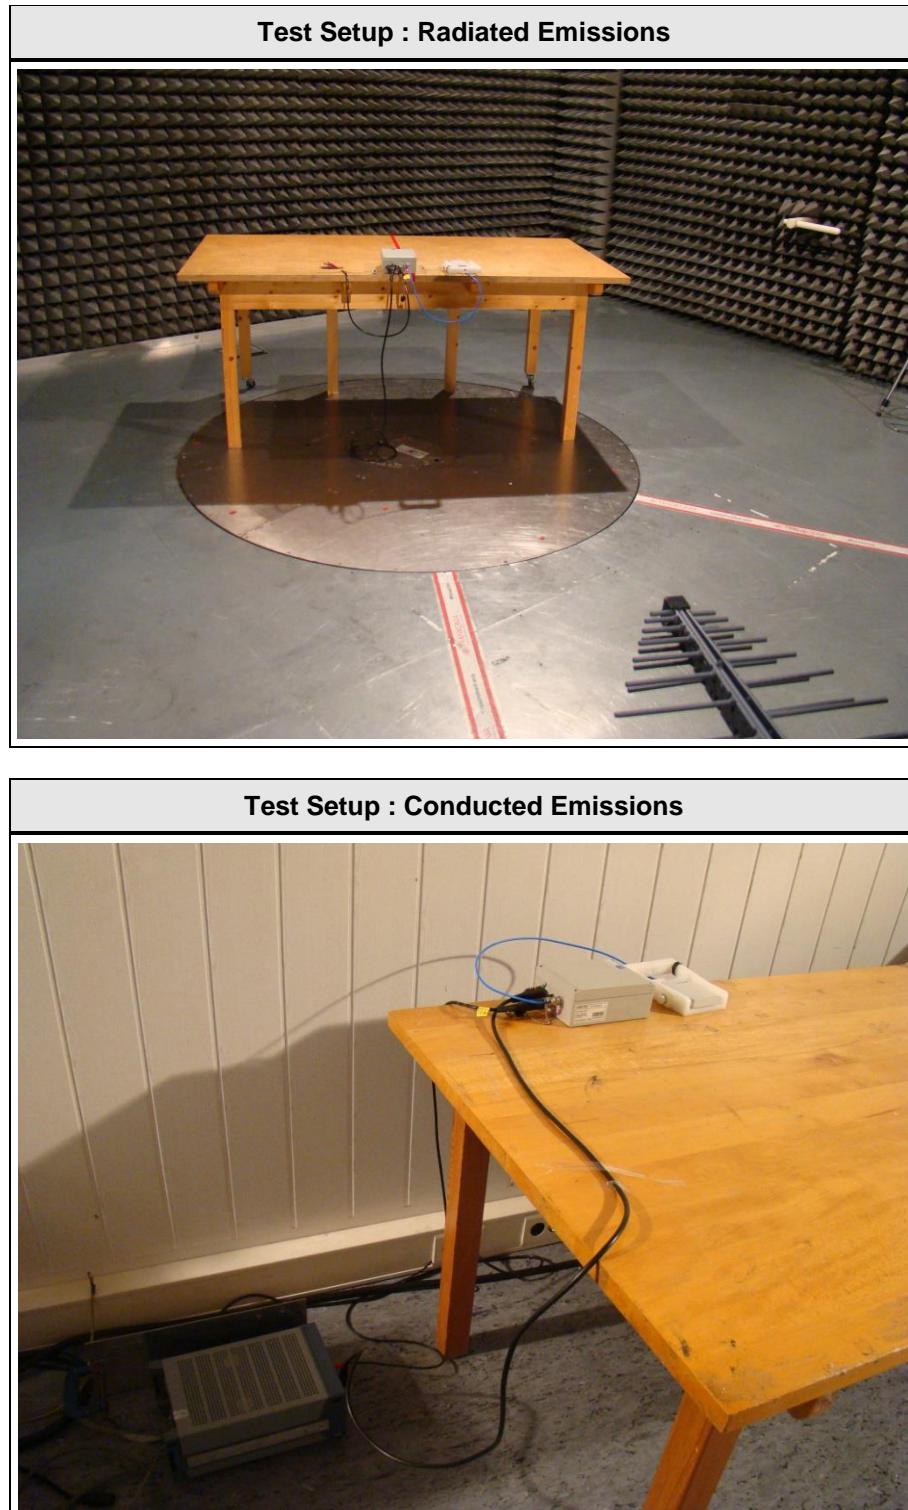

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Antenna	Huber & Suhner	Planar Antenna SPA 5600/65/12/0/V	

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or  
 SIM : Simulator (Not Subjected to Test)  
 CABL : Connecting cables

#### 1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	AC power port	AC	>3m	No	-
2	Fiber Optic Port	N/E	up to 1000 m	No	Abatec Protocol no standard
3	Antenna	I/O	>3m	Yes	-

**\*Note:** Use the following abbreviations:

AC : AC power port  
 DC : DC power port  
 N/E : Non electrical  
 I/O : Signal input or output port  
 TP : Telecommunication port

## 1.6 Operating Modes and Configurations

Mode #	Description
1	TX mode

### 1.7 Test Equipment Used During Testing

<b>Measurement Software</b>					
Description		Manufacturer	Name		Version
EMC Test Software		Dare Instruments	Radimation		2014.1.15

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU8	EF00379	2014-03	2015-03
EMI Test Receiver	R&S	ESCS30	EF00295	2014-10	2015-10

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	-
Remarks:				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen			Verdict: PASS			
Laboratory Parameters:	Required prior to the test		During the test			
Ambient Temperature	15 to 35 °C		23°C			
Relative Humidity	30 to 60 %		34%			
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax [MHz] = 110					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 5 GHz					
Operating mode configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB $\mu$ V/m]	Result	Average [dB $\mu$ V/m]	Result	Peak [dB $\mu$ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

**Test Procedure:**

The test site is in accordance with ANSI C63.4:2009 requirements and is listed by FCC.  
The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
EUT Name: Basisstation  
Model: LPM Basisstation Ser.1  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Pflug  
Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3m  
Mode: tx  
Test Date: 2014-11-21  
Note:

Index 1

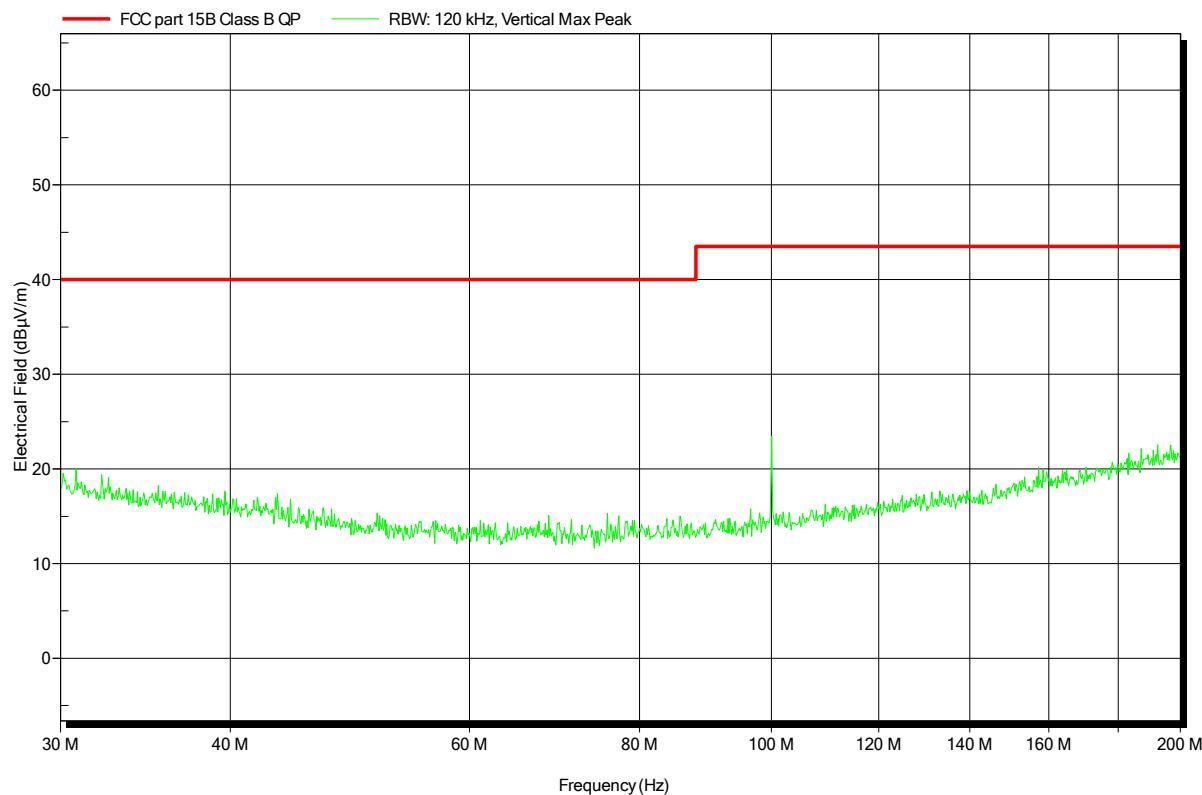


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
EUT Name: Basisstation  
Model: LPM Basisstation Ser.1  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Pflug  
Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3m  
Mode: tx  
Test Date: 2014-11-21  
Note:

Index 2

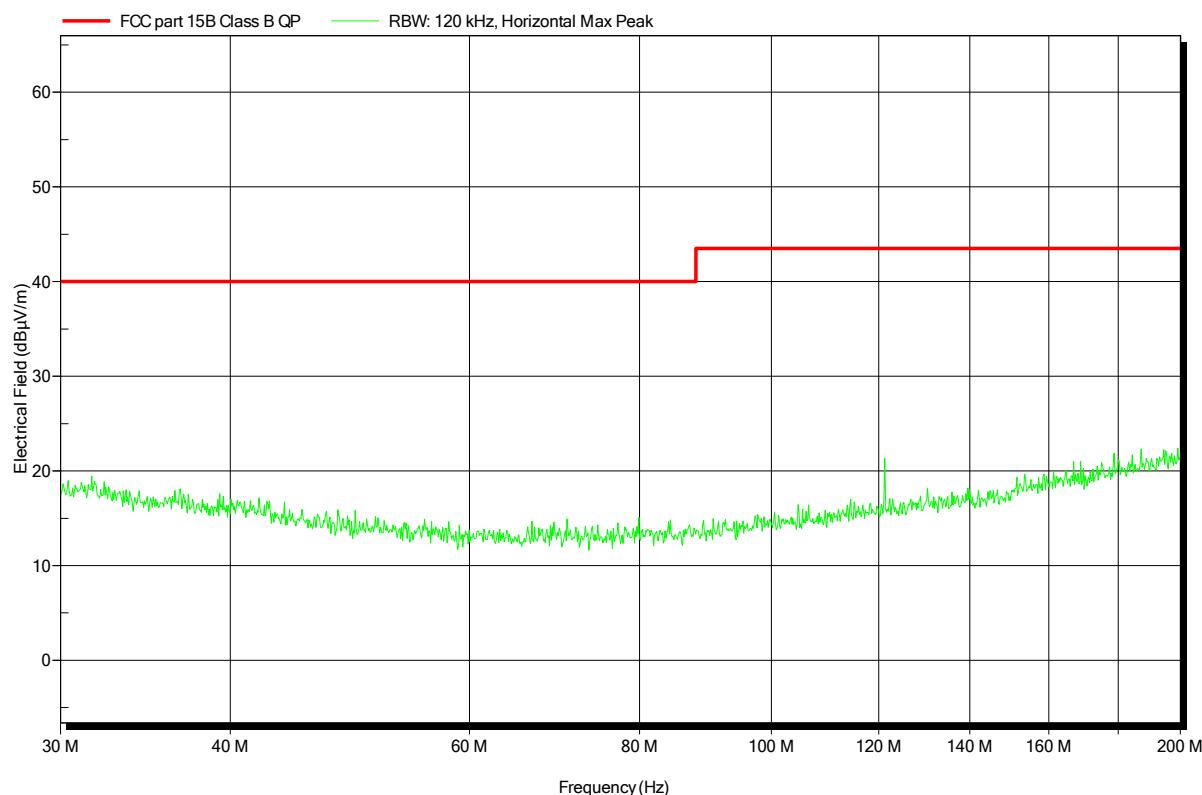

Test Report No.: G0M-1308-3097-EF01-V01


Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
 EUT Name: Basisstation  
 Model: LPM Basisstation Ser.1  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pflug  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3m  
 Mode: tx  
 Test Date: 2014-11-21  
 Note:

Index 4

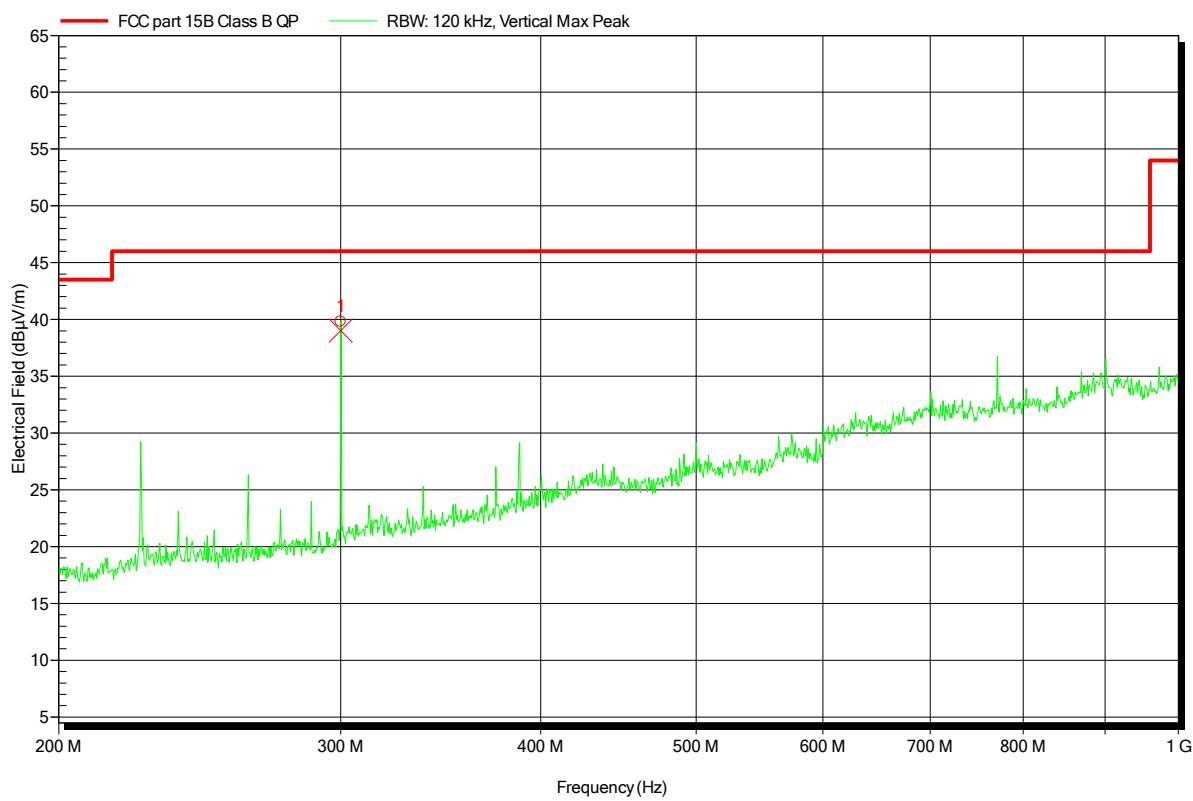

Test Report No.: G0M-1308-3097-EF01-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
 EUT Name: Basisstation  
 Model: LPM Basisstation Ser.1  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pflug  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3m  
 Mode: tx  
 Test Date: 2014-11-21  
 Note:

Index 3

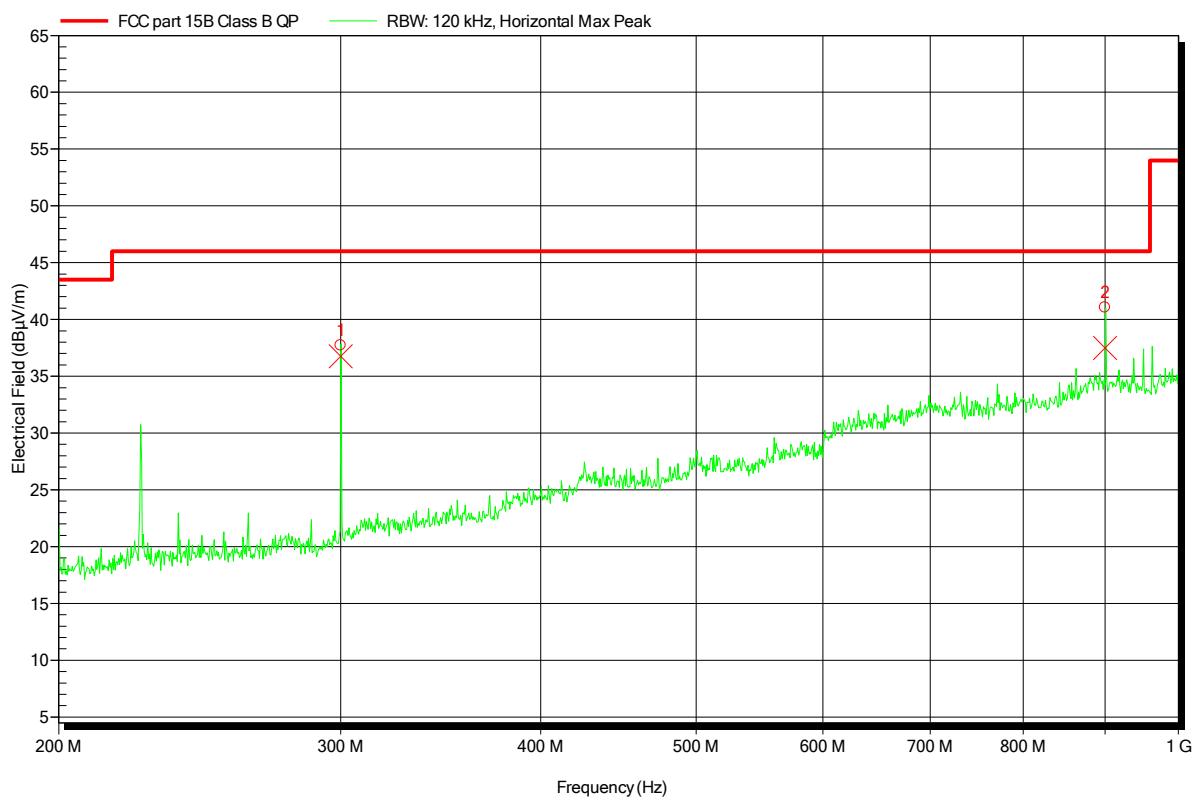


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
299.995 MHz	36.75 dB $\mu$ V/m	46 dB $\mu$ V/m	-9.25 dB	Pass
899.995 MHz	37.5 dB $\mu$ V/m	46 dB $\mu$ V/m	-8.5 dB	Pass

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
 EUT Name: Basisstation  
 Model: LPM Basisstation Ser.1  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pflug  
 Test Conditions: Tnom: 23°C, Unom: 120VAC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3m  
 Mode: TX  
 Test Date: 2014-11-21  
 Note:

Index 32

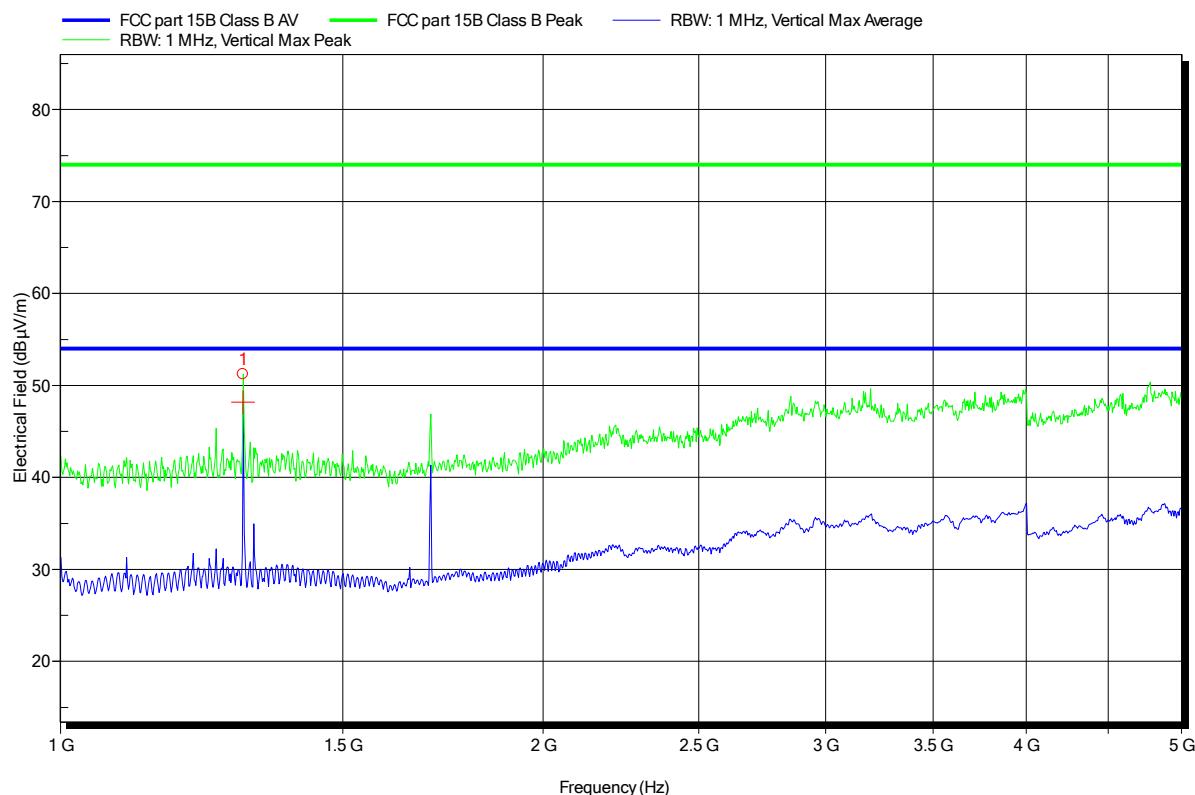

Test Report No.: G0M-1308-3097-EF01-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
 EUT Name: Basisstation  
 Model: LPM Basisstation Ser.1  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pflug  
 Test Conditions: Tnom: 23°C, Unom: 120VAC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3m  
 Mode: TX  
 Test Date: 2014-11-21  
 Note:

Index 31

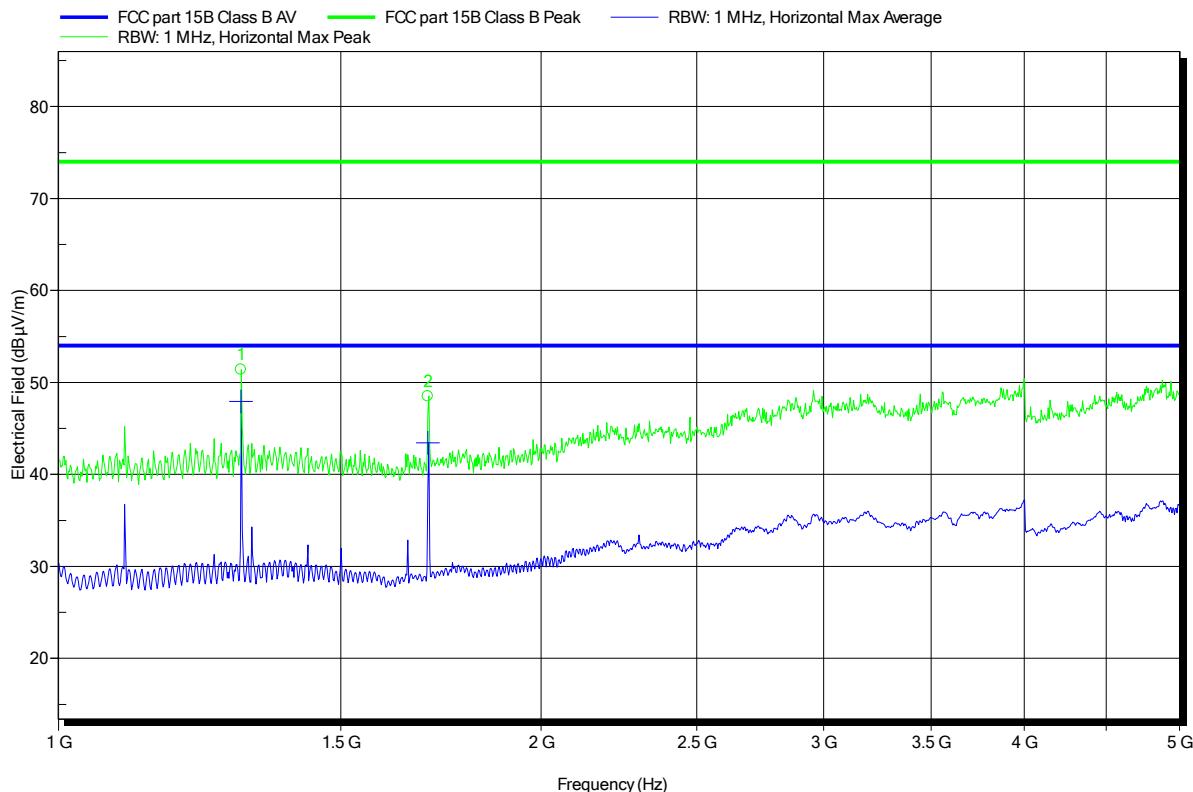

Frequency	Average	Average Limit	Average Difference	Average Status
1.3 GHz	47.92 dB $\mu$ V/m	54 dB $\mu$ V/m	-6.08 dB	Pass
1.7 GHz	43.45 dB $\mu$ V/m	54 dB $\mu$ V/m	-10.55 dB	Pass

### 3.2 Test Conditions and Results – AC power line conducted emissions

<b>Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen</b>			<b>Verdict: PASS</b>	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	23°C		
Relative Humidity	30 to 60 %	34%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	1			
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

**Test Procedure:**


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

### EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
 EUT Name: Basisstation  
 Model: LPM Basisstation Ser.1  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pflug  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
 LISN: ESH2-Z5 N  
 Mode: TX  
 Test Date: 2014-11-21  
 Note:

Index 5

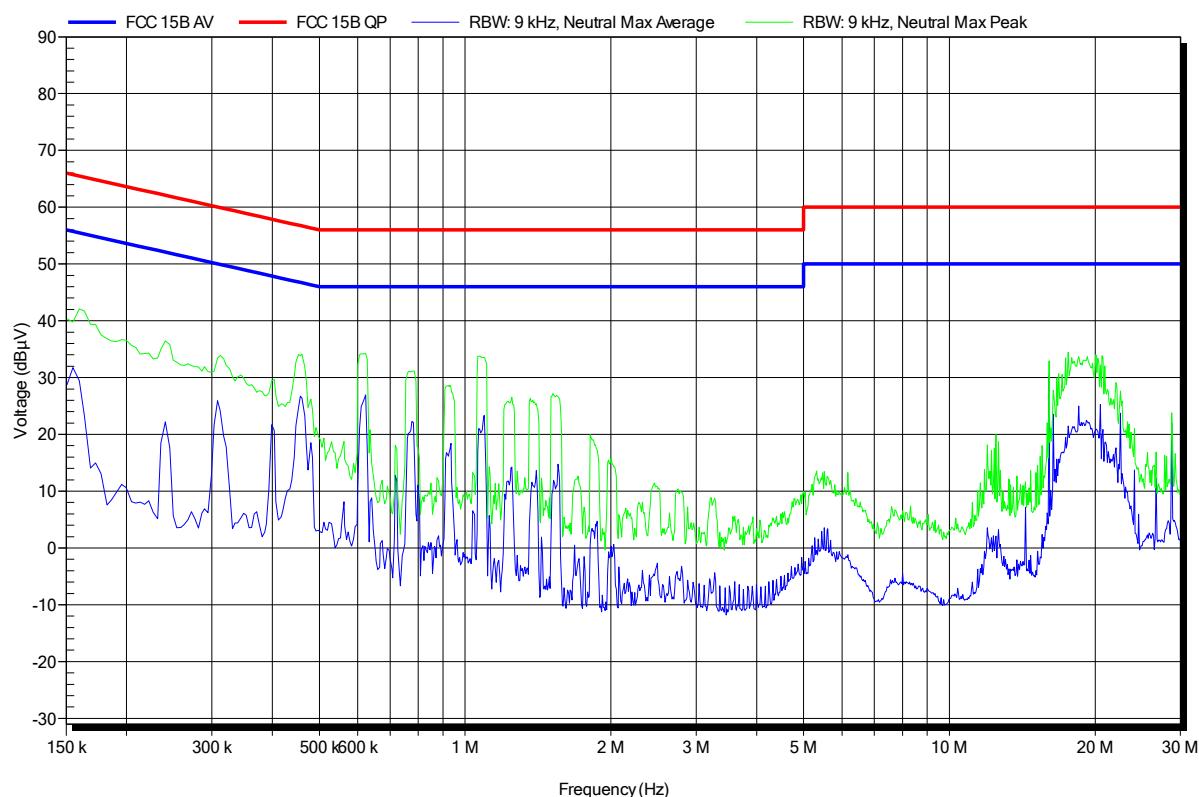

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1308-3097

Manufacturer: inmotiotec GmbH  
EUT Name: Basisstation  
Model: ee  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Pflug  
Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $U_{nom}: 120\text{VAC}$   
LISN: ESH2-Z5 L  
Mode: TX  
Test Date: 2014-11-21  
Note:

Index 6

