







# ISO/IEC17025Accredited Lab.

Report No: FCC 1308120 File reference No: 2013-09-03

Applicant: Sound of soul ltd.

Product: Bluetooth shower speaker

Model No: MN619

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: Sep 03, 2013

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1308120 Page 2 of 77

Date: 2013-09-03



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

# IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 77

Report No: 1308120 Date: 2013-09-03



# **Test Report Conclusion** Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth Measurement.	22
8.0	Maximum Peak Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time)	45
12.0	Out of Band Measurement.	58
13.0	Antenna Requirement.	71
14.0	FCC Label.	72
15.0	Photo of Test Setup and EUT View.	73

Report No: 1308120 Page 4 of 77

Date: 2013-09-03



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

# 1.2 Applicant Details

Applicant: Sound of soul ltd.

Address: 83, hung to rd, 21 floor "C", Kwan Tong, Hongkong

Telephone: 852 62731841

Fax: --

#### 1.3 Description of EUT

Product: Bluetooth shower speaker

Manufacturer: SiWei Manufactory LongGang ShenZhen

Address: Block 8, HongYongLi Industrial Park LongXing Community LongGang

Subdistrict LongGang District ShenZhen

Brand Name: N/A
Model Number: MN619
Additional Model Name N/A
Additional Trade Name N/A

Type of Modulation GFSK, Л/4QPSK, 8DPSK

Frequency range 2402-2480MHz

Number of Channel 79

Frequency Selection By software

Antenna type PCB antenna, the antenna gain is 1.0dBi

# 1.4 Submitted Sample: 1 Sample

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1308120 Page 5 of 77

Date: 2013-09-03



Test Duration: 2013-08-30 to 2013-09-02 1.5

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 77

Report No: 1308120 Date: 2013-09-03



2.0		Test Equip	oments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22
Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22
3m OATS			N/A	2013-08-22	2014-08-21
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2012-08-21	2013-08-20
LISN	AFJ	LS16C	10010947251	2012-08-21	2013-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22

Report No: 1308120 Page 7 of 77

Date: 2013-09-03



#### 3.0 Technical Details

# 3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and	15.247(d),15.205(a),	PASS	Complies
Restricted bands	15.209 (a),15.109		
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

# 4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Report No: 1308120 Page 8 of 77

Date: 2013-09-03



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

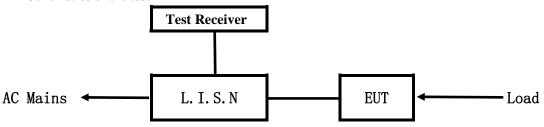


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

#### Block diagram of Test setup

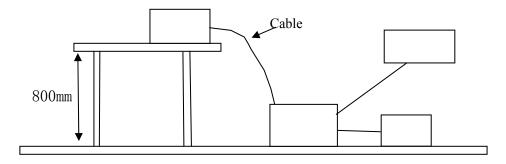

## 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

Page 9 of 77

Report No: 1308120 Date: 2013-09-03



#### A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth shower	SiWei Manufactory LongGang	MN619	2AAVZMN619
speaker	ShenZhen	WINO19	

#### B. Internal Device

Device	Manufacturer	Model	Rating

# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

# 5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Limits (dB µ V)		Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1308120 Page 10 of 77

Date: 2013-09-03



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: --Equipment Level: Class B** 

Results: N/A

Please refer to following diagram for individual

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
	Live				
	Live				

Report No: 1308120 Page 11 of 77

Date: 2013-09-03



# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: --**

**Equipment Level: Class B** 

**Results: N/A** 

Please refer to following diagram for individual

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
	Neutral				
	Neutral				
	Neutral				

N/A --- Due to battery operation, this test item not applicable.

Report No: 1308120 Page 12 of 77

Date: 2013-09-03



#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Report No: 1308120 Page 13 of 77

Report No: 1308120 Date: 2013-09-03



## 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.109. 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. After pre-scanning, GFSK was the worse case. The test data of this mode was recorded.
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Remark: New battery used

Report No: 1308120 Page 14 of 77

Date: 2013-09-03



#### Test result

# General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
152.840	28.75	Н	43.50
105.720	27.41	V	43.50

Report No: 1308120 Page 15 of 77

Date: 2013-09-03



# Test Figure:

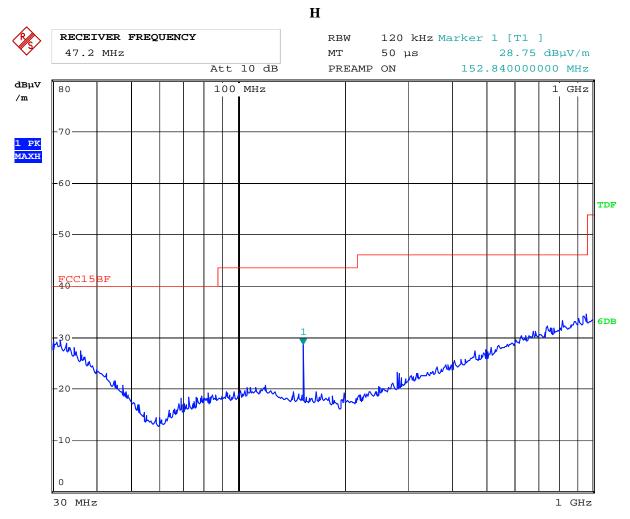

Date: 26.AUG.2013 10:51:17


Report No: 1308120 Page 16 of 77

Date: 2013-09-03



Test Figure:

V

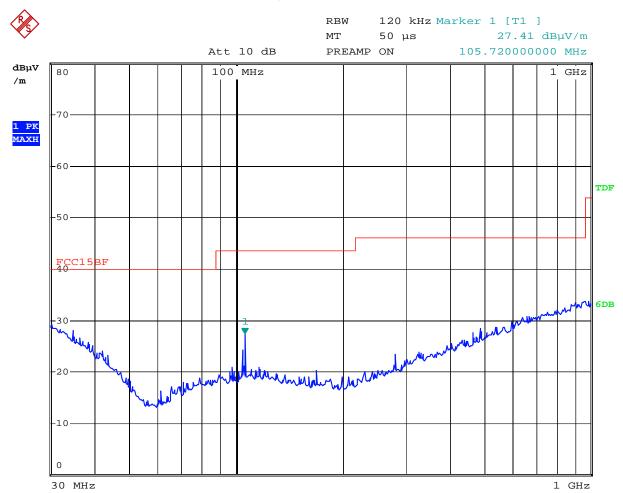

Date: 26.AUG.2013 10:55:08

Report No: 1308120 Page 17 of 77

Date: 2013-09-03



# **Operation Mode: Transmitting under Low Channel (2402MHz)**

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
2402	89.48 (PK)	Н	Fundamental Frequency
2402	89.08 (PK)	V	Fundamental Frequency
4804	47.81 (PK)	Н	74(Peak)/ 54(AV)
4804	48.23 (PK)	V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608	-	H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

# **Operation Mode: Transmitting g under Middle Channel (2441MHz)**

	0.0	`	<i>'</i>
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2441	88.78 (PK)	Н	Eundomontal Eroquanay
2441	88.52 (PK)	V	Fundamental Frequency
4882		Н	74(Peak)/ 54(AV)
4882	47.04 (PK)	V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: 1308120 Page 18 of 77

Date: 2013-09-03



# Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \( \mu \) V/m)
2480	89.56 (PK)	Н	Fundamental Frequency
2480	89.57 (PK)	V	Fundamental Frequency
4960.	47.89 (PK)	Н	74(Peak)/ 54(AV)
4960.	47.19 (PK)	V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


<sup>2.</sup> Remark "---" means that the emissions level is too low to be measured

Report No: 1308120 Date: 2013-09-03




Please refer to the following test plots for details:

#### Low Channel: Horizontal

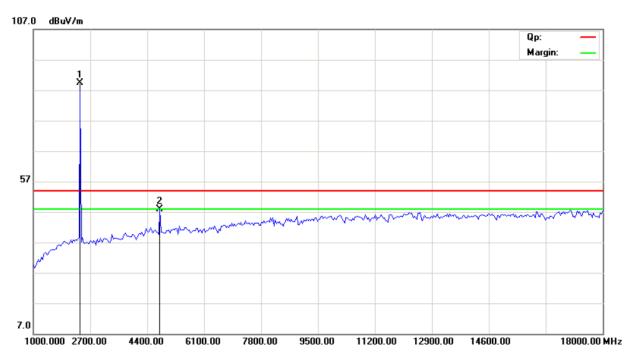

#### **Low Channel: Vertical**

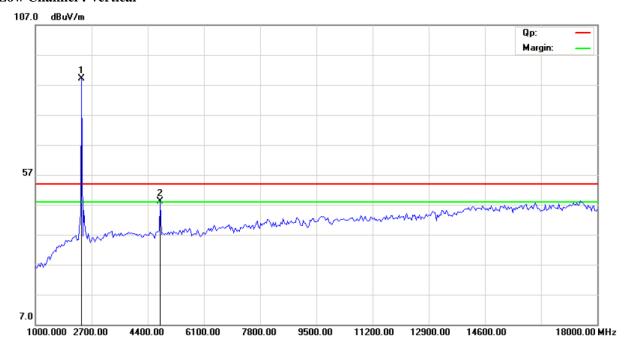

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 20 of 77


Report No: 1308120 Date: 2013-09-03



#### **Middle Channel: Horizontal**

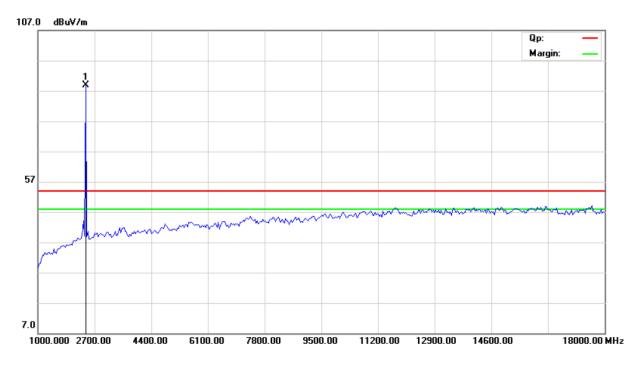

# **Middle Channel: Vertical**

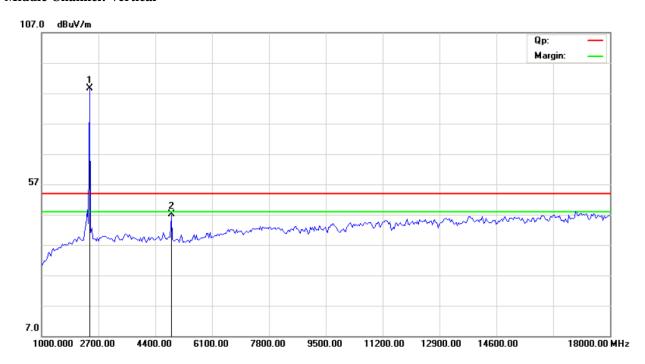

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1308120 Date: 2013-09-03



# **High Channel: Horizontal**

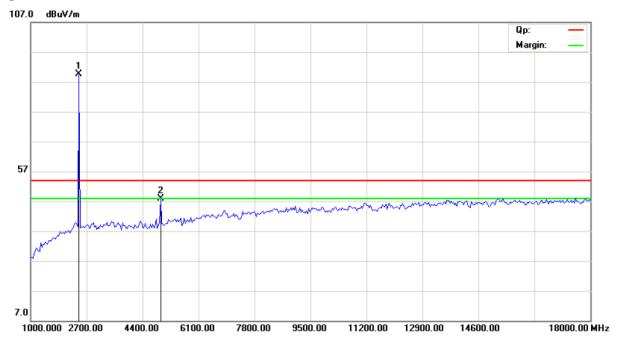

# **High Channel: Vertical**

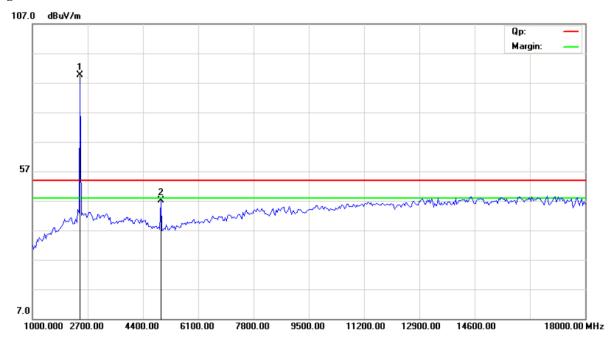

Note: for the radiated emissions above 18G, it is the floor noise.

Report No: 1308120 Page 22 of 77

Date: 2013-09-03



#### 7.0 20dB Bandwidth Measurement

# 7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 7.2 Limits of 20dB Bandwidth Measurement

N/A

#### 7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =5MHz, VBW =30 kHz, RBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

#### 7.4 Test Result

#### Type of Modulation: GFSK

EUT	Bluet	Bluetooth shower speaker		MN619
Mode	de Keep Transmitting		Input Voltage	DC4.5V
Temperat	erature 24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	852		Pass
Middle	2441	846		Pass
High	2480 858			Pass


Report No: 1308120 Page 23 of 77

Date: 2013-09-03



# Test Figure:

#### 1. Condition: Low Channel

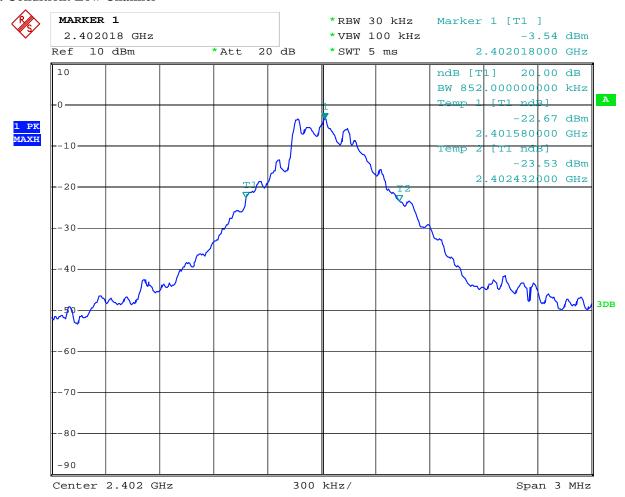


Date: 2.SEP.2013 12:38:08

Report No: 1308120 Page 24 of 77

Date: 2013-09-03



#### 2. Condition: Middle Channel

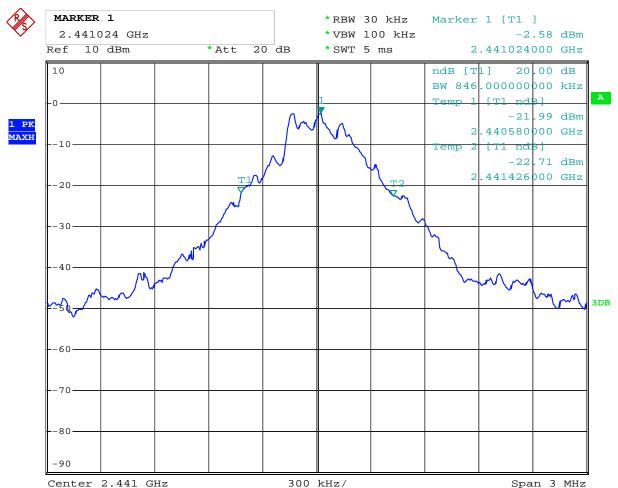


Date: 2.SEP.2013 12:39:37

Report No: 1308120 Page 25 of 77

Date: 2013-09-03



# 3. High Channel

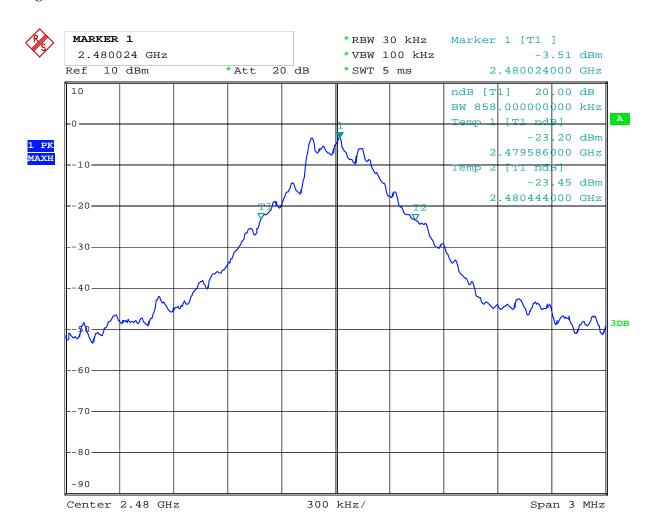

Date: 2.SEP.2013 16:50:25

Report No: 1308120 Page 26 of 77

Date: 2013-09-03



# **Test Result**

Type of Modulation: JI/4QPSK

EUT	Bluetooth shower speaker		Model	MN619
Mode	Keep Transmitting		Input Voltage	DC4.5V
Temperat	rature 24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz) 20 dB Bandwidth (kHz)		Maximum Limit (kHz)	Pass/ Fail
Low	2402	1230		Pass
Middle	2441	1224		Pass
High	2480	1224		Pass


Report No: 1308120 Page 27 of 77

Date: 2013-09-03



# Test Figure:

#### 1. Condition: Low Channel

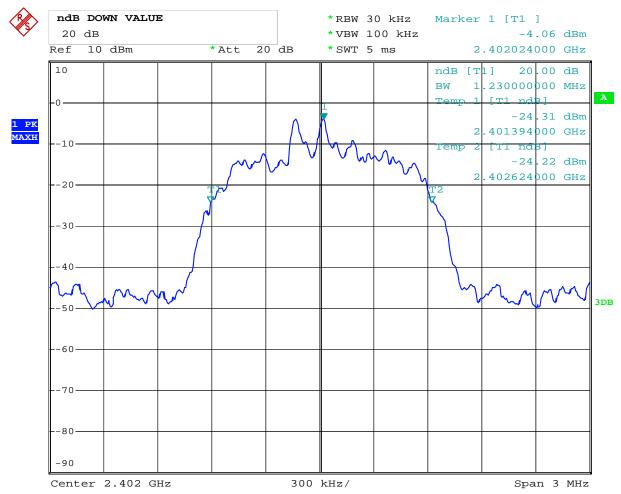


Date: 2.SEP.2013 14:58:13

Report No: 1308120 Page 28 of 77

Date: 2013-09-03



#### 2. Condition: Middle Channel

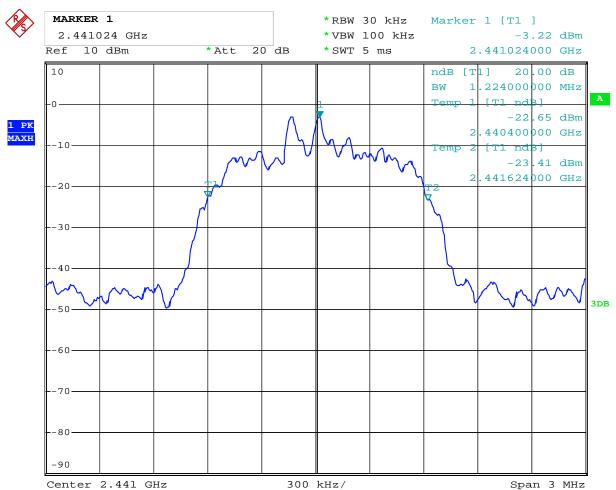


Date: 2.SEP.2013 14:59:53

Report No: 1308120 Page 29 of 77

Date: 2013-09-03



# 3. High Channel

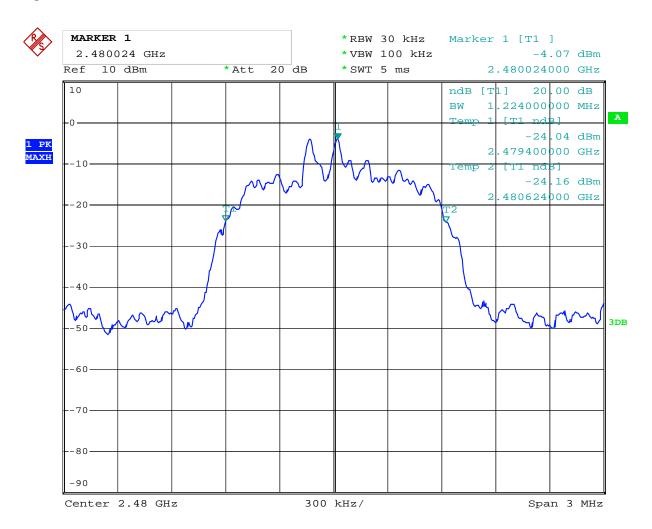

Date: 2.SEP.2013 15:00:44

Report No: 1308120 Page 30 of 77

Date: 2013-09-03



# **Test Result**

**Type of Modulation: 8DPSK** 

EUT	Bluetooth shower speaker		Model	MN619
Mode	Keep Transmitting		Input Voltage	DC4.5V
Temperat	rature 24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz) 20 dB Bandwidth (kHz)		Maximum Limit (kHz)	Pass/ Fail
Low	2402	1218		Pass
Middle	2441	1218		Pass
High	2480	1212		Pass


Report No: 1308120 Page 31 of 77

Date: 2013-09-03



# Test Figure:

#### 1. Condition: Low Channel

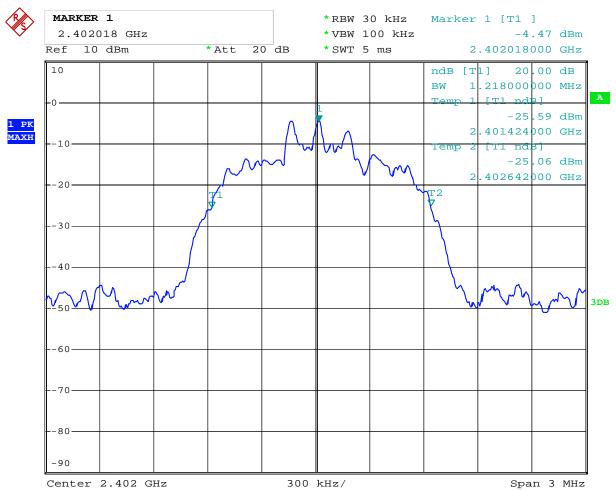


Date: 2.SEP.2013 16:02:01

Report No: 1308120 Page 32 of 77

Date: 2013-09-03



#### 2. Condition: Middle Channel

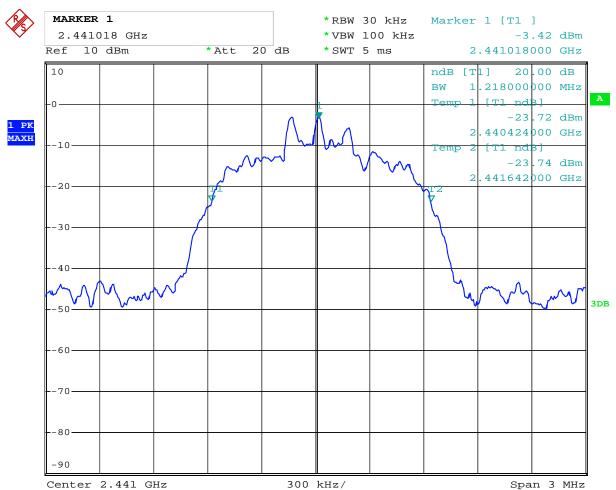


Date: 2.SEP.2013 16:03:16

Report No: 1308120 Page 33 of 77

Date: 2013-09-03



# 3. High Channel

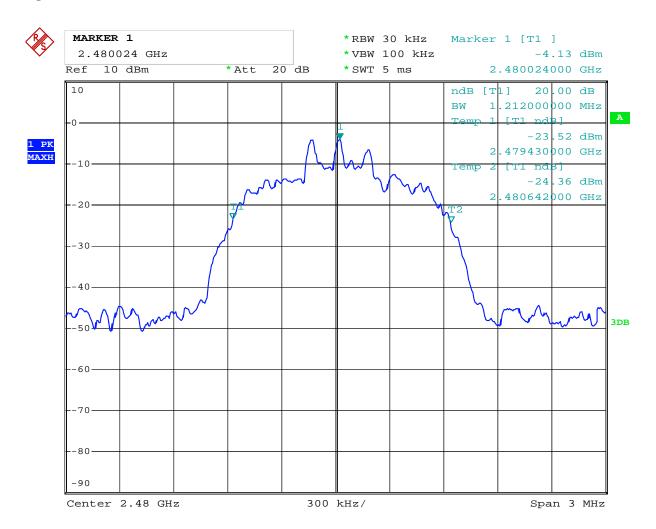

Date: 2.SEP.2013 16:04:13

Report No: 1308120 Page 34 of 77

Date: 2013-09-03



# 8. Maximum Peak Output Power

#### 8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

# 8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 35 of 77

Report No: 1308120 Date: 2013-09-03



#### **8.4Test Results**

#### Type of Modulation: GFSK

EUT	Blueto	oth shower speaker	Model		MN619
Mode Ke		eep Transmitting		it Voltage	DC4.5V
Temperatu	re	24 deg. C,	Humidity		56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm	)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-1.26		30	Pass
Middle	2441	-0.13		30	Pass
High	2480	-1.35		30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. New battery used The worse case was recorded

#### Type of Modulation: J\( J\)/4OPSK

	114101	<del>-</del>			
EUT Bluetoe		oth shower speaker	Model		MN619
Mode Ke		eep Transmitting		t Voltage	DC4.5V
Temperatur	те	24 deg. C, Humidity		umidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm	)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-2.33		30	Pass
Middle	2441	-1.20		30	Pass
High	2480	-2.15		30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. New battery used The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1308120 Page 36 of 77

Date: 2013-09-03



# **Type of Modulation: 8DPSK**

EUT	Blueto	Bluetooth shower speaker		Model	MN619
Mode Kee		eep Transmitting		it Voltage	DC4.5V
Temperatur	re	24 deg. C,	Humidity		56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm	)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-2.06		30	Pass
Middle	2441	-0.99	•	30	Pass
High	2480	-1.99		30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. New battery used The worse case was recorded

Report No: 1308120 Page 37 of 77

Date: 2013-09-03



# 9. Carrier Frequency Separation

### 9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

#### 9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 77

Report No: 1308120 Date: 2013-09-03




### 9.4Test Result

### Type of Modulation: GFSK

EUT	Bluetooth shower	Model		MN619			
Mode	Hopping O	Input Voltage	DC4.5V				
Temperature	24 deg. C,		Humidity		56% RH		
Carrier Frequency Separation			Limit		Pass/ Fail		
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		Pass			

### **Test Plots**

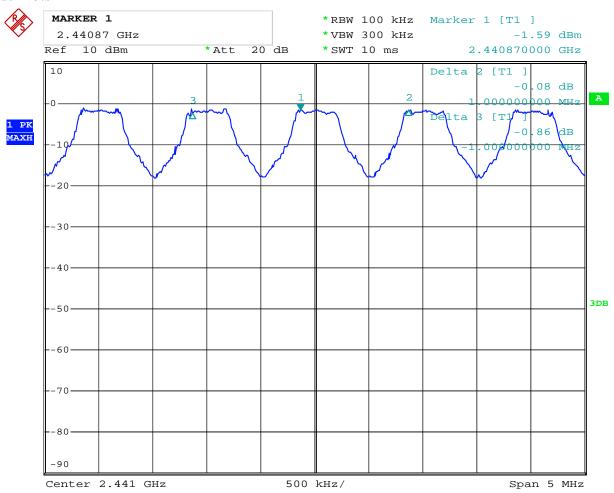

Date: 2.SEP.2013 13:03:13

Page 39 of 77


Report No: 1308120 Date: 2013-09-03



### Type of Modulation: JI/4QPSK

EUT	Bluetooth shower	Model	MN619			
Mode	Hopping O	Input Voltage		DC4.5V		
Temperature	24 deg. C,	Humidity	56% RH			
Carrier I	Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass	

### **Test Plots**

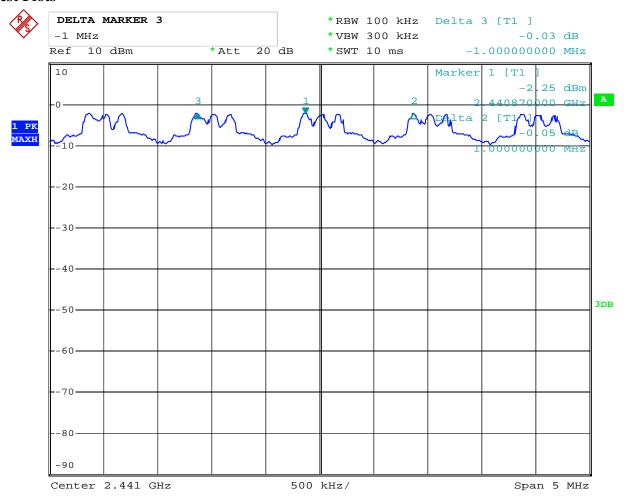

Date: 2.SEP.2013 15:33:54

Page 40 of 77


Report No: 1308120 Date: 2013-09-03



### **Type of Modulation: 8DPSK**

EUT	Bluetooth shower	Model		MN619		
Mode	Hopping On		Input Voltage		DC4.5V	
Temperature	24 deg. C,		Humidity		56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail	
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		Pass		

### **Test Plots**

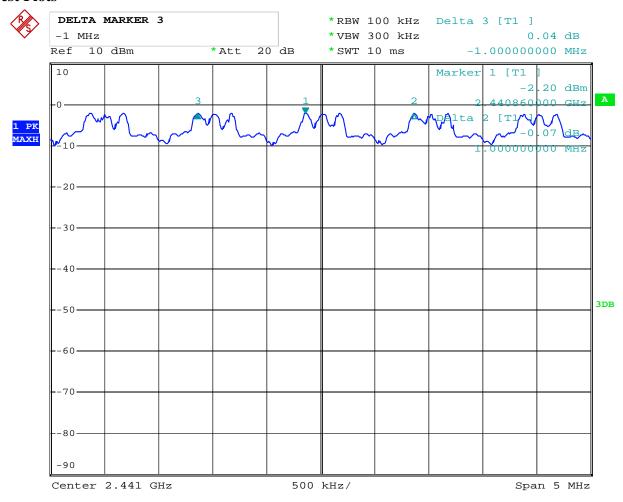

Date: 2.SEP.2013 16:29:46

Report No: 1308120 Page 41 of 77

Date: 2013-09-03



# 10. Number of Hopping Channels

### 10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### 10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 77

Report No: 1308120 Date: 2013-09-03




### 10.4Test Result

### **Type of Modulation: GFSK**

EUT	Bluetooth shower speaker			odel	N	MN619	
Mode	Hopping On			Input Voltage		DC4.5V	
Temperature		24 deg. C,			5	6% RH	
Operating Frequ	iency	Number of hopping channels	•	Lir	nit	Pass/ Fail	
2402-2480MI	Hz	79		>	15	Pass	

#### **Test Plot**

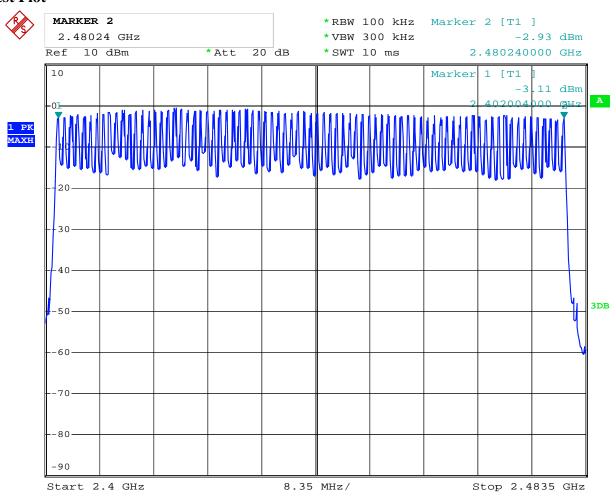

Date: 2.SEP.2013 13:06:13

Page 43 of 77


Report No: 1308120 Date: 2013-09-03



### Type of Modulation: JI/4QPSK

EUT		Bluetooth shower speaker	odel	N	/N619	
Mode		Hopping On	Input '	Voltage	DC4.5V	
Temperature		24 deg. C,			50	6% RH
Operating Frequency		Number of hopping channels		Lir	nit	Pass/ Fail
2402-2480M	Hz	79	•	≥ 1	15	Pass

### **Test Plot**

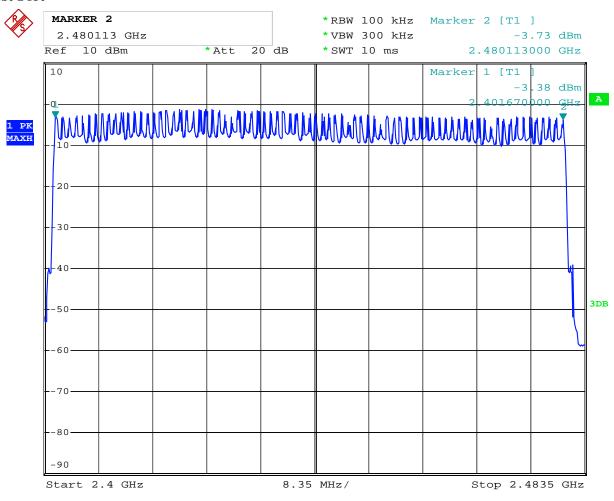

Date: 2.SEP.2013 16:00:50

Page 44 of 77


Report No: 1308120 Date: 2013-09-03



### **Type of Modulation: 8DPSK**

EUT		Bluetooth shower speaker	odel	N	ЛN619	
Mode		Hopping On	Input '	Voltage	DC4.5V	
Temperature		24 deg. C,			50	6% RH
Operating Frequ	iency	Number of hopping channels		Lir	nit	Pass/ Fail
2402-2480M	Hz	79		>1	15	Pass

### **Test Plot**

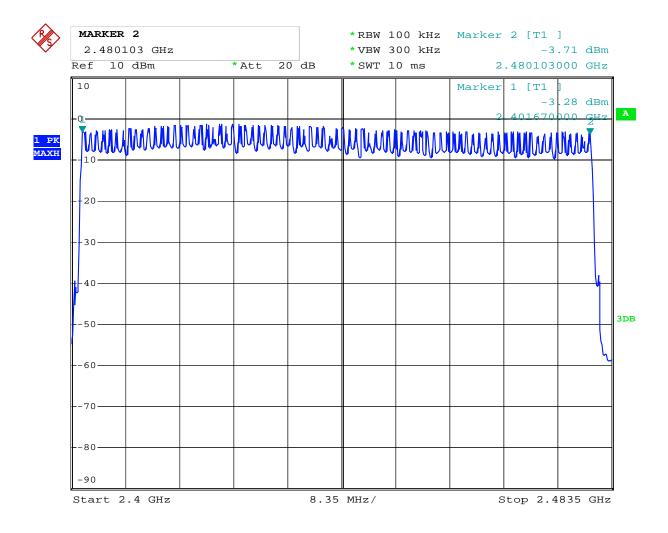

Date: 2.SEP.2013 16:39:41

Report No: 1308120 Page 45 of 77

Date: 2013-09-03



### 11. Time of Occupancy (Dwell Time)

### 11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

### 11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No: 1308120 Page 46 of 77

Date: 2013-09-03



### 11.4 Test Result

**Type of Modulation: GFSK** 

EUT		Bluetooth shower speaker Mode			1	MN619	
Mode		Keep Transmitting Input Volt			tage	DC4.5V	
Temperatu	re		24 deg. C,		Humidi	ity	56% RH
Channel		Reading	Hoping Rate	A	Actual		Limit
Low		2.98	266.667 hop/s	(	0.318		0.4s
Middle		2.98	266.667 hop/s	(	0.318		0.4s
High		2.98	266.667 hop/s	0.318			0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case

Page 47 of 77


Date: 2013-09-03

Report No: 1308120



### Test Plots:

### Low Channel:

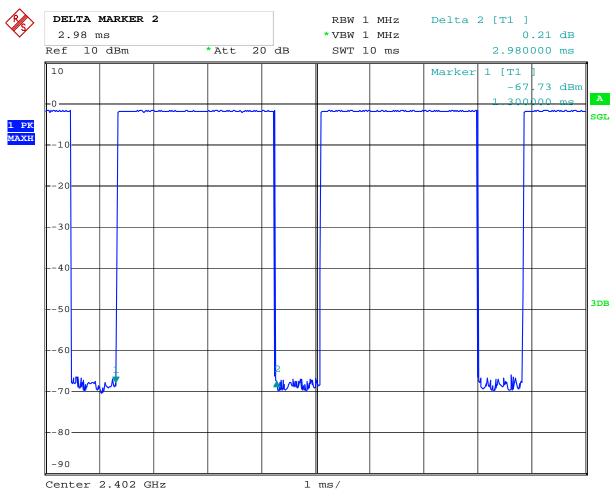

Date: 2.SEP.2013 12:49:13


Page 48 of 77

Date: 2013-09-03

Report No: 1308120



### Middle Channel:

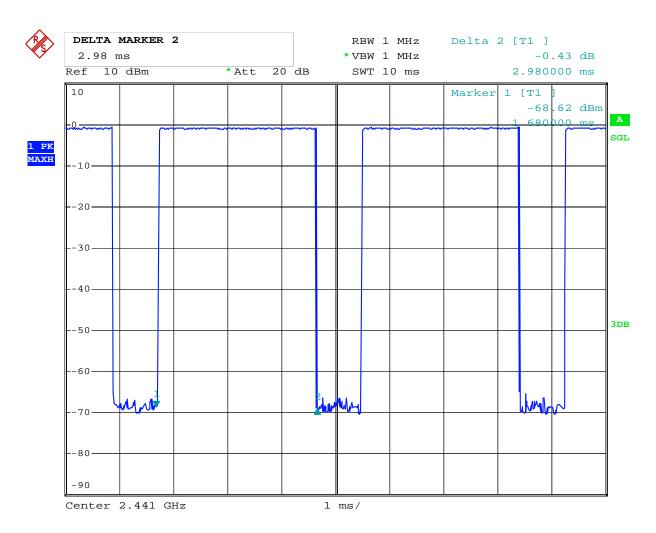

Date: 2.SEP.2013 12:51:16


Page 49 of 77

Date: 2013-09-03

Report No: 1308120



### High Channel

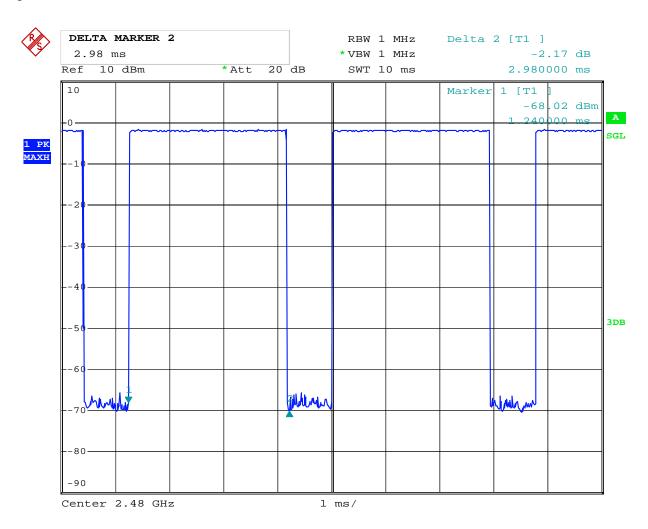

Date: 2.SEP.2013 12:52:13

Report No: 1308120 Page 50 of 77

Date: 2013-09-03



### **Test Result**

### Type of Modulation: $\pi/4QPSK$

EUT		Bluetooth shower speaker			Model		MN619
Mode		Ke	Keep Transmitting Input Volu			tage	DC4.5V
Temperatu	re		24 deg. C,		Humidity 56%		56% RH
Channel		Reading	Hoping Rate	A	Actual	Limit	
Low		2.98	266.667 hop/s	(	0.318		0.4s
Middle		2.98	266.667 hop/s	0.318			0.4s
High		2.96	266.667 hop/s	0.316			0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1308120 Page 51 of 77

Date: 2013-09-03



### Test Plots:

### Low Channel:

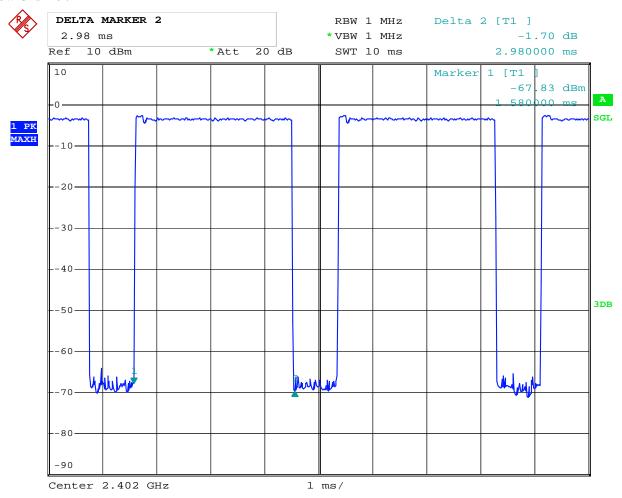


Date: 2.SEP.2013 15:04:32

Report No: 1308120 Page 52 of 77

Date: 2013-09-03



### Middle Channel:

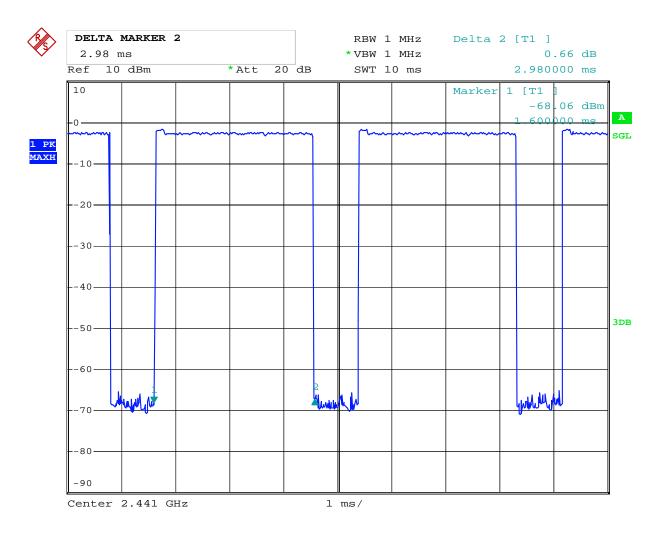


Date: 2.SEP.2013 15:05:41

Report No: 1308120 Page 53 of 77

Date: 2013-09-03



### High Channel

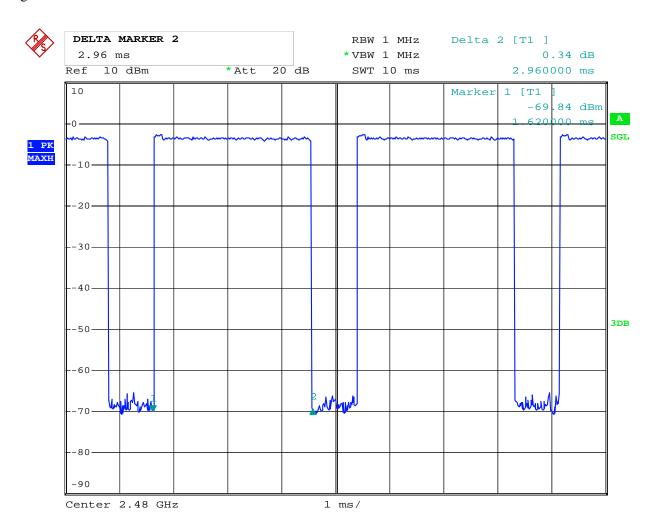

Date: 2.SEP.2013 15:06:49

Report No: 1308120 Page 54 of 77

Date: 2013-09-03



### **Type of Modulation: 8DPSK**

EUT		Bluetooth shower speaker			Model		MN619
Mode		Keep Transmitting Input Volta			tage	DC4.5V	
Temperatu	re		24 deg. C,		Humidity		56% RH
Channel		Reading	Hoping Rate	A	Actual		Limit
Low		2.98	266.667 hop/s	(	0.318		0.4s
Middle		2.96	266.667 hop/s	0.316			0.4s
High		2.96	266.667 hop/s	(	0.316		0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Page 55 of 77

Report No: 1308120 Date: 2013-09-03



### Test Plots:

### Low Channel:

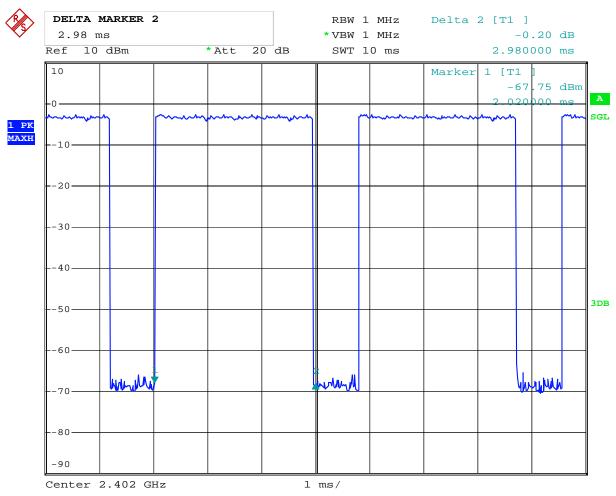


Date: 2.SEP.2013 16:07:25

Report No: 1308120 Page 56 of 77

Date: 2013-09-03



### Middle Channel:

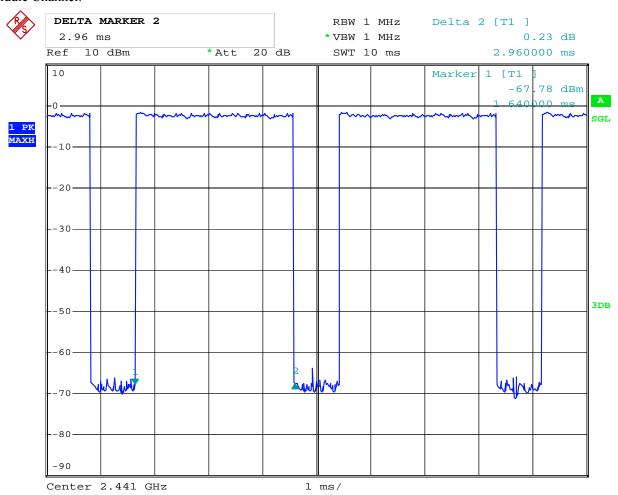


Date: 2.SEP.2013 16:08:23

Report No: 1308120 Page 57 of 77

Date: 2013-09-03



# High Channel

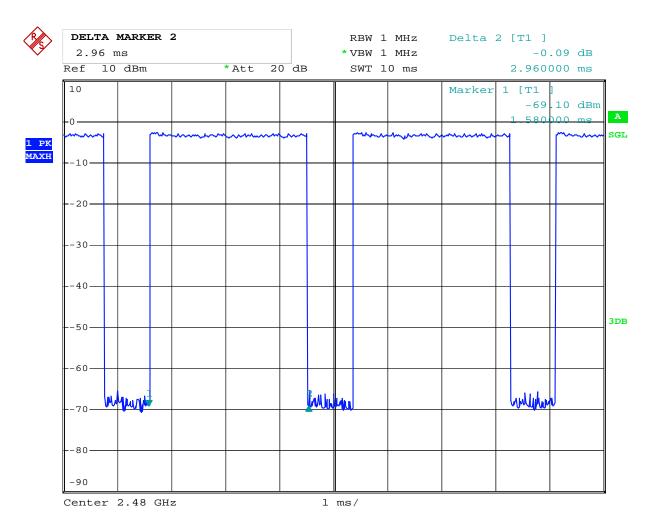

Date: 2.SEP.2013 16:09:25


Report No: 1308120 Page 58 of 77

Date: 2013-09-03



### 12 Out of Band Measurement

### 12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### 12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 59 of 77

Report No: 1308120 Date: 2013-09-03




### Type of Modulation: GFSK

### 12.4 Out of Band Test Result

Product:	Blueto	ooth shower speaker	Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC4.5V
Temperature		24 deg. C	Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	35.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

### **Test Figure:**

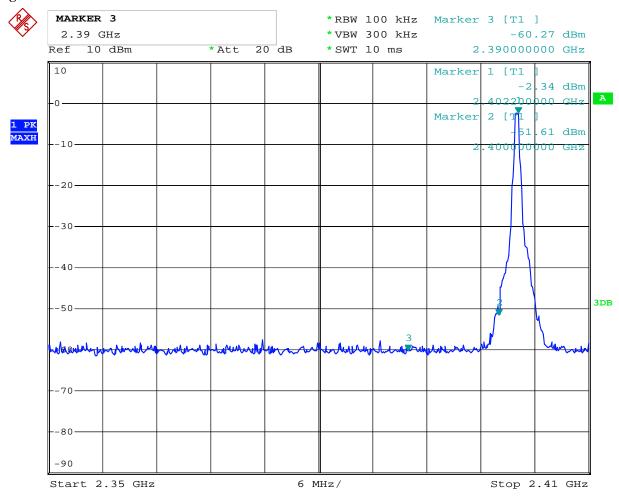

Date: 2.SEP.2013 12:54:05

Page 60 of 77

Report No: 1308120 Date: 2013-09-03




### Type of Modulation: GFSK

### 12.4 Out of Band Test Result

Product:	В	luetooth shower speaker	Test Mode:	High Channel
Mode	Kee	ping Transmitting	Input Voltage	DC4.5V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	36.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

### **Test Figure:**

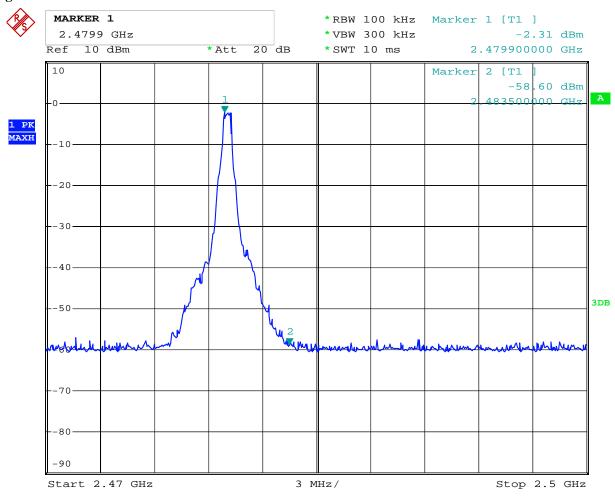

Date: 2.SEP.2013 12:58:32

Page 61 of 77

Report No: 1308120 Date: 2013-09-03




### Type of Modulation: GFSK

### 12.4 Out of Band Test Result

Product:	Blueto	ooth shower speaker	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC4.5V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	36.2		74(dBμV/m)
Restrict Band	AV(dBμV/m)	AV(dBμV/m)		54(dBμV/m)
2390MHz				

### **Test Figure:**

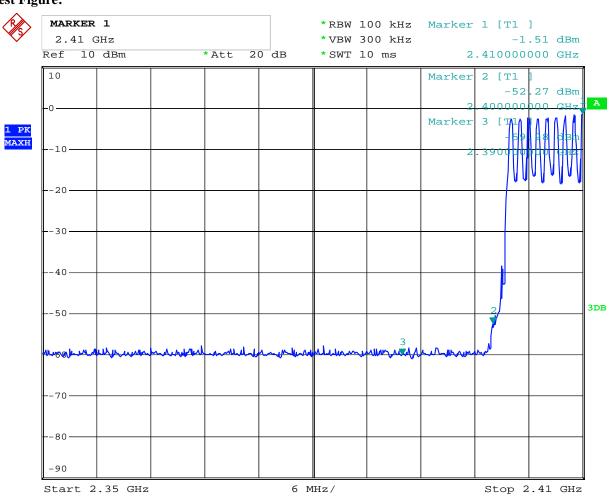

Date: 2.SEP.2013 12:55:51

Report No: 1308120 Date: 2013-09-03




### Type of Modulation: GFSK

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	37.1		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

### **Test Figure:**

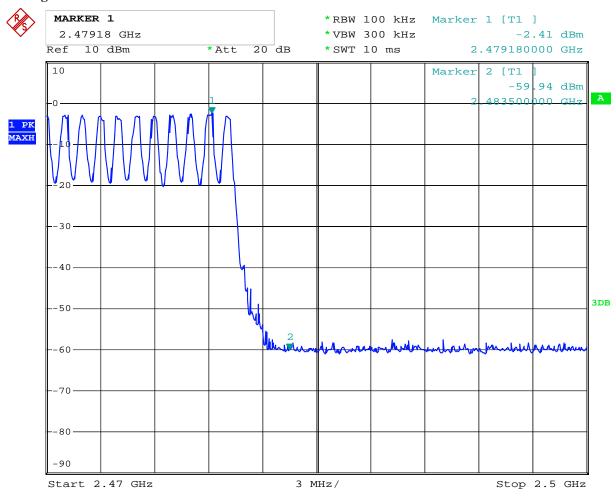

Date: 2.SEP.2013 12:57:07

Page 63 of 77

Report No: 1308120 Date: 2013-09-03




### Type of Modulation: Л/4QPSK

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC4.5V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.2			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

### **Test Figure:**

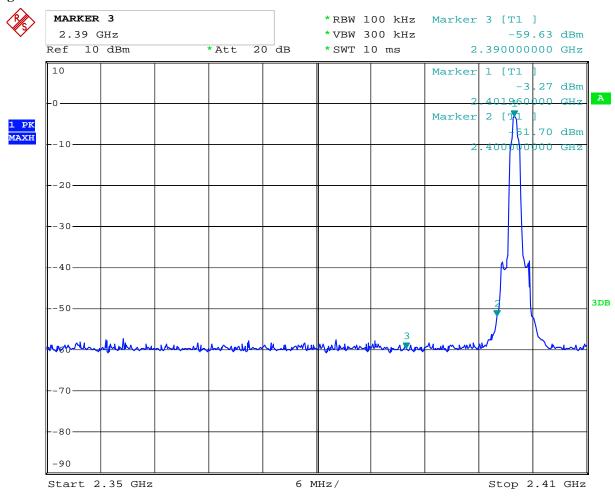

Date: 2.SEP.2013 15:12:36

Page 64 of 77

Report No: 1308120 Date: 2013-09-03




# Type of Modulation: JI/4QPSK

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.7			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

### **Test Figure:**

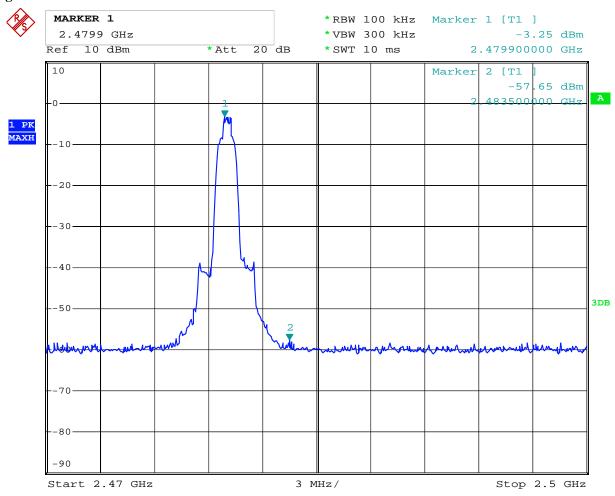

Date: 2.SEP.2013 15:22:26

Page 65 of 77

Report No: 1308120 Date: 2013-09-03




# Type of Modulation: JI/4QPSK

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

### **Test Figure:**

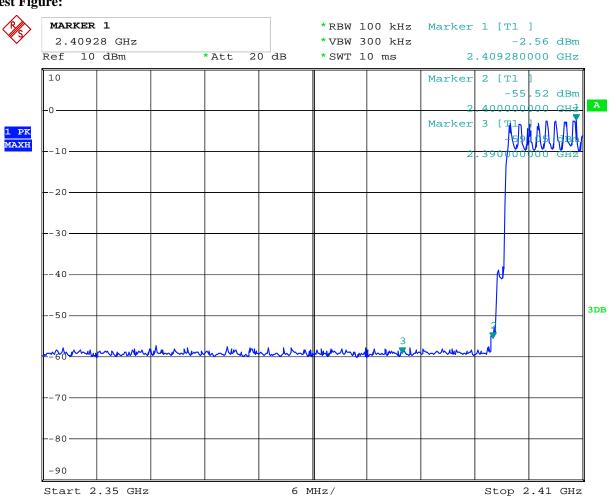

Date: 2.SEP.2013 15:17:51

Report No: 1308120 Date: 2013-09-03




# Type of Modulation: JI/4QPSK

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	37.7		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

### **Test Figure:**

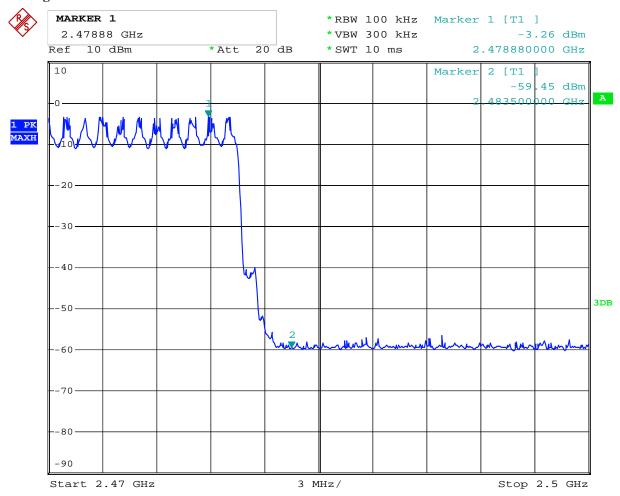

Date: 2.SEP.2013 15:21:32

Page 67 of 77

Report No: 1308120 Date: 2013-09-03




### **Type of Modulation: 8DPSK**

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC4.5V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 35.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

### **Test Figure:**

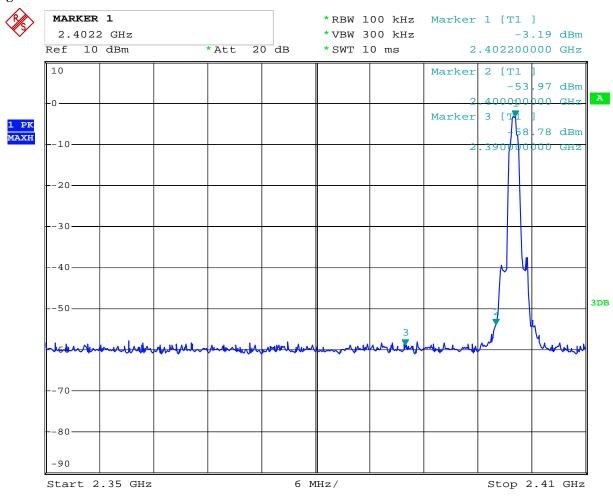

Date: 2.SEP.2013 16:11:23

Report No: 1308120 Date: 2013-09-03




### **Type of Modulation: 8DPSK**

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.8			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

### **Test Figure:**

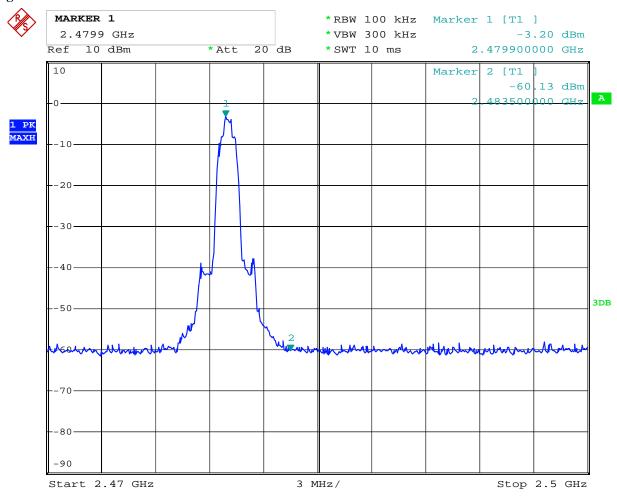

Date: 2.SEP.2013 16:20:14

Page 69 of 77

Report No: 1308120 Date: 2013-09-03




### **Type of Modulation: 8DPSK**

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.4			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

### **Test Figure:**

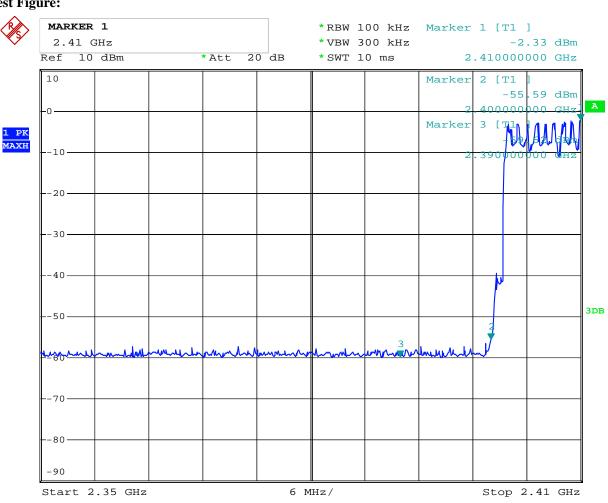

Date: 2.SEP.2013 16:16:48

Report No: 1308120 Date: 2013-09-03




### **Type of Modulation: 8DPSK**

### 12.4 Out of Band Test Result

Product:	Bluetooth shower speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC4.5V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK ( $dB\mu V/m$ )	38.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

### **Test Figure:**

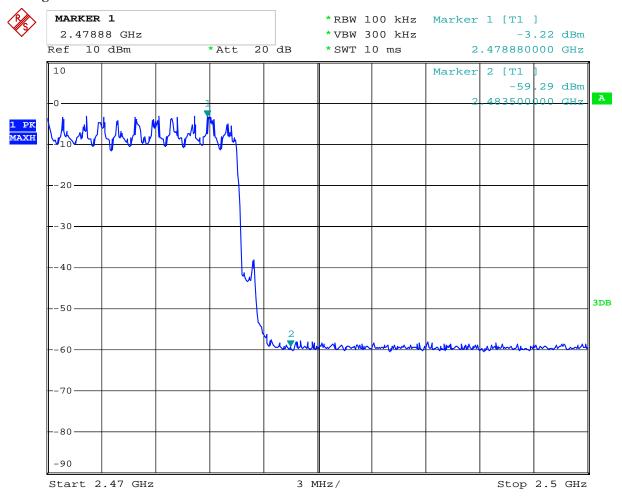

Date: 2.SEP.2013 16:19:33

Report No: 1308120 Page 71 of 77

Date: 2013-09-03



### 13.0 Antenna Requirement

### 13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 13.2 Antenna Connected constructions

The antenna is PCB antenna. The maximum Gain of this antenna is 1.0dBi

Report No: 1308120 Page 72 of 77

Date: 2013-09-03




### 14.0 FCC ID Label

### FCC ID: 2AAVZMN619

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

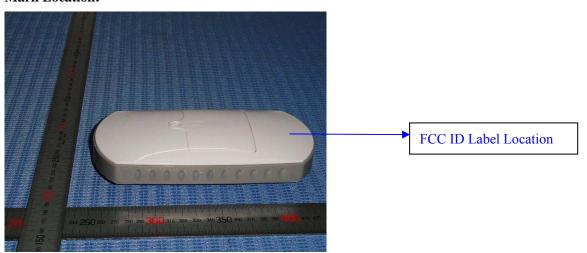


Report No: 1308120 Date: 2013-09-03



#### **15.0** Photo of testing

Conducted Emission Test Setup:--N/A

Radiated Emission Test Setup:

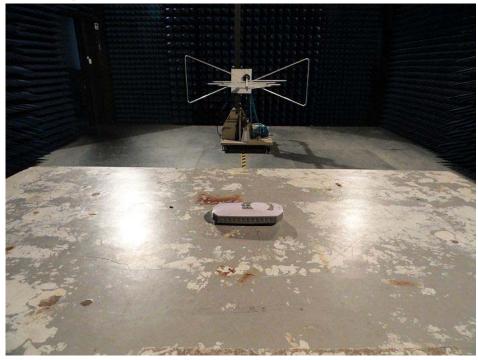



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 74 of 77

Report No: 1308120 Date: 2013-09-03



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 75 of 77

Report No: 1308120 Date: 2013-09-03



# Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 76 of 77

Report No: 1308120 Date: 2013-09-03



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1308120 Date: 2013-09-03



Photo for the EUT



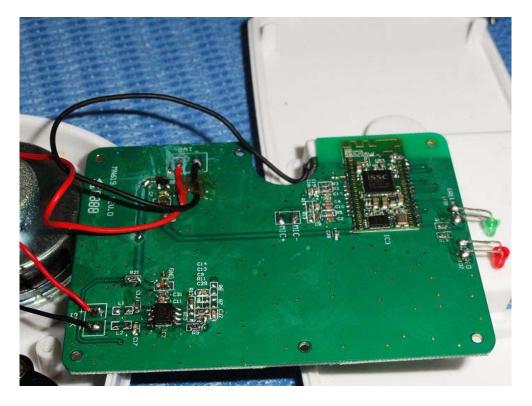

# End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to