

# TESTREPORT

Applicant Name : The Singing Machine Company Inc.  
Address : 6301 NW 5th Way, Suite 2900, Fort Lauderdale, FL, 33309, U.S.A.  
Report Number: RA230510-25327E-RF-00B  
FCC ID: 2AAXO-ISM9010

**Test Standard (s)**


FCC Part 15.247

**Sample Description**

Product: WiFi Touch Screen Karaoke System  
Model No.: iSM9010, iSM9012, iSM9015, iSM9020,  
iSM9010XX, iSM9012XX, iSM9015XX, iSM9020XX  
(XX means unit color, it can be A to Z or N/A)  
Trade Name: Singing Machine  
Date Received: 2023-05-10  
Date of Test: 2023-05-22 to 2023-06-29  
Report Date: 2023-06-29

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

Roger Ling  
EMC Engineer

**Approved By:**

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk ★.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk \*\*. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503290

Web: [www.atc-lab.com](http://www.atc-lab.com)

## TABLE OF CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	7
DUTY CYCLE .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC §1.1307(b) – RF EXPOSURE .....</b>	<b>12</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	14
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE .....	15
FACTOR & CALCULATION.....	16
TEST DATA .....	16
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	20
TEST PROCEDURE .....	20
FACTOR& MARGIN CALCULATION .....	20
TEST DATA .....	20
<b>FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH.....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(d) - 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29

---

<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	31
<b>APPENDIX A: 6dB Emission Bandwidth .....</b>	<b>32</b>
<b>APPENDIX B: Occupied Channel Bandwidth .....</b>	<b>37</b>
<b>APPENDIX C: Maximum Average Conducted Output Power.....</b>	<b>42</b>
<b>APPENDIX D: Band Edge Measurements.....</b>	<b>43</b>
<b>APPENDIX E: Maximum Power Spectral Density .....</b>	<b>47</b>
<b>APPENDIX F: Duty Cycle.....</b>	<b>52</b>

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230510-25327E-RF-00B	Original Report	2023-06-29

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	WiFi Touch Screen Karaoke System	
Tested Model	iSM9010	
Multiple Model	iSM9012,iSM9015,iSM9020, iSM9010XX,iSM9012XX,iSM9015XX,iSM9020XX (XX means unit color, it can be A to Z or N/A)	
Model Difference	Please refer to DOS letter	
Frequency Range	Wi-Fi: 2412-2462MHz (802.11b/g/n20/n40)	
Maximum Conducted Average Power	Wi-Fi: 18.79dBm(802.11b) 15.15dBm(802.11n20) 16.31dBm(802.11g) 14.07dBm(802.11n.40)	
	Modulation Technique	
	Wi-Fi: DSSS, OFDM	
Antenna Specification*	Internal Antenna: 4.57dBi(provided by the applicant)	
Voltage Range	DC 15V from adapter	
Sample serial number	RA230510-25327E-RF-S1 (CE&RE) RA230510-25327E-RF-S2(RF Conducted Test) (Assigned by ATC, Shenzhen)	
Sample/EUT Status	Good condition	
Adapter Information	Model No.: S-23-150-1500-US Input: 100-240~50/60Hz 1.0A Output: 15.0V === 1.5A	

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.71dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.74dB	
Emissions, Radiated	30MHz - 1GHz 1GHz- 18GHz 18GHz- 26.5GHz	5.08dB 4.96dB 5.16dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20, and 802.11n-HT40, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

802.11n-HT40 mode was tested with Channel 3, 6 and 9.

### Equipment Modifications

No modification was made to the EUT tested.

### EUT Exercise Software

“adb\*” was used during testing and power level as below:

Mode	Data Rate (Mbps)	Power Level*
802.11 b	1	default
802.11 g	6	default
802.11 n20	MCS0	default
802.11n-HT40	MCS0	default

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

### Duty cycle

Test Result: Compliant. Please refer to the Appendix F

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
PHILIPS	Display	275M8C	3GB035866A
Hisense	Phone	A5	860372041491400
Kingston	USB flash disk	Datatraveler G3	Unknown
SCI	Earphone	SCRC-130A	Unknown
Unknown	Microphone*2	Unknown	Unknown


## External I/O Cable

Cable Description	Length (m)	From Port	To
Shielded Detachable HDMI Cable	2.0	EUT	Displayer
Unshielded Detachable Power Cable	1.0	EUT	Adapter
Unshielded Detachable Earphone Cable	1.2	EUT	Earphone
Unshielded Detachable AUX IN Cable	1.0	EUT	Phone
Unshielded Detachable Microphone Cable*2	1.4	EUT	Microphone*2

## Block Diagram of Test Setup

### For Conducted Emission:

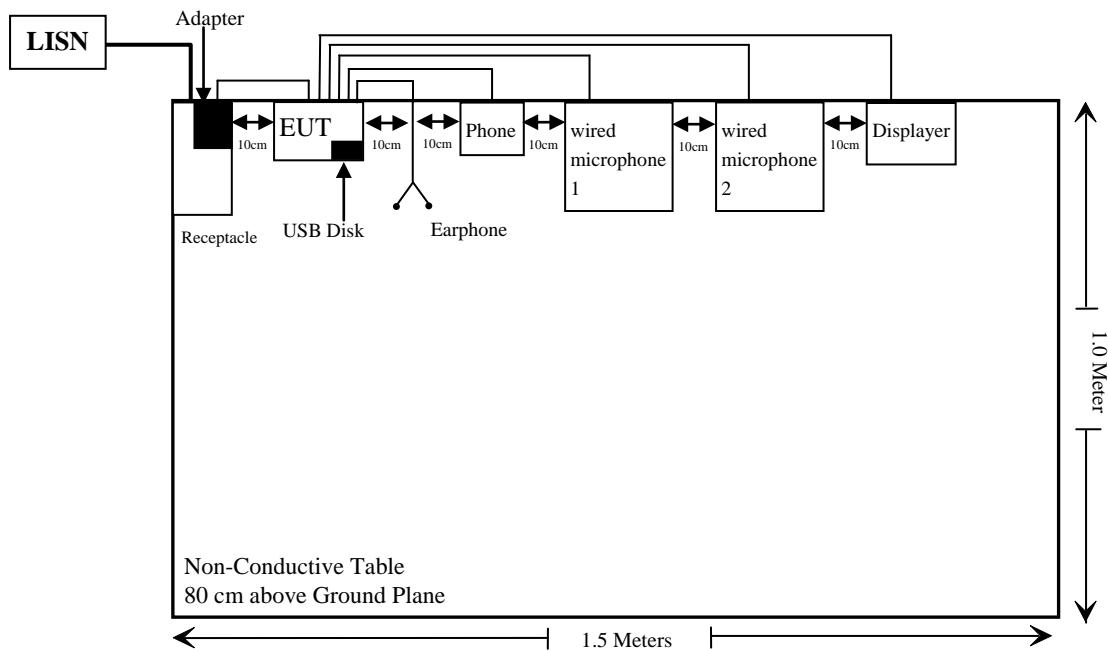

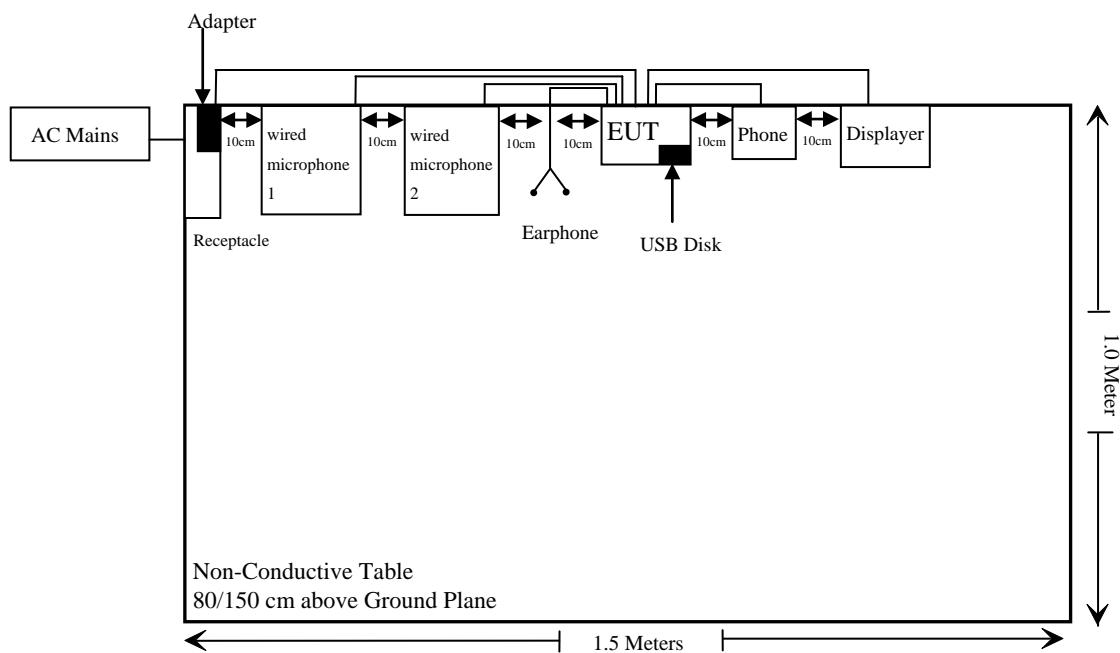**For Radiated Emission:**

Note: The support table edge was flush with the center of turntable.

## **SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1307(b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth& Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
<b>Radiated Emissions Test</b>					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Wainwright	Band Reject Filter	WRCG2400/2 485-2375/251 0-60/11SS	10	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 191218 (V9)					
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/6/27	2023/06/26
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307(b) – RF EXPOSURE

### Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4—MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

## Test Result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (W)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(W)		
BT	2402-2480	5.0	3.16	-0.68	-2.83	2.17	0.002	20	0.768
2.4G Wi-Fi	2412-2462	19.0	79.43	4.57	2.42	21.42	0.139	20	0.768
5G Wi-Fi	5150-5250	13.5	22.39	-0.77	-2.92	10.58	0.011	20	0.768
5G Wi-Fi	5725-5850	14.5	28.18	2.95	0.8	15.3	0.034	20	0.768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The BT function can transmit at the same time with the Wi-Fi function.

Simultaneous transmitting consideration:

The ratio=  $MPE_{BT}/\text{limit} + MPE_{2.4G \text{ Wi-Fi}}/\text{limit} = 0.002/0.768 + 0.139/0.768 = 0.18 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result:** Compliant.

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for 2.4G Wi-Fi, which was permanently attached and the antenna gain is 4.57dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

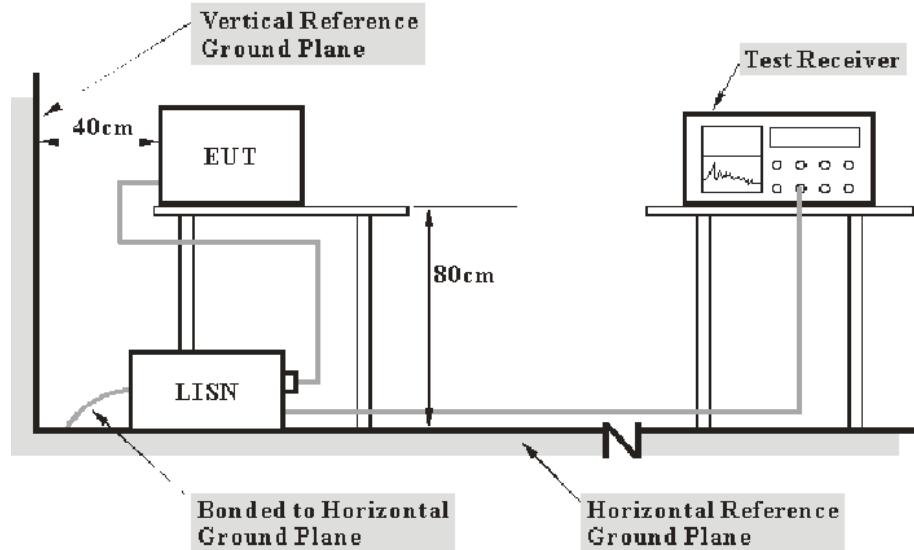

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data


### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

*The testing was performed by Jerry Wu on 2023-05-29.*

*EUT operation mode: 2.4G Wi-Fi Transmitting (Worst case for 802.11B High channel as below)*

## AC 120V/60 Hz ,Line

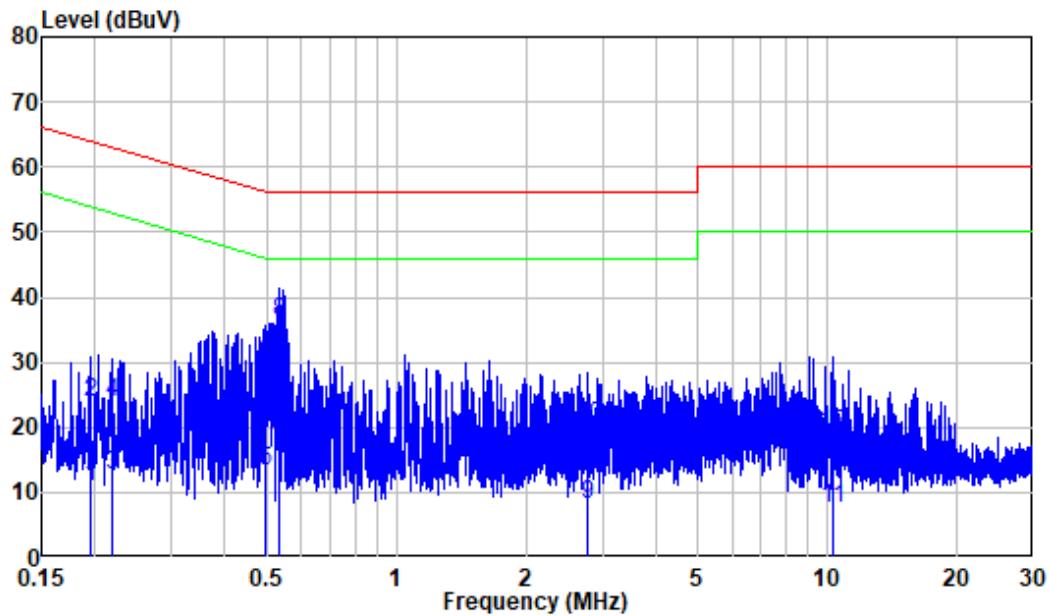

Site : Shielding Room


Condition: Line

Job No. : RA230510-25327E-RF

Mode : 2.4G WIFI Transmitting

Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB	dBuV	dBuV	Line	Limit
1	0.194	10.30	0.51	10.81	53.85	-43.04	Average
2	0.194	10.30	13.60	23.90	63.85	-39.95	QP
3	0.219	10.31	2.31	12.62	52.87	-40.25	Average
4	0.219	10.31	13.56	23.87	62.87	-39.00	QP
5	0.494	10.57	2.66	13.23	46.10	-32.87	Average
6	0.494	10.57	19.43	30.00	56.10	-26.10	QP
7	0.533	10.59	5.79	16.38	46.00	-29.62	Average
8	0.533	10.59	25.70	36.29	56.00	-19.71	QP
9	2.763	10.47	-2.41	8.06	46.00	-37.94	Average
10	2.763	10.47	9.69	20.16	56.00	-35.84	QP
11	10.240	10.59	-2.98	7.61	50.00	-42.39	Average
12	10.240	10.59	8.58	19.17	60.00	-40.83	QP


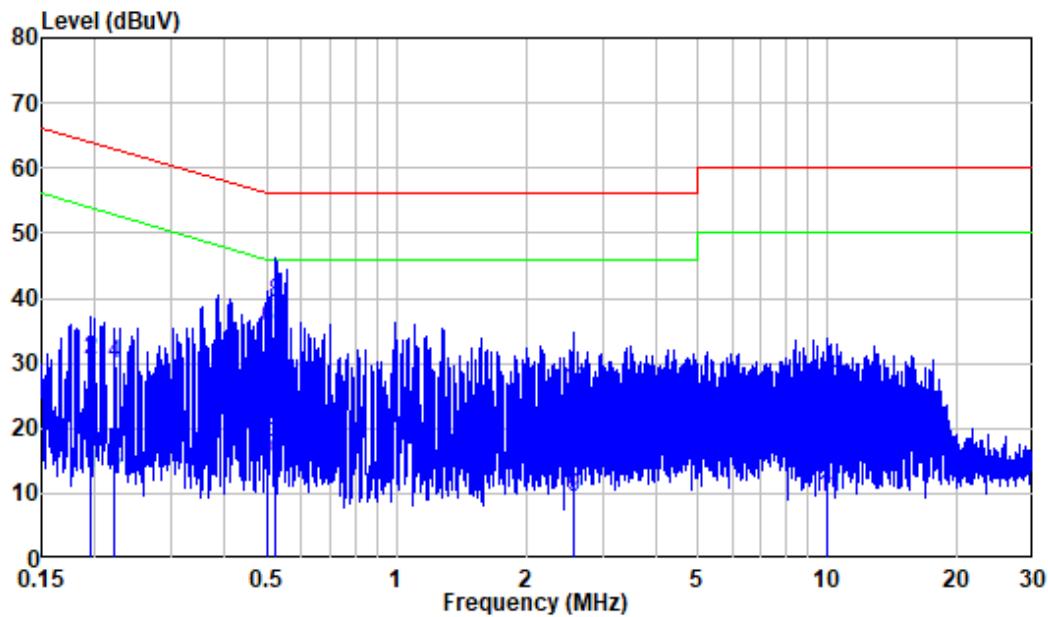
**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
Condition: Neutral  
Job No. : RA230510-25327E-RF  
Mode : 2.4G WIFI Transmitting  
Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB	dBuV	dBuV	dBuV	dB
1	0.195	10.29	2.62	12.91	53.82	-40.91	Average
2	0.195	10.29	20.30	30.59	63.82	-33.23	QP
3	0.221	10.30	3.04	13.34	52.77	-39.43	Average
4	0.221	10.30	19.62	29.92	62.77	-32.85	QP
5	0.500	10.47	4.81	15.28	46.00	-30.72	Average
6	0.500	10.47	24.85	35.32	56.00	-20.68	QP
7	0.525	10.47	6.81	17.28	46.00	-28.72	Average
8	0.525	10.47	28.78	39.25	56.00	-16.75	QP
9	2.577	10.52	-1.19	9.33	46.00	-36.67	Average
10	2.577	10.52	15.04	25.56	56.00	-30.44	QP
11	9.999	10.72	-1.35	9.37	50.00	-40.63	Average
12	9.999	10.72	15.11	25.83	60.00	-34.17	QP

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

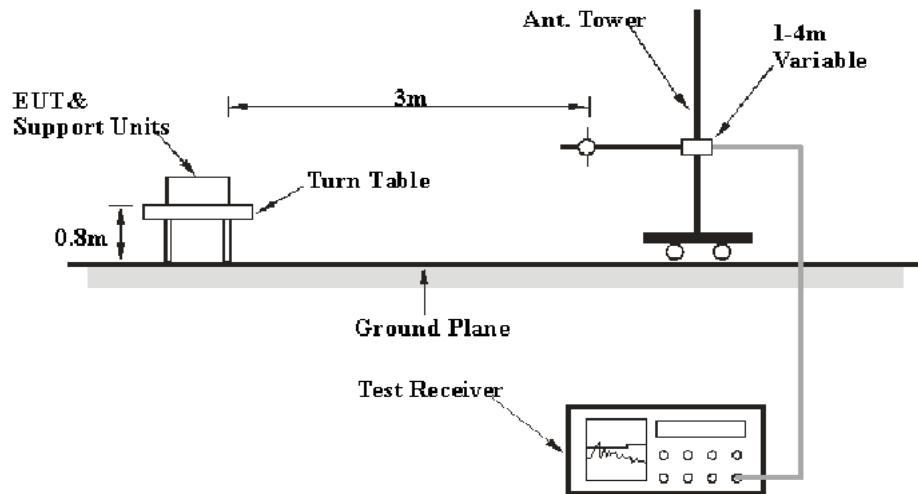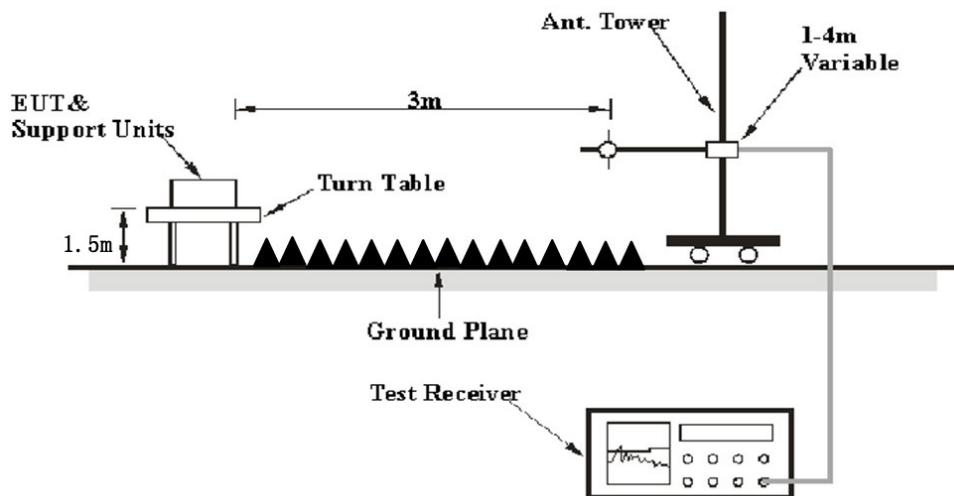**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	>1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor& Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude-Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data


### Environmental Conditions

Temperature:	23-24 °C
Relative Humidity:	53-57 %
ATM Pressure:	101.0 kPa

The Below 1GHz testing was performed by Jason Liu on 2023-05-27.

The Above 1GHz testing was performed by Jimmy Zheng from 2023-05-25.

EUT operation mode: 2.4G Wi-Fi Transmitting

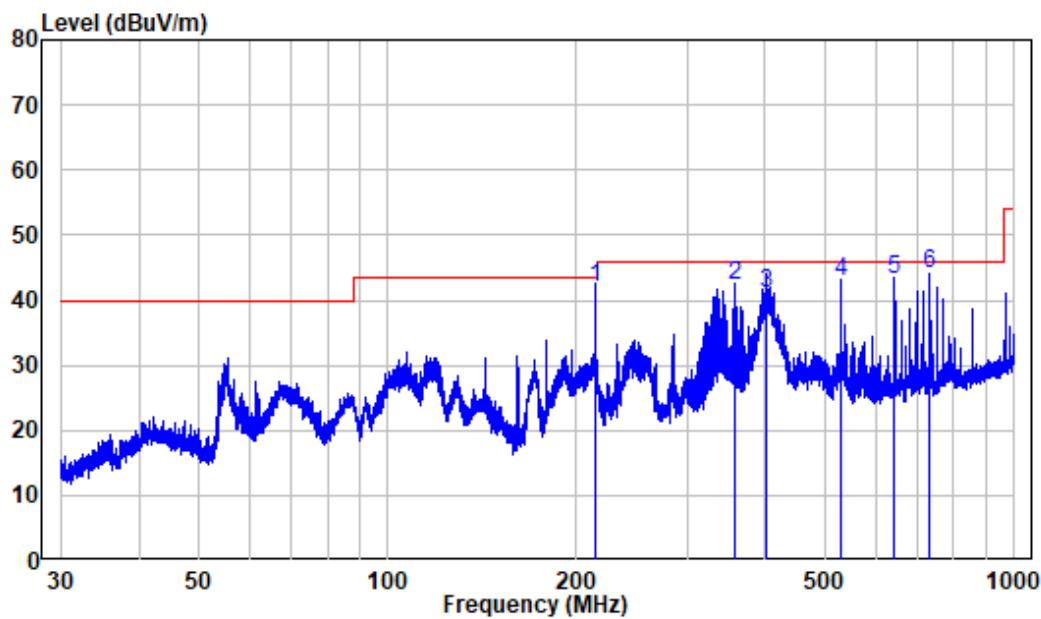**30MHz-1GHz:****802.11 b High Channel (Worst case)****Horizontal**


Site : chamber

Condition: 3m HORIZONTAL

Job No. : RA230510-25327E-RF

Test Mode: 2.4G WIFI Transmitting

Freq	Factor	Read		Limit	Over	Remark		
		MHz	dB/m	Level	dBuV	dBuV/m	Line	dB
1	214.797	53.79	-11.91	41.88	41.88	43.50	-1.62	QP
2	358.086	49.70	-7.34	42.36	42.36	46.00	-3.64	QP
3	402.720	47.39	-6.31	41.08	41.08	46.00	-4.92	QP
4	528.014	47.00	-4.14	42.86	42.86	46.00	-3.14	QP
5	644.554	45.11	-1.86	43.25	43.25	46.00	-2.75	QP
6	734.169	44.70	-0.62	44.08	44.08	46.00	-1.92	QP

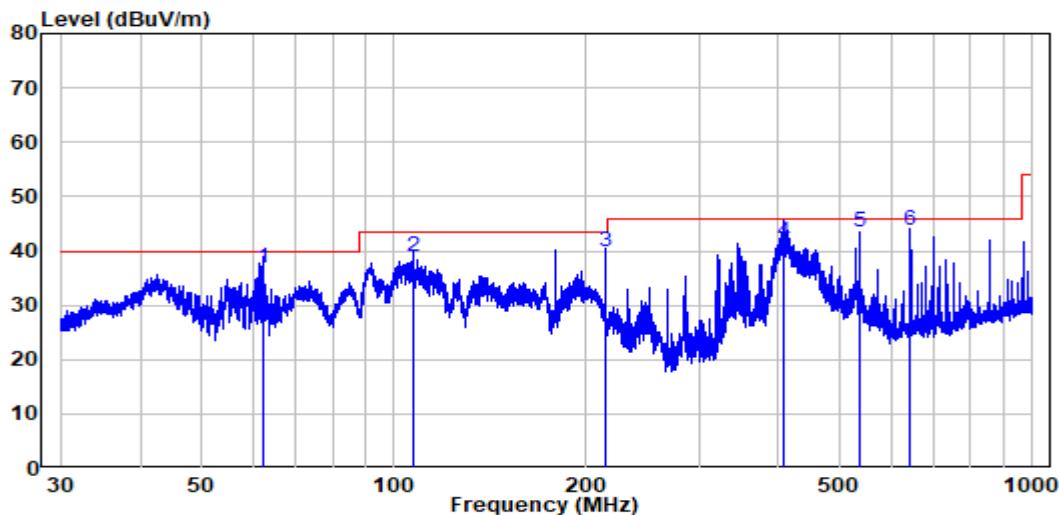**Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA230510-25327E-RF  
Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
1	62.514	-11.75	48.70	36.95	40.00	-3.05	QP
2	107.369	-11.98	50.81	38.83	43.50	-4.67	QP
3	214.797	-11.91	51.79	39.88	43.50	-3.62	QP
4	408.588	-6.00	47.80	41.80	46.00	-4.20	QP
5	537.118	-3.88	47.21	43.33	46.00	-2.67	QP
6	644.554	-1.86	45.61	43.75	46.00	-2.25	QP

**1-25 GHz:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	57.87	PK	124	2.1	H	-10.32	47.55	74	-26.45
2310	56.21	PK	211	2.1	V	-10.32	45.89	74	-28.11
2390	67.03	PK	211	2.1	H	-10.62	56.41	74	-17.59
2390	49.02	AV	211	2.1	H	-10.62	38.40	54	-15.60
2390	58.64	PK	282	2.1	V	-10.62	48.02	74	-25.98
4824	50	PK	318	1.2	H	-5.55	44.45	74	-29.55
4824	52.27	PK	138	1.6	V	-5.55	46.72	74	-27.28
802.11B, Middle Channel									
4874	51.6	PK	312	2.1	H	-5.29	46.31	74	-27.69
4874	52.73	PK	38	2.0	V	-5.29	47.44	74	-26.56
802.11B, High Channel									
2483.5	66.61	PK	38	2.0	H	-10.46	56.15	74	-17.85
2483.5	51.41	AV	38	2.0	H	-10.46	40.95	54	-13.05
2483.5	68.03	PK	245	2.0	V	-10.46	57.57	74	-16.43
2483.5	52.17	AV	245	2.0	V	-10.46	41.71	54	-12.29
2500	65.84	PK	298	2.0	H	-10.32	55.52	74	-18.48
2500	49.5	AV	298	2.0	H	-10.32	39.18	54	-14.82
2500	58.77	PK	244	1.8	V	-10.32	48.45	74	-25.55
4924	55.27	PK	343	1.6	H	-5.03	50.24	74	-23.76
4924	53.51	PK	188	1.5	V	-5.03	48.48	74	-25.52
802.11G, Low Channel									
2310	59.8	PK	174	2.0	H	-10.32	49.48	74	-24.52
2310	57.01	PK	239	2.2	V	-10.32	46.69	74	-27.31
2390	77.39	PK	239	2.2	H	-10.62	66.77	74	-7.23
2390	62.02	AV	239	2.2	H	-10.62	51.40	54	-2.60
2390	73.75	PK	202	2.1	V	-10.62	63.13	74	-10.87
2390	57.22	AV	202	2.1	V	-10.62	46.60	54	-7.40
4824	51.81	PK	193	1.8	H	-5.55	46.26	74	-27.74
4824	51.92	PK	71	1.6	V	-5.55	46.37	74	-27.63
802.11G, Middle Channel									
4874	52.34	PK	87	2.0	H	-5.29	47.05	74	-26.95
4874	53.56	PK	229	1.0	V	-5.29	48.27	74	-25.73
802.11G, High Channel									
2483.5	79.44	PK	73	1.1	H	-10.46	68.98	74	-5.02
2483.5	62.61	AV	73	1.1	H	-10.46	52.15	54	-1.85
2483.5	71.98	PK	229	1.0	V	-10.46	61.52	74	-12.48
2483.5	58.31	AV	229	1.0	V	-10.46	47.85	54	-6.15
2500	70.92	PK	347	1.1	H	-10.32	60.60	74	-13.40
2500	55.77	AV	347	1.1	H	-10.32	45.45	54	-8.55
2500	59.58	PK	234	1.3	V	-10.32	49.26	74	-24.74
4924	54.27	PK	319	1.9	H	-5.03	49.24	74	-24.76
4924	52.51	PK	113	1.5	V	-5.03	47.48	74	-26.52

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N20, Low Channel									
2310	63.29	PK	69	1.1	H	-10.32	52.97	74	-21.03
2310	55.1	PK	38	2.0	V	-10.32	44.78	74	-29.22
2390	75.48	PK	38	2.0	H	-10.62	64.86	74	-9.14
2390	61.72	AV	38	2.0	H	-10.62	51.10	54	-2.90
2390	70.85	PK	69	1.3	V	-10.62	60.23	74	-13.77
2390	58.22	AV	69	1.3	V	-10.62	47.60	54	-6.40
4824	50	PK	188	1.8	H	-5.55	44.45	74	-29.55
4824	50.8	PK	254	2.0	V	-5.55	45.25	74	-28.75
802.11N20, Middle Channel									
4874	50.96	PK	188	1.5	H	-5.29	45.67	74	-28.33
4874	50.08	PK	129	1.1	V	-5.29	44.79	74	-29.21
802.11N20, High Channel									
2483.5	69.27	PK	129	1.1	H	-10.46	58.81	74	-15.19
2483.5	55.21	AV	129	1.1	H	-10.46	44.75	54	-9.25
2483.5	66.37	PK	174	2.0	V	-10.46	55.91	74	-18.09
2483.5	50.51	AV	174	2.0	V	-10.46	40.05	54	-13.95
2500	63.25	PK	202	2.1	H	-10.32	52.93	74	-21.07
2500	56.07	PK	202	2.1	V	-10.32	45.75	74	-28.25
4924	52.55	PK	149	1.5	H	-5.03	47.52	74	-26.48
4924	51.4	PK	193	1.8	V	-5.03	46.37	74	-27.63
802.11N40, Low Channel									
2310	61.28	PK	245	2.0	H	-10.32	50.96	74	-23.04
2310	58.04	PK	252	1.9	V	-10.32	47.72	74	-26.28
2390	67.23	PK	245	2.0	H	-10.62	56.61	74	-17.39
2390	54.15	AV	245	2.0	H	-10.62	43.53	54	-10.47
2390	65.8	PK	212	1.4	V	-10.62	55.18	74	-18.82
2390	52.24	AV	212	1.4	V	-10.62	41.62	54	-12.38
4844	52.98	PK	135	1.4	H	-5.52	47.46	74	-26.54
4844	51.19	PK	248	1.3	H	-5.52	45.67	74	-28.33
802.11N40, Middle Channel									
4874	51.67	PK	360	2.1	H	-5.29	46.38	74	-27.62
4874	50.84	PK	179	1.1	V	-5.29	45.55	74	-28.45
802.11N40, High Channel									
2483.5	66.52	PK	174	1.6	H	-10.46	56.06	74	-17.94
2483.5	53.23	AV	174	1.6	H	-10.46	42.77	54	-11.23
2483.5	66.09	PK	358	1.5	V	-10.46	55.63	74	-18.37
2483.5	51.51	AV	358	1.5	V	-10.46	41.05	54	-12.95
2500	60.75	PK	57	1.6	H	-10.32	50.43	74	-23.57
2500	59.2	PK	28	1.5	V	-10.32	48.88	74	-25.12
4904	52.07	PK	28	1.5	H	-5.05	47.02	74	-26.98
4904	51.21	PK	200	1.6	V	-5.05	46.16	74	-27.84

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude – Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


**1-18 GHz (Pre-scan plots):**

**802.11 b High Channel (Worst case)**

**Horizontal**

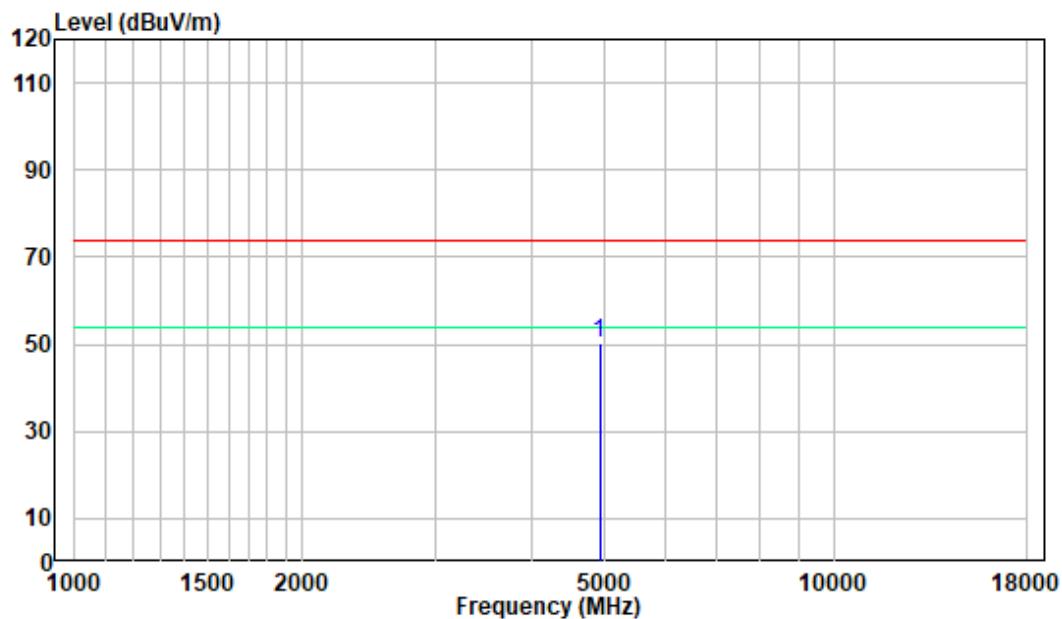


**Vertical**

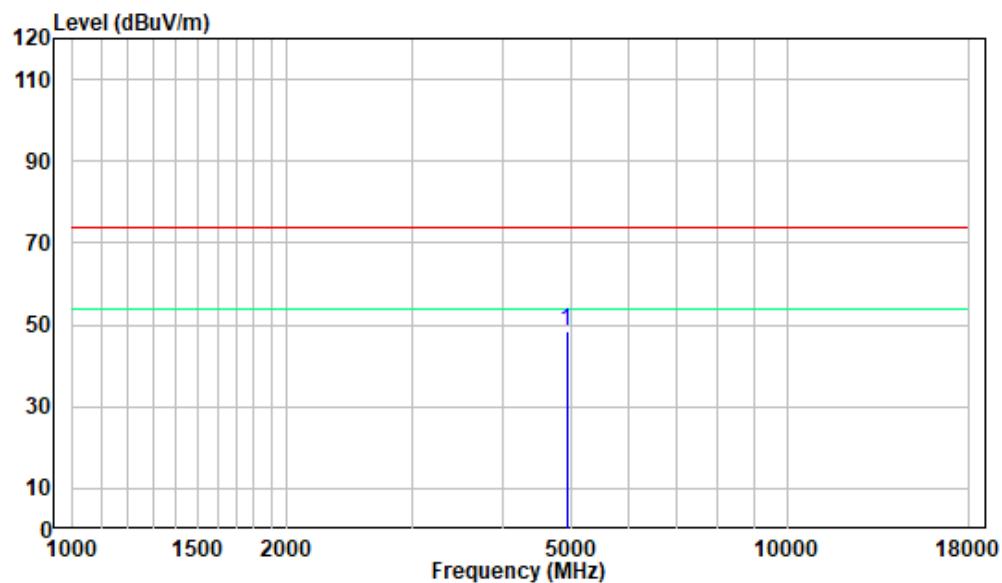


18 -25GHz (Pre-scan plots):

802.11 b High Channel (Worst case)

Horizontal

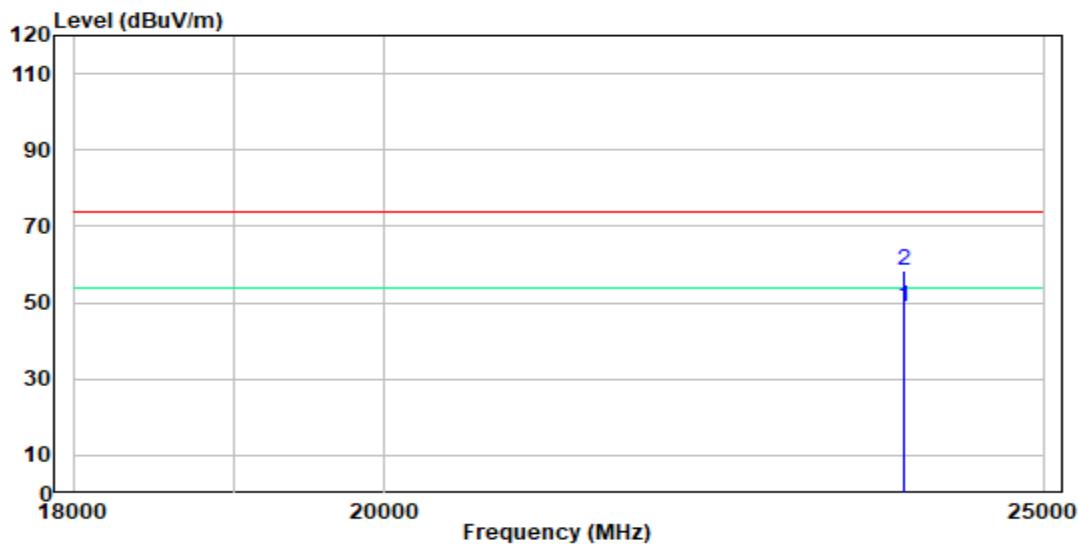

Vertical

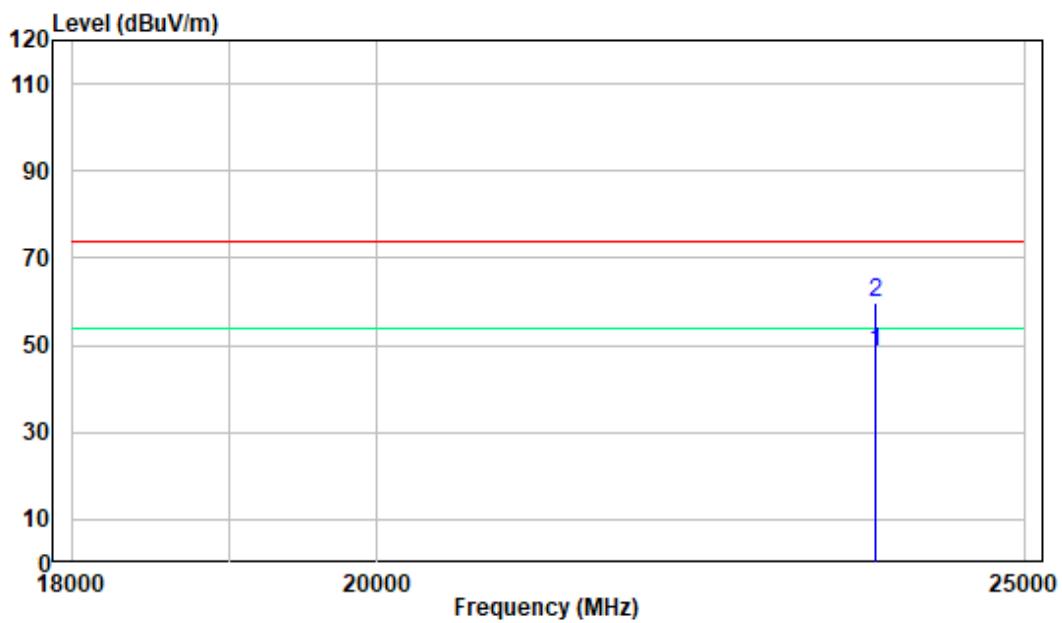

## FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Liang on 2023-05-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix A and Appendix B.

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to ANSI C63.10-2013, section 11.9.2.3.2

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Liang on 2023-05-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix C.


**FCC §15.247(d) - 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

According to ANSI C63.10-2013, section 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Liang on 2023-05-22.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix D.

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to ANSI C63.10-2013, section 11.10.3


Method AVGPSD-1: (for duty cycle  $\geq 98\%$ )

1. Use this procedure when the maximum conducted average output power in the fundamental emission is used to demonstrate compliance and with continuous transmission (or at least 98% duty cycle).
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to at least 1.5 times the OBW.
5. Detector = power averaging (rms) or sample detector (when rms not available).
6. Sweep time = auto couple.
7. Ensure that the number of measurement points in the sweep  $\geq [2 \cdot \text{span} / \text{RBW}]$ .
8. Employ trace averaging (rms) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Method AVGPSD-2: (for duty cycle  $< 98\%$ )

1. Use this procedure when the maximum conducted average output power in the fundamental emission is used to demonstrate compliance and the continuous transmission (or at least 98% duty cycle) cannot be achieved but exhibit a constant duty cycle during the measurement duration.
2. Measure the duty cycle (D) of the transmitter output signal as described in C63.10-2013 Clause 11.6.
3. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Set the span to at least 1.5 times the OBW.
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Sweep time = auto couple.
8. Ensure that the number of measurement points in the sweep  $\geq [2 * \text{span} / \text{RBW}]$ .
9. Do not use sweep triggering; allow sweep to “free run.”
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $[10 \log (1 / D)]$ , where D is the duty cycle measured in step 2), to the measured PSD to compute the average PSD during the actual transmission time.

13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).



## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Matt Liang on 2023-05-22.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix E.

**APPENDIX A: 6dB Emission Bandwidth****Test Result**


Test Mode	Antenna	Channel[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.11	0.5	PASS
		2437	9.27	0.5	PASS
		2462	9.90	0.5	PASS
11G	Ant1	2412	16.47	0.5	PASS
		2437	16.14	0.5	PASS
		2462	16.44	0.5	PASS
11N20SISO	Ant1	2412	17.34	0.5	PASS
		2437	17.43	0.5	PASS
		2462	17.64	0.5	PASS
11N40SISO	Ant1	2422	35.28	0.5	PASS
		2437	35.52	0.5	PASS
		2452	35.28	0.5	PASS

## Test Graphs


11B\_Ant1\_2412

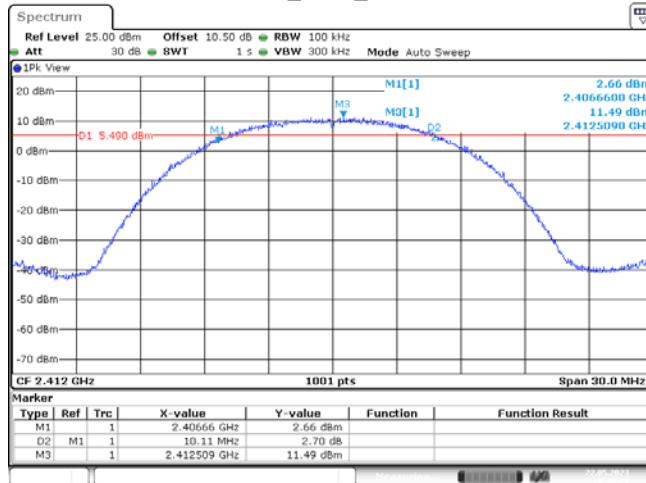


11B\_Ant1\_2437

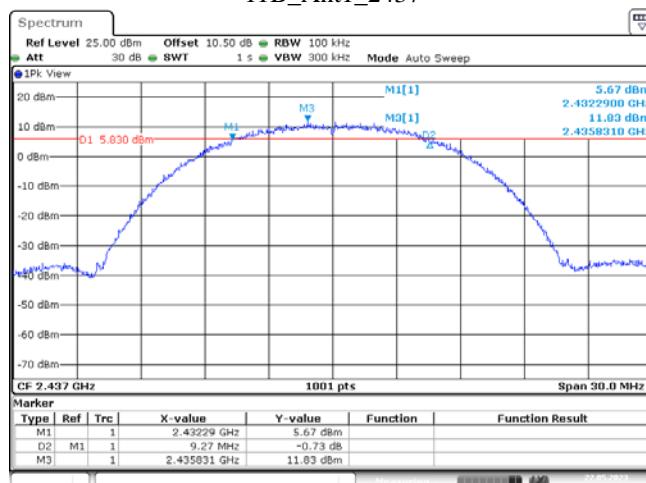


11B\_Ant1\_2462

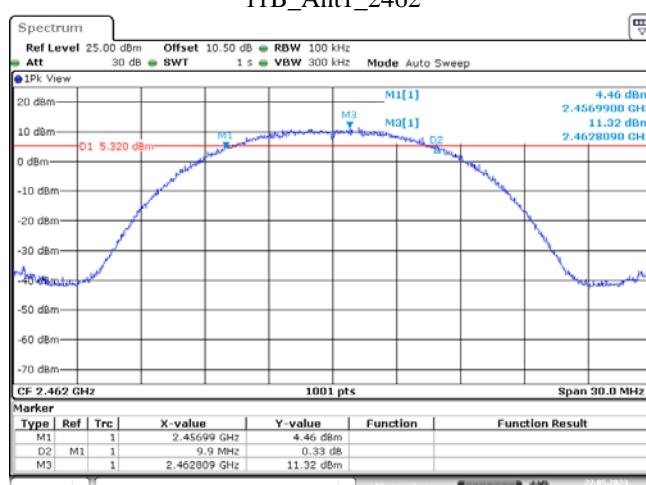


## 11G\_Ant1\_2412

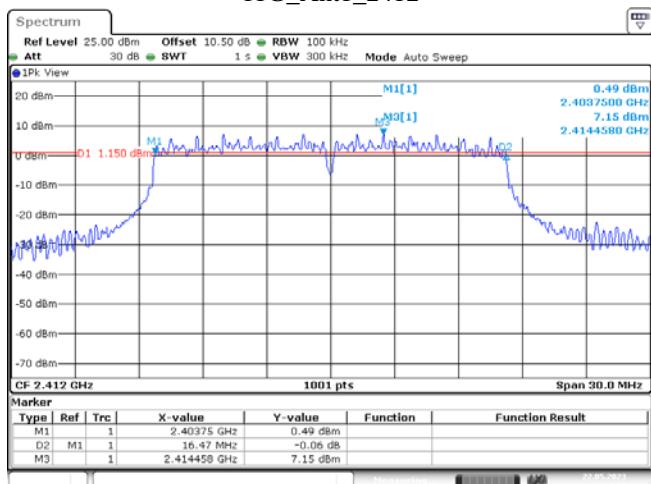


## 11G\_Ant1\_2437

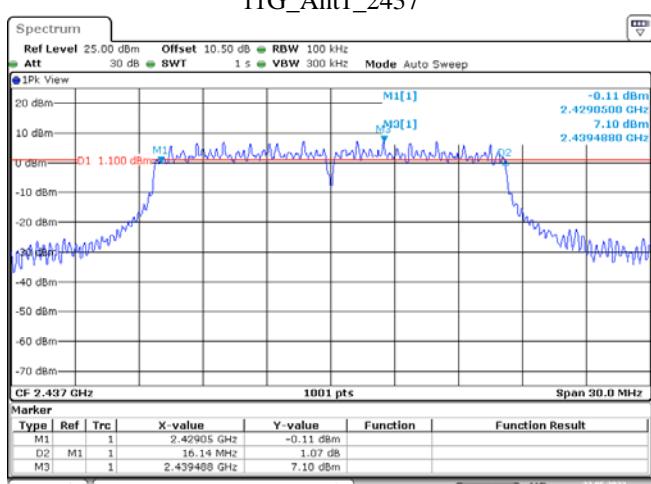

## 11G\_Ant1\_2462

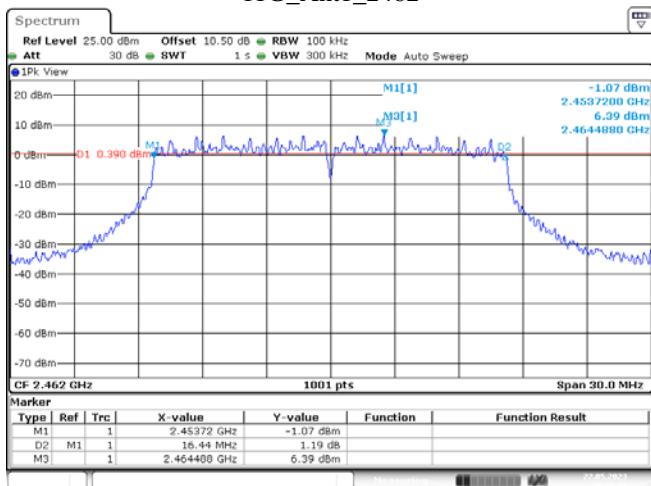


## 11N20SISO\_Ant1\_2412

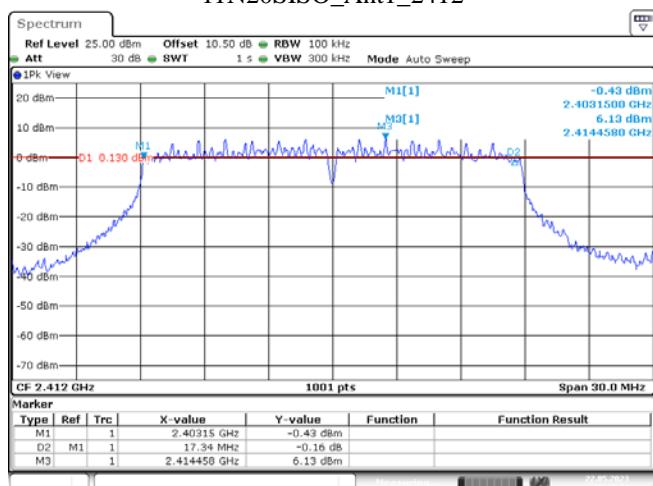


Date: 22.MAY.2023 19:49:10

## 11N20SISO\_Ant1\_2437

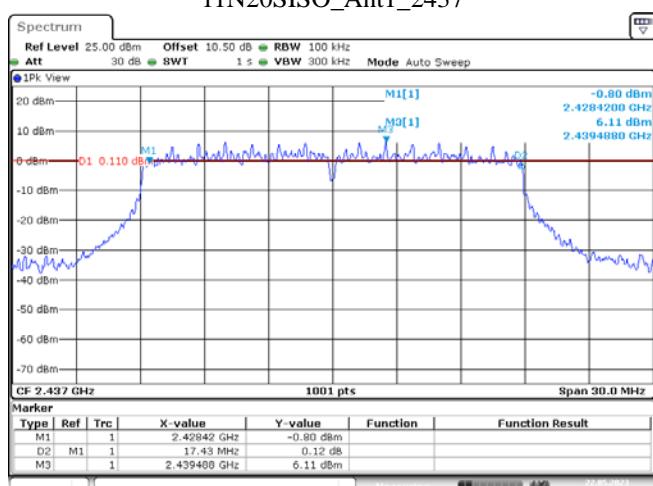


Date: 22.MAY.2023 19:57:29

## 11N20SISO\_Ant1\_2462

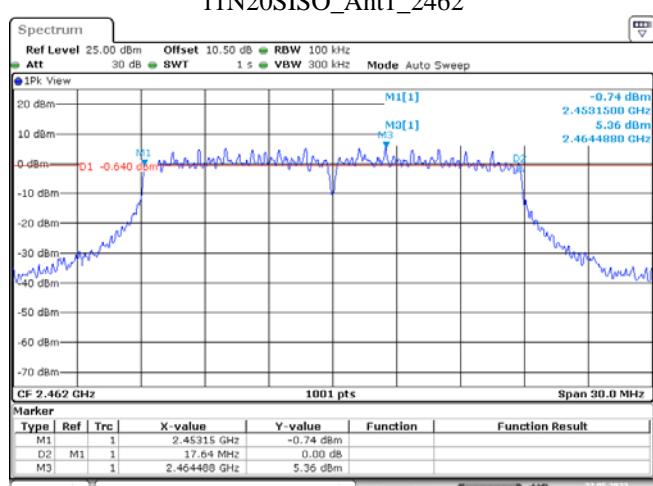


Date: 22.MAY.2023 20:14:25


## 11N40SISO\_Ant1\_2422

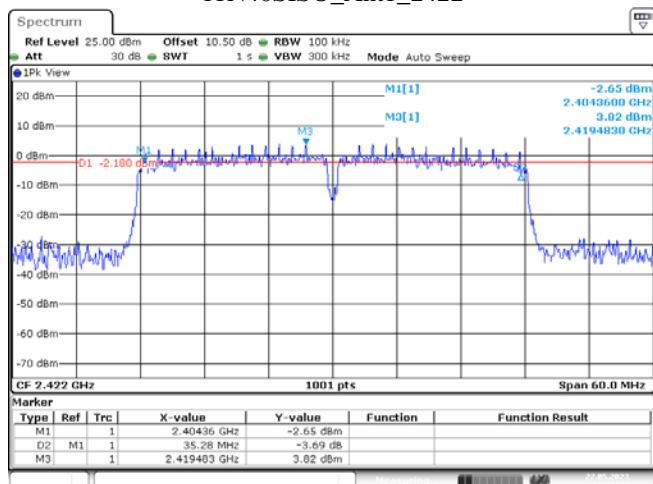

## 11N40SISO\_Ant1\_2437

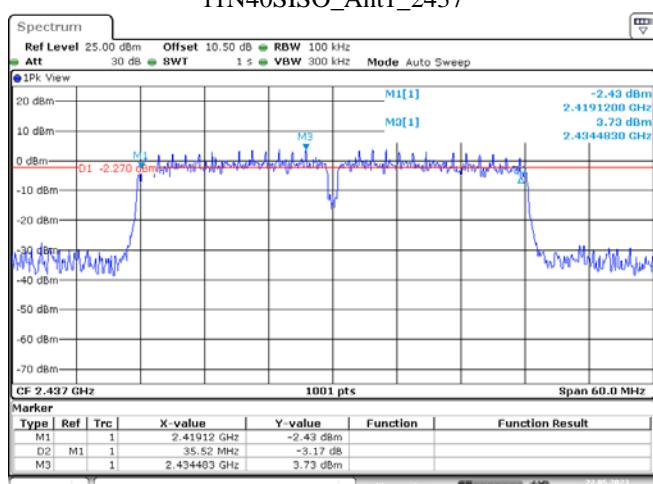

## 11N40SISO\_Ant1\_2452

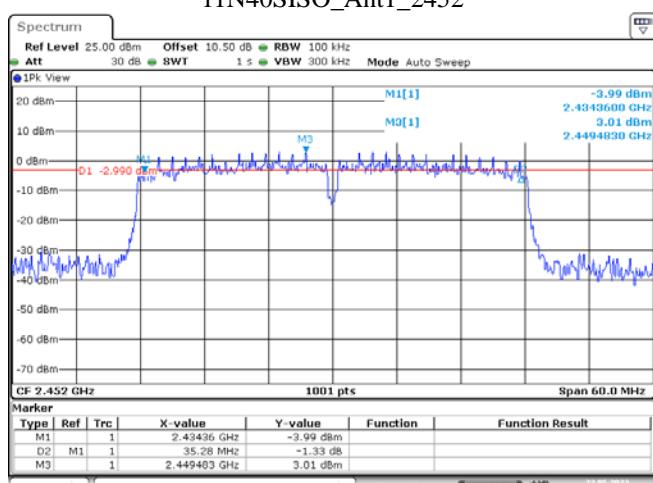


## APPENDIX B: Occupied Channel Bandwidth

### Test Result:


Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.786	---	PASS
		2437	13.826	---	PASS
		2462	13.786	---	PASS
11G	Ant1	2412	16.583	---	PASS
		2437	16.583	---	PASS
		2462	16.543	---	PASS
11N20SISO	Ant1	2412	17.702	---	PASS
		2437	17.742	---	PASS
		2462	17.702	---	PASS
11N40SISO	Ant1	2422	35.964	---	PASS
		2437	36.044	---	PASS
		2452	35.964	---	PASS

## Test Graphs:


11B\_Ant1\_2412

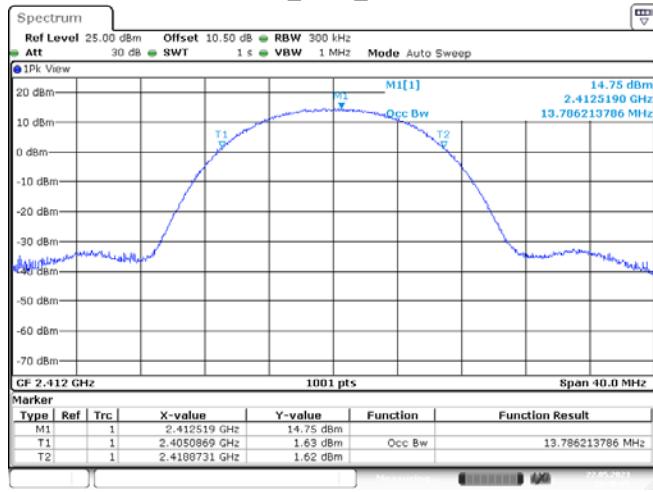


11B\_Ant1\_2437

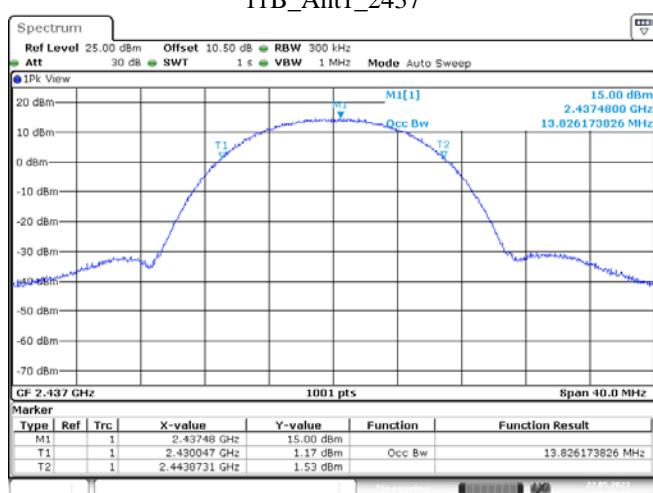


11B\_Ant1\_2462

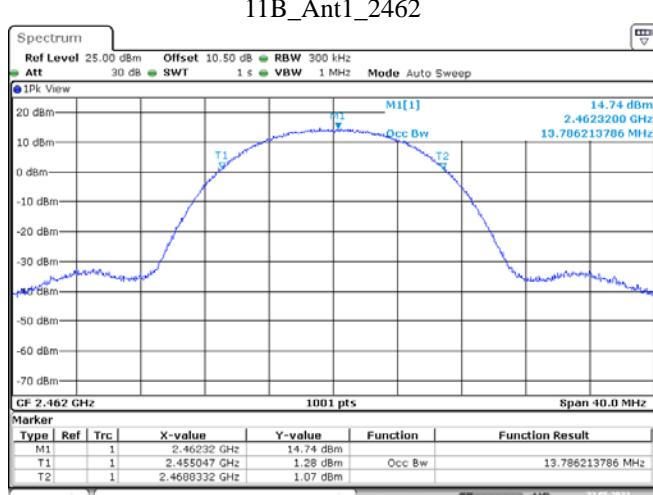


## 11G\_Ant1\_2412

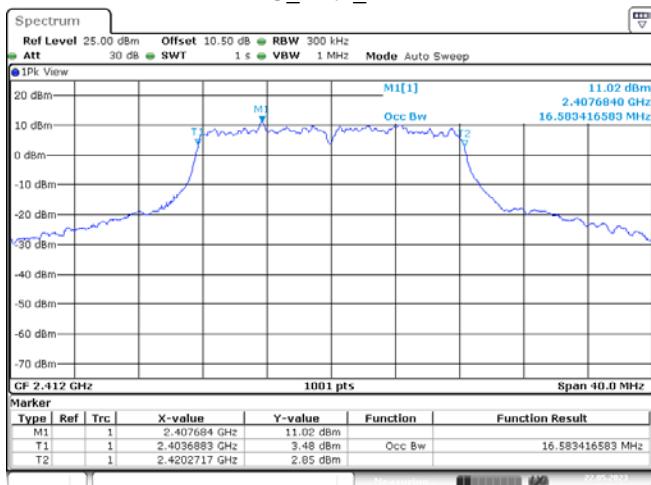


## 11G\_Ant1\_2437

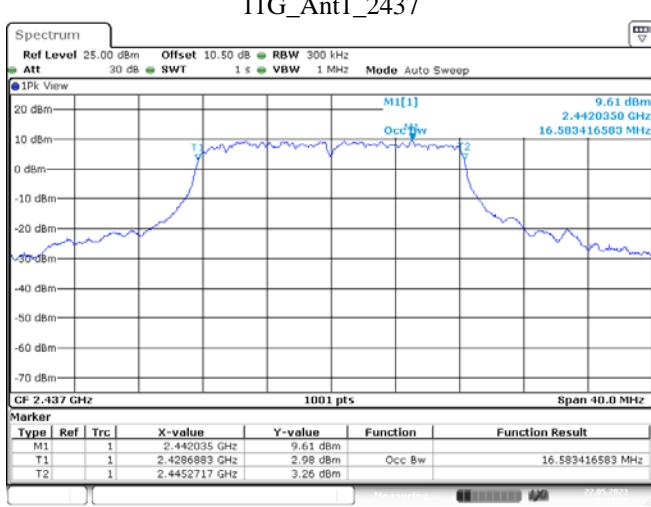


## 11G\_Ant1\_2462

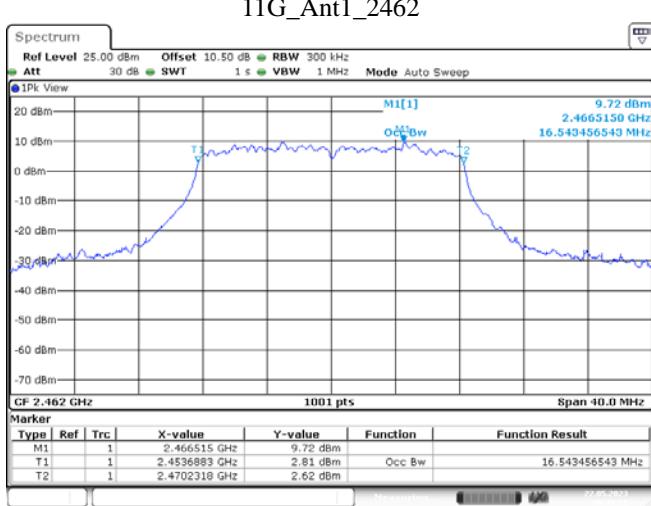


## 11N20SISO\_Ant1\_2412

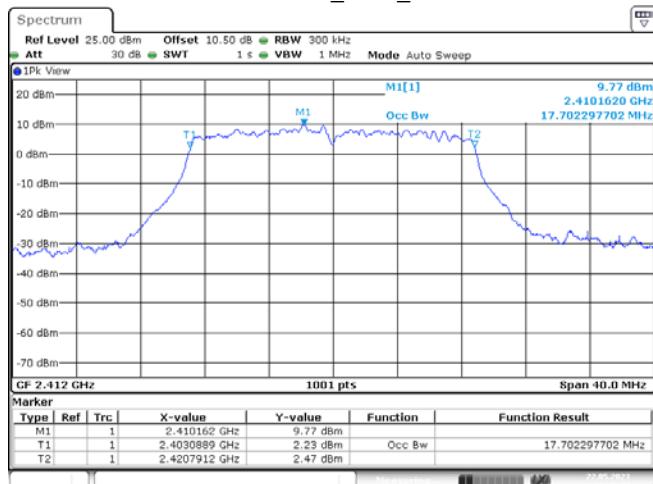


## 11N20SISO\_Ant1\_2437

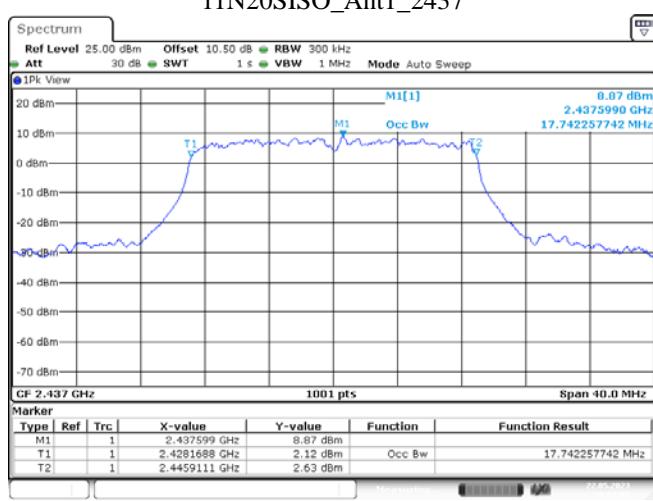

## 11N20SISO\_Ant1\_2462

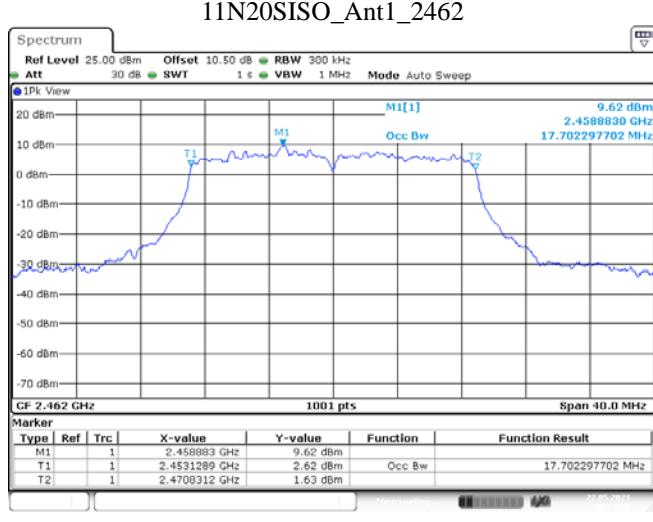


## 11N40SISO\_Ant1\_2422

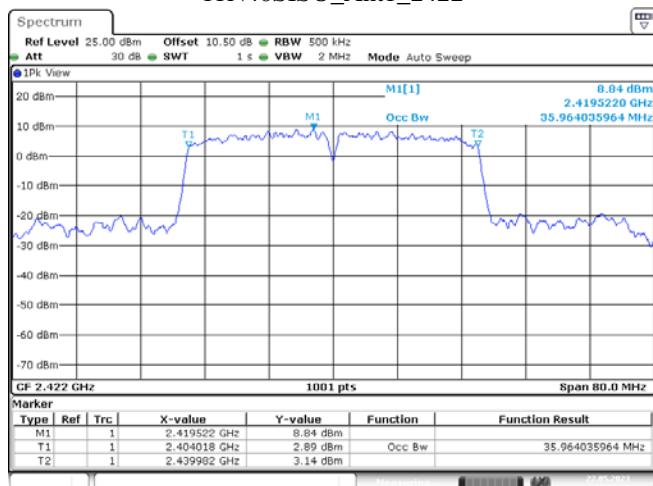


Date: 22.MAY.2023 19:36:26

## 11N40SISO\_Ant1\_2437

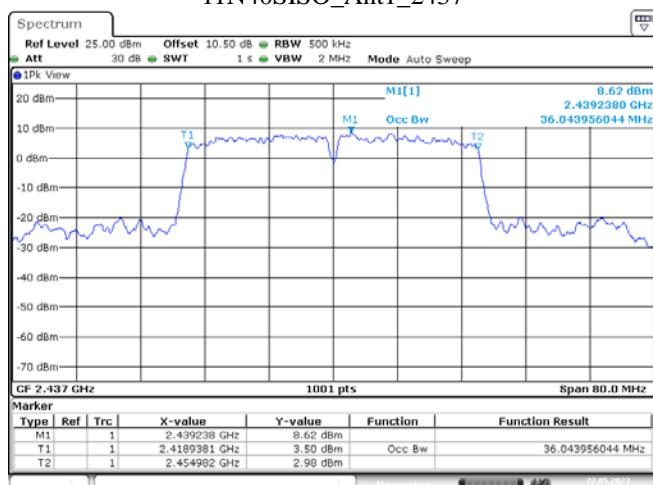

Date: 22.MAY.2023 19:32:24

## 11N40SISO\_Ant1\_2452

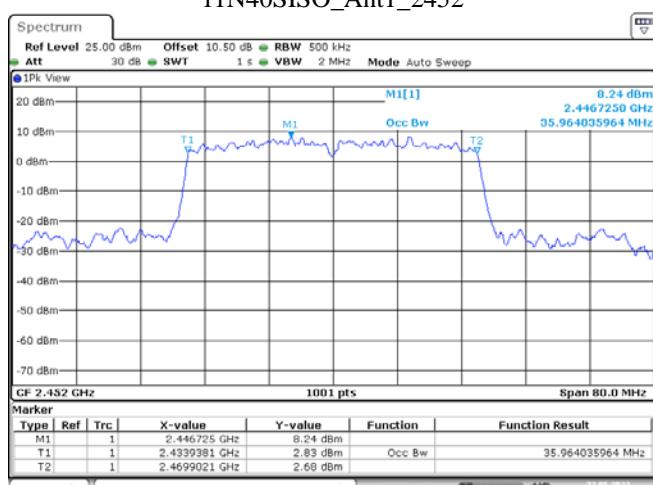



Date: 22.MAY.2023 19:25:28



**APPENDIX C: Maximum Average Conducted Output Power****Test Result**



Test Mode	Antenna	Channel	Average power [dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	18.79	<=30	PASS
		2437	18.77	<=30	PASS
		2462	<b>18.79</b>	<=30	PASS
11G	Ant1	2412	<b>16.31</b>	<=30	PASS
		2437	16.12	<=30	PASS
		2462	15.39	<=30	PASS
11N20SISO	Ant1	2412	<b>15.15</b>	<=30	PASS
		2437	15.00	<=30	PASS
		2462	14.33	<=30	PASS
11N40SISO	Ant1	2422	14.00	<=30	PASS
		2437	<b>14.07</b>	<=30	PASS
		2452	13.32	<=30	PASS



## APPENDIX D: Band Edge Measurements

### Test Graphs

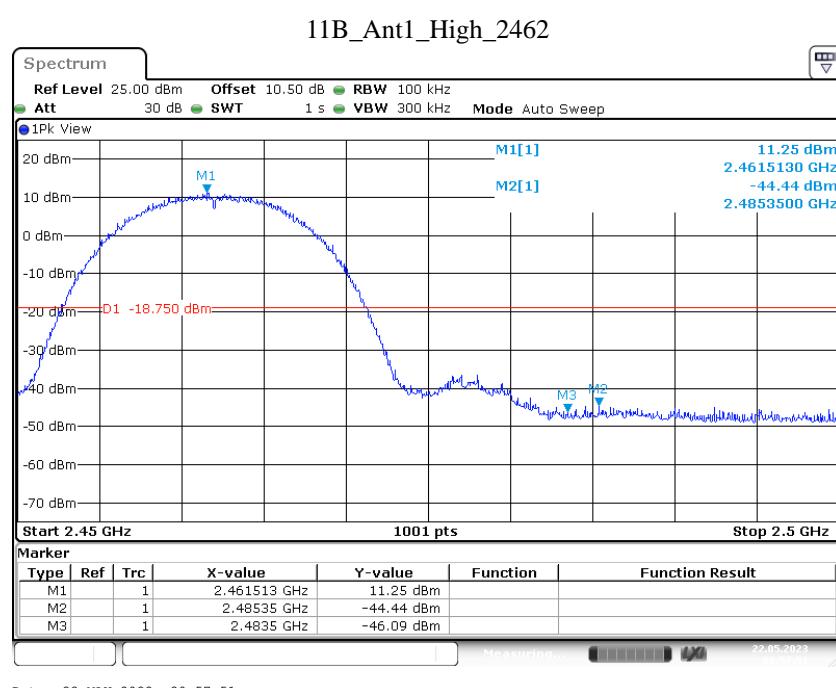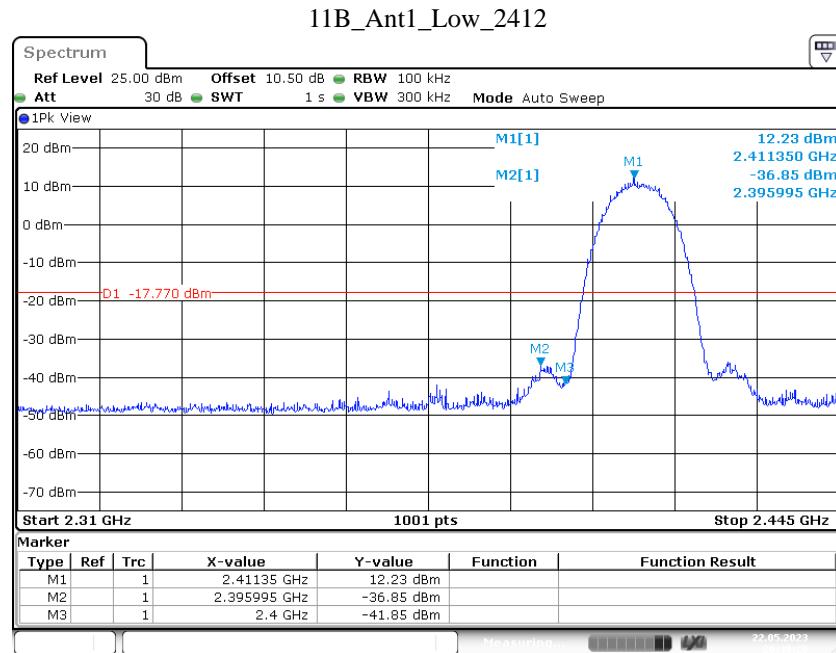

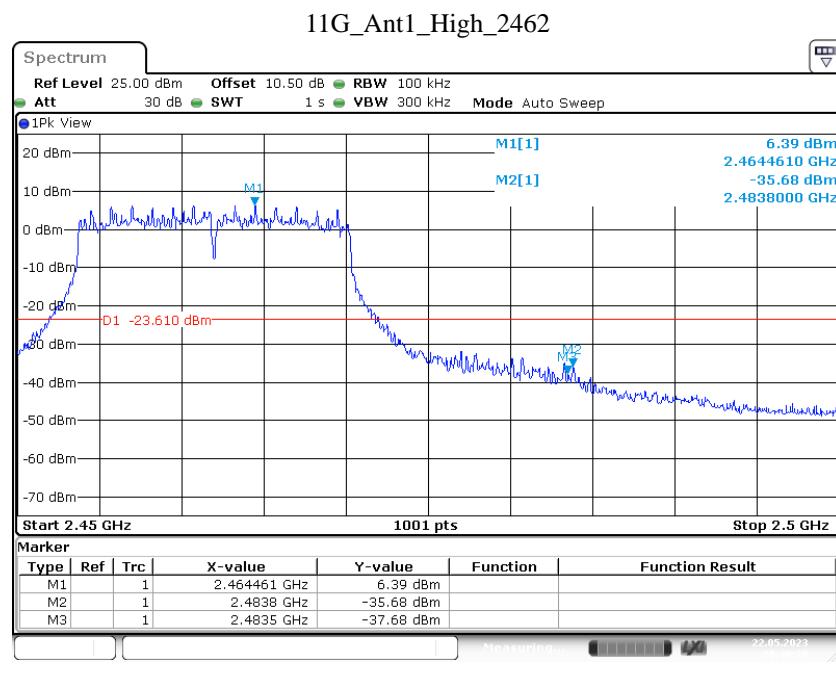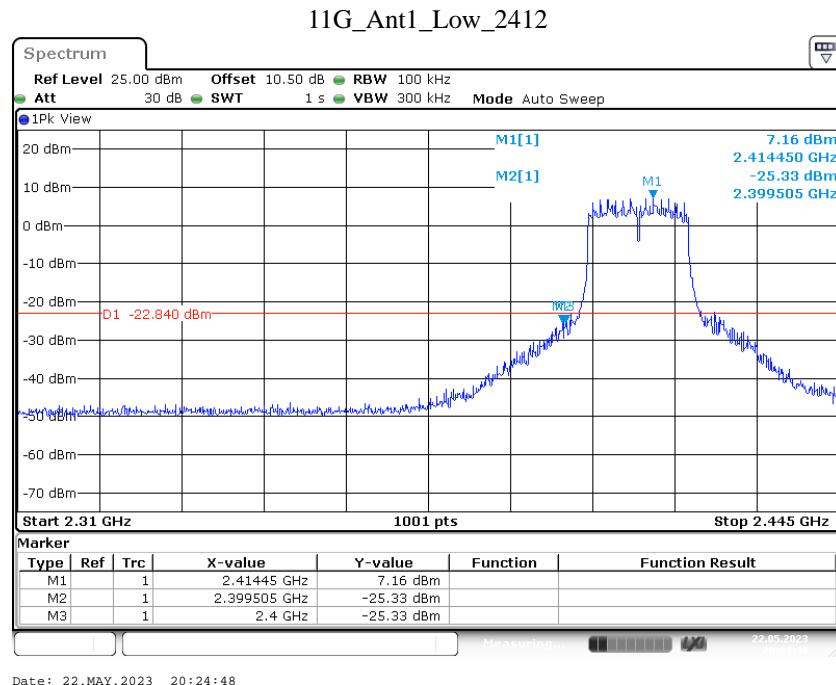

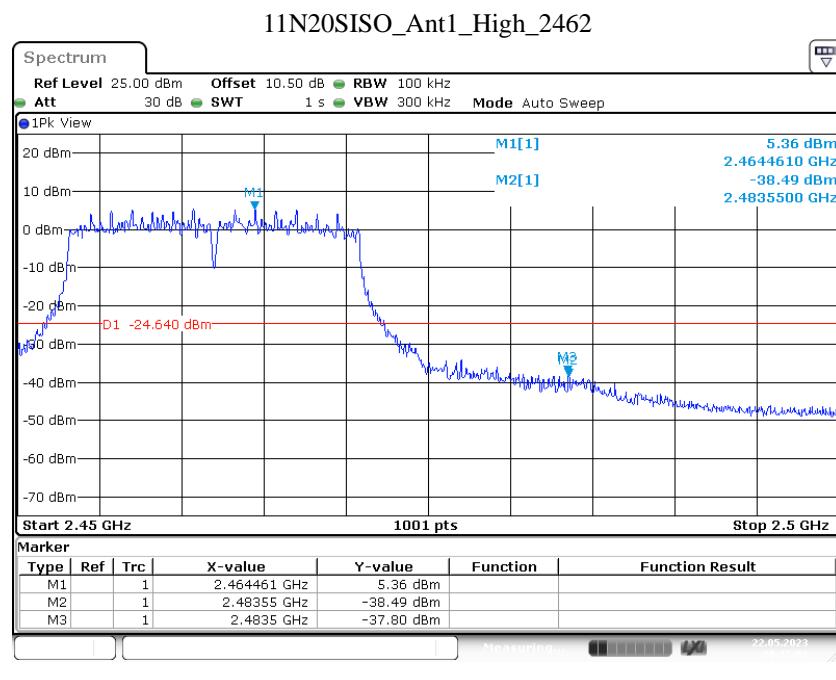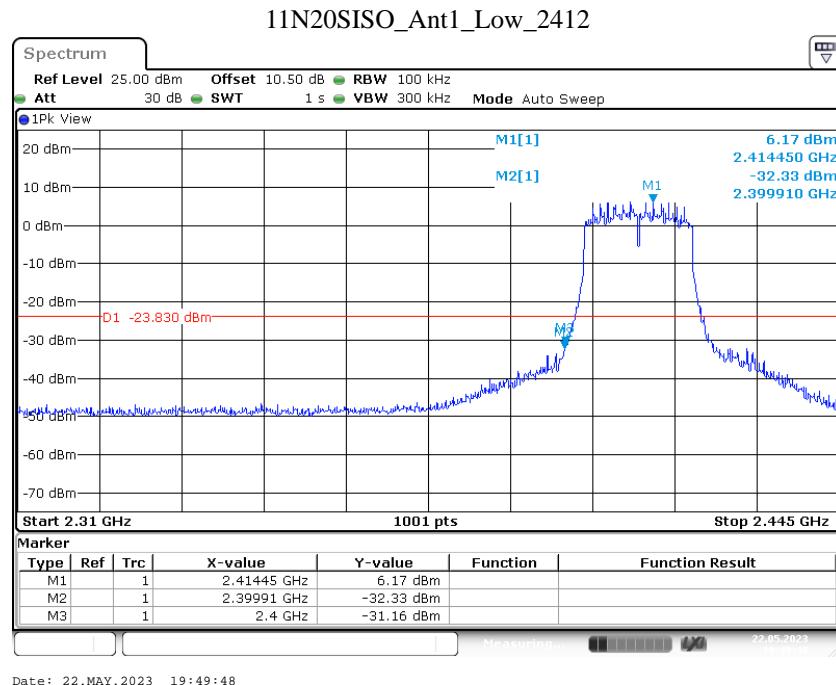

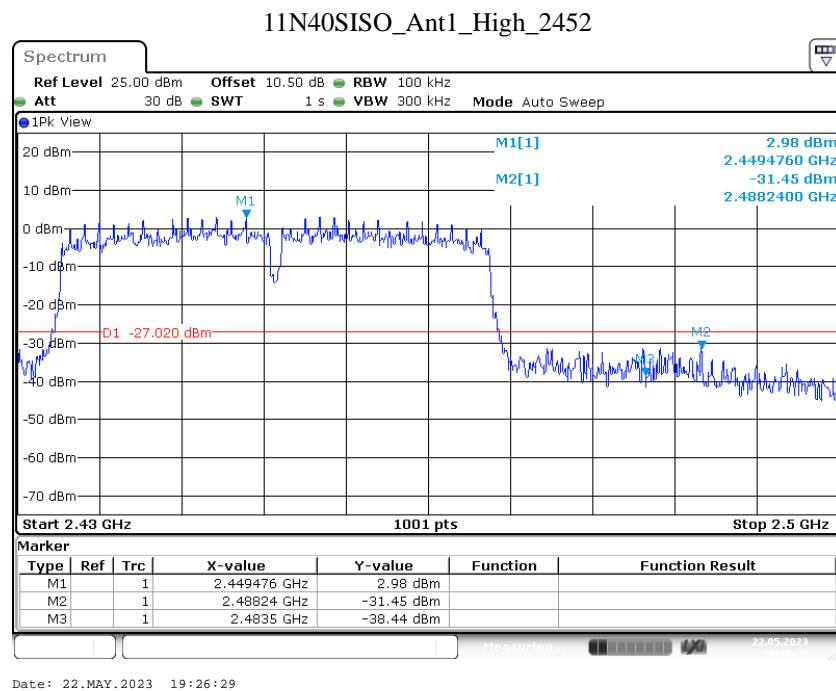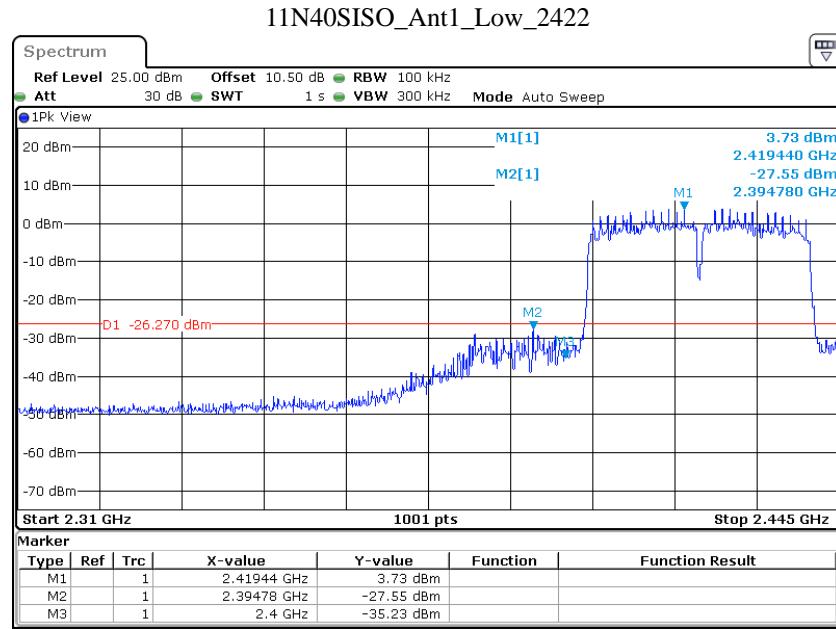

## APPENDIX E: Maximum Power Spectral Density

### Test Result


Test Mode	Antenna	Channel	Reading [dBm/10kHz]	DC factor [dB]	PSD [dBm/10kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-7.99	/	-7.99	$\leq 8.00$	PASS
		2437	-8.57	/	-8.57	$\leq 8.00$	PASS
		2462	-8.50	/	-5.50	$\leq 8.00$	PASS
11G	Ant1	2412	-7.72	0.178	-7.542	$\leq 8.00$	PASS
		2437	-6.79	0.178	-6.612	$\leq 8.00$	PASS
		2462	-9.81	0.175	-9.635	$\leq 8.00$	PASS
11N20SISO	Ant1	2412	-9.03	0.191	-8.839	$\leq 8.00$	PASS
		2437	-8.72	0.191	-8.529	$\leq 8.00$	PASS
		2462	-10.46	0.189	-10.271	$\leq 8.00$	PASS
11N40SISO	Ant1	2422	-12.24	0.189	-12.051	$\leq 8.00$	PASS
		2437	-12.30	0.191	-12.109	$\leq 8.00$	PASS
		2452	-12.58	0.191	-12.389	$\leq 8.00$	PASS

Note: PSD=reading + DC factor


DC factor= $10 \times \log(1/\text{duty cycle})$ , where duty cycle please refer Appendix F.

## Test Graphs


11B\_Ant1\_2412

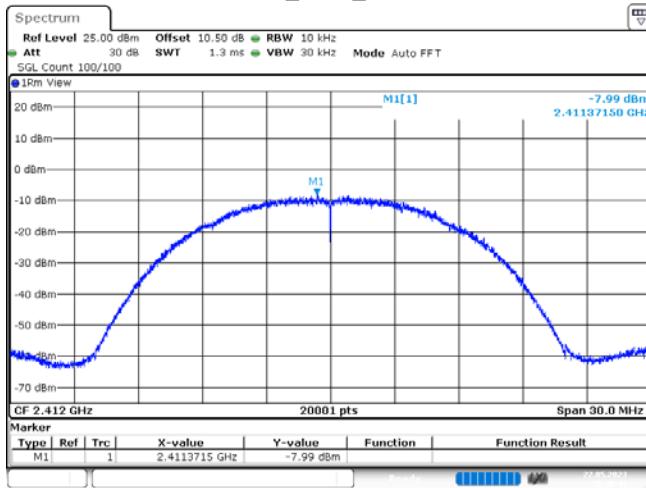


11B\_Ant1\_2437

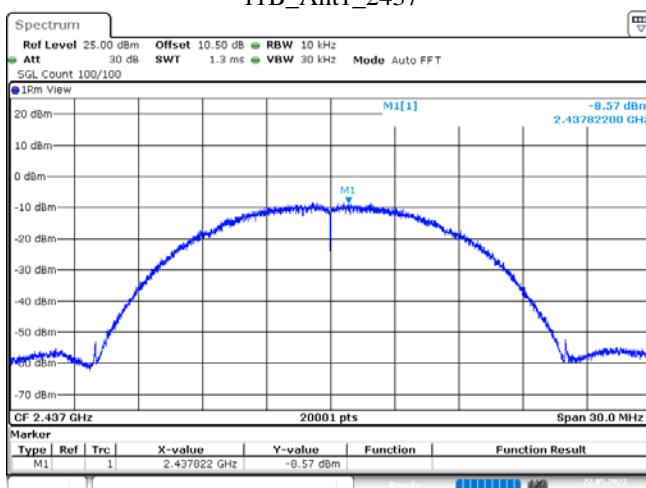


11B\_Ant1\_2462

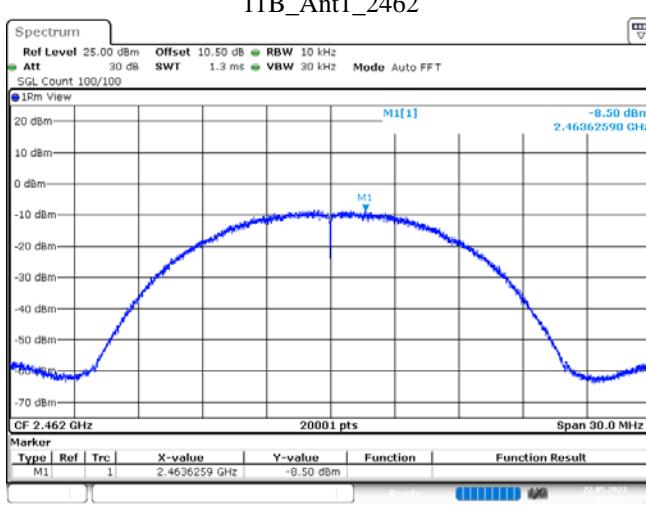


## 11G\_Ant1\_2412

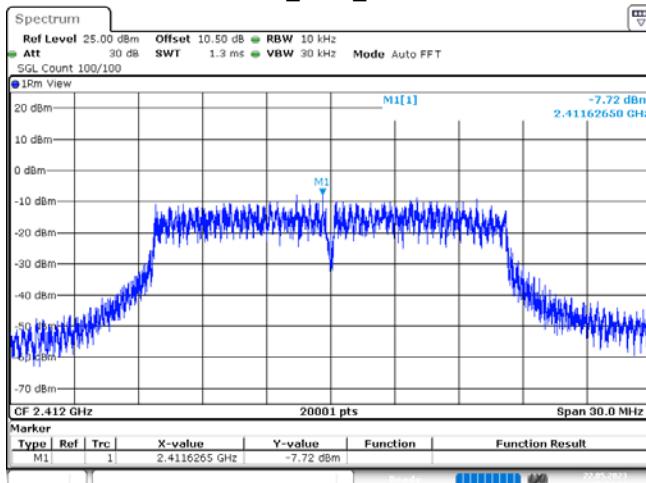


## 11G\_Ant1\_2437

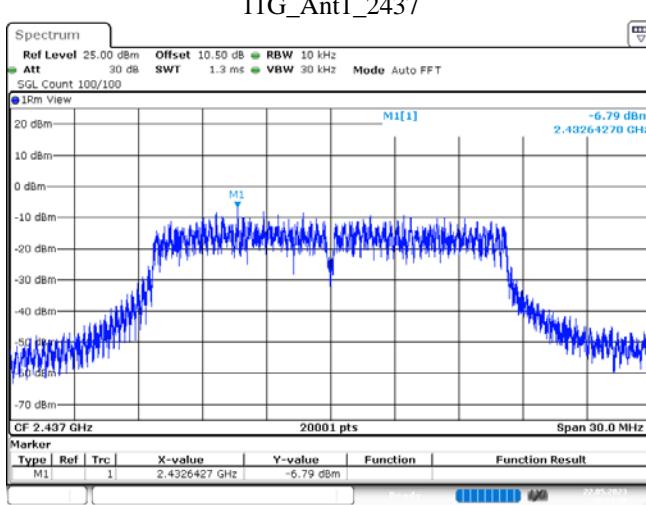


## 11G\_Ant1\_2462

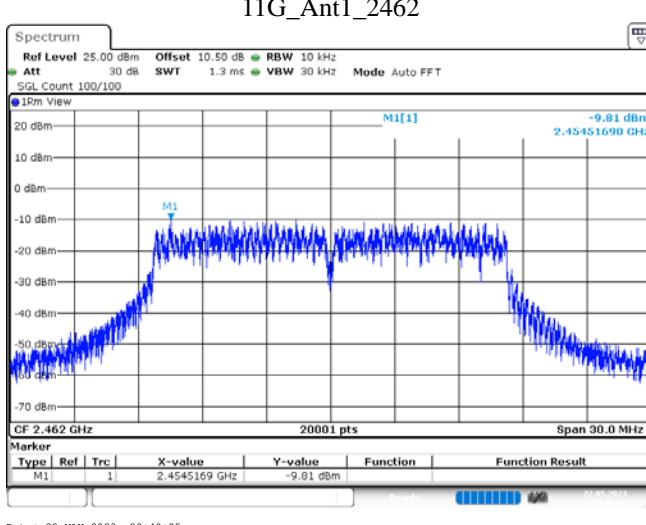


## 11N20SISO\_Ant1\_2412

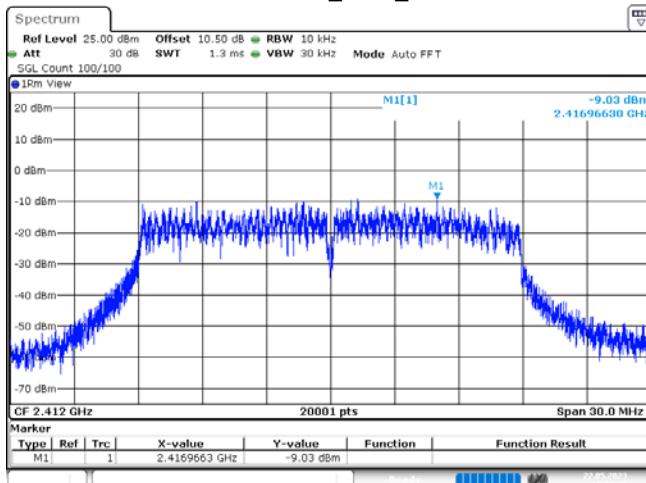


## 11N20SISO\_Ant1\_2437

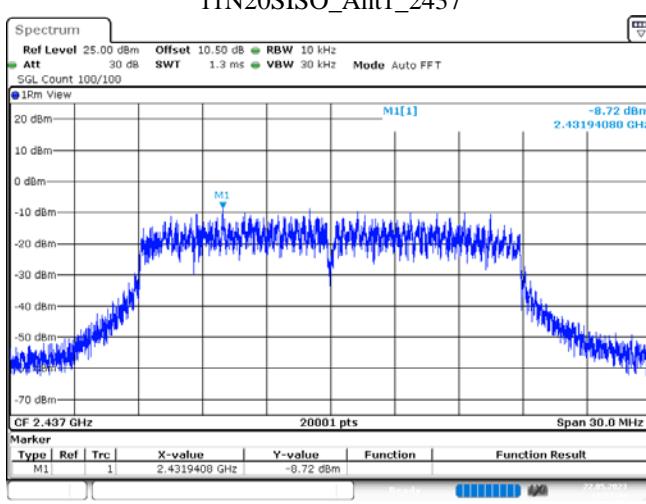


## 11N20SISO\_Ant1\_2462

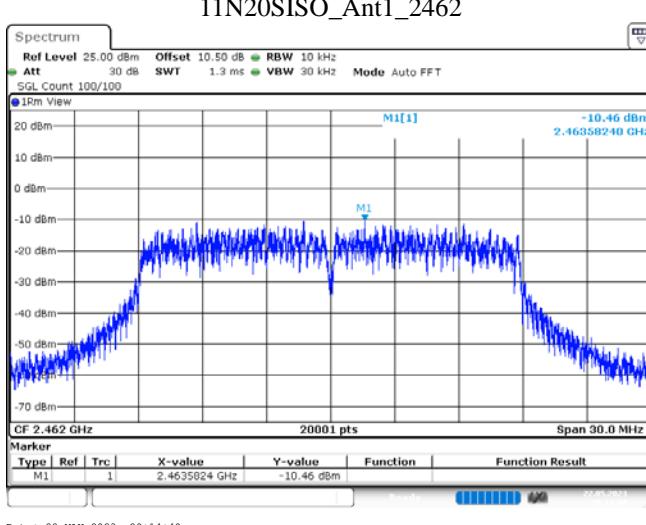


## 11N40SISO\_Ant1\_2422

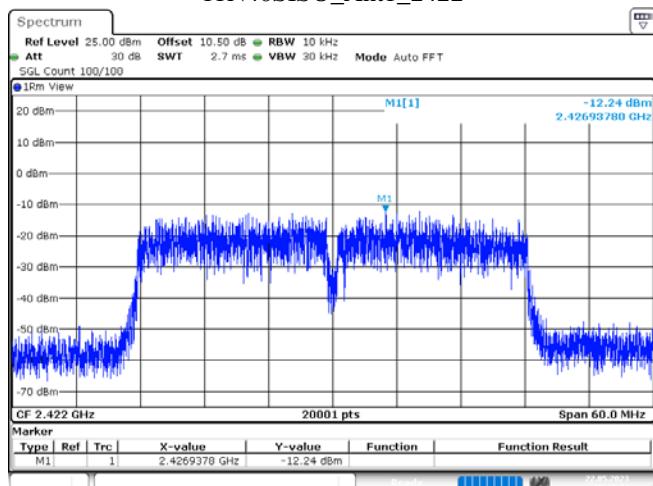

## 11N40SISO\_Ant1\_2437

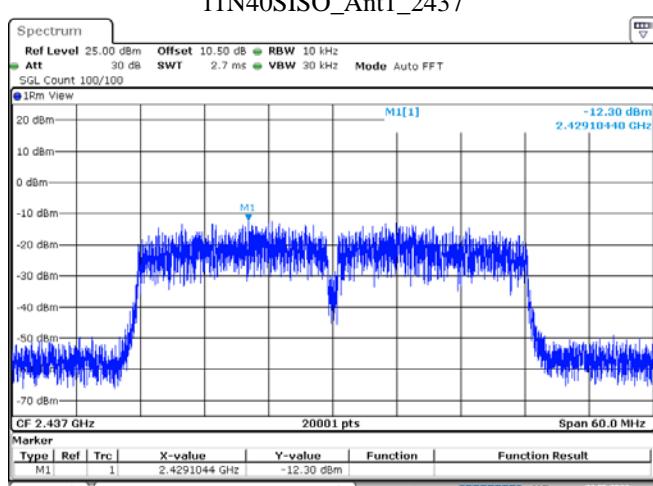

## 11N40SISO\_Ant1\_2452

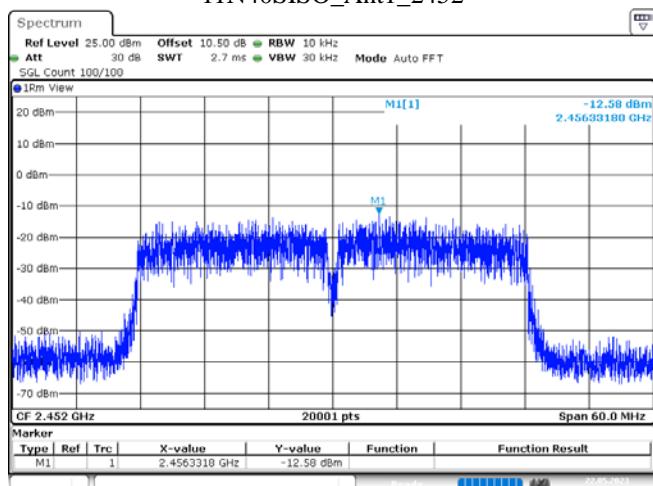

## APPENDIX F: Duty Cycle

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-29.

EUT operation mode: Transmitting


### Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factor [dB]	1/T Minimum VBW[kHz]
11B	Ant1	2412	6.5925	6.6325	99.40	/	/
		2437	6.59	6.6325	99.36	/	/
		2462	6.5925	6.6325	99.40	/	/
11G	Ant1	2412	1.091875	1.1375	95.99	0.178	0.916
		2437	1.091875	1.1375	95.99	0.178	0.916
		2462	1.091875	1.136875	96.04	0.175	0.916
11N20SISO	Ant1	2412	1.011875	1.0575	95.69	0.191	0.988
		2437	1.011875	1.0575	95.69	0.191	0.988
		2462	1.011875	1.056875	95.74	0.189	0.988
11N40SISO	Ant1	2422	1.011875	1.056875	95.74	0.189	0.988
		2437	1.011875	1.0575	95.69	0.191	0.988
		2452	1.011875	1.0575	95.69	0.191	0.988


Note: DC factor=10\*log10(1/duty cycle)

## Test Graphs


11B\_Ant1\_2412

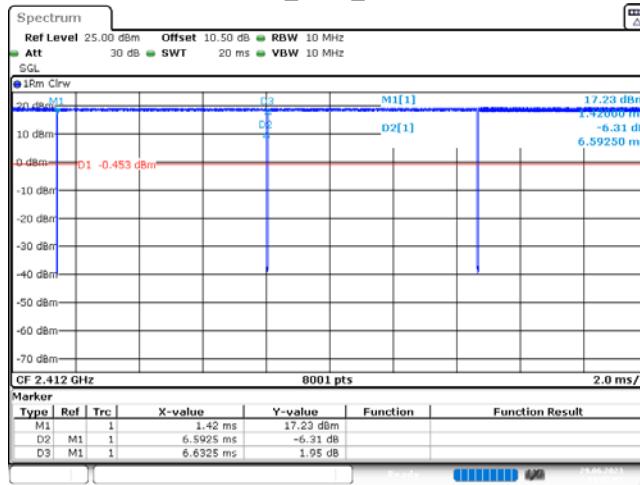


11B\_Ant1\_2437

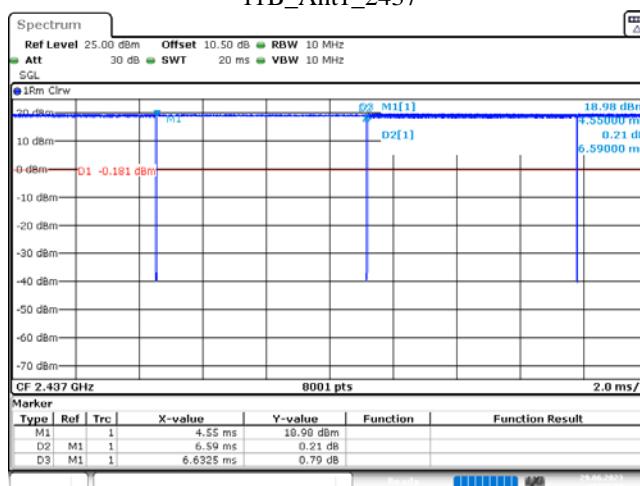


11B\_Ant1\_2462

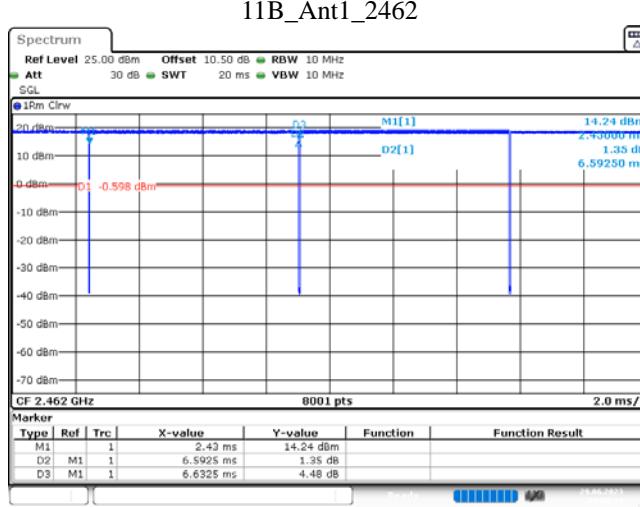


## 11G\_Ant1\_2412

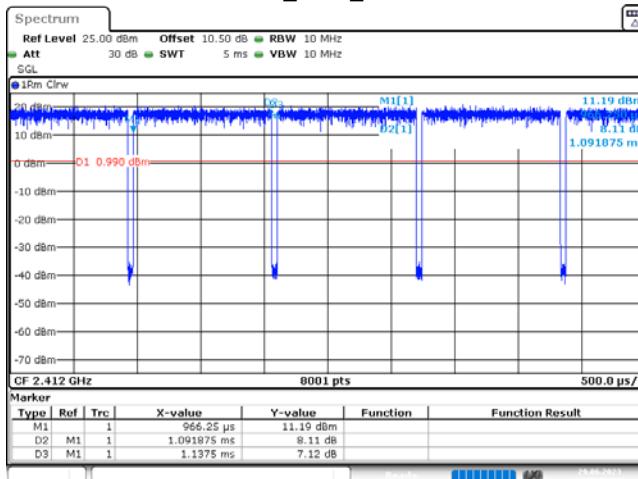


## 11G\_Ant1\_2437

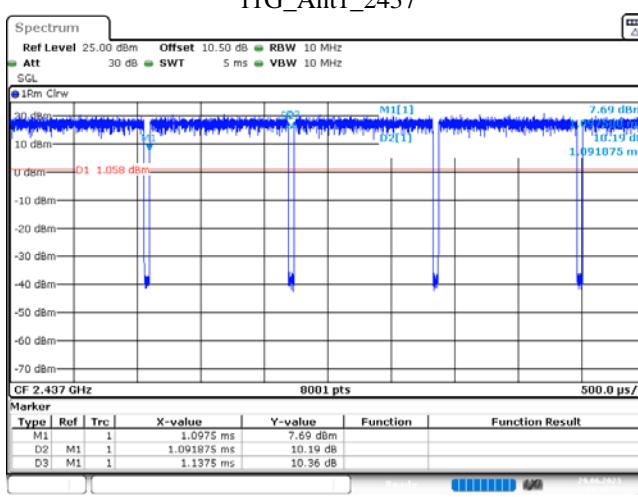


## 11G\_Ant1\_2462

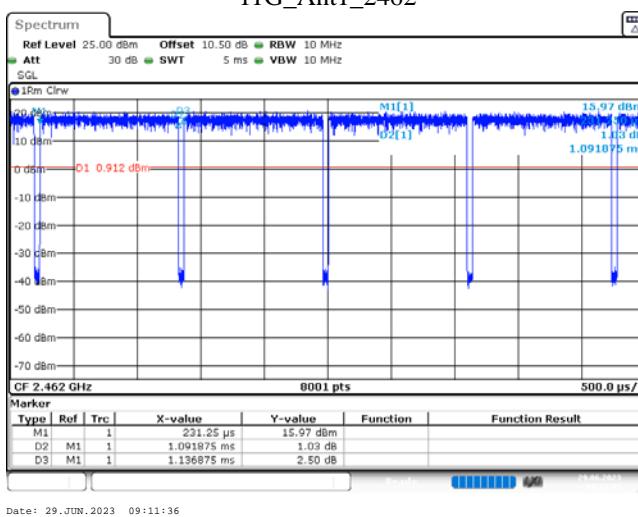


## 11N20SISO\_Ant1\_2412

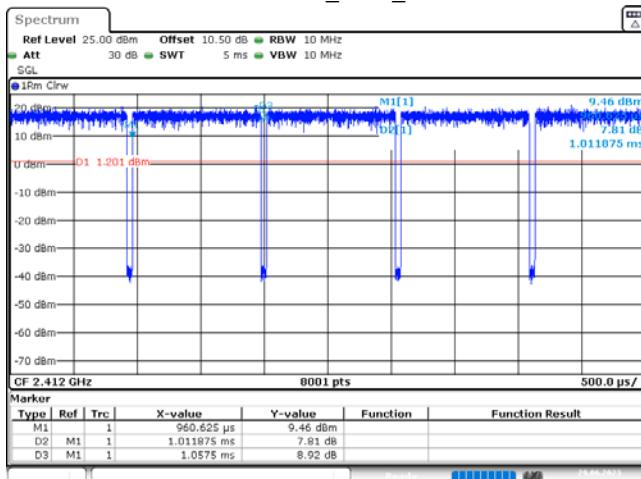


## 11N20SISO\_Ant1\_2437

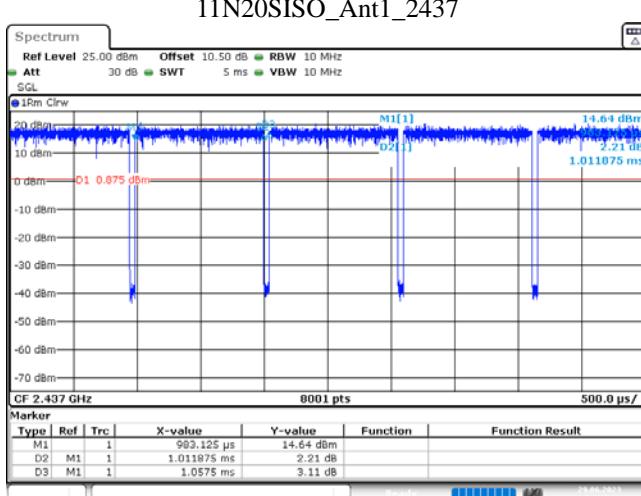


## 11N20SISO\_Ant1\_2462

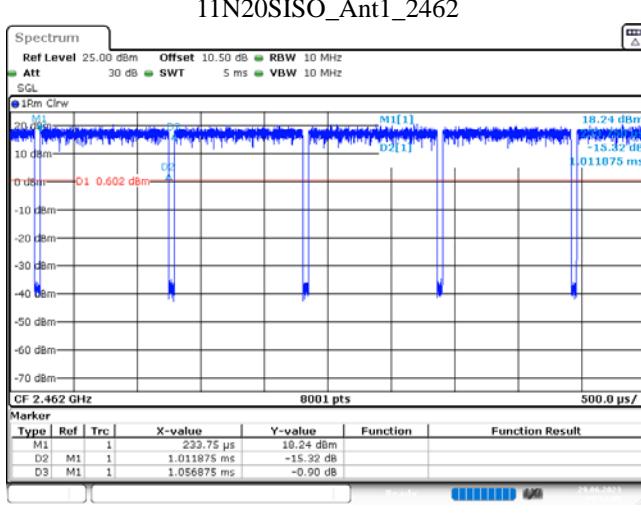


## 11N40SISO\_Ant1\_2422

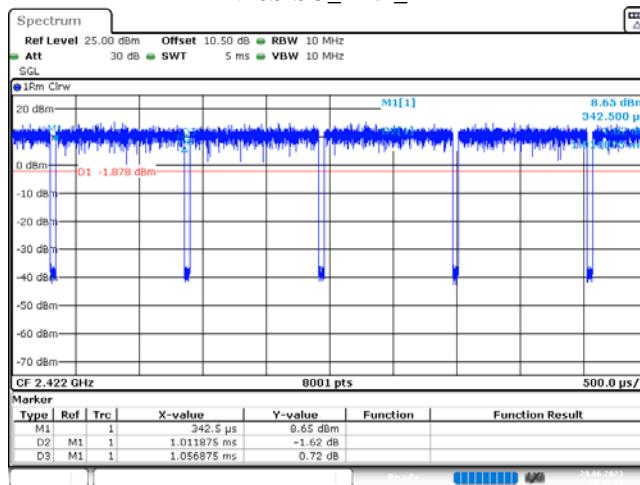

## 11N40SISO\_Ant1\_2437

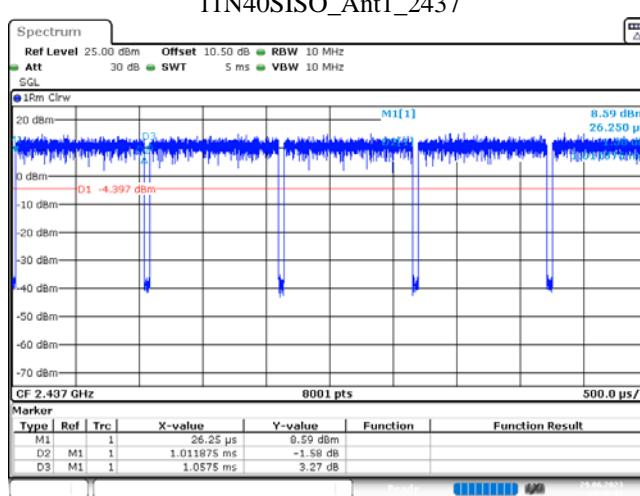

## 11N40SISO\_Ant1\_2452

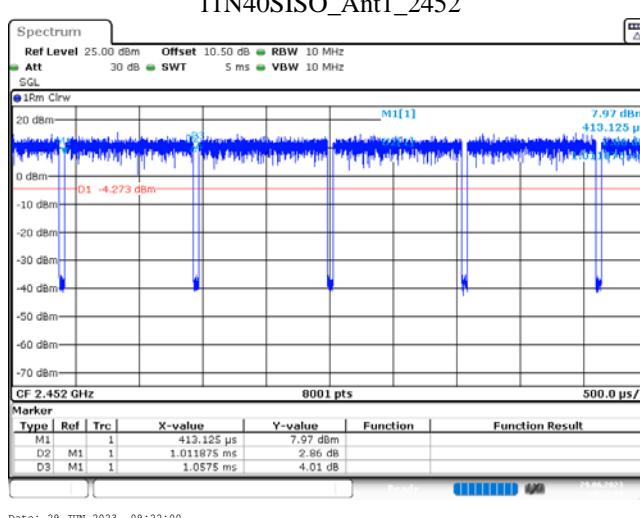

\*\*\*\*\* END OF REPORT \*\*\*\*\*