



CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

Lighting

MODEL NUMBER: 8Wy-A806ST-Q1Z

FCC ID: 2AB2Q8WYA806ST

REPORT NUMBER: 4788910050.1-1

ISSUE DATE: March 15, 2019

Prepared for

LEEDARSON LIGHTING CO., LTD.

**Xingtai Industrial Zone, Economic Development Zone, Changtai County, Zhangzhou
City, Fujian Province, P.R.China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake
Hi-Tech Development Zone Dongguan, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	3/15/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. CHANNEL LIST	10
5.4. TEST CHANNEL CONFIGURATION.....	10
5.5. THE WORSE CASE CONFIGURATIONS	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.7. DESCRIPTION OF TEST SETUP.....	12
6. MEASURING INSTRUMENT AND SOFTWARE USED	13
7. MEASUREMENT METHODS	14
8. ANTENNA PORT TEST RESULTS	15
8.1. ON TIME AND DUTY CYCLE.....	15
8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH	18
8.2.1. 802.11b MODE	19
8.2.2. 802.11g MODE	23
8.2.3. 802.11n HT20 MODE	27
8.3. PEAK CONDUCTED OUTPUT POWER.....	31
8.3.1. 802.11b MODE	32
8.3.2. 802.11g MODE	32
8.3.3. 802.11n HT20 MODE	32
8.4. POWER SPECTRAL DENSITY	33
8.4.1. 802.11b MODE	34
8.4.2. 802.11g MODE	36
8.4.3. 802.11n HT20 MODE	38
8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	40
8.5.1. 802.11b MODE	41
8.5.2. 802.11g MODE	47
8.5.3. 802.11n HT20 MODE	53
9. RADIATED TEST RESULTS.....	59



9.1.	RESTRICTED BANDEDGE	65
9.1.1.	802.11b MODE	65
9.1.2.	802.11g MODE	69
9.1.3.	802.11n HT20 MODE	74
9.2.	SPURIOUS EMISSIONS (3~18GHz)	81
9.2.1.	802.11b MODE	81
9.2.2.	802.11g MODE	87
9.2.3.	802.11n HT20 MODE	93
9.3.	SPURIOUS EMISSIONS (1~3GHz)	99
9.3.1.	802.11b MODE	99
9.3.2.	802.11g MODE	105
9.3.3.	802.11n HT20 MODE	111
9.4.	SPURIOUS EMISSIONS (18~26GHz)	117
9.4.1.	802.11b MODE	117
9.5.	SPURIOUS EMISSIONS (0.03 ~ 1 GHz)	119
9.5.1.	802.11b MODE for 8WY-A806ST-Q1R	119
9.5.2.	802.11b MODE for 8WY-A806ST-Q1Z	121
9.6.	SPURIOUS EMISSIONS BELOW 30M	123
9.6.1.	802.11b MODE	123
10.	AC POWER LINE CONDUCTED EMISSIONS	129
10.1.	802.11b MODE 8WY-A806ST-Q1R	130
10.2.	802.11b MODE 8WY-A806ST-Q1Z	132
11.	ANTENNA REQUIREMENTS	134



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingtai Industrial Zone, Economic Development Zone, Changtai County, Zhangzhou City, Fujian Province, P.R.China

Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingtai Industrial Zone, Economic Development Zone, Changtai County, Zhangzhou City, Fujian Province, P.R.China

EUT Description

EUT Name: Lighting
Model: 8Wy-A806ST-Q1Z
Series Model: 8Wy-A806ST-Q1R
Model Difference: Please refer to section 5.1
Sample Status: Normal
Sample Received Date: January 23, 2019
Date of Tested: January 24 ~ March 15, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Checked By:

Kebo Zhang
Engineer Project Associate
Approved By:

Shawn Wen
Laboratory Leader

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r01, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Lighting		
Model	8Wy-A806ST-Q1Z		
Series Model	8Wy-A806ST-Q1R		
Model Difference	8Wy-A806ST-Q1R have the same RF circuit and the performance , same technical construction including drive circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with 8Wy-A806ST-Q1Z.The difference lies only the model number and an additional color temperature changeable IC and its auxiliary circuit , which consist of the components: R12,R13, C4,C10,U3,D4 etc.		
Radio Technology	IEEE802.11b/g/n HT20		
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz		
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)		
Rated Input	AC 120V, 60Hz		
Power Supply	Power Adapter	Input	/
		Output	/
	Battery	/	

5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)
1	IEEE 802.11b	2412-2462	1-11[11]	16.22
1	IEEE 802.11g	2412-2462	1-11[11]	17.87
1	IEEE 802.11nHT20	2412-2462	1-11[11]	18.24



5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz

5.5. THE WORSE CASE CONFIGURATIONS

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		UI_mptool		
Modulation Mode	Transmit Antenna Number	Test Channel		
		NCB: 20MHz		
		CH 1	CH 6	CH 11
802.11b	1	41	42	42
802.11g	1	47	47	47
802.11n HT20	1	45	45	45

**5.6. DESCRIPTION OF AVAILABLE ANTENNAS**

Antenna	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2412-2462	Integral Antenna	-0.7

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.



5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB TO UART	/	/	/

I/O CABLES

Item	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	NA	NA	1	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

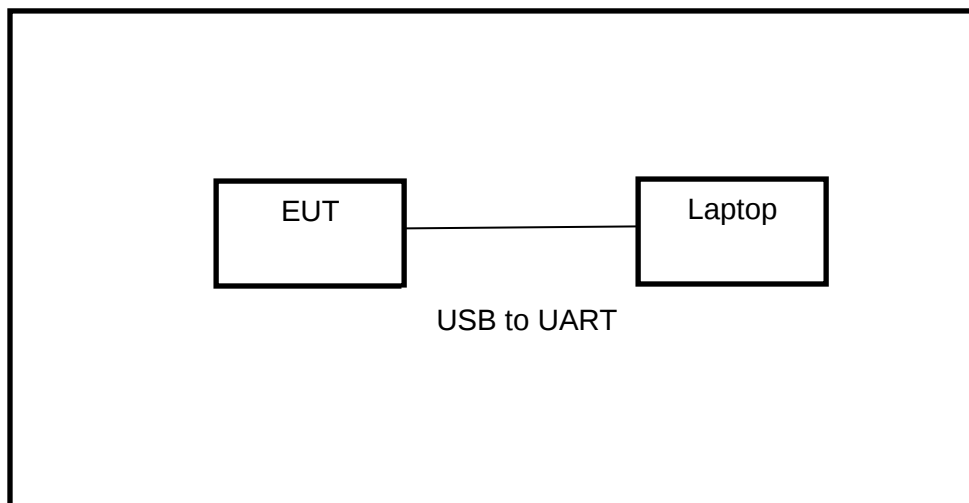

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.10,2018	Dec.10,2019
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.10,2018	Dec.10,2019
☒	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.10,2018	Dec.10,2019
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
☒	Preamplifier	HP	8447D	2944A09099	Dec.10,2018	Dec.10,2019
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.10,2018	Dec.10,2019
☒	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.10,2018	Dec.10,2019
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.10,2018	Dec.10,2019
☒	Loop antenna	Schwarzbeck	1519B	00008	Mar.26,2016	Mar.25, 2019
☒	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Dec.10,2018	Dec.10,2019
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1
Other instruments						



Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.10,2018	Dec.10,2019
☒	Power Meter	Keysight	N1911A	MY55416024	Dec.10,2018	Dec.10,2019
☒	Power Sensor	Keysight	U2021XA	MY5100022	Dec.10,2018	Dec.10,2019

7. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r01	8.2
2	Peak Output Power	KDB 558074 D01 15.247 Meas Guidance v05r01	8.3.1.3/8.3.2.3
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r01	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r01	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r01	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r01	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2
8	99% Bandwidth	ANSI C63.10-2013	6.9.3



8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz

RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (KHz)	Final setting For VBW (KHz)
11b	128.8	128.8	1	100	0	0.008	0.01
11g	128.5	128.5	1	100	0	0.008	0.01
11n20	128.0	128.0	1	100	0	0.008	0.01

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.




11b ON TIME AND DUTY CYCLE MID CH

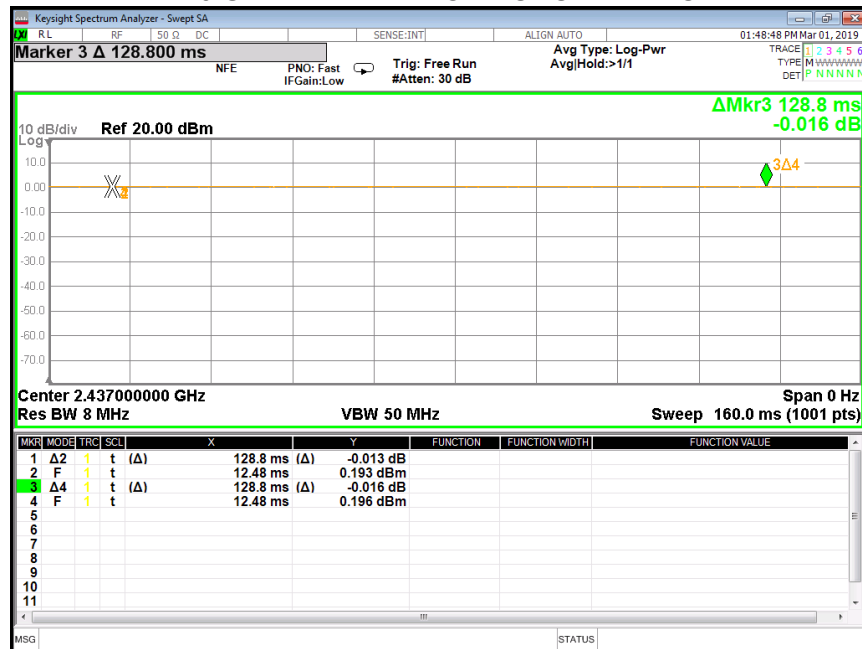

11g ON TIME AND DUTY CYCLE MID CH

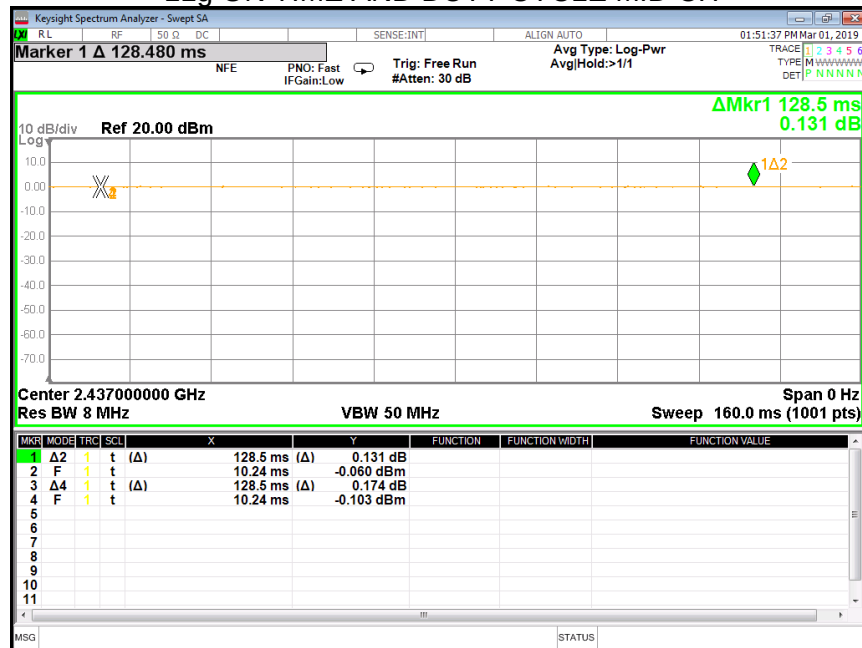

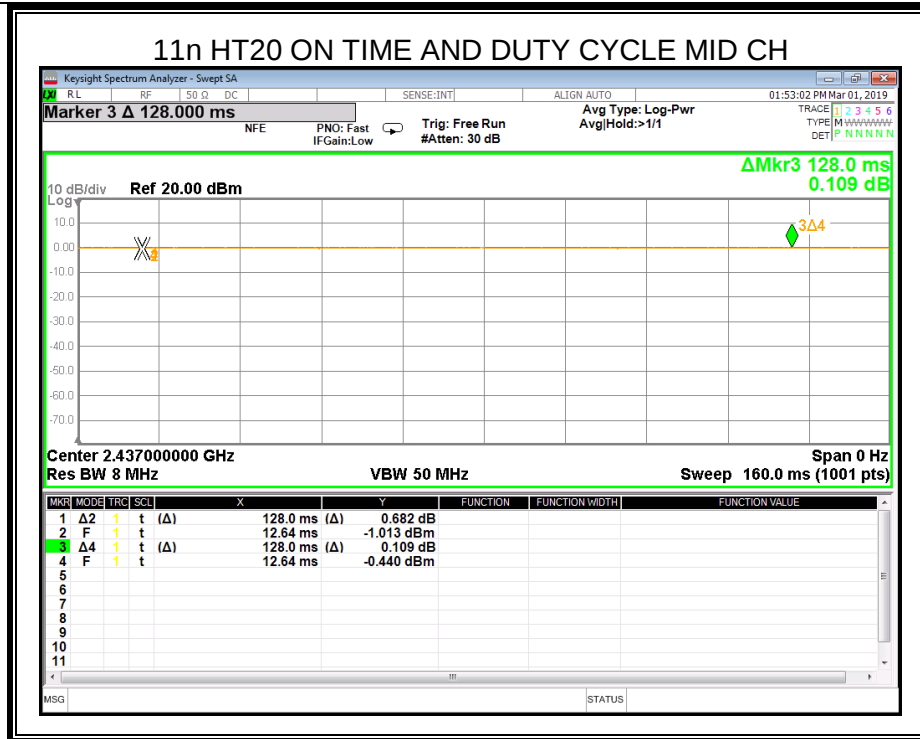



8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5
ANSI C63.10-2013 section 6.9.3	99% Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100K For 99% Occupied Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP






TEST ENVIRONMENT



Temperature	22.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz



RESULTS


8.2.1. 802.11b MODE

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	10.07	14.964	≥500	Pass
Middle	10.05	14.739	≥500	Pass
High	10.05	14.793	≥500	Pass

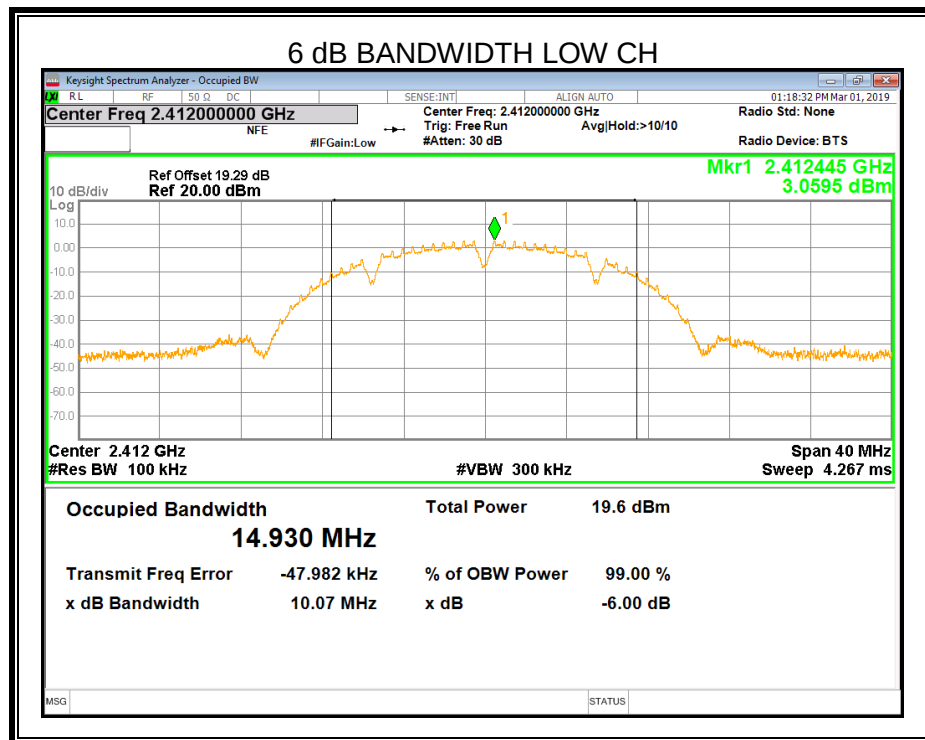

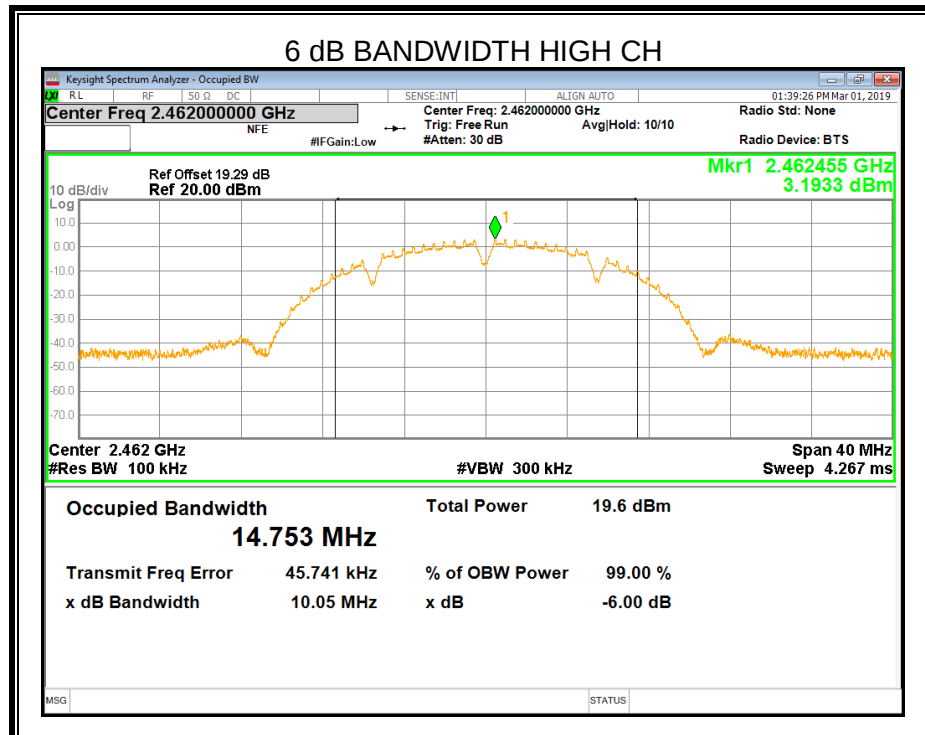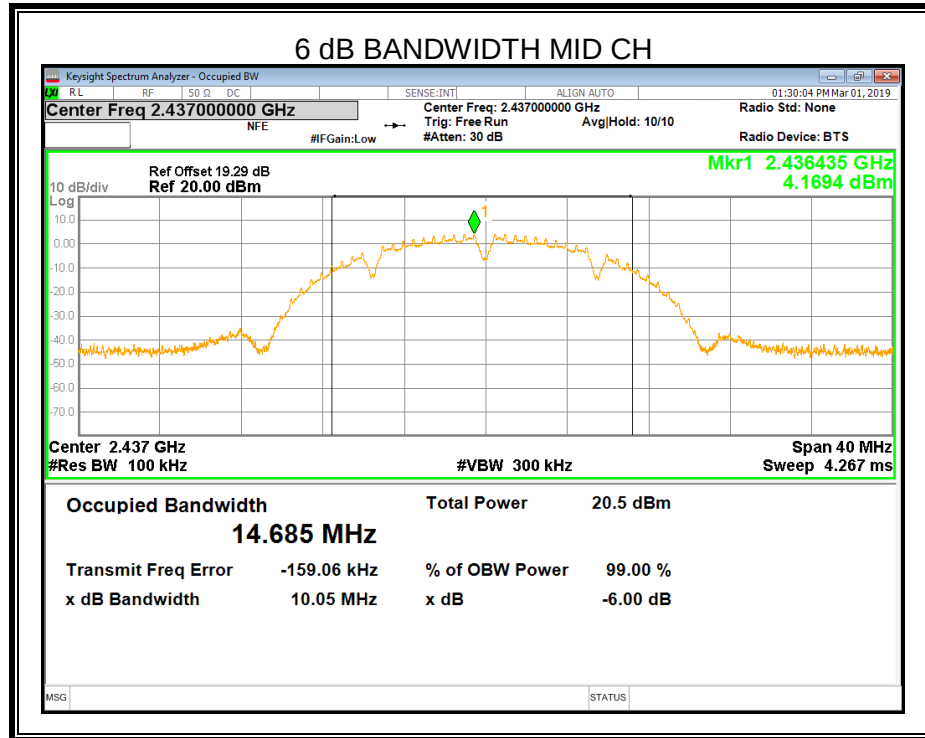

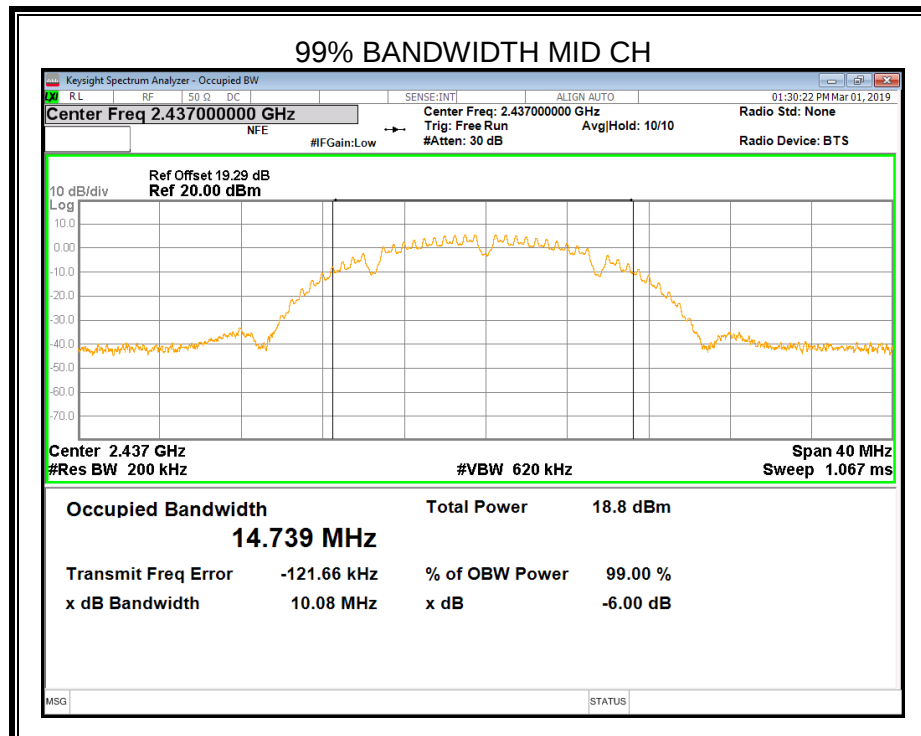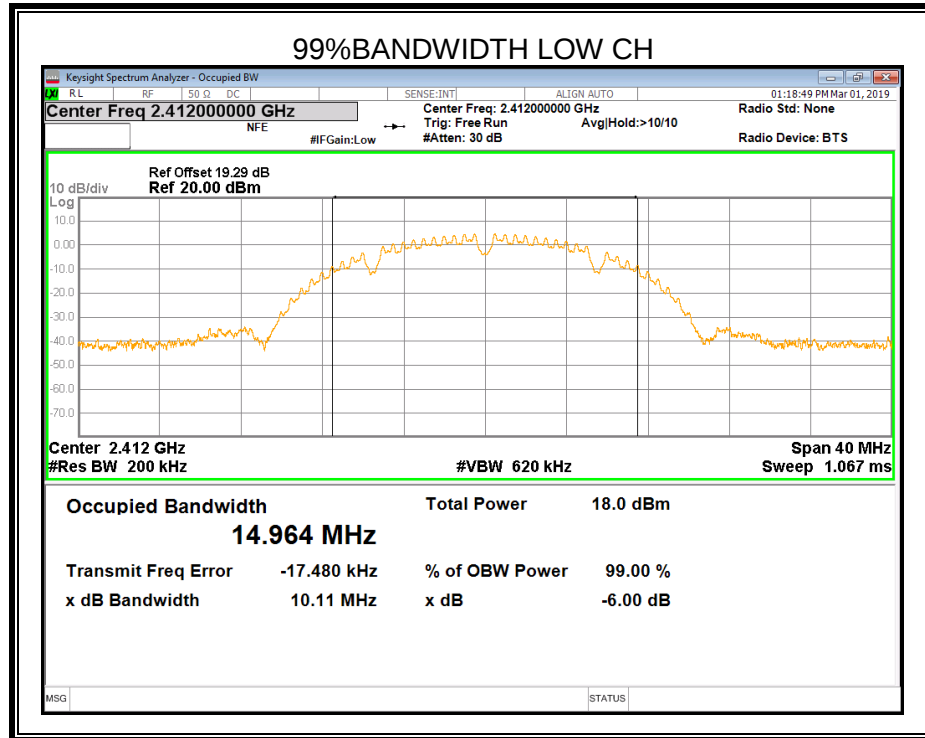



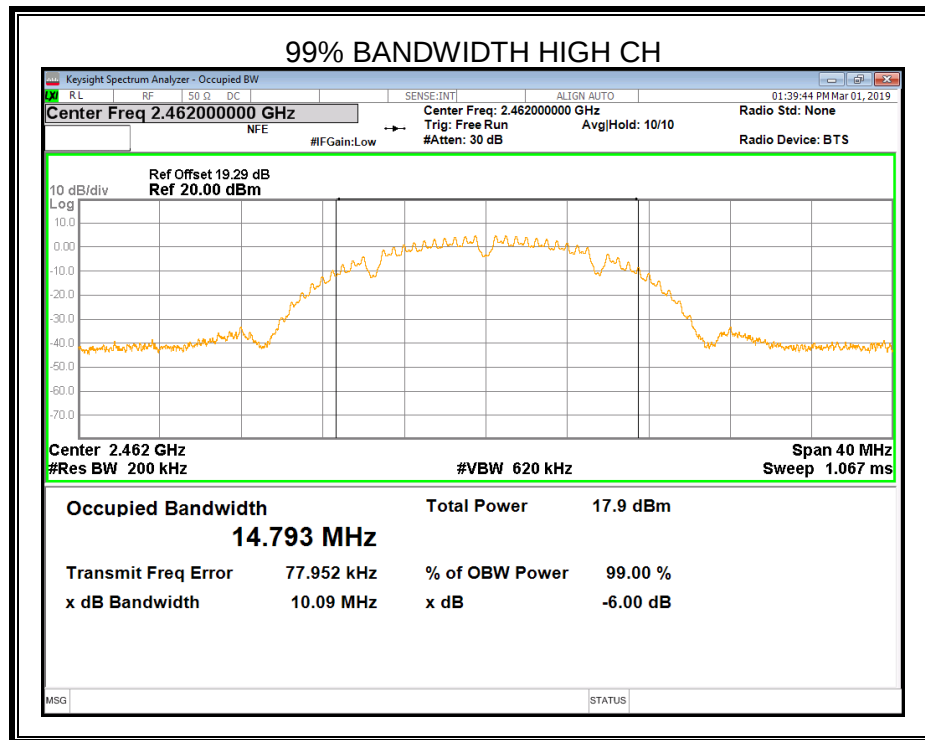







8.2.2. 802.11g MODE

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	16.55	16.616	≥500	Pass
Middle	16.48	16.557	≥500	Pass
High	16.46	16.562	≥500	Pass

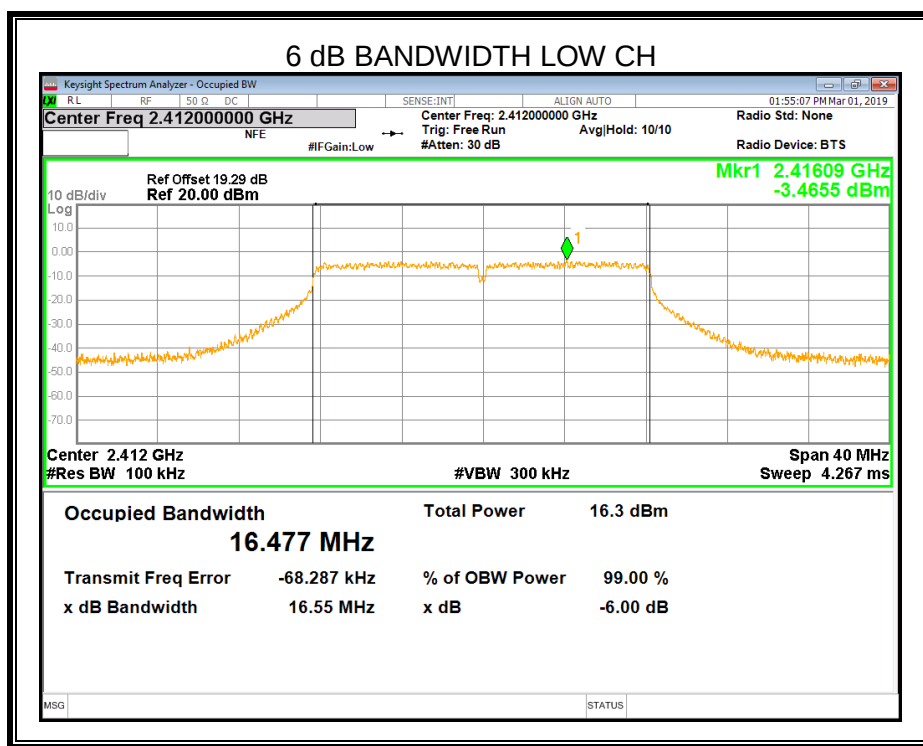

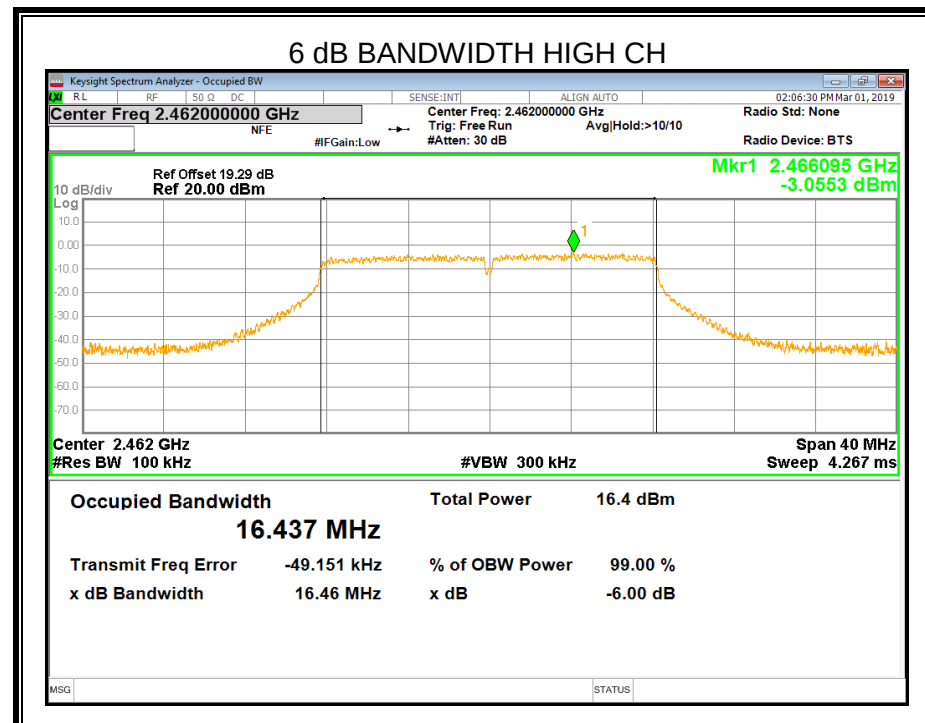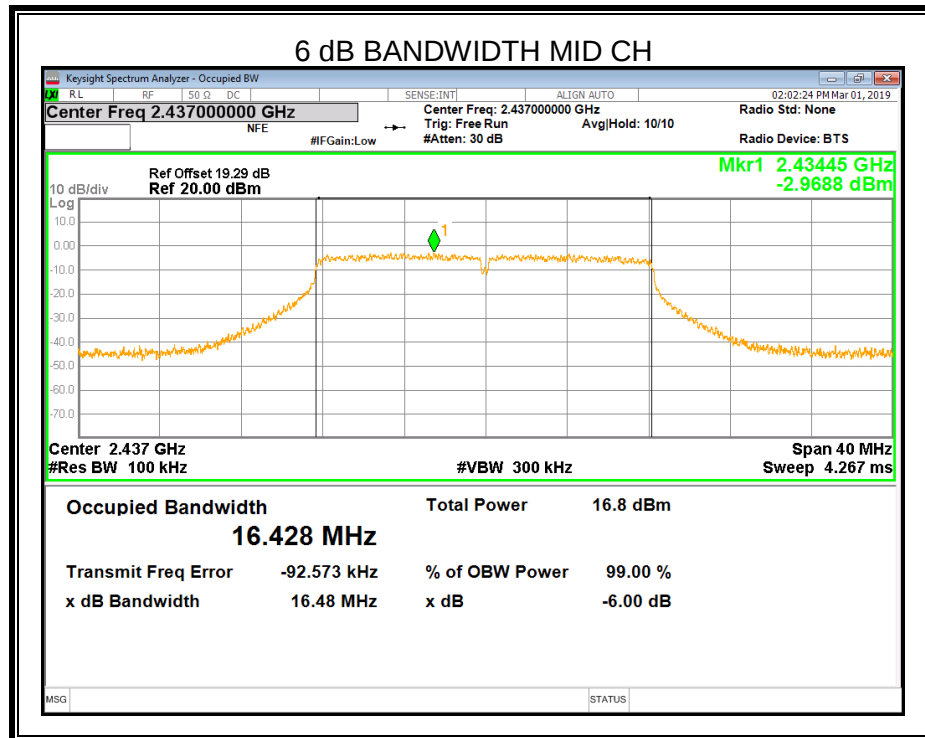

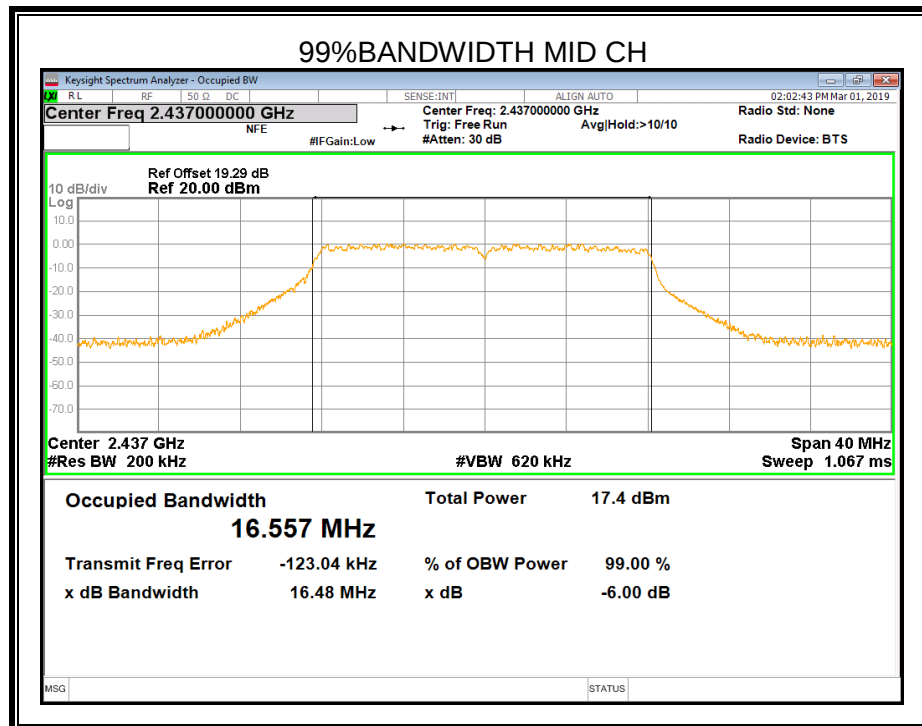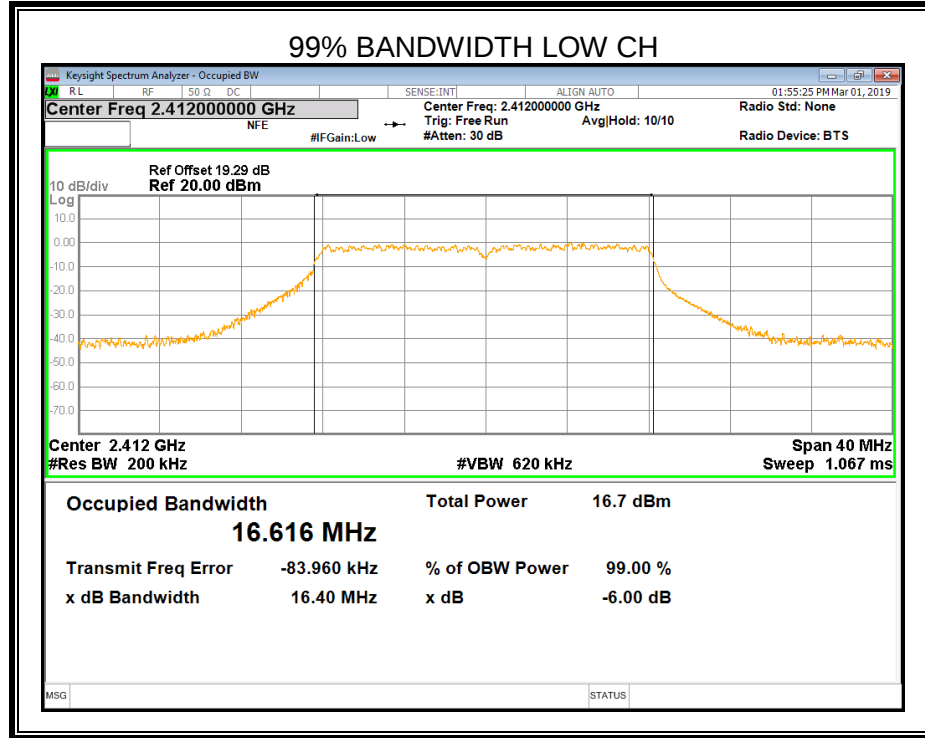



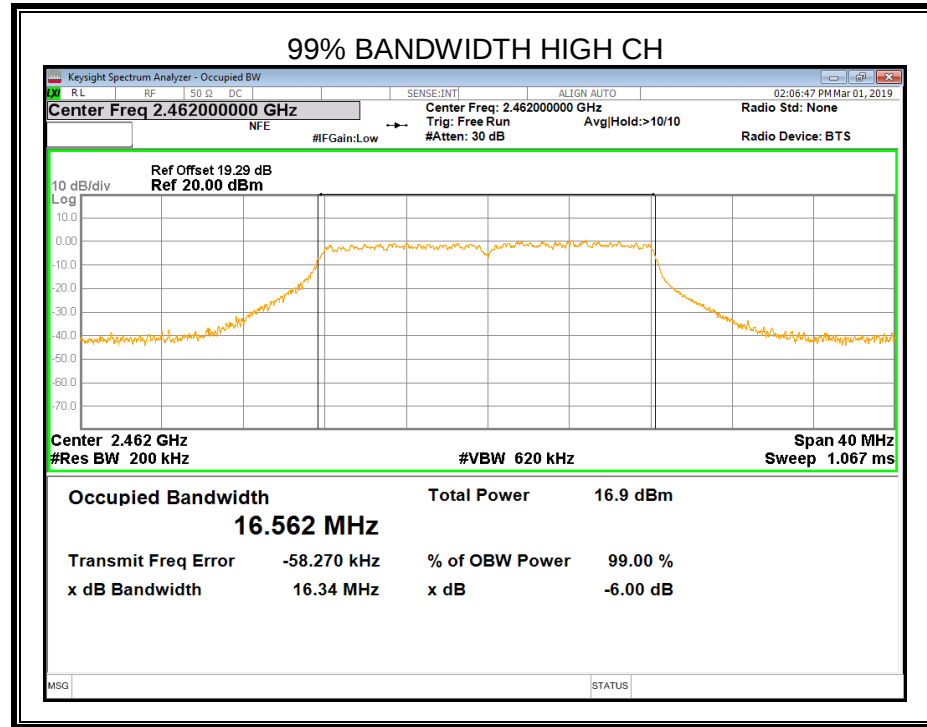







8.2.3. 802.11n HT20 MODE

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	17.79	17.790	≥500	Pass
Middle	17.68	17.700	≥500	Pass
High	17.70	17.722	≥500	Pass

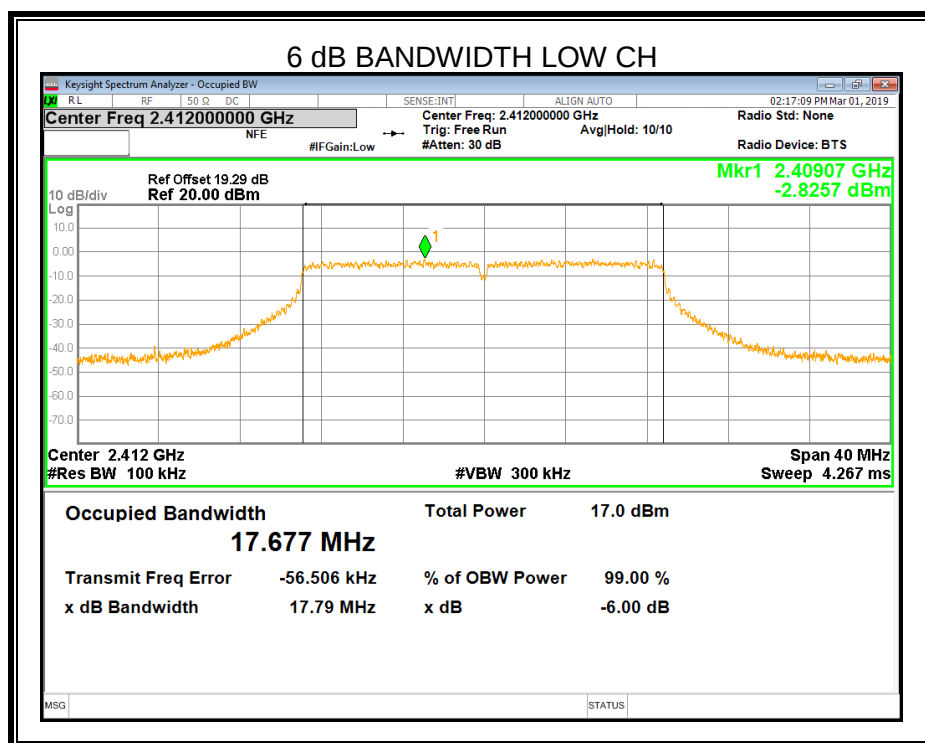

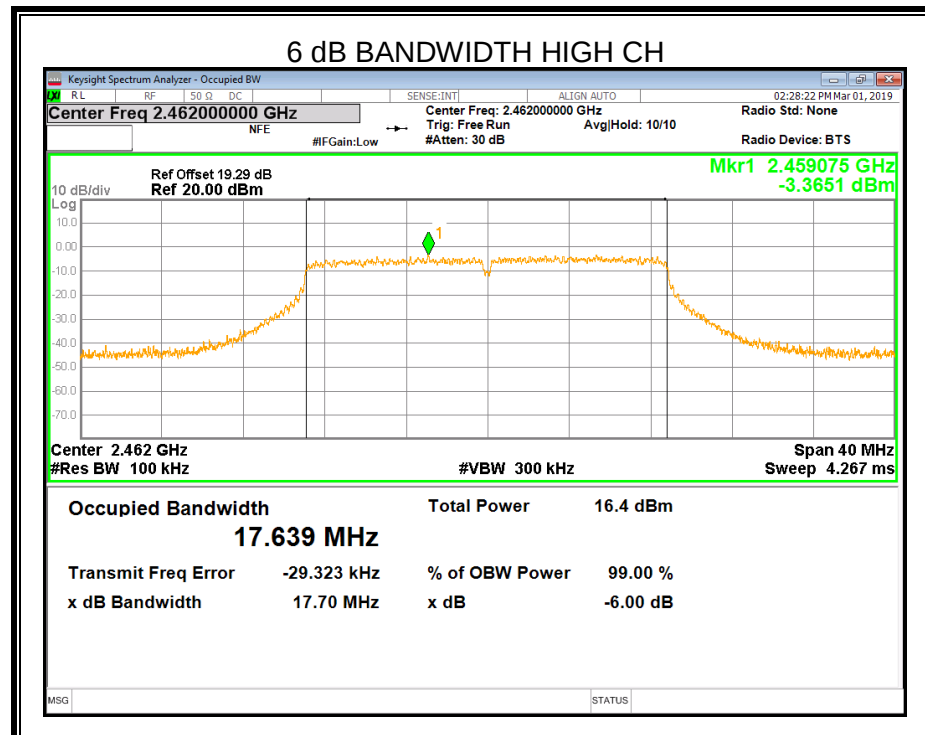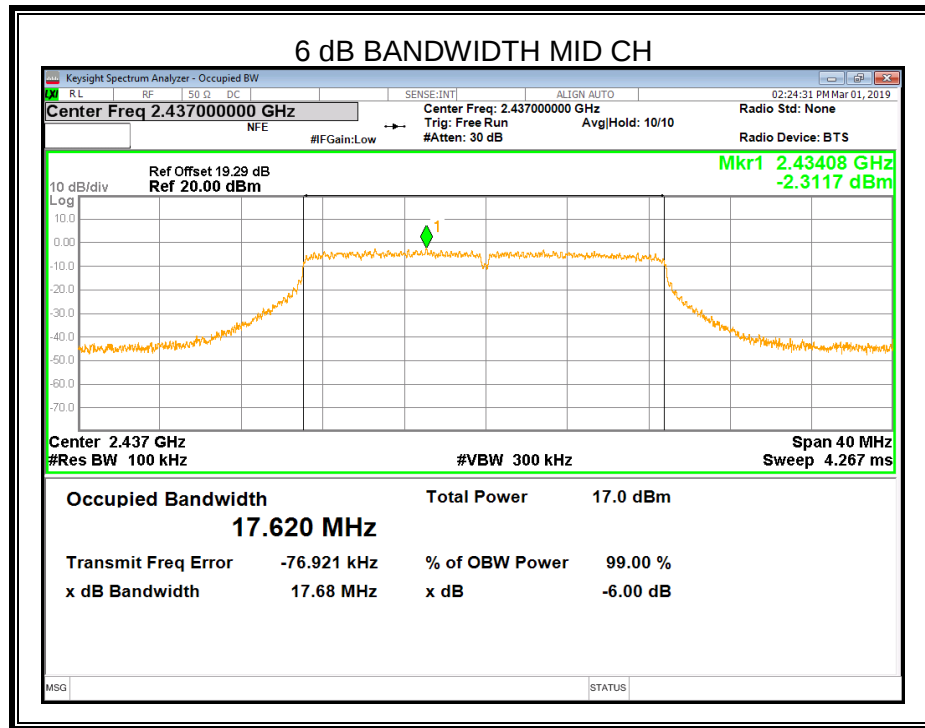

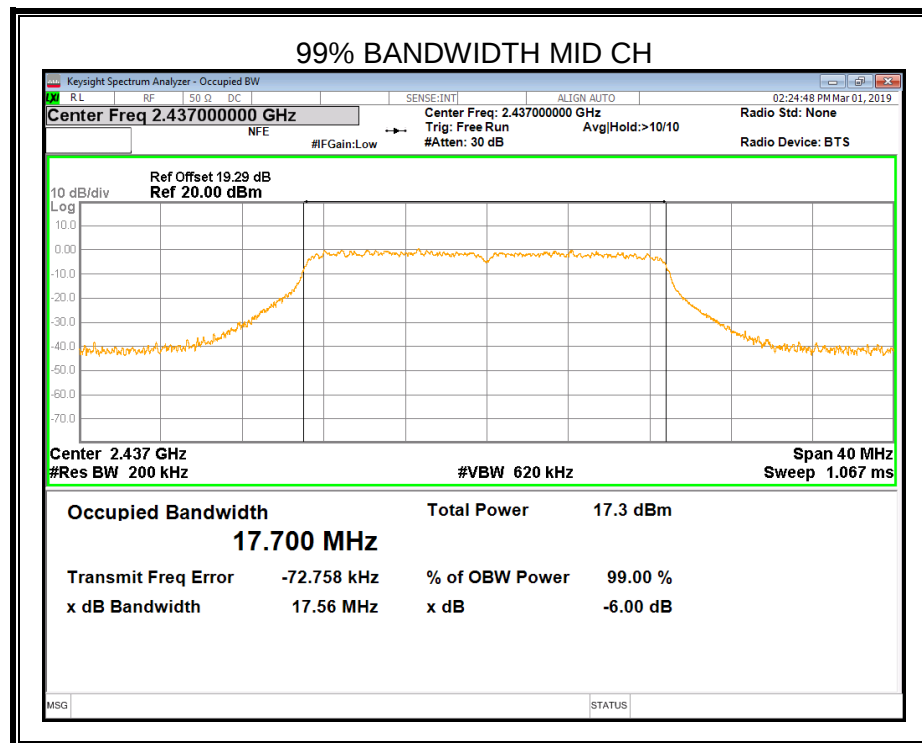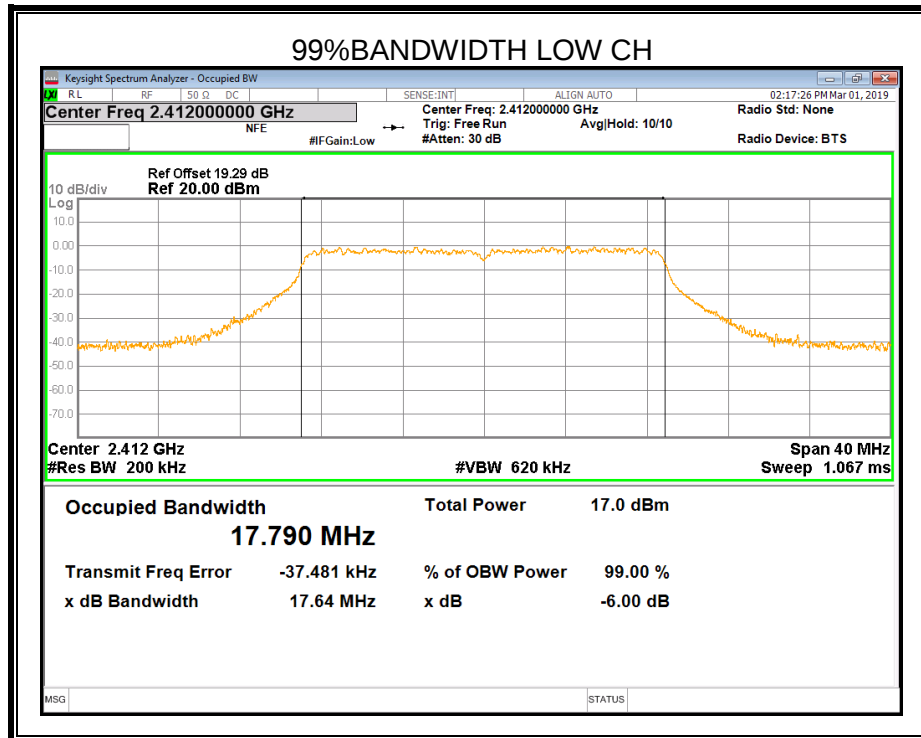

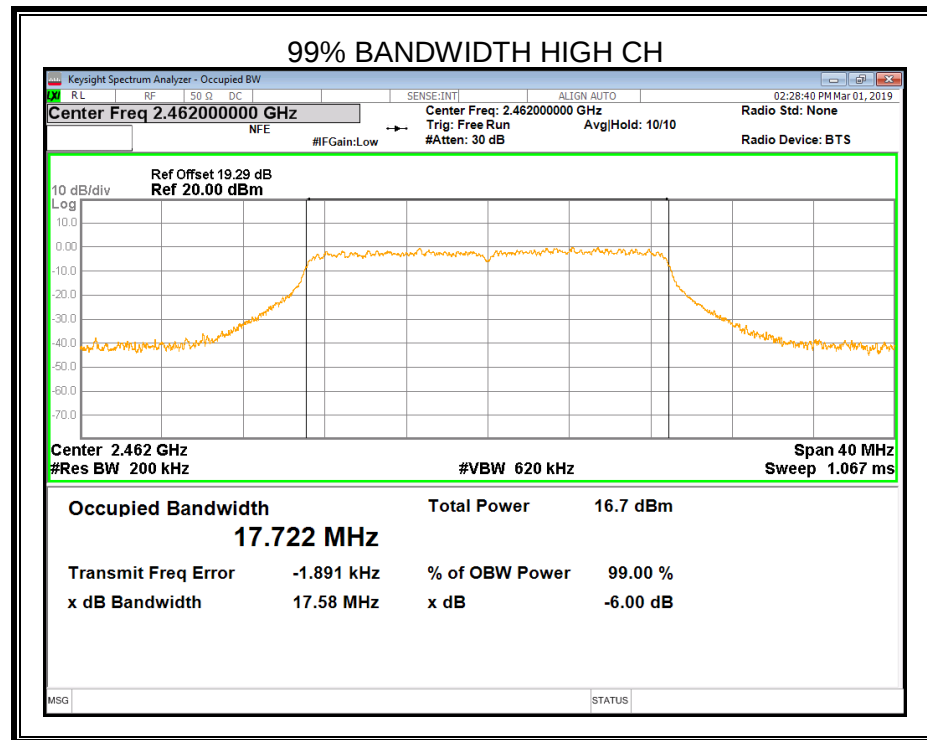



8.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure the power of each channel.
Peak Detector use for Peak result.
AVG Detector use for AVG result.

TEST SETUP

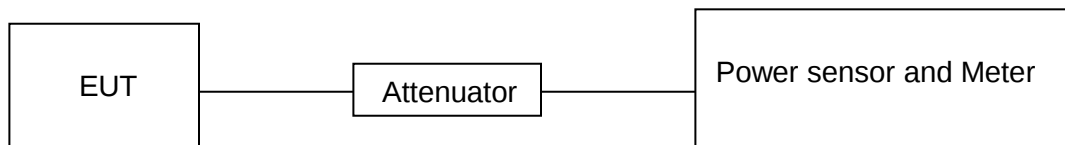

TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz



RESULTS

8.3.1. 802.11b MODE

Test Channel	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(dBm)	(dBm)	dBm
Low	15.37	13.18	30
Middle	16.22	13.94	30
High	15.39	13.16	30

8.3.2. 802.11g MODE

Test Channel	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(dBm)	(dBm)	dBm
Low	17.15	10.45	30
Middle	17.87	11.20	30
High	17.35	10.68	30

8.3.3. 802.11n HT20 MODE

Test Channel	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(dBm)	(dBm)	dBm
Low	17.80	10.66	30
Middle	18.24	11.21	30
High	17.67	10.65	30



8.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT


Temperature	22.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz



RESULTS



8.4.1. 802.11b MODE

Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-16.479	8	PASS
Middle	-14.914	8	PASS
High	-15.829	8	PASS

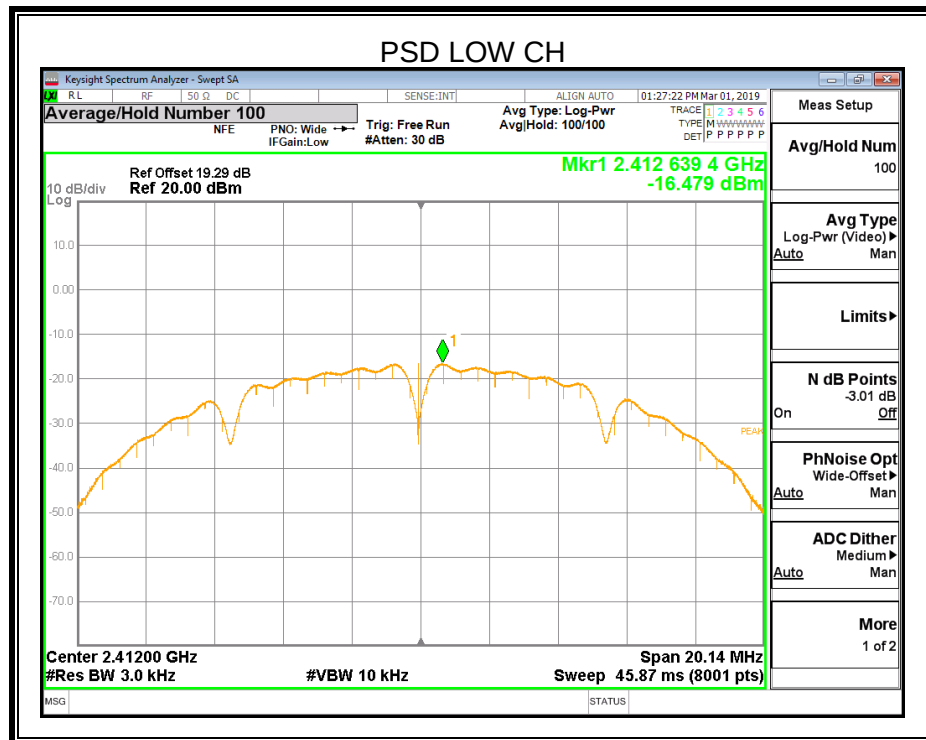


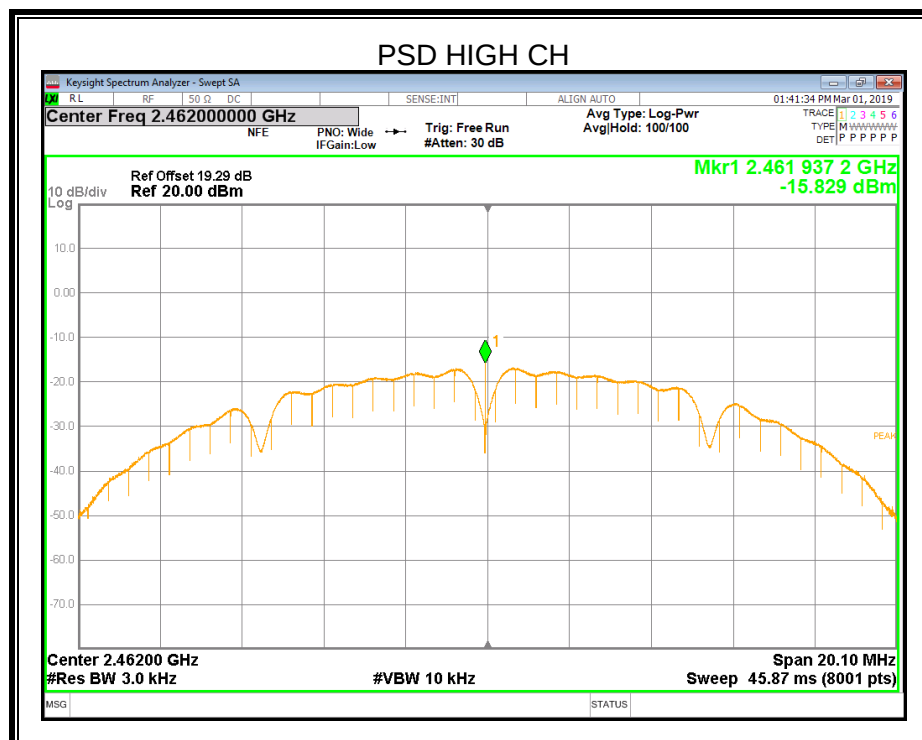
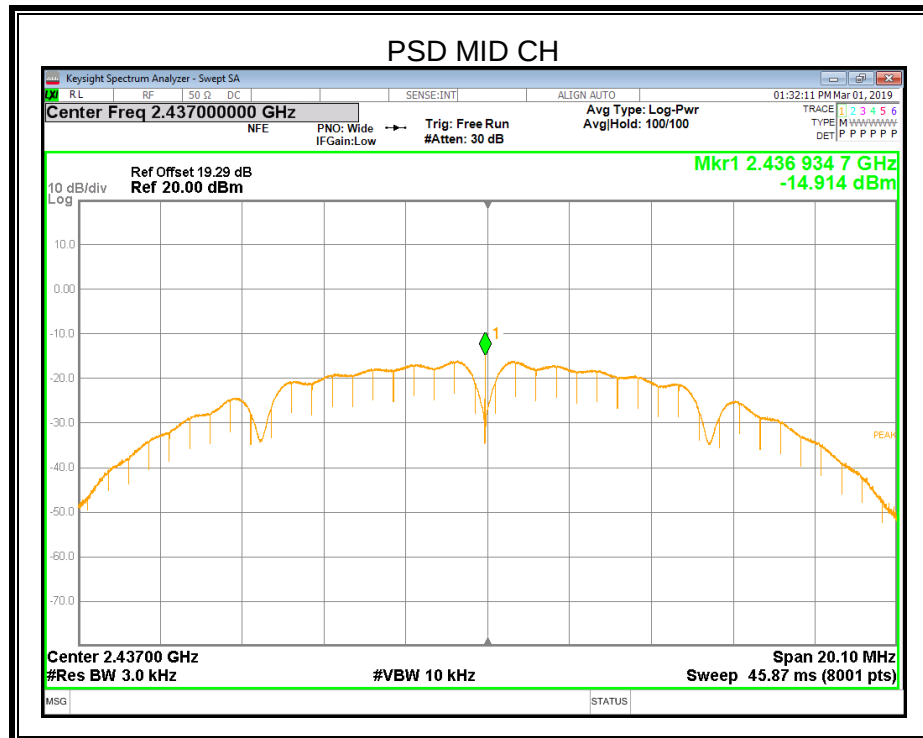




8.4.2. 802.11g MODE


Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-16.340	8	PASS
Middle	-15.277	8	PASS
High	-15.918	8	PASS


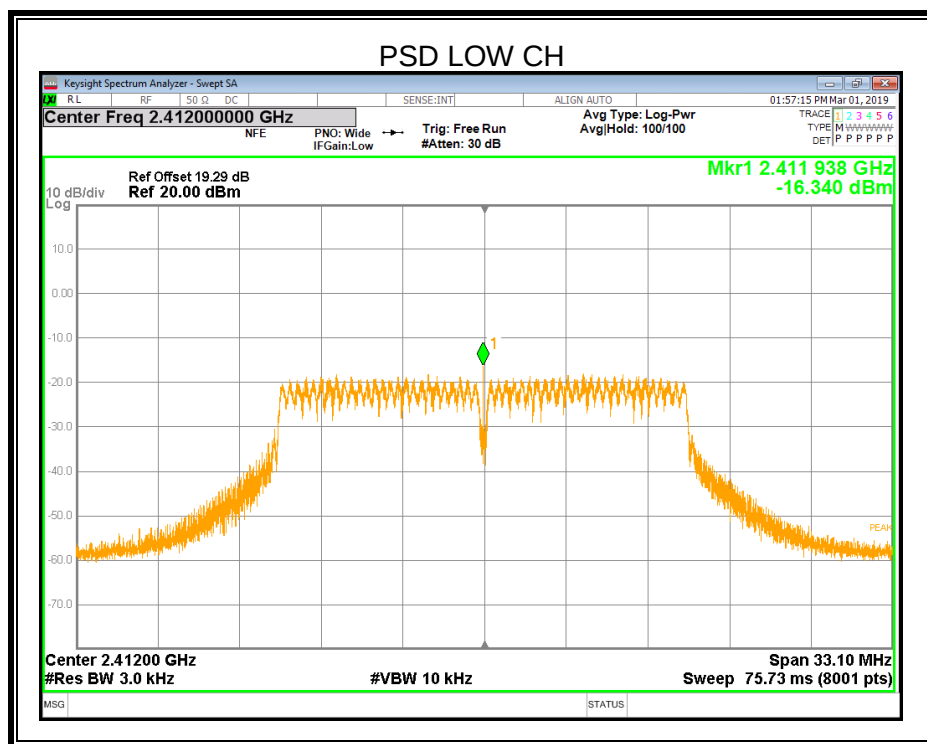


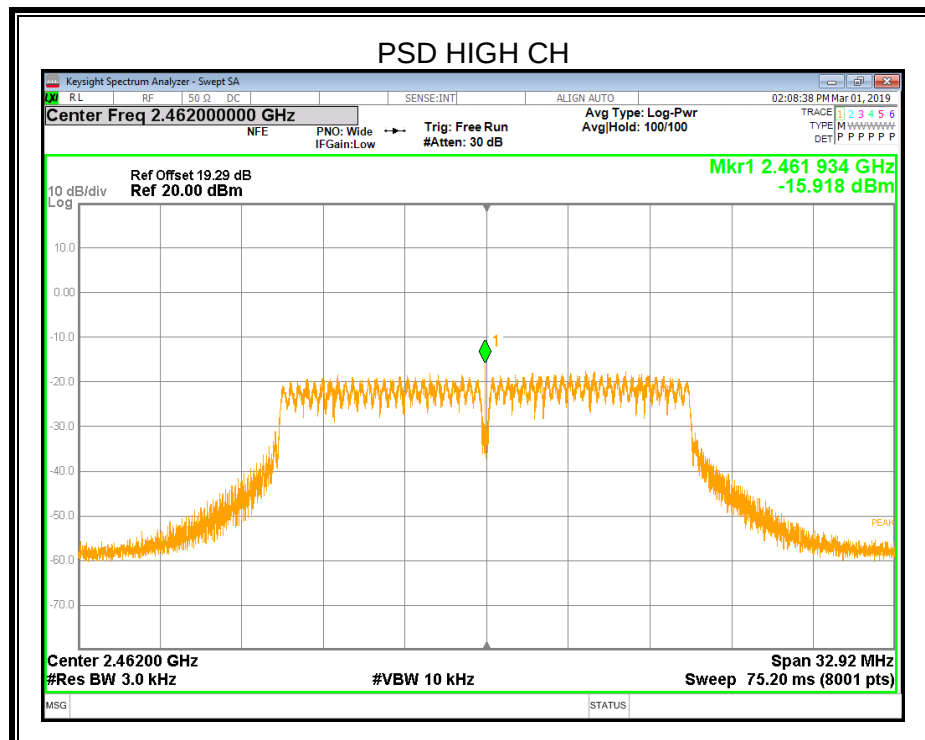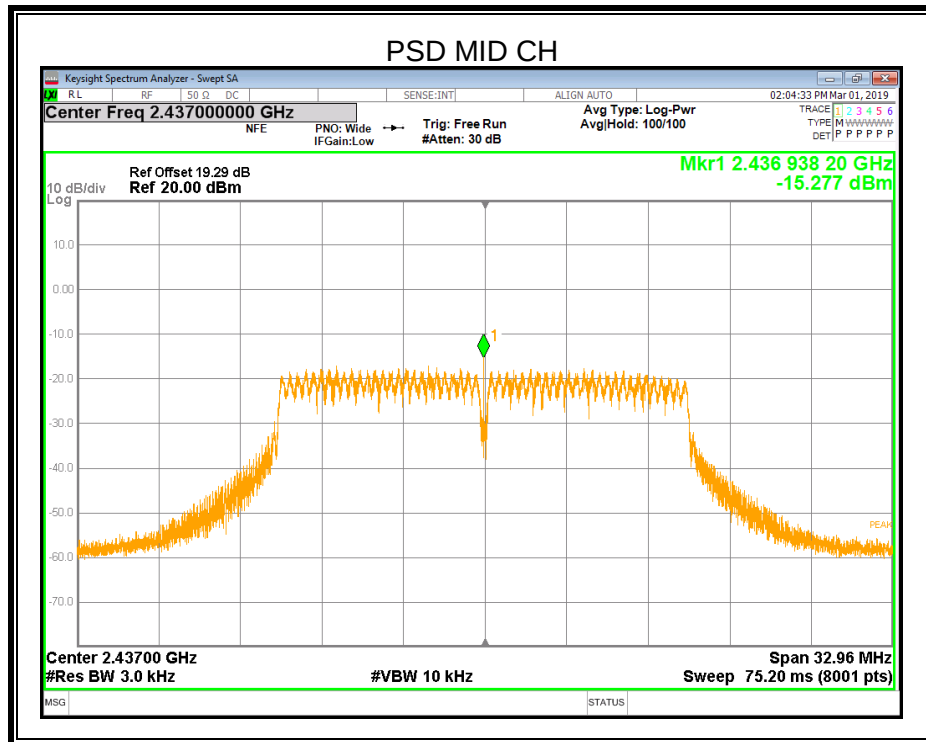

**8.4.3. 802.11n HT20 MODE**

Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-15.917	8	PASS
Middle	-14.753	8	PASS
High	-15.426	8	PASS

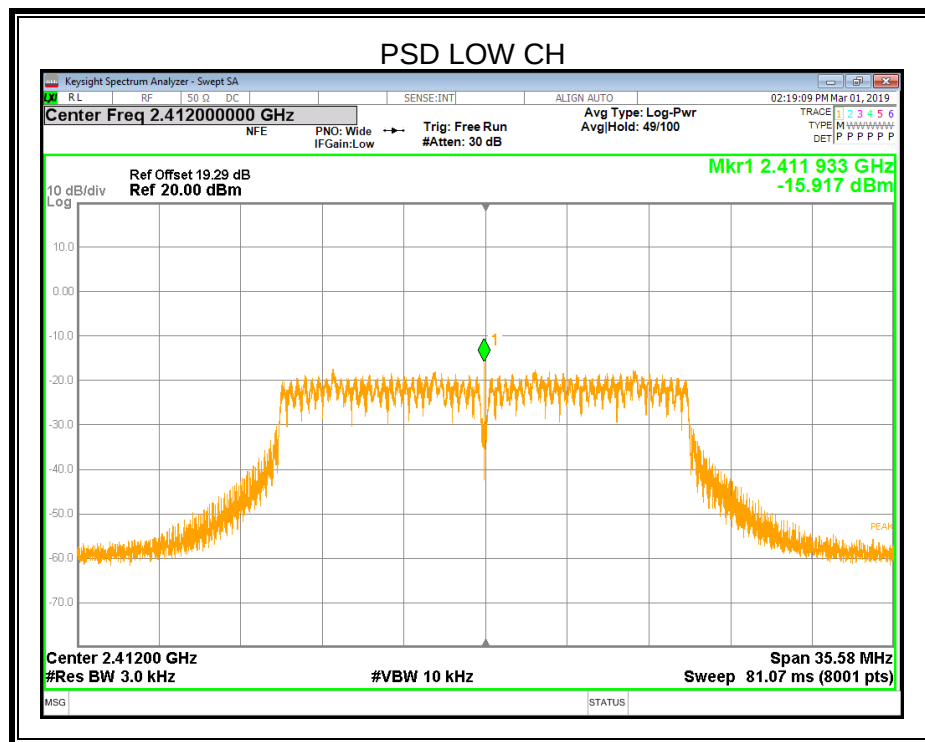

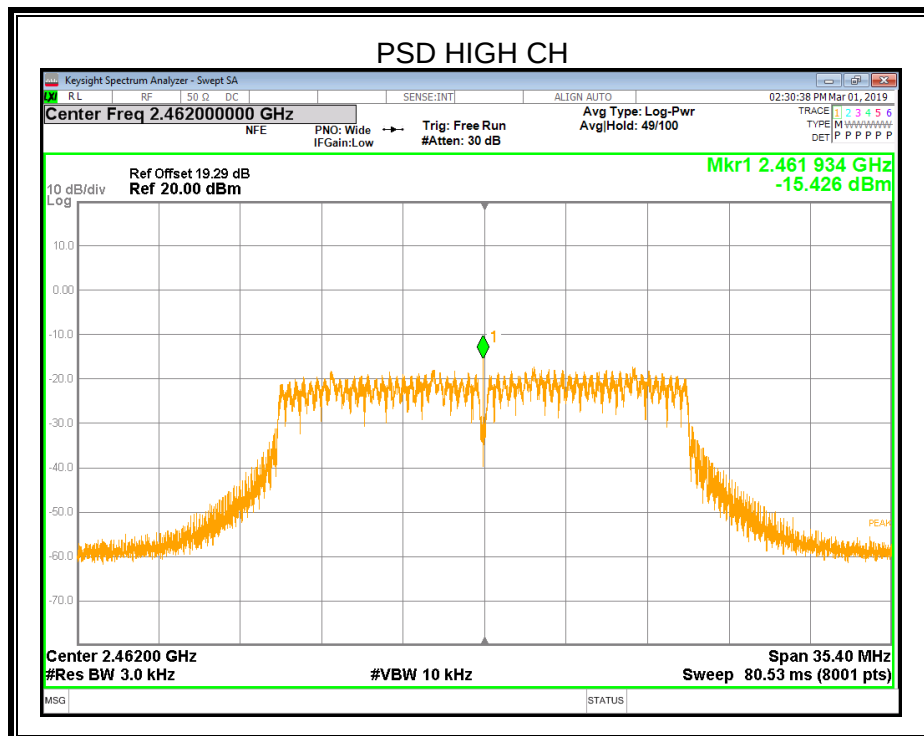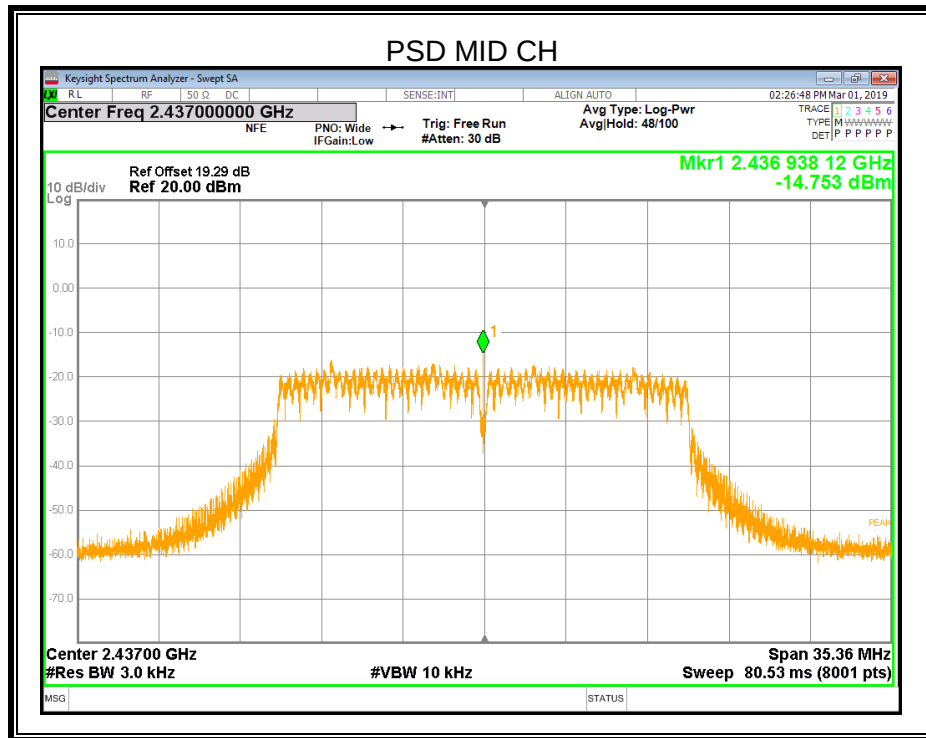



8.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.



TEST SETUP

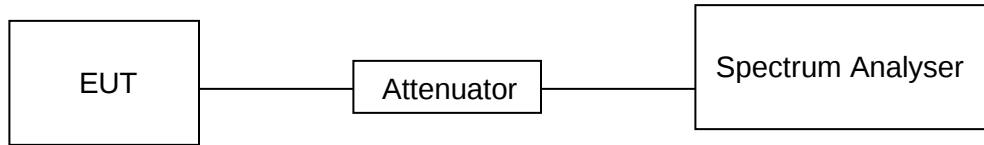


TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz


RESULTS

8.5.1. 802.11b MODE

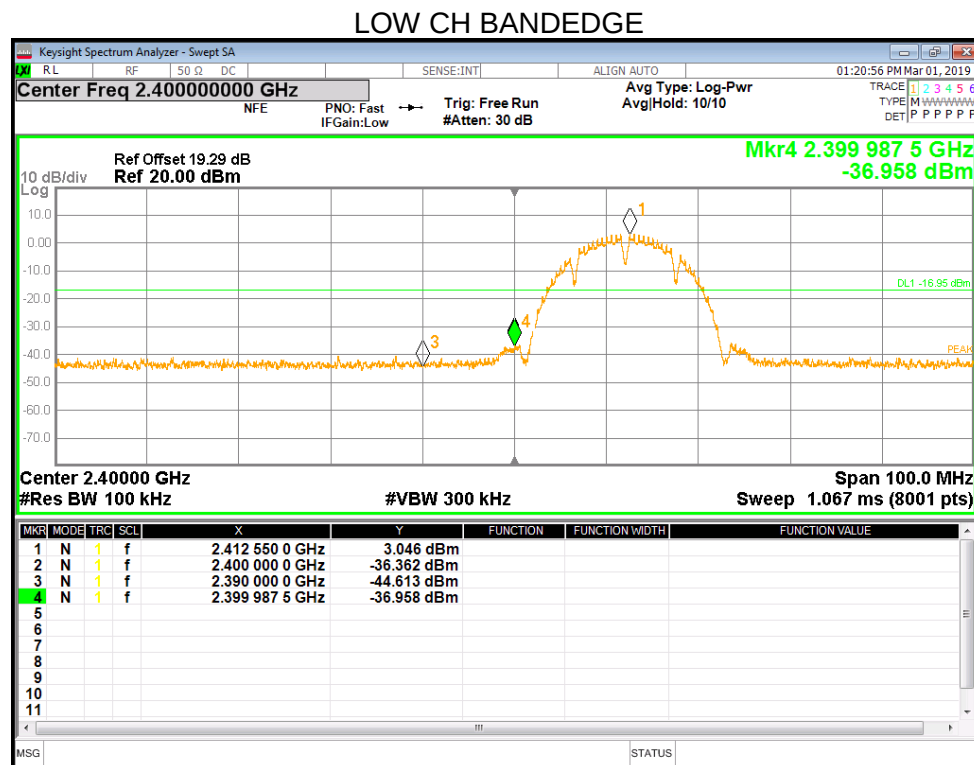




LOW CH SPURIOUS EMISSIONS REFERENCE

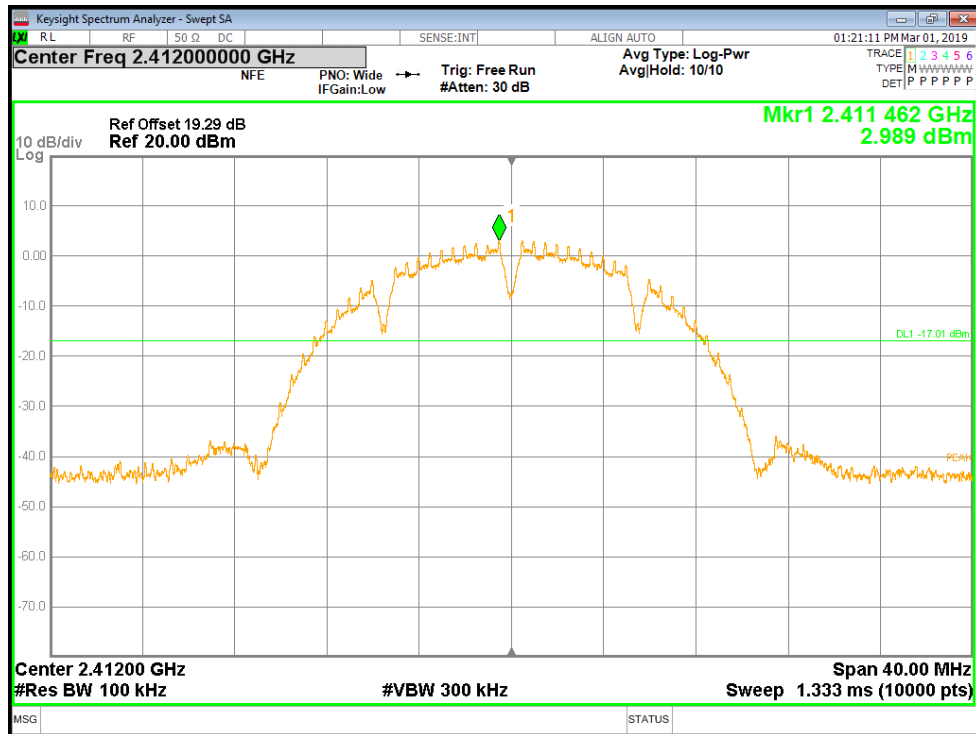


LOW CH SPURIOUS EMISSIONS 30M-10G

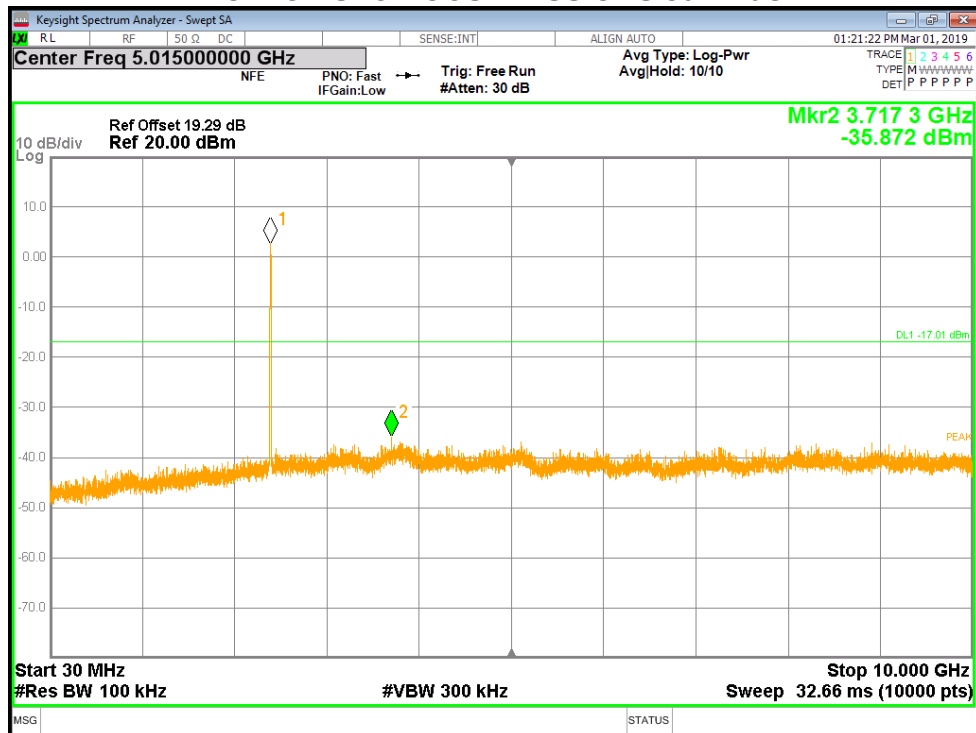




LOW CH SPURIOUS EMISSIONS 10G-26G

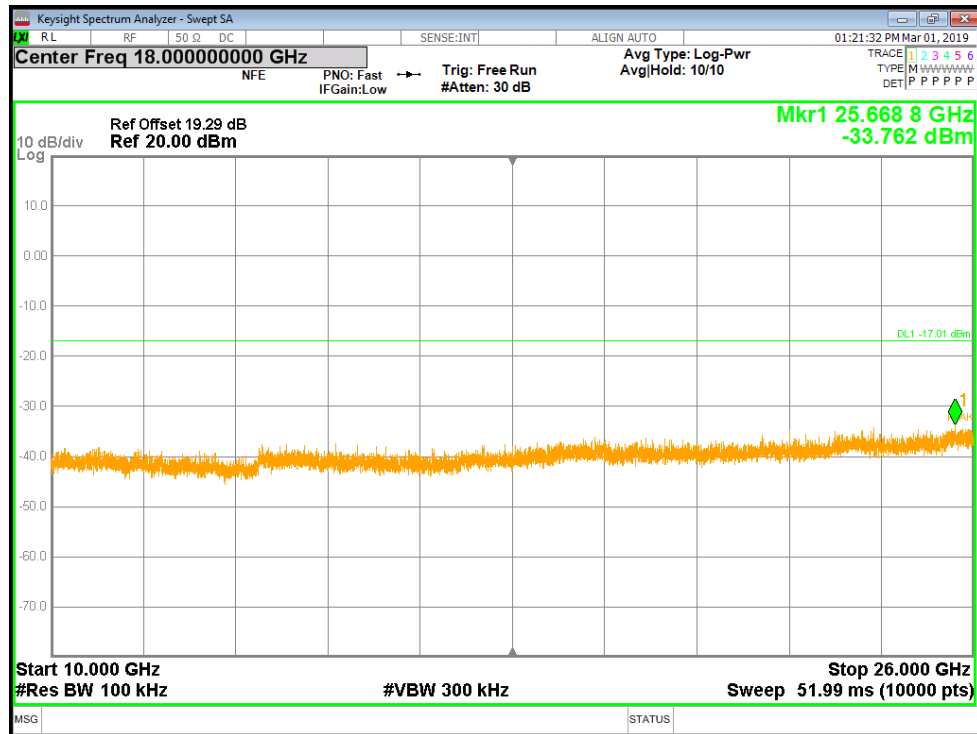


MID CH SPURIOUS EMISSIONS REFERENCE

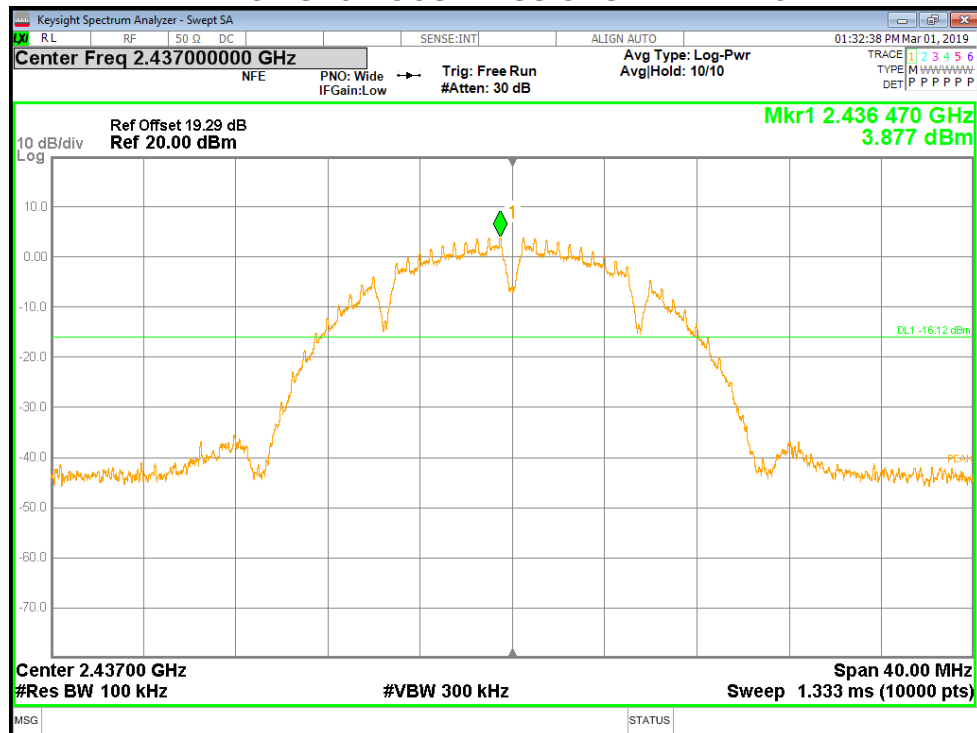




MID CH SPURIOUS EMISSIONS 30M-10G

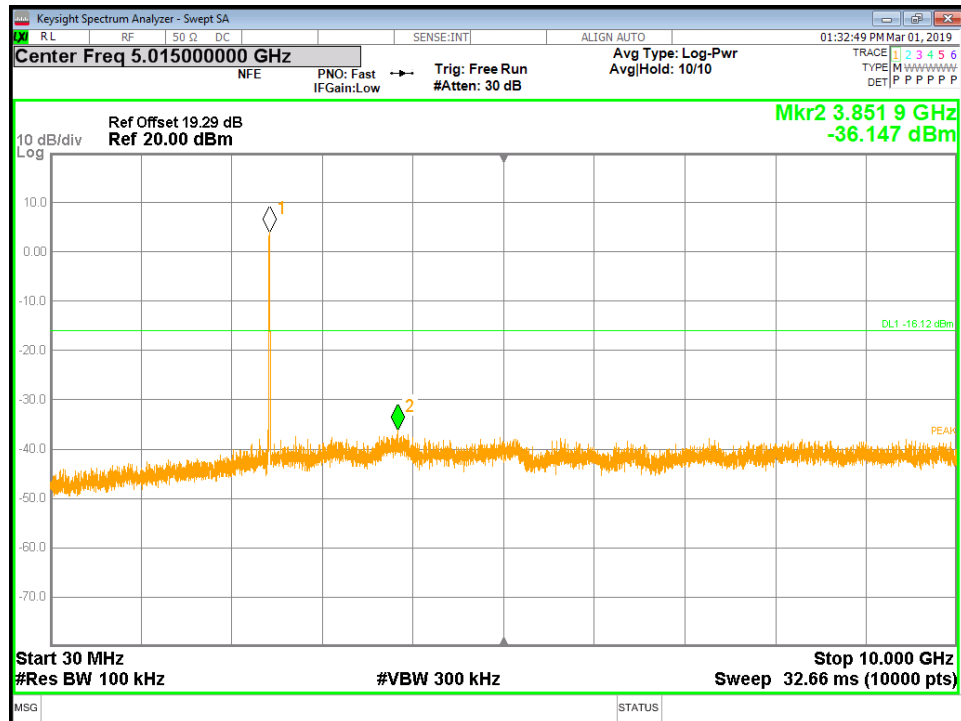


MID CH SPURIOUS EMISSIONS 10G-26G

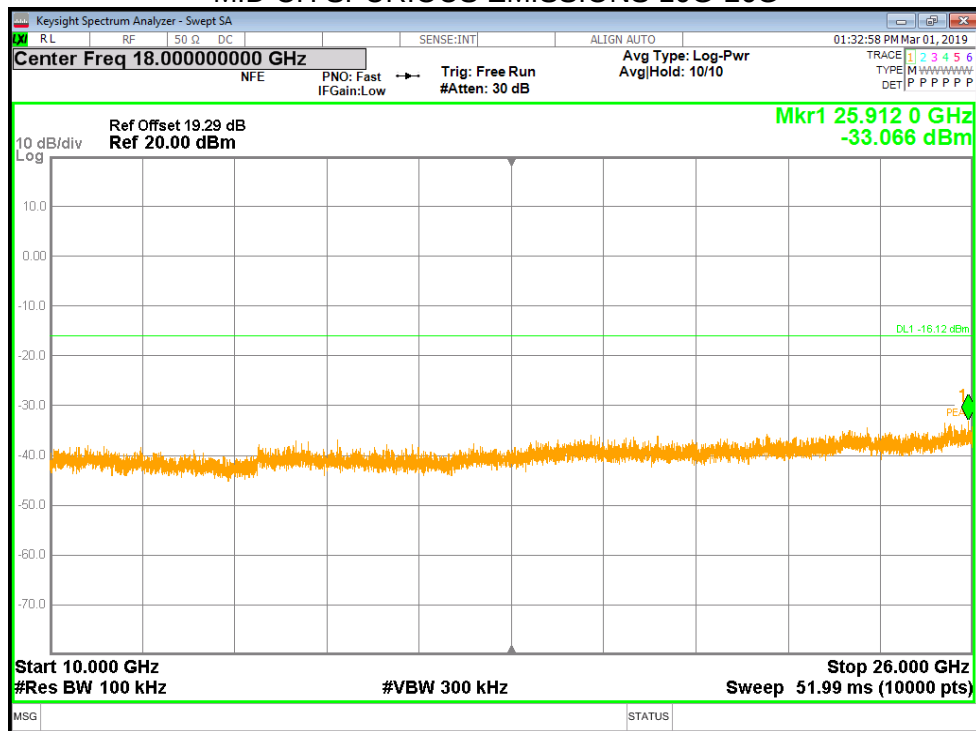




HIGH CH BANDEDGE

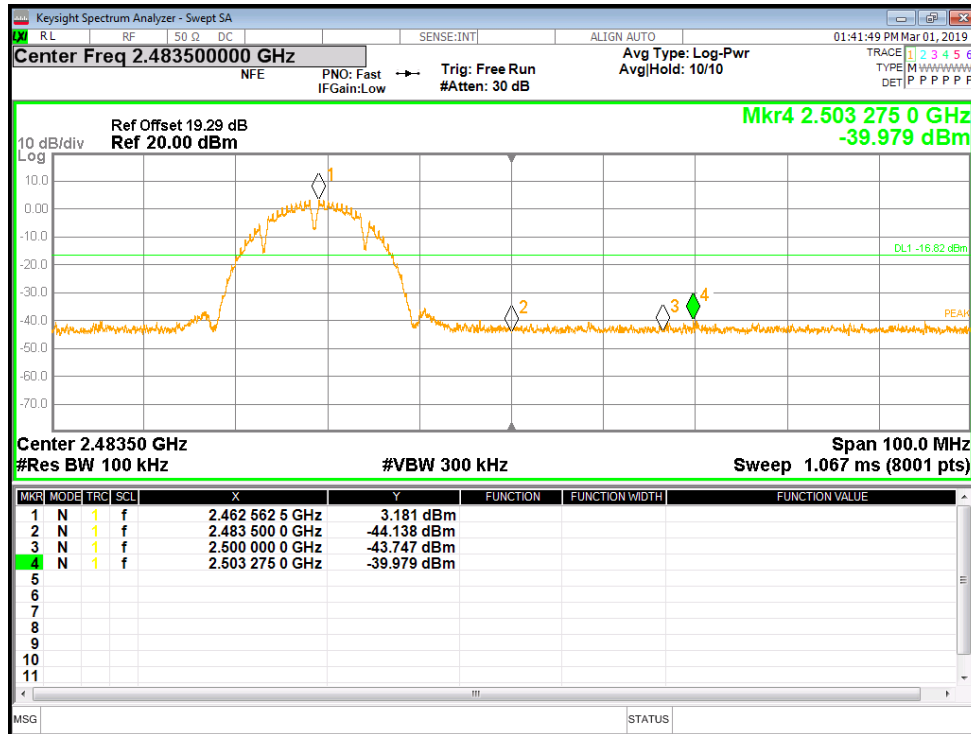


HIGH CH SPURIOUS EMISSIONS REFERENCE

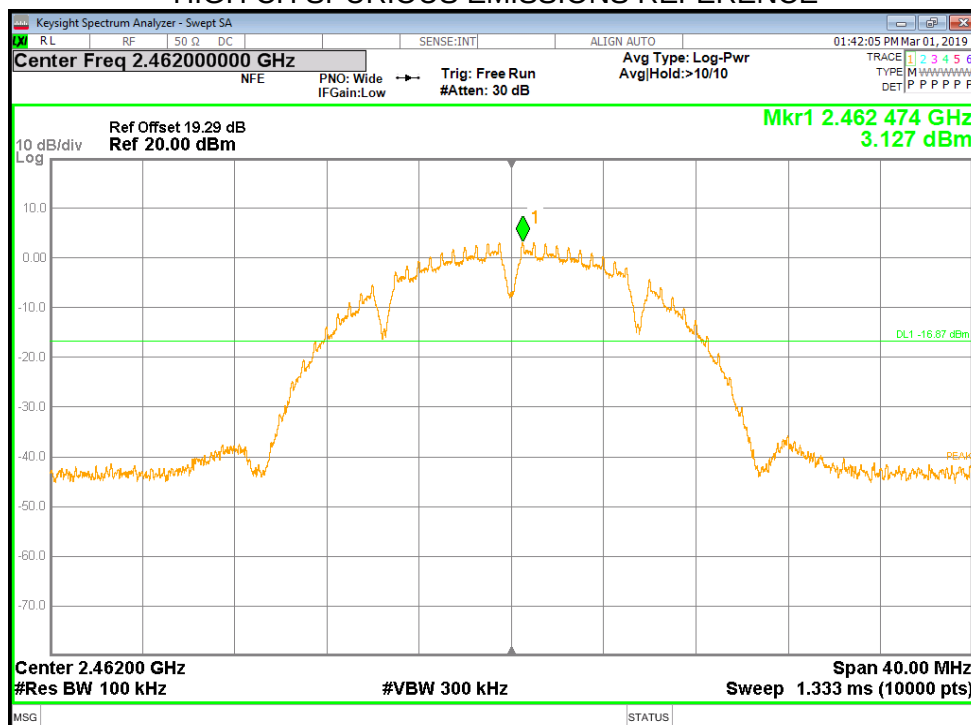




HIGH CH SPURIOUS EMISSIONS 30M-10G

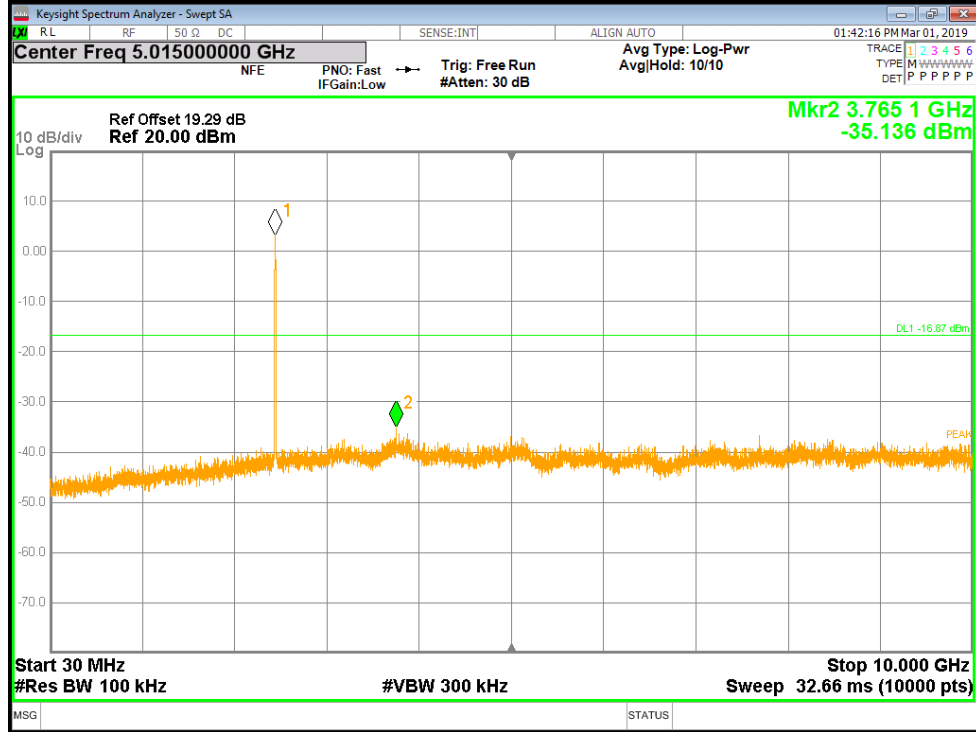


HIGH CH SPURIOUS EMISSIONS 10G-26G

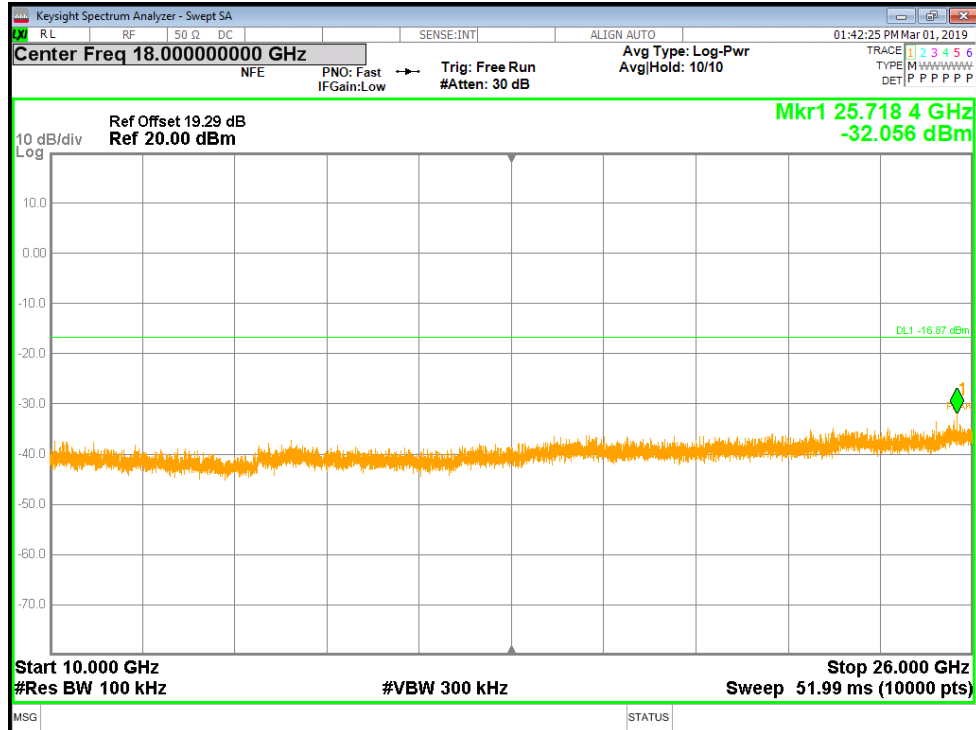




8.5.2. 802.11g MODE

LOW CH BANDEDGE

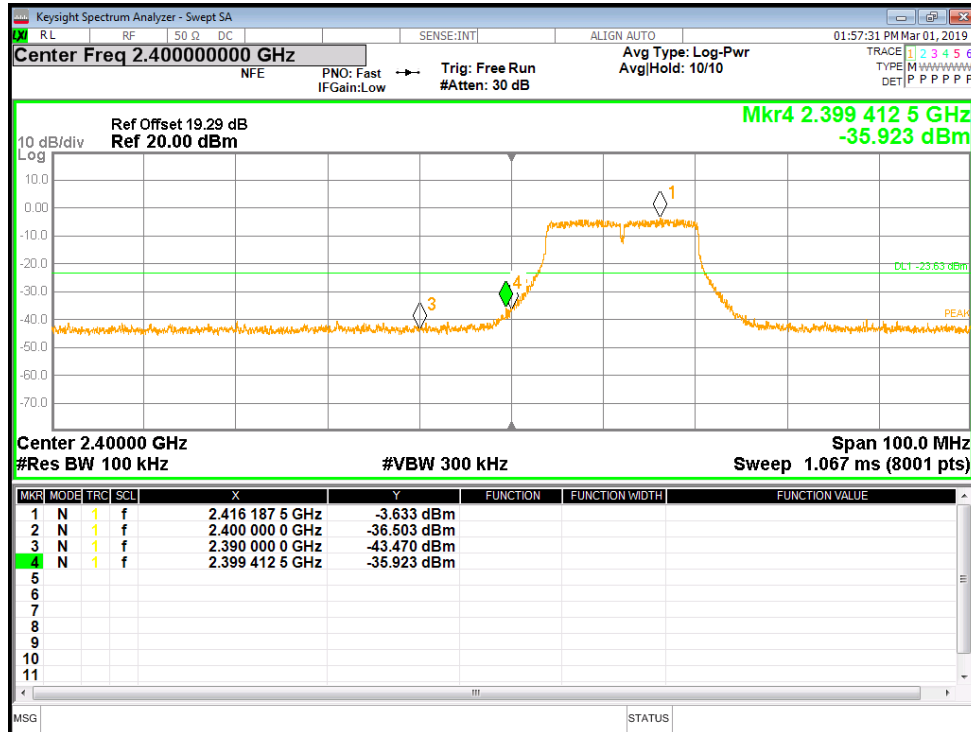


LOW CH SPURIOUS EMISSIONS REFERENCE

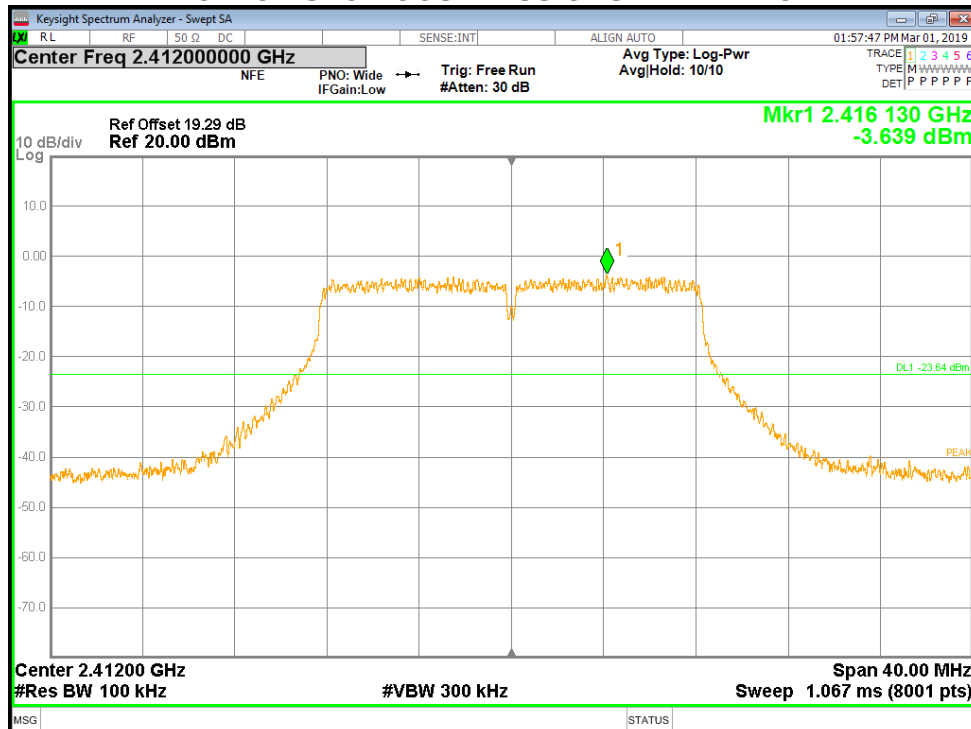




LOW CH SPURIOUS EMISSIONS 30M-10G

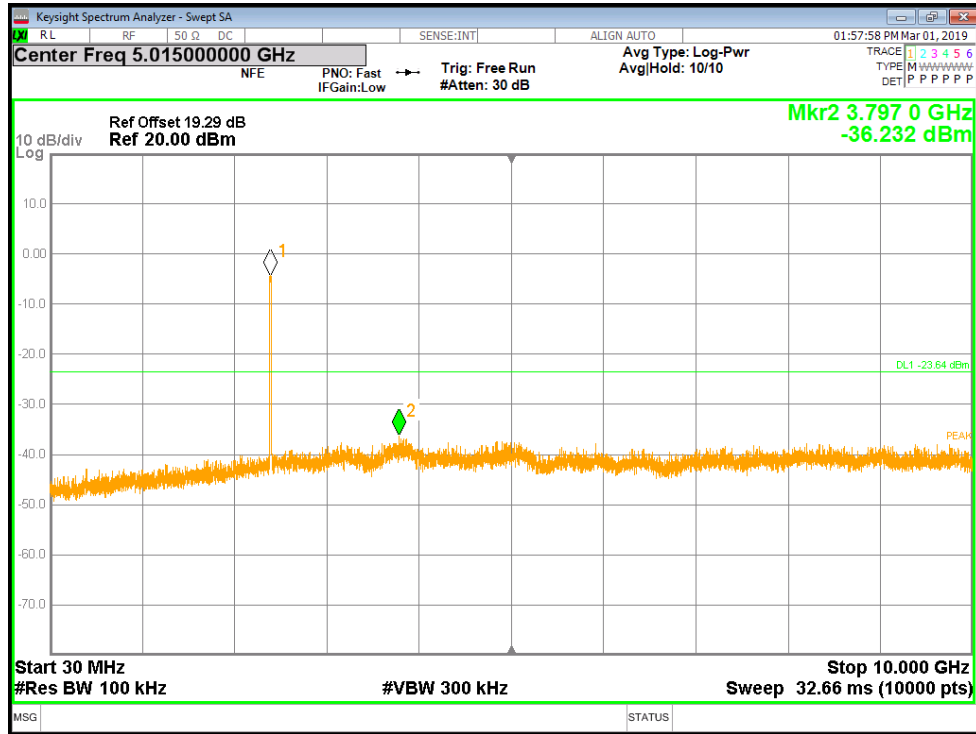


LOW CH SPURIOUS EMISSIONS 10G-26G

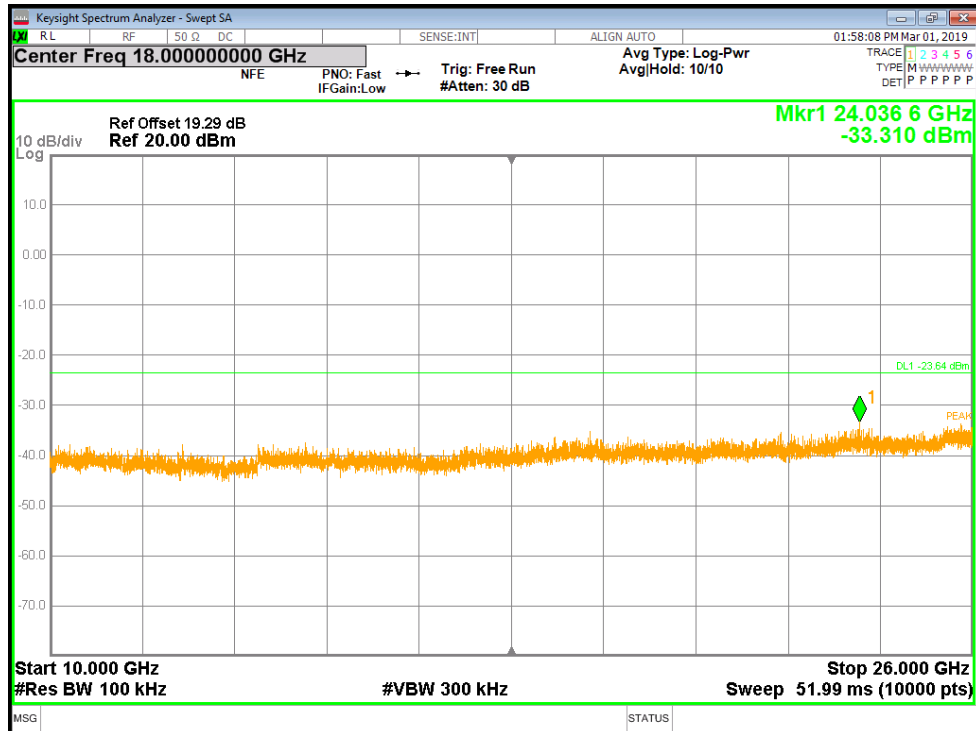




MID CH SPURIOUS EMISSIONS REFERENCE

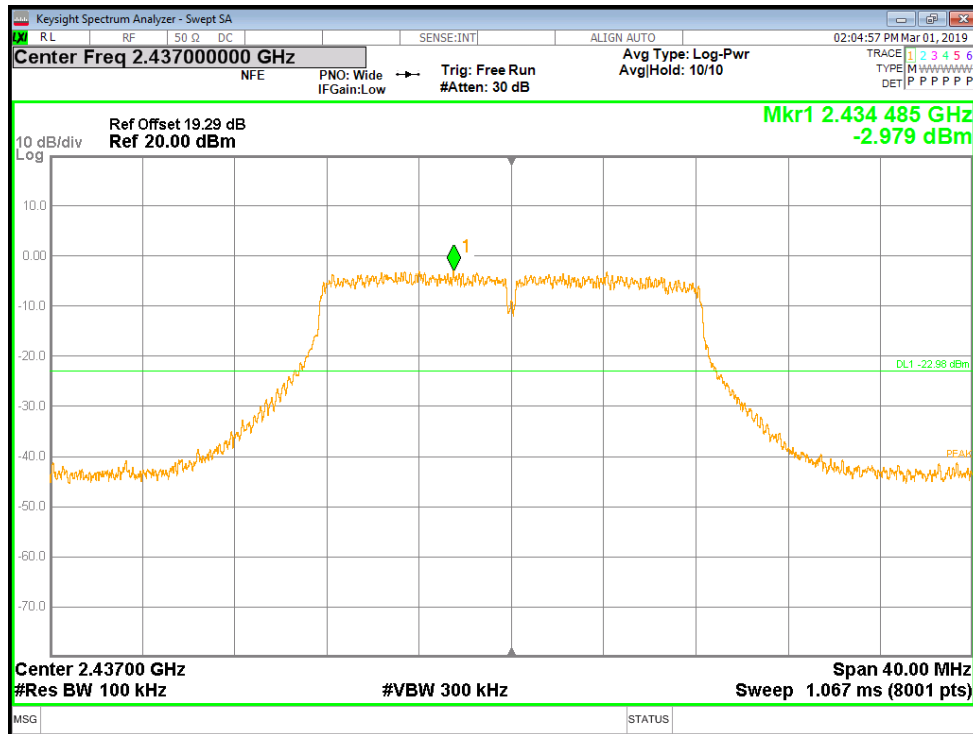


MID CH SPURIOUS EMISSIONS 30M-10G

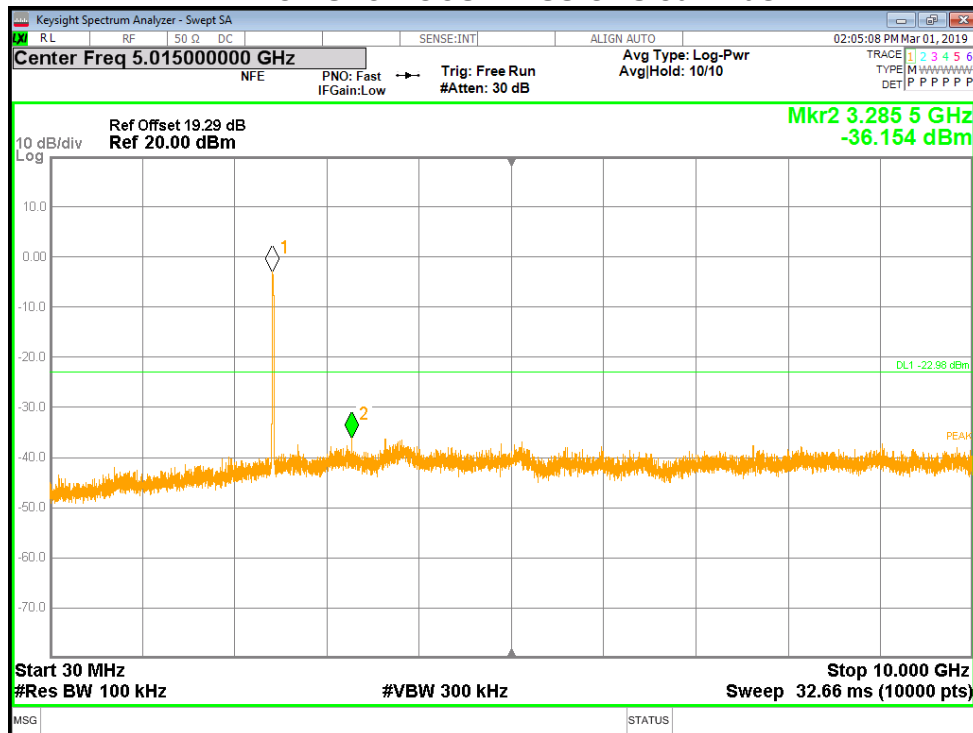




MID CH SPURIOUS EMISSIONS 10G-26G

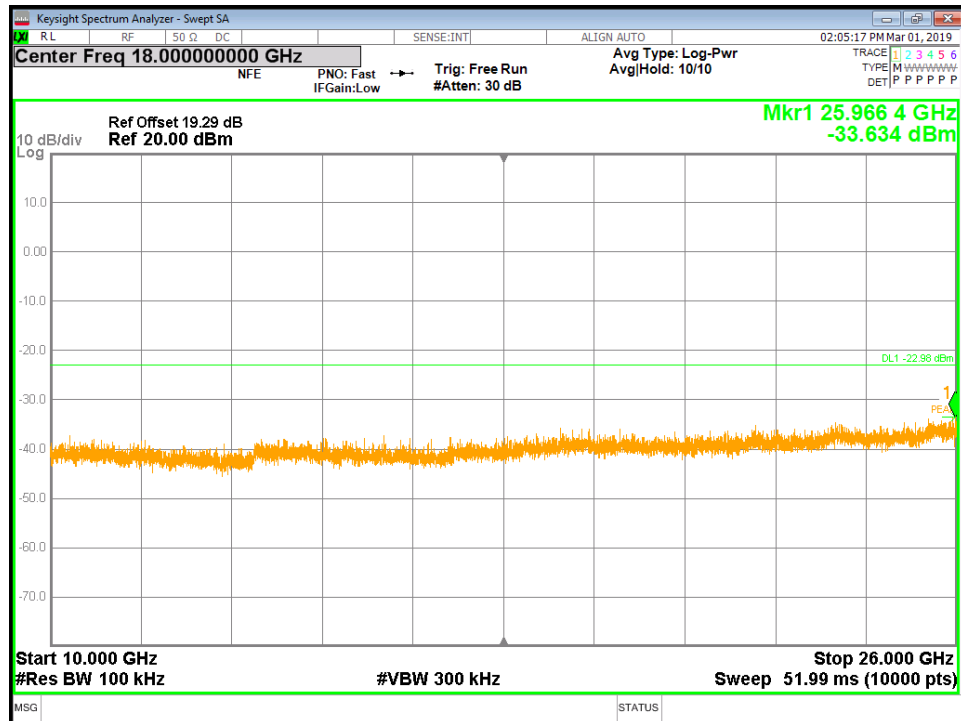


HIGH CH BANDEDGE

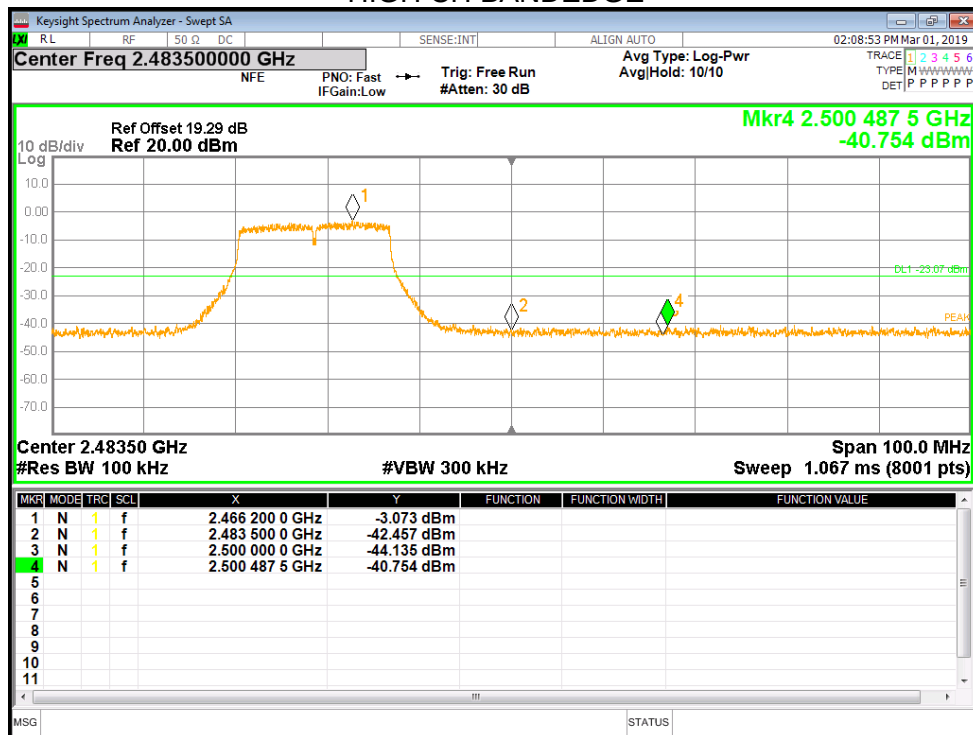




HIGH CH SPURIOUS EMISSIONS REFERENCE

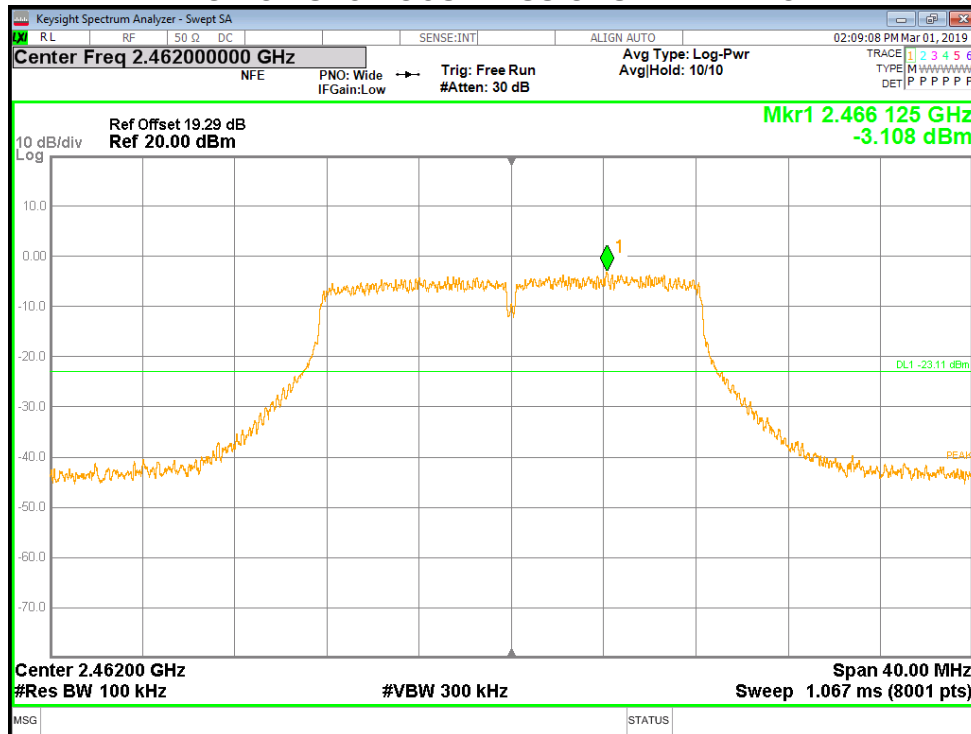


HIGH CH SPURIOUS EMISSIONS 30M-10G

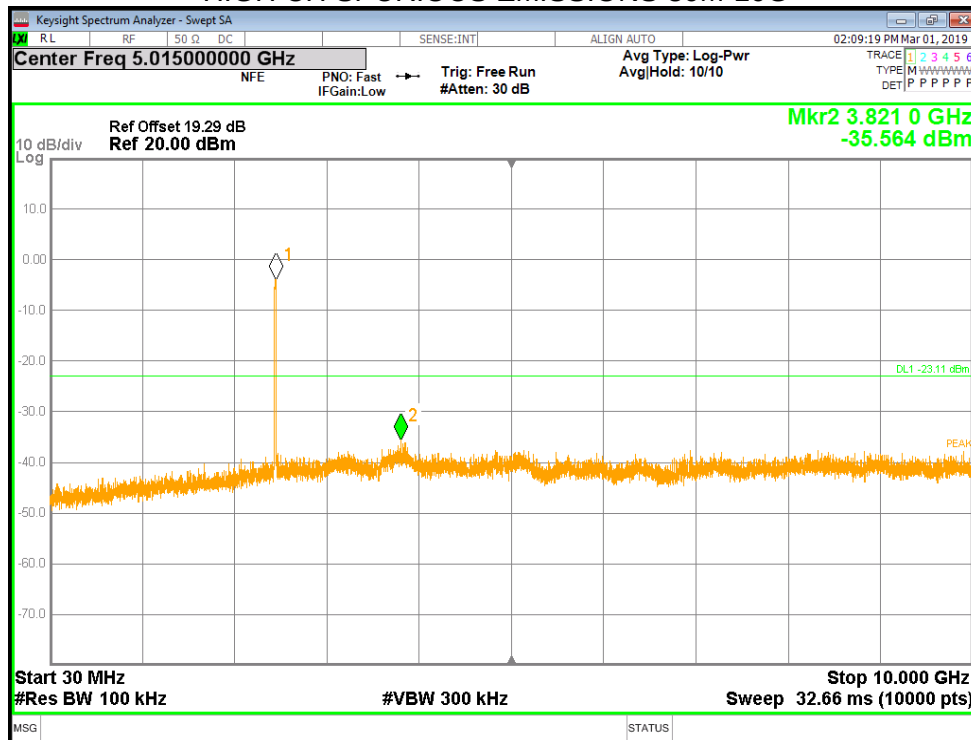




HIGH CH SPURIOUS EMISSIONS 10G-26G

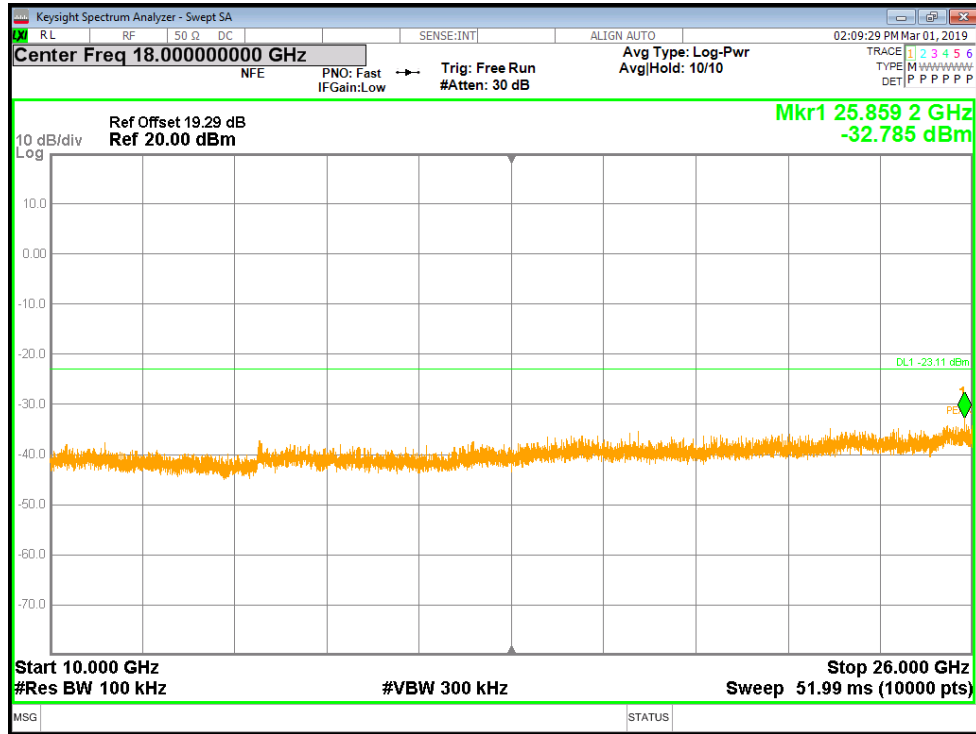




8.5.3. 802.11n HT20 MODE

LOW CH BANDEDGE

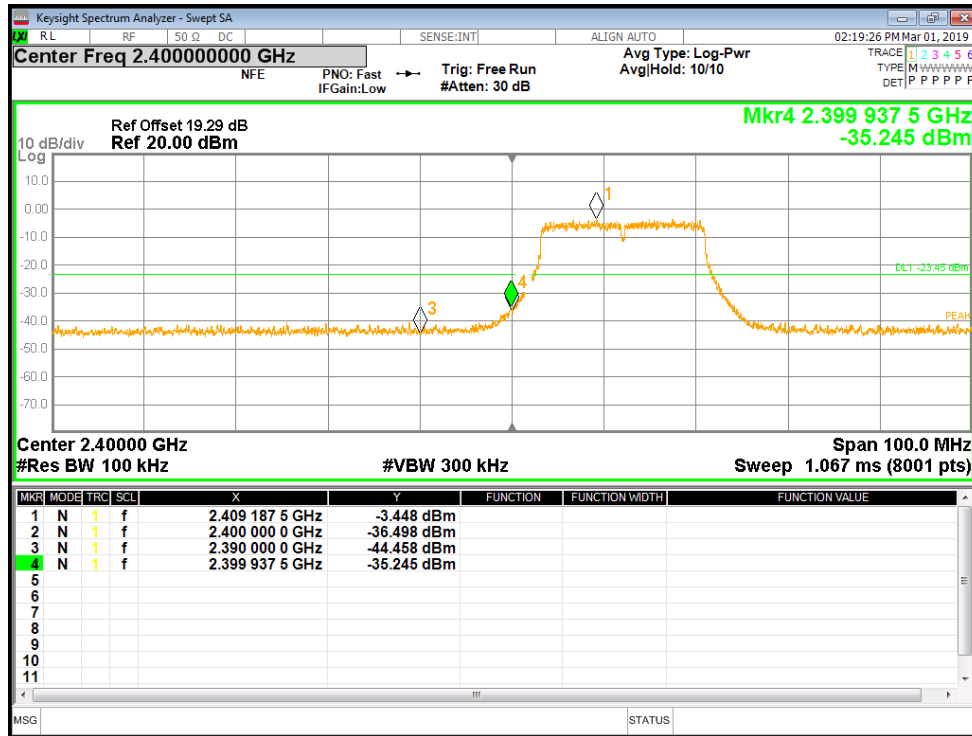


LOW CH SPURIOUS EMISSIONS REFERENCE

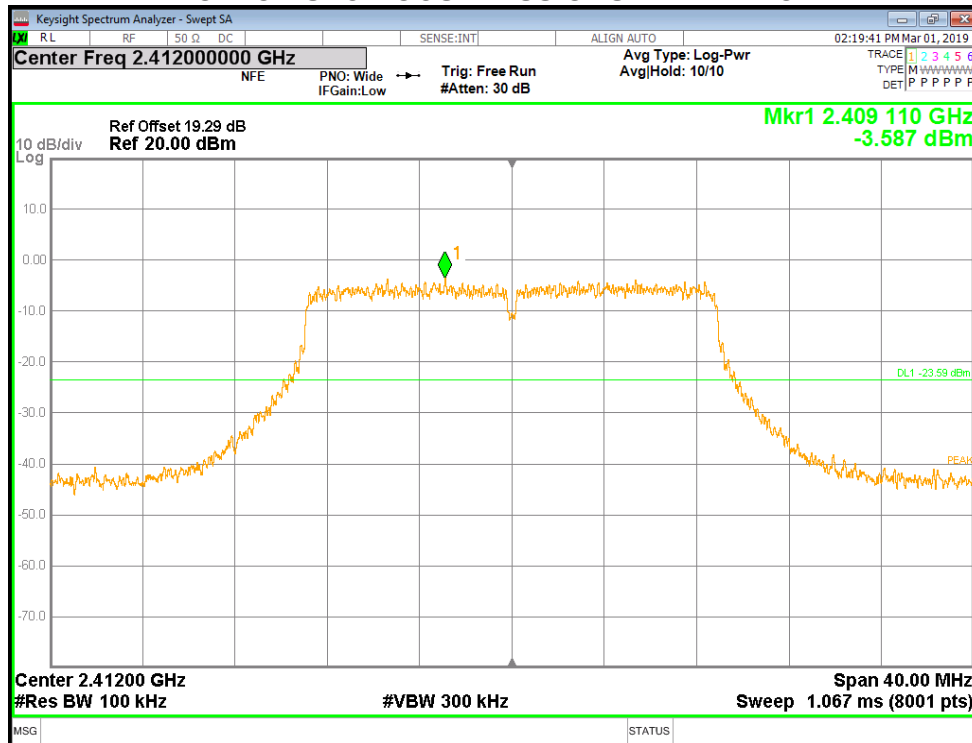





LOW CH SPURIOUS EMISSIONS 30M-10G

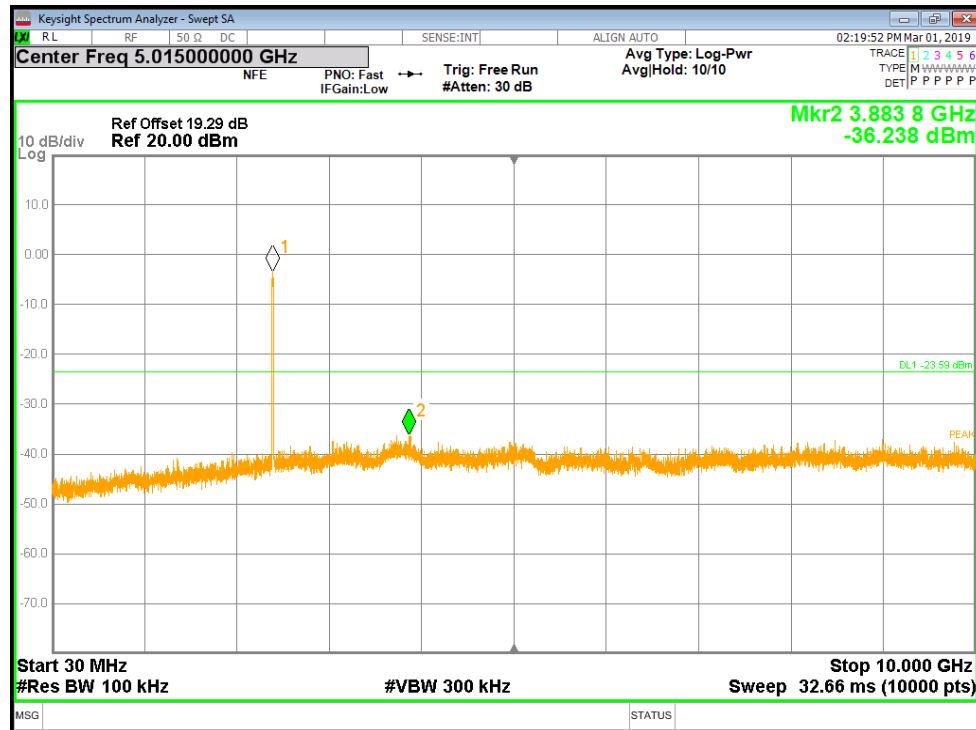


LOW CH SPURIOUS EMISSIONS 10G-26G

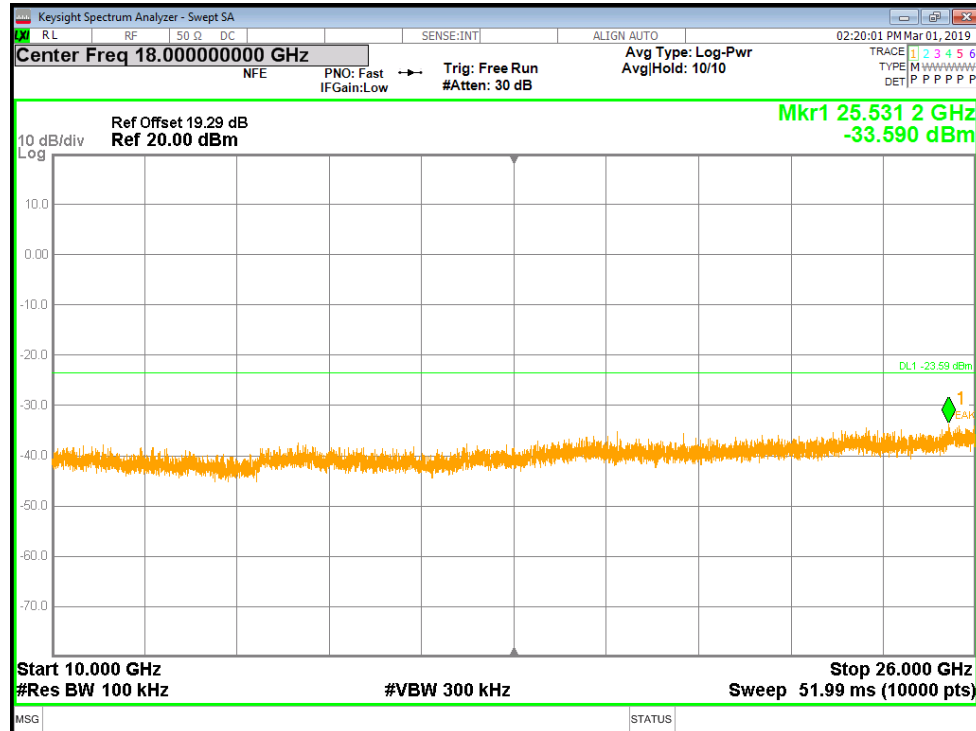

MID CH SPURIOUS EMISSIONS REFERENCE

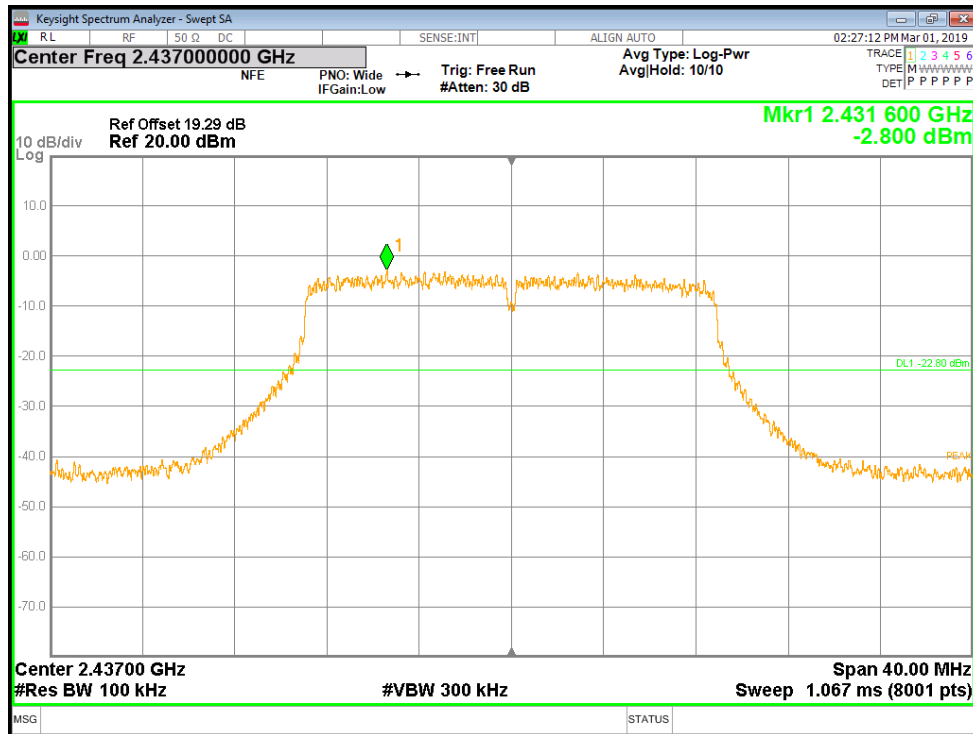


MID CH SPURIOUS EMISSIONS 30M-10G

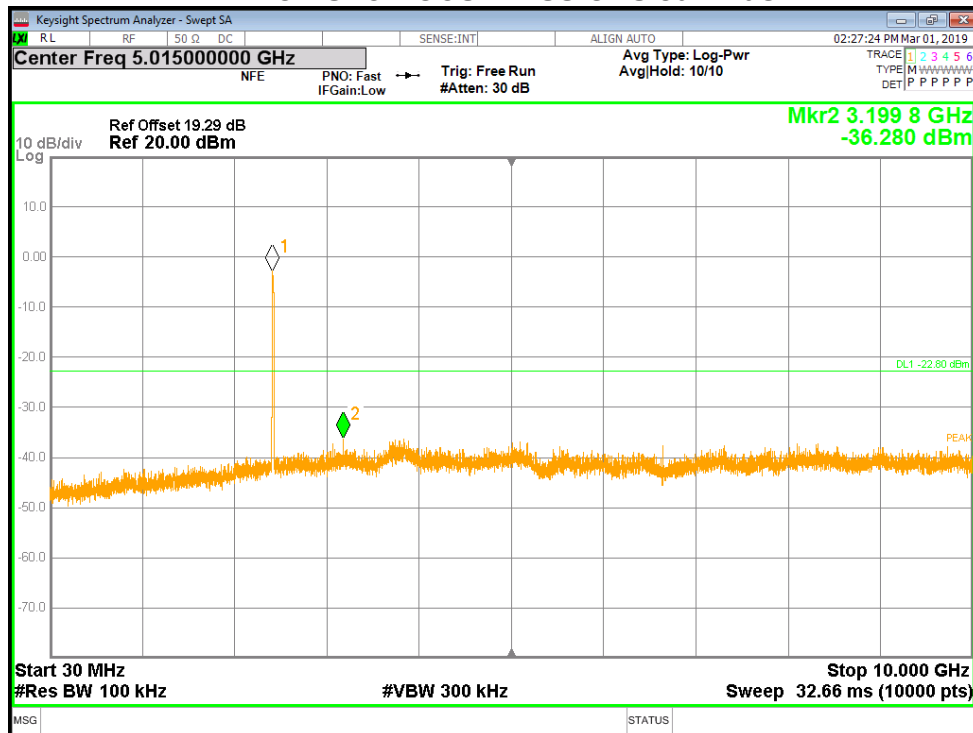




MID CH SPURIOUS EMISSIONS 10G-26G

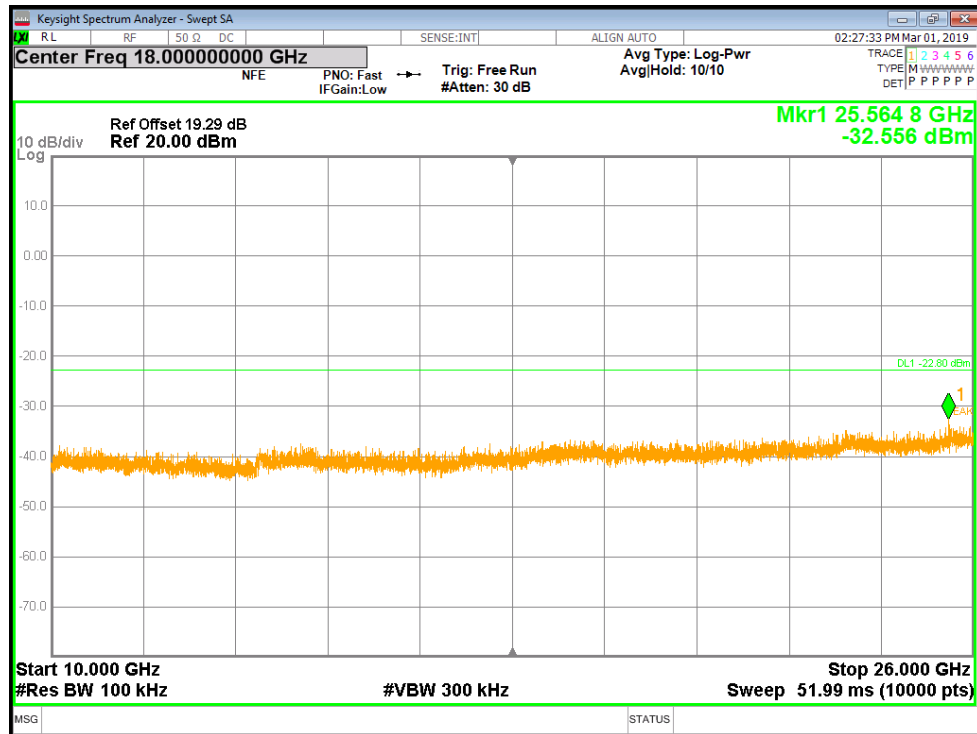


HIGH CH BANDEDGE

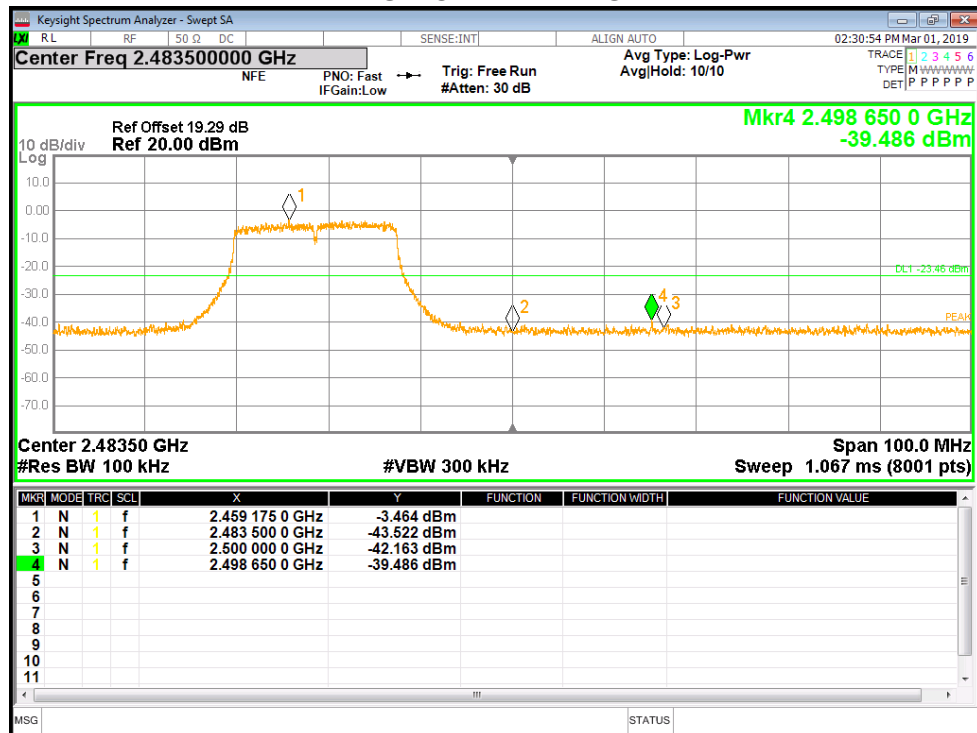




HIGH CH SPURIOUS EMISSIONS REFERENCE

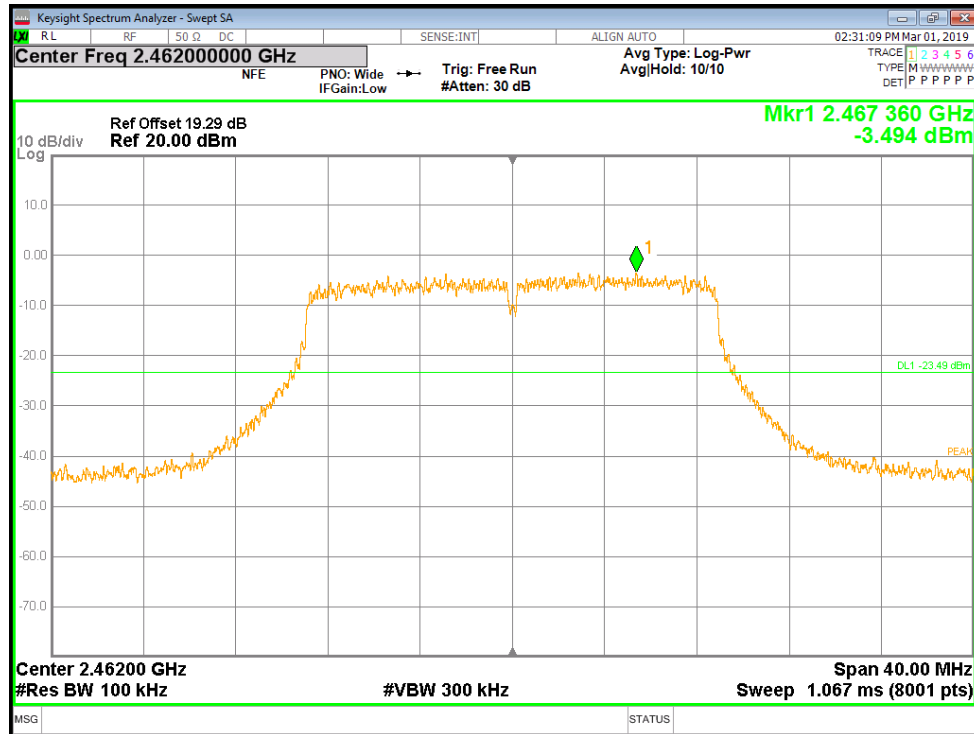


HIGH CH SPURIOUS EMISSIONS 30M-10G

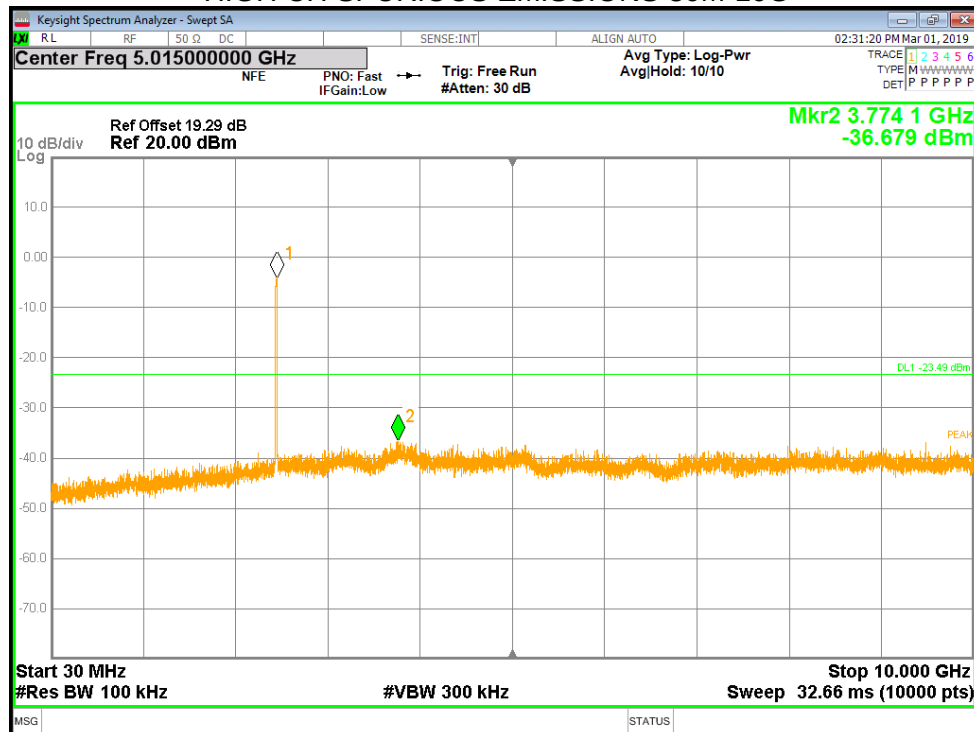



HIGH CH SPURIOUS EMISSIONS 10G-26G

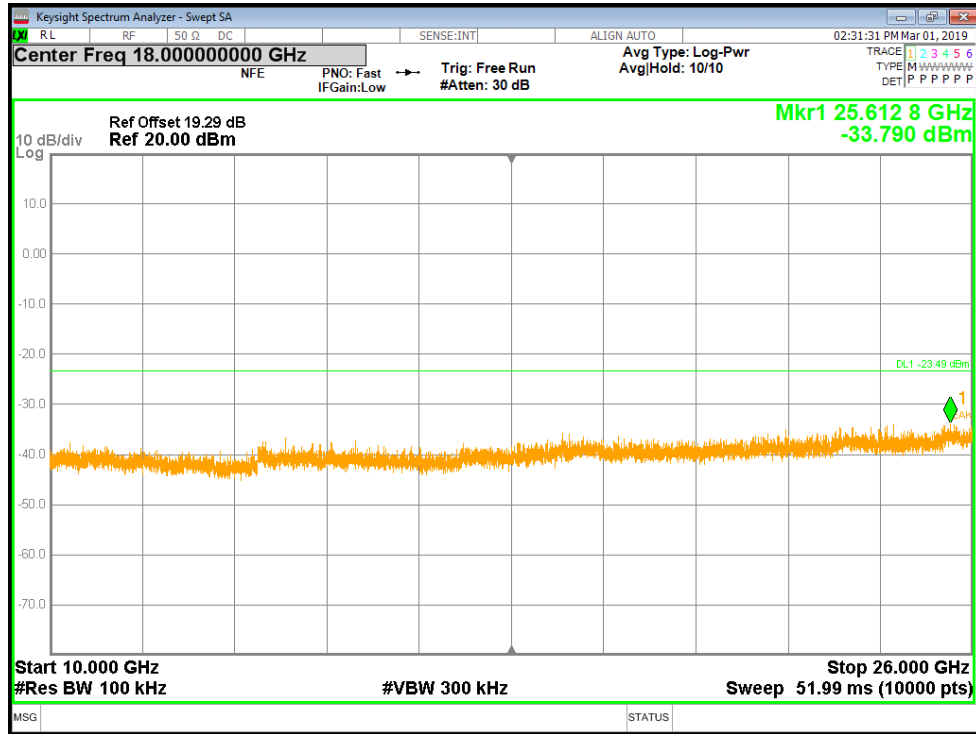



9. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

IC Restricted bands please refer to ISSED RSS-GEN Clause 8.10


FCC Restricted bands of operation:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

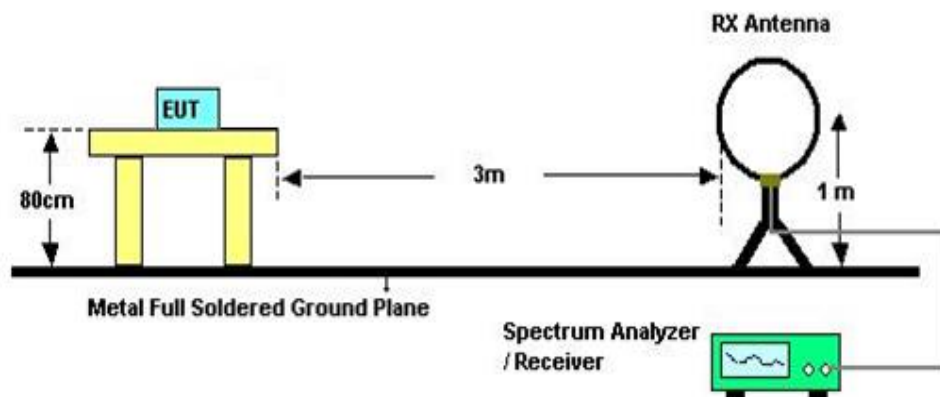


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1G

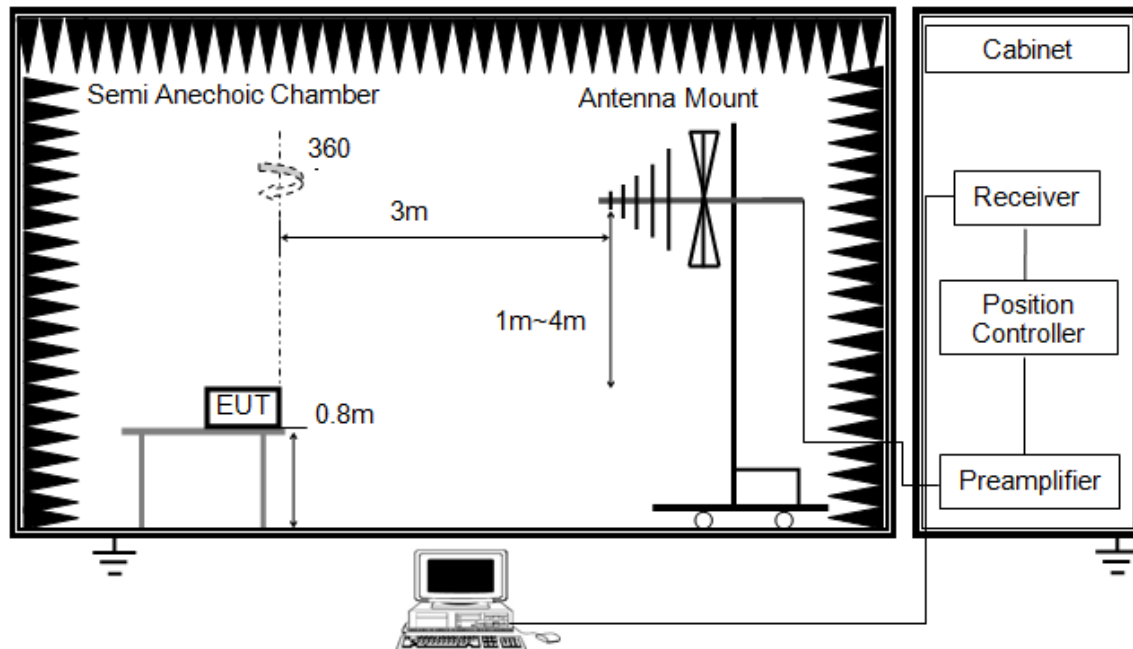


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

ABOVE 1G

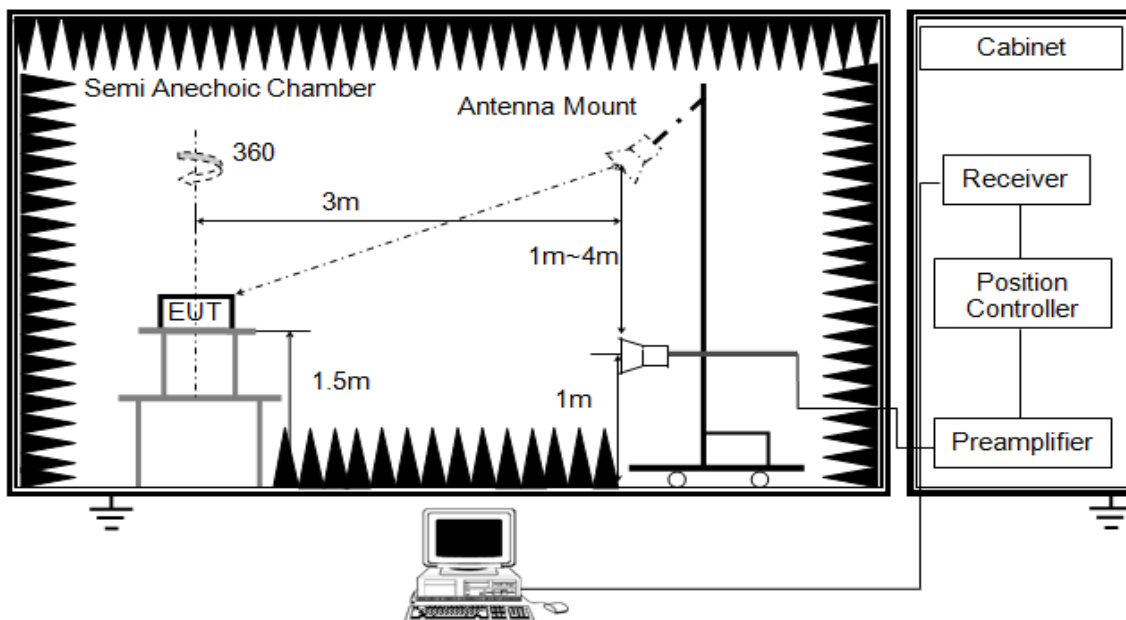


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions:

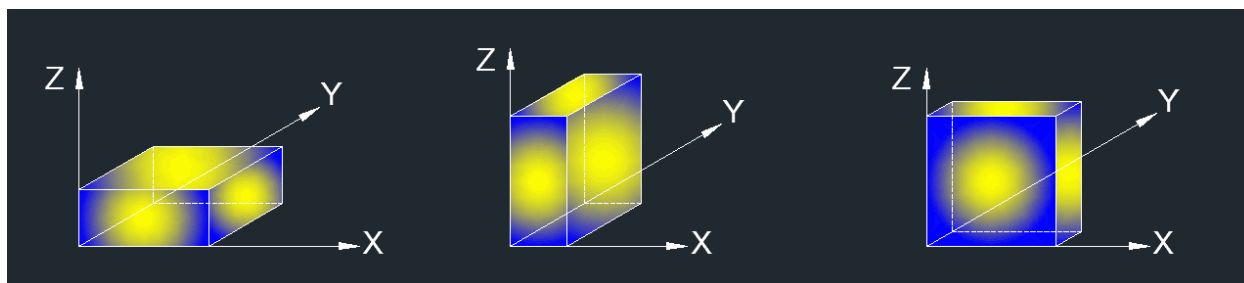

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	22.1°C	Relative Humidity	49%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz




9.1. RESTRICTED BANDEDGE

8WY-A806ST-Q1Z

9.1.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

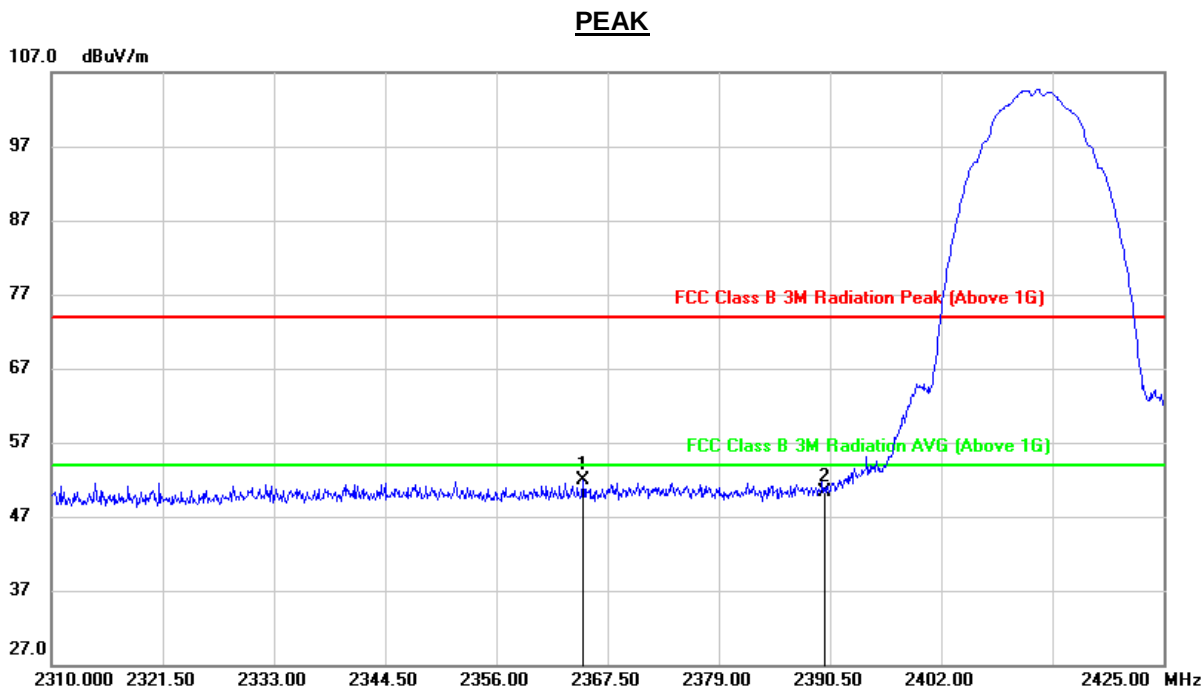


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.970	18.97	32.86	51.83	74.00	-22.17	peak
2	2390.000	17.44	32.94	50.38	74.00	-23.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

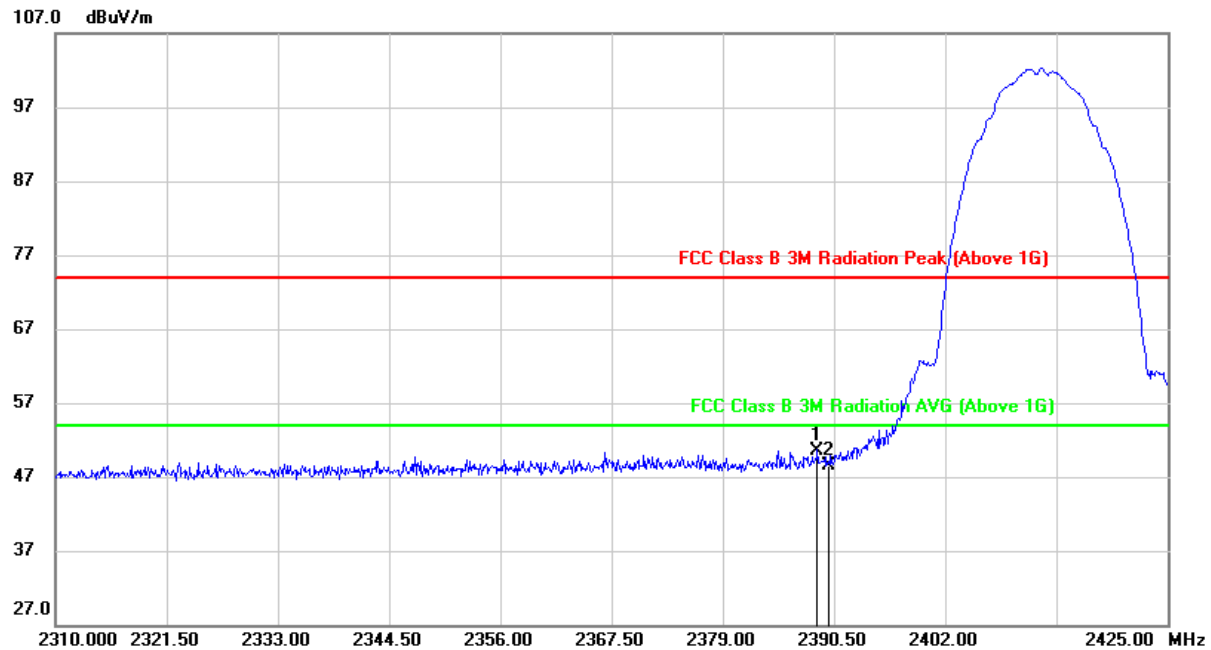


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.775	17.66	32.94	50.60	74.00	-23.40	peak
2	2390.000	15.66	32.94	48.60	74.00	-25.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

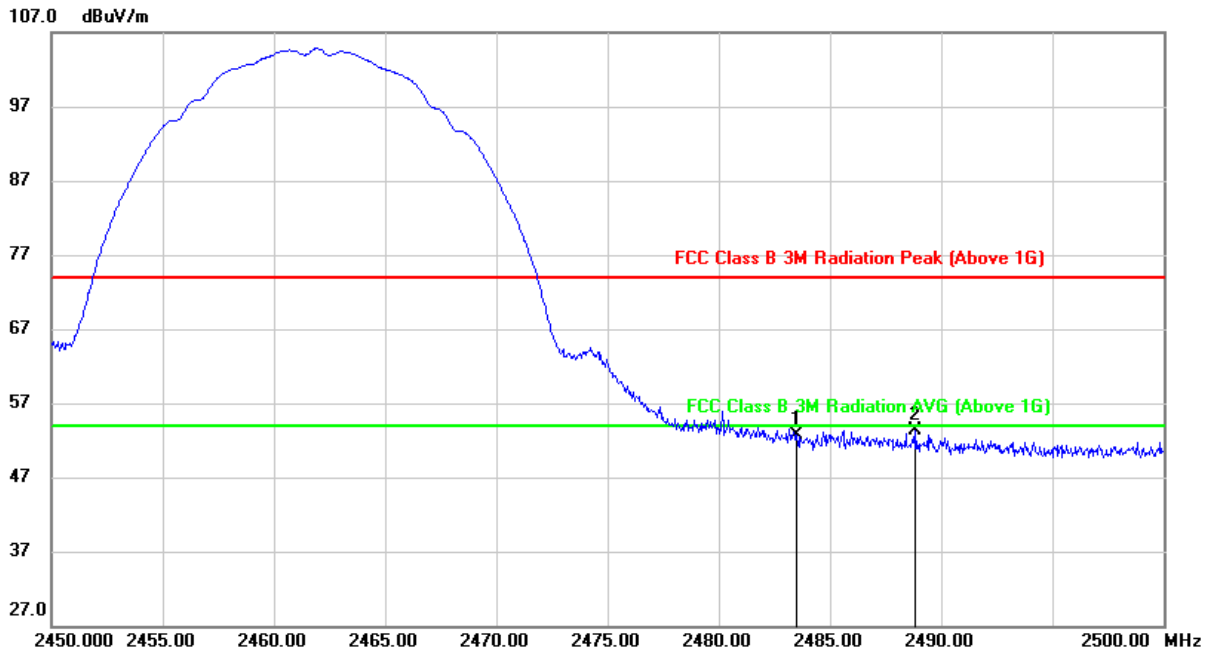

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.05	33.58	52.63	74.00	-21.37	peak
2	2488.850	19.72	33.62	53.34	74.00	-20.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

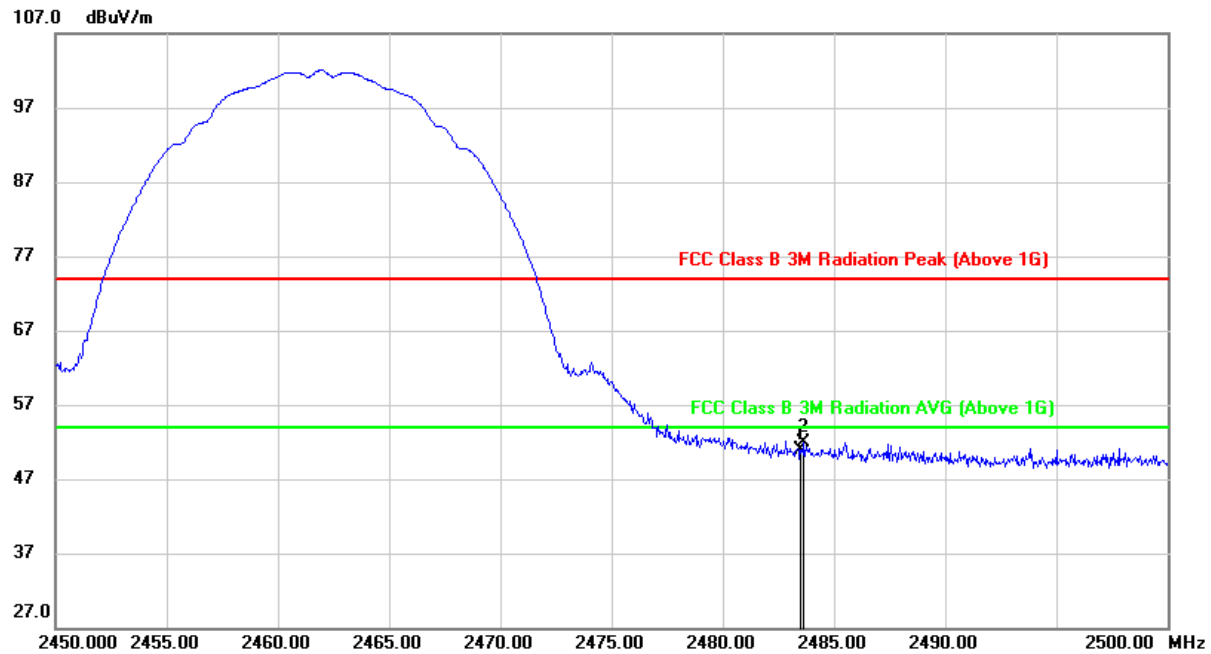**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.39	33.58	50.97	74.00	-23.03	peak
2	2483.650	18.24	33.58	51.82	74.00	-22.18	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



9.1.2. 802.11g MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

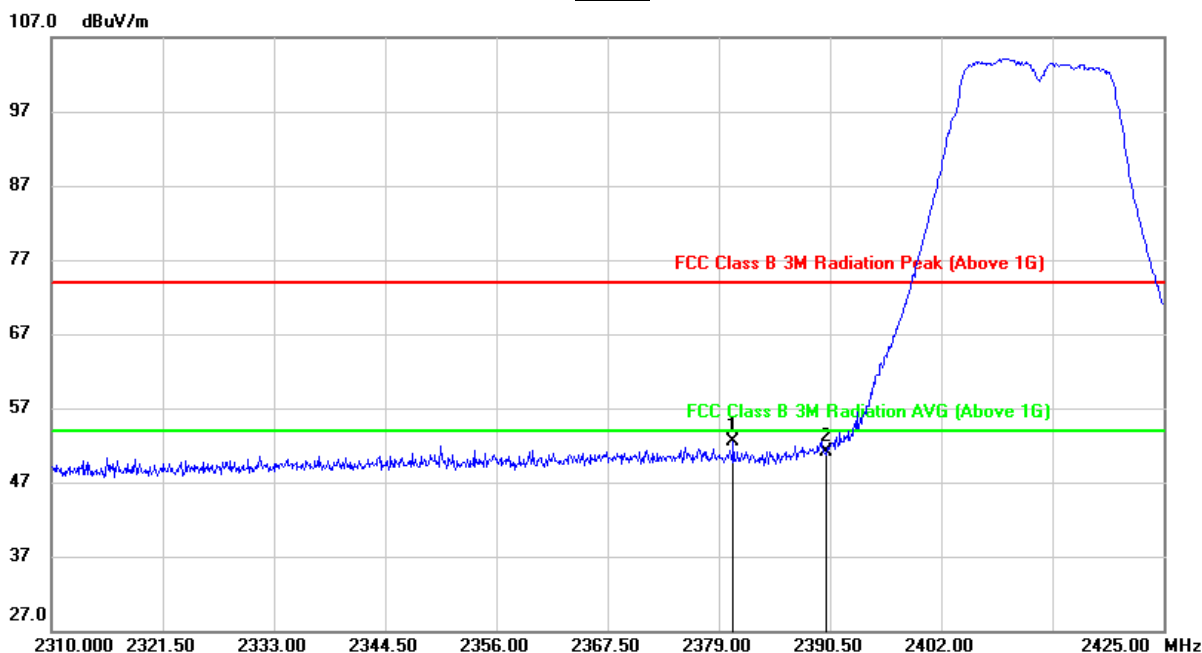


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.495	19.55	32.91	52.46	74.00	-21.54	peak
2	2390.000	18.22	32.94	51.16	74.00	-22.84	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

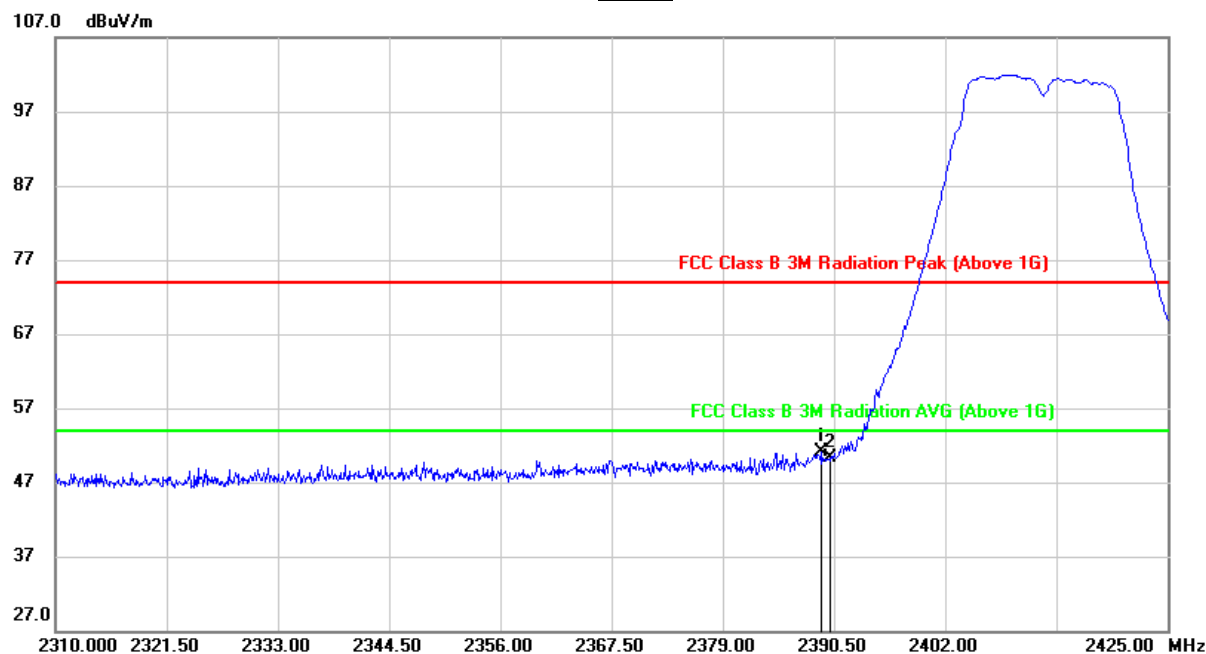**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.235	18.11	32.94	51.05	74.00	-22.95	peak
2	2390.000	17.33	32.94	50.27	74.00	-23.73	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

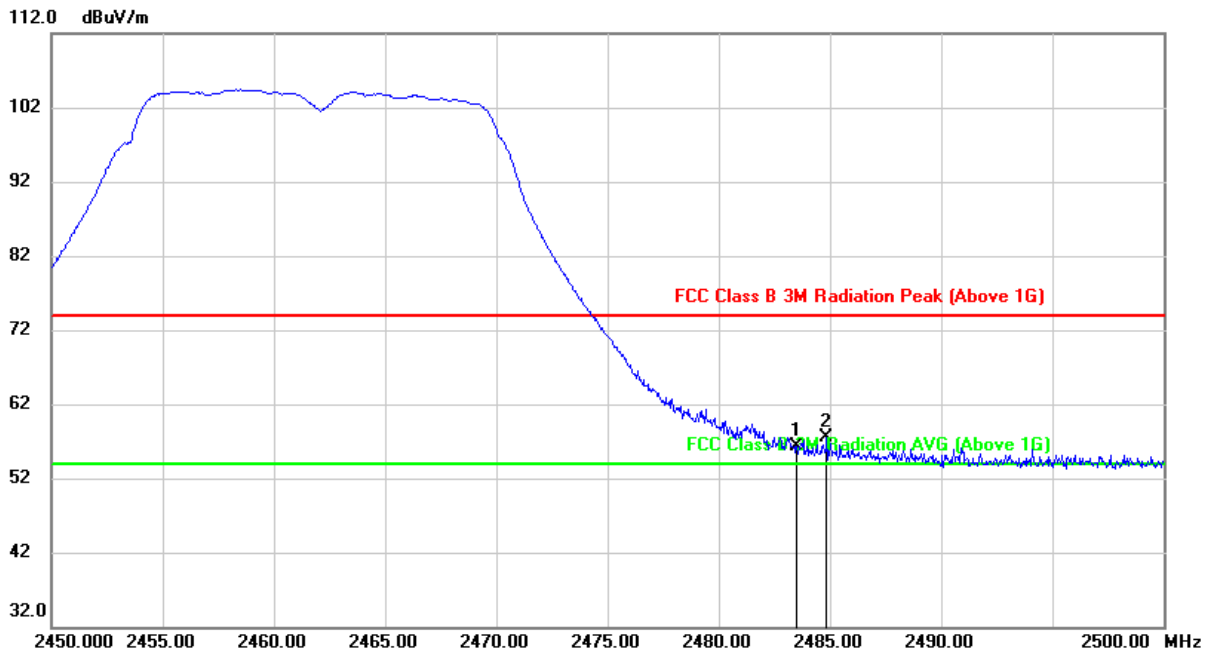
**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.66	33.58	56.24	74.00	-17.76	peak
2	2484.850	23.83	33.59	57.42	74.00	-16.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

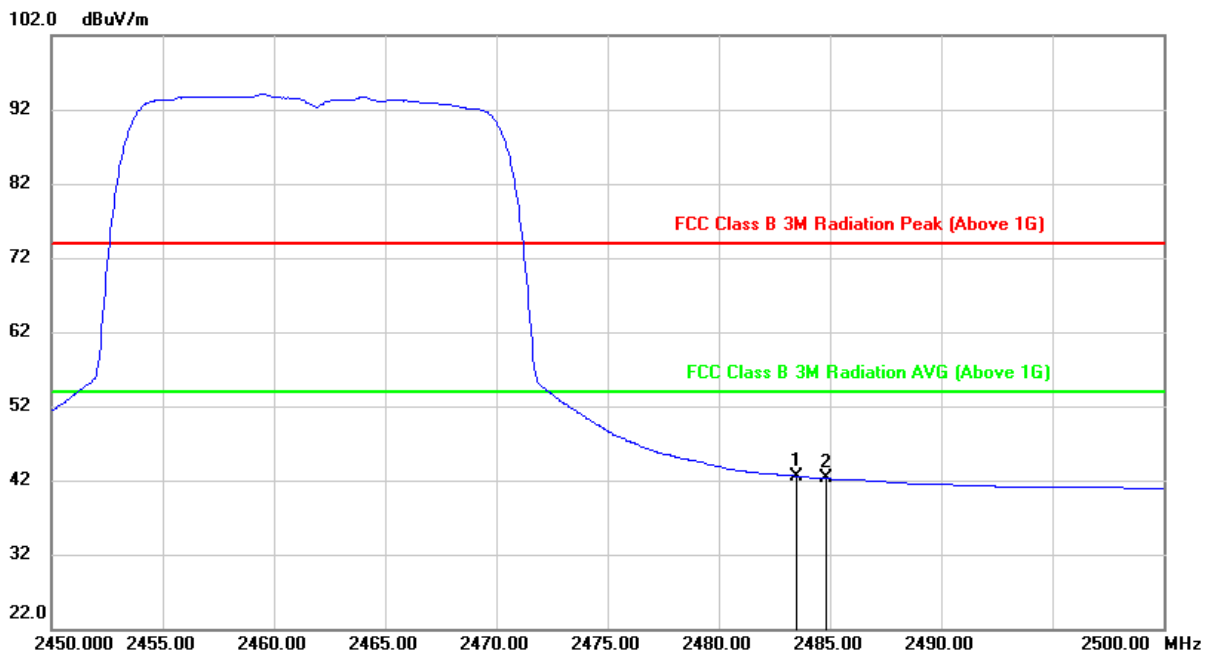


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	9.01	33.58	42.59	54.00	-11.41	AVG
2	2484.850	8.69	33.59	42.28	54.00	-11.72	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

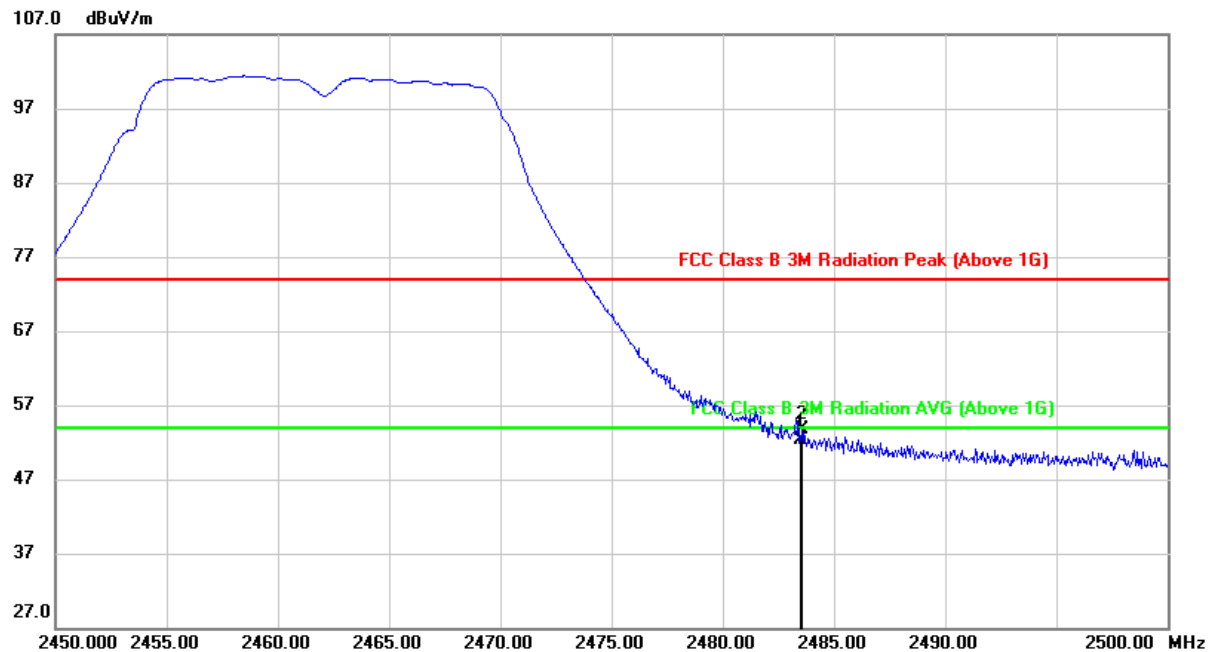

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.64	33.58	52.22	74.00	-21.78	peak
2	2483.550	20.10	33.58	53.68	74.00	-20.32	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



9.1.3. 802.11n HT20 MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

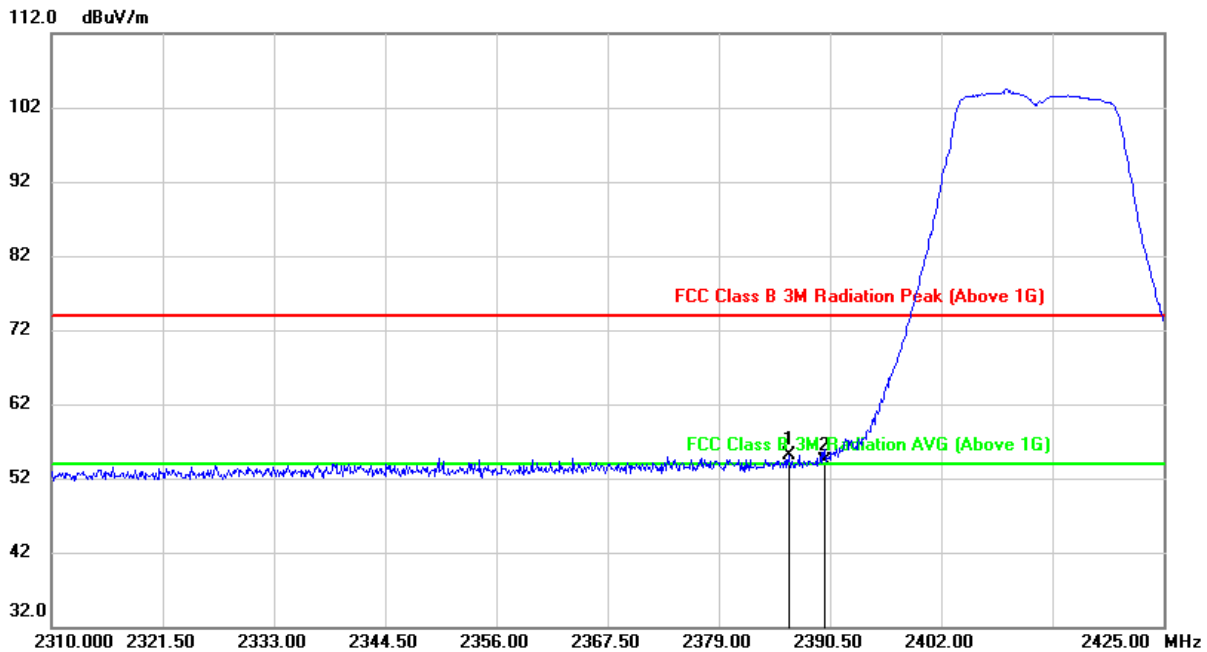

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.245	22.07	32.94	55.01	74.00	-18.99	peak
2	2390.000	21.43	32.94	54.37	74.00	-19.63	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

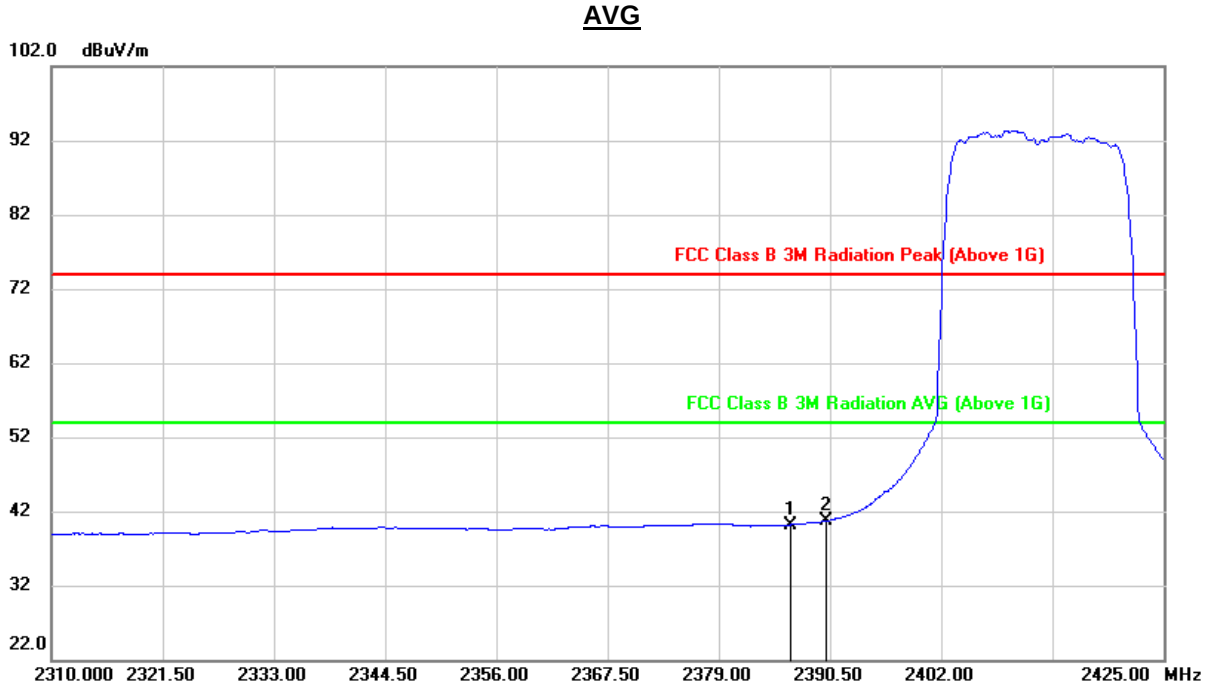


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.245	7.25	32.94	40.19	54.00	-13.81	AVG
2	2390.000	7.77	32.94	40.71	54.00	-13.29	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

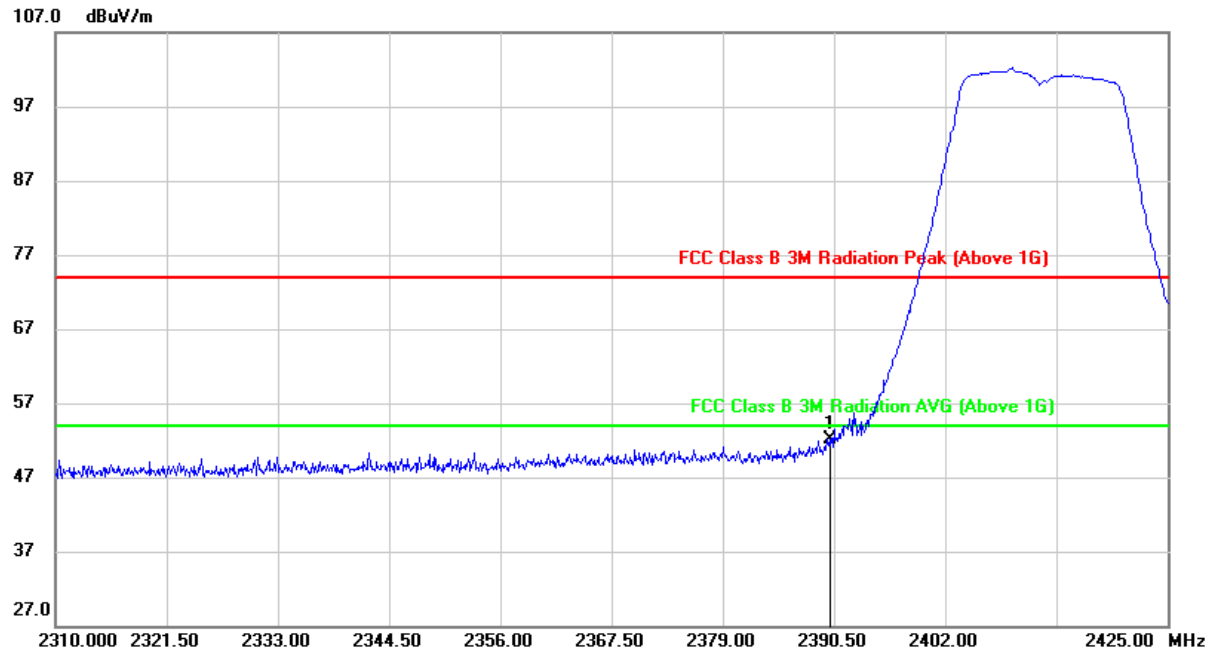


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.11	32.94	52.05	74.00	-21.95	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

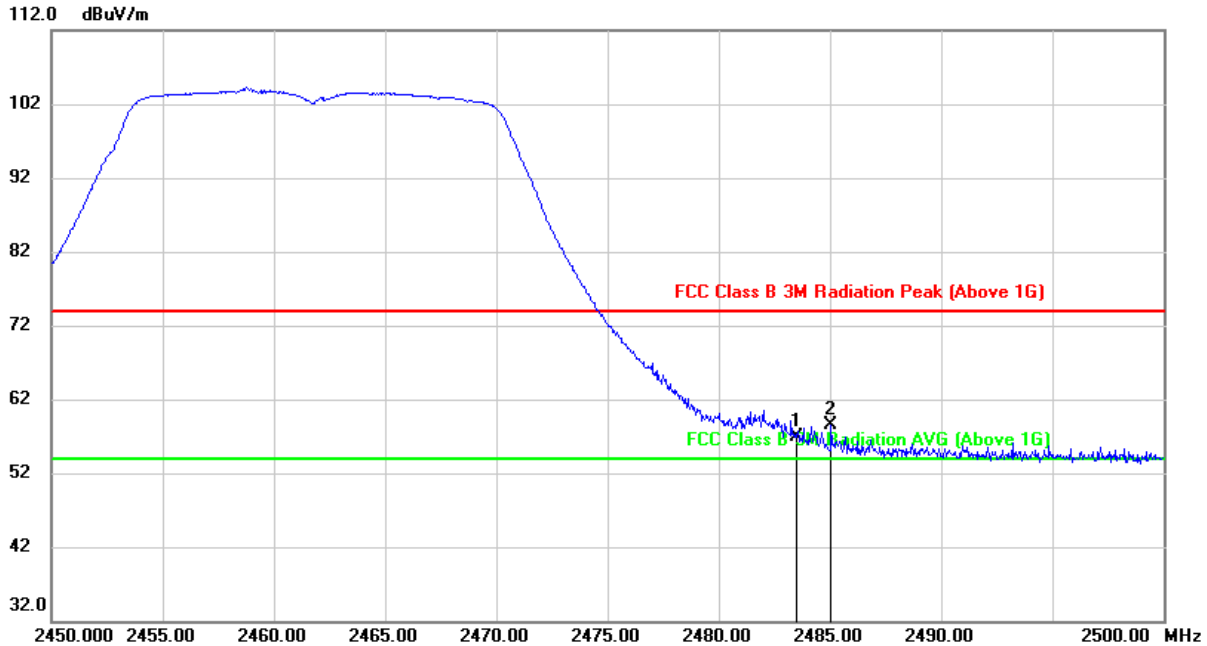**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.28	33.58	56.86	74.00	-17.14	peak
2	2485.050	24.88	33.59	58.47	74.00	-15.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

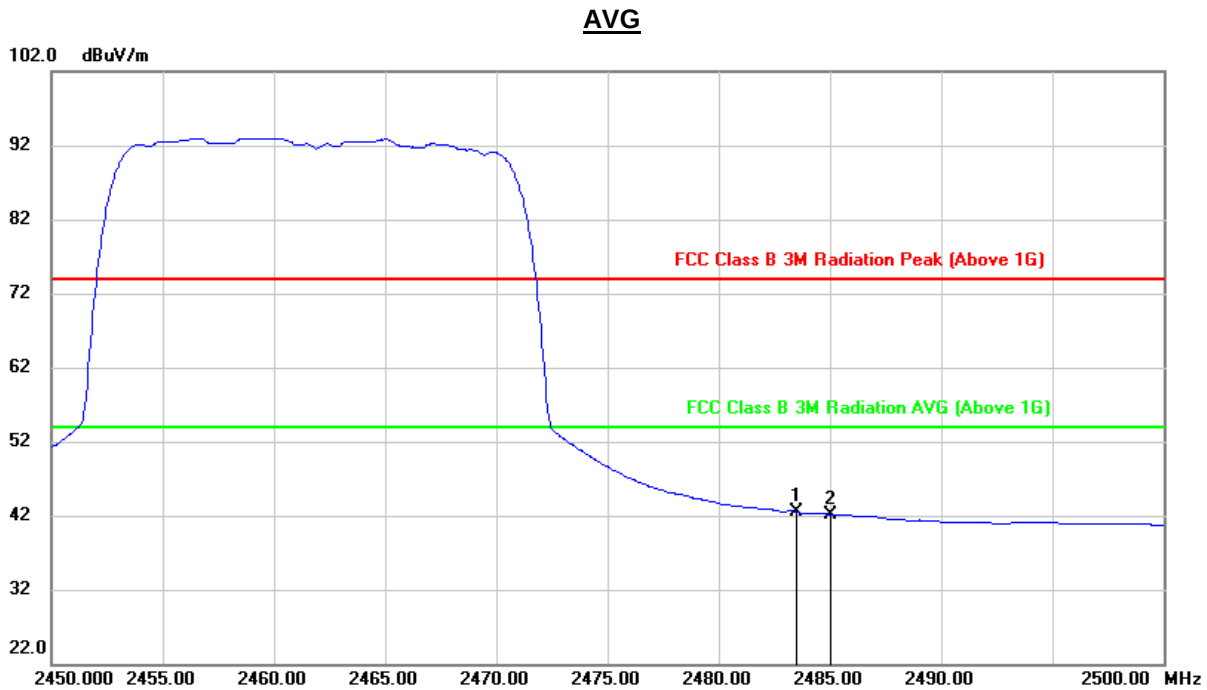


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.93	33.58	42.51	54.00	-11.49	AVG
2	2485.050	8.56	33.59	42.15	54.00	-11.85	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

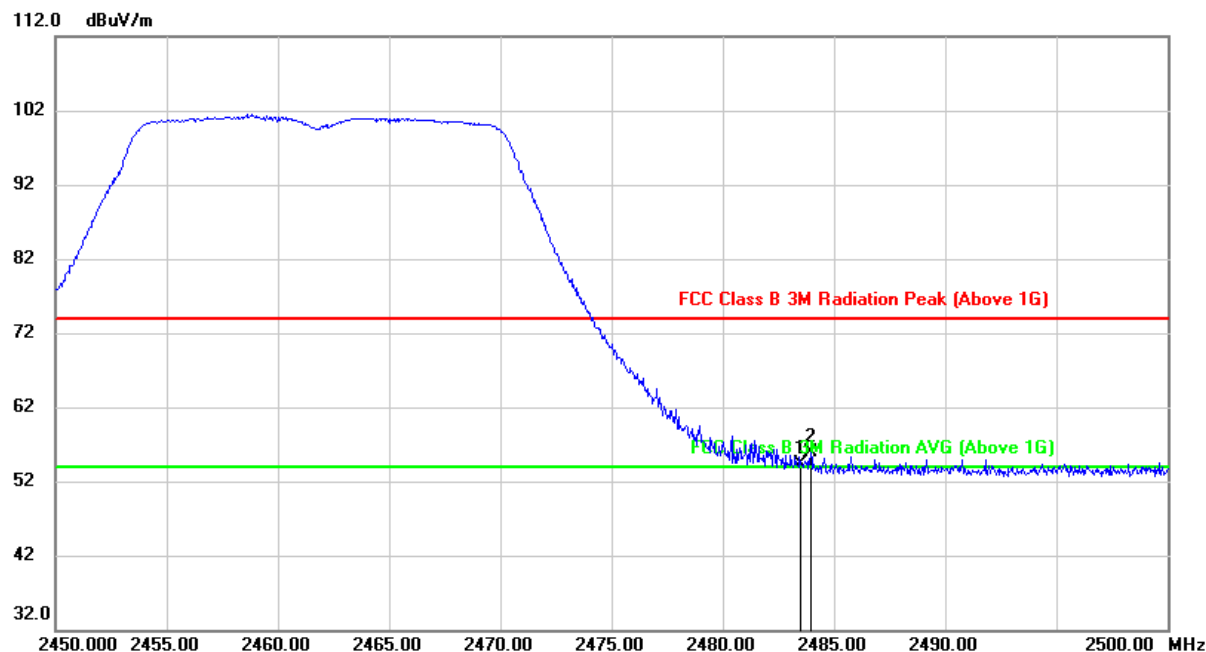

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.63	33.58	54.21	74.00	-19.79	peak
2	2483.950	22.34	33.58	55.92	74.00	-18.08	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

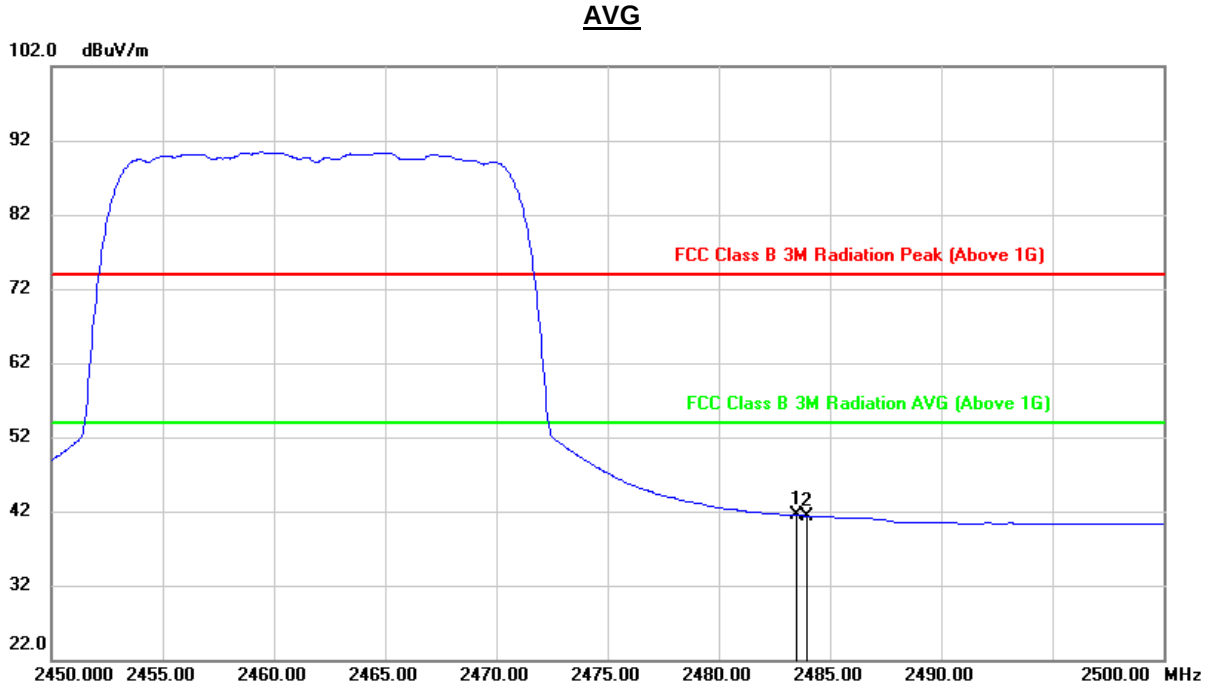

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	7.91	33.58	41.49	54.00	-12.51	AVG
2	2483.950	7.76	33.58	41.34	54.00	-12.66	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 8.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All models have been tested, only the worst data record in the report




9.2. SPURIOUS EMISSIONS (3~18GHz)

8WY-A806ST-Q1Z

9.2.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

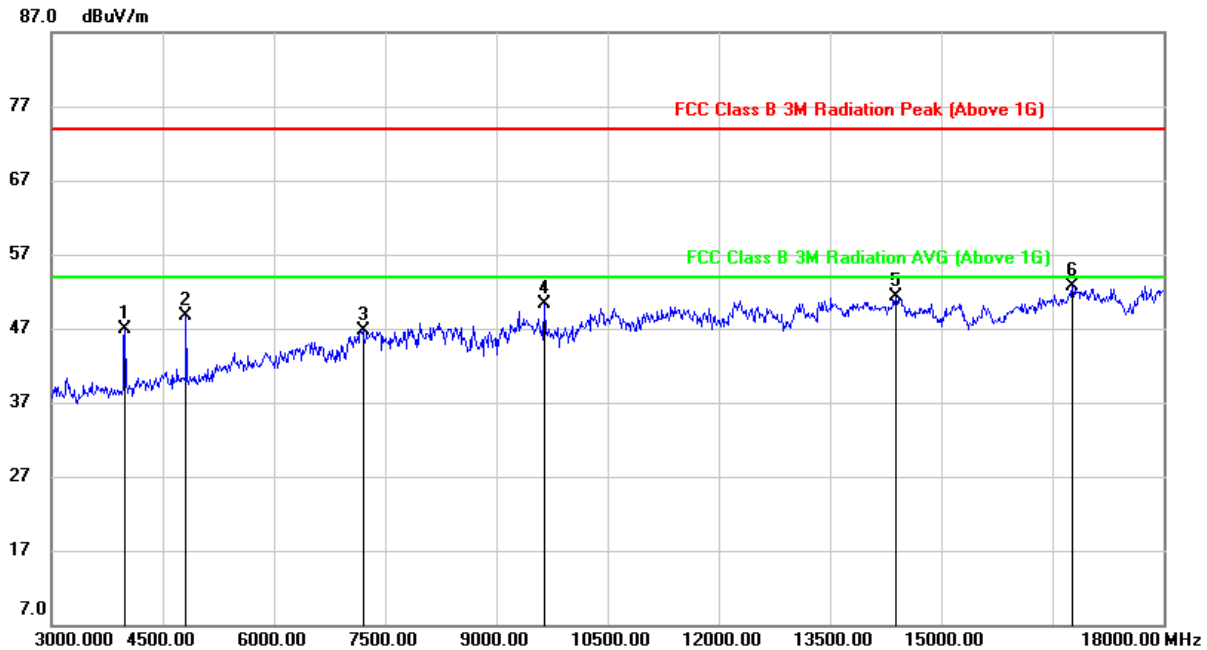


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.93	-2.95	46.98	74.00	-27.02	peak
2	4815.000	48.98	-0.23	48.75	74.00	-25.25	peak
3	7200.000	39.82	6.88	46.70	74.00	-27.30	peak
4	9645.000	40.36	10.03	50.39	74.00	-23.61	peak
5	14385.000	34.96	16.41	51.37	74.00	-22.63	peak
6	16770.000	32.80	19.89	52.69	74.00	-21.31	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

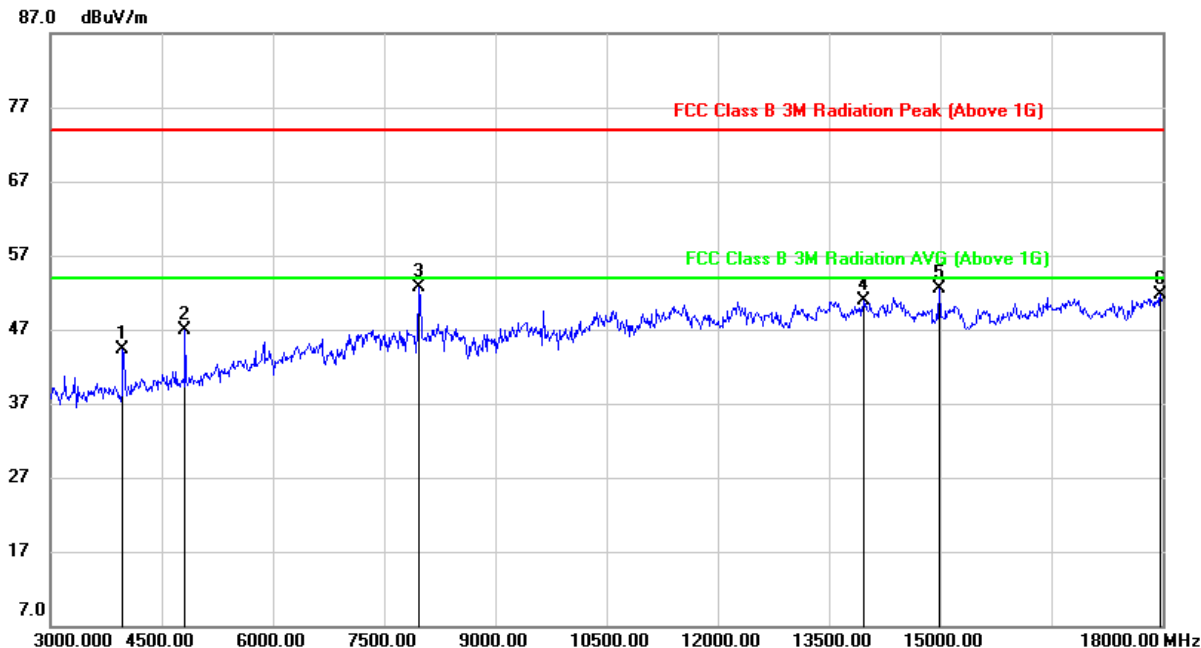


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.55	-2.95	44.60	74.00	-29.40	peak
2	7965.000	44.66	8.26	52.92	74.00	-21.08	peak
3	11460.000	35.83	13.79	49.62	74.00	-24.38	peak
4	14460.000	34.97	16.35	51.32	74.00	-22.68	peak
5	14970.000	35.33	15.48	50.81	74.00	-23.19	peak
6	17805.000	29.33	23.22	52.55	74.00	-21.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

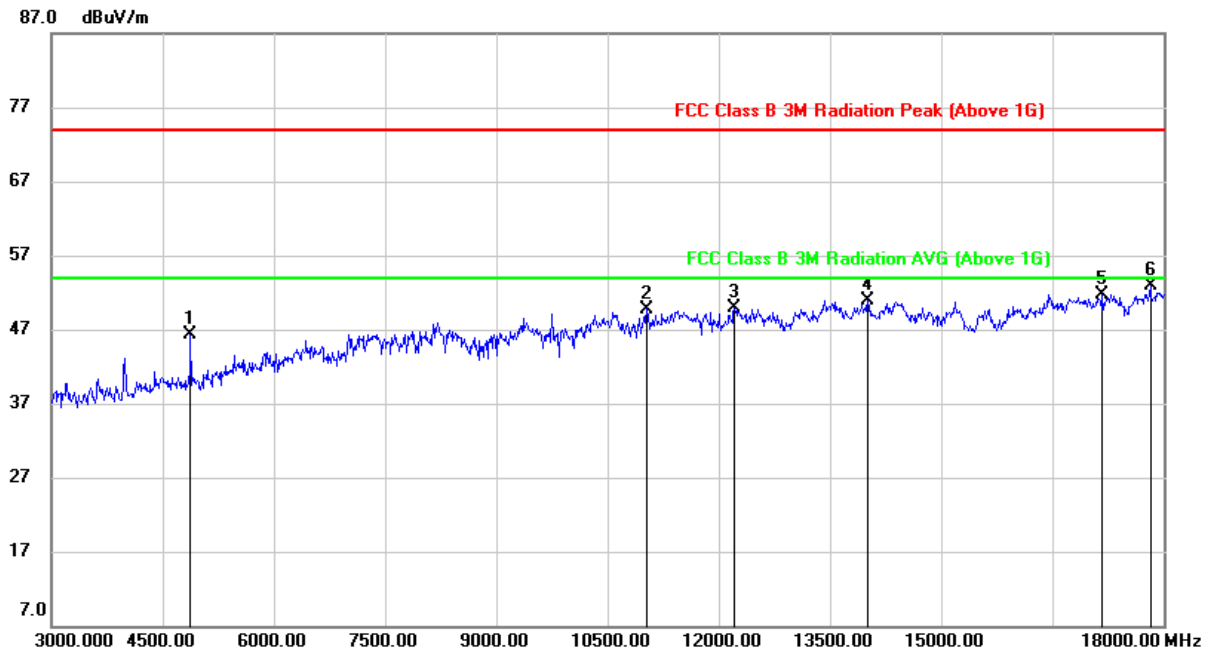


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.38	-0.12	46.26	74.00	-27.74	peak
2	11025.000	36.53	13.27	49.80	74.00	-24.20	peak
3	12210.000	35.58	14.25	49.83	74.00	-24.17	peak
4	14010.000	34.59	16.34	50.93	74.00	-23.07	peak
5	17175.000	30.82	20.94	51.76	74.00	-22.24	peak
6	17820.000	29.70	23.21	52.91	74.00	-21.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

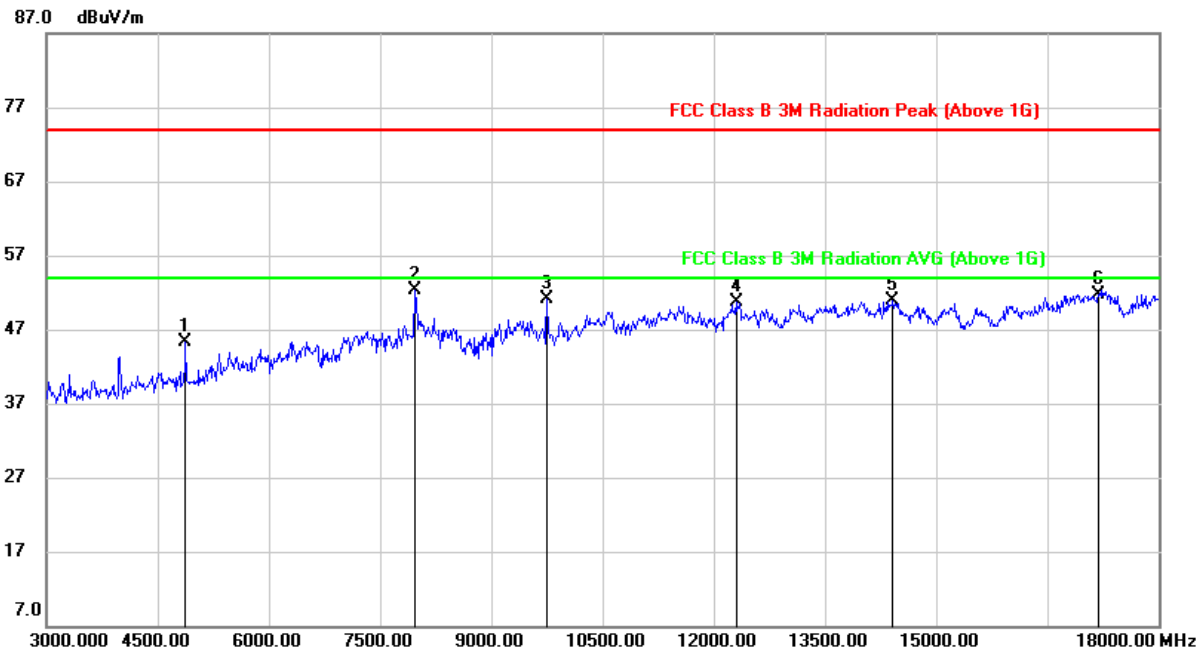


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.46	-0.12	45.34	74.00	-28.66	peak
2	7965.000	44.10	8.26	52.36	74.00	-21.64	peak
3	9750.000	40.87	10.14	51.01	74.00	-22.99	peak
4	12300.000	36.24	14.39	50.63	74.00	-23.37	peak
5	14415.000	34.40	16.41	50.81	74.00	-23.19	peak
6	17190.000	30.66	20.99	51.65	74.00	-22.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

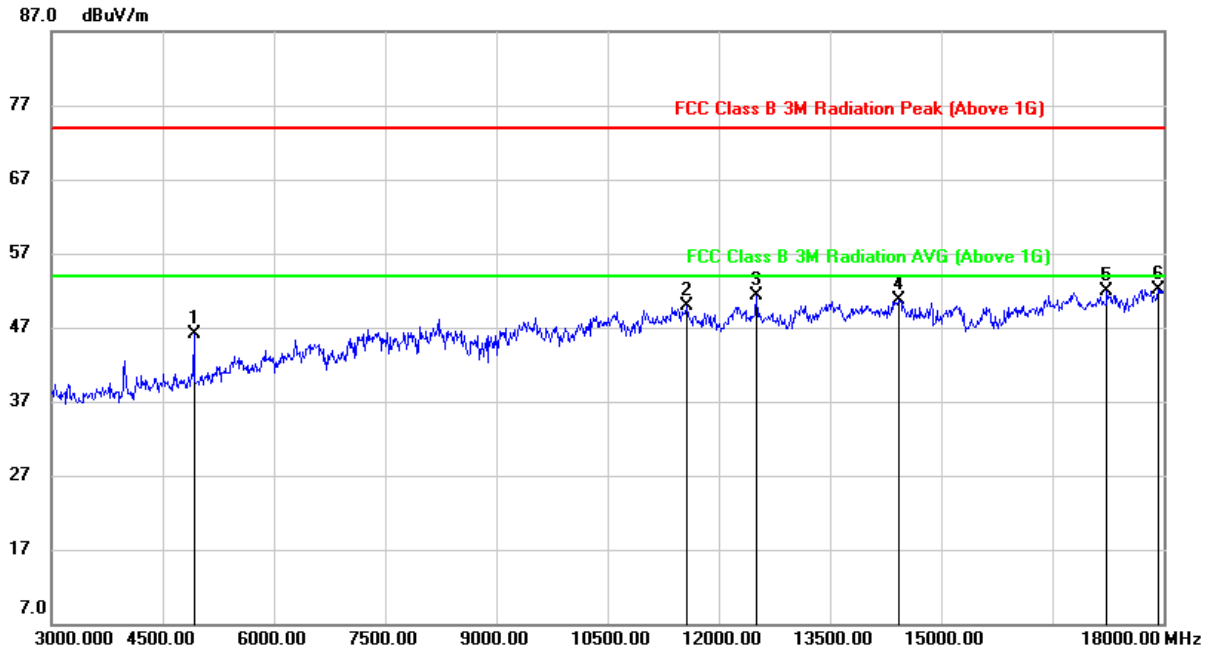


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	46.12	0.02	46.14	74.00	-27.86	peak
2	11565.000	35.69	14.14	49.83	74.00	-24.17	peak
3	12510.000	36.52	14.76	51.28	74.00	-22.72	peak
4	14430.000	34.23	16.39	50.62	74.00	-23.38	peak
5	17235.000	30.57	21.32	51.89	74.00	-22.11	peak
6	17925.000	28.97	23.18	52.15	74.00	-21.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

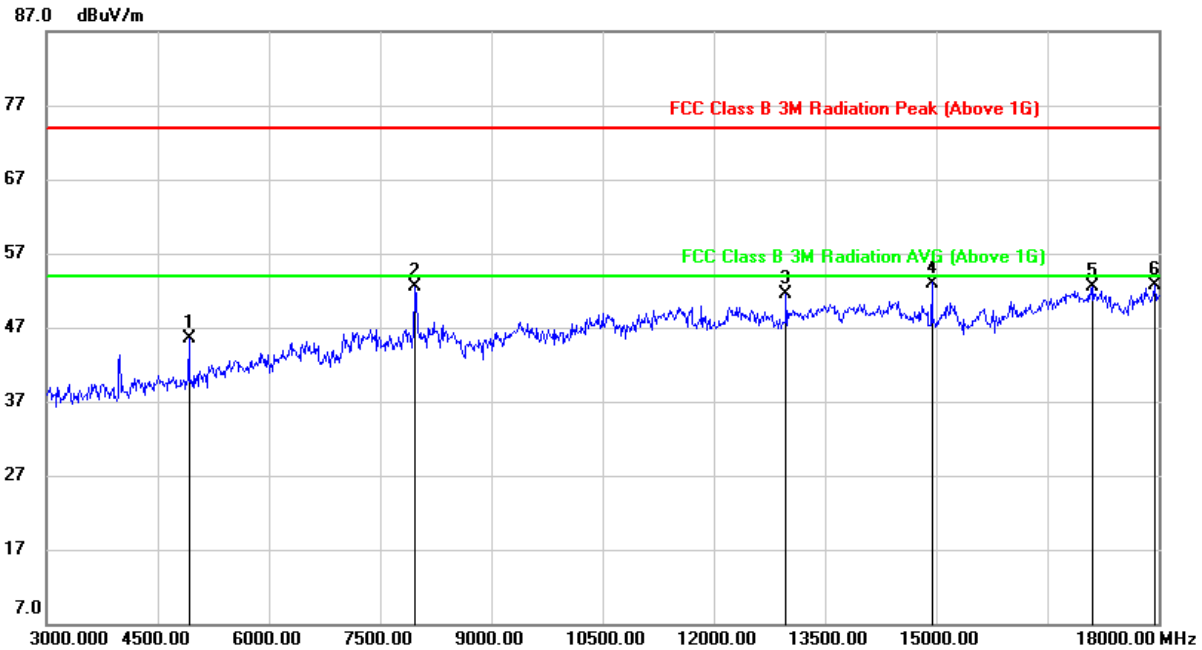


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.45	0.02	45.47	74.00	-28.53	peak
2	7965.000	44.16	8.26	52.42	74.00	-21.58	peak
3	12975.000	36.72	14.71	51.43	74.00	-22.57	peak
4	14940.000	37.50	15.50	53.00	74.00	-21.00	peak
5	17115.000	31.64	20.81	52.45	74.00	-21.55	peak
6	17955.000	29.49	23.23	52.72	74.00	-21.28	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.2.2. 802.11g MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

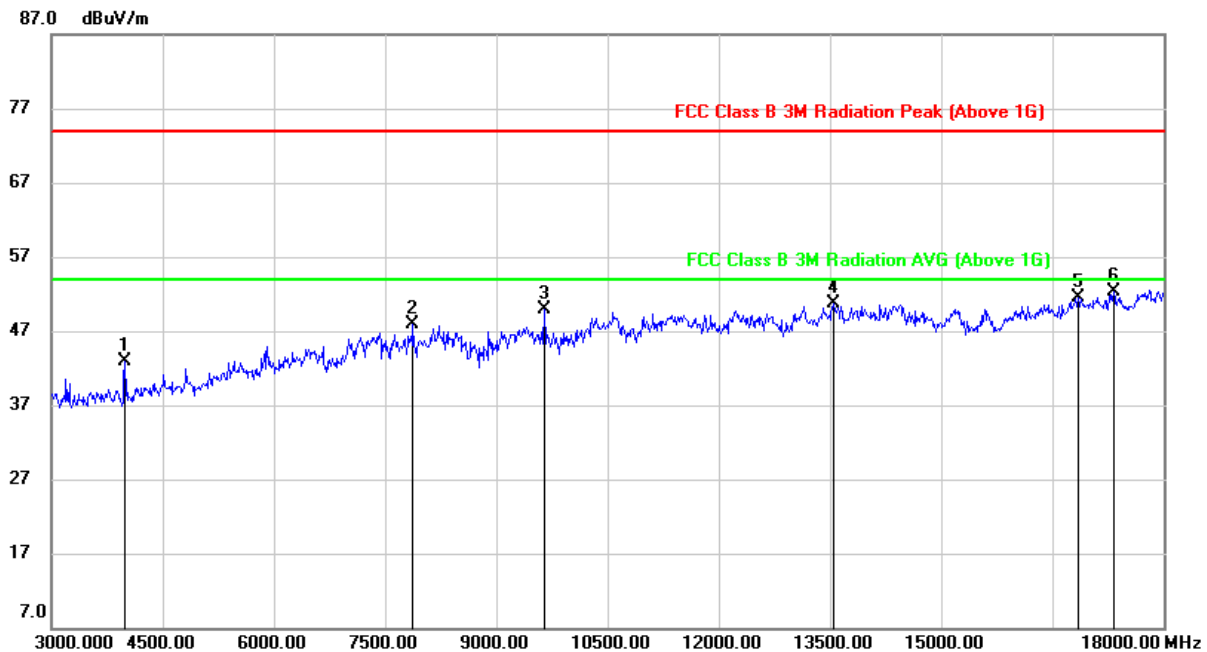


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	45.95	-2.95	43.00	74.00	-31.00	peak
2	7875.000	39.26	8.55	47.81	74.00	-26.19	peak
3	9645.000	39.80	10.03	49.83	74.00	-24.17	peak
4	13545.000	34.81	15.85	50.66	74.00	-23.34	peak
5	16845.000	31.51	19.92	51.43	74.00	-22.57	peak
6	17325.000	30.57	21.80	52.37	74.00	-21.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

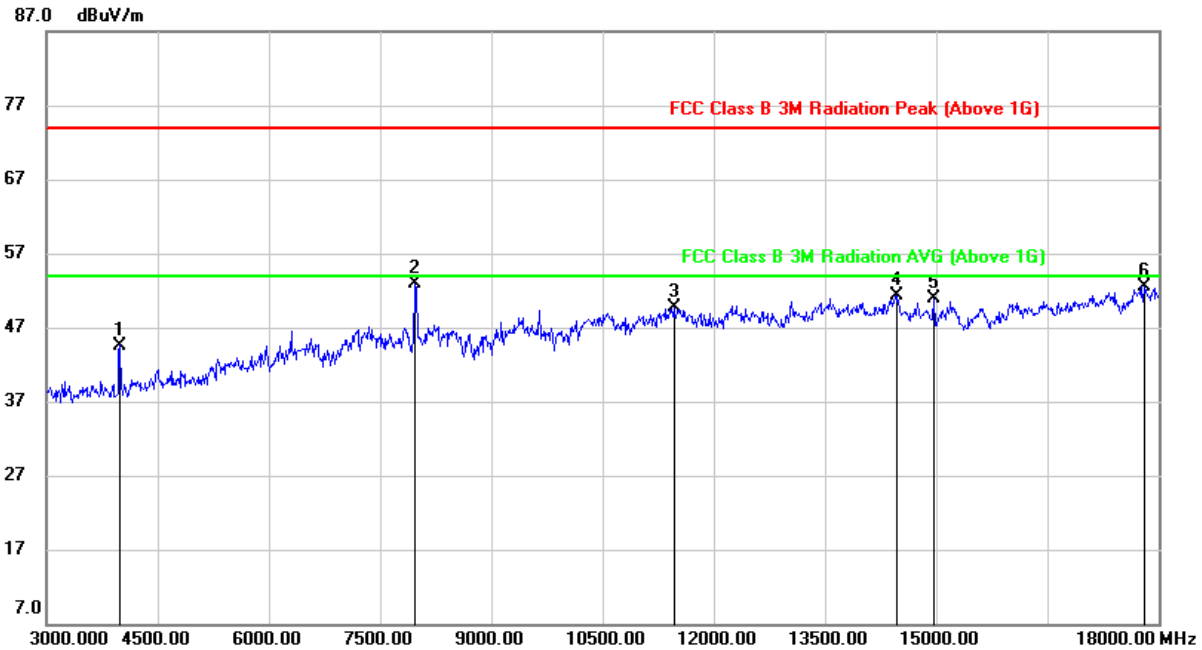


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.55	-2.95	44.60	74.00	-29.40	peak
2	7965.000	44.66	8.26	52.92	74.00	-21.08	peak
3	11460.000	35.83	13.79	49.62	74.00	-24.38	peak
4	14460.000	34.97	16.35	51.32	74.00	-22.68	peak
5	14970.000	35.33	15.48	50.81	74.00	-23.19	peak
6	17805.000	29.33	23.22	52.55	74.00	-21.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

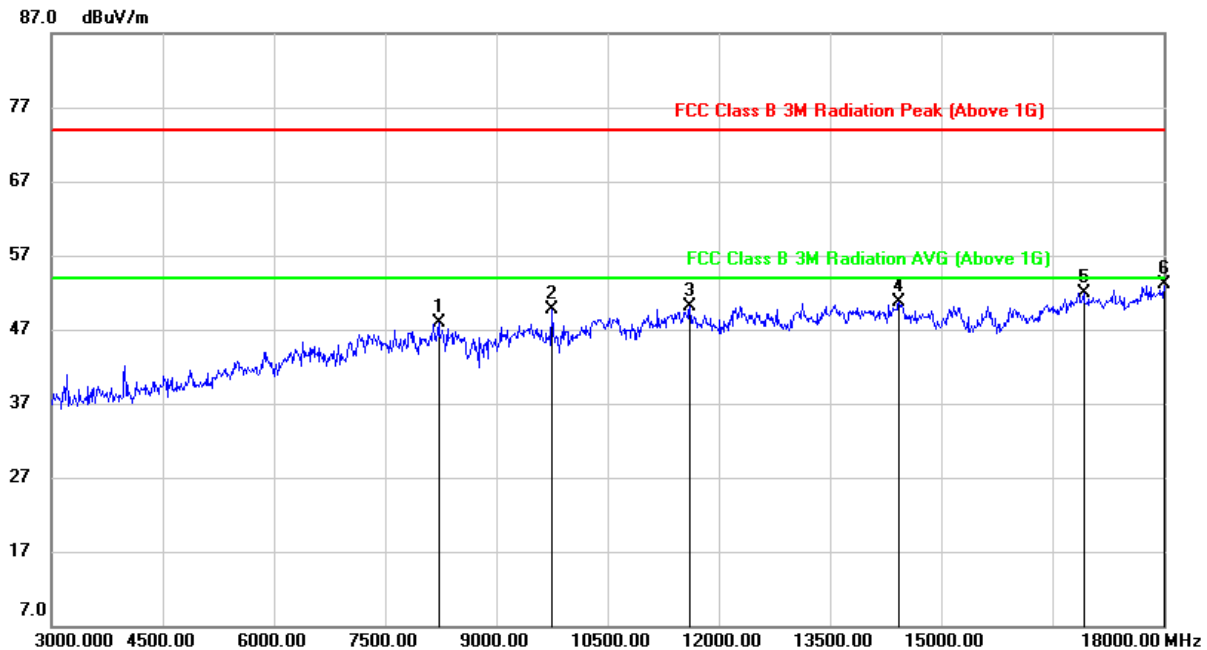


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8220.000	38.49	9.40	47.89	74.00	-26.11	peak
2	9750.000	39.49	10.14	49.63	74.00	-24.37	peak
3	11610.000	35.90	14.12	50.02	74.00	-23.98	peak
4	14430.000	34.27	16.39	50.66	74.00	-23.34	peak
5	16920.000	31.93	20.01	51.94	74.00	-22.06	peak
6	18000.000	29.86	23.27	53.13	74.00	-20.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

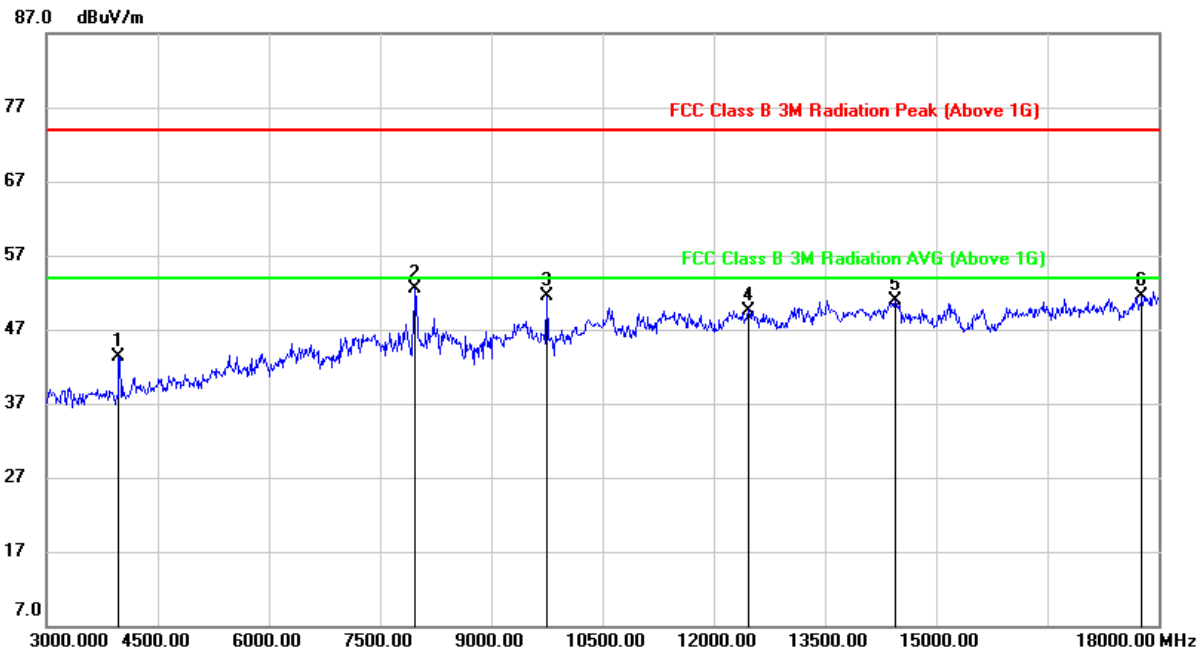


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	46.22	-2.98	43.24	74.00	-30.76	peak
2	7965.000	44.16	8.26	52.42	74.00	-21.58	peak
3	9750.000	41.44	10.14	51.58	74.00	-22.42	peak
4	12465.000	34.95	14.65	49.60	74.00	-24.40	peak
5	14445.000	34.61	16.37	50.98	74.00	-23.02	peak
6	17775.000	28.48	22.97	51.45	74.00	-22.55	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

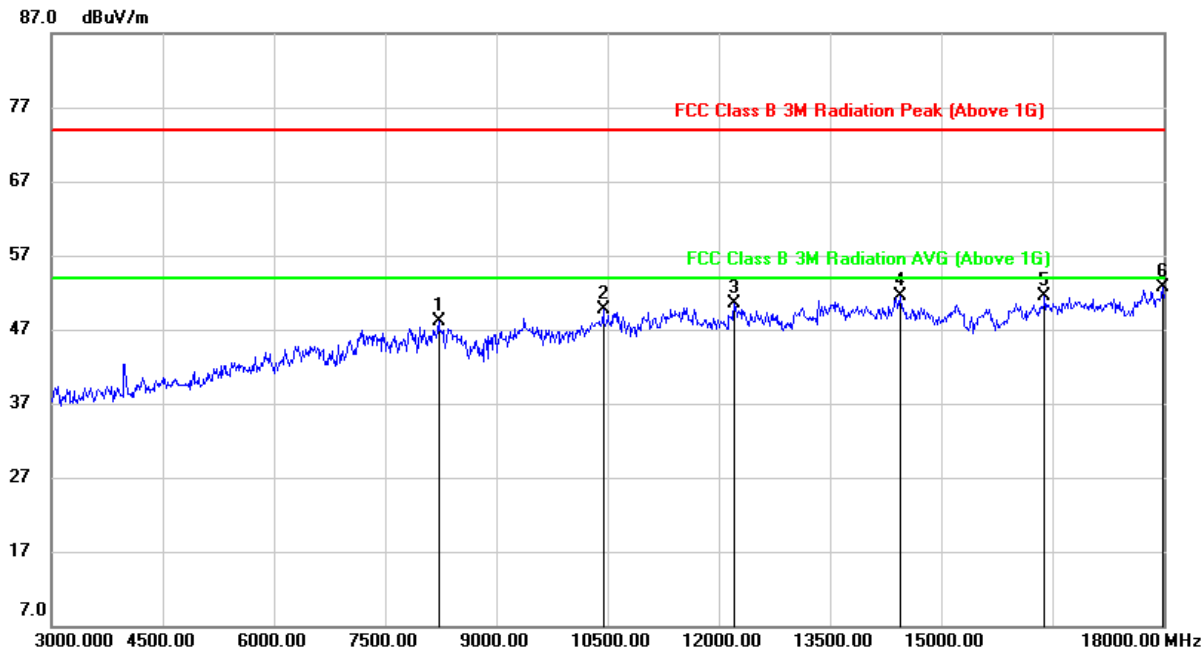


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8220.000	38.67	9.40	48.07	74.00	-25.93	peak
2	10440.000	38.01	11.60	49.61	74.00	-24.39	peak
3	12210.000	36.17	14.25	50.42	74.00	-23.58	peak
4	14445.000	35.07	16.37	51.44	74.00	-22.56	peak
5	16395.000	32.88	18.55	51.43	74.00	-22.57	peak
6	17985.000	29.48	23.25	52.73	74.00	-21.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

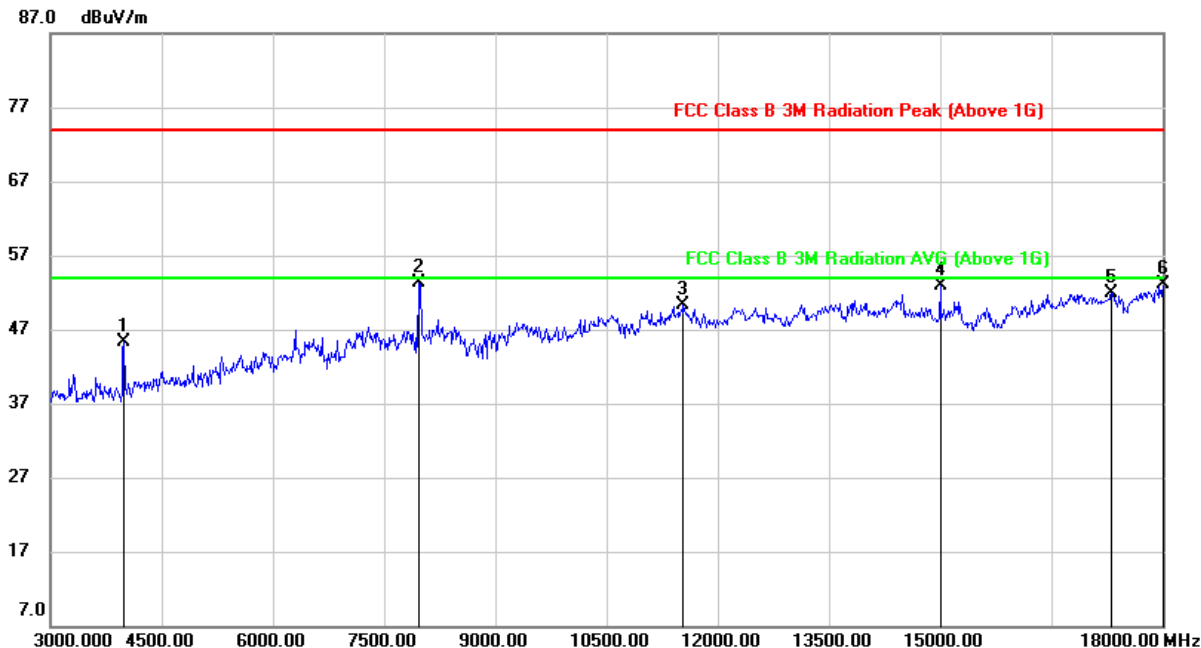


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	48.23	-2.95	45.28	74.00	-28.72	peak
2	7965.000	45.10	8.26	53.36	74.00	-20.64	peak
3	11535.000	36.28	14.10	50.38	74.00	-23.62	peak
4	15000.000	37.37	15.47	52.84	74.00	-21.16	peak
5	17310.000	30.13	21.86	51.99	74.00	-22.01	peak
6	18000.000	29.90	23.27	53.17	74.00	-20.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.2.3. 802.11n HT20 MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

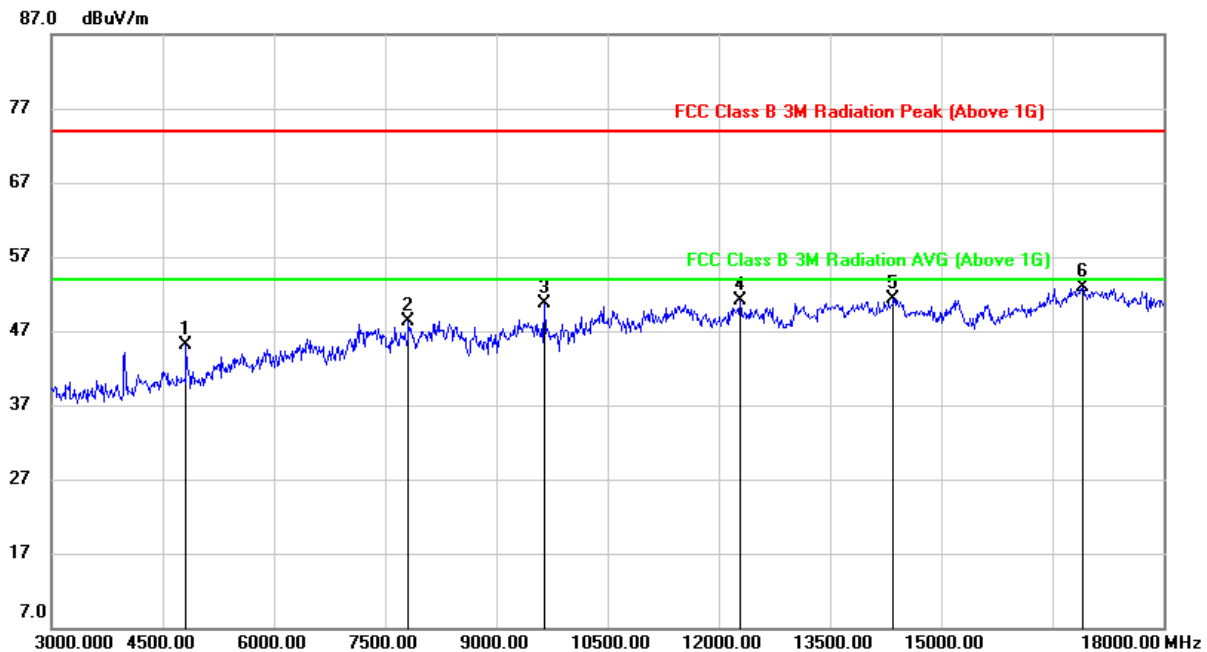


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	45.35	-0.23	45.12	74.00	-28.88	peak
2	7815.000	39.49	8.81	48.30	74.00	-25.70	peak
3	9645.000	40.64	10.03	50.67	74.00	-23.33	peak
4	12285.000	36.66	14.37	51.03	74.00	-22.97	peak
5	14355.000	35.00	16.38	51.38	74.00	-22.62	peak
6	16905.000	32.95	19.95	52.90	74.00	-21.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

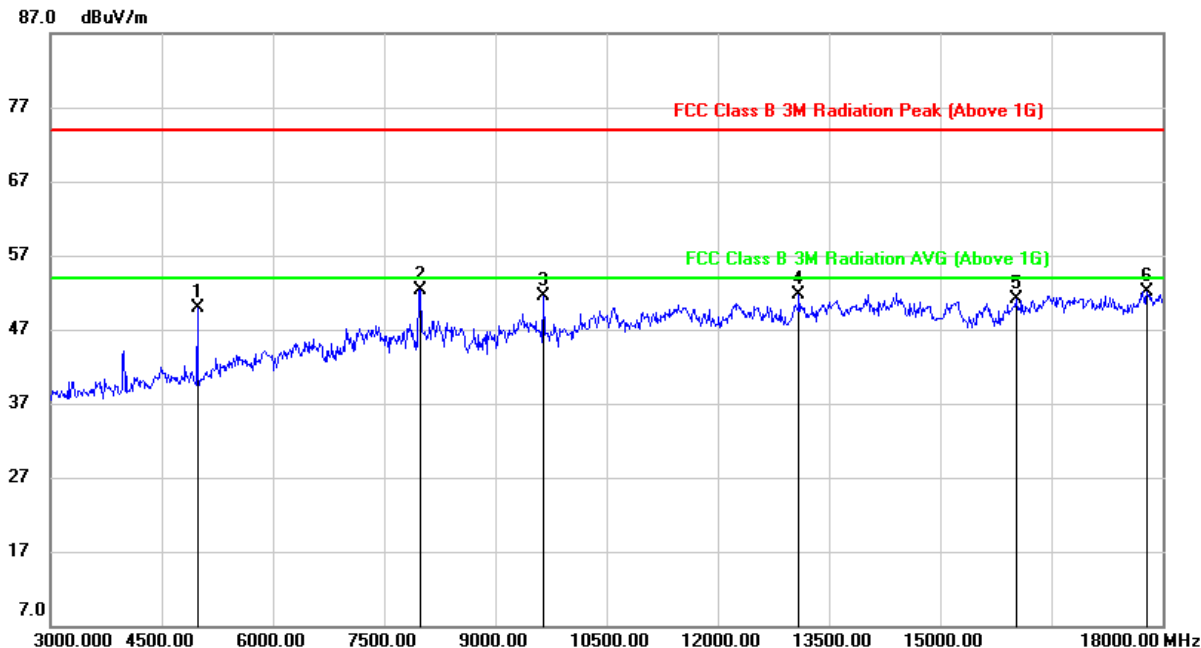


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4980.000	49.54	0.37	49.91	74.00	-24.09	peak
2	7995.000	44.08	8.16	52.24	74.00	-21.76	peak
3	9645.000	41.46	10.03	51.49	74.00	-22.51	peak
4	13095.000	36.79	14.97	51.76	74.00	-22.24	peak
5	16020.000	33.80	17.28	51.08	74.00	-22.92	peak
6	17790.000	29.01	23.12	52.13	74.00	-21.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

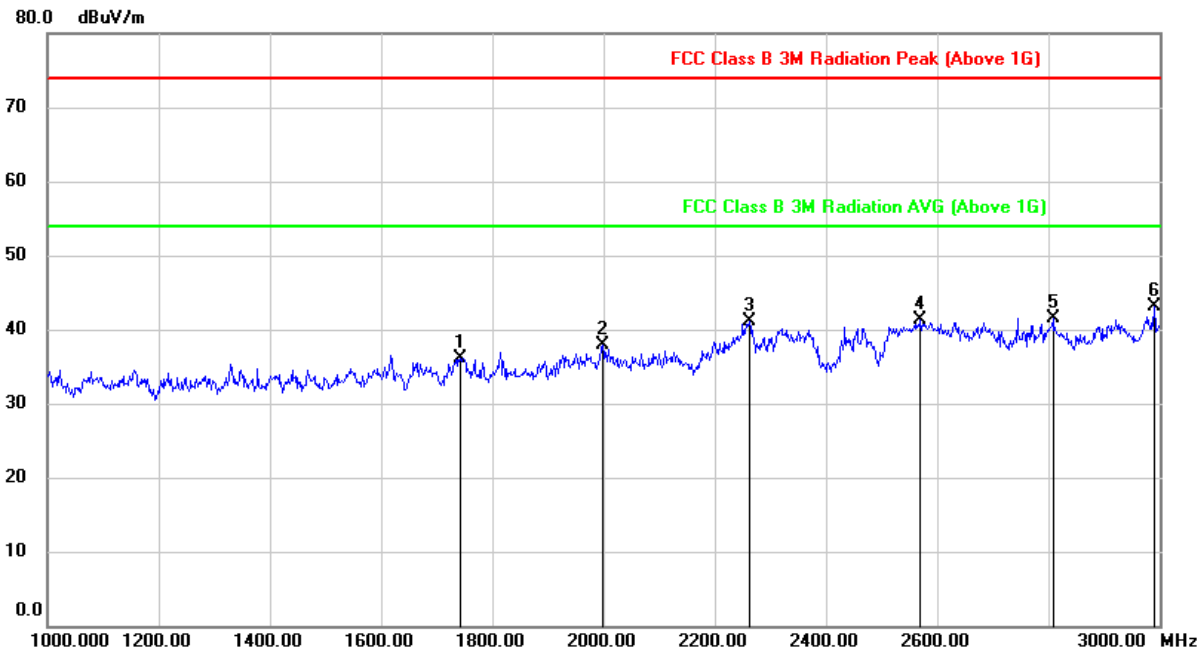


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1742.000	46.33	-10.16	36.17	74.00	-37.83	peak
2	1998.000	47.58	-9.77	37.81	74.00	-36.19	peak
3	2262.000	49.03	-7.86	41.17	74.00	-32.83	peak
4	2570.000	48.00	-6.66	41.34	74.00	-32.66	peak
5	2808.000	46.72	-5.19	41.53	74.00	-32.47	peak
6	2990.000	47.69	-4.65	43.04	74.00	-30.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

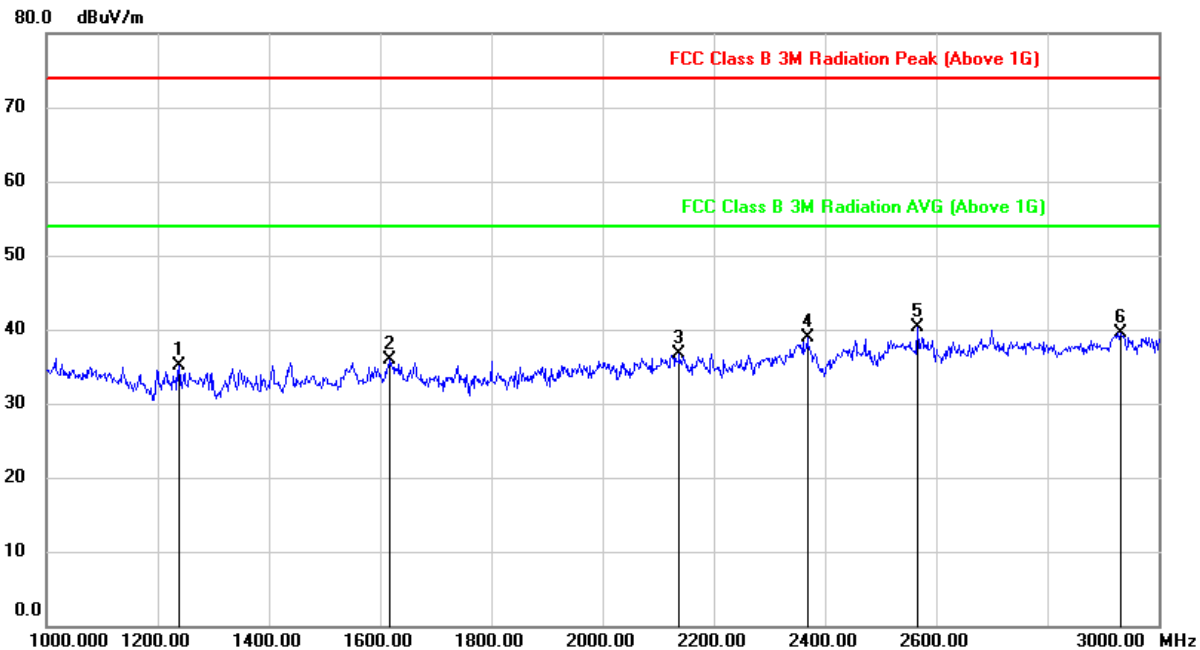


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1238.000	47.02	-11.97	35.05	74.00	-38.95	peak
2	1618.000	46.43	-10.62	35.81	74.00	-38.19	peak
3	2138.000	45.13	-8.36	36.77	74.00	-37.23	peak
4	2368.000	46.23	-7.23	39.00	74.00	-35.00	peak
5	2566.000	47.02	-6.64	40.38	74.00	-33.62	peak
6	2932.000	44.52	-4.97	39.55	74.00	-34.45	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

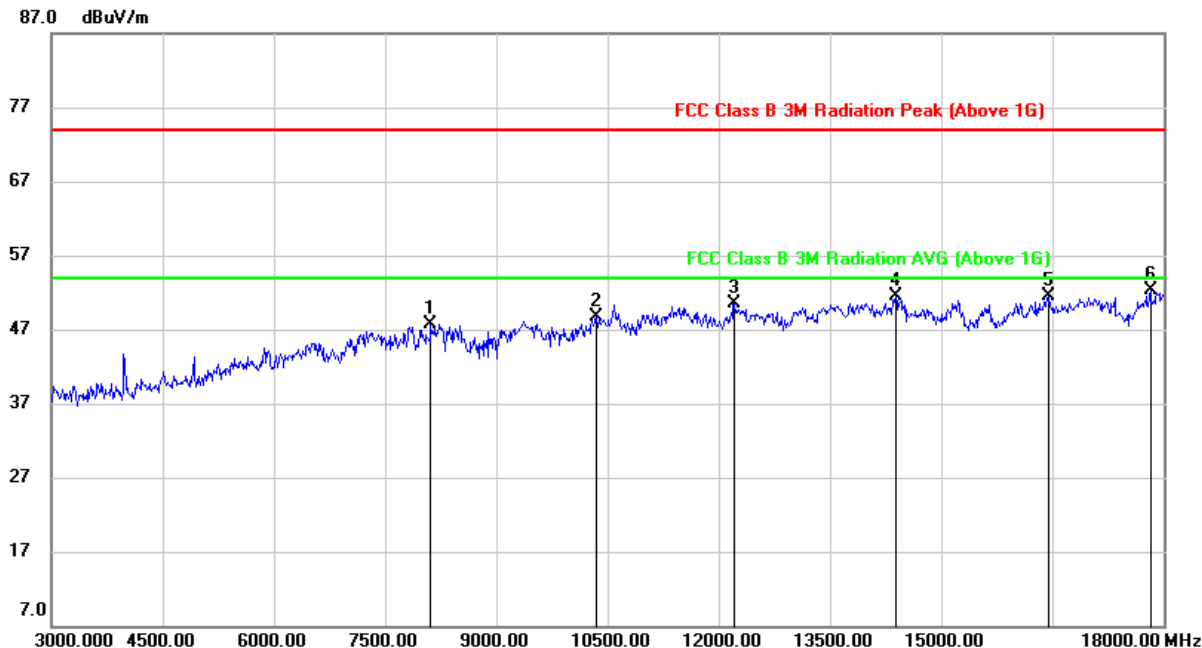


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8115.000	38.58	9.12	47.70	74.00	-26.30	peak
2	10350.000	37.23	11.56	48.79	74.00	-25.21	peak
3	12210.000	36.33	14.25	50.58	74.00	-23.42	peak
4	14385.000	35.01	16.41	51.42	74.00	-22.58	peak
5	16455.000	32.73	18.75	51.48	74.00	-22.52	peak
6	17820.000	29.04	23.21	52.25	74.00	-21.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

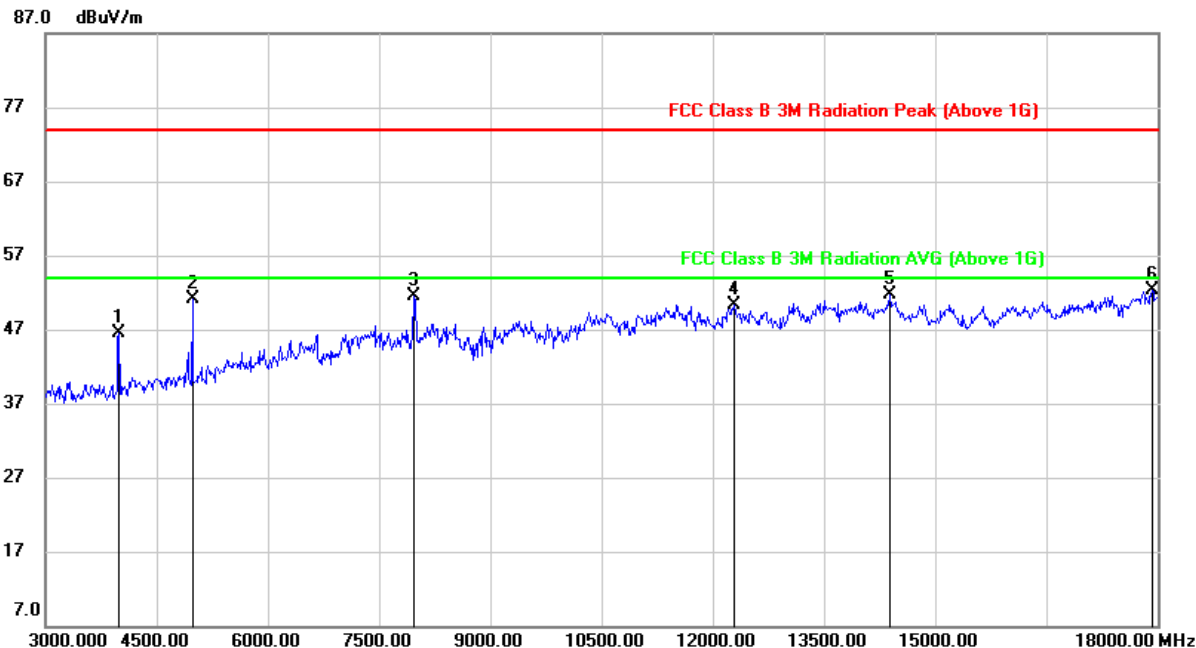

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.42	-2.95	46.47	74.00	-27.53	peak
2	4980.000	50.66	0.37	51.03	74.00	-22.97	peak
3	7965.000	43.27	8.26	51.53	74.00	-22.47	peak
4	12285.000	35.95	14.37	50.32	74.00	-23.68	peak
5	14385.000	35.29	16.41	51.70	74.00	-22.30	peak
6	17925.000	29.05	23.18	52.23	74.00	-21.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The High Pass filter loss factor already add into the correct factor.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All models have been tested, only the worst data record in the report




9.3. SPURIOUS EMISSIONS (1~3GHz)

8WY-A806ST-Q1Z

9.3.1. 802.11b MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

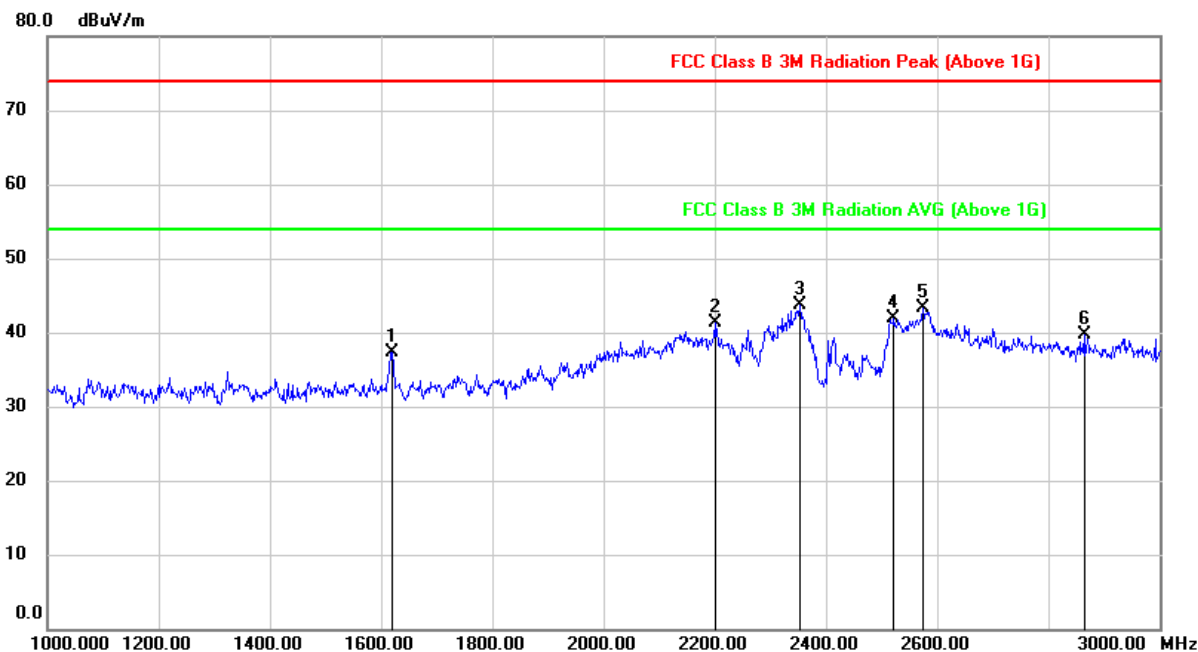


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1620.000	48.02	-10.62	37.40	74.00	-36.60	peak
2	2200.000	49.75	-8.44	41.31	74.00	-32.69	peak
3	2352.000	51.05	-7.29	43.76	74.00	-30.24	peak
4	2522.000	48.39	-6.44	41.95	74.00	-32.05	peak
5	2574.000	49.94	-6.68	43.26	74.00	-30.74	peak
6	2864.000	44.84	-5.16	39.68	74.00	-34.32	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

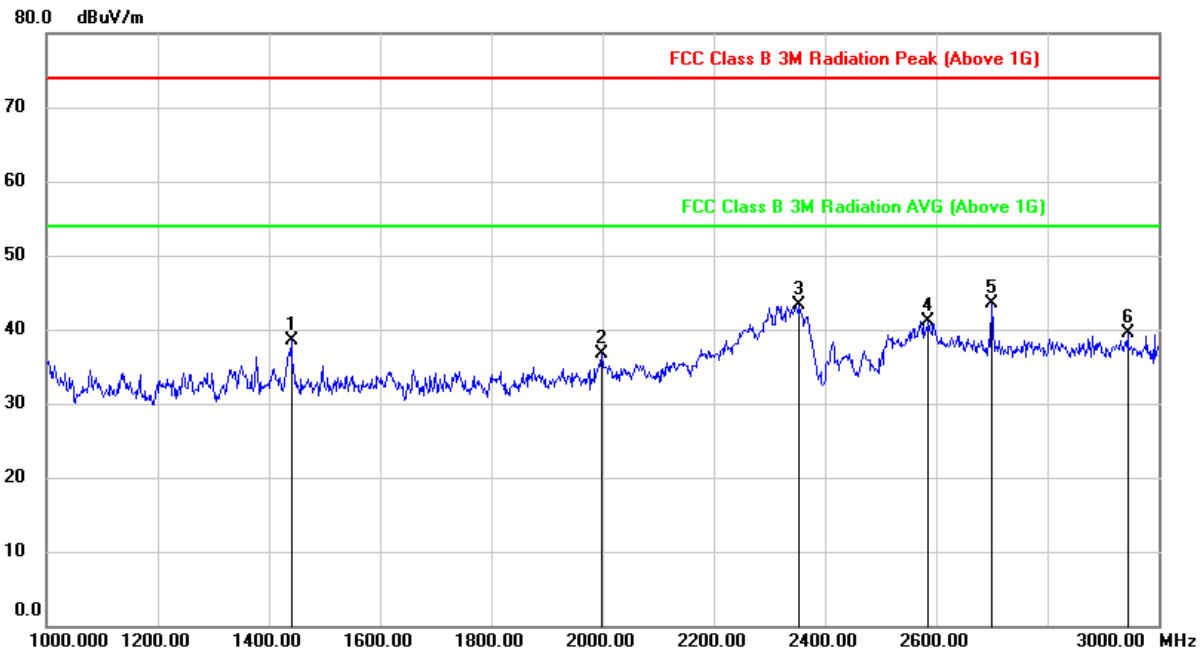


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	50.27	-11.79	38.48	74.00	-35.52	peak
2	1998.000	46.42	-9.77	36.65	74.00	-37.35	peak
3	2354.000	50.51	-7.28	43.23	74.00	-30.77	peak
4	2586.000	47.76	-6.73	41.03	74.00	-32.97	peak
5	2700.000	50.92	-7.42	43.50	74.00	-30.50	peak
6	2944.000	44.48	-4.90	39.58	74.00	-34.42	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

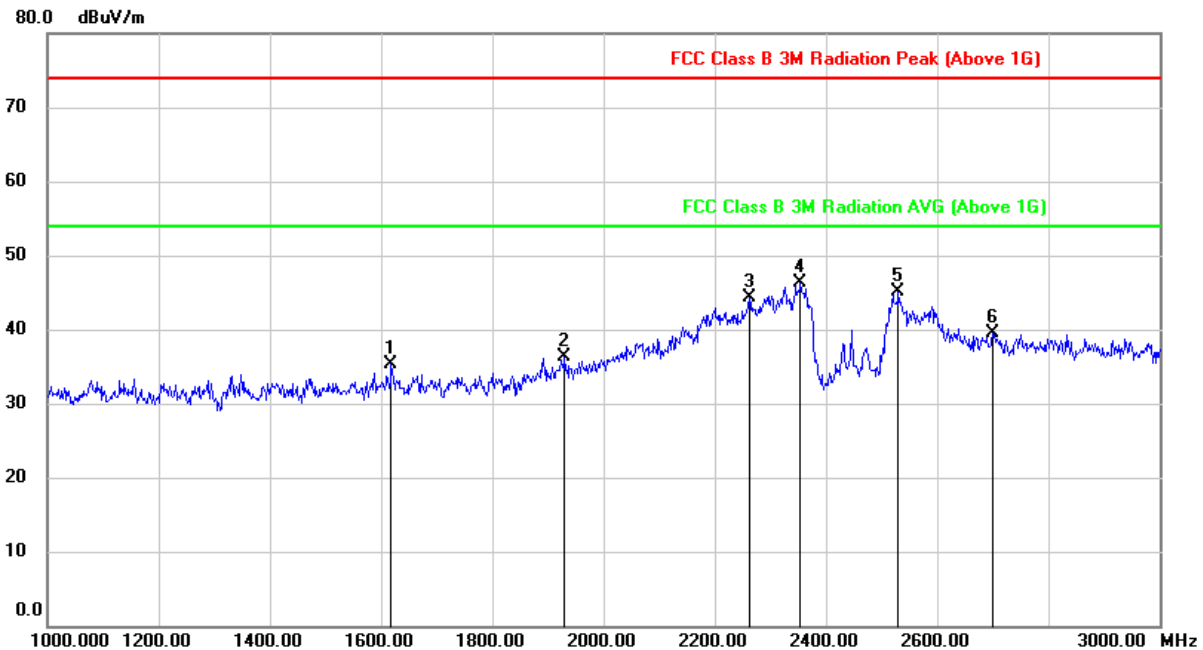


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	45.91	-10.62	35.29	74.00	-38.71	peak
2	1930.000	45.80	-9.45	36.35	74.00	-37.65	peak
3	2262.000	52.07	-7.86	44.21	74.00	-29.79	peak
4	2354.000	53.61	-7.28	46.33	74.00	-27.67	peak
5	2530.000	51.51	-6.47	45.04	74.00	-28.96	peak
6	2700.000	47.01	-7.42	39.59	74.00	-34.41	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

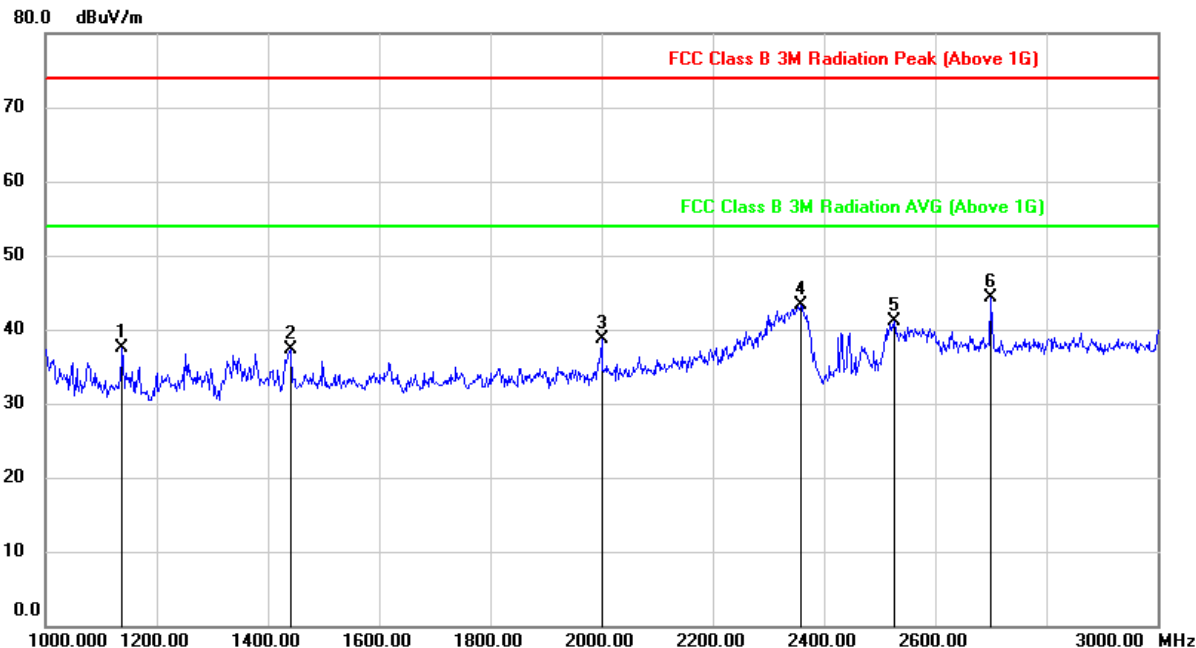

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	50.05	-12.53	37.52	74.00	-36.48	peak
2	1440.000	49.08	-11.79	37.29	74.00	-36.71	peak
3	2000.000	48.41	-9.78	38.63	74.00	-35.37	peak
4	2358.000	50.51	-7.27	43.24	74.00	-30.76	peak
5	2526.000	47.63	-6.46	41.17	74.00	-32.83	peak
6	2700.000	51.80	-7.42	44.38	74.00	-29.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

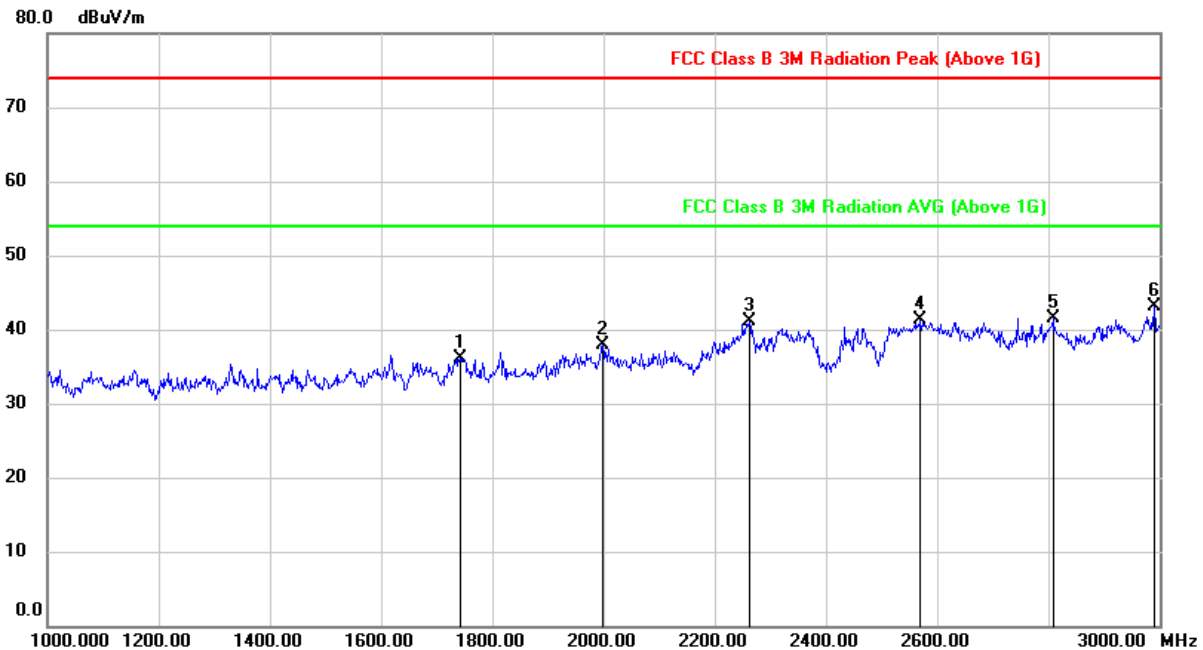
**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1742.000	46.33	-10.16	36.17	74.00	-37.83	peak
2	1998.000	47.58	-9.77	37.81	74.00	-36.19	peak
3	2262.000	49.03	-7.86	41.17	74.00	-32.83	peak
4	2570.000	48.00	-6.66	41.34	74.00	-32.66	peak
5	2808.000	46.72	-5.19	41.53	74.00	-32.47	peak
6	2990.000	47.69	-4.65	43.04	74.00	-30.96	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

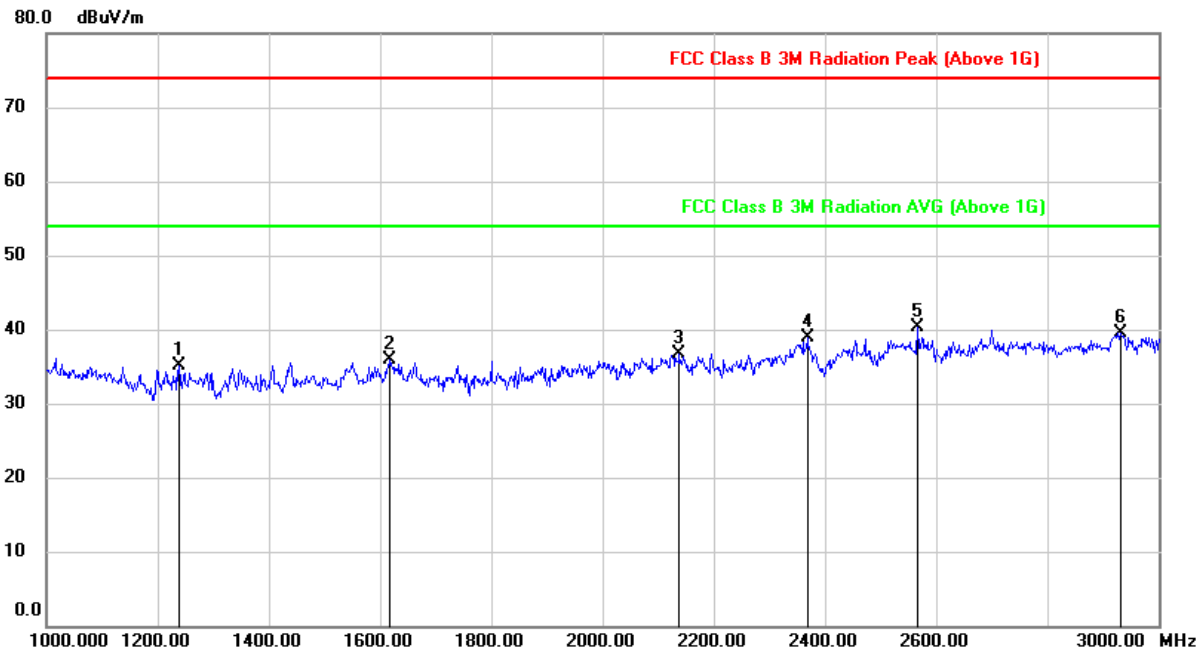


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1238.000	47.02	-11.97	35.05	74.00	-38.95	peak
2	1618.000	46.43	-10.62	35.81	74.00	-38.19	peak
3	2138.000	45.13	-8.36	36.77	74.00	-37.23	peak
4	2368.000	46.23	-7.23	39.00	74.00	-35.00	peak
5	2566.000	47.02	-6.64	40.38	74.00	-33.62	peak
6	2932.000	44.52	-4.97	39.55	74.00	-34.45	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.3.2. 802.11g MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

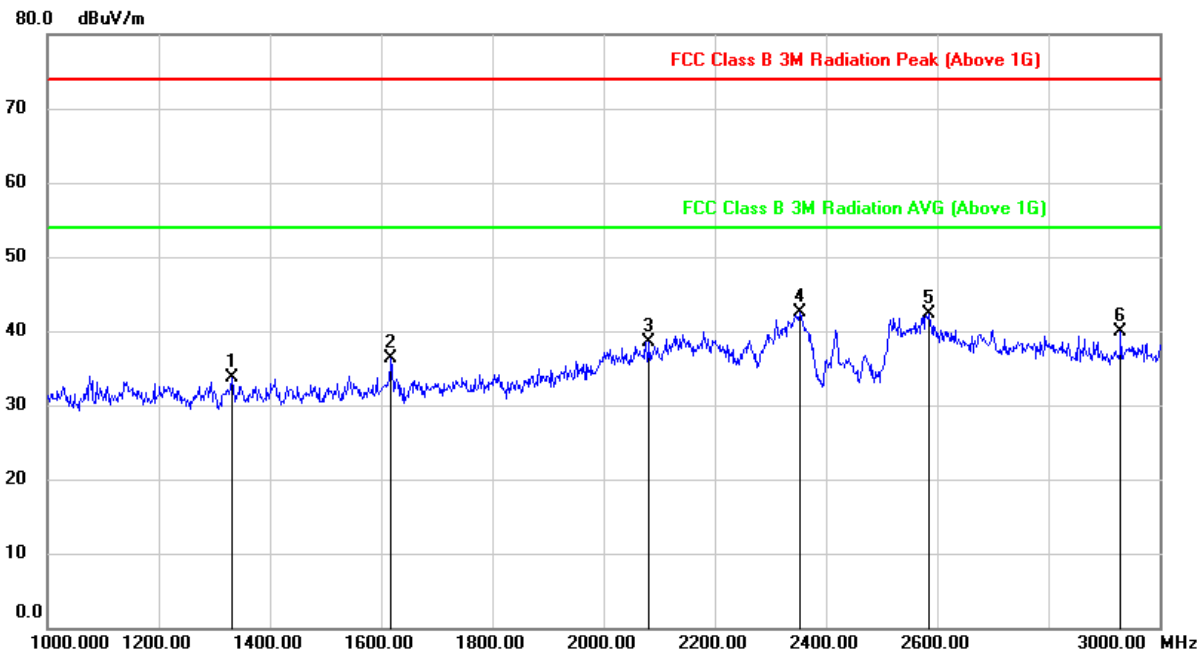


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	45.21	-11.43	33.78	74.00	-40.22	peak
2	1618.000	47.01	-10.62	36.39	74.00	-37.61	peak
3	2082.000	47.13	-8.58	38.55	74.00	-35.45	peak
4	2354.000	49.79	-7.28	42.51	74.00	-31.49	peak
5	2584.000	48.94	-6.73	42.21	74.00	-31.79	peak
6	2930.000	44.87	-4.97	39.90	74.00	-34.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

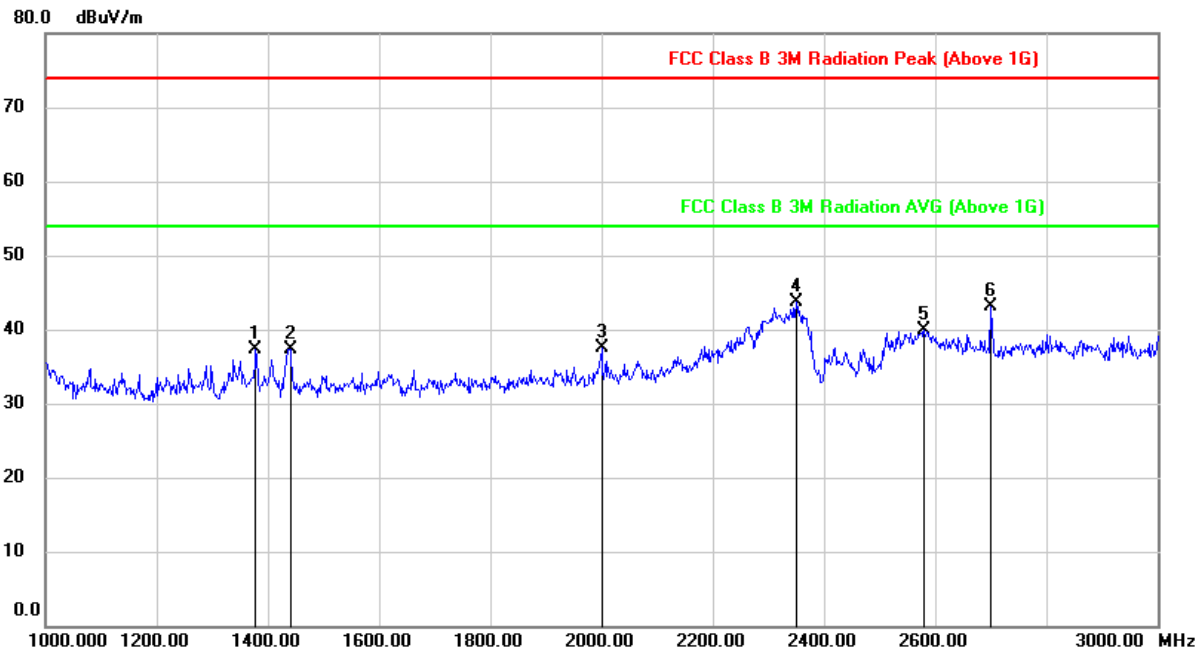


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1378.000	49.05	-11.77	37.28	74.00	-36.72	peak
2	1440.000	49.19	-11.79	37.40	74.00	-36.60	peak
3	2000.000	47.23	-9.78	37.45	74.00	-36.55	peak
4	2350.000	51.08	-7.30	43.78	74.00	-30.22	peak
5	2580.000	46.59	-6.71	39.88	74.00	-34.12	peak
6	2700.000	50.57	-7.42	43.15	74.00	-30.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

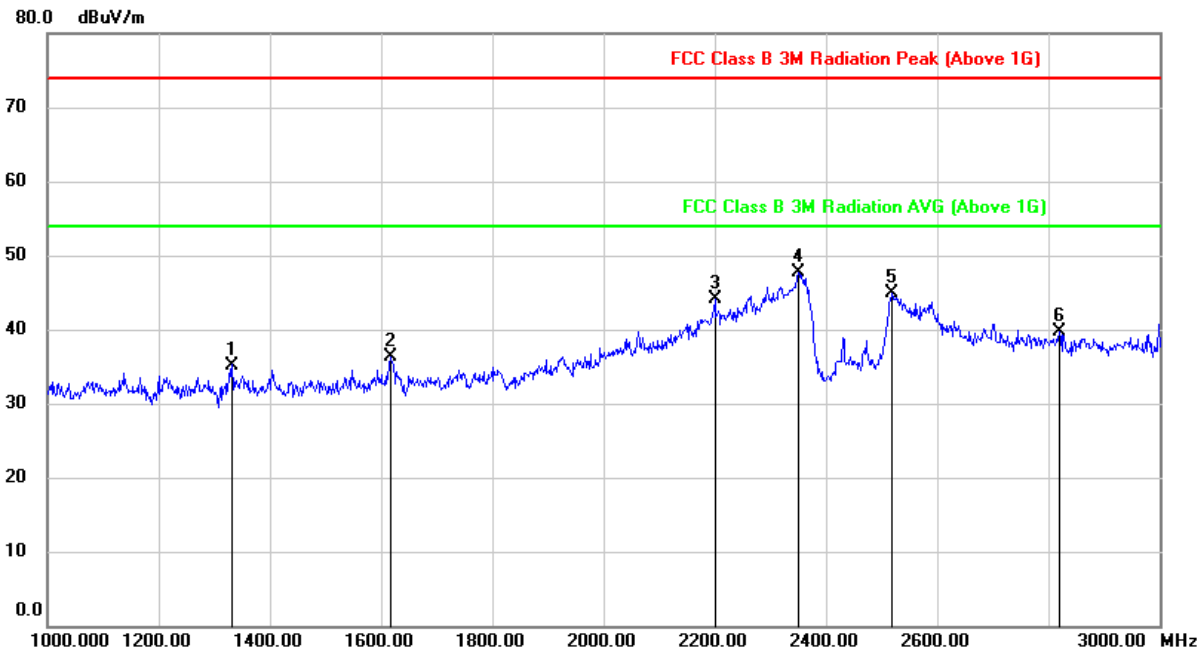


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	46.63	-11.43	35.20	74.00	-38.80	peak
2	1616.000	46.95	-10.63	36.32	74.00	-37.68	peak
3	2200.000	52.60	-8.44	44.16	74.00	-29.84	peak
4	2350.000	55.03	-7.30	47.73	74.00	-26.27	peak
5	2518.000	51.33	-6.42	44.91	74.00	-29.09	peak
6	2820.000	44.98	-5.19	39.79	74.00	-34.21	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

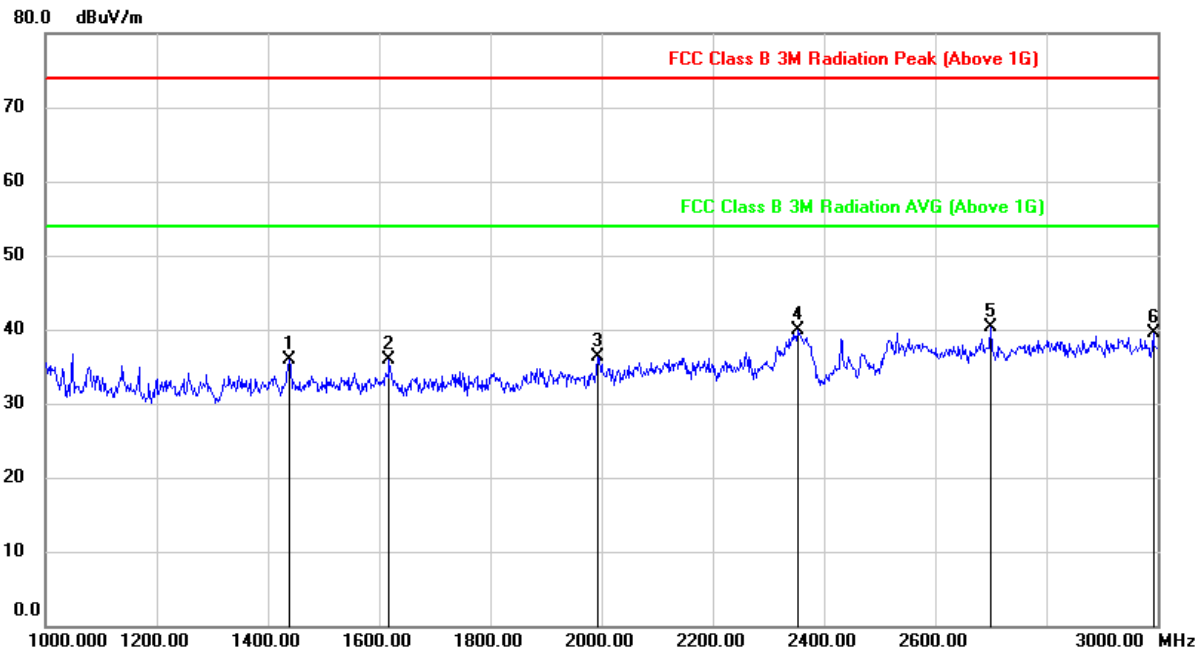


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	47.65	-11.79	35.86	74.00	-38.14	peak
2	1618.000	46.46	-10.62	35.84	74.00	-38.16	peak
3	1994.000	46.06	-9.75	36.31	74.00	-37.69	peak
4	2352.000	47.18	-7.29	39.89	74.00	-34.11	peak
5	2700.000	47.70	-7.42	40.28	74.00	-33.72	peak
6	2992.000	44.13	-4.64	39.49	74.00	-34.51	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

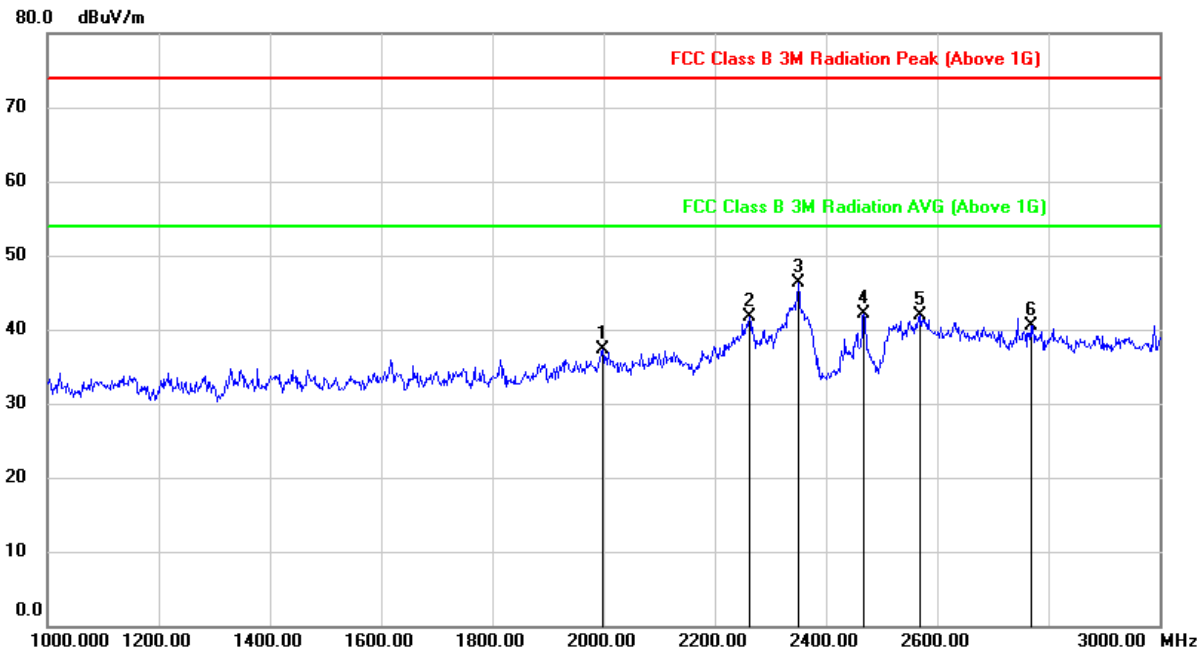


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1998.000	47.08	-9.77	37.31	74.00	-36.69	peak
2	2262.000	49.53	-7.86	41.67	74.00	-32.33	peak
3	2350.000	53.58	-7.30	46.28	74.00	-27.72	peak
4	2468.000	48.70	-6.59	42.11	74.00	-31.89	peak
5	2570.000	48.50	-6.66	41.84	74.00	-32.16	peak
6	2768.000	46.44	-5.91	40.53	74.00	-33.47	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

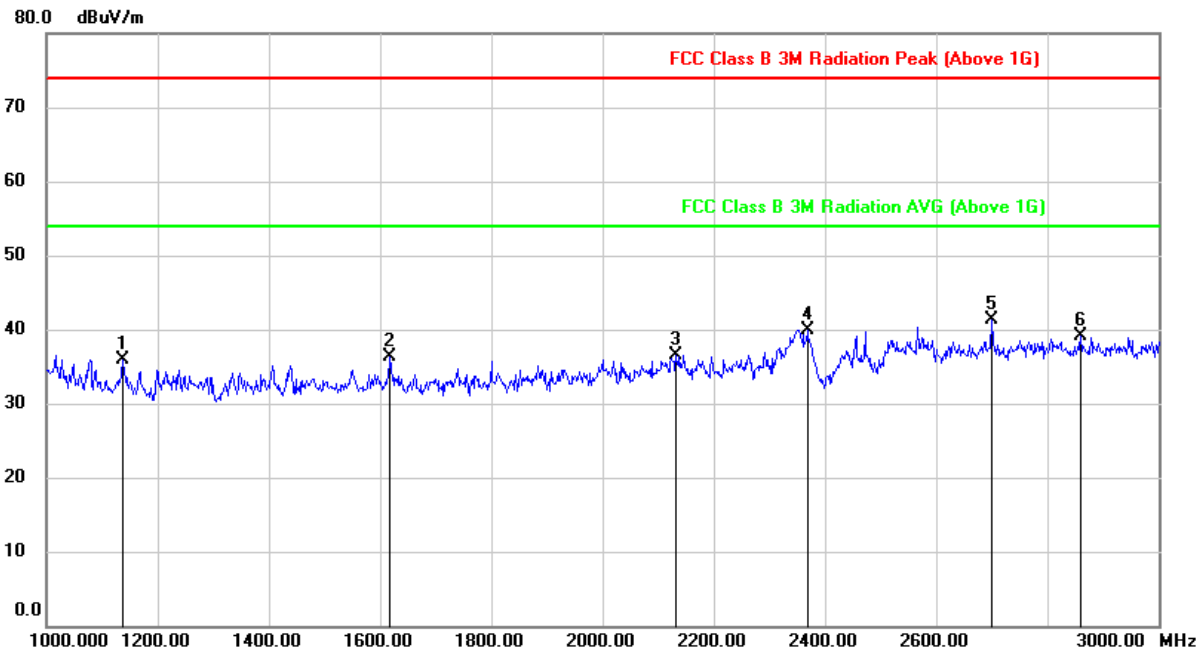


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1136.000	48.50	-12.54	35.96	74.00	-38.04	peak
2	1618.000	46.93	-10.62	36.31	74.00	-37.69	peak
3	2132.000	44.89	-8.35	36.54	74.00	-37.46	peak
4	2368.000	47.23	-7.23	40.00	74.00	-34.00	peak
5	2700.000	48.80	-7.42	41.38	74.00	-32.62	peak
6	2860.000	44.24	-5.16	39.08	74.00	-34.92	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



9.3.3. 802.11n HT20 MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

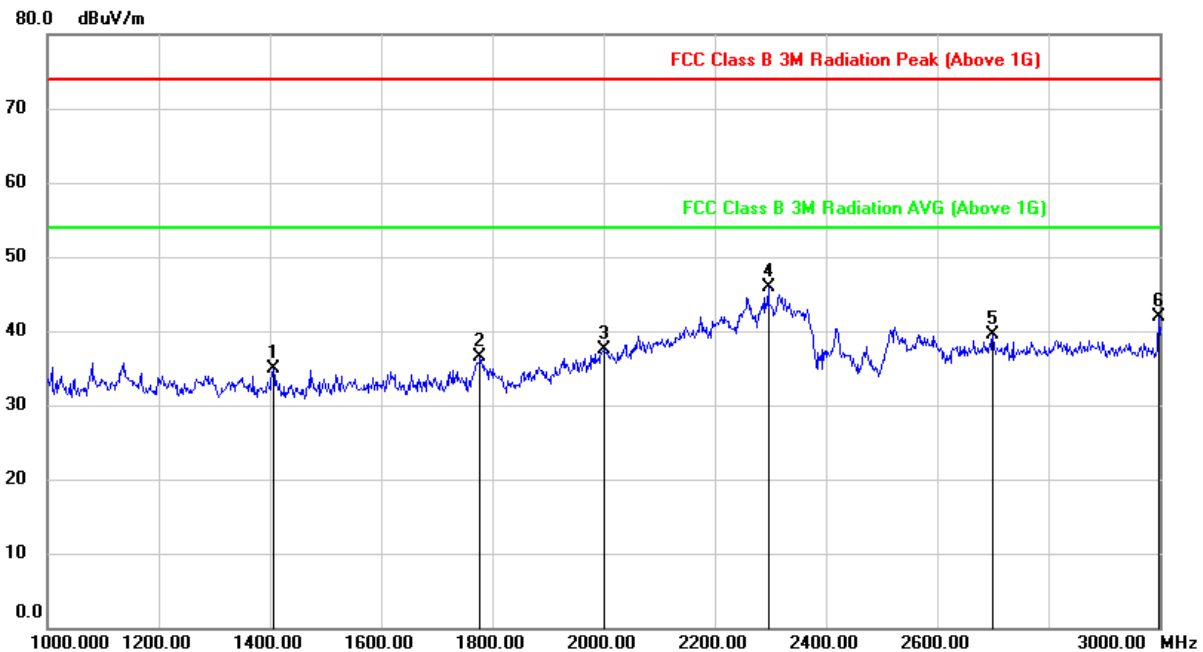


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1406.000	46.75	-11.90	34.85	74.00	-39.15	peak
2	1778.000	46.25	-9.70	36.55	74.00	-37.45	peak
3	2000.000	47.30	-9.78	37.52	74.00	-36.48	peak
4	2296.000	53.50	-7.53	45.97	74.00	-28.03	peak
5	2700.000	46.89	-7.42	39.47	74.00	-34.53	peak
6	2998.000	46.44	-4.60	41.84	74.00	-32.16	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

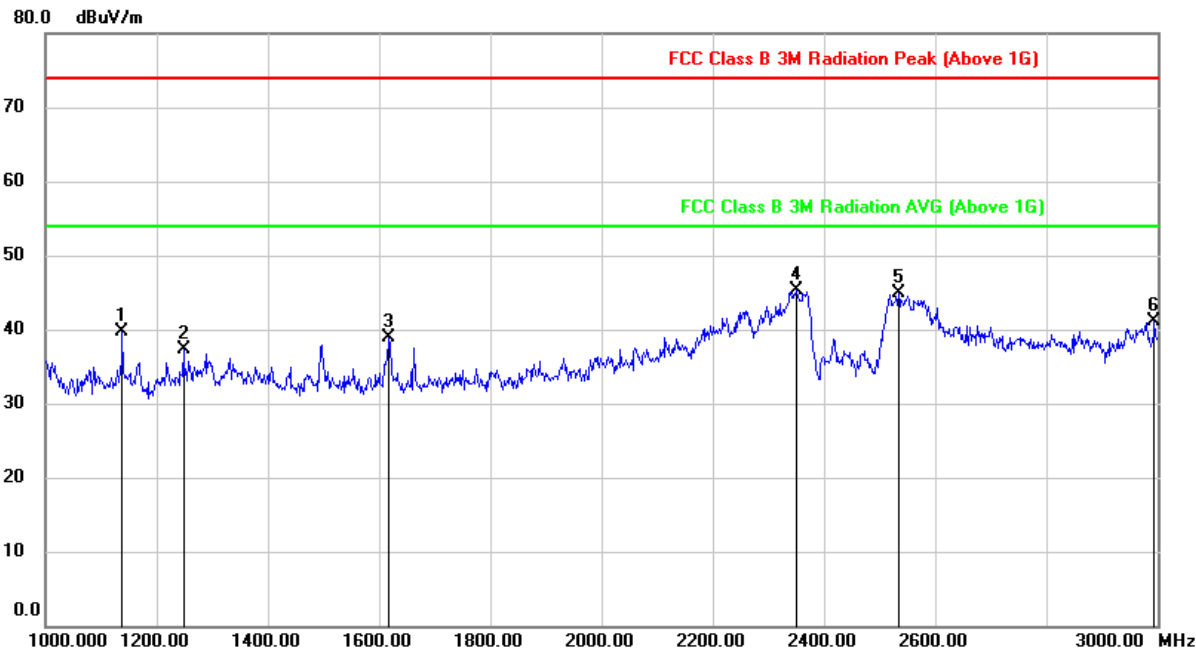


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	52.16	-12.53	39.63	74.00	-34.37	peak
2	1248.000	49.08	-11.84	37.24	74.00	-36.76	peak
3	1618.000	49.60	-10.62	38.98	74.00	-35.02	peak
4	2350.000	52.70	-7.30	45.40	74.00	-28.60	peak
5	2534.000	51.38	-6.50	44.88	74.00	-29.12	peak
6	2994.000	45.69	-4.62	41.07	74.00	-32.93	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

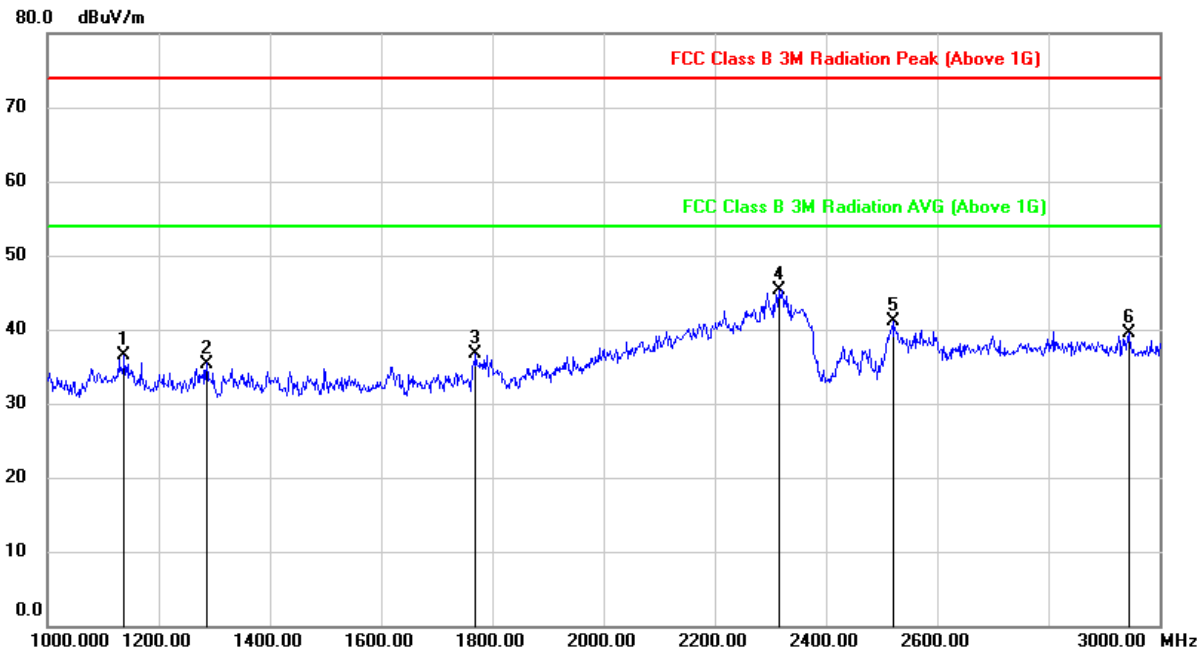


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	48.98	-12.53	36.45	74.00	-37.55	peak
2	1286.000	46.79	-11.39	35.40	74.00	-38.60	peak
3	1770.000	46.45	-9.81	36.64	74.00	-37.36	peak
4	2316.000	52.75	-7.43	45.32	74.00	-28.68	peak
5	2520.000	47.59	-6.43	41.16	74.00	-32.84	peak
6	2944.000	44.31	-4.90	39.41	74.00	-34.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

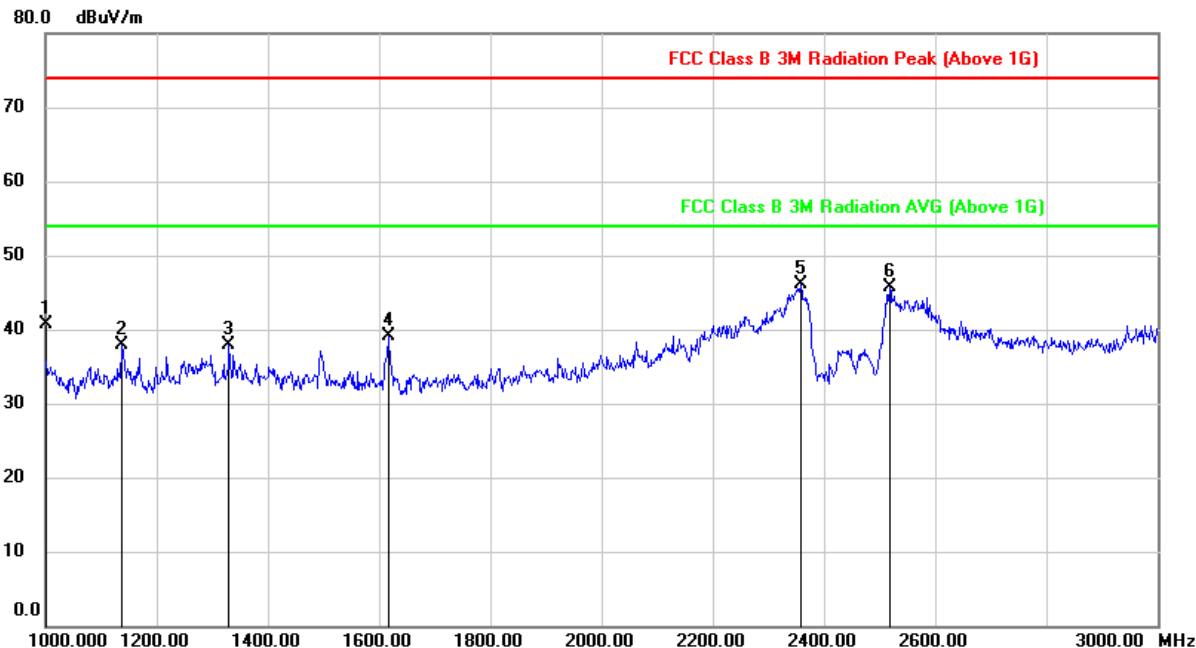


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1000.0000	53.78	-13.11	40.67	74.00	-33.33	peak
2	1138.000	50.37	-12.53	37.84	74.00	-36.16	peak
3	1330.000	49.29	-11.42	37.87	74.00	-36.13	peak
4	1616.000	49.75	-10.63	39.12	74.00	-34.88	peak
5	2358.000	53.43	-7.27	46.16	74.00	-27.84	peak
6	2518.000	52.10	-6.42	45.68	74.00	-28.32	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

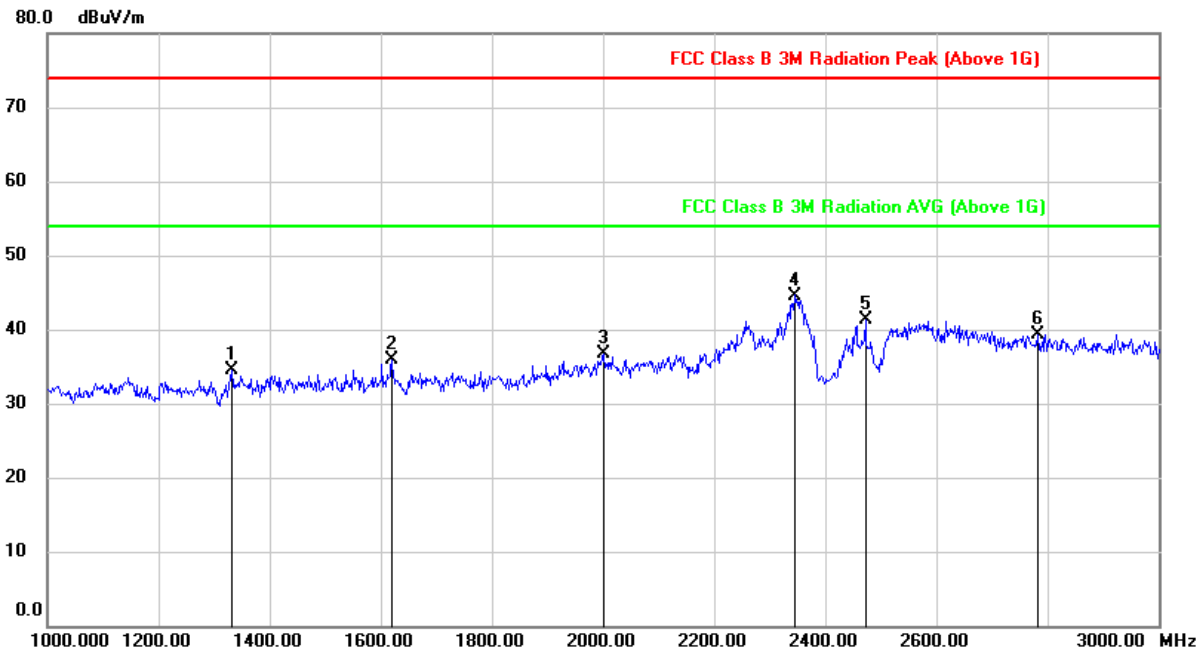


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	45.92	-11.43	34.49	74.00	-39.51	peak
2	1620.000	46.54	-10.62	35.92	74.00	-38.08	peak
3	2000.000	46.46	-9.78	36.68	74.00	-37.32	peak
4	2346.000	51.92	-7.32	44.60	74.00	-29.40	peak
5	2472.000	47.85	-6.56	41.29	74.00	-32.71	peak
6	2782.000	44.89	-5.59	39.30	74.00	-34.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

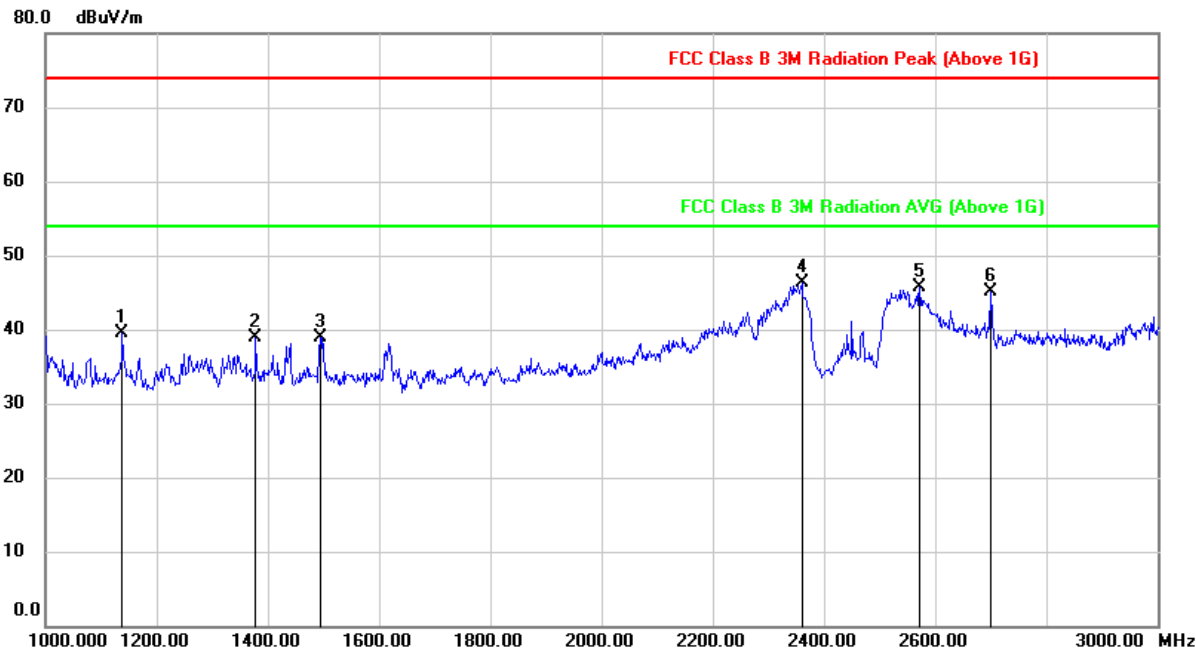

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	52.08	-12.53	39.55	74.00	-34.45	peak
2	1378.000	50.67	-11.77	38.90	74.00	-35.10	peak
3	1494.000	50.53	-11.62	38.91	74.00	-35.09	peak
4	2360.000	53.50	-7.26	46.24	74.00	-27.76	peak
5	2572.000	52.44	-6.67	45.77	74.00	-28.23	peak
6	2700.000	52.45	-7.42	45.03	74.00	-28.97	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All models have been tested, only the worst data record in the report




9.4. SPURIOUS EMISSIONS (18~26GHz)

8WY-A806ST-Q1Z

9.4.1. 802.11b MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

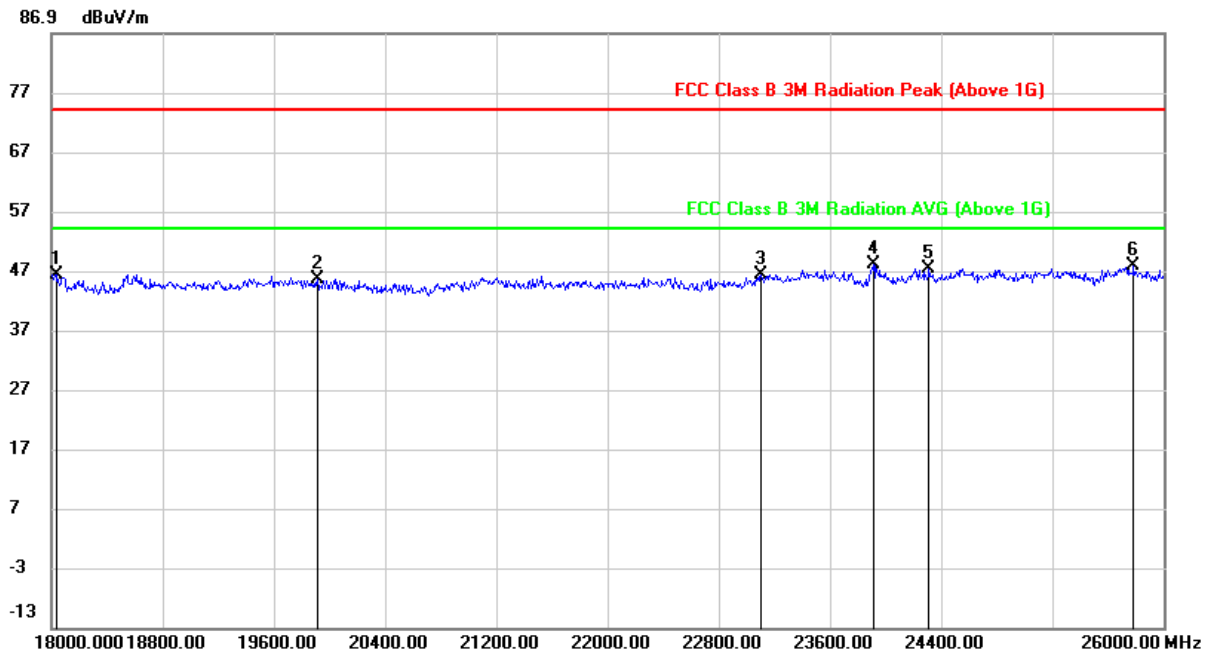


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18032.000	50.26	-3.93	46.33	74.00	-27.67	peak
2	19912.000	49.91	-4.36	45.55	74.00	-28.45	peak
3	23104.000	51.85	-5.47	46.38	74.00	-27.62	peak
4	23912.000	52.32	-4.23	48.09	74.00	-25.91	peak
5	24312.000	50.60	-3.35	47.25	74.00	-26.75	peak
6	25784.000	49.23	-1.49	47.74	74.00	-26.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

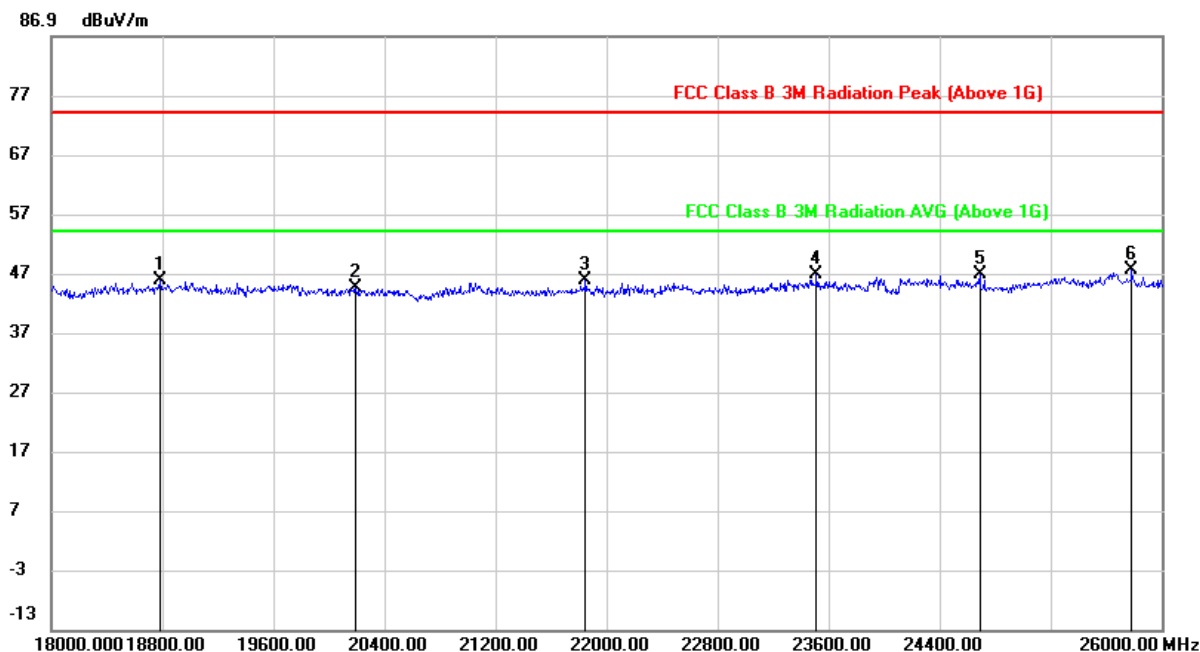

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18784.000	50.55	-4.84	45.71	74.00	-28.29	peak
2	20192.000	49.37	-4.76	44.61	74.00	-29.39	peak
3	21848.000	51.76	-5.95	45.81	74.00	-28.19	peak
4	23512.000	51.51	-4.76	46.75	74.00	-27.25	peak
5	24688.000	48.89	-2.11	46.78	74.00	-27.22	peak
6	25784.000	49.08	-1.49	47.59	74.00	-26.41	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.


Note: All models have been tested, only the worst data record in the report



9.5. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)

9.5.1. 802.11b MODE for 8WY-A806ST-Q1R

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

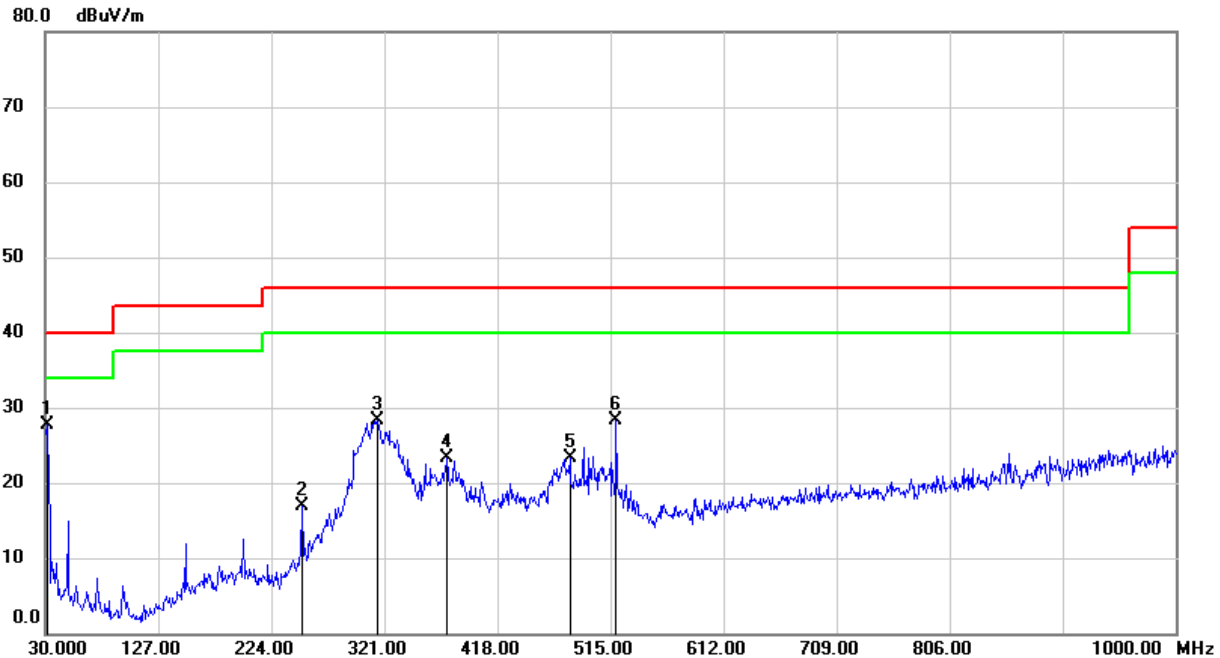


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	44.86	-17.09	27.77	40.00	-12.23	QP
2	250.1900	32.71	-15.76	16.95	46.00	-29.05	QP
3	315.1800	41.67	-13.34	28.33	46.00	-17.67	QP
4	374.3500	35.65	-12.37	23.28	46.00	-22.72	QP
5	480.0800	33.71	-10.48	23.23	46.00	-22.77	QP
6	519.8500	37.98	-9.62	28.36	46.00	-17.64	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

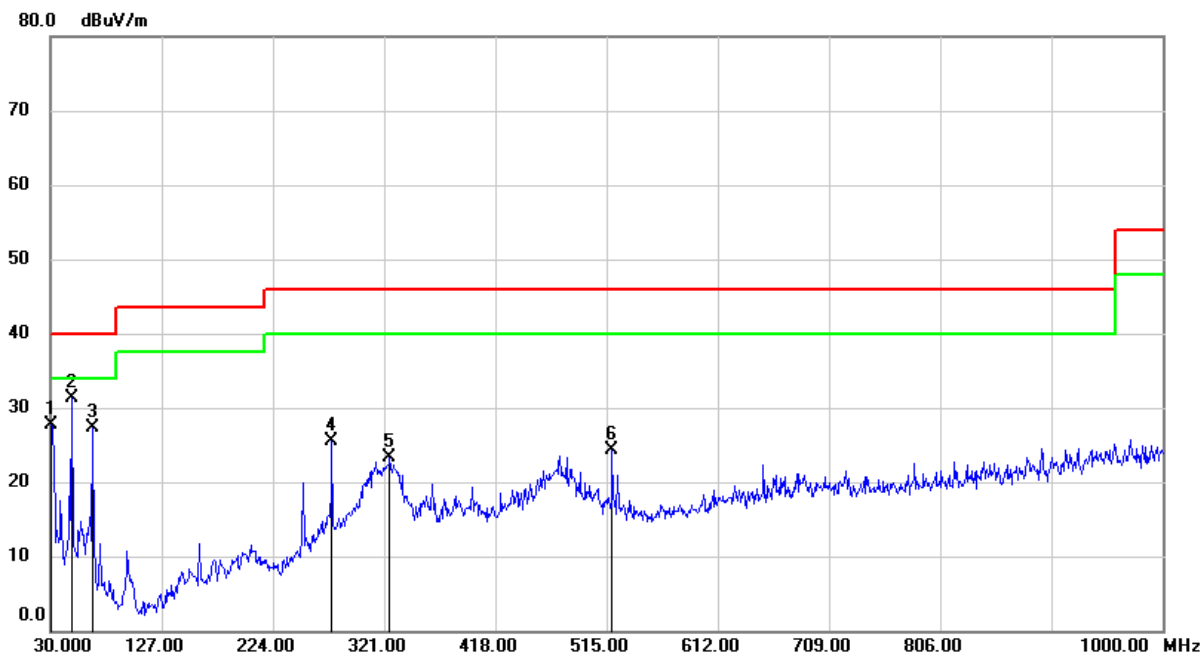


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	44.59	-16.94	27.65	40.00	-12.35	QP
2	48.4300	49.36	-18.10	31.26	40.00	-8.74	QP
3	66.8600	46.93	-19.69	27.24	40.00	-12.76	QP
4	275.4100	40.24	-14.69	25.55	46.00	-20.45	QP
5	325.8500	36.57	-13.23	23.34	46.00	-22.66	QP
6	519.8500	34.01	-9.62	24.39	46.00	-21.61	QP

- Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto



9.5.2. 802.11b MODE for 8WY-A806ST-Q1Z

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

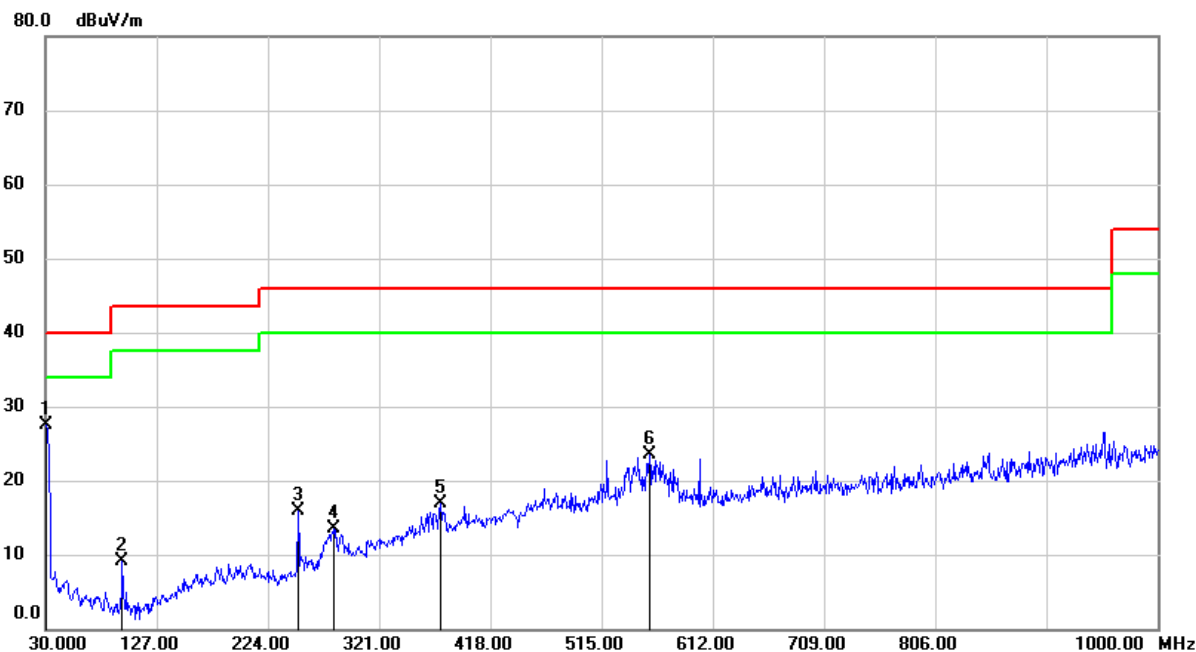


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	44.36	-16.94	27.42	40.00	-12.58	QP
2	96.9300	30.42	-21.38	9.04	43.50	-34.46	QP
3	250.1900	31.57	-15.76	15.81	46.00	-30.19	QP
4	281.2300	27.85	-14.43	13.42	46.00	-32.58	QP
5	374.3500	29.18	-12.37	16.81	46.00	-29.19	QP
6	556.7100	32.53	-9.00	23.53	46.00	-22.47	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

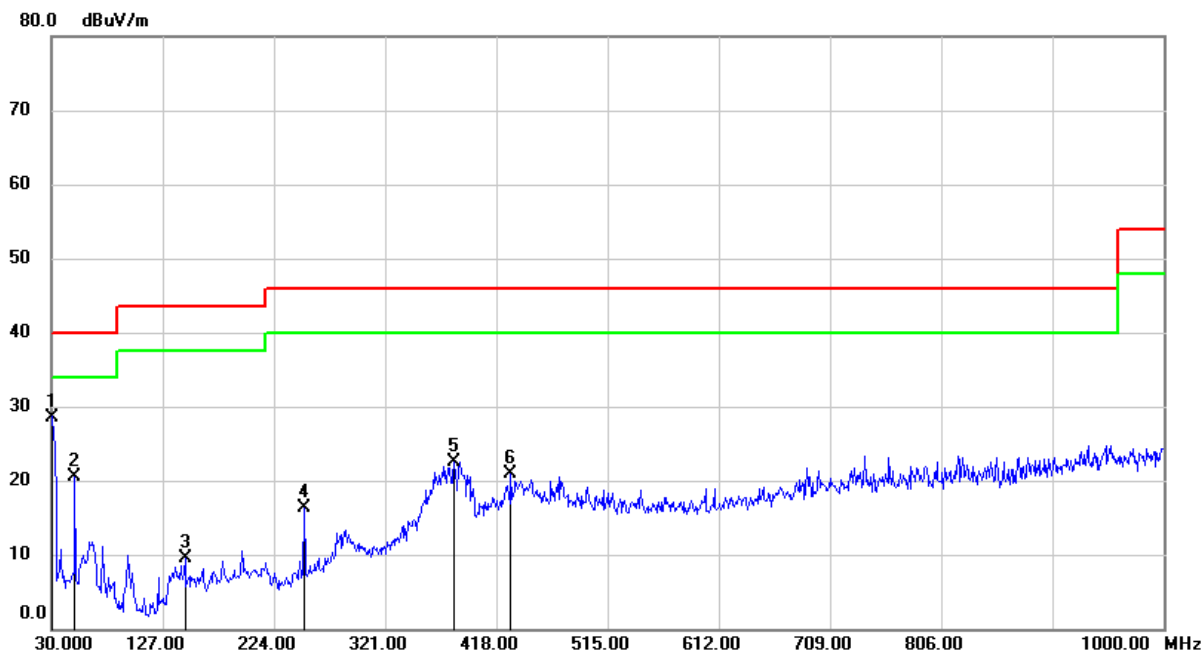

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.54	-16.94	28.60	40.00	-11.40	QP
2	50.3700	38.58	-18.17	20.41	40.00	-19.59	QP
3	146.4000	27.79	-18.28	9.51	43.50	-33.99	QP
4	250.1900	32.11	-15.76	16.35	46.00	-29.65	QP
5	381.1400	34.83	-12.28	22.55	46.00	-23.45	QP
6	430.6100	32.37	-11.37	21.00	46.00	-25.00	QP

- Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All test mode has been tested, only the worst data record in the report




9.6. SPURIOUS EMISSIONS BELOW 30M

8WY-A806ST-Q1Z

9.6.1. 802.11b MODE


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

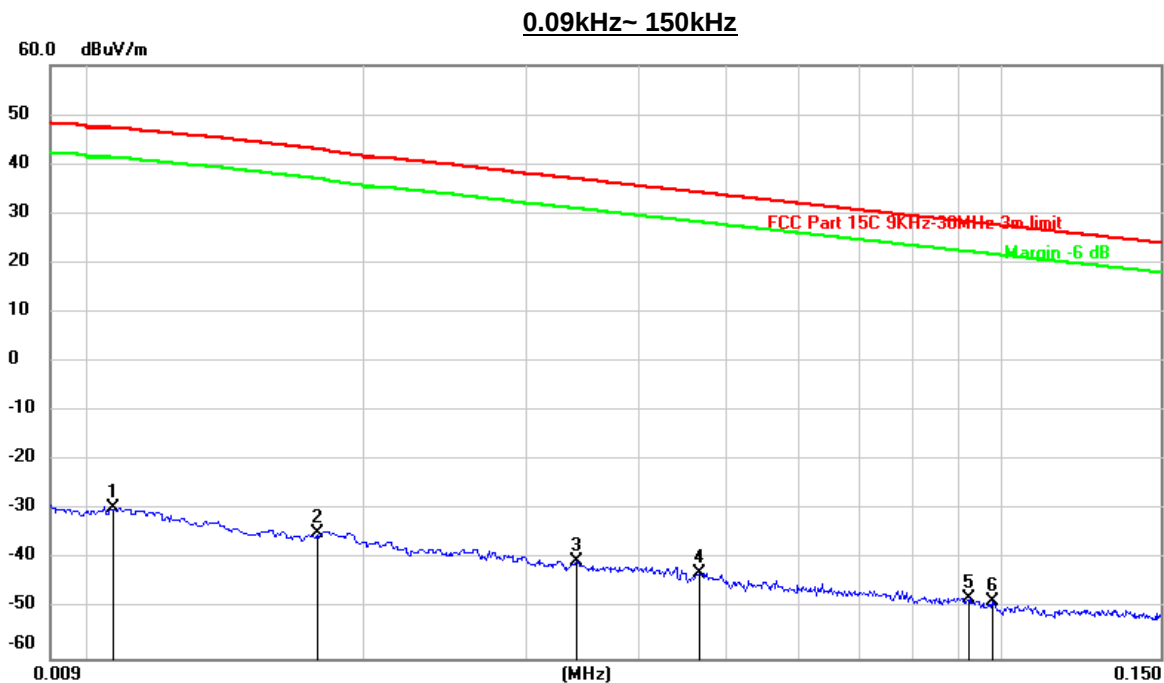

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0106	71.71	-101.39	-29.68	47.24	-76.92	peak
2	0.0177	66.85	-101.35	-34.50	42.96	-77.46	peak
3	0.0342	60.93	-101.41	-40.48	37.01	-77.49	peak
4	0.0466	58.80	-101.46	-42.66	34.28	-76.94	peak
5	0.0922	53.91	-101.74	-47.83	28.32	-76.15	peak
6	0.0980	53.37	-101.78	-48.41	27.78	-76.19	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

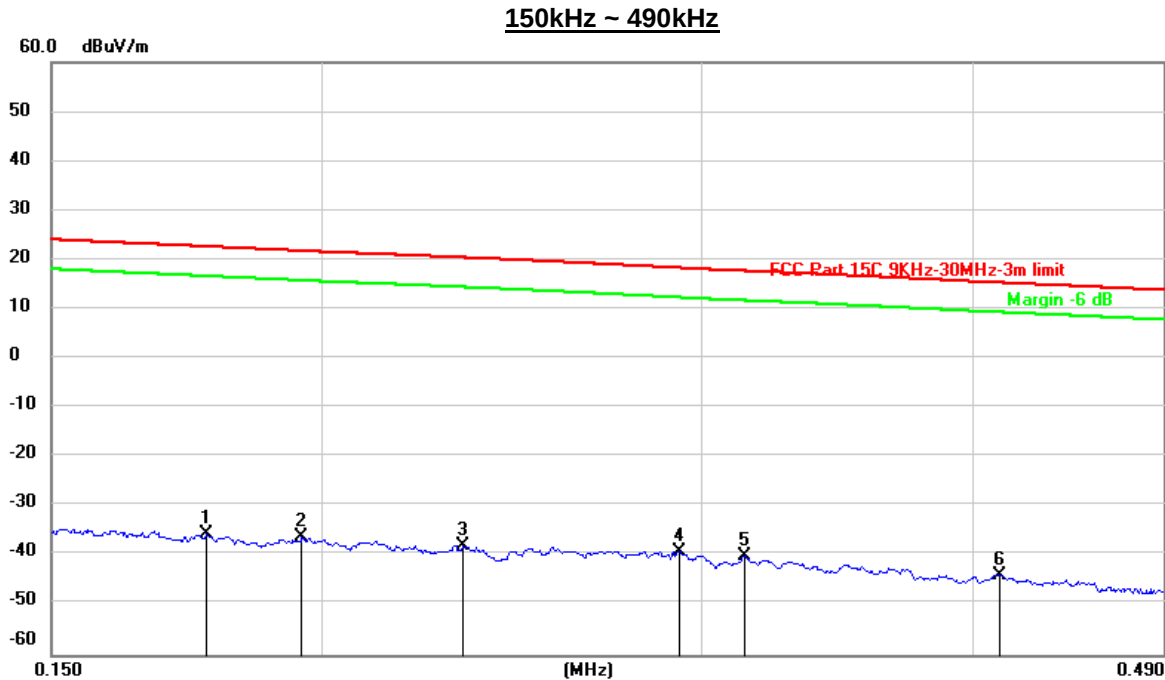

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1768	66.05	-101.68	-35.63	22.66	-58.29	peak
2	0.1958	65.48	-101.71	-36.23	21.77	-58.00	peak
3	0.2326	63.72	-101.77	-38.05	20.43	-58.48	peak
4	0.2928	62.79	-101.85	-39.06	18.31	-57.37	peak
5	0.3139	61.74	-101.87	-40.13	17.71	-57.84	peak
6	0.4112	58.10	-101.97	-43.87	15.34	-59.21	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

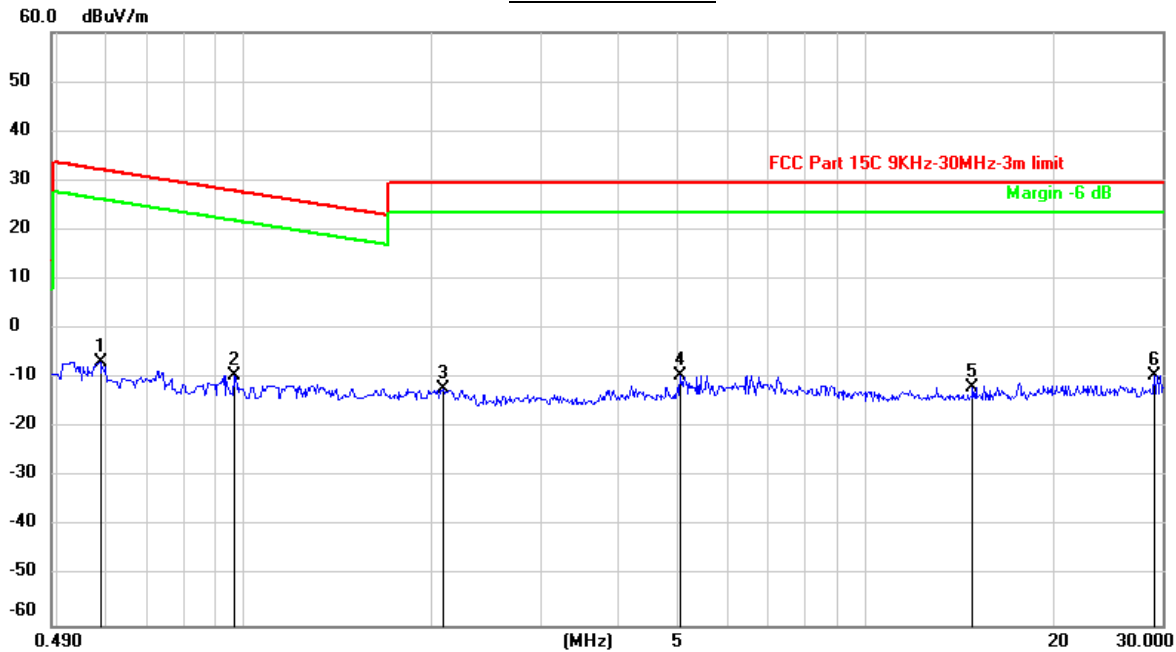**490kHz ~ 30MHz**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5872	55.24	-62.08	-6.84	32.24	-39.08	peak
2	0.9622	52.78	-62.24	-9.46	27.95	-37.41	peak
3	2.0939	49.53	-61.79	-12.26	29.54	-41.80	peak
4	5.0345	52.06	-61.49	-9.43	29.54	-38.97	peak
5	14.8612	49.26	-61.02	-11.76	29.54	-41.30	peak
6	29.0557	50.66	-60.06	-9.40	29.54	-38.94	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

0.09~ 150kHz

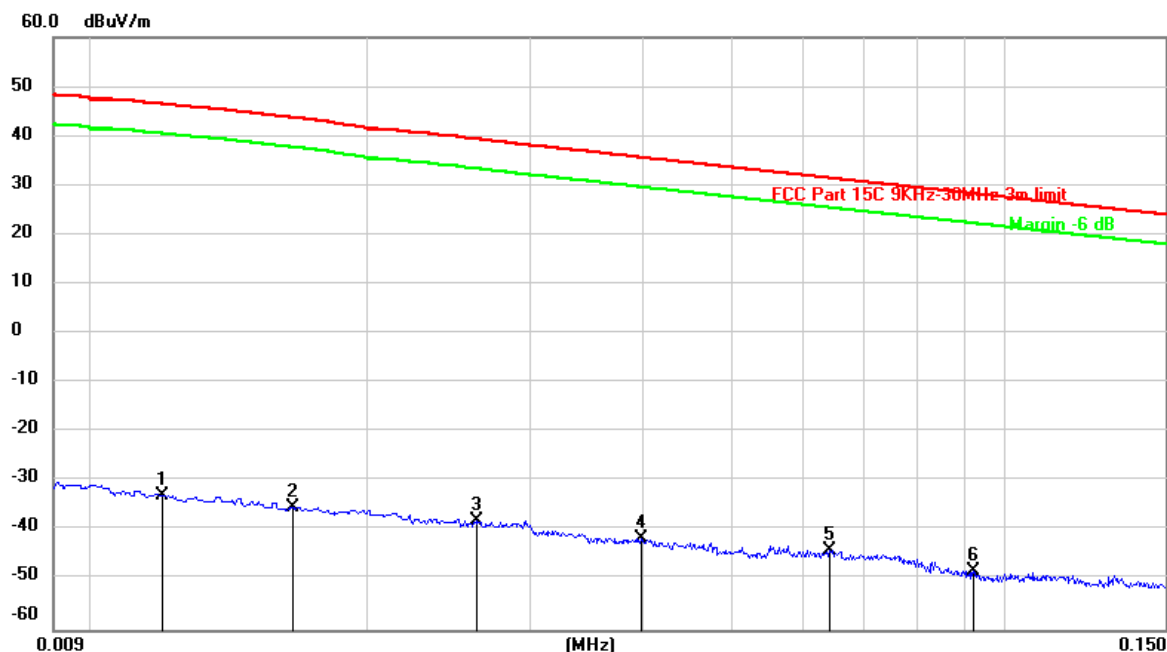


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0119	68.66	-101.39	-32.73	46.46	-79.19	peak
2	0.0165	66.14	-101.37	-35.23	43.69	-78.92	peak
3	0.0263	63.42	-101.37	-37.95	39.36	-77.31	peak
4	0.0398	59.86	-101.43	-41.57	35.61	-77.18	peak
5	0.0641	57.46	-101.54	-44.08	31.49	-75.57	peak
6	0.0922	53.51	-101.74	-48.23	28.32	-76.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.




150kHz ~ 490kHz

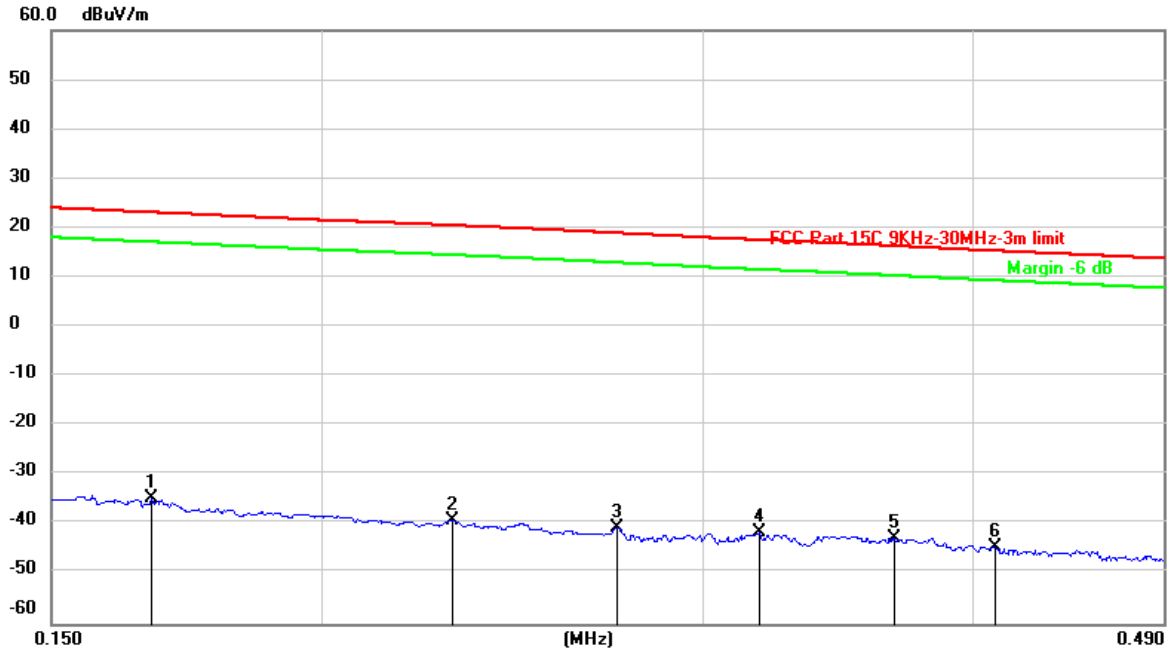

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1669	67.15	-101.66	-34.51	23.16	-57.67	peak
2	0.2298	62.55	-101.77	-39.22	20.53	-59.75	peak
3	0.2736	61.08	-101.83	-40.75	18.99	-59.74	peak
4	0.3190	60.29	-101.88	-41.59	17.58	-59.17	peak
5	0.3679	59.23	-101.93	-42.70	16.36	-59.06	peak
6	0.4097	57.52	-101.97	-44.45	15.37	-59.82	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

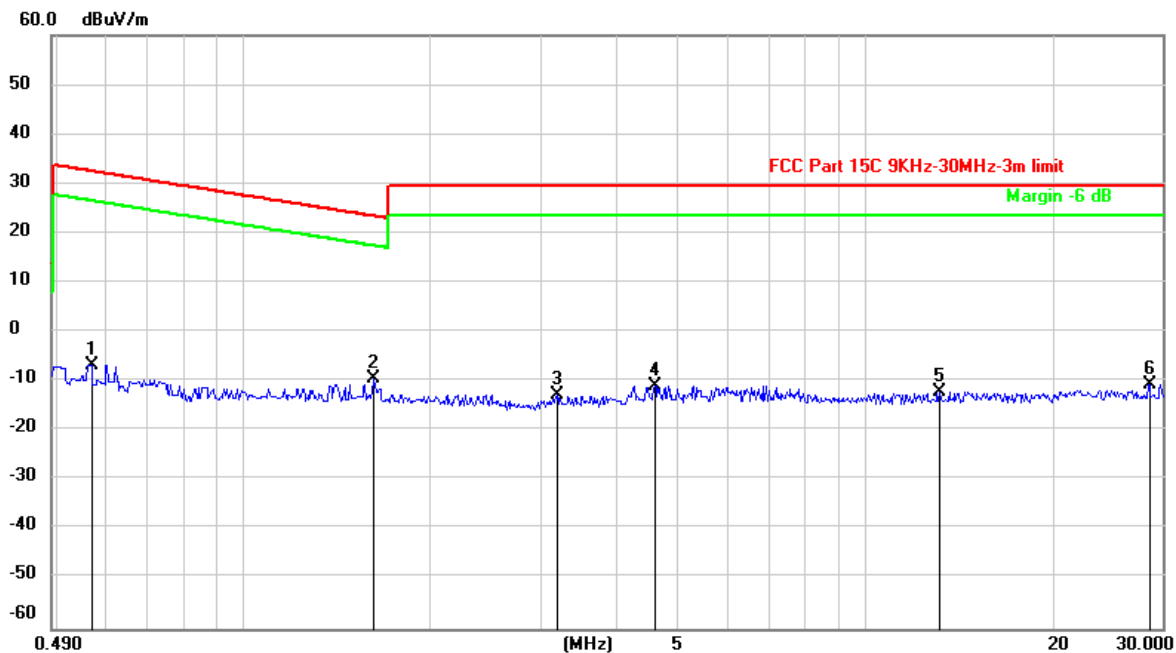490kHz ~ 30MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5682	55.37	-62.07	-6.70	32.55	-39.25	peak
2	1.6155	52.62	-62.00	-9.38	23.44	-32.82	peak
3	3.1859	48.72	-61.53	-12.81	29.54	-42.35	peak
4	4.5918	50.52	-61.43	-10.91	29.54	-40.45	peak
5	13.1498	48.72	-60.94	-12.22	29.54	-41.76	peak
6	28.6128	49.37	-60.10	-10.73	29.54	-40.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

Note: All models have been tested, only the worst data record in the report


10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

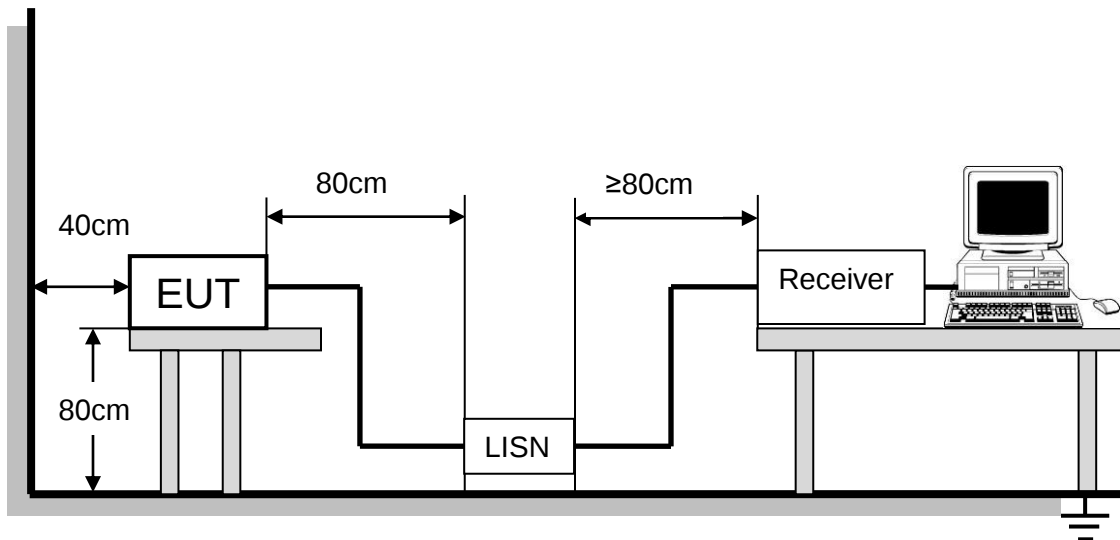


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10 -2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	53%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

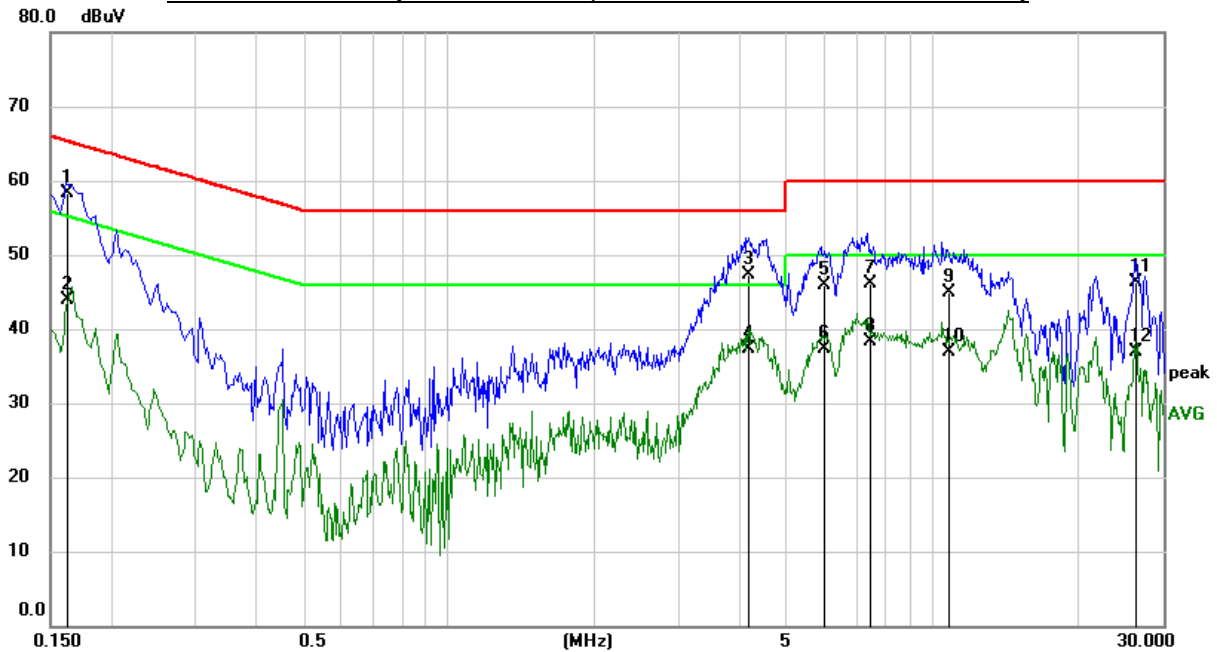**TEST RESULTS****10.1. 802.11b MODE 8WY-A806ST-Q1R****LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1631	48.76	9.60	58.36	65.30	-6.94	QP
2	0.1631	34.40	9.60	44.00	55.30	-11.30	AVG
3	4.1934	37.58	9.66	47.24	56.00	-8.76	QP
4	4.1934	27.69	9.66	37.35	46.00	-8.65	AVG
5	5.9603	36.28	9.70	45.98	60.00	-14.02	QP
6	5.9603	27.59	9.70	37.29	50.00	-12.71	AVG
7	7.4093	36.34	9.72	46.06	60.00	-13.94	QP
8	7.4093	28.51	9.72	38.23	50.00	-11.77	AVG
9	10.8790	35.10	9.78	44.88	60.00	-15.12	QP
10	10.8790	27.21	9.78	36.99	50.00	-13.01	AVG
11	26.3200	36.19	10.02	46.21	60.00	-13.79	QP
12	26.3200	26.80	10.02	36.82	50.00	-13.18	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

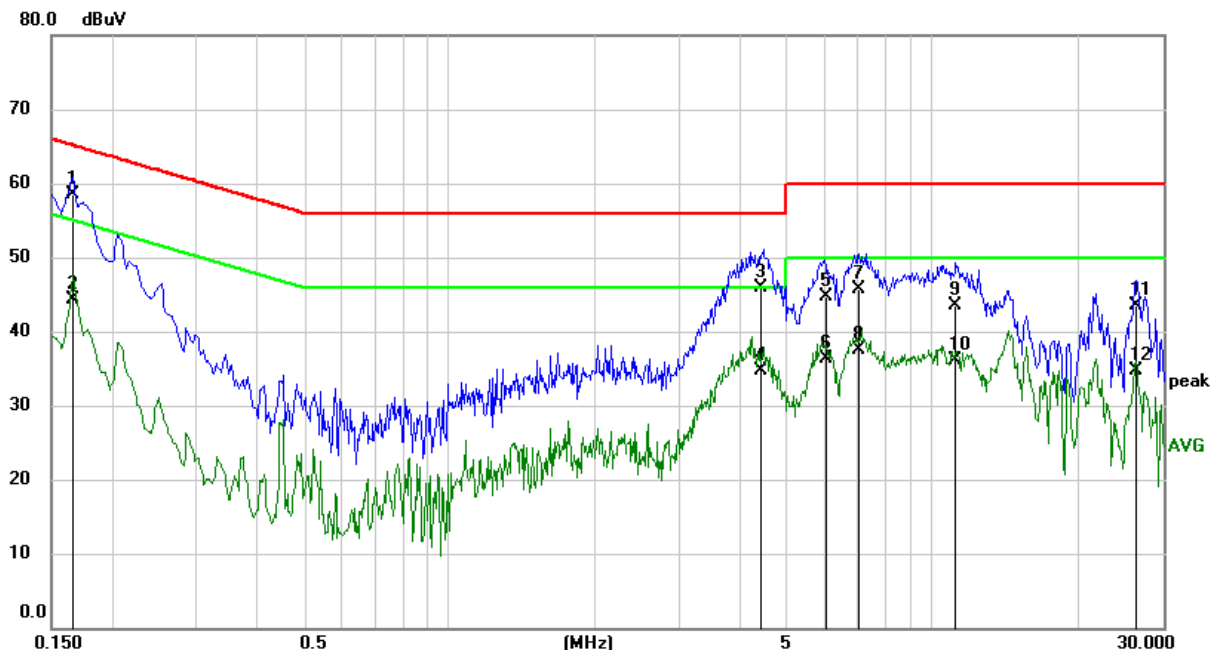**LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1651	48.98	9.61	58.59	65.20	-6.61	QP
2	0.1651	34.67	9.61	44.28	55.20	-10.92	AVG
3	4.3893	36.23	9.66	45.89	56.00	-10.11	QP
4	4.3893	25.09	9.66	34.75	46.00	-11.25	AVG
5	6.0393	35.03	9.71	44.74	60.00	-15.26	QP
6	6.0393	26.63	9.71	36.34	50.00	-13.66	AVG
7	7.0801	35.95	9.71	45.66	60.00	-14.34	QP
8	7.0801	27.82	9.71	37.53	50.00	-12.47	AVG
9	11.1598	33.84	9.76	43.60	60.00	-16.40	QP
10	11.1598	26.38	9.76	36.14	50.00	-13.86	AVG
11	26.2800	33.64	9.92	43.56	60.00	-16.44	QP
12	26.2800	24.74	9.92	34.66	50.00	-15.34	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.




10.2. 802.11b MODE 8WY-A806ST-Q1Z

LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

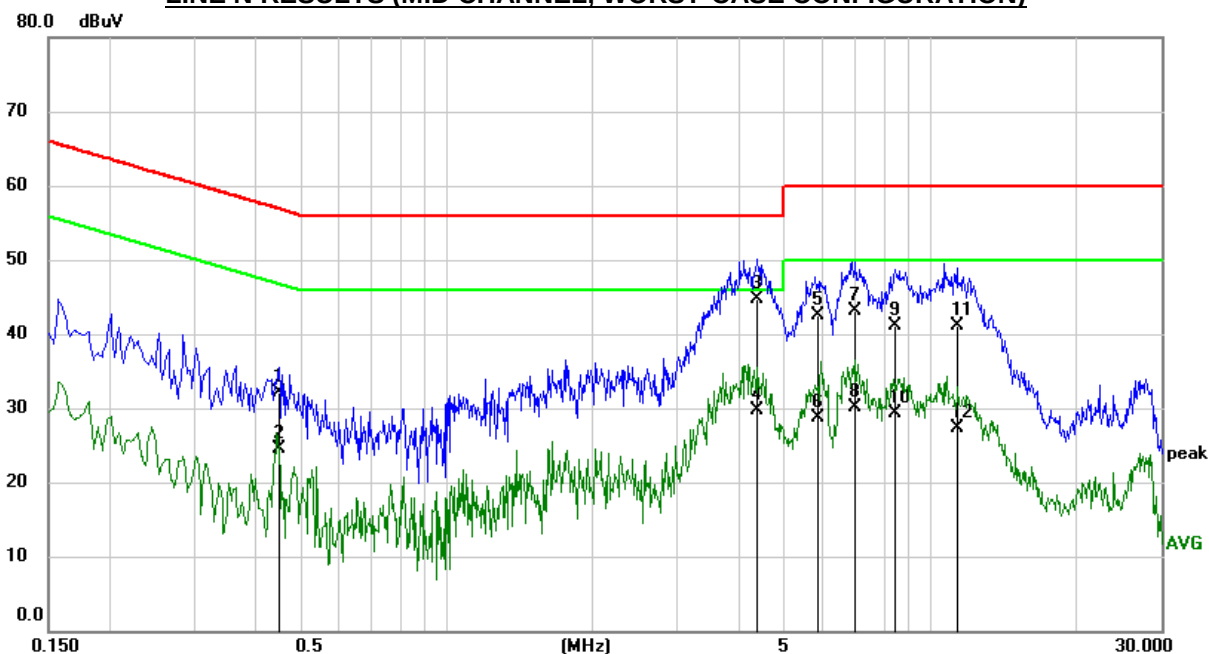

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4473	22.53	9.60	32.13	56.93	-24.80	QP
2	0.4473	14.81	9.60	24.41	46.93	-22.52	AVG
3	4.4098	35.04	9.66	44.70	56.00	-11.30	QP
4	4.4098	19.96	9.66	29.62	46.00	-16.38	AVG
5	5.8484	32.81	9.70	42.51	60.00	-17.49	QP
6	5.8484	19.08	9.70	28.78	50.00	-21.22	AVG
7	6.9820	33.38	9.71	43.09	60.00	-16.91	QP
8	6.9820	20.42	9.71	30.13	50.00	-19.87	AVG
9	8.4951	31.36	9.73	41.09	60.00	-18.91	QP
10	8.4951	19.56	9.73	29.29	50.00	-20.71	AVG
11	11.3333	31.24	9.79	41.03	60.00	-18.97	QP
12	11.3333	17.56	9.79	27.35	50.00	-22.65	AVG

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

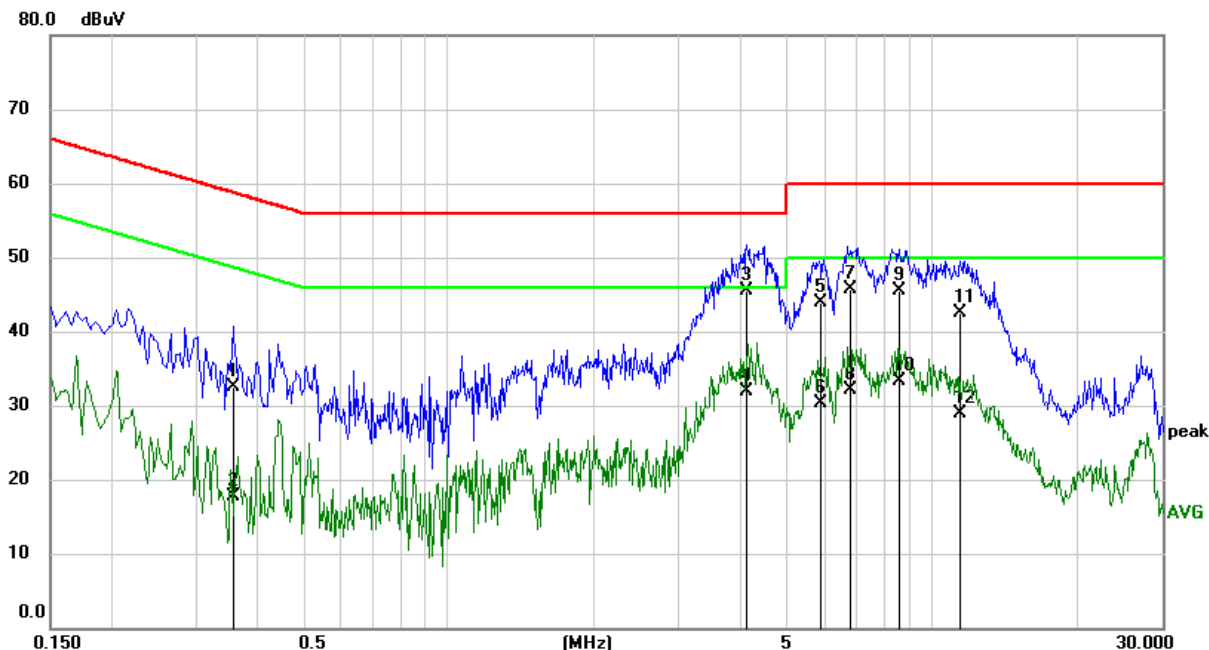**LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3560	22.82	9.60	32.42	58.82	-26.40	QP
2	0.3560	8.06	9.60	17.66	48.82	-31.16	AVG
3	4.1147	35.89	9.66	45.55	56.00	-10.45	QP
4	4.1147	22.18	9.66	31.84	46.00	-14.16	AVG
5	5.8955	34.15	9.70	43.85	60.00	-16.15	QP
6	5.8955	20.70	9.70	30.40	50.00	-19.60	AVG
7	6.7502	36.05	9.71	45.76	60.00	-14.24	QP
8	6.7502	22.39	9.71	32.10	50.00	-17.90	AVG
9	8.6184	35.80	9.73	45.53	60.00	-14.47	QP
10	8.6184	23.50	9.73	33.23	50.00	-16.77	AVG
11	11.4647	32.71	9.77	42.48	60.00	-17.52	QP
12	11.4647	19.20	9.77	28.97	50.00	-21.03	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test mode has been tested, only the worst data record in the report



11. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT