

FCC REPORT

Applicant: HUNG WAI PRODUCTS LIMITED

Address of Applicant: Unit 11, 12/F., New Commerce Centre, 19 On Sum Street,
Shatin, Hong Kong

Equipment Under Test (EUT)

Product Name: Android player Main board with wireless module

Model No.: ASSY-1859ATMBA-00

FCC ID: 2AB6Z-1859ATMB

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 15 Jun., 2015

Date of Test: 15 Jun., to 21 Jul., 2015

Date of report issued: 21 Jul., 2015

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	21 Jul., 2015	Original

Prepared by:



Date:

21 Jul., 2015

Report Clerk

Reviewed by:



Date:

21 Jul., 2015

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION.....	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CONDUCTED EMISSION.....	10
6.3 CONDUCTED OUTPUT POWER.....	13
6.4 OCCUPY BANDWIDTH.....	21
6.5 POWER SPECTRAL DENSITY.....	38
6.6 BAND EDGE.....	46
6.7 SPURIOUS EMISSION.....	51
6.7.1 Restricted Band.....	51
6.7.2 Unwanted Emissions in the Restricted Bands.....	57
6.8 FREQUENCY STABILITY.....	67
7 TEST SETUP PHOTO	69
8 EUT CONSTRUCTIONAL DETAILS	71

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.407 (g)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a)	Pass
26dB Occupied Bandwidth	15.407 (a)	Pass
6dB Emission Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407 (a)	Pass
Band Edge	15.407(b)	Pass
Spurious Emission	15.205/15.209	Pass
Frequency Stability	15.407(g)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2009.

5 General Information

5.1 Client Information

Applicant:	HUNG WAI PRODUCTS LIMITED
Address of Applicant:	Unit 11, 12/F., New Commerce Centre, 19 On Sum Street, Shatin, Hong Kong
Manufacturer:	HUNG WAI ELECTRONICS (HUIZHOU) LTD.
Address of Manufacturer:	3 rd floor, NO. 3, Minfeng Road, Huinan High and New Technology Industry Park, Huiiao Avenue, Huizhou City, Guangdong, China

5.2 General Description of E.U.T.

Product Name:	Android player Main board with wireless module
Model No.:	ASSY-1859ATMBA-00
Operation Frequency:	Band 1: 5180MHz-5240MHz Band 4: 5745MHz-5825MHz
Operation mode:	Indoor used
Channel numbers:	Band 1: 802.11a/802.11n20: 4, 802.11n40: 2 Band 4: 802.11a/802.11n20: 5, 802.11n40: 2
Channel separation:	802.11a/802.11n20: 20MHz, 802.11n40: 40MHz
Modulation technology: (IEEE 802.11a)	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology: (IEEE 802.11n)	BPSK, QPSK, 16-QAM, 64-QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps, MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Antenna Type:	Omni-directional
Antenna gain:	2.5 dBi
Power supply:	AC 120V/ 60Hz

Operation Frequency each of channel

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
36	5180MHz	39	5190MHz
40	5200MHz	45	5230MHz
44	5220MHz		
48	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz
153	5765MHz	159	5795MHz
157	5785MHz		
161	5805MHz		
165	5825MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5180MHz	The lowest channel	5190MHz
The middle channel	5200MHz	The highest channel	5230MHz
The highest channel	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5745MHz	The lowest channel	5755MHz
The middle channel	5785MHz	The highest channel	5795MHz
The highest channel	5825MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 6 Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed with duty cycle above 98%, meet the requirements of KDB789033.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282
 Fax: +86-755-23116366


5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi - Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-28-2015	03-28-2016
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-28-2015	03-28-2016
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
6	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2015	03-31-2016
7	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2015	03-31-2016
9	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
10	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	03-28-2015	03-28-2016
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-28-2015	03-28-2016
13	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
14	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	03-28-2015	03-28-2016
15	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-08-2015	04-08-2016

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	11-10-2012	11-09-2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-28-2015	03-28-2016
3	LISN	CHASE	MN2050D	CCIS0074	03-28-2015	03-28-2016
4	Coaxial Cable	CCIS	N/A	CCIS0086	04-01-2015	03-31-2016
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement

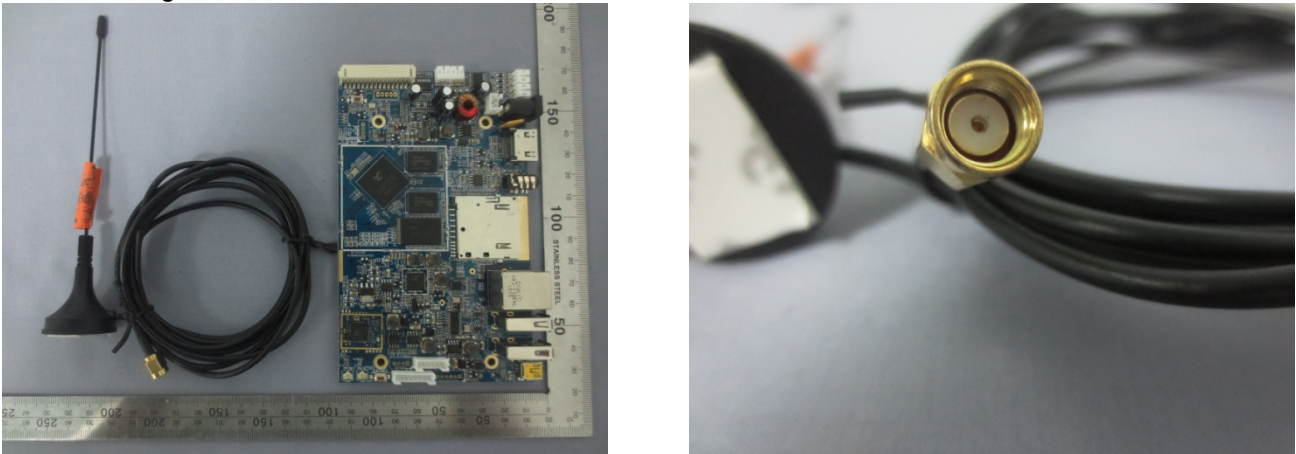
Standard requirement:	FCC Part15 E Section 15.203 /407(a)
<p><i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i></p>	
E.U.T Antenna:	
<p><i>The antenna of EUT is a reverse-SMA connector, which cannot be replaced by end-user. And the antenna gain is 2.5 dBi.</i></p>	
	

6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150 kHz to 30 MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9 kHz, VBW=30 kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
0.5-5	56	46													
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test procedure	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test setup:	<p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>														
Test Instruments:	Refer to section 5.6 for details														
Test mode:	Refer to section 5.3 for details.														
Test results:	Passed														

Measurement Data

Line:

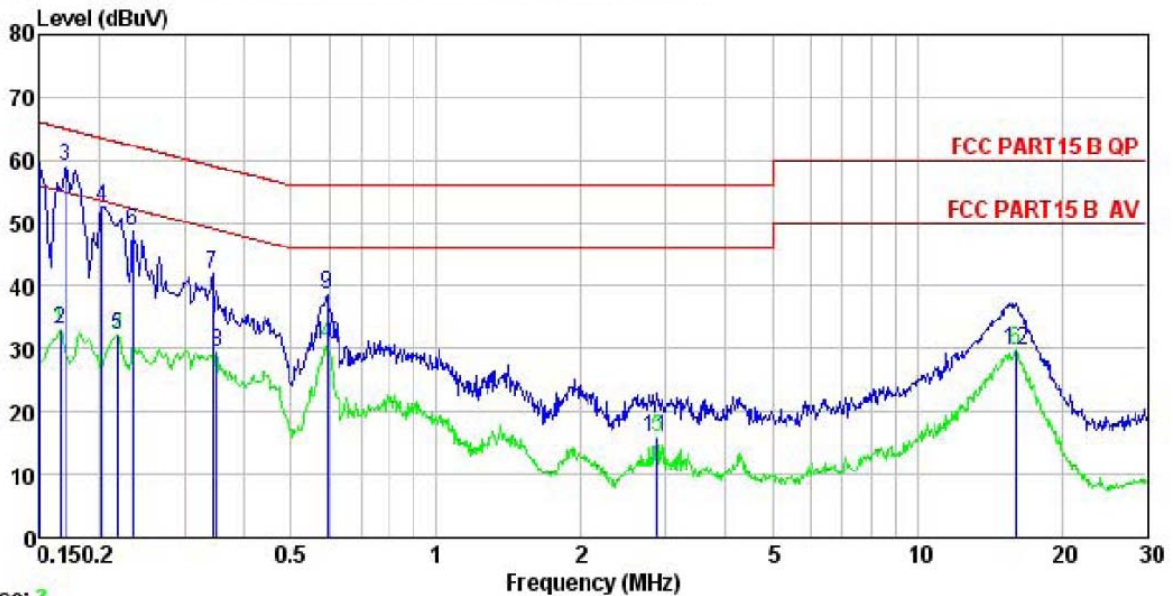


Trace: 3

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 Job No. : 456RF
 EUT : Android player Main board with wireless
 Model : ASSY-1859ATMBA-00
 Test Mode : 5G-Wifi mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: MT
 Remark :

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	48.67	0.27	10.78	59.72	66.00	-6.28	QP
2	0.166	21.92	0.27	10.77	32.96	55.16	-22.20	Average
3	0.170	48.10	0.27	10.77	59.14	64.94	-5.80	QP
4	0.202	41.49	0.28	10.76	52.53	63.54	-11.01	QP
5	0.219	21.24	0.28	10.76	32.28	52.88	-20.60	Average
6	0.234	37.75	0.27	10.75	48.77	62.30	-13.53	QP
7	0.343	30.99	0.27	10.73	41.99	59.13	-17.14	QP
8	0.350	18.56	0.27	10.73	29.56	48.96	-19.40	Average
9	0.595	27.71	0.25	10.77	38.73	56.00	-17.27	QP
10	0.595	19.55	0.25	10.77	30.57	46.00	-15.43	Average
11	2.869	4.64	0.27	10.92	15.83	46.00	-30.17	Average
12	16.055	18.49	0.32	10.91	29.72	50.00	-20.28	Average

Neutral:

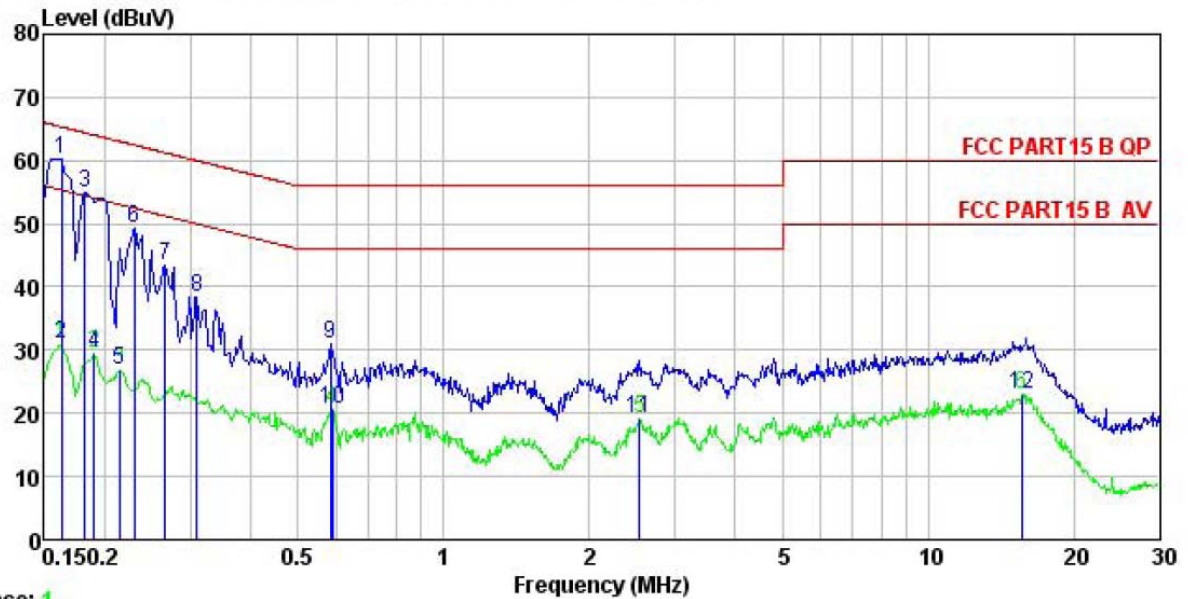


Trace: 1
 Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 Job No. : 456RF
 EUT : Android player Main board with wireless
 Model : ASSY-1859ATMBA-00
 Test Mode : 5G-Wifi mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: MT
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	49.29	0.25	10.77	60.31	65.34	-5.03	QP
2	0.162	19.93	0.25	10.77	30.95	55.34	-24.39	Average
3	0.182	43.94	0.25	10.77	54.96	64.42	-9.46	QP
4	0.190	18.66	0.25	10.76	29.67	54.02	-24.35	Average
5	0.214	15.89	0.25	10.76	26.90	53.05	-26.15	Average
6	0.230	38.18	0.25	10.75	49.18	62.44	-13.26	QP
7	0.266	32.28	0.26	10.75	43.29	61.25	-17.96	QP
8	0.310	27.43	0.26	10.74	38.43	59.97	-21.54	QP
9	0.585	19.95	0.24	10.77	30.96	56.00	-25.04	QP
10	0.589	9.66	0.24	10.77	20.67	46.00	-25.33	Average
11	2.540	8.00	0.29	10.94	19.23	46.00	-26.77	Average
12	15.635	12.00	0.25	10.91	23.16	50.00	-26.84	Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Output Power

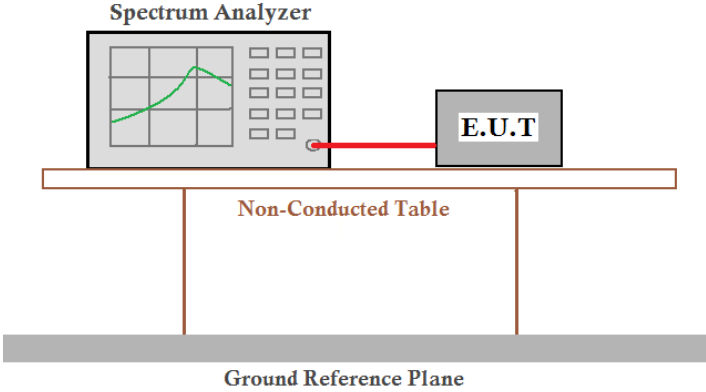Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10: 2013, KDB 789033
Limit:	Band 1: 1 W (For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.); Band 4: 1W.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Band 1




Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	5.56	30.00	Pass
	Middle	2.91	30.00	Pass
	Highest	1.90	30.00	Pass
802.11n20	Lowest	4.06	30.00	Pass
	Middle	3.20	30.00	Pass
	Highest	2.27	30.00	Pass
802.11n40	Lowest	2.43	30.00	Pass
	Highest	1.97	30.00	Pass

Band 4

Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	9.34	30.00	Pass
	Middle	9.52	30.00	Pass
	Highest	9.14	30.00	Pass
802.11n20	Lowest	10.07	30.00	Pass
	Middle	10.24	30.00	Pass
	Highest	10.82	30.00	Pass
802.11n40	Lowest	9.12	30.00	Pass
	Highest	9.38	30.00	Pass


Test plot as follows:

Band 1

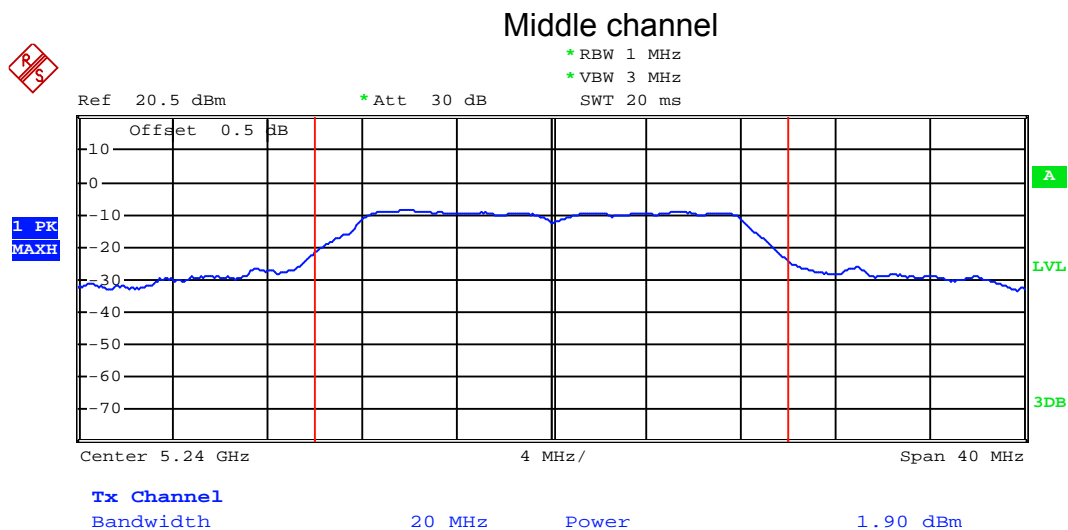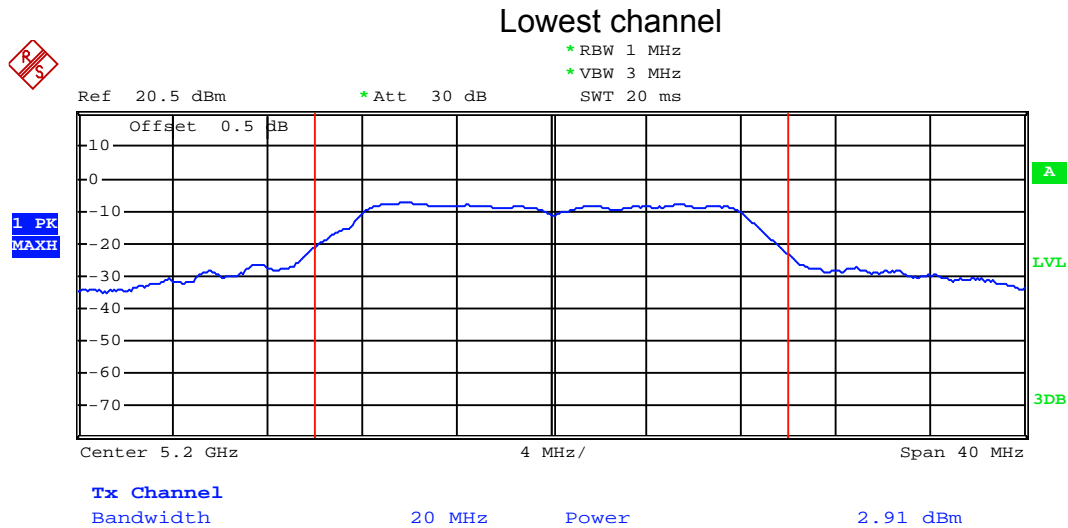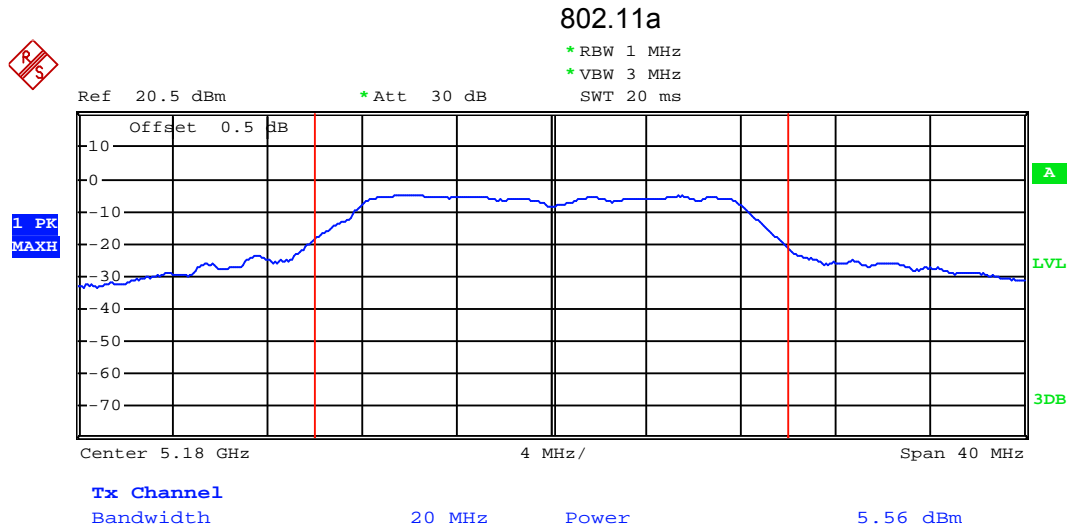


Highest channel

802.11n20

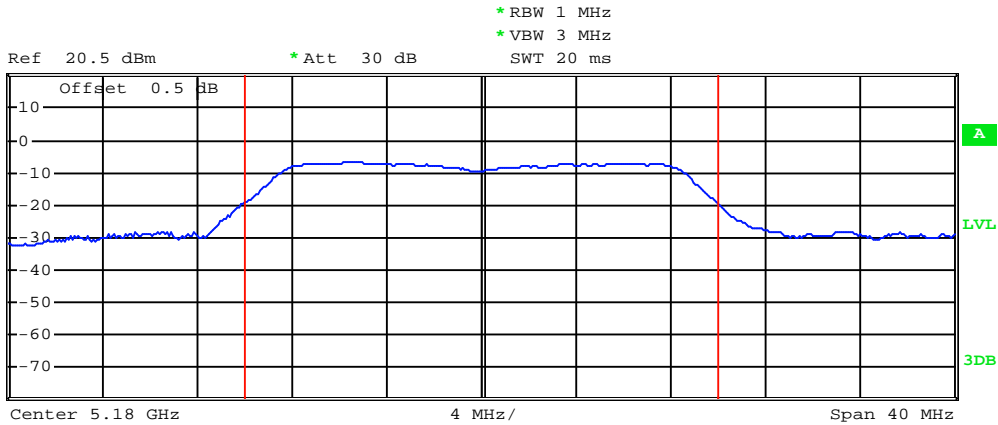


Tx Channel
 Bandwidth 20 MHz Power 4.06 dBm

Lowest channel

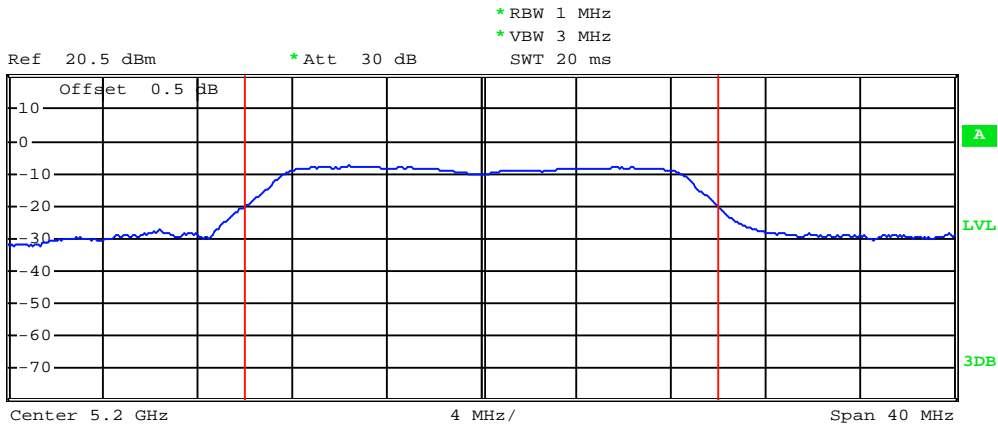

Tx Channel
 Bandwidth 20 MHz Power 3.20 dBm


Middle channel

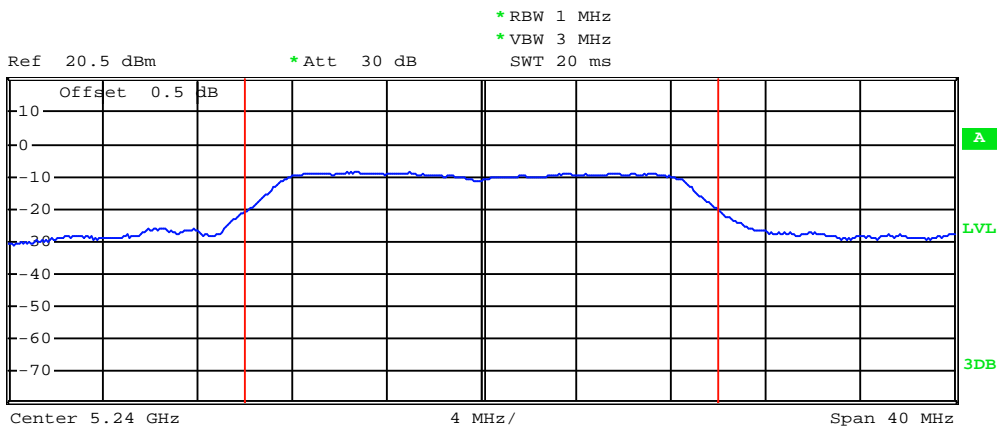

Tx Channel
 Bandwidth 20 MHz Power 2.27 dBm


Highest channel

802.11n40

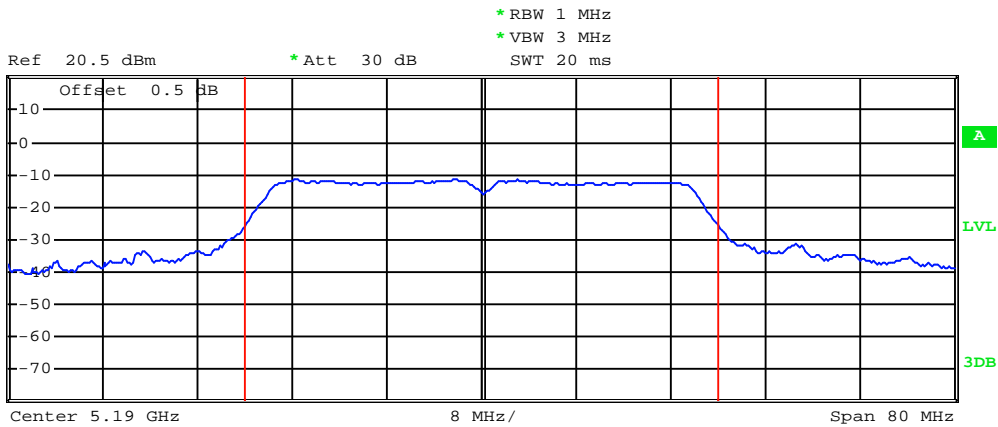

Tx Channel
 Bandwidth 40 MHz Power 2.43 dBm

Lowest channel

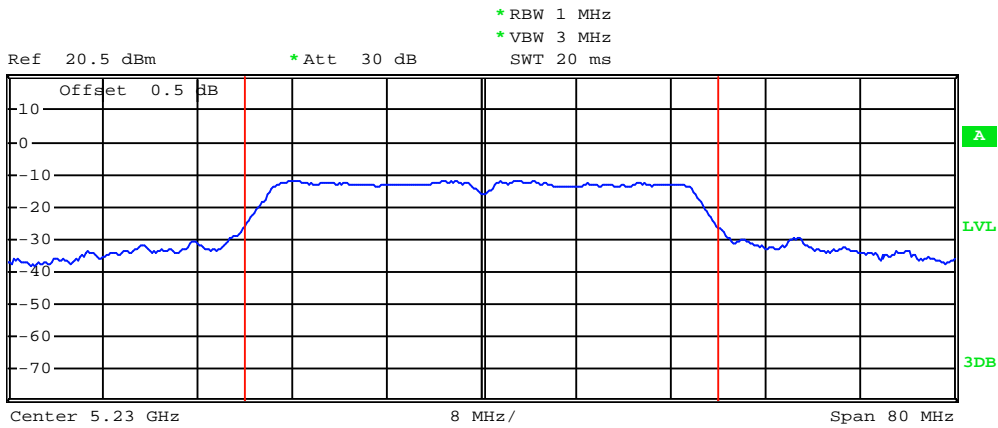

Tx Channel
 Bandwidth 40 MHz Power 1.97 dBm


Highest channel

Band 4:

802.11a



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

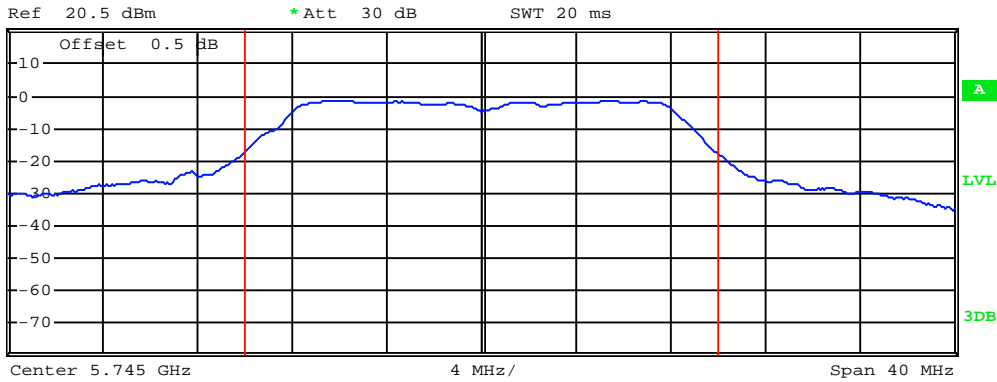


Tx Channel
Bandwidth 20 MHz Power 9.34 dBm

Lowest channel



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

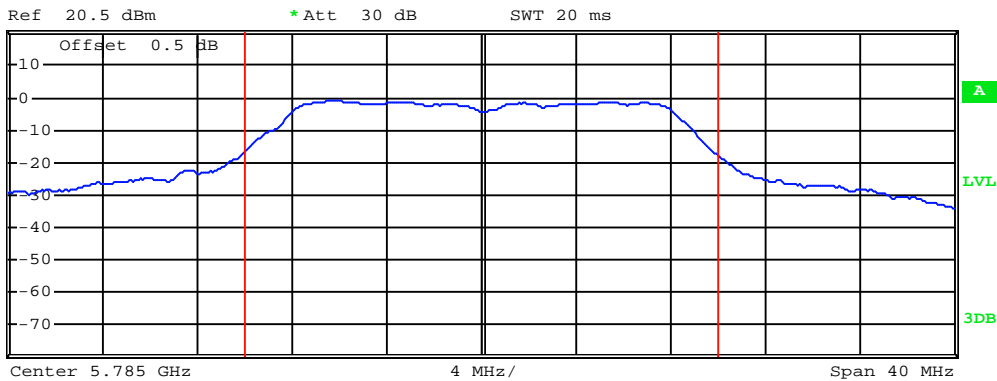


Tx Channel
Bandwidth 20 MHz Power 9.52 dBm

Middle channel




* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

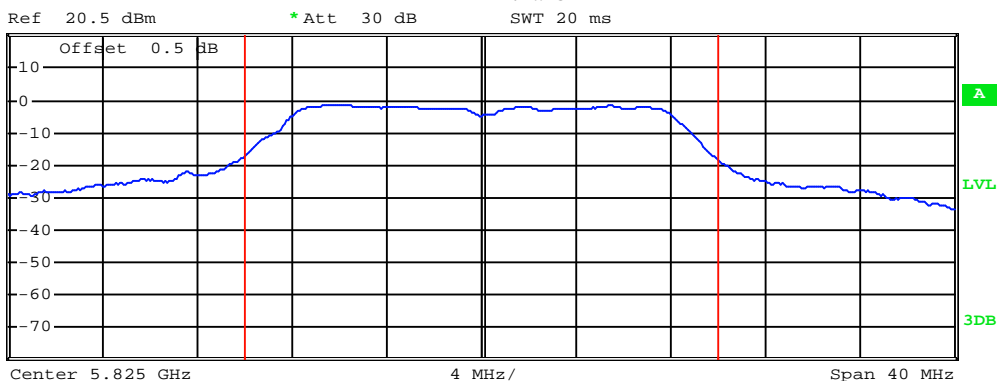

Tx Channel
Bandwidth 20 MHz Power 9.14 dBm


Highest channel

802.11n20

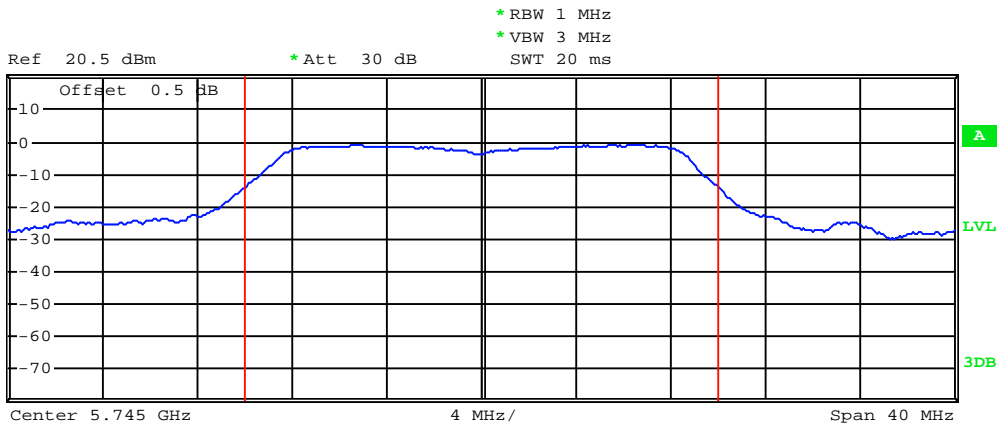


Tx Channel
 Bandwidth 20 MHz Power 10.07 dBm

Lowest channel

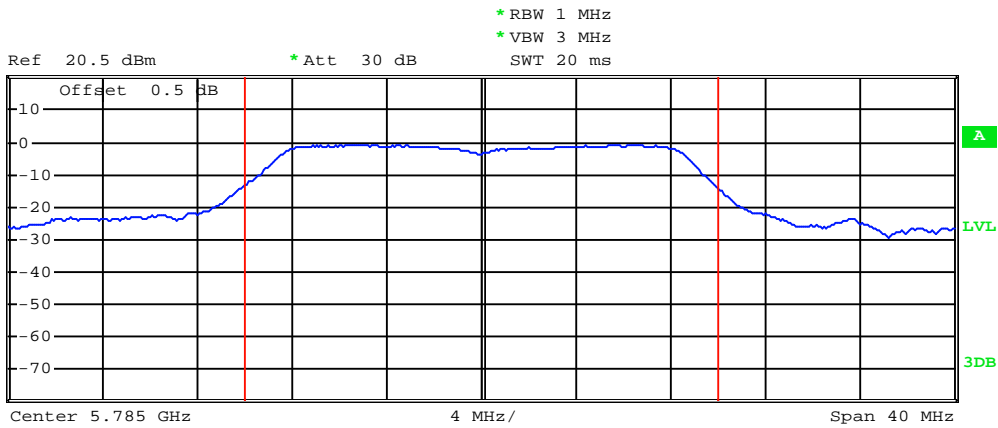

Tx Channel
 Bandwidth 20 MHz Power 10.24 dBm


Middle channel

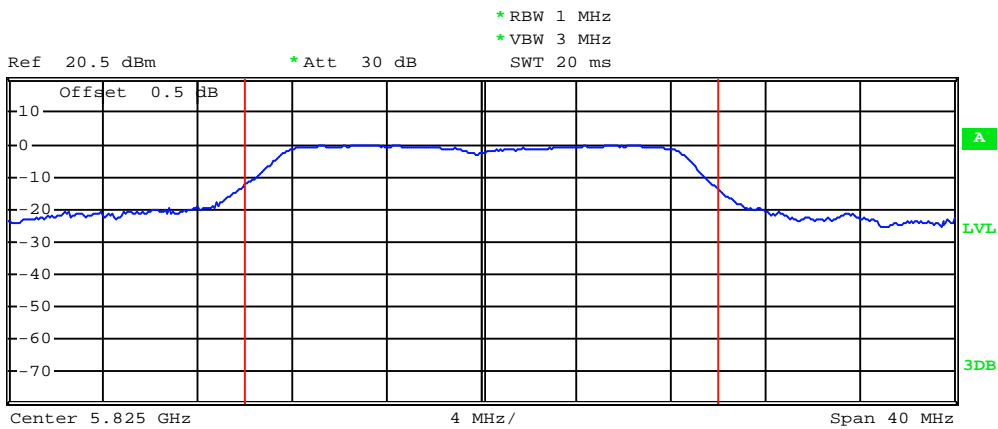


Tx Channel
 Bandwidth 20 MHz Power 10.82 dBm

Highest channel

802.11n40

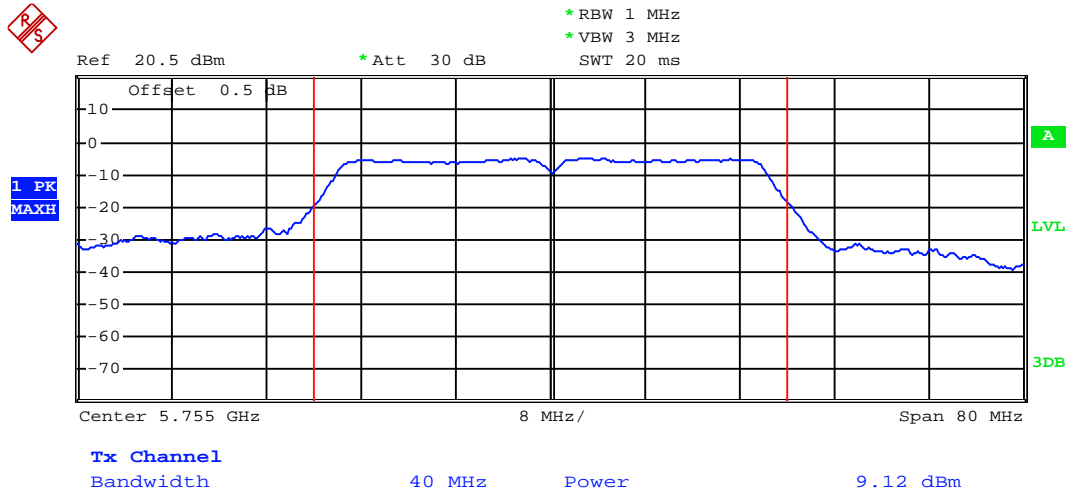


Lowest channel

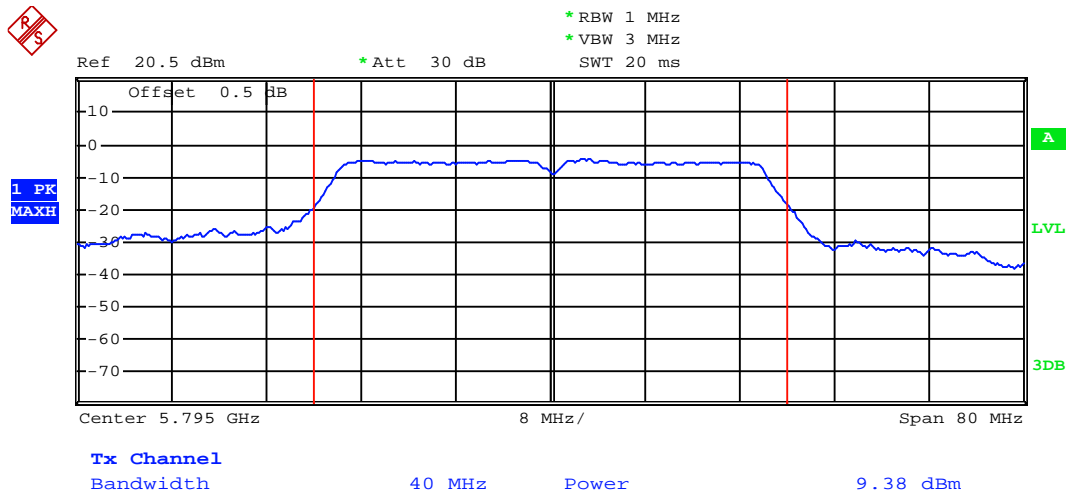

Highest channel

6.4 Occupy Bandwidth

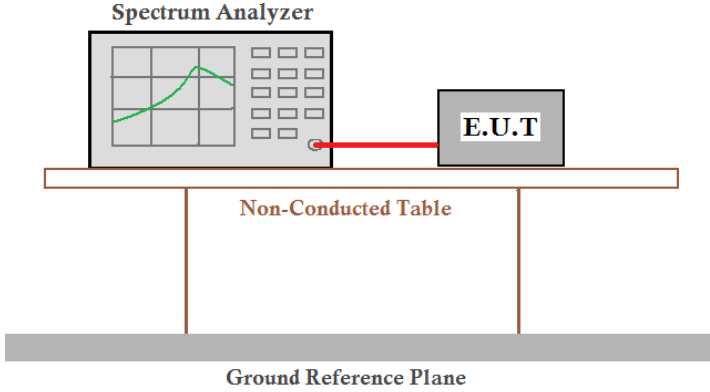Test Requirement:	FCC Part15 E Section 15.407 (a) (5) and Section 15.407 (e)
Test Method:	ANSI C63.10:2013 and KDB 789033
Limit:	Band 1: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz(6dB Bandwidth)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Band 1:

Test Channel	26dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	22.08	24.40	44.32	N/A	N/A
Middle	22.08	22.56	---		
Highest	24.16	24.48	45.12		

Test Channel	99% Occupy Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	17.04	18.24	36.64	N/A	N/A
Middle	17.12	18.08	---		
Highest	17.36	18.24	36.64		

Band 4:

Test Channel	26dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	21.84	22.48	44.16	N/A	N/A
Middle	21.84	22.56	---		
Highest	21.84	22.40	43.52		


Test Channel	99% Occupy Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	17.04	18.00	36.64	N/A	N/A
Middle	16.96	18.08	---		
Highest	16.96	18.00	36.64		

Test Channel	6dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.72	17.84	36.96	>500kHz	N/A
Middle	16.72	17.84	---		
Highest	16.72	17.84	36.96		

Test plot as follows:


Band 1:

26 dB EBW - 802.11a

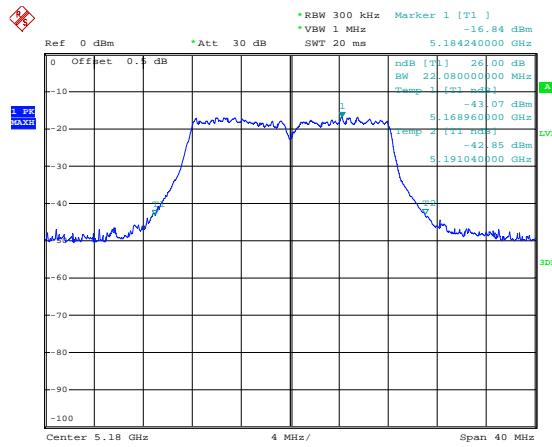


Date: 1.JUL.2015 15:44:27

Lowest channel

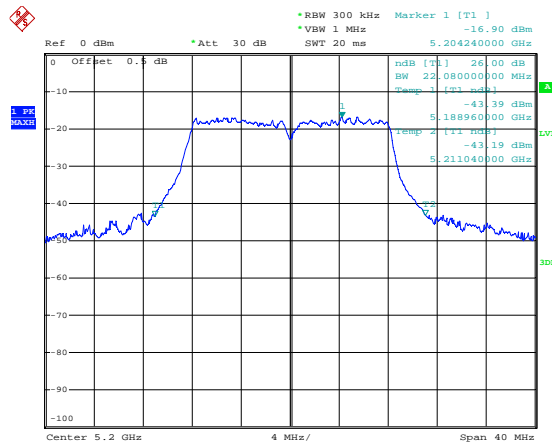

Date: 1.JUL.2015 15:45:40


Middle channel

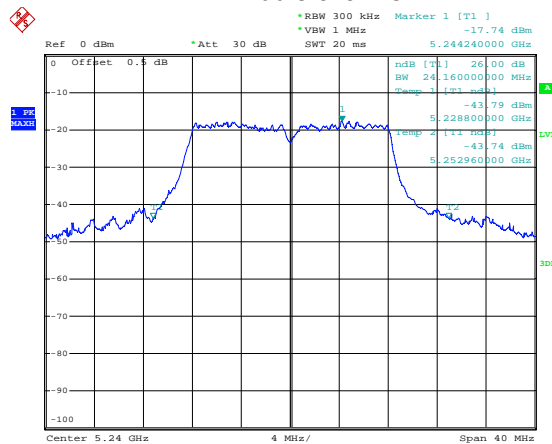

Date: 1.JUL.2015 15:46:04


Highest channel

802.11n20

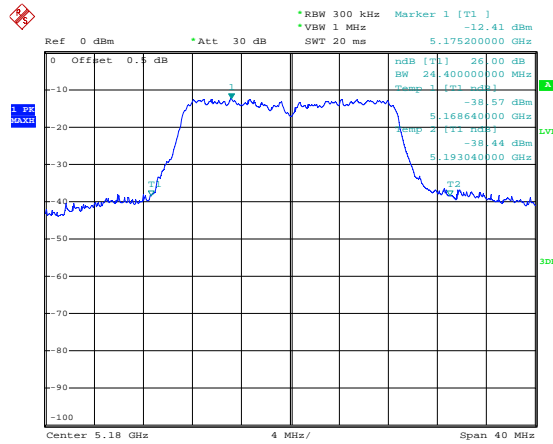


Date: 1.JUL.2015 15:47:23

Lowest channel

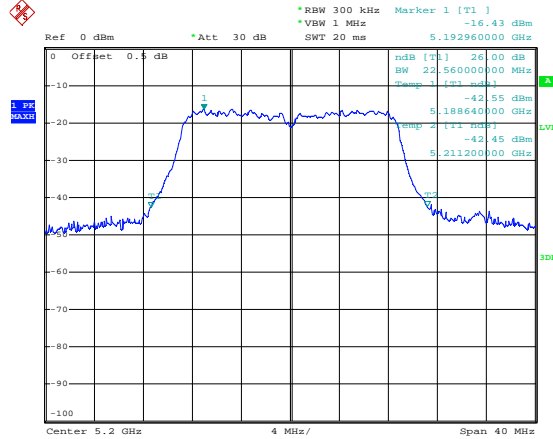

Date: 1.JUL.2015 15:47:44


Middle channel

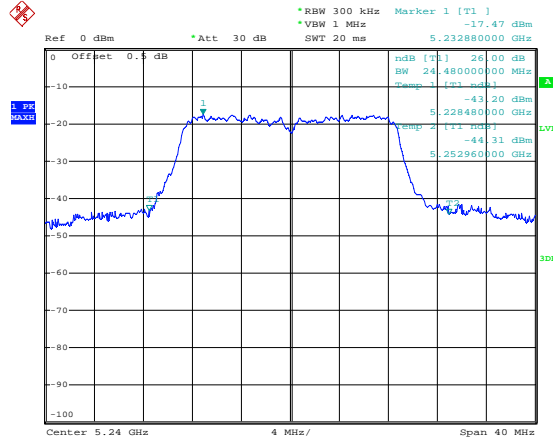

Date: 1.JUL.2015 15:48:13


Highest channel

802.11n40

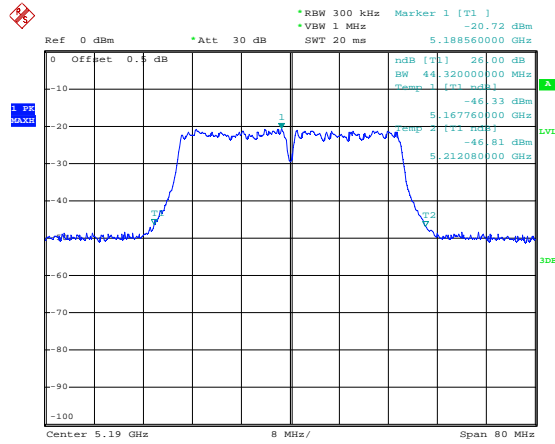

Date: 1.JUL.2015 15:49:01


Lowest channel

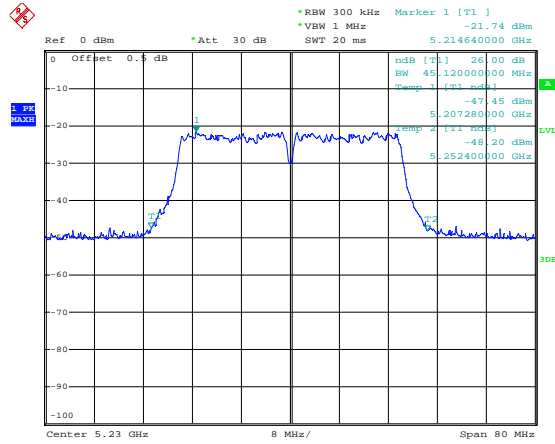

Date: 1.JUL.2015 15:49:29


Highest channel

99% OBW - 802.11a

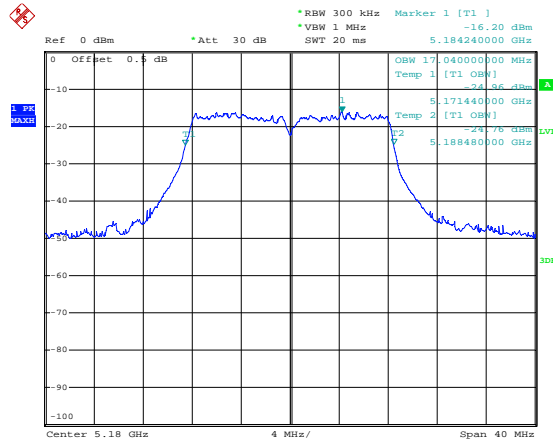


Date: 1.JUL.2015 15:59:05

Lowest channel

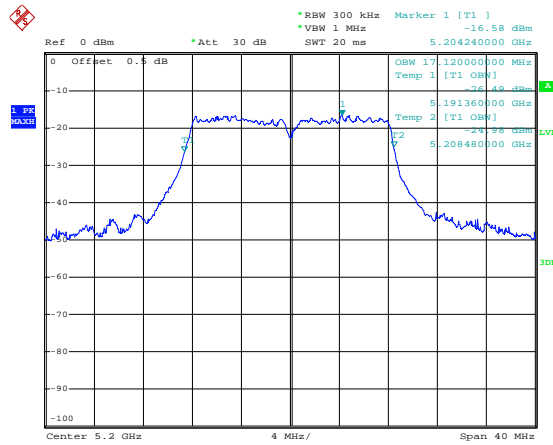

Date: 1.JUL.2015 15:59:32


Middle channel

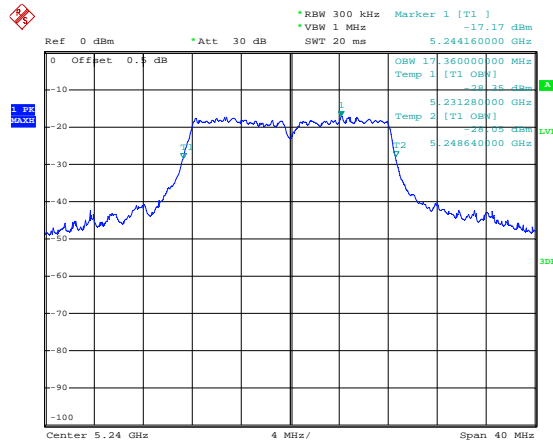

Date: 1.JUL.2015 15:59:56


Highest channel

802.11n20

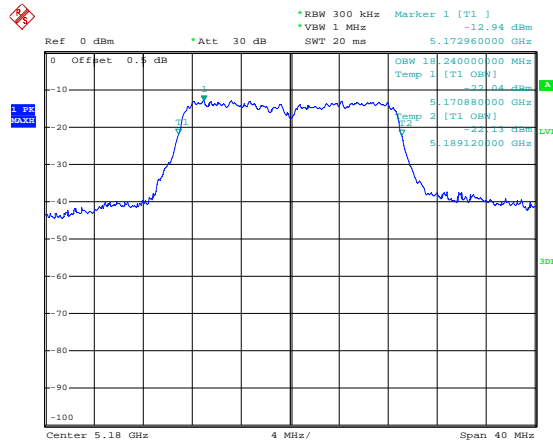


Date: 1.JUL.2015 16:00:51

Lowest channel

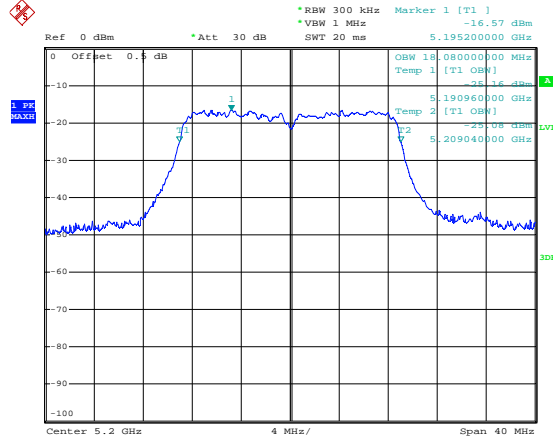

Date: 1.JUL.2015 16:01:11


Middle channel

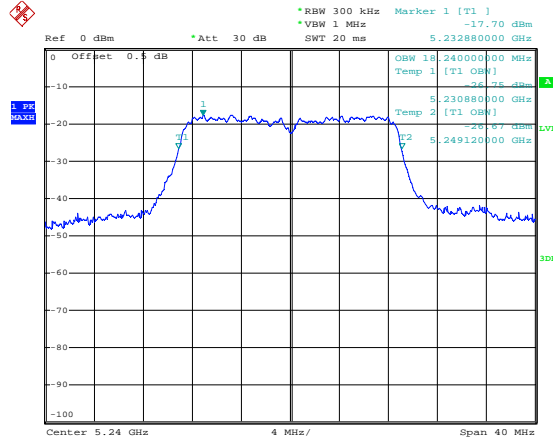

Date: 1.JUL.2015 16:01:48


Highest channel

802.11n40

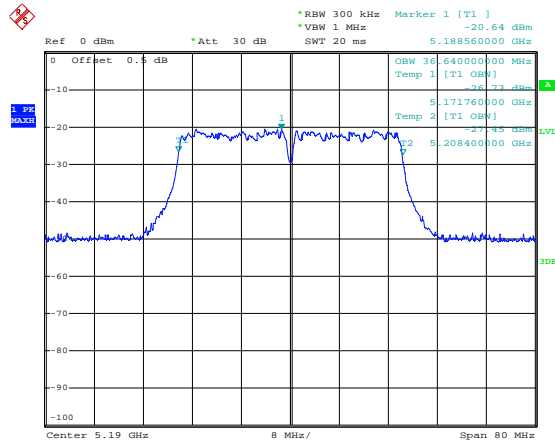

Date: 1.JUL.2015 16:02:21

Lowest channel

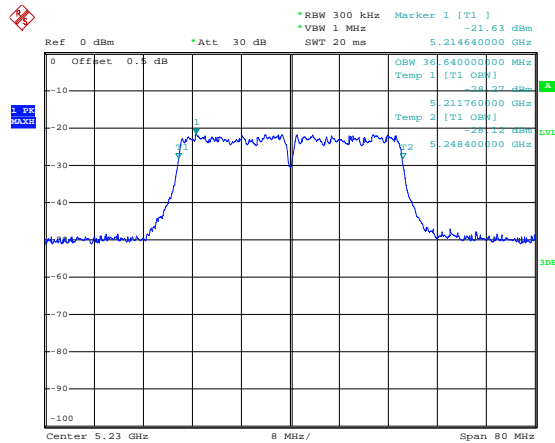


Date: 1.JUL.2015 16:02:45

Highest channel


Band 4:

26 dB EBW - 802.11a

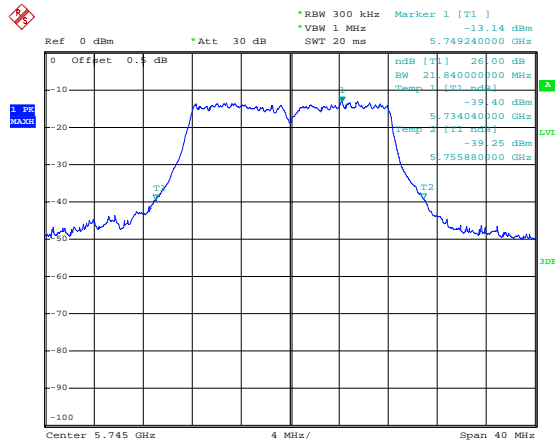


Date: 1.JUL.2015 15:51:20

Lowest channel

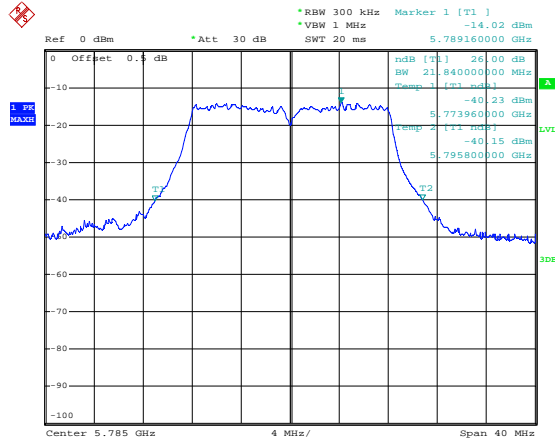

Date: 1.JUL.2015 15:52:49


Middle channel

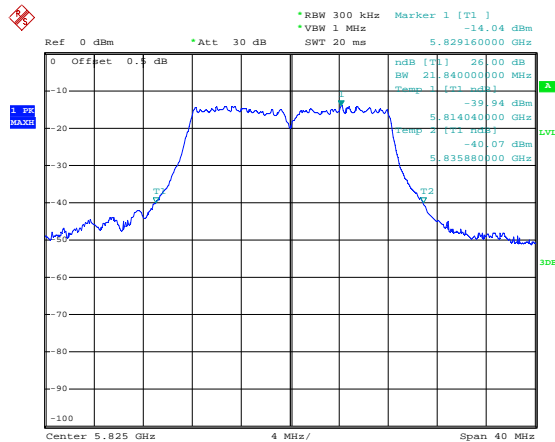

Date: 1.JUL.2015 15:53:23


Highest channel

802.11n20

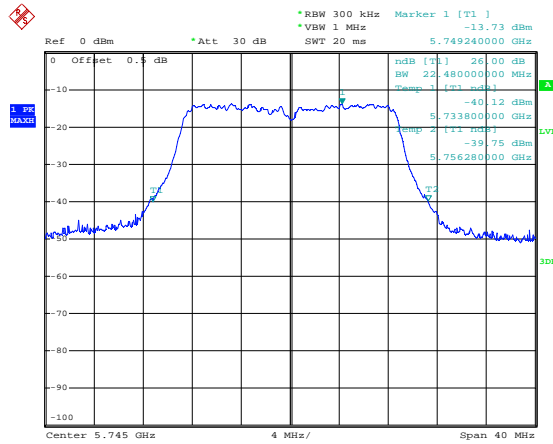


Date: 1.JUL.2015 15:56:05

Lowest channel

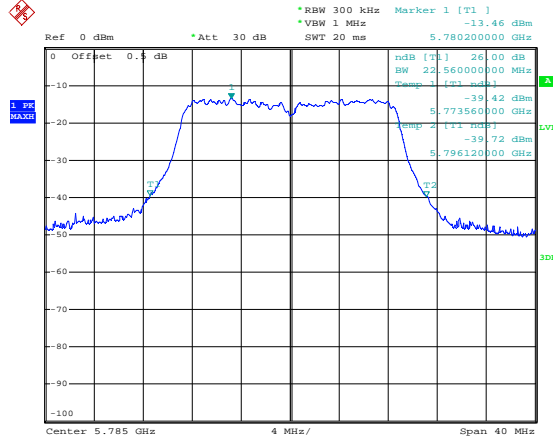

Date: 1.JUL.2015 15:55:12


Middle channel

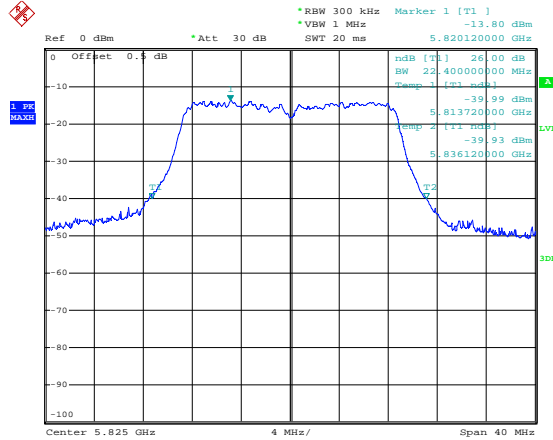

Date: 1.JUL.2015 15:54:34


Highest channel

802.11n40

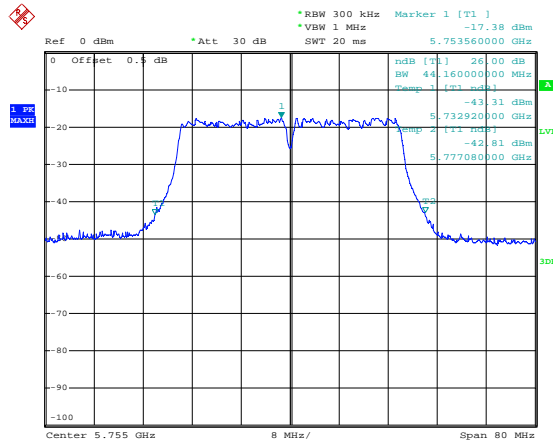

Date: 1.JUL.2015 15:57:04


Lowest channel

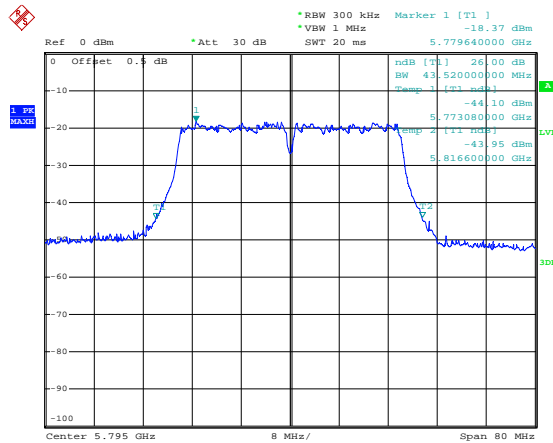

Date: 1.JUL.2015 15:57:56


Highest channel

99% OBW - 802.11a

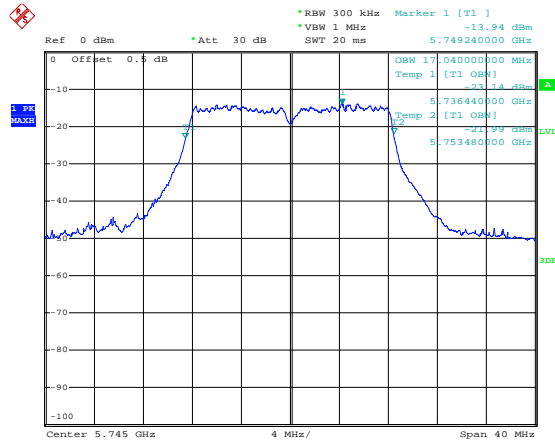


Date: 1.JUL.2015 15:51:58

Lowest channel

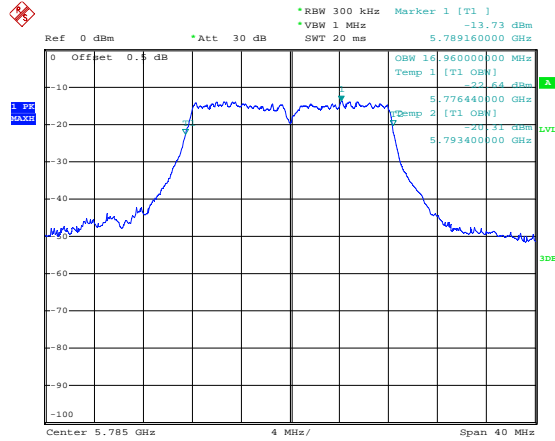

Date: 1.JUL.2015 15:52:35


Middle channel

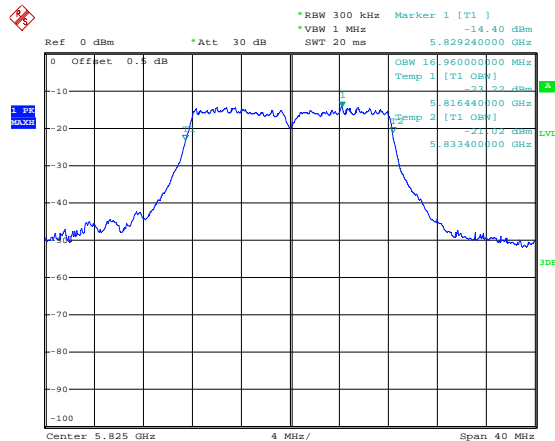

Date: 1.JUL.2015 15:53:37


Highest channel

802.11n20

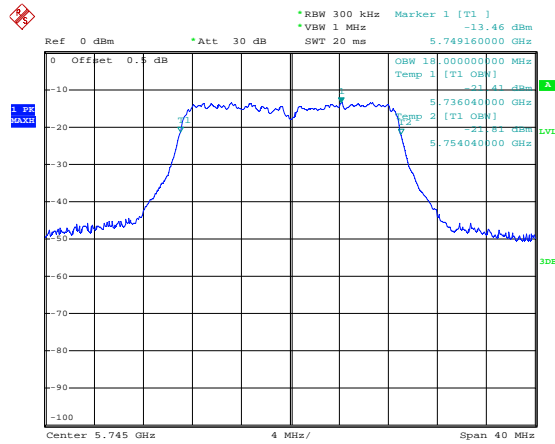


Date: 1.JUL.2015 15:55:53

Lowest channel

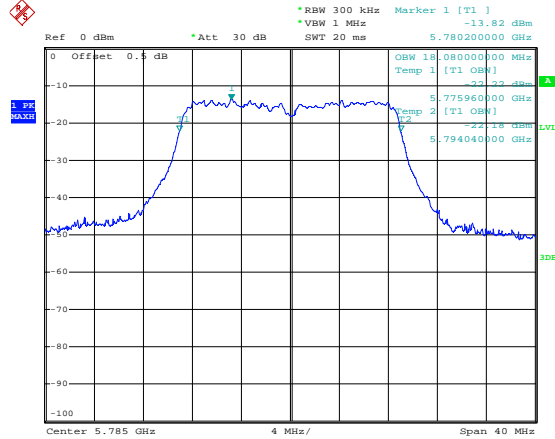

Date: 1.JUL.2015 15:55:23


Middle channel

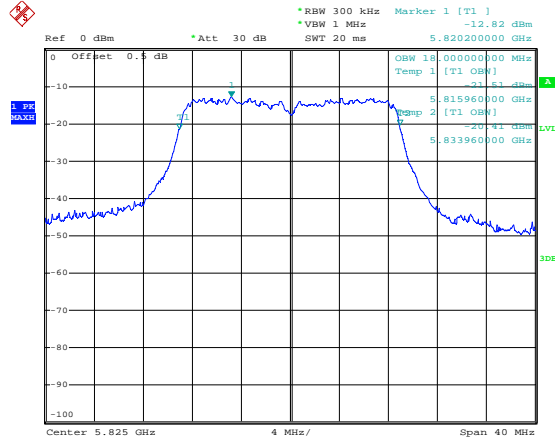

Date: 1.JUL.2015 15:54:23


Highest channel

802.11n40

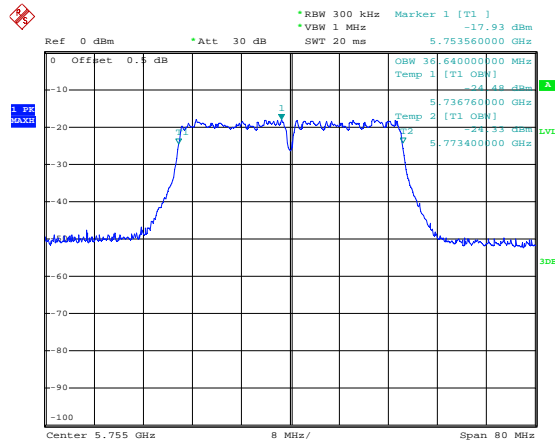

Date: 1.JUL.2015 15:57:16


Lowest channel

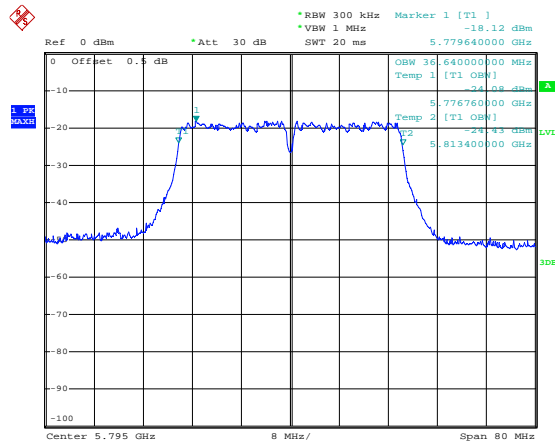

Date: 1.JUL.2015 15:57:45


Highest channel

6 dB BW - 802.11a

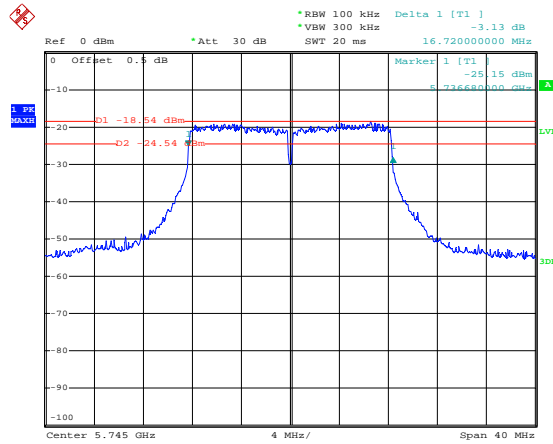


Date: 1.JUL.2015 16:25:27

Lowest channel

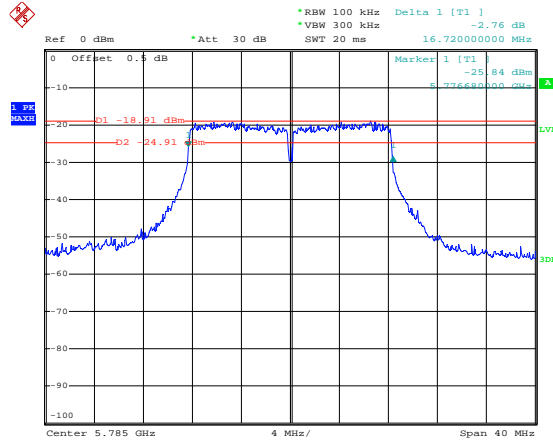

Date: 1.JUL.2015 16:26:35


Middle channel

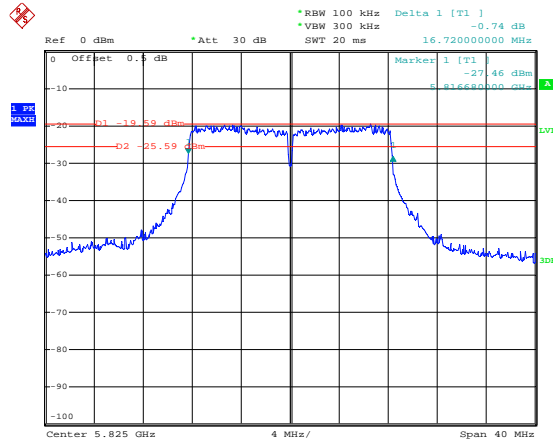

Date: 1.JUL.2015 16:28:11


Highest channel

802.11n20

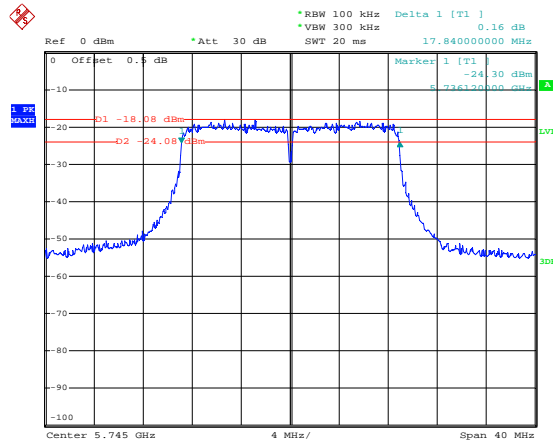


Date: 1.JUL.2015 16:36:01

Lowest channel

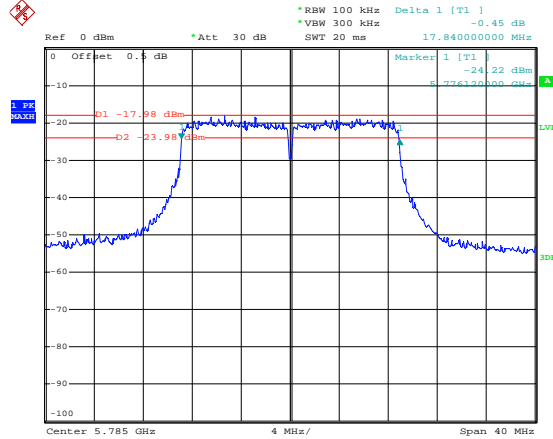

Date: 1.JUL.2015 16:35:07


Middle channel

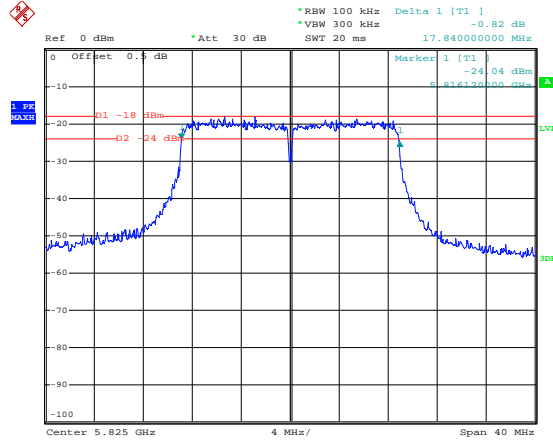

Date: 1.JUL.2015 16:29:19


Highest channel

802.11n40

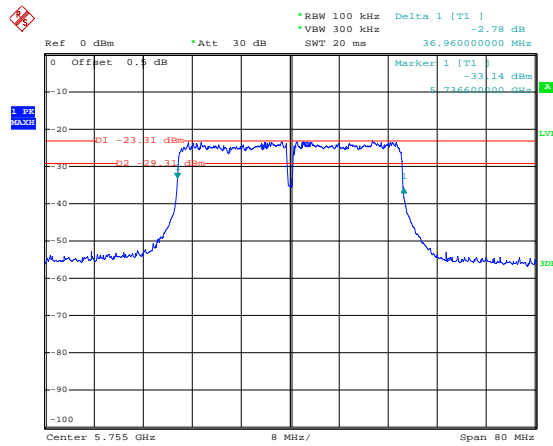

Date: 1.JUL.2015 16:37:23


Lowest channel

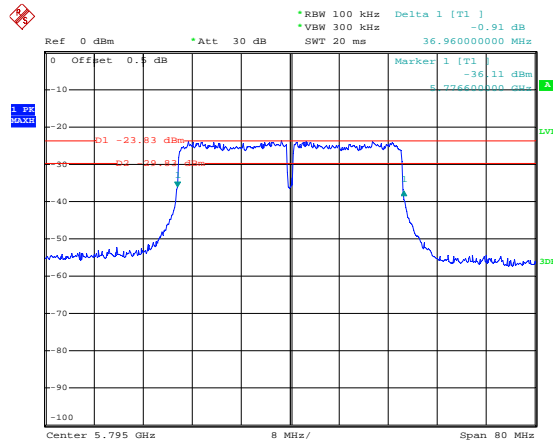

Date: 1.JUL.2015 16:38:16

Highest channel

6.5 Power Spectral Density

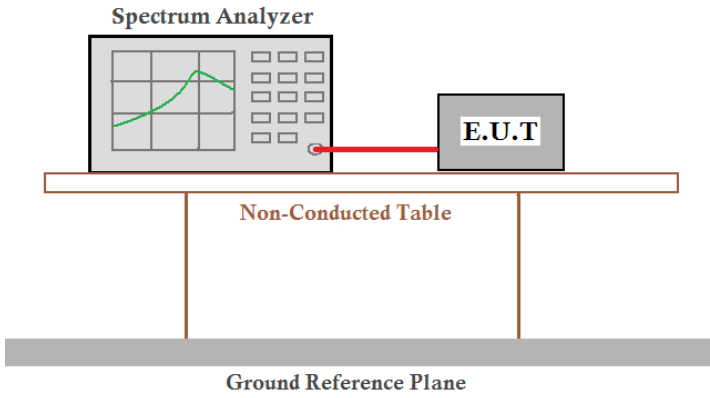Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10:2013, KDB 789033
Limit:	<p>Band 1: 17 dBm/MHz (The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.);</p> <p>Band 4: 30dBm/500kHz</p>
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Band 1

Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	-13.00	17.00	Pass
	Middle	-13.34	17.00	Pass
	Highest	-13.68	17.00	Pass
802.11n20	Lowest	-13.71	17.00	Pass
	Middle	-13.43	17.00	Pass
	Highest	-13.59	17.00	Pass
802.11n40	Lowest	-16.66	17.00	Pass
	Highest	-16.94	17.00	Pass


Band 4

Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	-4.24	30.00	Pass
	Middle	-4.73	30.00	Pass
	Highest	-5.43	30.00	Pass
802.11n20	Lowest	-3.55	30.00	Pass
	Middle	-5.11	30.00	Pass
	Highest	-5.37	30.00	Pass
802.11n40	Lowest	-8.07	30.00	Pass
	Highest	-8.36	30.00	Pass

Test plot as follows:


Band 1:

Test mode: 802.11a

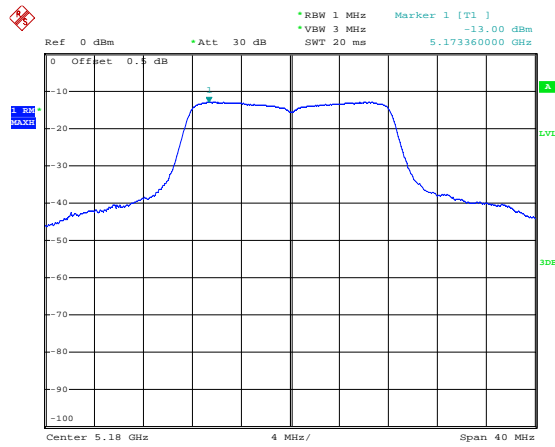


Date: 1.JUL.2015 16:54:32

Lowest channel

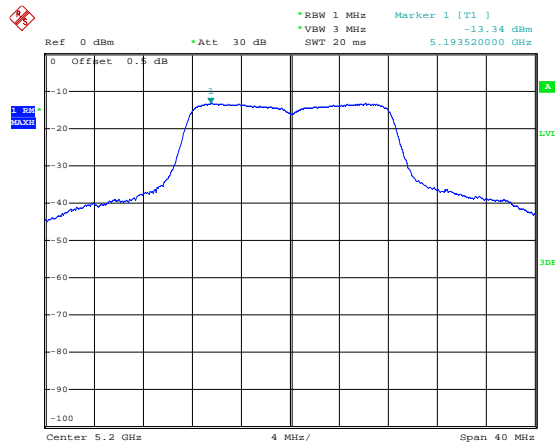

Date: 1.JUL.2015 16:55:01


Middle channel

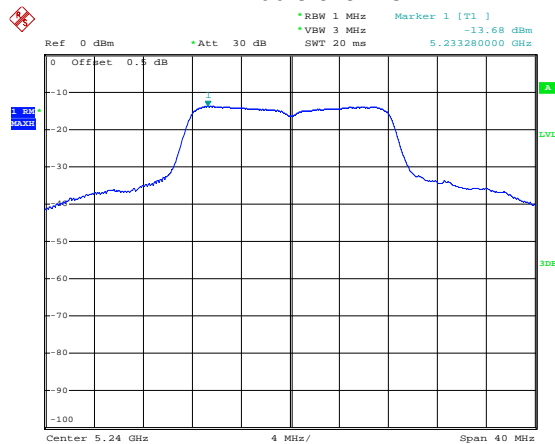

Date: 1.JUL.2015 16:55:29


Highest channel

Test mode: 802.11n20

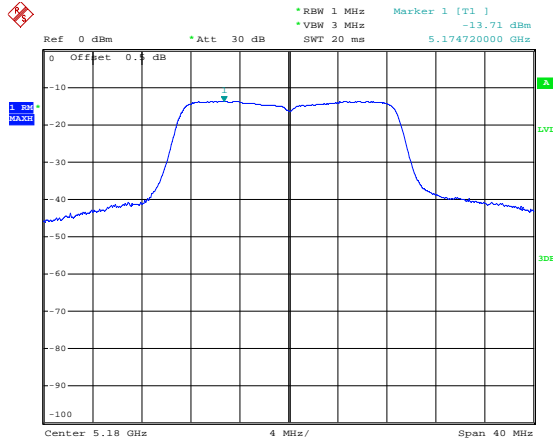


Date: 1.JUL.2015 16:56:54

Lowest channel

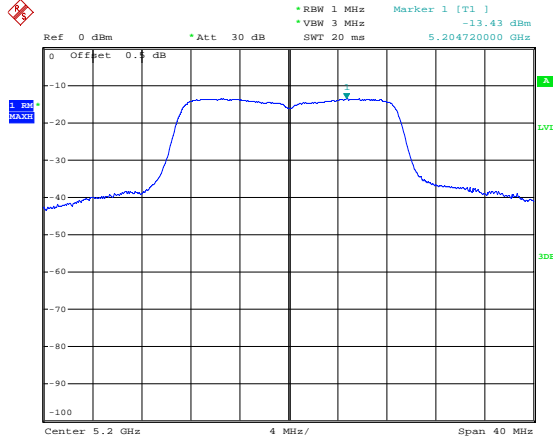

Date: 1.JUL.2015 16:56:28


Middle channel

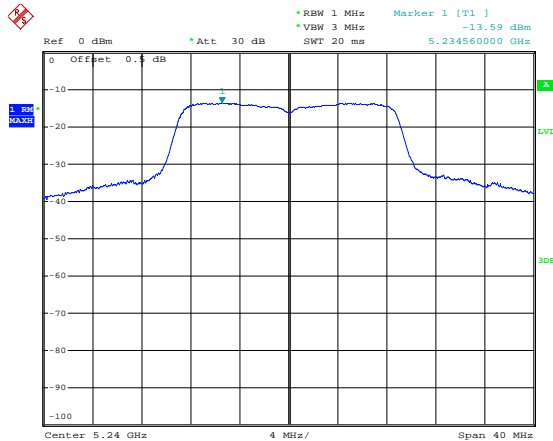

Date: 1.JUL.2015 16:56:03


Highest channel

Test mode: 802.11n40

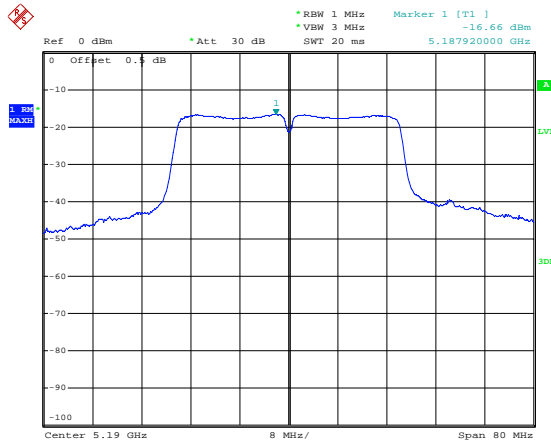

Date: 1.JUL.2015 16:52:25

Lowest channel

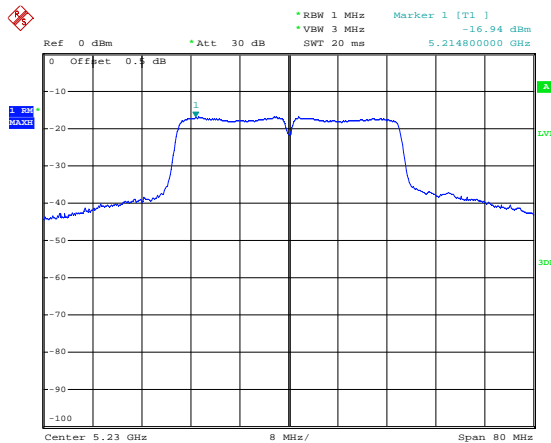


Date: 1.JUL.2015 16:53:06


Highest channel

Band 4:


Test mode: 802.11a

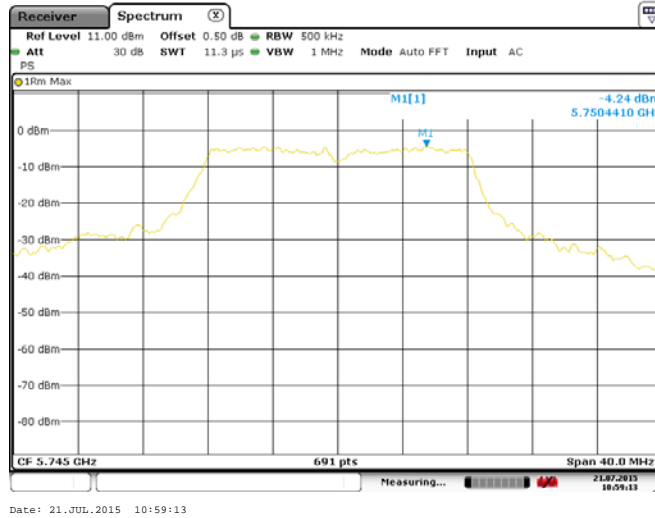

Lowest channel

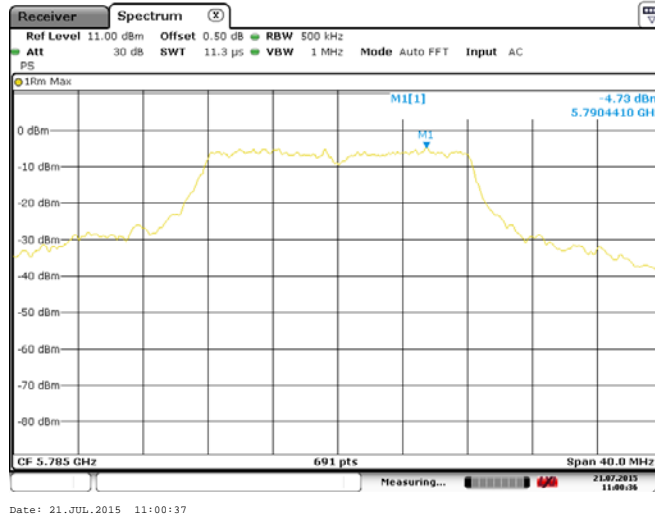


Middle channel

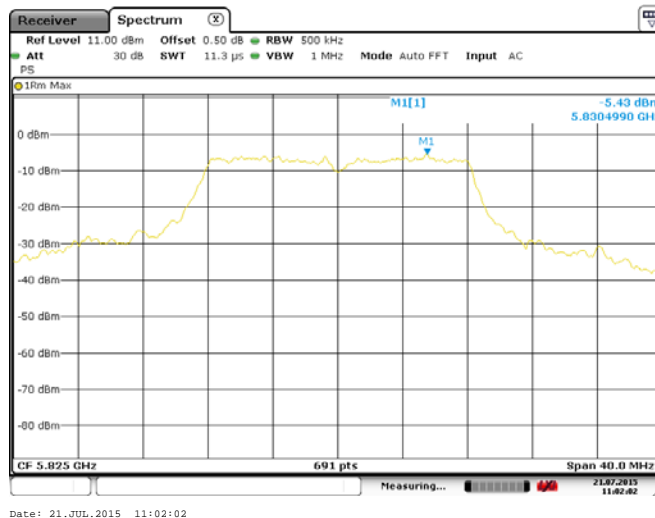


Highest channel


Test mode: 802.11n20

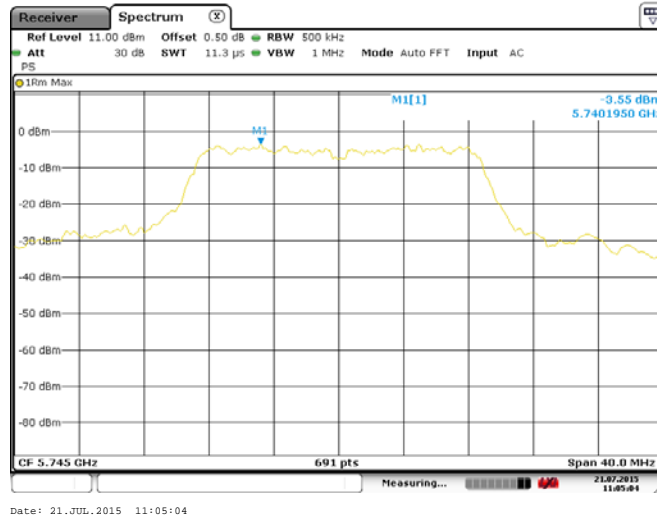

Lowest channel

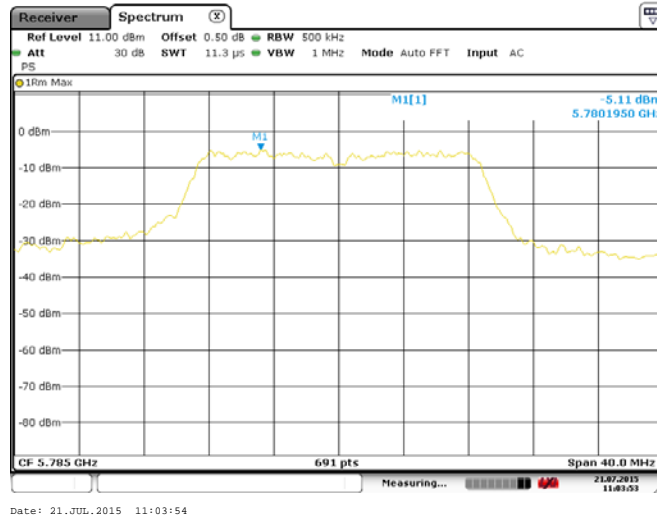


Middle channel

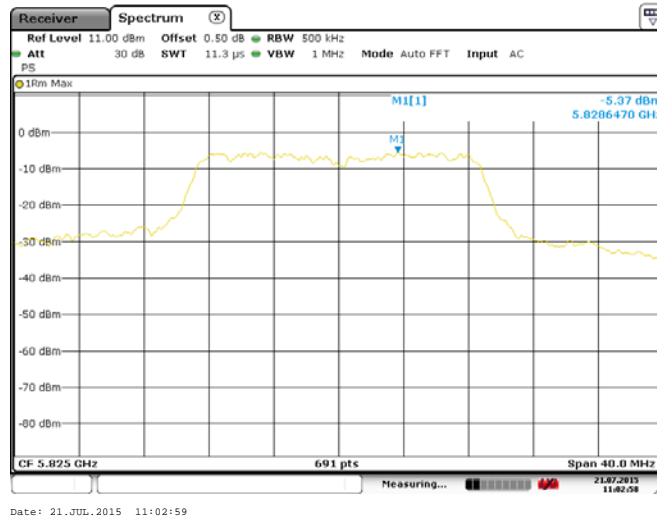


Highest channel

Test mode: 802.11n40

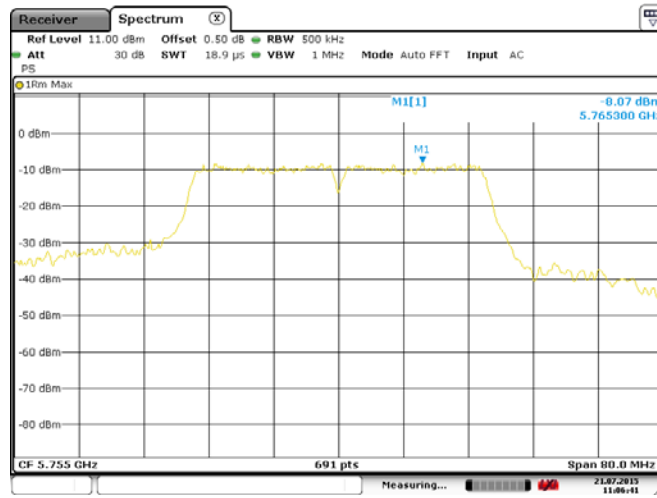

Lowest channel

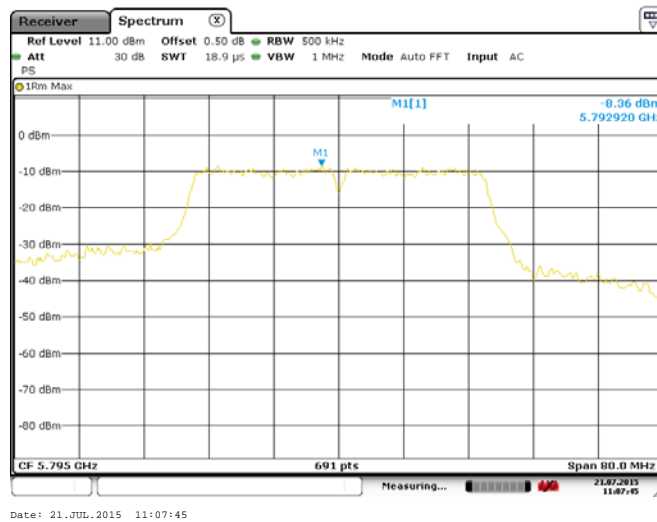

Highest channel

6.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 (b)													
Test Method:	ANSI C63.10:2013 , KDB 789033													
Receiver setup:	<table border="1"> <thead> <tr> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>RMS</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>	Detector	RBW	VBW	Remark	Quasi-peak	120kHz	300kHz	Quasi-peak Value	RMS	1MHz	3MHz	Average Value	
Detector	RBW	VBW	Remark											
Quasi-peak	120kHz	300kHz	Quasi-peak Value											
RMS	1MHz	3MHz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th></th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Band 1</td> <td>68.20</td> <td>Peak Value</td> </tr> <tr> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td rowspan="2">Band 4</td> <td>78.20</td> <td>Peak Value</td> </tr> <tr> <td>54.00</td> <td>Average Value</td> </tr> </tbody> </table> <p>Remark:</p> <ol style="list-style-type: none"> Band 1 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27dBm$. Band 4 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 78.2 \text{ dBuV/m}$, for $EIPR[dBm] = -17dBm$. 		Limit (dBuV/m @3m)	Remark	Band 1	68.20	Peak Value	54.00	Average Value	Band 4	78.20	Peak Value	54.00	Average Value
	Limit (dBuV/m @3m)	Remark												
Band 1	68.20	Peak Value												
	54.00	Average Value												
Band 4	78.20	Peak Value												
	54.00	Average Value												
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 													
Test setup:														
Test Instruments:	Refer to section 5.6 for details													
Test mode:	Refer to section 5.3 for details													
Test results:	Passed													

Band 1:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.15	32.07	9.13	40.06	38.29	68.20	-29.91	Horizontal
5150.00	36.69	32.07	9.13	40.06	37.83	68.20	-30.37	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	27.12	32.07	9.13	40.06	28.26	54.00	-25.74	Horizontal
5150.00	26.52	32.07	9.13	40.06	27.66	54.00	-26.34	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.52	31.78	9.15	40.18	38.27	68.20	-29.93	Horizontal
5350.00	37.65	31.78	9.15	40.18	38.40	68.20	-29.80	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	27.85	31.78	9.15	40.18	28.60	54.00	-25.40	Horizontal
5350.00	27.54	31.78	9.15	40.18	28.29	54.00	-25.71	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.12	32.07	9.13	40.06	38.26	68.20	-29.94	Horizontal
5150.00	36.69	32.07	9.13	40.06	37.83	68.20	-30.37	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	27.83	32.07	9.13	40.06	28.97	54.00	-25.04	Horizontal
5150.00	27.98	32.07	9.13	40.06	29.12	54.00	-24.88	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.69	31.78	9.15	40.18	37.44	68.20	-30.76	Horizontal
5350.00	36.19	31.78	9.15	40.18	36.94	68.20	-31.26	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	27.54	31.78	9.15	40.18	28.29	54.00	-25.71	Horizontal
5350.00	28.62	31.78	9.15	40.18	29.37	54.00	-24.63	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.35	32.07	9.13	40.06	37.49	68.20	-30.71	Horizontal
5150.00	36.14	32.07	9.13	40.06	37.28	68.20	-30.92	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	26.54	32.07	9.13	40.06	27.68	54.00	-26.32	Horizontal
5150.00	25.37	32.07	9.13	40.06	26.51	54.00	-27.49	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.32	31.78	9.15	40.18	37.07	68.20	-31.13	Horizontal
5350.00	36.77	31.78	9.15	40.18	37.52	68.20	-30.68	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	26.36	31.78	9.15	40.18	27.11	54.00	-26.89	Horizontal
5350.00	26.74	31.78	9.15	40.18	27.49	54.00	-26.51	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Band 4:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	40.25	32.27	9.30	40.54	41.28	78.20	-36.92	Horizontal
5725.00	40.11	32.27	9.30	40.54	41.14	78.20	-37.06	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	30.47	32.27	9.30	40.54	31.50	54.00	-22.50	Horizontal
5725.00	30.62	32.27	9.30	40.54	31.65	54.00	-22.35	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	40.35	32.71	9.37	40.69	41.74	78.20	-36.46	Horizontal
5850.00	39.55	32.71	9.37	40.69	40.94	78.20	-37.26	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	29.65	32.71	9.37	40.69	31.04	54.00	-22.96	Horizontal
5850.00	30.21	32.71	9.37	40.69	31.60	54.00	-22.40	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	40.12	32.27	9.30	40.54	41.15	78.20	-37.05	Horizontal
5725.00	40.14	32.27	9.30	40.54	41.17	78.20	-37.03	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	30.85	32.27	9.30	40.54	31.88	54.00	-22.12	Horizontal
5725.00	30.24	32.27	9.30	40.54	31.27	54.00	-22.73	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	40.12	32.71	9.37	40.69	41.51	78.20	-36.69	Horizontal
5850.00	39.66	32.71	9.37	40.69	41.05	78.20	-37.15	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	30.21	32.71	9.37	40.69	31.60	54.00	-22.40	Horizontal
5850.00	29.87	32.71	9.37	40.69	31.26	54.00	-22.74	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	39.65	32.27	9.30	40.54	40.68	78.20	-37.52	Horizontal
5725.00	40.47	32.27	9.30	40.54	41.50	78.20	-36.70	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	29.35	32.27	9.30	40.54	30.38	54.00	-23.62	Horizontal
5725.00	30.28	32.27	9.30	40.54	31.31	54.00	-22.69	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	40.35	32.71	9.37	40.69	41.74	78.20	-36.46	Horizontal
5850.00	39.98	32.71	9.37	40.69	41.37	78.20	-36.83	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	30.47	32.71	9.37	40.69	31.86	54.00	-22.14	Horizontal
5850.00	29.48	32.71	9.37	40.69	30.87	54.00	-23.13	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

6.7 Spurious Emission

6.7.1 Restricted Band

Test Requirement:	FCC Part15 E Section 15.407(b)														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	Band 1: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz Band 4: 5.35 GHz to 5.46 GHz														
Test site:	Measurement Distance: 3m														
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>RMS</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	RMS	1MHz	3MHz	Average Value
Frequency	Detector	RBW	VBW	Remark											
Above 1GHz	Peak	1MHz	3MHz	Peak Value											
	RMS	1MHz	3MHz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>74.00</td> <td>Peak Value</td> </tr> <tr> <td>54.00</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	74.00	Peak Value	54.00	Average Value						
Frequency	Limit (dBuV/m @3m)	Remark													
Above 1GHz	74.00	Peak Value													
	54.00	Average Value													
Test Procedure:	<ol style="list-style-type: none"> 7. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 8. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 9. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 10. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 11. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 12. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 														
Test setup:	<p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table that is 0.8m high. The EUT is positioned 3m away from an antenna tower. The antenna tower has a horn antenna mounted on it, which can be adjusted to heights of 1m, 2m, 3m, or 4m. The antenna tower is connected to a spectrum analyzer via an amplifier.</p>														
Test Instruments:	Refer to section 5.6 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

Band 1:

802.11a

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	36.24	30.72	8.54	40.67	34.83	74.00	-39.17	Horizontal
4500.00	37.02	30.72	8.54	40.67	35.61	74.00	-38.39	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	26.54	30.72	8.54	40.67	25.13	54.00	-28.87	Horizontal
4500.00	26.40	30.72	8.54	40.67	24.99	54.00	-29.01	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	37.26	31.99	9.16	40.23	38.18	74.00	-35.82	Horizontal
5460.00	37.05	31.99	9.16	40.23	37.97	74.00	-36.03	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	27.12	31.99	9.16	40.23	28.04	54.00	-25.96	Horizontal
5460.00	27.00	31.99	9.16	40.23	27.92	54.00	-26.08	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	36.87	30.72	8.54	40.67	35.46	74.00	-38.54	Horizontal
4500.00	36.38	30.72	8.54	40.67	34.97	74.00	-39.03	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	26.54	30.72	8.54	40.67	25.13	54.00	-28.87	Horizontal
4500.00	26.36	30.72	8.54	40.67	24.95	54.00	-29.05	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	37.28	31.99	9.16	40.23	38.20	74.00	-35.80	Horizontal
5460.00	37.89	31.99	9.16	40.23	38.81	74.00	-35.20	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	27.52	31.99	9.16	40.23	28.44	54.00	-25.56	Horizontal
5460.00	27.18	31.99	9.16	40.23	28.10	54.00	-25.90	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	37.50	30.72	8.54	40.67	36.09	74.00	-37.91	Horizontal
4500.00	37.55	30.72	8.54	40.67	36.14	74.00	-37.86	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	27.55	30.72	8.54	40.67	26.14	54.00	-27.86	Horizontal
4500.00	27.36	30.72	8.54	40.67	25.95	54.00	-28.05	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	36.28	31.99	9.16	40.23	37.20	74.00	-36.80	Horizontal
5460.00	37.29	31.99	9.16	40.23	38.21	74.00	-35.80	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	27.32	31.99	9.16	40.23	28.24	54.00	-25.76	Horizontal
5460.00	27.56	31.99	9.16	40.23	28.48	54.00	-25.52	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Band 4:

802.11a

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	43.21	31.78	9.15	40.18	43.96	74.00	-30.04	Horizontal
5460.00	43.65	31.99	9.16	40.23	44.57	74.00	-29.43	Horizontal
5350.00	42.85	31.78	9.15	40.18	43.60	74.00	-30.40	Vertical
5460.00	43.26	31.99	9.16	40.23	44.18	74.00	-29.82	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.65	31.78	9.15	40.18	34.40	54.00	-19.60	Horizontal
5460.00	32.85	31.99	9.16	40.23	33.77	54.00	-20.23	Horizontal
5350.00	32.38	31.78	9.15	40.18	33.13	54.00	-20.87	Vertical
5460.00	33.97	31.99	9.16	40.23	34.89	54.00	-19.11	Vertical

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	43.12	31.78	9.15	40.18	43.87	74.00	-30.13	Horizontal
5460.00	42.25	31.99	9.16	40.23	43.17	74.00	-30.83	Horizontal
5350.00	42.11	31.78	9.15	40.18	42.86	74.00	-31.14	Vertical
5460.00	43.26	31.99	9.16	40.23	44.18	74.00	-29.82	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.69	31.78	9.15	40.18	34.44	54.00	-19.56	Horizontal
5460.00	32.85	31.99	9.16	40.23	33.77	54.00	-20.23	Horizontal
5350.00	32.54	31.78	9.15	40.18	33.29	54.00	-20.71	Vertical
5460.00	33.87	31.99	9.16	40.23	34.79	54.00	-19.21	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

802.11n-HT40



Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	42.68	31.78	9.15	40.18	43.43	74.00	-30.57	Horizontal
5460.00	43.57	31.99	9.16	40.23	44.49	74.00	-29.51	Horizontal
5350.00	43.99	31.78	9.15	40.18	44.74	74.00	-29.26	Vertical
5460.00	44.87	31.99	9.16	40.23	45.79	74.00	-28.21	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.47	31.78	9.15	40.18	34.22	54.00	-19.78	Horizontal
5460.00	34.52	31.99	9.16	40.23	35.44	54.00	-18.56	Horizontal
5350.00	33.85	31.78	9.15	40.18	34.60	54.00	-19.40	Vertical
5460.00	34.12	31.99	9.16	40.23	35.04	54.00	-18.96	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.7.2 Unwanted Emissions in the Restricted Bands

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																							
Test Method:	ANSI C63.10:2013																							
Test Frequency Range:	30MHz to 40GHz																							
Test site:	Measurement Distance: 3m																							
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100kHz</td> <td>300kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value								
Frequency	Detector	RBW	VBW	Remark																				
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBm/MHz)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>68.20</td> <td>Peak Value</td> </tr> <tr> <td>54.00</td> <td>Average Value</td> </tr> </tbody> </table> <p>Remark: 1. Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27dBm$.</p>	Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Frequency	Limit (dBm/MHz)	Remark	Above 1GHz	68.20	Peak Value	54.00	Average Value
Frequency	Limit (dBuV/m @3m)	Remark																						
30MHz-88MHz	40.0	Quasi-peak Value																						
88MHz-216MHz	43.5	Quasi-peak Value																						
216MHz-960MHz	46.0	Quasi-peak Value																						
960MHz-1GHz	54.0	Quasi-peak Value																						
Frequency	Limit (dBm/MHz)	Remark																						
Above 1GHz	68.20	Peak Value																						
	54.00	Average Value																						
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																							
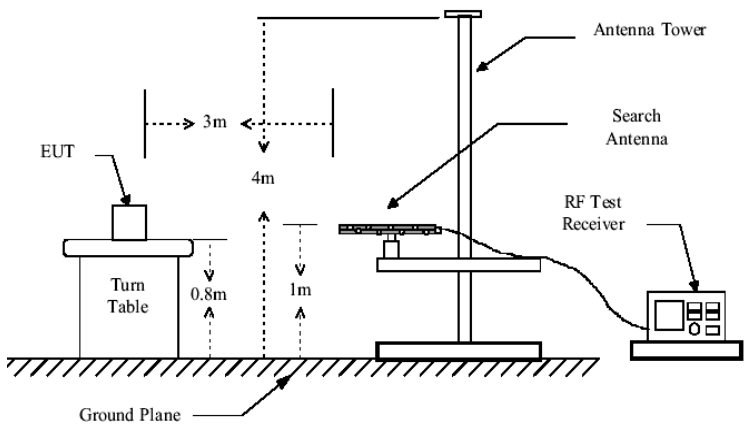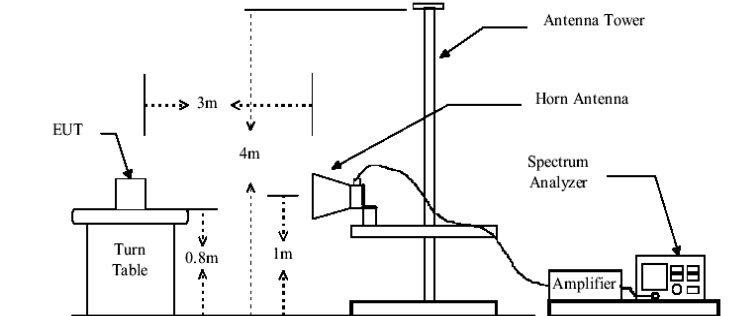
<p>Test setup:</p>	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Instruments:</p>	<p>Refer to section 5.6 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>

Below 1GHz

Horizontal:

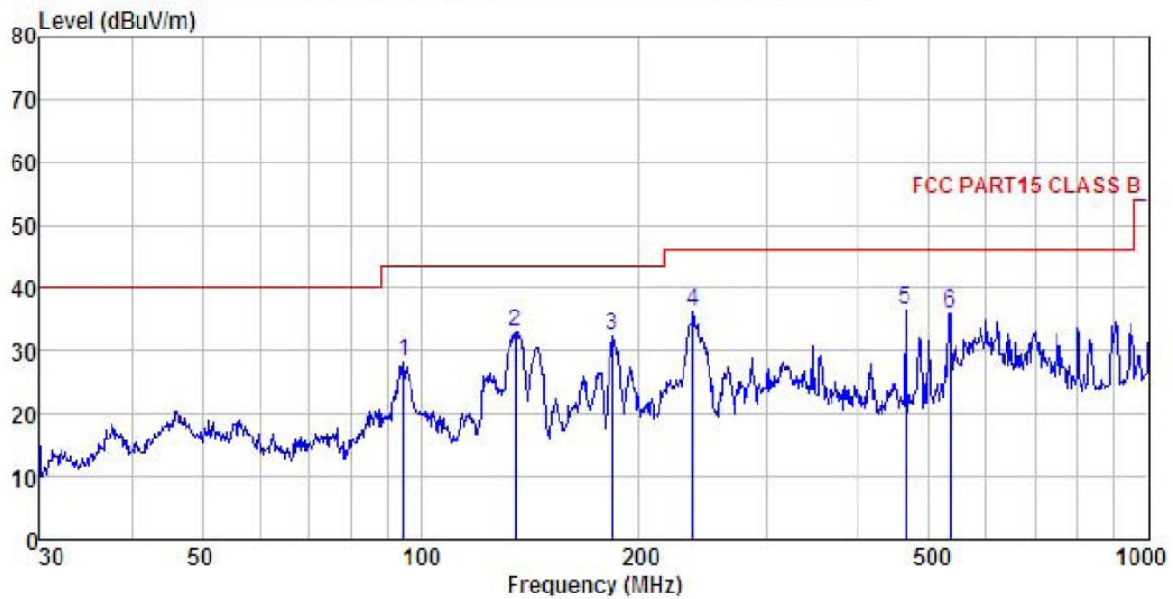


```

Site       : 3m chamber
Condition  : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
Job No.    : 456RF
EUI       : Android player Main board with wireless
Model      : ASSY-1859ATMBA-00
Test mode  : 5Gwifi mode
Power Rating : AC 120V/50Hz
Environment : Temp:25.5°C Humi:55% 101KPa
Test Engineer: MT
REMARK    :
    
```

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	94.760	44.18	12.84	0.93	29.55	28.40	43.50	-15.10 QP
2	135.032	52.66	8.56	1.23	29.30	33.15	43.50	-10.35 QP
3	183.201	50.08	9.92	1.36	28.95	32.41	43.50	-11.09 QP
4	236.645	51.51	11.93	1.56	28.61	36.39	46.00	-9.61 QP
5	463.970	47.40	15.71	2.30	28.89	36.52	46.00	-9.48 QP
6	533.832	45.26	17.26	2.49	29.05	35.96	46.00	-10.04 QP

Vertical:

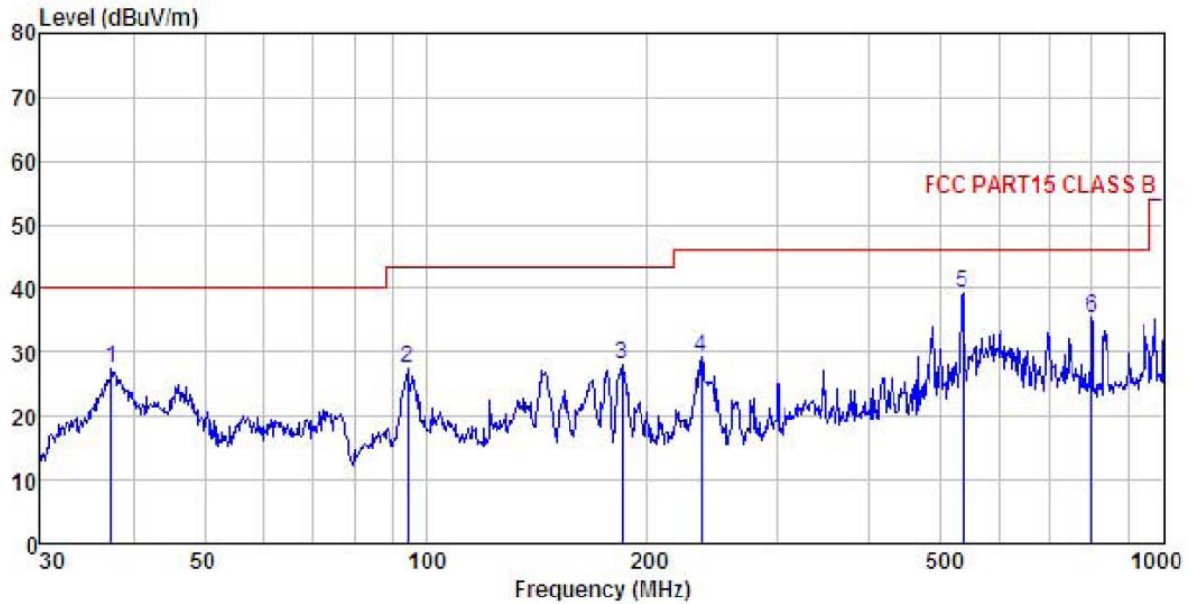

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 456RF
 EUT : Android player Main board with wireless
 Model : ASSY-1859ATMBA-00
 Test mode : 5Gwifi mode
 Power Rating : AC 120V/50Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: MT
 REMARK :

	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	37.416	43.85	12.92	0.50	29.92	27.35	40.00	-12.65	QP
2	94.428	43.24	12.75	0.93	29.55	27.37	43.50	-16.13	QP
3	184.490	45.69	10.08	1.36	28.94	28.19	43.50	-15.31	QP
4	235.816	44.42	11.88	1.56	28.62	29.24	46.00	-16.76	QP
5	533.832	48.56	17.26	2.49	29.05	39.26	46.00	-6.74	QP
6	798.980	40.27	20.06	3.17	28.20	35.30	46.00	-10.70	QP

Above 1GHz:

Band 1:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	45.62	39.23	13.84	41.34	57.35	68.20	-10.85	Vertical
10360.00	44.12	39.23	13.84	41.34	55.85	68.20	-12.35	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	32.52	39.23	13.84	41.34	44.25	54.00	-9.75	Vertical
10360.00	33.69	39.23	13.84	41.34	45.42	54.00	-8.58	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	44.62	39.36	13.85	41.27	56.56	68.20	-11.64	Vertical
10400.00	44.95	39.36	13.85	41.27	56.89	68.20	-11.31	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	34.52	39.36	13.85	41.27	46.46	54.00	-7.54	Vertical
10400.00	35.01	39.36	13.85	41.27	46.95	54.00	-7.05	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.62	39.56	13.90	41.06	56.02	68.20	-12.18	Vertical
10480.00	42.35	39.56	13.90	41.06	54.75	68.20	-13.45	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	33.15	39.56	13.90	41.06	45.55	54.00	-8.45	Vertical
10480.00	32.54	39.56	13.90	41.06	44.94	54.00	-9.06	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	45.32	39.23	13.84	41.34	57.05	68.20	-11.15	Vertical
10360.00	44.21	39.23	13.84	41.34	55.94	68.20	-12.26	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	35.62	39.23	13.84	41.34	47.35	54.00	-6.65	Vertical
10360.00	34.85	39.23	13.84	41.34	46.58	54.00	-7.42	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	45.62	39.36	13.85	41.27	57.56	68.20	-10.64	Vertical
10400.00	44.23	39.36	13.85	41.27	56.17	68.20	-12.03	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	35.62	39.36	13.85	41.27	47.56	54.00	-6.44	Vertical
10400.00	34.85	39.36	13.85	41.27	46.79	54.00	-7.21	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.35	39.56	13.90	41.06	55.75	68.20	-12.45	Vertical
10480.00	44.01	39.56	13.90	41.06	56.41	68.20	-11.79	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	32.14	39.56	13.90	41.06	44.54	54.00	-9.46	Vertical
10480.00	31.11	39.56	13.90	41.06	43.51	54.00	-10.49	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	43.25	39.29	13.84	41.31	55.07	68.20	-13.13	Vertical
10380.00	44.57	39.29	13.84	41.31	56.39	68.20	-11.81	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	31.47	39.29	13.84	41.31	43.29	54.00	-10.71	Vertical
10380.00	32.20	39.29	13.84	41.31	44.02	54.00	-9.98	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	43.25	39.54	13.88	41.17	55.50	68.20	-12.70	Vertical
10460.00	42.28	39.54	13.88	41.17	54.53	68.20	-13.67	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	33.25	39.54	13.88	41.17	45.50	54.00	-8.50	Vertical
10460.00	32.28	39.54	13.88	41.17	44.53	54.00	-9.47	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Band 4:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	43.68	40.25	13.82	40.75	57.00	68.20	-11.20	Vertical
11490.00	43.11	40.25	13.82	40.75	56.43	68.20	-11.77	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	30.23	40.25	13.82	40.75	43.55	54.00	-10.45	Vertical
11490.00	30.15	40.25	13.82	40.75	43.47	54.00	-10.53	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	43.24	40.17	13.78	40.91	56.28	68.20	-11.92	Vertical
11570.00	43.35	40.17	13.78	40.91	56.39	68.20	-11.81	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	31.23	40.17	13.78	40.91	44.27	54.00	-9.73	Vertical
11570.00	30.25	40.17	13.78	40.91	43.29	54.00	-10.71	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	44.21	39.89	13.74	41.06	56.78	68.20	-11.42	Vertical
11650.00	43.68	39.89	13.74	41.06	56.25	68.20	-11.95	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	33.58	39.89	13.74	41.06	46.15	54.00	-7.85	Vertical
11650.00	31.25	39.89	13.74	41.06	43.82	54.00	-10.18	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	43.25	40.25	13.82	40.75	56.57	68.20	-11.63	Vertical
11490.00	42.14	40.25	13.82	40.75	55.46	68.20	-12.74	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	30.25	40.25	13.82	40.75	43.57	54.00	-10.43	Vertical
11490.00	29.74	40.25	13.82	40.75	43.06	54.00	-10.94	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	43.68	40.17	13.78	40.91	56.72	68.20	-11.48	Vertical
11570.00	43.20	40.17	13.78	40.91	56.24	68.20	-11.96	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	30.21	40.17	13.78	40.91	43.25	54.00	-10.75	Vertical
11570.00	30.45	40.17	13.78	40.91	43.49	54.00	-10.51	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.35	39.89	13.74	41.06	54.92	68.20	-13.28	Vertical
11650.00	42.70	39.89	13.74	41.06	55.27	68.20	-12.93	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	32.62	39.89	13.74	41.06	45.19	54.00	-8.81	Vertical
11650.00	30.44	39.89	13.74	41.06	43.01	54.00	-10.99	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	41.21	40.26	13.83	40.77	54.53	68.20	-13.67	Vertical
11510.00	42.87	40.26	13.83	40.77	56.19	68.20	-12.01	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	29.65	40.26	13.83	40.77	42.97	54.00	-11.03	Vertical
11510.00	29.40	40.26	13.83	40.77	42.72	54.00	-11.28	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	41.54	40.08	13.77	40.95	54.44	68.20	-13.76	Vertical
11590.00	42.30	40.08	13.77	40.95	55.20	68.20	-13.00	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	29.35	40.08	13.77	40.95	42.25	54.00	-11.75	Vertical
11590.00	29.74	40.08	13.77	40.95	42.64	54.00	-11.36	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

6.8 Frequency stability

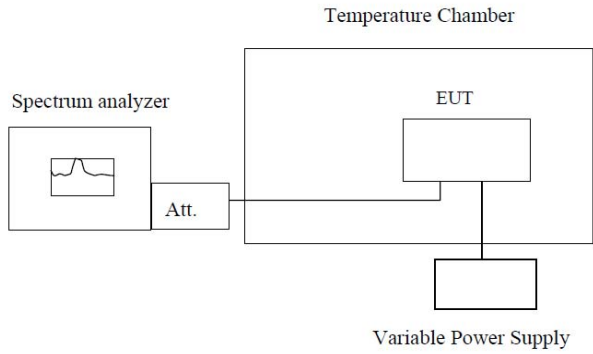Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	 <p style="text-align: center;">Temperature Chamber</p> <p style="text-align: center;">Spectrum analyzer Att. EUT</p> <p style="text-align: center;">Variable Power Supply</p> <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Band 1:

Voltage vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(AC /60Hz)		
20	138	5179.984500	2.99
	120	5179.987800	2.36
	102	5179.987400	2.43

Temperature vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(AC /60Hz)	Temp(°C)		
120	-20	5179.985100	2.88
	-10	5179.987400	2.43
	0	5179.988200	2.28
	10	5179.988400	2.24
	20	5179.988700	2.18
	30	5179.986800	2.55
	40	5179.984700	2.95
	50	5179.983500	3.19

Band 4:

Voltage vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(AC /60Hz)		
20	138	5744.986584	2.34
	120	5744.988745	1.96
	102	5744.987548	2.17

Temperature vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(AC /60Hz)	Temp(°C)		
120	-20	5744.993550	1.12
	-10	5744.998471	0.27
	0	5744.989878	1.76
	10	5744.997884	0.37
	20	5744.988875	1.94
	30	5744.998541	0.25
	40	5744.986784	2.30
	50	5744.990247	1.70