

FCC Report (Bluetooth)

Product Name : Bluetooth Earphone
Trade mark : N/A
Model No. : TWS-589
FCC ID : 2AB75-TWS589
Report Number : BLA-EMC-201911-A21-01
Date of sample receipt : November 8, 2019
Date of Test : November 8, 2019–November 18, 2019
Date of Issue : November 18, 2019
Test standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test result : PASS

Prepared for:

Wintop Electronics Co.,Ltd

**Flat 2, 8/F Workingport Com'L Bldg, 3 Hau Fook ST, Tsim Sha Tsui, Kln
Hong Kong**

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

**No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,
China**

TEL: +86-755-28682673

FAX: +86-755-28682673

Compiled by:

Eason

Review by:

Sweet . Wang

Approved by:

Emen - li

Date: November 18, 2019



2 Version

Version No.	Date	Description
00	November 18, 2019	Original

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
5.1	GENERAL DESCRIPTION OF EUT	5
5.2	TEST MODE	7
5.3	TEST FACILITY.....	7
5.4	TEST LOCATION.....	7
5.5	OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
5.6	DESCRIPTION OF SUPPORT UNITS.....	7
6	TEST INSTRUMENTS LIST	8
7	TEST RESULTS AND MEASUREMENT DATA	10
7.1	ANTENNA REQUIREMENT	10
7.2	CONDUCTED EMISSIONS	11
7.3	CONDUCTED PEAK OUTPUT POWER.....	14
7.4	20dB EMISSION BANDWIDTH.....	18
7.5	CARRIER FREQUENCIES SEPARATION.....	22
7.6	HOPPING CHANNEL NUMBER	26
7.7	DWELL TIME.....	27
7.8	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	29
7.9	BAND EDGE.....	30
7.9.1	<i>Conducted Emission Method</i>	30
7.9.2	<i>Radiated Emission Method</i>	34
7.10	SPURIOUS EMISSION	36
7.10.1	<i>Conducted Emission Method</i>	36
7.10.2	<i>Radiated Emission Method</i>	38
8	TEST SETUP PHOTO	46
9	EUT CONSTRUCTIONAL DETAILS.....	48

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Bluetooth Earphone
Model No.:	TWS-589
Test Model No.:	TWS-589
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.</i>	
Serial No.:	N/A
Sample(s) Status	Engineer sample
Hardware:	HTS108_HGZN-589L_V1.1B
Software:	HTS108_HGZN-589L_V1.1B
Operation Frequency:	2402MHz-2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Internal Antenna
Antenna gain:	-0.22dBi
Power supply:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: • FCC — Designation No.: CN1252 <i>BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252. • ISED — CAB identifier No.: CN0028 <i>BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.4 Test Location

All tests were performed at:
<i>All tests were performed at:</i> <i>BlueAsia of Technical Services(Shenzhen) Co., Ltd.</i> <i>IOT Test Centre of BlueAsia</i> <i>No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China</i> <i>Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673</i> No tests were sub-contracted.

5.5 Other Information Requested by the Customer

None.

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number
UGREEN	Adapter	CD112	20358
Lenovo	Notebook computer	E470C	PF-10FB5C

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-14-2019	07-13-2020
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-14-2019	07-13-2020
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Pre-amplifier	SKET	N/A	N/A	07-19-2019	07-18-2020
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2019	05-23-2020
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	03-21-2019	03-20-2020
8	Controller	SKET	N/A	N/A	N/A	N/A
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2019	05-23-2020
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2019	05-23-2020
11	Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
12	Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
13	Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2019	06-09-2020
2	LISN	CHASE	MN2050D	1447	12-18-2018	12-17-2019
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	07-19-2019	07-18-2020
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2019	07-18-2020
6	Coaxial Cable	BlueAsia	BLA-XC-05	N/A	N/A	N/A


RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2019	05-23-2020
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2019	05-23-2020
3	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2019	05-23-2020
4	Signal Generator	Agilent	E8257D	MY44320250	05-24-2019	05-23-2020
5	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO27	05-24-2019	05-23-2020
6	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO28	05-24-2019	05-23-2020
7	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2019	07-18-2020
8	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2019	07-18-2020

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The antenna is Internal antenna, the best case gain of the antenna is -0.22dBi 	


7.2 Conducted Emissions

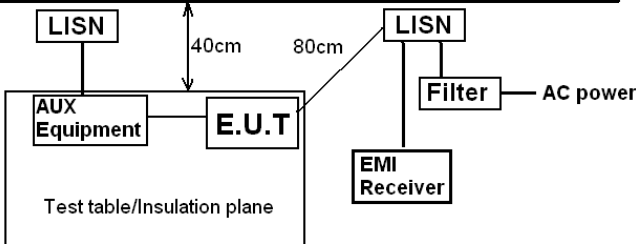Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement data:

Line:


EUT:	Bluetooth Earphone	Probe:	L1
Model:	TWS-589	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		

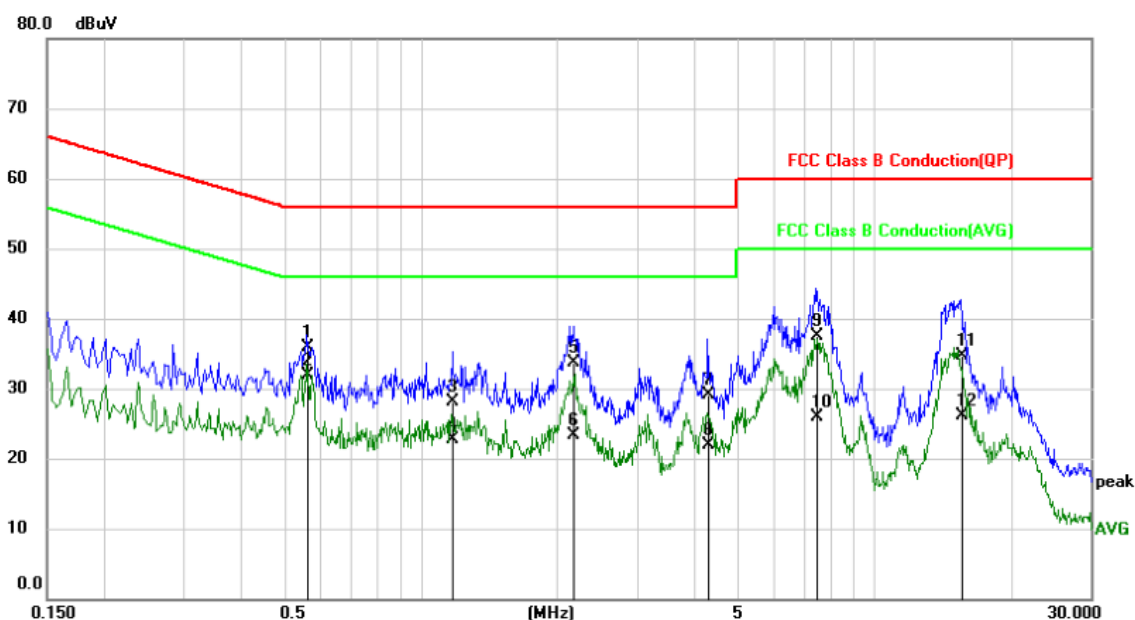

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.5620	26.14	9.74	35.88	56.00	-20.12	QP
2	*	0.5620	22.22	9.74	31.96	46.00	-14.04	AVG
3		1.1740	18.33	9.82	28.15	56.00	-27.85	QP
4		1.1740	12.89	9.82	22.71	46.00	-23.29	AVG
5		2.1780	23.83	9.82	33.65	56.00	-22.35	QP
6		2.1780	13.43	9.82	23.25	46.00	-22.75	AVG
7		4.3020	19.25	9.84	29.09	56.00	-26.91	QP
8		4.3020	12.04	9.84	21.88	46.00	-24.12	AVG
9		7.4580	27.55	9.87	37.42	60.00	-22.58	QP
10		7.4580	16.12	9.87	25.99	50.00	-24.01	AVG
11		15.5380	24.77	9.96	34.73	60.00	-25.27	QP
12		15.5380	16.22	9.96	26.18	50.00	-23.82	AVG

Neutral:

EUT:	Bluetooth Earphone	Probe:	N
Model:	TWS-589	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		

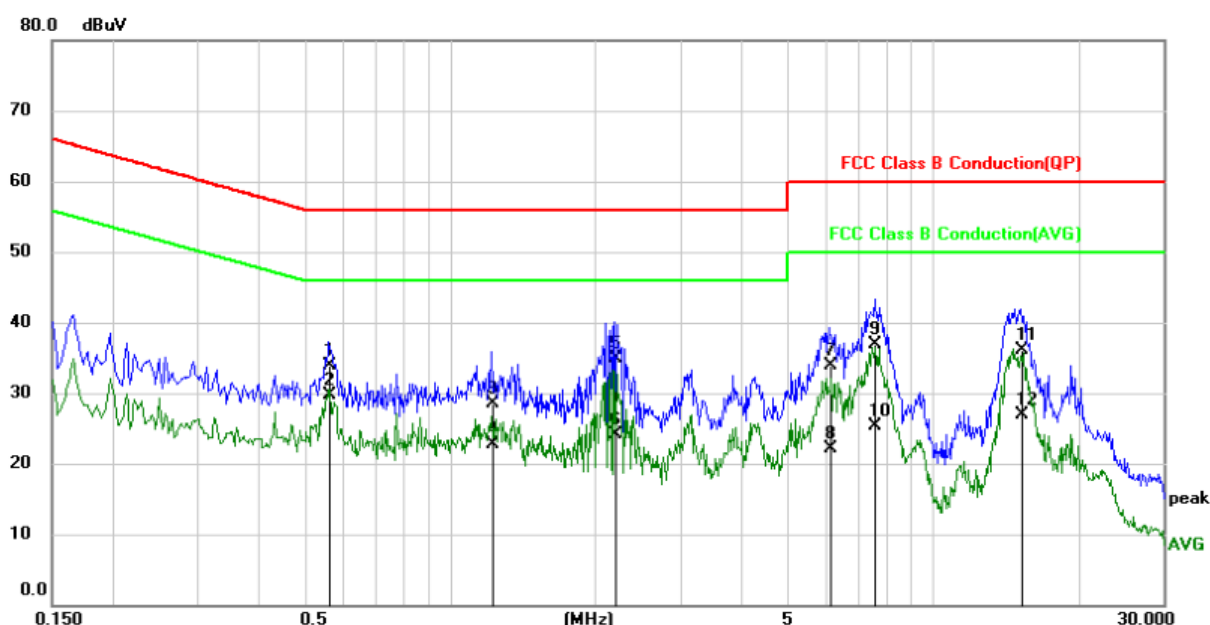

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.5620	24.09	9.73	33.82	56.00	-22.18	QP
2	*	0.5620	20.07	9.73	29.80	46.00	-16.20	AVG
3		1.2220	18.60	9.83	28.43	56.00	-27.57	QP
4		1.2220	12.93	9.83	22.76	46.00	-23.24	AVG
5		2.1940	25.11	9.86	34.97	56.00	-21.03	QP
6		2.1940	14.32	9.86	24.18	46.00	-21.82	AVG
7		6.0980	23.98	9.87	33.85	60.00	-26.15	QP
8		6.0980	12.15	9.87	22.02	50.00	-27.98	AVG
9		7.5780	27.14	9.85	36.99	60.00	-23.01	QP
10		7.5780	15.52	9.85	25.37	50.00	-24.63	AVG
11		15.1500	26.08	10.02	36.10	60.00	-23.90	QP
12		15.1500	16.83	10.02	26.85	50.00	-23.15	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

3. Final Level =Receiver Read level +Correct Factor

4. Correct Factor = LISN Factor + Cable Loss

7.3 Conducted Peak Output Power

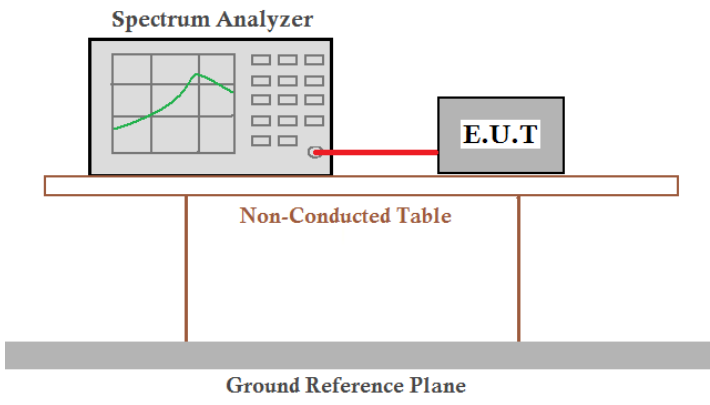
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),21dBm(for EDR)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	3.59	30.00	Pass
	Middle	4.48		
	Highest	4.26		
Pi/4QPSK	Lowest	4.20	21.00	Pass
	Middle	3.68		
	Highest	3.04		
8-DPSK	Lowest	4.17	21.00	Pass
	Middle	3.68		
	Highest	3.01		


Test plot as follows:

Test mode:	GFSK mode
------------	-----------

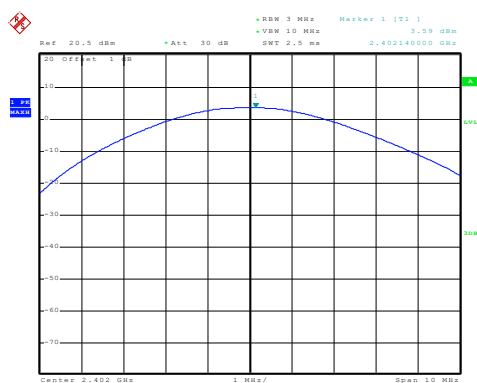


Date: 18.NOV.2019 12:20:04

Lowest channel

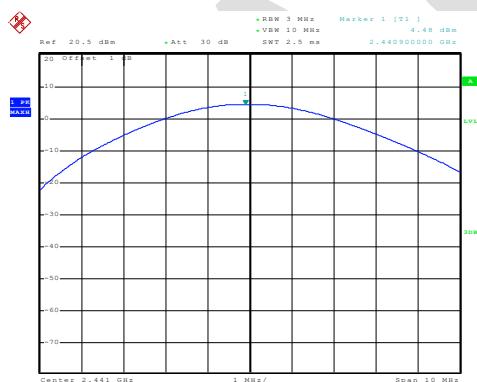

Date: 18.NOV.2019 12:21:10

Middle channel

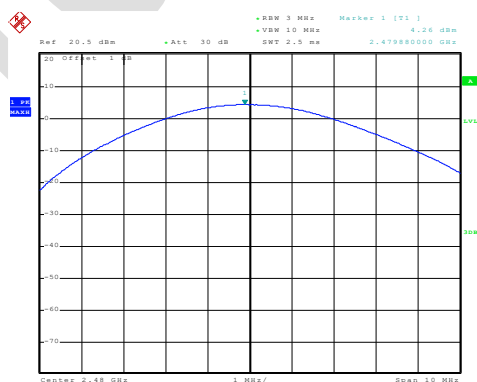


Date: 18.NOV.2019 12:21:49

Highest channel


Test mode:

PI/4QPSK mode

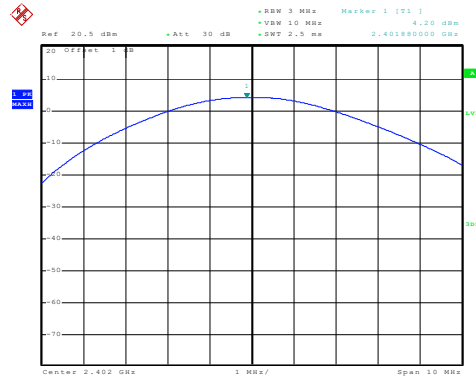


Date: 15.NOV.2019 11:00:43

Lowest channel

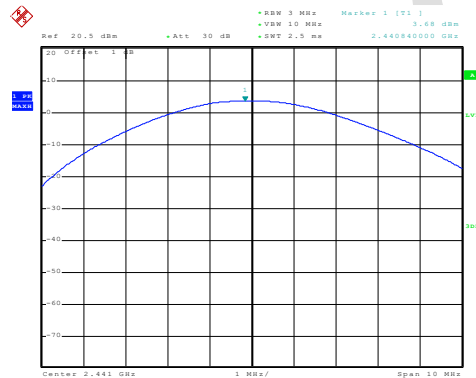

Date: 15.NOV.2019 11:02:41

Middle channel

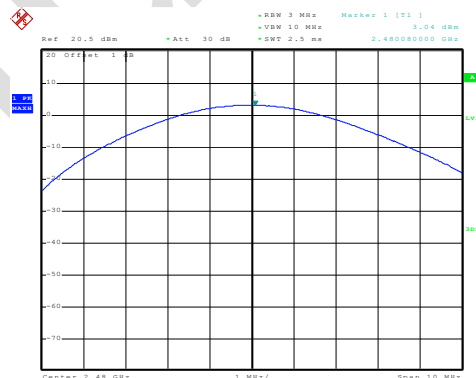


Date: 15.NOV.2019 11:03:48

Highest channel


Test mode:

8-DPSK mode

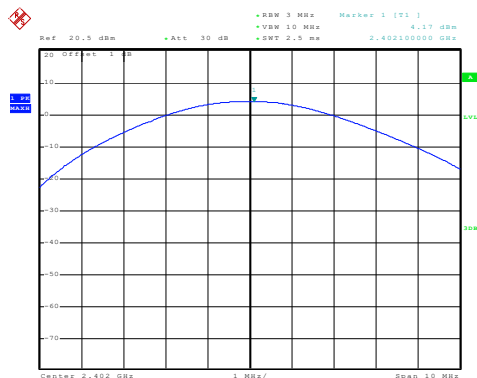


Date: 15.NOV.2019 11:06:39

Lowest channel

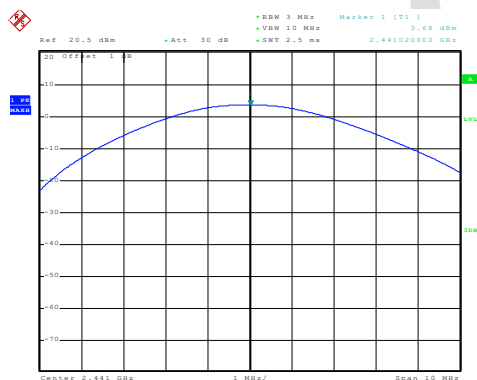

Date: 15.NOV.2019 11:08:03


Middle channel

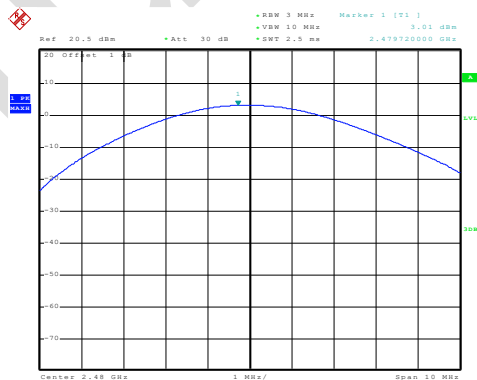

Date: 15.NOV.2019 11:09:46

Highest channel

7.4 20dB Emission Bandwidth

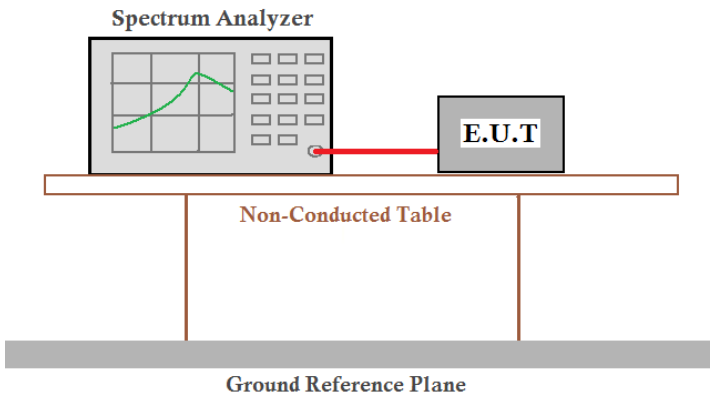
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.056	Pass
	Middle	1.052	
	Highest	1.056	
Pi/4QPSK	Lowest	1.170	Pass
	Middle	1.194	
	Highest	1.188	
8-DPSK	Lowest	1.188	Pass
	Middle	1.182	
	Highest	1.194	


Test plot as follows:

Test mode:	GFSK mode
------------	-----------

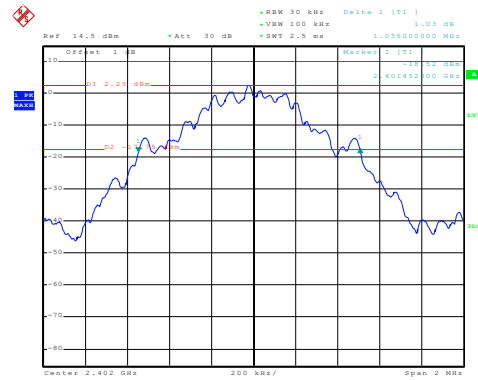


Date: 15.NOV.2019 10:44:15

Lowest channel

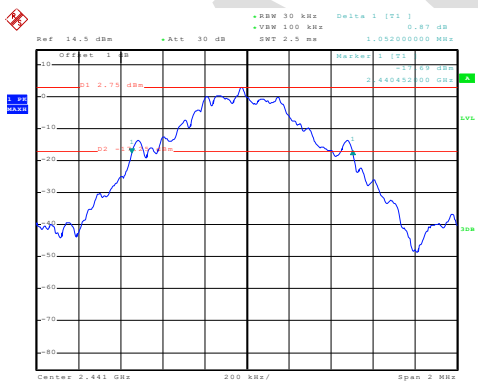

Date: 18.NOV.2019 12:24:23

Middle channel

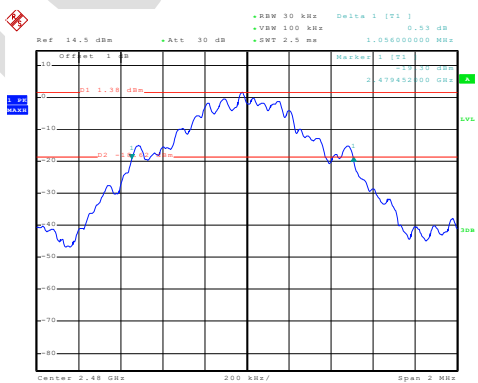


Date: 15.NOV.2019 10:49:28

Highest channel


Test mode:

PI/4QPSK mode

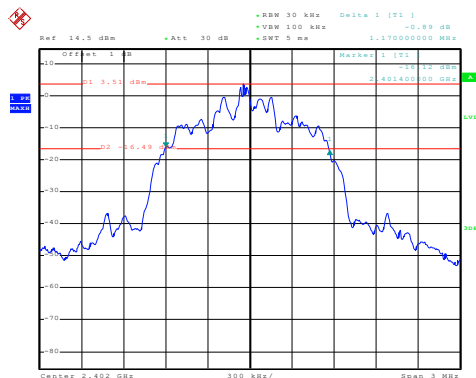


Date: 15.NOV.2019 10:17:25

Lowest channel

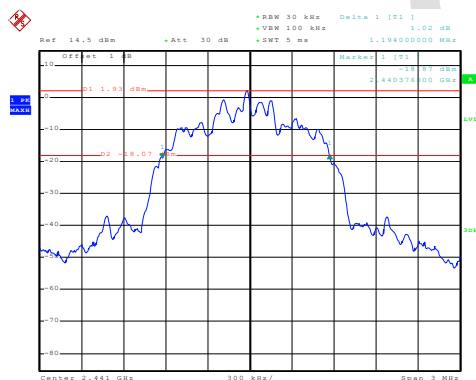

Date: 15.NOV.2019 10:28:21

Middle channel

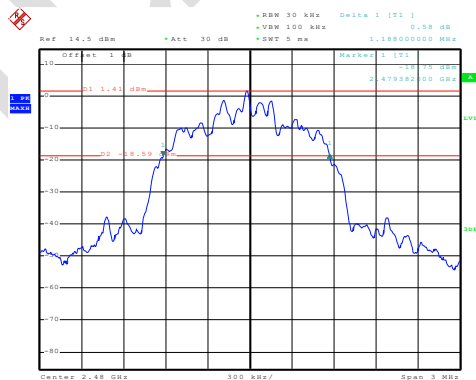


Date: 15.NOV.2019 10:31:27

Highest channel


Test mode:

8-DPSK mode

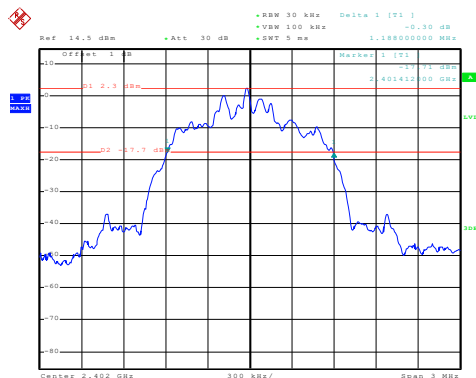


Date: 15.NOV.2019 10:34:31

Lowest channel

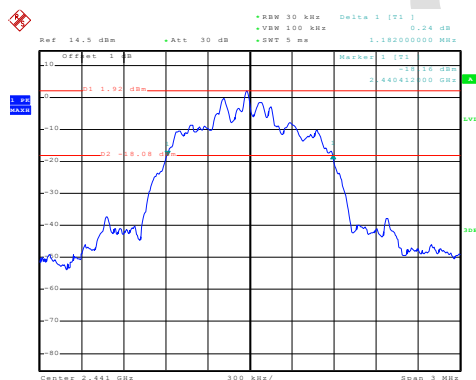

Date: 15.NOV.2019 10:36:44


Middle channel

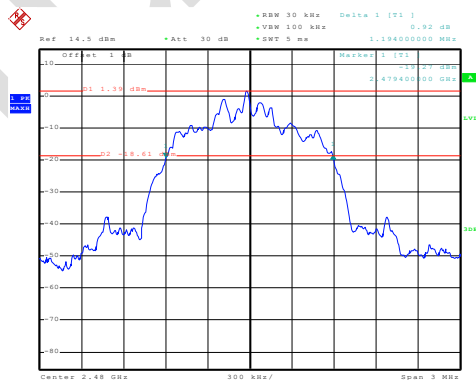

Date: 15.NOV.2019 10:38:52

Highest channel

7.5 Carrier Frequencies Separation

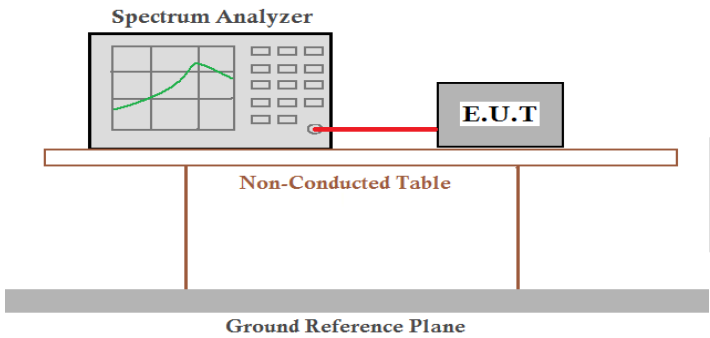Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	GFSK & Pi/4QPSK & 8-DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1000	704	Pass
	Middle	1004	704	Pass
	Highest	1000	704	Pass
Pi/4QPSK	Lowest	1000	796	Pass
	Middle	1000	796	Pass
	Highest	1000	796	Pass
8-DPSK	Lowest	1000	796	Pass
	Middle	1000	796	Pass
	Highest	1000	796	Pass

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1056	704
Pi/4QPSK	1194	796
8-DPSK	1194	796


Test plot as follows:

Modulation mode:	GFSK
------------------	------

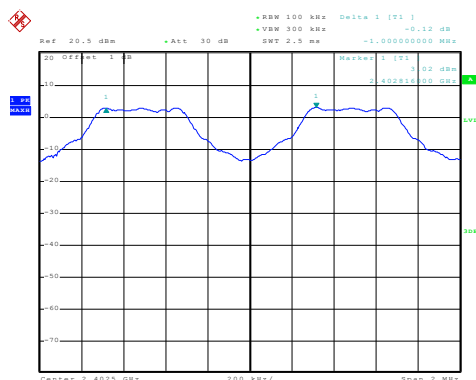


Date: 18.NOV.2019 11:55:17

Lowest channel

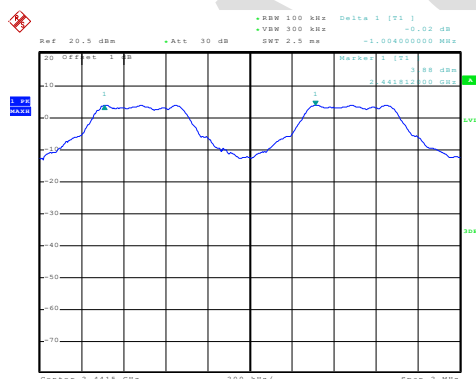

Date: 18.NOV.2019 11:57:21

Middle channel

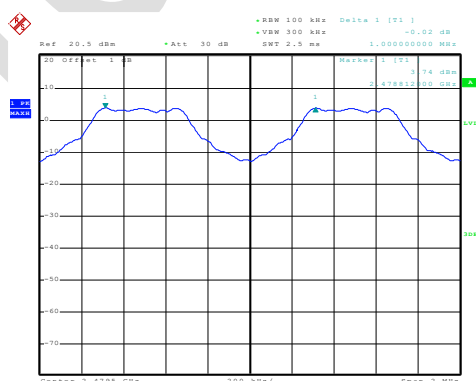


Date: 18 NOV 2019 11:59:24

Highest channel


Test mode:

PI/4QPSK mode

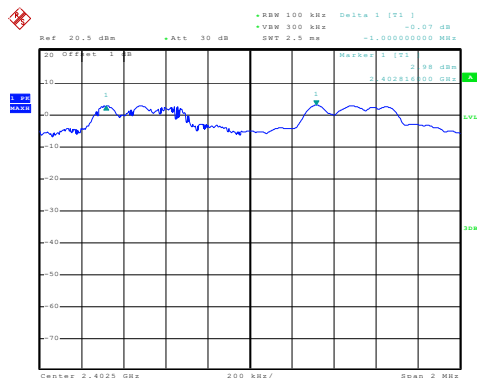


Date: 18.NOV.2019 12:01:44

Lowest channel

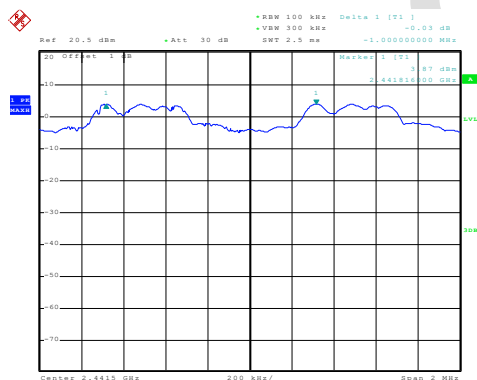

Date: 18.NOV.2019 12:03:08

Middle channel

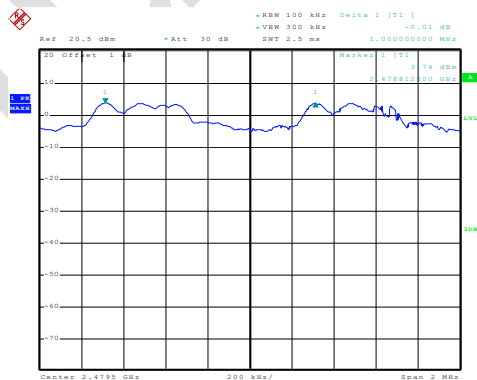


Date: 18.NOV.2019 12:04:58

Highest channel


Test mode:

8-DPSK mode

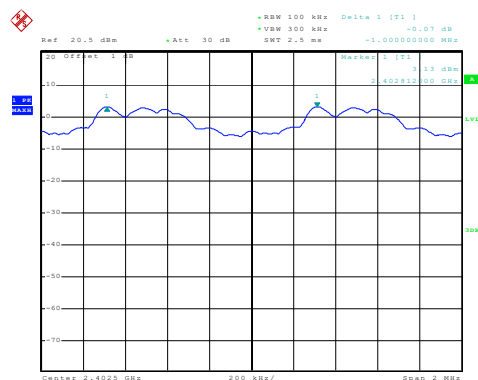


Date: 18.NOV.2019 12:09:53

Lowest channel

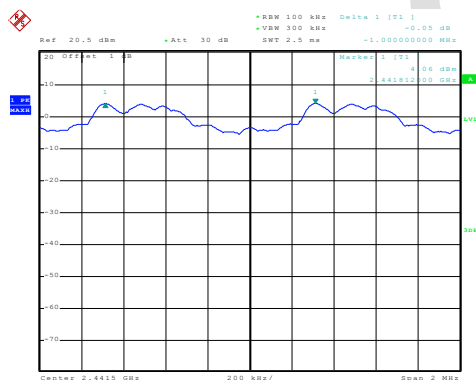

Date: 18.NOV.2019 12:11:32


Middle channel

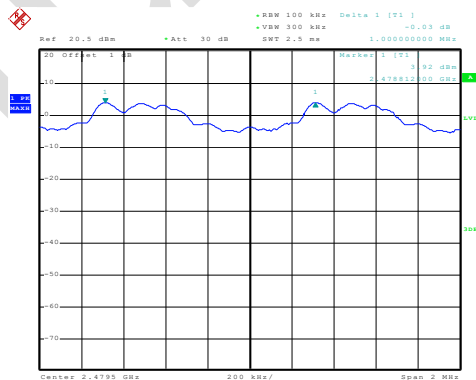

Date: 18.NOV.2019 12:13:40


Highest channel

7.6 Hopping Channel Number

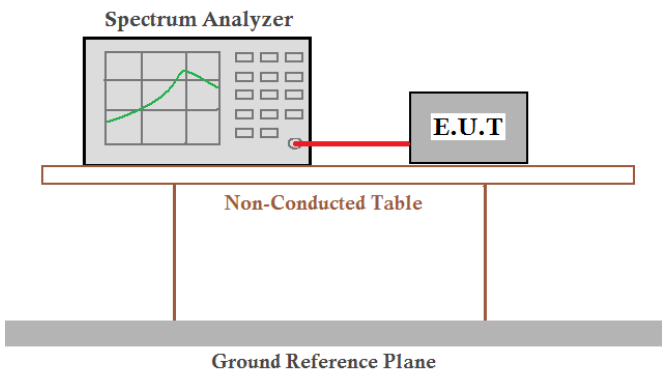Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass
8-DPSK	79	15	Pass

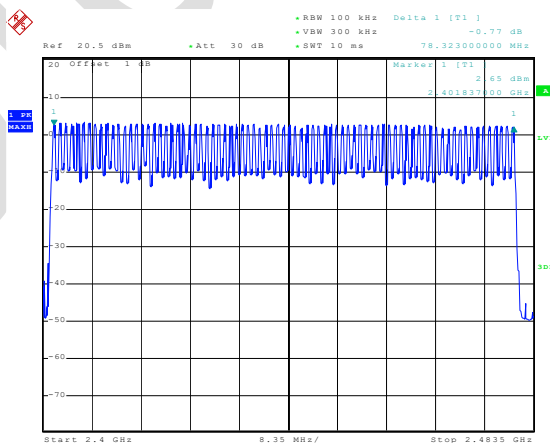

Date: 15.NOV.2019 11:53:30

7.7 Dwell Time

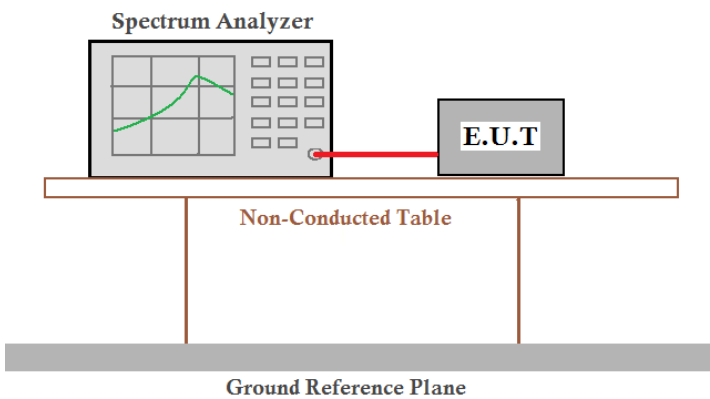Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1/2-DH1/3-DH1	128.00	400	Pass
2441MHz	DH3/2-DH3/3-DH3	268.00	400	Pass
2441MHz	DH5/2-DH5/3-DH5	312.32	400	Pass

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as blow


DH1/2-DH1/3-DH1 time slot = $0.400(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 128.00\text{ms}$

DH3/2-DH3/3-DH3 time slot = $1.680(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 268.80\text{ms}$

DH5/2-DH5/3-DH5 time slot = $2.928(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 312.32\text{ms}$


Test plot as follows:

Test channel:	2441MHz
---------------	---------

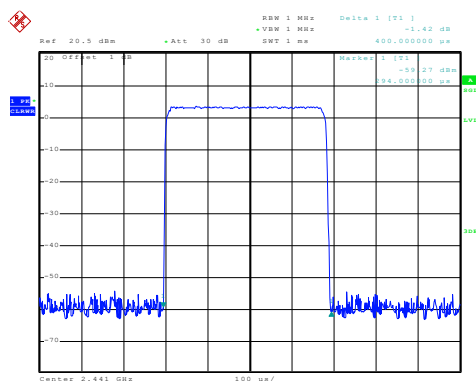


Date: 15.NOV.2019 11:38:18

DH1/2-DH1/3-DH1

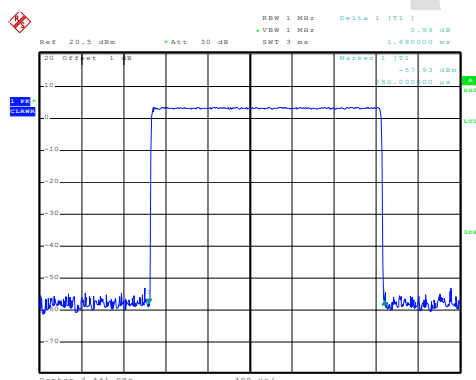

Date: 15.NOV.2019 11:44:30



DH3/2-DH3/3-DH3

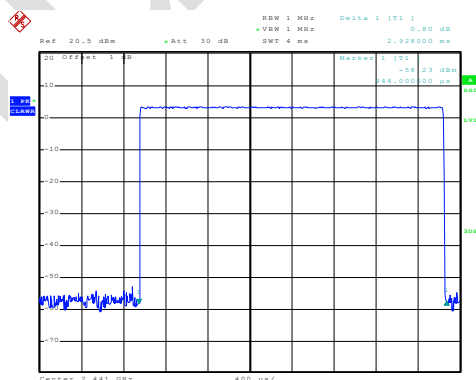

Date: 15.NOV.2019 11:47:05


DH5/2-DH5/3-DH5

7.8 Pseudorandom Frequency Hopping Sequence

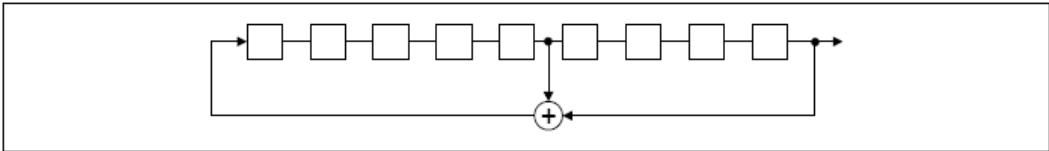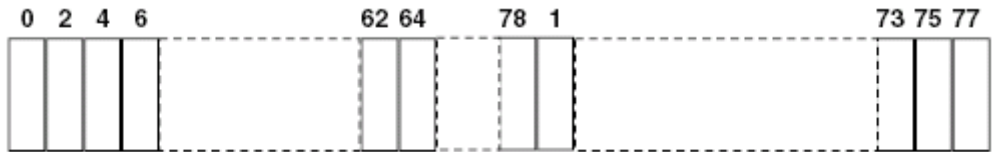Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal)  <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow:  Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.	

7.9 Band Edge


7.9.1 Conducted Emission Method

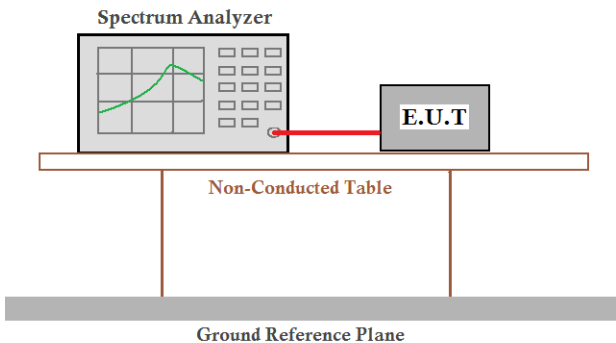Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:


GFSK Mode:

Test channel:	Lowest channel
---------------	----------------

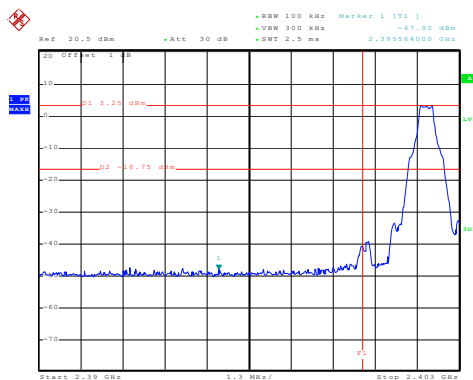

Date: 15 NOV 2019 15:11:50


No-hopping mode

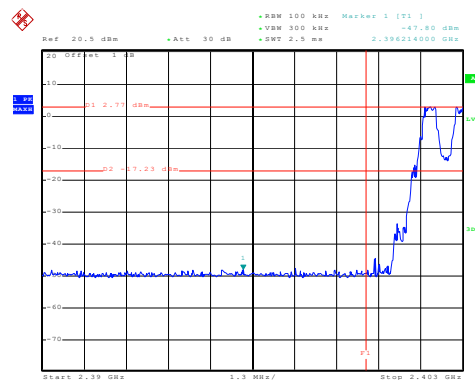

Date: 15 NOV 2019 15:29:03


Hopping mode

Test channel:	Highest channel
---------------	-----------------

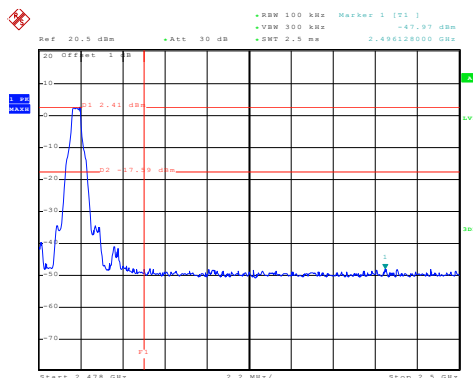

Date: 15.NOV.2019 15:14:06

No-hopping mode

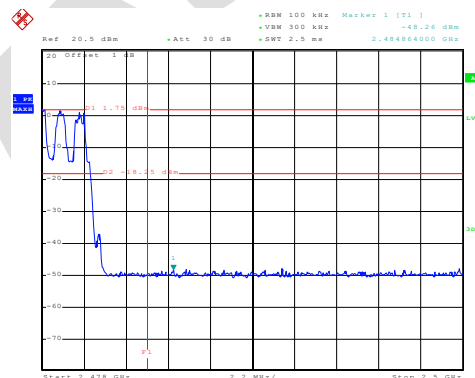


Date: 15.NOV.2019 15:31:36

Hopping mode


Pi/4QPSK Mode:

Test channel:	Lowest channel
---------------	----------------

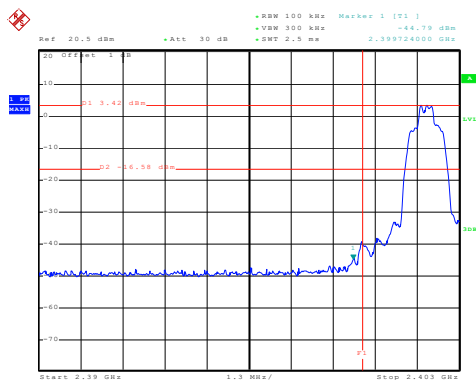

Date: 15 NOV 2019 14:49:31


No-hopping mode

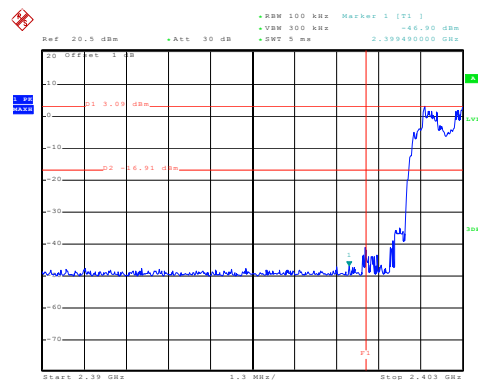

Date: 15 NOV 2019 15:17:54


Hopping mode

Test channel:	Highest channel
---------------	-----------------

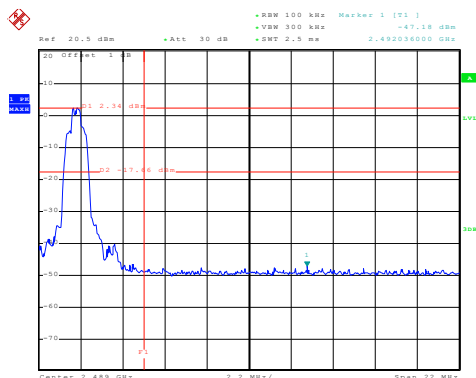

Date: 15 NOV 2019 14:55:56

No-hopping mode

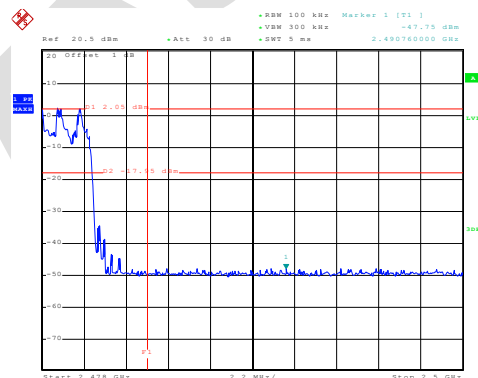


Date: 15 NOV 2019 15:20:44

Hopping mode


8-DPSK Mode:

Test channel:	Lowest channel
---------------	----------------

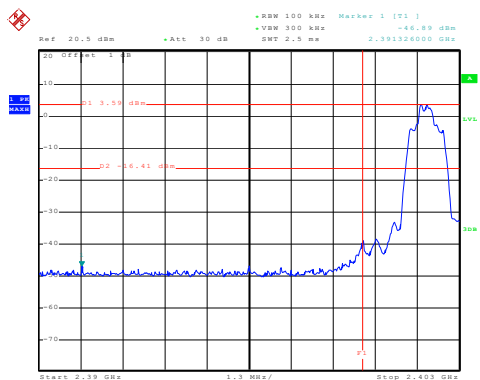

Date: 15 NOV 2019 17:47:16


No-hopping mode

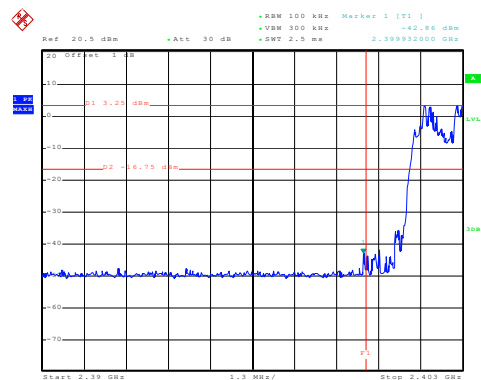

Date: 15 NOV 2019 15:23:21


Hopping mode

Test channel:	Highest channel
---------------	-----------------

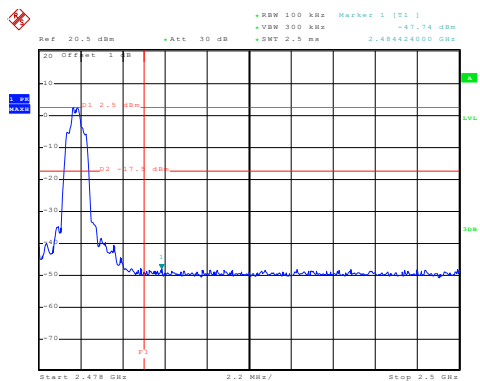

Date: 15.NOV.2019 15:05:07


No-hopping mode

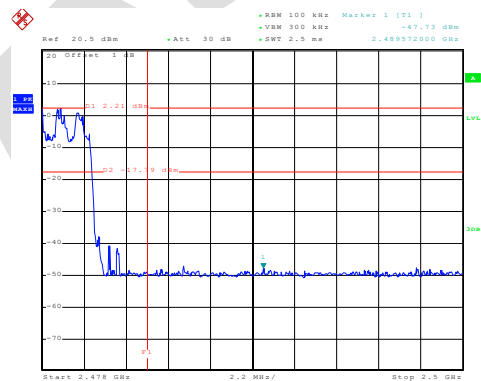

Date: 15.NOV.2019 15:26:19

Hopping mode

7.9.2 Radiated Emission Method

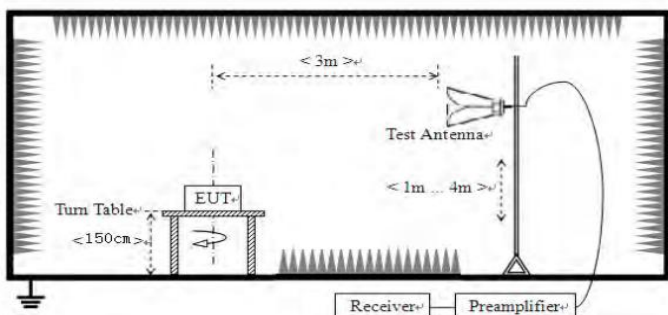Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All restriction band have been tested, and 2310MHz to 2390MHz, 2483.5MHz to 2500MHz band is the worse case				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remark:

- During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	56.11	-14.42	41.69	74.00	-32.31	Horizontal
2390.00	56.80	-14.11	42.69	74.00	-31.31	Horizontal
2310.00	60.07	-14.71	45.36	74.00	-28.64	Vertical
2390.00	62.47	-14.44	48.03	74.00	-25.97	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	42.90	-14.42	28.48	54.00	-25.52	Horizontal
2390.00	44.36	-14.11	30.25	54.00	-23.75	Horizontal
2310.00	43.72	-14.71	29.01	54.00	-24.99	Vertical
2390.00	43.92	-14.44	29.48	54.00	-24.52	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	56.95	-13.61	43.34	74.00	-30.66	Horizontal
2500.00	63.78	-13.53	50.25	74.00	-23.75	Horizontal
2483.50	59.69	-14.00	45.69	74.00	-28.31	Vertical
2500.00	61.62	-13.93	47.69	74.00	-26.31	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.97	-13.61	31.36	54.00	-22.64	Horizontal
2500.00	50.68	-13.53	37.15	54.00	-16.85	Horizontal
2483.50	45.25	-14.00	31.25	54.00	-22.75	Vertical
2500.00	49.08	-13.93	35.15	54.00	-18.85	Vertical

Remark:

- Final Level = Receiver Read level + Correct factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

7.10 Spurious Emission

7.10.1 Conducted Emission Method

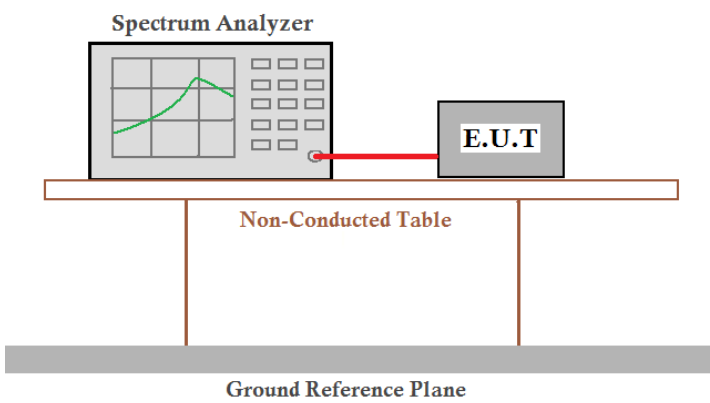
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:

During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

Test channel:

Lowest channel

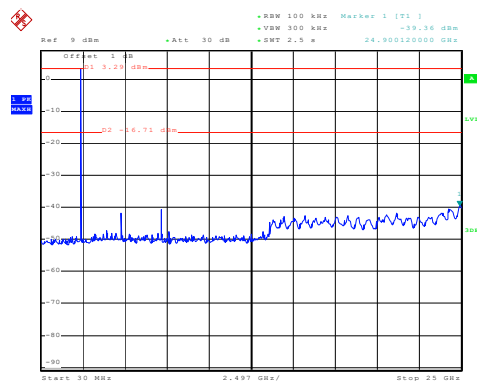


Date: 15.NOV.2019 11:15:43

30MHz~25GHz

Test channel:

Middle channel

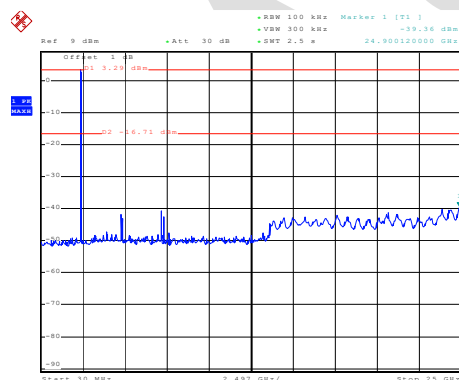


Date: 15.NOV.2019 11:20:21

30MHz~25GHz

Test channel:

Highest channel



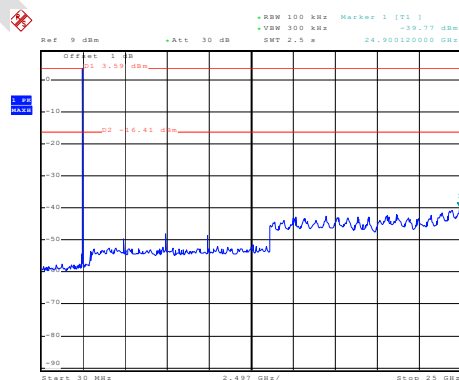


Date: 18.NOV.2019 11:50:51

30MHz~25GHz

7.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Value	Measurement Distance
	0.009MHz-0.490MHz	2400/F(KHz)		QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)		QP	30m
	1.705MHz-30MHz	30		QP	30m
	30MHz-88MHz	100		QP	3m
	88MHz-216MHz	150		QP	
	216MHz-960MHz	200		QP	
	960MHz-1GHz	500		QP	
	Above 1GHz	500		Average	
		5000		Peak	
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				

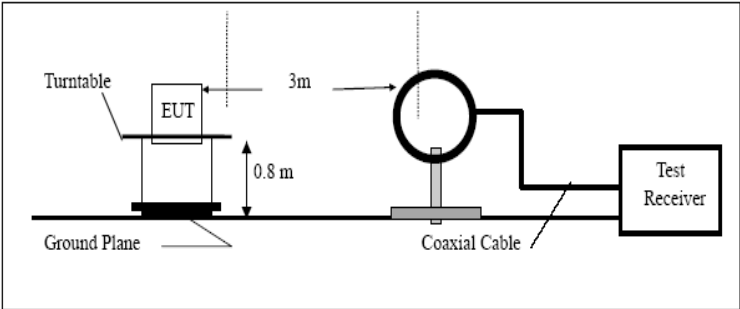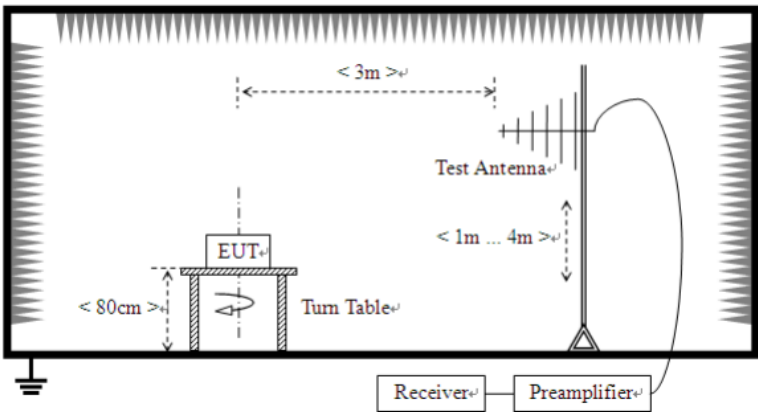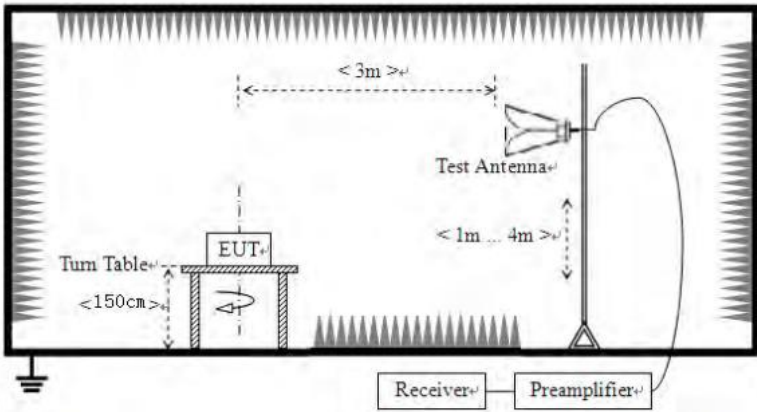Test setup:	Below 30MHz  Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Remark:


1. During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Below 1GHz


EUT:	Bluetooth Earphone	Polarization:	Horizontal
Model:	TWS-589	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		

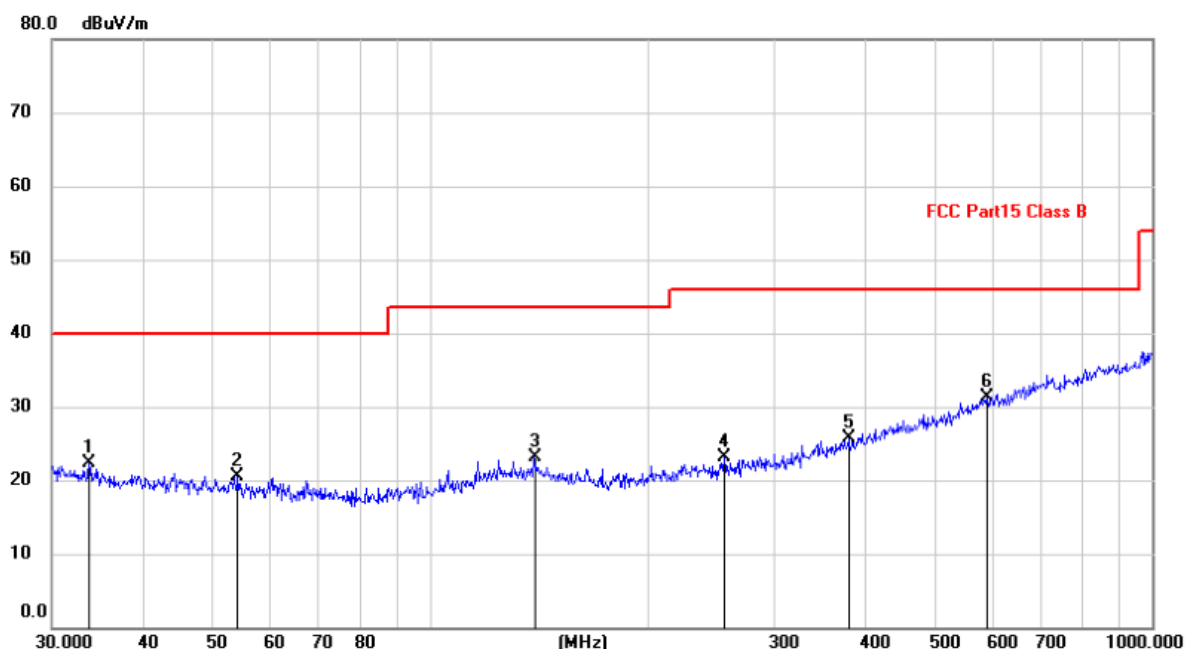

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		33.7986	9.38	12.90	22.28	40.00	-17.72	QP
2		54.2610	6.69	13.90	20.59	40.00	-19.41	QP
3		139.3613	9.98	13.16	23.14	43.50	-20.36	QP
4		255.6231	10.31	12.84	23.15	46.00	-22.85	QP
5		379.9141	9.47	16.28	25.75	46.00	-20.25	QP
6	*	590.9737	10.39	20.87	31.26	46.00	-14.74	QP

EUT: Bluetooth Earphone
Model: TWS-589
Mode: BT mode
Temp./Hum.(%H): 26°C/60%RH

Polarziation: Vertical
Power Source: AC120V/60Hz
Test by: Eason

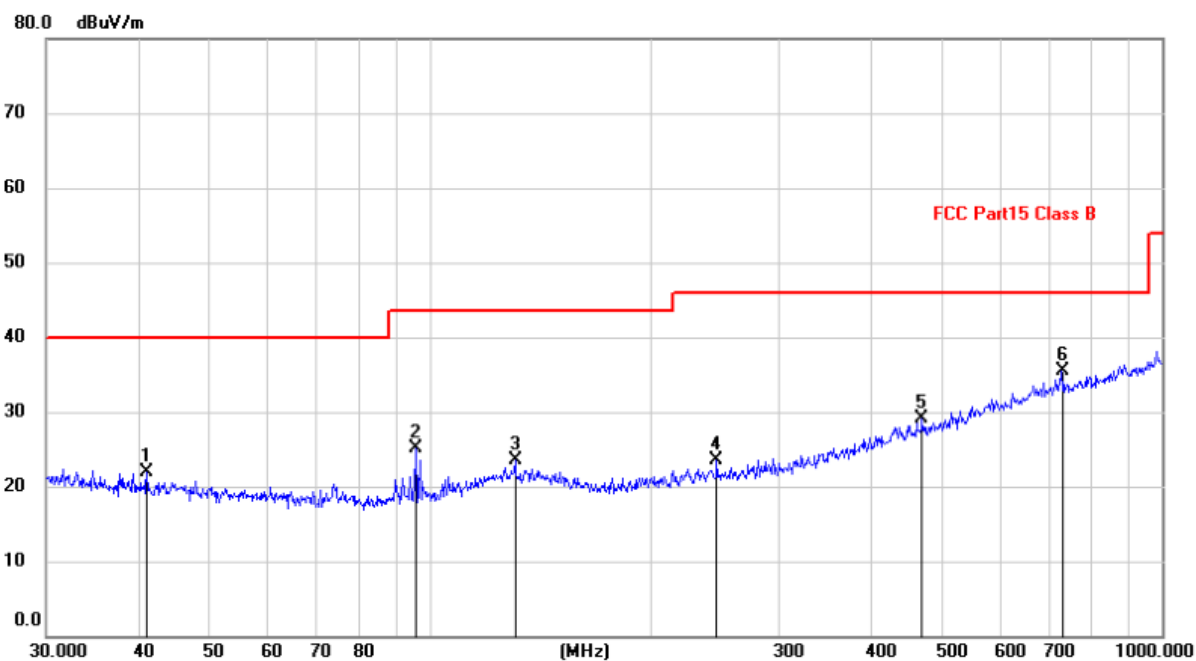

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		41.1320	7.71	14.19	21.90	40.00	-18.10	QP
2		95.7622	14.92	10.10	25.02	43.50	-18.48	QP
3		130.8369	10.59	12.90	23.49	43.50	-20.01	QP
4		246.8149	10.67	12.87	23.54	46.00	-22.46	QP
5		470.5232	10.77	18.28	29.05	46.00	-16.95	QP
6	*	729.3583	12.38	23.05	35.43	46.00	-10.57	QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	54.21	-7.87	46.34	74.00	-27.66	Vertical
7206.00	57.84	-2.42	55.42	74.00	-18.58	Vertical
9608.00	58.03	-2.38	55.65	74.00	-18.35	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	55.56	-7.87	47.69	74.00	-26.31	Horizontal
7206.00	56.64	-2.42	54.22	74.00	-19.78	Horizontal
9608.00	57.92	-2.38	55.54	74.00	-18.46	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	44.36	-7.87	36.49	54.00	-17.51	Vertical
7206.00	45.51	-2.42	43.09	54.00	-10.91	Vertical
9608.00	45.34	-2.38	42.96	54.00	-11.04	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	45.51	-7.87	37.64	54.00	-16.36	Horizontal
7206.00	44.72	-2.42	42.30	54.00	-11.70	Horizontal
9608.00	46.39	-2.38	44.01	54.00	-9.99	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	53.95	-10.06	43.89	74.00	-30.11	Vertical
7323.00	56.24	-2.40	53.84	74.00	-20.16	Vertical
9764.00	58.29	-2.38	55.91	74.00	-18.09	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	54.91	-10.06	44.85	74.00	-29.15	Horizontal
7323.00	57.13	-2.40	54.73	74.00	-19.27	Horizontal
9764.00	58.72	-2.38	56.34	74.00	-17.66	Horizontal
12205.00	*			74.00		Horizontal
14646.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	45.45	-10.06	35.39	54.00	-18.61	Vertical
7323.00	46.36	-2.40	43.96	54.00	-10.01	Vertical
9764.00	46.08	-2.38	43.70	54.00	-10.30	Vertical
12205.00	*			54.00		Vertical
14646.00	*			54.00		Vertical
4882.00	44.71	-10.06	34.65	54.00	-19.35	Horizontal
7323.00	45.28	-2.40	42.88	54.00	-11.12	Horizontal
9764.00	46.95	-2.38	44.57	54.00	-9.43	Horizontal
12205.00	*			54.00		Horizontal
14646.00	*			54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is too weak instrument of signal is unable to test.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	53.70	-9.19	44.51	74.00	-29.49	Vertical
7440.00	55.21	-2.45	52.76	74.00	-21.24	Vertical
9920.00	56.32	-2.37	53.95	74.00	-20.05	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	52.85	-9.19	43.66	74.00	-30.34	Horizontal
7440.00	54.59	-2.45	52.14	74.00	-21.86	Horizontal
9920.00	57.15	-2.37	54.78	74.00	-19.22	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	45.69	-9.19	36.50	54.00	-17.50	Vertical
7440.00	46.01	-2.45	43.56	54.00	-10.44	Vertical
9920.00	45.51	-2.37	43.14	54.00	-10.86	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	46.10	-9.19	36.91	54.00	-17.09	Horizontal
7440.00	45.52	-2.45	43.07	54.00	-10.93	Horizontal
9920.00	46.29	-2.37	43.92	54.00	-10.08	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:


1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Radiated Emission

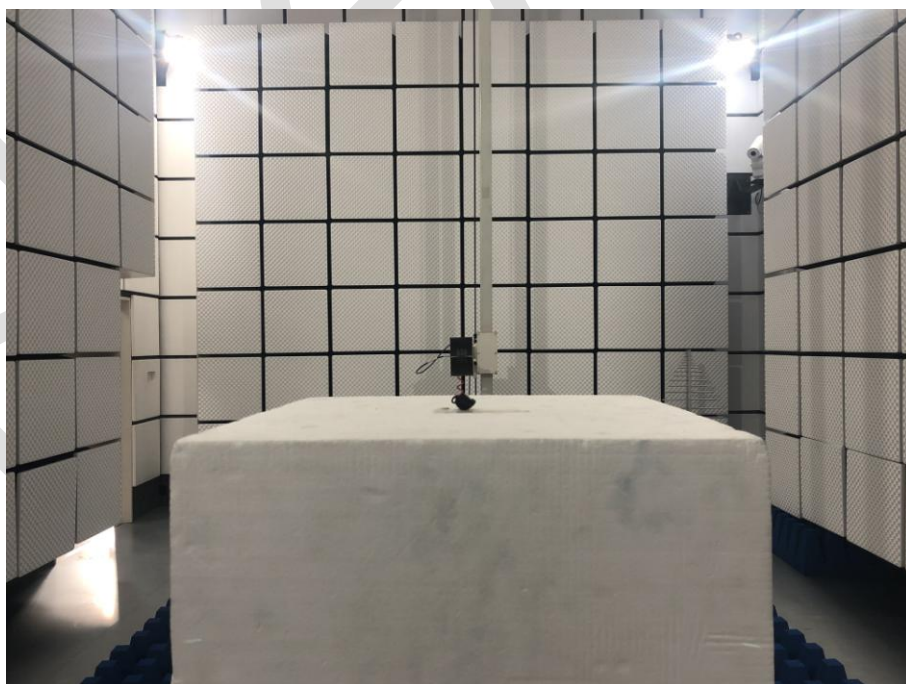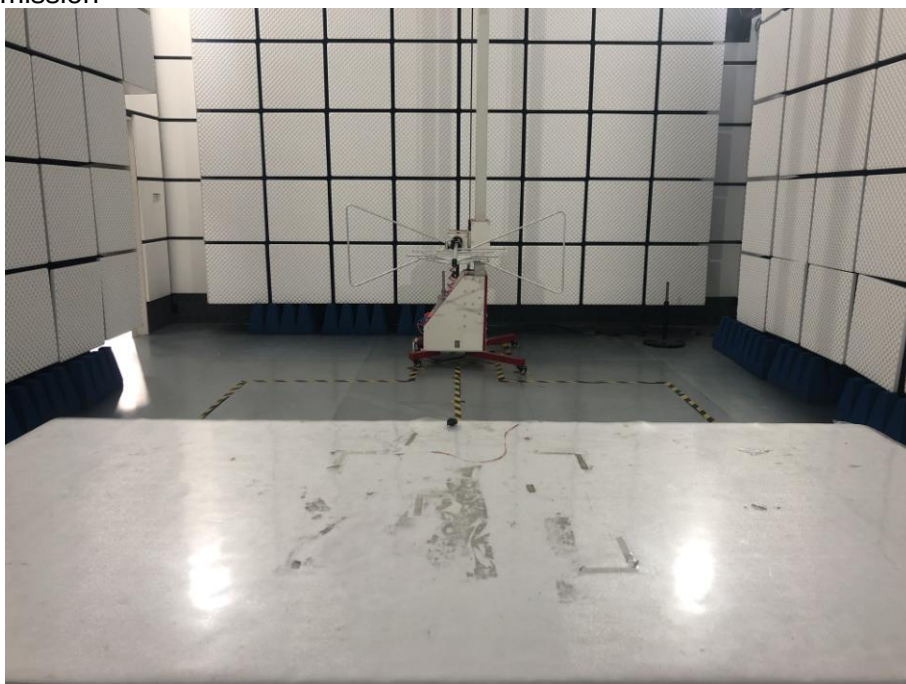

Conducted Emission

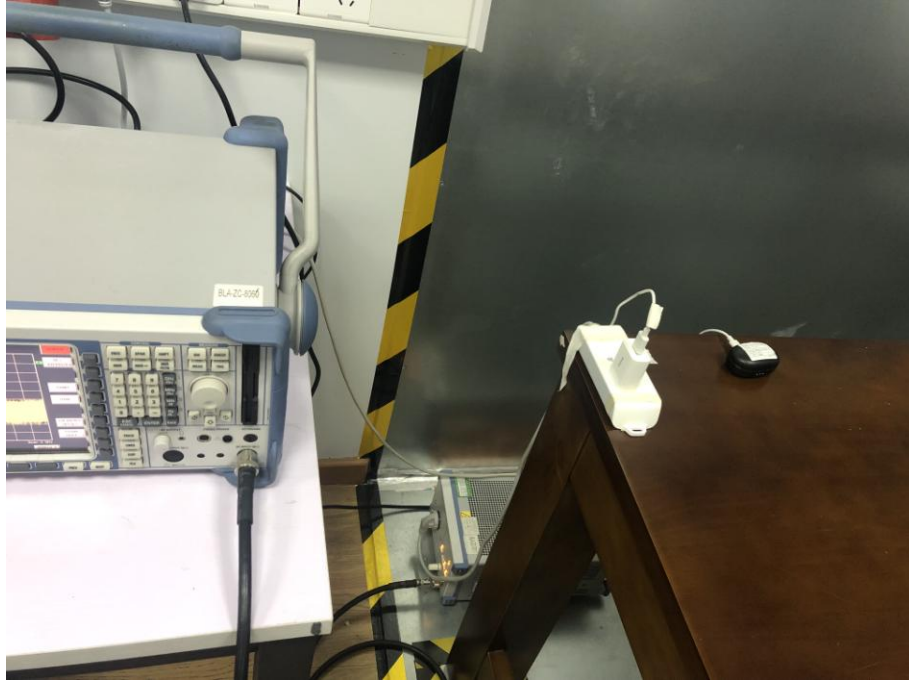

9 EUT Constructional Details
















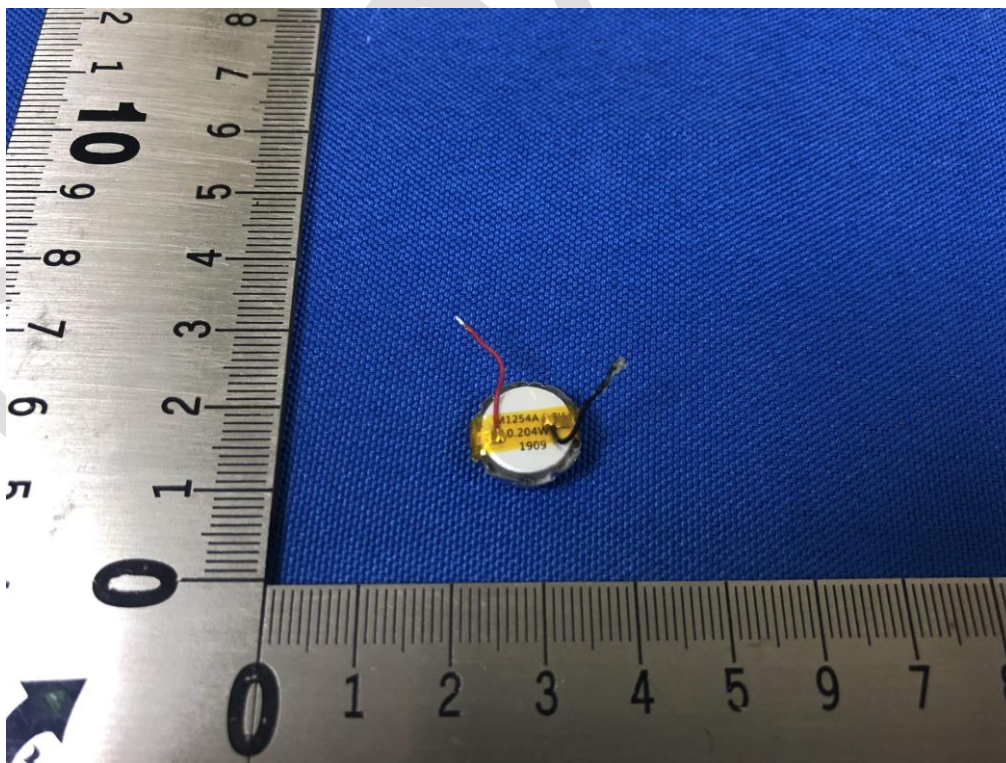

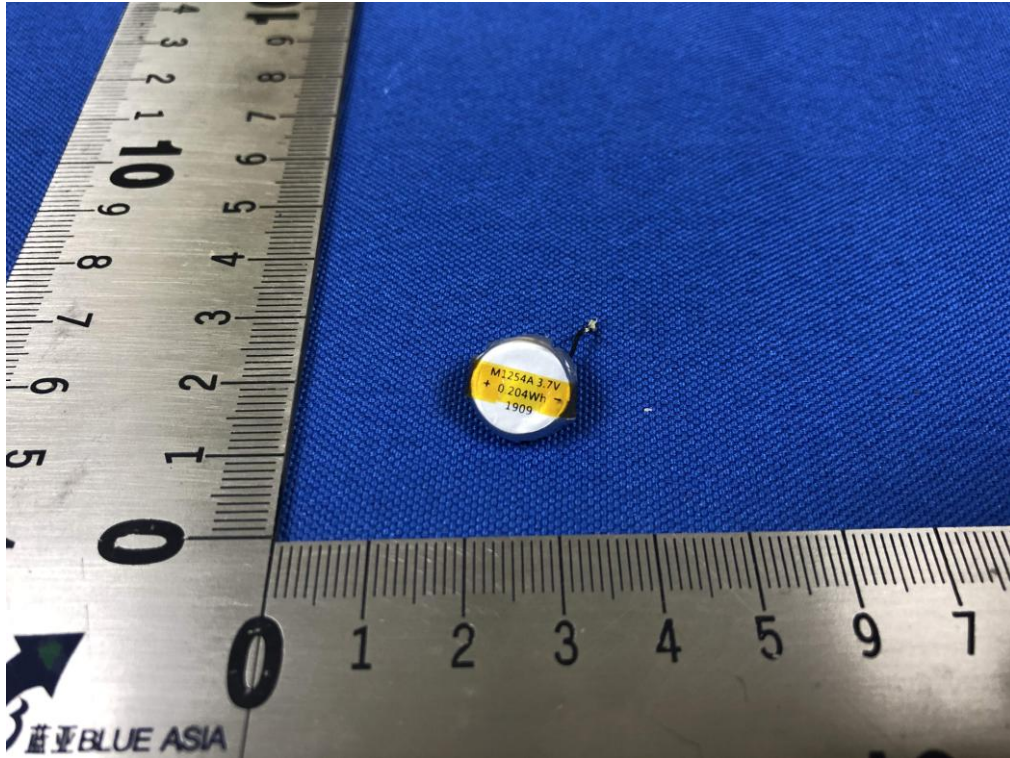

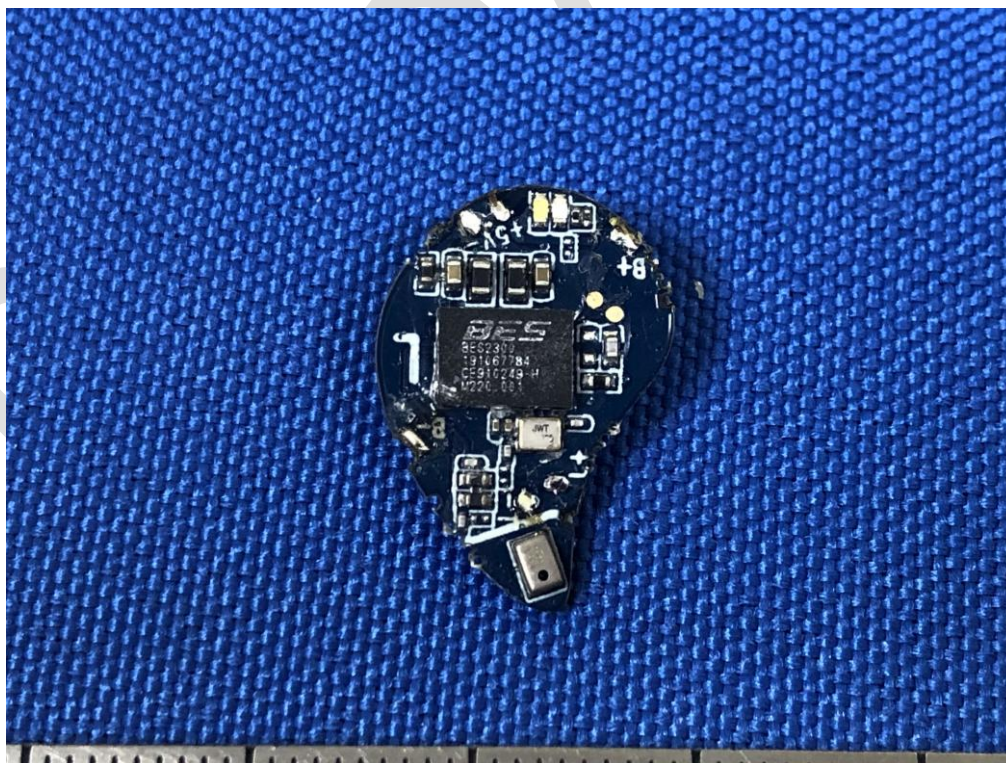

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

-----End-----

BlueAsia