Ke Mei Ou Laboratory Co., Ltd.

E506, 5th Floor, No.39 Keji Middle 2nd Rd, Science & Technology Park, Nanshan District, Shenzhen, P. R. China Tel: +86 755 83642690 Fax: +86 755 83297077 www.kmolab.com

FCC TEST REPORT

Under FCC 15 Subpart C, Paragraph 15.247

Operating in 2400 ~ 2483.5 MHz Band

Prepared For:

Amber Innovation

1301, No.271 Hushu South Rd., HangZhou, ZheJiang, China

FCC ID: 2ABDO-A001

EUT: Proximity Tag

Model: A001

October 31, 2013

Issue Date:

Original Report

Report Type:

Eric Guo Test Engineer: Eric Guo

Review By: Apollo Liu / Manager

The test report consists 36 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

TABLE OF CONTENTS

1. General Information	3
1. 1 Notes	
1. 2 Testing Laboratory	
1. 3 Details of Applicant	
1. 4 Application Details	3
1. 5 Test Item	
1. 6 Test Standards	
2. Technical Test	4
2. 1 Summary of Test Results	4
2. 2 Antenna Requirement	4
3. EUT Modifications	4
4. Conducted Power Line Test	
4. 1 Test Equipment	5
4. 2 Test Procedure	5
4. 3 Test Setup	5
4. 4 Configuration of the EUT	
4. 5 EUT Operating Condition	
4. 6 Conducted Power Line Emission Limits	
4. 7 Conducted Power Line Test Result	
5. FCC Part 15.247 Requirements for DTS Systems	
5. 1 Test Equipment	
5. 2 Test Procedure	
5. 3 Test Setup	
5. 4 Configuration of the EUT	
5. 5 EUT Operating Condition	
5. 6 Limit	
5. 7 Test Result	
6. Transmitter Spurious Radiated Emission at 3 Meters	
6. 1 Test Equipment	
6. 2 Test Procedure	
6. 3 Test Setup	
6. 4 Configuration of the EUT	
6. 5 EUT Operating Condition	
6. 6 Limit	
6. 7 Test Result	
7. RF Exposure Requirements	
7. 1 Test Equipment	
7. 2 Limit	
7. 3 Test Result	
8. Photos of Testing	
8. 1 EUT Test Photographs	26
8. 2 EUT Detailed Photographs	
9. FCC ID Label	
10. Test Equipment	

1. General Information

1. 1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

1. 2 Testing Laboratory

Ke Mei Ou Laboratory Co., Ltd.

ANSI-ASQ National Accreditation Board/ACLASS ISO/IEC 17025 Accredited Lab for telecommunication standards. The Registration Number is AT-1532. The testing quality system meets with ISO/IEC-17025 requirements, This approval results is accepted by MRA of ILAC.

FCC Test Site Registration Number: 962205 IC Test Site Registration Number: 4986A-2

1. 3 Details of Applicant

Name : Amber Innovation

Address: 1301, No.271 Hushu South Rd., Hang Zhou, Zhe Jiang, China

Contact : JIE LIU Tel : 18975829088

Fax : N/A

1. 4 Application Details

Date of Receipt of Application : September 23, 2013 Date of Receipt of Test Item : October 17,2013

Date of Test : October 17~October 31, 2013

1. 5 Test Item

Manufacturer : Amber Innovation

Address : 1301, No.271 Hushu South Rd., HangZhou, ZheJiang, China

Trade Name : N/A Model No.(Base) : A001 Model No.(Extension) : A002

Description : Proximity Tag

Additional Information

Product Type : Bluetooth 4.0 LE (1TX, 1RX)
Radio Type : Intentional Transceiver
Power Type : DC 3V(By battery)
Modulation : see the below tables
Data Modulation : Bluetooth: GFSK (1Mbps))
Date Rate (Mbps) : see the below table
Frequency Range : 2402~2480MHz

Channel Number : 40 Antenna : Internal

Bluetooth

Type of Modulation	Data Rate
GFSK	1Mbps

1. 6 Test Standards

FCC 15 Subpart C, Paragraph 15.247

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2. Technical Test

2. 1 Summary of Test Results

The EUT has been tested according to the following specifications:

FCC Rule	Test Type	Limit	Result	Notes
FCC 15.247(a)(2)	6dB Bandwidth	>=0.5MHz	PASS	Complies
FCC 15.247(b)(1)	Peak Output Power	<=30dBm	PASS	Complies
FCC 15.247(e)	Power Spectral Density	<=8dBm	PASS	Complies
FCC 15.247(d)	Conducted Band Edges and Spurious Emission	<=20dBc	PASS	Complies.
FCC 15.247(d)	Radiated Band Edges and Spurious Emission	FCC 15.209(a) & 15.247(d)	PASS	Complies.
FCC 15.207	AC Conducted Emission	FCC15.207(a)	N/A	Complies.
FCC 15.203 & 15.247(b)	Antenna Requirement	N/A	PASS	Complies

2. 2 Antenna Requirement

A. Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

B. Result

The antenna type used in this product is internal Antenna and fixed in the EUT and without connector. That no antenna other than furnished by the responsible party shall be used with the device. The EUT as tested meets the criteria of this rule by being antenna being permanently attached and professionally installed. The EUT is compliant with Section 15.203.

3. EUT Modifications

No modification by test lab.

4. Conducted Power Line Test

4. 1 Test Equipment


Please refer to Section 10 this report.

4. 2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4. 3 Test Setup

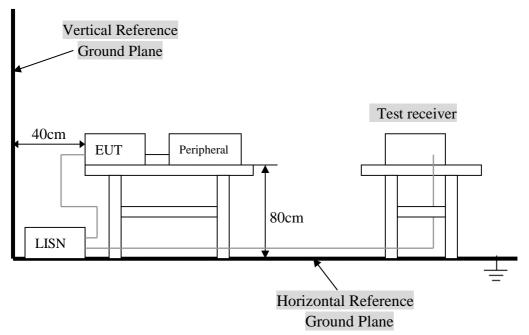

For the actual test configuration, Please refer to the related items - Photos of Testing.

4. 4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used DC3V. The operation frequency is from 2400MHz~2483.5MHz. Enable the signal transmitted from the EUT to iPhone/Notebook PC. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below. Note:


-) Operating Modes: Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. The EUT operates in normal Bluetooth 4.0 for occupancy duration and frequency separation.
- 2) Special Test Software & Hardware: Special firmware and hardware provided by the Applicant are installed to allow the EUT to operates in Bluetooth 4.0 or at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
- 3) Transmitter Test Antenna: The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as describe with the test results.
- Frequency(ies) Tested: 2402MHz, 2440MHz and 2480MHz were pre-tested, The worst case one, was chosen for conducted emission test.
- 5) Above 1GHz, the 2402MHz, 2440MHz and 2480MHz were tested individually.
- 6) Normal Test Modulation: Bluetooth 4.0
- 7) Modulating Signal Source: Internal
- * Associated Antenna Descriptions: The antenna used in this product is embedded antenna.

A. EUT

Device	Manufacturer	Model #	FCC ID
Proximity Tag	Amber Innovation	A001	2ABDO-A001

Field Antenna For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
0	Mag.layers	Bluetooth Antenna	Internal	N/A	2.00	TX/RX

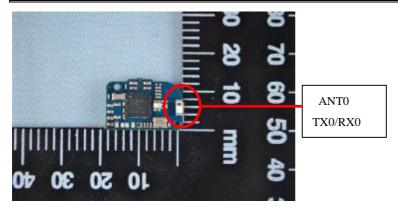

Bluetooth Test Modes For 2.4GHz Band

Worst Modulation Mode	Number of Transmit (Ntx)	Frequency (MHz)	Power Setting	Data Rate
BT-1M	1	2402	63	1 Mbps
BT-1M	1	2440	63	1 Mbps
BT-1M	1	2480	63	1 Mbps

B. Internal Devices

Device	Manufacturer	Model #	FCC ID
N/A	N/A	N/A	N/A

C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Notebook	ACER	Aspire4253	HLZ-AR5B97	1.5m unshielded power cord
SmartPhone	Apple	A1387	BCG-E243QA	N/A

FCC ID: 2ABDO-A001 Amber Innovation


4. 5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

A. Setup the EUT and simulators as shown on follow.

B. Enable RF signal and confirm EUT active.

- C. Modulate output capacity of EUT up to specification.

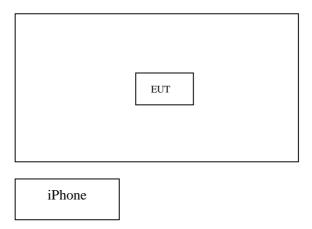

4. 6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)					
Frequency Range Class A Class B					
(MHz)	QP/AV				
0.15 - 0.5	79/66	66-56/56-46			
0.5 - 5.0	73/60	56/46			
5.0 - 30	73/60	60/50			

NOTE: In the above table, the tighter limit applies at the band edges.

4. 7 Conducted Power Line Test Result

Product : Proximity Tag Test Mode : Normal Link / Auto

Test Item : Conducted Emission Data Temperature : $25 \, ^{\circ}$ C Test Voltage : DC 3V (By battery) Humidity : 56%RH

Test Result : N/A

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

· Temperature : $\underline{26}$ °C · Humidity : $\underline{53}$ % RH

	FCC Part 15 Paragraph 15.207						
Frequency Emission (dBuV)			LINE/ NEUTRAL	Limit ((dBuV)	Margi OP	n (dB) AV
(MHz)	QP	AV	NEUIKAL	QP	AV	QP	AV
N/A			Line				
			Neutral				
			Line				
			Neutral				
			Line				
			Neutral				

Note: NF = No Significant Peak was Found.

Note:

- 1.Uncertainty in conducted emission measured is <+/ -2dB.
- 2. The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level Limit Value.

5. FCC Part 15.247 Requirements for DTS Systems

5. 1 Test Equipment

Please refer to Section 10 this report.

5. 2 Test Procedure

Refer to FCC 15.247(a)(2), ANSI C63.4: 2003

6 dB Bandwidth:

- 1. Set resolution bandwidth (RBW) = 100 kHz.
- 2. Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Peak Power:

- 1. Set the RBW = 1 MHz.
- 2. Set the VBW \geq 3 RBW
- 3. Set the span $\geq 1.5 \text{ x DTS}$ bandwidth.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.

Band Edges Measurement:

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.
- c. The band edges was measured and recorded.

Peak Power Spectral Density:

- a. The testing follows Measurement Procedure 5.3.1 (Peak PSD) of FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01.
- b. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
- c. Record the measurement data derived from the spectrum analyzer.
- d. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW)=100kHz. Video bandwidth(VBW) >= 300KHz. In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth(EBW).
- e. Detector = peak, Sweep time = auto couple, Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- f. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log (3kHz/100 kHz=-15.2dB).

5. 3 Test Setup



5. 4 Configuration of the EUT

Same as section 4.4 of this report

5. 5 EUT Operating Condition

Same as section 4.5 of this report.

5. 6 Limit

According to $\S15.247(a)(2)$, systems using digital modulation techniques may operate in the $902 \sim 928$ MHz, $2400 \sim 2483.5$ MHz, and $5725 \sim 5850$ MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section

5. 7 Test Result

A. 6 dB Bandwidth

Product : Proximity Tag Test Mode : Bluetooth 4.0 LE


Test Item : 6 dB BW Temperature : $25 \text{ }^{\circ}\text{C}$ Test Voltage : DC 3V(By battery) Humidity : 56% RH

Test Result : PASS

Bluetooth 4.0 LE


Channel	Frequency (MHz)	Bandwidth (kHz)	FCC Limit (kHz)	Result
Low	2402	660		PASS
Mid	2440	660	>500 kHz	PASS
High	2480	660		PASS

CH Low

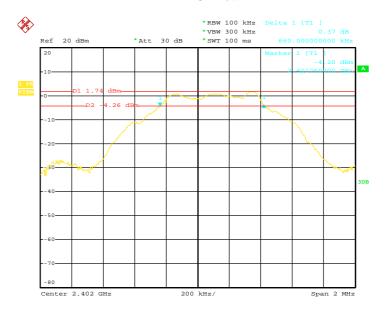


Date: 21.OCT.2013 10:51:18

CH Mid

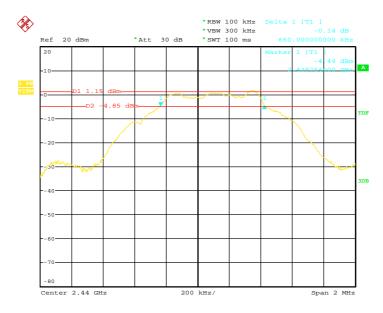

Date: 31.OCT.2013 15:56:30

CH High

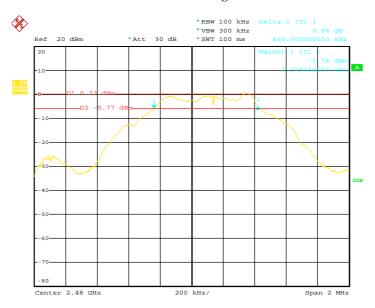

Date: 21.0CT.2013 11:17:50

B. Peak Power

Product : Proximity Tag : Bluetooth 4.0 LE

Test Item : Peak Power Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH

Test Result : PASS

Bluetooth 4.0 LE

Didetooth no EE					
Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result	
Low	2402	1.69		PASS	
Mid	2440	1.14	1.00/30.00	PASS	
High	2480	0.26		PASS	


C. Band Edges Measurement

Product : Proximity Tag : Bluetooth 4.0 LE

Test Item : Band Edges Measurement Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH


Test Result : PASS

Bluetooth 4.0 LE Channel: Low

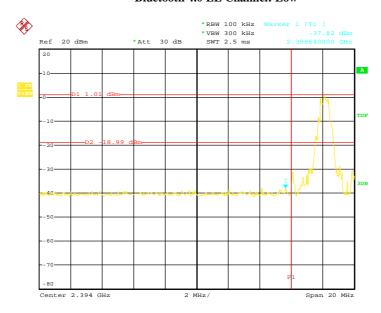

Date: 31.0CT.2013 16:12:53

Bluetooth 4.0 LE Channel: High

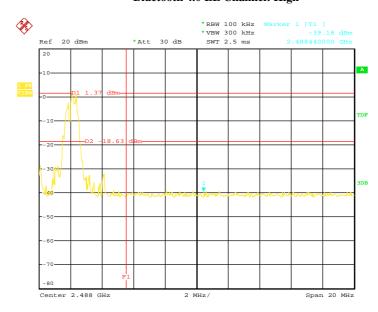

Date: 31.OCT.2013 16:22:47

D. Peak Power Spectral Density

Product : Proximity Tag : Bluetooth 4.0 LE

Test Item : Peak Power Spectral Density Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH

Test Result : PASS


Bluetooth 4.0 LE

Channel	Frequency (MHz)	3kHz PPSD (dBm)	FCC Limit (dBm)	Result
Low	2402	-19.32		PASS
Mid	2440	-19.68	8.00	PASS
High	2480	-20.92		PASS

Channel: Low




Date: 21.0CT.2013 13:59:11

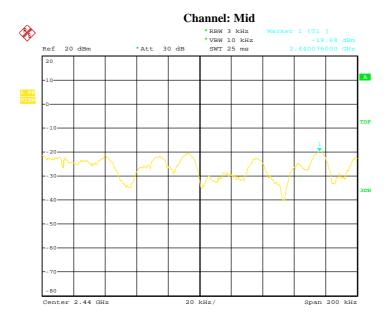

Date: 31.0CT.2013 16:32:10

Channel: High

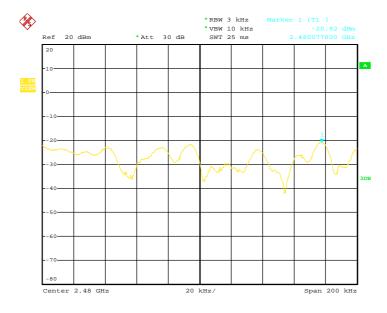

Date: 21.OCT.2013 14:07:29


E. Conducted Spurious Emission

Product : Proximity Tag Test Mode : Bluetooth 4.0 LE

Test Item : Peak Power Spectral Density Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH


Test Result : PASS

Conducted Spurious Emission Bluetooth LE 1 Mbps - GFSK Channel Low

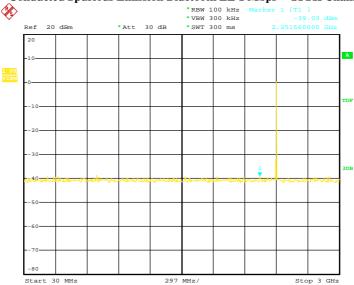


Date: 31.0CT.2013 16:36:25

Conducted Spurious Emission Bluetooth LE 1 Mbps - GFSK Channel Low

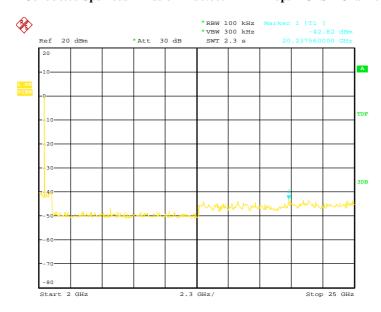


Date: 31.OCT.2013 16:37:55

Conducted Spurious Emission Bluetooth LE 1 Mbps – GFSK Channel Mid

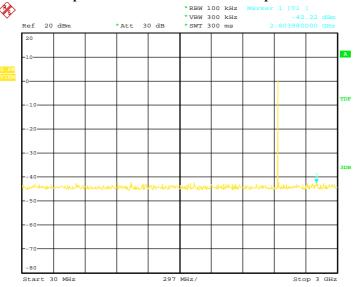


Date: 31.OCT.2013 16:42:54

Conducted Spurious Emission Bluetooth LE 1 Mbps – GFSK Channel Mid

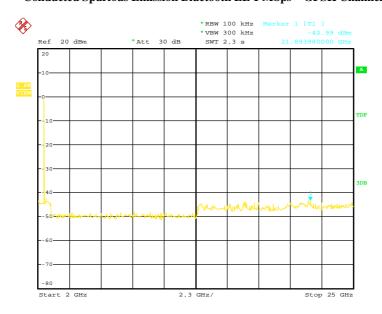


Date: 31.OCT.2013 16:43:49

Conducted Spurious Emission Bluetooth LE 1 Mbps – GFSK Channel High

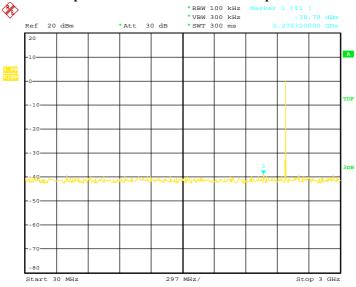

Date: 31.0CT.2013 16:40:37

Conducted Spurious Emission Bluetooth LE 1 Mbps – GFSK Channel High

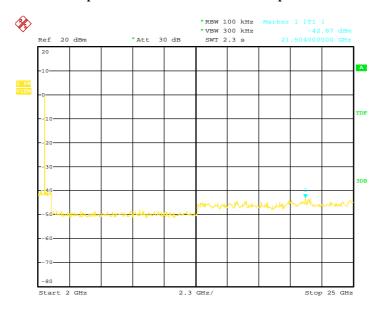

Date: 31.OCT.2013 16:39:37

6. Transmitter Spurious Radiated Emission at 3 Meters 6. 1 Test Equipment


Please refer to Section 10 this report.

6. 2 Test Procedure

- 1. The EUT was tested according to ANSI C63.4 2003.
- 2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high <u>0.8</u> m. All set up is according to ANSI C63.4-2003.
- 3. The frequency spectrum from 9 kHz to 25 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- 4. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
- 5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- 6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4 2003.

6. 3 Test Setup

For Frequencies below 30 MHz

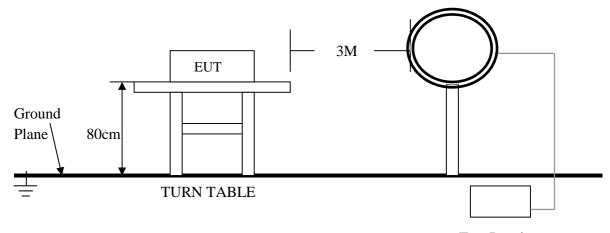


Test Receiver

For the actual test configuration, please refer to the related items - Photos of Testing

FCC ID: 2ABDO-A001 Amber Innovation

For Frequencies above 30 MHz

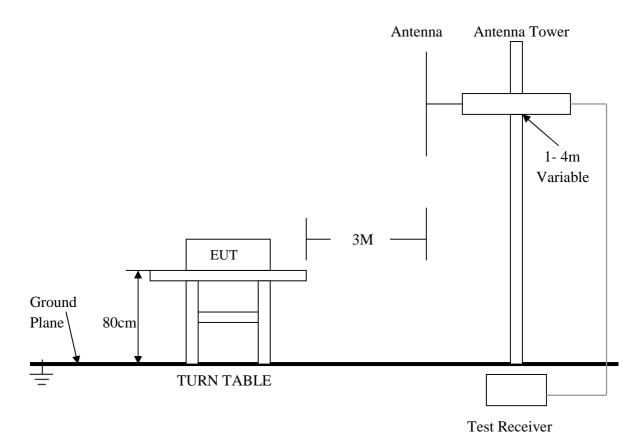

For the actual test configuration, please refer to the related items - Photos of Testing

6. 4 Configuration of the EUT Same as section 4.4 of this report

6. 5 EUT Operating Condition

Same as section 4.5 of this report.

6. 6 Limit

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)

Note:

Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para, 15.205(a) - Restricted Frequency Bands

1 00 01 17,1 tht 19, 9	Restricted Frequency Bu		
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5–5.15
1 0.495-0.505	16.69475-16.69525	608–614	5.35-5.46
2.1735–2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125–4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5–38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73–74.6	1645.5-1646.5	9.3–9.5
6.215-6.218	74.8–75.2	1660–1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175–6.31225	123-138	2200-2300	14.47–14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7–21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36–13.41.			.,

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

FCC 47 CFR, Part 15.209(a) - Field Strength Limits within Restricted Frequency Bands

Frequency (MHz)	Field strength (microvolts/meter)	Measure- ment dis- tance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

² Above 38.6

6. 7 Test Result

Product : Proximity Tag Test Mode : Bluetooth 4.0 LE

Test Item : Spurious Radiated Emissions Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH

Test Result : PASS

Harmonics Radiated Emission Data

CH Low

CILLOW				
Freq.	Emission (dBuV/m)	HORIZ /	Limits (dBuV/m)	Margin
(MHz)	Peak Detector	VERT	Peak / Average	(dB)
4804.00	48.98	HORZ	74.0 / 54.0	-25.02
4804.00	46.56	VERT	74.0 / 54.0	-27.44
7206.00	48.87	HORZ	74.0 / 54.0	-25.13
7206.00	46.44	VERT	74.0 / 54.0	-27.56
24020.00	-	HORZ	74.0 / 54.0	-
24020.00	-	VERT	74.0 / 54.0	-

CH Mid

CII IVIIG				
Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4880.00	48.89	HORZ	74.0 / 54.0	-25.11
4880.00	46.96	VERT	74.0 / 54.0	-27.04
7320.00	48.73	HORZ	74.0 / 54.0	-25.27
7320.00	46.48	VERT	74.0 / 54.0	-27.52
24410.00	-	HORZ	74.0 / 54.0	-
24410.00	_	VERT	74.0 / 54.0	-

CH High

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4960.00	48.87	HORZ	74.0 / 54.0	-25.13
4960.00	46.42	VERT	74.0 / 54.0	-27.58
7440.00	48.99	HORZ	74.0 / 54.0	-25.01
7440.00	46.64	VERT	74.0 / 54.0	-27.36
24800.00	-	HORZ	74.0 / 54.0	-
24800.00	-	VERT	74.0 / 54.0	-

Note:

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector): RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6) Where an emission level is indicated by a –, levels had a margin greater than 20~dB when compared to the limit.

General Radiated Emission Data

Product : Proximity Tag : Bluetooth 4.0 LE

Test Item : Fundamental Radiated Emission Data Temperature : $25~^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH

Test Result : PASS

For Frequency Below 30MHz

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A

Note:

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

For Frequency Above 30MHz

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
119.960	37.87	HORZ	43.5	-5.63
48.000	32.91	VERT	40.0	-7.09
150.000	37.92	HORZ	43.5	-5.58
56.000	30.02	VERT	40.0	-9.98
193.560	35.65	HORZ	43.5	-7.85
399.840	27.86	VERT	46.0	-18.14

Note:

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

7. RF Exposure Requirements

7. 1 Test Equipment

Please refer to Section 10 this report.

7. 2 Limit

According to FCC 15.247(e)(i) and FCC 1.1307(b)(1), Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commissions guidelines.

According to KDB 447498 D01 General RF Exposure v05, section 4.3.1

SAR Test Exclusion Thresholds for 100 MHz-6GHz and <=50mm

Frequency Range		Maximum measured	SAR Limitation	
Low Frequency(MHz)	High Frequency(MHz)	transmitter power frequency(MHz)	(mW)	
2402	2480	2402	10	

7. 3 Test Result

Product : Proximity Tag Test Mode : Bluetooth 4.0 LE

Test Item : RF Exposure Temperature : 25 $^{\circ}$ C Test Voltage : DC 3V(By battery) Humidity : 56%RH


Test Result : PASS


RF Exposure Requirements	Compliance with FCC Rules
EIRP=PxG Where: P=Power input to antenna G=Power gain of the antenna relative to an isotropic radiator	Maximum output power at antenna input terminal: 1.69 dBm = 1.48 mW (Bluetooth 4.0 LE, 2402MHz) Prediction distance: <=50mm Antenna gain : 2.0 dBi SAR Test Exclusion Threshold is 10 mW Bluetooth 4.0 LE : 2.35 mW The max. output power E.I.R.P < 10 mW Conclusion: No SAR is required.

8. Photos of Testing

8. 1 EUT Test Photographs

Radiated emission test view

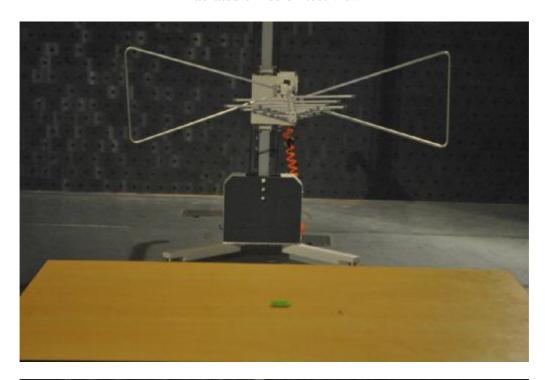

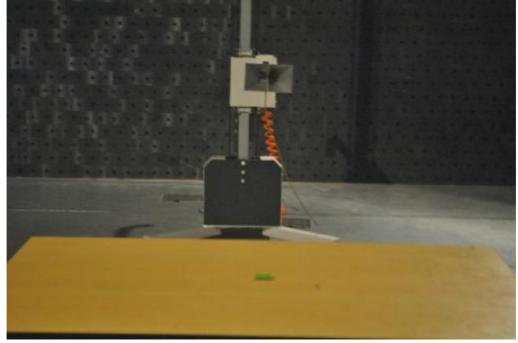

8. 2 EUT Detailed Photographs

A001


EUT top view









EUT bottom view

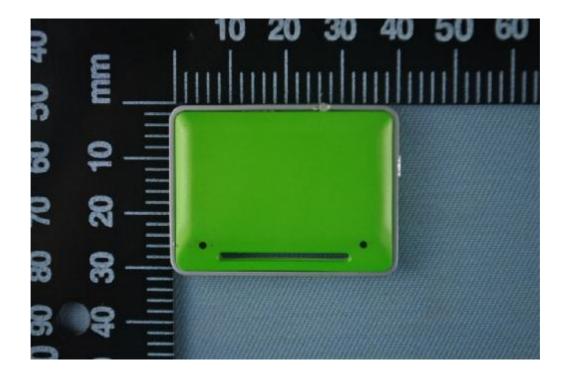


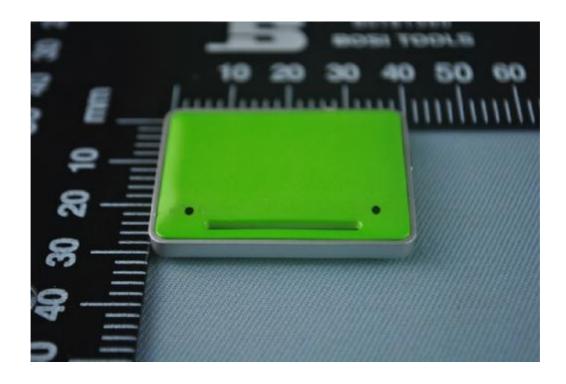


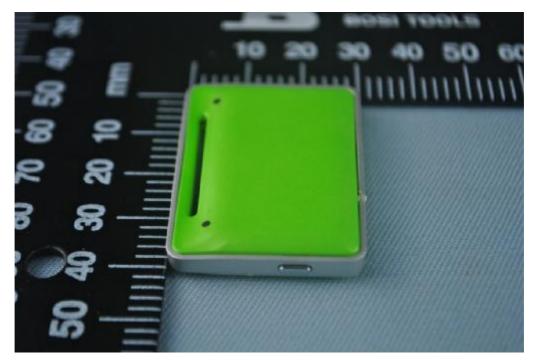


A002


EUT top view

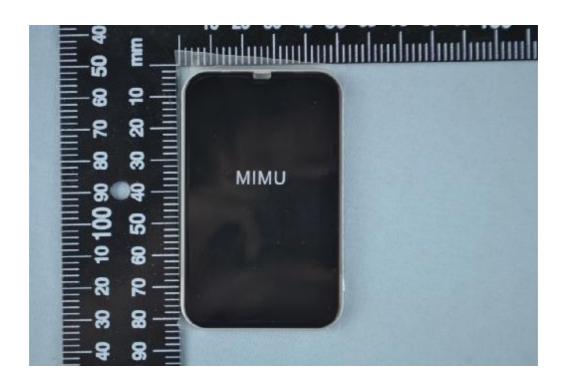


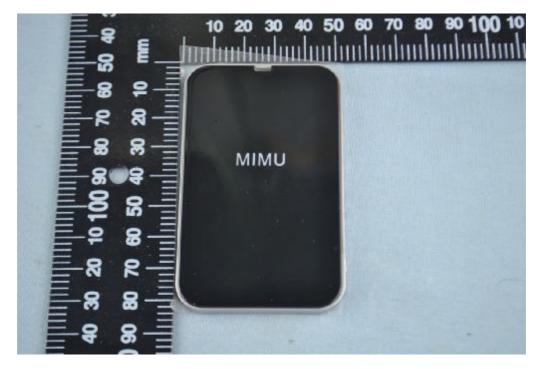

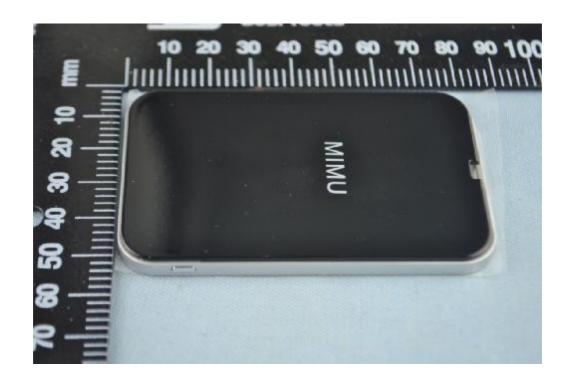


EUT bottom view

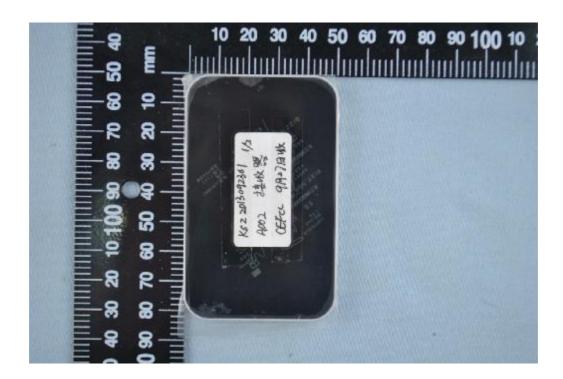


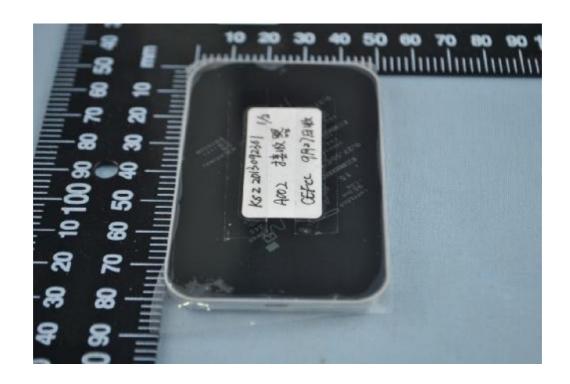




EUT inside whole view

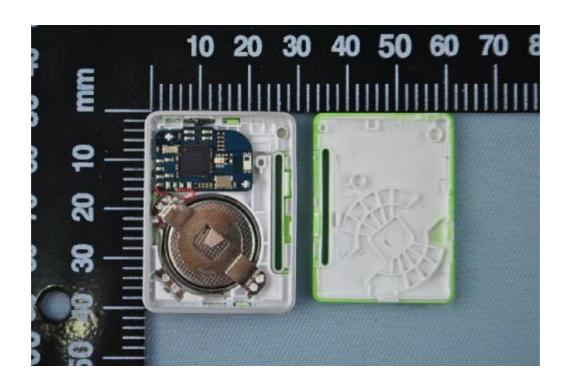


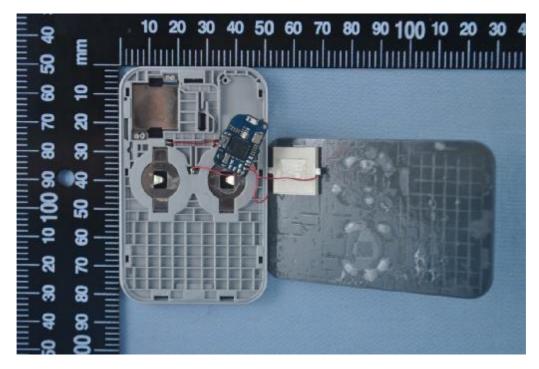

Main board component side

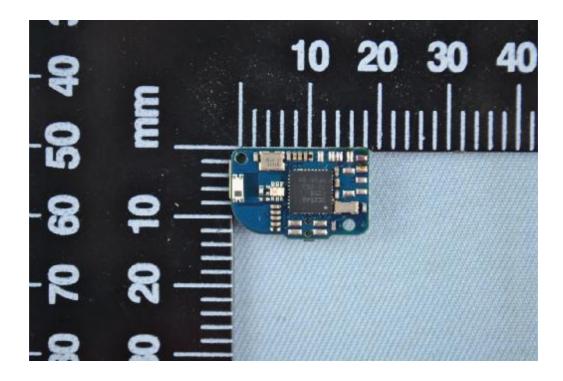

Main board solder side

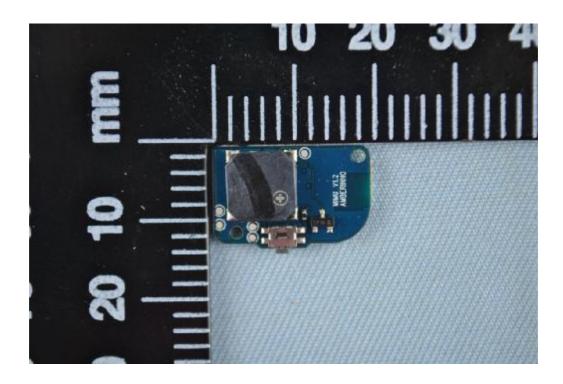

9. FCC ID Label

FCC ID: 2ABDO-A001

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location



10. Test Equipment

Equipment/	Manufacturer	Model #	Serial No.	Due Date
Facilities				
Turntable	Innco systems GmbH	CT-0801	KMO-SZ114	NCR
Antenna Tower	Innco systems GmbH	MM4000-PP	KMO-SZ115	NCR
Controller	Innco systems GmbH	CO2000	KMO-SZ116	NCR
Pre-Amplifier	Agilent	87405C	KMO-SZ155	Dec.6, 2013
Pre-Amplifier	Com-Power	PAM-840	KMO-SZ156	Dec.6, 2013
Horn Antenna	Com-Power	AH-840	KMO-SZ157	Dec.6, 2013
EMI Test Receiver	Rohde & Schwarz	ESPI7	KMO-SZ002	June 01, 2014
Spectrum Analyzer	Rohde & Schwarz	FSP40	KMO-SZ003	May 27, 2014
Signal Generator	FLUKE	PM5418+Y/C	KMO-SZ020	May 27, 2014
Loop Antenna	Rohde & Schwarz	HFH2-Z2	KMO-SZ004	Jan. 30, 2014
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ005	Sep.18, 2014
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ006	Sep.18, 2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ007	Sep.18, 2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ008	Sep.18, 2014
AMN	Rohde & Schwarz	ESH3-Z5	KMO-SZ009	May 27, 2014
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	KMO-SZ077	Nov.29, 2013
ISN	SCHWARZBECK	NTFM 8158 CAT3	KMO-SZ070	Nov.19, 2013
ISN	SCHWARZBECK	NTFM 8158 CAT5	KMO-SZ071	Nov.19, 2013
ISN	SCHWARZBECK	NTFM 8158 CAT6	KMO-SZ072	Nov.19, 2013
KMO Shielded Room	KMO	KMO-001	N/A	N/A
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	KMO-SZ037	Sep.18, 2014
AC Power Source / Analyzer	Agilent	6813B	KMO-S166	July 22, 2014
SOHO Telephone Switching System	IKE	2000-108C	N/A	NCR
3m Anechoic Chamber	KMO	KMO-3AC	KMO-3AC-1	Nov.12, 2016
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2014