50 x 5.0 x 0.5 (mm) WiFi PCB Substrate Antenna (L=50mm)

Engineering Specification

1. Explanation of Product Number

H 2 B 1 B E 1 A 1 B 1 3 0 0

(1) (2) (3) (4) (5)





Product Code:

(1) Product Categories:

B: polymer substrate antenna

(2) Dimensions:

E1: 50 x 5.0 x 0.5(mm)

(3) Material:

A: GF

(4) Working Frequencies

1B: 2400~2500 MHz

(5) Antenna Series:

13: serial number

(IPEX I Compatible, L=50mm, Tape: 3M#1600SB)

Unictron
Technologies Corp.

2013-03-20

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Nacy Designed by: Jason Checked by: Jason Approved by: Herbert UNIT: mm

TITLE: 50 x 5.0 x 0.5 (mm) WiFi PCB Substrate
Antenna(L=50mm) Engineering Specification

ADDOCUMENT
NO.

H2B1BE1A1B1300
A

2. Features

- *Stable and reliable in performances
- *Compact size
- *RoHS compliance

3. Applications

- * IEEE802.11 (b/g/n).
- * Hand-held devices when WiFi (802.11 b/g/n) functions are needed.

4. Description

Unictron's PCB antenna series are specially designed for WiFi (802.11 b/g/n) applications. Based on Unictron's proprietary design and processes, this PCB antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications

5-1. Electrical Table:

Characte	eristics	Specifications	Unit	
Outline Dimen	sions	50 x 5.0 x 0.5	mm	
Working Frequ	iency*	2400~2500	MHz	
Bandwidth		100 min.	MHz	
VSWR		2 max.		
Impedance		50	Ω	
Polarization		Linear Polarization		
Gain	Peak	3.3 (typical)	dBi	
	Efficiency	76 (typical)	%	

Note:

* Working frequency will be offset to another frequency according to the conditions of user's ground plane and radome.

Unictron Technologies Corp.

2013-03-20

Document

Unictron
Technologies Corp.

詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Nacy Designed by: Jason Checked by: Jason Approved by: Herbert UNIT: mm

TITLE: 50 x 5.0 x 0.5 (mm) WiFi PCB Substrate
Antenna(L=50mm) Engineering Specification

DOCUMENT NO.


H2B1BE1A1B1300

5-2. Return Loss & Smith Chart


Return Loss (S₁₁)

Smith Chart (S₁₁)






6. Antenna Dimensions: (unit: mm)

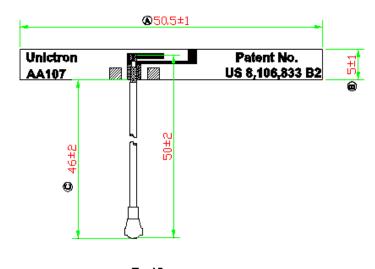

Top View





Side View

Unictron Technologies Corp.

2013-03-20

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Nacy Designed by: Jason Checked by: Jason Approved by: Herbert UNIT: mm


TITLE: 50 x 5.0 x 0.5 (mm) WiFi PCB Substrate
Antenna(L=50mm) Engineering Specification


DOCUMENT NO.


H2B1BE1A1B1300


7. Radiation Pattern

7-1. 3D Gain Pattern (Radiation Pattern @ 2442 MHz)











詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Nacy Designed by: Jason Checked by: Jason Approved by: Herbert UNIT: mm


TITLE: 50 x 5.0 x 0.5 (mm) WiFi PCB Substrate
Antenna(L=50mm) Engineering Specification

DOCUMENT NO.

H2B1BE1A1B1300

7-2. 3D Efficiency Table															
Frequency(GHz)	2.400	2.412	2.417	2.422	2.427	2.432	2.437	2.442	2.447	2.452	2.457	2.462	2.467	2.472	2.484
Efficiency(dB)	-1.58	-1.21	-1.24	-1.27	-1.25	-1.21	-1.14	-1.16	-1.14	-1.10	-1.04	-1.01	-0.87	-0.80	-0.86
Efficiency(%)	69.50	75.68	75.16	74.64	74.99	75.68	76.91	76.56	76.91	77.62	78.70	79.25	81.85	83.18	82.04
Gain(dBi)	2.81	3.20	3.18	3.17	3.21	3.22	3.35	3.39	3.48	3.60	3.66	3.73	4.02	4.13	4.06

7-3. 3D Efficiency vs. Frequency

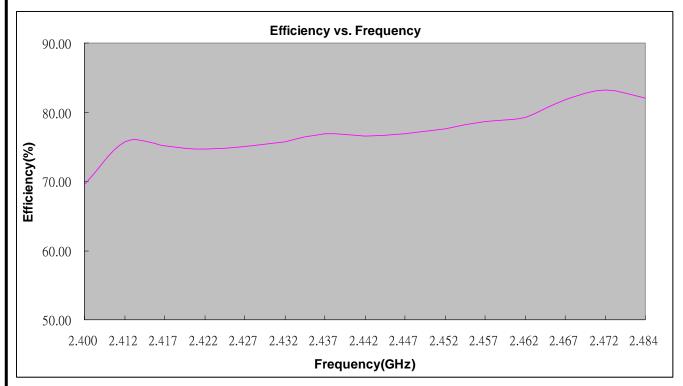

Unictron Technologies Corp.

2013-03-20

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Nacy Designed by: Jason Checked by: Jason Approved by: Herbert UNIT: mm

TITLE: 50 x 5.0 x 0.5 (mm) WiFi PCB Substrate
Antenna(L=50mm) Engineering Specification

DOCUMENT NO.

H2B1BE1A1B1300