

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: CDXT11MF6012, CDXT12MF6012

REPORT NUMBER: 4791682149.1-1-RF-3

**FCC ID: 2AC23-CDXT11
IC: 12290A-CDXT11**

ISSUE DATE: February 25, 2025

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.6 Qiaoguang Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou City,
Guangdong Province, Huizhou, Guangdong, 516227 China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	February 25, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C

ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>11</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>13</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>14</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	15
7. ANTENNA PORT TEST RESULTS	18
7.1. <i>CONDUCTED OUTPUT POWER.....</i>	<i>18</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>19</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>21</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>22</i>
7.5. <i>DUTY CYCLE</i>	<i>24</i>
8. RADIATED TEST RESULTS.....	25
8.1. <i>RESTRICTED BANDEDGE</i>	<i>33</i>
8.1. <i>RESTRICTED BANDEDGE FOR 802.11AX PARTIAL RU MODE.....</i>	<i>58</i>
8.1. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>70</i>
8.2. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>76</i>
8.1. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) FOR 802.11AX PARTIAL RU MODE</i>	<i>112</i>
8.2. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>118</i>
8.3. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>121</i>
8.4. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>123</i>
9. ANTENNA REQUIREMENT	125

10.	AC POWER LINE CONDUCTED EMISSION	126
11.	TEST DATA.....	130
11.1.	<i>APPENDIX A: DTS BANDWIDTH.....</i>	130
11.1.1.	Test Result.....	130
11.1.2.	Test Graphs	132
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....</i>	150
11.2.1.	Test Result.....	150
11.2.2.	Test Graphs	151
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	163
11.3.1.	Test Result.....	163
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....</i>	165
11.4.1.	Test Result.....	165
11.4.2.	Test Graphs	167
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS.....</i>	185
11.5.1.	Test Result.....	185
11.5.2.	Test Graphs	186
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i>	198
11.6.1.	Test Result.....	198
11.6.2.	Test Graphs	201
11.7.	<i>APPENDIX G: DUTY CYCLE.....</i>	254
11.7.1.	Test Result.....	254
11.7.2.	Test Graphs	255

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.6 Qiaoguang Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, Huizhou, Guangdong, 516227 China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.6 Qiaoguang Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, Huizhou, Guangdong, 516227 China

EUT Information

EUT Name: WIFI+BT Module
Model: CDXT11MF6012
Series Model: CDXT12MF6012
Model difference: Please refer to section 5.1
Brand: GSD
Sample Received Date: November 13, 2024
Sample Status: Normal
Sample ID: 8158265
Date of Tested: November 14, 2024 to February 25, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



Daniel Zhang
Project Engineer

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01
Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC
Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p>
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd.
Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	CDXT11MF6012
Series Model	CDXT12MF6012
Model difference	The CDXT12MF6012 model has the same layout and RF performance as the original CDXT11MF6012, except that the DSP module (Digital signal processing) has been removed from the CDXT12MF6012 model. All these changes do not degrade the unwanted emissions of the certified product. We have pre-test two models and select the worst model CDXT11MF6012 to test and perform in the report.

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA(1024-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/n HT40/ax HE20/ax HE40
Normal Test Voltage:	DC 5V

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	22.20	27.20
g	2412 ~ 2462	1-11[11]	20.27	25.27
n HT20	2412 ~ 2462	1-11[11]	17.49	22.49
n HT40	2422 ~ 2452	3-9[7]	18.43	23.43
ax HE20	2412 ~ 2462	1-11[11]	18.03	23.03
ax HE40	2422 ~ 2452	3-9[7]	17.35	22.35

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
ax HE40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band	
Test Software	QA Tool

Mode	Freq	Antenna	Power Setting
802.11b	2412	1&2	15.5
	2437	1&2	15.5
	2462	1&2	15.5
802.11g	2412	1&2	13
	2437	1&2	14
	2462	1&2	14
802.11n 20M	2412	1&2	11
	2437	1&2	12
	2462	1&2	12
802.11n 40M	2422	1&2	13
	2437	1&2	13.5
	2452	1&2	13.5

Mode	Freq(MHz)	RU size	RU Index	Antenna	Power Setting
802.11ax 20M	2412	26	0	1&2	12
		52	37	1&2	12
		106	53	1&2	12
		SU	/	1&2	12
	2437	26	4	1&2	12
		52	38	1&2	12
		106	53	1&2	12
		SU	/	1&2	12
	2462	26	8	1&2	12
		52	40	1&2	12
		106	54	1&2	12
		SU	/	1&2	12
802.11ax 40M	2422	SU	/	1&2	12
	2437	SU	/	1&2	12
	2452	SU	/	1&2	12

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ax HE20 mode: MCS0

802.11ax HE40 mode: MCS0

All modes support CDD mode.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

802.11ax HE20 and 802.11ax HE40 support OFDMA single RU and partial RU tone. According to Preliminary Investigation, conducted power was performed to compare Full RU Tone modes and SU (Single User) Tone modes. It was determined that SU (Single User) modes were worst case over Full RU Tone in every instance. Therefore, SU modes were tested to represent Dull RU modes as the worst-case scenario.

Preliminary Investigation were performed for 802.11 ax modes were determined by the following:

Testing was performed 802.11ax HE20 26T, 52T, 106T, SU & HE40 SU to cover HE40 26T, 52T, 106T and 242T.

802.11ax HE20 26T Harmonics and Spurious Emissions were ran at maximum power and PSD between 26T, 52T, 104T, 242T and SU modes across all bandwidths to cover HE20 52T, 106 and SU, HE40 26T, 52T, 106T, 242T and SU as worst-case power and PSD.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB	4
2	2412-2462	PCB	5

Note: Ant1 in the report denotes Ant0 of EUT, Ant2 in the report denotes Ant1 of EUT.

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 8.01 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/
2	AC Adaptor	Lenovo	ADLX65YCC3D	Input: AC 100-240V, 1.8A, 50-60Hz Output: DC 20V, 3.25A, 65.0W Max

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

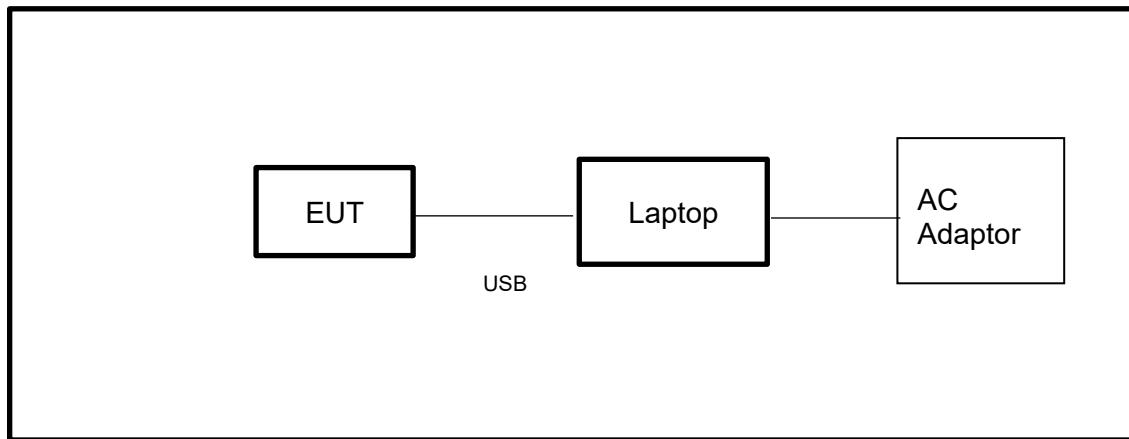

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonsend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	/	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	/	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	/	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	/	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	/	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	/	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	/	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	/	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	/	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	/	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	Sep.28, 2024	Sep.27, 2025
Software						
Description			Manufacturer	Name	Version	

Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1
--------------------------------------	-------	--------	-------------

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP

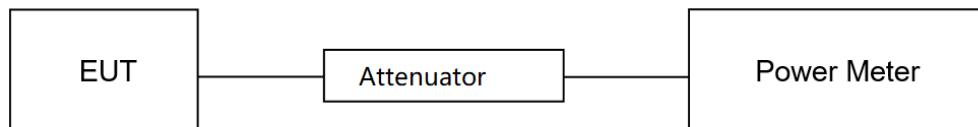

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

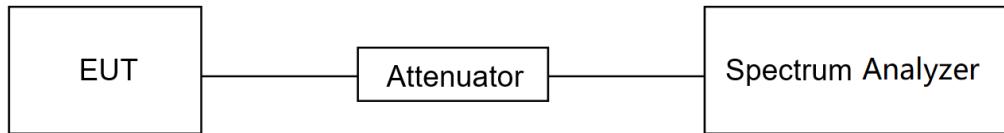TEST SETUP**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A & B

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW}$ bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

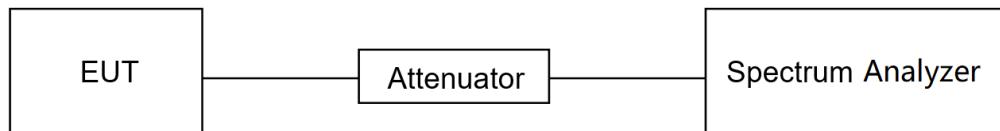

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP

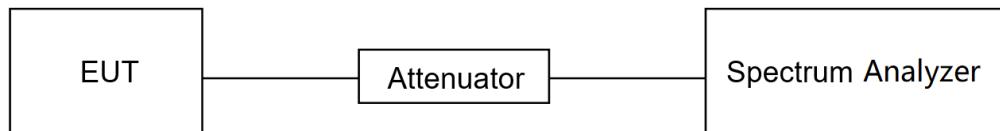

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E & F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

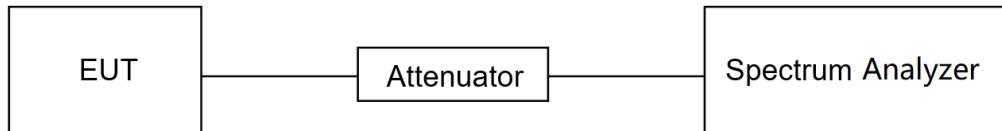

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.8 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2855 - 2900	
13.36 - 13.41	3260 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y-51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

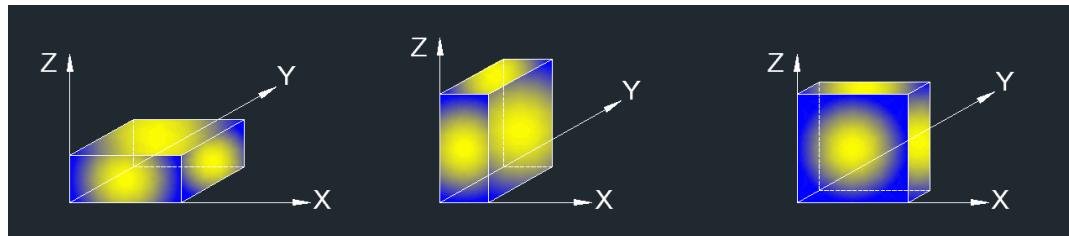

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

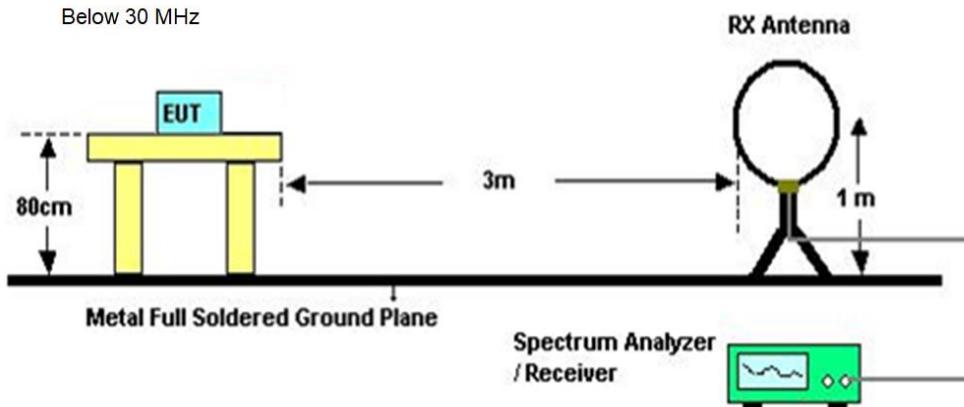

Below 1 GHz and above 30 MHz

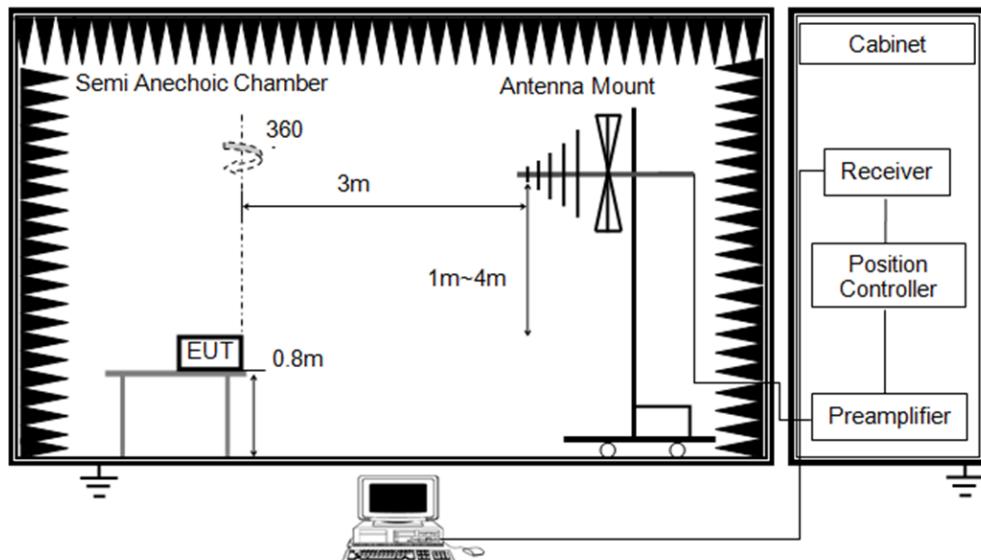

Above 1GHz

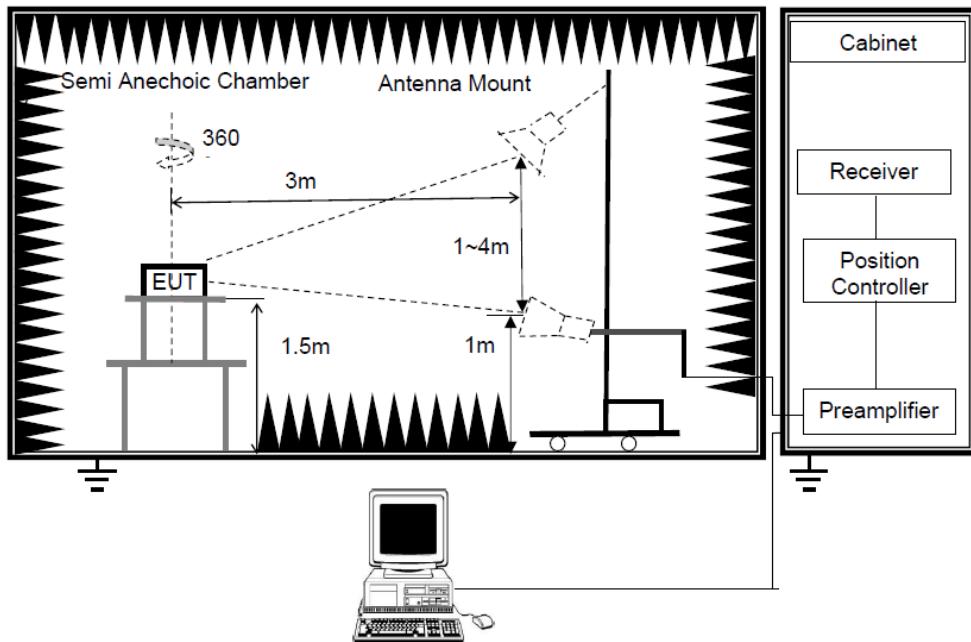

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

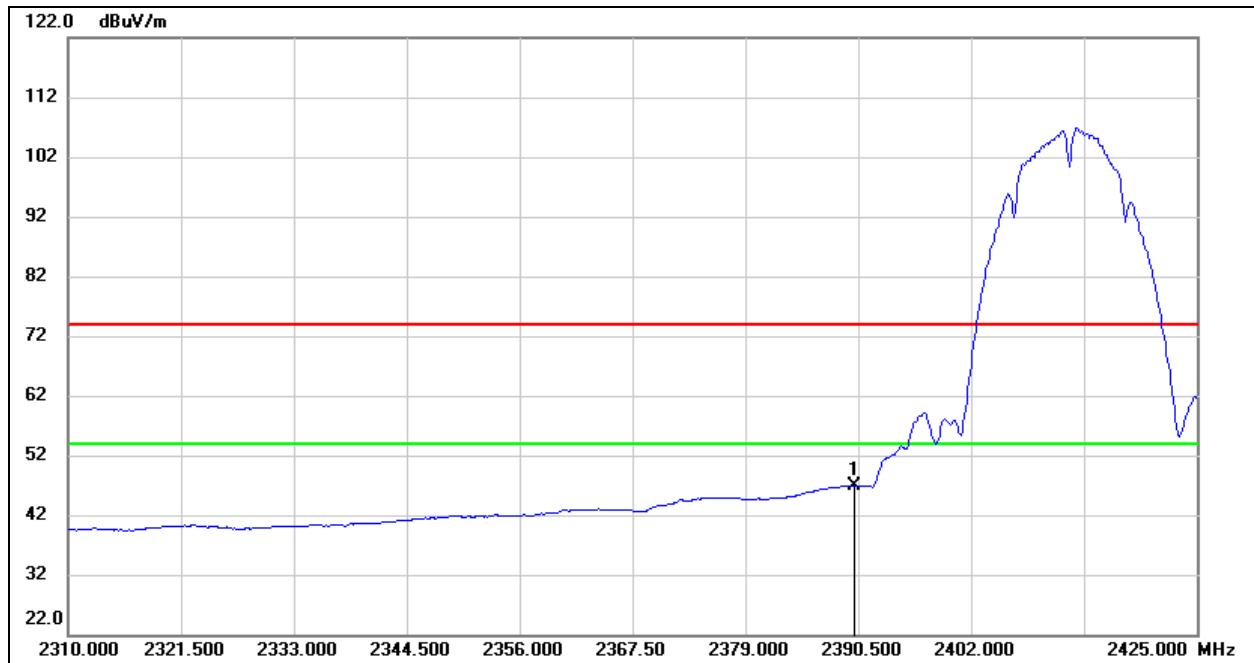


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	15.23	31.73	46.96	54.00	-7.04	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

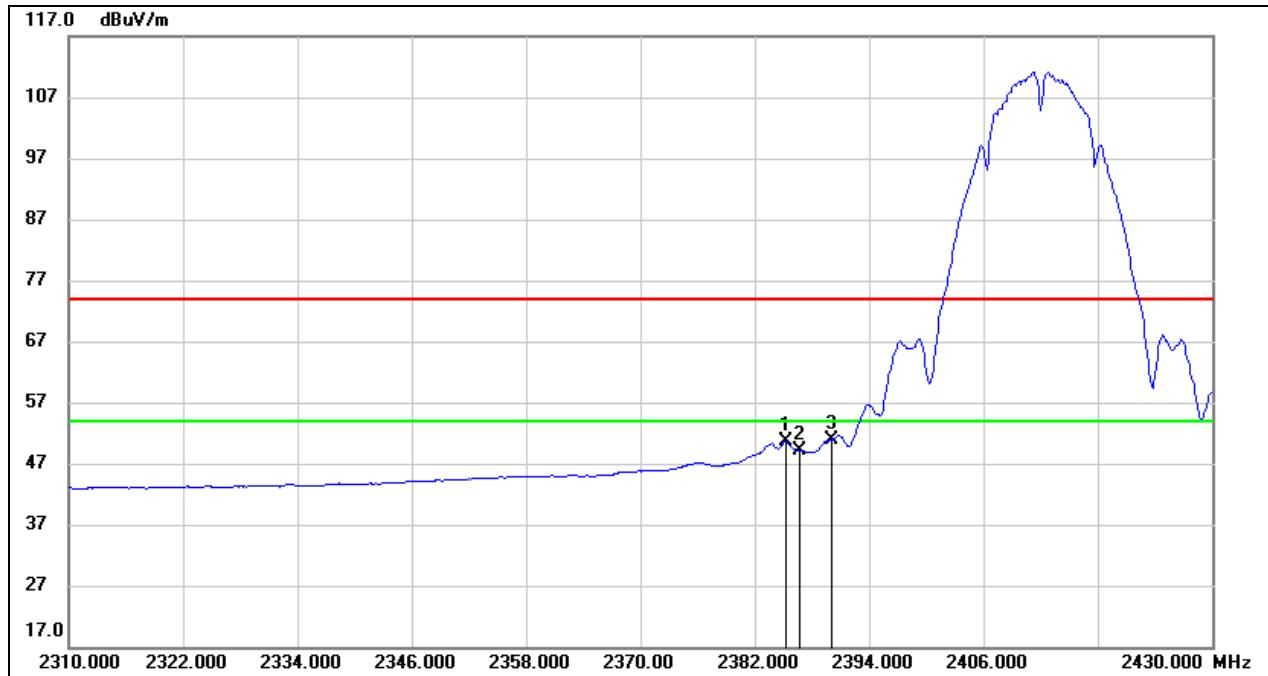


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.240	18.90	31.71	50.61	54.00	-3.39	AVG
2	2386.680	17.40	31.72	49.12	54.00	-4.88	AVG
3	2390.000	19.25	31.73	50.98	54.00	-3.02	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

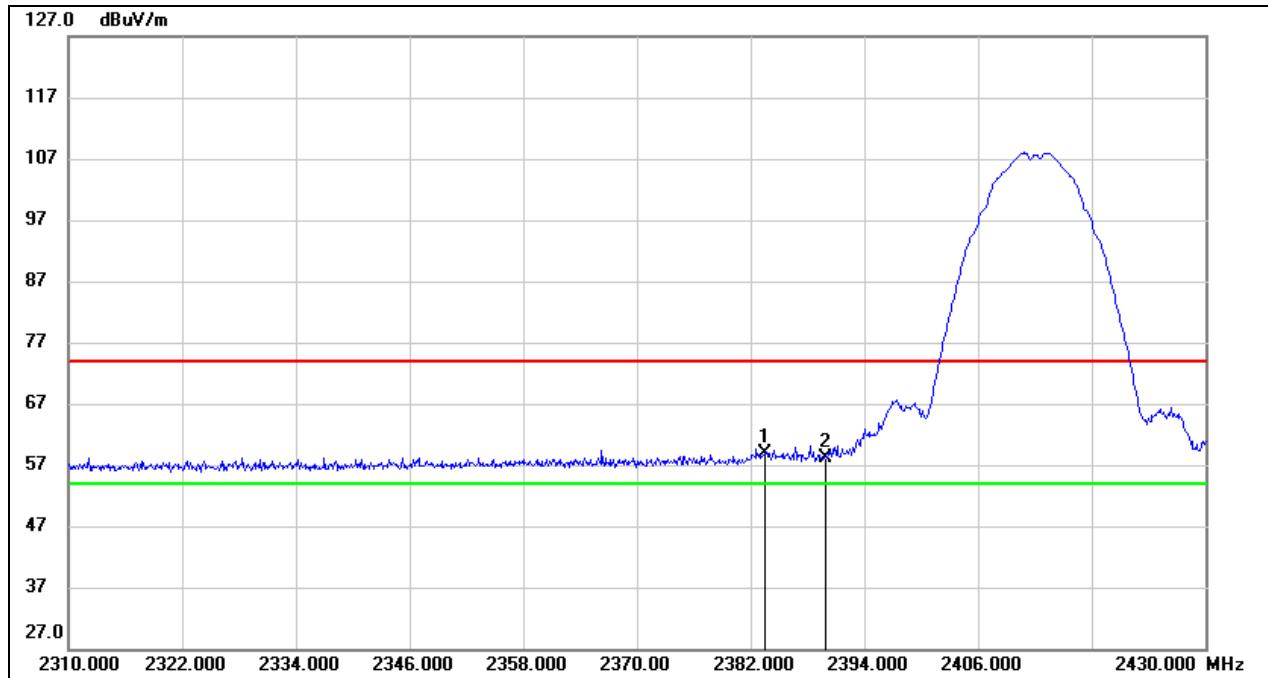


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.560	26.24	32.53	58.77	74.00	-15.23	peak
2	2390.000	25.46	32.55	58.01	74.00	-15.99	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

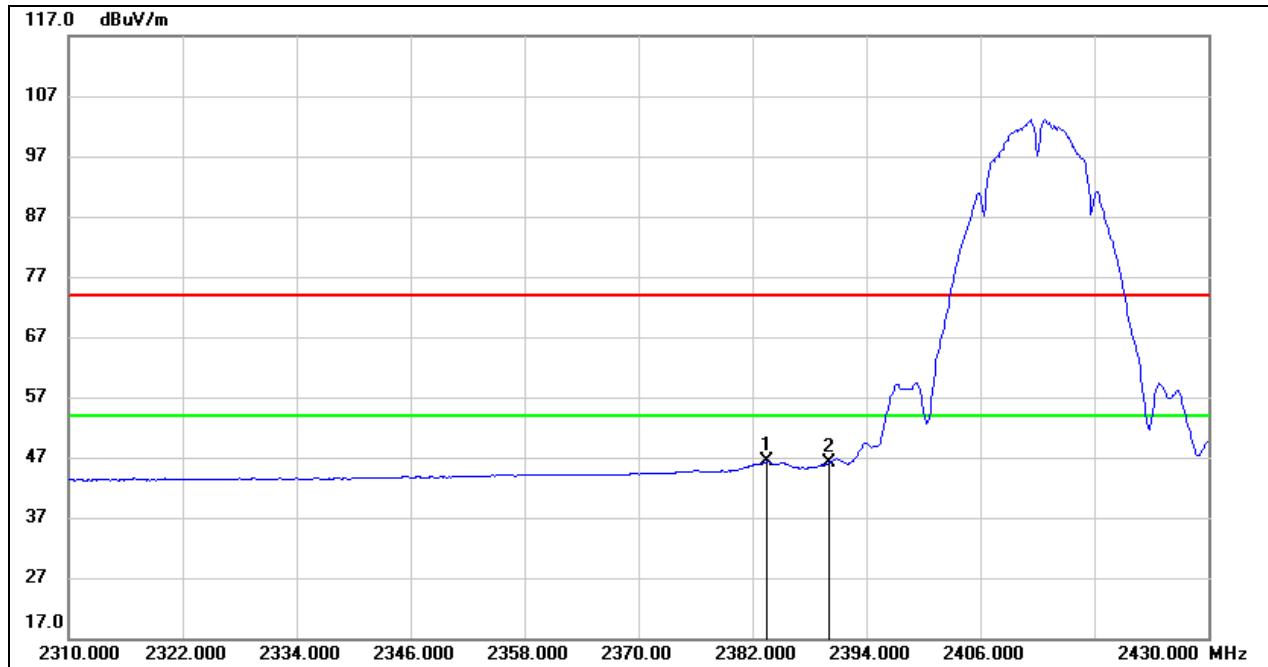


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.560	13.81	32.53	46.34	54.00	-7.66	AVG
2	2390.000	13.48	32.55	46.03	54.00	-7.97	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

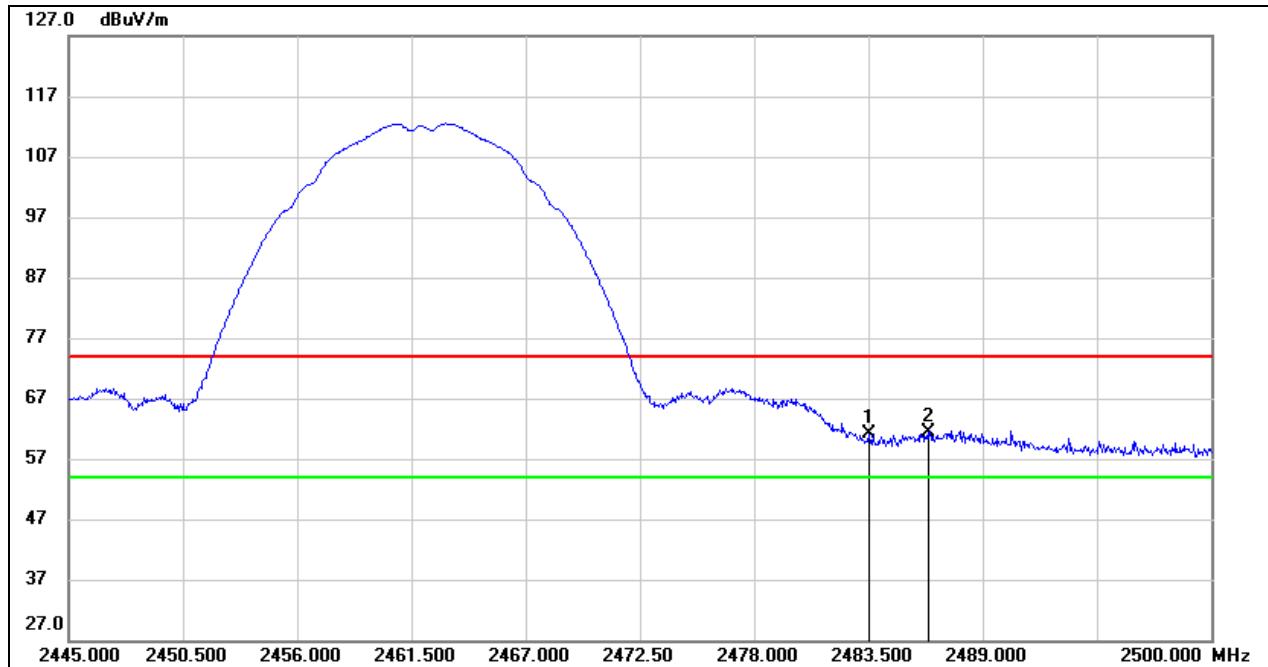


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.10	32.00	61.10	74.00	-12.90	peak
2	2486.305	29.40	32.00	61.40	74.00	-12.60	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

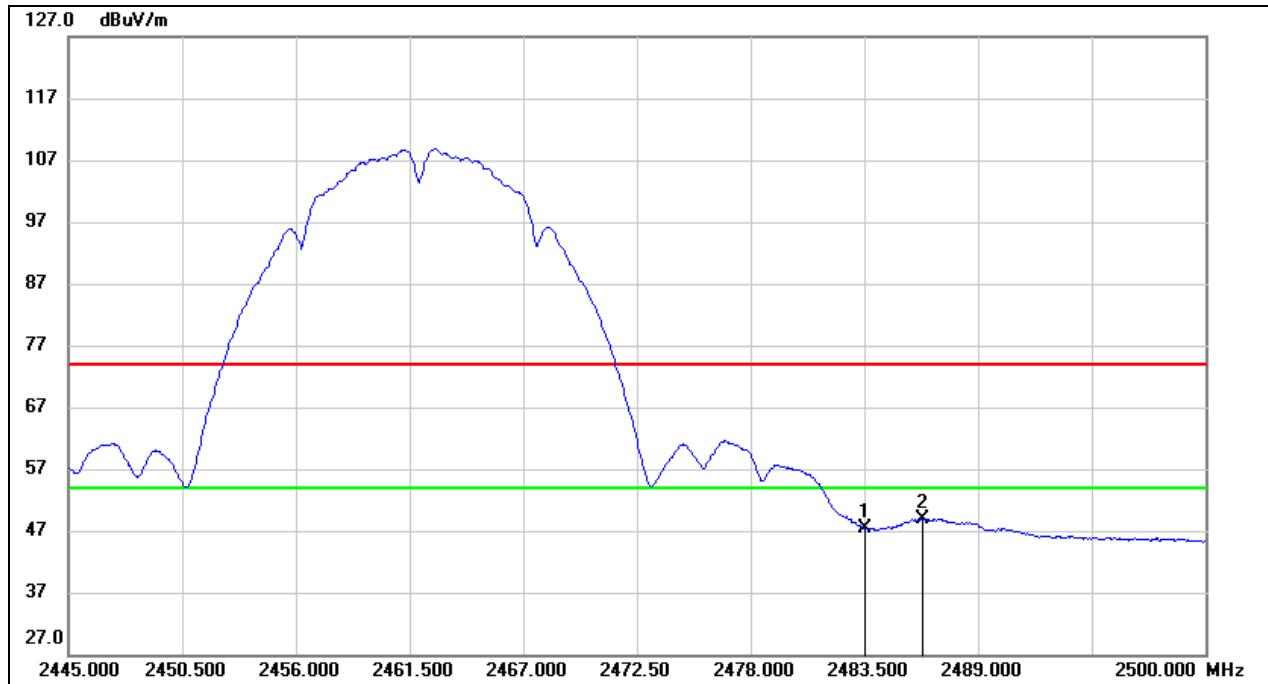


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.35	32.00	47.35	54.00	-6.65	AVG
2	2486.305	16.91	32.00	48.91	54.00	-5.09	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

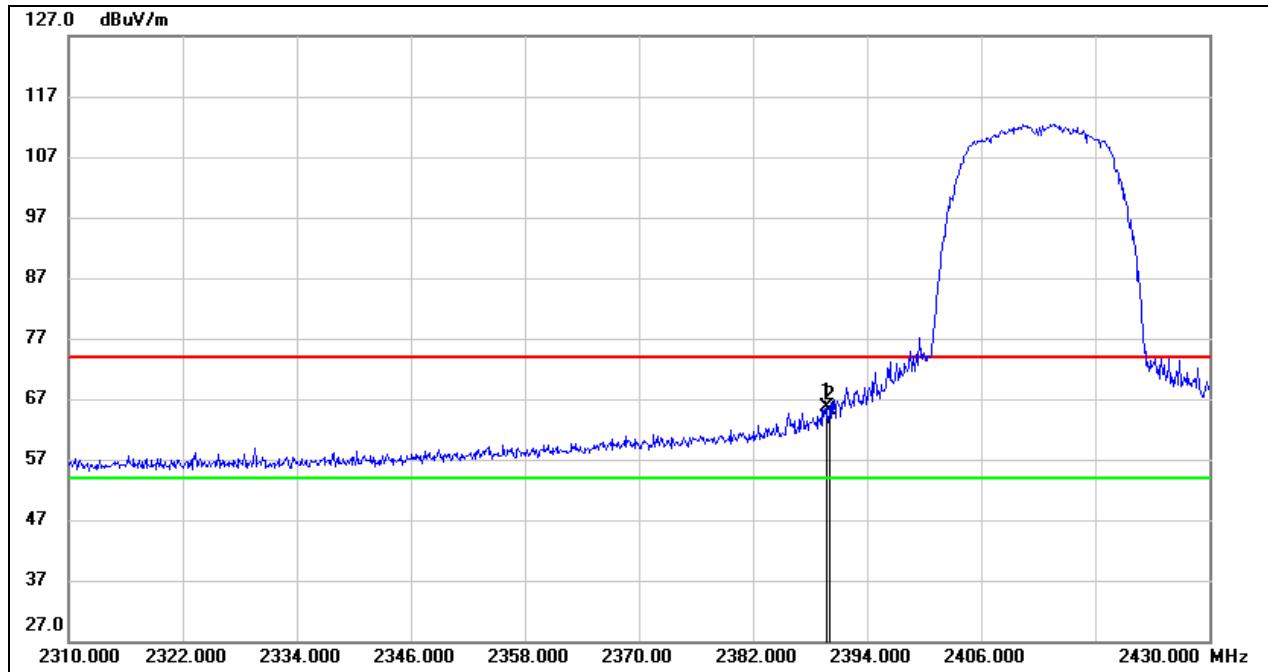


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.680	33.98	31.73	65.71	74.00	-8.29	peak
2	2390.000	33.30	31.73	65.03	74.00	-8.97	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

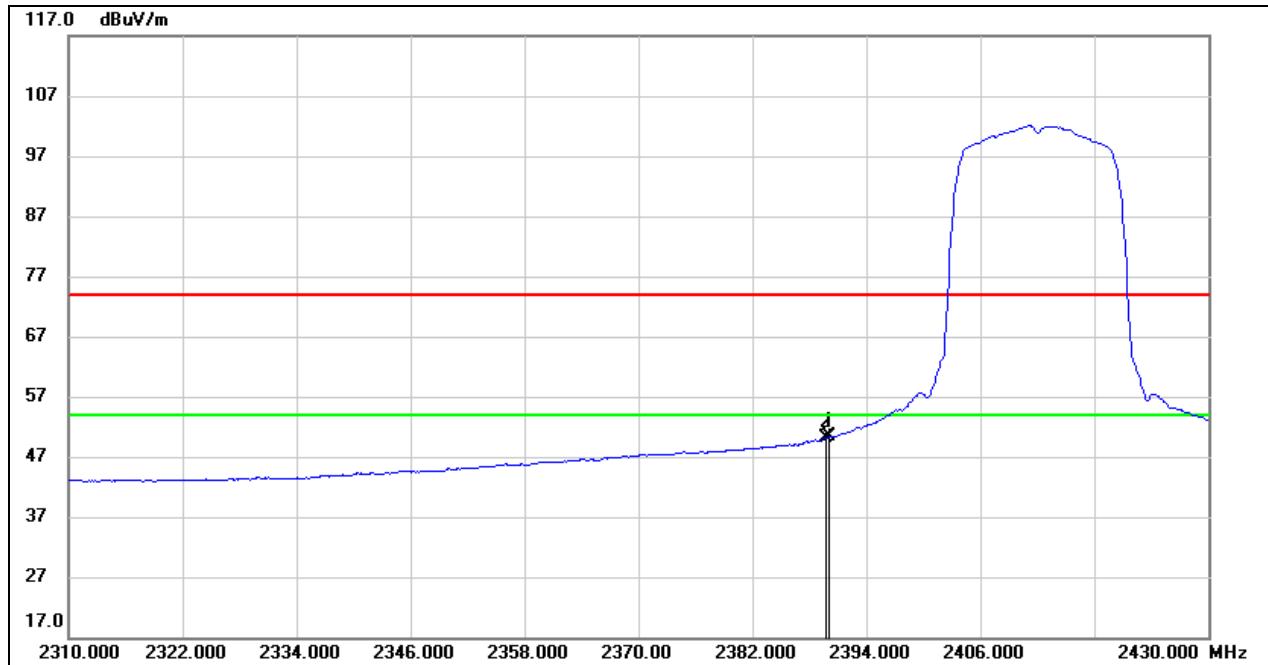


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.58	31.73	50.31	54.00	-3.69	AVG
2	2389.680	18.37	31.73	50.10	54.00	-3.90	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

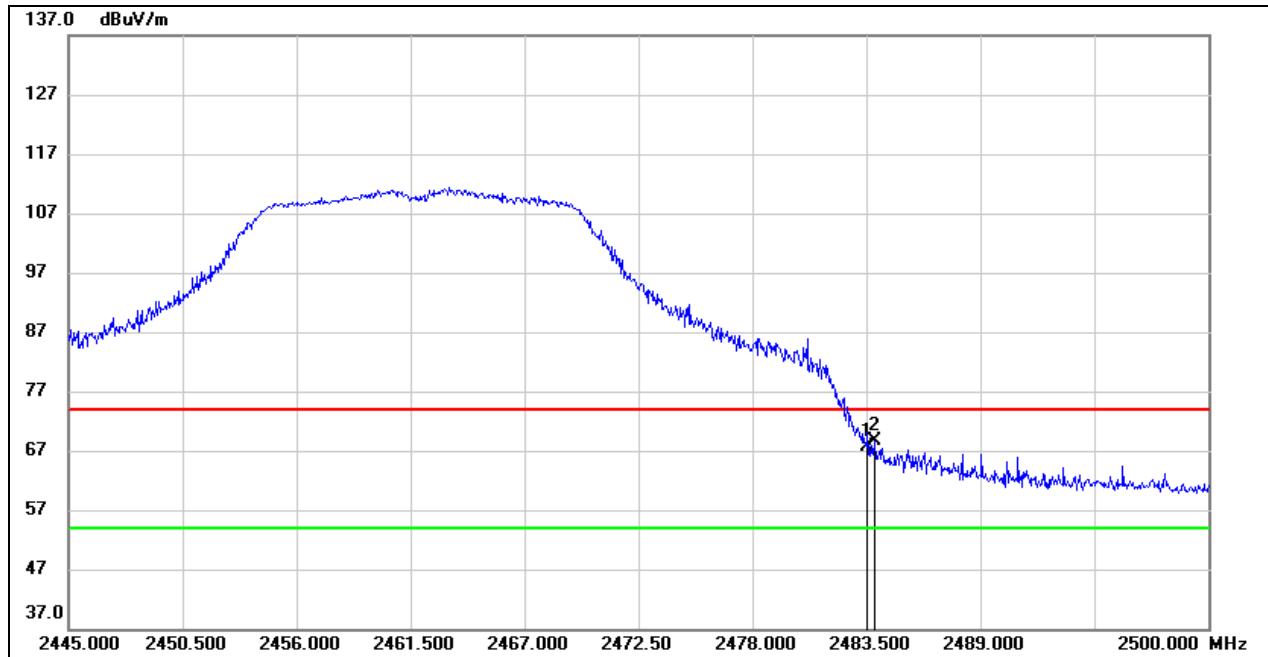


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.63	32.00	67.63	74.00	-6.37	peak
2	2483.885	36.56	32.00	68.56	74.00	-5.44	peak

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

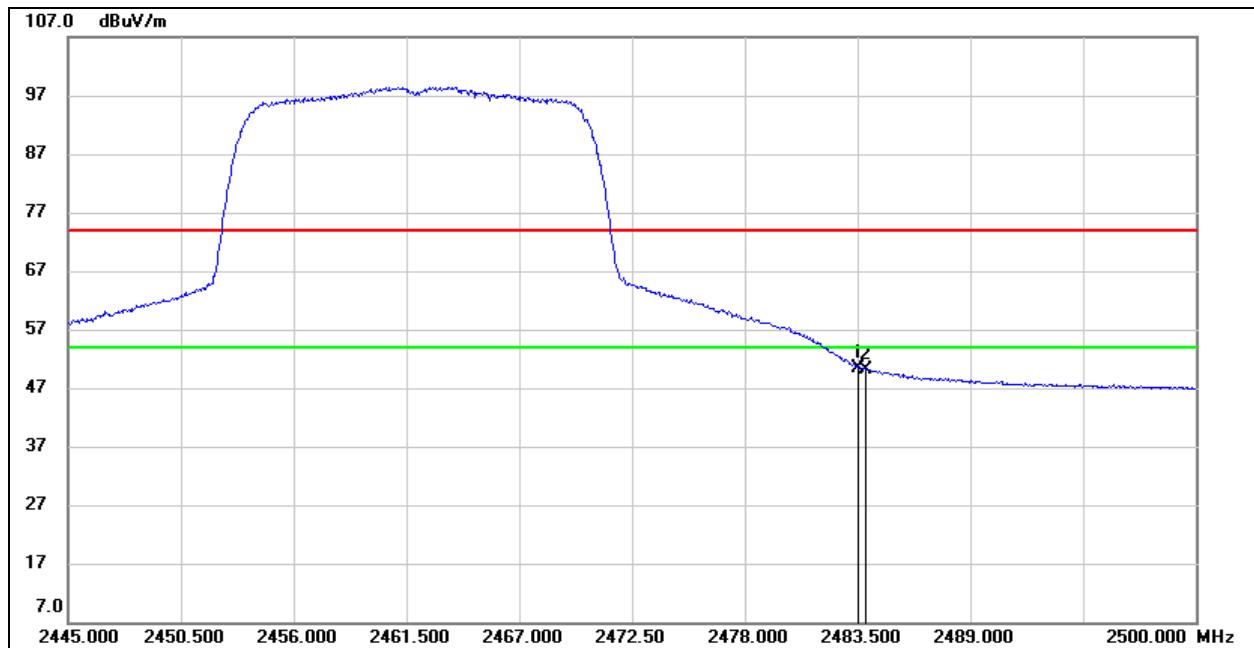


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.49	32.00	50.49	54.00	-3.51	AVG
2	2483.885	18.21	32.00	50.21	54.00	-3.79	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

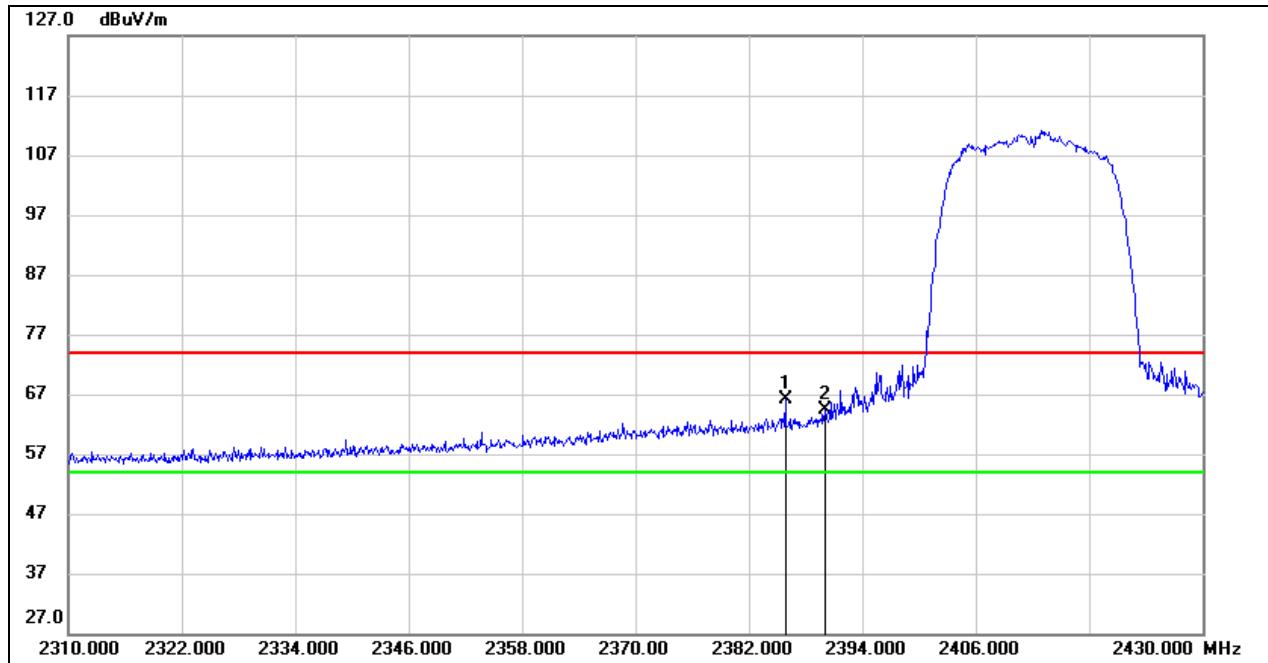


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.840	34.41	31.71	66.12	74.00	-7.88	peak
2	2390.000	32.59	31.73	64.32	74.00	-9.68	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

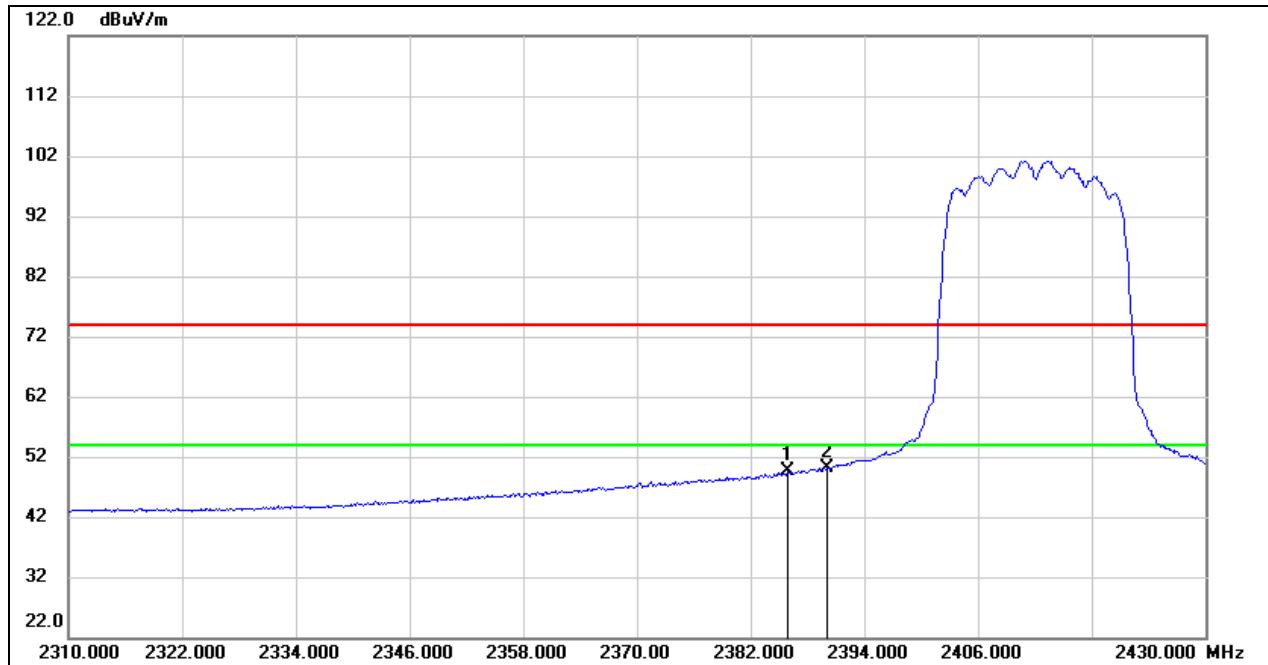


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.840	17.84	31.71	49.55	54.00	-4.45	AVG
2	2390.000	18.52	31.73	50.25	54.00	-3.75	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

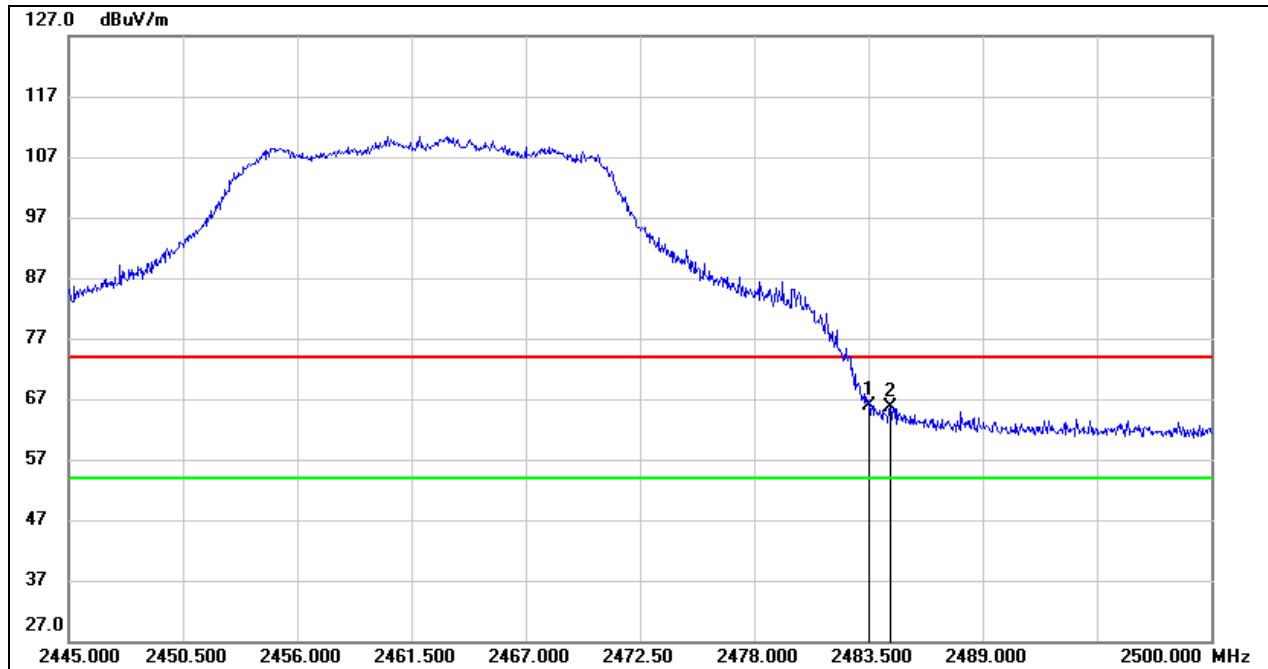


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.80	32.00	65.80	74.00	-8.20	peak
2	2484.545	33.69	32.00	65.69	74.00	-8.31	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

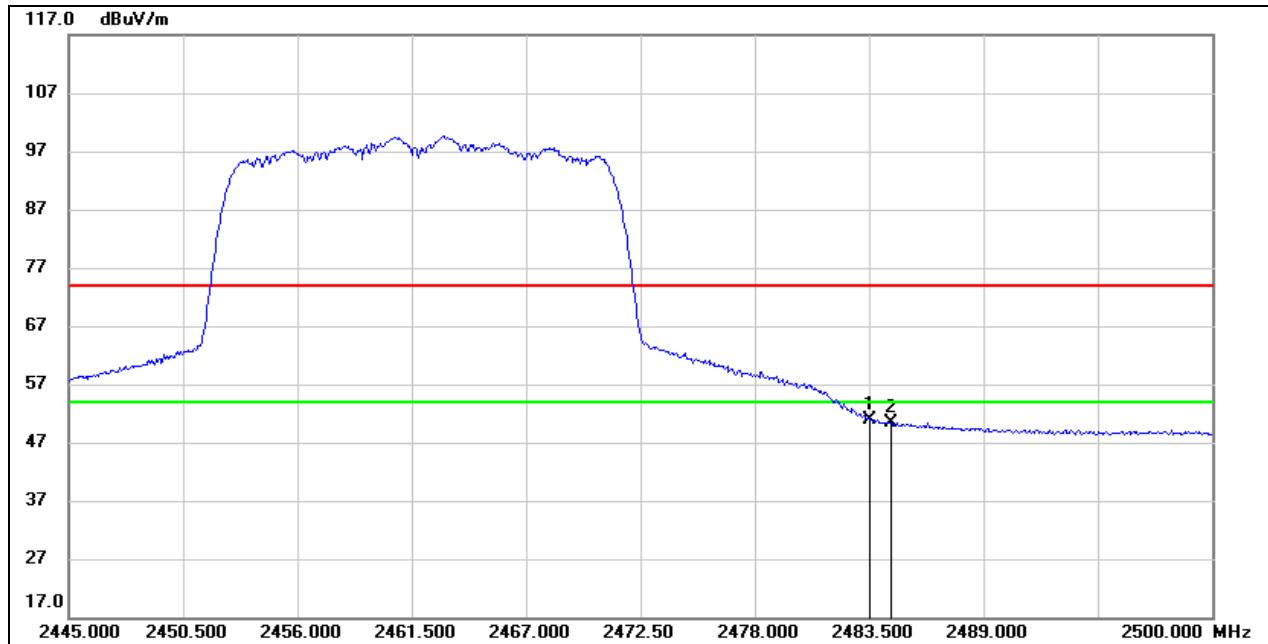


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.85	32.00	50.85	54.00	-3.15	AVG
2	2484.545	18.41	32.00	50.41	54.00	-3.59	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

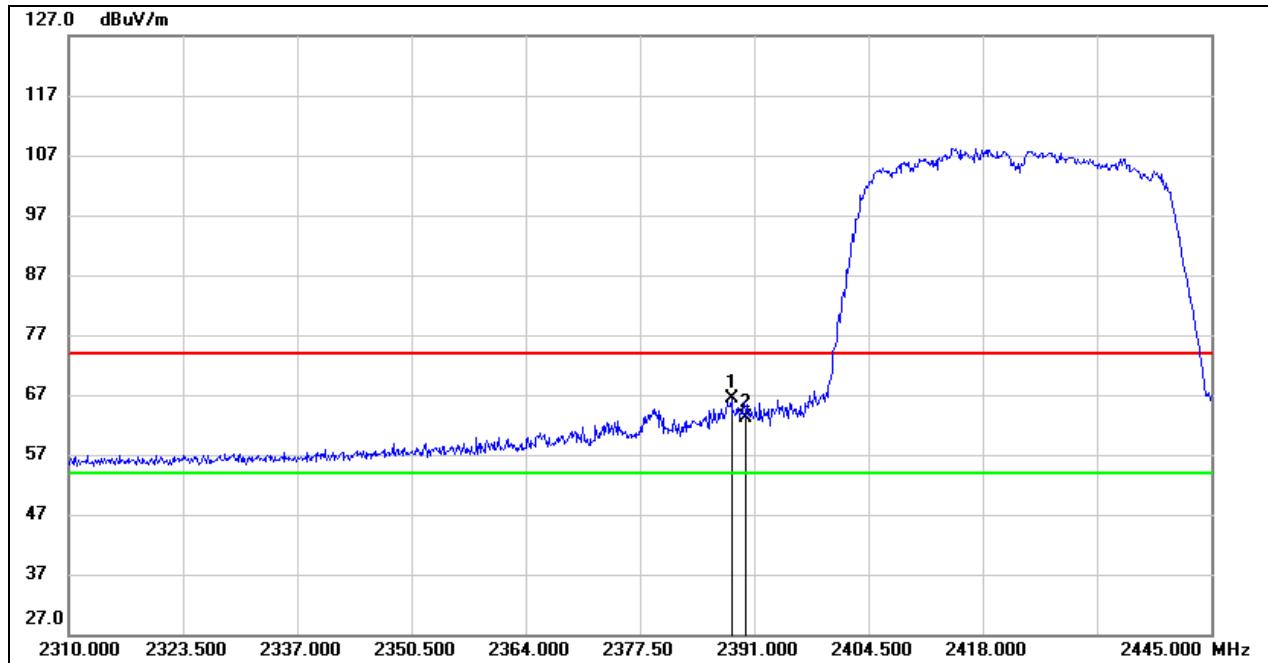


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	34.53	31.73	66.26	74.00	-7.74	peak
2	2390.000	31.49	31.73	63.22	74.00	-10.78	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

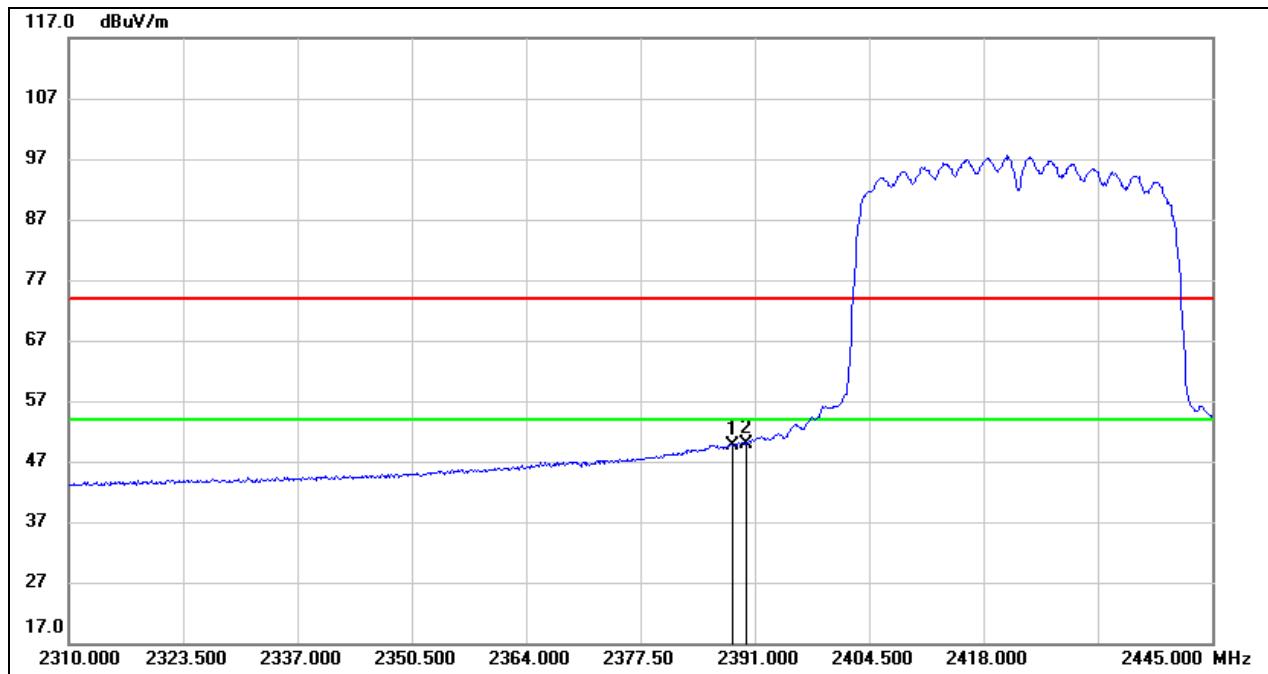


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	17.83	31.73	49.56	54.00	-4.44	AVG
2	2390.000	18.27	31.73	50.00	54.00	-4.00	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 5V

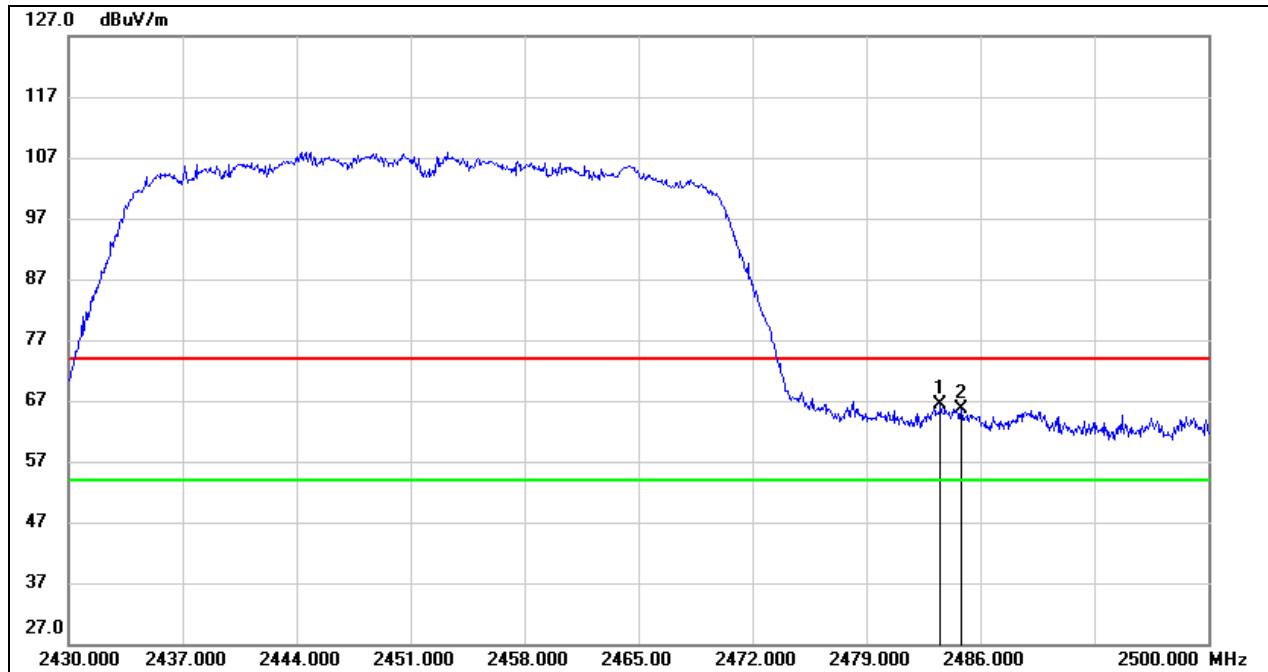


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.44	32.00	66.44	74.00	-7.56	peak
2	2484.810	33.61	32.00	65.61	74.00	-8.39	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 5V

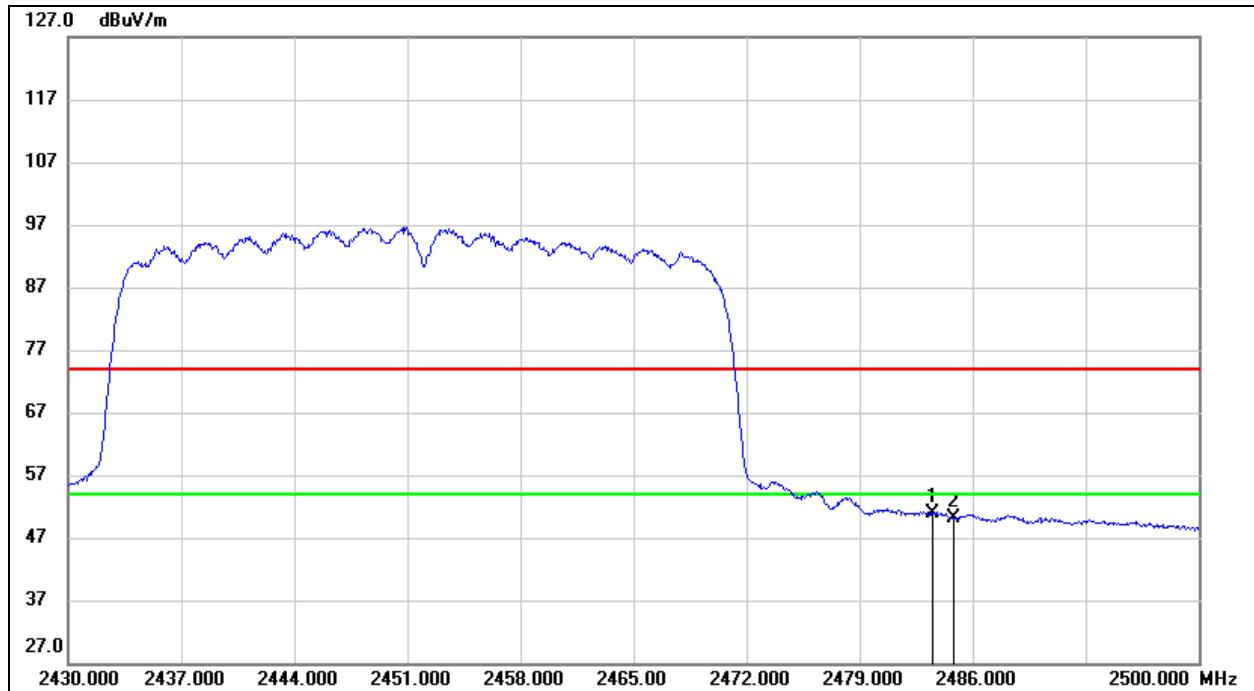


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.85	32.00	50.85	54.00	-3.15	AVG
2	2484.810	18.13	32.00	50.13	54.00	-3.87	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

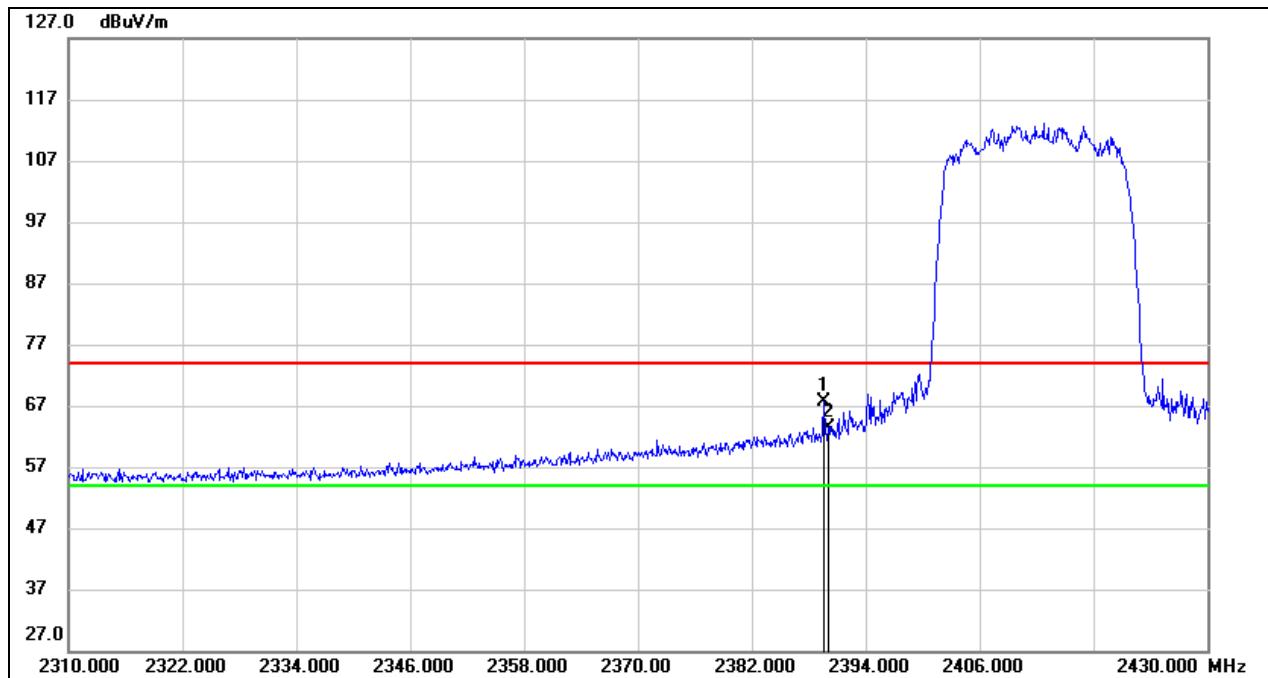


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	35.81	31.73	67.54	74.00	-6.46	peak
2	2390.000	31.70	31.73	63.43	74.00	-10.57	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

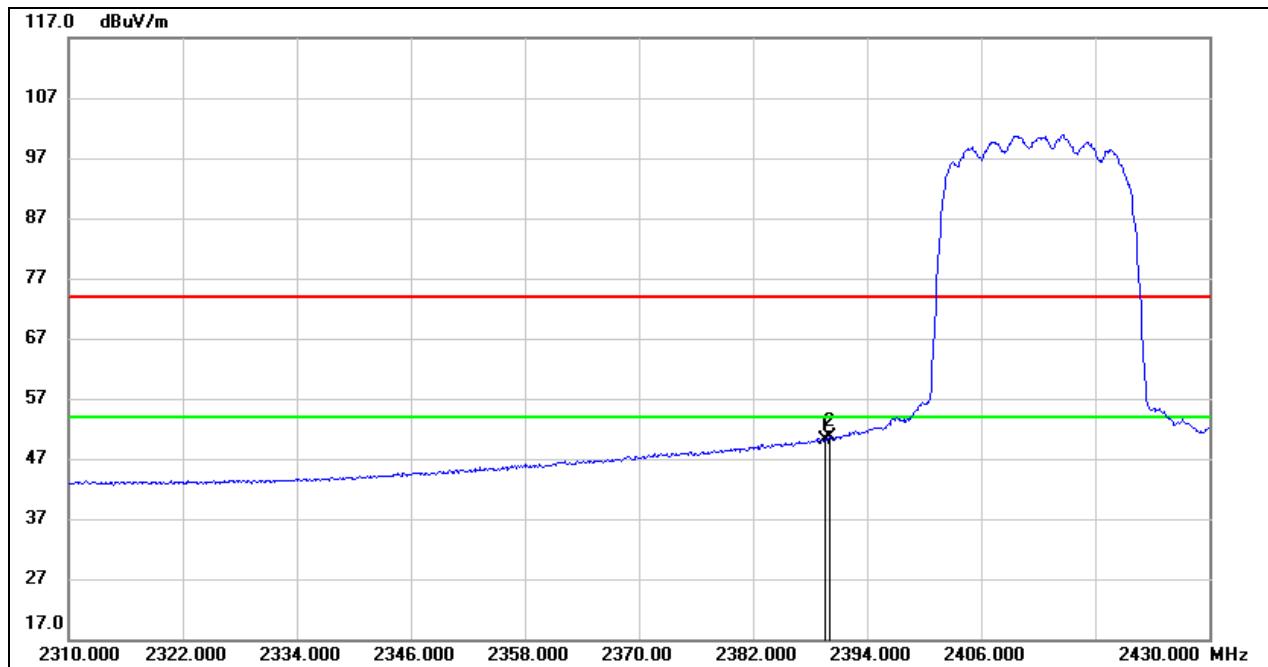


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	18.42	31.73	50.15	54.00	-3.85	AVG
2	2390.000	18.79	31.73	50.52	54.00	-3.48	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

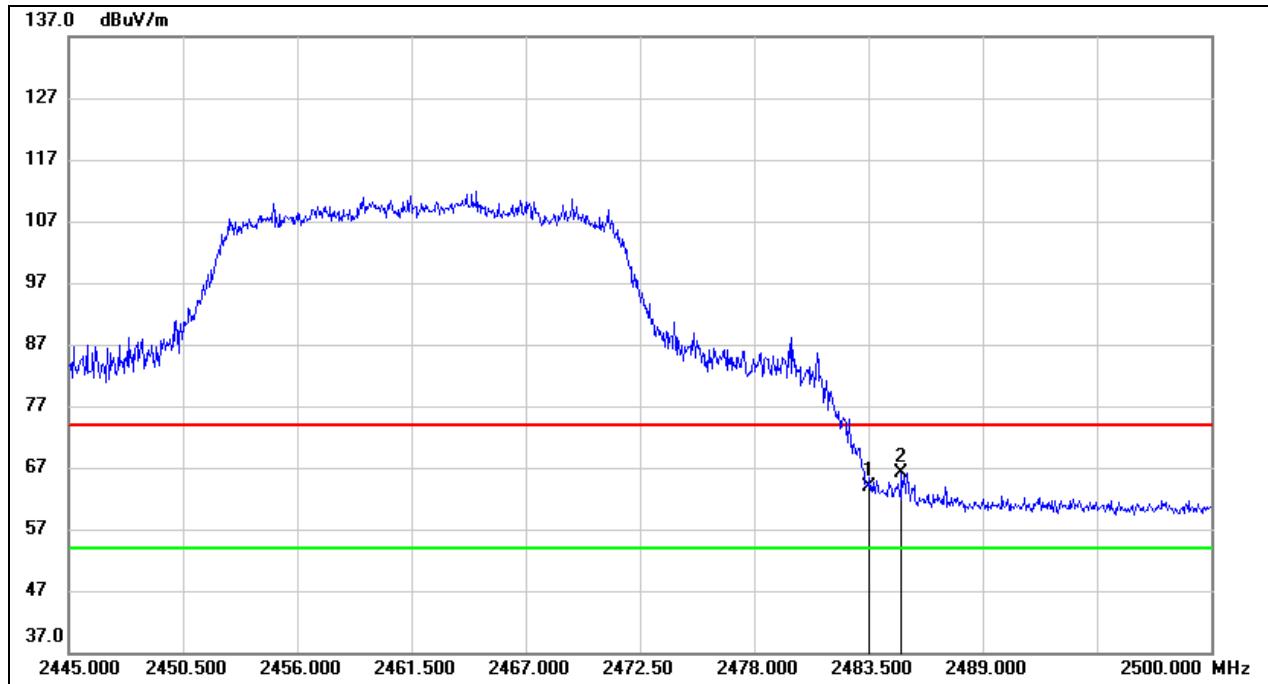


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.94	32.00	63.94	74.00	-10.06	peak
2	2485.095	34.21	32.00	66.21	74.00	-7.79	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

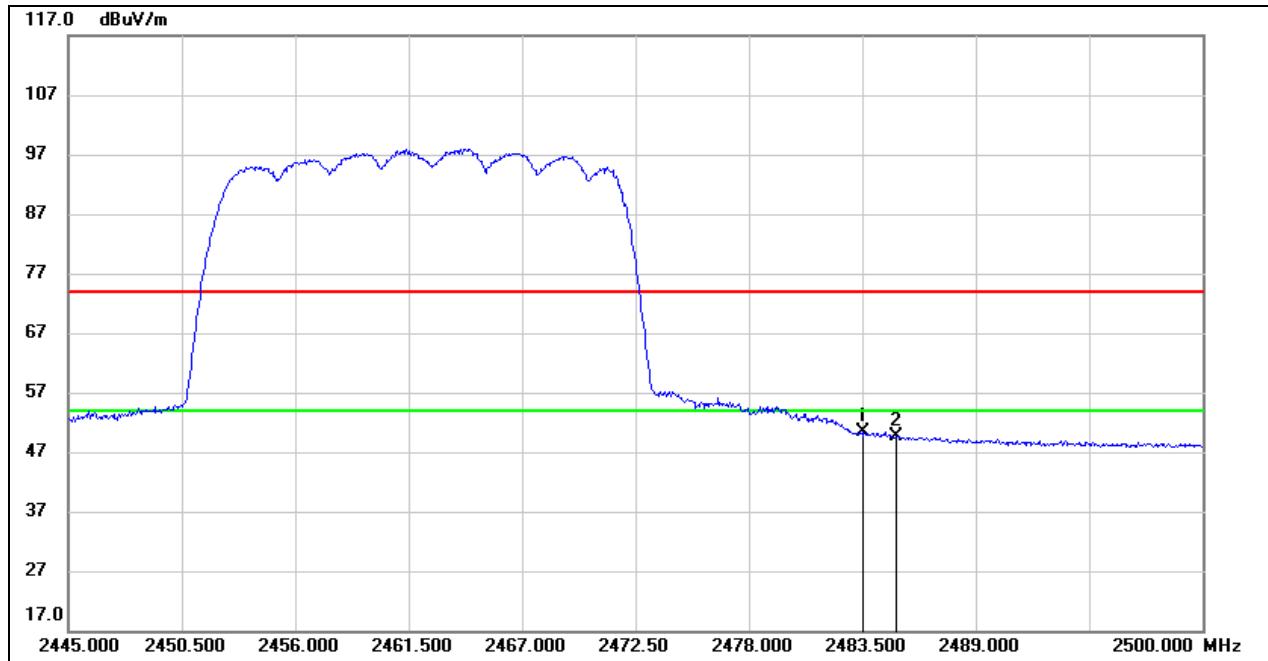


No.	Frequency (MHz)	Reading (dB _{uV})	Correct (dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2483.500	18.38	32.00	50.38	54.00	-3.62	AVG
2	2485.095	17.72	32.00	49.72	54.00	-4.28	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

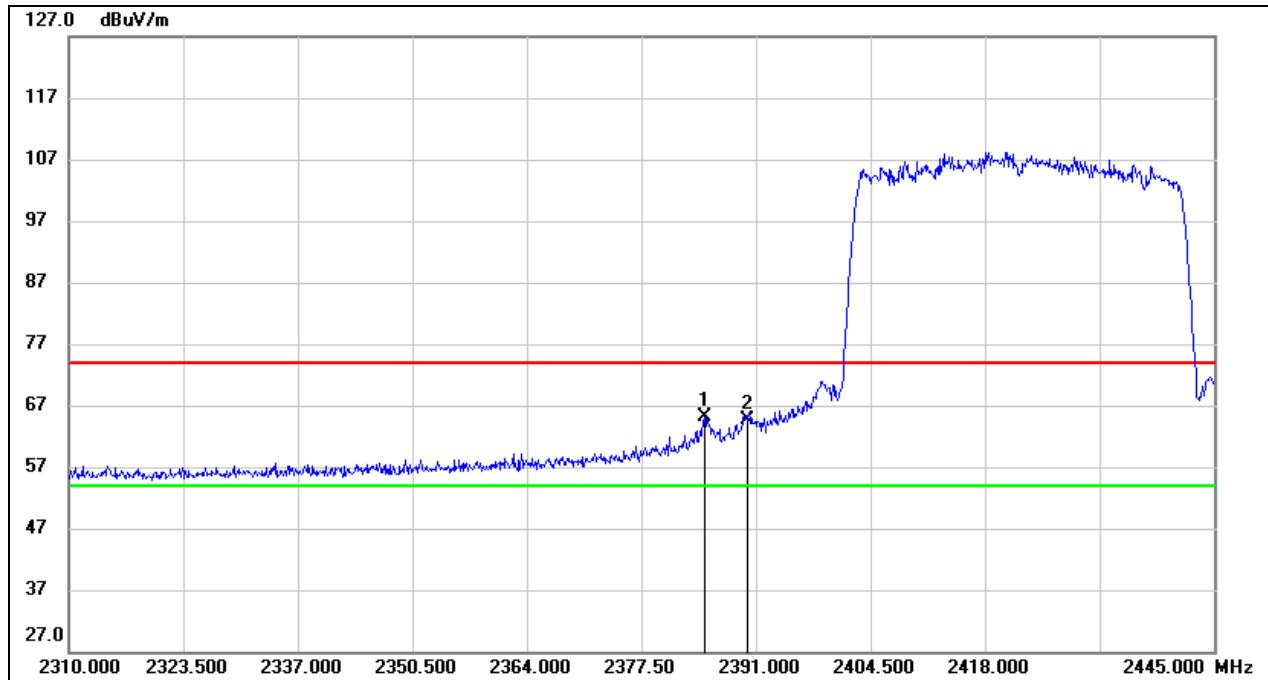


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.925	33.31	31.71	65.02	74.00	-8.98	peak
2	2390.000	33.00	31.73	64.73	74.00	-9.27	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

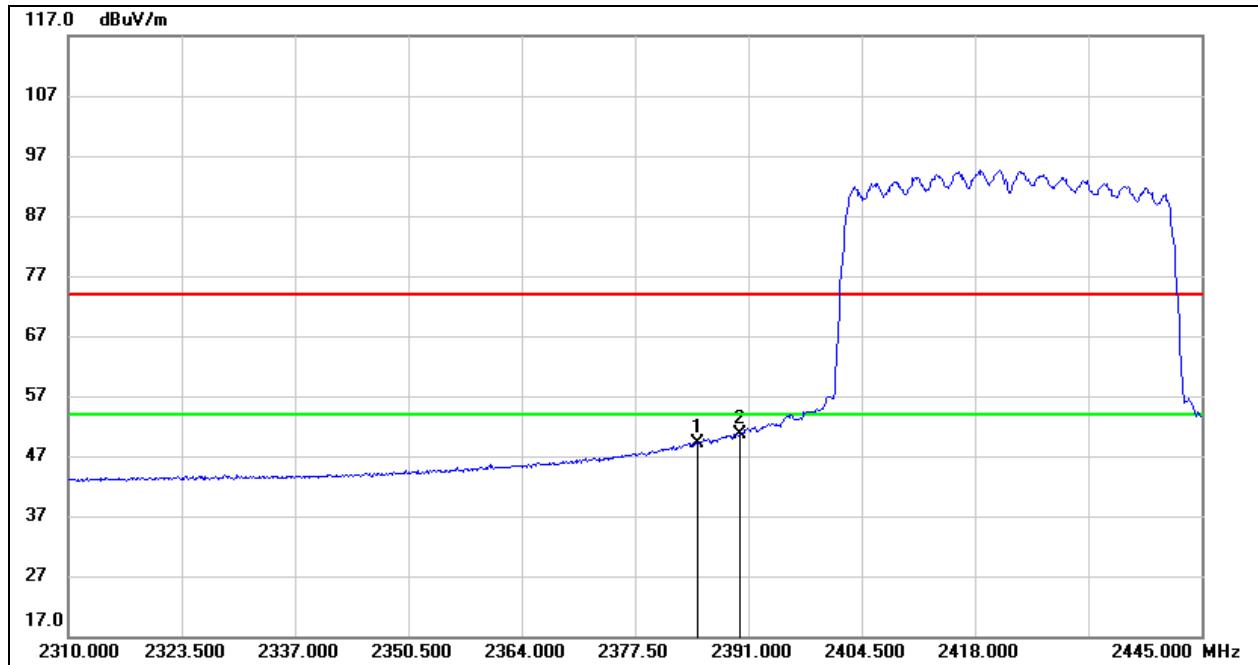

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.925	17.34	31.71	49.05	54.00	-4.95	AVG
2	2390.000	18.78	31.73	50.51	54.00	-3.49	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 5V

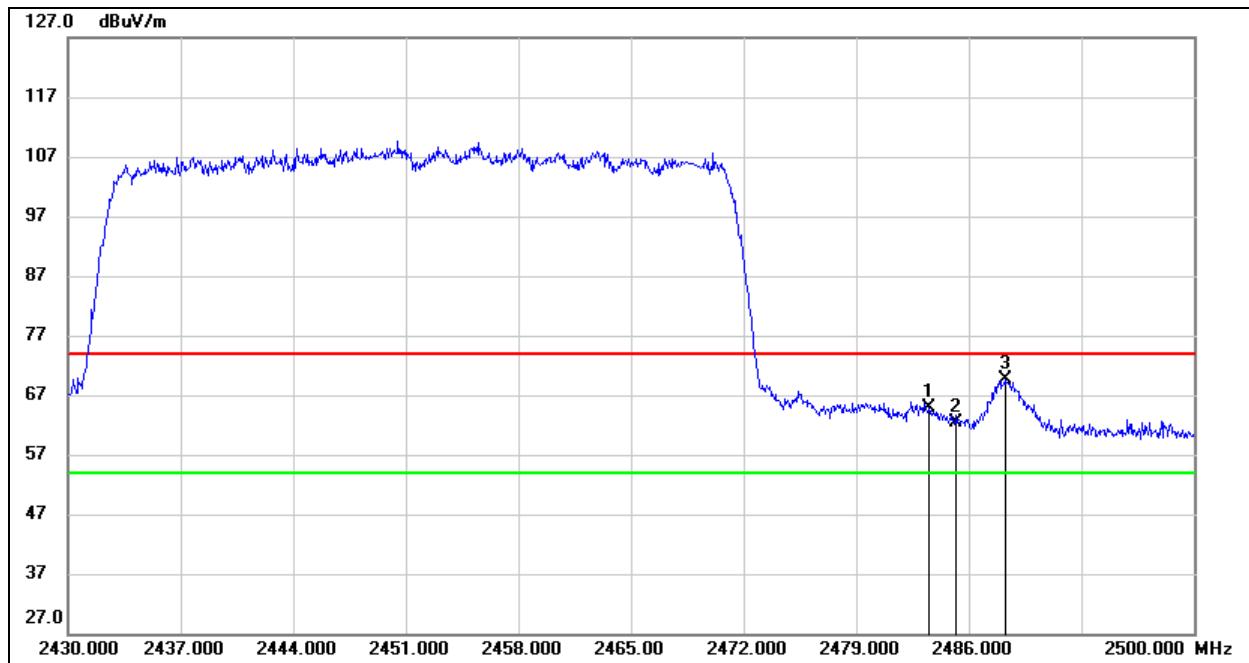


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.87	32.00	64.87	74.00	-9.13	peak
2	2485.160	30.26	32.00	62.26	74.00	-11.74	peak
3	2488.240	37.50	32.01	69.51	74.00	-4.49	peak

8.1. RESTRICTED BANDEDGE FOR 802.11AX PARTIAL RU MODE


Note: For 3 data of Frequency means: Frequency, RU Size, RU index

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412 26 0
Polarity:	Horizontal	Test Voltage:	DC 5V

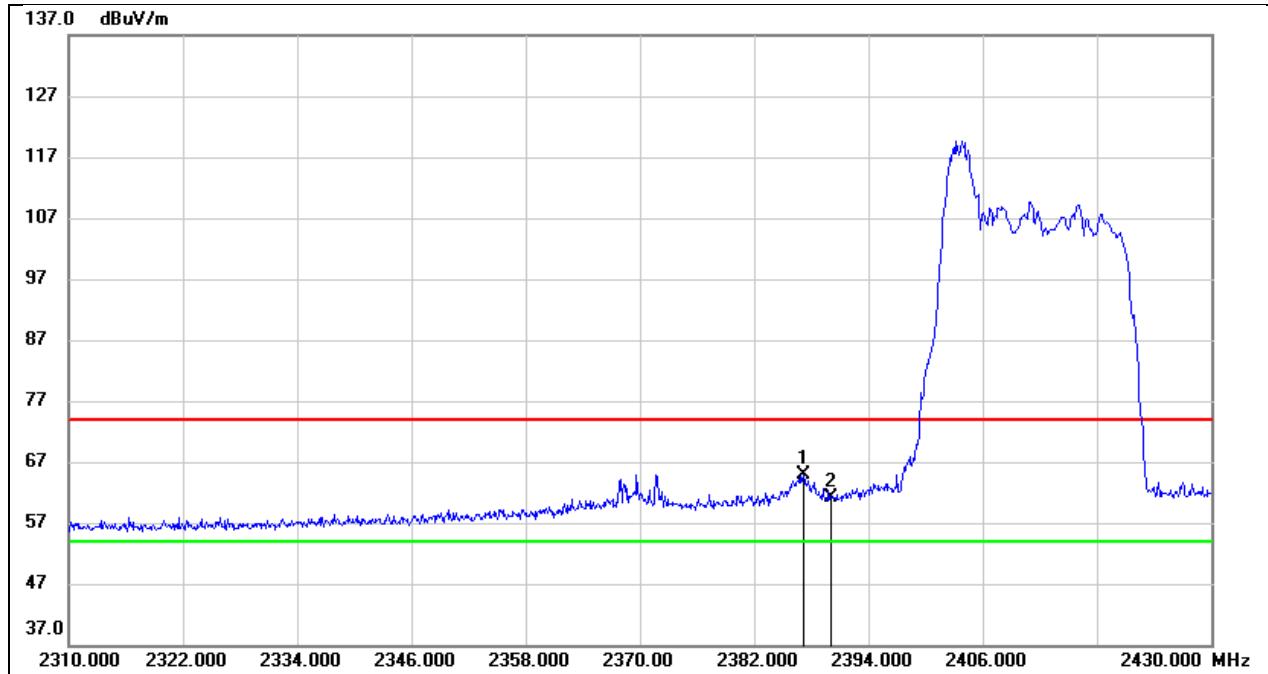


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.160	33.24	31.72	64.96	74.00	-9.04	peak
2	2390.000	29.46	31.73	61.19	74.00	-12.81	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412 26 0
Polarity:	Horizontal	Test Voltage:	DC 5V

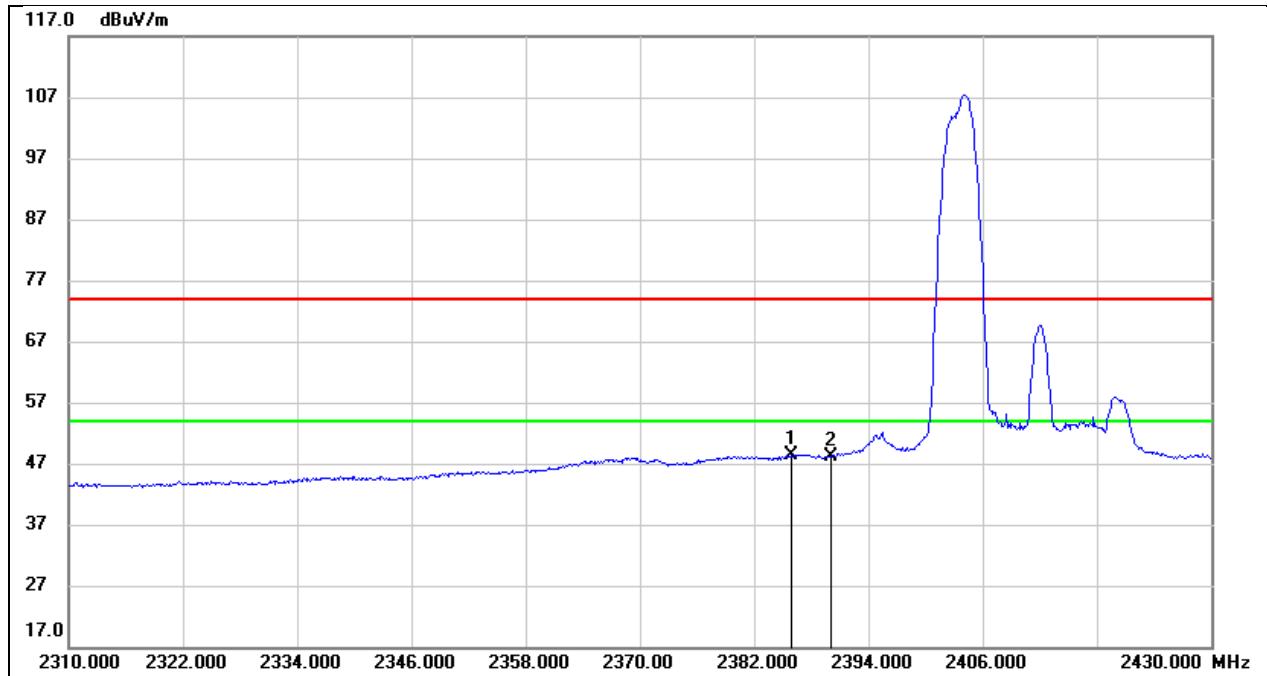


No.	Frequency (MHz)	Reading (dB _{UV})	Correct (dB/m)	Result (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Remark
1	2385.840	16.79	31.71	48.50	54.00	-5.50	AVG
2	2390.000	16.52	31.73	48.25	54.00	-5.75	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412 52 37
Polarity:	Horizontal	Test Voltage:	DC 5V

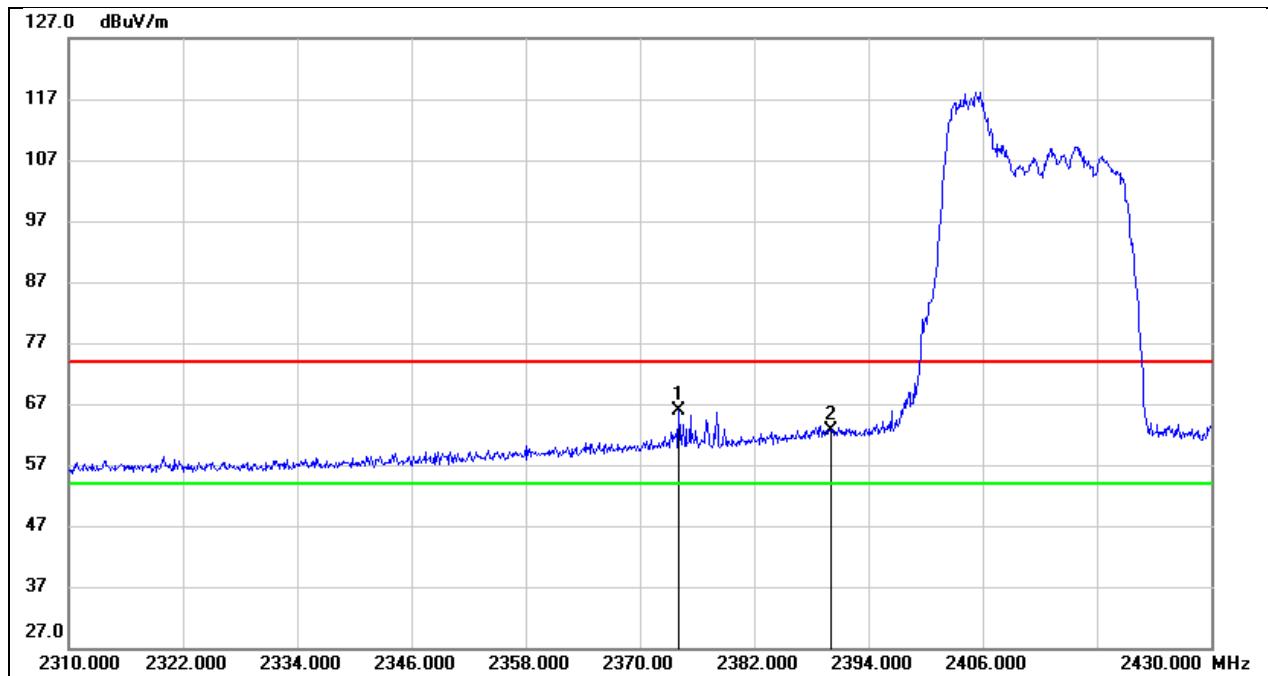


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.080	34.30	31.67	65.97	74.00	-8.03	peak
2	2390.000	30.99	31.73	62.72	74.00	-11.28	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412 52 37
Polarity:	Horizontal	Test Voltage:	DC 5V

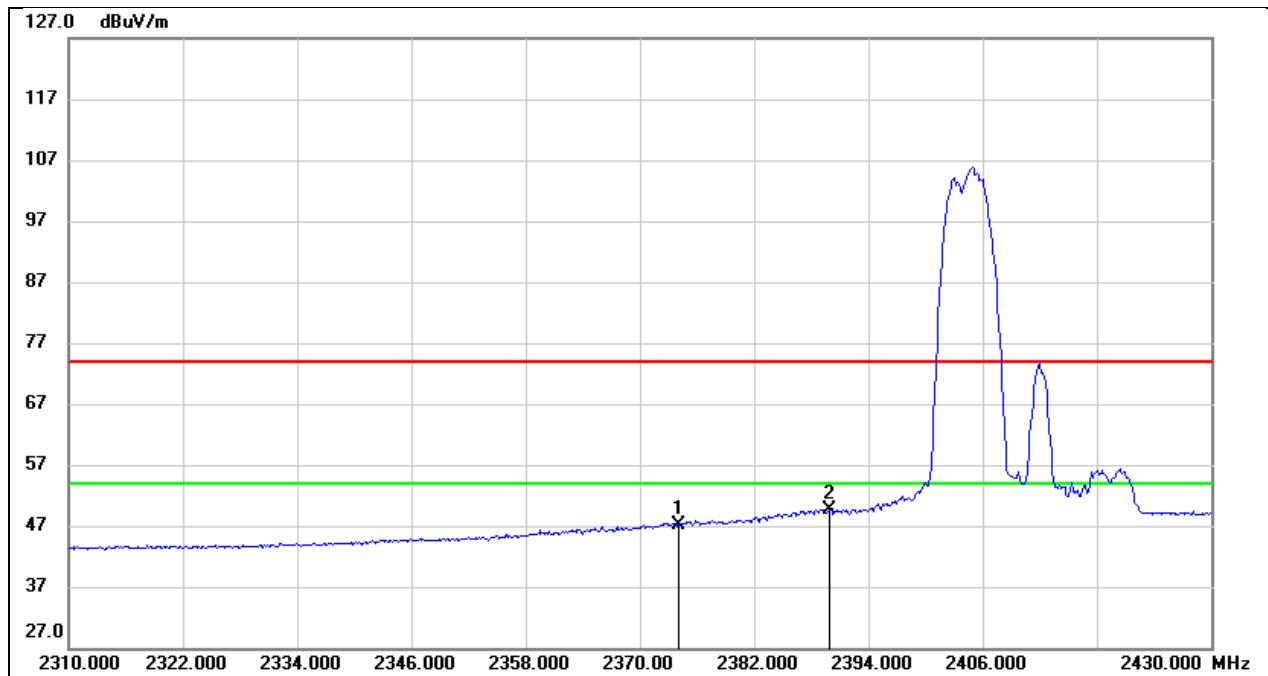


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.080	15.50	31.67	47.17	54.00	-6.83	AVG
2	2390.000	17.88	31.73	49.61	54.00	-4.39	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412 106 53
Polarity:	Horizontal	Test Voltage:	DC 5V

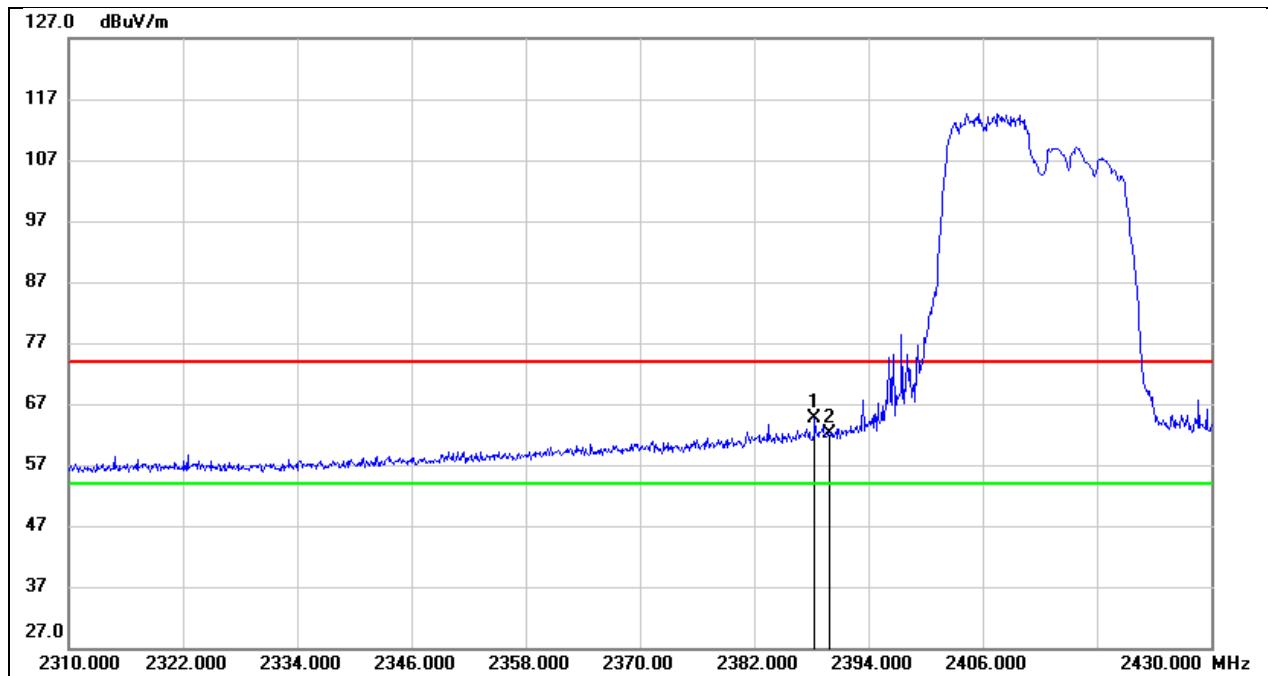


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.360	33.00	31.73	64.73	74.00	-9.27	peak
2	2390.000	30.38	31.73	62.11	74.00	-11.89	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412 106 53
Polarity:	Horizontal	Test Voltage:	DC 5V

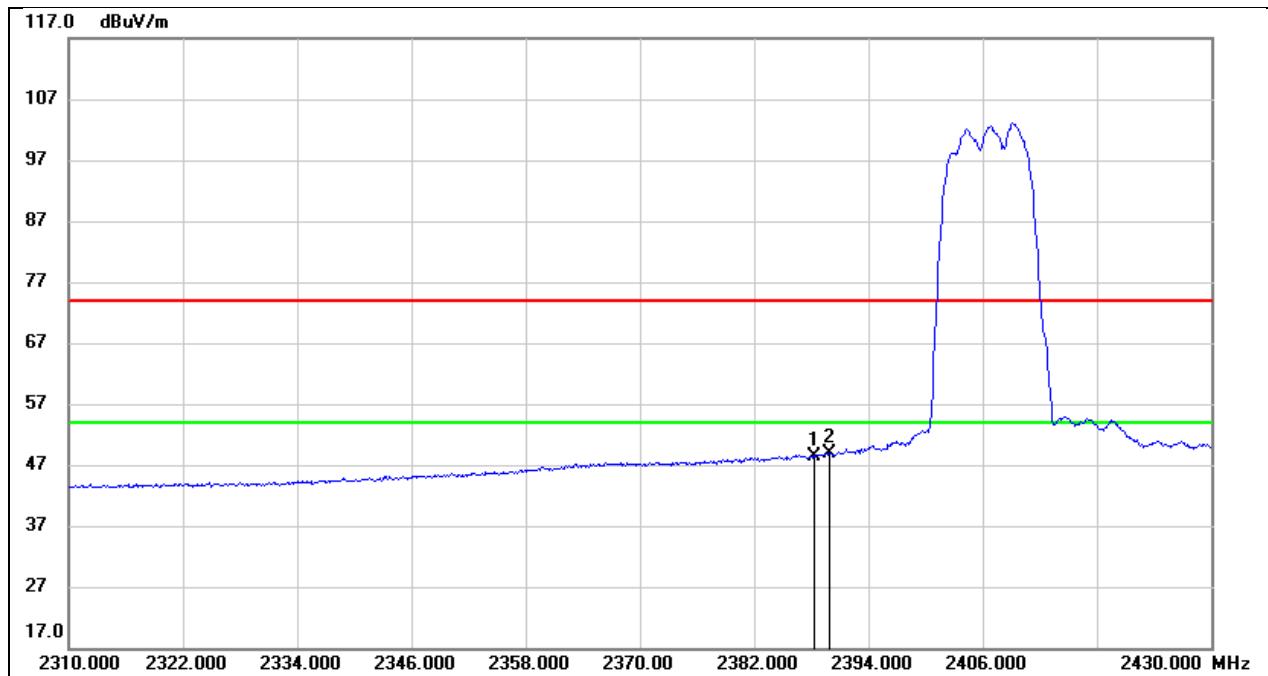


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.360	16.57	31.73	48.30	54.00	-5.70	AVG
2	2390.000	17.10	31.73	48.83	54.00	-5.17	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462 26 8
Polarity:	Horizontal	Test Voltage:	DC 5V

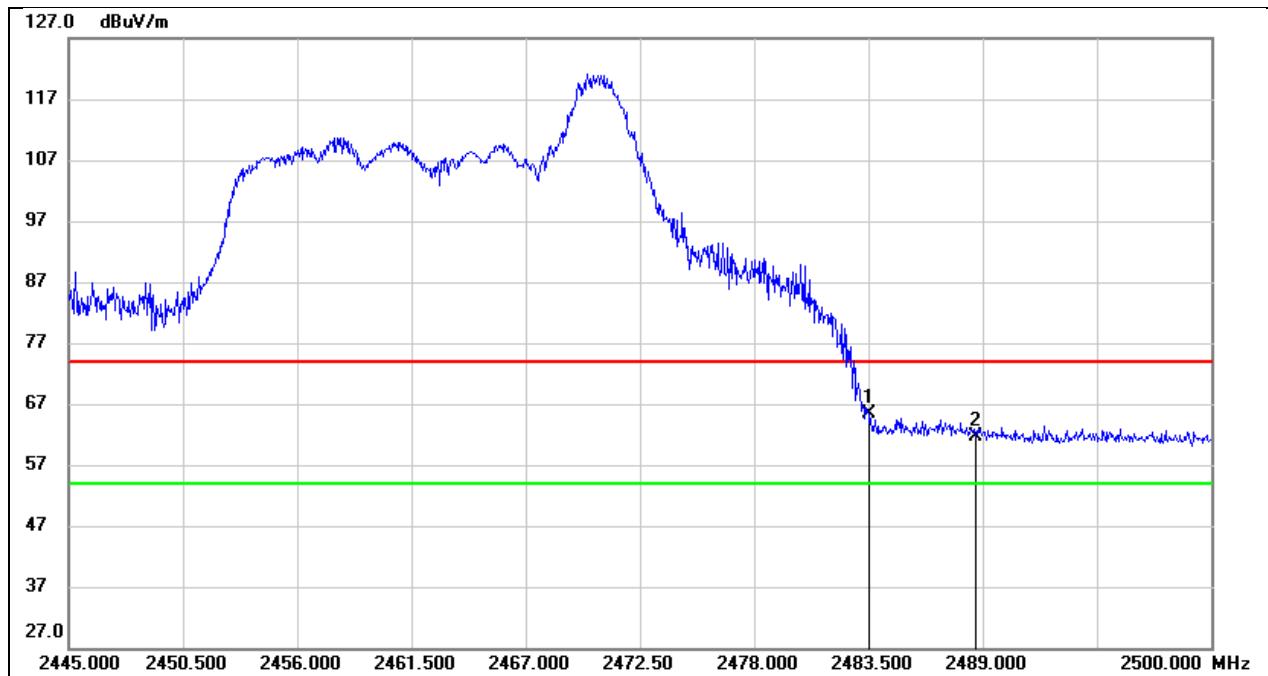


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.27	32.00	65.27	74.00	-8.73	peak
2	2488.670	29.57	32.01	61.58	74.00	-12.42	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462 26 8
Polarity:	Horizontal	Test Voltage:	DC 5V

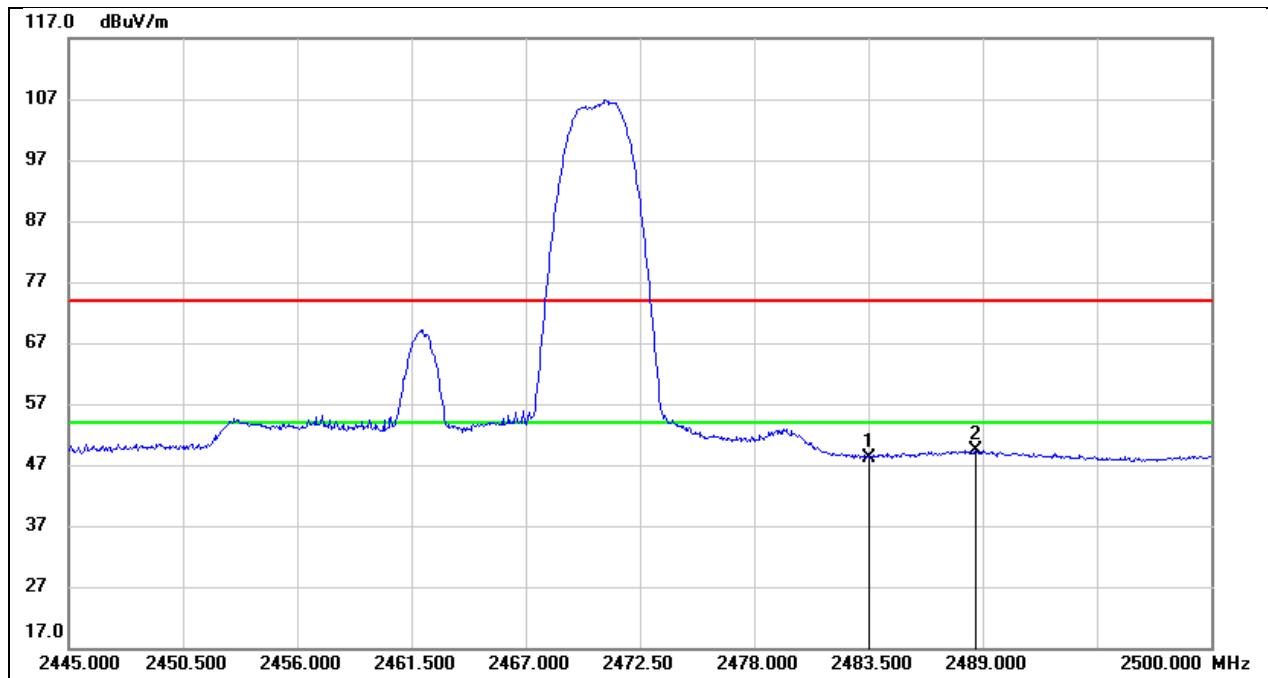


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.24	32.00	48.24	54.00	-5.76	AVG
2	2488.670	17.43	32.01	49.44	54.00	-4.56	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462 52 40
Polarity:	Horizontal	Test Voltage:	DC 5V

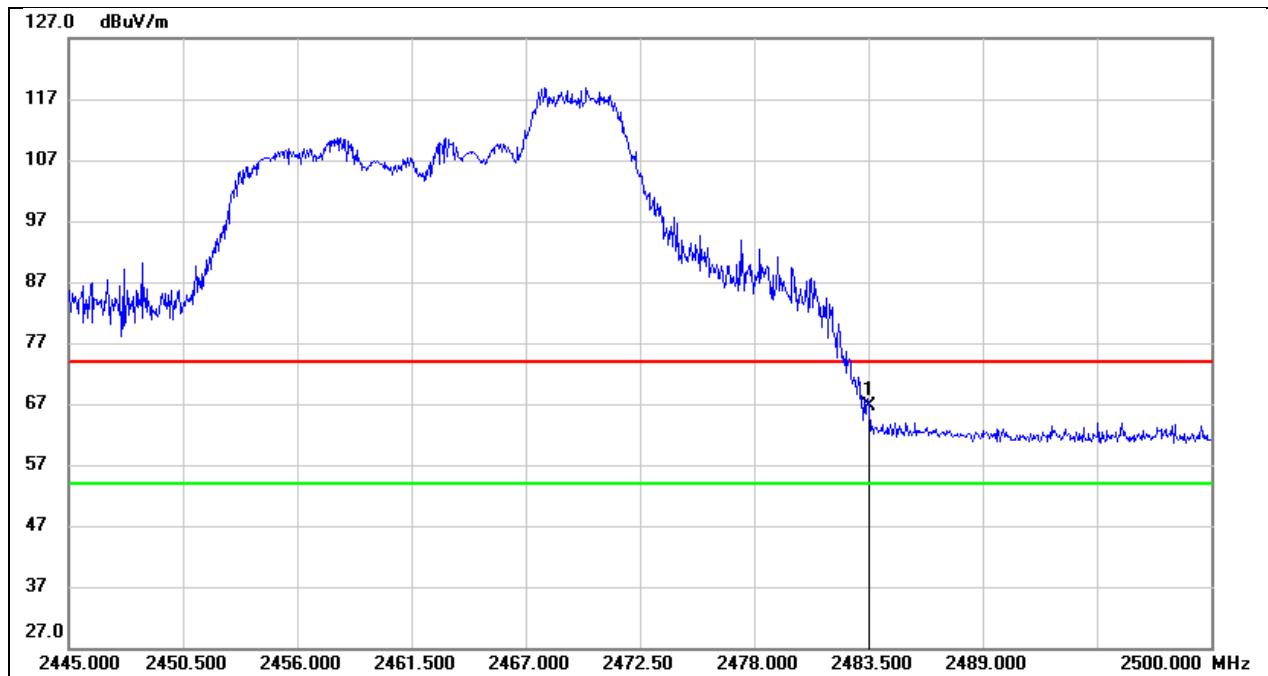


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.51	32.00	66.51	74.00	-7.49	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462 52 40
Polarity:	Horizontal	Test Voltage:	DC 5V

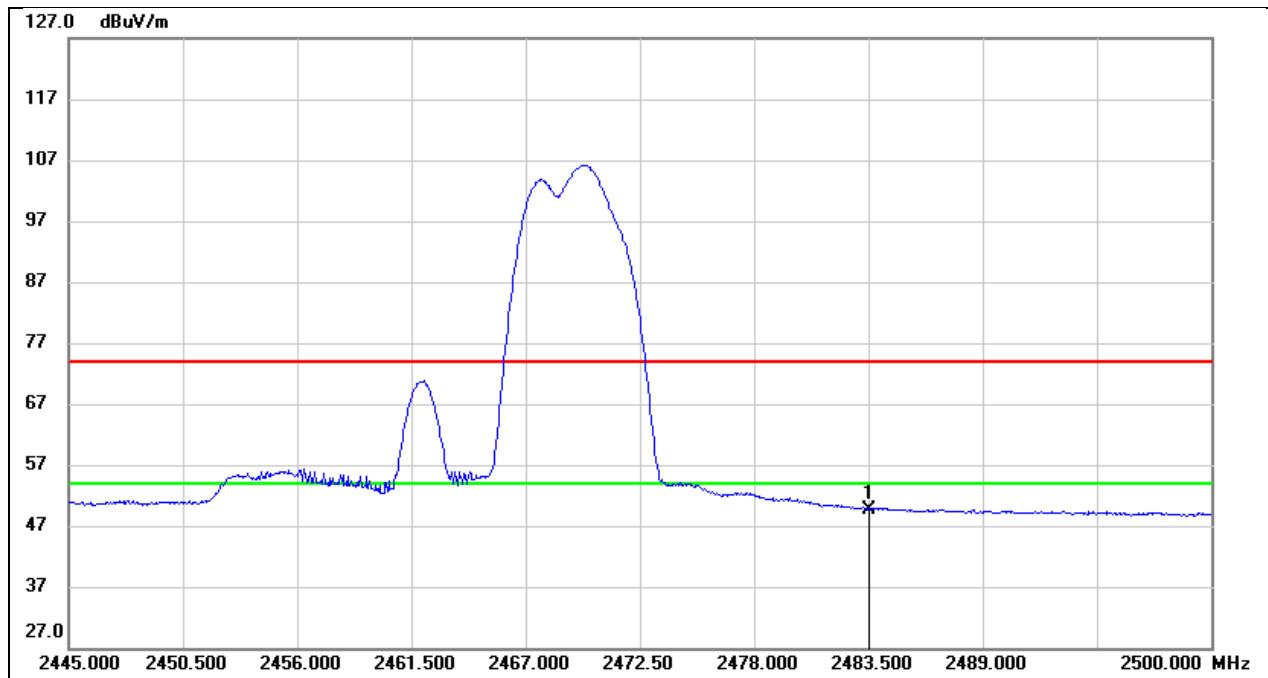


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.72	32.00	49.72	54.00	-4.28	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462 106 54
Polarity:	Horizontal	Test Voltage:	DC 5V

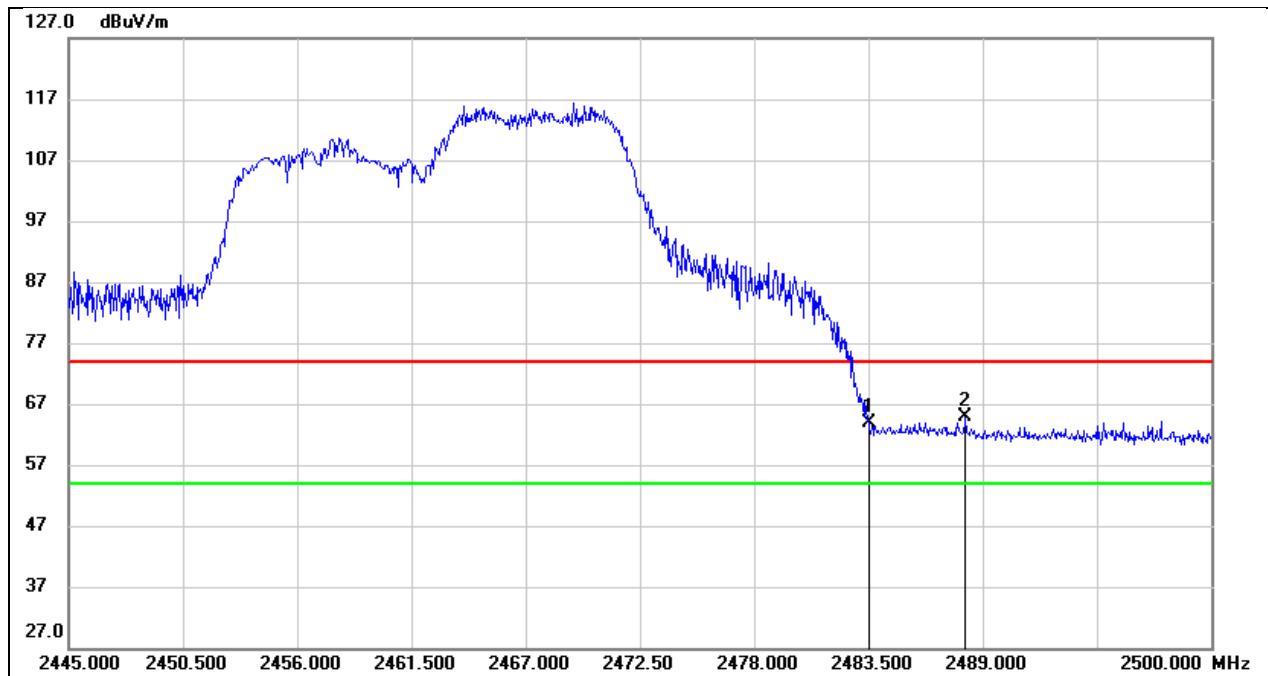

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.79	32.00	63.79	74.00	-10.21	peak
2	2488.175	32.96	32.01	64.97	74.00	-9.03	peak


Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462 106 54
Polarity:	Horizontal	Test Voltage:	DC 5V

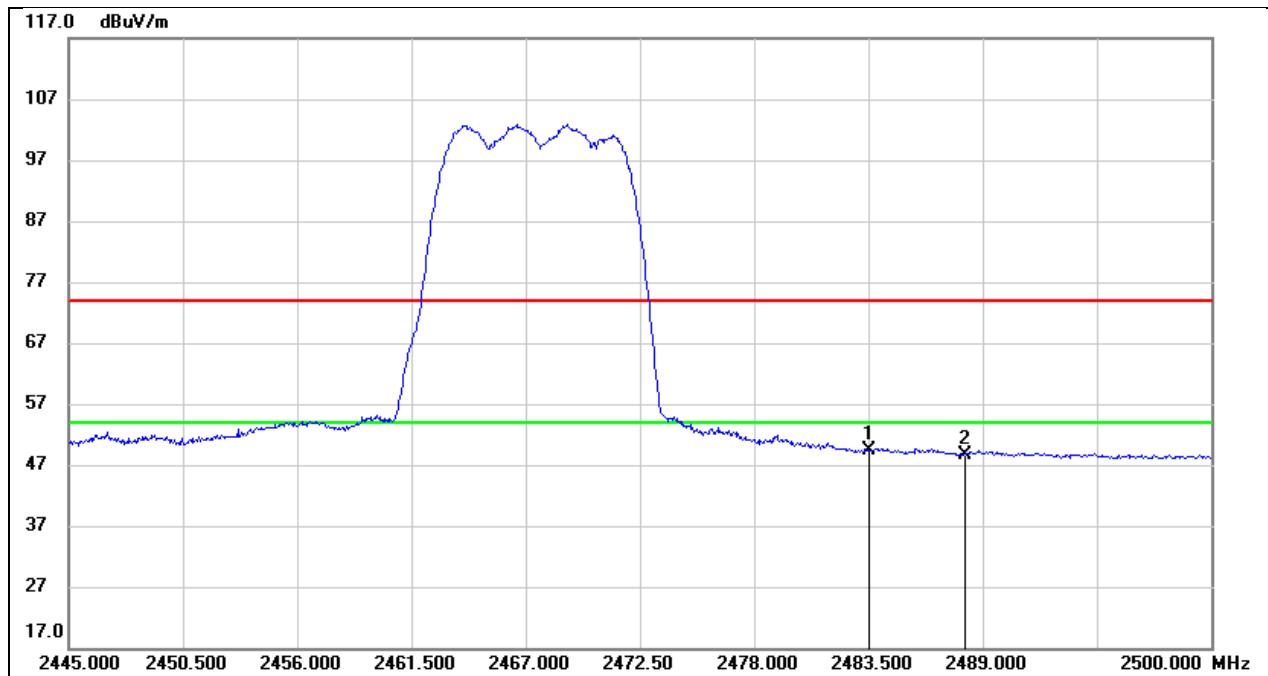

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.34	32.00	49.34	54.00	-4.66	AVG
2	2488.175	16.74	32.01	48.75	54.00	-5.25	AVG


8.1. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5 V

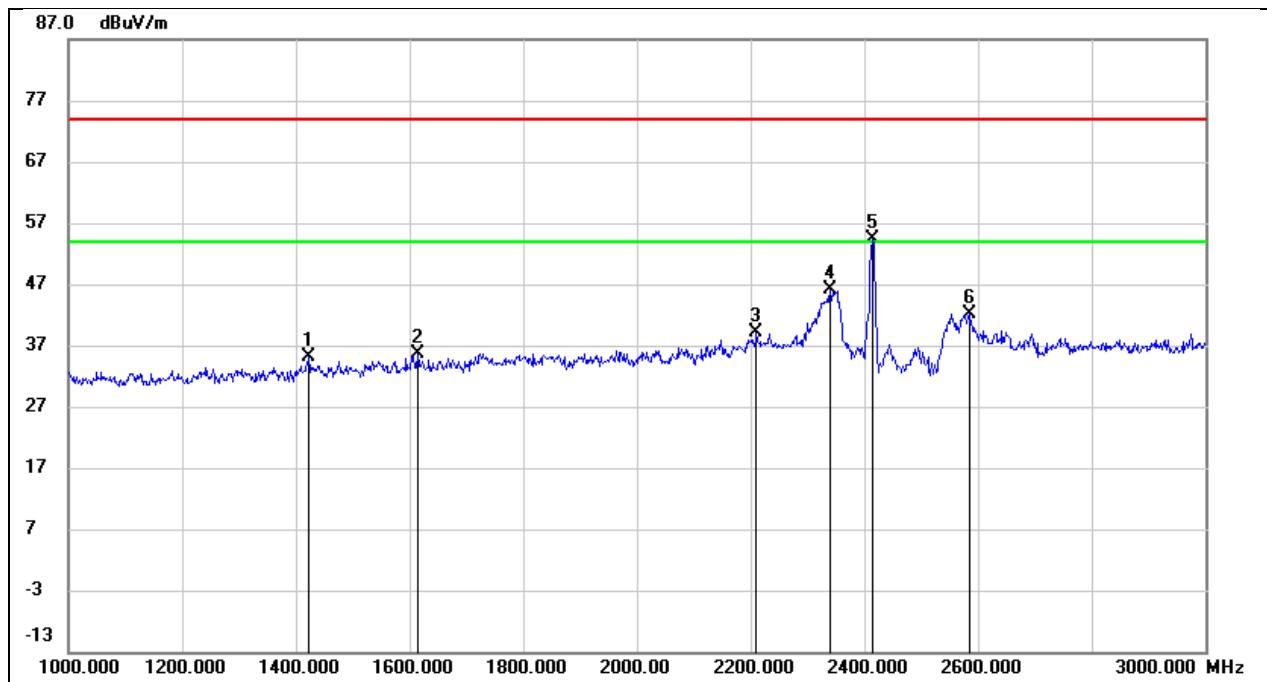


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1422.000	47.34	-12.21	35.13	74.00	-38.87	peak
2	1614.000	46.83	-11.20	35.63	74.00	-38.37	peak
3	2210.000	48.33	-9.28	39.05	74.00	-34.95	peak
4	2340.000	54.99	-8.78	46.21	74.00	-27.79	peak
5	2412.000	62.85	-8.49	54.36	/	/	fundamental
6	2584.000	49.94	-7.77	42.17	74.00	-31.83	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5 V

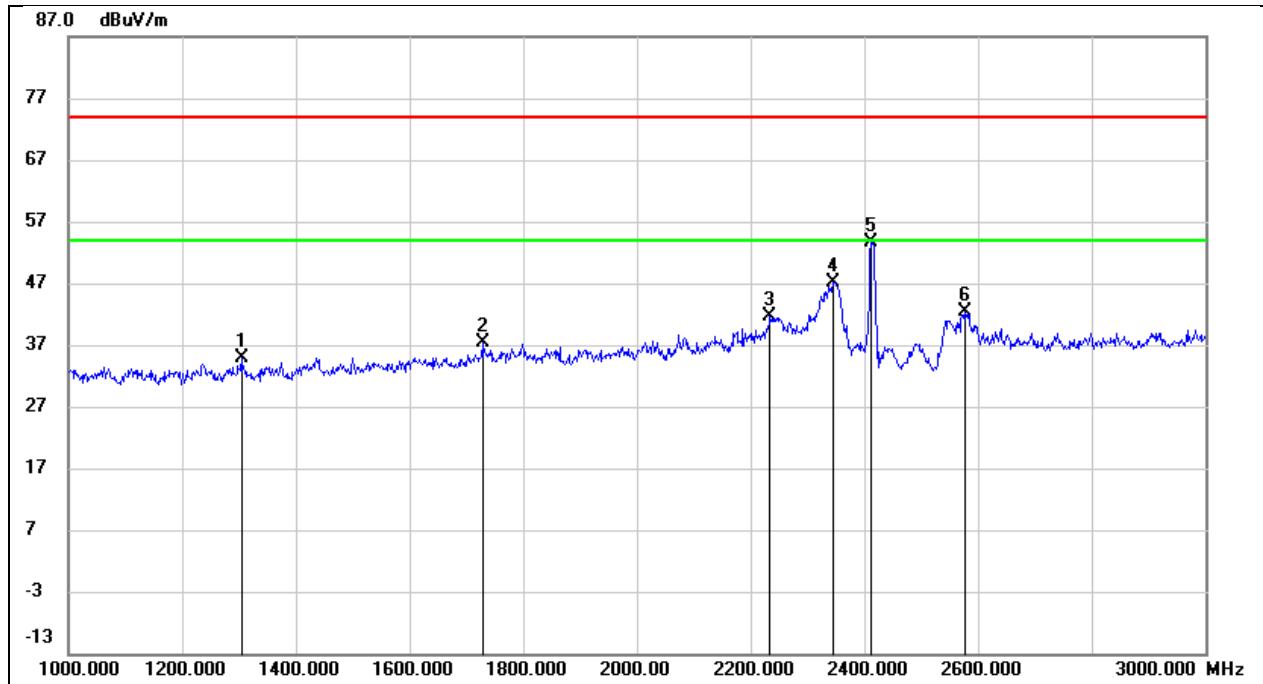


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1304.000	47.42	-12.47	34.95	74.00	-39.05	peak
2	1728.000	47.32	-9.95	37.37	74.00	-36.63	peak
3	2234.000	49.88	-8.34	41.54	74.00	-32.46	peak
4	2344.000	55.11	-7.93	47.18	74.00	-26.82	peak
5	2412.000	61.44	-7.69	53.75	/	/	fundamental
6	2576.000	49.28	-6.94	42.34	74.00	-31.66	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5 V

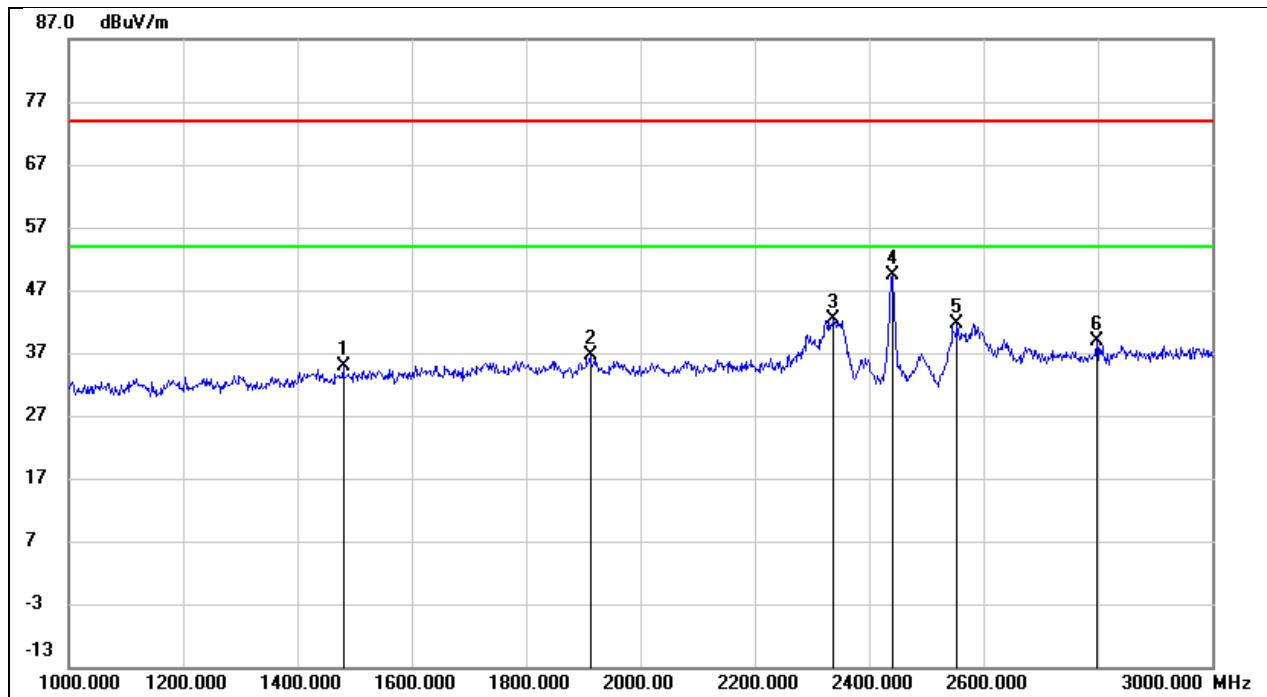


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1480.000	46.84	-11.89	34.95	74.00	-39.05	peak
2	1912.000	46.66	-10.02	36.64	74.00	-37.36	peak
3	2338.000	51.17	-8.78	42.39	74.00	-31.61	peak
4	2437.000	57.83	-8.39	49.44	/	/	fundamental
5	2554.000	49.47	-7.91	41.56	74.00	-32.44	peak
6	2798.000	45.69	-6.85	38.84	74.00	-35.16	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5 V

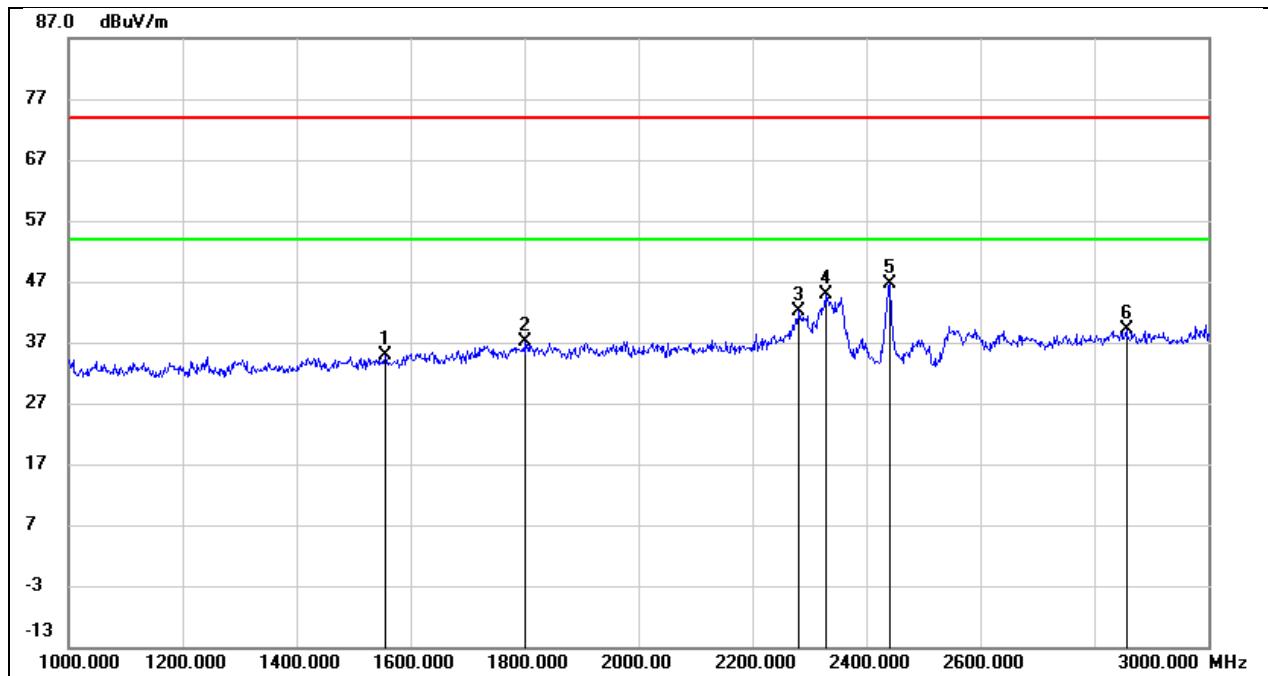


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1556.000	46.11	-11.32	34.79	74.00	-39.21	peak
2	1802.000	46.38	-9.34	37.04	74.00	-36.96	peak
3	2282.000	50.40	-8.16	42.24	74.00	-31.76	peak
4	2328.000	52.97	-7.99	44.98	74.00	-29.02	peak
5	2437.000	54.28	-7.58	46.70	/	/	fundamental
6	2856.000	44.65	-5.42	39.23	74.00	-34.77	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5 V

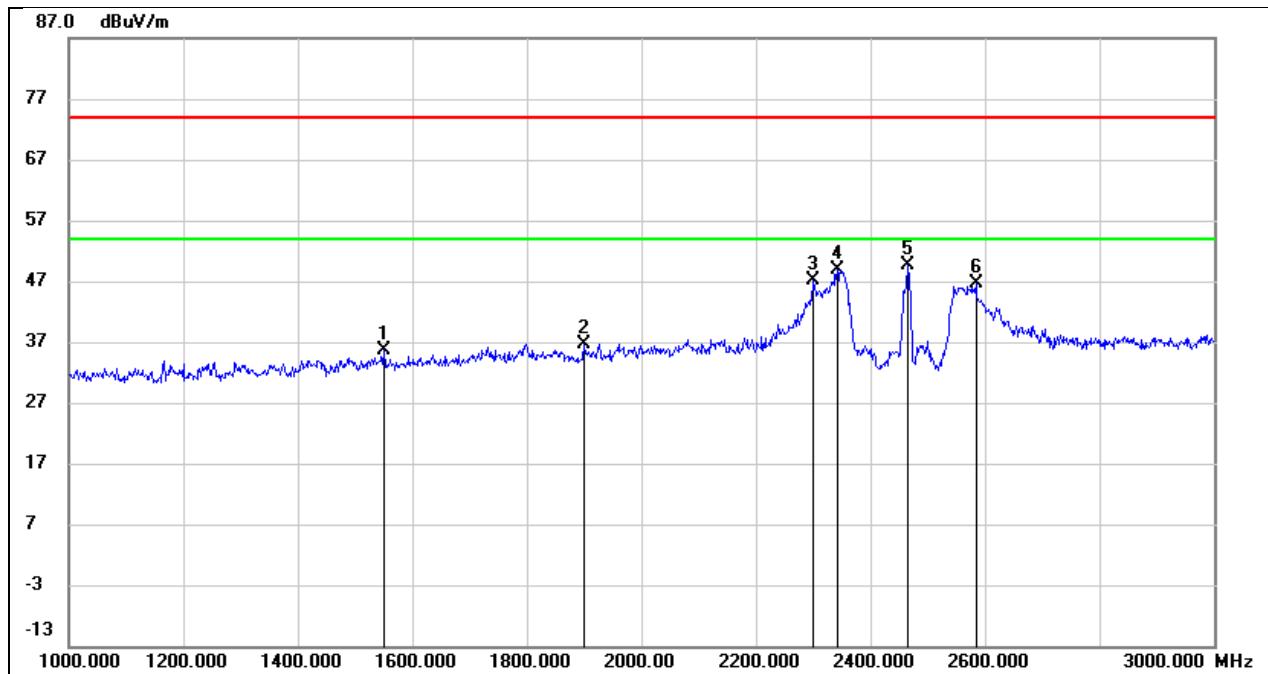

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1550.000	47.05	-11.54	35.51	74.00	-38.49	peak
2	1900.000	46.72	-10.01	36.71	74.00	-37.29	peak
3	2300.000	55.95	-8.94	47.01	74.00	-26.99	peak
4	2342.000	57.62	-8.78	48.84	74.00	-25.16	peak
5	2462.000	57.93	-8.30	49.63	/	/	fundamental
6	2584.000	54.40	-7.77	46.63	74.00	-27.37	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5 V

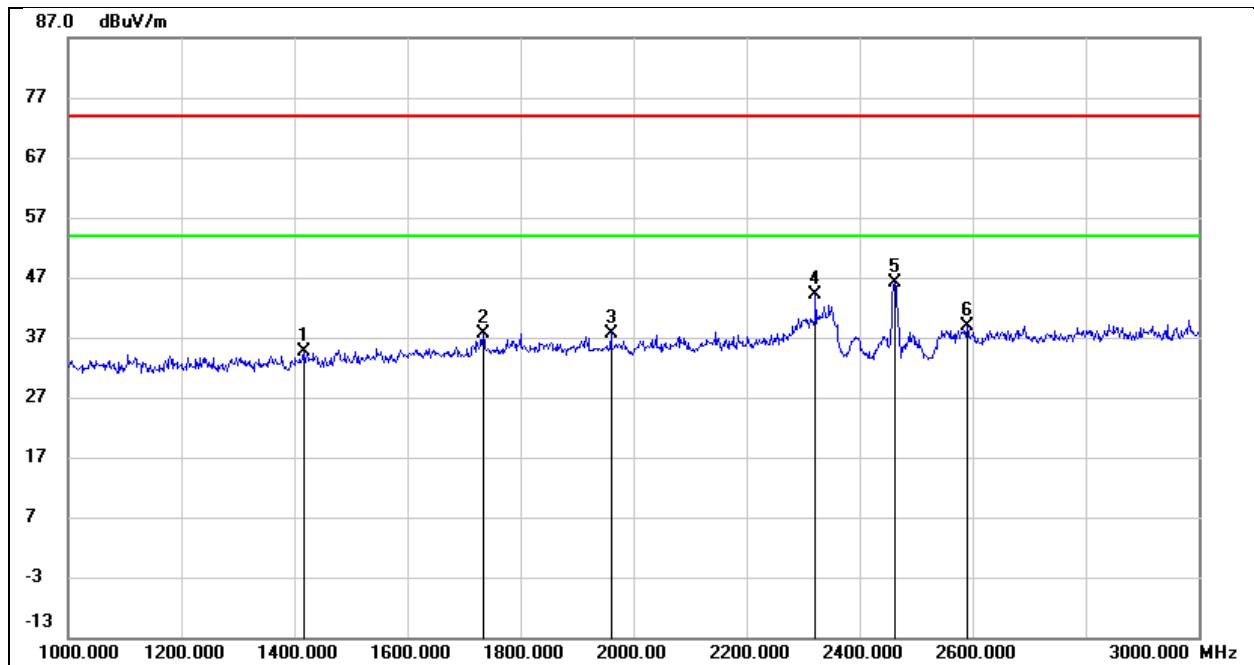

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1416.000	46.60	-12.05	34.55	74.00	-39.45	peak
2	1734.000	47.55	-9.90	37.65	74.00	-36.35	peak
3	1960.000	46.98	-9.23	37.75	74.00	-36.25	peak
4	2322.000	52.22	-8.01	44.21	74.00	-29.79	peak
5	2462.000	53.63	-7.50	46.13	/	/	fundamental
6	2590.000	45.77	-6.86	38.91	74.00	-35.09	peak


8.2. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

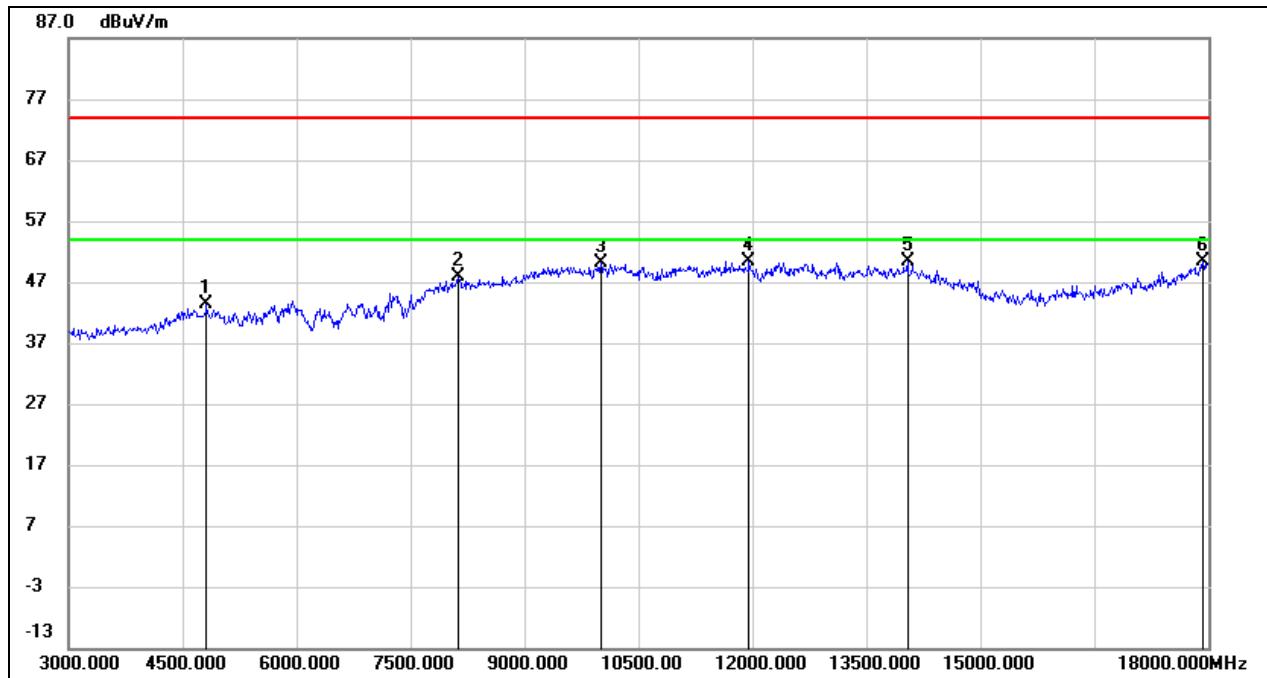


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	42.87	0.63	43.50	74.00	-30.50	peak
2	8130.000	39.62	8.35	47.97	74.00	-26.03	peak
3	10005.000	36.92	13.33	50.25	74.00	-23.75	peak
4	11955.000	31.48	18.85	50.33	74.00	-23.67	peak
5	14040.000	26.87	23.50	50.37	74.00	-23.63	peak
6	17925.000	21.77	28.67	50.44	74.00	-23.56	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

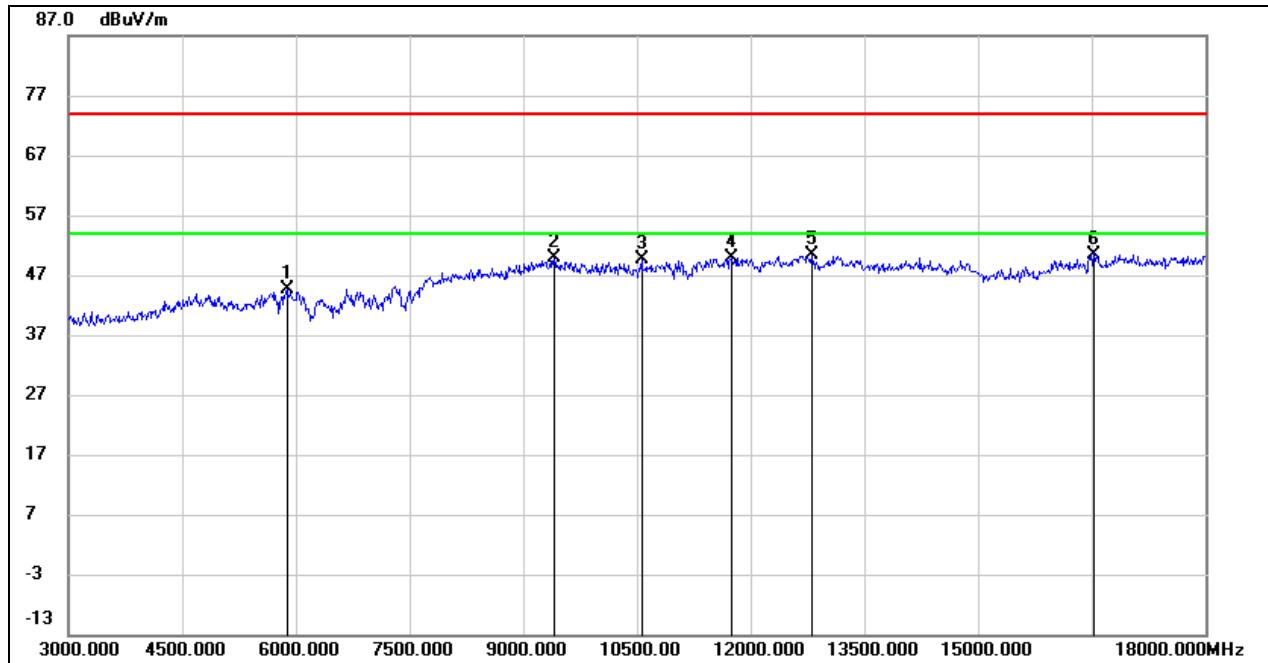


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	40.63	4.06	44.69	74.00	-29.31	peak
2	9405.000	37.83	11.98	49.81	74.00	-24.19	peak
3	10560.000	35.97	13.59	49.56	74.00	-24.44	peak
4	11745.000	32.78	17.22	50.00	74.00	-24.00	peak
5	12810.000	31.88	18.41	50.29	74.00	-23.71	peak
6	16530.000	26.46	24.04	50.50	74.00	-23.50	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

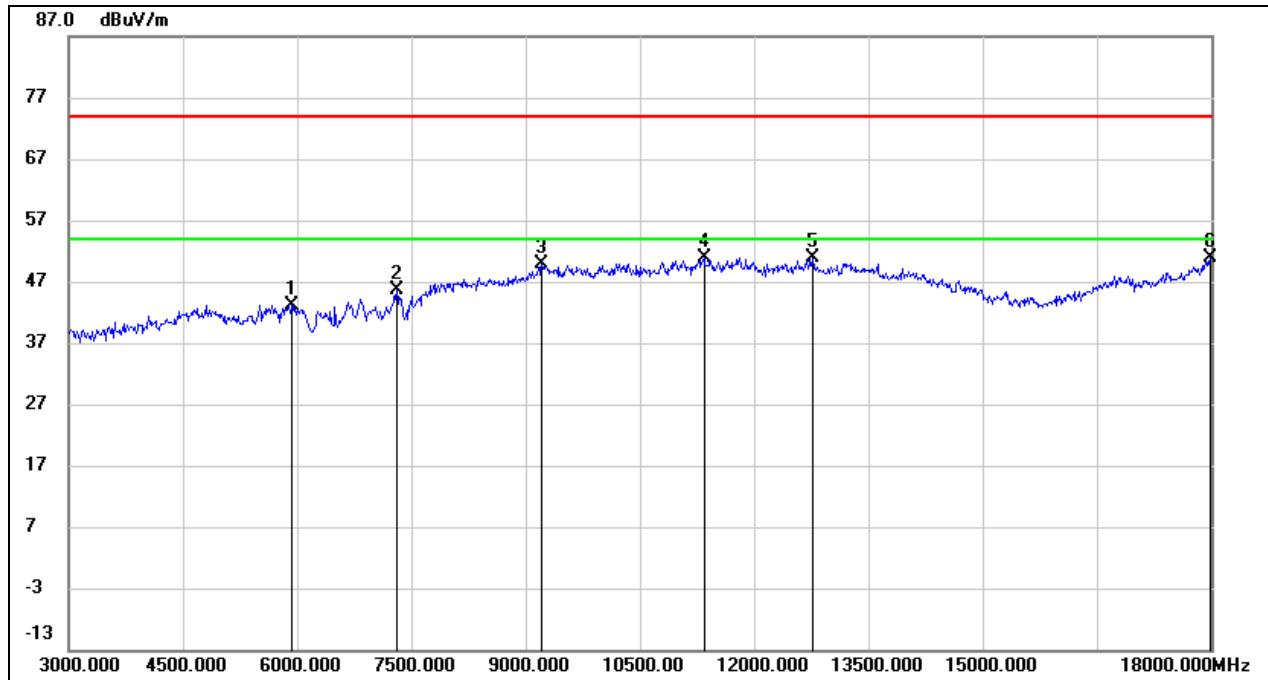


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	40.04	3.09	43.13	74.00	-30.87	peak
2	7305.000	38.53	7.10	45.63	74.00	-28.37	peak
3	9210.000	38.88	11.05	49.93	74.00	-24.07	peak
4	11340.000	33.46	17.46	50.92	74.00	-23.08	peak
5	12765.000	31.52	19.37	50.89	74.00	-23.11	peak
6	17985.000	21.65	29.29	50.94	74.00	-23.06	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

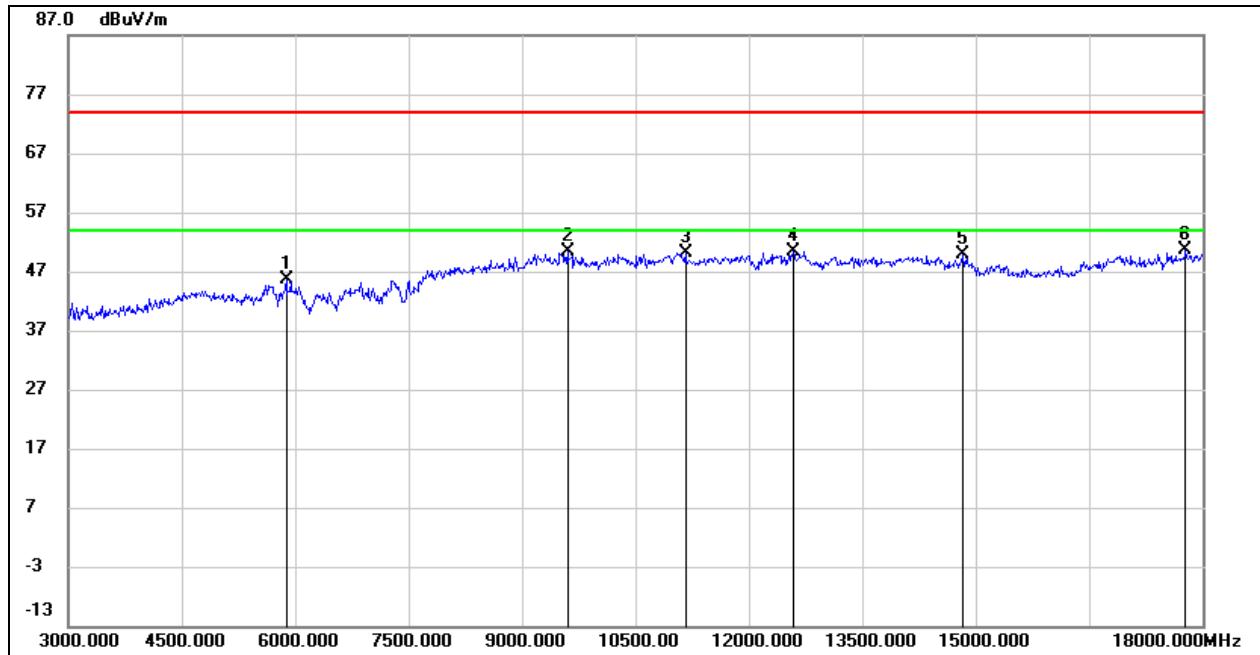


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	41.52	4.06	45.58	74.00	-28.42	peak
2	9600.000	37.74	12.65	50.39	74.00	-23.61	peak
3	11160.000	34.32	15.83	50.15	74.00	-23.85	peak
4	12585.000	32.38	18.03	50.41	74.00	-23.59	peak
5	14835.000	29.20	20.61	49.81	74.00	-24.19	peak
6	17775.000	24.58	26.01	50.59	74.00	-23.41	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

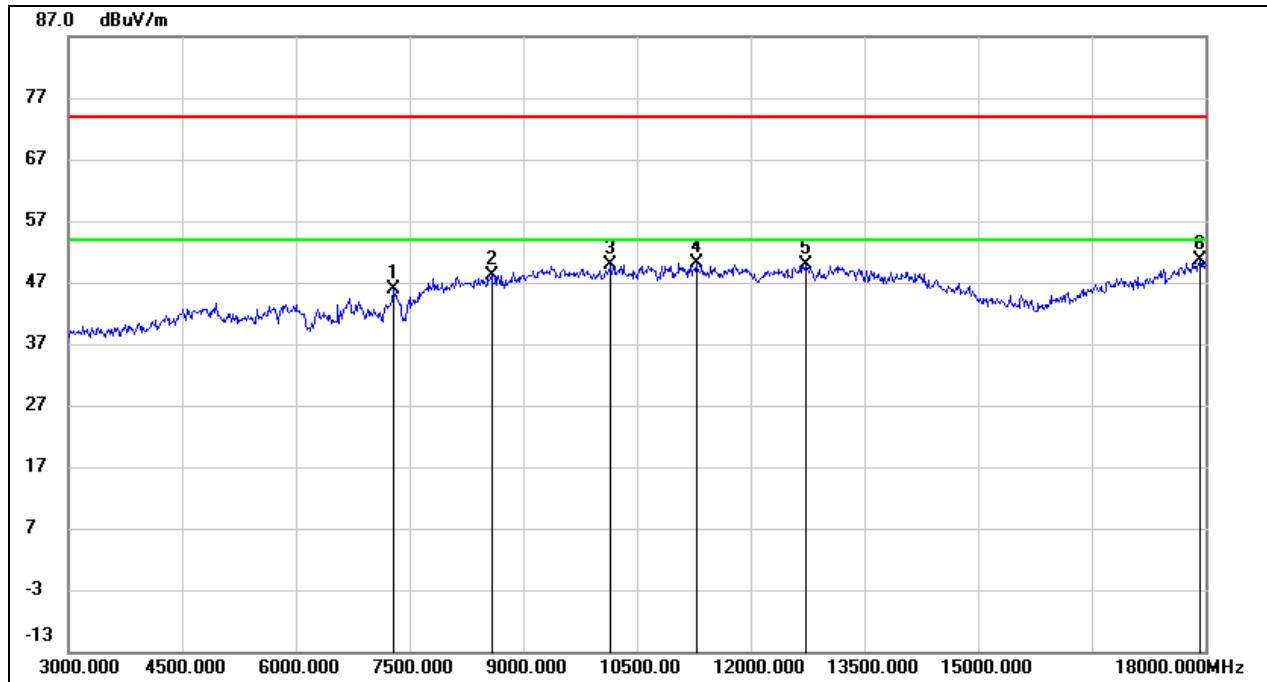


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7290.000	38.76	7.09	45.85	74.00	-28.15	peak
2	8580.000	38.91	9.20	48.11	74.00	-25.89	peak
3	10155.000	36.63	13.27	49.90	74.00	-24.10	peak
4	11280.000	32.89	17.31	50.20	74.00	-23.80	peak
5	12720.000	30.69	19.28	49.97	74.00	-24.03	peak
6	17925.000	21.86	28.67	50.53	74.00	-23.47	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5V

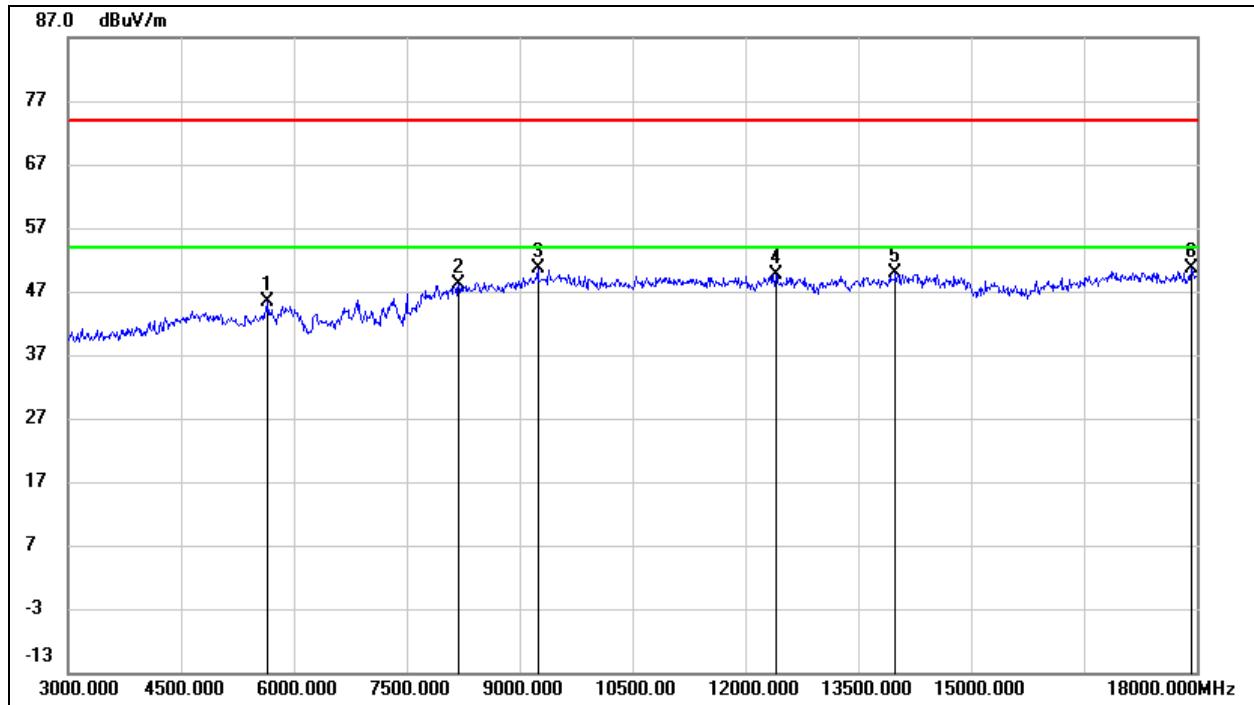


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	41.73	3.72	45.45	74.00	-28.55	peak
2	8190.000	39.02	9.03	48.05	74.00	-25.95	peak
3	9240.000	39.22	11.39	50.61	74.00	-23.39	peak
4	12405.000	31.63	18.11	49.74	74.00	-24.26	peak
5	13995.000	27.90	21.98	49.88	74.00	-24.12	peak
6	17925.000	23.73	26.80	50.53	74.00	-23.47	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

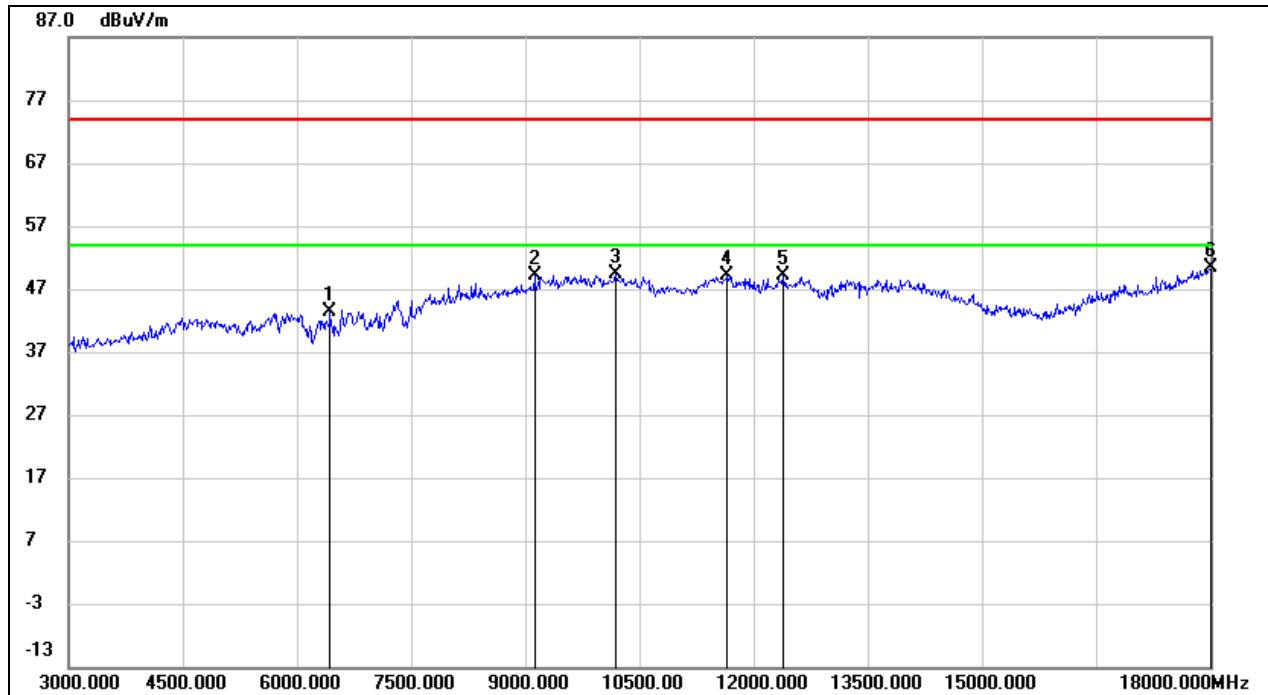


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6435.000	38.68	4.61	43.29	74.00	-30.71	peak
2	9120.000	38.58	10.63	49.21	74.00	-24.79	peak
3	10185.000	36.12	13.25	49.37	74.00	-24.63	peak
4	11655.000	30.80	18.34	49.14	74.00	-24.86	peak
5	12390.000	30.07	19.04	49.11	74.00	-24.89	peak
6	18000.000	20.99	29.44	50.43	74.00	-23.57	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

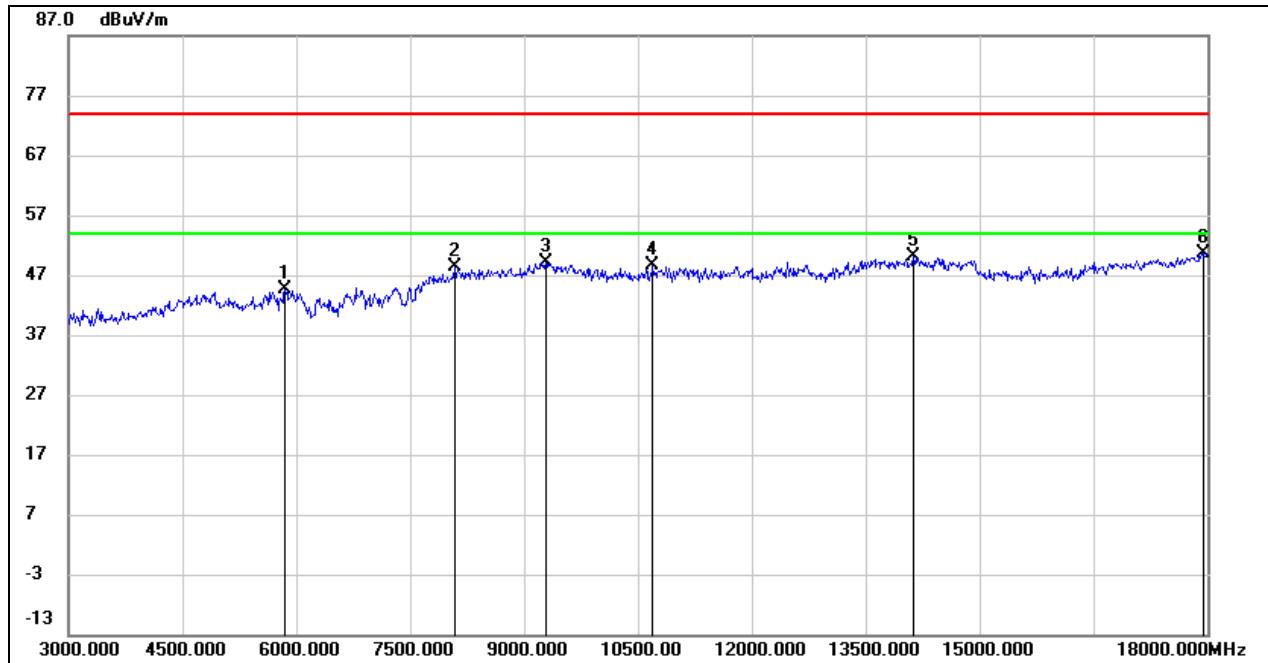


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	40.56	4.02	44.58	74.00	-29.42	peak
2	8085.000	39.53	8.76	48.29	74.00	-25.71	peak
3	9285.000	37.52	11.55	49.07	74.00	-24.93	peak
4	10695.000	34.71	13.95	48.66	74.00	-25.34	peak
5	14130.000	27.97	22.04	50.01	74.00	-23.99	peak
6	17955.000	23.59	26.98	50.57	74.00	-23.43	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

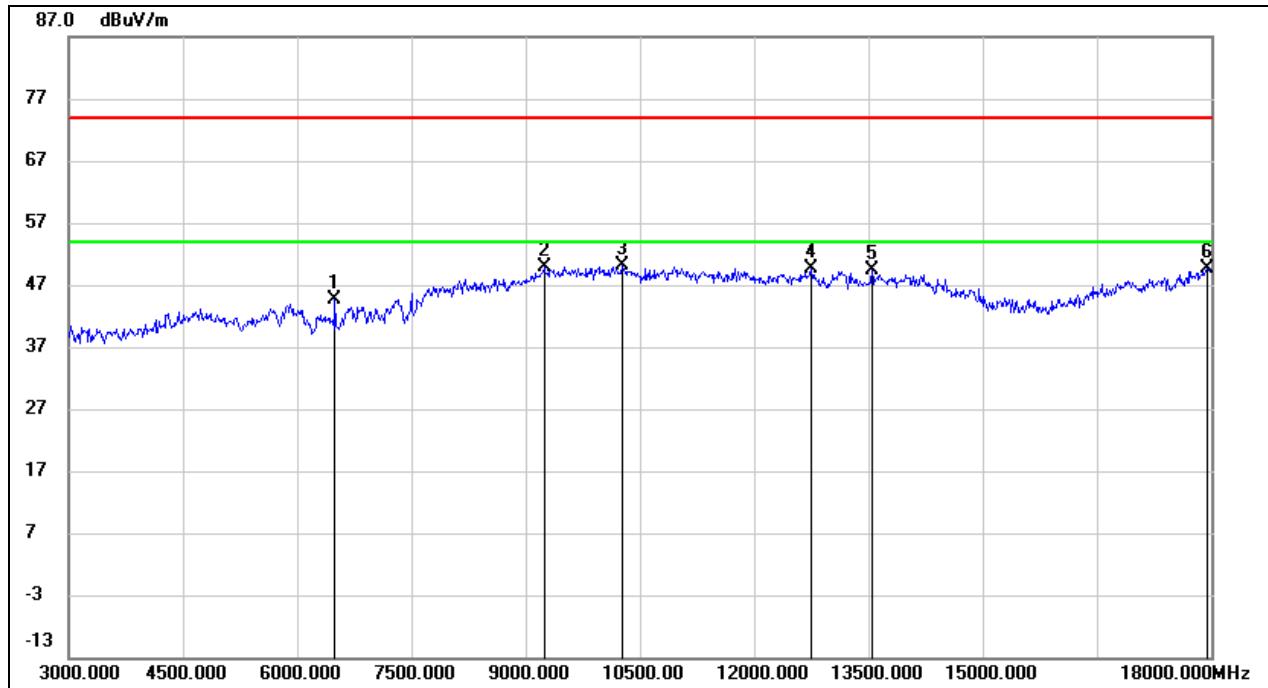


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6495.000	39.90	4.83	44.73	74.00	-29.27	peak
2	9240.000	38.64	11.18	49.82	74.00	-24.18	peak
3	10260.000	36.83	13.31	50.14	74.00	-23.86	peak
4	12750.000	30.24	19.35	49.59	74.00	-24.41	peak
5	13545.000	27.08	22.37	49.45	74.00	-24.55	peak
6	17940.000	20.83	28.83	49.66	74.00	-24.34	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

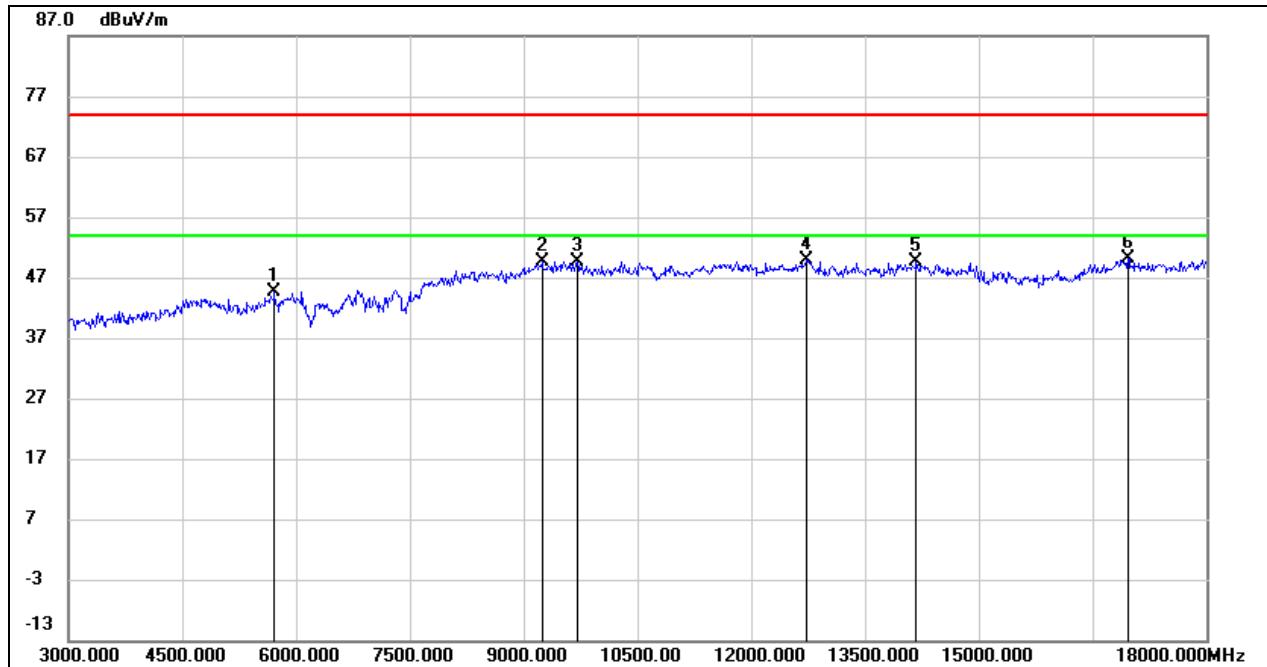


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	40.94	3.80	44.74	74.00	-29.26	peak
2	9240.000	38.16	11.39	49.55	74.00	-24.45	peak
3	9705.000	36.97	12.76	49.73	74.00	-24.27	peak
4	12720.000	31.68	18.25	49.93	74.00	-24.07	peak
5	14175.000	27.46	22.06	49.52	74.00	-24.48	peak
6	16965.000	25.22	24.95	50.17	74.00	-23.83	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

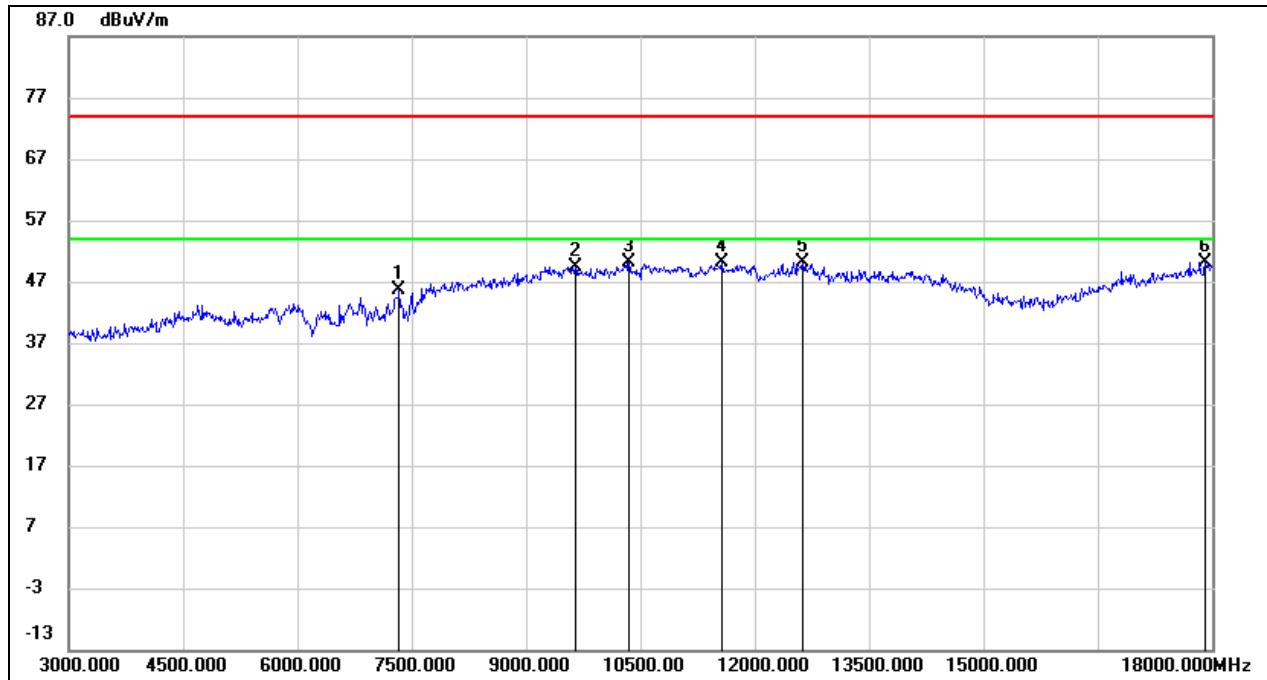


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7335.000	38.46	7.14	45.60	74.00	-28.40	peak
2	9645.000	36.57	12.90	49.47	74.00	-24.53	peak
3	10350.000	36.78	13.39	50.17	74.00	-23.83	peak
4	11565.000	31.91	18.16	50.07	74.00	-23.93	peak
5	12630.000	31.12	19.06	50.18	74.00	-23.82	peak
6	17910.000	21.66	28.53	50.19	74.00	-23.81	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5V

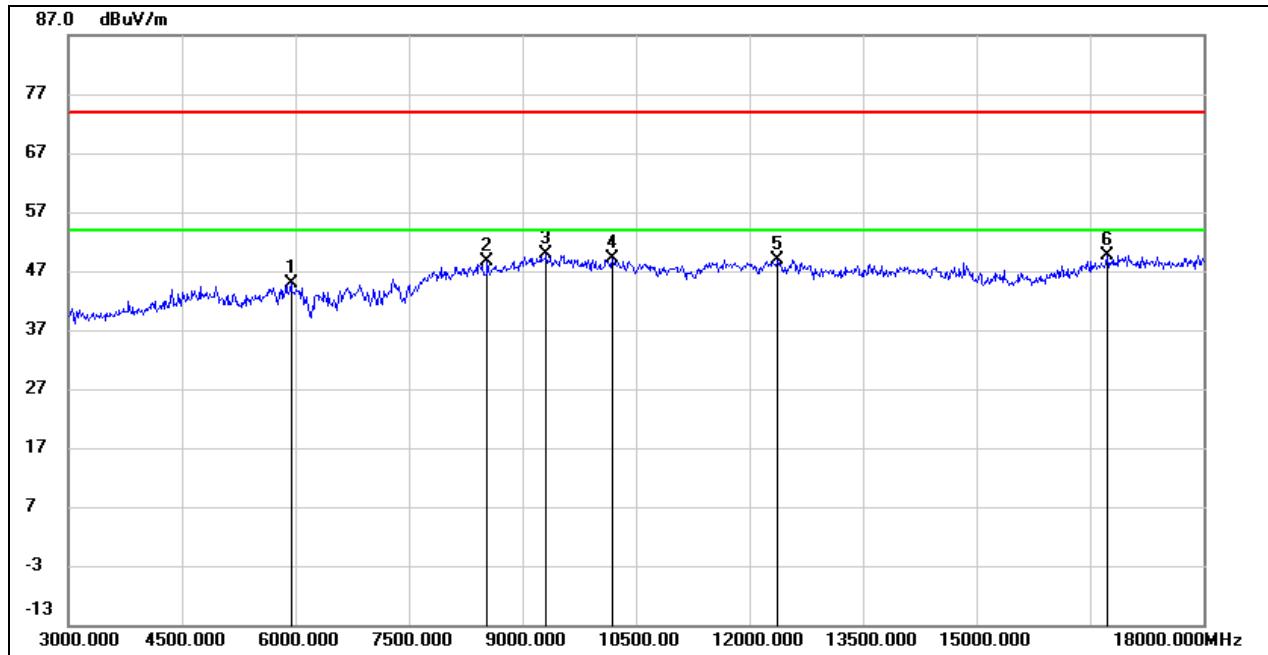


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	40.63	4.14	44.77	74.00	-29.23	peak
2	8535.000	39.07	9.66	48.73	74.00	-25.27	peak
3	9315.000	38.18	11.66	49.84	74.00	-24.16	peak
4	10185.000	36.42	12.74	49.16	74.00	-24.84	peak
5	12375.000	30.91	18.08	48.99	74.00	-25.01	peak
6	16725.000	25.05	24.57	49.62	74.00	-24.38	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

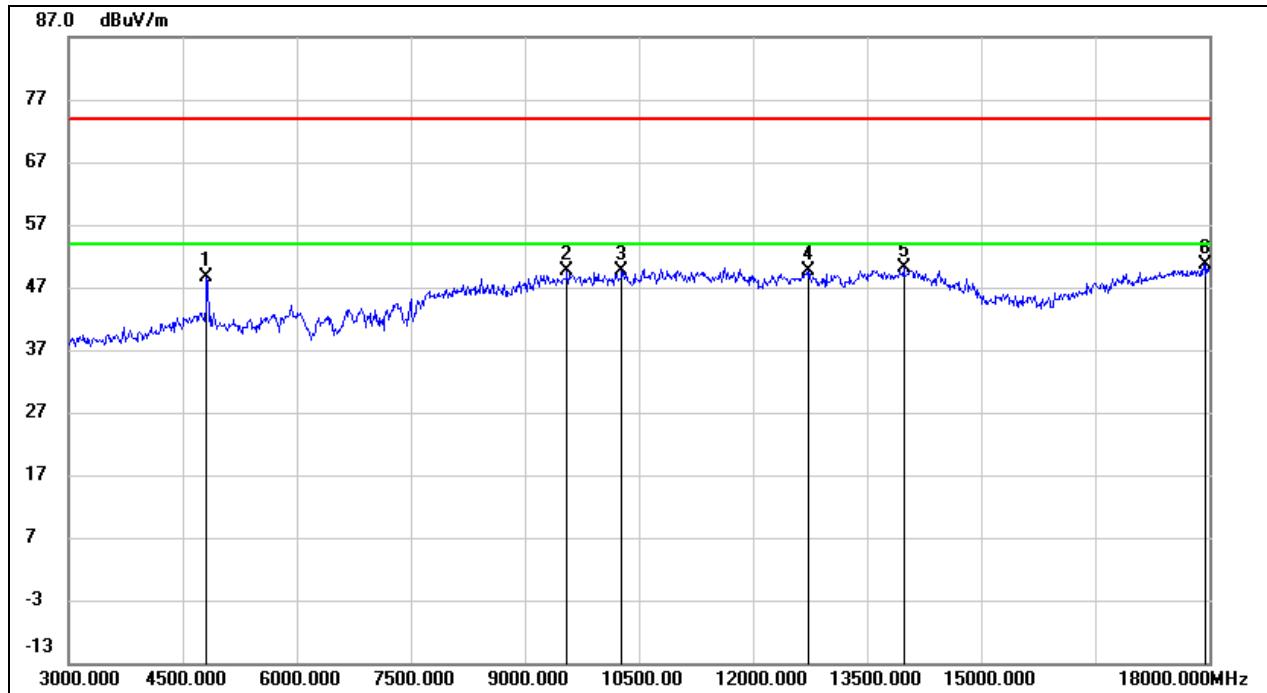


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	48.07	0.63	48.70	74.00	-25.30	peak
2	9555.000	37.00	12.61	49.61	74.00	-24.39	peak
3	10275.000	36.33	13.33	49.66	74.00	-24.34	peak
4	12735.000	30.30	19.31	49.61	74.00	-24.39	peak
5	13980.000	26.60	23.51	50.11	74.00	-23.89	peak
6	17955.000	21.66	28.98	50.64	74.00	-23.36	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

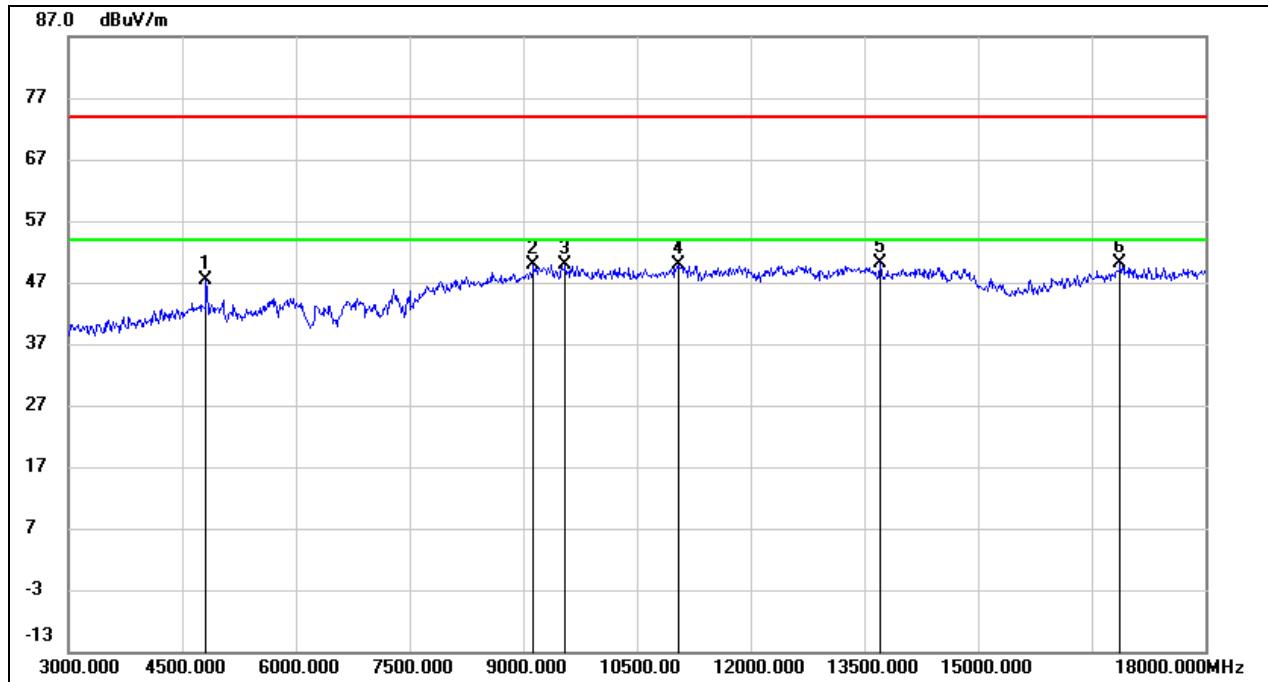


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	45.56	1.72	47.28	74.00	-26.72	peak
2	9135.000	38.76	11.00	49.76	74.00	-24.24	peak
3	9555.000	37.31	12.53	49.84	74.00	-24.16	peak
4	11040.000	34.54	15.24	49.78	74.00	-24.22	peak
5	13710.000	29.11	20.96	50.07	74.00	-23.93	peak
6	16875.000	25.23	24.85	50.08	74.00	-23.92	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

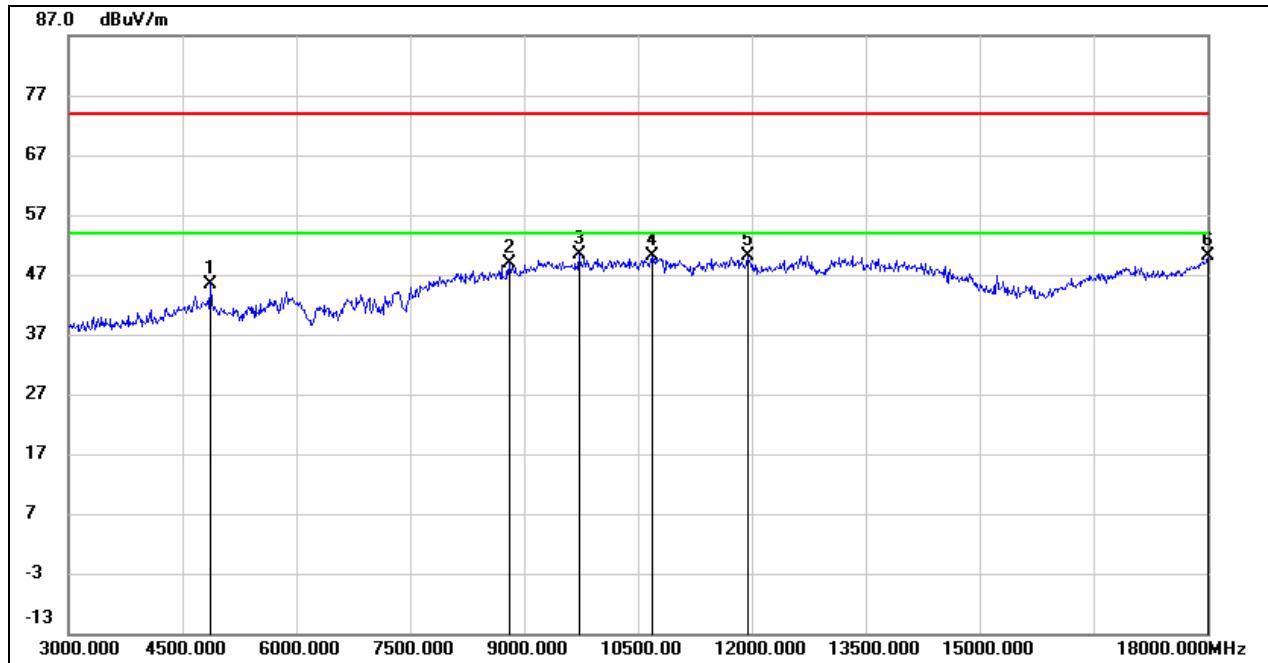


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.48	0.80	45.28	74.00	-28.72	peak
2	8805.000	39.37	9.50	48.87	74.00	-25.13	peak
3	9720.000	37.32	13.08	50.40	74.00	-23.60	peak
4	10695.000	35.70	14.38	50.08	74.00	-23.92	peak
5	11940.000	31.30	18.83	50.13	74.00	-23.87	peak
6	18000.000	20.68	29.44	50.12	74.00	-23.88	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

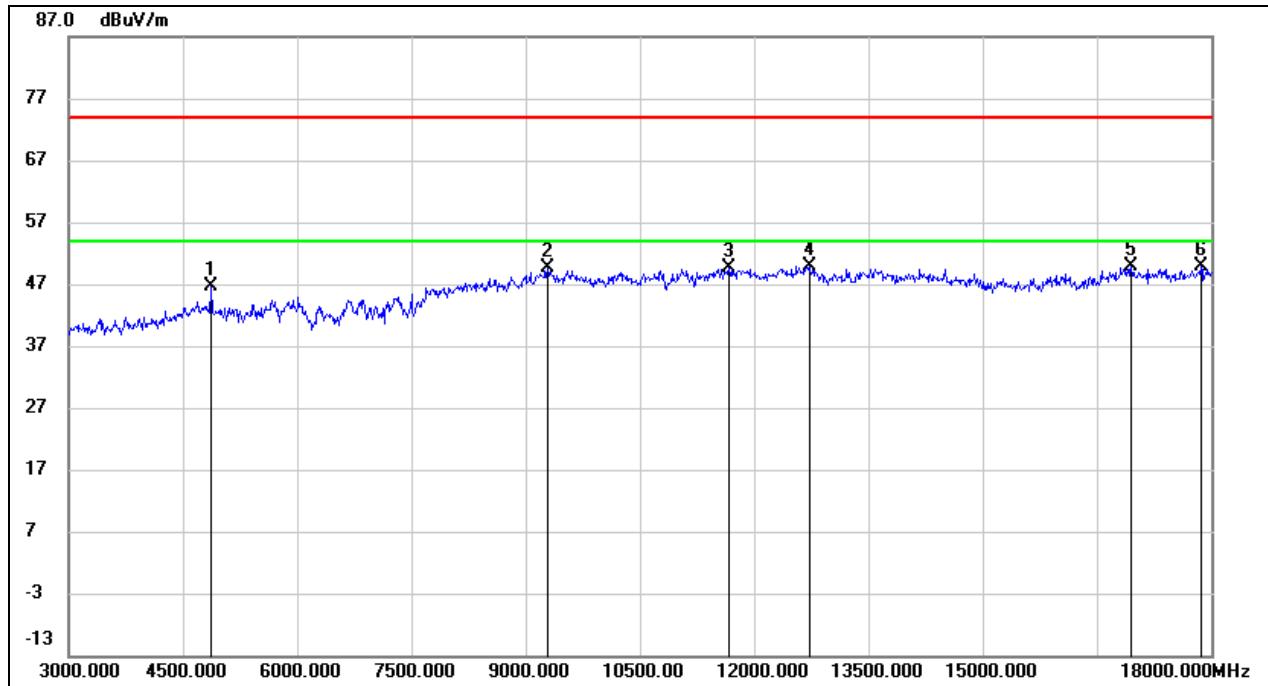


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.64	1.93	46.57	74.00	-27.43	peak
2	9285.000	38.07	11.55	49.62	74.00	-24.38	peak
3	11670.000	32.63	17.01	49.64	74.00	-24.36	peak
4	12720.000	31.68	18.25	49.93	74.00	-24.07	peak
5	16950.000	24.93	24.93	49.86	74.00	-24.14	peak
6	17865.000	23.48	26.46	49.94	74.00	-24.06	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

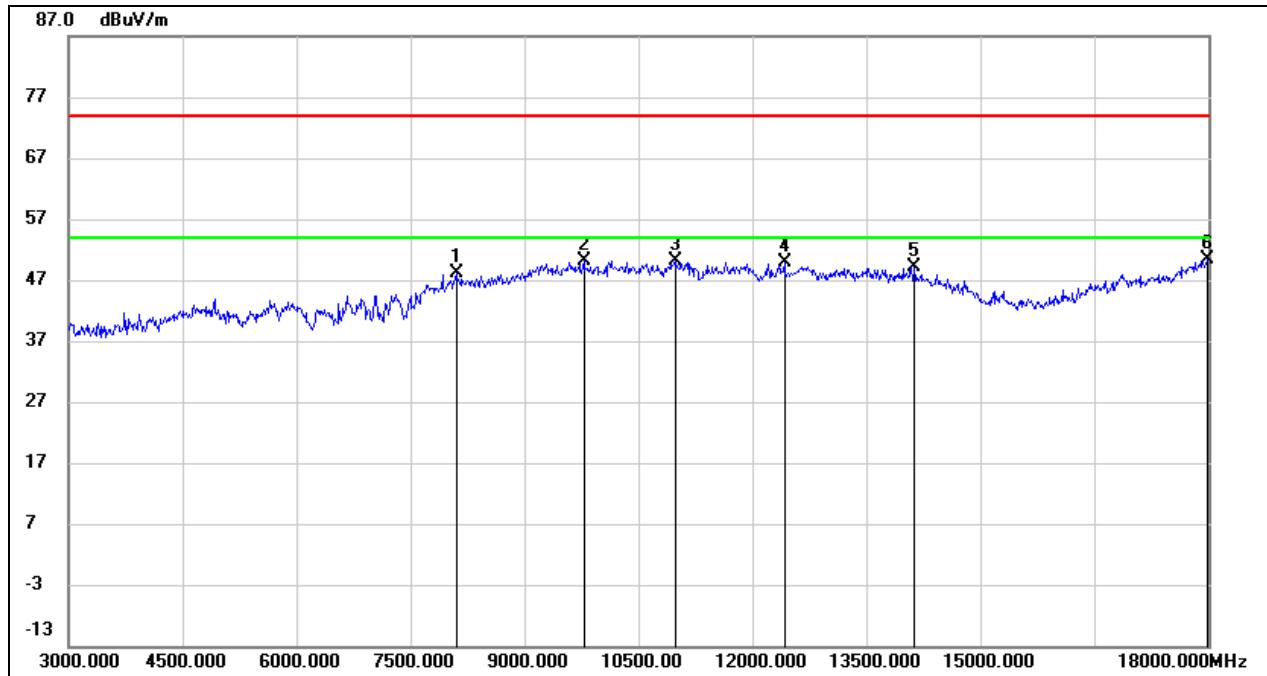


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.82	8.28	48.10	74.00	-25.90	peak
2	9780.000	36.80	13.22	50.02	74.00	-23.98	peak
3	10980.000	34.39	15.74	50.13	74.00	-23.87	peak
4	12420.000	30.87	19.03	49.90	74.00	-24.10	peak
5	14130.000	25.76	23.30	49.06	74.00	-24.94	peak
6	17985.000	21.03	29.29	50.32	74.00	-23.68	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5V

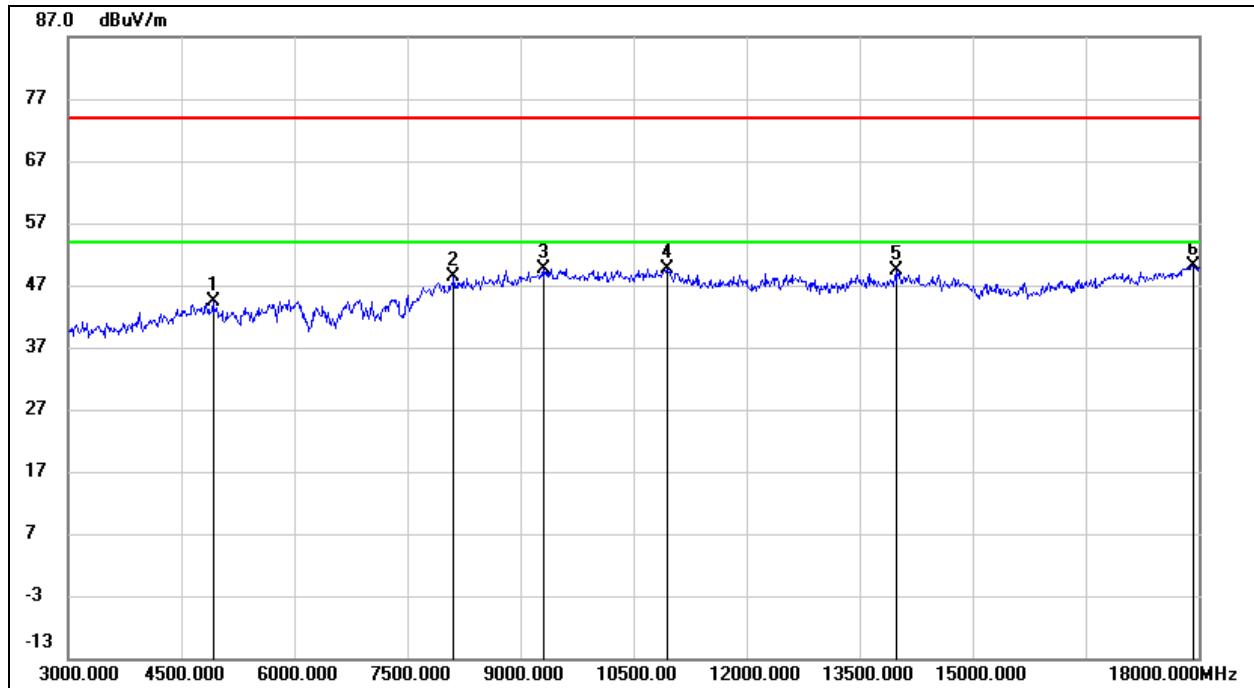


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.30	2.08	44.38	74.00	-29.62	peak
2	8115.000	39.48	8.85	48.33	74.00	-25.67	peak
3	9315.000	38.01	11.66	49.67	74.00	-24.33	peak
4	10950.000	34.78	14.84	49.62	74.00	-24.38	peak
5	13995.000	27.34	21.98	49.32	74.00	-24.68	peak
6	17925.000	23.40	26.80	50.20	74.00	-23.80	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

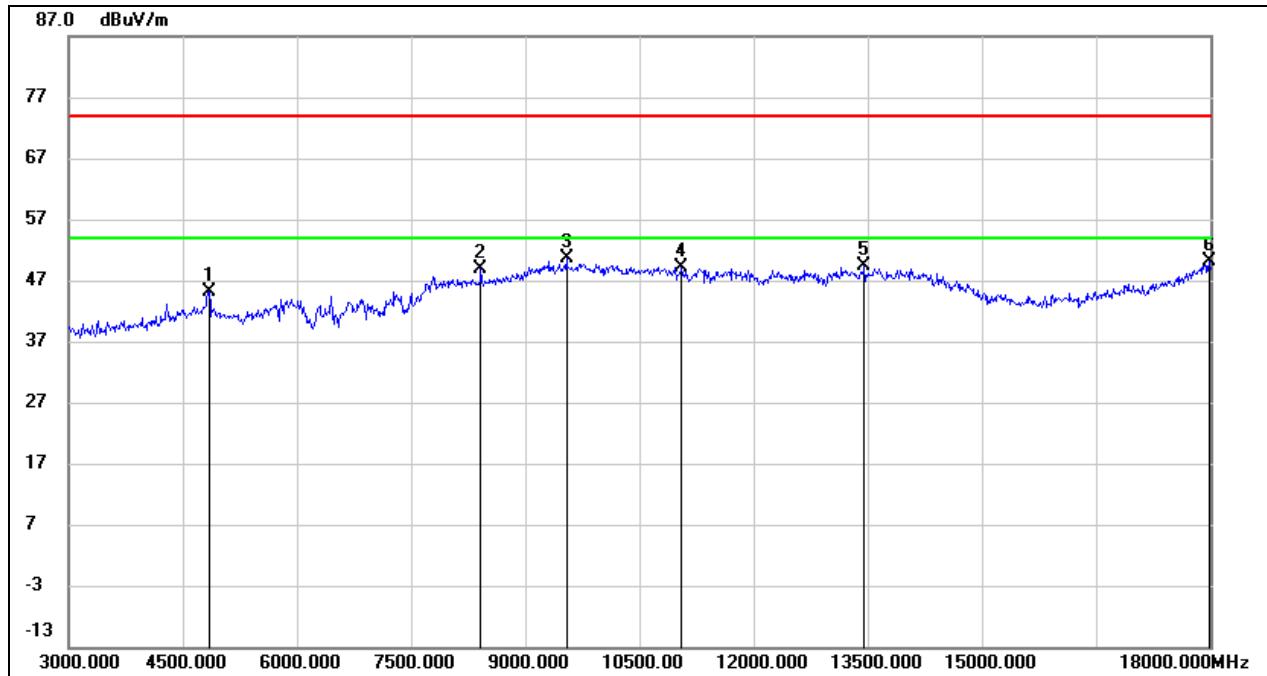


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	44.45	0.72	45.17	74.00	-28.83	peak
2	8415.000	40.08	8.87	48.95	74.00	-25.05	peak
3	9540.000	38.20	12.54	50.74	74.00	-23.26	peak
4	11055.000	32.97	16.19	49.16	74.00	-24.84	peak
5	13455.000	27.35	22.12	49.47	74.00	-24.53	peak
6	17985.000	20.78	29.29	50.07	74.00	-23.93	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 5V

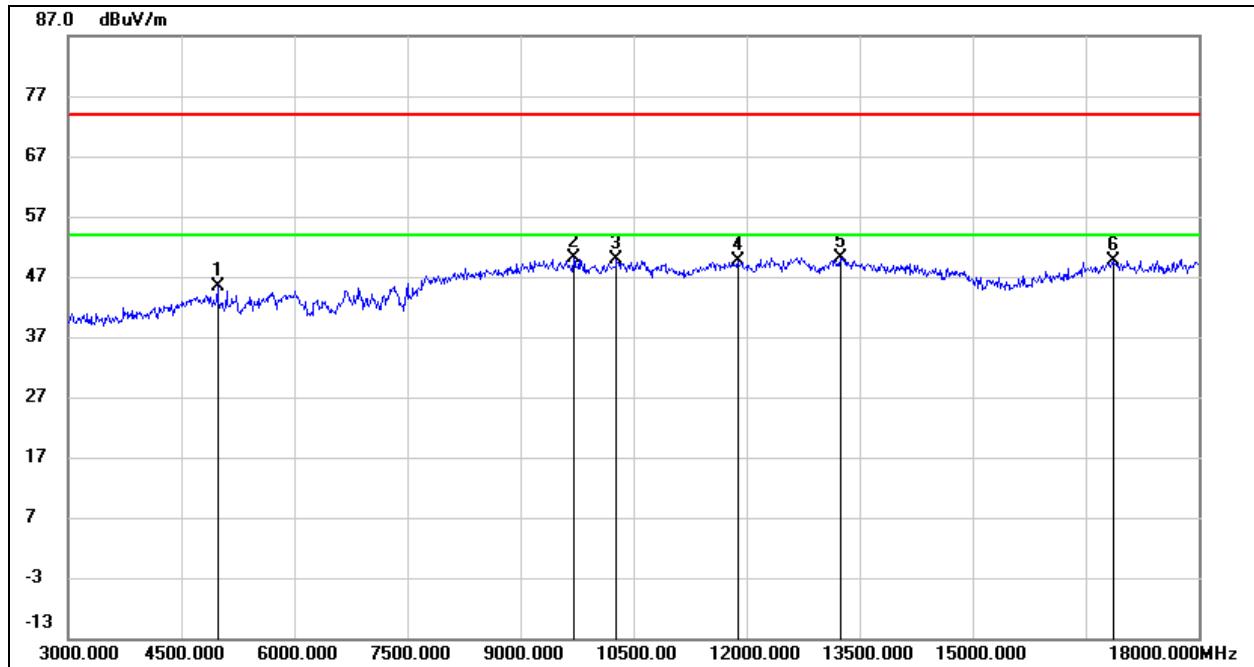


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4980.000	43.11	2.28	45.39	74.00	-28.61	peak
2	9705.000	37.27	12.76	50.03	74.00	-23.97	peak
3	10275.000	36.86	12.90	49.76	74.00	-24.24	peak
4	11880.000	32.18	17.55	49.73	74.00	-24.27	peak
5	13245.000	30.38	19.83	50.21	74.00	-23.79	peak
6	16875.000	24.86	24.85	49.71	74.00	-24.29	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

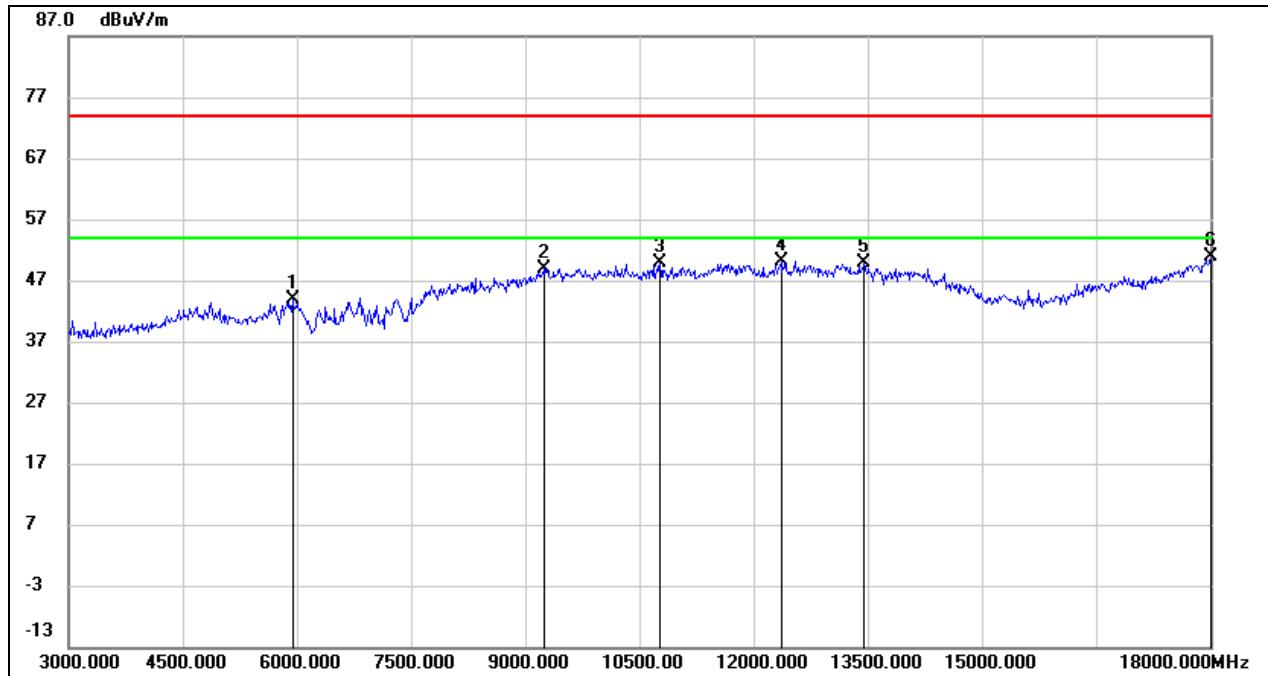


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	40.89	3.11	44.00	74.00	-30.00	peak
2	9240.000	37.76	11.18	48.94	74.00	-25.06	peak
3	10770.000	35.14	14.68	49.82	74.00	-24.18	peak
4	12360.000	31.02	19.01	50.03	74.00	-23.97	peak
5	13455.000	27.72	22.12	49.84	74.00	-24.16	peak
6	18000.000	21.35	29.44	50.79	74.00	-23.21	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

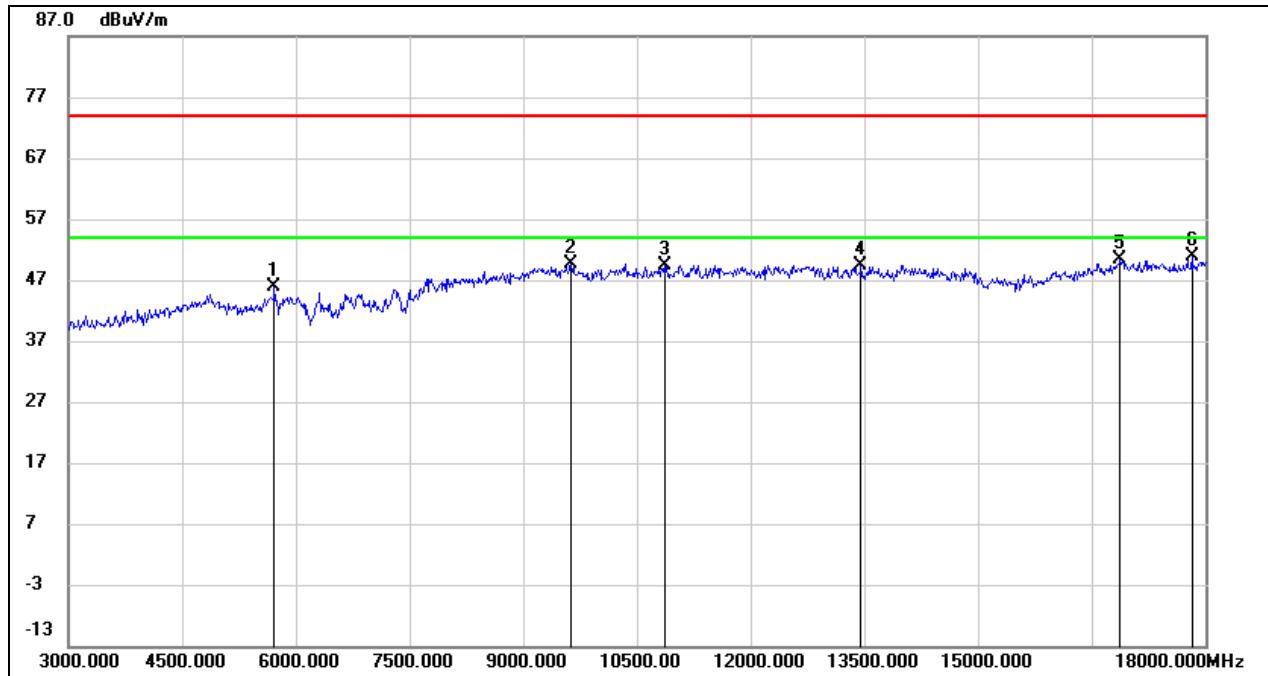


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	42.14	3.80	45.94	74.00	-28.06	peak
2	9630.000	36.98	12.68	49.66	74.00	-24.34	peak
3	10875.000	34.84	14.53	49.37	74.00	-24.63	peak
4	13455.000	28.95	20.47	49.42	74.00	-24.58	peak
5	16875.000	25.46	24.85	50.31	74.00	-23.69	peak
6	17820.000	24.71	26.19	50.90	74.00	-23.10	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 5V

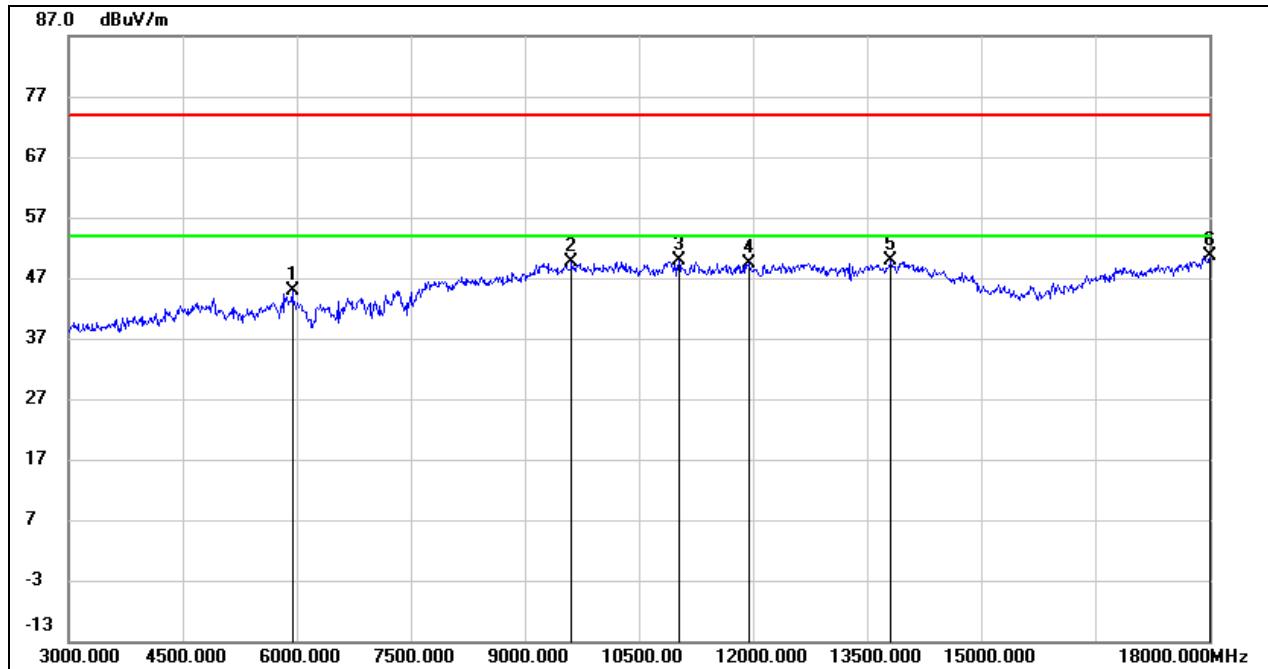


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	41.66	3.11	44.77	74.00	-29.23	peak
2	9615.000	36.70	12.83	49.53	74.00	-24.47	peak
3	11025.000	33.83	16.00	49.83	74.00	-24.17	peak
4	11940.000	30.61	18.83	49.44	74.00	-24.56	peak
5	13815.000	27.12	22.82	49.94	74.00	-24.06	peak
6	18000.000	21.16	29.44	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 5V

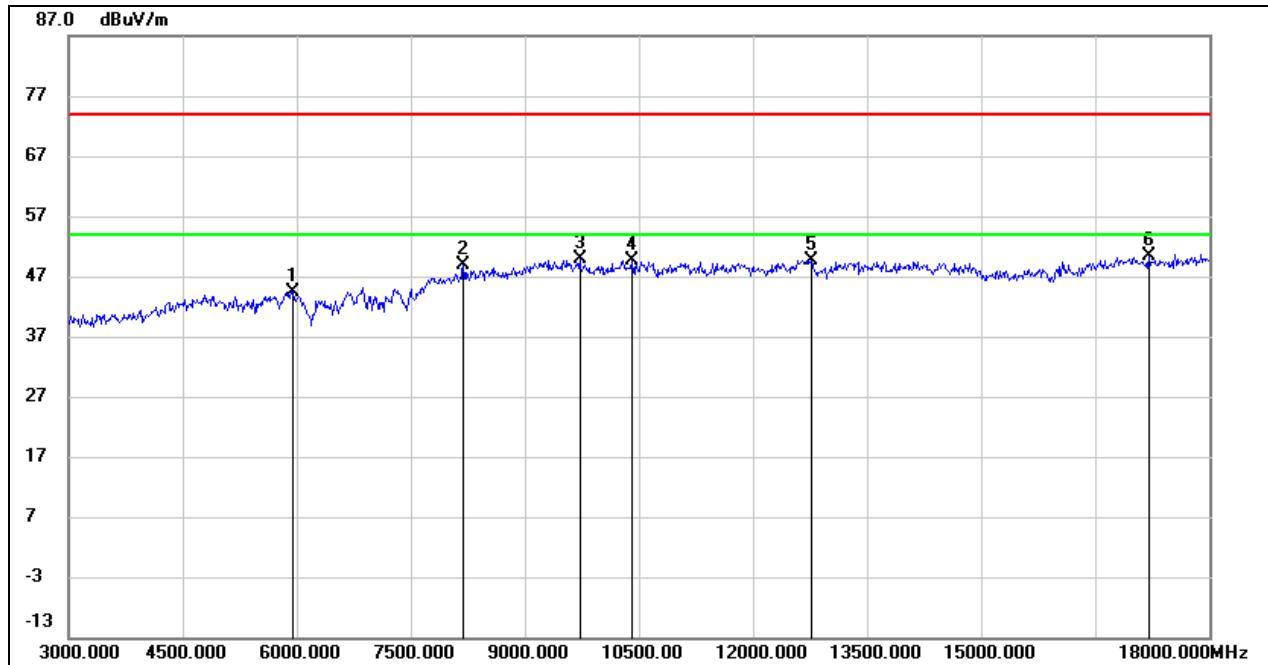


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5955.000	40.24	4.17	44.41	74.00	-29.59	peak
2	8190.000	39.83	9.03	48.86	74.00	-25.14	peak
3	9720.000	37.10	12.77	49.87	74.00	-24.13	peak
4	10410.000	36.51	13.17	49.68	74.00	-24.32	peak
5	12765.000	31.39	18.31	49.70	74.00	-24.30	peak
6	17205.000	25.25	25.12	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

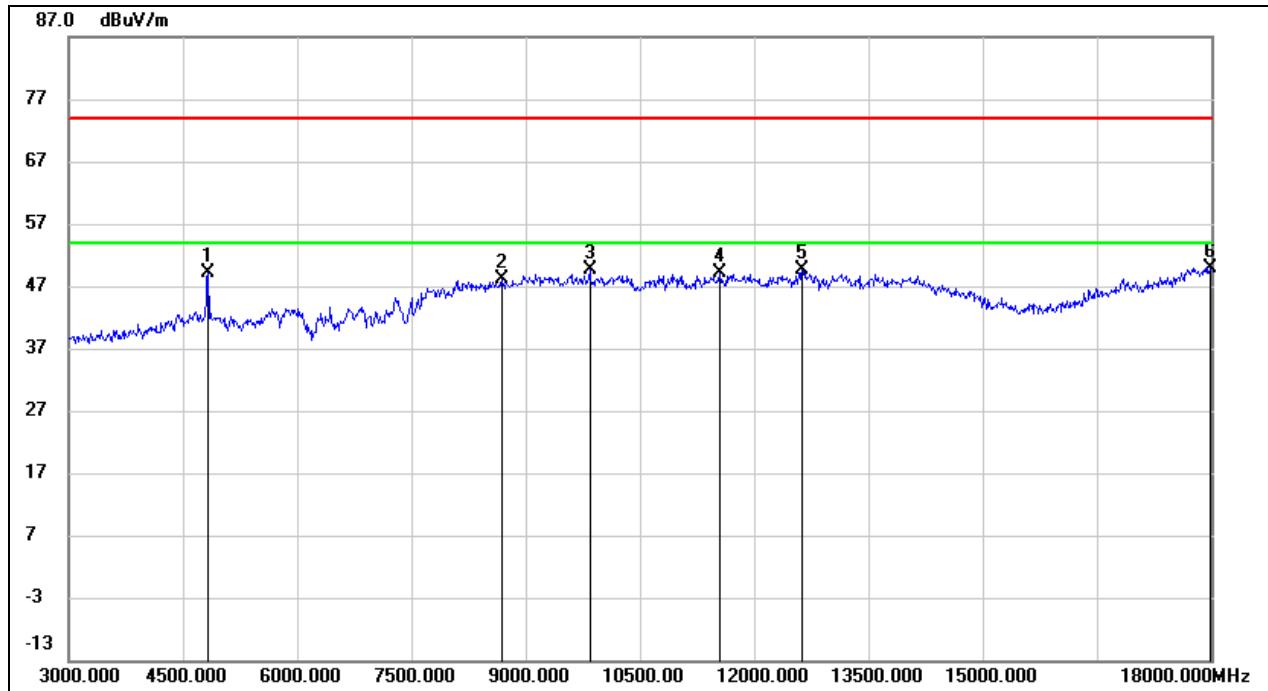


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	48.42	0.67	49.09	74.00	-24.91	peak
2	8685.000	38.74	9.35	48.09	74.00	-25.91	peak
3	9840.000	36.23	13.29	49.52	74.00	-24.48	peak
4	11550.000	31.07	18.13	49.20	74.00	-24.80	peak
5	12630.000	30.61	19.06	49.67	74.00	-24.33	peak
6	17985.000	20.65	29.29	49.94	74.00	-24.06	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

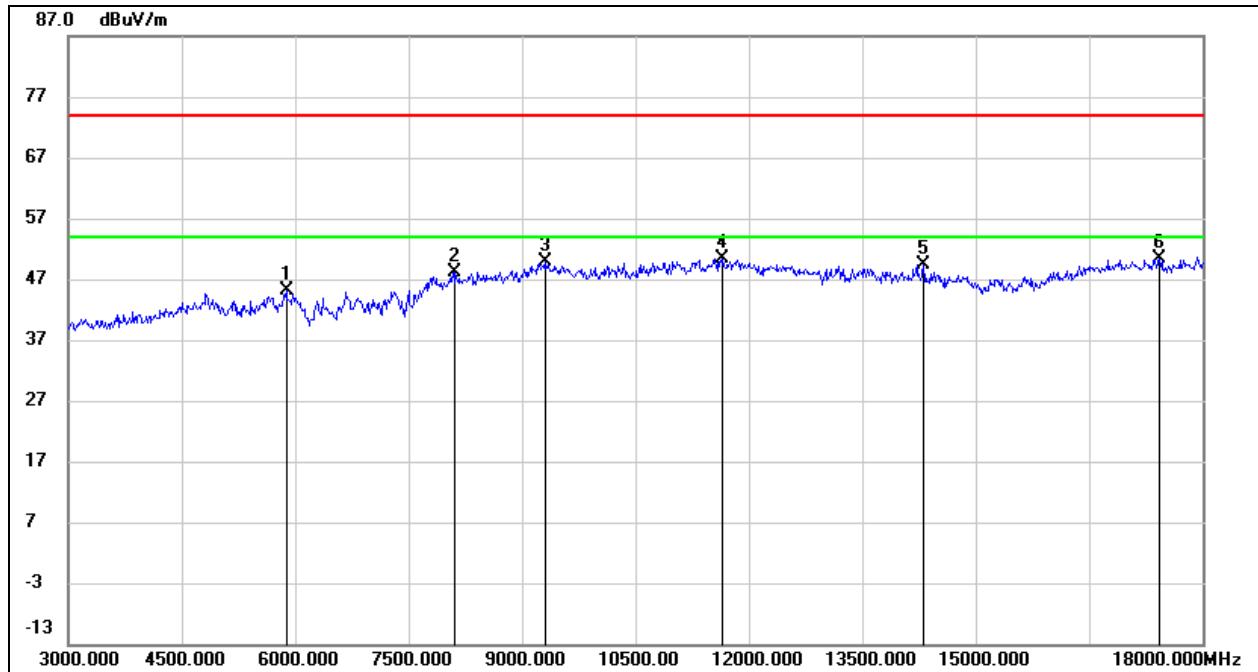


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	41.04	4.06	45.10	74.00	-28.90	peak
2	8115.000	39.34	8.85	48.19	74.00	-25.81	peak
3	9300.000	38.28	11.61	49.89	74.00	-24.11	peak
4	11655.000	33.46	16.97	50.43	74.00	-23.57	peak
5	14310.000	27.58	21.77	49.35	74.00	-24.65	peak
6	17430.000	25.12	25.20	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

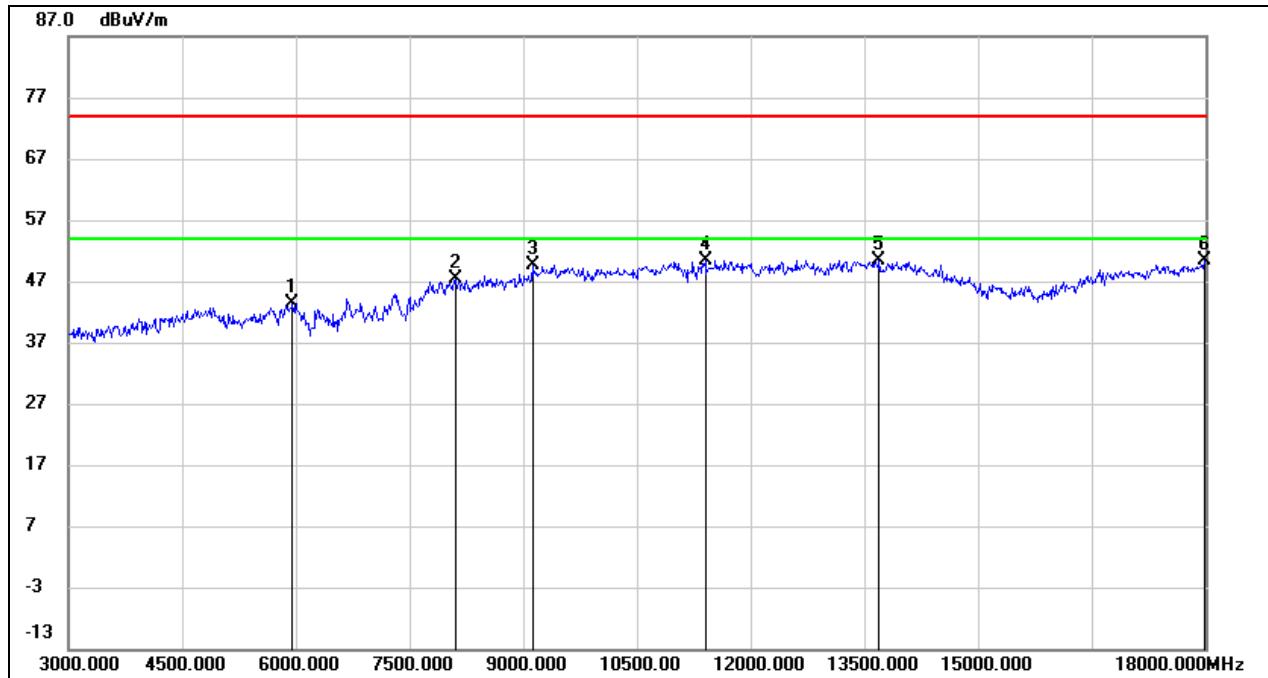


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5955.000	40.20	3.15	43.35	74.00	-30.65	peak
2	8115.000	38.95	8.32	47.27	74.00	-26.73	peak
3	9120.000	39.06	10.63	49.69	74.00	-24.31	peak
4	11400.000	32.85	17.62	50.47	74.00	-23.53	peak
5	13695.000	27.70	22.60	50.30	74.00	-23.70	peak
6	17985.000	21.00	29.29	50.29	74.00	-23.71	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

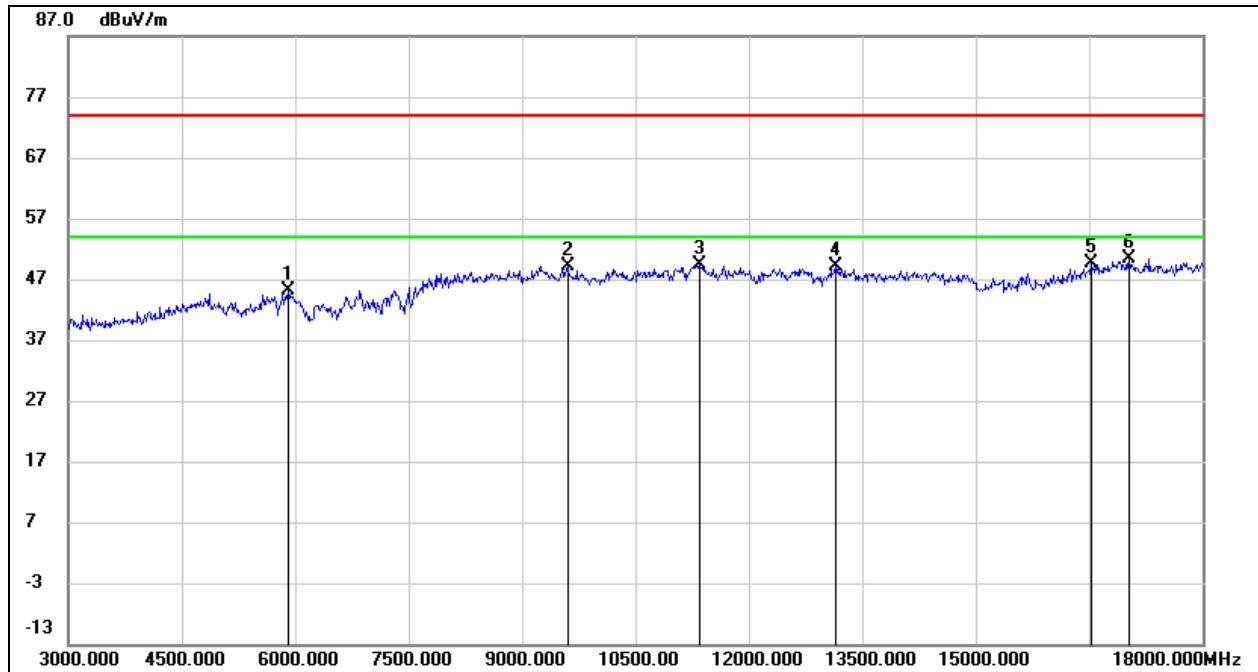


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5910.000	41.02	4.10	45.12	74.00	-28.88	peak
2	9600.000	36.59	12.65	49.24	74.00	-24.76	peak
3	11340.000	33.16	16.18	49.34	74.00	-24.66	peak
4	13140.000	29.58	19.44	49.02	74.00	-24.98	peak
5	16530.000	25.49	24.04	49.53	74.00	-24.47	peak
6	17025.000	25.30	24.99	50.29	74.00	-23.71	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 5V

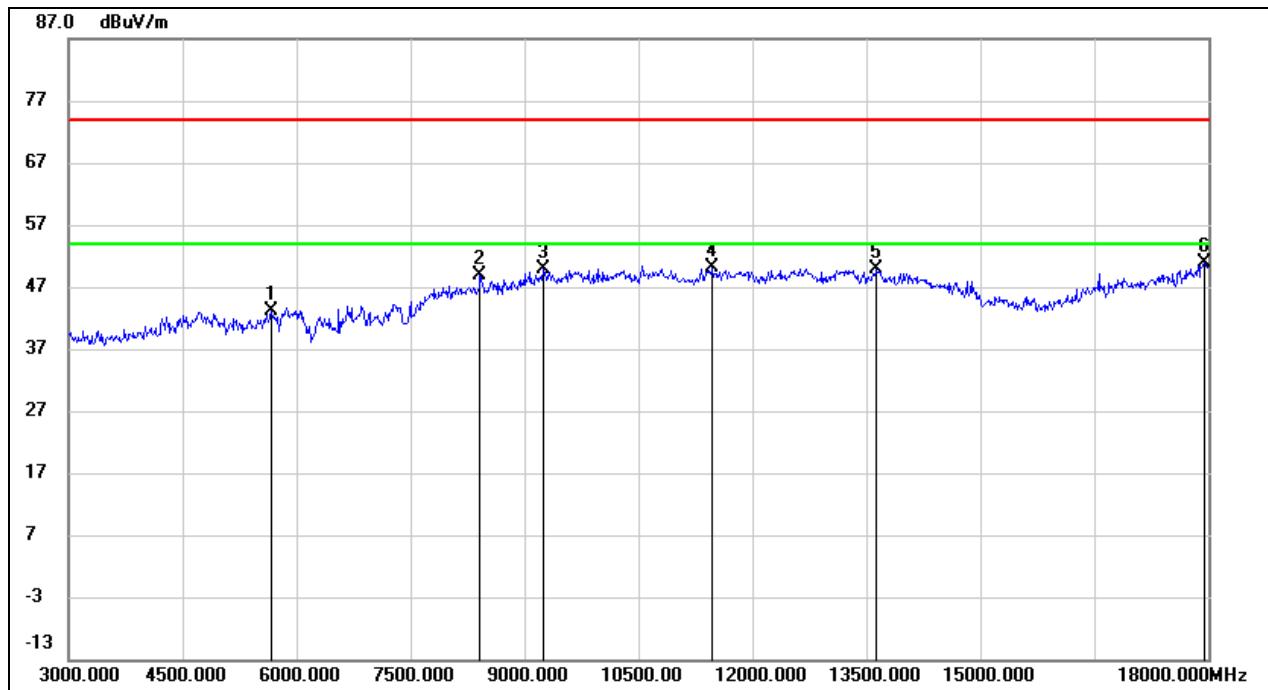


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	40.48	2.60	43.08	74.00	-30.92	peak
2	8415.000	40.02	8.87	48.89	74.00	-25.11	peak
3	9240.000	38.62	11.18	49.80	74.00	-24.20	peak
4	11475.000	32.24	17.92	50.16	74.00	-23.84	peak
5	13635.000	27.39	22.51	49.90	74.00	-24.10	peak
6	17940.000	22.06	28.83	50.89	74.00	-23.11	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 5V

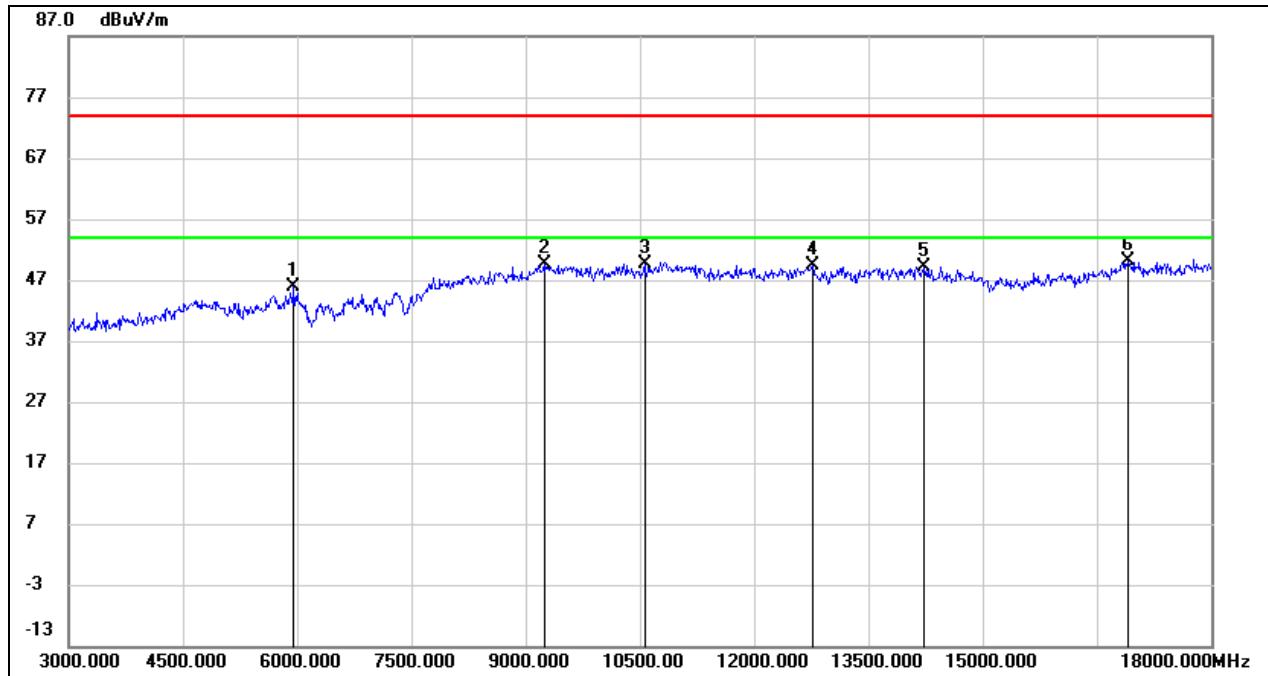


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5955.000	41.74	4.17	45.91	74.00	-28.09	peak
2	9240.000	38.35	11.39	49.74	74.00	-24.26	peak
3	10560.000	36.10	13.59	49.69	74.00	-24.31	peak
4	12765.000	31.15	18.31	49.46	74.00	-24.54	peak
5	14235.000	27.28	21.97	49.25	74.00	-24.75	peak
6	16905.000	25.35	24.88	50.23	74.00	-23.77	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 5V

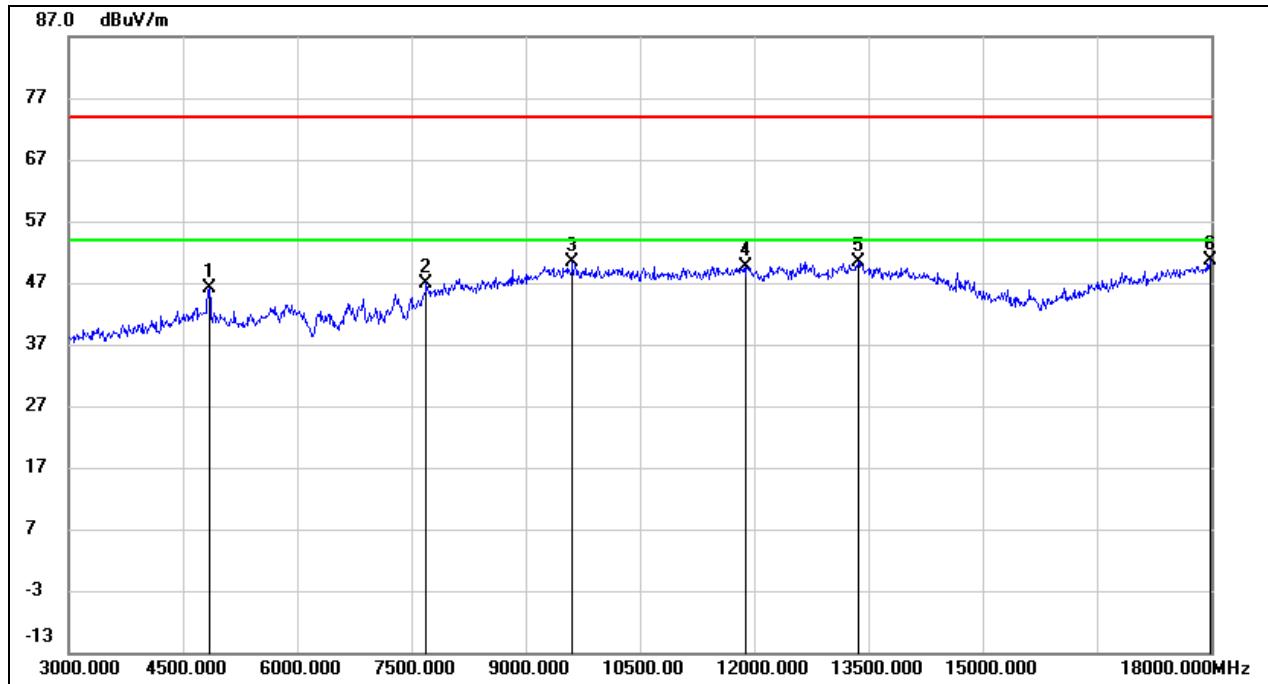


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	45.41	0.72	46.13	74.00	-27.87	peak
2	7695.000	39.36	7.64	47.00	74.00	-27.00	peak
3	9615.000	37.44	12.83	50.27	74.00	-23.73	peak
4	11895.000	30.94	18.77	49.71	74.00	-24.29	peak
5	13365.000	28.60	21.77	50.37	74.00	-23.63	peak
6	17985.000	21.23	29.29	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 5V

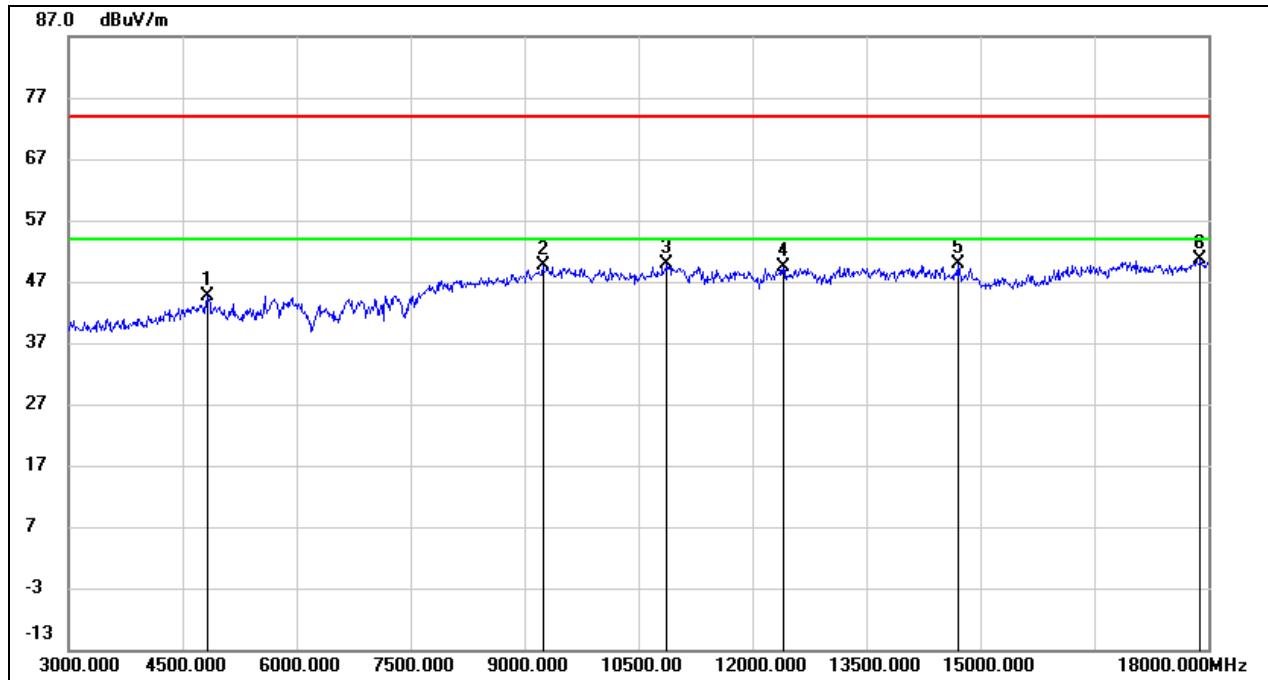


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	42.86	1.77	44.63	74.00	-29.37	peak
2	9240.000	38.16	11.39	49.55	74.00	-24.45	peak
3	10875.000	35.23	14.53	49.76	74.00	-24.24	peak
4	12405.000	31.20	18.11	49.31	74.00	-24.69	peak
5	14700.000	29.03	20.94	49.97	74.00	-24.03	peak
6	17895.000	24.01	26.63	50.64	74.00	-23.36	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 5V

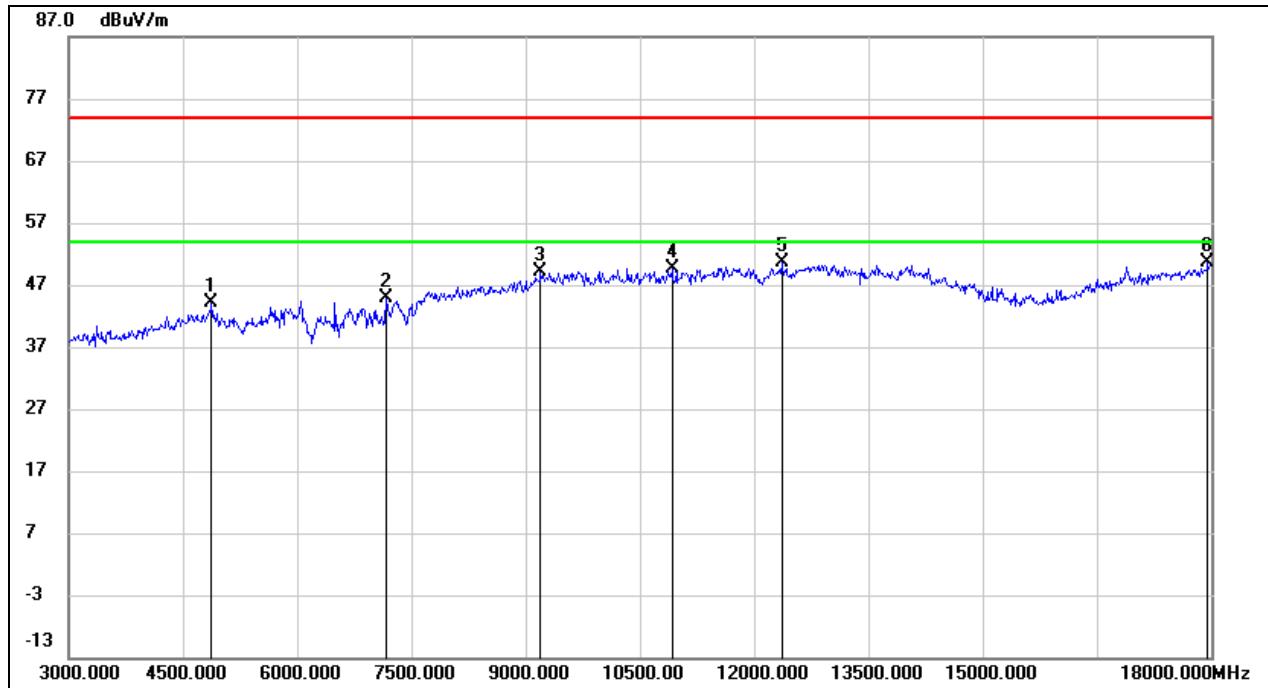


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.28	0.80	44.08	74.00	-29.92	peak
2	7170.000	37.90	6.89	44.79	74.00	-29.21	peak
3	9195.000	38.03	10.98	49.01	74.00	-24.99	peak
4	10920.000	34.21	15.43	49.64	74.00	-24.36	peak
5	12360.000	31.53	19.01	50.54	74.00	-23.46	peak
6	17955.000	21.56	28.98	50.54	74.00	-23.46	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 5V

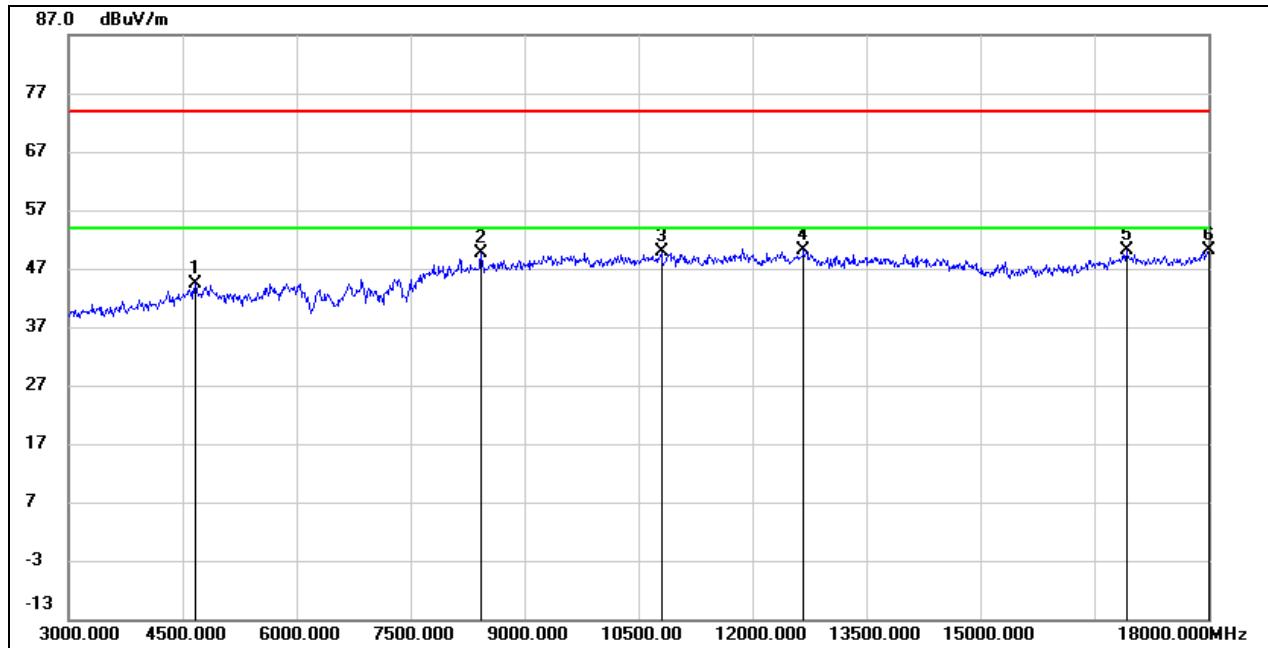


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	43.29	1.13	44.42	74.00	-29.58	peak
2	8430.000	40.04	9.47	49.51	74.00	-24.49	peak
3	10800.000	35.61	14.23	49.84	74.00	-24.16	peak
4	12675.000	32.06	18.16	50.22	74.00	-23.78	peak
5	16920.000	25.27	24.89	50.16	74.00	-23.84	peak
6	18000.000	22.90	27.24	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 5V

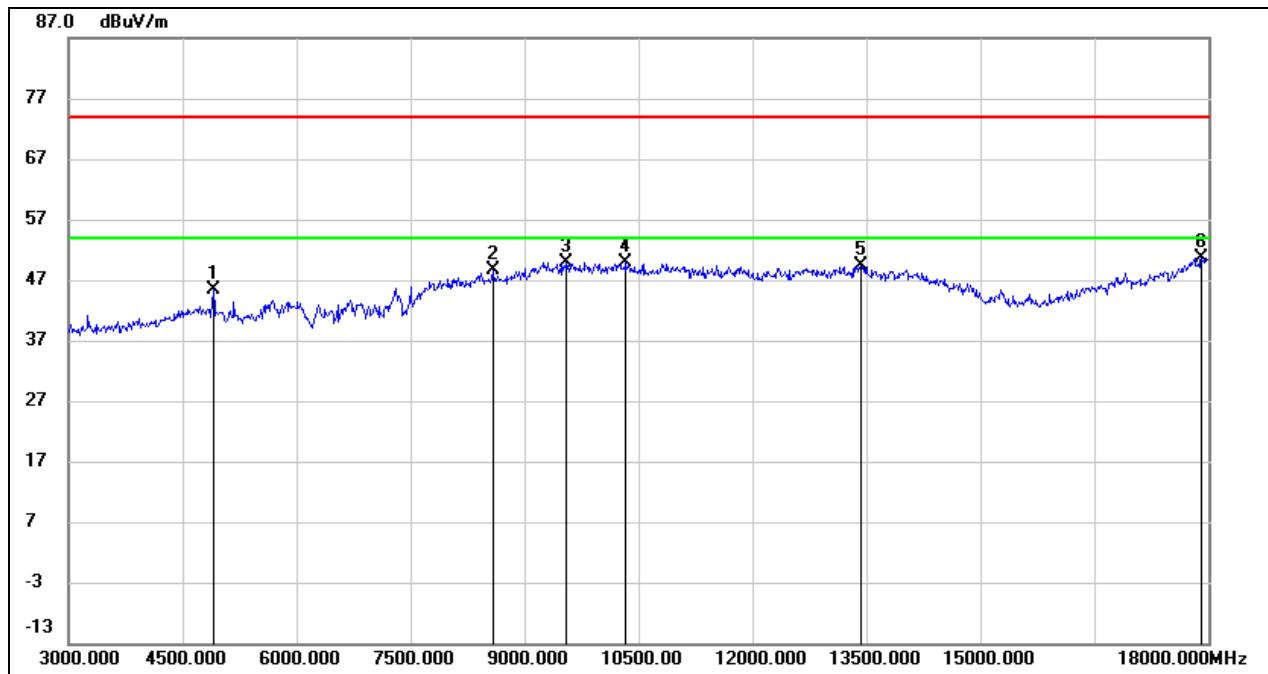

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	44.51	0.88	45.39	74.00	-28.61	peak
2	8580.000	39.33	9.20	48.53	74.00	-25.47	peak
3	9555.000	37.33	12.61	49.94	74.00	-24.06	peak
4	10335.000	36.51	13.37	49.88	74.00	-24.12	peak
5	13425.000	27.35	22.00	49.35	74.00	-24.65	peak
6	17910.000	22.07	28.53	50.60	74.00	-23.40	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 5V

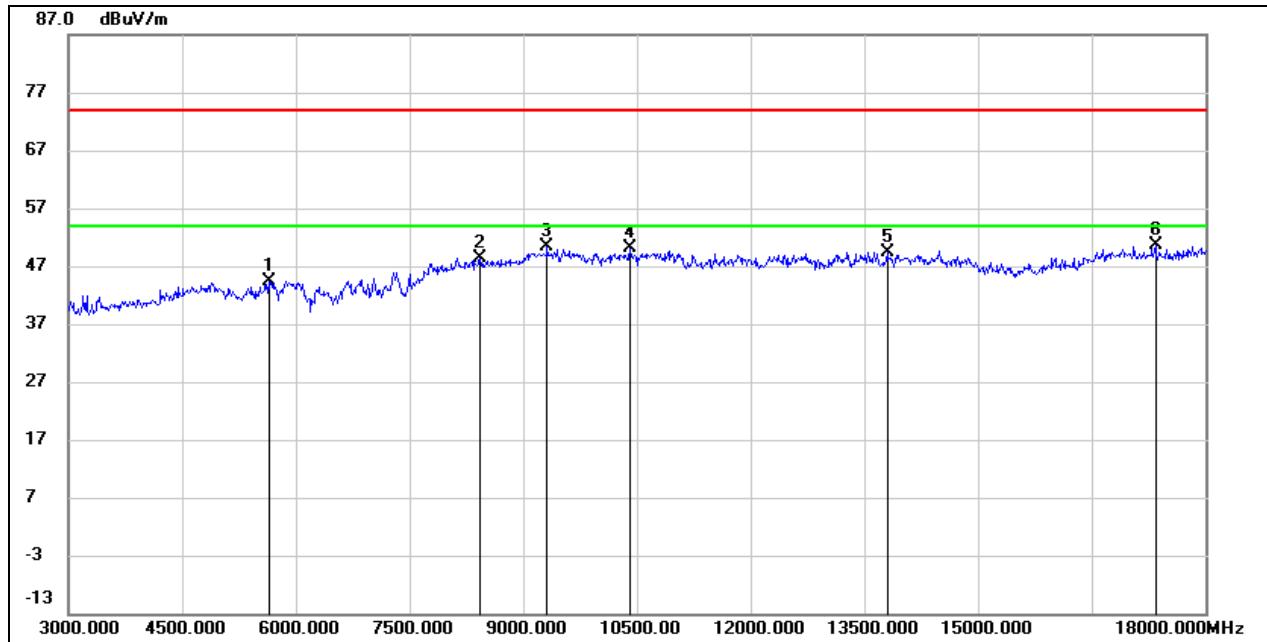


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	40.58	3.68	44.26	74.00	-29.74	peak
2	8430.000	38.99	9.47	48.46	74.00	-25.54	peak
3	9315.000	38.71	11.66	50.37	74.00	-23.63	peak
4	10410.000	36.91	13.17	50.08	74.00	-23.92	peak
5	13800.000	28.36	21.11	49.47	74.00	-24.53	peak
6	17340.000	25.56	25.17	50.73	74.00	-23.27	peak

8.1. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) FOR 802.11AX PARTIAL RU MODE


Note: For 3 data of Frequency means: Frequency, RU Size, RU index

Test Mode:	802.11ax HE20	Frequency(MHz):	2412 26 0
Polarity:	Horizontal	Test Voltage:	DC 5V

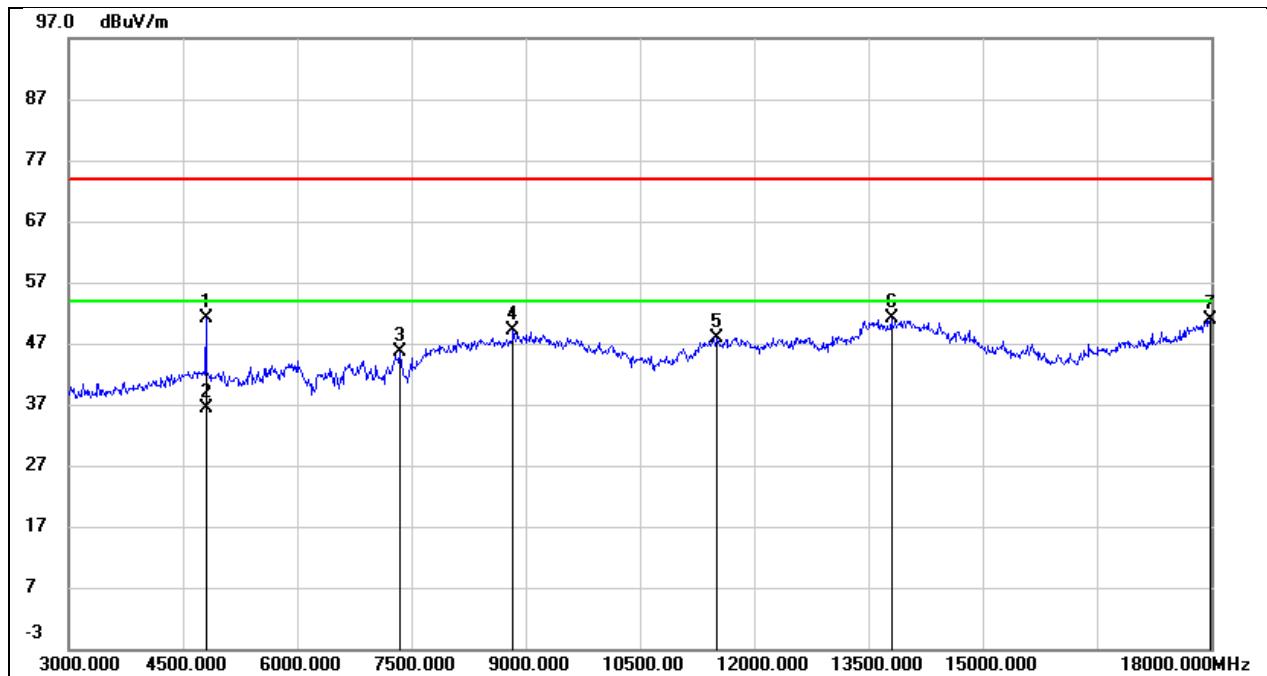


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	50.73	0.47	51.20	74.00	-22.80	peak
2	4800.000	35.82	0.47	36.29	54.00	-17.71	AVG
3	7350.000	38.56	7.09	45.65	74.00	-28.35	peak
4	8835.000	39.41	9.67	49.08	74.00	-24.92	peak
5	11505.000	30.00	17.99	47.99	74.00	-26.01	peak
6	13800.000	28.26	22.93	51.19	74.00	-22.81	peak
7	17985.000	21.28	29.49	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412 26 0
Polarity:	Vertical	Test Voltage:	DC 5V

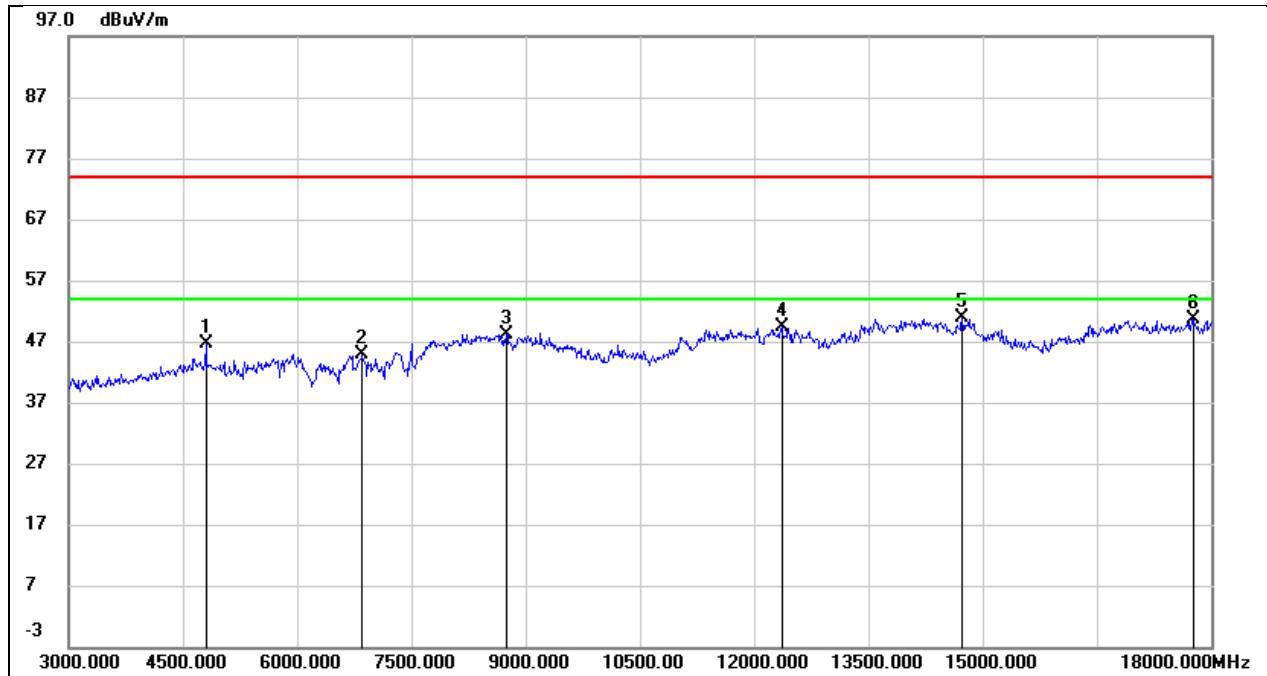


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.97	1.55	46.52	74.00	-27.48	peak
2	6855.000	38.10	6.88	44.98	74.00	-29.02	peak
3	8745.000	38.24	10.00	48.24	74.00	-25.76	peak
4	12360.000	31.43	17.96	49.39	74.00	-24.61	peak
5	14730.000	29.69	21.07	50.76	74.00	-23.24	peak
6	17760.000	24.50	26.16	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437 26 4
Polarity:	Horizontal	Test Voltage:	DC 5V

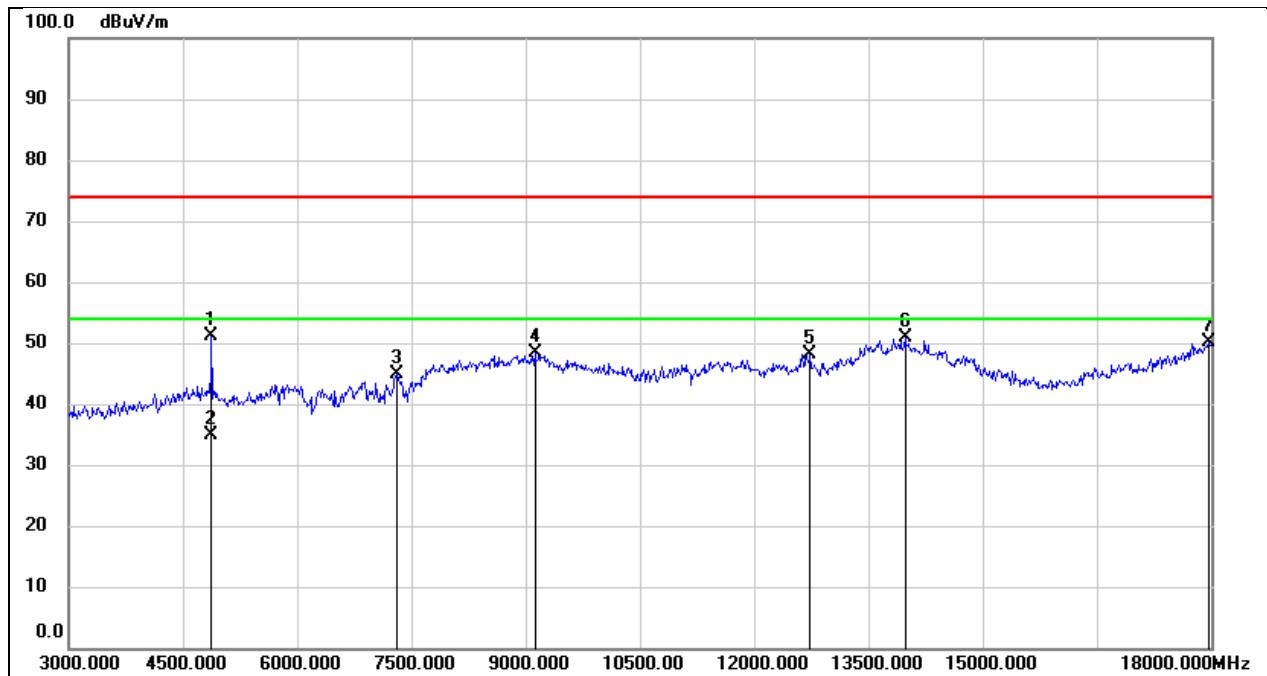


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	50.45	0.65	51.10	74.00	-22.90	peak
2	4875.000	34.14	0.65	34.79	54.00	-19.21	AVG
3	7305.000	37.90	7.03	44.93	74.00	-29.07	peak
4	9120.000	37.75	10.72	48.47	74.00	-25.53	peak
5	12735.000	28.90	19.33	48.23	74.00	-25.77	peak
6	13980.000	27.20	23.71	50.91	74.00	-23.09	peak
7	17970.000	20.69	29.33	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437 26 4
Polarity:	Vertical	Test Voltage:	DC 5V

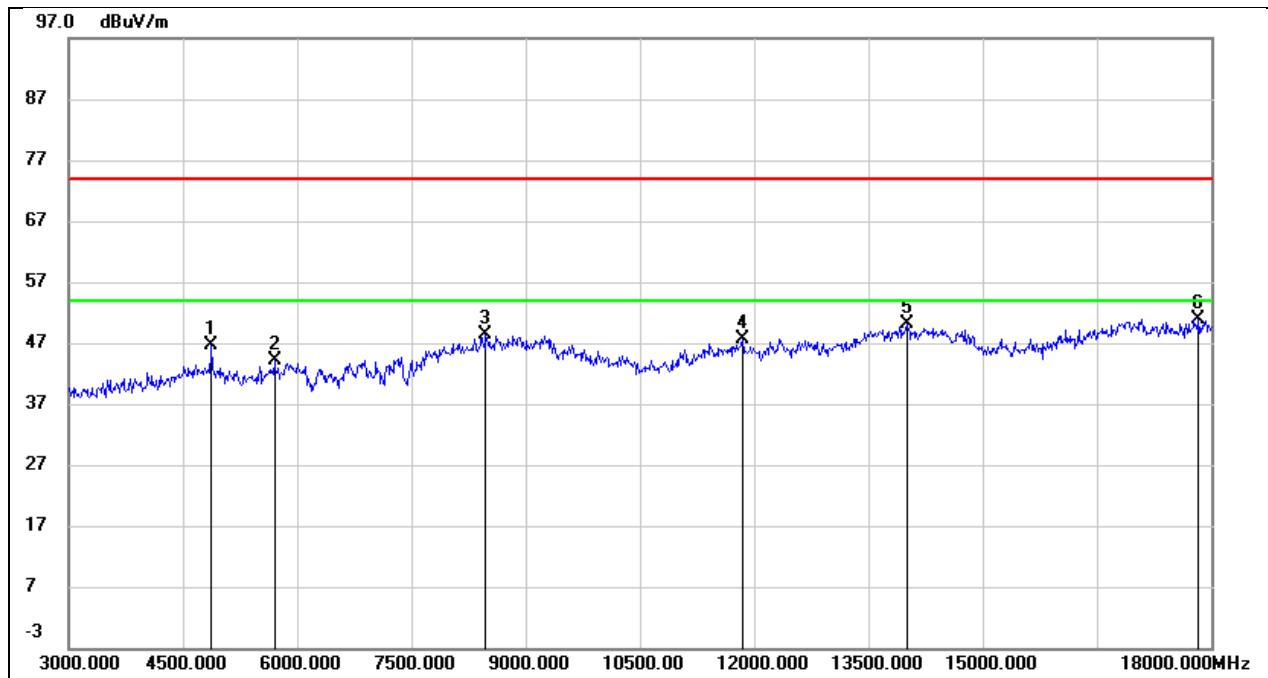


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.95	1.78	46.73	74.00	-27.27	peak
2	5700.000	40.48	3.65	44.13	74.00	-29.87	peak
3	8475.000	38.88	9.57	48.45	74.00	-25.55	peak
4	11850.000	30.39	17.33	47.72	74.00	-26.28	peak
5	14010.000	27.88	22.20	50.08	74.00	-23.92	peak
6	17835.000	24.47	26.48	50.95	74.00	-23.05	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462 26 8
Polarity:	Horizontal	Test Voltage:	DC 5V

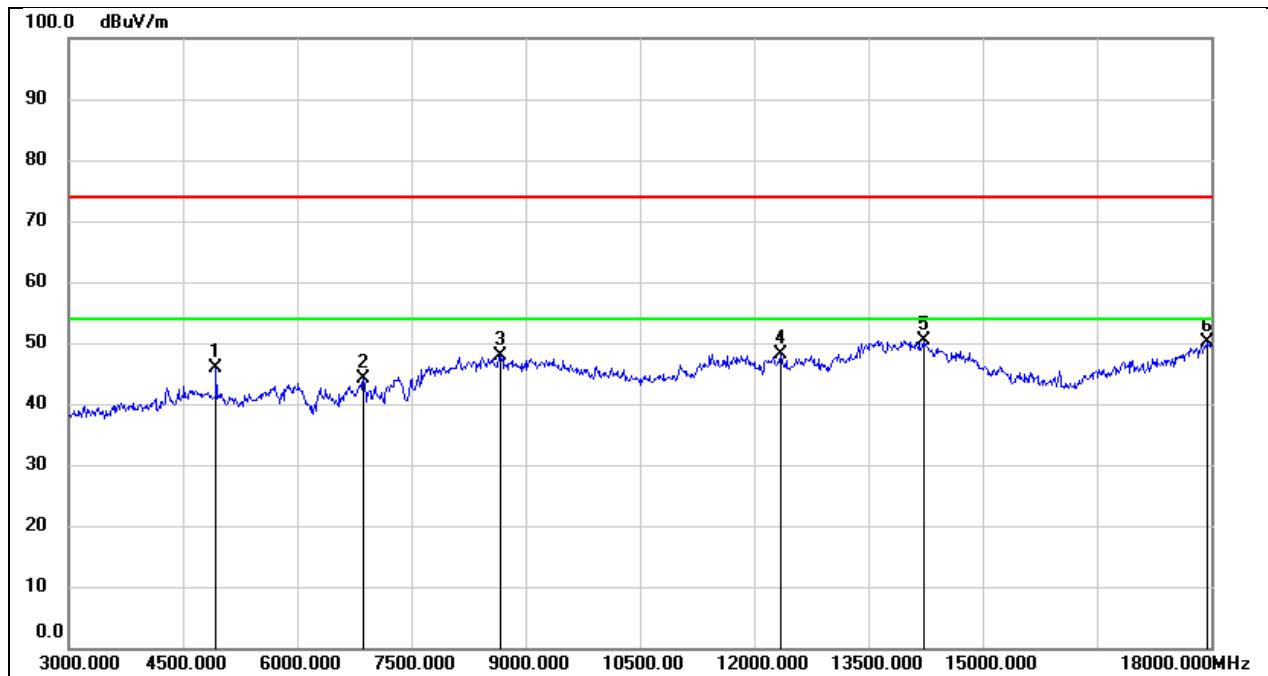

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.000	45.08	0.80	45.88	74.00	-28.12	peak
2	6870.000	38.07	6.04	44.11	74.00	-29.89	peak
3	8670.000	38.54	9.40	47.94	74.00	-26.06	peak
4	12345.000	29.23	18.90	48.13	74.00	-25.87	peak
5	14220.000	27.05	23.25	50.30	74.00	-23.70	peak
6	17940.000	20.98	29.03	50.01	74.00	-23.99	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	2462 26 8
Polarity:	Vertical	Test Voltage:	DC 5V

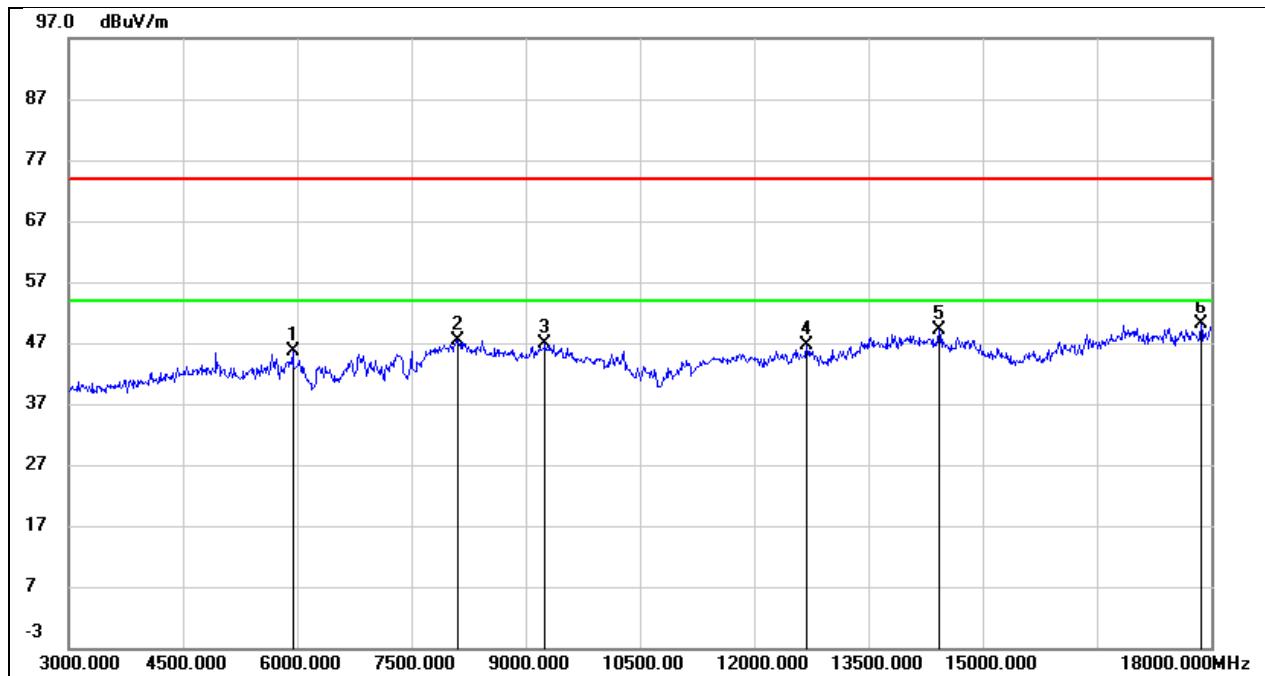

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	41.62	4.04	45.66	74.00	-28.34	peak
2	8100.000	38.69	8.81	47.50	74.00	-26.50	peak
3	9255.000	35.34	11.51	46.85	74.00	-27.15	peak
4	12690.000	28.53	18.19	46.72	74.00	-27.28	peak
5	14430.000	27.39	21.68	49.07	74.00	-24.93	peak
6	17865.000	23.46	26.66	50.12	74.00	-23.88	peak


8.2. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

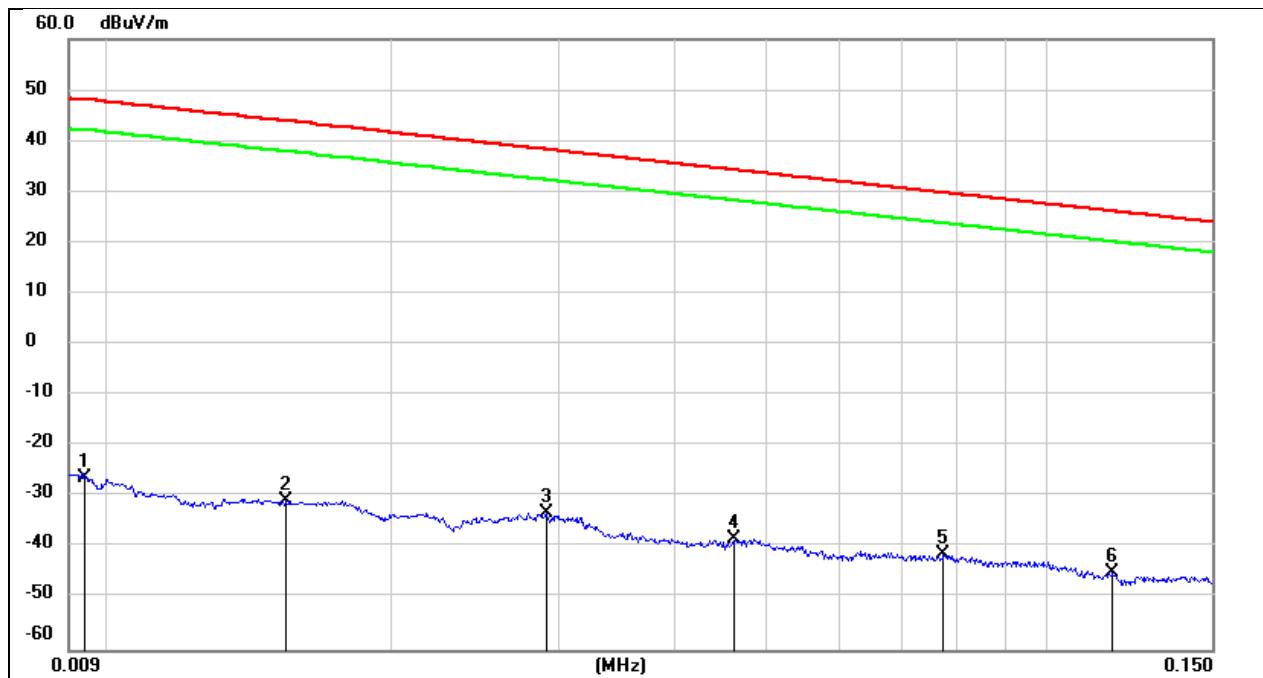


No.	Frequency	Reading	Correct	Result	Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0094	75.07	-101.35	-26.28	48.05	-77.78	-3.45	-74.33	peak
2	0.0154	70.49	-101.37	-30.88	43.85	-82.38	-7.65	-74.73	peak
3	0.0292	68.29	-101.39	-33.10	38.29	-84.6	-13.21	-71.39	peak
4	0.0463	63.14	-101.46	-38.32	34.29	-89.82	-17.21	-72.61	peak
5	0.0772	60.30	-101.61	-41.31	29.85	-92.81	-21.65	-71.16	peak
6	0.1174	56.83	-101.74	-44.91	26.21	-96.41	-25.29	-71.12	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

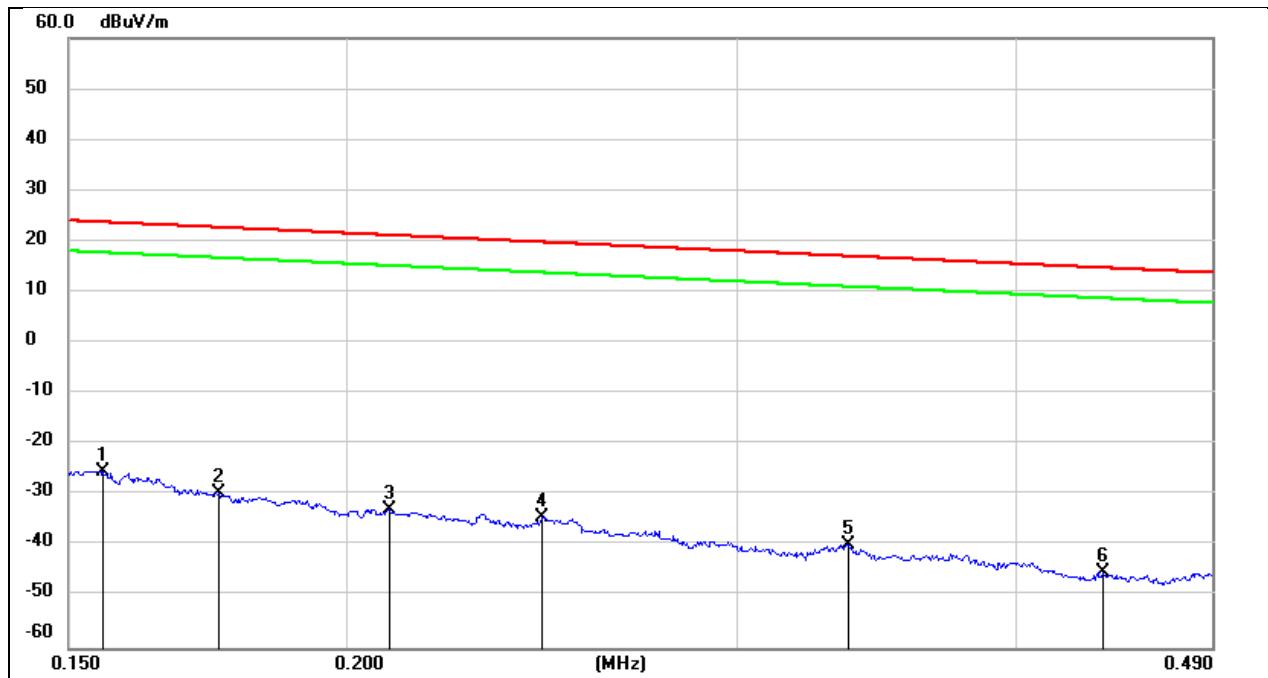

No.	Frequency	Reading	Correct	Result	Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1554	76.27	-101.65	-25.38	23.77	-76.88	-27.73	-49.15	peak
2	0.1751	72.23	-101.68	-29.45	22.74	-80.95	-28.76	-52.19	peak
3	0.2091	68.82	-101.73	-32.91	21.19	-84.41	-30.31	-54.10	peak
4	0.2449	67.58	-101.79	-34.21	19.82	-85.71	-31.68	-54.03	peak
5	0.3361	62.22	-101.89	-39.67	17.07	-91.17	-34.43	-56.74	peak
6	0.4383	56.80	-102.01	-45.21	14.77	-96.71	-36.73	-59.98	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

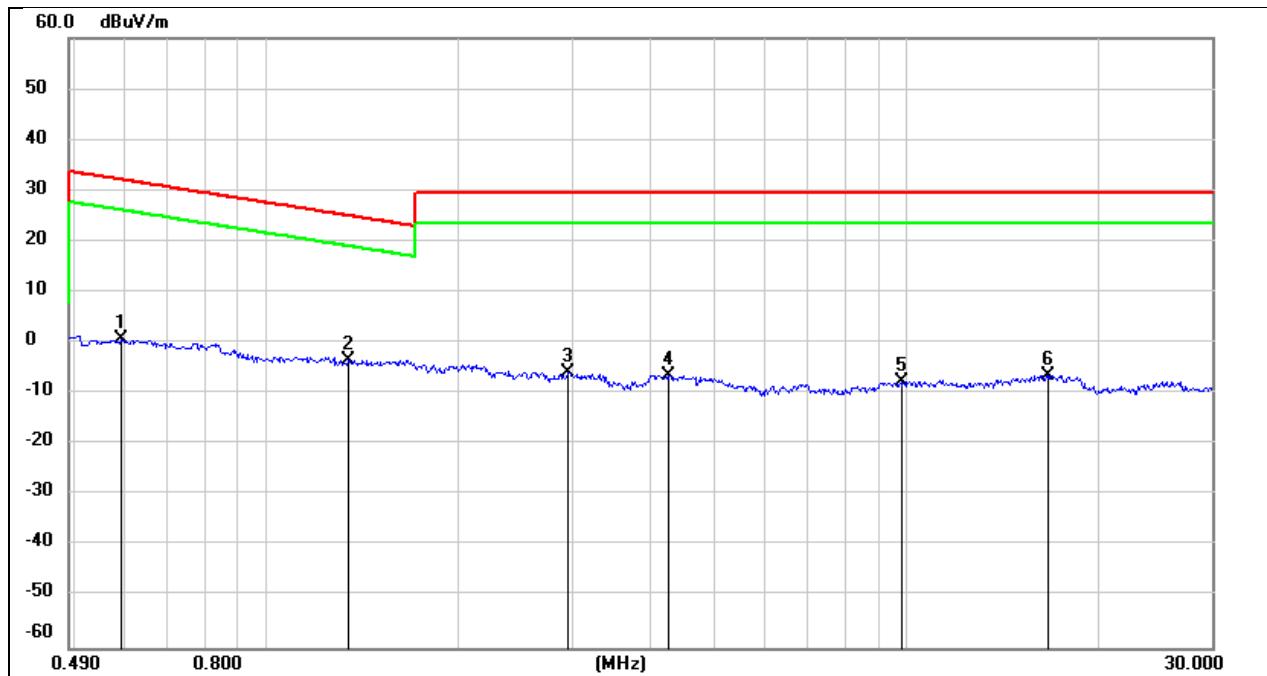

No.	Frequency	Reading	Correct	Result	Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.5917	62.74	-62.08	0.66	32.16	-50.84	-19.34	-31.50	peak
2	1.3366	58.77	-62.11	-3.34	25.09	-54.84	-26.41	-28.43	peak
3	2.9687	55.87	-61.59	-5.72	29.54	-57.22	-21.96	-35.26	peak
4	4.2378	55.07	-61.37	-6.30	29.54	-57.8	-21.96	-35.84	peak
5	9.8152	53.08	-60.82	-7.74	29.54	-59.24	-21.96	-37.28	peak
6	16.7205	54.54	-60.95	-6.41	29.54	-57.91	-21.96	-35.95	peak


8.3. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 5V

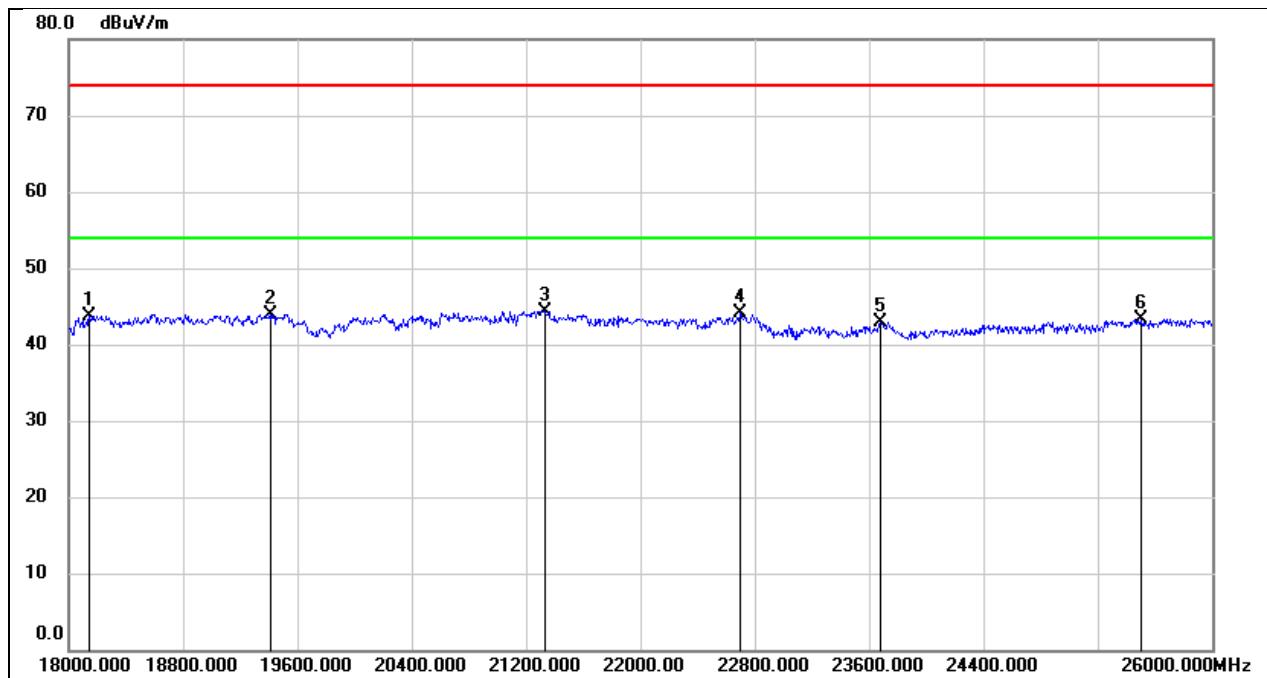

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	49.27	-5.48	43.79	74.00	-30.21	peak
2	19416.000	49.53	-5.55	43.98	74.00	-30.02	peak
3	21336.000	49.12	-4.74	44.38	74.00	-29.62	peak
4	22696.000	47.78	-3.73	44.05	74.00	-29.95	peak
5	23680.000	46.16	-3.18	42.98	74.00	-31.02	peak
6	25504.000	45.07	-1.77	43.30	74.00	-30.70	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 5V

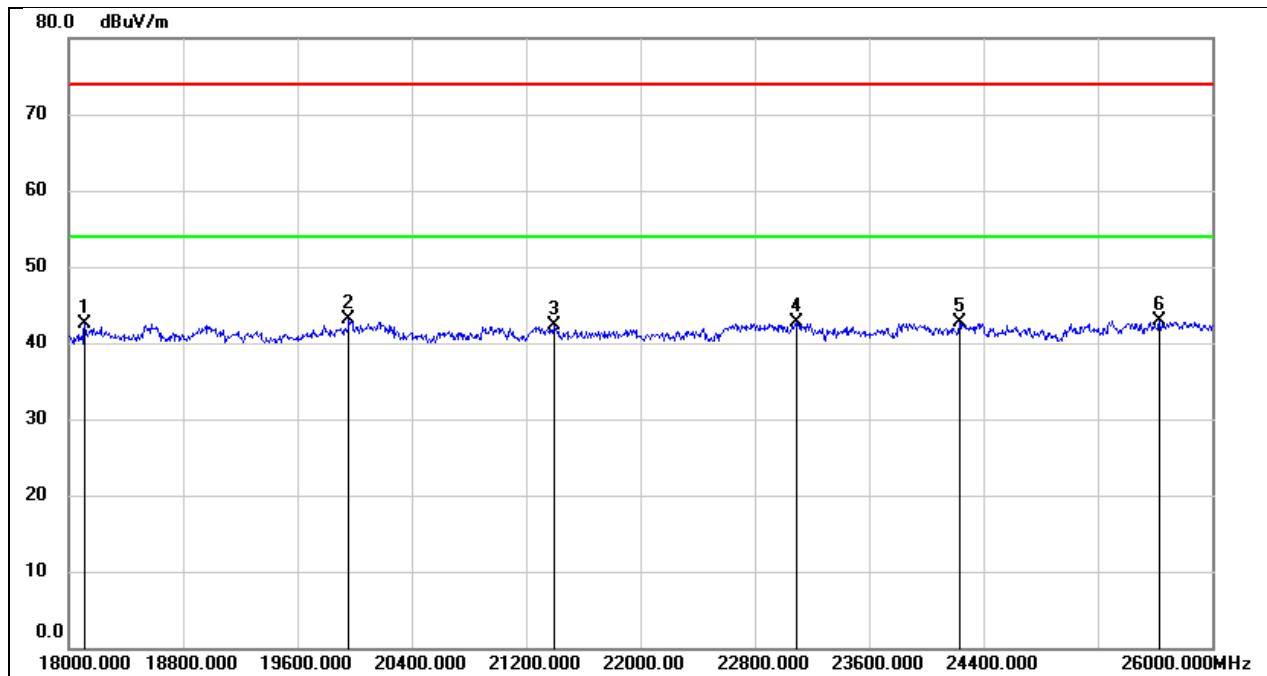

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18112.000	47.96	-5.47	42.49	74.00	-31.51	peak
2	19960.000	48.56	-5.42	43.14	74.00	-30.86	peak
3	21400.000	47.04	-4.72	42.32	74.00	-31.68	peak
4	23088.000	46.02	-3.41	42.61	74.00	-31.39	peak
5	24232.000	45.46	-2.82	42.64	74.00	-31.36	peak
6	25632.000	44.06	-1.16	42.90	74.00	-31.10	peak


8.4. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC5V

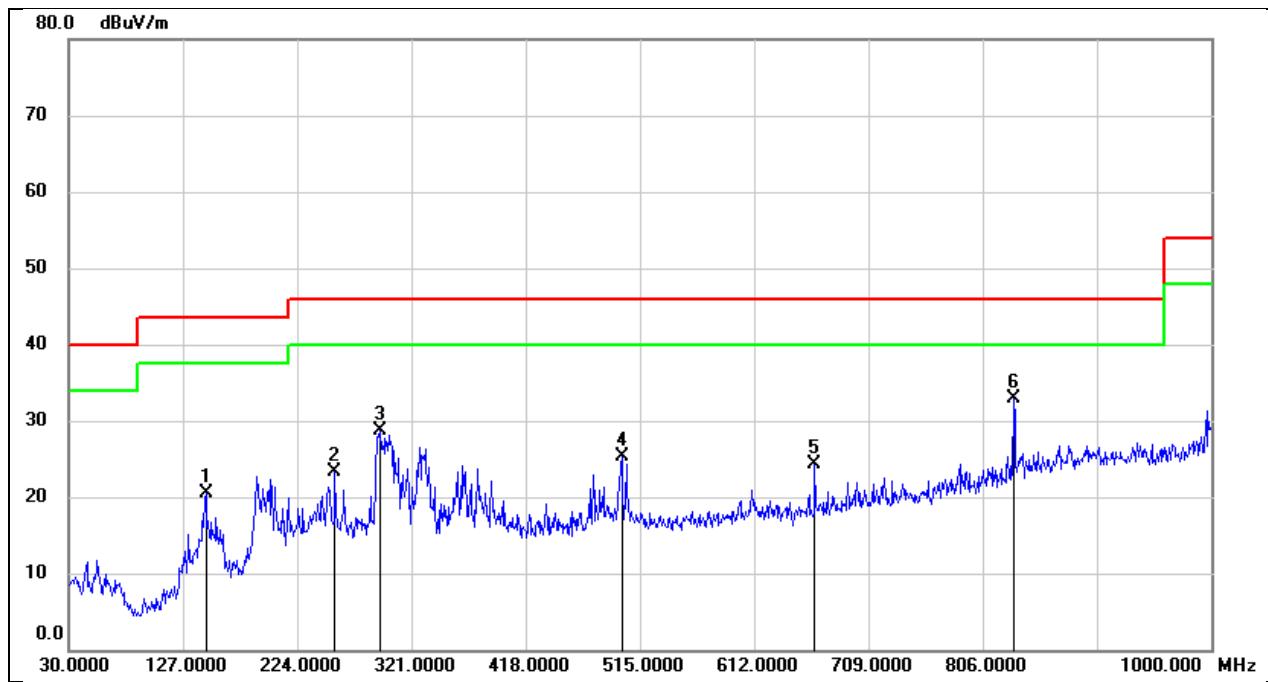

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	146.4000	34.23	-13.66	20.57	43.50	-22.93	QP
2	256.0100	37.61	-14.22	23.39	46.00	-22.61	QP
3	294.8100	40.48	-11.82	28.66	46.00	-17.34	QP
4	499.4800	33.00	-7.69	25.31	46.00	-20.69	QP
5	663.4099	29.57	-5.27	24.30	46.00	-21.70	QP
6	832.1900	34.80	-1.82	32.98	46.00	-13.02	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC5V

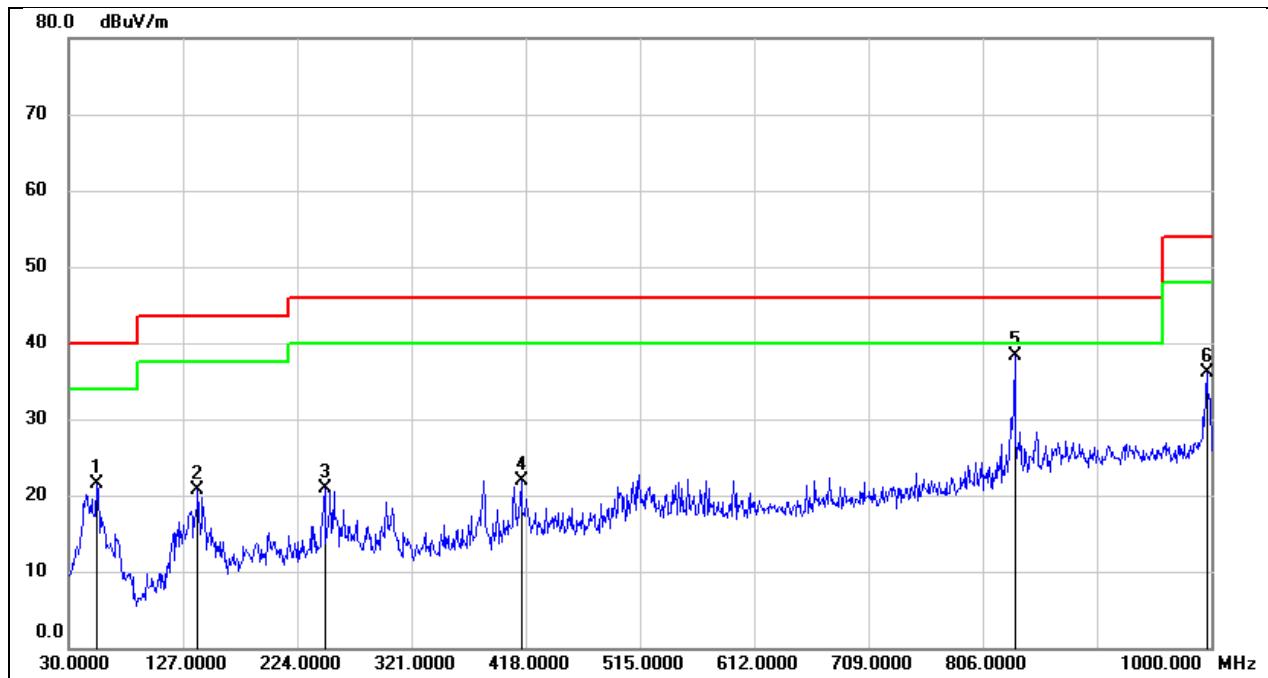

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	36.48	-15.04	21.44	40.00	-18.56	QP
2	139.6100	34.74	-14.00	20.74	43.50	-22.76	QP
3	247.2800	35.41	-14.43	20.98	46.00	-25.02	QP
4	414.1200	31.17	-9.23	21.94	46.00	-24.06	QP
5	833.1599	40.16	-1.78	38.38	46.00	-7.62	QP
6	996.1200	36.23	-0.17	36.06	54.00	-17.94	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 – 56 *	56 – 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

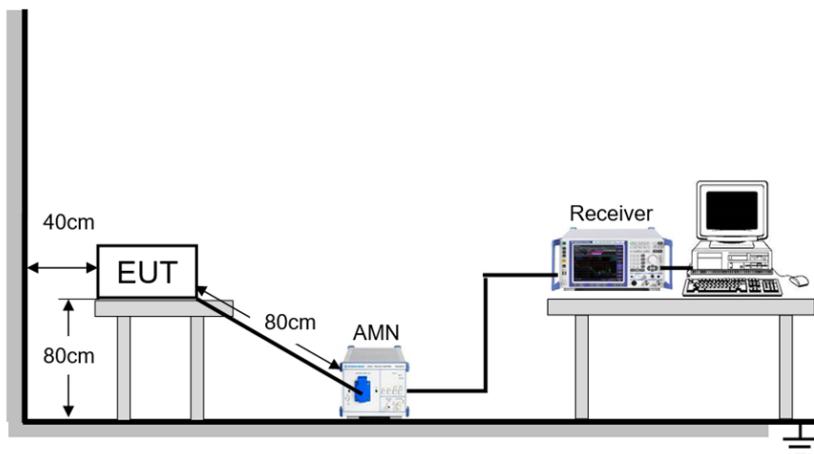

TEST ENVIRONMENT


Temperature	23.2°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

TEST DATE / ENGINEER

Test Date	February 07, 2025	Test By	Daniel Zhang
-----------	-------------------	---------	--------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

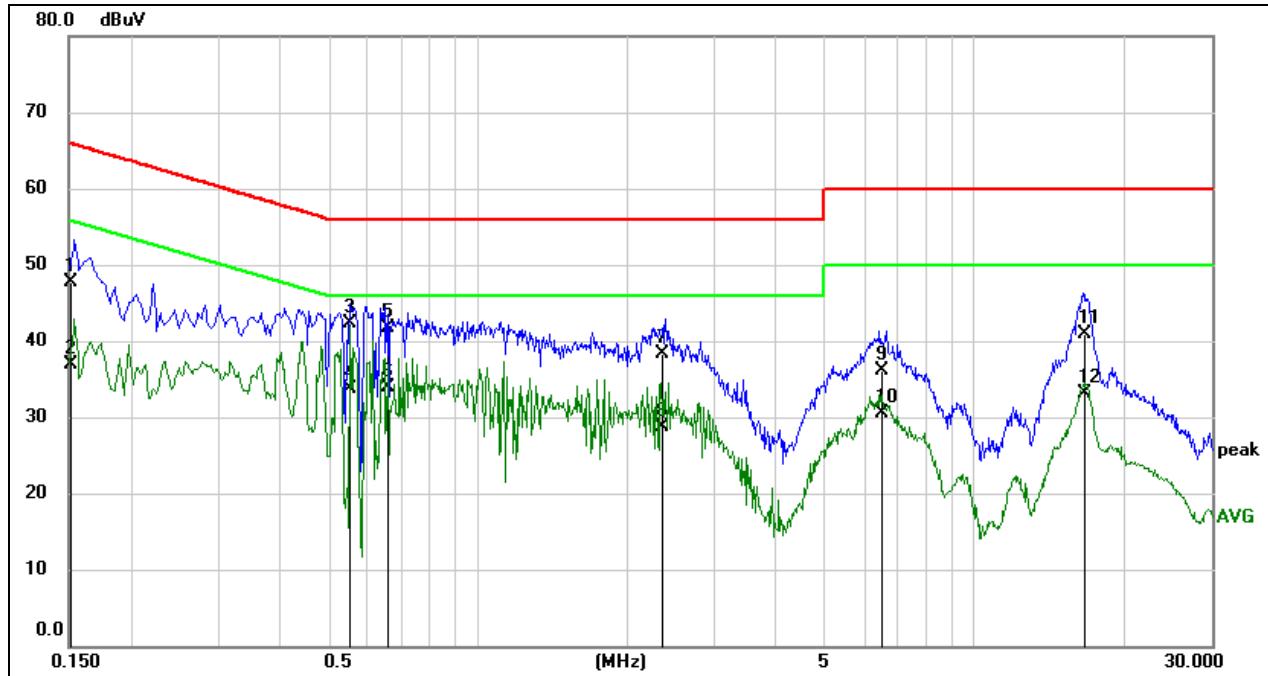


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1510	38.13	9.64	47.77	65.94	-18.17	QP
2	0.1510	27.25	9.64	36.89	55.94	-19.05	AVG
3	0.5571	32.69	9.64	42.33	56.00	-13.67	QP
4	0.5571	24.12	9.64	33.76	46.00	-12.24	AVG
5	0.6554	32.14	9.63	41.77	56.00	-14.23	QP
6	0.6554	24.18	9.63	33.81	46.00	-12.19	AVG
7	2.3598	28.58	9.64	38.22	56.00	-17.78	QP
8	2.3598	19.08	9.64	28.72	46.00	-17.28	AVG
9	6.4766	26.36	9.71	36.07	60.00	-23.93	QP
10	6.4766	20.73	9.71	30.44	50.00	-19.56	AVG
11	16.6204	31.09	9.74	40.83	60.00	-19.17	QP
12	16.6204	23.33	9.74	33.07	50.00	-16.93	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

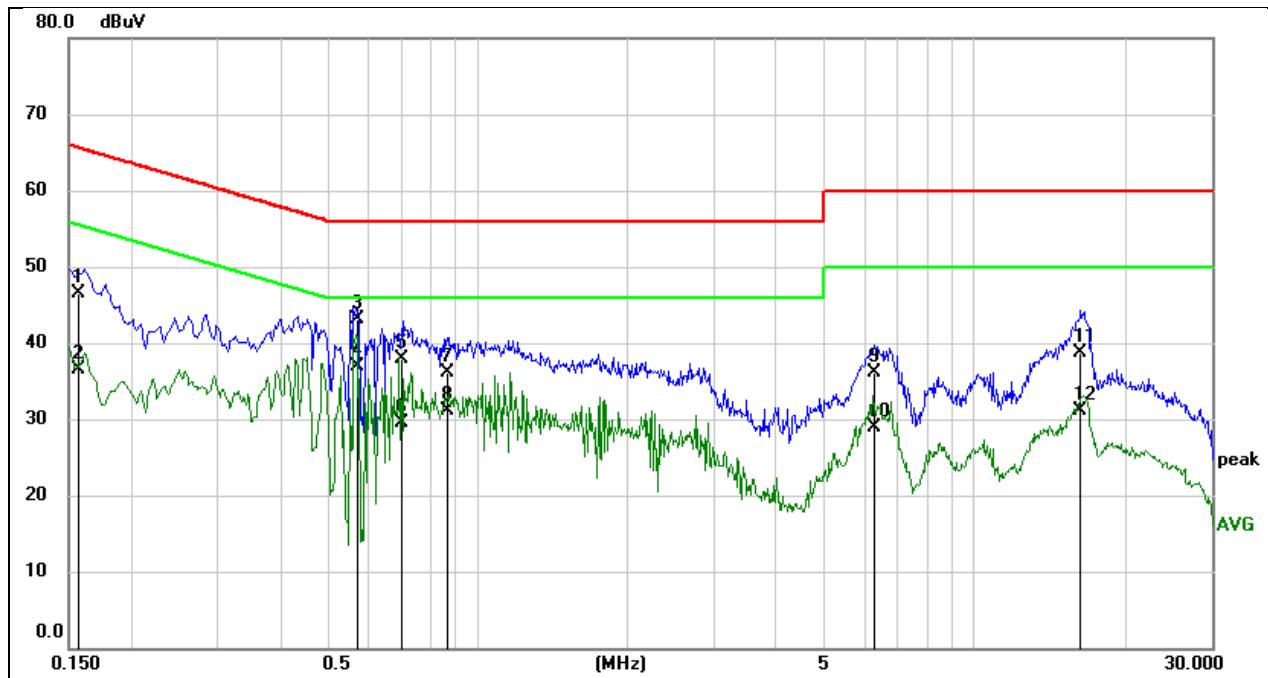

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1570	36.77	9.64	46.41	65.62	-19.21	QP
2	0.1570	26.77	9.64	36.41	55.62	-19.21	AVG
3	0.5723	33.49	9.64	43.13	56.00	-12.87	QP
4	0.5723	27.32	9.64	36.96	46.00	-9.04	AVG
5	0.6997	28.19	9.63	37.82	56.00	-18.18	QP
6	0.6997	19.96	9.63	29.59	46.00	-16.41	AVG
7	0.8657	26.40	9.63	36.03	56.00	-19.97	QP
8	0.8657	21.48	9.63	31.11	46.00	-14.89	AVG
9	6.3357	26.37	9.71	36.08	60.00	-23.92	QP
10	6.3357	19.21	9.71	28.92	50.00	-21.08	AVG
11	16.3746	28.89	9.74	38.63	60.00	-21.37	QP
12	16.3746	21.39	9.74	31.13	50.00	-18.87	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

11.1. APPENDIX A: DTS BANDWIDTH


11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	7.12	2408.44	2415.56	≥ 0.5	PASS
	Ant2	2412	7.08	2408.44	2415.52	≥ 0.5	PASS
	Ant1	2437	8.04	2432.48	2440.52	≥ 0.5	PASS
	Ant2	2437	7.08	2433.44	2440.52	≥ 0.5	PASS
	Ant1	2462	9.04	2457.48	2466.52	≥ 0.5	PASS
	Ant2	2462	7.08	2458.44	2465.52	≥ 0.5	PASS
11G-CDD	Ant1	2412	16.32	2403.84	2420.16	≥ 0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	≥ 0.5	PASS
	Ant1	2437	15.32	2429.44	2444.76	≥ 0.5	PASS
	Ant2	2437	16.04	2428.84	2444.88	≥ 0.5	PASS
	Ant1	2462	16.32	2453.84	2470.16	≥ 0.5	PASS
	Ant2	2462	16.32	2453.84	2470.16	≥ 0.5	PASS
11N20MIMO	Ant1	2412	15.680	2403.880	2419.560	≥ 0.5	PASS
	Ant2	2412	14.040	2405.480	2419.520	≥ 0.5	PASS
	Ant1	2437	17.040	2428.480	2445.520	≥ 0.5	PASS
	Ant2	2437	17.600	2428.200	2445.800	≥ 0.5	PASS
	Ant1	2462	17.560	2453.240	2470.800	≥ 0.5	PASS
	Ant2	2462	17.560	2453.240	2470.800	≥ 0.5	PASS
11N40MIMO	Ant1	2422	35.040	2404.480	2439.520	≥ 0.5	PASS
	Ant2	2422	35.360	2404.160	2439.520	≥ 0.5	PASS
	Ant1	2437	35.040	2419.480	2454.520	≥ 0.5	PASS
	Ant2	2437	35.040	2419.480	2454.520	≥ 0.5	PASS
	Ant1	2452	35.040	2434.480	2469.520	≥ 0.5	PASS
	Ant2	2452	35.120	2434.480	2469.600	≥ 0.5	PASS
11AX20MIMO	Ant1	2412	18.920	2402.520	2421.440	≥ 0.5	PASS
	Ant2	2412	16.680	2403.080	2419.760	≥ 0.5	PASS
	Ant1	2437	19.040	2427.480	2446.520	≥ 0.5	PASS
	Ant2	2437	16.320	2429.400	2445.720	≥ 0.5	PASS
	Ant1	2462	18.800	2452.640	2471.440	≥ 0.5	PASS
	Ant2	2462	18.720	2452.680	2471.400	≥ 0.5	PASS
11AX40MIMO	Ant1	2422	37.360	2403.200	2440.560	≥ 0.5	PASS
	Ant2	2422	37.200	2403.040	2440.240	≥ 0.5	PASS
	Ant1	2437	36.240	2419.480	2455.720	≥ 0.5	PASS
	Ant2	2437	36.400	2419.400	2455.800	≥ 0.5	PASS
	Ant1	2452	37.600	2433.200	2470.800	≥ 0.5	PASS
	Ant2	2452	32.400	2437.040	2469.440	≥ 0.5	PASS

Test Mode	Antenna	Channel	Ru Size	Ru Index	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11AX20MIMO	Ant1	2412	26Tone	RU0	2.08	2402.48	2404.56	≥ 0.5	PASS
			52Tone	RU37	17.04	2402.48	2419.52	≥ 0.5	PASS
			106Tone	RU53	17.12	2402.44	2419.56	≥ 0.5	PASS
	Ant2	2412	26Tone	RU0	2.08	2402.44	2404.52	≥ 0.5	PASS
			52Tone	RU37	17.00	2402.48	2419.48	≥ 0.5	PASS
			106Tone	RU53	17.08	2402.44	2419.52	≥ 0.5	PASS
	Ant1	2437	26Tone	RU4	2.64	2435.64	2438.28	≥ 0.5	PASS
			52Tone	RU38	15.08	2429.44	2444.52	≥ 0.5	PASS
			106Tone	RU53	17.12	2427.40	2444.52	≥ 0.5	PASS
	Ant2	2437	26Tone	RU4	2.60	2435.68	2438.28	≥ 0.5	PASS
			52Tone	RU38	15.08	2429.44	2444.52	≥ 0.5	PASS
			106Tone	RU53	17.08	2427.44	2444.52	≥ 0.5	PASS
	Ant1	2462	26Tone	RU8	2.08	2469.44	2471.52	≥ 0.5	PASS
			52Tone	RU40	15.80	2455.68	2471.48	≥ 0.5	PASS
			106Tone	RU54	17.16	2454.40	2471.56	≥ 0.5	PASS
	Ant2	2462	26Tone	RU8	2.08	2469.44	2471.52	≥ 0.5	PASS
			52Tone	RU40	17.04	2454.44	2471.48	≥ 0.5	PASS
			106Tone	RU54	17.16	2454.40	2471.56	≥ 0.5	PASS

Note: For ax partial RU mode, 26Tone has the lowest DTS bandwidth, so only the worst data of 26Tone DTS bandwidth were performed in the report.

11.1.2. Test Graphs

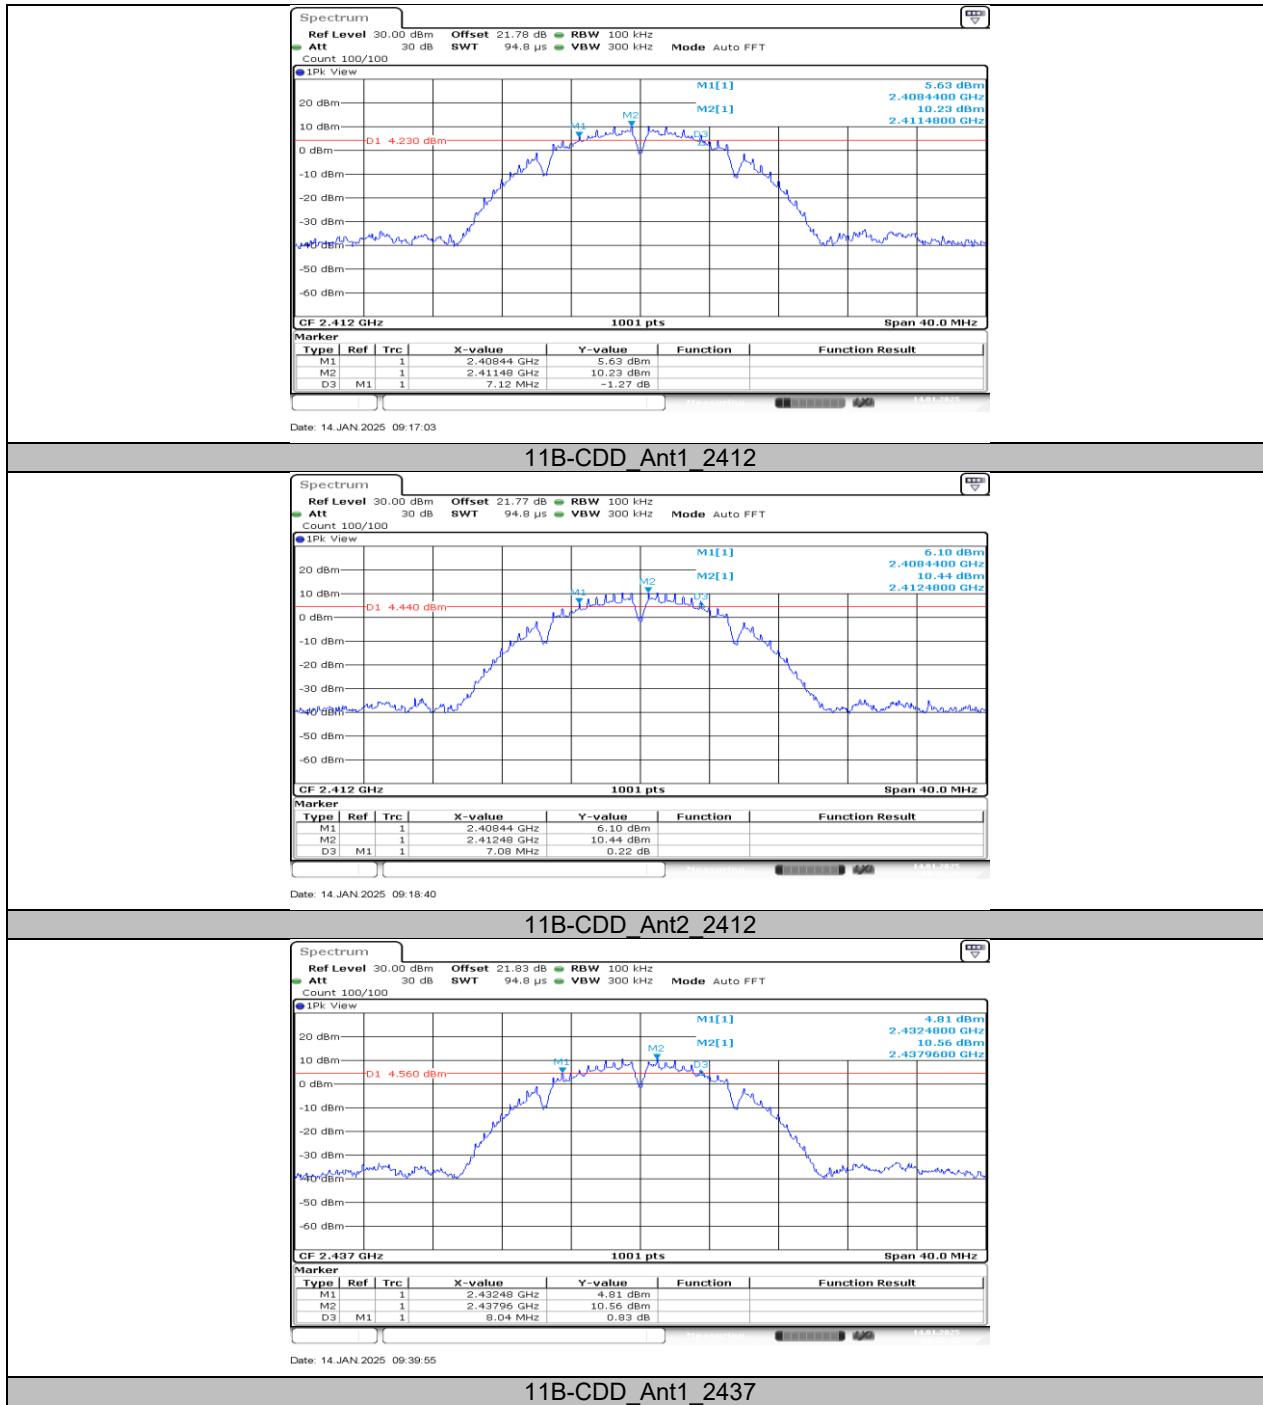

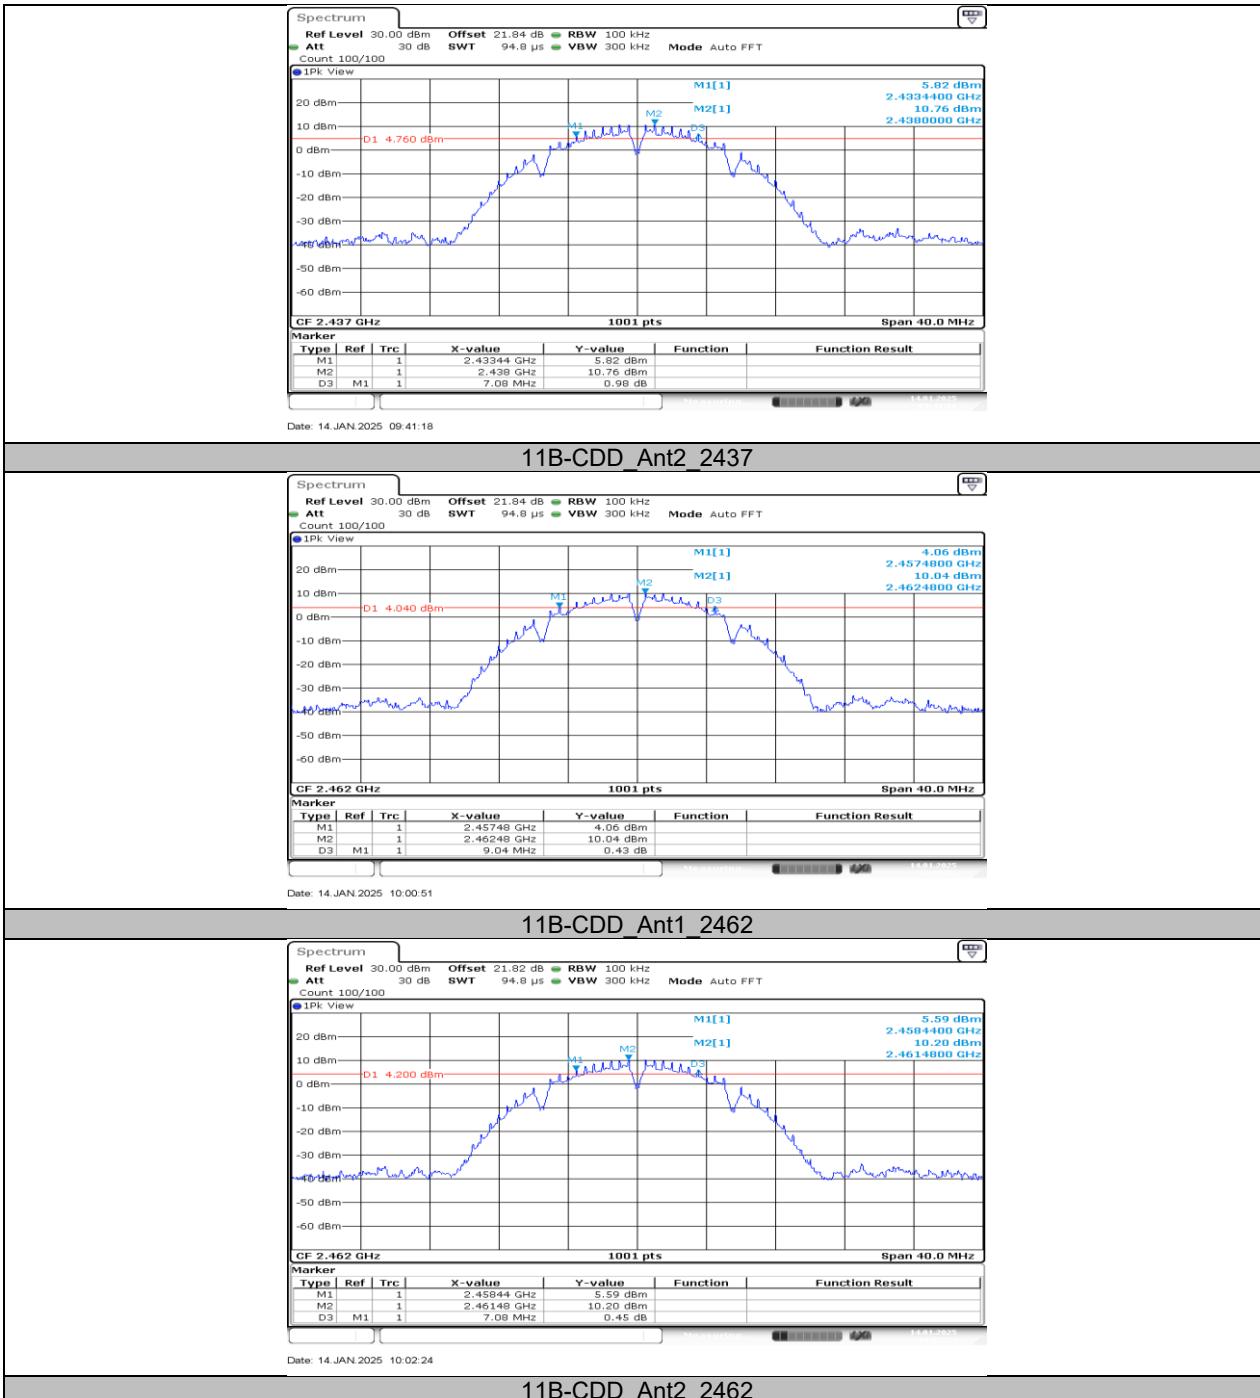
11B-CDD Ant2_2462

