

**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 Issue 3**

**TEST REPORT**

*For*

**WIFI+BT Module**

**MODEL NUMBER: DCT1ZR2701**

**REPORT NUMBER: 4791227226-1-RF-3**

**ISSUE DATE: April 11, 2024**

**FCC ID: 2AC23-DCT1Z  
IC: 12290A-DCT1Z**

*Prepared for*

**Hui Zhou Gaoshengda Technology Co.,LTD  
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou  
City,Guangdong,China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 11, 2024	Initial Issue	

## Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C

ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>9</i>
5.2. <i>CHANNEL LIST.....</i>	<i>9</i>
5.3. <i>MAXIMUM POWER.....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION .....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>12</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>13</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
7.1. <i>CONDUCTED OUTPUT POWER .....</i>	<i>17</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH .....</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY .....</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>22</i>
7.5. <i>DUTY CYCLE.....</i>	<i>24</i>
<b>8. RADIATED TEST RESULTS .....</b>	<b>25</b>
8.1. <i>RESTRICTED BANDEdge .....</i>	<i>33</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ) .....</i>	<i>51</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ) .....</i>	<i>57</i>
8.4. <i>SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ) .....</i>	<i>81</i>
8.5. <i>SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ) .....</i>	<i>84</i>
8.6. <i>SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ) .....</i>	<i>86</i>
<b>9. ANTENNA REQUIREMENT .....</b>	<b>88</b>
<b>10. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>89</b>
<b>11. TEST DATA .....</b>	<b>92</b>
11.1. <i>APPENDIX A: DTS BANDWIDTH .....</i>	<i>92</i>
11.1.1. <i>Test Result .....</i>	<i>92</i>

11.1.2.	Test Graphs .....	93
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i> .....	100
11.2.1.	Test Result.....	100
11.2.2.	Test Graphs .....	101
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i> .....	108
11.3.1.	Test Result.....	108
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i> .....	109
11.4.1.	Test Result.....	109
11.4.2.	Test Graphs .....	110
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i> .....	117
11.5.1.	Test Result.....	117
11.5.2.	Test Graphs .....	118
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i> .....	123
11.6.1.	Test Result.....	123
11.6.2.	Test Graphs .....	125
11.7.	<i>APPENDIX G: DUTY CYCLE</i> .....	146
11.7.1.	Test Result.....	146
11.7.2.	Test Graphs .....	147

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

### Manufacturer Information


Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

### EUT Information

EUT Name: WIFI+BT Module  
Model: DCT1ZR2701  
Brand: GSD  
Sample Received Date: March 11, 2024  
Sample Status: Normal  
Sample ID: 7002245  
Date of Tested: March 23, 2024 to April 11, 2024


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



Fanny Huang  
Engineer Project Associate

Checked By:



Denny Huang  
Senior Project Engineer

Approved By:



Stephen Guo  
Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01  
Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC  
Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	---

### Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

### Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

### Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz) ±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	DCT1ZR2701

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40
Normal Test Voltage:	DC 3.3 V

### 5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	17.72
g	2412 ~ 2462	1-11[11]	15.87
n HT20	2412 ~ 2462	1-11[11]	16.62
n HT40	2422 ~ 2452	3-9[7]	16.61

## 5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		MP Tool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	90	90	90	/		
	2	80	80	80			
802.11g	1	88	88	88			
	2	80	80	80			
802.11n HT20	1	85	85	85			
	2	78	78	78			
802.11n HT40	1	/			80	78	80
	2	/			72	70	70

## WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11b/g SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spartial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PIFA antenna	1.72
2	2412-2462	PIFA antenna	1.72

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 1.72 \text{ dBi}$$

$G_{\text{ANT}}$  : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for  $N_{\text{ANT}} \leq 4$

For power spectral density (PSD) measurements:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.73 \text{ dBi}$$

Array Gain =  $10 \log(N_{\text{ANT}}/N_{\text{SS}})$  dB.

$N_{\text{ANT}}$  : number of transmit antennas

$N_{\text{SS}}$  : number of spatial streams, The worst case directional gain will occur when  $N_{\text{SS}} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: 1.BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)		

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Adaptor	Lenovo	ADLX65YCC3D	Input: AC 100-240V, 1.8A, 50-60Hz Output: DC 20V, 3.25A, 65.0W Max

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

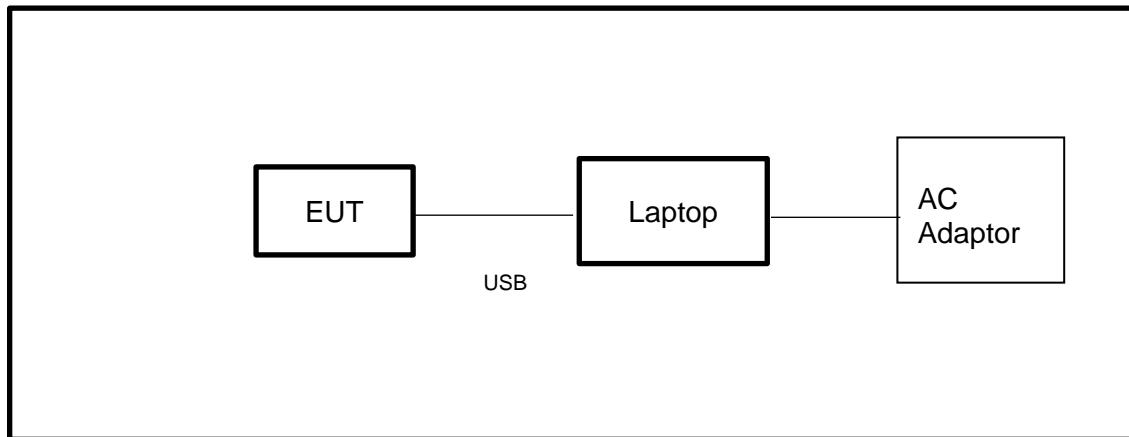

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test.

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonsend	JS0806-2	23B80620666	April 18, 2023	April 17, 2024
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

<b>Other Instrument</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP

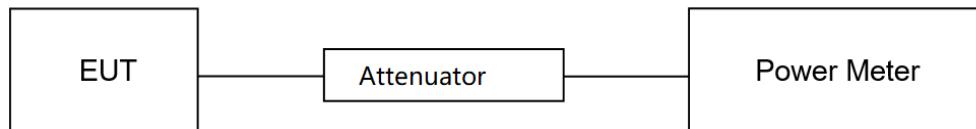

#### TEST ENVIRONMENT

Temperature	21.3°C	Relative Humidity	55.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

#### TEST DATE / ENGINEER

Test Date	March 23, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

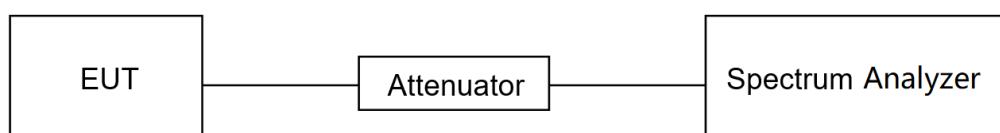

**TEST ENVIRONMENT**

Temperature	21.3°C	Relative Humidity	55.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	March 23, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x OBW bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

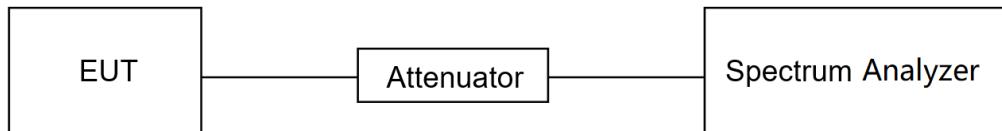

#### TEST ENVIRONMENT

Temperature	21.3°C	Relative Humidity	55.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

#### TEST DATE / ENGINEER

Test Date	March 23, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

### TEST SETUP

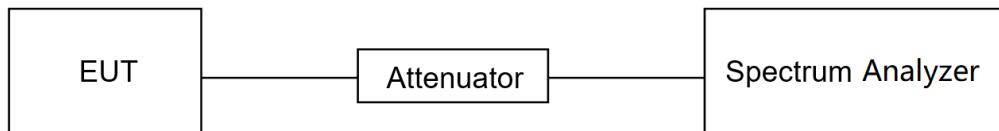

### TEST ENVIRONMENT

Temperature	21.3°C	Relative Humidity	55.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

### TEST DATE / ENGINEER

Test Date	March 23, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E&F

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP

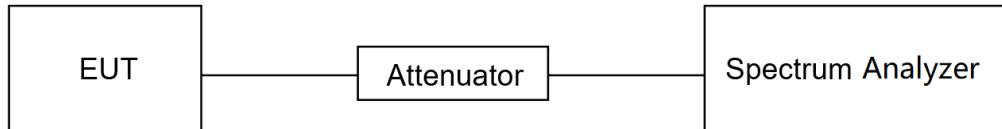

### TEST ENVIRONMENT

Temperature	21.3°C	Relative Humidity	55.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

### TEST DATE / ENGINEER

Test Date	March 23, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix G

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz					
Frequency Range (MHz)		Field Strength Limit (uV/m) at 3 m		Field Strength Limit (dBuV/m) at 3 m	
				Quasi-Peak	
30 - 88		100		40	
88 - 216		150		43.5	
216 - 960		200		46	
Above 960		500		54	
Above 1000		500		Peak	Average
				74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 38.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2380	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2665 - 2900	
13.36 - 13.41	3280 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST PROCEDURE

Below 30 MHz

## The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency  $X$  kHz resulted in a level of  $Y$  dB $\mu$ V/m, which is equivalent to  $Y-51.5 = Z$  dB $\mu$ A/m, which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


## Above 1 GHz

### The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

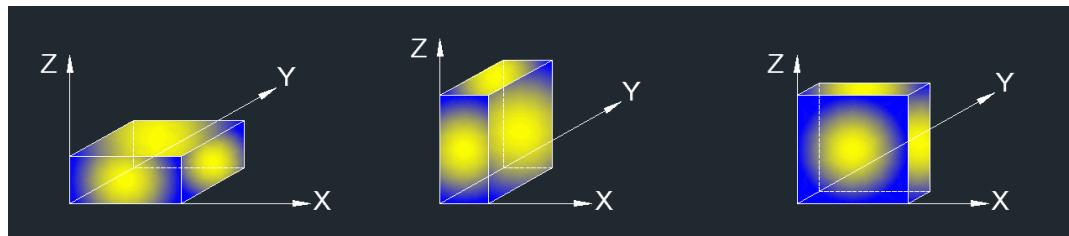

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

**For Restricted Bandedge:****Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

**For Radiate Spurious emission (9 kHz ~ 30 MHz):****Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

**For Radiate Spurious Emission (30 MHz ~ 1 GHz):****Note:**

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

**For Radiate Spurious Emission (1 GHz ~ 3 GHz):****Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


## TEST SETUP

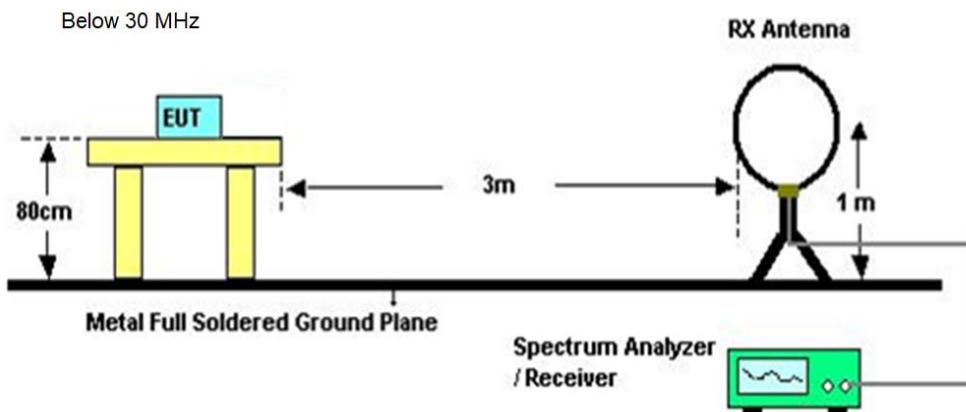

Below 1 GHz and above 30 MHz

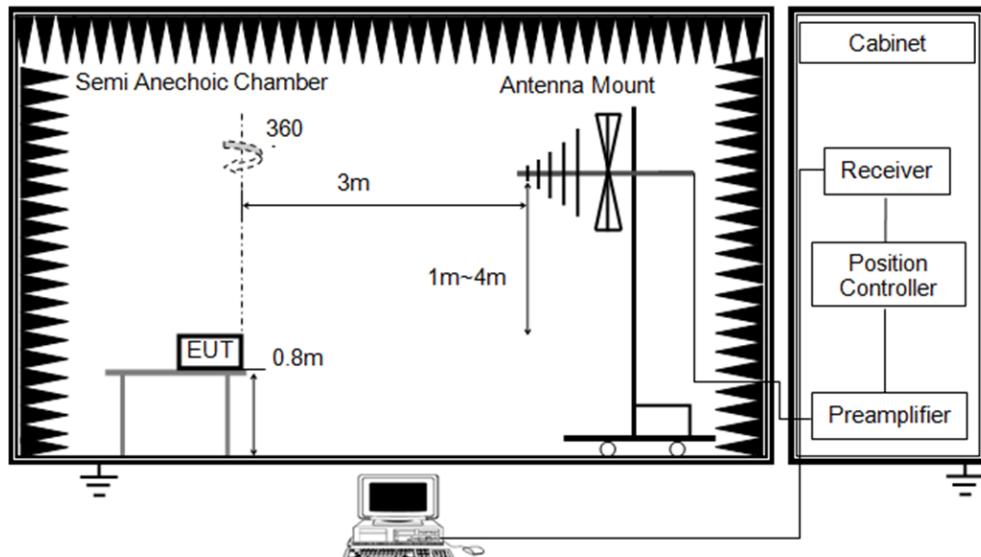

Above 1 GHz

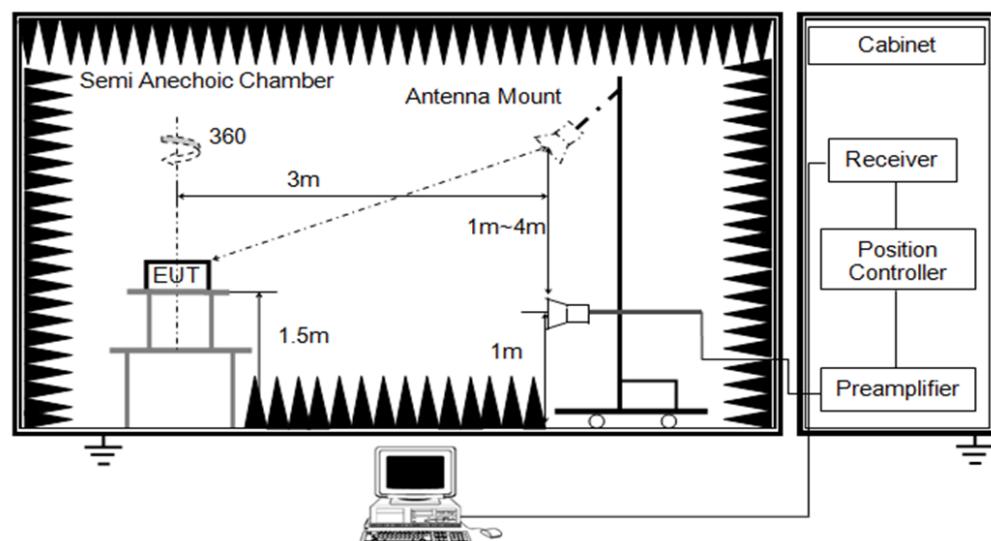

### TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	58.4%
Atmosphere Pressure	101kPa	Test Voltage	


### TEST DATE / ENGINEER

Test Date	April 11, 2024	Test By	Mason Wang
-----------	----------------	---------	------------

### TEST RESULTS


## 8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

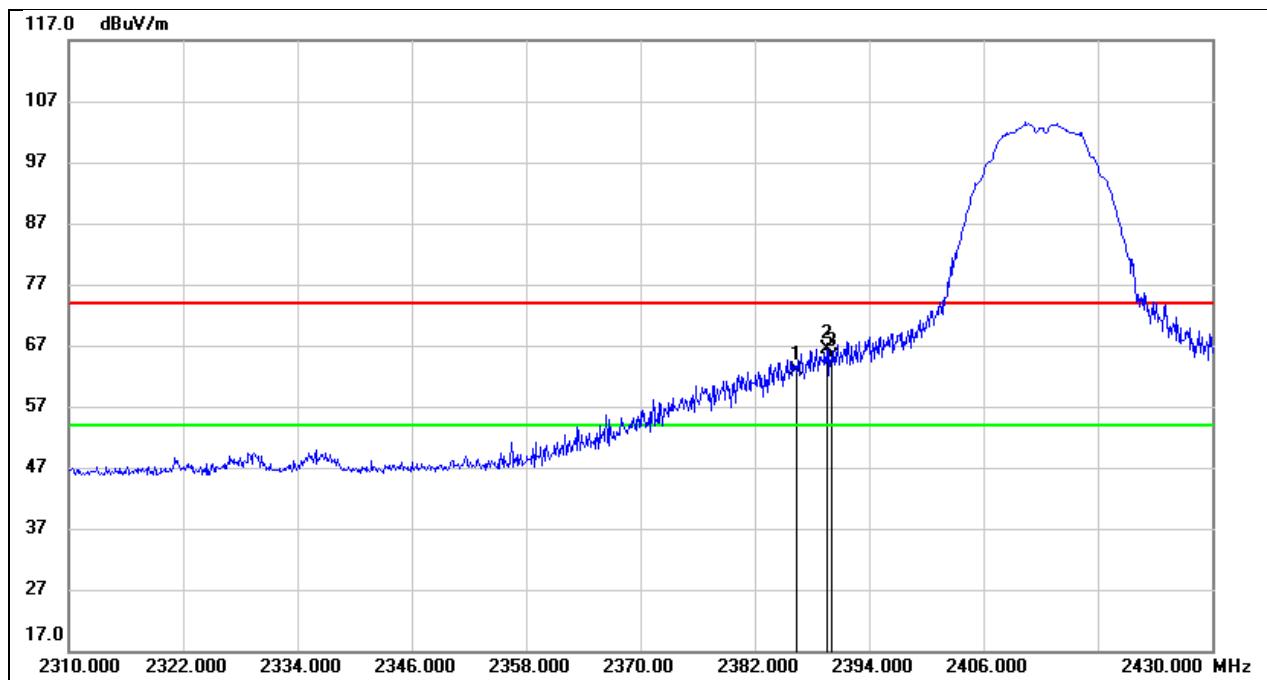


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.320	29.98	32.90	62.88	74.00	-11.12	peak
2	2389.560	33.43	32.92	66.35	74.00	-7.65	peak
3	2390.000	32.10	32.92	65.02	74.00	-8.98	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

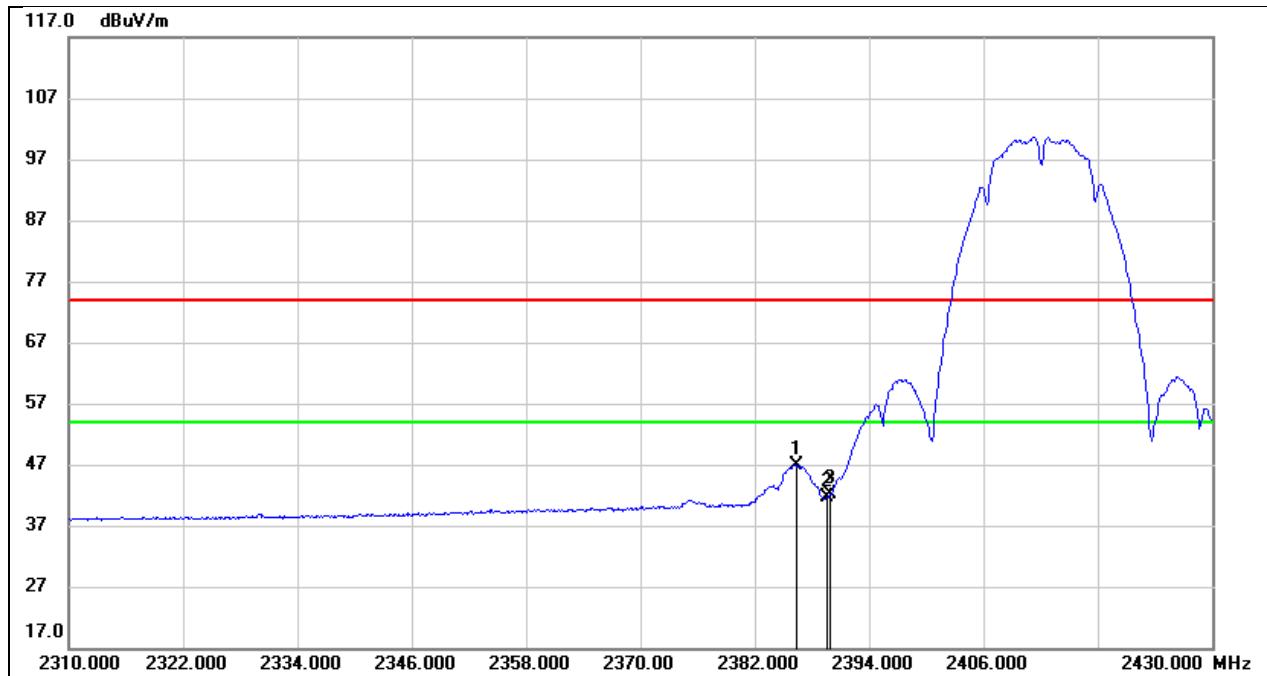


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	2386.320	13.94	32.90	46.84	54.00	-7.16	AVG
2	2389.560	8.66	32.92	41.58	54.00	-12.42	AVG
3	2390.000	9.13	32.92	42.05	54.00	-11.95	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

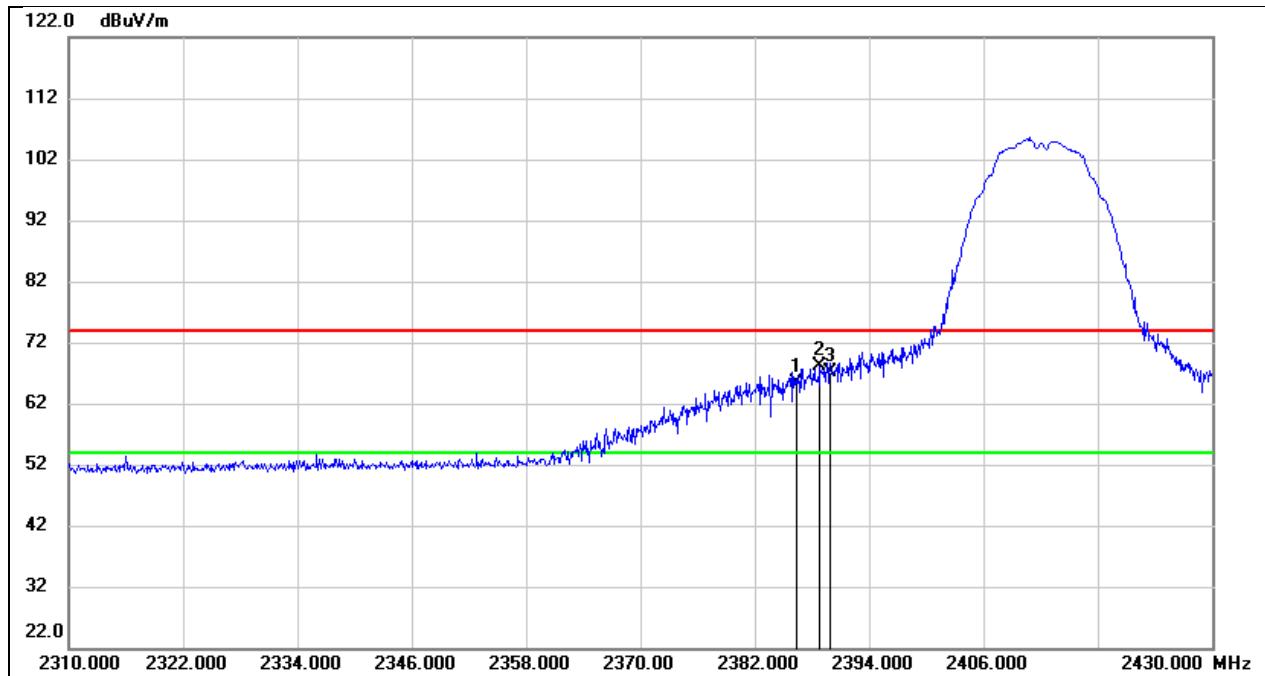


No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Correct (dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	2386.440	32.57	32.90	65.47	74.00	-8.53	peak
2	2388.840	35.24	32.92	68.16	74.00	-5.84	peak
3	2390.000	34.26	32.92	67.18	74.00	-6.82	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

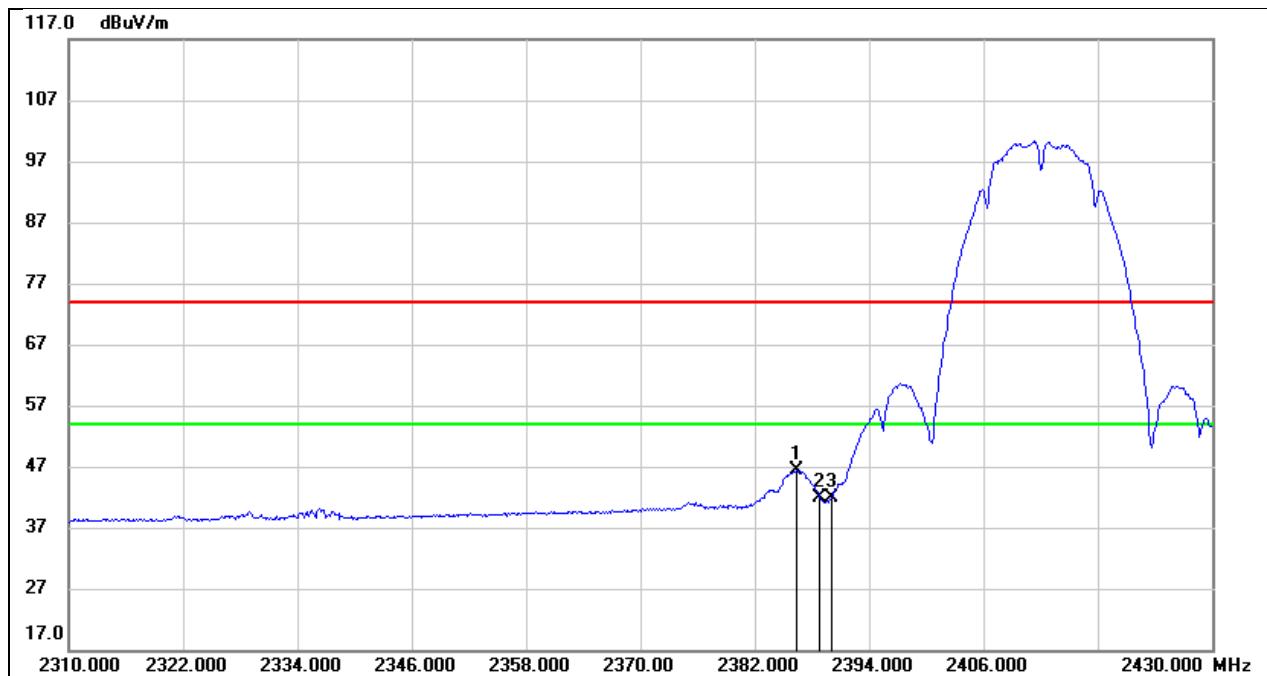


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.440	13.36	32.90	46.26	54.00	-7.74	AVG
2	2388.840	8.97	32.92	41.89	54.00	-12.11	AVG
3	2390.000	9.07	32.92	41.99	54.00	-12.01	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

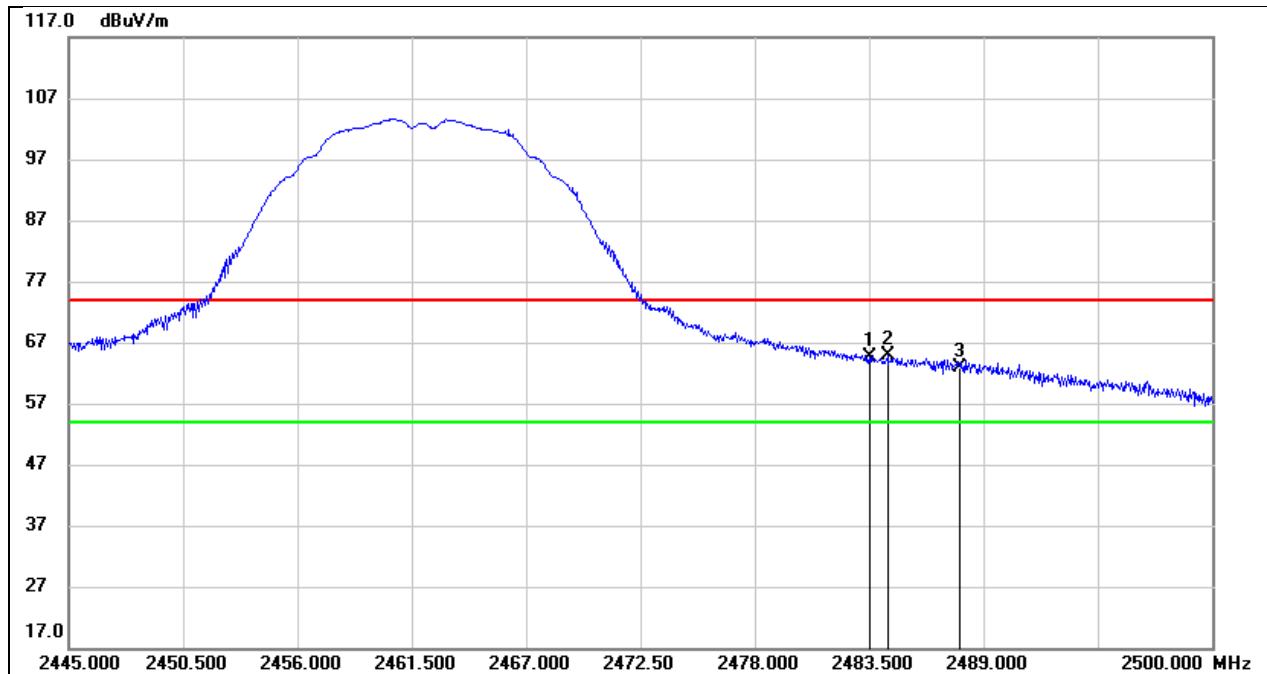


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	2483.500	31.74	32.94	64.68	74.00	-9.32	peak
2	2484.380	31.92	32.94	64.86	74.00	-9.14	peak
3	2487.845	29.89	32.94	62.83	74.00	-11.17	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

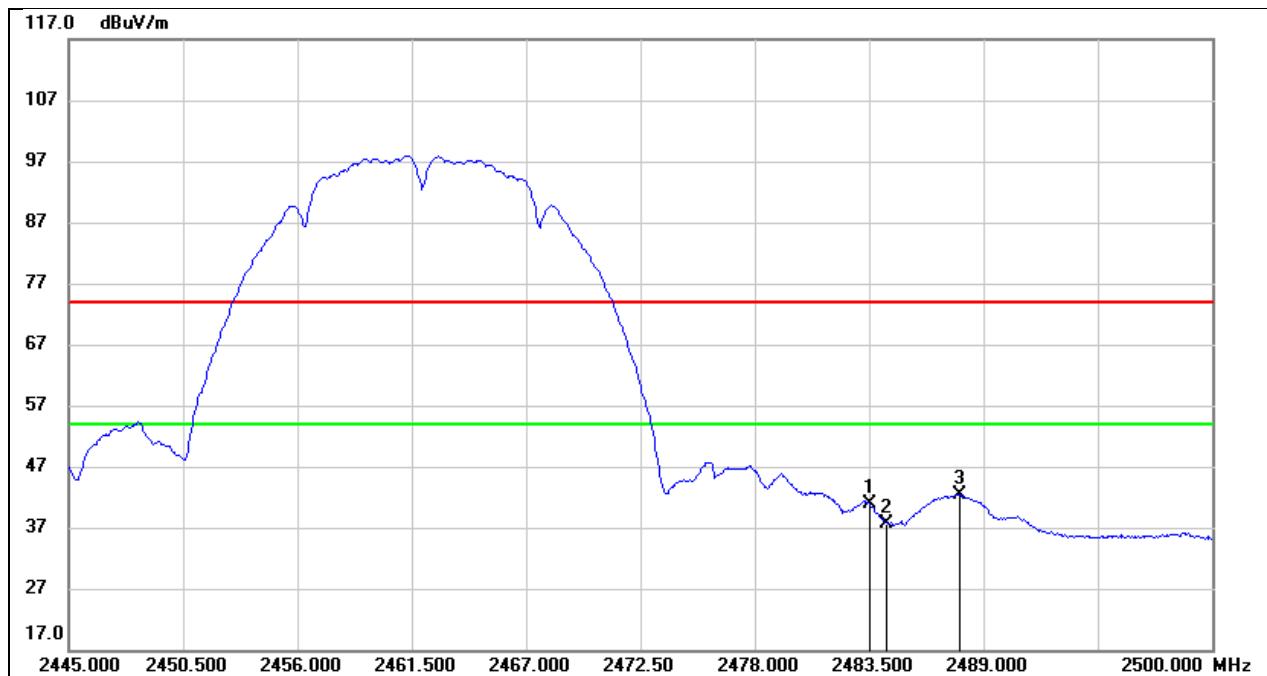


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	2483.500	7.98	32.94	40.92	54.00	-13.08	AVG
2	2484.380	4.81	32.94	37.75	54.00	-16.25	AVG
3	2487.845	9.54	32.94	42.48	54.00	-11.52	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

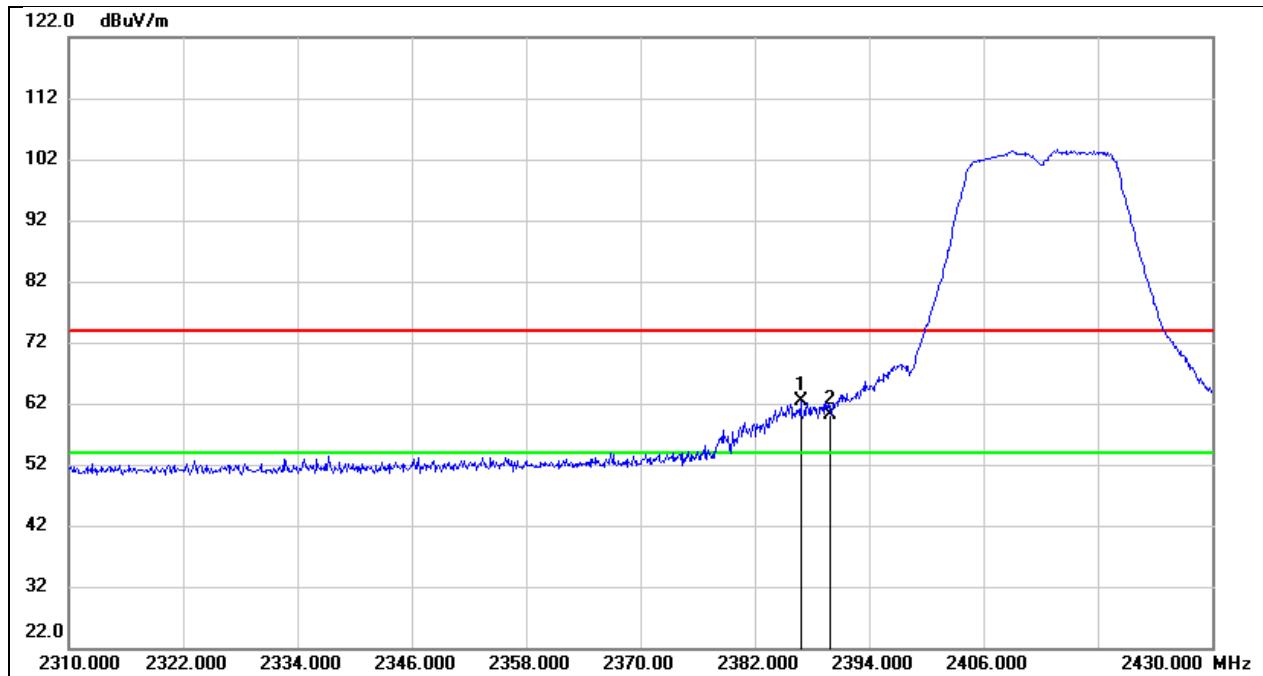


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.800	29.41	32.91	62.32	74.00	-11.68	peak
2	2390.000	27.31	32.92	60.23	74.00	-13.77	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

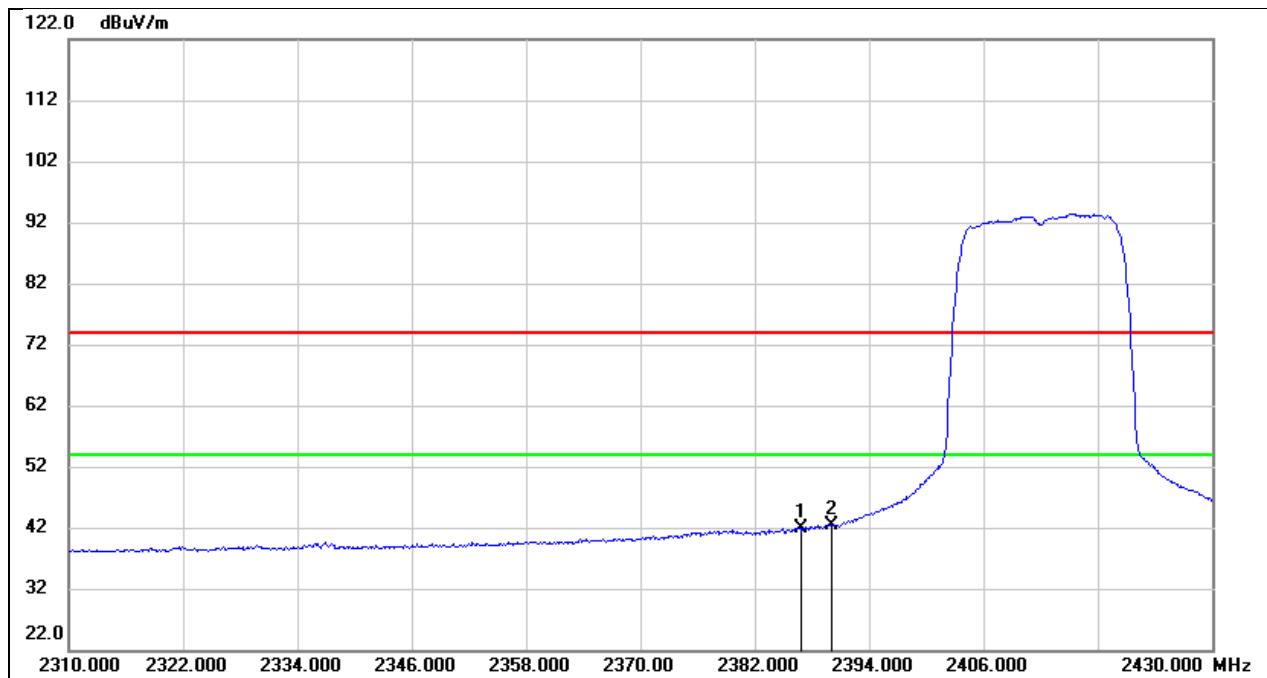


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.800	9.08	32.91	41.99	54.00	-12.01	AVG
2	2390.000	9.50	32.92	42.42	54.00	-11.58	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

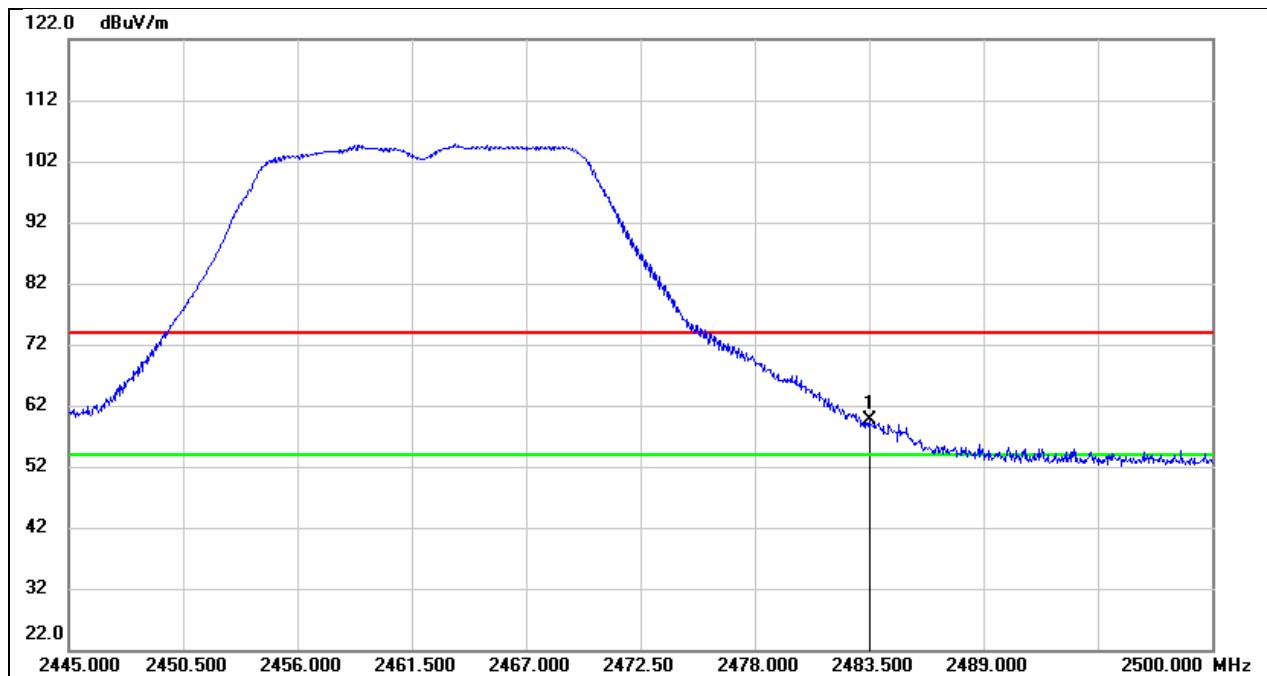


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.72	32.94	59.66	74.00	-14.34	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

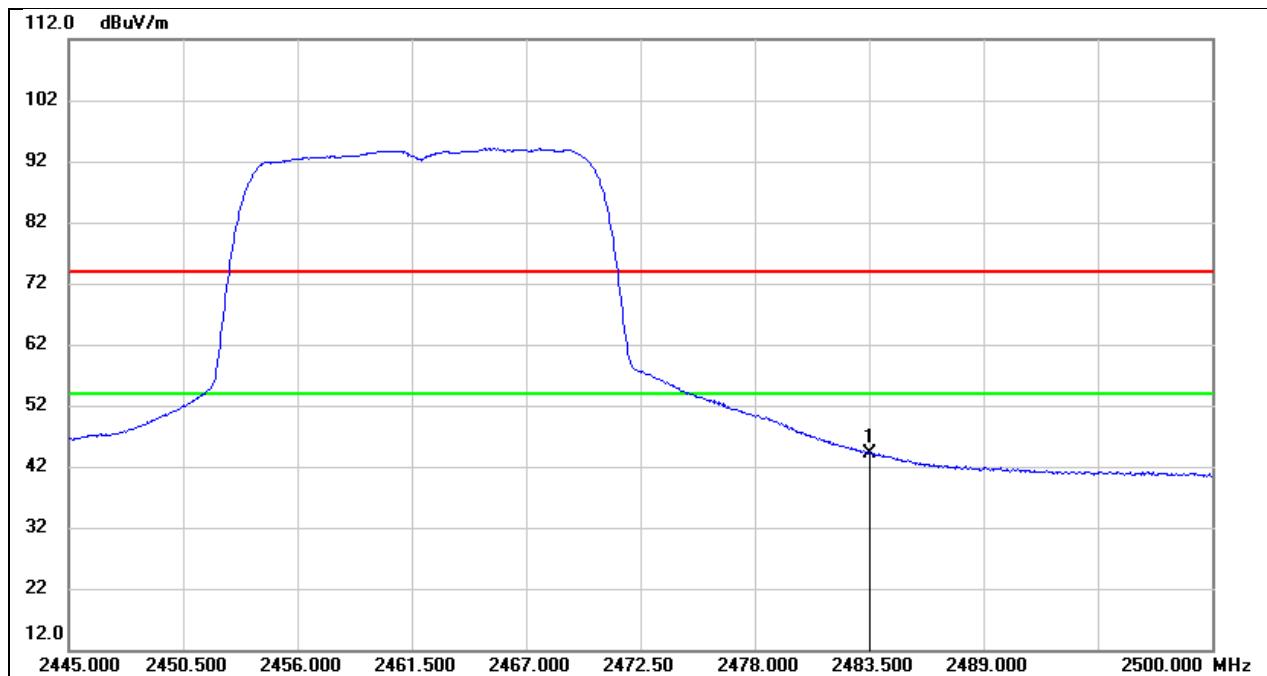


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.23	32.94	44.17	54.00	-9.83	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

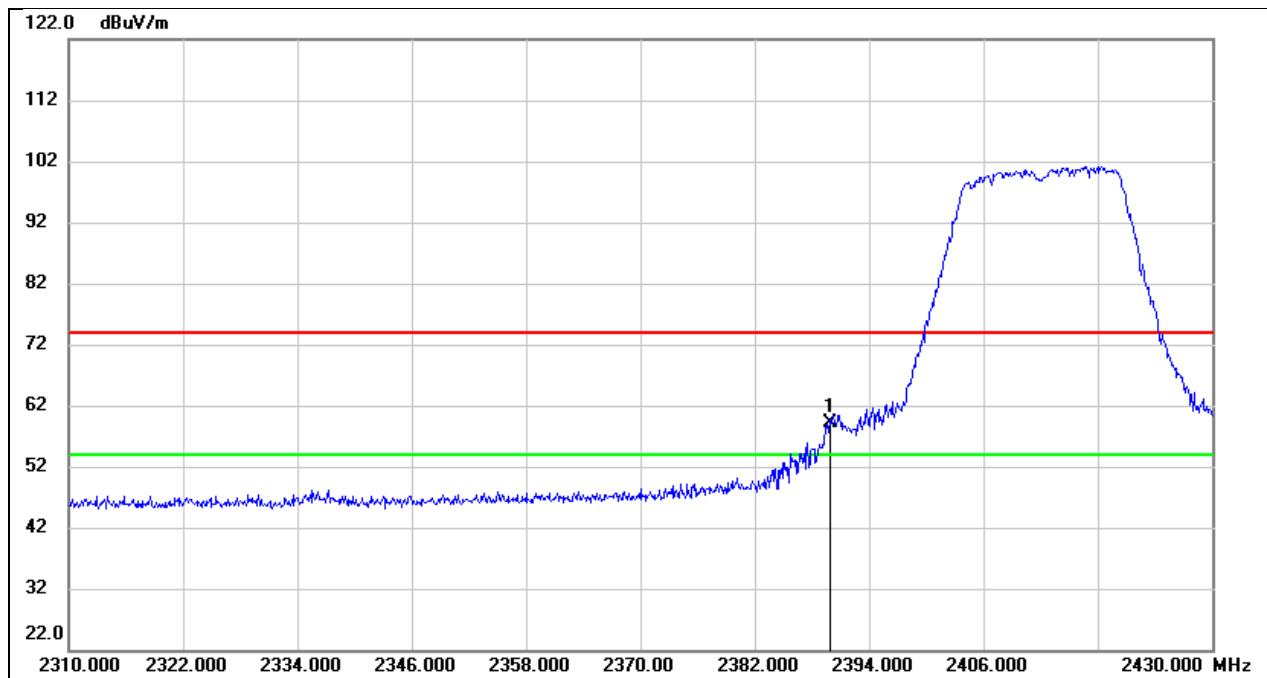


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.73	27.51	59.24	74.00	-14.76	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

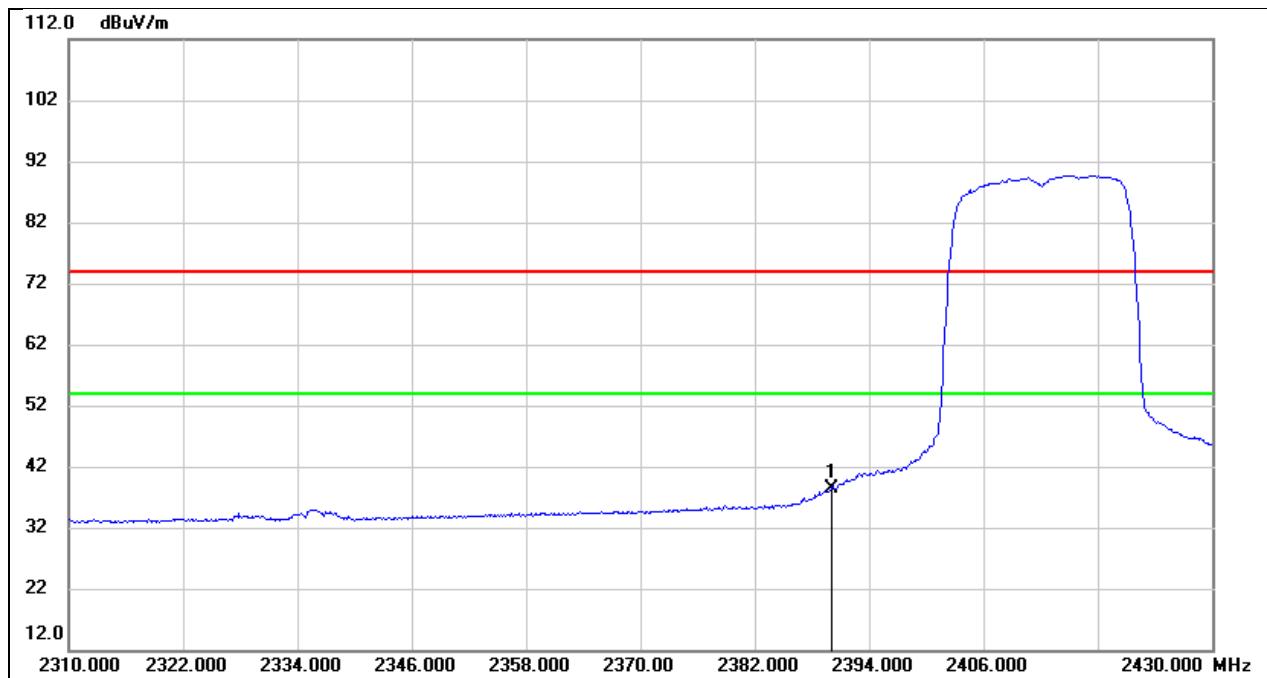


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	10.89	27.51	38.40	54.00	-15.60	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

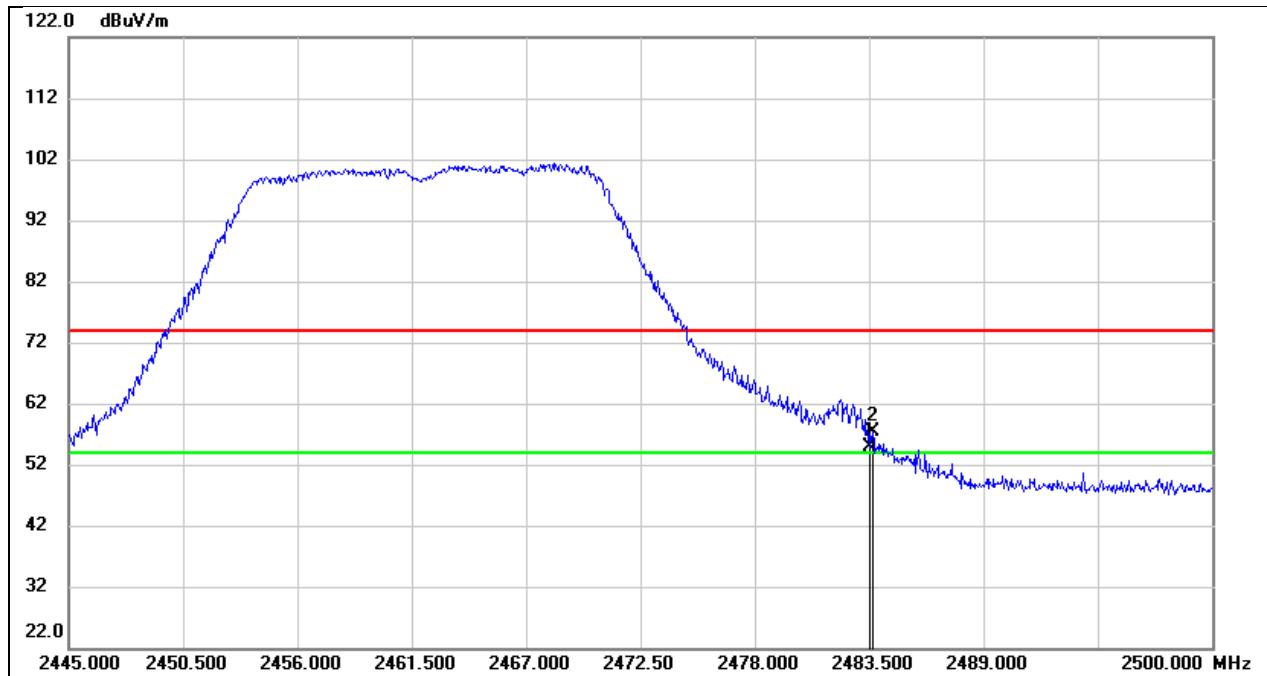


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.21	27.76	54.97	74.00	-19.03	peak
2	2483.665	29.57	27.76	57.33	74.00	-16.67	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

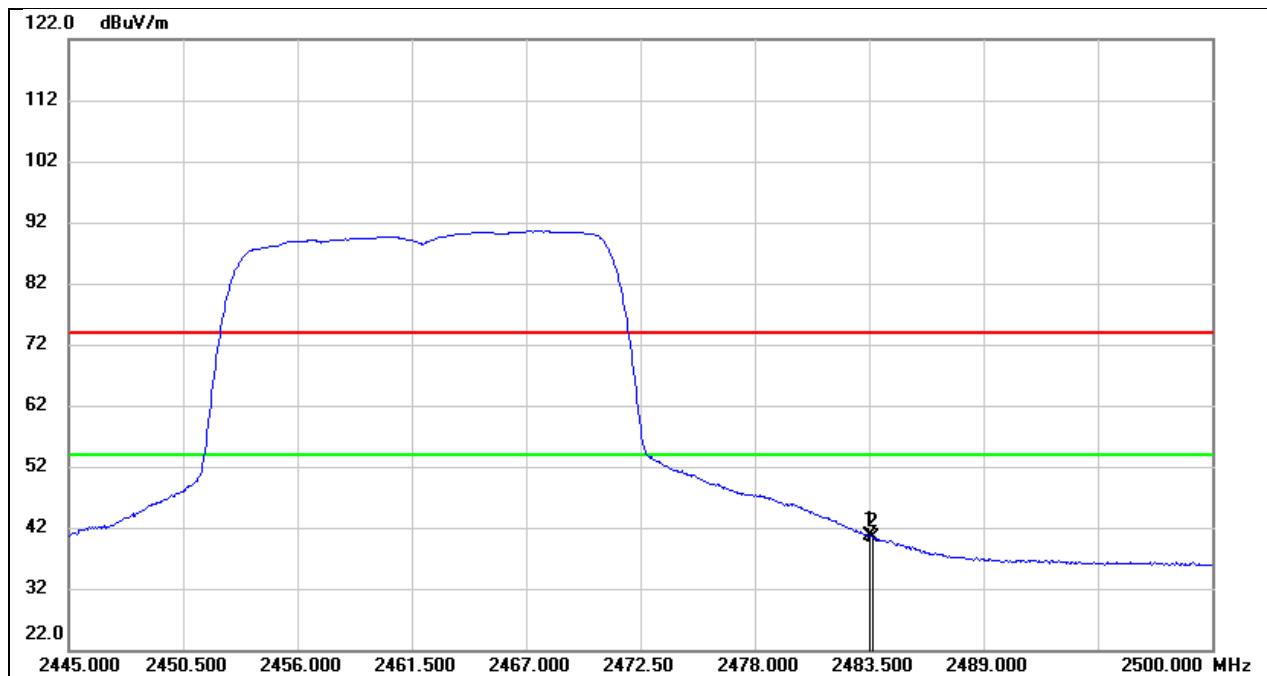


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.99	27.76	40.75	54.00	-13.25	AVG
2	2483.665	12.57	27.76	40.33	54.00	-13.67	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 3.3 V

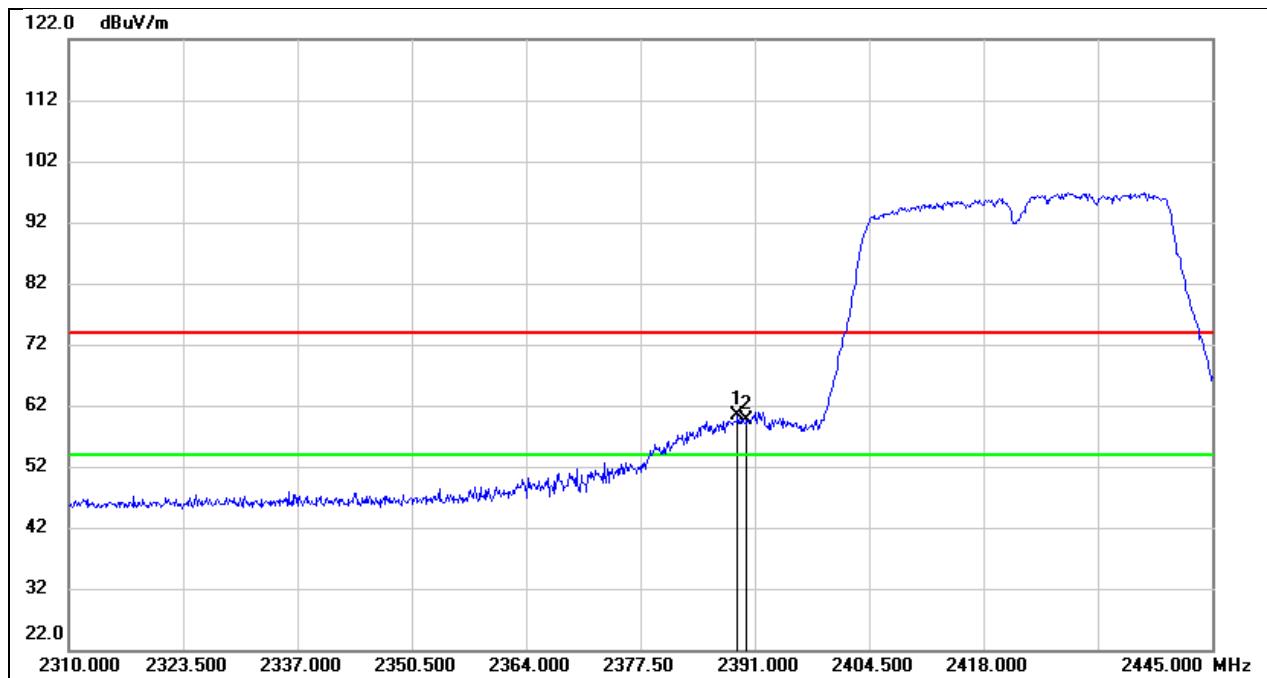


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.975	32.81	27.51	60.32	74.00	-13.68	peak
2	2390.000	32.09	27.51	59.60	74.00	-14.40	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 3.3 V

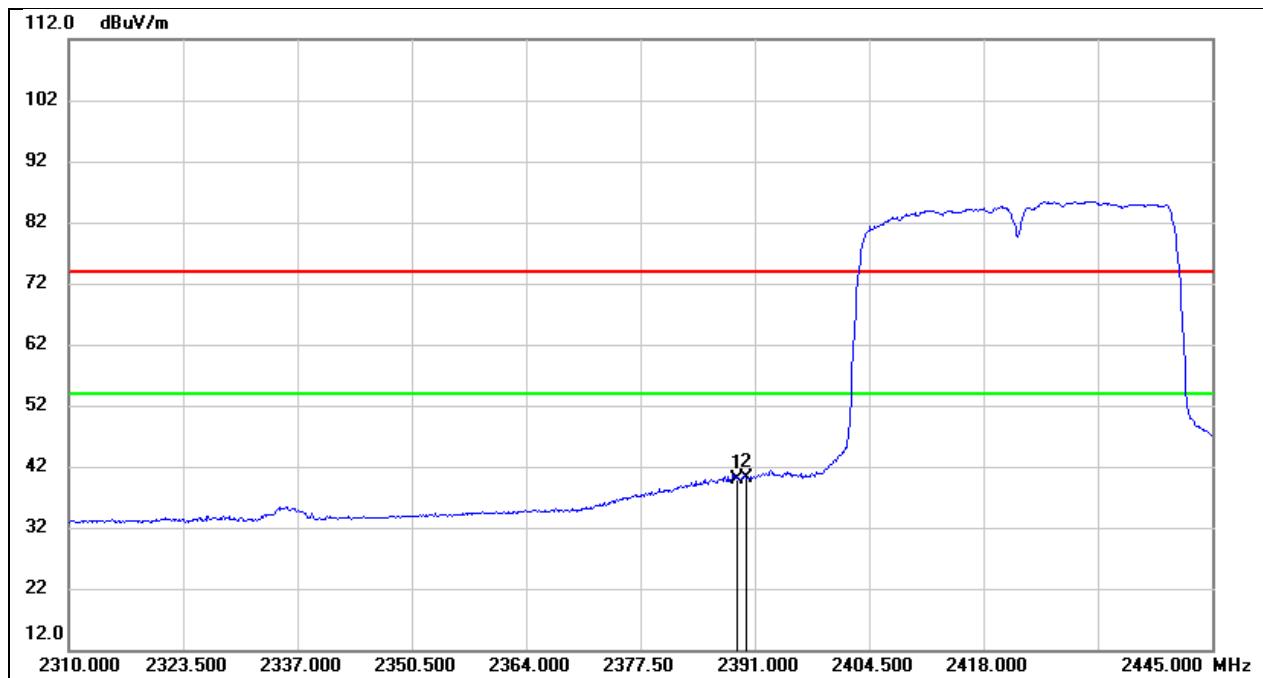


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.975	12.37	27.51	39.88	54.00	-14.12	AVG
2	2390.000	12.64	27.51	40.15	54.00	-13.85	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 3.3 V

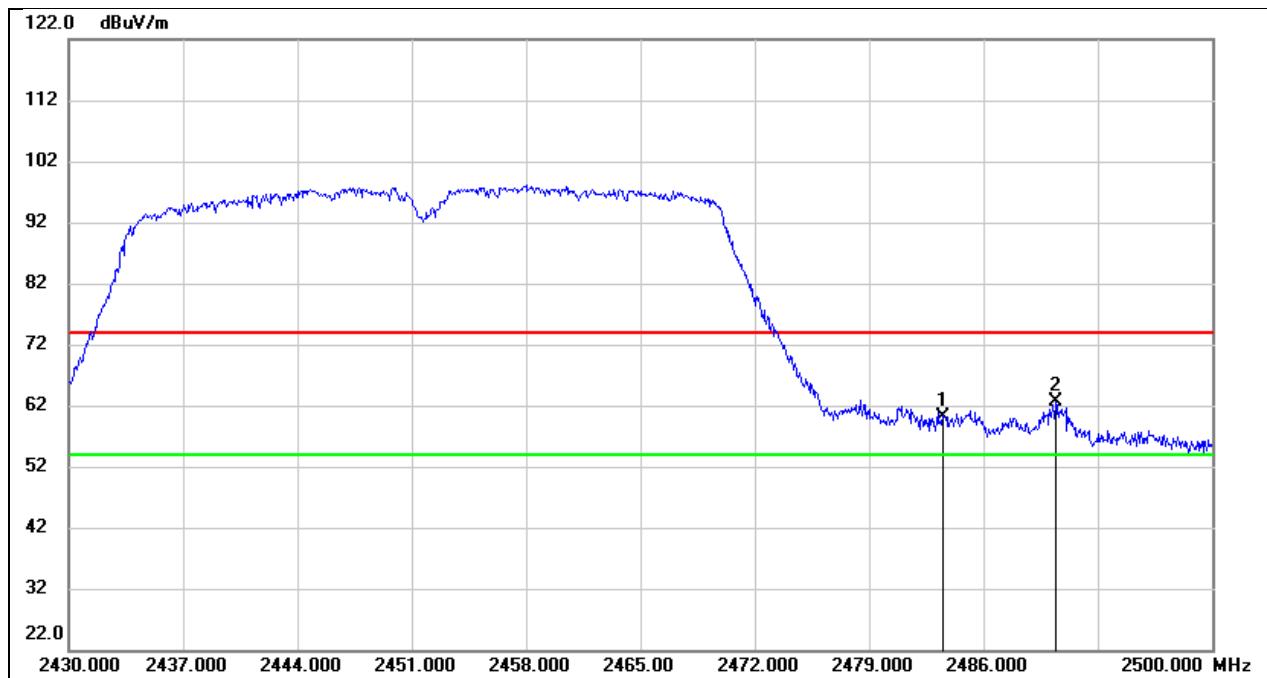

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.27	27.76	60.03	74.00	-13.97	peak
2	2490.410	34.74	27.78	62.52	74.00	-11.48	peak


Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 3.3 V

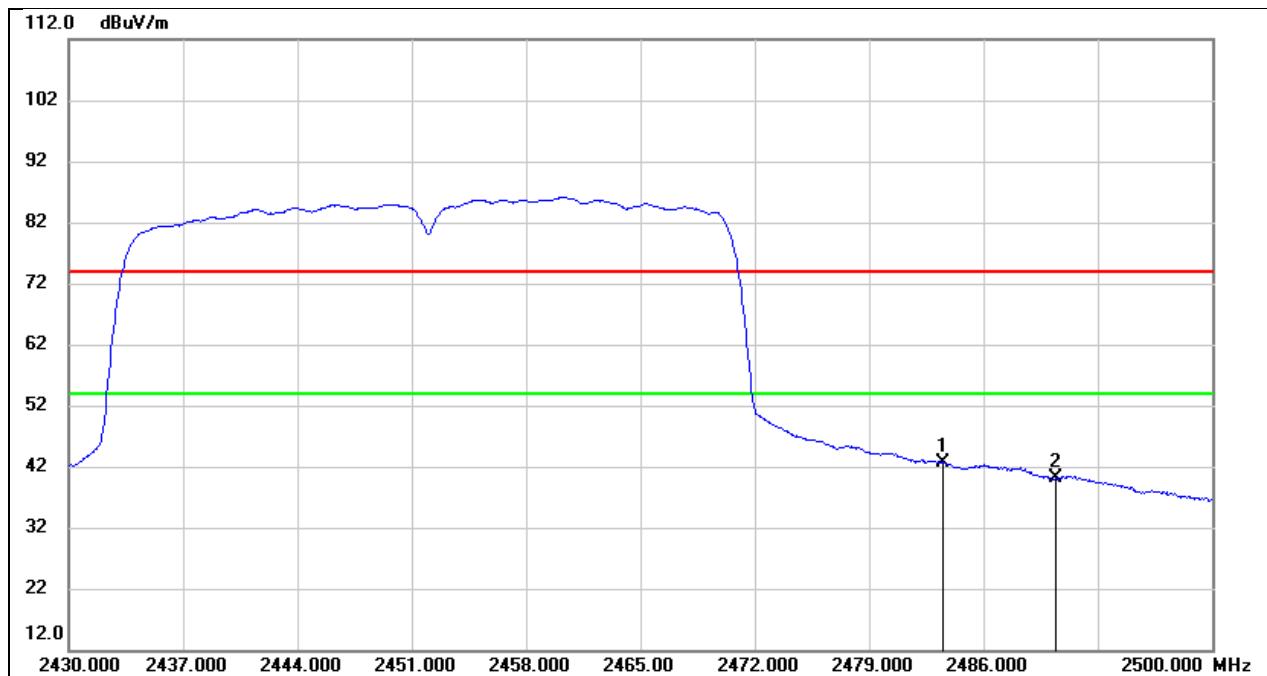

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.95	27.76	42.71	54.00	-11.29	AVG
2	2490.410	12.28	27.78	40.06	54.00	-13.94	AVG


## 8.2. SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

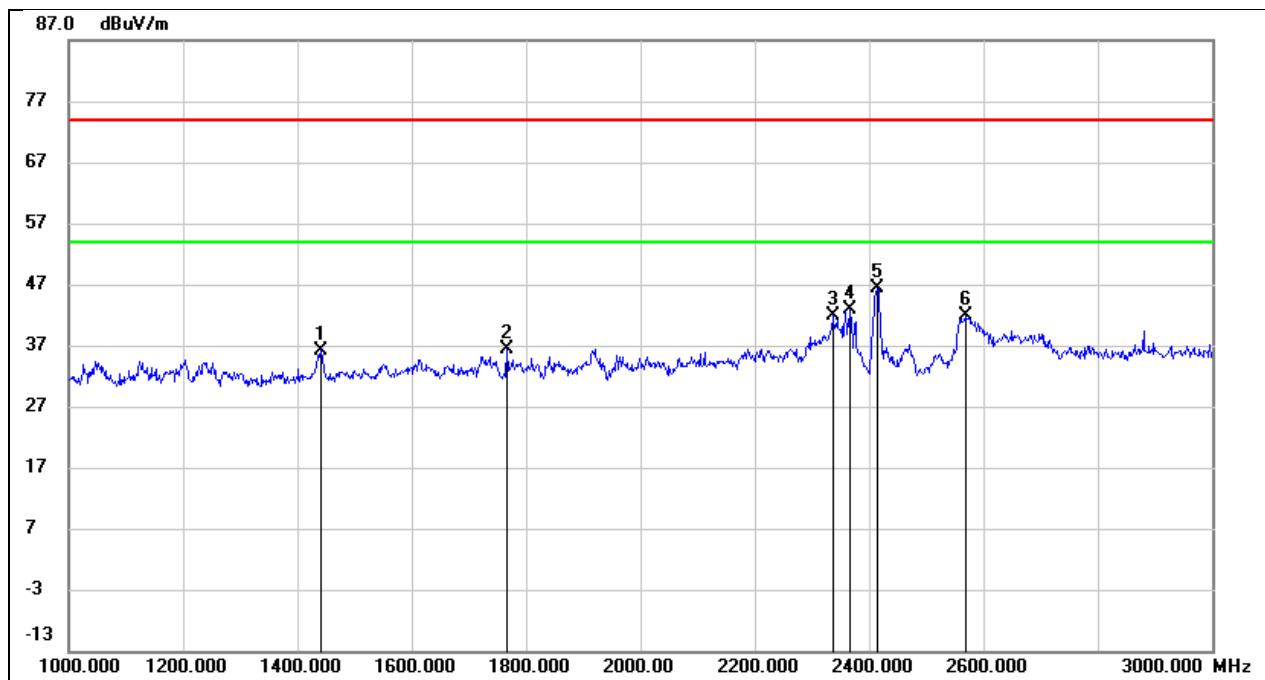


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1442.000	48.38	-12.13	36.25	74.00	-37.75	peak
2	1766.000	46.77	-10.40	36.37	74.00	-37.63	peak
3	2336.000	49.72	-7.87	41.85	74.00	-32.15	peak
4	2366.000	50.58	-7.65	42.93	74.00	-31.07	peak
5	2412.000	53.74	-7.41	46.33	/	/	fundamental
6	2568.000	49.48	-7.62	41.86	74.00	-32.14	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

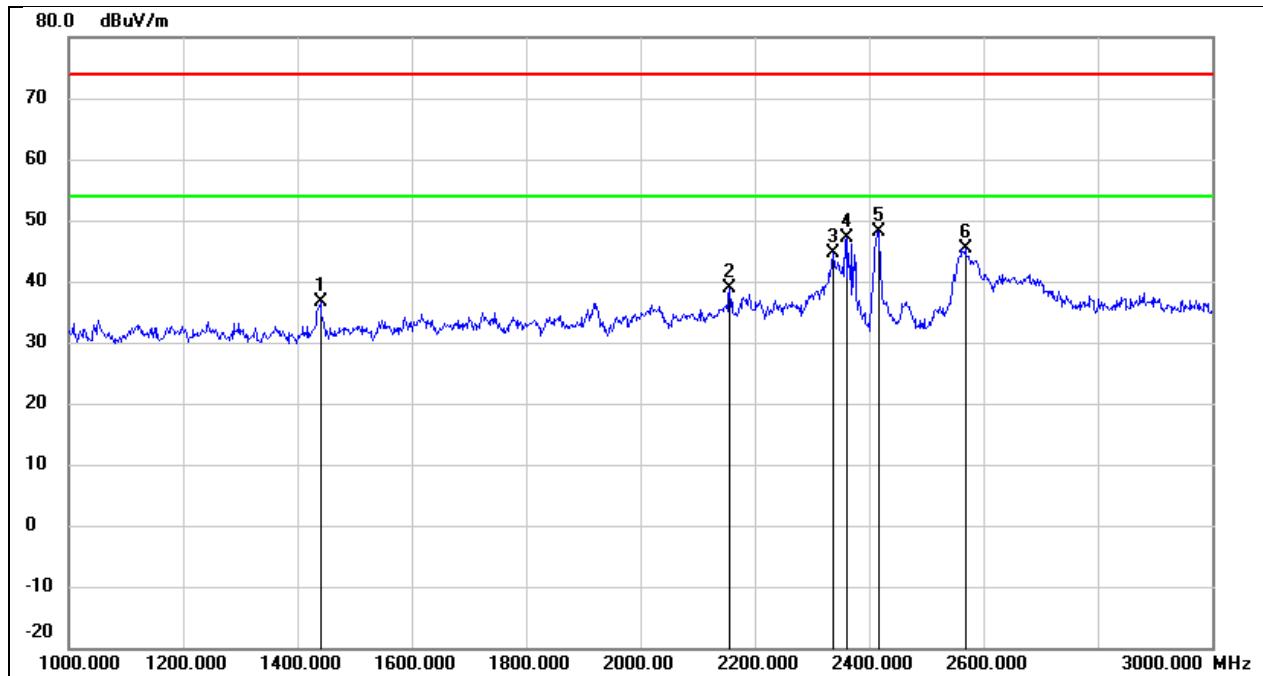


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	48.65	-12.14	36.51	74.00	-37.49	peak
2	2156.000	47.93	-9.15	38.78	74.00	-35.22	peak
3	2338.000	52.51	-7.85	44.66	74.00	-29.34	peak
4	2362.000	54.70	-7.69	47.01	74.00	-26.99	peak
5	2412.000	55.53	-7.42	48.11	/	/	fundamental
6	2568.000	53.00	-7.62	45.38	74.00	-28.62	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

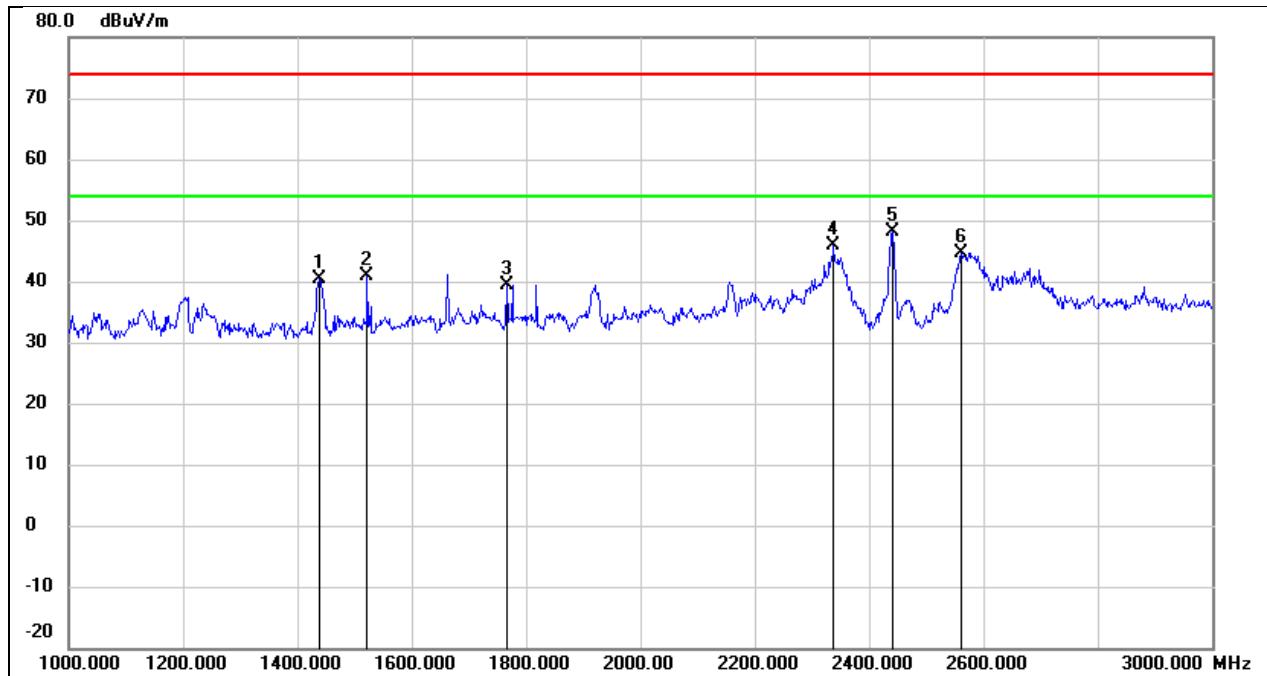


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	52.42	-12.15	40.27	74.00	-33.73	peak
2	1522.000	52.39	-11.62	40.77	74.00	-33.23	peak
3	1766.000	49.81	-10.40	39.41	74.00	-34.59	peak
4	2338.000	53.73	-7.85	45.88	74.00	-28.12	peak
5	2437.000	55.53	-7.44	48.09	/	/	fundamental
6	2562.000	52.36	-7.62	44.74	74.00	-29.26	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3 V

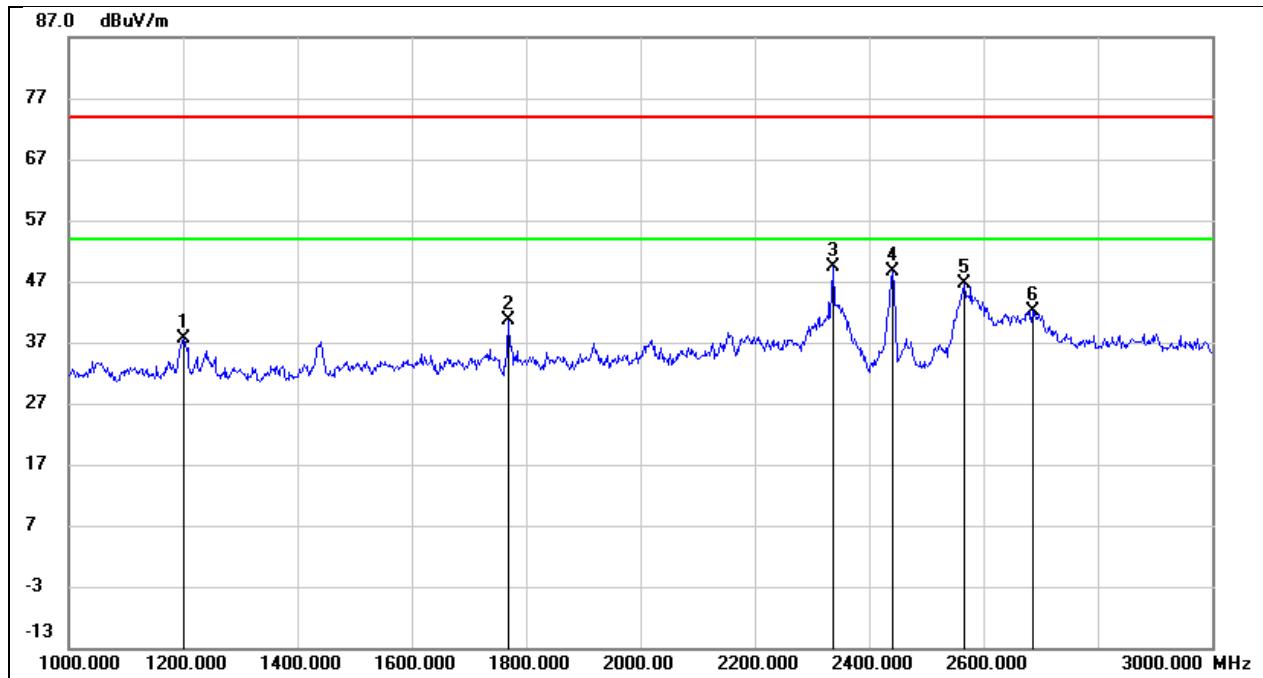


No.	Frequency (MHz)	Reading (dB <sub>u</sub> V)	Correct (dB/m)	Result (dB <sub>u</sub> V/m)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Remark
1	1200.000	50.26	-12.64	37.62	74.00	-36.38	peak
2	1768.000	50.98	-10.39	40.59	74.00	-33.41	peak
3	2338.000	57.11	-7.85	49.26	74.00	-24.74	peak
4	2437.000	55.97	-7.44	48.53	/	/	fundamental
5	2566.000	54.28	-7.61	46.67	74.00	-27.33	peak
6	2686.000	49.33	-7.31	42.02	74.00	-31.98	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

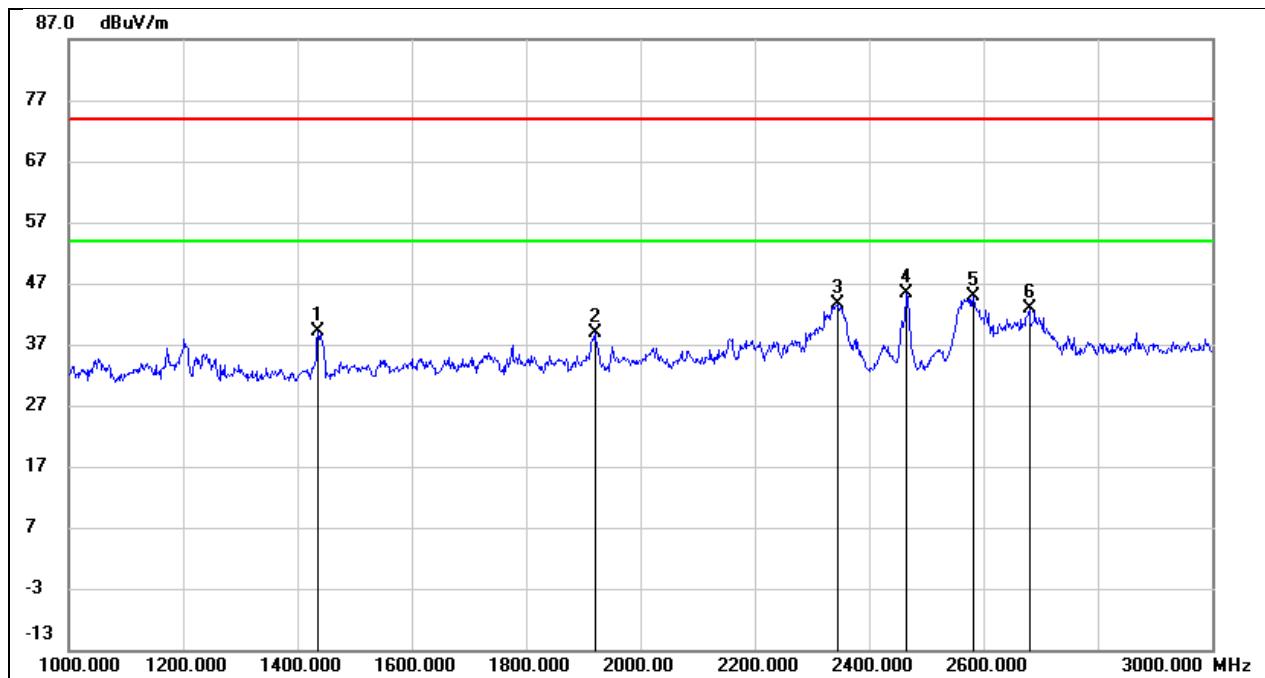

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1436.000	51.20	-12.17	39.03	74.00	-34.97	peak
2	1920.000	49.10	-10.16	38.94	74.00	-35.06	peak
3	2346.000	51.43	-7.80	43.63	74.00	-30.37	peak
4	2462.000	52.85	-7.46	45.39	/	/	fundamental
5	2582.000	52.42	-7.64	44.78	74.00	-29.22	peak
6	2680.000	50.25	-7.33	42.92	74.00	-31.08	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

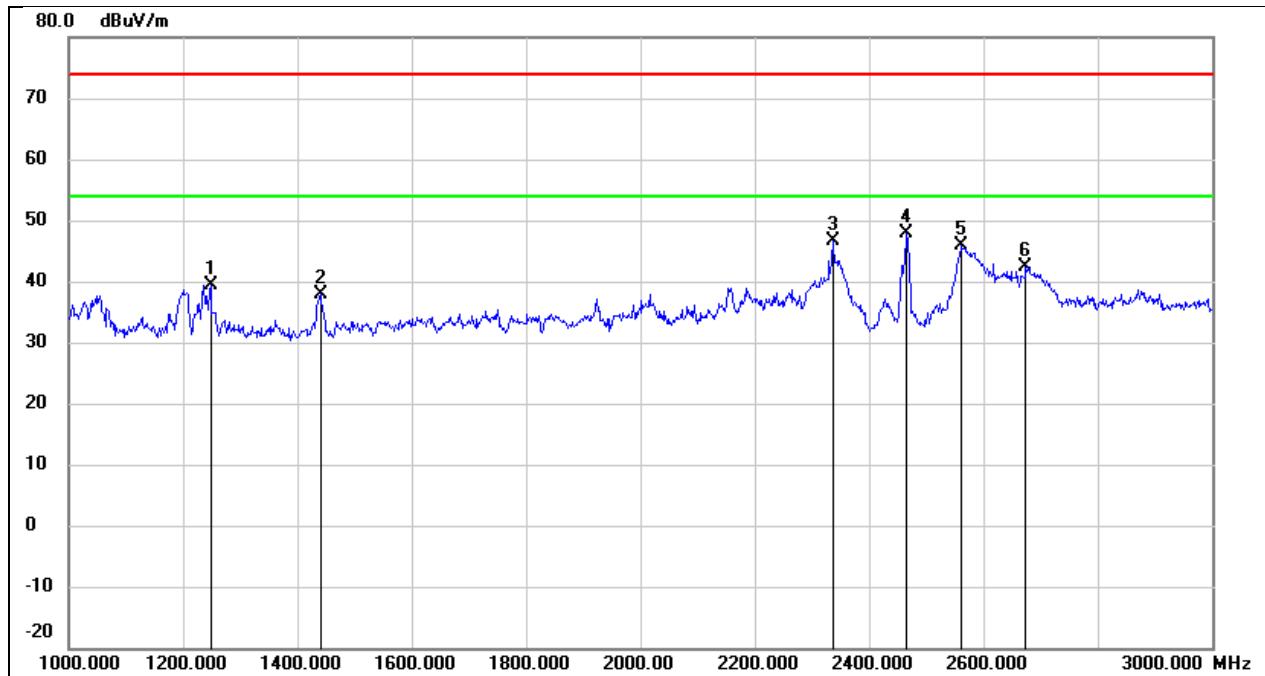

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1248.000	51.92	-12.59	39.33	74.00	-34.67	peak
2	1440.000	50.06	-12.14	37.92	74.00	-36.08	peak
3	2336.000	54.54	-7.87	46.67	74.00	-27.33	peak
4	2462.000	55.30	-7.46	47.84	/	/	fundamental
5	2562.000	53.42	-7.62	45.80	74.00	-28.20	peak
6	2674.000	49.74	-7.36	42.38	74.00	-31.62	peak


### 8.3. SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

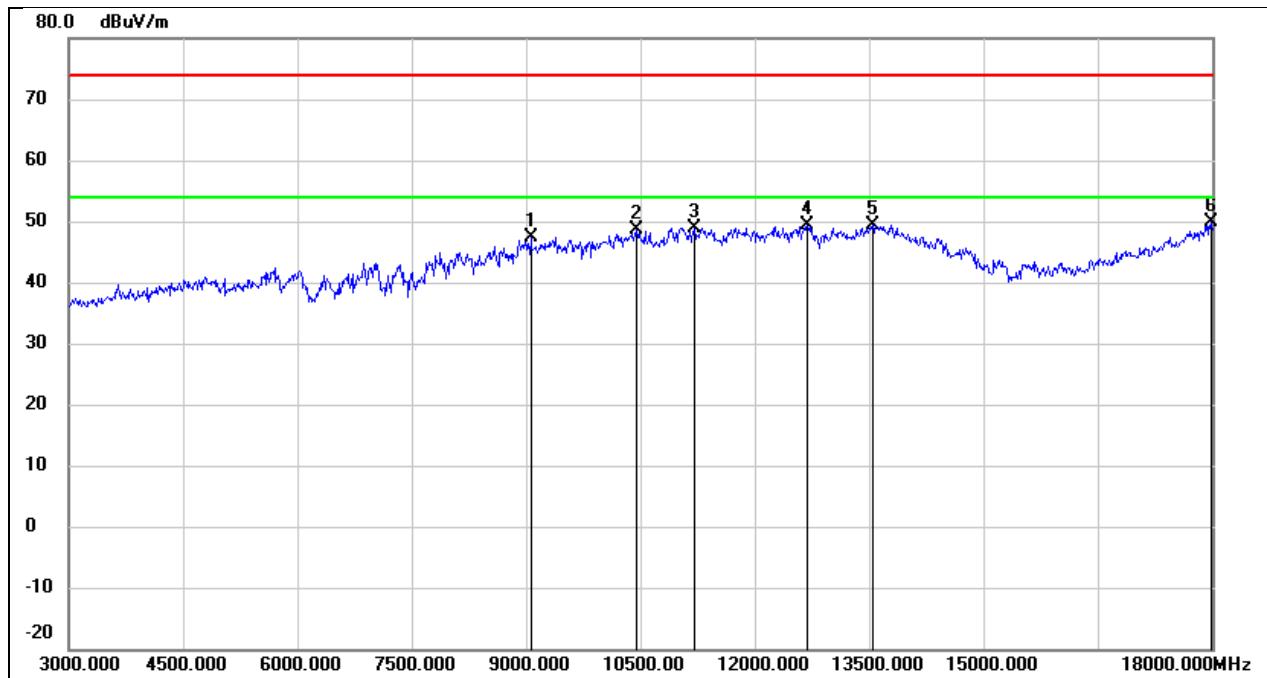


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9060.000	36.65	10.82	47.47	74.00	-26.53	peak
2	10455.000	35.08	13.59	48.67	74.00	-25.33	peak
3	11205.000	33.54	15.41	48.95	74.00	-25.05	peak
4	12690.000	30.70	18.60	49.30	74.00	-24.70	peak
5	13545.000	27.81	21.68	49.49	74.00	-24.51	peak
6	17985.000	23.20	26.77	49.97	74.00	-24.03	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

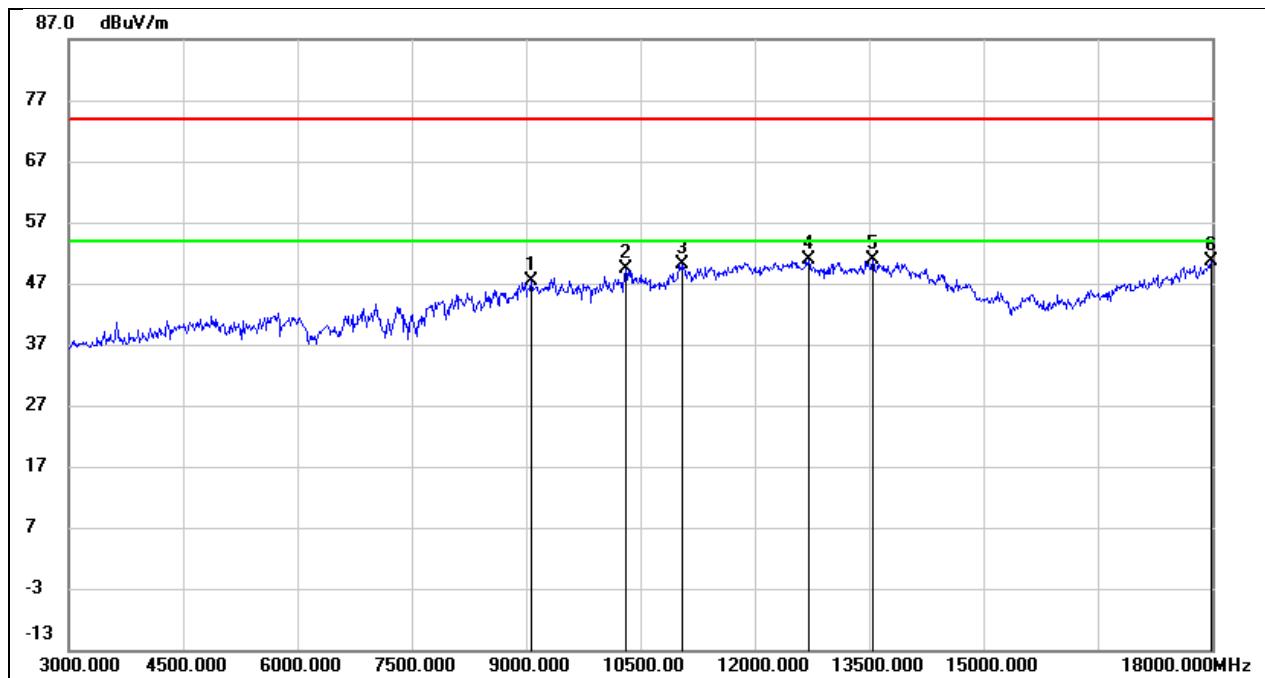


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9060.000	36.61	10.82	47.43	74.00	-26.57	peak
2	10305.000	36.41	13.00	49.41	74.00	-24.59	peak
3	11055.000	35.08	15.04	50.12	74.00	-23.88	peak
4	12705.000	32.17	18.66	50.83	74.00	-23.17	peak
5	13545.000	29.27	21.68	50.95	74.00	-23.05	peak
6	17985.000	23.78	26.77	50.55	74.00	-23.45	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

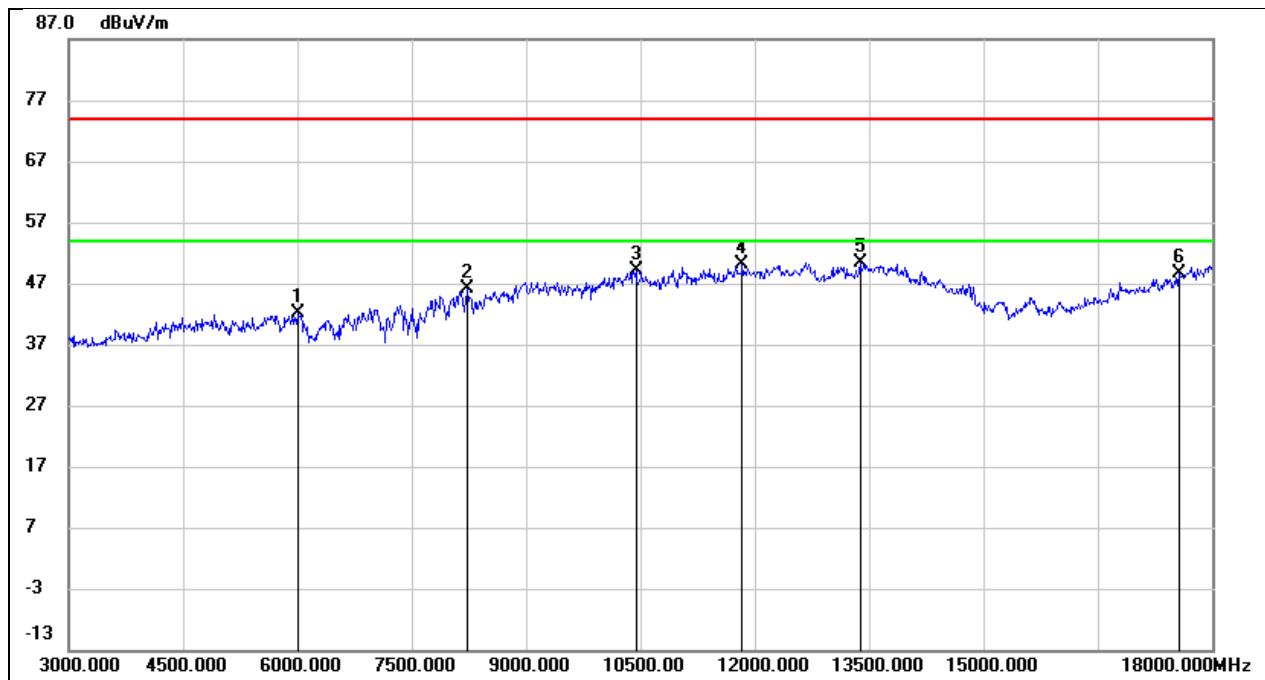


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	38.93	3.09	42.02	74.00	-31.98	peak
2	8235.000	37.32	8.70	46.02	74.00	-27.98	peak
3	10440.000	35.50	13.56	49.06	74.00	-24.94	peak
4	11835.000	32.44	17.79	50.23	74.00	-23.77	peak
5	13380.000	29.03	21.33	50.36	74.00	-23.64	peak
6	17565.000	24.58	24.05	48.63	74.00	-25.37	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3 V

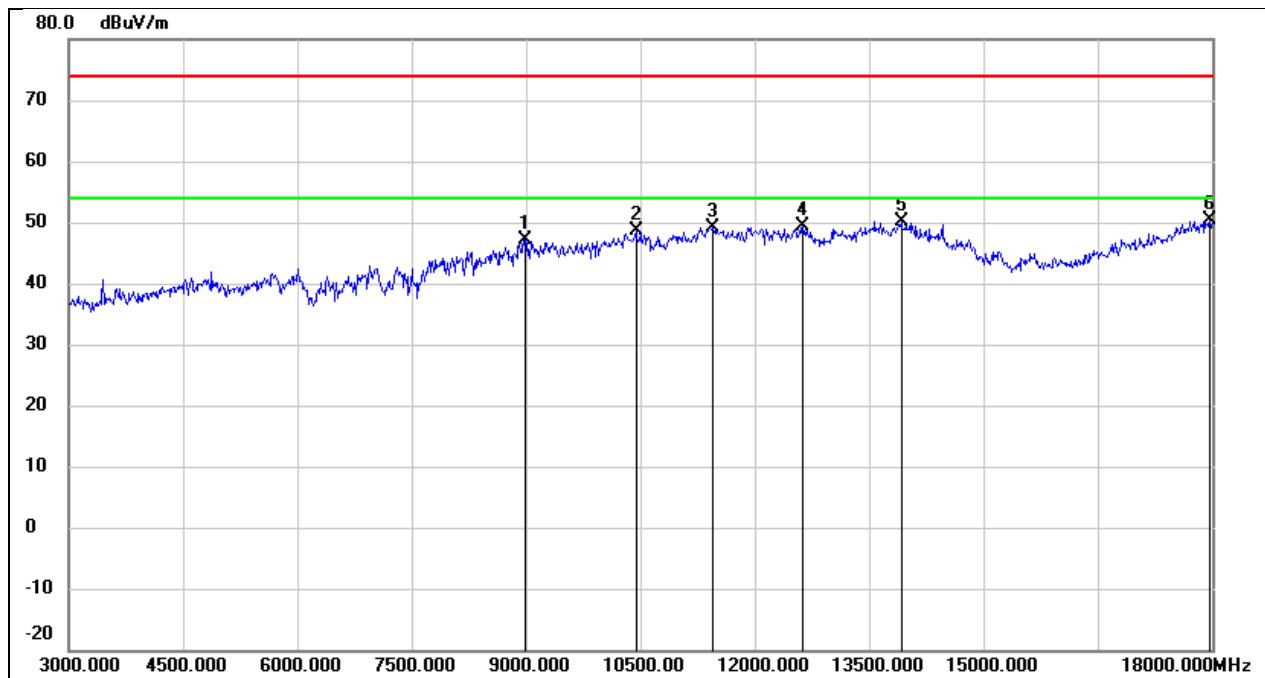


No.	Frequency (MHz)	Reading (dB <sub>u</sub> V)	Correct (dB/m)	Result (dB <sub>u</sub> V/m)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Remark
1	8985.000	36.19	10.97	47.16	74.00	-26.84	peak
2	10440.000	35.13	13.56	48.69	74.00	-25.31	peak
3	11445.000	32.52	16.69	49.21	74.00	-24.79	peak
4	12630.000	30.88	18.39	49.27	74.00	-24.73	peak
5	13920.000	27.50	22.71	50.21	74.00	-23.79	peak
6	17970.000	23.63	26.72	50.35	74.00	-23.65	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

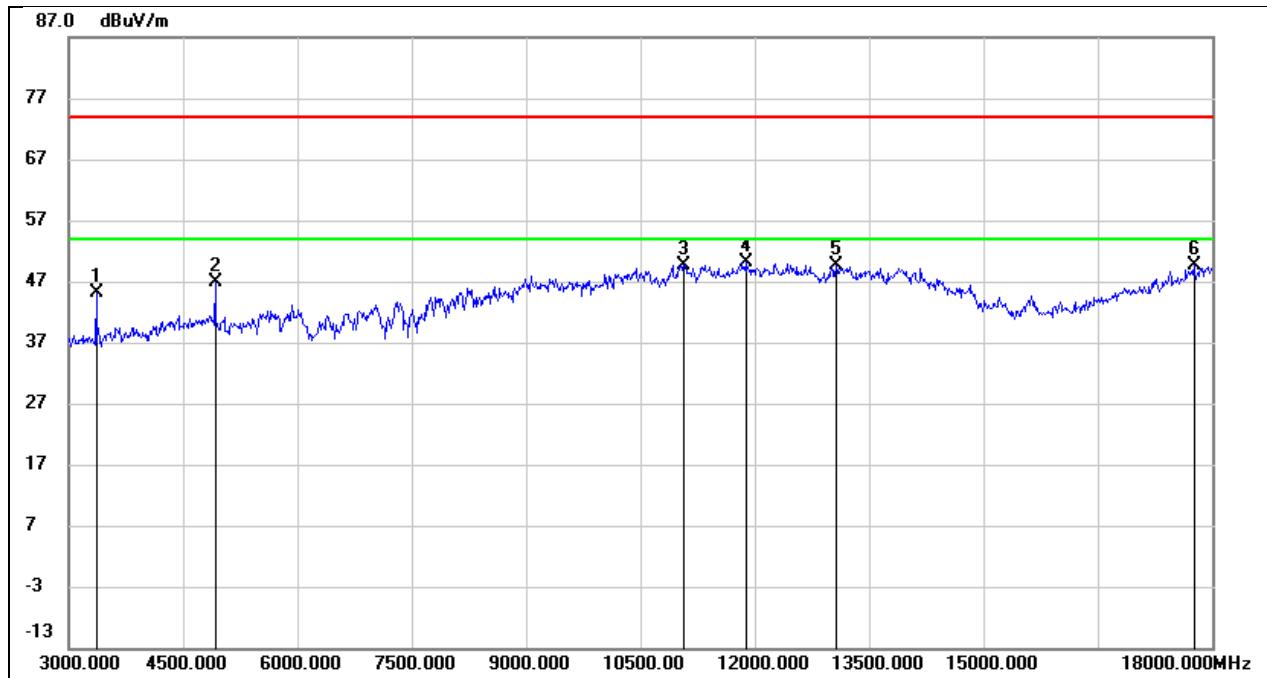


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3360.000	49.67	-4.57	45.10	74.00	-28.90	peak
2	4920.000	46.31	0.69	47.00	74.00	-27.00	peak
3	11070.000	34.64	15.08	49.72	74.00	-24.28	peak
4	11880.000	32.19	17.97	50.16	74.00	-23.84	peak
5	13065.000	30.14	19.42	49.56	74.00	-24.44	peak
6	17760.000	23.92	25.72	49.64	74.00	-24.36	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

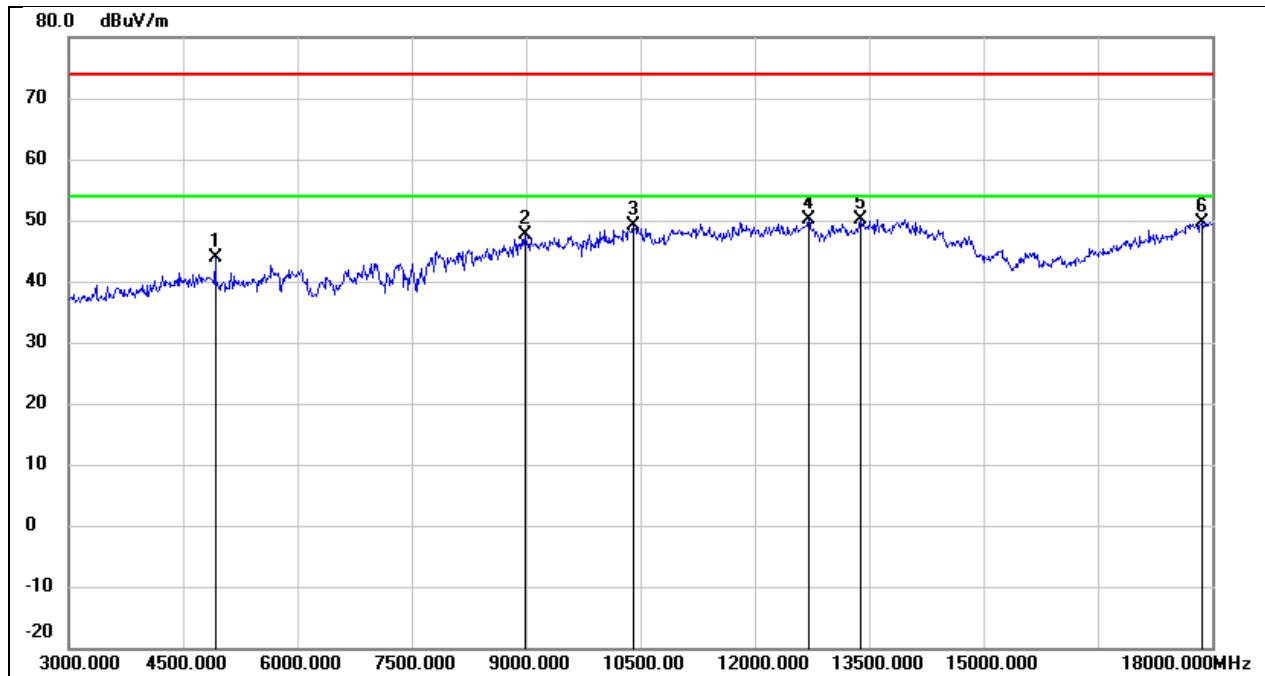


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	43.19	0.69	43.88	74.00	-30.12	peak
2	8985.000	36.65	10.97	47.62	74.00	-26.38	peak
3	10410.000	35.69	13.48	49.17	74.00	-24.83	peak
4	12705.000	31.54	18.66	50.20	74.00	-23.80	peak
5	13380.000	28.91	21.33	50.24	74.00	-23.76	peak
6	17865.000	23.39	26.33	49.72	74.00	-24.28	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

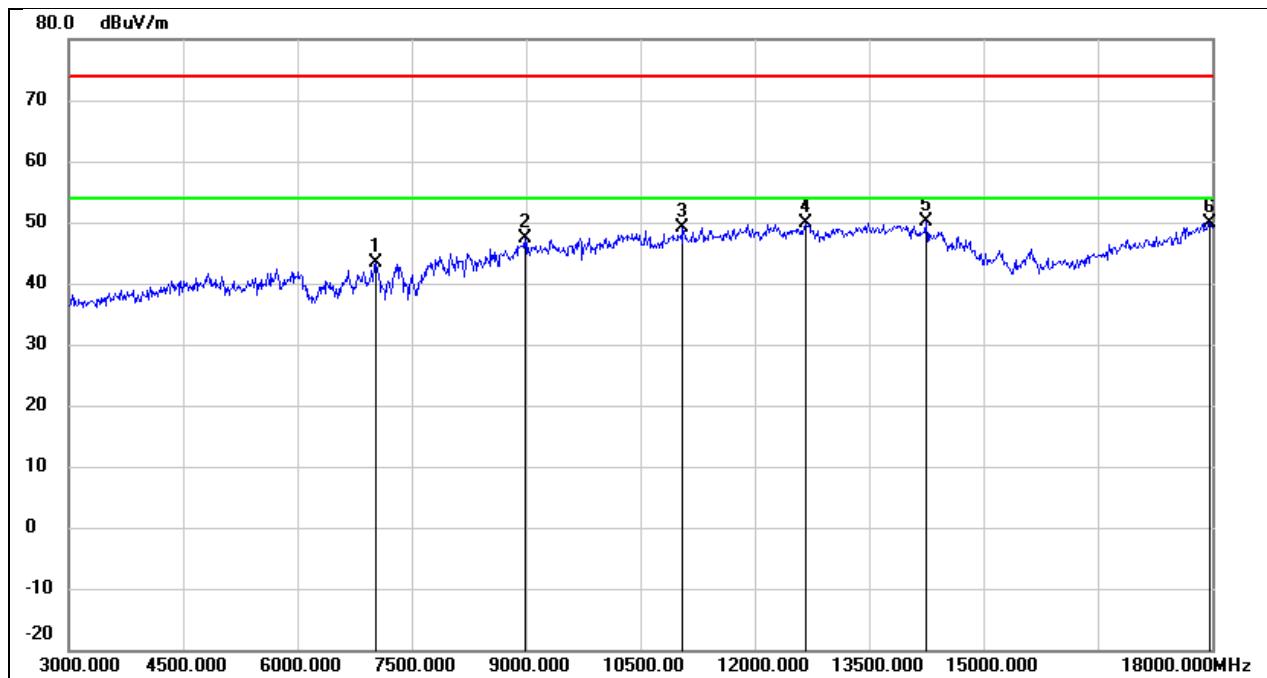


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.04	7.28	43.32	74.00	-30.68	peak
2	8985.000	36.30	10.97	47.27	74.00	-26.73	peak
3	11055.000	34.07	15.04	49.11	74.00	-24.89	peak
4	12675.000	31.45	18.54	49.99	74.00	-24.01	peak
5	14250.000	28.26	21.87	50.13	74.00	-23.87	peak
6	17970.000	23.16	26.72	49.88	74.00	-24.12	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

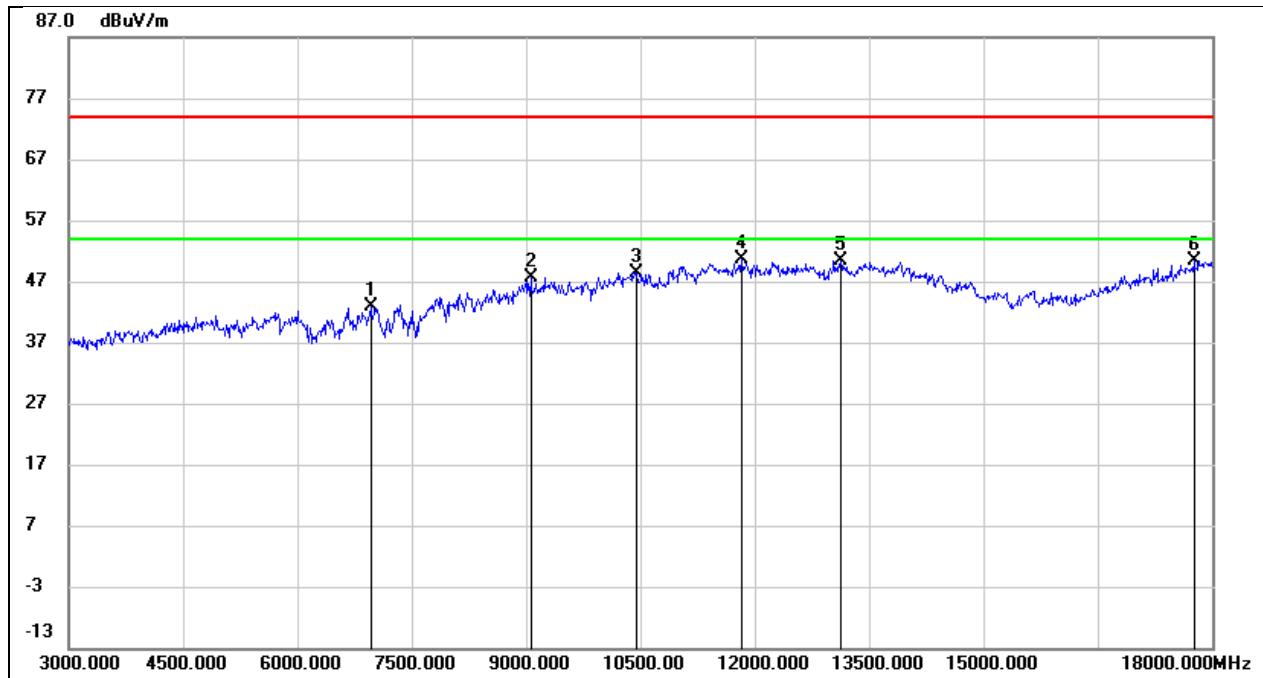


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6960.000	35.98	7.00	42.98	74.00	-31.02	peak
2	9060.000	36.73	10.82	47.55	74.00	-26.45	peak
3	10455.000	34.86	13.59	48.45	74.00	-25.55	peak
4	11820.000	32.94	17.73	50.67	74.00	-23.33	peak
5	13125.000	30.67	19.72	50.39	74.00	-23.61	peak
6	17760.000	24.78	25.72	50.50	74.00	-23.50	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

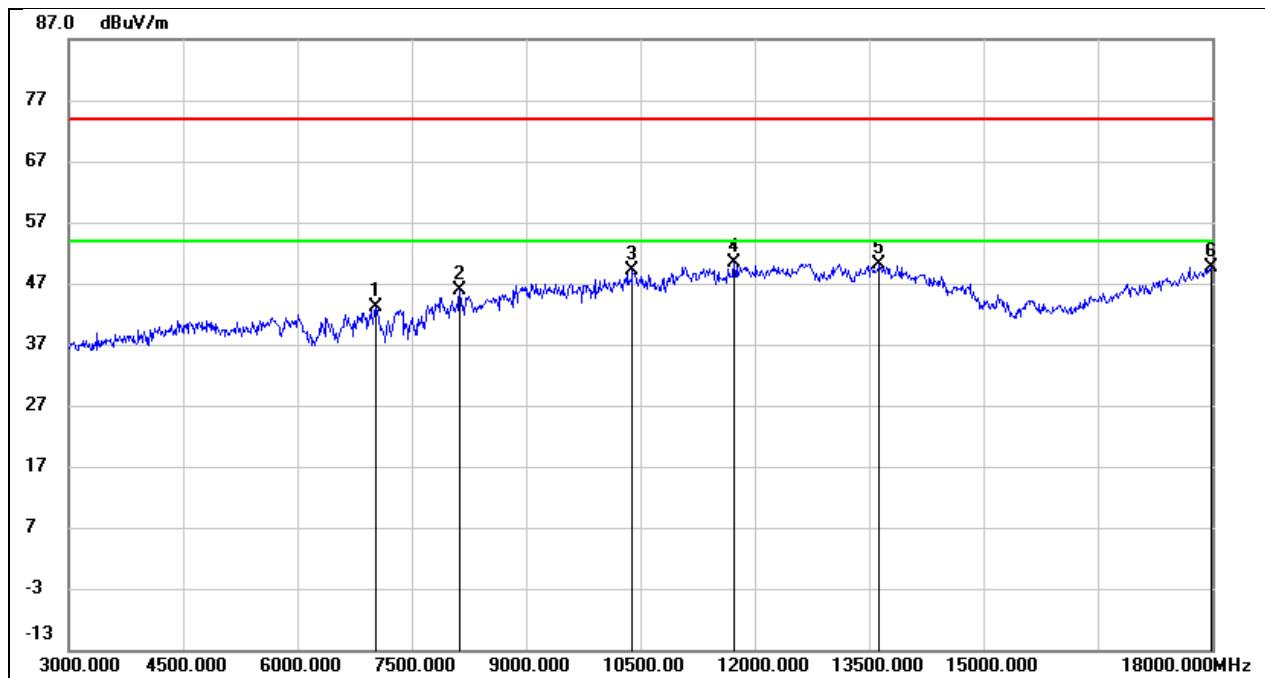


No.	Frequency (MHz)	Reading (dB <sub>u</sub> V)	Correct (dB/m)	Result (dB <sub>u</sub> V/m)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Remark
1	7035.000	35.77	7.28	43.05	74.00	-30.95	peak
2	8130.000	37.56	8.21	45.77	74.00	-28.23	peak
3	10395.000	35.70	13.43	49.13	74.00	-24.87	peak
4	11730.000	32.88	17.41	50.29	74.00	-23.71	peak
5	13635.000	28.40	21.83	50.23	74.00	-23.77	peak
6	17985.000	22.75	26.77	49.52	74.00	-24.48	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3 V

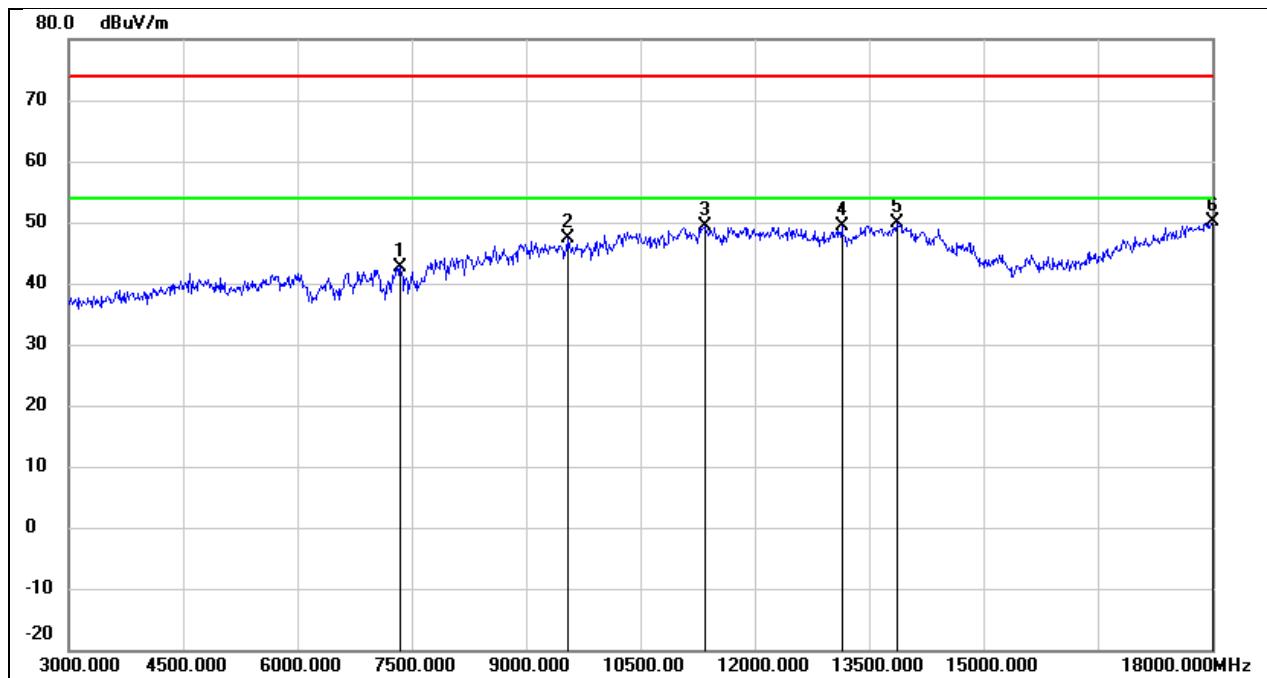


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	7350.000	35.54	7.17	42.71	74.00	-31.29	peak
2	9540.000	36.41	10.90	47.31	74.00	-26.69	peak
3	11340.000	33.29	16.19	49.48	74.00	-24.52	peak
4	13140.000	29.49	19.80	49.29	74.00	-24.71	peak
5	13860.000	27.14	22.68	49.82	74.00	-24.18	peak
6	18000.000	23.38	26.83	50.21	74.00	-23.79	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

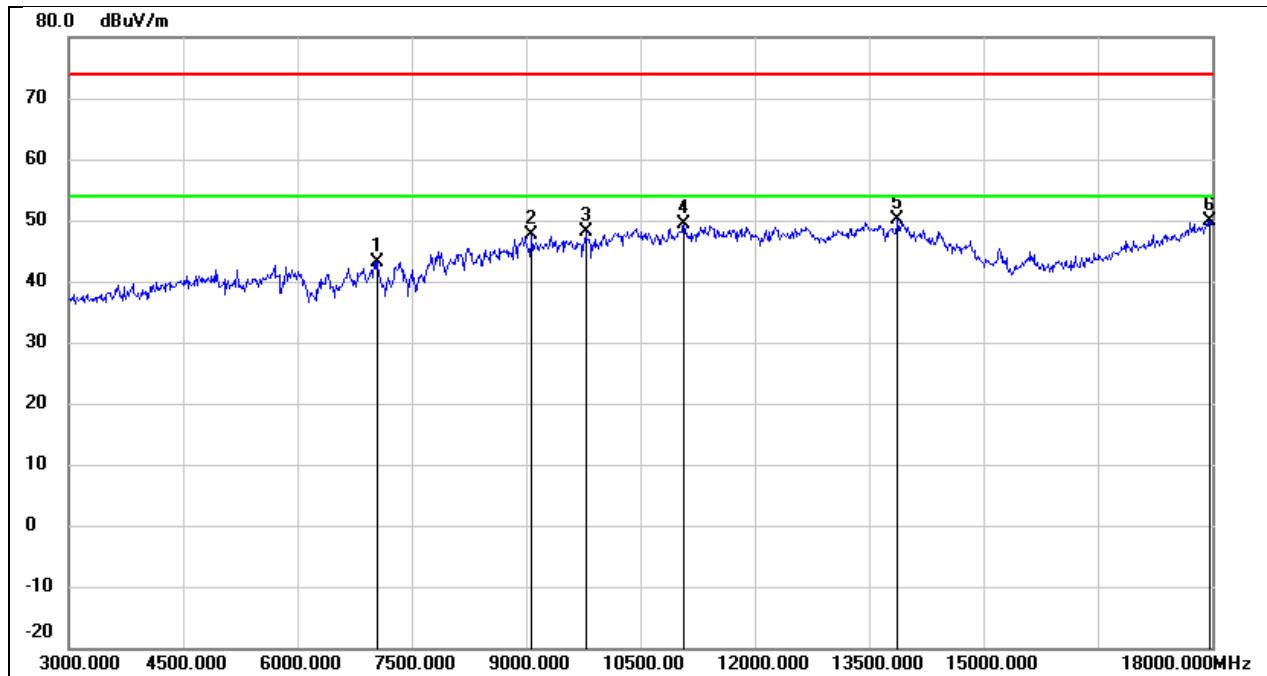


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7050.000	36.06	7.19	43.25	74.00	-30.75	peak
2	9075.000	36.97	10.74	47.71	74.00	-26.29	peak
3	9780.000	36.63	11.47	48.10	74.00	-25.90	peak
4	11070.000	34.22	15.08	49.30	74.00	-24.70	peak
5	13875.000	27.44	22.68	50.12	74.00	-23.88	peak
6	17970.000	23.22	26.72	49.94	74.00	-24.06	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

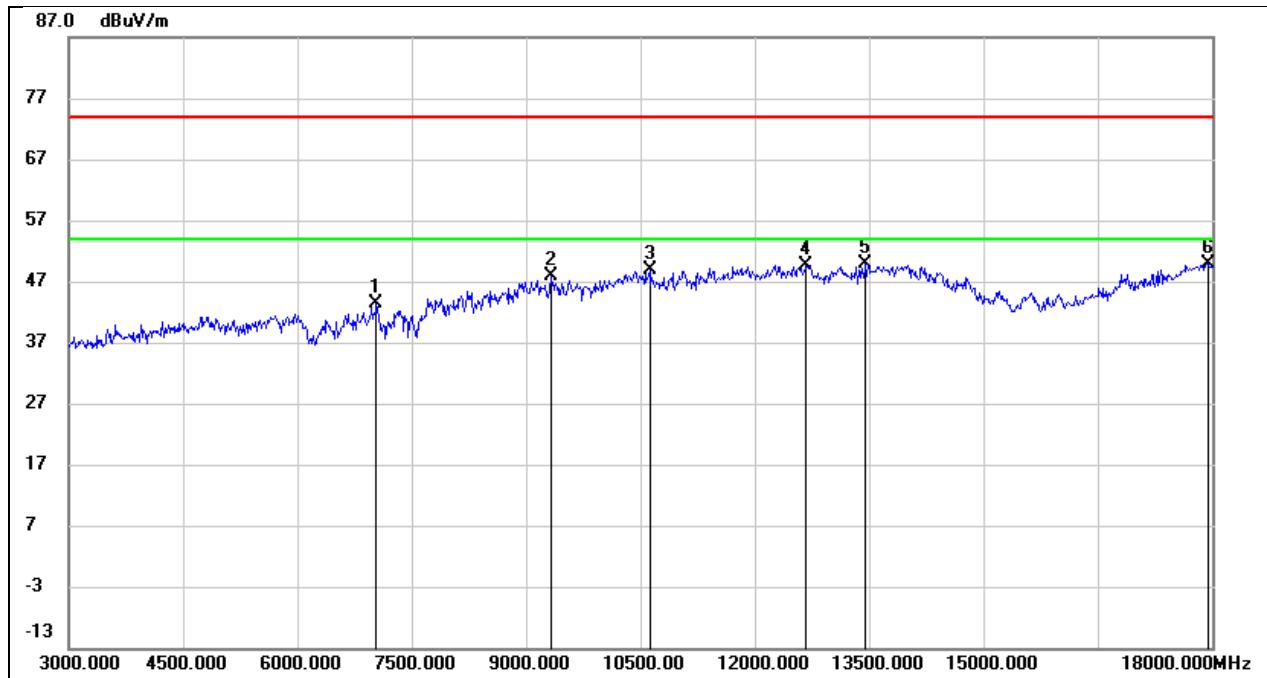


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.10	7.28	43.38	74.00	-30.62	peak
2	9330.000	37.49	10.30	47.79	74.00	-26.21	peak
3	10620.000	34.85	13.95	48.80	74.00	-25.20	peak
4	12675.000	31.14	18.54	49.68	74.00	-24.32	peak
5	13455.000	28.34	21.58	49.92	74.00	-24.08	peak
6	17955.000	23.15	26.66	49.81	74.00	-24.19	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

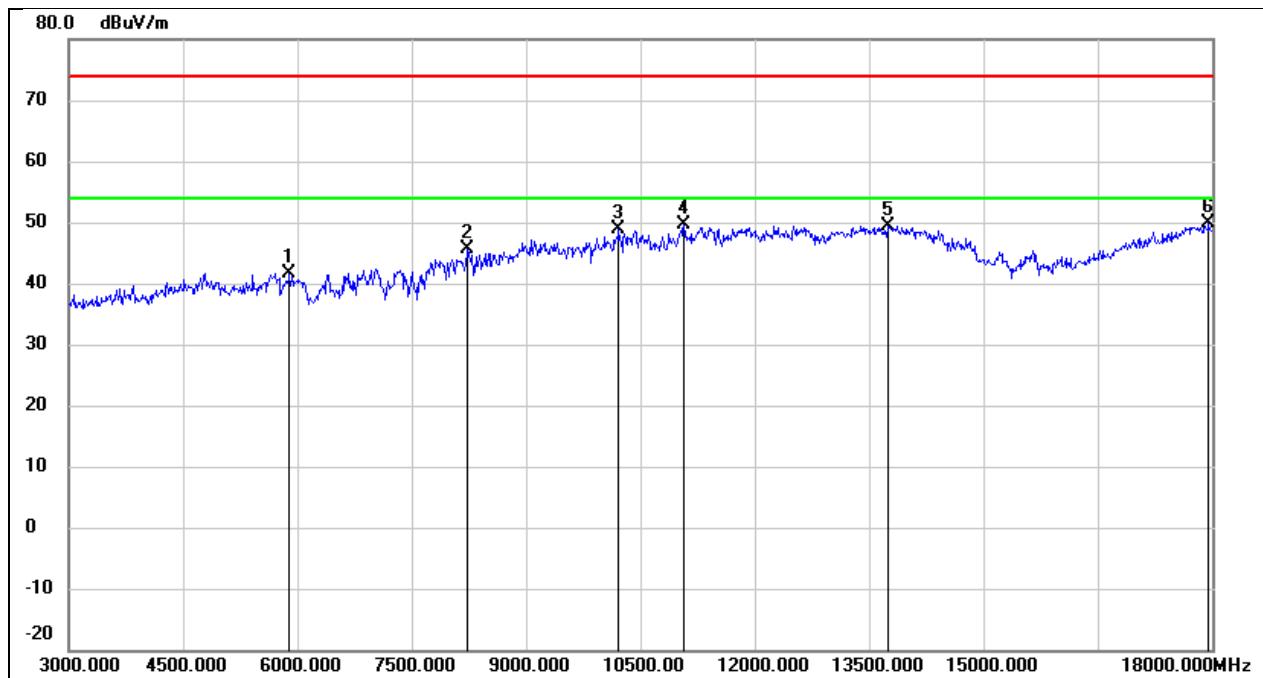


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	38.99	2.67	41.66	74.00	-32.34	peak
2	8235.000	36.92	8.70	45.62	74.00	-28.38	peak
3	10215.000	36.27	12.56	48.83	74.00	-25.17	peak
4	11070.000	34.62	15.08	49.70	74.00	-24.30	peak
5	13740.000	27.08	22.35	49.43	74.00	-24.57	peak
6	17955.000	23.22	26.66	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

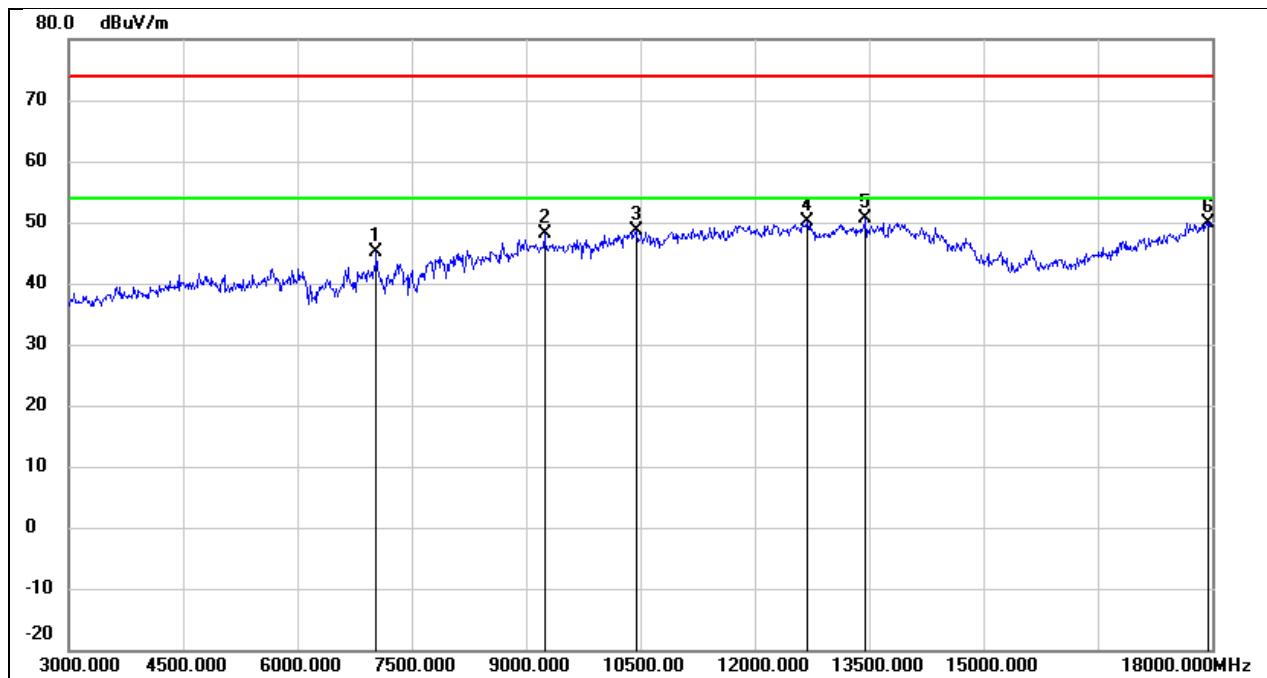


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	37.82	7.28	45.10	74.00	-28.90	peak
2	9240.000	37.96	10.10	48.06	74.00	-25.94	peak
3	10440.000	35.09	13.56	48.65	74.00	-25.35	peak
4	12690.000	31.46	18.60	50.06	74.00	-23.94	peak
5	13455.000	28.94	21.58	50.52	74.00	-23.48	peak
6	17940.000	23.35	26.61	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

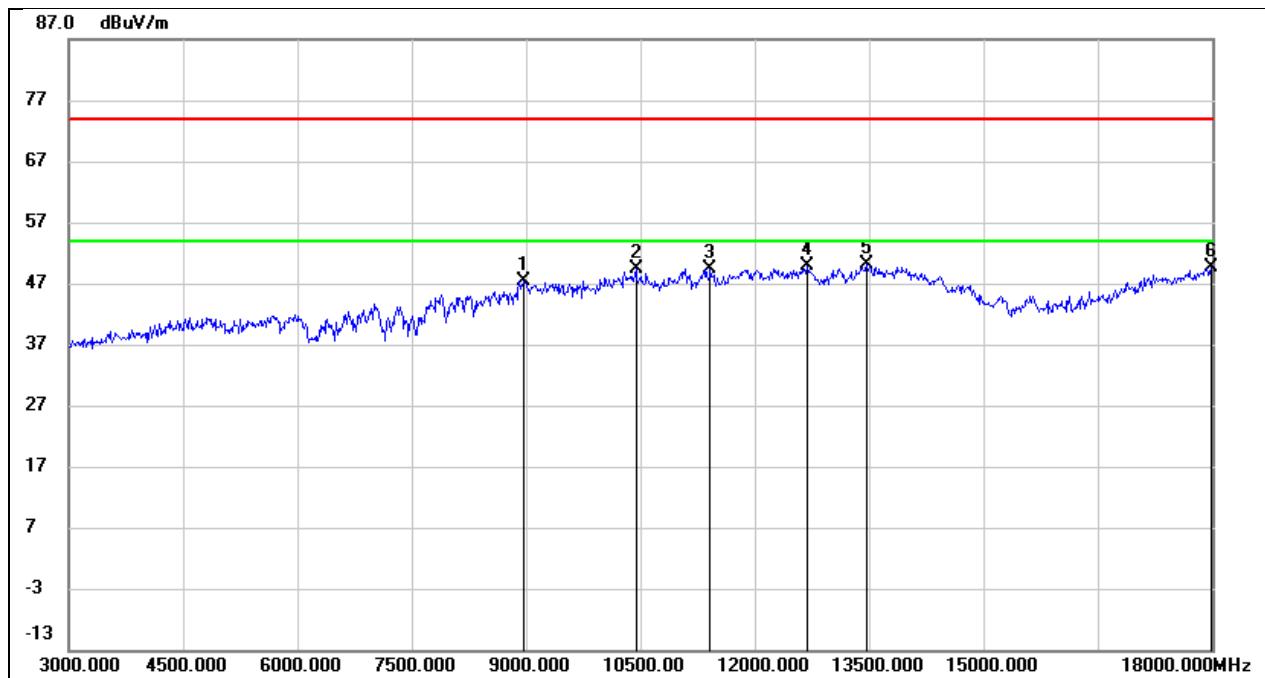


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8970.000	36.72	10.75	47.47	74.00	-26.53	peak
2	10440.000	35.70	13.56	49.26	74.00	-24.74	peak
3	11415.000	32.80	16.59	49.39	74.00	-24.61	peak
4	12690.000	31.38	18.60	49.98	74.00	-24.02	peak
5	13470.000	28.53	21.62	50.15	74.00	-23.85	peak
6	17985.000	22.97	26.77	49.74	74.00	-24.26	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3 V

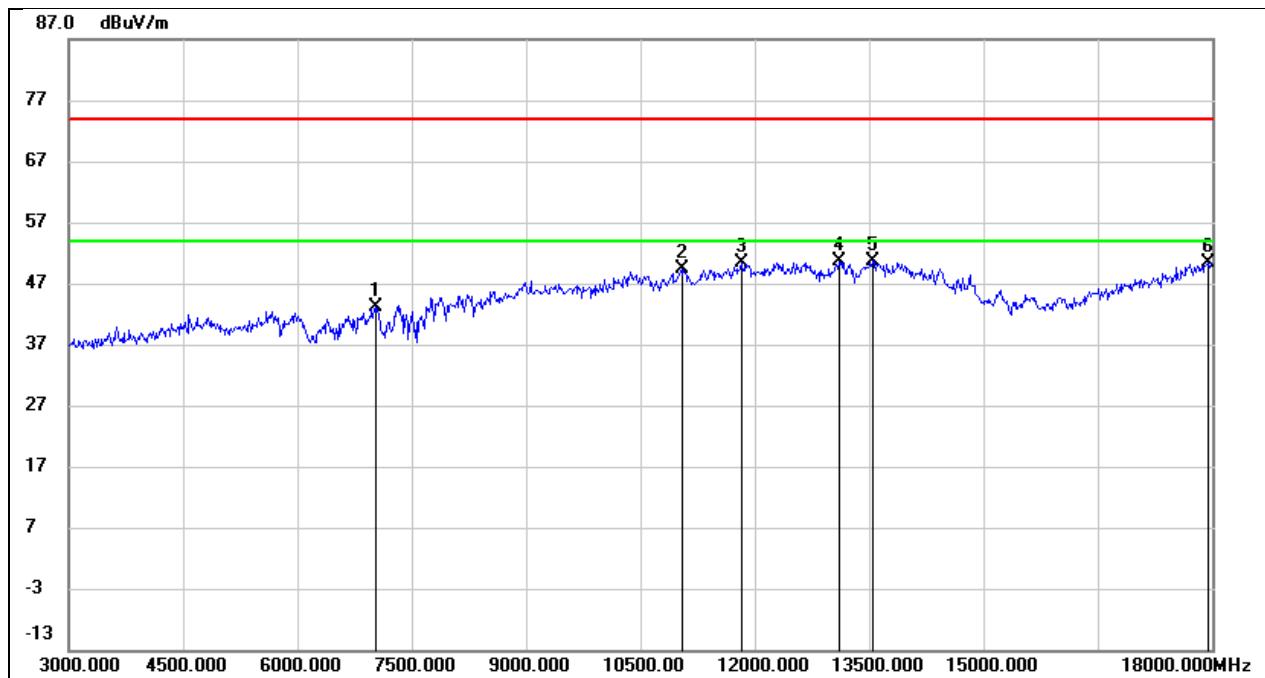


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	35.93	7.28	43.21	74.00	-30.79	peak
2	11055.000	34.41	15.04	49.45	74.00	-24.55	peak
3	11820.000	32.67	17.73	50.40	74.00	-23.60	peak
4	13110.000	31.07	19.64	50.71	74.00	-23.29	peak
5	13545.000	29.02	21.68	50.70	74.00	-23.30	peak
6	17940.000	23.82	26.61	50.43	74.00	-23.57	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

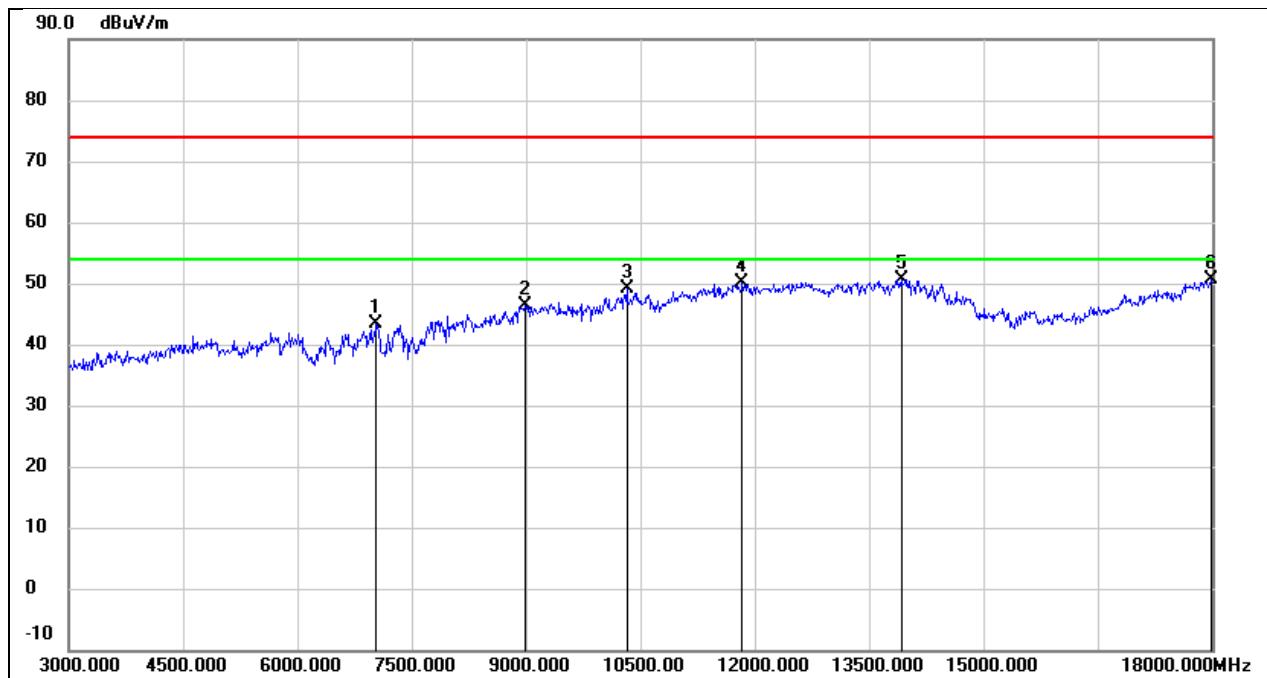


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.02	7.28	43.30	74.00	-30.70	peak
2	8985.000	35.47	10.97	46.44	74.00	-27.56	peak
3	10320.000	36.00	13.07	49.07	74.00	-24.93	peak
4	11835.000	32.37	17.79	50.16	74.00	-23.84	peak
5	13920.000	27.92	22.71	50.63	74.00	-23.37	peak
6	17985.000	23.93	26.77	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 3.3 V

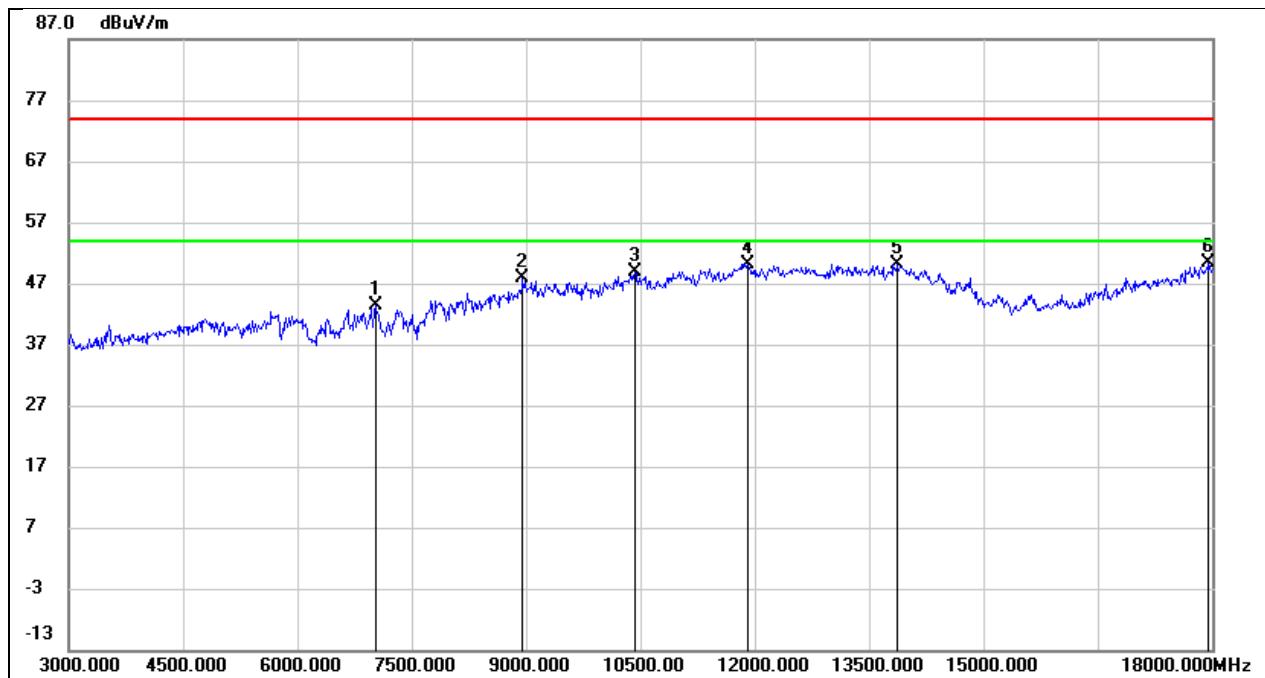


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7020.000	36.09	7.37	43.46	74.00	-30.54	peak
2	8955.000	37.24	10.56	47.80	74.00	-26.20	peak
3	10425.000	35.37	13.51	48.88	74.00	-25.12	peak
4	11910.000	32.09	18.11	50.20	74.00	-23.80	peak
5	13875.000	27.52	22.68	50.20	74.00	-23.80	peak
6	17955.000	23.81	26.66	50.47	74.00	-23.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

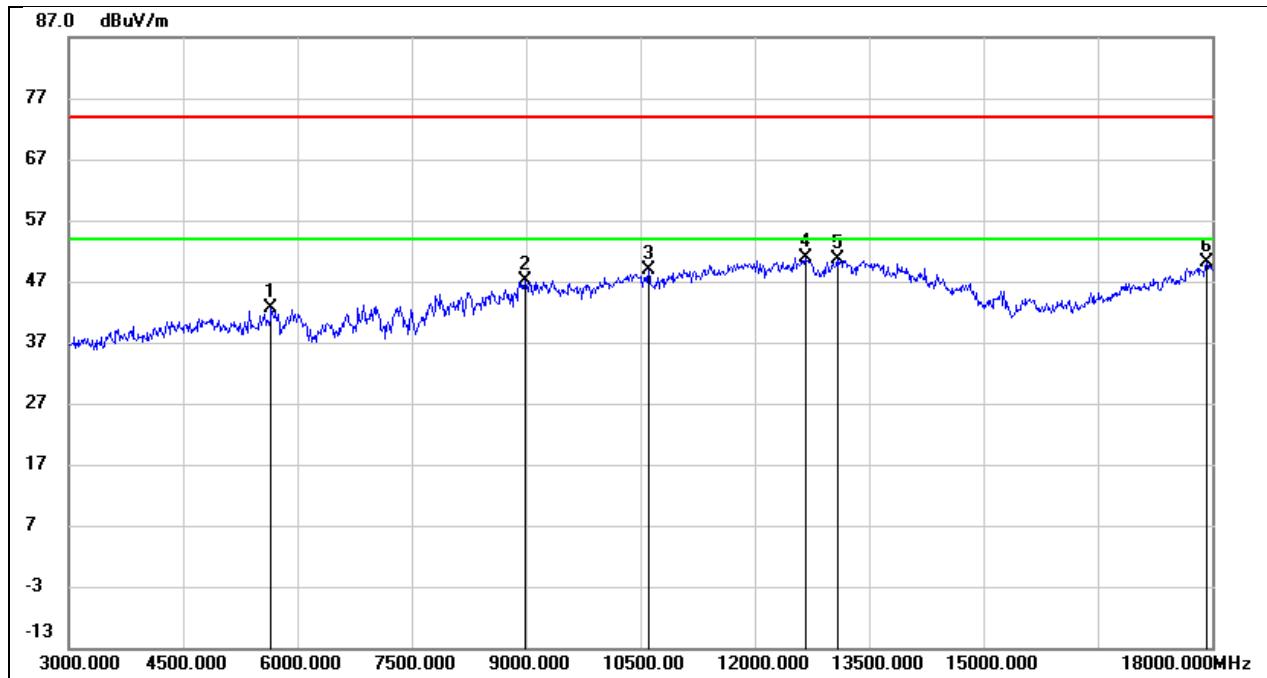


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.96	2.67	42.63	74.00	-31.37	peak
2	8985.000	36.16	10.97	47.13	74.00	-26.87	peak
3	10605.000	35.01	13.94	48.95	74.00	-25.05	peak
4	12660.000	32.44	18.49	50.93	74.00	-23.07	peak
5	13080.000	31.23	19.50	50.73	74.00	-23.27	peak
6	17925.000	23.60	26.55	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 3.3 V

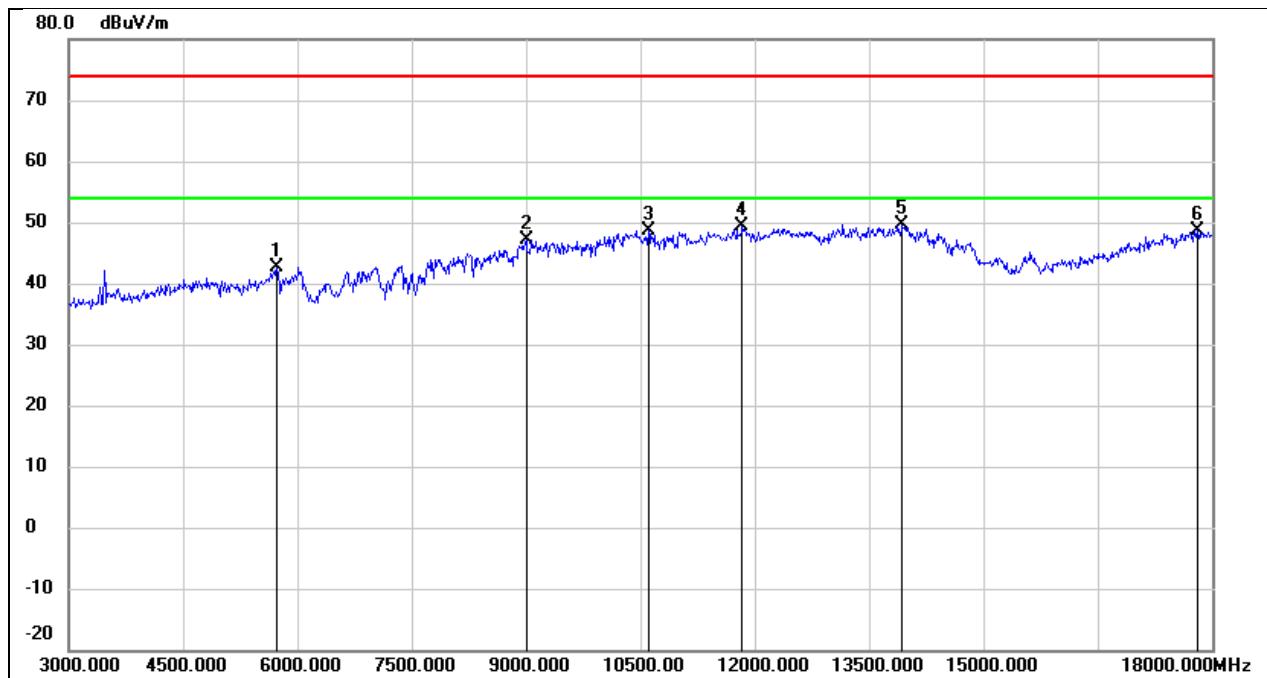


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5730.000	40.27	2.46	42.73	74.00	-31.27	peak
2	9000.000	35.89	11.17	47.06	74.00	-26.94	peak
3	10605.000	34.67	13.94	48.61	74.00	-25.39	peak
4	11835.000	31.52	17.79	49.31	74.00	-24.69	peak
5	13935.000	26.82	22.72	49.54	74.00	-24.46	peak
6	17805.000	22.43	26.11	48.54	74.00	-25.46	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

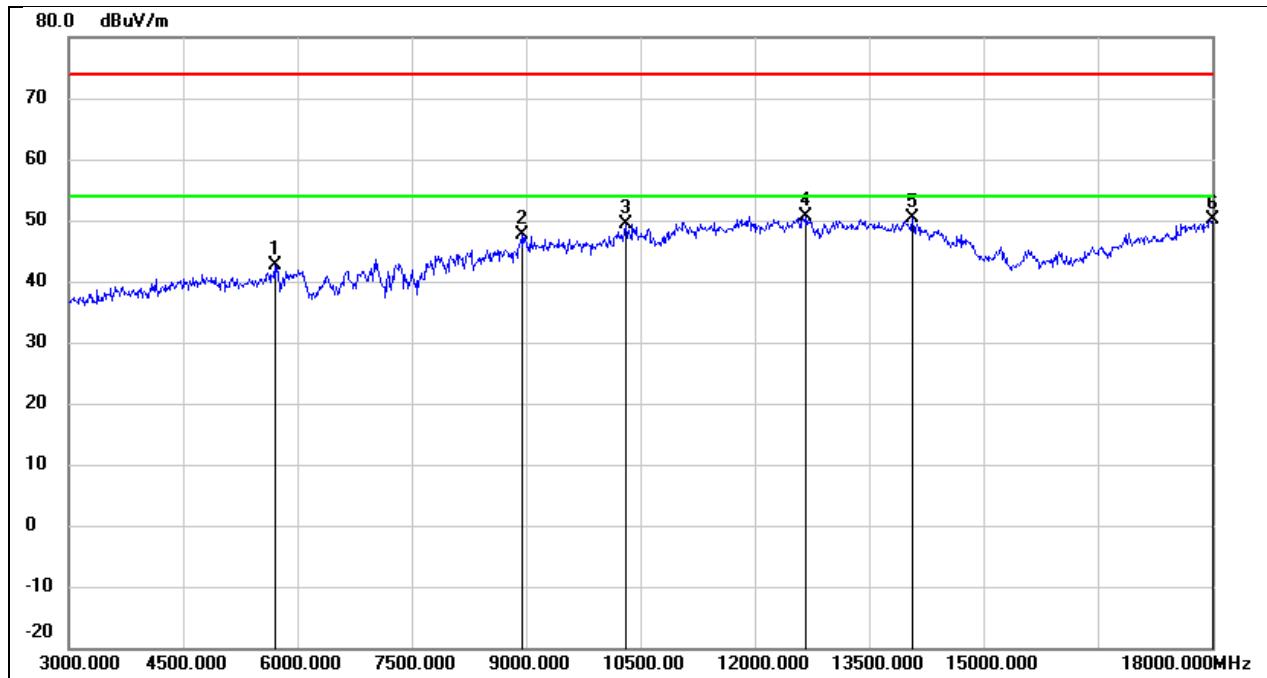


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	39.99	2.54	42.53	74.00	-31.47	peak
2	8940.000	37.16	10.35	47.51	74.00	-26.49	peak
3	10305.000	36.39	13.00	49.39	74.00	-24.61	peak
4	12675.000	32.13	18.54	50.67	74.00	-23.33	peak
5	14070.000	27.81	22.55	50.36	74.00	-23.64	peak
6	18000.000	23.41	26.83	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 3.3 V

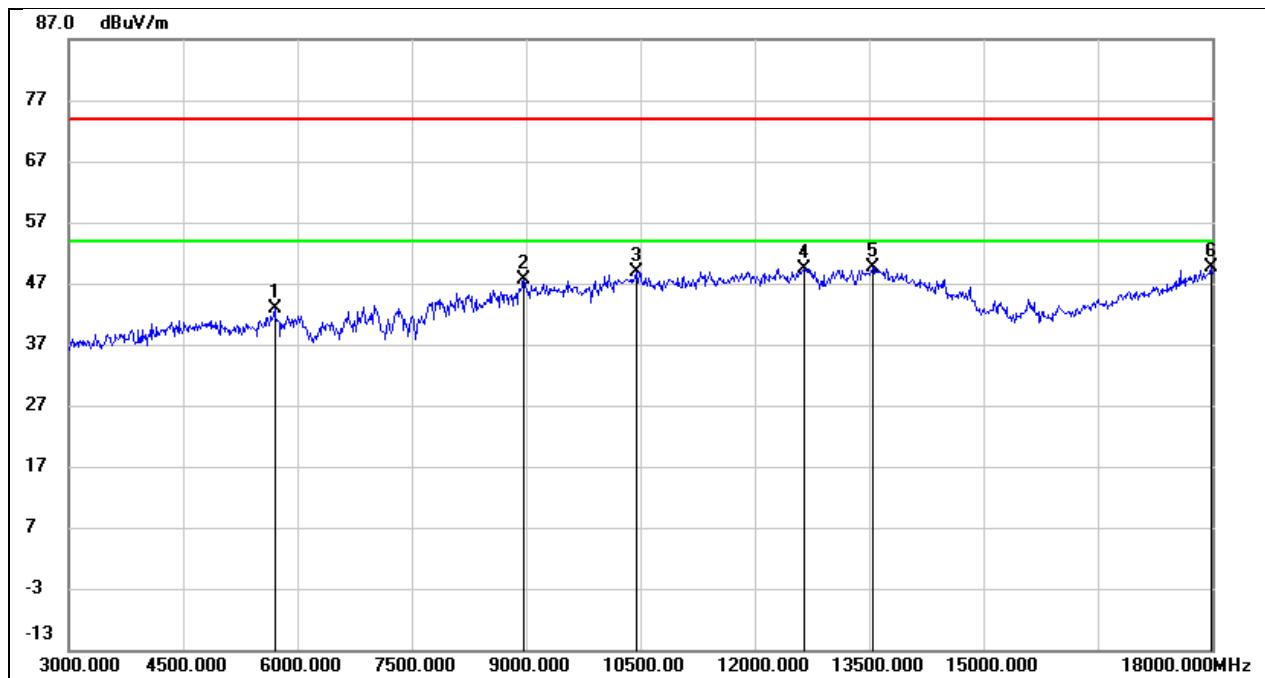


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	40.26	2.54	42.80	74.00	-31.20	peak
2	8970.000	36.85	10.75	47.60	74.00	-26.40	peak
3	10440.000	35.43	13.56	48.99	74.00	-25.01	peak
4	12645.000	30.90	18.44	49.34	74.00	-24.66	peak
5	13545.000	27.91	21.68	49.59	74.00	-24.41	peak
6	17985.000	22.78	26.77	49.55	74.00	-24.45	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

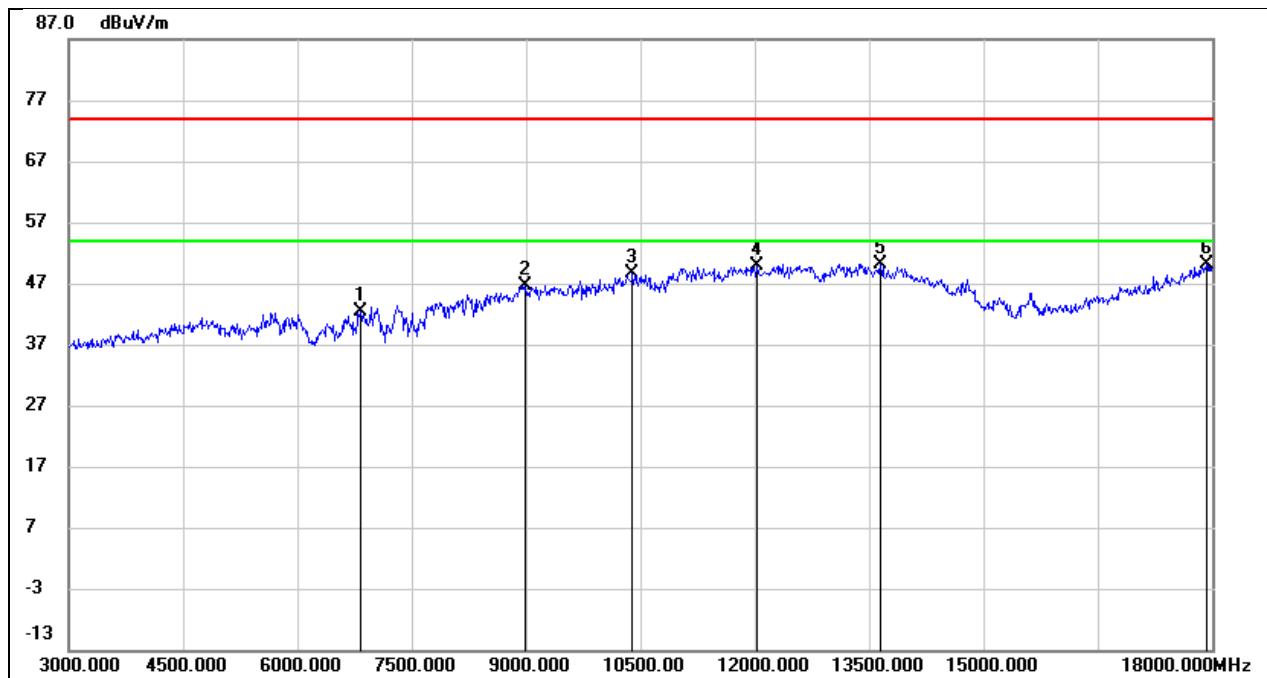

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6825.000	37.16	5.29	42.45	74.00	-31.55	peak
2	8985.000	35.74	10.97	46.71	74.00	-27.29	peak
3	10395.000	35.09	13.43	48.52	74.00	-25.48	peak
4	12030.000	31.42	18.47	49.89	74.00	-24.11	peak
5	13650.000	28.23	21.90	50.13	74.00	-23.87	peak
6	17925.000	23.61	26.55	50.16	74.00	-23.84	peak


Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 3.3 V

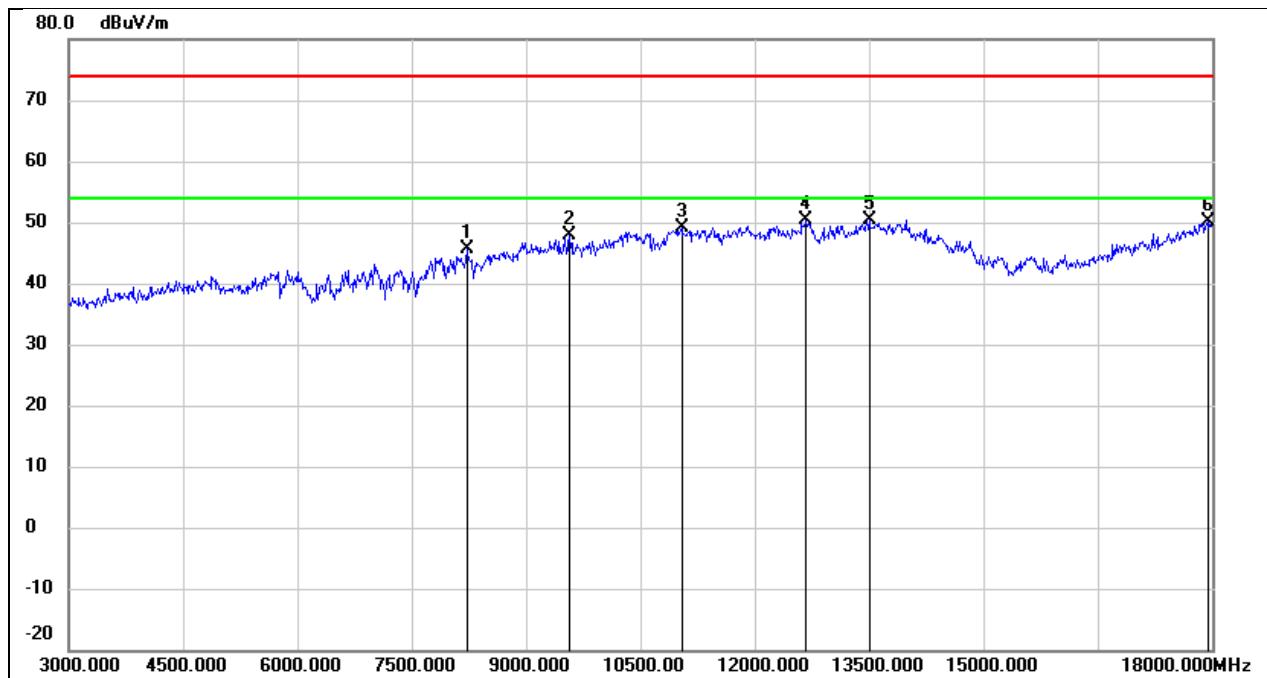

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8220.000	36.90	8.76	45.66	74.00	-28.34	peak
2	9570.000	36.89	10.98	47.87	74.00	-26.13	peak
3	11040.000	34.18	15.01	49.19	74.00	-24.81	peak
4	12675.000	31.77	18.54	50.31	74.00	-23.69	peak
5	13500.000	28.74	21.69	50.43	74.00	-23.57	peak
6	17955.000	23.53	26.66	50.19	74.00	-23.81	peak


## 8.4. SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

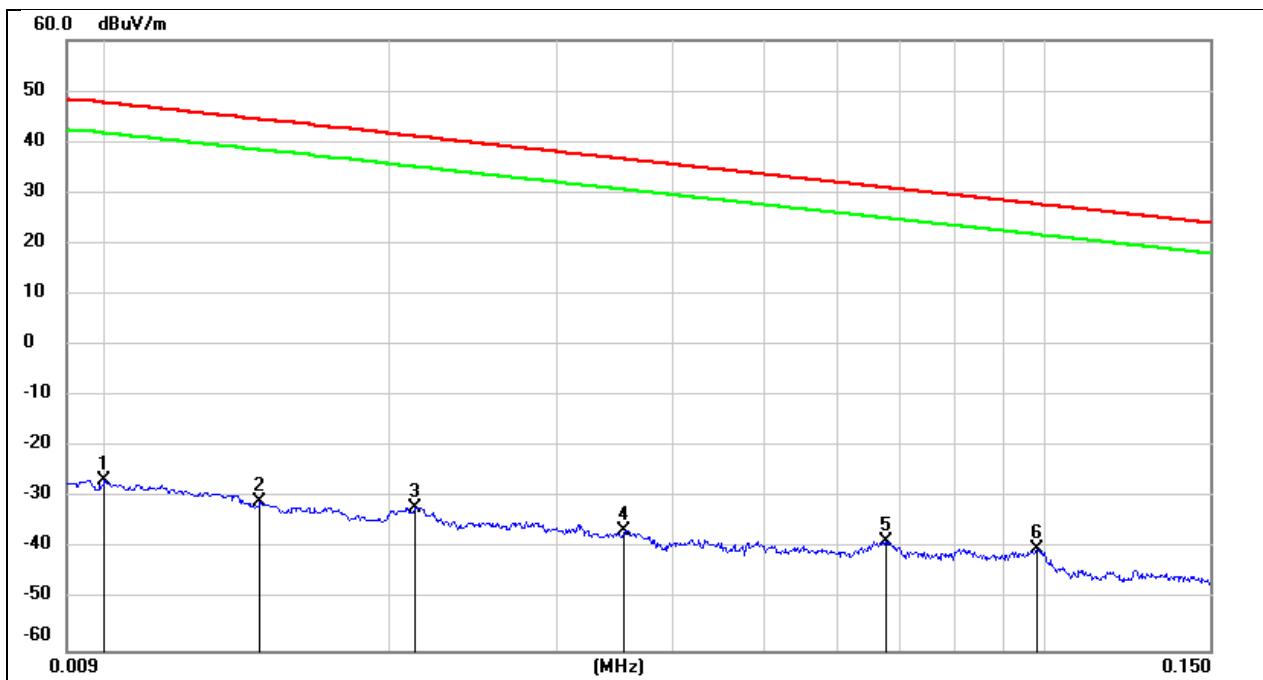


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	74.72	-101.40	-26.68	47.60	-74.28	peak
2	0.0145	70.55	-101.38	-30.83	44.37	-75.20	peak
3	0.0212	69.54	-101.35	-31.81	41.07	-72.88	peak
4	0.0354	64.97	-101.41	-36.44	36.62	-73.06	peak
5	0.0675	63.14	-101.56	-38.42	31.02	-69.44	peak
6	0.0981	61.77	-101.78	-40.01	27.77	-67.78	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

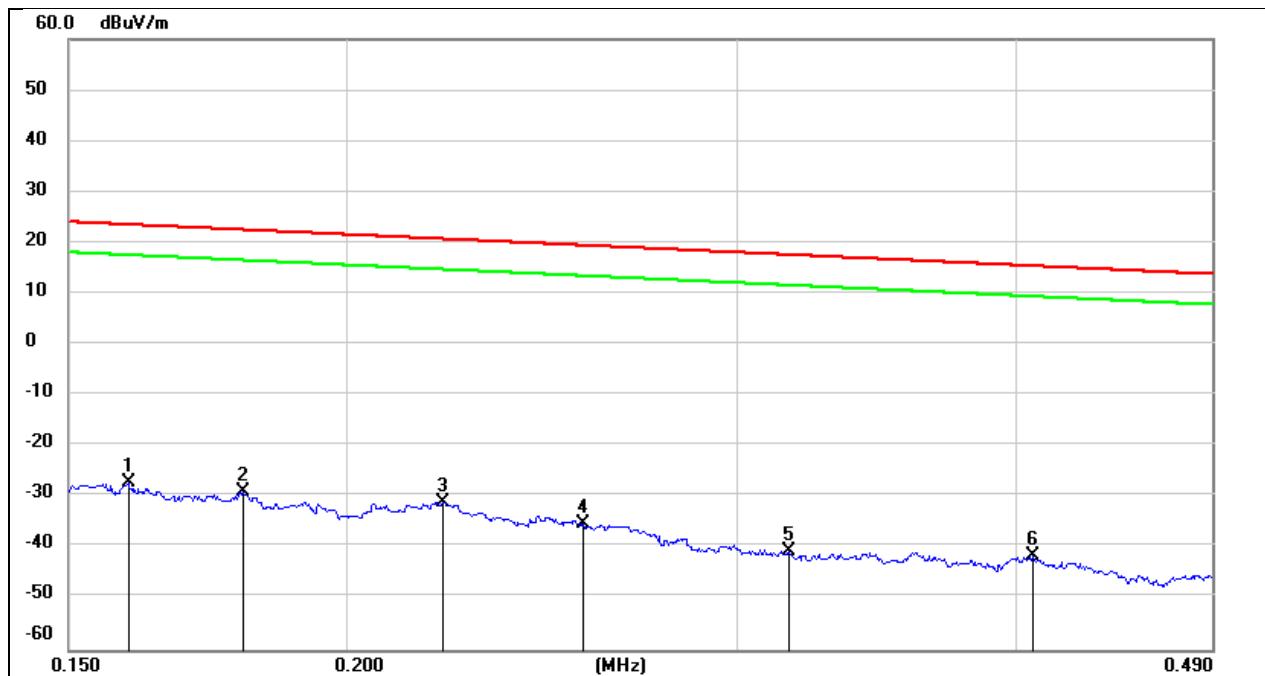

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	74.36	-101.65	-27.29	23.55	-50.84	peak
2	0.1796	72.74	-101.68	-28.94	22.52	-51.46	peak
3	0.2210	70.84	-101.75	-30.91	20.71	-51.62	peak
4	0.2555	66.57	-101.80	-35.23	19.45	-54.68	peak
5	0.3163	61.20	-101.87	-40.67	17.60	-58.27	peak
6	0.4066	60.52	-101.96	-41.44	15.42	-56.86	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

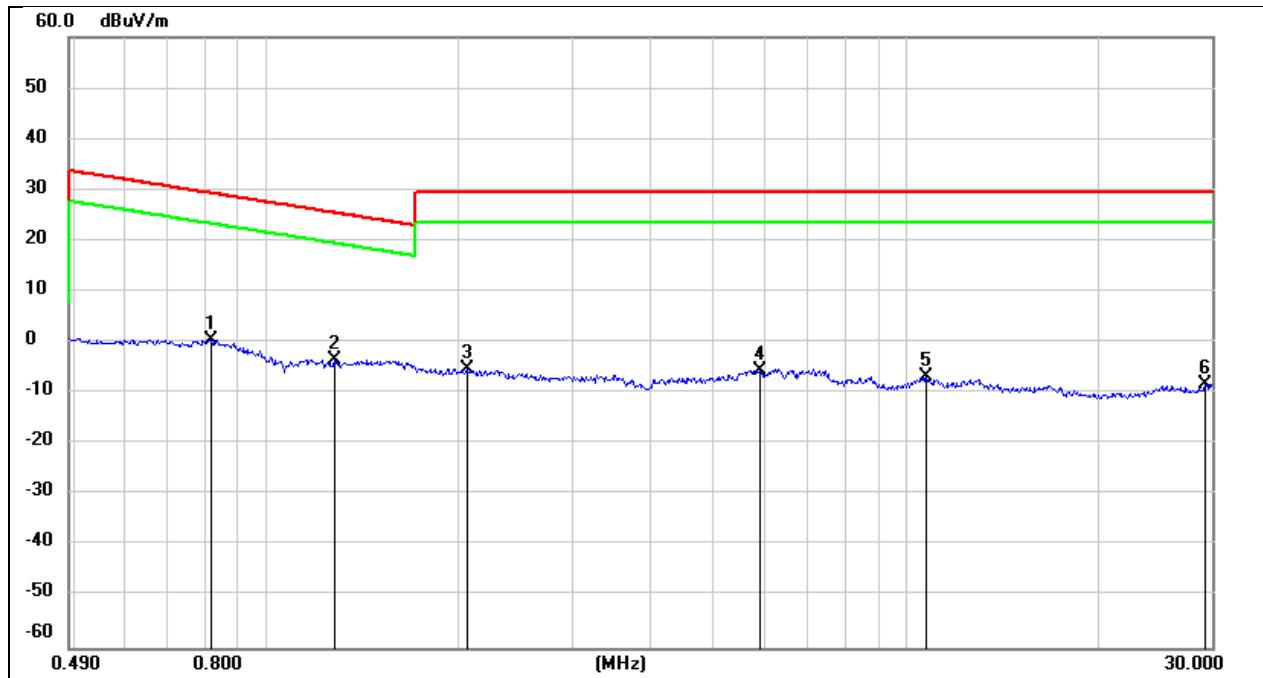

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.8195	62.66	-62.16	0.50	29.33	-28.83	peak
2	1.2721	58.74	-62.15	-3.41	25.52	-28.93	peak
3	2.0539	56.70	-61.81	-5.11	29.54	-34.65	peak
4	5.9198	55.93	-61.36	-5.43	29.54	-34.97	peak
5	10.7299	53.98	-60.83	-6.85	29.54	-36.39	peak
6	29.3213	51.80	-60.02	-8.22	29.54	-37.76	peak


## 8.5. SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

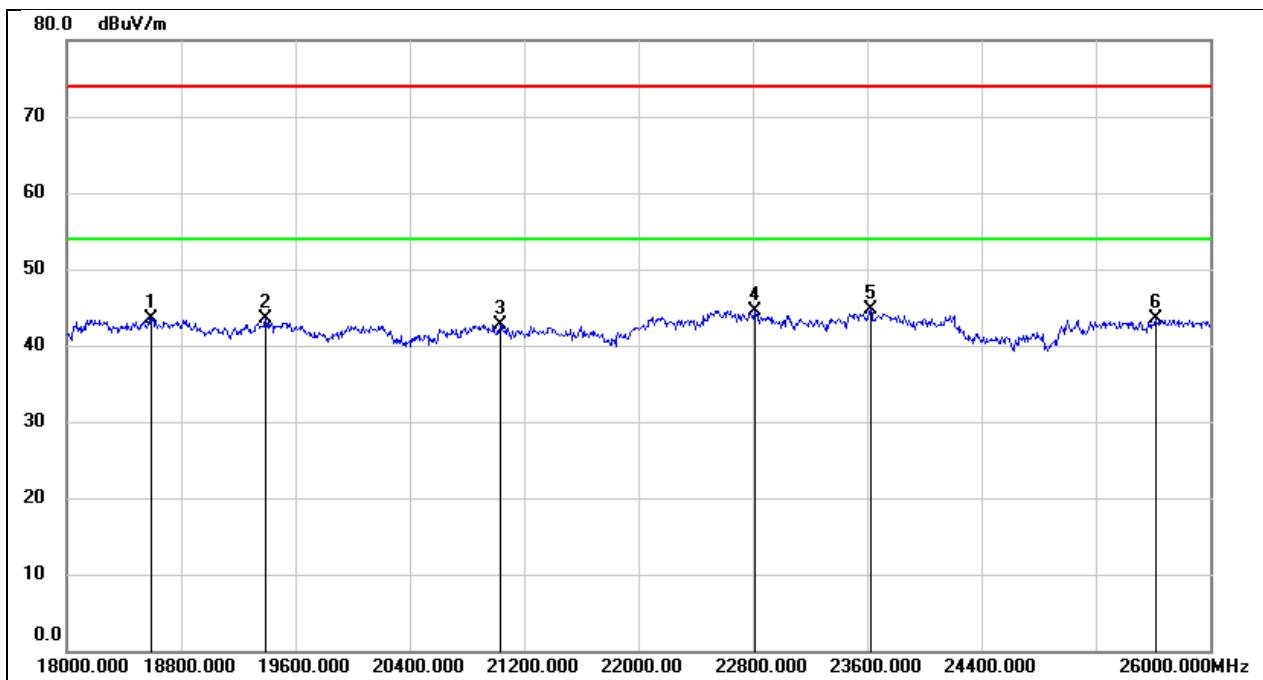

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	48.75	-5.31	43.44	74.00	-30.56	peak
2	19392.000	49.12	-5.57	43.55	74.00	-30.45	peak
3	21032.000	47.65	-4.87	42.78	74.00	-31.22	peak
4	22816.000	48.16	-3.63	44.53	74.00	-29.47	peak
5	23624.000	47.85	-3.16	44.69	74.00	-29.31	peak
6	25616.000	44.68	-1.24	43.44	74.00	-30.56	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

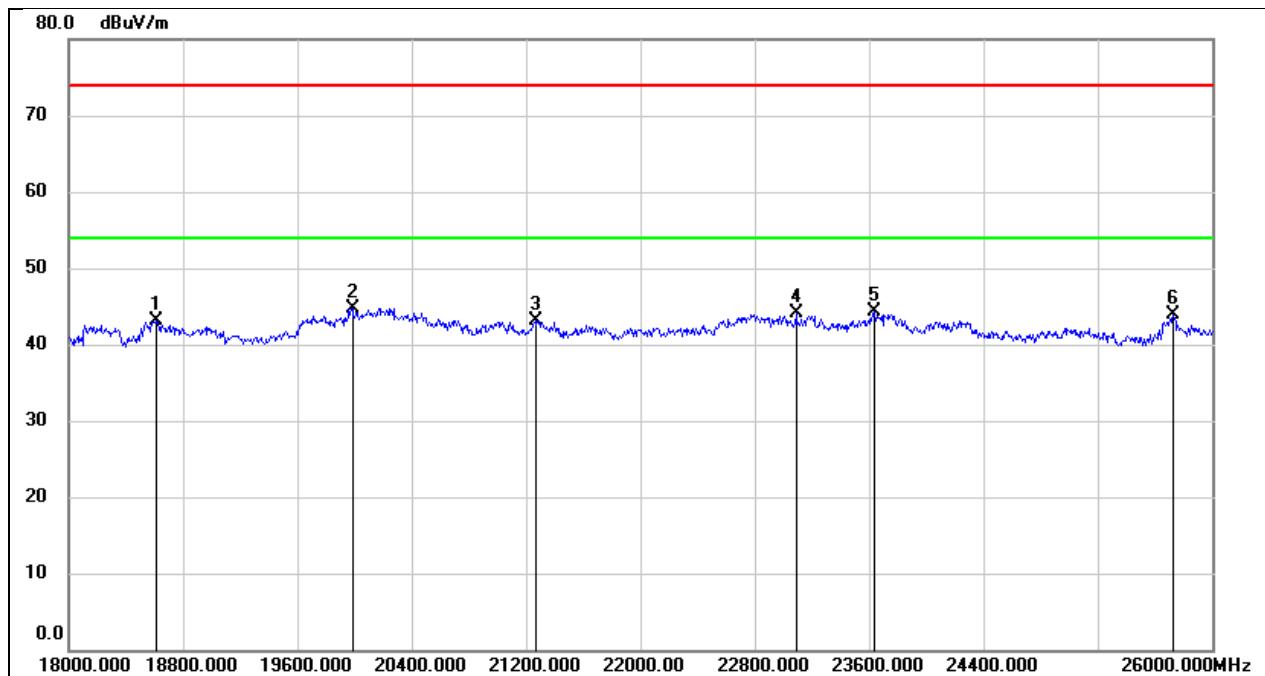

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	48.39	-5.34	43.05	74.00	-30.95	peak
2	19984.000	50.21	-5.44	44.77	74.00	-29.23	peak
3	21264.000	47.85	-4.76	43.09	74.00	-30.91	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	23640.000	47.47	-3.17	44.30	74.00	-29.70	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


## 8.6. SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

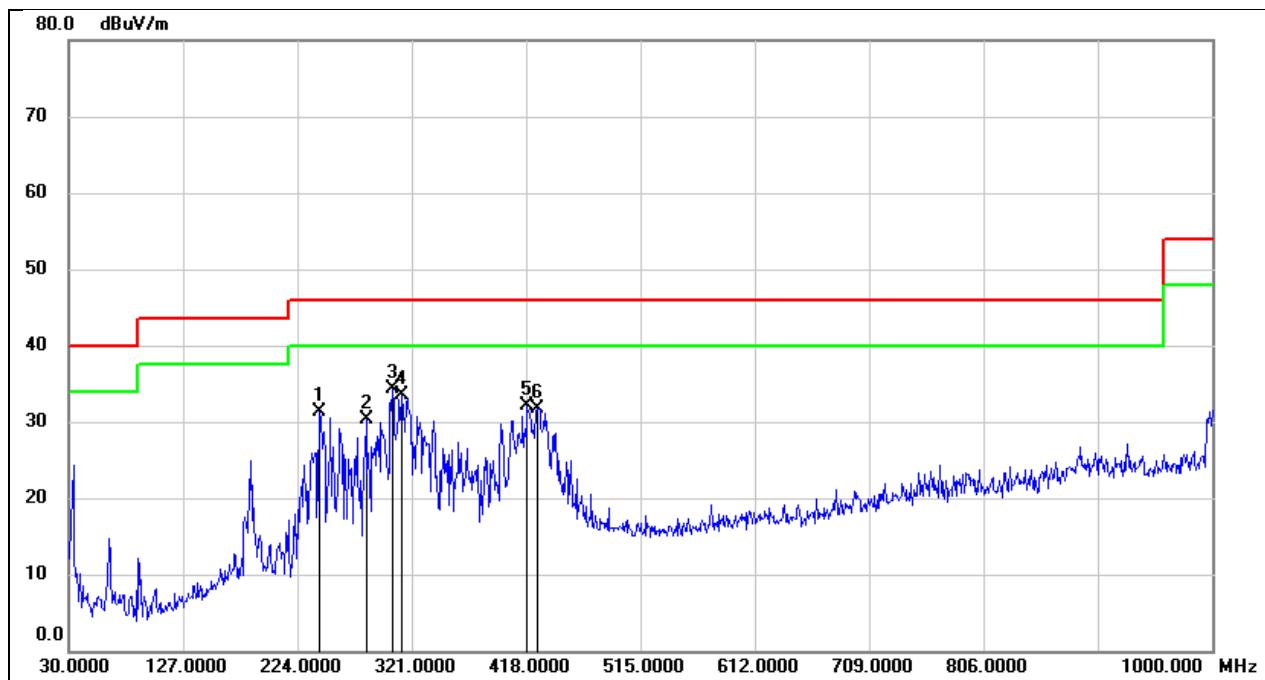

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	242.4300	45.63	-14.32	31.31	46.00	-14.69	QP
2	282.2000	43.20	-12.80	30.40	46.00	-15.60	QP
3	304.5100	45.74	-11.51	34.23	46.00	-11.77	QP
4	312.2700	44.73	-11.19	33.54	46.00	-12.46	QP
5	418.9700	41.45	-9.36	32.09	46.00	-13.91	QP
6	427.7000	40.95	-9.18	31.77	46.00	-14.23	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

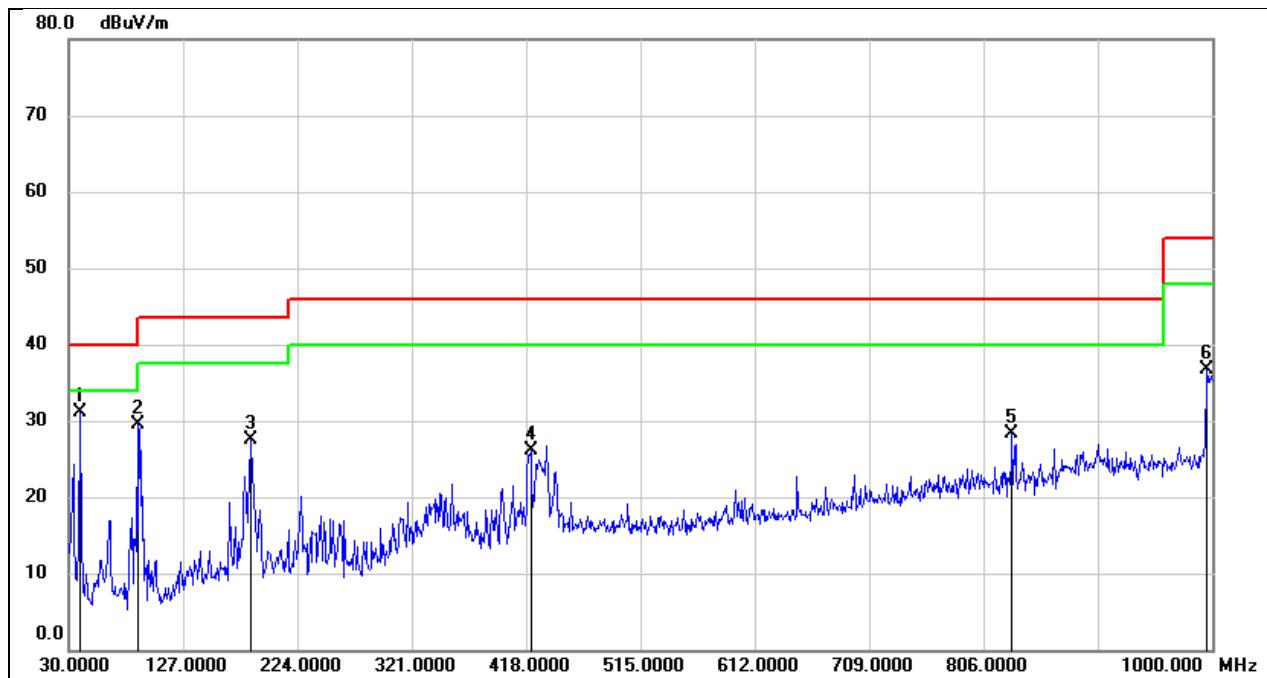

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	46.10	-14.90	31.20	40.00	-8.80	QP
2	88.2000	46.66	-17.06	29.60	43.50	-13.90	QP
3	184.2300	39.61	-12.05	27.56	43.50	-15.94	QP
4	421.8800	35.49	-9.31	26.18	46.00	-19.82	QP
5	830.2500	31.21	-2.83	28.38	46.00	-17.62	QP
6	995.1500	38.02	-1.28	36.74	54.00	-17.26	QP

## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

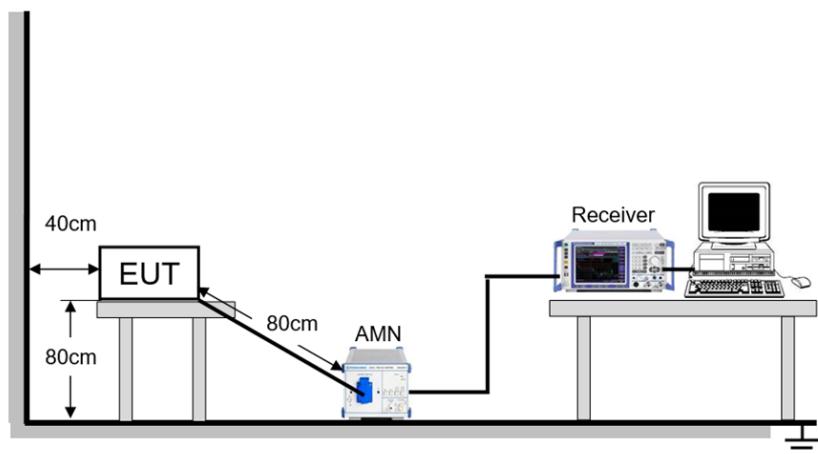

### TEST ENVIRONMENT


Temperature	24.6°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

### TEST DATE / ENGINEER

Test Date	April 11, 2024	Test By	Fanny Huang
-----------	----------------	---------	-------------


**TEST RESULTS**

Test Mode:	802.11b	Frequency(MHz):	2412
Probe:	L1		

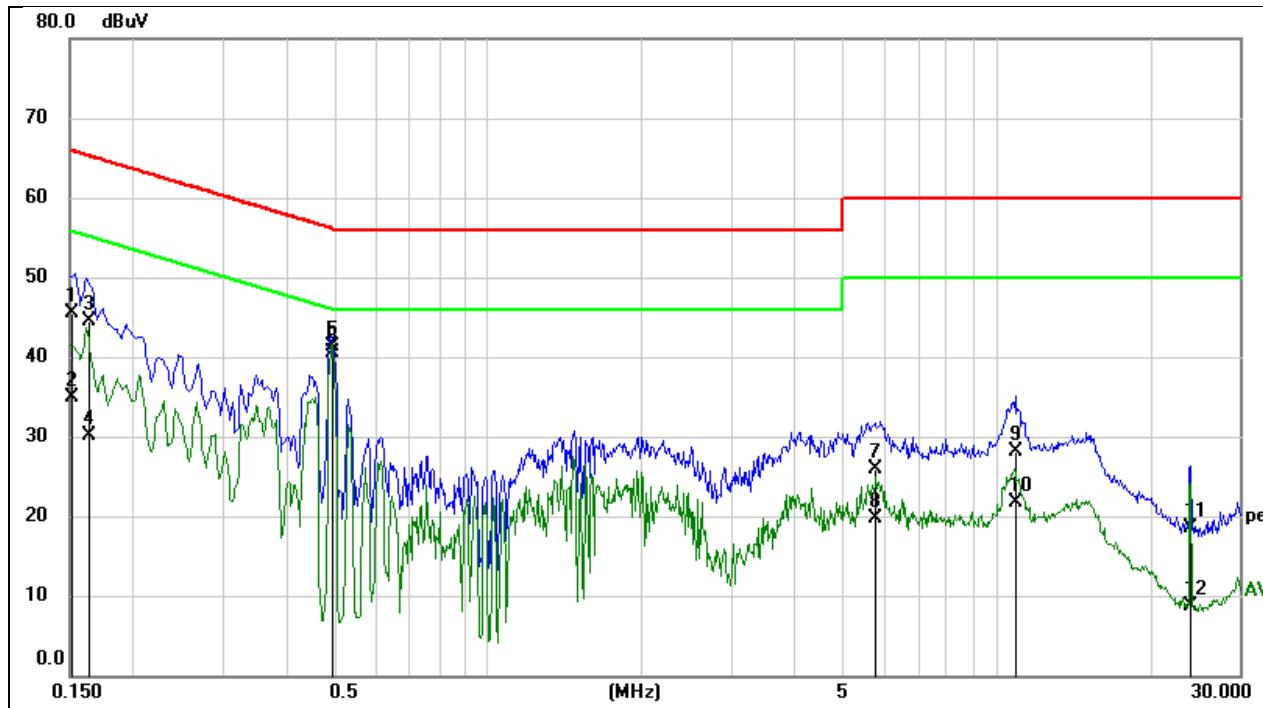

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	35.25	10.34	45.59	65.96	-20.37	QP
2	0.1508	24.56	10.34	34.90	55.96	-21.06	AVG
3	0.1638	34.25	10.31	44.56	65.27	-20.71	QP
4	0.1638	19.85	10.31	30.16	55.27	-25.11	AVG
5	0.4941	31.13	10.24	41.37	56.10	-14.73	QP
6	0.4941	30.33	10.24	40.57	46.10	-5.53	AVG
7	5.8158	15.64	10.29	25.93	60.00	-34.07	QP
8	5.8158	9.32	10.29	19.61	50.00	-30.39	AVG
9	10.8030	17.77	10.36	28.13	60.00	-31.87	QP
10	10.8030	11.34	10.36	21.70	50.00	-28.30	AVG
11	24.0905	7.69	10.85	18.54	60.00	-41.46	QP
12	24.0905	-2.13	10.85	8.72	50.00	-41.28	AVG

Test Mode:	802.11b	Frequency(MHz):	2412
Probe:	N		

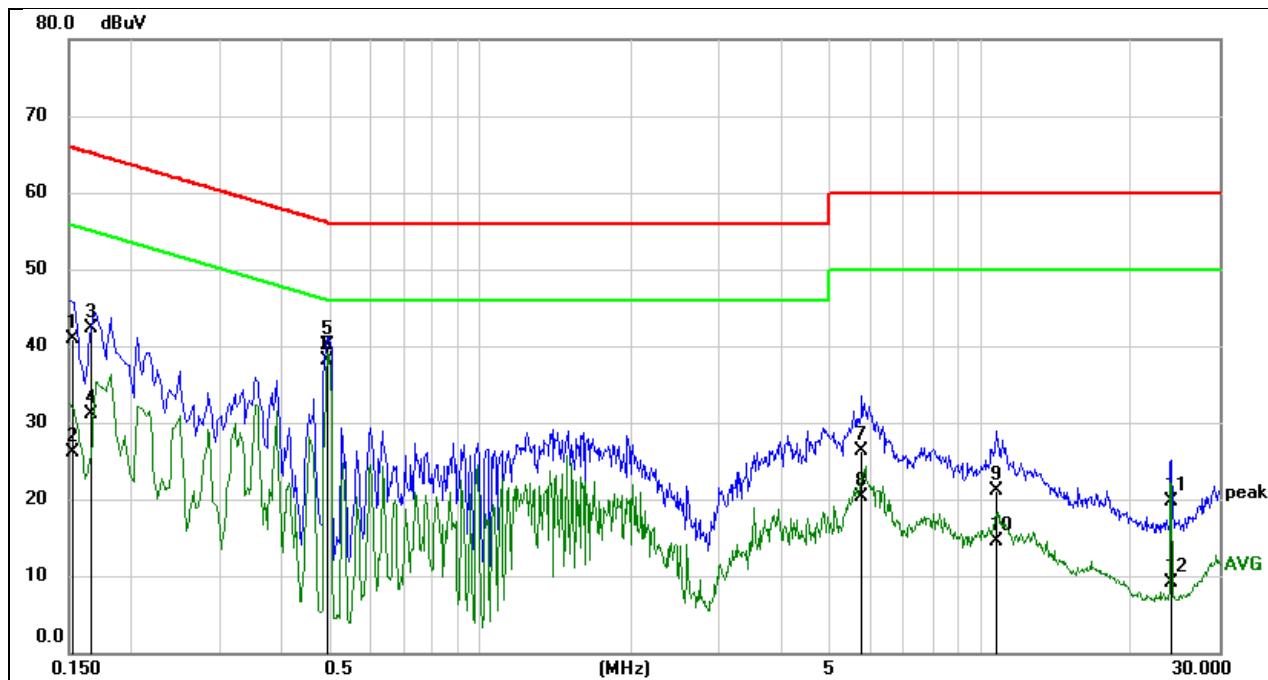

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1528	30.61	10.23	40.84	65.85	-25.01	QP
2	0.1528	15.83	10.23	26.06	55.85	-29.79	AVG
3	0.1659	32.00	10.21	42.21	65.16	-22.95	QP
4	0.1659	20.93	10.21	31.14	55.16	-24.02	AVG
5	0.4937	30.14	10.04	40.18	56.11	-15.93	QP
6	0.4937	28.15	10.04	38.19	46.11	-7.92	AVG
7	5.7937	15.98	10.39	26.37	60.00	-33.63	QP
8	5.7937	9.96	10.39	20.35	50.00	-29.65	AVG
9	10.7666	10.71	10.46	21.17	60.00	-38.83	QP
10	10.7666	4.11	10.46	14.57	50.00	-35.43	AVG
11	24.0473	8.59	11.03	19.62	60.00	-40.38	QP
12	24.0473	-2.01	11.03	9.02	50.00	-40.98	AVG

Note: All the modes have been tested, only the worst data was recorded in the report.


## 11. TEST DATA


### 11.1. APPENDIX A: DTS BANDWIDTH


#### 11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.08	2406.96	2417.04	$\geq 0.5$	PASS
	Ant2	2412	10.08	2406.96	2417.04	$\geq 0.5$	PASS
	Ant1	2437	10.08	2431.96	2442.04	$\geq 0.5$	PASS
	Ant2	2437	10.08	2431.96	2442.04	$\geq 0.5$	PASS
	Ant1	2462	10.08	2456.96	2467.04	$\geq 0.5$	PASS
	Ant2	2462	10.04	2456.96	2467.00	$\geq 0.5$	PASS
11G	Ant1	2412	16.32	2403.84	2420.16	$\geq 0.5$	PASS
	Ant2	2412	16.32	2403.84	2420.16	$\geq 0.5$	PASS
	Ant1	2437	16.32	2428.84	2445.16	$\geq 0.5$	PASS
	Ant2	2437	16.32	2428.84	2445.16	$\geq 0.5$	PASS
	Ant1	2462	16.32	2453.84	2470.16	$\geq 0.5$	PASS
	Ant2	2462	16.32	2453.84	2470.16	$\geq 0.5$	PASS
11N20MIMO	Ant1	2412	17.52	2403.28	2420.80	$\geq 0.5$	PASS
	Ant2	2412	17.52	2403.28	2420.80	$\geq 0.5$	PASS
	Ant1	2437	17.60	2428.24	2445.84	$\geq 0.5$	PASS
	Ant2	2437	17.56	2428.24	2445.80	$\geq 0.5$	PASS
	Ant1	2462	17.56	2453.24	2470.80	$\geq 0.5$	PASS
	Ant2	2462	17.56	2453.24	2470.80	$\geq 0.5$	PASS
11N40MIMO	Ant1	2422	35.76	2404.08	2439.84	$\geq 0.5$	PASS
	Ant2	2422	35.68	2404.08	2439.76	$\geq 0.5$	PASS
	Ant1	2437	35.76	2419.08	2454.84	$\geq 0.5$	PASS
	Ant2	2437	35.76	2419.08	2454.84	$\geq 0.5$	PASS
	Ant1	2452	35.76	2434.08	2469.84	$\geq 0.5$	PASS
	Ant2	2452	35.76	2434.08	2469.84	$\geq 0.5$	PASS


## 11.1.2. Test Graphs

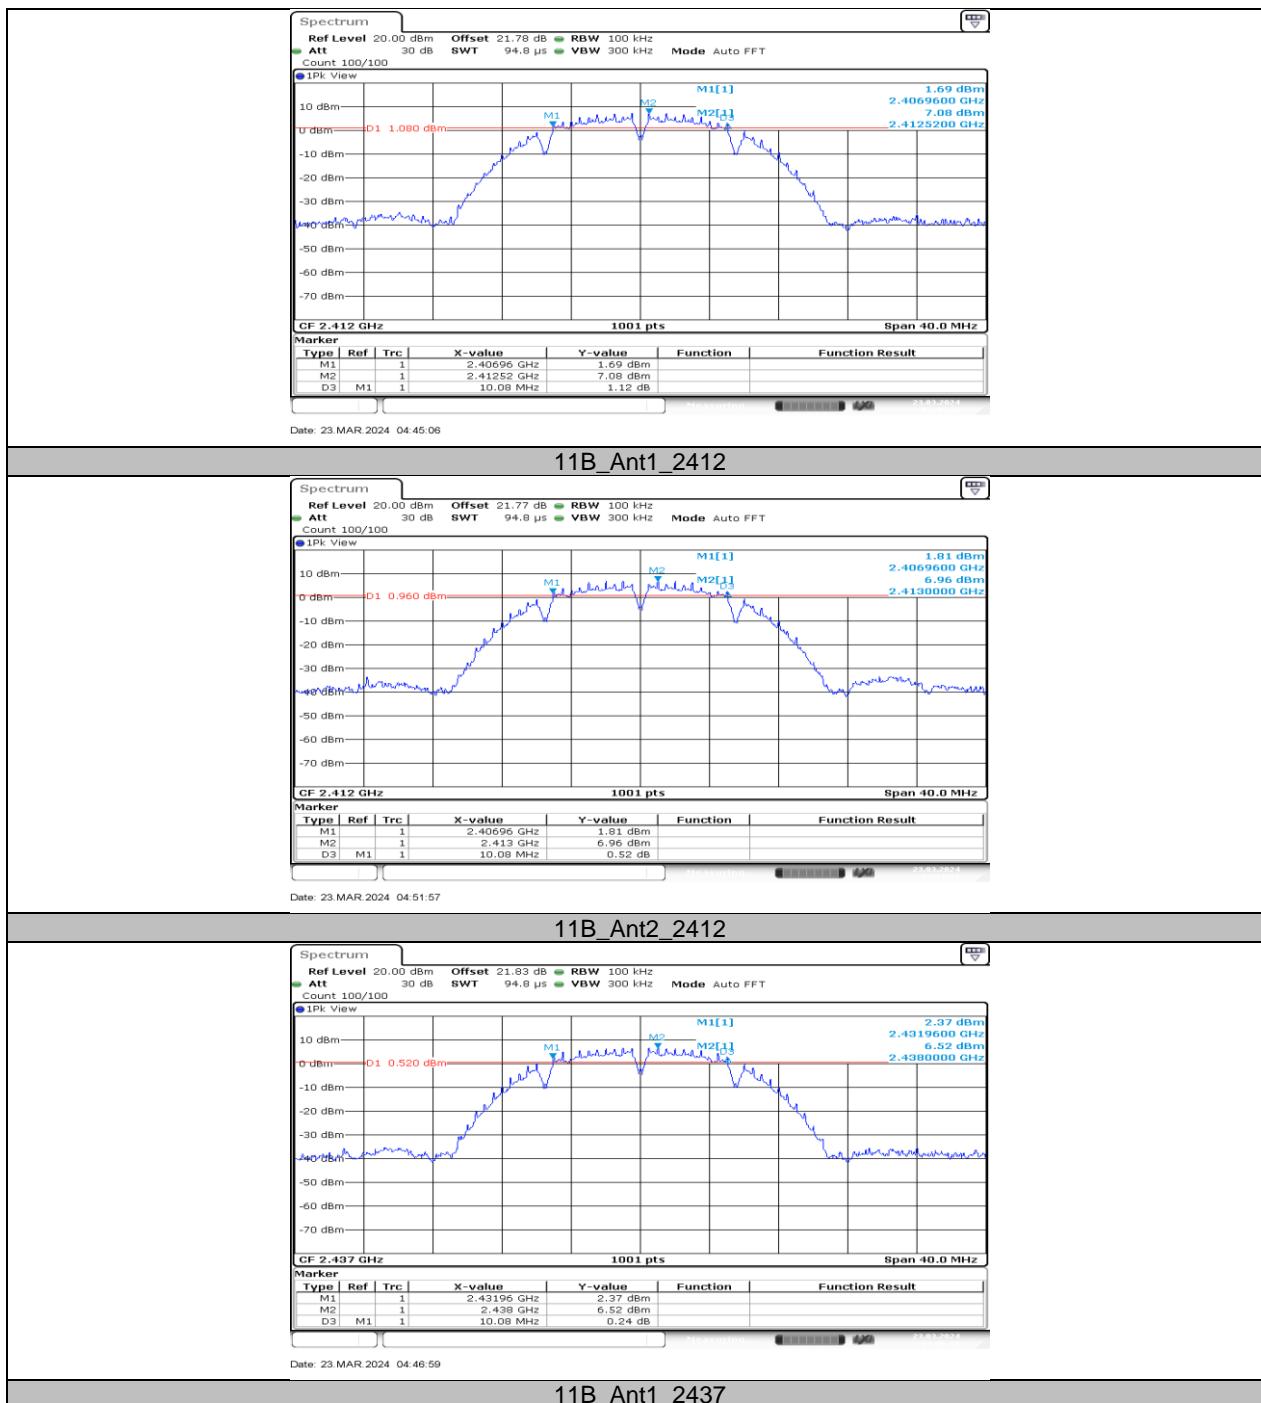

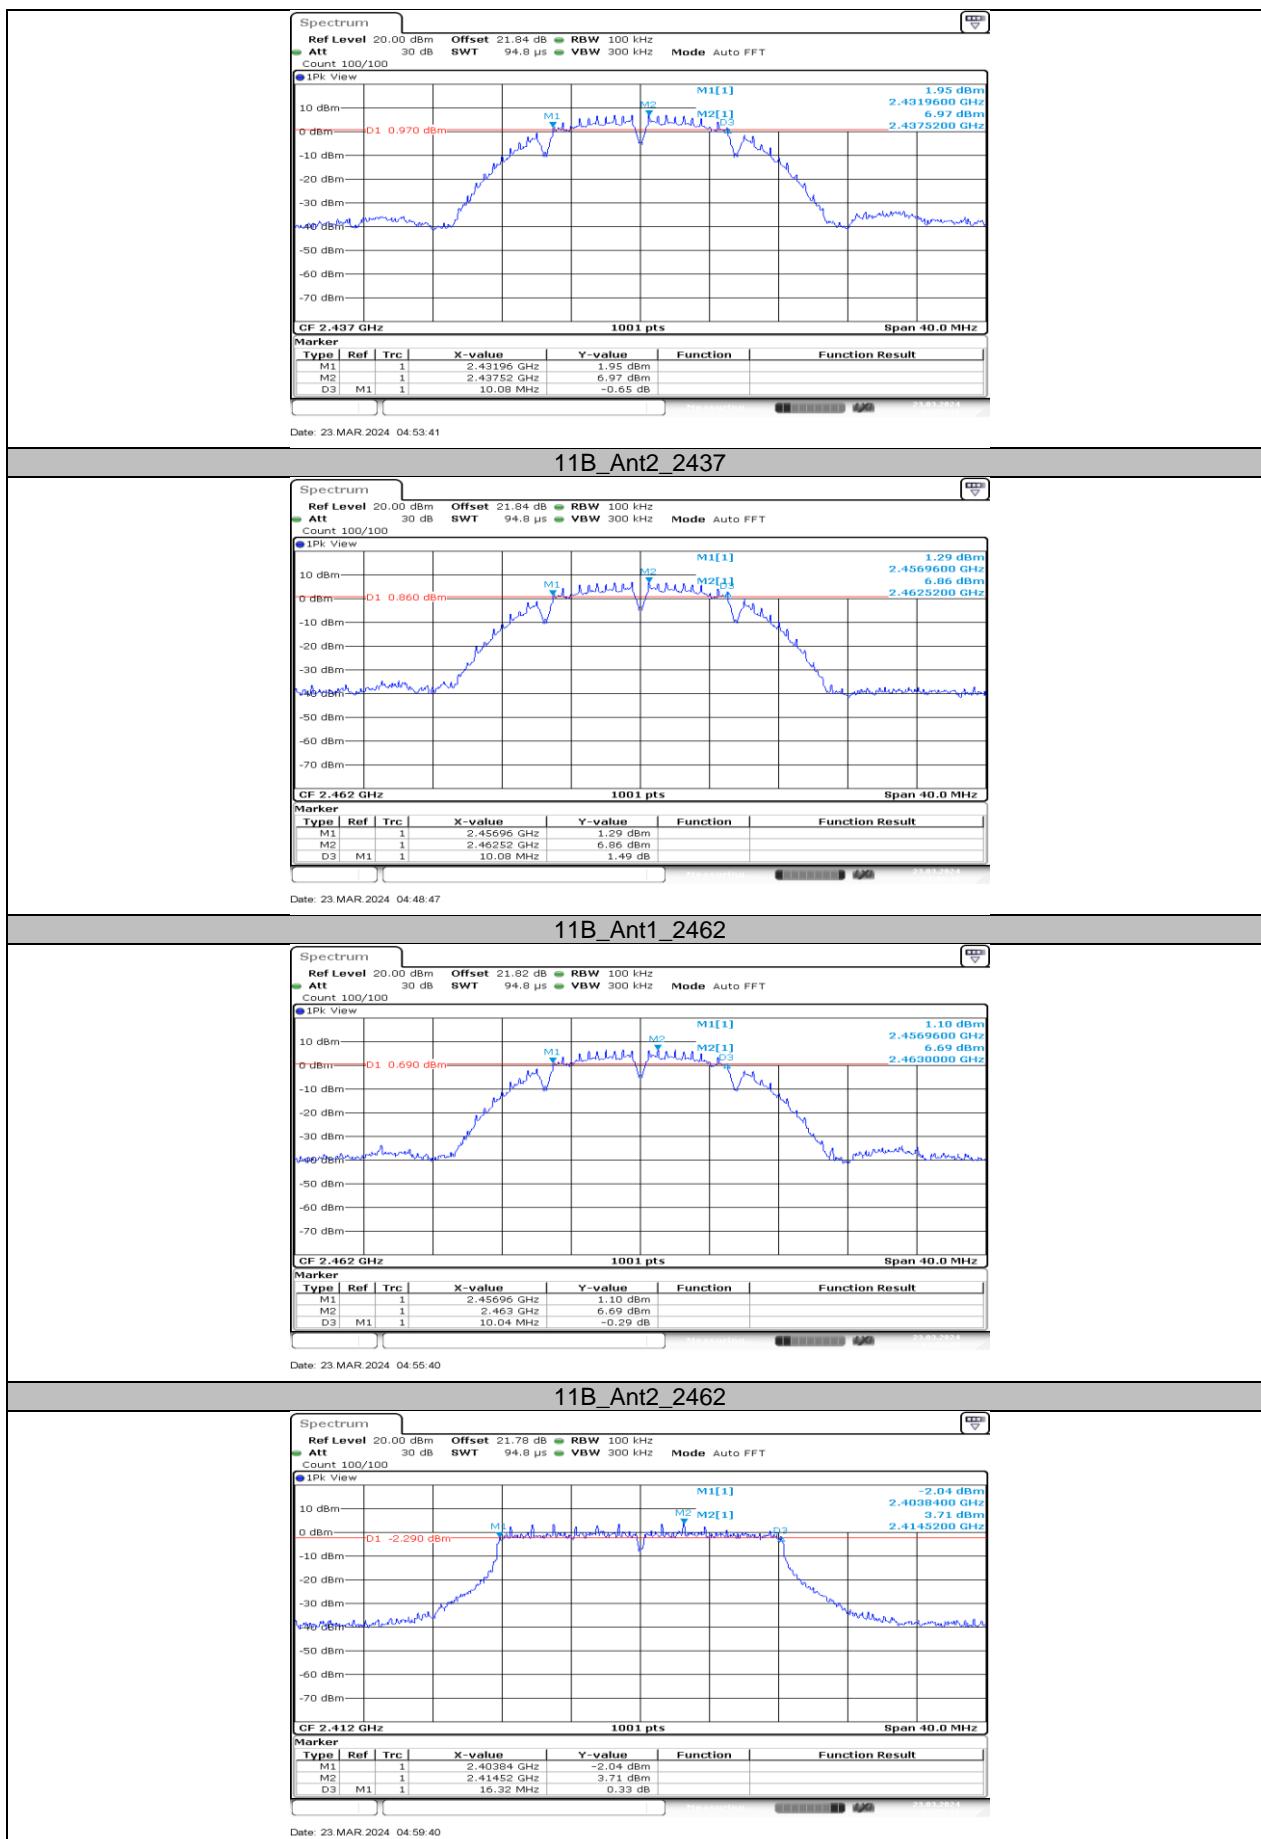


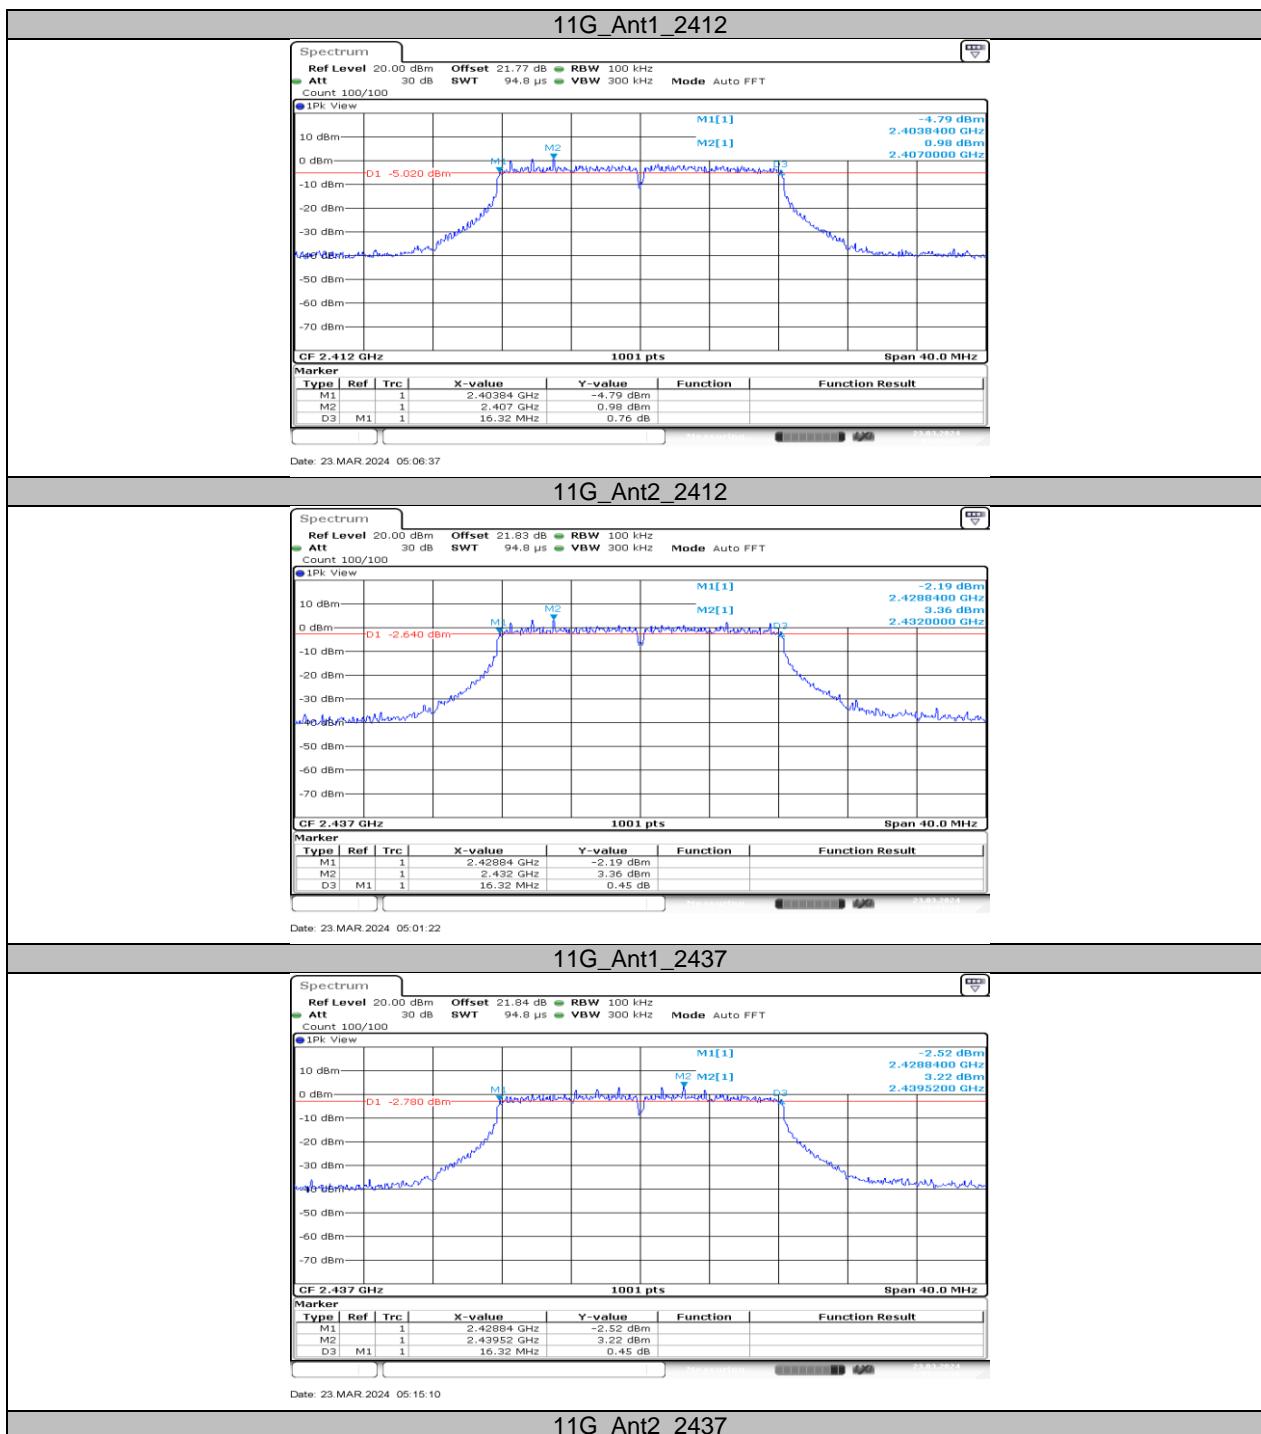

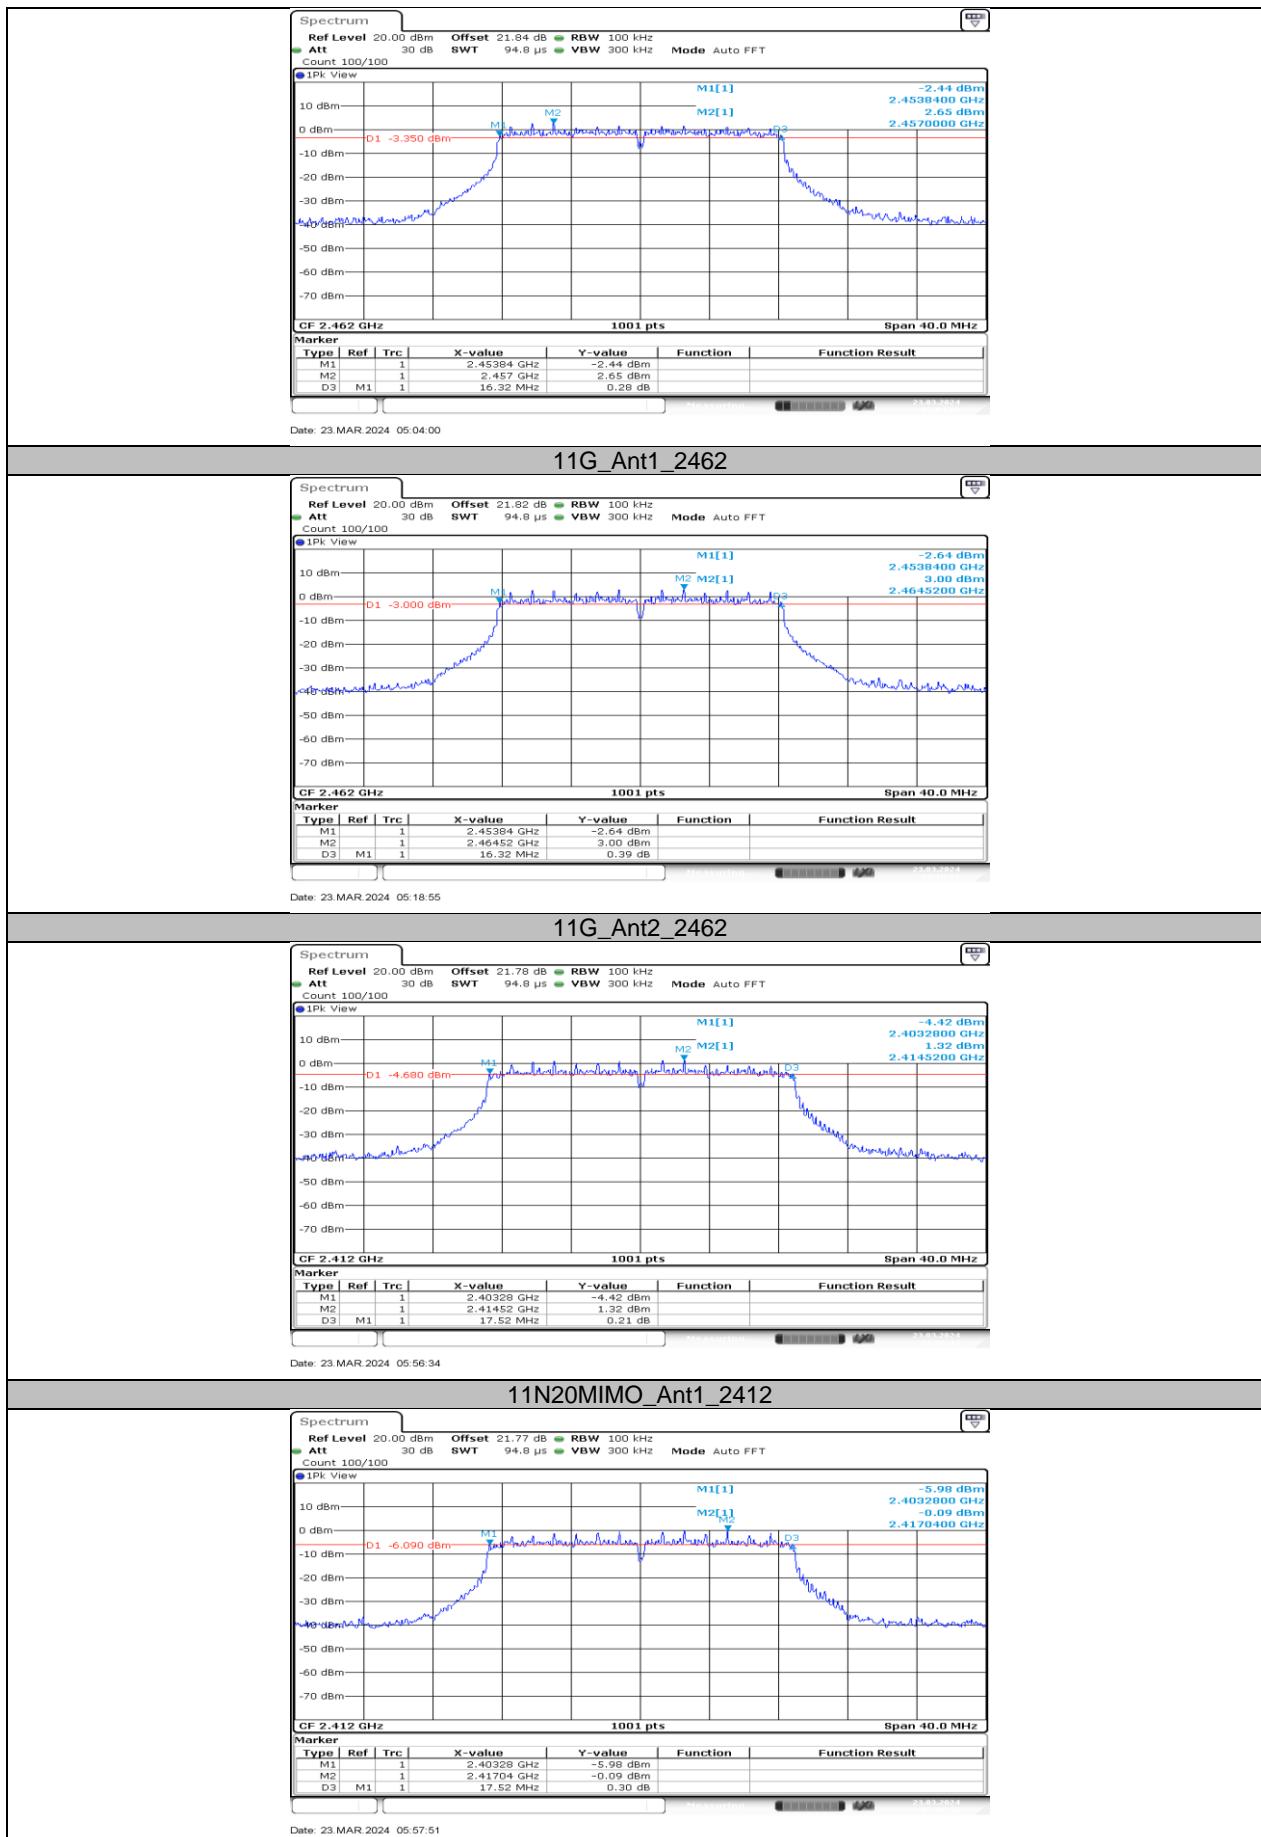

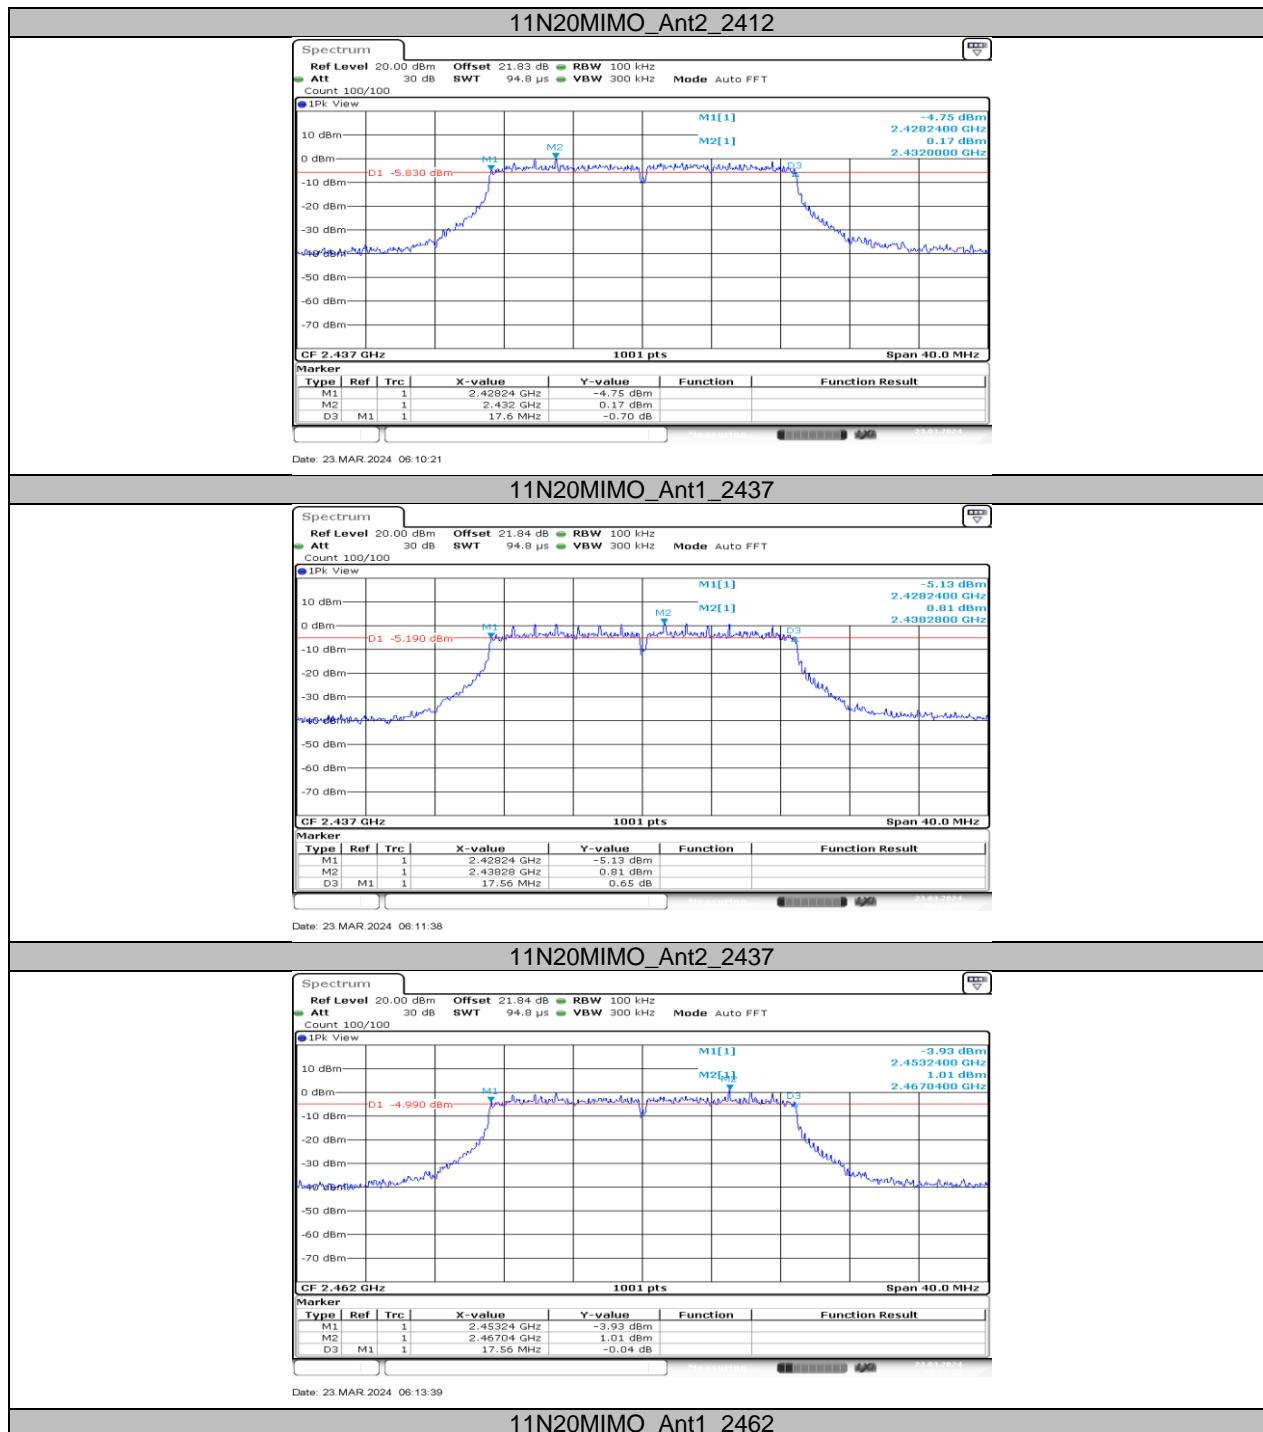



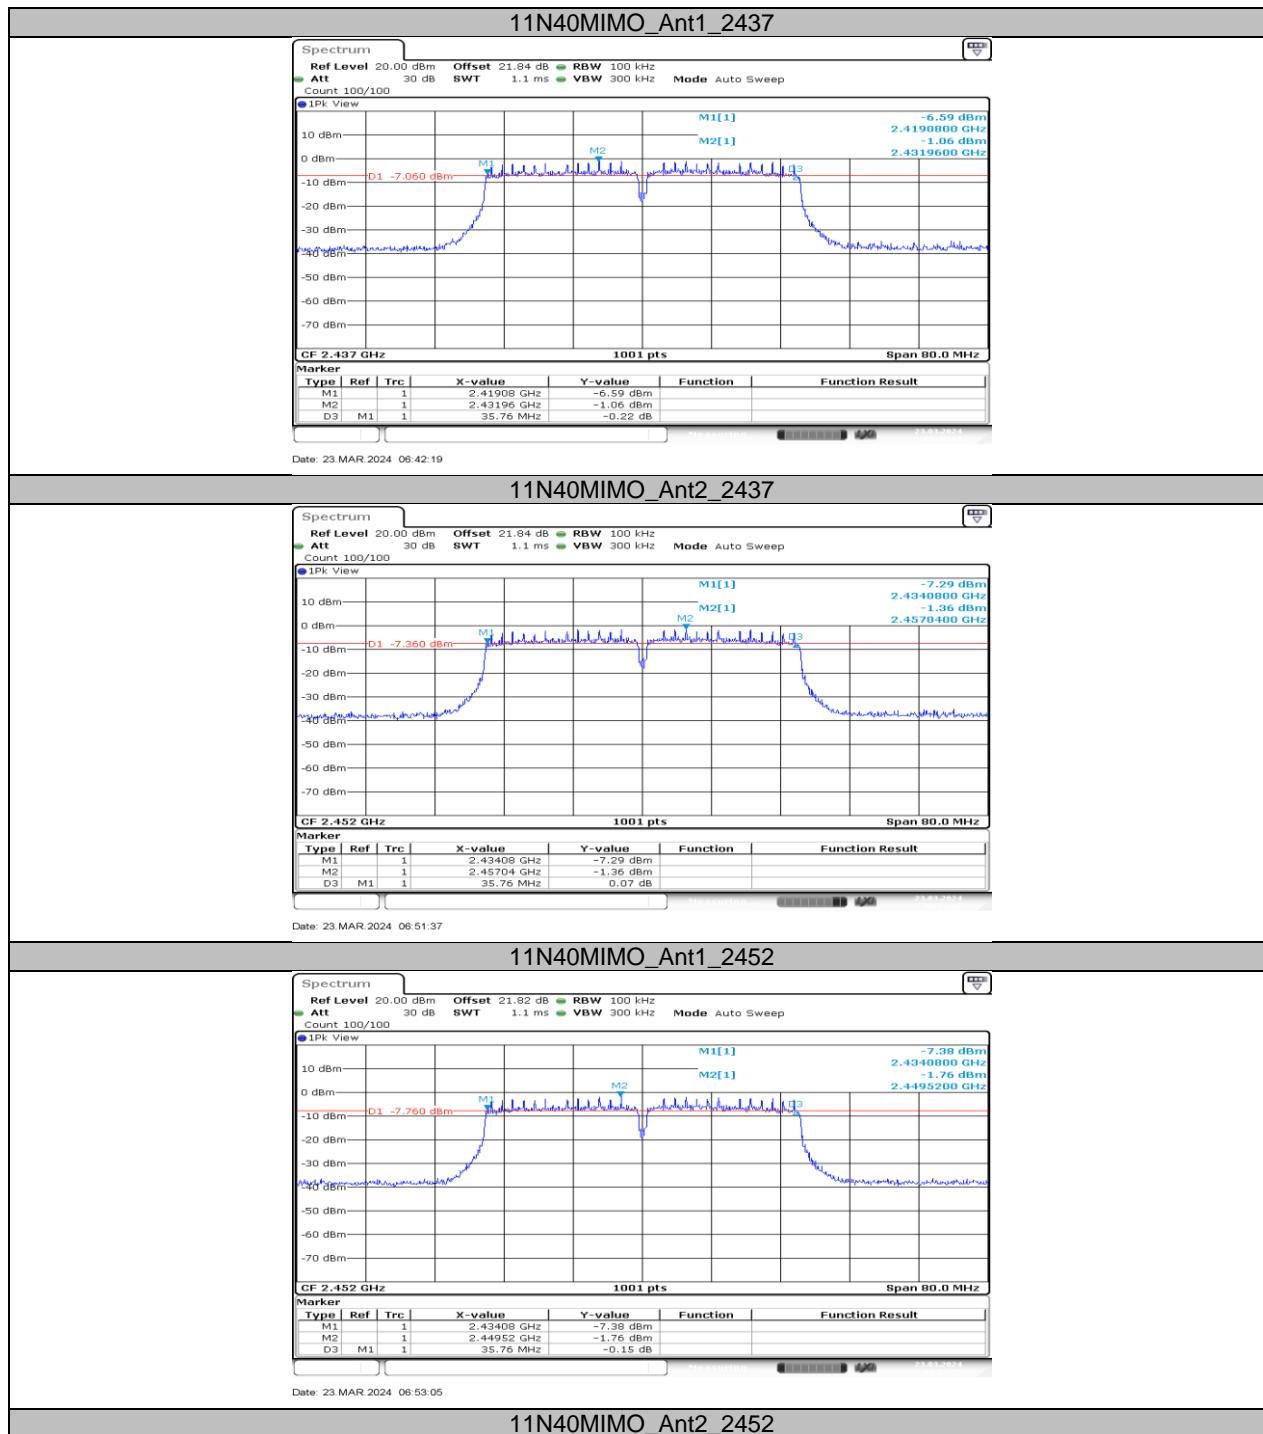



## 11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


### 11.2.1. Test Result


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.665	2404.6873	2419.3526	PASS
	Ant2	2412	14.705	2404.6474	2419.3526	PASS
	Ant1	2437	14.625	2429.6873	2444.3127	PASS
	Ant2	2437	14.665	2429.6873	2444.3526	PASS
	Ant1	2462	14.665	2454.6873	2469.3526	PASS
	Ant2	2462	14.665	2454.6873	2469.3526	PASS
11G	Ant1	2412	17.303	2403.4486	2420.7512	PASS
	Ant2	2412	17.343	2403.4086	2420.7512	PASS
	Ant1	2437	17.343	2428.4086	2445.7512	PASS
	Ant2	2437	17.343	2428.4086	2445.7512	PASS
	Ant1	2462	17.343	2453.4086	2470.7512	PASS
	Ant2	2462	17.303	2453.4086	2470.7113	PASS
11N20MIMO	Ant1	2412	18.541	2402.7692	2421.3107	PASS
	Ant2	2412	18.501	2402.7692	2421.2707	PASS
	Ant1	2437	18.462	2427.8092	2446.2707	PASS
	Ant2	2437	18.501	2427.7692	2446.2707	PASS
	Ant1	2462	18.462	2452.7692	2471.2308	PASS
	Ant2	2462	18.462	2452.8092	2471.2707	PASS
11N40MIMO	Ant1	2422	36.683	2403.6184	2440.3017	PASS
	Ant2	2422	36.683	2403.6184	2440.3017	PASS
	Ant1	2437	36.683	2418.6184	2455.3017	PASS
	Ant2	2437	36.763	2418.5385	2455.3017	PASS
	Ant1	2452	36.683	2433.6184	2470.3017	PASS
	Ant2	2452	36.763	2433.5385	2470.3017	PASS


## 11.2.2. Test Graphs

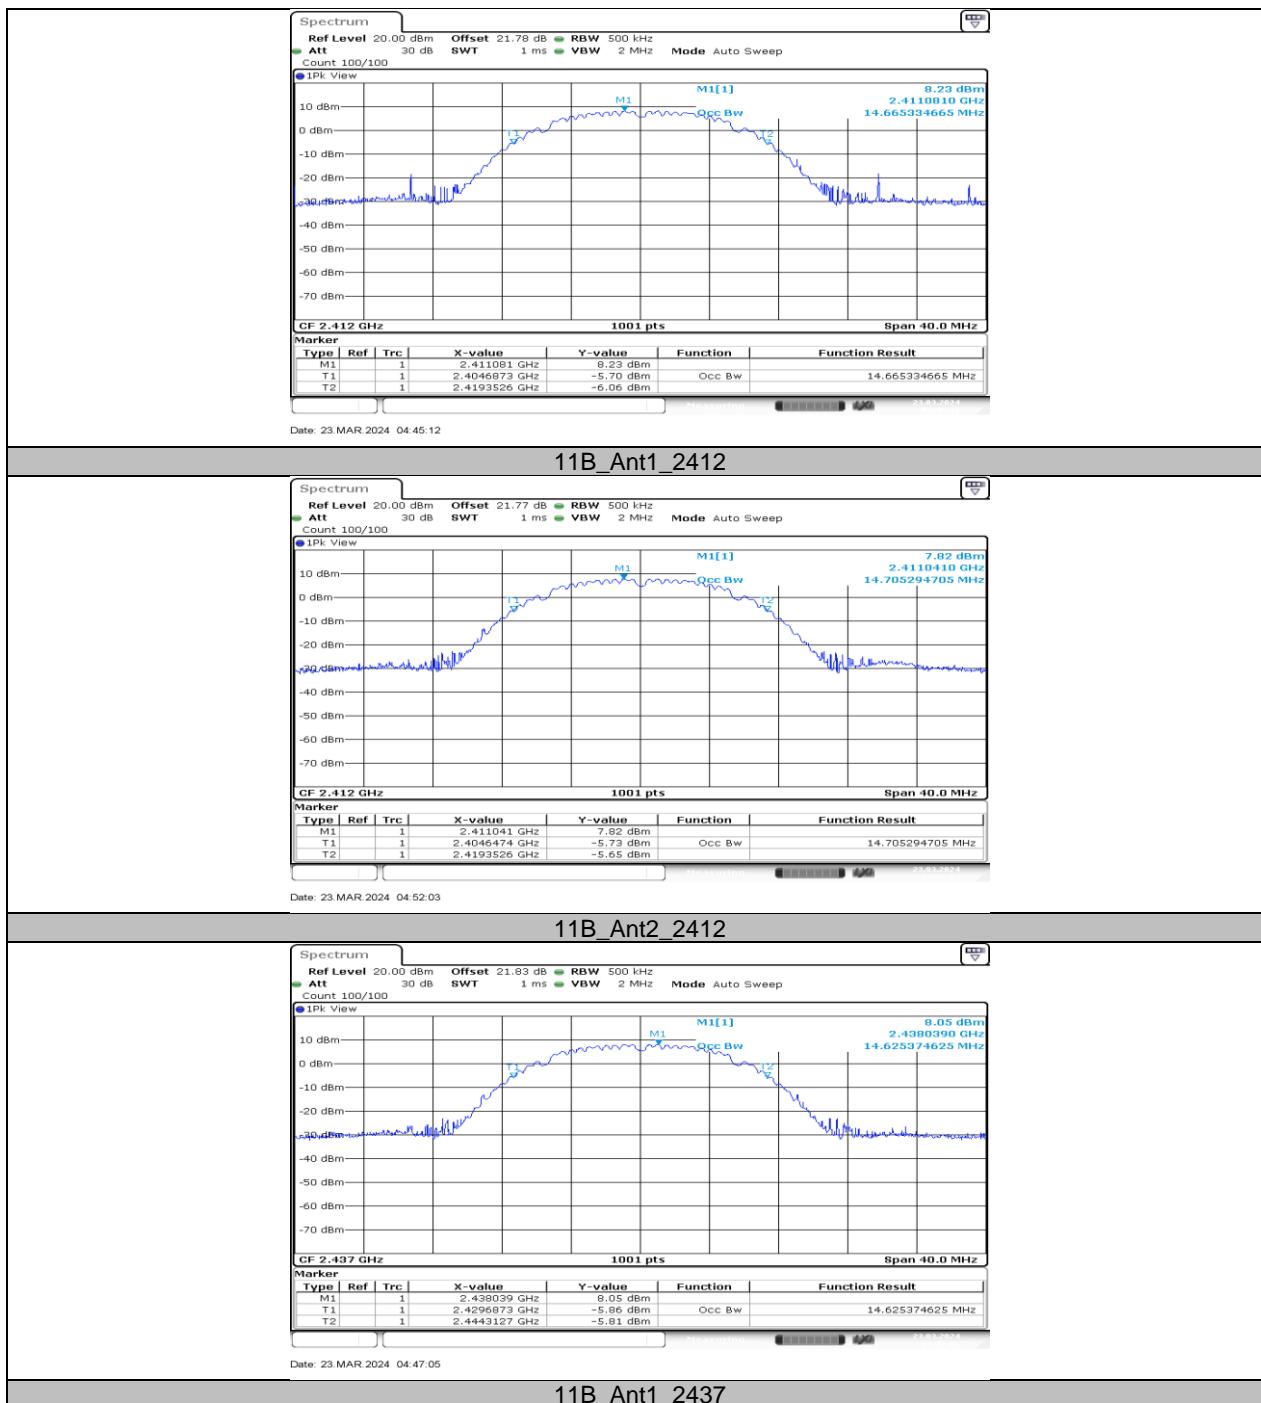

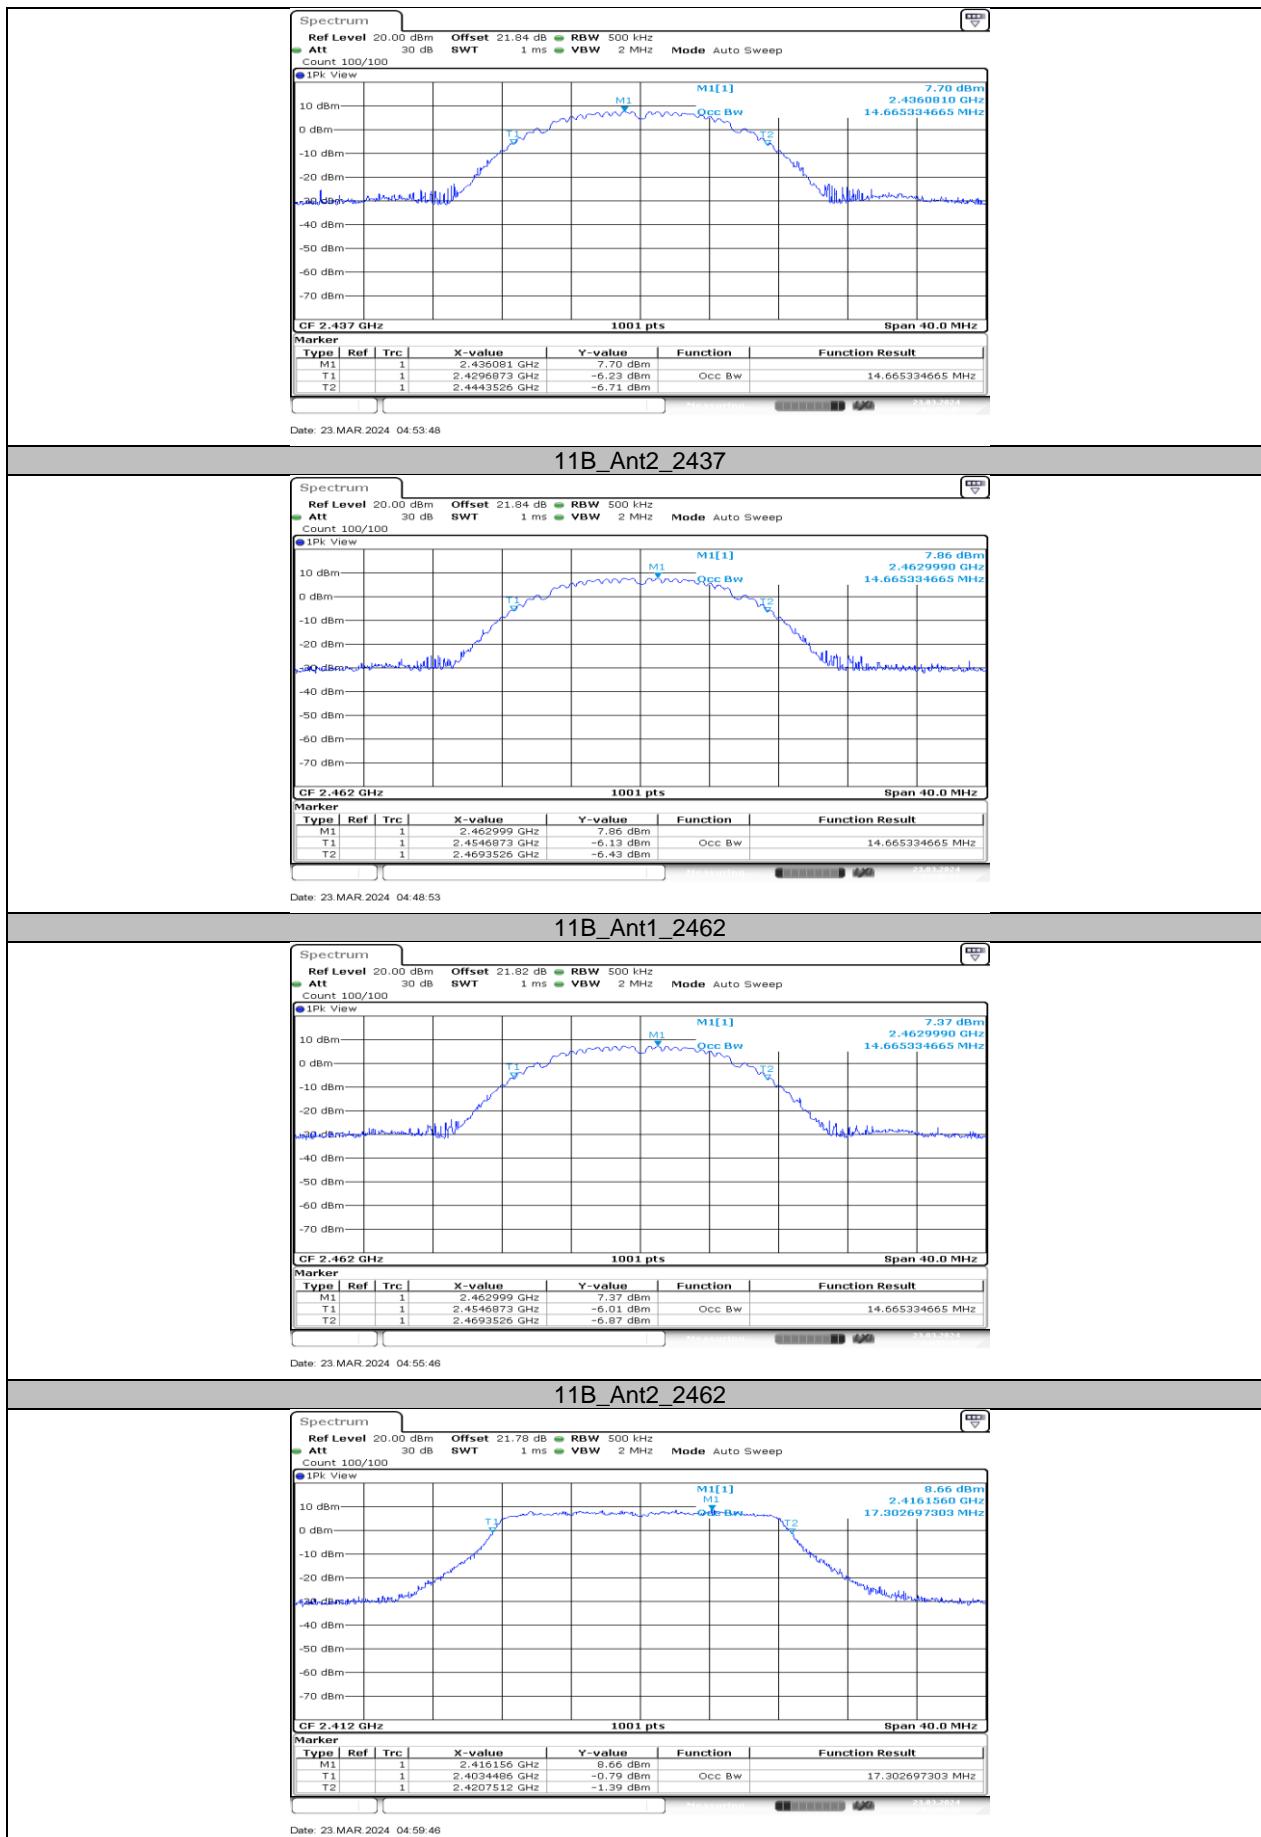


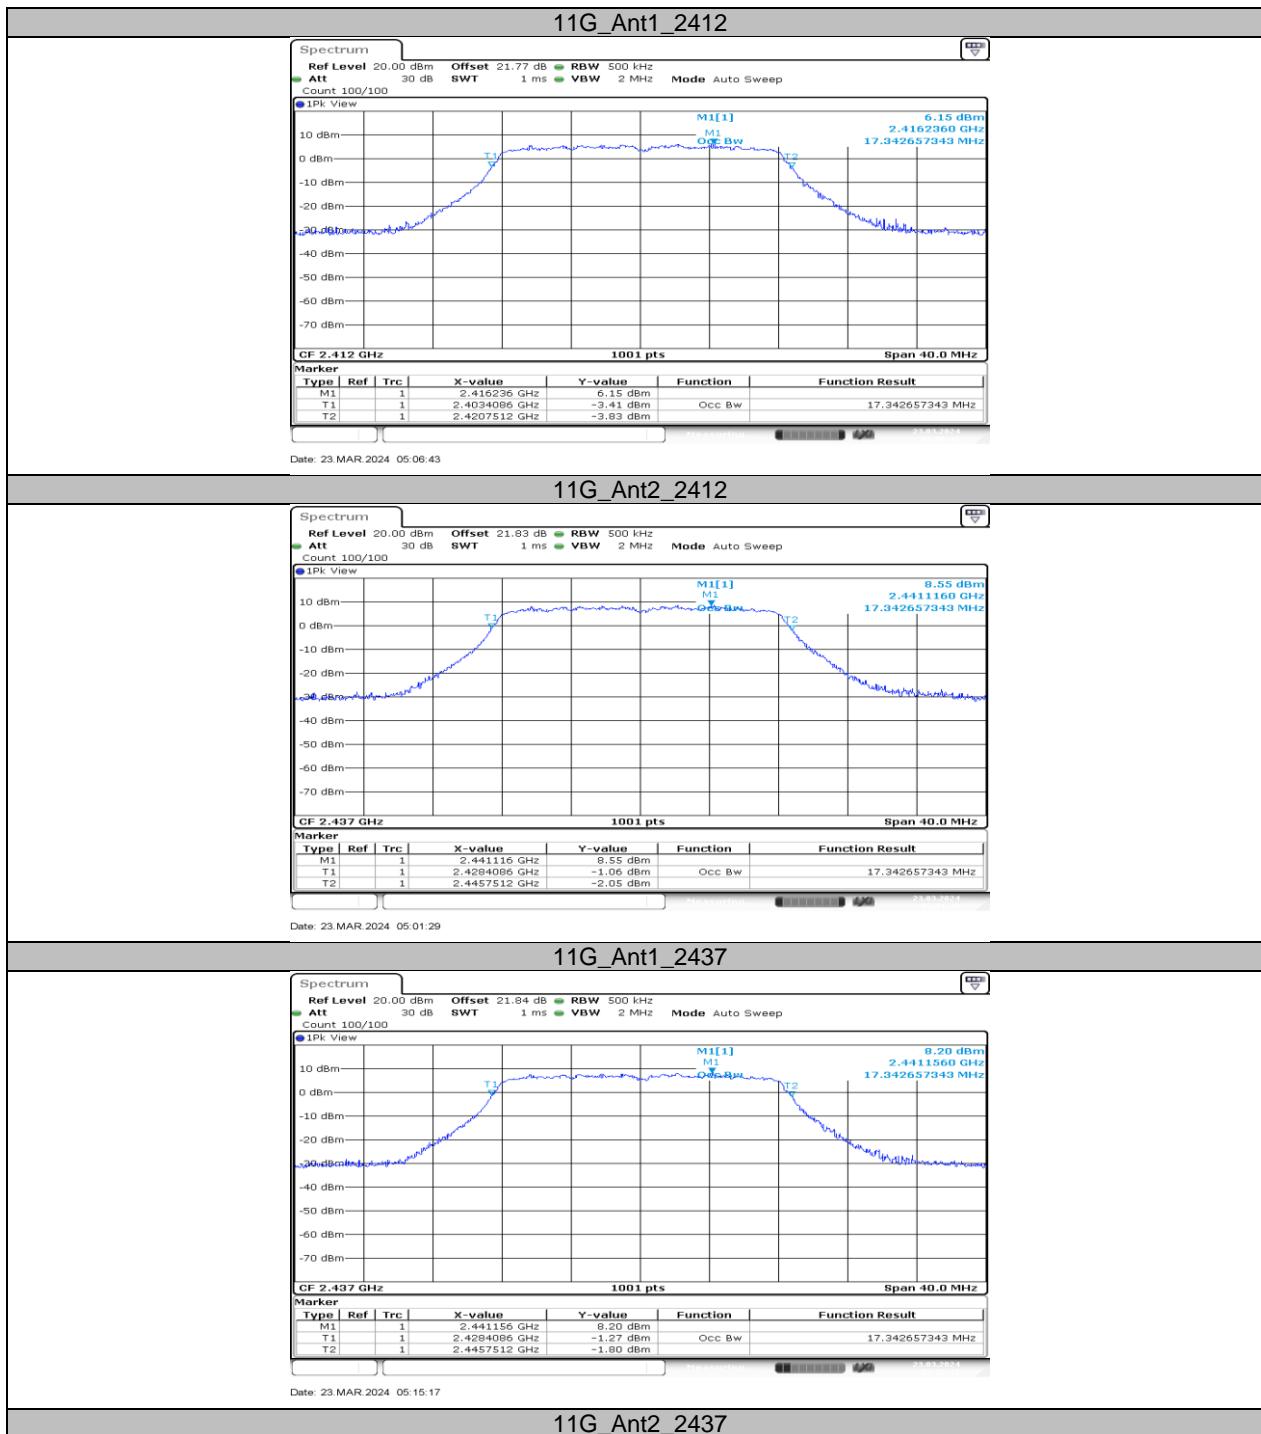

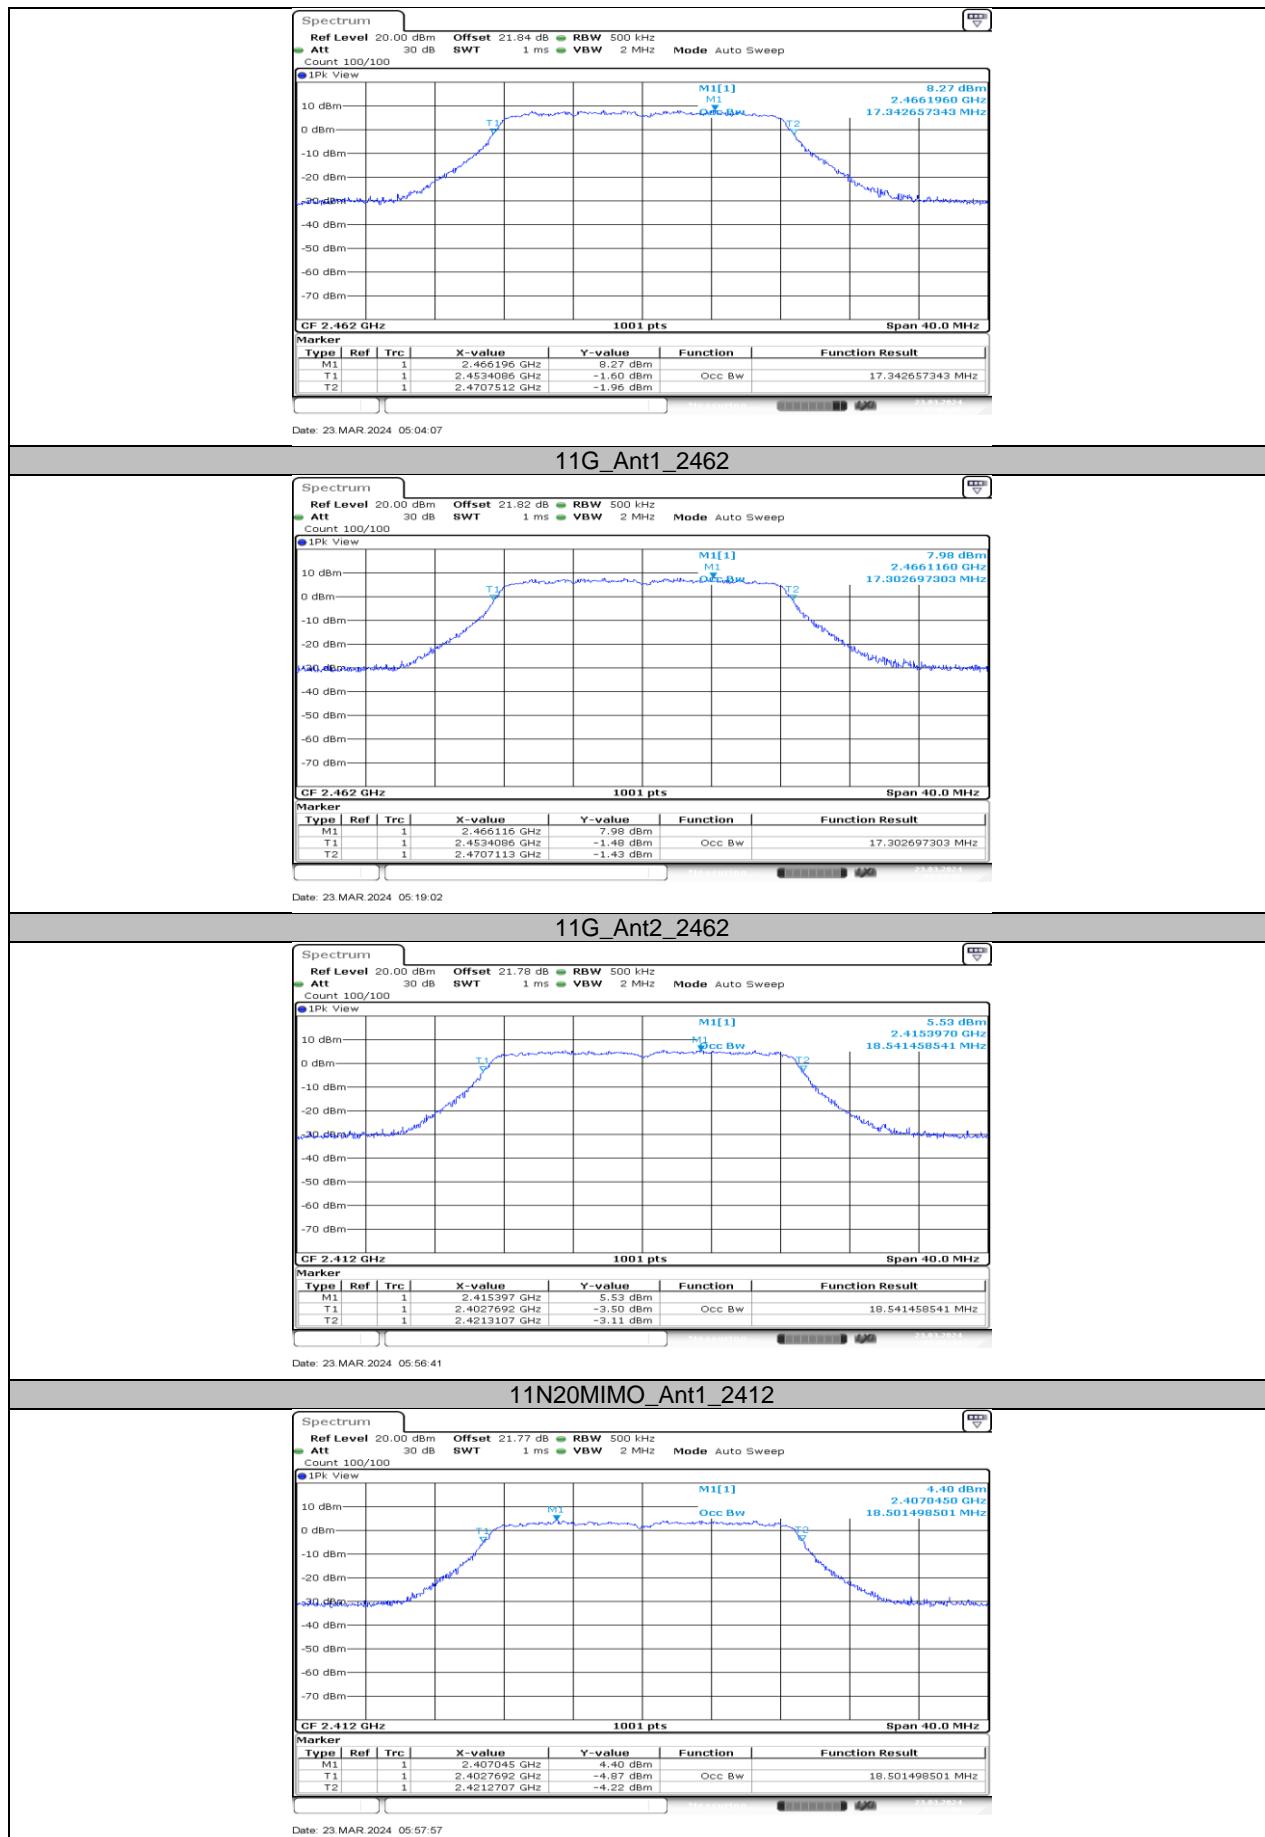

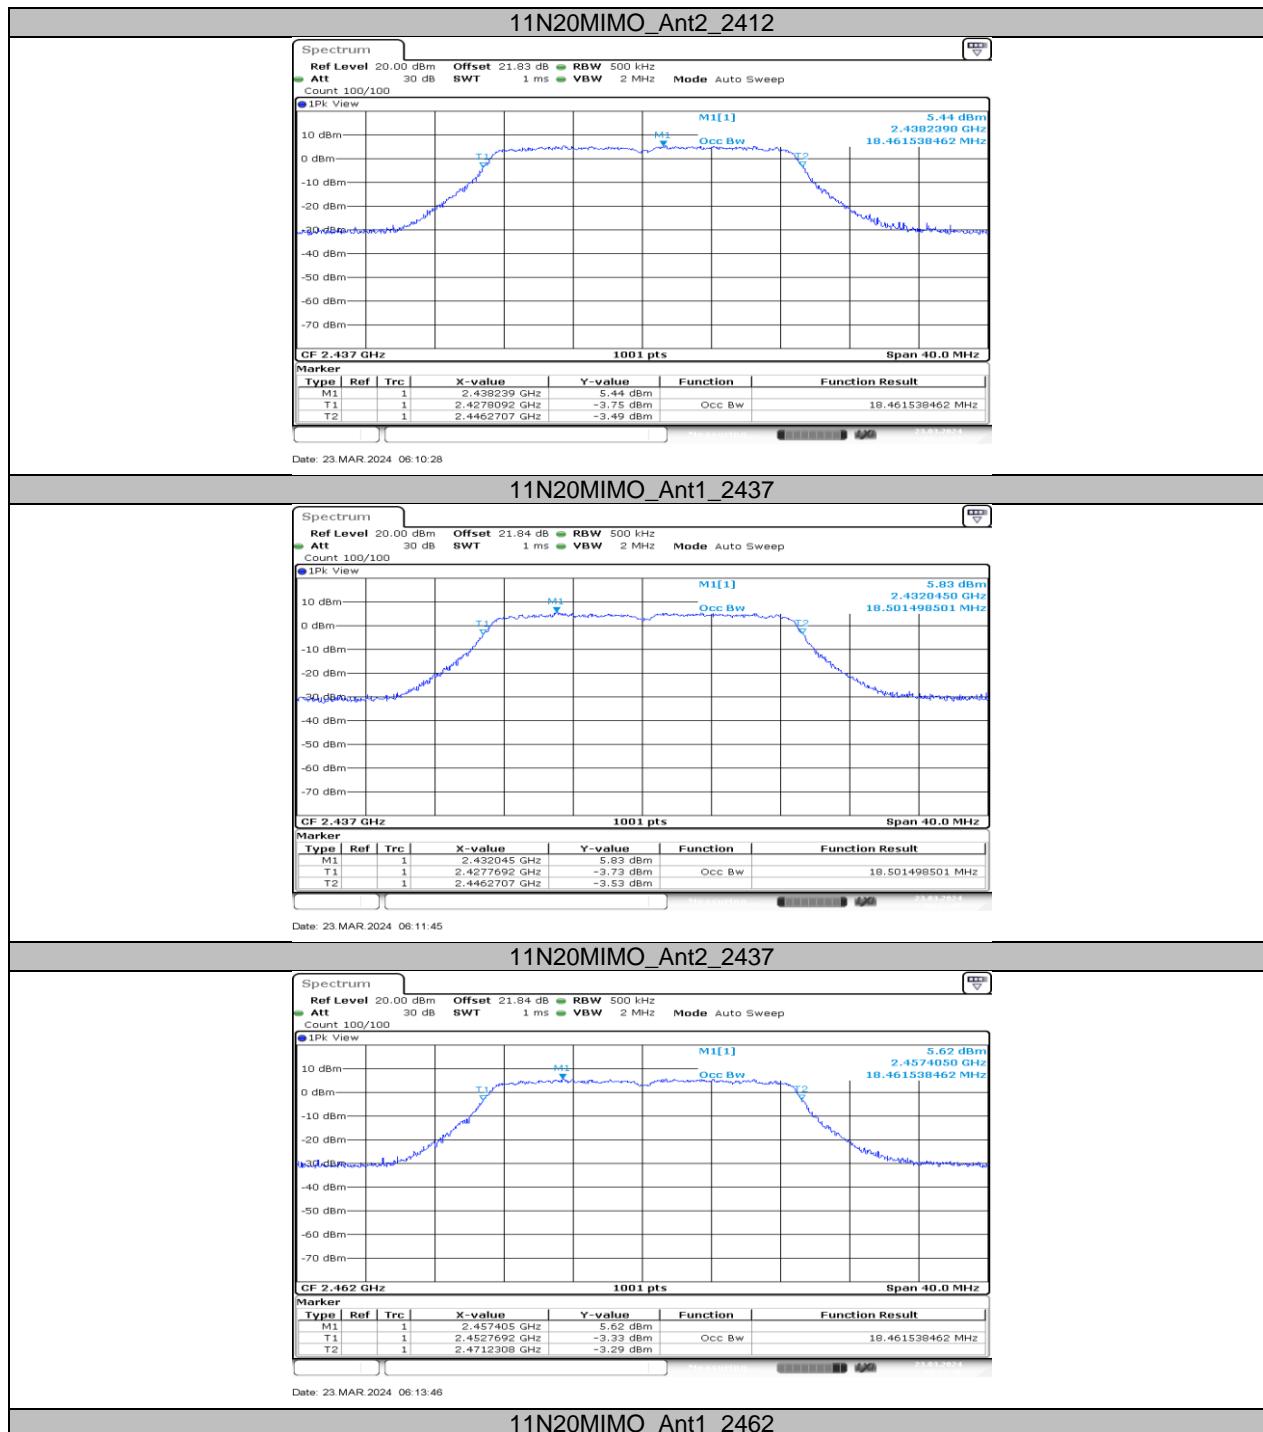



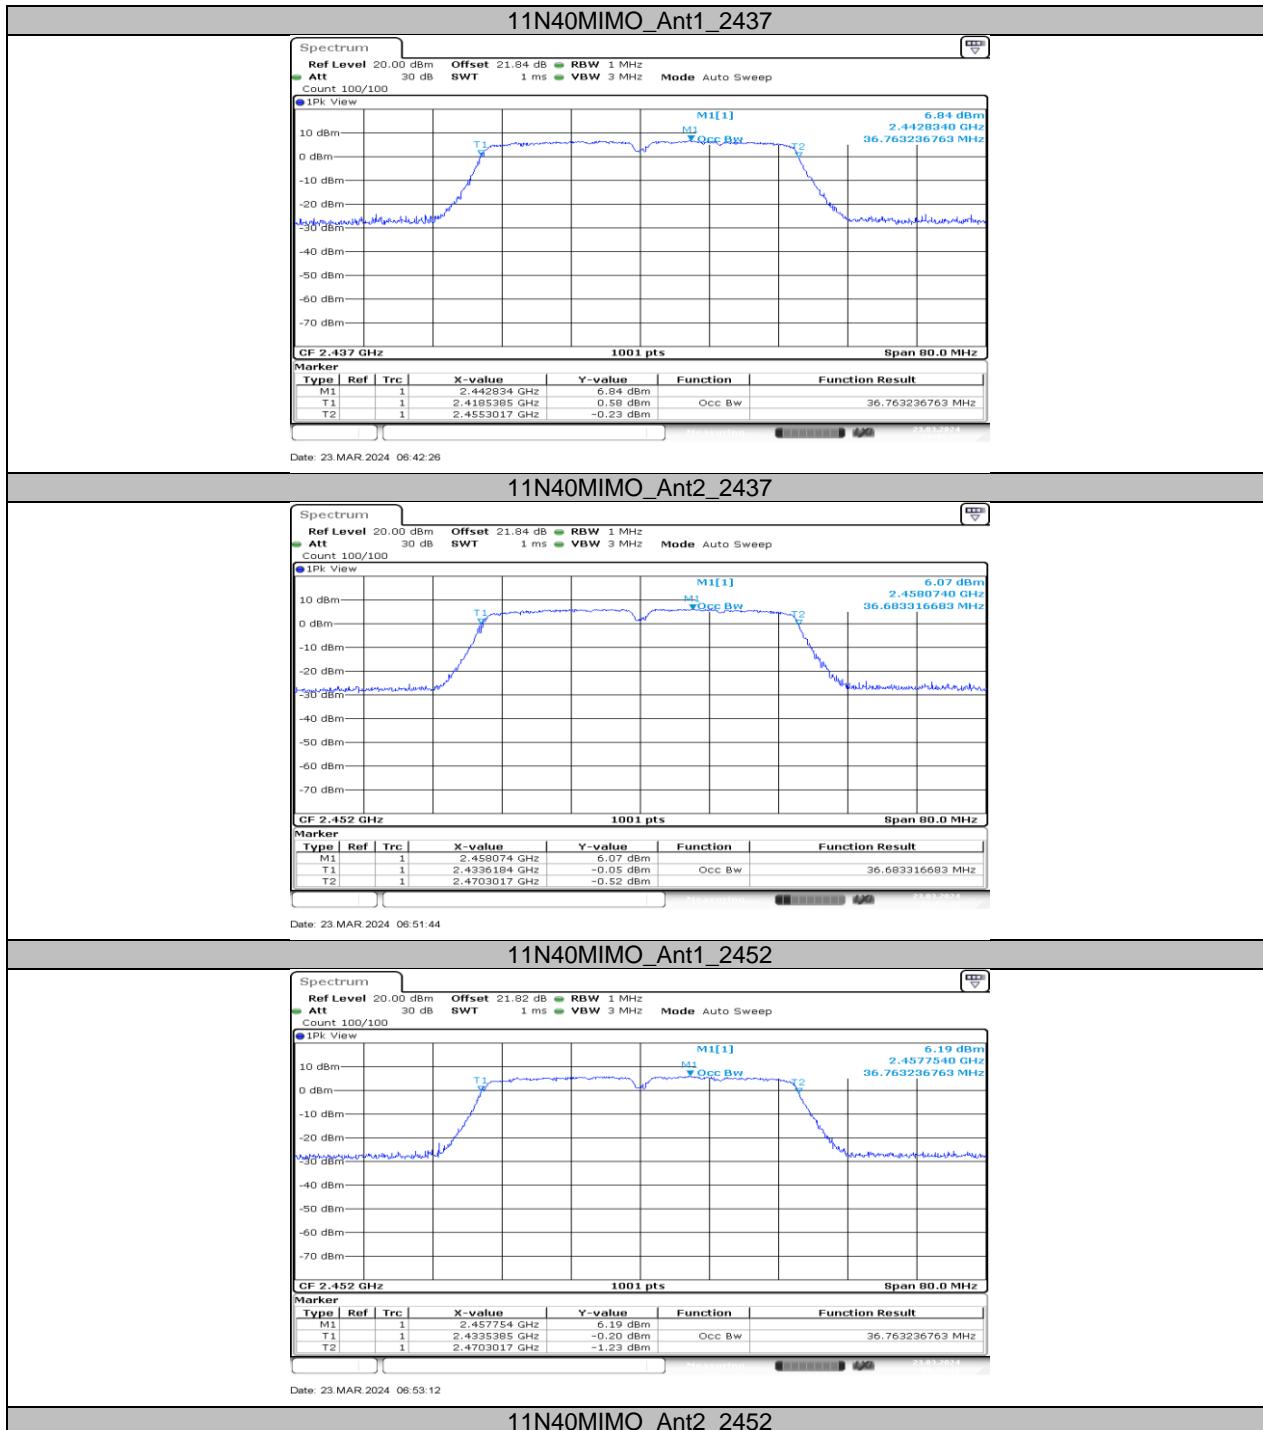

## 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

### 11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	17.54	≤30.00	PASS
	Ant2	2412	17.08	≤30.00	PASS
	Ant1	2437	17.51	≤30.00	PASS
	Ant2	2437	16.90	≤30.00	PASS
	Ant1	2462	17.72	≤30.00	PASS
	Ant2	2462	16.80	≤30.00	PASS
11G	Ant1	2412	15.46	≤30.00	PASS
	Ant2	2412	15.75	≤30.00	PASS
	Ant1	2437	15.87	≤30.00	PASS
	Ant2	2437	15.15	≤30.00	PASS
	Ant1	2462	15.71	≤30.00	PASS
	Ant2	2462	15.14	≤30.00	PASS
11N20MIMO	Ant1	2412	13.47	≤30.00	PASS
	Ant2	2412	13.75	≤30.00	PASS
	total	2412	16.62	≤30.00	PASS
	Ant1	2437	13.42	≤30.00	PASS
	Ant2	2437	13.32	≤30.00	PASS
	total	2437	16.38	≤30.00	PASS
	Ant1	2462	13.59	≤30.00	PASS
	Ant2	2462	12.92	≤30.00	PASS
	total	2462	16.28	≤30.00	PASS
	Ant1	2422	13.29	≤30.00	PASS
11N40MIMO	Ant2	2422	13.45	≤30.00	PASS
	total	2422	16.38	≤30.00	PASS
	Ant1	2437	13.21	≤30.00	PASS
	Ant2	2437	13.37	≤30.00	PASS
	total	2437	16.30	≤30.00	PASS
	Ant1	2452	13.88	≤30.00	PASS
	Ant2	2452	13.31	≤30.00	PASS
	total	2452	16.61	≤30.00	PASS

## 11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY

### 11.4.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.62	≤8.00	PASS
	Ant2	2412	-14.67	≤8.00	PASS
	Ant1	2437	-14.80	≤8.00	PASS
	Ant2	2437	-14.96	≤8.00	PASS
	Ant1	2462	-14.74	≤8.00	PASS
	Ant2	2462	-15.08	≤8.00	PASS
11G	Ant1	2412	-16.38	≤8.00	PASS
	Ant2	2412	-15.86	≤8.00	PASS
	Ant1	2437	-15.09	≤8.00	PASS
	Ant2	2437	-16.27	≤8.00	PASS
	Ant1	2462	-16.31	≤8.00	PASS
	Ant2	2462	-16.82	≤8.00	PASS
11N20MIMO	Ant1	2412	-15.22	≤8.00	PASS
	Ant2	2412	-18.57	≤8.00	PASS
	total	2412	-13.57	≤8.00	PASS
	Ant1	2437	-18.04	≤8.00	PASS
	Ant2	2437	-18.73	≤8.00	PASS
	total	2437	-15.36	≤8.00	PASS
	Ant1	2462	-17.13	≤8.00	PASS
	Ant2	2462	-18.75	≤8.00	PASS
	total	2462	-14.85	≤8.00	PASS
11N40MIMO	Ant1	2422	-19.43	≤8.00	PASS
	Ant2	2422	-19.88	≤8.00	PASS
	total	2422	-16.64	≤8.00	PASS
	Ant1	2437	-19.29	≤8.00	PASS
	Ant2	2437	-20.32	≤8.00	PASS
	total	2437	-16.76	≤8.00	PASS
	Ant1	2452	-18.73	≤8.00	PASS
	Ant2	2452	-20.30	≤8.00	PASS
	total	2452	-16.43	≤8.00	PASS