



深圳汉阳天线设计有限公司

SHENZHEN HANYANG ANTENNA DESIGN CO. LTD.




R&D Building No.9, Main Park, Taohuayuan Science and Technology Innovation Park, Xixiang Street, Baoan District, Shenzhen, China

Applicant: GSD

Antenna specification

Project name: WKT80


Date: 2025-01-14

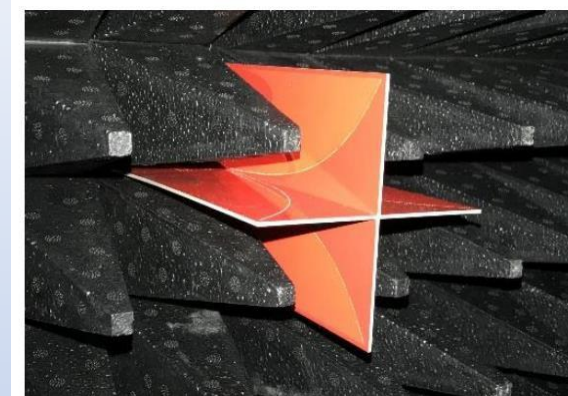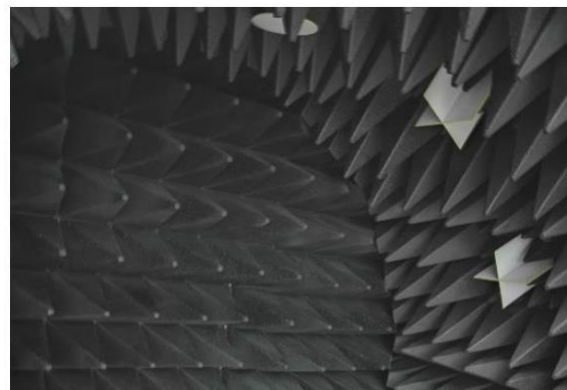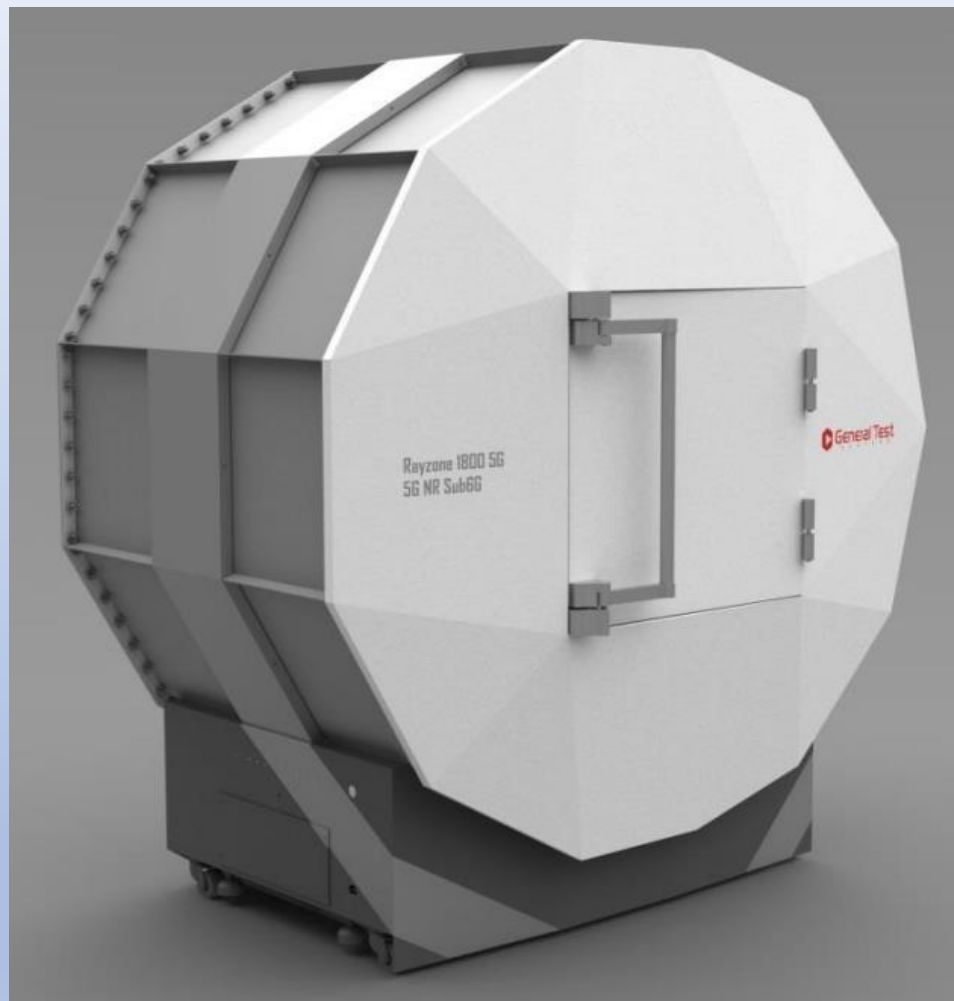


- 无线通信标准: 2G/3G/4G/5G(FR1)/GNSS/A-GNSS/Wi-Fi/Bluetooth
- 物联网通信标准: LTE Cat NB1(NB-IoT)/Cat-M1(e-MTC)
- SISO测试TRP/TIS/EIRP/EIS, 2x2 MIMO吞吐率测试;
- 无源天线测试、Desense测试、ICS
- 支持600MHz-7.5GHz频段
- GTS MaxSign 100 测试软件支持天线/OTA测试, 提供可视化数据分析
- 新型EPP硬质环保吸波材料、低RCS高增益测量天线组、透波转台和夹具
- 快速MIMO测试; 认证级测试精度
- 一体化设计, 即插即用, 维护简单






RayZone1800 Test Setup

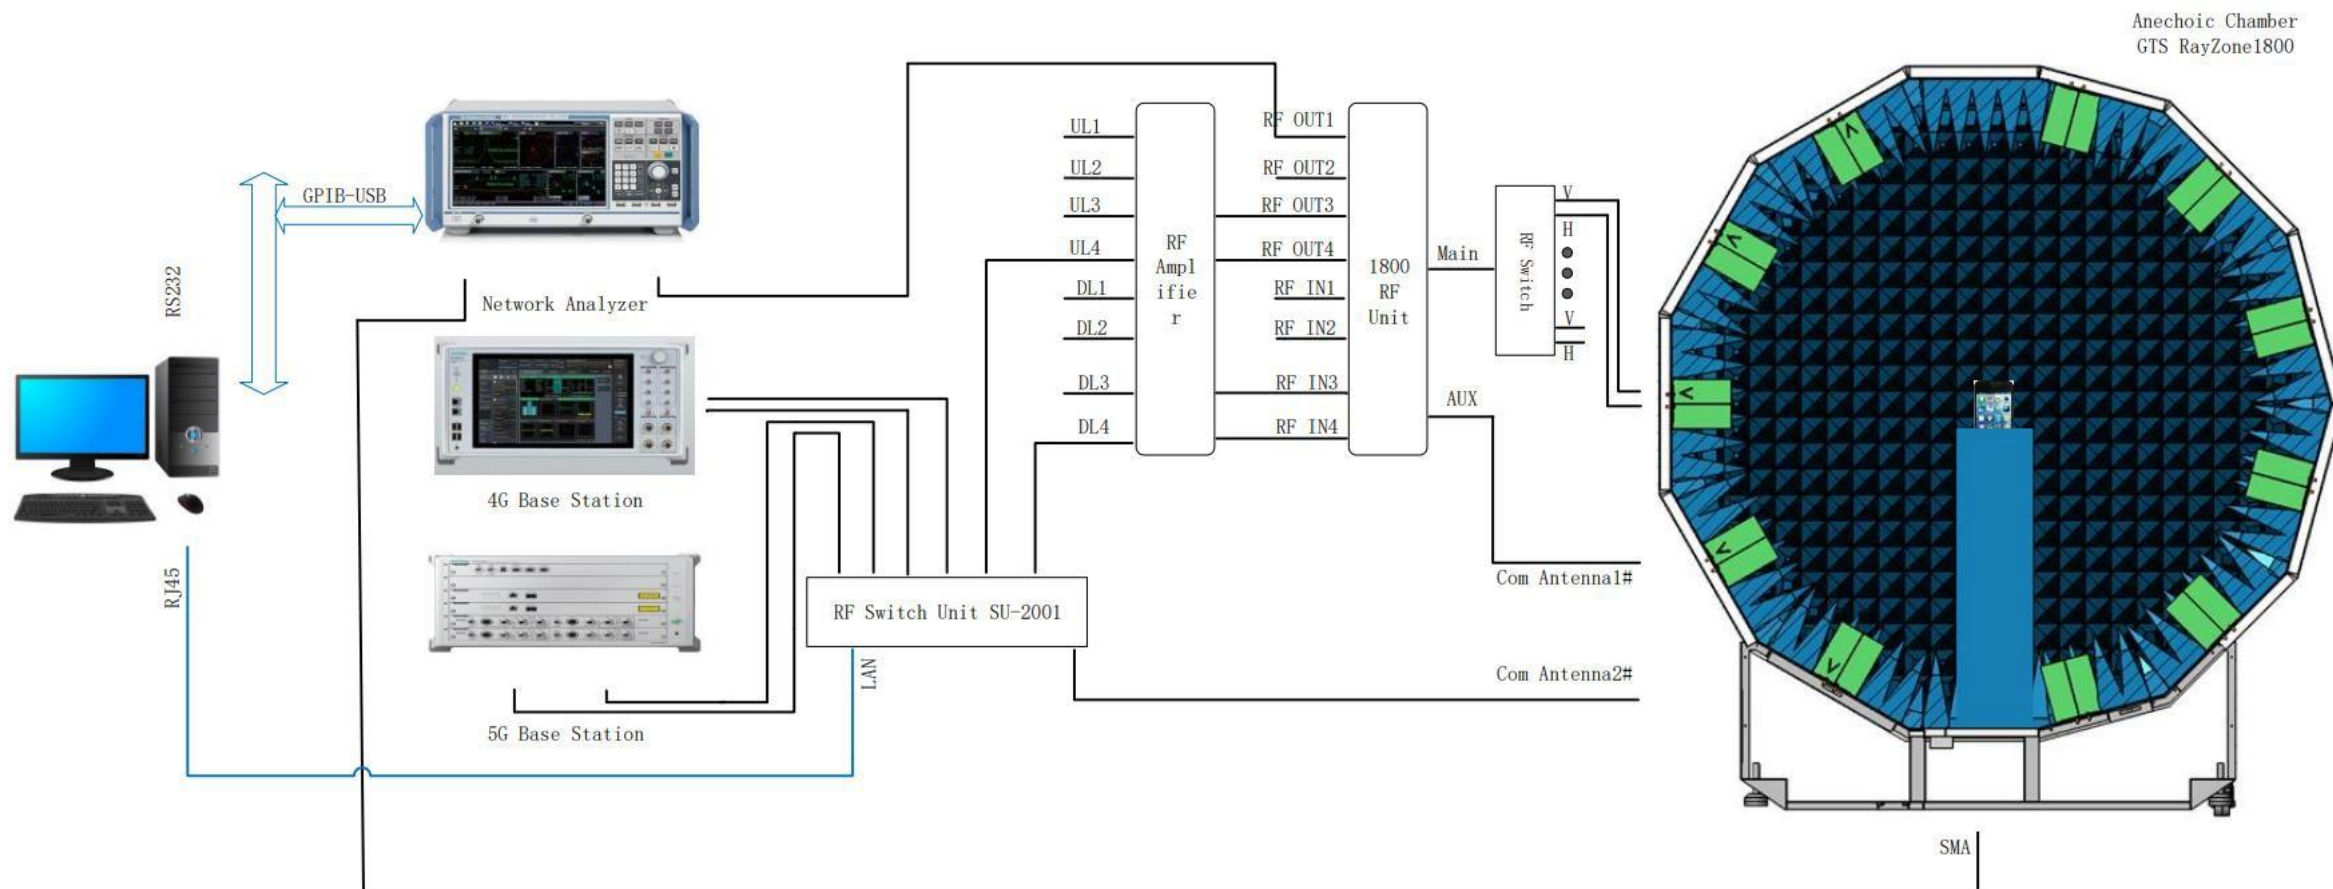



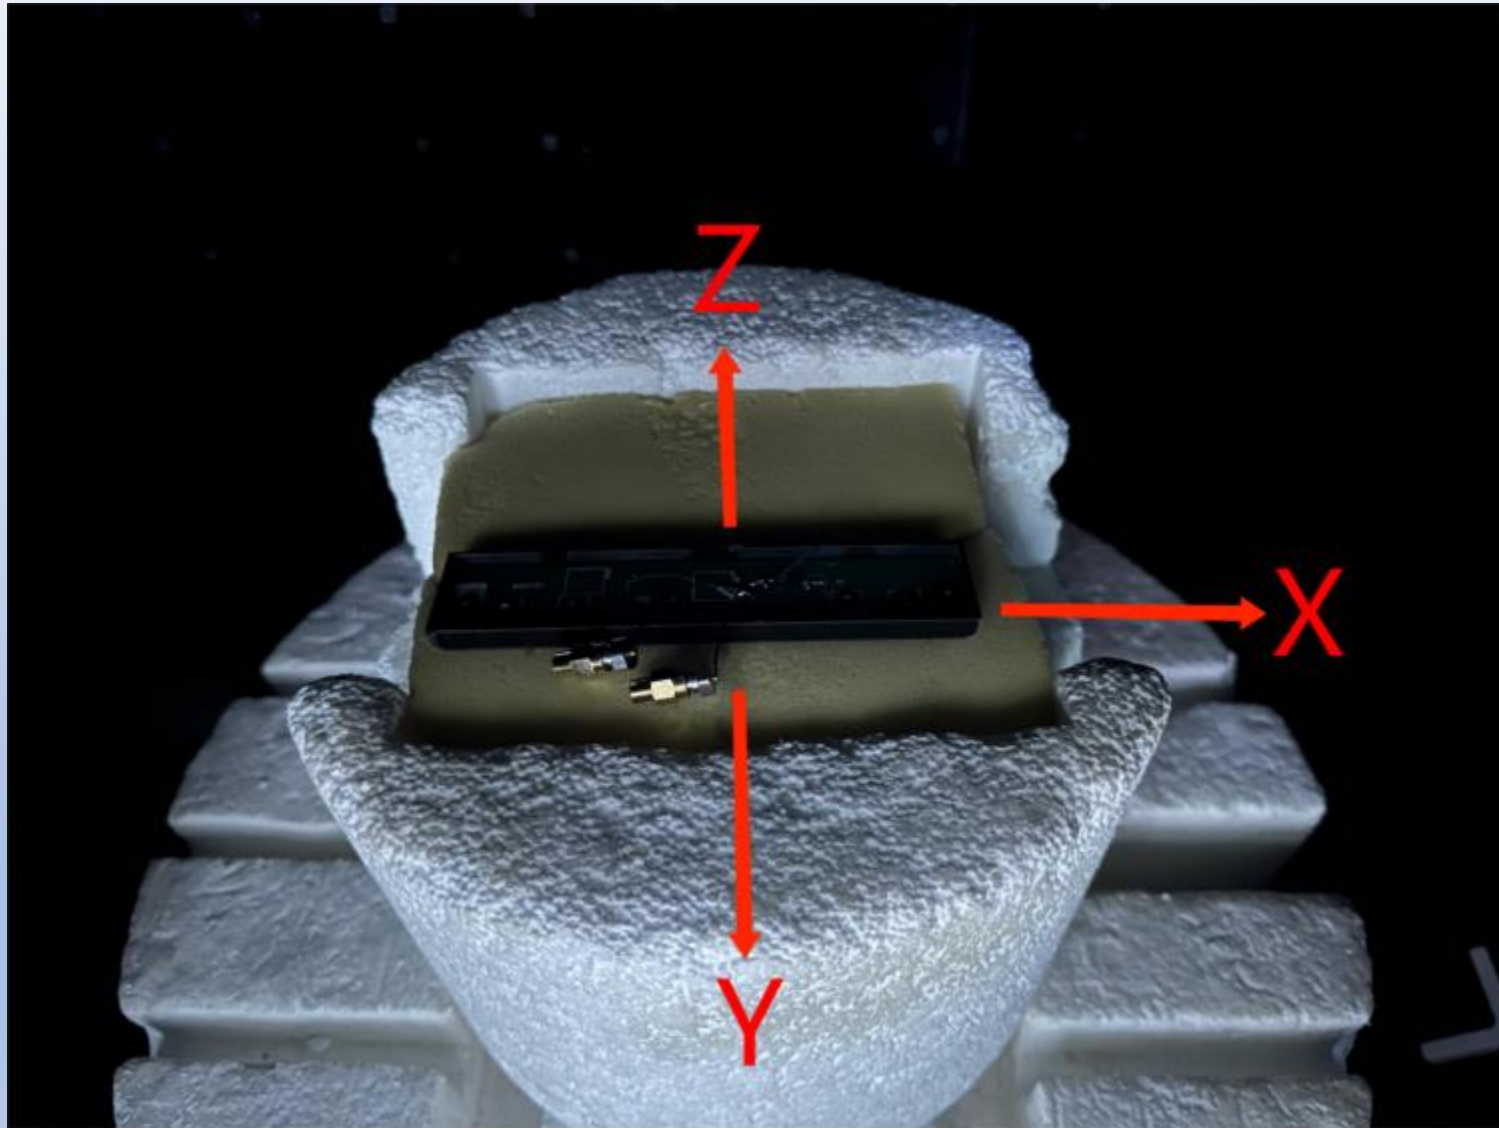



WIFI-0 2.4G				WIFI-0 5.8G			
Freq	EfficiencydB	EfficiencyPcent	Gain	Freq	EfficiencydB	EfficiencyPcent	Gain
2300	-8.02	15.76	-3.9	5150	-5.41	28.75	-1.78
2310	-7.89	16.25	-3.86	5175	-5.15	30.52	-1.41
2320	-7.47	17.91	-3.37	5200	-4.86	32.65	-1.06
2330	-7.19	19.11	-3.04	5225	-4.63	34.47	-0.77
2340	-6.9	20.4	-2.76	5250	-4.5	35.52	-0.37
2350	-6.61	21.84	-2.37	5275	-4.58	34.86	-0.15
2360	-6.3	23.46	-2.05	5300	-4.55	35.06	0.18
2370	-5.94	25.44	-1.78	5325	-4.48	35.68	0.5
2380	-5.56	27.79	-1.37	5350	-4.27	37.39	0.93
2390	-5.33	29.31	-1.06	5375	-4.07	39.19	1.16
2400	-5.05	31.27	-0.83	5400	-4.03	39.58	1.46
2410	-4.8	33.11	-0.62	5425	-4.1	38.88	1.5
2420	-4.47	35.74	-0.24	5450	-4.39	36.42	1.21
2430	-4.11	38.78	0.11	5475	-4.71	33.82	0.78
2440	-3.91	40.64	0.27	5500	-4.93	32.14	0.33
2450	-3.74	42.31	0.46	5525	-5	31.6	0.27
2460	-3.57	43.93	0.56	5550	-5.1	30.9	0.35
2470	-3.43	45.36	0.66	5575	-5.02	31.47	0.34
2480	-3.34	46.35	0.66	5600	-5.07	31.1	0.21
2490	-3.36	46.13	0.65	5625	-4.92	32.23	0.42
2500	-3.39	45.78	0.5	5650	-4.83	32.85	0.45
2510	-3.47	45	0.38	5675	-4.9	32.38	0.17
2520	-3.61	43.59	0.26	5700	-4.84	32.84	0.26
2530	-3.82	41.5	-0.05	5725	-4.81	33.04	0.25
2540	-4.12	38.75	-0.5	5750	-4.66	34.17	0.31
2550	-4.43	36.07	-0.86	5775	-4.61	34.56	0.37
2560	-4.76	33.45	-1.22	5800	-4.54	35.19	0.51
2570	-5.09	30.96	-1.61	5825	-4.49	35.52	0.58
2580	-5.52	28.03	-2.07	5850	-4.46	35.79	0.6
2590	-5.97	25.3	-2.55				
2600	-6.36	23.13	-2.85				


2450MHZ

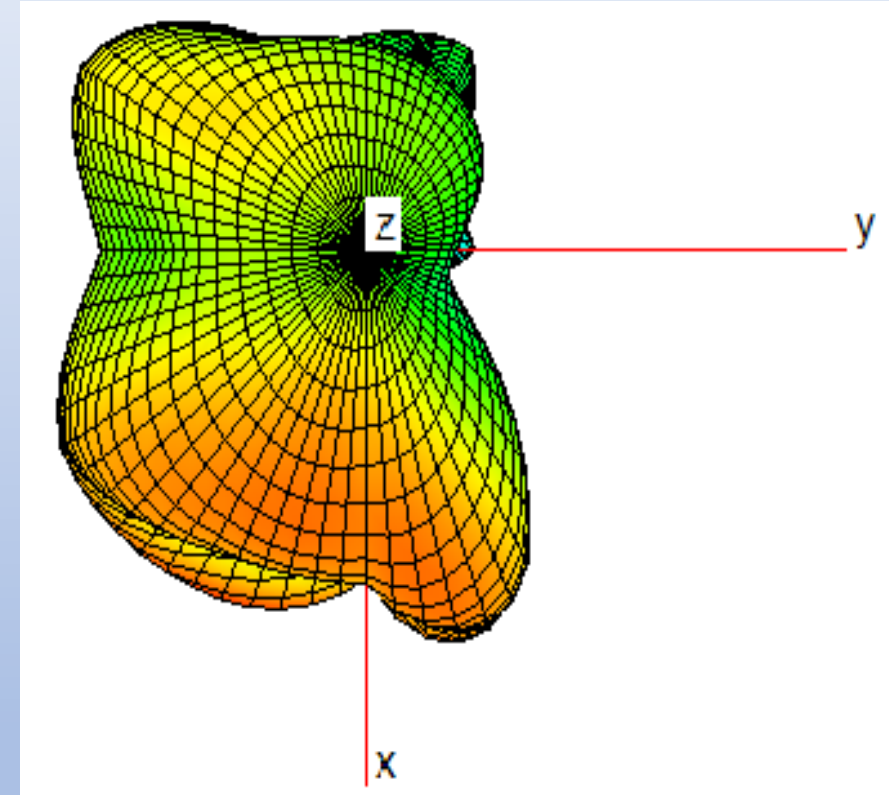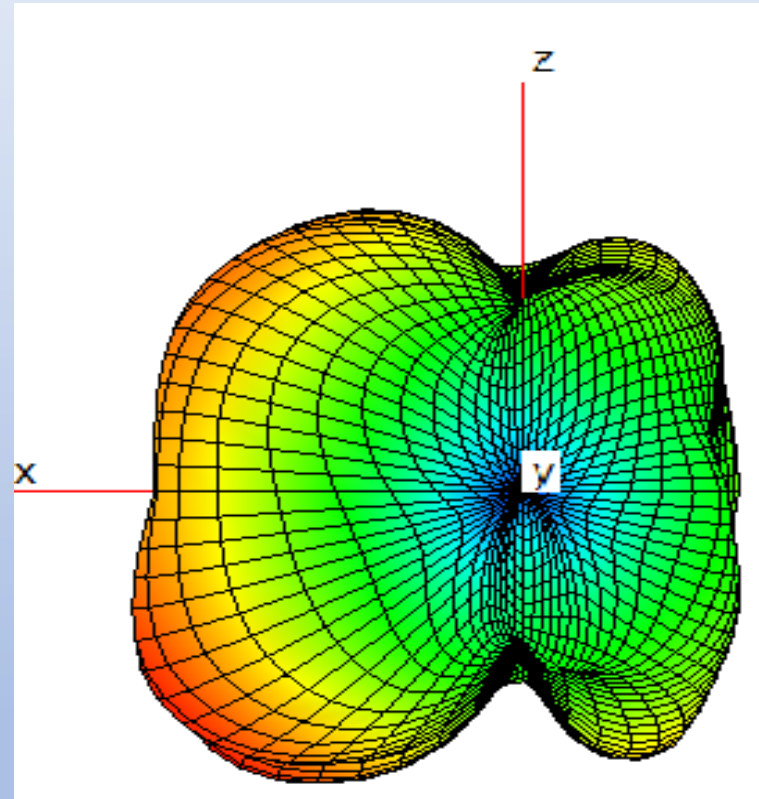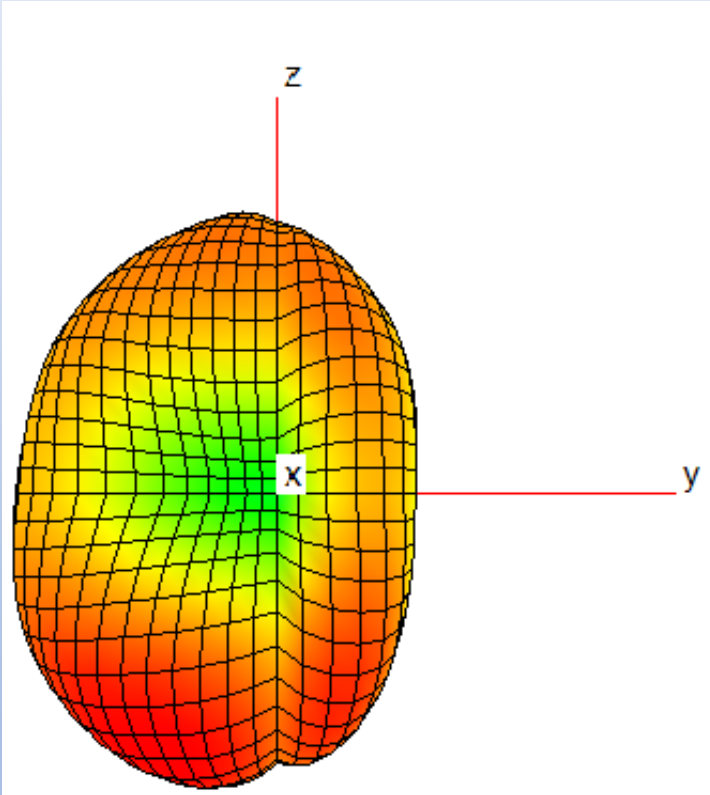

5650MHZ

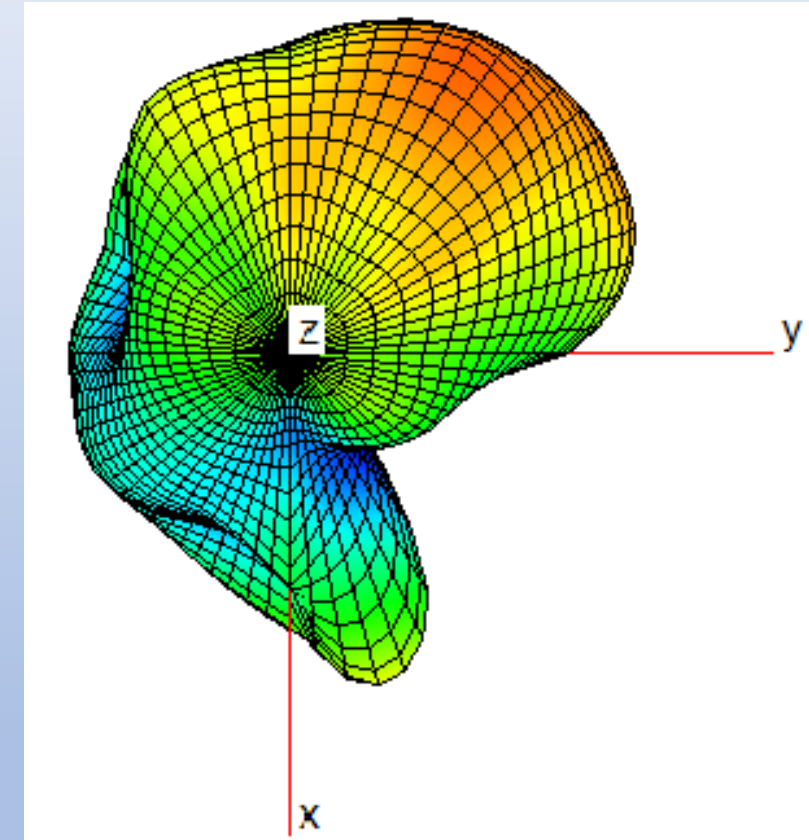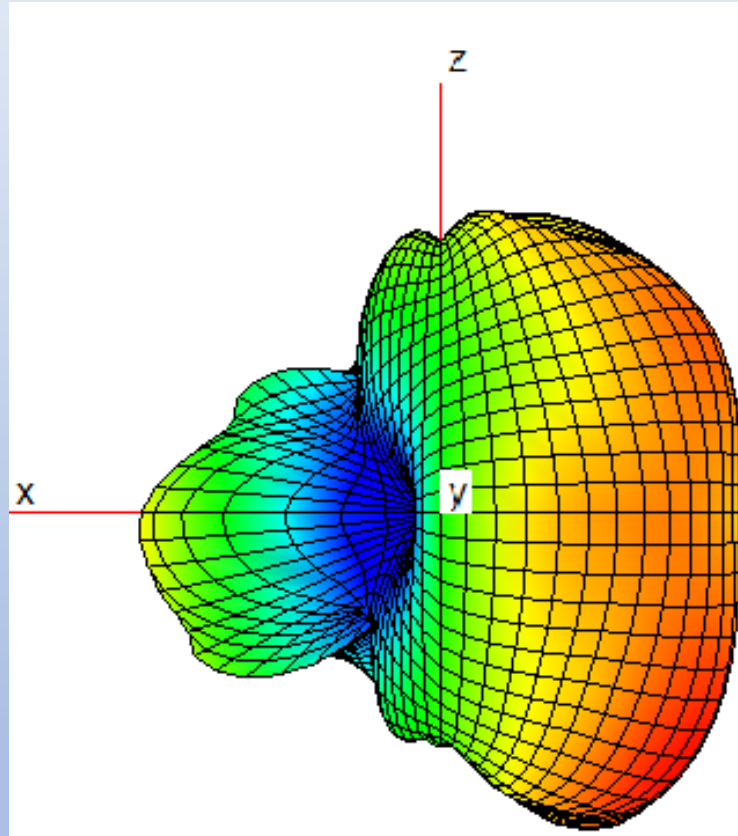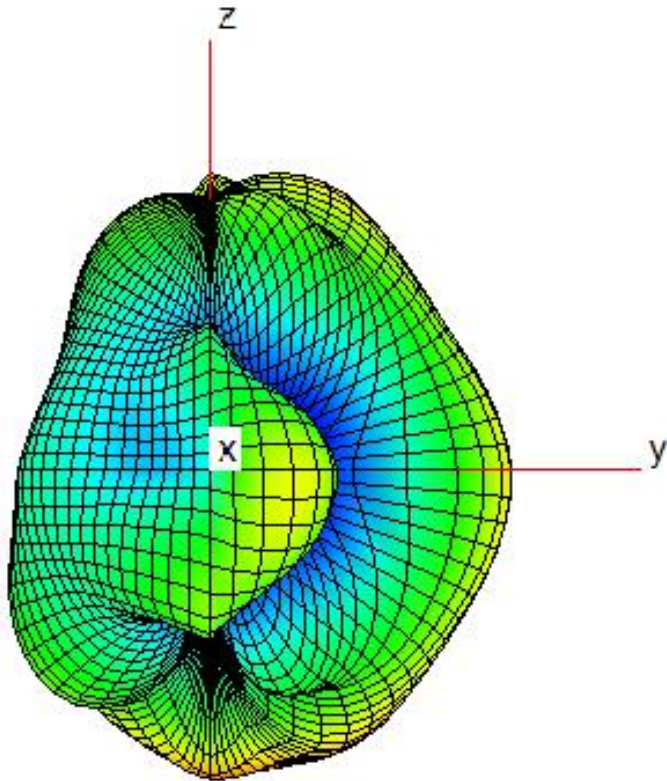



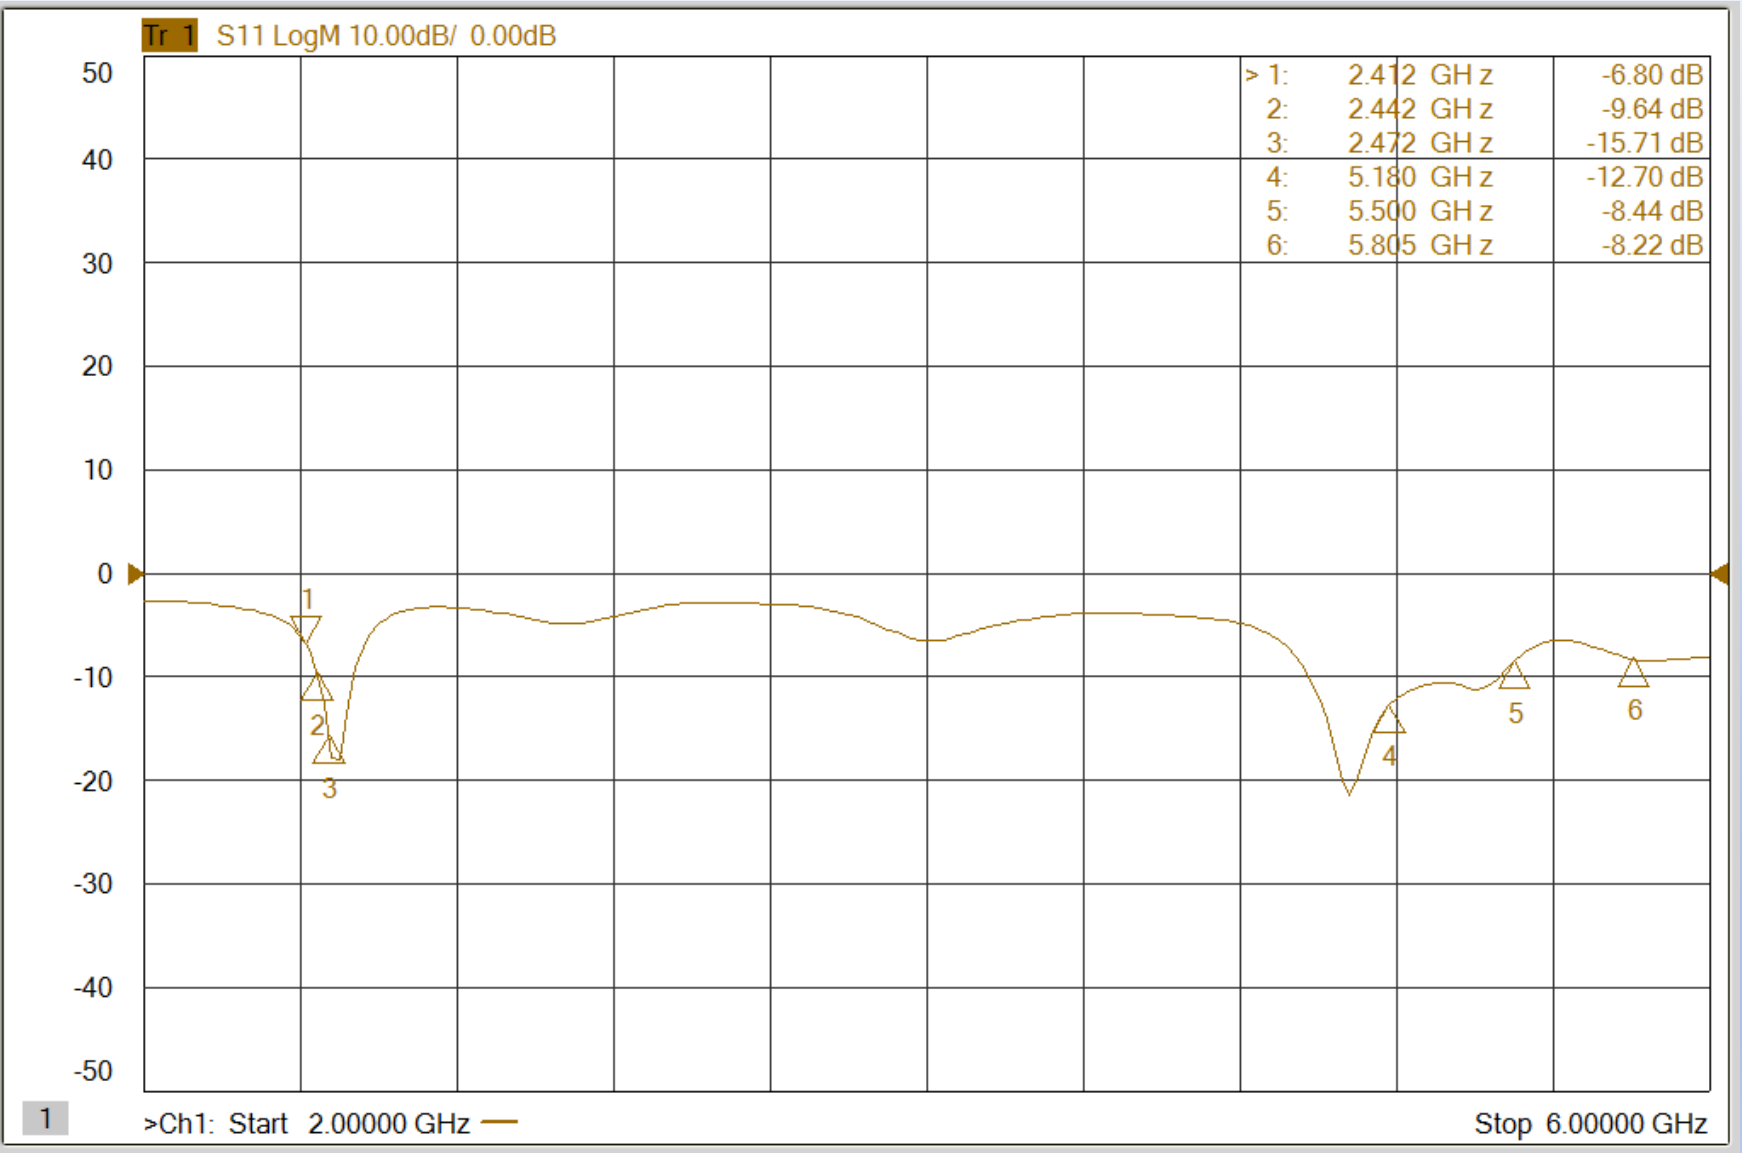


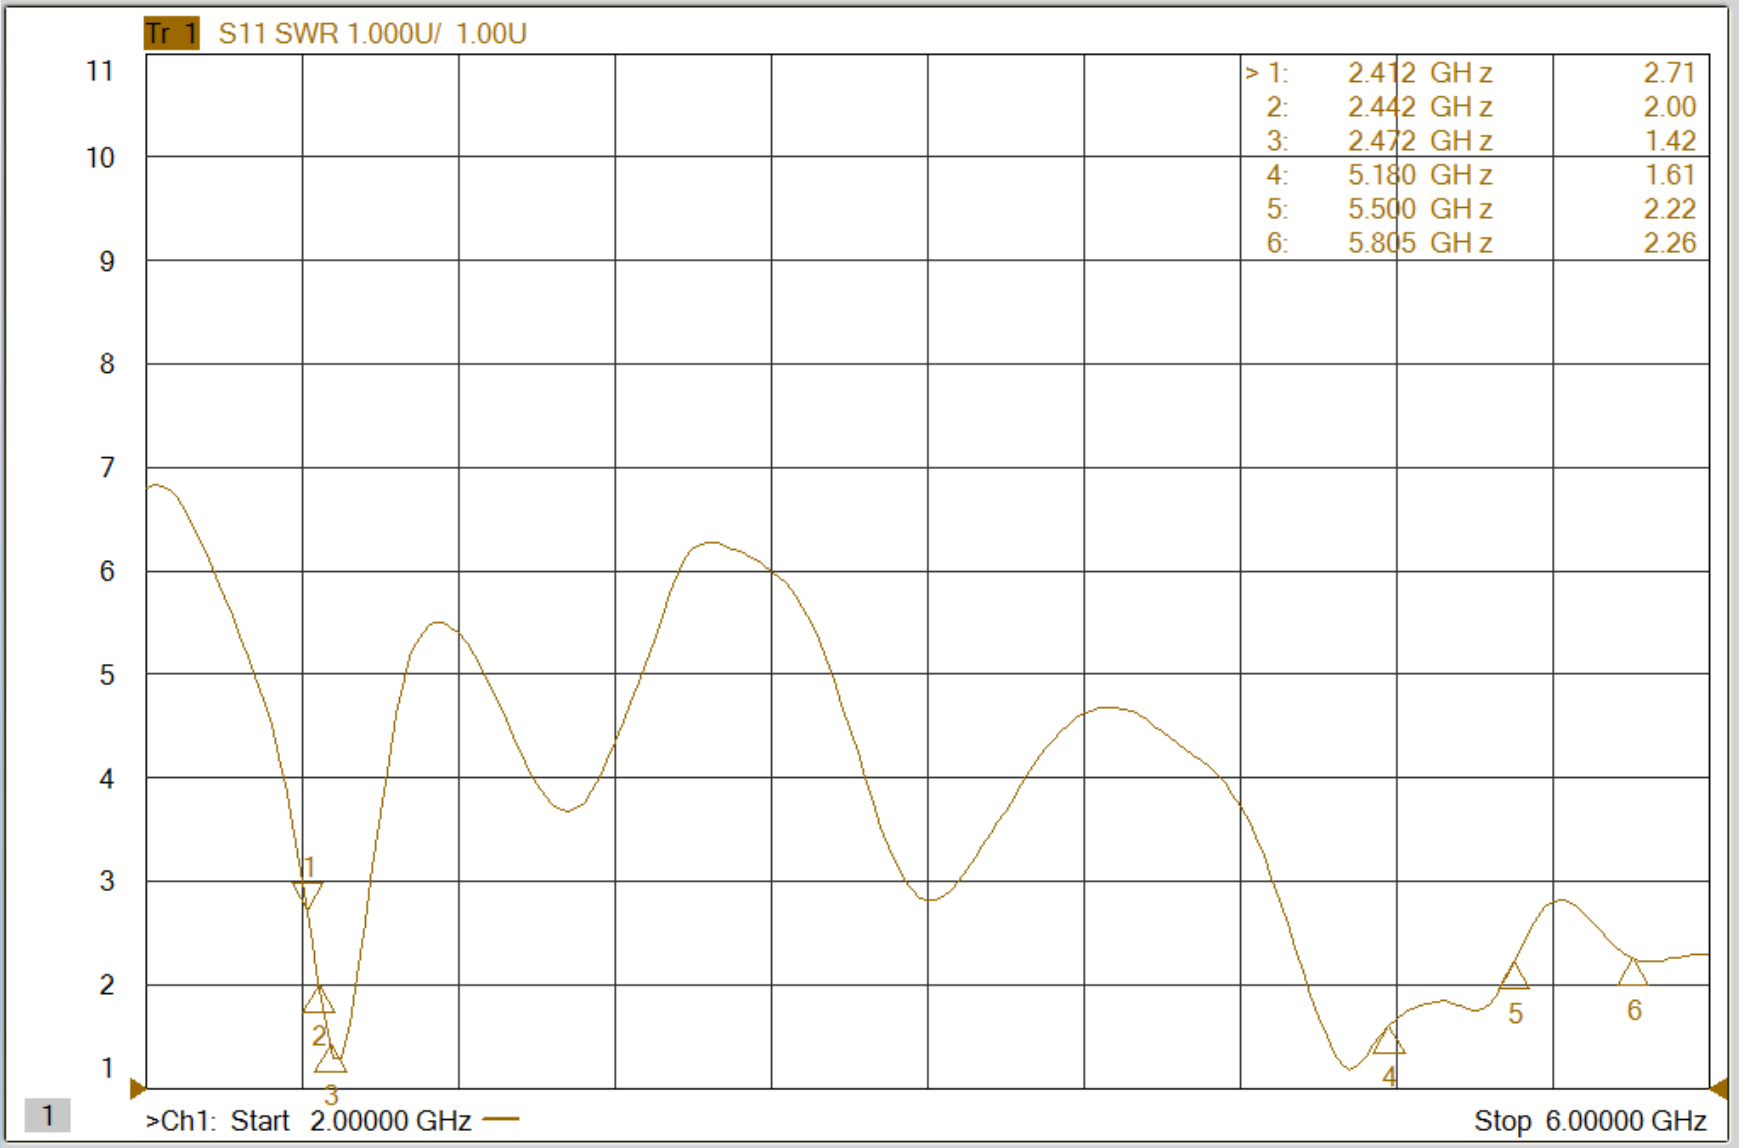





BT			
Freq	EfficiencydB	EfficiencyPcent	Gain
2300	-4.75	33.53	-0.1
2310	-4.47	35.72	0.24
2320	-4.26	37.48	0.42
2330	-3.95	40.31	0.79
2340	-3.63	43.37	1.07
2350	-3.35	46.26	1.31
2360	-2.99	50.19	1.73
2370	-2.8	52.42	1.73
2380	-2.56	55.53	1.98
2390	-2.3	58.87	2.26
2400	-2.09	61.83	2.46
2410	-1.91	64.48	2.73
2420	-1.74	67.02	2.97
2430	-1.68	67.96	3.18
2440	-1.66	68.24	3.32
2450	-1.72	67.23	3.44
2460	-1.86	65.13	3.38
2470	-2.04	62.53	3.27
2480	-2.24	59.66	3.21
2490	-2.5	56.18	2.96
2500	-2.79	52.57	2.78
2510	-3.07	49.33	2.51
2520	-3.39	45.78	2.19
2530	-3.7	42.69	1.92
2540	-3.99	39.94	1.63
2550	-4.35	36.73	1.23
2560	-4.69	33.96	0.77
2570	-5.05	31.29	0.47
2580	-5.45	28.54	-0.08
2590	-5.8	26.32	-0.55
2600	-6.21	23.91	-0.93

2450MHZ

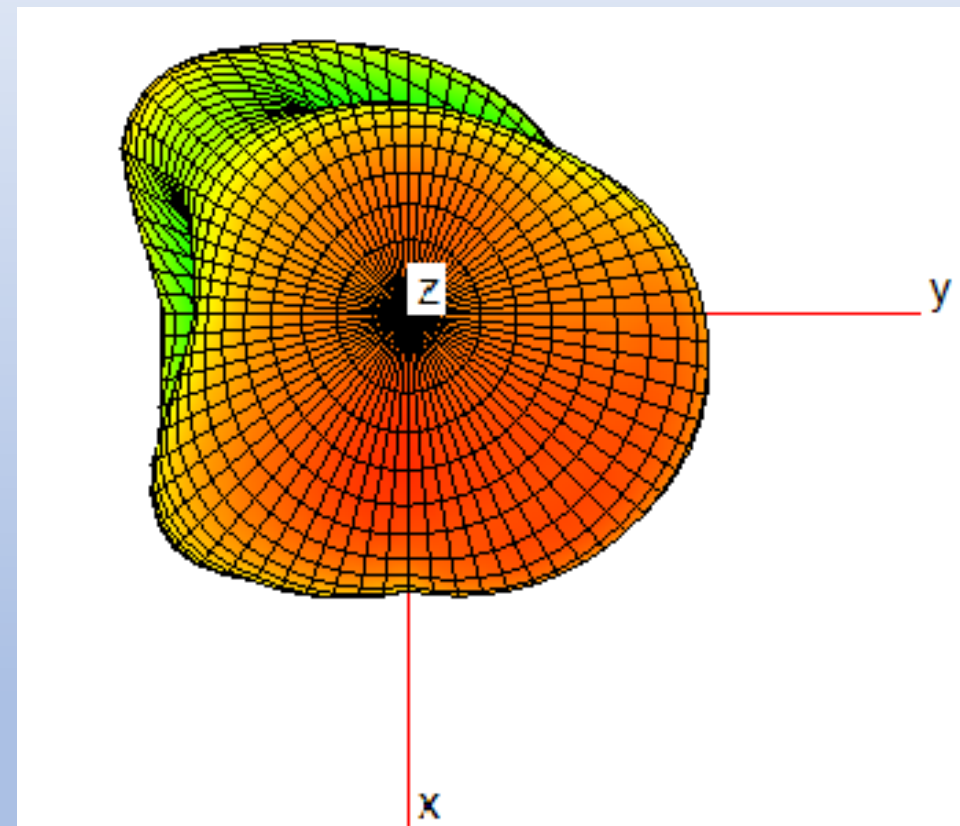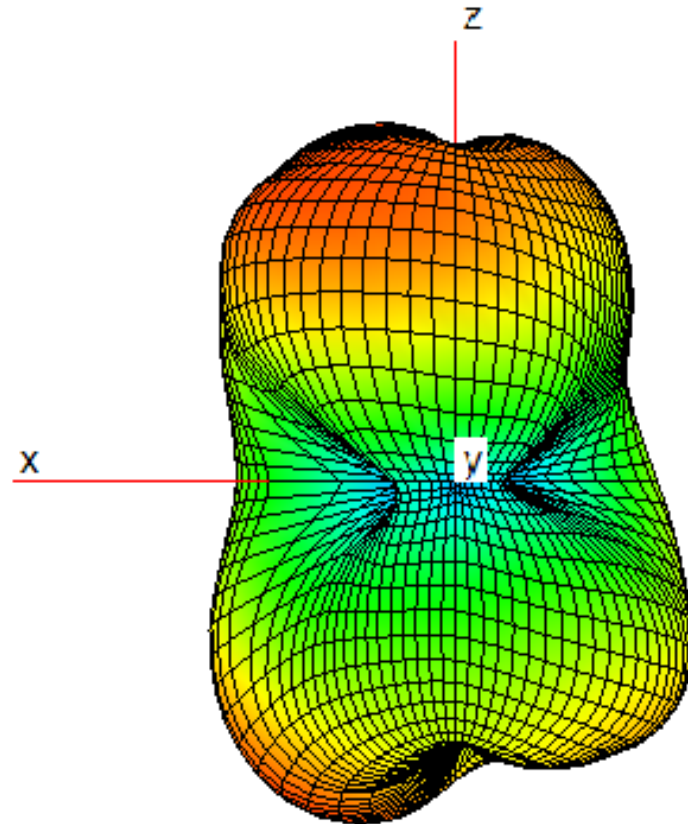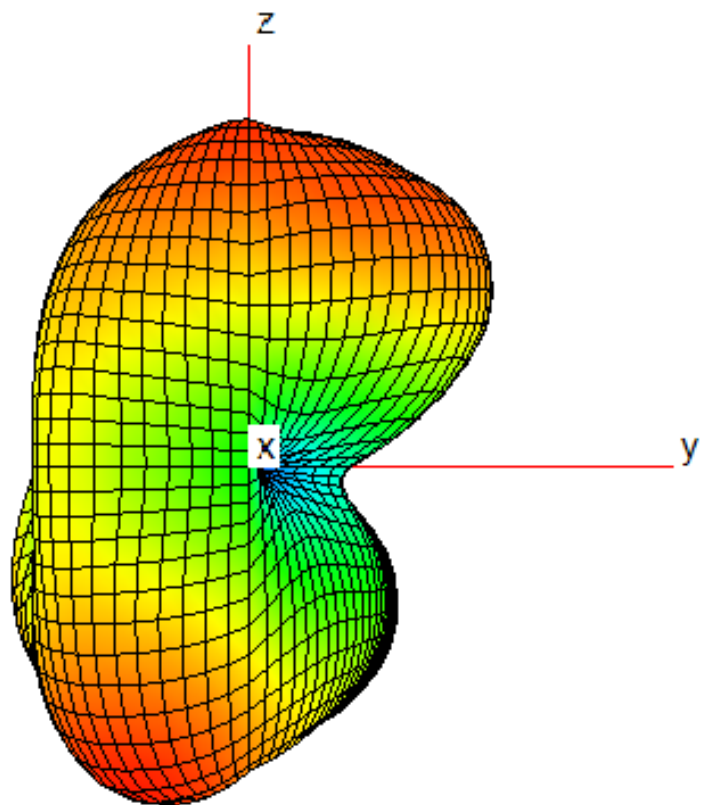

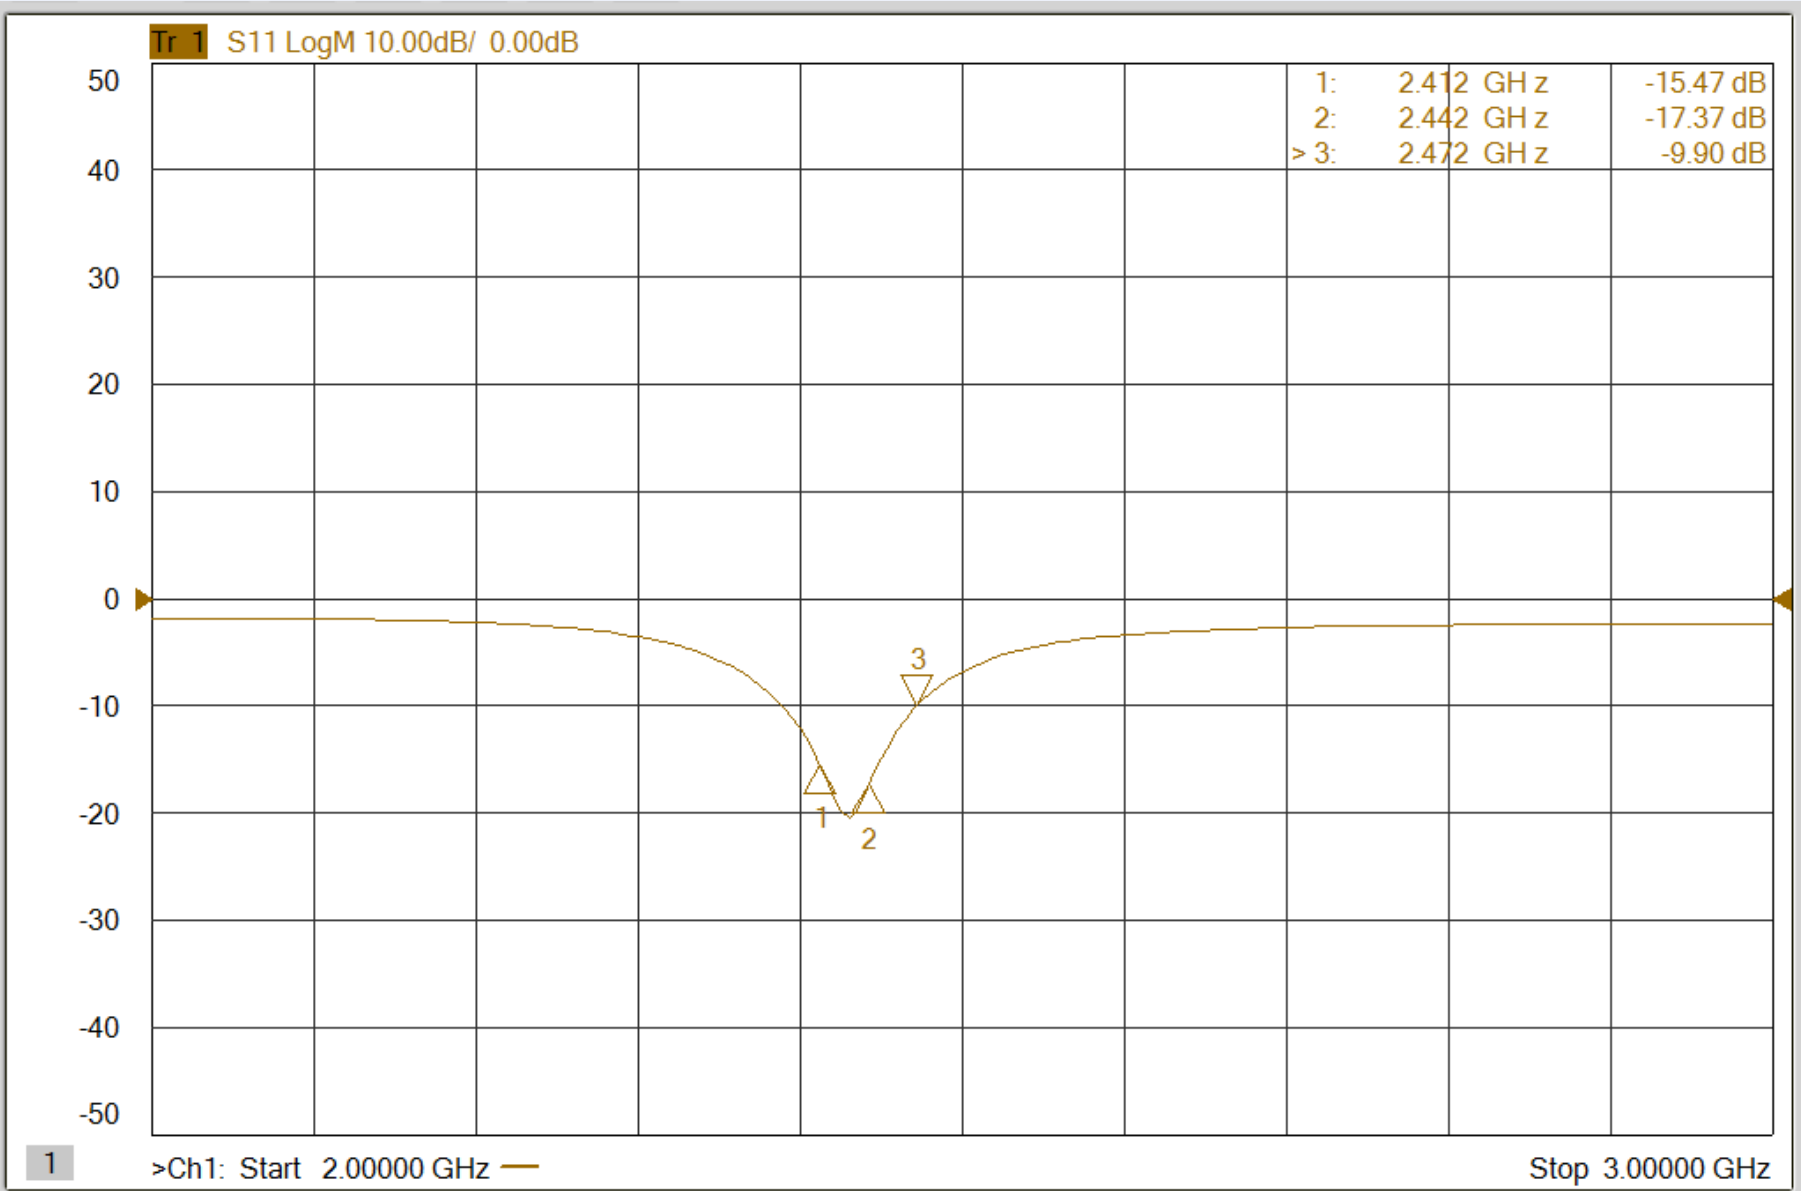

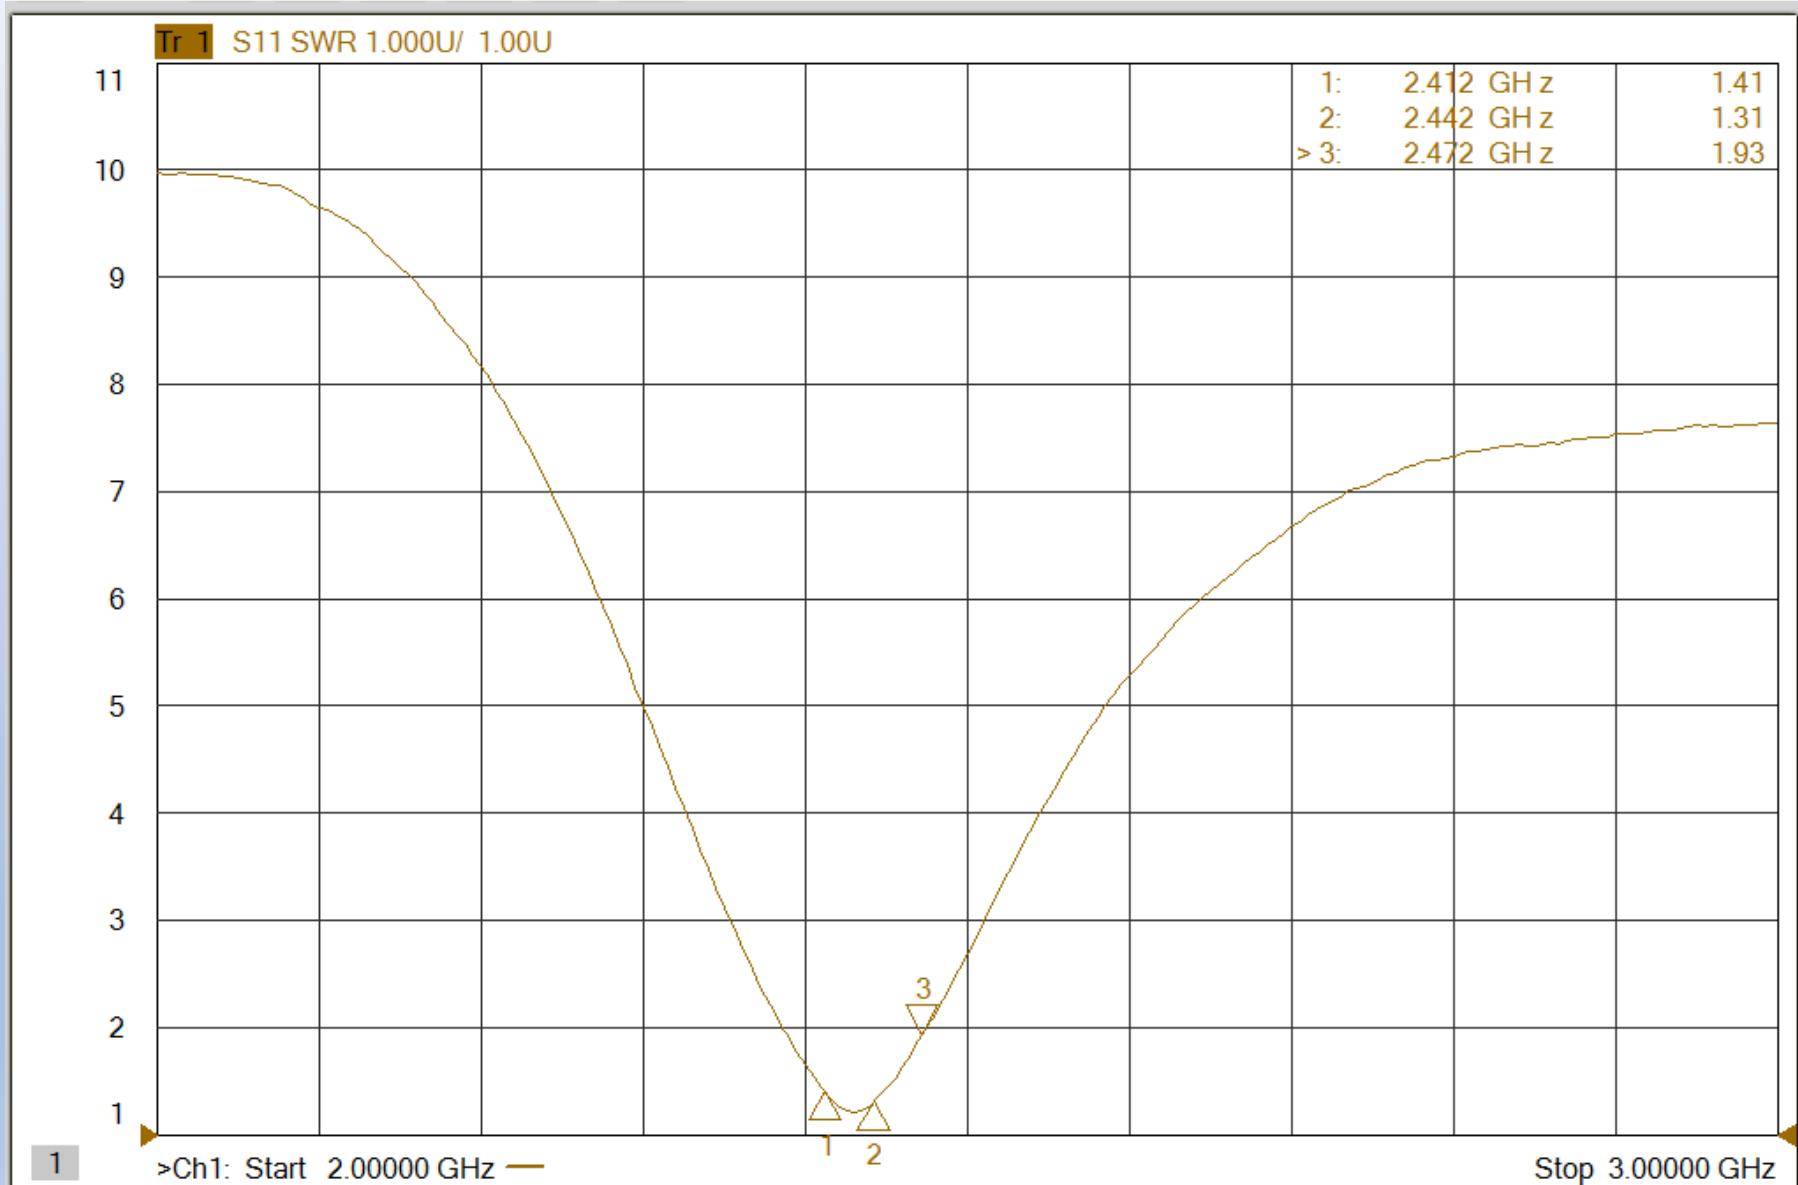

WIFI-0-Tr 1 S11

WIFI-1-Tr 2 S22

BT-Tr 3 S33

