

FCC Radio Test Report

FCC ID: 2AC24-NSBTSP

This report concerns (check one): ⊠Original Grant □Class II Change

Project No. : 1408C116

Equipment: Bluetooth Speaker

Model Name : NSBTSP-1003; QUBOne; NSBTSP-2003;

NSBTSP-1003B1; NSBTSP-1003B2;

NSBTSP-BA01

Applicant : Hangzhou Newsources Electronics Co., LTD **Address** : No. 7 Houyang Rd, Anxi Industrial Zone,

Liangzhu, Hangzhou, China 311113

Date of Receipt : Aug. 14, 2014

Date of Test : Aug. 14, 2014 ~ Sep. 10, 2014

Issued Date : Sep. 10, 2014 Tested by : BTL Inc.

Testing Engineer : Favid Mac

(David Mao)

Technical Manager :

(Leo Hung)

Authorized Signatory : ______

(Steven Lu)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FCCP-1-1408C116 Page 1 of 110



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **CHINA**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-1-1408C116 Page 2 of 110



Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TES	TED 13
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 4.1.2 TEST PROCEDURE	15 15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS 4.1.6 EUT TEST CONDITIONS	16 16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE 4.2.3 DEVIATION FROM TEST STANDARD	18 18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	20 20
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	21
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	21
5 . NUMBER OF HOPPING CHANNEL	22
5.1 APPLIED PROCEDURES	22
5.1.1 TEST PROCEDURE	22
5.1.2 DEVIATION FROM STANDARD 5.1.3 TEST SETUP	22 22
5.1.4 EUT OPERATION CONDITIONS	22
5.1.5 EUT TEST CONDITIONS	22
5.1.6 TEST RESULTS	22

Report No.: BTL-FCCP-1-1408C116 Page 3 of 110



Table of Contents	Page
6 . AVERAGE TIME OF OCCUPANCY	23
6.1 APPLIED PROCEDURES / LIMIT	23
6.1.1 TEST PROCEDURE	23
6.1.2 DEVIATION FROM STANDARD 6.1.3 TEST SETUP	23 23
6.1.4 EUT OPERATION CONDITIONS	23 24
6.1.5 EUT TEST CONDITIONS	24
6.1.6 TEST RESULTS	24
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	25
7.1 APPLIED PROCEDURES / LIMIT	25
7.1.1 TEST PROCEDURE	25
7.1.2 DEVIATION FROM STANDARD	25
7.1.3 TEST SETUP	25
7.1.4 EUT TEST CONDITIONS 7.1.5 TEST RESULTS	25 25
	-
8 . BANDWIDTH TEST	26
8.1 APPLIED PROCEDURES	26
8.1.1 TEST PROCEDURE 8.1.2 DEVIATION FROM STANDARD	26 26
8.1.3 TEST SETUP	26
8.1.4 EUT OPERATION CONDITIONS	26
8.1.5 EUT TEST CONDITIONS	26
8.1.6 TEST RESULTS	26
9 . PEAK OUTPUT POWER TEST	27
9.1 APPLIED PROCEDURES / LIMIT	27
9.1.1 TEST PROCEDURE	27
9.1.2 DEVIATION FROM STANDARD 9.1.3 TEST SETUP	27 27
9.1.4 EUT OPERATION CONDITIONS	27 27
9.1.5 EUT TEST CONDITIONS	27
9.1.6 TEST RESULTS	27
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	28
10.1 APPLIED PROCEDURES / LIMIT	28
10.1.1 TEST PROCEDURE	28
10.1.2 DEVIATION FROM STANDARD	28
10.1.3 TEST SETUP 10.1.4 EUT OPERATION CONDITIONS	28
10.1.4 EUT OPERATION CONDITIONS 10.1.5 EUT TEST CONDITIONS	28 28
10.1.6 TEST RESULTS	28
11 . MEASUREMENT INSTRUMENTS LIST	29
II. IVILAGUNEIVIEINI IINGINUIVIEINIG LIGI	29

Report No.: BTL-FCCP-1-1408C116 Page 4 of 110



Table of Contents	Page
12 . EUT TEST PHOTO	31
ATTACHMENT A - CONDUCTED EMISSION	35
ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)	38
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	40
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	47
ATTACHMENT E - NUMBER OF HOPPING CHANNEL	72
ATTACHMENT F - AVERAGE TIME OF OCCUPANCY	74
ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT	87
ATTACHMENT H - BANDWIDTH	92
ATTACHMENT I - PEAK OUTPUT POWER	97
ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION	102

Report No.: BTL-FCCP-1-1408C116 Page 5 of 110



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1408C116	Original Issue.	Sep. 10, 2014

Report No.: BTL-FCCP-1-1408C116 Page 6 of 110



1. CERTIFICATION

Equipment : Bluetooth Speaker Brand Name : NEWSOURCES

Model Name: NSBTSP-1003; QUBOne; NSBTSP-2003; NSBTSP-1003B1;

NSBTSP-1003B2; NSBTSP-BA01

Applicant Hangzhou Newsources Electronics Co., LTD Manufacturer: Hangzhou Newsources Electronics Co., LTD

Address : No. 7 Houyang Rd, Anxi Industrial Zone, Liangzhu, Hangzhou, China 311113

Factory : Hangzhou Newsources Electronics Co., LTD

Address : No. 7 Houyang Rd, Anxi Industrial Zone, Liangzhu, Hangzhou, China 311113

Date of Test : Aug. 14, 2014 \sim Sep. 10, 2014

Test Sample: ENGINEERING SAMPLE

Standard(s): FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4: 2009 /

FCC Public Notice DA 00-705, March 30, 2000.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1408C116) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-1-1408C116 Page 7 of 110



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): 47 CFR Part 15, Subpart C: 2013				
Standard(s) Section	Test Item	Judgment	Remark	
FCC	reet item	- Juaginoni	rtorriant	
15.207	Conducted Emission	PASS		
15.247(d)	Antenna conducted Spurious Emission	PASS		
15.247	Hopping Channel	PASS		
(a)(1)	Separation	FAGG		
15.247	Peak Output Power	PASS		
(b)(1)	1 cak Output i owei	1 700		
15.247(d)	Radiated Spurious	PASS		
15.209	Emission	FAGG		
15.247	Number of Hopping	PASS		
(a)(1)(iii)	Frequency	1 700		
15.247	Dwell Time	PASS		
(a)(1)(iii)	Dweii Time	PASS		
15.205	Restricted Bands	PASS		
15.203	Antenna Requirement	PASS		

Note:

- (1)" N/A" denotes test is not applicable in this test report
- (2) According to FCC Public Notice DA 00-705, March 30, 2000.

Report No.: BTL-FCCP-1-1408C116 Page 8 of 110



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dong Guan, Guangdong, China.523792 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

	Test Site	Method	Measurement Frequency Range	U,(dB)	Note
Γ	DG-C02	CISPR	150 KHz ~ 30MHz	3.40	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	Note
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Η	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.60	
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	3.86	
DG-CB03	CISEIX	200MHz ~ 1,000MHz	Н	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Η	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Н	4.14	

Report No.: BTL-FCCP-1-1408C116 Page 9 of 110



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Speaker			
Brand Name	NEWSOURCES	NEWSOURCES		
Model Name	, , ,	NSBTSP-1003; QUBOne; NSBTSP-1003-1; NSBTSP-1003-2; NSBTSP-1003-3; NSBTSP-1003-4; NSBTSP-1003-5		
Model Difference	Only differ in model name.			
	Operation Frequency	2402~2480 MHz		
	Modulation Technology	GFSK(1Mbps)		
Output Power (Max.)	Bit Rate of Transmitter	π /4-DQPSK(2Mbps) 8-DPSK(3Mbps)		
	Output Power Max.	2.10 dBm(1Mbps) -0.25 dBm(3Mbps)		
Power Source	1# DC voltage supplied from USB port. 2# DC voltage supplied from battery.			
Power Rating	1# DC 5V 0.5A 2# DC 3.7V			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Report No.: BTL-FCCP-1-1408C116 Page 10 of 110



2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	4.5

Report No.: BTL-FCCP-1-1408C116 Page 11 of 110



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)
Mode 2	Bluetooth

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission		
Final Test Mode	Description	
Mode 2	Bluetooth	

For Radiated Emission	
Final Test Mode Description	
Mode 1 TX Mode Note (1)	

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

1Mbps

Test Software Version	RDA_BT_Tester		
Frequency (MHz)	2402	2441	2480
Parameters	13	13	13

3Mbps

Test Software Version	RDA_BT_Tester		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters	13	13	13

Report No.: BTL-FCCP-1-1408C116 Page 12 of 110



	PIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTER and TX Mode:	
Radiated [*]	TX Mode:	
	EUT	

Report No.: BTL-FCCP-1-1408C116 Page 13 of 110



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	1	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

Report No.: BTL-FCCP-1-1408C116 Page 14 of 110



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: BTL-FCCP-1-1408C116 Page 15 of 110



4.1.4 TEST SETUP

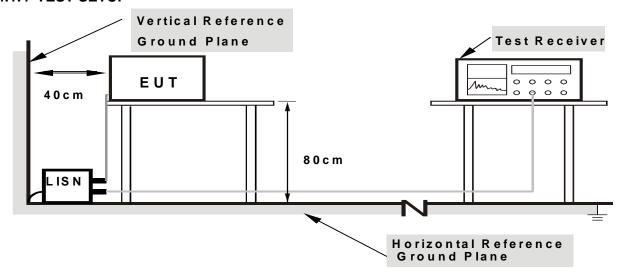

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

Report No.: BTL-FCCP-1-1408C116 Page 16 of 110



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Fraguency (MHz)	dB(uV/m) (at 3 meters)	
Frequency (MHz)	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) =20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	1 MHz / 1 MHz for Dook 1 MHz / 10Hz for Average
(emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

Report No.: BTL-FCCP-1-1408C116 Page 17 of 110



4.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FCCP-1-1408C116 Page 18 of 110




4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

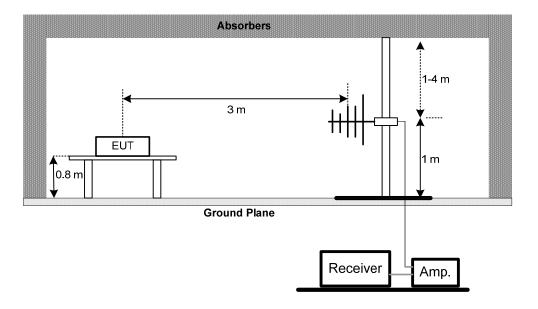


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

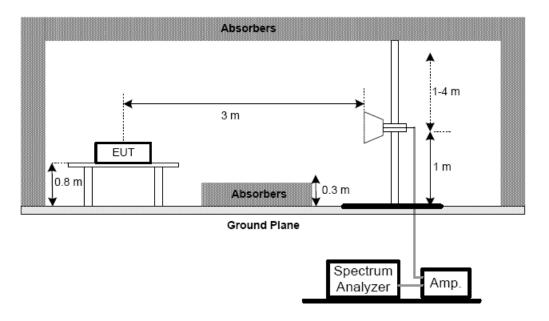

Report No.: BTL-FCCP-1-1408C116 Page 19 of 110



(C) For radiated emissions below 30MHz

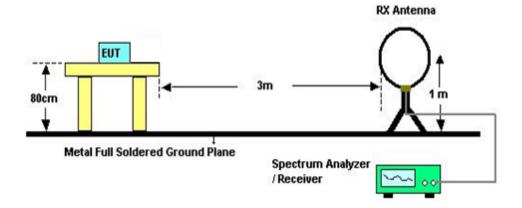

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5** Unless otherwise a special operating condition is specified in the follows during the testing

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

Report No.: BTL-FCCP-1-1408C116 Page 20 of 110



4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: BTL-FCCP-1-1408C116 Page 21 of 110



5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Frequency Range (MHz)	Result	
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS	

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

5.1.6 TEST RESULTS

Please refer to the Attachment E

Report No.: BTL-FCCP-1-1408C116 Page 22 of 110



6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

011 7(11 E1ED 1 1(00ED 01(E0 / E1III))				
FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds.
- j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- k. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

Report No.: BTL-FCCP-1-1408C116 Page 23 of 110



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

6.1.6 TEST RESULTS

Please refer to the Attachment F

Report No.: BTL-FCCP-1-1408C116 Page 24 of 110



7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = Auto Detector function = Peak Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

7.1.5 TEST RESULTS

Please refer to the Attachment G

Report No.: BTL-FCCP-1-1408C116 Page 25 of 110



8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247), Subpart C			
Section	Test Item	Frequency Range (MHz)	
15.247(a)(2)	Bandwidth	2400-2483.5	

Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency	> Measurement Bandwidth or Channel Separation	
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)	
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)	
Detector	Peak	
Trace	Max Hold	
Sweep Time	Auto	

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

8.1.6 TEST RESULTS

Please refer to the Attachment H

Report No.: BTL-FCCP-1-1408C116 Page 26 of 110



9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 Watt or 30dBm	2400-2483.5	PASS

9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

9.1.6 TEST RESULTS

Please refer to the Attachment I

Report No.: BTL-FCCP-1-1408C116 Page 27 of 110



10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.7V

10.1.6 TEST RESULTS

Please refer to the Attachment J

Report No.: BTL-FCCP-1-1408C116 Page 28 of 110



11. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until			
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015			
2	LISN	R&S	ENV216	101447	Mar. 29, 2015			
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015			
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015			
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015			

	Radiated Emission Measurement							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until			
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015			
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015			
3	Test Receiver	R&S	ESCI	100382	Mar. 29, 2015			
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015			
5	Antenna	ETS	3115	00075789	Mar. 29, 2015			
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015			
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09, 2014			
8	Test Cable	HUBER+SUHNER	C-45	N/A	Mar. 29, 2015			
9	Controller	СТ	SC100	N/A	N/A			
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015			
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015			

Report No.: BTL-FCCP-1-1408C116 Page 29 of 110



Number of Hopping Channel					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

	Hopping Channel Separation Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014		

	Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014	

Peak Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Antenna Conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014	

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FCCP-1-1408C116 Page 30 of 110



12. EUT TEST PHOTO

Conducted Measurement Photos





Report No.: BTL-FCCP-1-1408C116 Page 31 of 110



Radiated Measurement Photos

9KHz to 30MHz





Report No.: BTL-FCCP-1-1408C116 Page 32 of 110



Radiated Measurement Photos

30MHz to 1000MHz





Report No.: BTL-FCCP-1-1408C116 Page 33 of 110



Radiated Measurement Photos

Above 1000MHz





Report No.: BTL-FCCP-1-1408C116 Page 34 of 110




ATTACHMENT A - CONDUCTED EMISSION

Report No.: BTL-FCCP-1-1408C116 Page 35 of 110






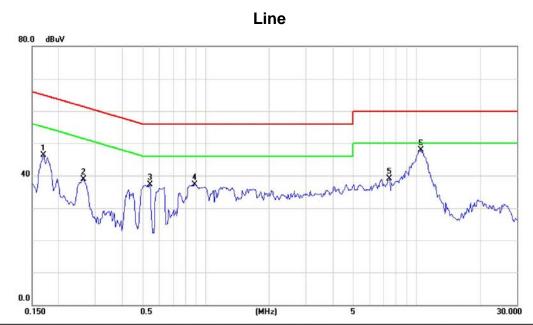

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1695	36.87	9.53	46.40	64.98	-18.58	peak	
2	0.2633	29.32	9.58	38.90	61.33	-22.43	peak	
3	0.5445	27.65	9.68	37.33	56.00	-18.67	peak	
4	0.8883	27.61	9.67	37.28	56.00	-18.72	peak	
5	7.4610	29.04	10.00	39.04	60.00	-20.96	peak	
6 *	10.5313	37.79	10.10	47.89	60.00	-12.11	peak	

Report No.: BTL-FCCP-1-1408C116 Page 36 of 110



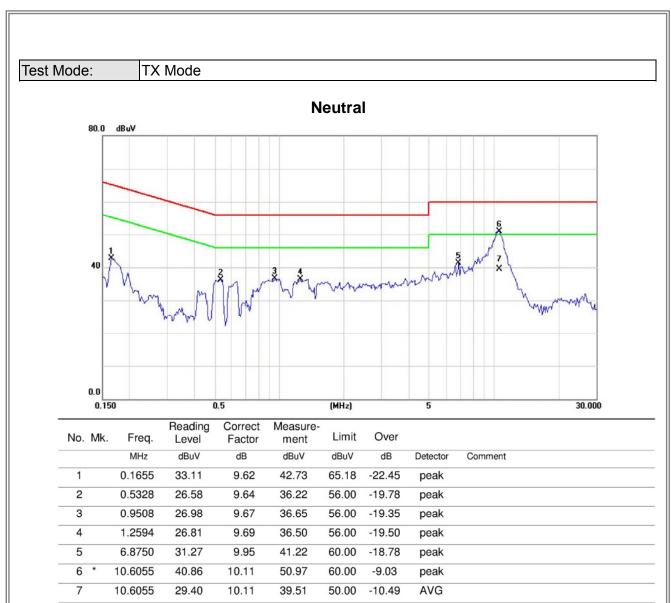

Report No.: BTL-FCCP-1-1408C116 Page 37 of 110



ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)	

Report No.: BTL-FCCP-1-1408C116 Page 38 of 110



Test Mode: TX Mode

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0097	0°	10.51	24.95	35.46	107.87	-72.41	AVG
0.0097	0°	12.96	24.95	37.91	127.87	-89.96	PEAK
0.0235	0°	14.24	24.08	38.32	100.18	-61.86	AVG
0.0235	0°	18.35	24.08	42.43	120.18	-77.75	PEAK
0.0312	0°	18.13	23.59	41.72	97.72	-56.00	AVG
0.0312	0°	22.42	23.59	46.01	117.72	-71.71	PEAK
0.0428	0°	21.50	22.86	44.36	94.98	-50.62	AVG
0.0428	0°	23.84	22.86	46.70	114.98	-68.28	PEAK
0.4916	0°	18.10	19.82	37.92	73.77	-35.85	QP
1.7152	0°	20.26	19.53	39.79	69.54	-29.75	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0095	90°	12.73	24.30	37.03	128.05	-91.02	AVG
0.0095	90°	13.28	24.30	37.58	148.05	-110.47	PEAK
0.0224	90°	10.15	24.15	34.30	120.60	-86.30	AVG
0.0224	90°	23.92	24.15	48.07	140.60	-92.53	PEAK
0.0349	90°	17.14	23.36	40.50	116.75	-76.25	AVG
0.0349	90°	20.37	23.36	43.73	136.75	-93.02	PEAK
0.0423	90°	19.52	22.89	42.41	115.08	-72.67	AVG
0.0423	90°	23.41	22.89	46.30	135.08	-88.78	PEAK
0.4917	90°	24.62	19.82	44.44	73.77	-29.33	QP
1.7126	90°	18.46	19.53	37.99	69.54	-31.55	QP

Report No.: BTL-FCCP-1-1408C116 Page 39 of 110




ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FCCP-1-1408C116 Page 40 of 110



Test Mode: TX 2402MHz _CH00_1Mbps


Vertical

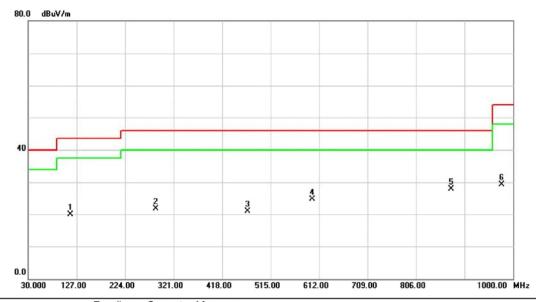

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		114.3900	34.75	-14.81	19.94	43.50	-23.56	peak	
2		285.1100	33.41	-11.73	21.68	46.00	-24.32	peak	
3		468.4400	30.15	-9.32	20.83	46.00	-25.17	peak	
4		598.4200	32.53	-7.91	24.62	46.00	-21.38	peak	
5	*	876.8100	30.17	-2.28	27.89	46.00	-18.11	peak	
6		977.6900	29.54	-0.32	29.22	54.00	-24.78	peak	

Report No.: BTL-FCCP-1-1408C116 Page 41 of 110



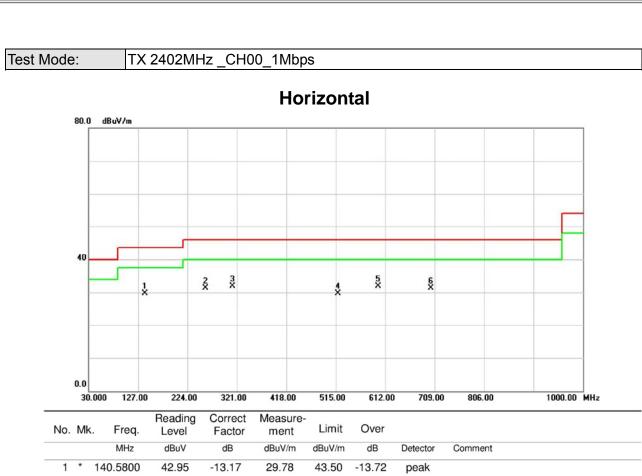


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	140.5800	42.95	-13.17	29.78	43.50	-13.72	peak	
2		259.8900	45.05	-13.79	31.26	46.00	-14.74	peak	
3		312.2700	43.19	-11.19	32.00	46.00	-14.00	peak	
4		519.8500	39.12	-9.49	29.63	46.00	-16.37	peak	
5		598.4200	39.82	-7.91	31.91	46.00	-14.09	peak	
6		702.2100	36.25	-4.93	31.32	46.00	-14.68	peak	

Report No.: BTL-FCCP-1-1408C116 Page 42 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

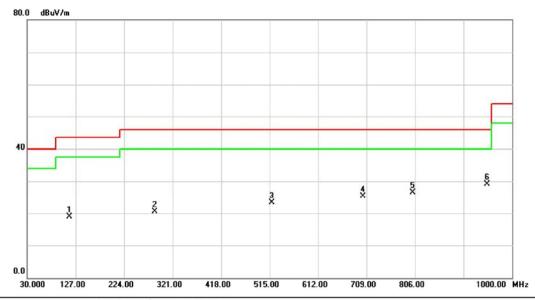


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		114.3900	33.68	-14.81	18.87	43.50	-24.63	peak	
2		285.1100	32.24	-11.73	20.51	46.00	-25.49	peak	
3		519.8500	32.74	-9.49	23.25	46.00	-22.75	peak	
4		702.2100	30.15	-4.93	25.22	46.00	-20.78	peak	
5		801.1500	29.35	-2.90	26.45	46.00	-19.55	peak	
6	*	949.5600	29.37	-0.22	29.15	46.00	-16.85	peak	

Report No.: BTL-FCCP-1-1408C116 Page 43 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

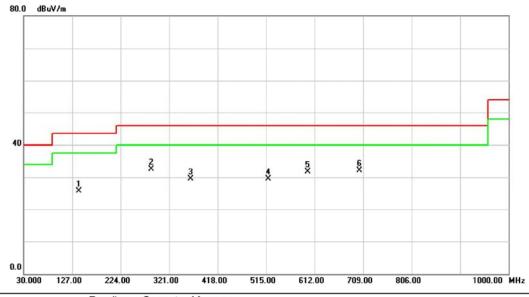


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		140.5800	38.92	-13.17	25.75	43.50	-17.75	peak	
2	*	285.1100	44.19	-11.73	32.46	46.00	-13.54	peak	
3		363.6800	40.77	-11.17	29.60	46.00	-16.40	peak	
4		519.8500	39.01	-9.49	29.52	46.00	-16.48	peak	
5		598.4200	39.63	-7.91	31.72	46.00	-14.28	peak	
6		702.2100	36.98	-4.93	32.05	46.00	-13.95	peak	

Report No.: BTL-FCCP-1-1408C116 Page 44 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Vertical

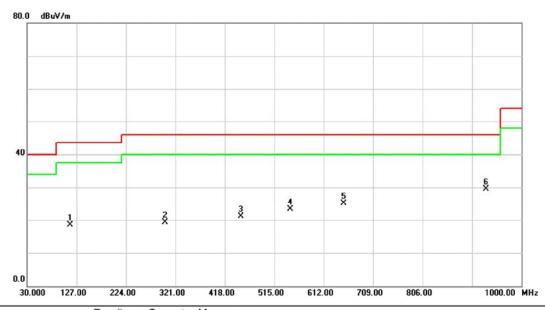


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		114.3900	33.24	-14.81	18.43	43.50	-25.07	peak	
2		300.6300	30.23	-11.01	19.22	46.00	-26.78	peak	
3		450.0100	29.69	-8.62	21.07	46.00	-24.93	peak	
4		546.0400	31.47	-8.13	23.34	46.00	-22.66	peak	
5		650.8000	30.29	-5.15	25.14	46.00	-20.86	peak	
6	*	930.1600	30.31	-0.74	29.57	46.00	-16.43	peak	

Report No.: BTL-FCCP-1-1408C116 Page 45 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal

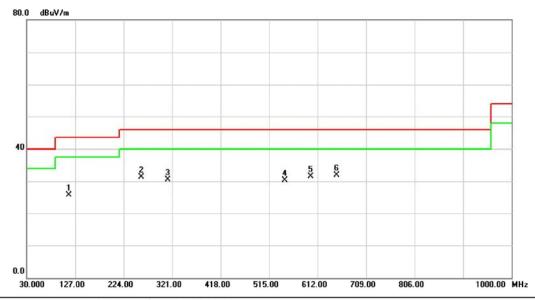

No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		114.3900	40.51	-14.81	25.70	43.50	-17.80	peak	
2		259.8900	45.05	-13.79	31.26	46.00	-14.74	peak	
3		312.2700	41.68	-11.19	30.49	46.00	-15.51	peak	
4		546.0400	38.36	-8.13	30.23	46.00	-15.77	peak	
5		598.4200	39.39	-7.91	31.48	46.00	-14.52	peak	
6	*	649.8300	37.12	-5.16	31.96	46.00	-14.04	peak	

Report No.: BTL-FCCP-1-1408C116 Page 46 of 110




ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-1-1408C116 Page 47 of 110



Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

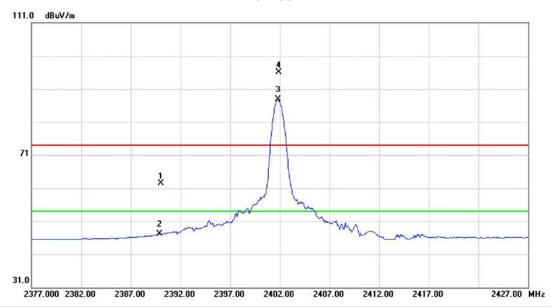


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	30.66	31.88	62.54	74.00	-11.46	peak	
2		2390.000	15.18	31.88	47.06	54.00	-6.94	AVG	
3	*	2401.850	56.03	31.89	87.92	54.00	33.92	AVG	No limit
4	Χ	2401.890	64.13	31.89	96.02	74.00	22.02	peak	No limit

Report No.: BTL-FCCP-1-1408C116 Page 48 of 110



Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

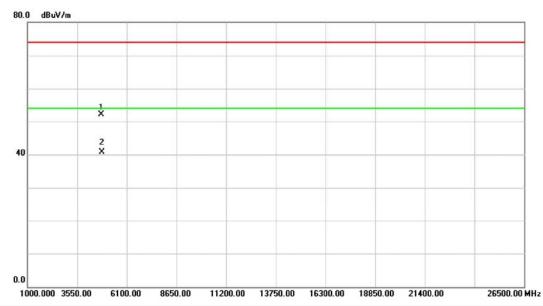


No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4803.590	48.43	3.58	52.01	74.00	-21.99	peak	
2	*	4803.630	37.03	3.58	40.61	54.00	-13.39	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 49 of 110



Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal

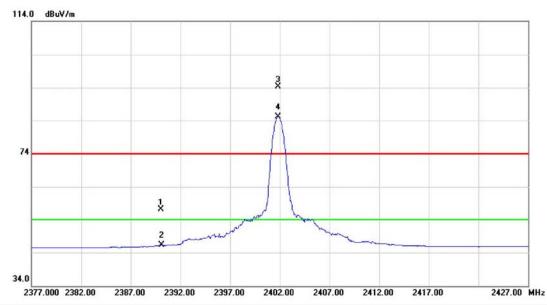


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	25.31	31.88	57.19	74.00	-16.81	peak	
2		2390.000	14.35	31.88	46.23	54.00	-7.77	AVG	
3	Χ	2401.800	62.41	31.89	94.30	74.00	20.30	peak	No limit
4	*	2401.850	53.17	31.89	85.06	54.00	31.06	AVG	No limit

Report No.: BTL-FCCP-1-1408C116 Page 50 of 110



Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal

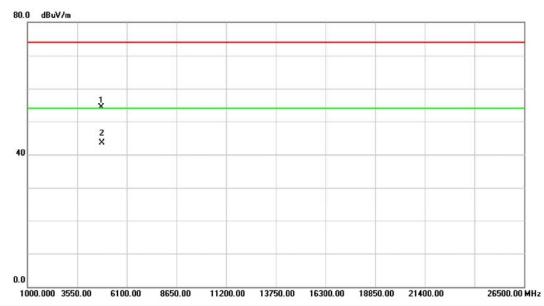


No.	٨	Иk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4	803.600	50.66	3.58	54.24	74.00	-19.76	peak	
2	*	* 4	803.630	39.94	3.58	43.52	54.00	-10.48	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 51 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

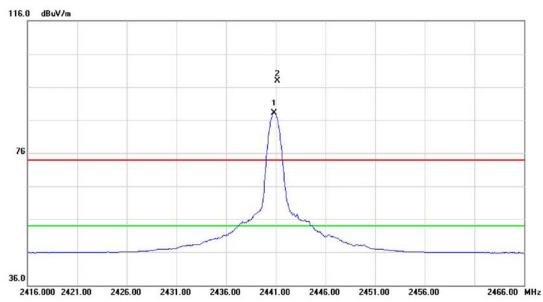


No.	М	k. Fred	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	*	2440.85	0 56.17	31.95	88.12	54.00	34.12	AVG	No limit	
2	Χ	2441.15	0 65.94	31.95	97.89	74.00	23.89	peak	No limit	

Report No.: BTL-FCCP-1-1408C116 Page 52 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

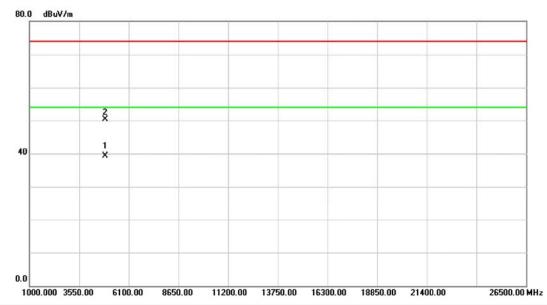


No.	Mł	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4881.625	35.67	3.73	39.40	54.00	-14.60	AVG	
2		4881.630	46.49	3.73	50.22	74.00	-23.78	peak	

Report No.: BTL-FCCP-1-1408C116 Page 53 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

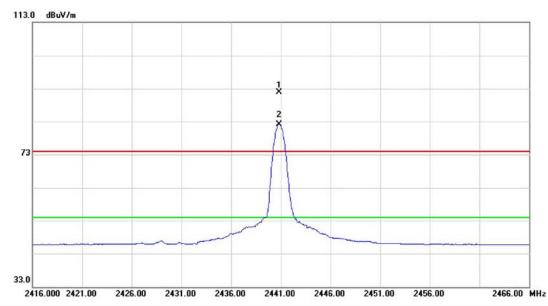


No.	MI	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.800	59.95	31.95	91.90	74.00	17.90	peak	No limit
2	*	2440.850	50.20	31.95	82.15	54.00	28.15	AVG	No limit

Report No.: BTL-FCCP-1-1408C116 Page 54 of 110



Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

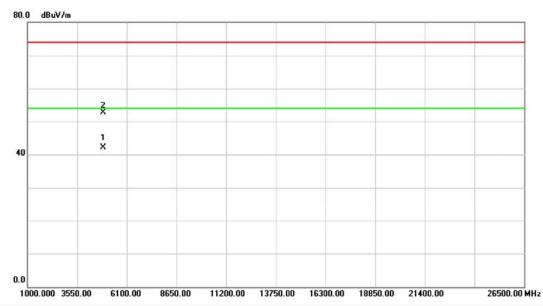


No.	Mł	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4881.630	38.33	3.73	42.06	54.00	-11.94	AVG	
2		4881.640	48.97	3.73	52.70	74.00	-21.30	peak	

Report No.: BTL-FCCP-1-1408C116 Page 55 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Vertical

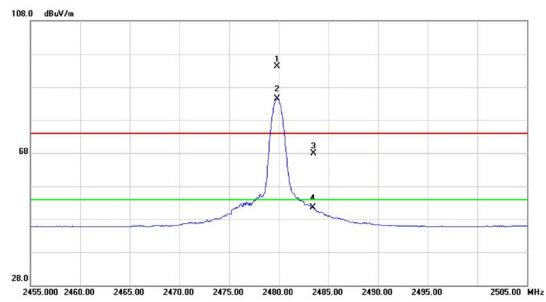


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.800	62.29	32.00	94.29	74.00	20.29	peak	No limit
2	*	2479.850	52.44	32.00	84.44	54.00	30.44	AVG	No limit
3		2483.500	35.94	32.01	67.95	74.00	-6.05	peak	
4		2483.500	19.44	32.01	51.45	54.00	-2.55	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 56 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Vertical

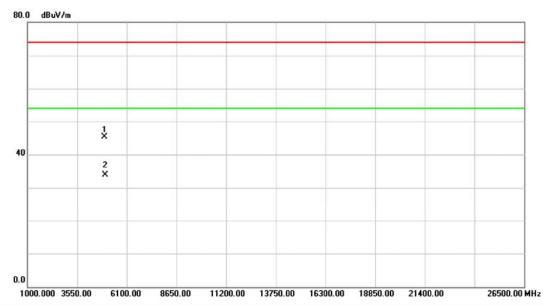


No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4959.595	41.52	3.88	45.40	74.00	-28.60	peak	
2	*	4959.625	29.96	3.88	33.84	54.00	-20.16	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 57 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal

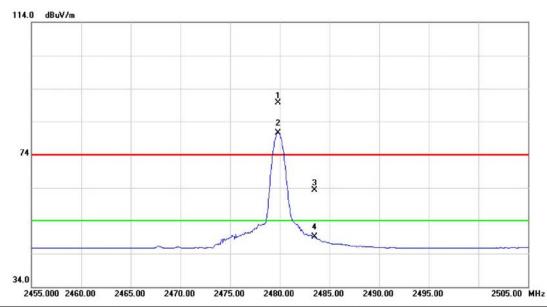


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.800	57.79	32.00	89.79	74.00	15.79	peak	No limit
2	*	2479.850	48.58	32.00	80.58	54.00	26.58	AVG	No limit
3		2483.500	31.30	32.01	63.31	74.00	-10.69	peak	
4		2483.500	17.00	32.01	49.01	54.00	-4.99	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 58 of 110



Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal

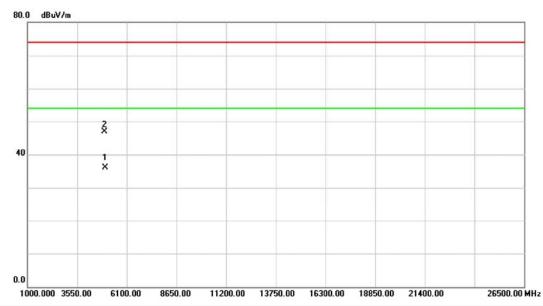


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4959.625	32.25	3.88	36.13	54.00	-17.87	AVG	
2		4959.645	43.11	3.88	46.99	74.00	-27.01	peak	

Report No.: BTL-FCCP-1-1408C116 Page 59 of 110



Test Mode: TX 2402MHz _CH00_3Mbps

Vertical

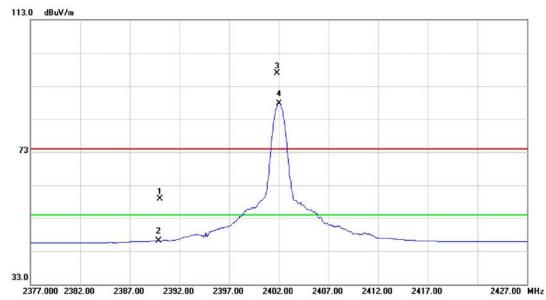


No.	Mk	c. Freq	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	27.08	31.88	58.96	74.00	-15.04	peak	
2		2390.000	14.30	31.88	46.18	54.00	-7.82	AVG	
3	Χ	2401.800	64.97	31.89	96.86	74.00	22.86	peak	No limit
4	*	2402.000	55.83	31.89	87.72	54.00	33.72	AVG	No limit

Report No.: BTL-FCCP-1-1408C116 Page 60 of 110



Test Mode: TX 2402MHz _CH00_3Mbps

Vertical

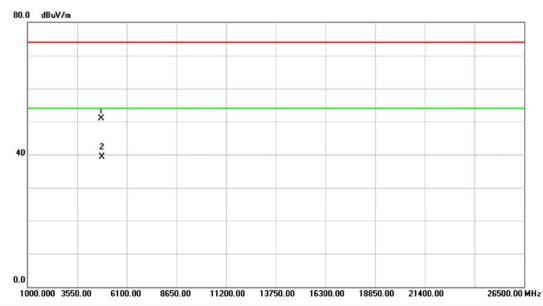


No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4803.435	47.24	3.58	50.82	74.00	-23.18	peak	
2	*	4804.100	35.75	3.58	39.33	54.00	-14.67	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 61 of 110



Test Mode: TX 2402MHz _CH00_3Mbps

Horizontal

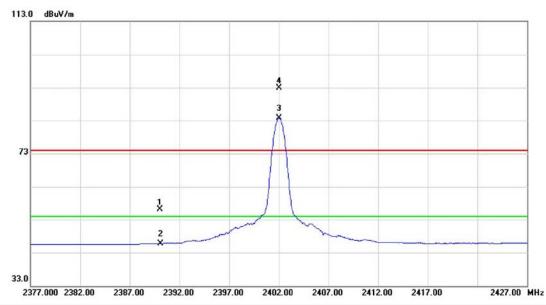


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.16	31.88	56.04	74.00	-17.96	peak	
2		2390.000	13.83	31.88	45.71	54.00	-8.29	AVG	
3	*	2402.000	51.73	31.89	83.62	54.00	29.62	AVG	No limit
4	Χ	2402.050	61.00	31.89	92.89	74.00	18.89	peak	No limit

Report No.: BTL-FCCP-1-1408C116 Page 62 of 110



Test Mode: TX 2402MHz _CH00_3Mbps

Horizontal

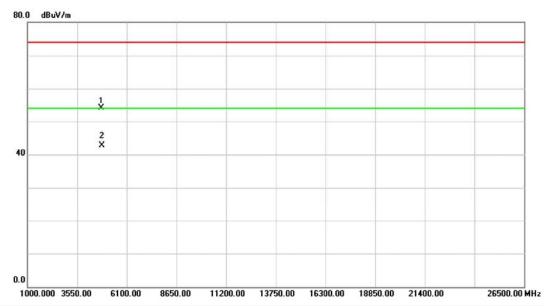


No.	N	Лk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		48	803.500	50.54	3.58	54.12	74.00	-19.88	peak	
2	*	48	804.090	39.15	3.58	42.73	54.00	-11.27	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 63 of 110



Test Mode: TX 2441MHz _CH39_3Mbps

Vertical

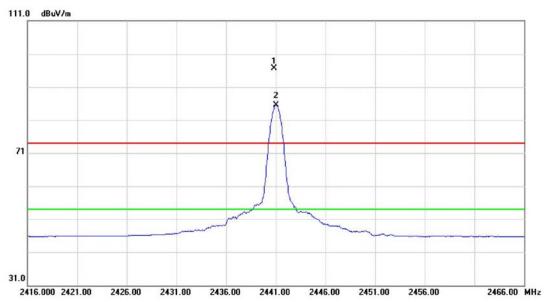


No.	Mł	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.800	64.81	31.95	96.76	74.00	22.76	peak	No limit
2	*	2441.000	53.46	31.95	85.41	54.00	31.41	AVG	No limit

Report No.: BTL-FCCP-1-1408C116 Page 64 of 110



Test Mode: TX 2441MHz _CH39_3Mbps

Vertical

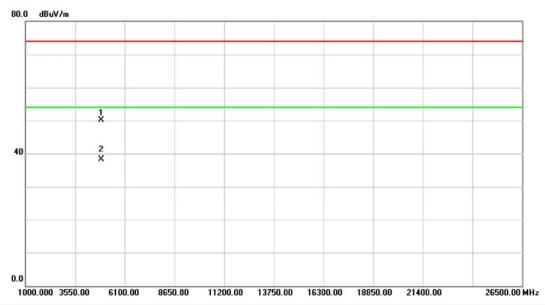


No.	Ν	Иk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4	881.550	46.31	3.73	50.04	74.00	-23.96	peak	
2	*	* 4	882.095	34.53	3.73	38.26	54.00	-15.74	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 65 of 110



Test Mode: TX 2441MHz _CH39_3Mbps

Horizontal

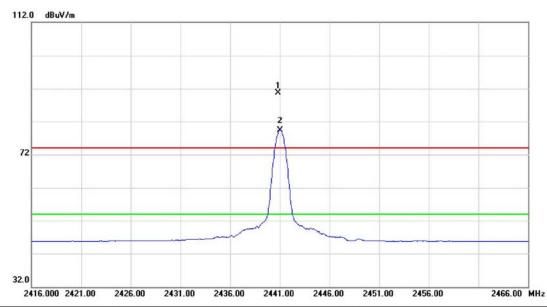

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.800	58.73	31.95	90.68	74.00	16.68	peak	No limit
2	*	2441.000	47.43	31.95	79.38	54.00	25.38	AVG	No limit

Report No.: BTL-FCCP-1-1408C116 Page 66 of 110



Test Mode: TX 2441MHz _CH39_3Mbps

Horizontal




No.	M	Λk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		48	81.480	46.92	3.73	50.65	74.00	-23.35	peak	
2	*	48	82.055	35.33	3.73	39.06	54.00	-14.94	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 67 of 110



Test Mode: TX 2480MHz _CH78_3Mbps

Vertical

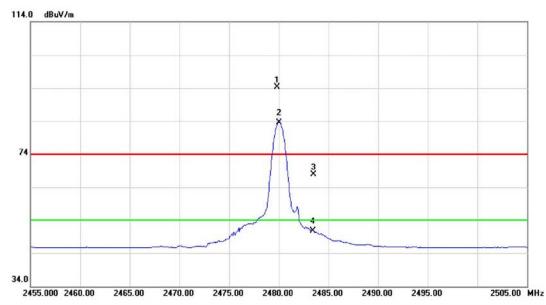

No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.800	62.25	32.00	94.25	74.00	20.25	peak	No limit
2	*	2480.000	51.56	32.00	83.56	54.00	29.56	AVG	No limit
3		2483.500	35.94	32.01	67.95	74.00	-6.05	peak	
4		2483.500	18.71	32.01	50.72	54.00	-3.28	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 68 of 110



Test Mode: TX 2480MHz _CH78_3Mbps

Vertical




No.	N	/lk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		49	959.600	43.81	3.88	47.69	74.00	-26.31	peak	
2	*	49	960.060	31.27	3.88	35.15	54.00	-18.85	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 69 of 110



Test Mode: TX 2480MHz _CH78_3Mbps

Horizontal

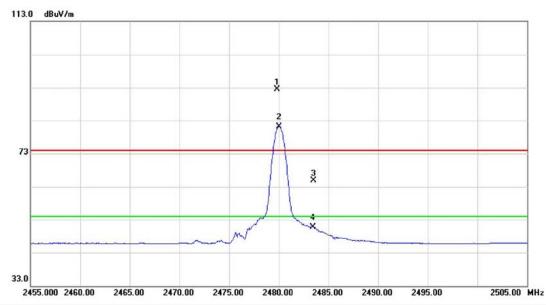


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.800	60.59	32.00	92.59	74.00	18.59	peak	No limit
2	*	2480.000	49.16	32.00	81.16	54.00	27.16	AVG	No limit
3		2483.500	32.93	32.01	64.94	74.00	-9.06	peak	
4		2483.500	18.75	32.01	50.76	54.00	-3.24	AVG	

Report No.: BTL-FCCP-1-1408C116 Page 70 of 110



Test Mode: TX 2480MHz _CH78_3Mbps

Horizontal

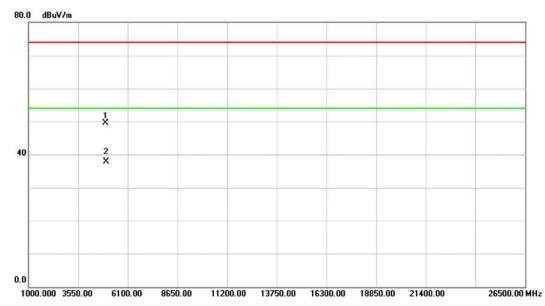

No.	Ν	Лk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		49	959.495	45.60	3.88	49.48	74.00	-24.52	peak	
2	*	49	960.050	34.07	3.88	37.95	54.00	-16.05	AVG	


Report No.: BTL-FCCP-1-1408C116 Page 71 of 110



ATTACHMENT E - NUMBER OF HOPPING CHANNEL

Report No.: BTL-FCCP-1-1408C116 Page 72 of 110



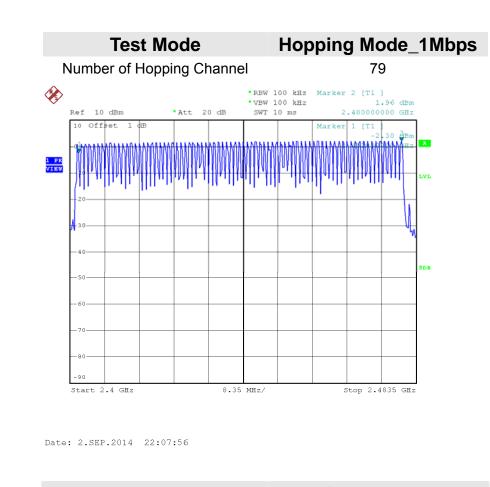



Report No.: BTL-FCCP-1-1408C116 Page 73 of 110

Date: 3.SEP.2014 00:24:19



ATTACHMENT F - AVERAGE TIME OF OCCUPANCY		

Report No.: BTL-FCCP-1-1408C116 Page 74 of 110





Test Mode : TX Mode_1Mbps

Data Daakat	Data Packet Frequency	Pulse	Dwell	Limita(a)	Test
Data Packet	Frequency	Duration(ms)	Time(s)	Limits(s)	Result
DH5	2402 MHz	3.0400	0.3243	0.4000	Complies
DH3	2402 MHz	1.7400	0.2784	0.4000	Complies
DH1	2402 MHz	0.4300	0.1376	0.4000	Complies
DH5	2441 MHz	3.0300	0.3232	0.4000	Complies
DH3	2441 MHz	1.7400	0.2784	0.4000	Complies
DH1	2441 MHz	0.4300	0.1376	0.4000	Complies
DH5	2480 MHz	3.0400	0.3243	0.4000	Complies
DH3	2480 MHz	1.7400	0.2784	0.4000	Complies
DH1	2480 MHz	0.4300	0.1376	0.4000	Complies

Report No.: BTL-FCCP-1-1408C116 Page 75 of 110




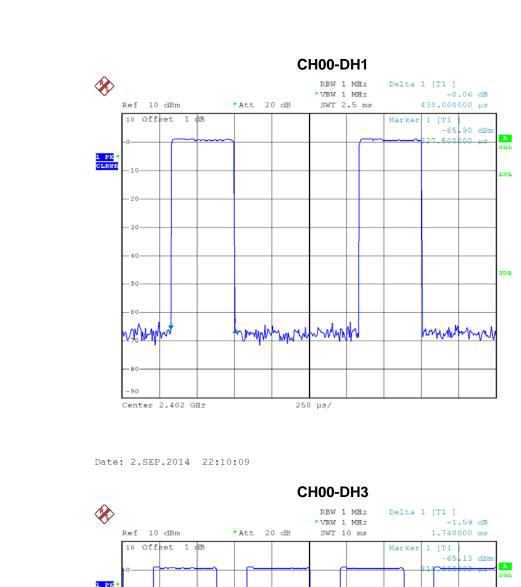

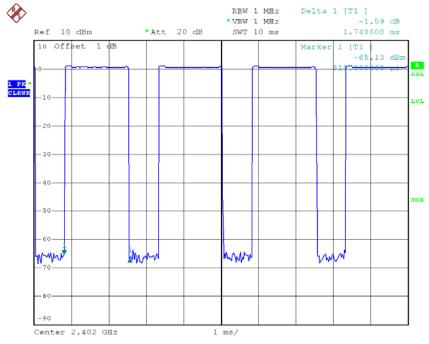

Date: 2.SEP.2014 22:27:07



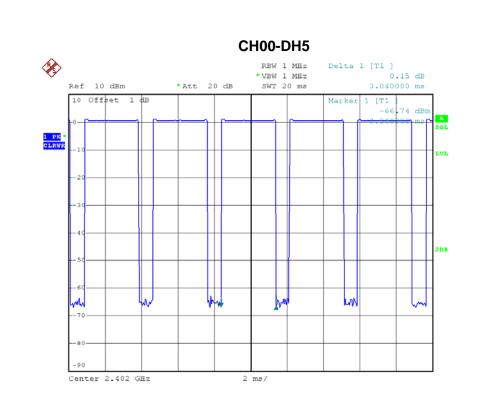

Date: 2.SEP.2014 22:35:44


250 μs/

CH39-DH1


Date: 2.SEP.2014 22:11:02

Center 2.441 GHz



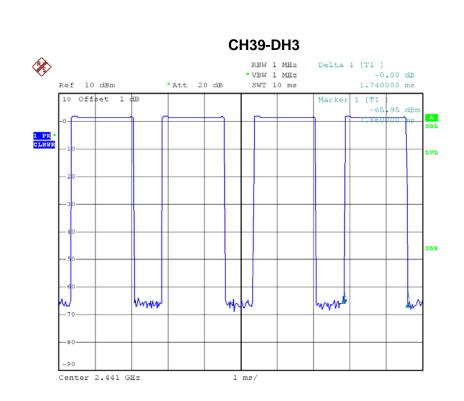


Date: 2.SEP.2014 22:28:46

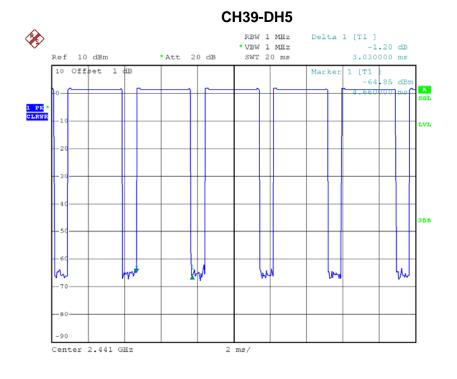


Date: 2.SEP.2014 22:49:22



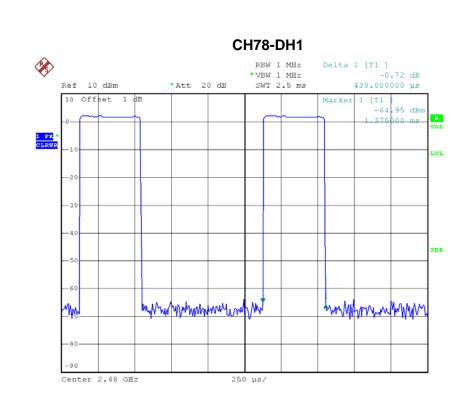


Date: 2.SEP.2014 22:12:55

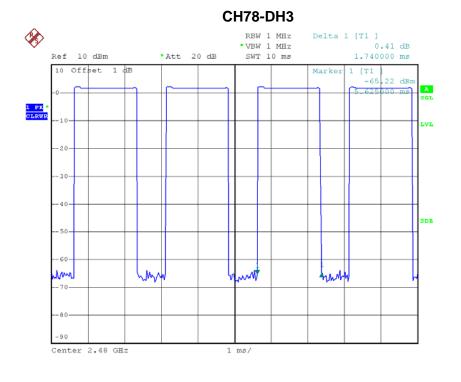

Date: 2.SEP.2014 22:30:12



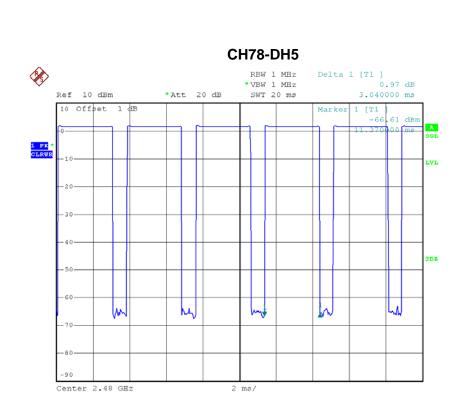

Date: 2.SEP.2014 22:50:34




Test Mode : TX Mode_3Mbps

Data Packet	Fraguanay	Pulse	Dwell	Limita(a)	Test
Data Packet	Frequency	Duration(ms)	Time(s)	Limits(s)	Result
DH5	2402 MHz	3.0400	0.3243	0.4000	Complies
DH3	2402 MHz	1.7400	0.2784	0.4000	Complies
DH1	2402 MHz	0.4300	0.1376	0.4000	Complies
DH5	2441 MHz	3.0400	0.3243	0.4000	Complies
DH3	2441 MHz	1.7600	0.2816	0.4000	Complies
DH1	2441 MHz	0.4300	0.1376	0.4000	Complies
DH5	2480 MHz	3.0000	0.3200	0.4000	Complies
DH3	2480 MHz	1.7150	0.2744	0.4000	Complies
DH1	2480 MHz	0.4300	0.1376	0.4000	Complies


Report No.: BTL-FCCP-1-1408C116 Page 81 of 110



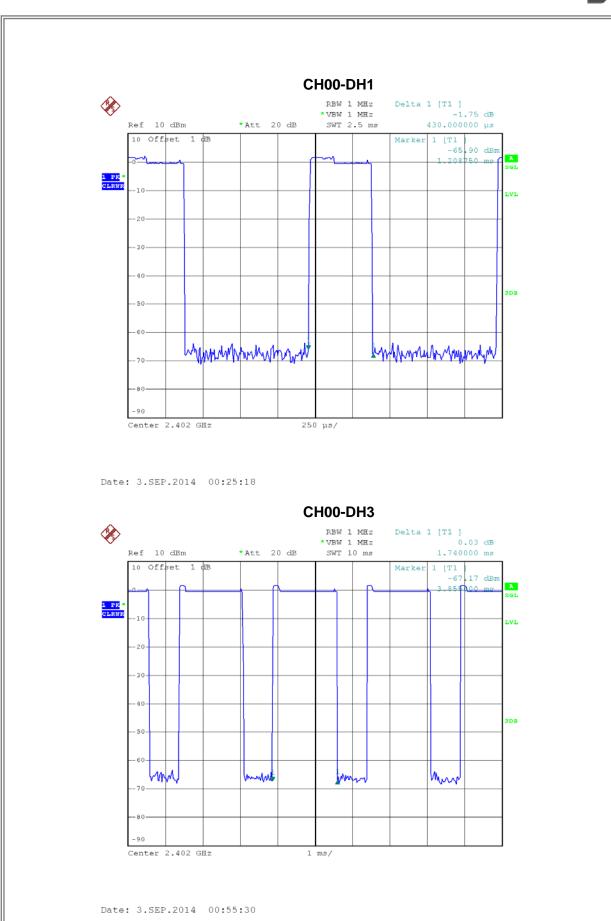


Report No.: BTL-FCCP-1-1408C116 Page 82 of 110



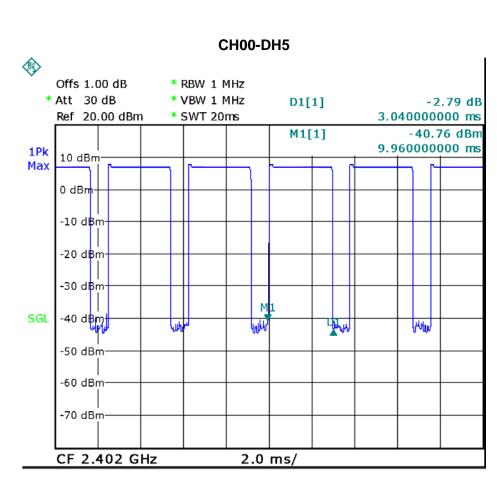


Date: 3.SEP.2014 08:07:34

CH39-DH1

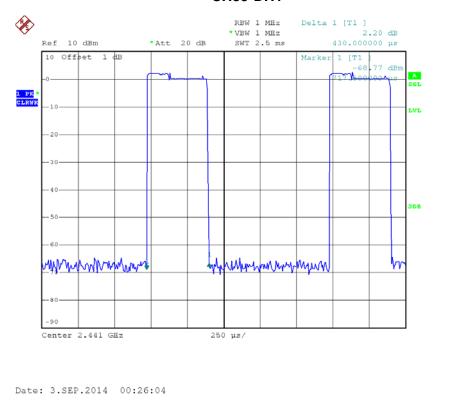

Report No.: BTL-FCCP-1-1408C116



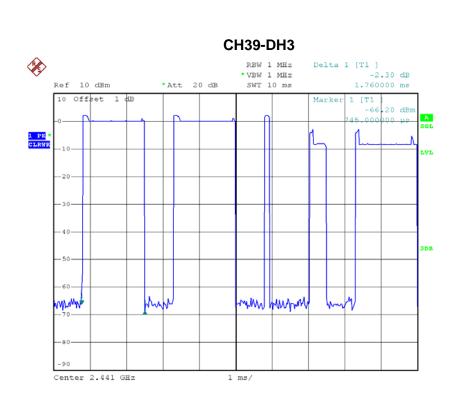

Date: 3.SEP.2014 00:56:41

Offs 1.00 dB * RBW 1 MHz * Att 30 dB * VBW 1 MHz 0.34 dB D1[1] Ref 20.00 dBm * SWT 20ms 3.040000000 ms M1[1] -43.04 dBm 9.280000000 ms 1Pk 10 dBm Max 0.dBm -10 dB m -20 dB m -30 dB m SGL -50 dBm -60 dBm--70 dBm-


2.0 ms/

CH39-DH5


Date: 3.SEP.2014 08:10:42

CF 2.441 GHz



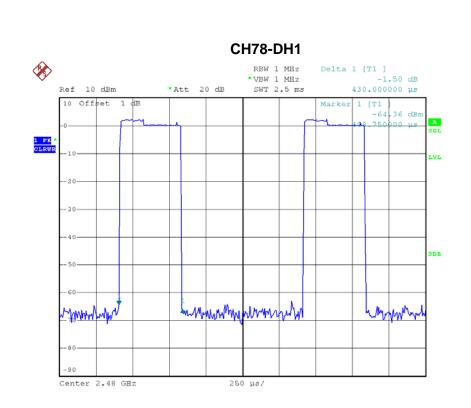


Date: 3.SEP.2014 00:26:51

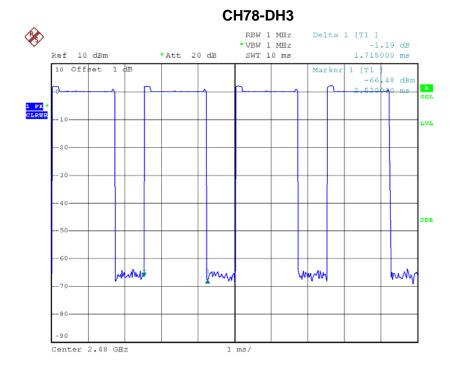

Date: 3.SEP.2014 00:57:20



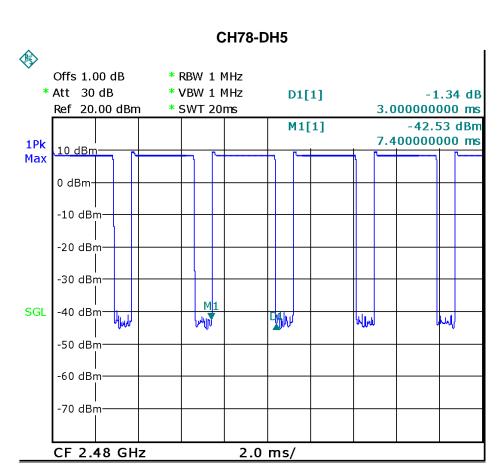

Date: 3.SEP.2014 08:14:46

Report No.: BTL-FCCP-1-1408C116 Page 86 of 110



ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT

Report No.: BTL-FCCP-1-1408C116 Page 87 of 110





Test Mode : Hopping on _1Mbps


Frequency (MHz)	Channel Separation	2/3 of 20dB Bandwidth	Test Result
2402	1.005	0.545	Complies
2441	1.005	0.545	Complies
2480	1.005	0.549	Complies

Date: 2.SEP.2014 22:56:33



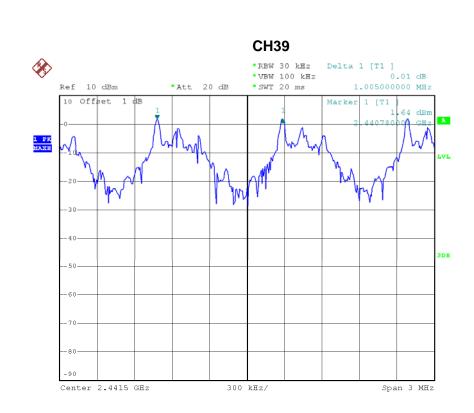



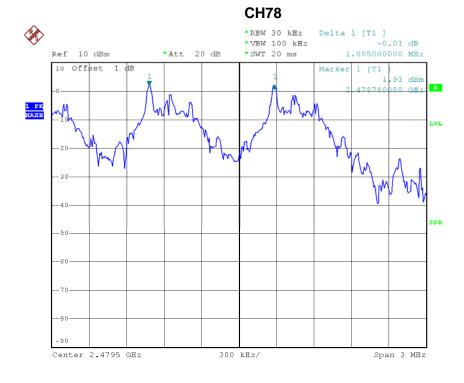


Date: 2.SEP.2014 22:04:36



Test Mode: Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth	Test Result
2402	1.005	0.891	Complies
2441	1.005	0.894	Complies
2480	1.005	0.894	Complies


CH00

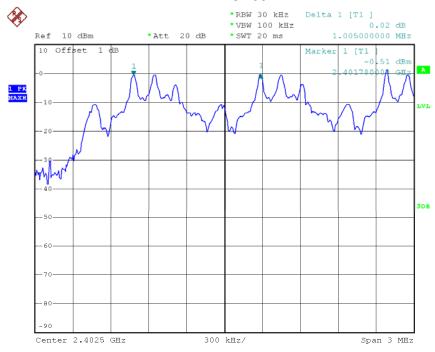


Date: 3.SEP.2014 00:13:55

Report No.: BTL-FCCP-1-1408C116 Page 90 of 110



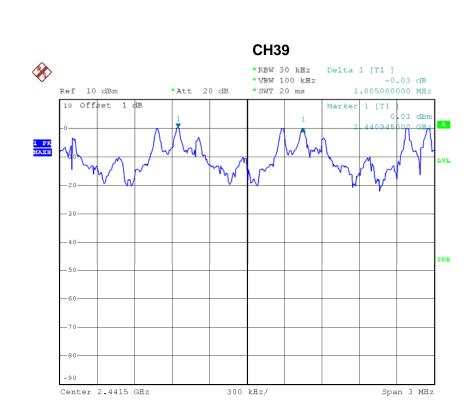

Date: 3.SEP.2014 00:15:40

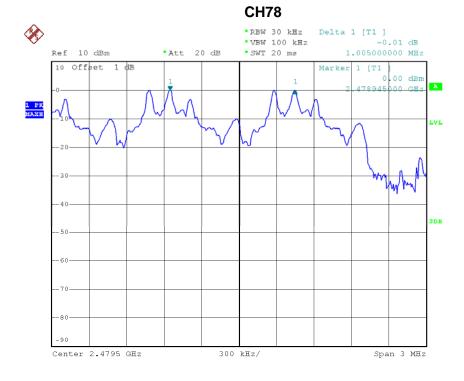

Date: 3.SEP.2014 00:19:27




Report No.: BTL-FCCP-1-1408C116 Page 92 of 110




Test Mode: TX Mode _1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.818	0.885	Complies
2441	0.818	0.905	Complies
2480	0.823	0.905	Complies

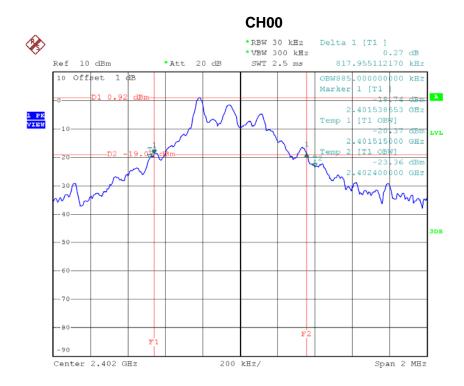


Date: 2.SEP.2014 21:45:38



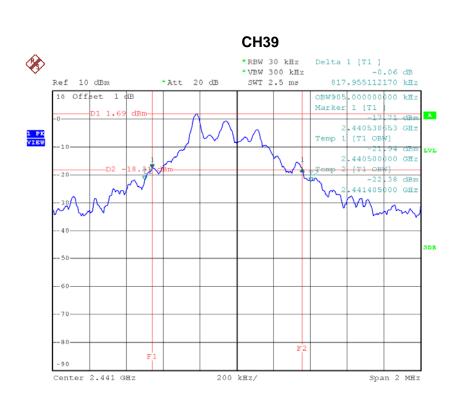



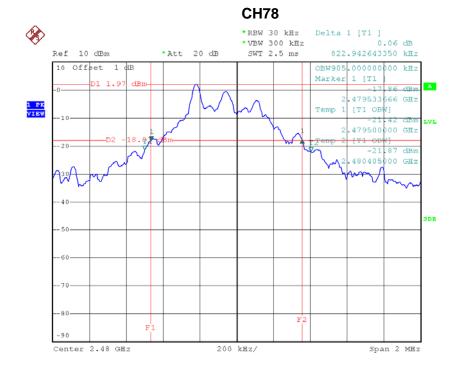


Date: 2.SEP.2014 21:55:39




Test Mode: TX Mode _3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.337	1.210	Complies
2441	1.342	1.215	Complies
2480	1.342	1.210	Complies

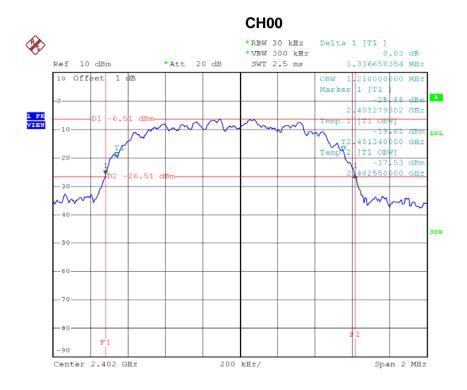


Date: 3.SEP.2014 00:00:51



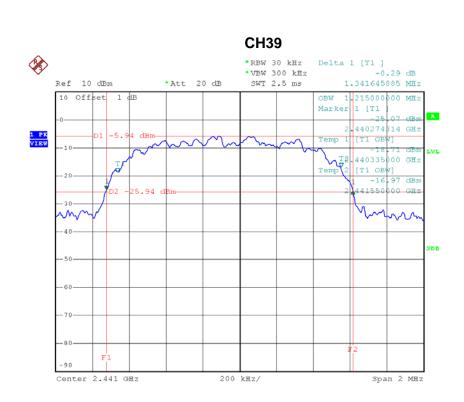

Date: 3.SEP.2014 00:04:32

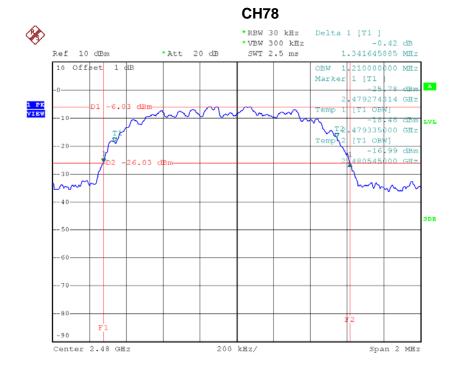

Date: 2.SEP.2014 23:56:10



ATTACHMENT I - PEAK OUTPUT POWER	

Report No.: BTL-FCCP-1-1408C116 Page 97 of 110



Test Mode :	TX Mode 1Mbps
TOST WIDGE .	TX Wode _ TWops

Frequency	Conducted Power	Conducted Power	Max. Limit	Max. Limit	Test
(MHz)	(dBm)	(W)	(dBm)	(W)	Result
2402	1.04	0.0013	30.00	1.0000	Complies
2441	1.81	0.0015	30.00	1.0000	Complies
2480	2.10	0.0016	30.00	1.0000	Complies


**REW 3 MH2 Marker 1 [T1] **VBW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHz **TEW 3 MHZ 1.04 dBm **TEW 3 MHZ 2.10 dBm **Att 20 dB **SWT 2.5 ms 2.401700000 GHZ **TEW 3 MHZ 1.04 dBm **TEW 3 MHZ 1.04

Date: 2.SEP.2014 21:42:45







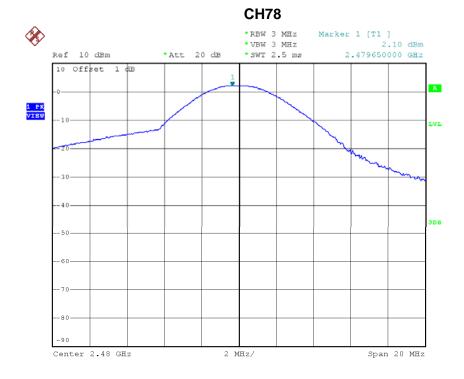

Date: 2.SEP.2014 21:53:40




Test Mode :	TX Mode 3Mbps
-------------	---------------

	Frequency	Conducted Power	Conducted Power	Max. Limit	Max. Limit	Test
	(MHz)	(dBm)	(W)	(dBm)	(W)	Result
Ī	2402	-0.80	0.0008	30.00	1.0000	Complies
	2441	-0.26	0.0009	30.00	1.0000	Complies
	2480	-0.25	0.0009	30.00	1.0000	Complies


Date: 2.SEP.2014 23:58:15

Report No.: BTL-FCCP-1-1408C116 Page 100 of 110



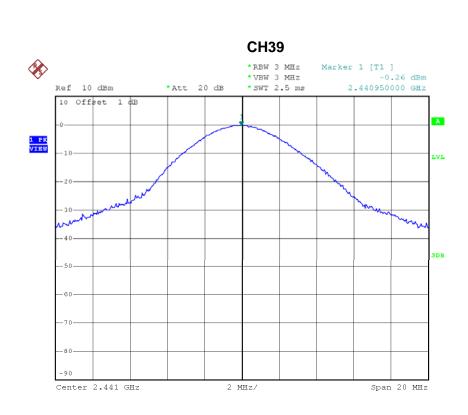

Date: 3.SEP.2014 00:02:07

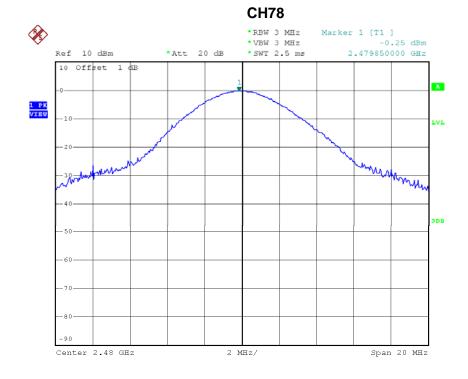


Date: 2.SEP.2014 23:52:13




ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION

Report No.: BTL-FCCP-1-1408C116 Page 102 of 110



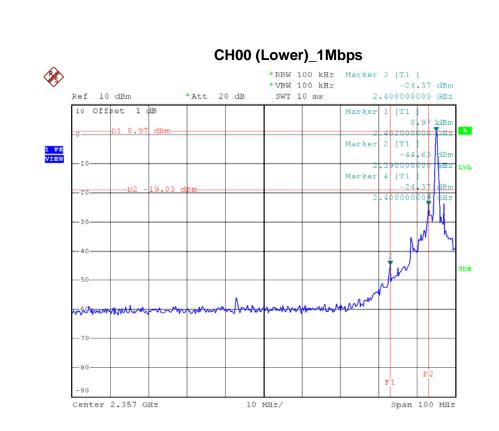



*RBW 100 kHz Marker 3 [T1] -32.57 dBm 2.483750000 GHz *VBW 100 kHz Ref 10 dBm *Att 20 dB SWT 10 ms 10 Offset 1 dB Marker 1 [T1] .03 dBm 2 [T1 Marker 1 PK VIEW -33,02 dBm 4 [T1 .500000000 GHz

10 MHz/

Span 100 MHz


CH78 (Upper) _1Mbps

Date: 2.SEP.2014 21:55:59

Center 2.523 GHz






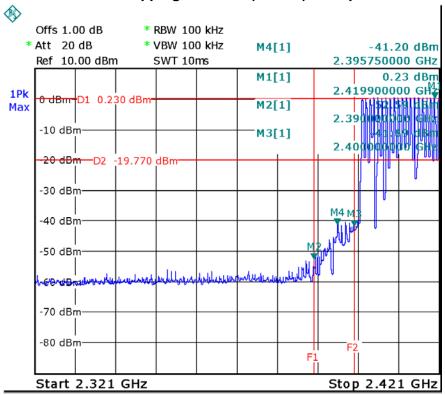


Date: 10.SEP.2014 12:38:27


CH78 Hopping on mode (Upper) _1Mbps

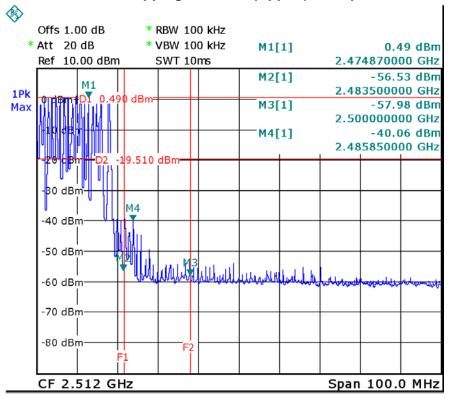

Date: 10.SEP.2014 12:40:42






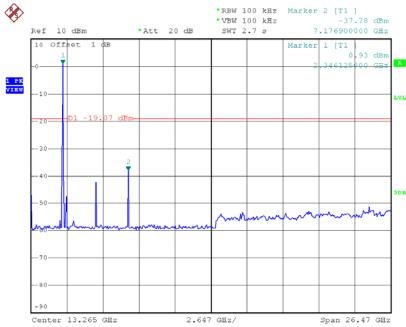


Date: 2.SEP.2014 21:44:54


CH39 (10 Harmonic of the frequency) _1Mbps

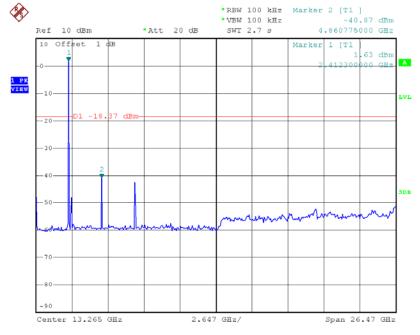

Date: 2.SEP.2014 21:51:32






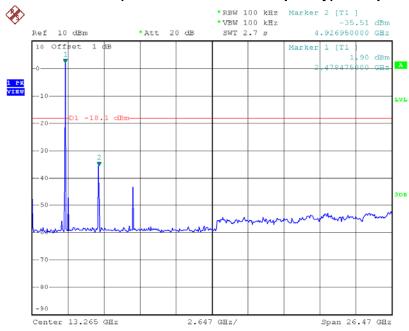


Date: 2.SEP.2014 21:54:57



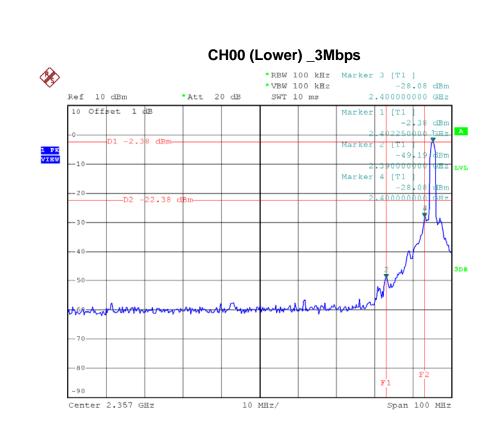

Date: 3.SEP.2014 00:01:10


CH78 (Upper) _3Mbps

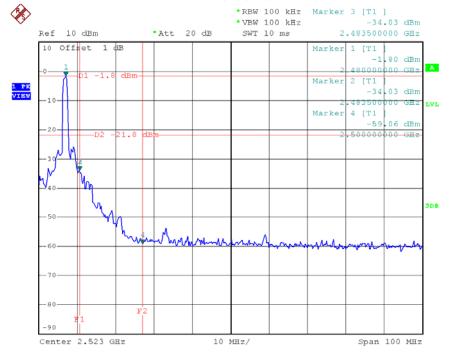

Date: 2.SEP.2014 23:56:37






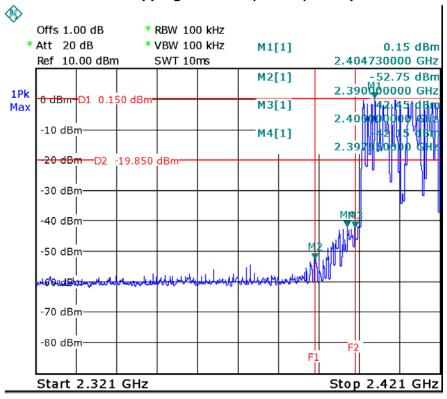


Date: 10.SEP.2014 12:50:13


CH78 Hopping on mode (Upper) _3Mbps

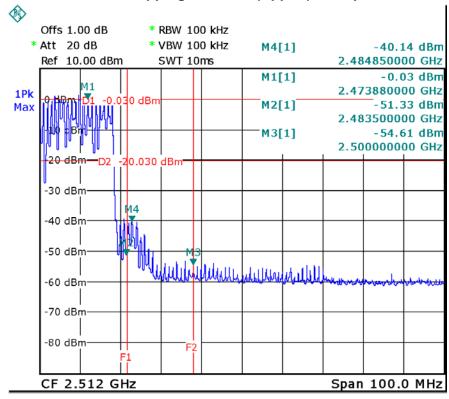

Date: 10.SEP.2014 12:47:32






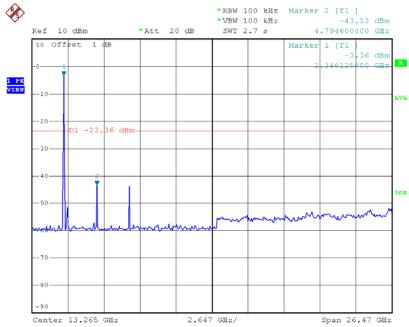


Date: 3.SEP.2014 00:00:30


CH39 (10 Harmonic of the frequency) _3Mbps

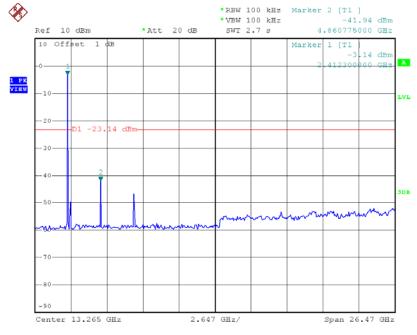

Date: 3.SEP.2014 00:04:05





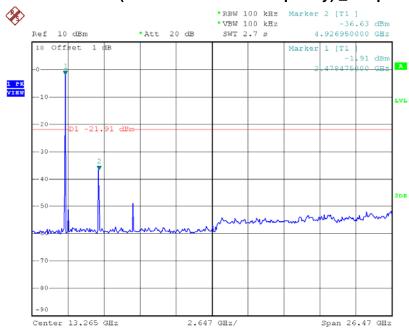

Date: 2.SEP.2014 23:55:47