



FCC 47 CFR PART 15 SUBPART C

Product Type : Card Phone
Applicant : WirelessMe Limited
Address : B210 Languang Building, NO.7 Xinxi Road, High-tech Park North,
Nanshan District, Shenzhen, China
Trade Name : Talkase
Model Number : T1
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009
Receive Date : December 24, 2014
Test Period : January 06, 2015 to January 28, 2015
Issue Date : February 02, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	February 02, 2015	Initial Issue	



Verification of Compliance

Issued Date: 02/02/2015

Product Type : Card Phone
Applicant : WirelessMe Limited
Address : B210 Languang Building, NO.7 Xinxi Road, High-tech park
North, Nanshan District, Shenzhen, China
Trade Name : Talkase
Model Number : T1
FCC ID : 2AC3S-T1
EUT Rated Voltage : DC 3.7V
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.


Approved By :  Reviewed By : 
(Manager) (Murphy Wang) (Testing Engineer) (Fly Lu)



TABLE OF CONTENTS

1	General Information.....	6
1.1.	Summary of Test Result	6
1.2.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software.....	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Maximum Conducted Output Power Measurement	10
4.1.	Limit.....	10
4.2.	Test Setup	10
4.3.	Test Instruments	10
4.4.	Test Procedure	10
4.5.	Test Result.....	11
5	Conducted Emission Measurement	13
5.1.	Limit.....	13
5.2.	Test Instruments	13
5.3.	Test Setup	13
5.4.	Test Procedure.....	14
5.5.	Test Result.....	15
6	Radiated Interference Measurement	17
6.1.	Limit.....	17
6.2.	Test Instruments	17
6.3.	Setup.....	19
6.4.	Test Procedure.....	20
6.5.	Test Result.....	21
7	20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	25
7.1.	Limit.....	25
7.2.	Test Setup	25
7.3.	Test Instruments	25
7.4.	Test Procedure	25
7.5.	Test Result.....	26
7.6.	Test Graphs	27
8	Carrier Frequency Separation Measurement	29



8.1. Limit.....	29
8.2. Test Setup	29
8.3. Test Instruments	29
8.4. Test Procedure.....	29
8.5. Test Result.....	30
8.6. Test Graphs	31
9 Number of Hopping Measurement	33
9.1. Limit.....	33
9.2. Test Setup	33
9.3. Test Instruments	33
9.4. Test Procedure.....	33
9.5. Test Result.....	34
9.6. Test Graphs	35
10 Time of Occupancy (Dwell Time) Measurement.....	37
10.1. Limit.....	37
10.2. Test Setup	37
10.3. Test Instruments	37
10.4. Test Procedure.....	37
10.5. Test Result.....	38
10.6. Test Graphs	40
11 Out of Band Conducted Emissions Measurement.....	42
11.1. Limit.....	42
11.2. Test Setup	42
11.3. Test Instruments	42
11.4. Test Procedure.....	42
11.5. Test Graphs	43
12 Band Edges Measurement.....	47
12.1. Limit.....	47
12.2. Test Setup	47
12.3. Test Instruments	47
12.4. Test Procedure.....	48
12.5. Test Result.....	49
13 Antenna Measurement	57
13.1. Limit.....	57
13.2. Antenna Connector Construction.....	57
13.3. Antenna Gain	57



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	----
15.247(b)(1)	Max. Output Power	PASS	----
15.247(c)	Transmitter Radiated Emissions	PASS	----
15.247(a)(1)	20dB RF Bandwidth	PASS	----
15.247(a)(1)(iii)	Carrier Frequency Separation	PASS	----
15.247(a)(1)(iii)	Number of Hopping	PASS	----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	----
15.247(c)	Out of Band Conducted Spurious Emission	PASS	----
15.247(c)	Band Edge Measurement	PASS	----
15.247(c)	Occupied Bandwidth Measurement	PASS	----
15.203	Antenna Requirement	PASS	----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	9kHz ~ 30MHz		± 3.49
	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54



2 EUT Description

Product	Card Phone				
Trade Name	Talkase				
Model Number	T1				
Applicant	WirelessMe Limited				
Applicant Address	B210 Languang Building, NO.7 Xinxi Road, High-tech park North, Nanshan District, Shenzhen, China				
Manufacturer	WirelessMe Limited				
Manufacturer Address	B210 Languang Building, NO.7 Xinxi Road, High-tech park North, Nanshan District, Shenzhen, China				
FCC ID	2AC3S-T1				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK for 1Mbps				
	$\pi/4$ -DQPSK for 2Mbps				
	8DPSK for 3Mbps				
Antenna Type	Internal Antenna				
Antenna Gain	1.5 dBi				
RF Output Power (Conducted)	GFSK for 1Mbps	2.96	dBm /	0.00198	W
	$\pi/4$ -DQPSK for 2Mbps	2.39	dBm /	0.00173	W
	8DPSK for 3Mbps	2.75	dBm /	0.00188	W
99 % Occupied Bandwidth	GFSK: 0.91MHz				
	8DPSK: 1.17MHz				
Emission Designator	GFSK: 908KD1D				
	8DPSK: 1M170D1D				



3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 3: $\pi/4$ -DQPSK Link Mode
Mode 4: 8DPSK Link Mode
--

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 6.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

3.2. EUT Exercise Software

1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	EUT run test program.
4	Open Bluetooth function link to CBT.



3.3. Configuration of Test System Details

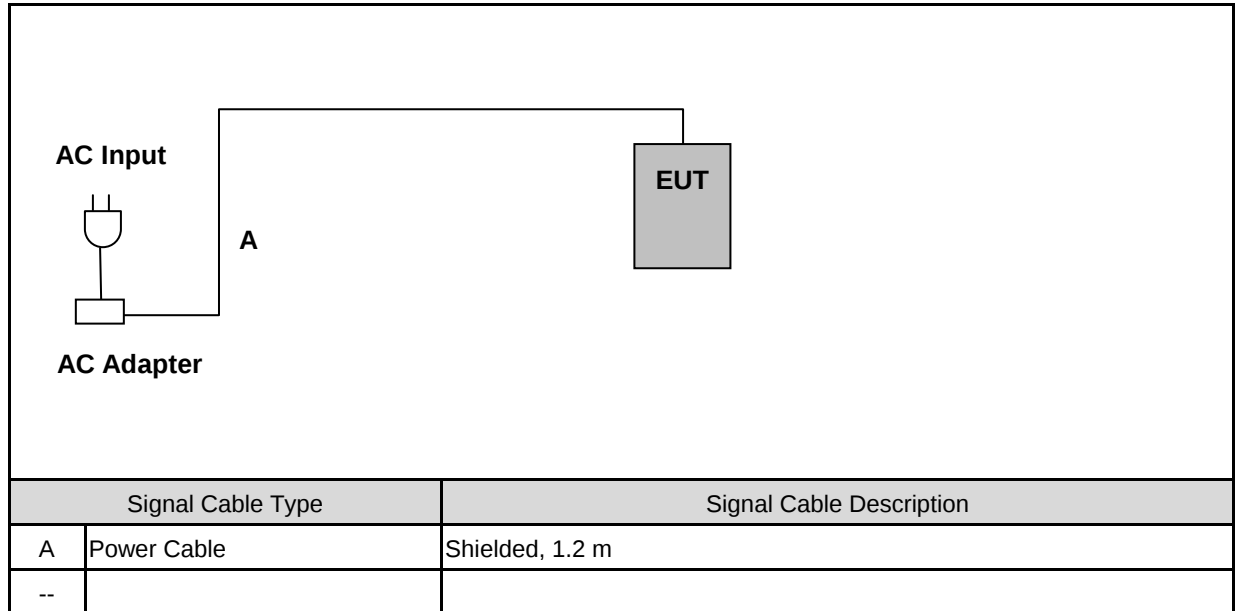

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950




4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

4.2. Test Setup

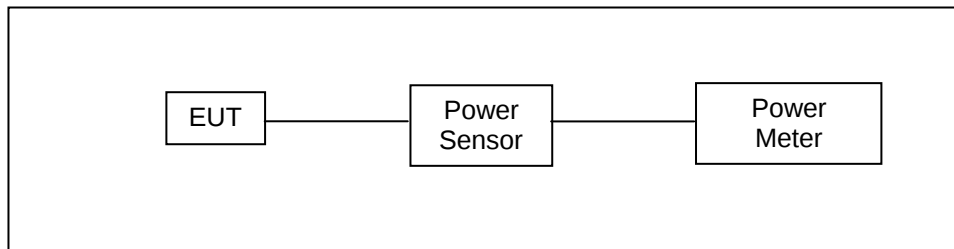

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.



4.5. Test Result

Model Number	T1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: GFSK Link Mode					
Date of Test	01/14/2015			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	0.31	0.00107	2.28	0.00169	< 1
	DH3	0.36	0.00109	2.33	0.00171	< 1
	DH5	0.41	0.00110	2.39	0.00173	< 1
2441	DH1	0.52	0.00113	2.44	0.00175	< 1
	DH3	0.58	0.00114	2.49	0.00177	< 1
	DH5	0.64	0.00116	2.55	0.00180	< 1
2480	DH1	1.31	0.00135	2.88	0.00194	< 1
	DH3	1.34	0.00136	2.92	0.00196	< 1
	DH5	1.39	0.00138	2.96	0.00198	< 1

Model Number	T1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: $\pi/4$ -DQPSK Mode					
Date of Test	01/14/2015			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	2DH1	-1.59	0.00069	1.98	0.00158	< 1
	2DH3	-1.53	0.00070	2.05	0.00160	< 1
	2DH5	-1.45	0.00072	2.13	0.00163	< 1
2441	2DH1	-1.52	0.00070	2.12	0.00163	< 1
	2DH3	-1.46	0.00071	2.19	0.00166	< 1
	2DH5	-1.41	0.00072	2.24	0.00167	< 1
2480	2DH1	-1.28	0.00074	2.31	0.00170	< 1
	2DH3	-1.24	0.00075	2.35	0.00172	< 1
	2DH5	-1.18	0.00076	2.39	0.00173	< 1



Model Number	T1					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: 8DPSK Mode					
Date of Test	01/14/2015			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	3DH1	-1.49	0.00071	2.25	0.00168	< 1
	3DH3	-1.41	0.00072	2.31	0.00170	< 1
	3DH5	-1.35	0.00073	2.41	0.00174	< 1
2441	3DH1	-1.38	0.00073	2.42	0.00175	< 1
	3DH3	-1.35	0.00073	2.48	0.00177	< 1
	3DH5	-1.29	0.00074	2.55	0.00180	< 1
2480	3DH1	-1.15	0.00077	2.65	0.00184	< 1
	3DH3	-1.12	0.00077	2.70	0.00186	< 1
	3DH5	-1.04	0.00079	2.75	0.00188	< 1

5 Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

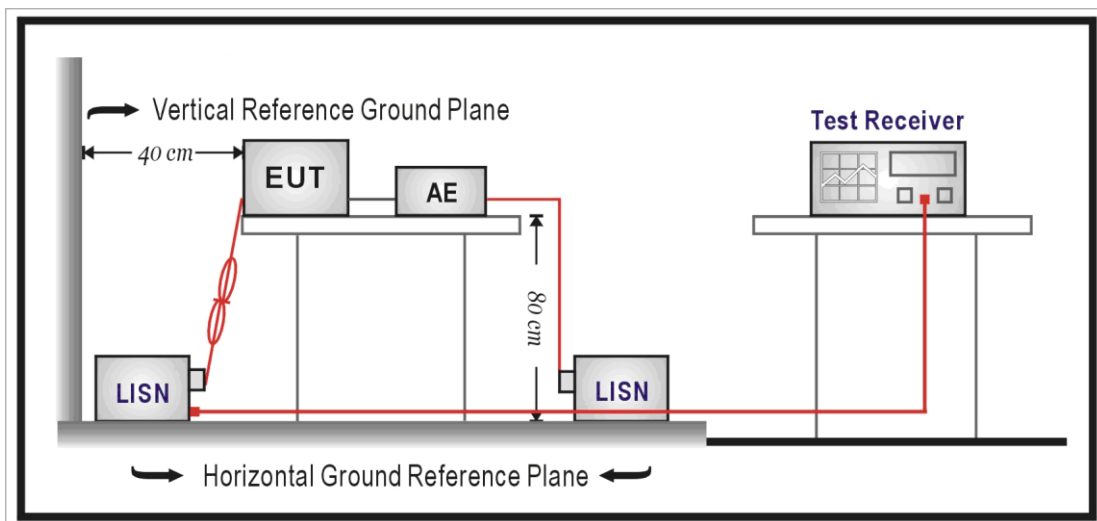



5.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.


Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.



5.5. Test Result


Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	01/14/2015
		Test By:	Eric Ou Yang
Description:			

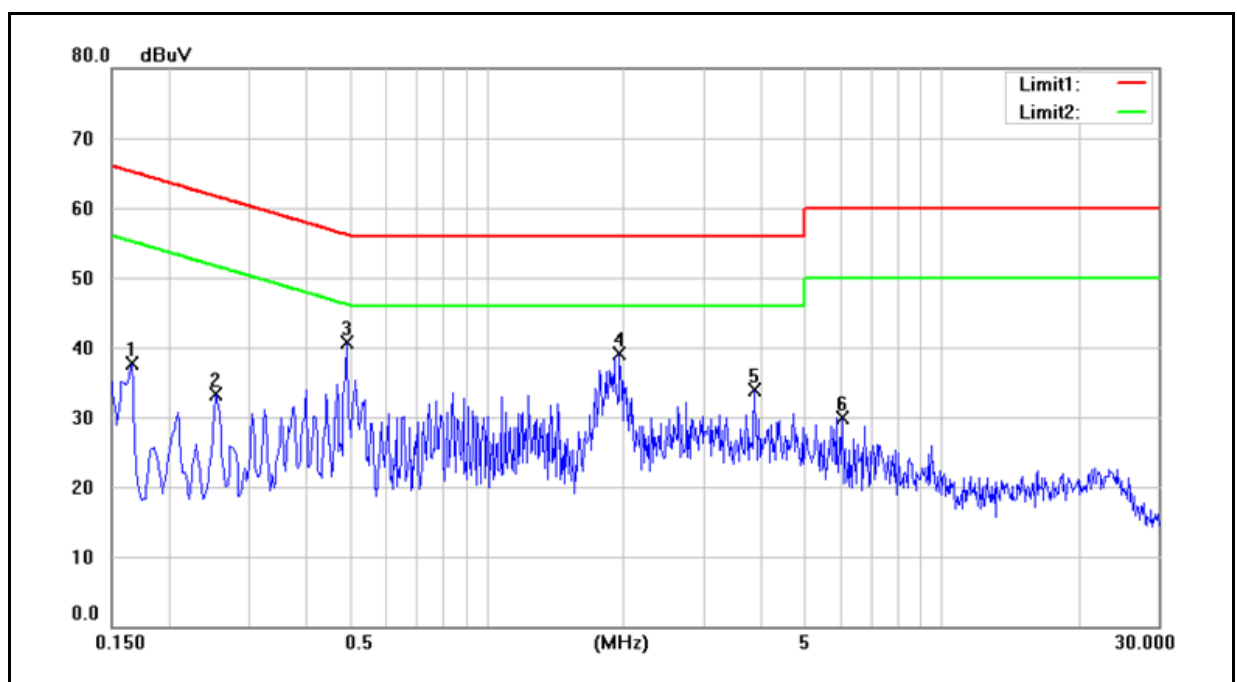

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	18.87	3.79	9.60	28.47	13.39	65.16	55.16	-36.69	-41.77	Pass
2	0.2540	19.77	10.27	9.61	29.38	19.88	61.63	51.63	-32.25	-31.75	Pass
3	0.4940	22.39	13.23	9.62	32.01	22.85	56.10	46.10	-24.09	-23.25	Pass
4	1.9660	23.96	14.81	9.69	33.65	24.50	56.00	46.00	-22.35	-21.50	Pass
5	3.8980	12.01	3.79	9.77	21.78	13.56	56.00	46.00	-34.22	-32.44	Pass
6	6.0780	7.84	0.82	9.83	17.67	10.65	60.00	50.00	-42.33	-39.35	Pass



Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	01/14/2015
		Test By:	Eric Ou Yang
Description:			

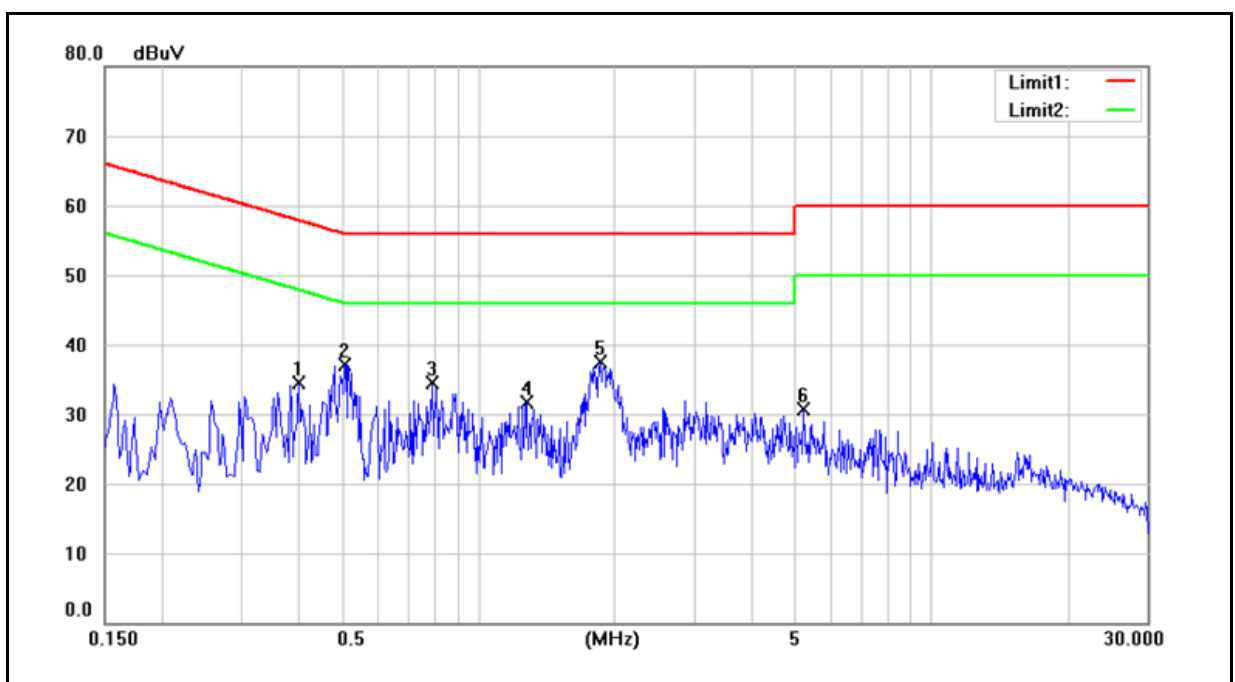

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4020	18.08	10.19	9.61	27.69	19.80	57.81	47.81	-30.12	-28.01	Pass
2	0.5100	22.55	13.46	9.62	32.17	23.08	56.00	46.00	-23.83	-22.92	Pass
3	0.7940	17.35	9.42	9.64	26.99	19.06	56.00	46.00	-29.01	-26.94	Pass
4	1.2820	15.32	7.35	9.66	24.98	17.01	56.00	46.00	-31.02	-28.99	Pass
5	1.8660	20.57	13.63	9.69	30.26	23.32	56.00	46.00	-25.74	-22.68	Pass
6	5.2340	10.05	2.30	9.83	19.88	12.13	60.00	50.00	-40.12	-37.87	Pass



6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments

3 Meter Chamber (966-A)					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/18/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/02/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2014	(3)
Test Site	ATL	TE01	888001	08/28/2014	(1)




3 Meter Chamber (966-B)					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/10/2014	(1)
Amplifier	Mini-Circuits	ZKL-1R5+	072010	05/29/2014	(1)
Amplifier	Mini-Circuits	ZVA-213-S+	467900926	05/29/2014	(1)
RF Pre-selector	Agilent	N9039A	MY46520255	01/06/2014	(1)
Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00128055	08/24/2014	(1)
Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	SB AC VULB	9168-419	05/10/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2014	(3)
Test Site	ATL	TE09	TE09	05/10/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup

Below 1GHz

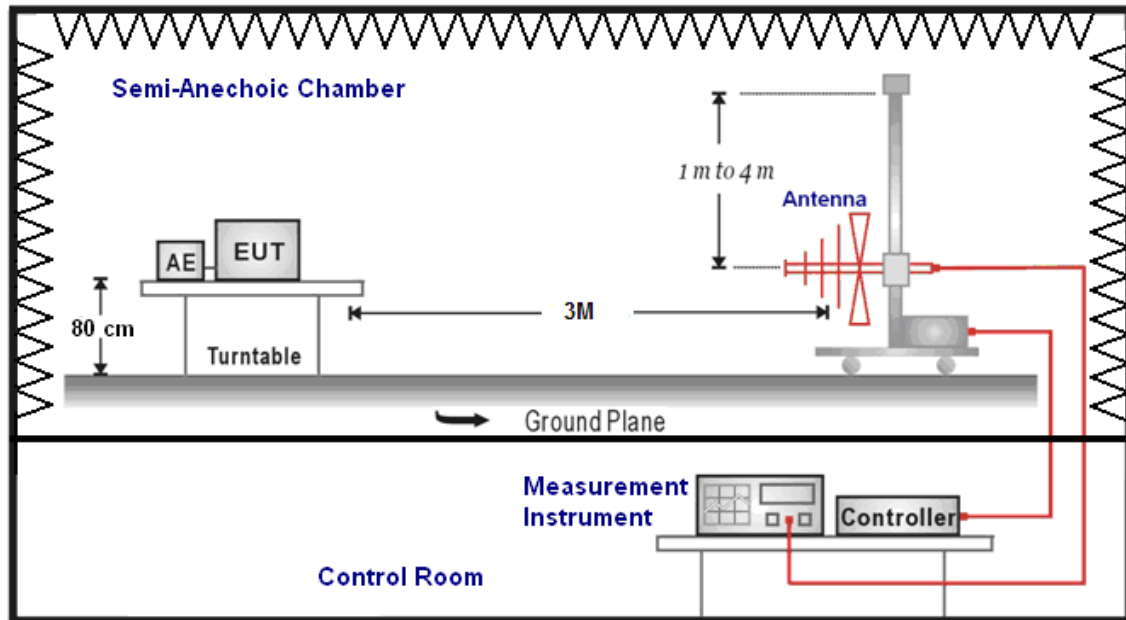

Above 1GHz

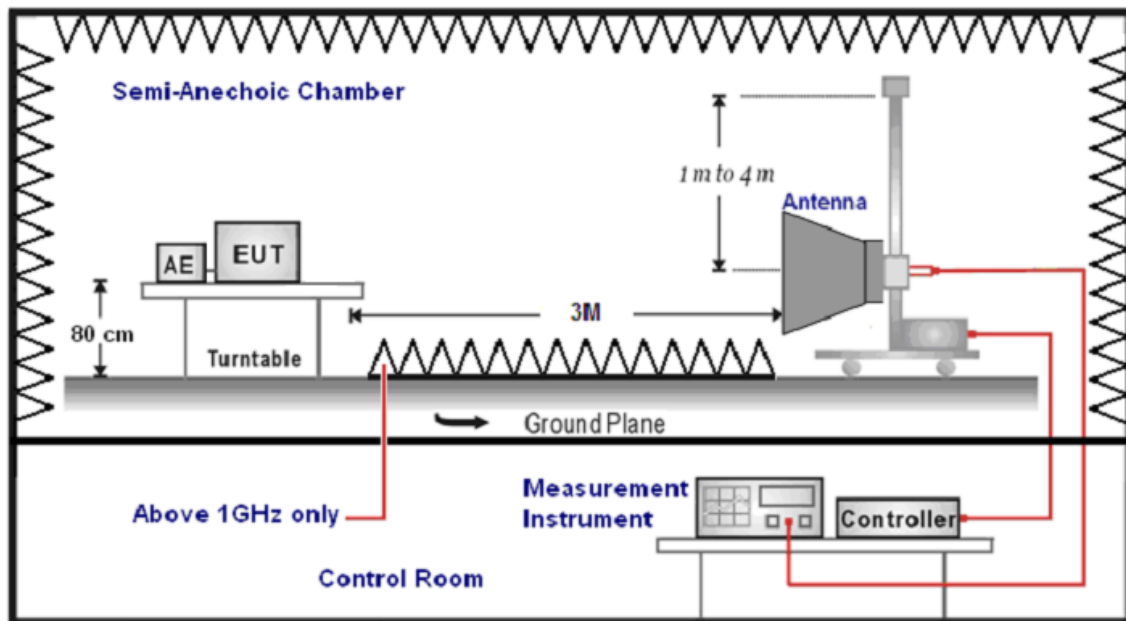



6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



6.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		T1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		01/22/2015	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
150.5000	25.20	-12.08	13.12	43.50	-30.38	QP	H
299.5000	25.33	-10.50	14.83	46.00	-31.17	QP	H
443.0000	26.06	-7.59	18.47	46.00	-27.53	QP	H
579.0000	26.13	-4.83	21.30	46.00	-24.70	QP	H
707.5000	26.35	-2.43	23.92	46.00	-22.08	QP	H
847.0000	25.37	0.33	25.70	46.00	-20.30	QP	H
124.5000	28.39	-14.11	14.28	43.50	-29.22	QP	V
186.0000	29.10	-13.76	15.34	43.50	-28.16	QP	V
366.0000	25.41	-9.22	16.19	46.00	-29.81	QP	V
510.0000	26.41	-6.37	20.04	46.00	-25.96	QP	V
678.0000	26.84	-3.02	23.82	46.00	-22.18	QP	V
855.0000	25.84	0.49	26.33	46.00	-19.67	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).



Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	T1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	01/22/2015		
Frequency:	2402 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	36.64	-0.48	36.16	74.00	-37.84	peak	H
4591.000	34.16	4.01	38.17	74.00	-35.83	peak	H
6670.000	34.51	9.45	43.96	74.00	-30.04	peak	H
3023.000	35.51	-0.48	35.03	74.00	-38.97	peak	V
4591.000	34.54	4.01	38.55	74.00	-35.45	peak	V
6691.000	33.88	9.50	43.38	74.00	-30.62	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	T1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	01/22/2015		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.58	-0.45	36.13	74.00	-37.87	peak	H
4626.000	34.32	4.10	38.42	74.00	-35.58	peak	H
6705.000	34.07	9.54	43.61	74.00	-30.39	peak	H
3030.000	37.82	-0.45	37.37	74.00	-36.63	peak	V
4577.000	33.74	3.98	37.72	74.00	-36.28	peak	V
6691.000	33.80	9.50	43.30	74.00	-30.70	peak	V



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		T1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		01/22/2015	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	36.61	-0.44	36.17	74.00	-37.83	peak	H
4570.000	35.07	3.97	39.04	74.00	-34.96	peak	H
6705.000	33.80	9.54	43.34	74.00	-30.66	peak	H
3037.000	36.97	-0.44	36.53	74.00	-37.47	peak	V
4605.000	35.14	4.05	39.19	74.00	-34.81	peak	V
6677.000	34.69	9.46	44.15	74.00	-29.85	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		T1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		01/22/2015	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	36.17	-0.48	35.69	74.00	-38.31	peak	H
4577.000	35.45	3.98	39.43	74.00	-34.57	peak	H
6691.000	33.08	9.50	42.58	74.00	-31.42	peak	H
3051.000	38.09	-0.40	37.69	74.00	-36.31	peak	V
4598.000	35.94	4.04	39.98	74.00	-34.02	peak	V
6719.000	35.39	9.58	44.97	74.00	-29.03	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	T1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	01/22/2015		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	35.85	-0.54	35.31	74.00	-38.69	peak	H
4570.000	34.05	3.97	38.02	74.00	-35.98	peak	H
6677.000	33.42	9.46	42.88	74.00	-31.12	peak	H
2981.000	36.59	-0.59	36.00	74.00	-38.00	peak	V
4542.000	34.44	3.89	38.33	74.00	-35.67	peak	V
6670.000	32.94	9.45	42.39	74.00	-31.61	peak	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	T1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	01/22/2015		
Frequency:	2480 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.14	-0.40	36.74	74.00	-37.26	peak	H
4619.000	34.55	4.10	38.65	74.00	-35.35	peak	H
6705.000	33.01	9.54	42.55	74.00	-31.45	peak	H
2995.000	37.00	-0.55	36.45	74.00	-37.55	peak	V
4591.000	34.01	4.01	38.02	74.00	-35.98	peak	V
6691.000	33.86	9.50	43.36	74.00	-30.64	peak	V

7 20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

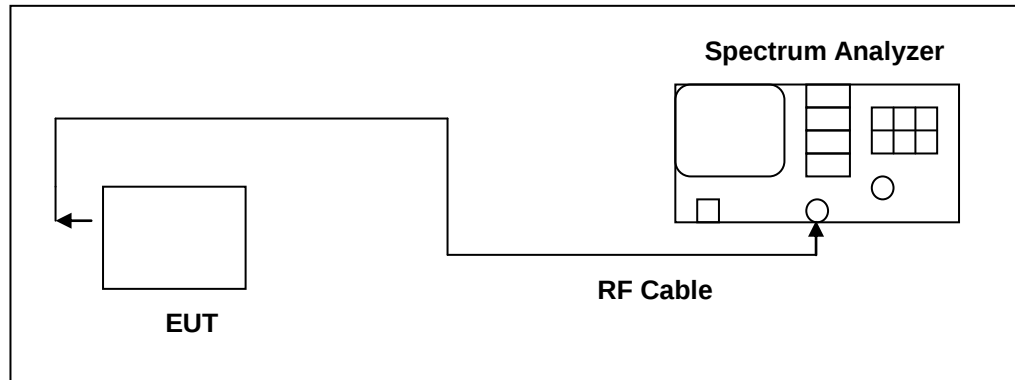

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY46181842	11/05/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW $\geq 1\%$ of the 20dB span, VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.



99 % Occupied Bandwidth

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	T1		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	0.966	0.897	-----
2441	1.046	0.908	-----
2480	1.043	0.906	-----




Model Number	T1		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 4: 8DPSK Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	1.283	1.160	-----
2441	1.298	1.172	-----
2480	1.273	1.158	-----



7.6. Test Graphs



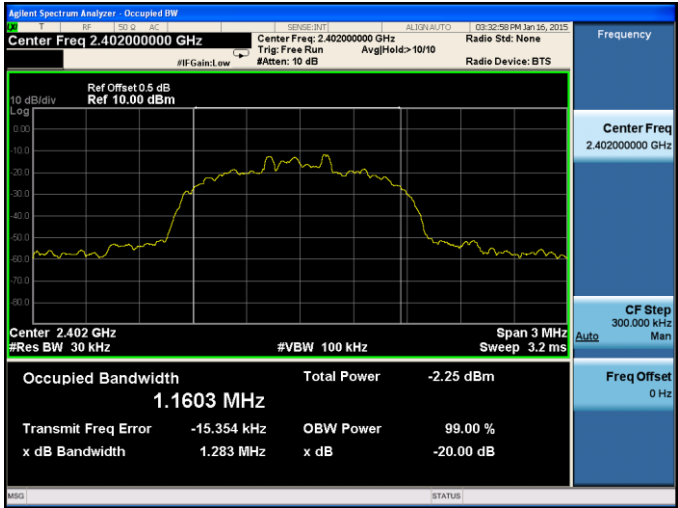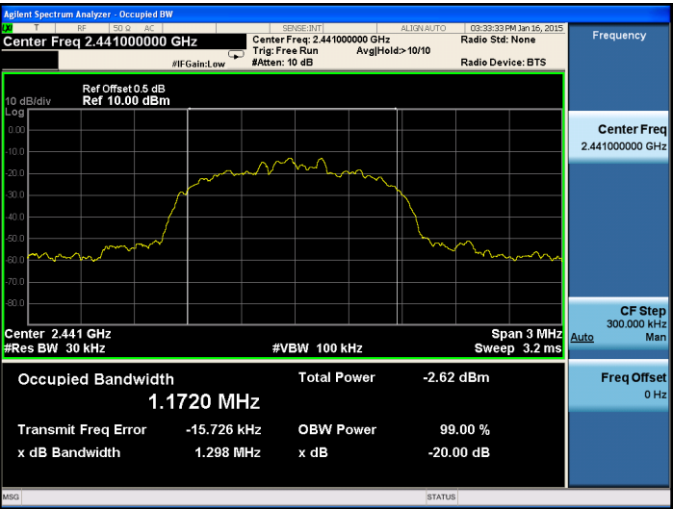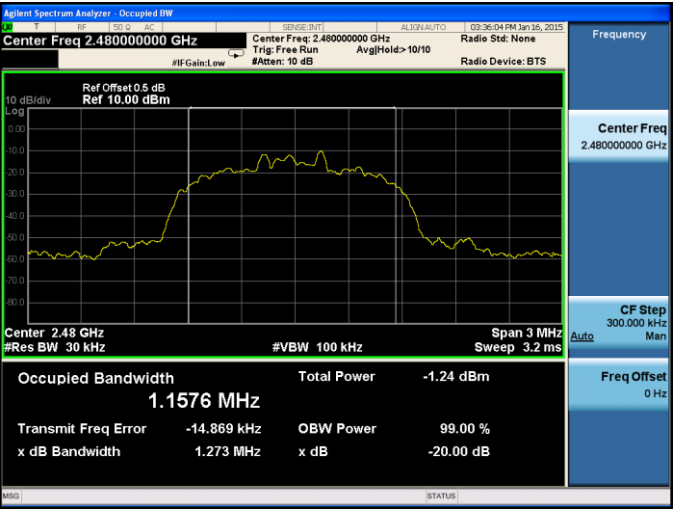


Mode 4: 8DPSK Mode	
2402	
2441	
2480	

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth.

8.2. Test Setup

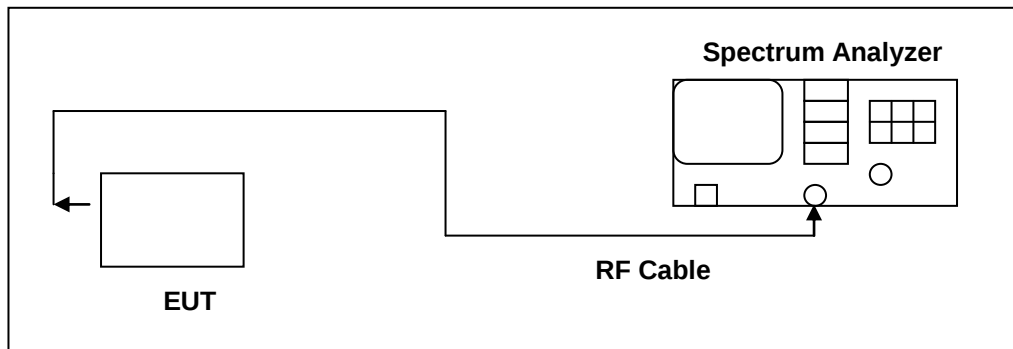

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY46181842	11/05/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.




8.5. Test Result


Model Number	T1		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	1	>0.644	
2441	1	>0.697	
2480	1	>0.695	

Model Number	T1		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 4: 8DPSK Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	1	>0.855	
2441	1	>0.865	
2480	1	>0.849	



8.6. Test Graphs

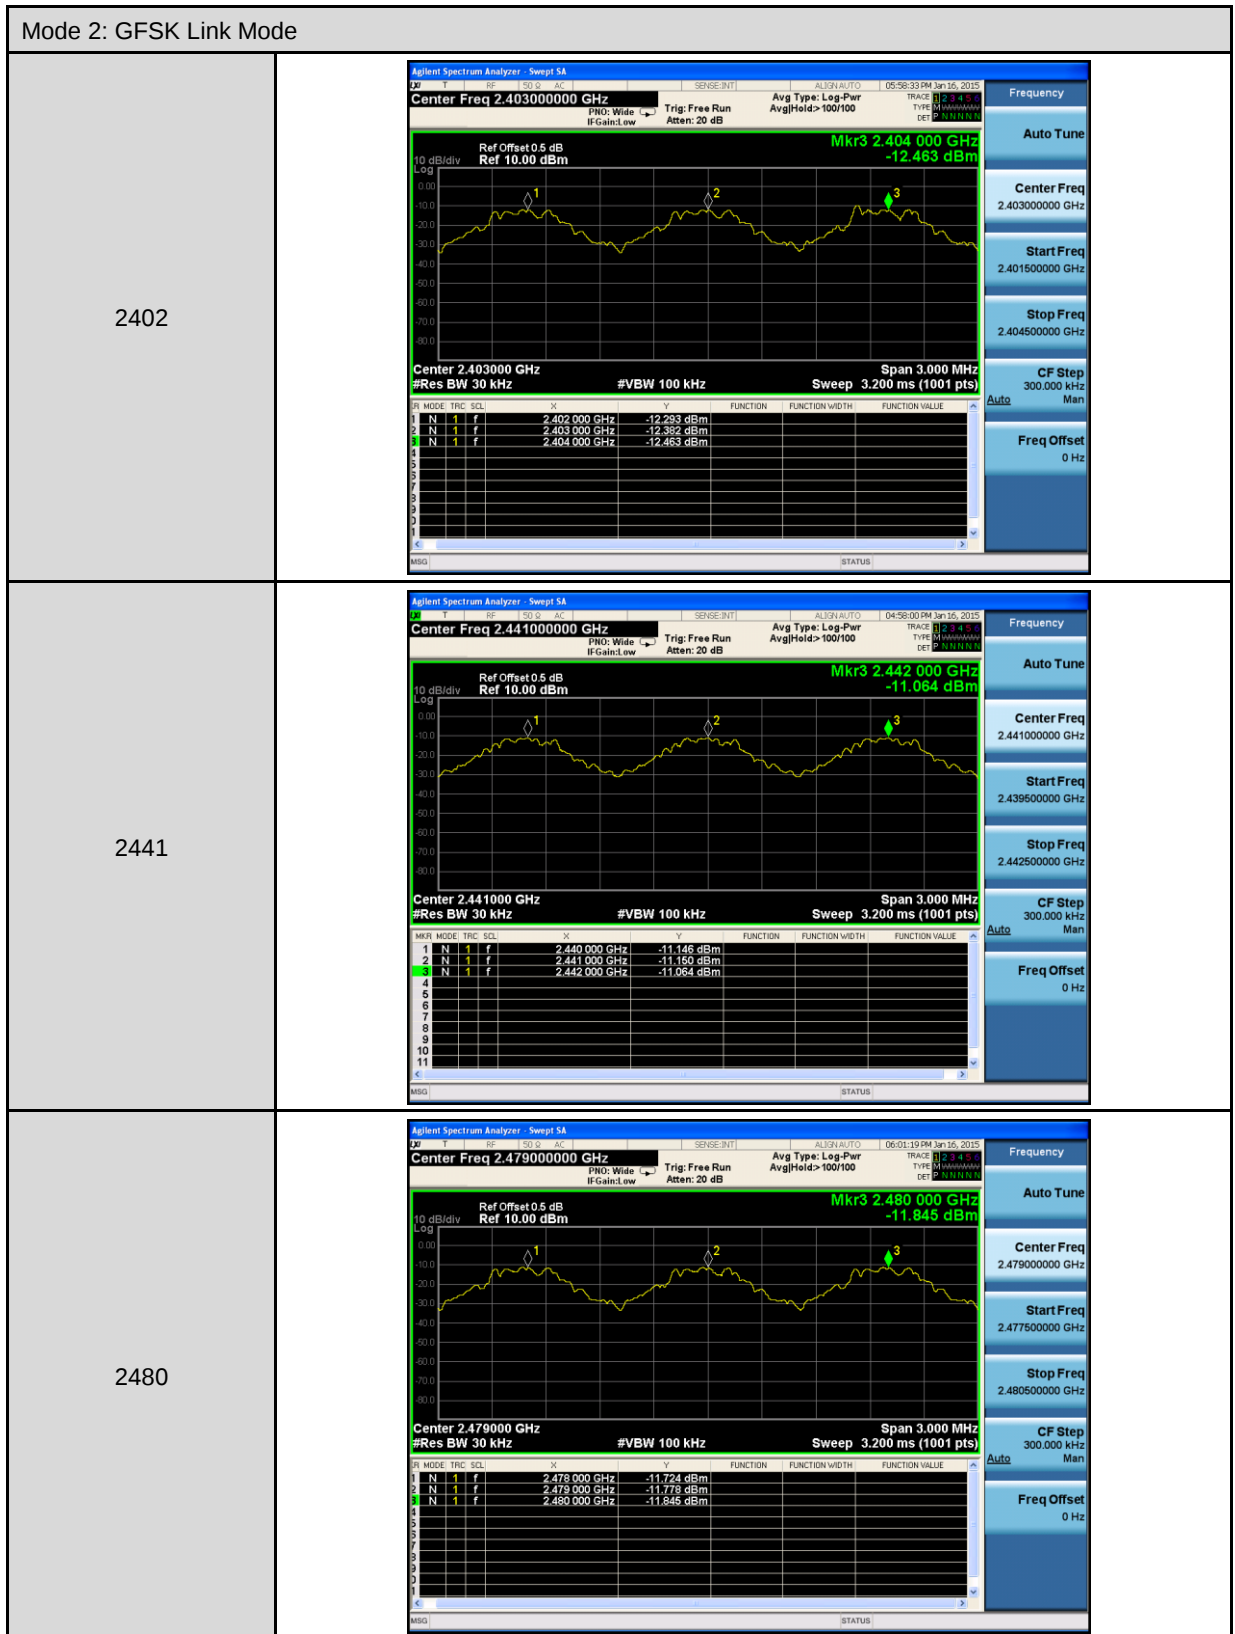

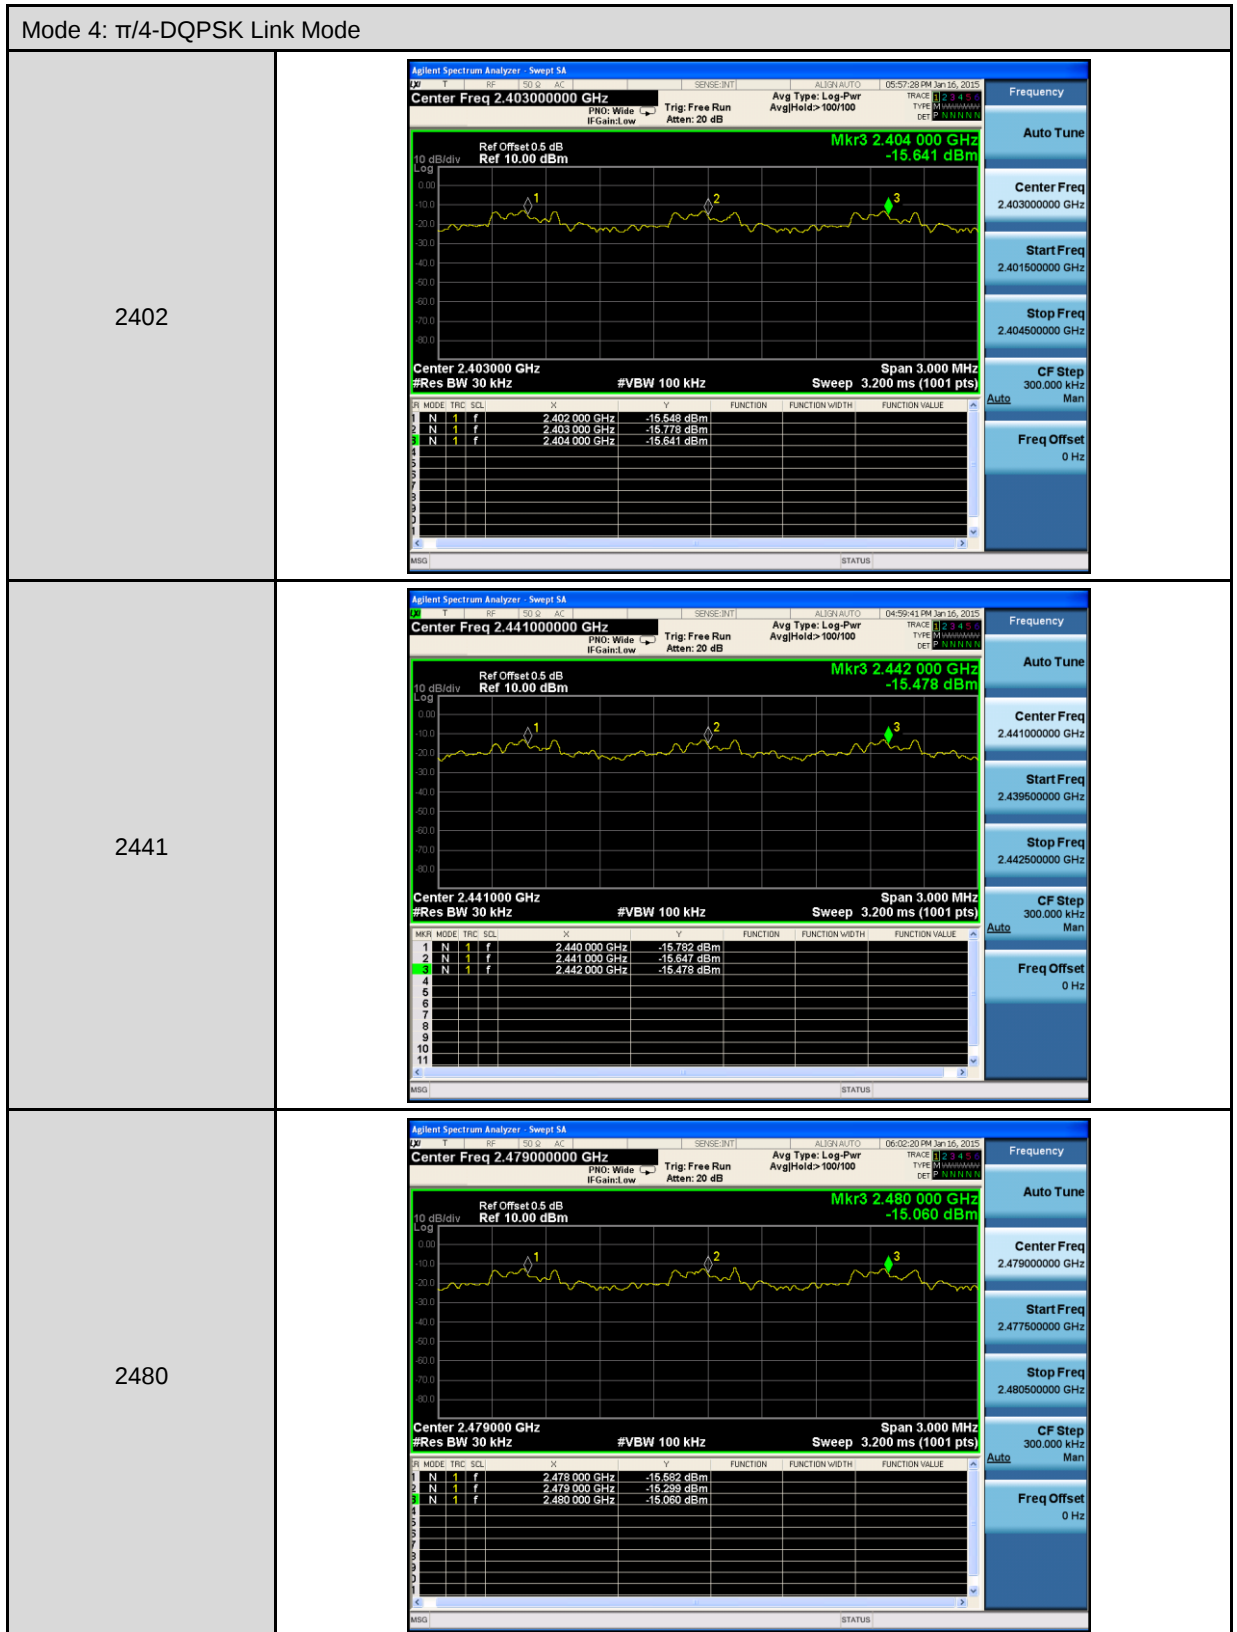


9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

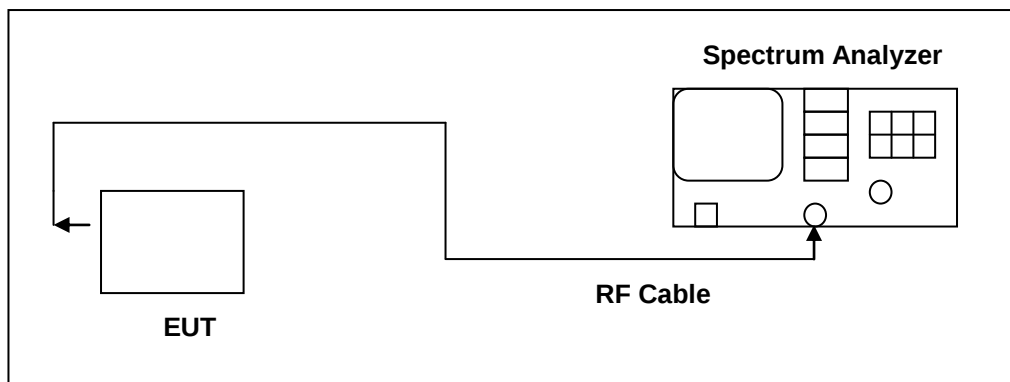

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY46181842	11/05/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW $\geq 1\%$ of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.




9.5. Test Result

Model Number	T1		
Test Item	Number of Hopping		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)	Limit (ch)	
2402 - 2480	79	> 15	

Model Number	T1		
Test Item	Number of Hopping		
Test Mode	Mode 4: 8DPSK Mode		
Date of Test	01/16/2015	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)	Limit (ch)	
2402 - 2480	79	> 15	




9.6. Test Graphs

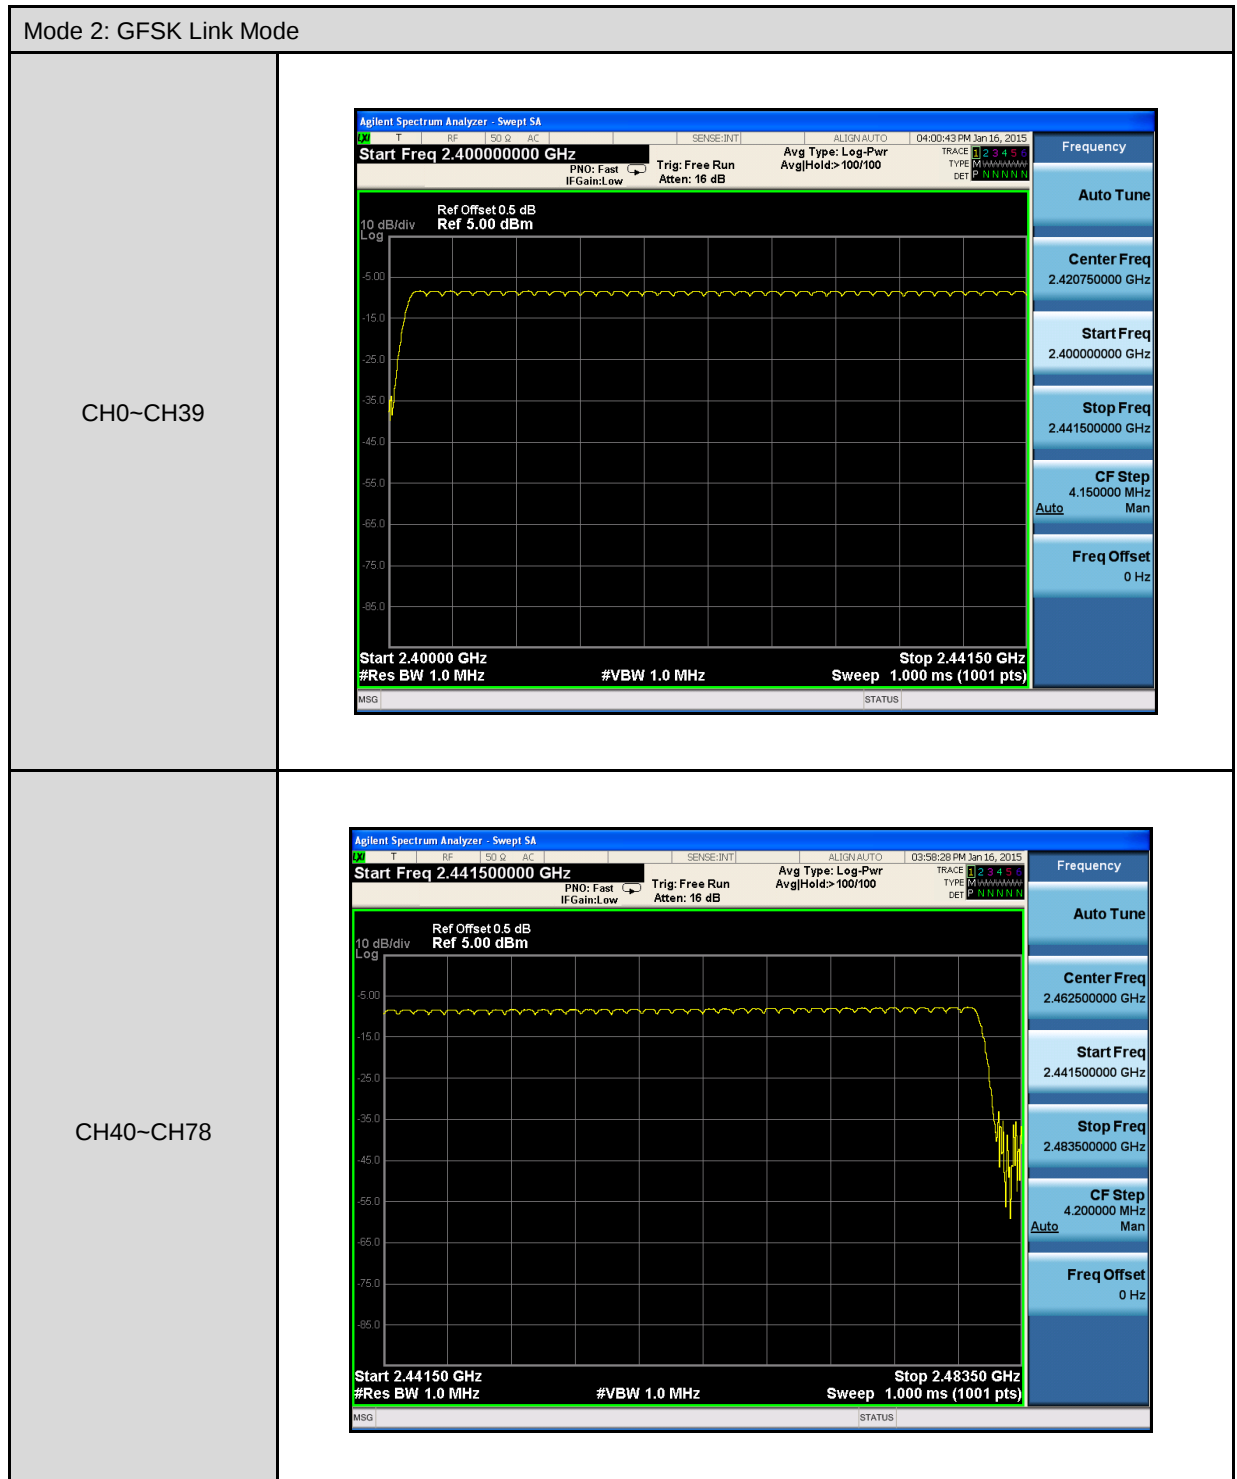




Mode 4: 8DPSK Mode

CH0~CH39

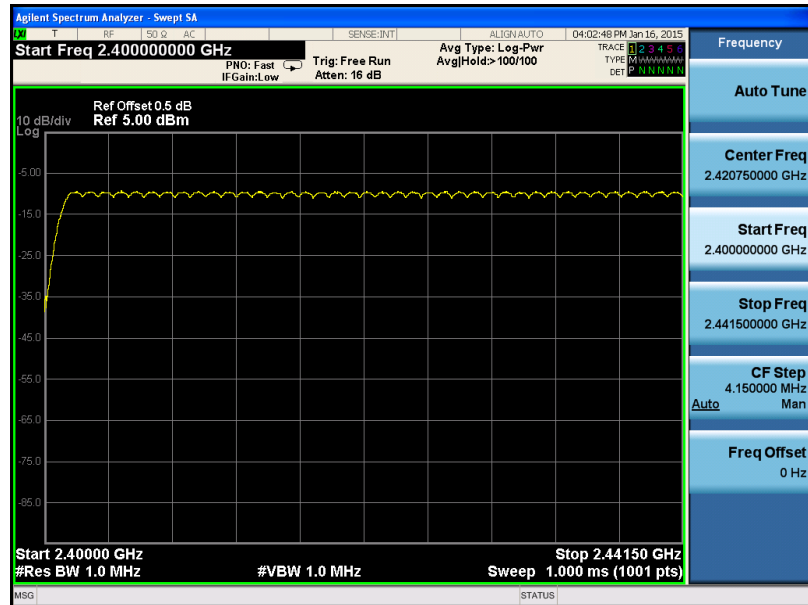

CH40~CH78

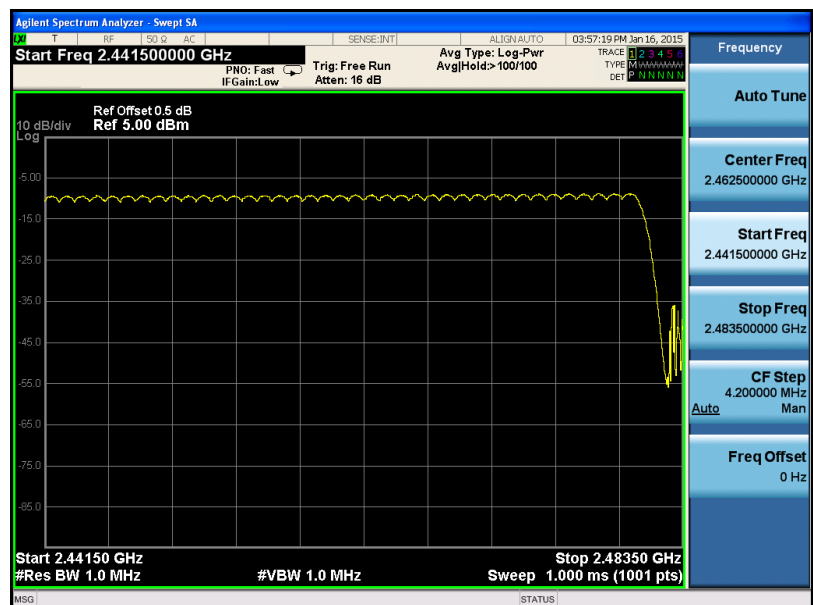


10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

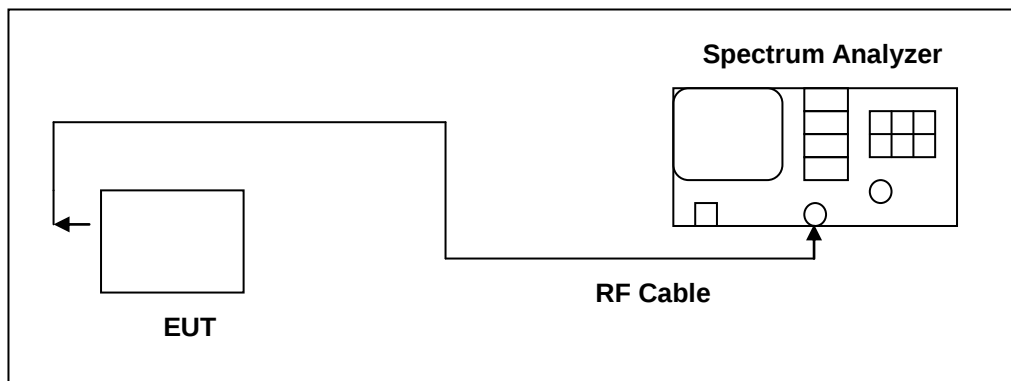

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY46181842	11/05/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.



10.5. Test Result


Model Number	T1		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	01/16/2015	Test Site	TE02
DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.410 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	131.2443 ms (sec)		
LIMIT(msec)	< = 400		
DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.06(times/sec)		
Each Channel Dwell Times (1)	1.660 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 159.896(times)		
Dwell Times on Cycle (1) * (2)	265.4274 ms (sec)		
LIMIT(msec)	< = 400		
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.38(times/sec)		
Each Channel Dwell Times (1)	2.910 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.808(times)		
Dwell Times on Cycle (1) * (2)	310.8113 ms (sec)		
LIMIT(msec)	< = 400		






Model Number	T1		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 4: 8DPSK Mode		
Date of Test	01/16/2015	Test Site	TE02
3DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.410 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	131.2443 ms (sec)		
LIMIT(msec)	< = 400		
3DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.06(times/sec)		
Each Channel Dwell Times (1)	1.660 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 5.06 = 159.896(times)		
Dwell Times on Cycle (1) * (2)	265.4734 ms (sec)		
LIMIT(msec)	< = 400		
3DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.38(times/sec)		
Each Channel Dwell Times (1)	2.910 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 3.38 = 106.808(times)		
Dwell Times on Cycle (1) * (2)	310.8113 ms (sec)		
LIMIT(msec)	< = 400		



10.6. Test Graphs

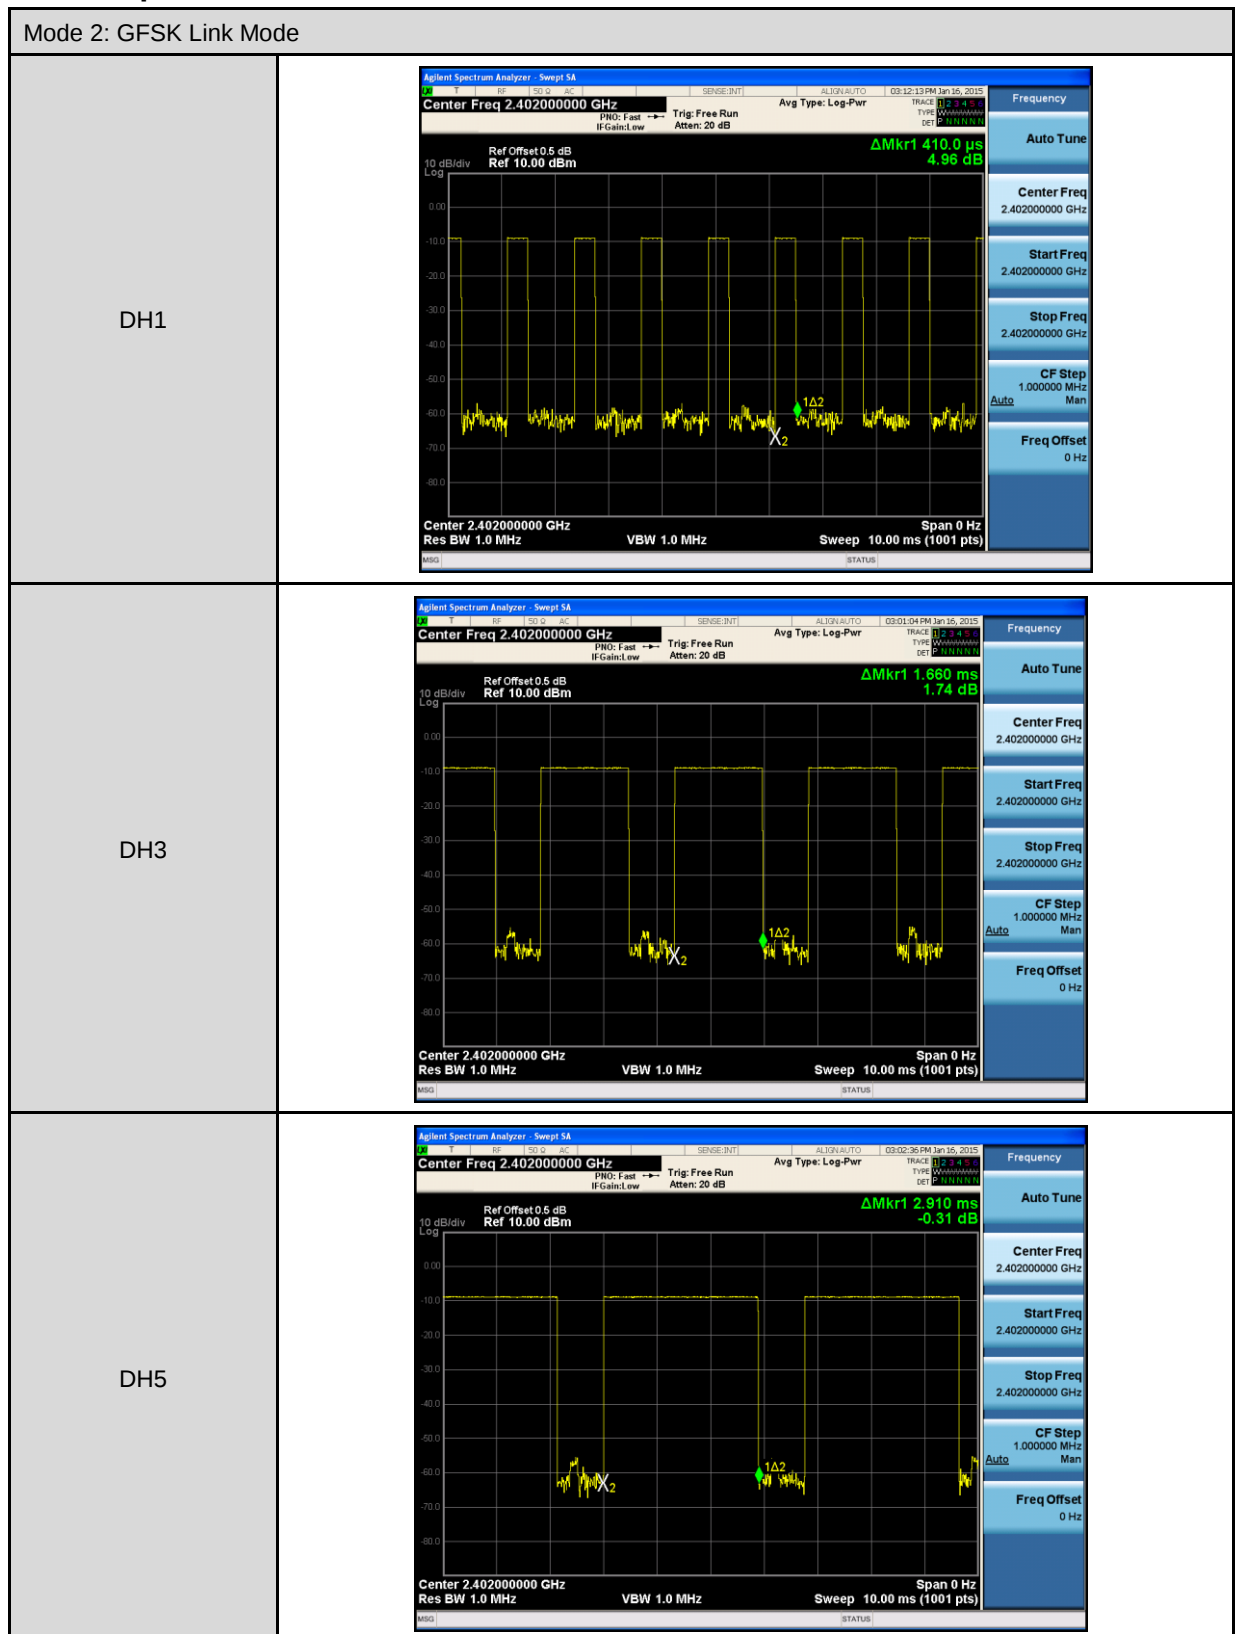

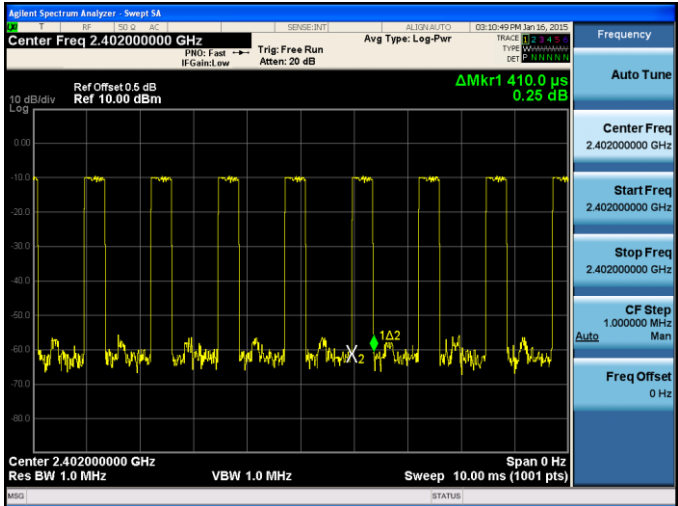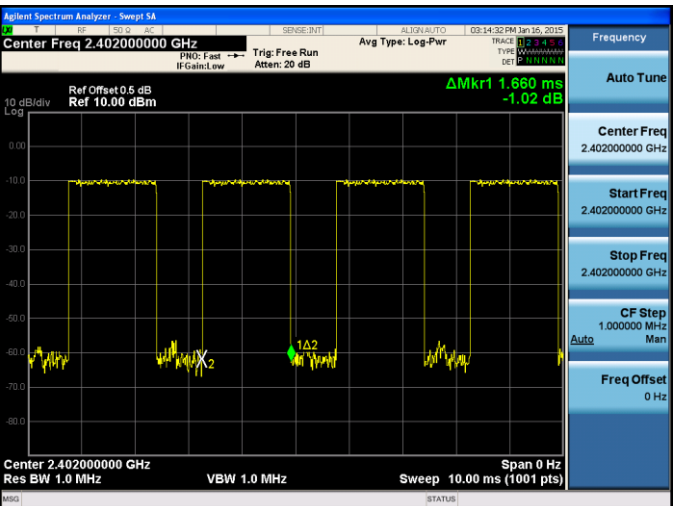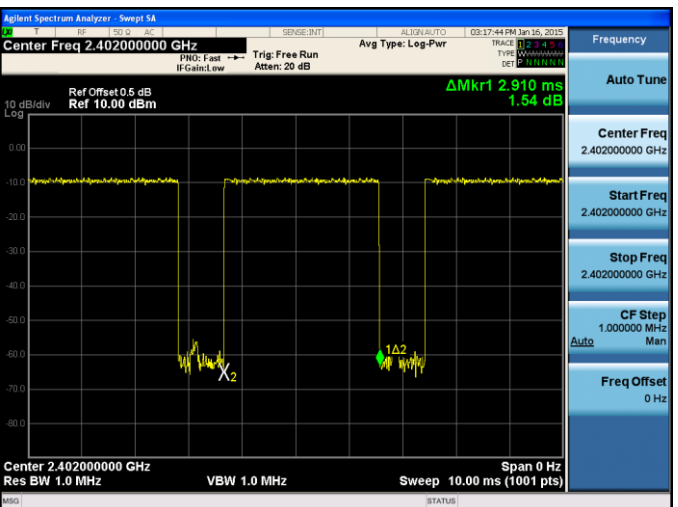


Mode 4: 8DPSK Mode	
2DH1	
2DH3	
2DH5	

11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup

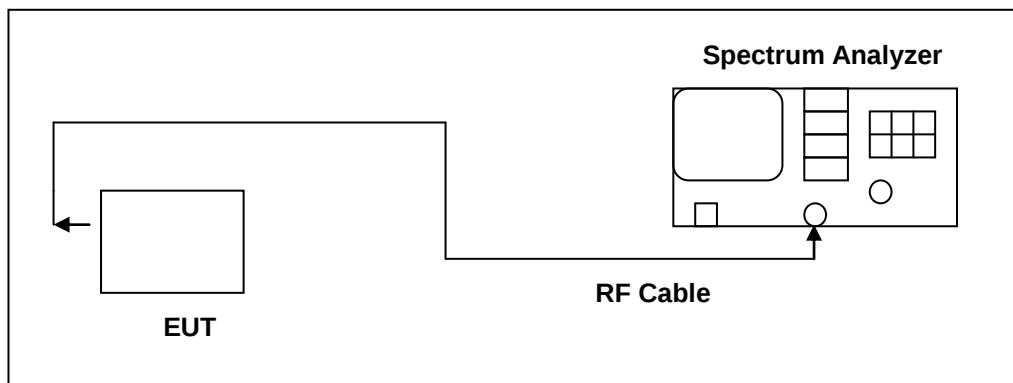

11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY46181842	11/05/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.




NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78), and the setting value of instrument are as below: Decetor=Peak, RBW=100kHz, VBW=300kHz



11.5. Test Graphs

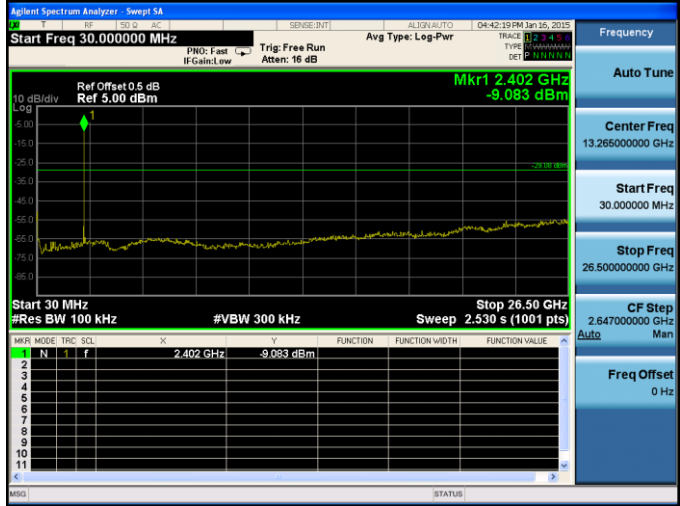
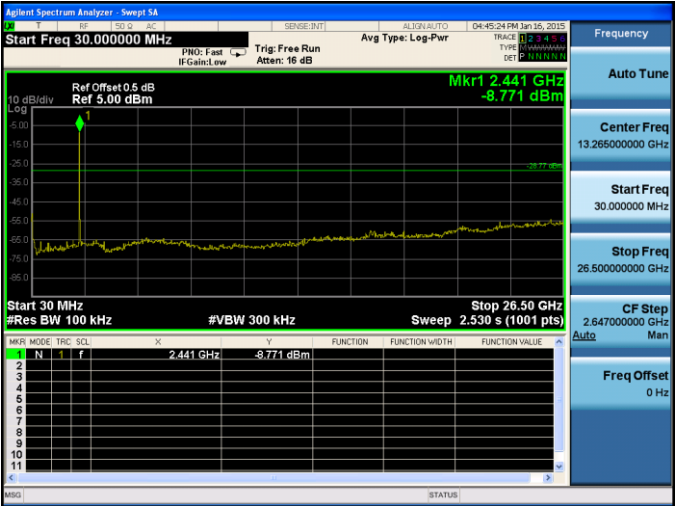
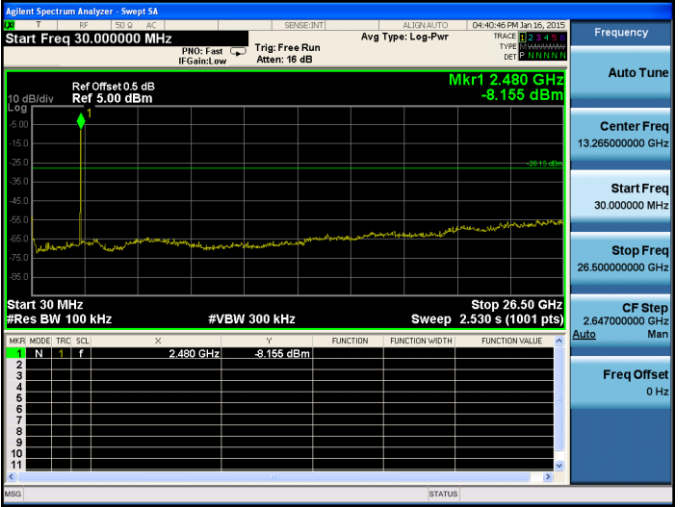
Mode 2: GFSK Link Mode	
2402	
2441	
2480	

Note: No emissions were found between 9 kHz to 30 MHz.



Mode 2: GFSK Link Mode(Bandedge)	
2402	Agilent Spectrum Analyzer - Swept SA Center Freq 2.400000000 GHz Ref Offset: 0.5 dB Ref 15.00 dBm 10 dB/div Log 5.00 0.00 -5.00 -15.00 -25.00 -35.00 -45.00 -55.00 -65.00 -75.00 Center 2.400000 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 1.000 ms (1001 pts) Span 8.000 MHz Avg Type: Log-Pwr Trig: Free Run Atten: 26 dB PRF: Wide IF Gain: Low 2.402112 GHz -1.57 dBm 2.400000 GHz -60.51 dBm FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 2.402112 GHz -1.57 dBm 2 N 1 f 2.400000 GHz -60.51 dBm 3 N 1 f 2.400000 GHz -60.51 dBm 4 N 1 f 2.400000 GHz -60.51 dBm 5 N 1 f 2.400000 GHz -60.51 dBm 6 N 1 f 2.400000 GHz -60.51 dBm 7 N 1 f 2.400000 GHz -60.51 dBm 8 N 1 f 2.400000 GHz -60.51 dBm 9 N 1 f 2.400000 GHz -60.51 dBm 10 N 1 f 2.400000 GHz -60.51 dBm 11 N 1 f 2.400000 GHz -60.51 dBm 12 N 1 f 2.400000 GHz -60.51 dBm 13 N 1 f 2.400000 GHz -60.51 dBm 14 N 1 f 2.400000 GHz -60.51 dBm 15 N 1 f 2.400000 GHz -60.51 dBm 16 N 1 f 2.400000 GHz -60.51 dBm 17 N 1 f 2.400000 GHz -60.51 dBm 18 N 1 f 2.400000 GHz -60.51 dBm 19 N 1 f 2.400000 GHz -60.51 dBm 20 N 1 f 2.400000 GHz -60.51 dBm 21 N 1 f 2.400000 GHz -60.51 dBm 22 N 1 f 2.400000 GHz -60.51 dBm 23 N 1 f 2.400000 GHz -60.51 dBm 24 N 1 f 2.400000 GHz -60.51 dBm 25 N 1 f 2.400000 GHz -60.51 dBm 26 N 1 f 2.400000 GHz -60.51 dBm 27 N 1 f 2.400000 GHz -60.51 dBm 28 N 1 f 2.400000 GHz -60.51 dBm 29 N 1 f 2.400000 GHz -60.51 dBm 30 N 1 f 2.400000 GHz -60.51 dBm 31 N 1 f 2.400000 GHz -60.51 dBm 32 N 1 f 2.400000 GHz -60.51 dBm 33 N 1 f 2.400000 GHz -60.51 dBm 34 N 1 f 2.400000 GHz -60.51 dBm 35 N 1 f 2.400000 GHz -60.51 dBm 36 N 1 f 2.400000 GHz -60.51 dBm 37 N 1 f 2.400000 GHz -60.51 dBm 38 N 1 f 2.400000 GHz -60.51 dBm 39 N 1 f 2.400000 GHz -60.51 dBm 40 N 1 f 2.400000 GHz -60.51 dBm 41 N 1 f 2.400000 GHz -60.51 dBm 42 N 1 f 2.400000 GHz -60.51 dBm 43 N 1 f 2.400000 GHz -60.51 dBm 44 N 1 f 2.400000 GHz -60.51 dBm 45 N 1 f 2.400000 GHz -60.51 dBm 46 N 1 f 2.400000 GHz -60.51 dBm 47 N 1 f 2.400000 GHz -60.51 dBm 48 N 1 f 2.400000 GHz -60.51 dBm 49 N 1 f 2.400000 GHz -60.51 dBm 50 N 1 f 2.400000 GHz -60.51 dBm 51 N 1 f 2.400000 GHz -60.51 dBm 52 N 1 f 2.400000 GHz -60.51 dBm 53 N 1 f 2.400000 GHz -60.51 dBm 54 N 1 f 2.400000 GHz -60.51 dBm 55 N 1 f 2.400000 GHz -60.51 dBm 56 N 1 f 2.400000 GHz -60.51 dBm 57 N 1 f 2.400000 GHz -60.51 dBm 58 N 1 f 2.400000 GHz -60.51 dBm 59 N 1 f 2.400000 GHz -60.51 dBm 60 N 1 f 2.400000 GHz -60.51 dBm 61 N 1 f 2.400000 GHz -60.51 dBm 62 N 1 f 2.400000 GHz -60.51 dBm 63 N 1 f 2.400000 GHz -60.51 dBm 64 N 1 f 2.400000 GHz -60.51 dBm 65 N 1 f 2.400000 GHz -60.51 dBm 66 N 1 f 2.400000 GHz -60.51 dBm 67 N 1 f 2.400000 GHz -60.51 dBm 68 N 1 f 2.400000 GHz -60.51 dBm 69 N 1 f 2.400000 GHz -60.51 dBm 70 N 1 f 2.400000 GHz -60.51 dBm 71 N 1 f 2.400000 GHz -60.51 dBm 72 N 1 f 2.400000 GHz -60.51 dBm 73 N 1 f 2.400000 GHz -60.51 dBm 74 N 1 f 2.400000 GHz -60.51 dBm 75 N 1 f 2.400000 GHz -60.51 dBm 76 N 1 f 2.400000 GHz -60.51 dBm 77 N 1 f 2.400000 GHz -60.51 dBm 78 N 1 f 2.400000 GHz -60.51 dBm 79 N 1 f 2.400000 GHz -60.51 dBm 80 N 1 f 2.400000 GHz -60.51 dBm 81 N 1 f 2.400000 GHz -60.51 dBm 82 N 1 f 2.400000 GHz -60.51 dBm 83 N 1 f 2.400000 GHz -60.51 dBm 84 N 1 f 2.400000 GHz -60.51 dBm 85 N 1 f 2.400000 GHz -60.51 dBm 86 N 1 f 2.400000 GHz -60.51 dBm 87 N 1 f 2.400000 GHz -60.51 dBm 88 N 1 f 2.400000 GHz -60.51 dBm 89 N 1 f 2.400000 GHz -60.51 dBm 90 N 1 f 2.400000 GHz -60.51 dBm 91 N 1 f 2.400000 GHz -60.51 dBm 92 N 1 f 2.400000 GHz -60.51 dBm 93 N 1 f 2.400000 GHz -60.51 dBm 94 N 1 f 2.400000 GHz -60.51 dBm 95 N 1 f 2.400000 GHz -60.51 dBm 96 N 1 f 2.400000 GHz -60.51 dBm 97 N 1 f 2.400000 GHz -60.51 dBm 98 N 1 f 2.400000 GHz -60.51 dBm 99 N 1 f 2.400000 GHz -60.51 dBm 100 N 1 f 2.400000 GHz -60.51 dBm 101 N 1 f 2.400000 GHz -60.51 dBm 102 N 1 f 2.400000 GHz -60.51 dBm 103 N 1 f 2.400000 GHz -60.51 dBm 104 N 1 f 2.400000 GHz -60.51 dBm 105 N 1 f 2.400000 GHz -60.51 dBm 106 N 1 f 2.400000 GHz -60.51 dBm 107 N 1 f 2.400000 GHz -60.51 dBm 108 N 1 f 2.400000 GHz -60.51 dBm 109 N 1 f 2.400000 GHz -60.51 dBm 110 N 1 f 2.400000 GHz -60.51 dBm 111 N 1 f 2.400000 GHz -60.51 dBm 112 N 1 f 2.400000 GHz -60.51 dBm 113 N 1 f 2.400000 GHz -60.51 dBm 114 N 1 f 2.400000 GHz -60.51 dBm 115 N 1 f 2.400000 GHz -60.51 dBm 116 N 1 f 2.400000 GHz -60.51 dBm 117 N 1 f 2.400000 GHz -60.51 dBm 118 N 1 f 2.400000 GHz -60.51 dBm 119 N 1 f 2.400000 GHz -60.51 dBm 120 N 1 f 2.400000 GHz -60.51 dBm 121 N 1 f 2.400000 GHz -60.51 dBm 122 N 1 f 2.400000 GHz -60.51 dBm 123 N 1 f 2.400000 GHz -60.51 dBm 124 N 1 f 2.400000 GHz -60.51 dBm 125 N 1 f 2.400000 GHz -60.51 dBm 126 N 1 f 2.400000 GHz -60.51 dBm 127 N 1 f 2.400000 GHz -60.51 dBm 128 N 1 f 2.400000 GHz -60.51 dBm 129 N 1 f 2.400000 GHz -60.51 dBm 130 N 1 f 2.400000 GHz -60.51 dBm 131 N 1 f 2.400000 GHz -60.51 dBm 132 N 1 f 2.400000 GHz -60.51 dBm 133 N 1 f 2.400000 GHz -60.51 dBm 134 N 1 f 2.400000 GHz -60.51 dBm 135 N 1 f 2.400000 GHz -60.51 dBm 136 N 1 f 2.400000 GHz -60.51 dBm 137 N 1 f 2.400000 GHz -60.51 dBm 138 N 1 f 2.400000 GHz -60.51 dBm 139 N 1 f 2.400000 GHz -60.51 dBm 140 N 1 f 2.400000 GHz -60.51 dBm 141 N 1 f 2.400000 GHz -60.51 dBm 142 N 1 f 2.400000 GHz -60.51 dBm 143 N 1 f 2.400000 GHz -60.51 dBm 144 N 1 f 2.400000 GHz -60.51 dBm 145 N 1 f 2.400000 GHz -60.51 dBm 146 N 1 f 2.400000 GHz -60.51 dBm 147 N 1 f 2.400000 GHz -60.51 dBm 148 N 1 f 2.400000 GHz -60.51 dBm 149 N 1 f 2.400000 GHz -60.51 dBm 150 N 1 f 2.400000 GHz -60.51 dBm 151 N 1 f 2.400000 GHz -60.51 dBm 152 N 1 f 2.400000 GHz -60.51 dBm 153 N 1 f 2.400000 GHz -60.51 dBm 154 N 1 f 2.400000 GHz -60.51 dBm 155 N 1 f 2.400000 GHz -60.51 dBm 156 N 1 f 2.400000 GHz -60.51 dBm 157 N 1 f 2.400000 GHz -60.51 dBm 158 N 1 f 2.400000 GHz -60.51 dBm 159 N 1 f 2.400000 GHz -60.51 dBm 160 N 1 f 2.400000 GHz -60.51 dBm 161 N 1 f 2.400000 GHz -60.51 dBm 162 N 1 f 2.400000 GHz -60.51 dBm 163 N 1 f 2.400000 GHz -60.51 dBm 164 N 1 f 2.400000 GHz -60.51 dBm 165 N 1 f 2.400000 GHz -60.51 dBm 166 N 1 f 2.400000 GHz -60.51 dBm 167 N 1 f 2.400000 GHz -60.51 dBm 168 N 1 f 2.400000 GHz -60.51 dBm 169 N 1 f 2.400000 GHz -60.51 dBm 170 N 1 f 2.400000 GHz -60.51 dBm 171 N 1 f 2.400000 GHz -60.51 dBm 172 N 1 f 2.400000 GHz -60.51 dBm 173 N 1 f 2.400000 GHz -60.51 dBm 174 N 1 f 2.400000 GHz -60.51 dBm 175 N 1 f 2.400000 GHz -60.51 dBm 176 N 1 f 2.400000 GHz -60.51 dBm 177 N 1 f 2.400000 GHz -60.51 dBm 178 N 1 f 2.400000 GHz -60.51 dBm 179 N 1 f 2.400000 GHz -60.51 dBm 180 N 1 f 2.400000 GHz -60.51 dBm 181 N 1 f 2.400000 GHz -60.51 dBm 182 N 1 f 2.400000 GHz -60.51 dBm 183 N 1 f 2.400000 GHz -60.51 dBm 184 N 1 f 2.400000 GHz -60.51 dBm 185 N 1 f 2.400000 GHz -60.51 dBm 186 N 1 f 2.400000 GHz -60.51 dBm 187 N 1 f 2.400000 GHz -60.51 dBm 188 N 1 f 2.400000 GHz -60.51 dBm 189 N 1 f 2.400000 GHz -60.51 dBm 190 N 1 f 2.400000 GHz -60.51 dBm 191 N 1 f 2.400000 GHz -60.51 dBm 192 N 1 f 2.400000 GHz -60.51 dBm 193 N 1 f 2.400000 GHz -60.51 dBm 194 N 1 f 2.400000 GHz -60.51 dBm 195 N 1 f 2.400000 GHz -60.51 dBm 196 N 1 f 2.400000 GHz -60.51 dBm 197 N 1 f 2.400000 GHz -60.51 dBm 198 N 1 f 2.400000 GHz -60.51 dBm 199 N 1 f 2.400000 GHz -60.51 dBm 200 N 1 f 2.400000 GHz -60.51 dBm 201 N 1 f 2.400000 GHz -60.51 dBm 202 N 1 f 2.400000 GHz -60.51 dBm 203 N 1 f 2.400000 GHz -60.51 dBm 204 N 1 f 2.400000 GHz -60.51 dBm 205 N 1 f 2.400000 GHz -60.51 dBm 206 N 1 f 2.400000 GHz -60.51 dBm 207 N 1 f 2.400000 GHz -60.51 dBm 208 N 1 f 2.400000 GHz -60.51 dBm 209 N 1 f 2.400000 GHz -60.51 dBm 210 N 1 f 2.400000 GHz -60.51 dBm 211 N 1 f 2.400000 GHz -60.51 dBm 212 N 1 f 2.400000 GHz -60.51 dBm 213 N 1 f 2.400000 GHz -60.51 dBm 214 N 1 f 2.400000 GHz -60.51 dBm 215 N 1 f 2.400000 GHz -60.51 dBm 216 N 1 f 2.400000 GHz -60.51 dBm 217 N 1 f 2.400000 GHz -60.51 dBm 218 N 1 f 2.400000 GHz -60.51 dBm 219 N 1 f 2.400000 GHz -60.51 dBm 220 N 1 f 2.400000 GHz -60.51 dBm 221 N 1 f 2.400000 GHz -60.51 dBm 222 N 1 f 2.400000 GHz -60.51 dBm 223 N 1 f 2.400000 GHz -60.51 dBm

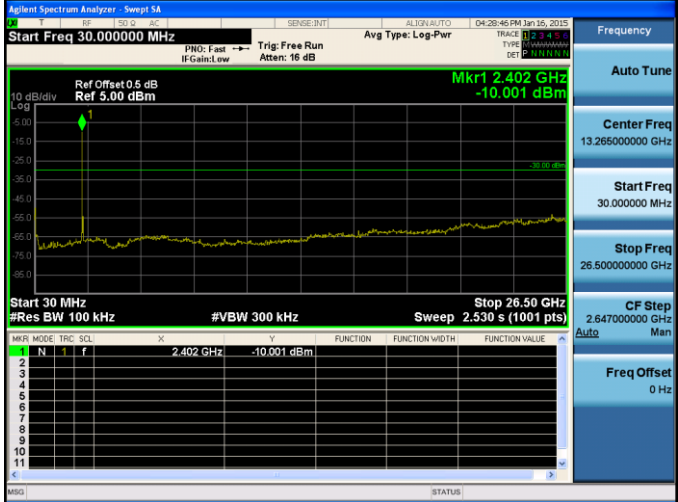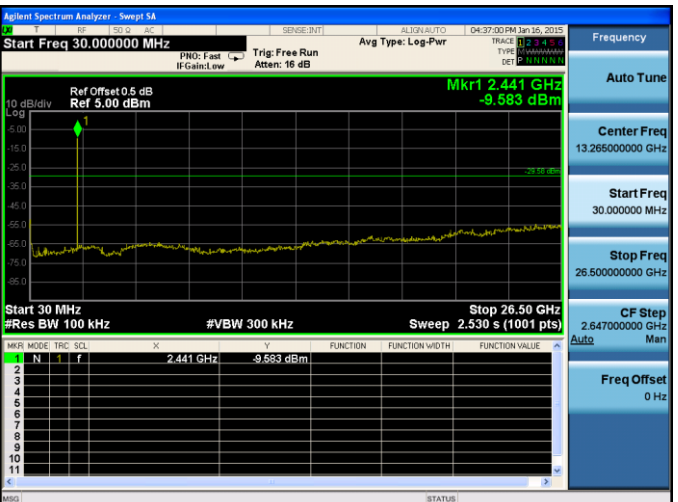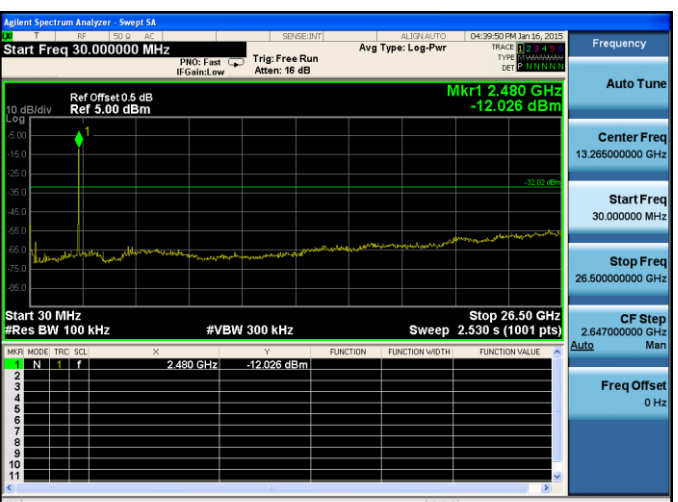


Mode 4: 8DPSK Mode	
2402	
2441	
2480	

Note: No emissions were found between 9 kHz to 30 MHz.




Mode 4: 8DPSK Mode (Bandedge)


2402

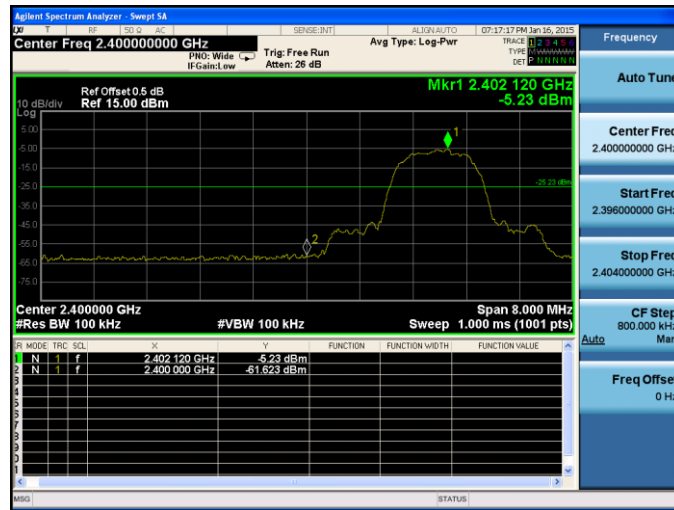

2480

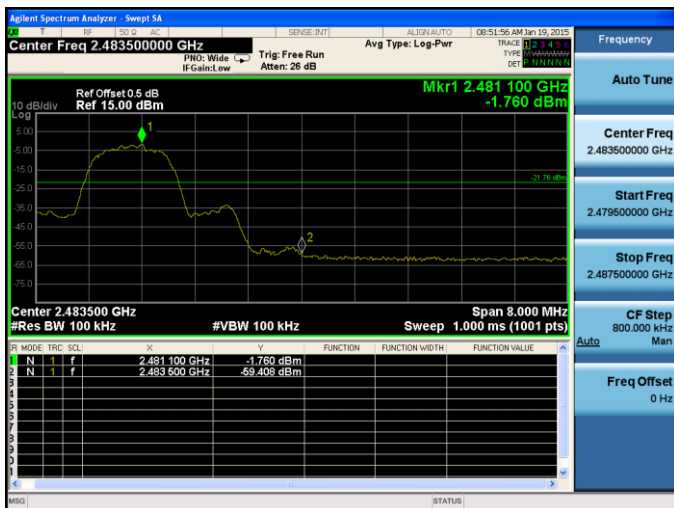

Hopping

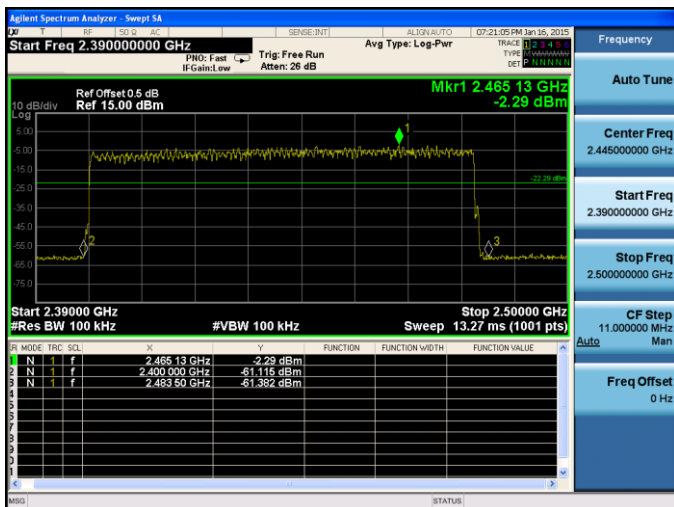


12 Band Edges Measurement

12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.2. Test Setup

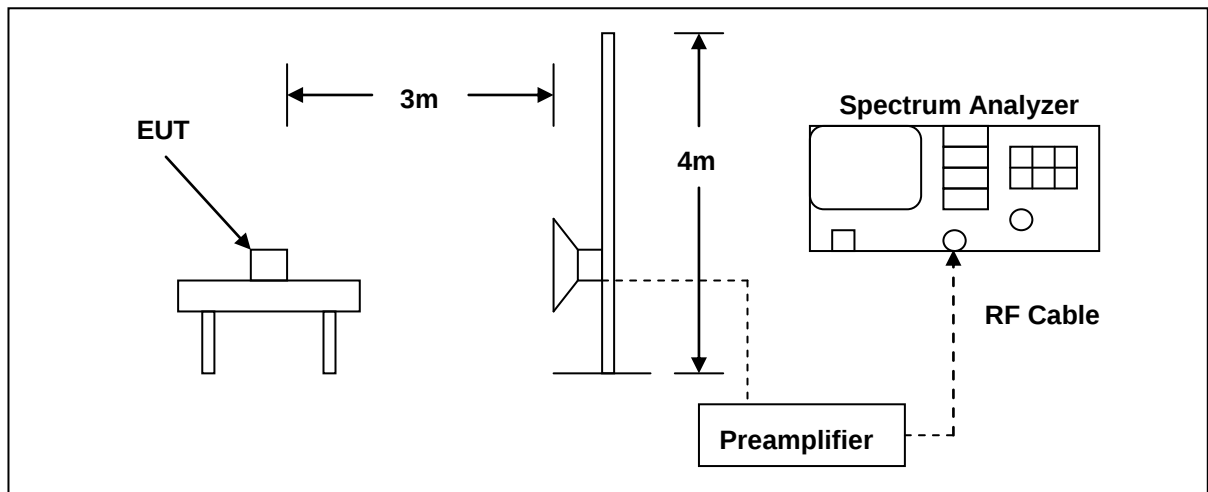

12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/14/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/11/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.



12.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.


The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



12.5. Test Result


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	01/22/2015
Frequency:	2402 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Horizontal		

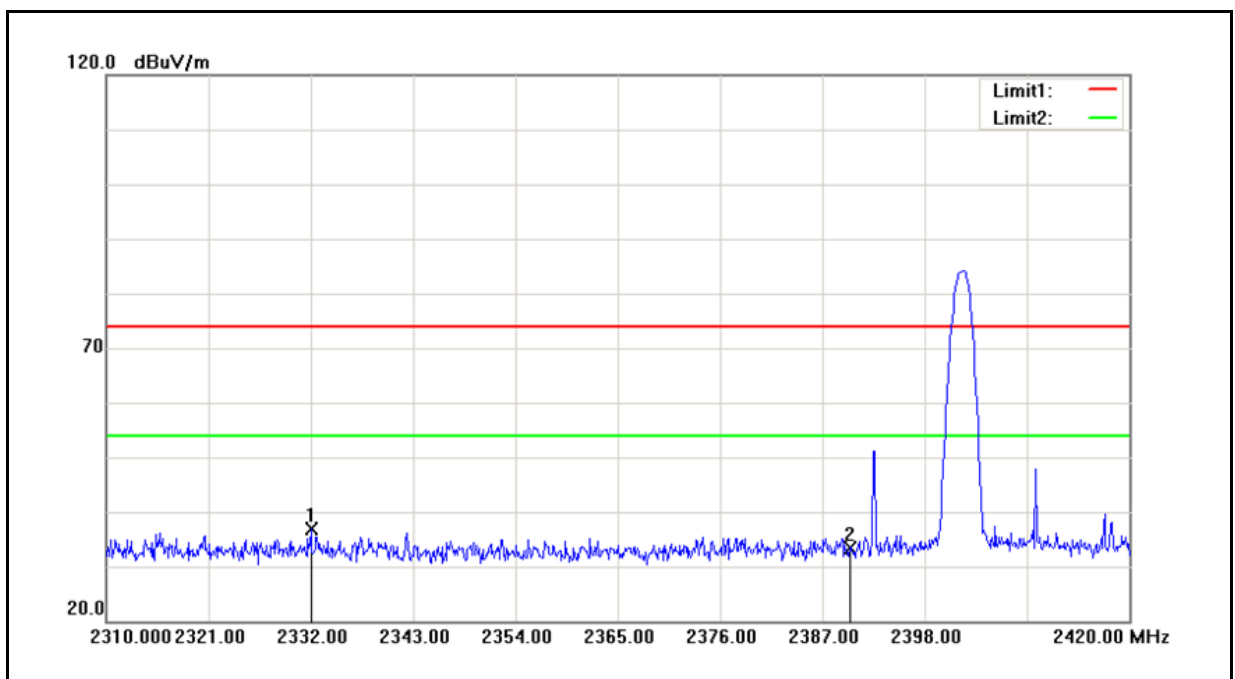

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	39.43	-2.49	36.94	74.00	-37.06	peak
2	2390.000	35.61	-2.24	33.37	74.00	-40.63	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	01/22/2015
Frequency:	2402 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Vertical		

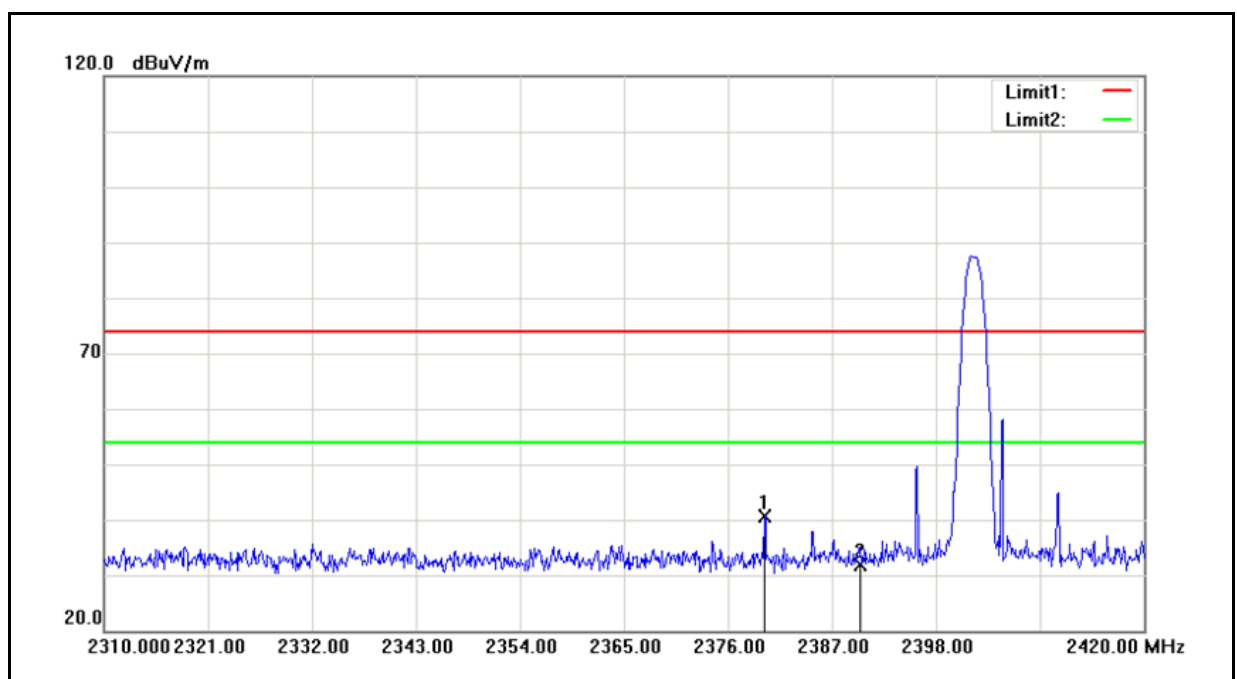

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.850	42.91	-2.29	40.62	74.00	-33.38	peak
2	2390.000	34.15	-2.24	31.91	74.00	-42.09	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	01/22/2015
Frequency:	2480 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Horizontal		

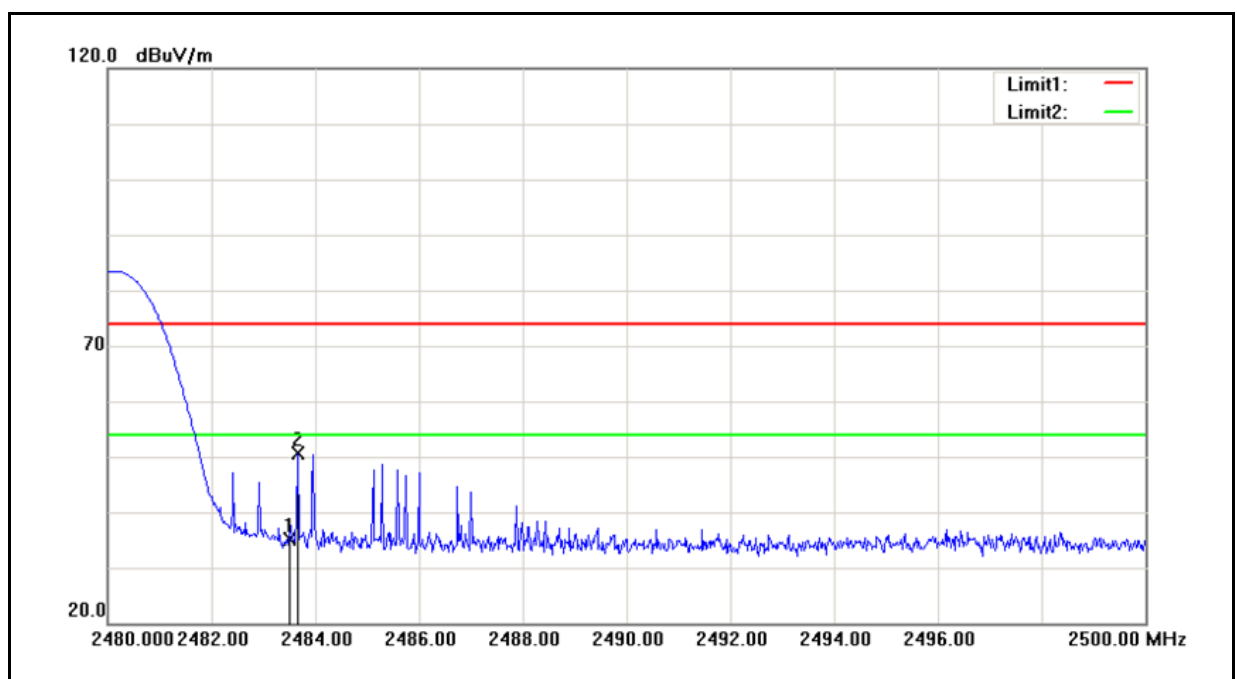

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.94	-1.83	35.11	74.00	-38.89	peak
2	2483.660	52.40	-1.83	50.57	74.00	-23.43	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	01/22/2015
Frequency:	2480 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Vertical		

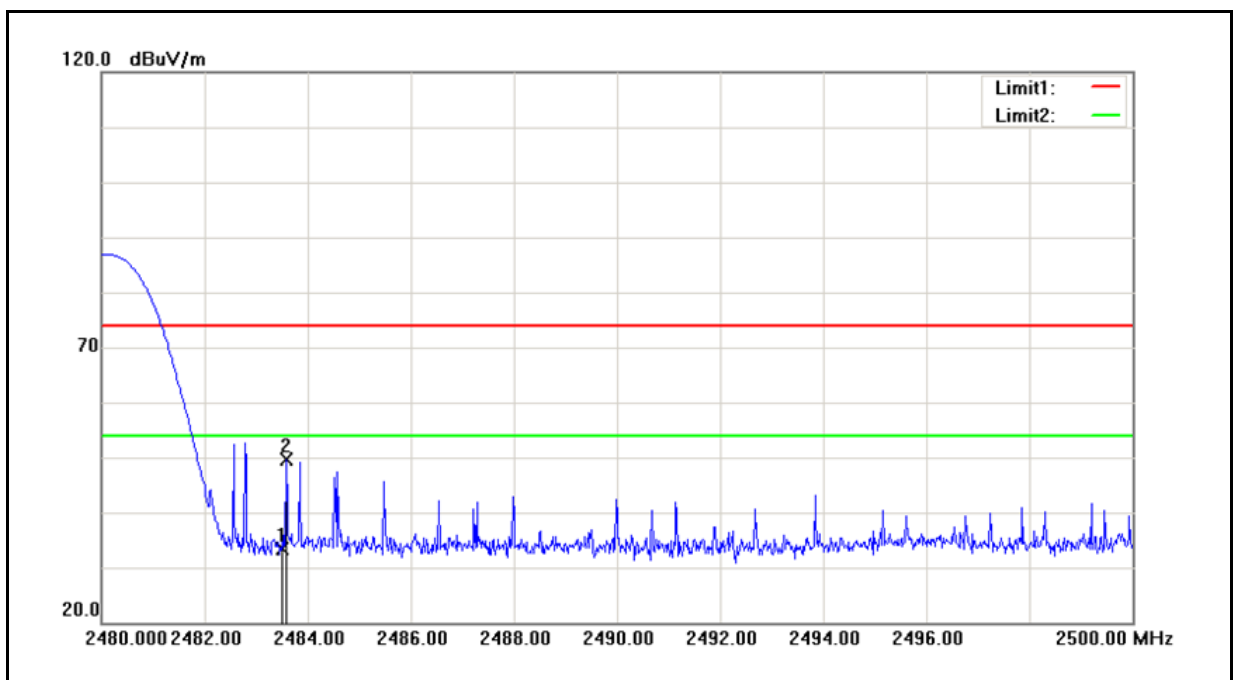

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.30	-1.83	33.47	74.00	-40.53	peak
2	2483.580	51.54	-1.83	49.71	74.00	-24.29	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	01/22/2015
Frequency:	2402 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Horizontal		

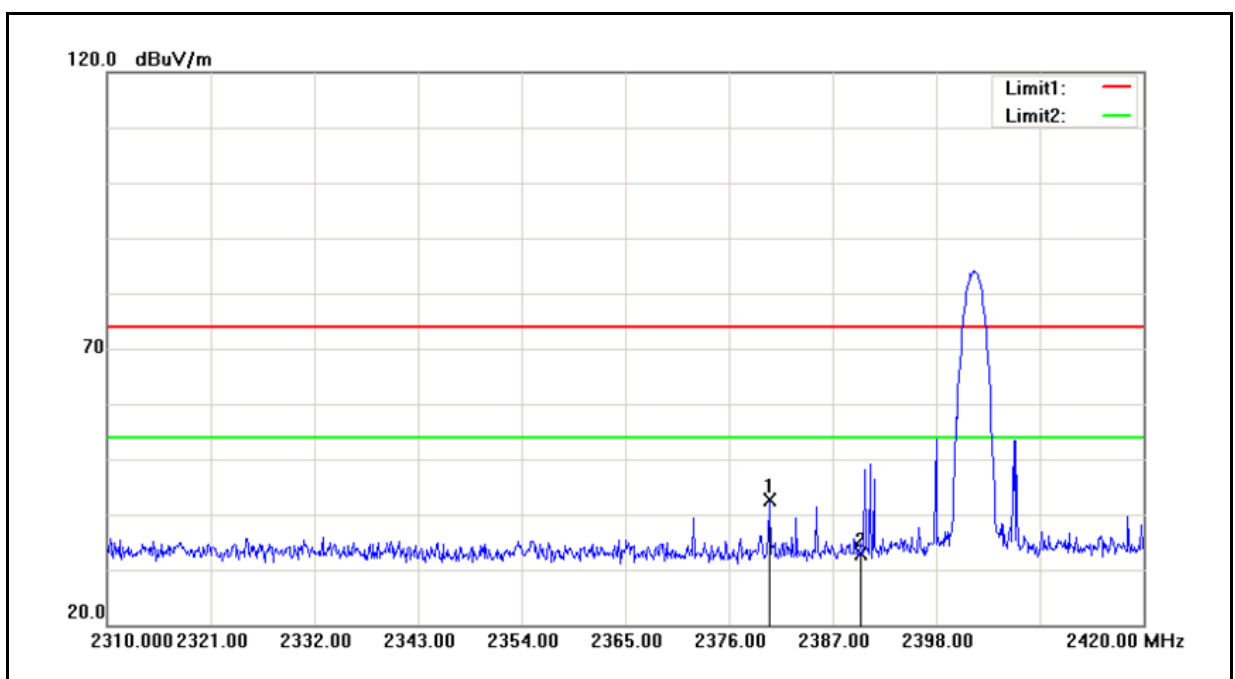

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.290	44.83	-2.29	42.54	74.00	-31.46	peak
2	2390.000	35.14	-2.24	32.90	74.00	-41.10	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	01/22/2015
Frequency:	2402 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Vertical		

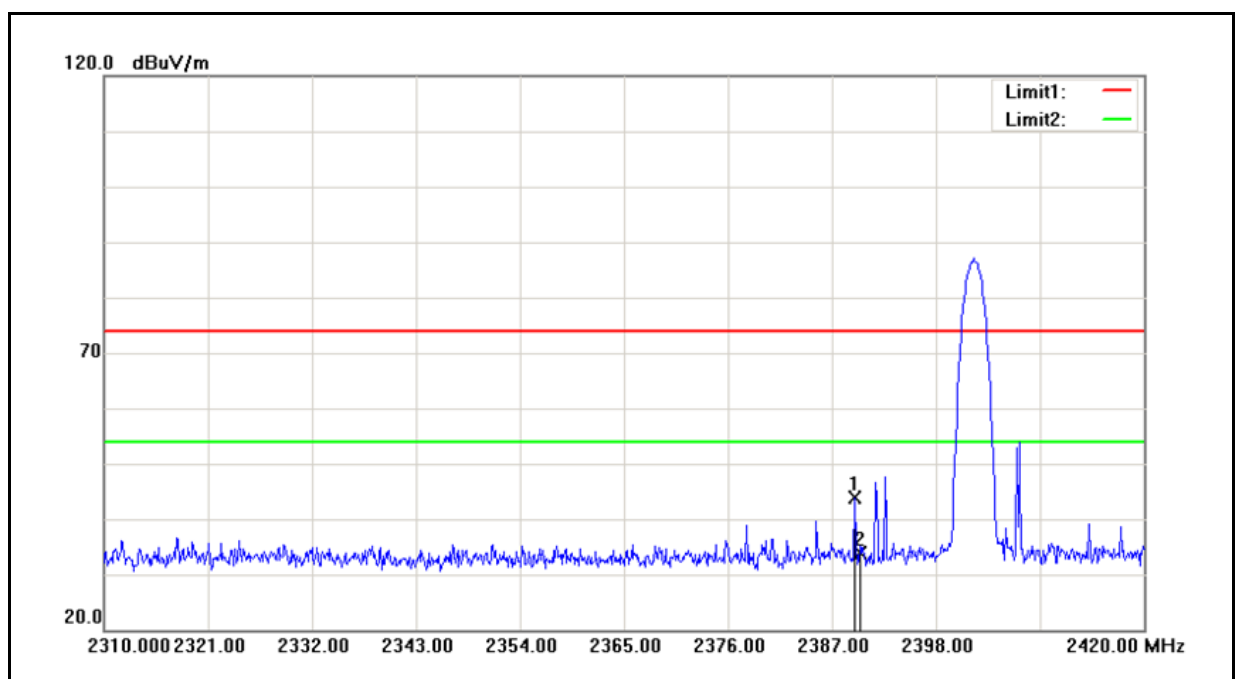

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	46.20	-2.25	43.95	74.00	-30.05	peak
2	2390.000	36.08	-2.24	33.84	74.00	-40.16	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	01/22/2015
Frequency:	2480 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Horizontal		

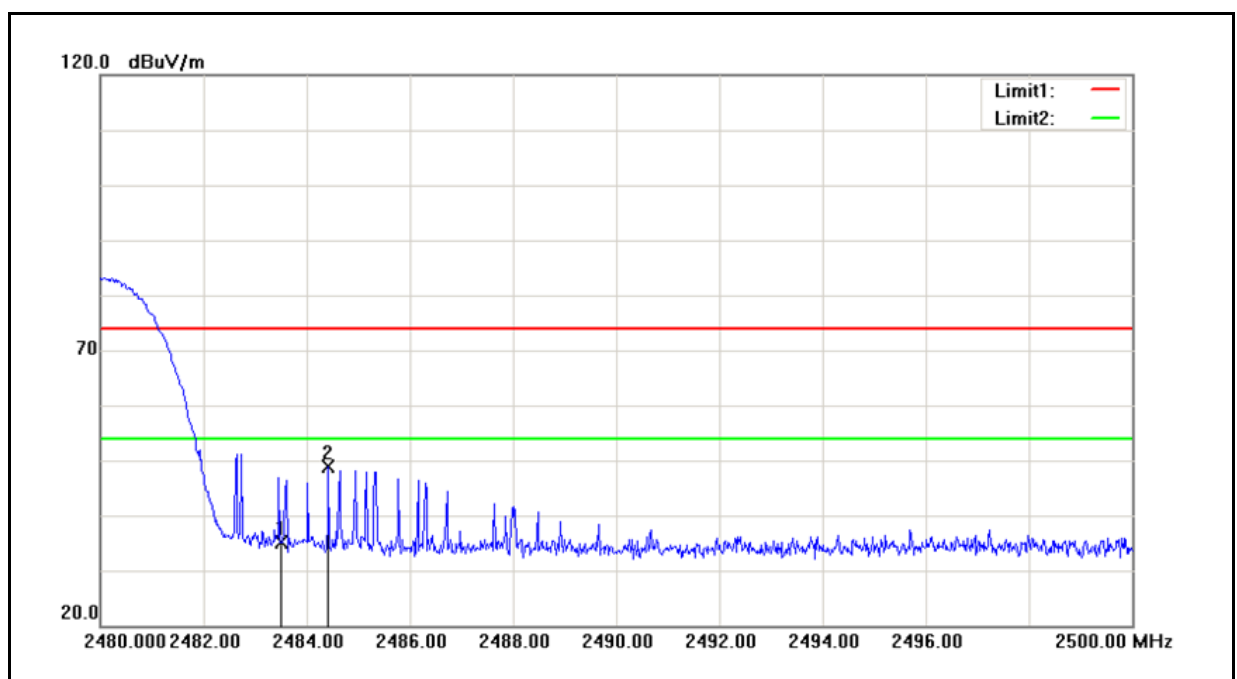

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.93	-1.83	35.10	74.00	-38.90	peak
2	2484.420	50.82	-1.82	49.00	74.00	-25.00	peak



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	T1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	01/22/2015
Frequency:	2480 MHz	Test By:	Eric Ou Yang
Ant.Polar.:	Vertical		

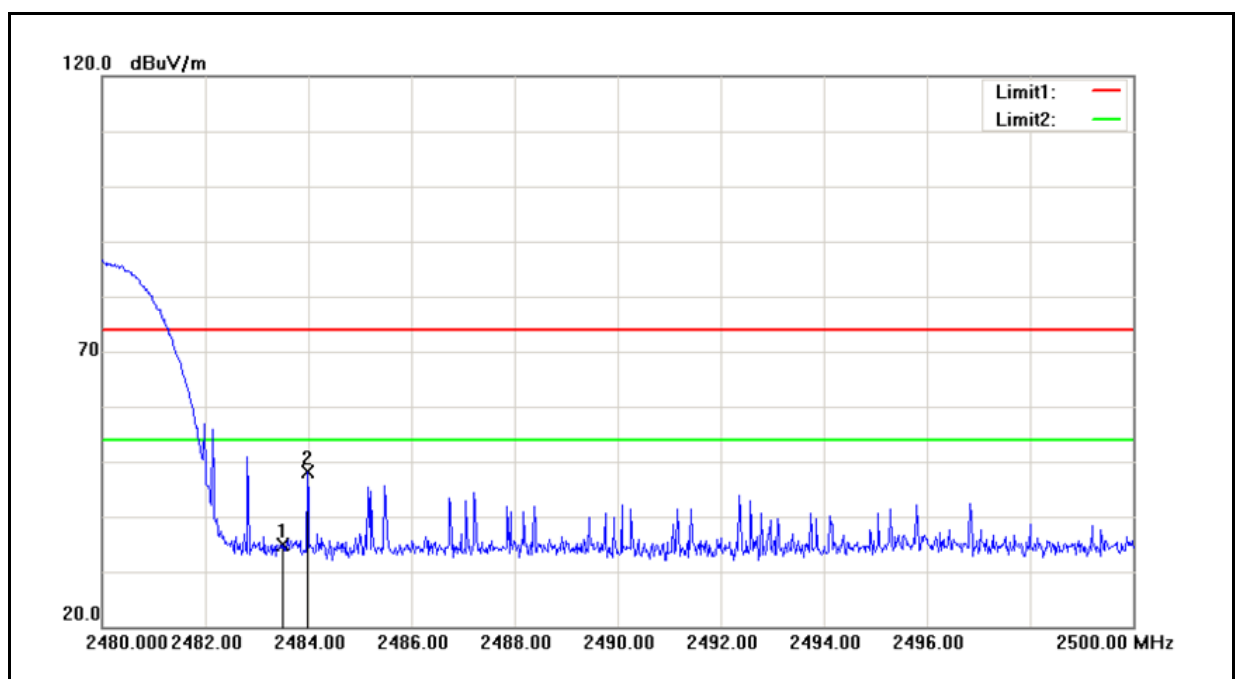

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.71	-1.83	34.88	74.00	-39.12	Peak
2	2483.980	50.00	-1.82	48.18	74.00	-25.82	Peak

Note: We have tested both un-hopping and hopping mode for the radiated bandedge test, and the un-hopping mode is the worse case.



13 Antenna Measurement

13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Antenna Connector Construction

The antenna used in this product is internal antenna. And the maximum Gain of this antenna is only 1.5 dBi.

13.3. Antenna Gain

	Low channel	Middle channel	High channel
Conducted power (dBm)	2.39	2.55	2.96
Radiated Power (dBm)	3.84	4.05	3.63
Gain (dBi)	1.45	1.50	0.67
Measurement uncertainty	$\pm 1.5\text{dB(Cond.)}/3\text{dB(Rad.)}$		