

Conducted Emission Measurement

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


802.11b

Low Channel 2412MHz






Middle Channel 2437MHz












No.: BCTC/RF-EMC-005 Page: 56 of 67 / / / / Edition: A.3




Low Channel 2412MHz






Middle Channel 2437MHz





High Channel 2462MHz







No.: BCTC/RF-EMC-005 Page: 57 of 67 / / / / Edition: A.3




802.11n20








Middle Channel 2437MHz





High Channel 2462MHz






No.: BCTC/RF-EMC-005 Page: 58 of 67 / / / / Edition: A.3




802.11n40

Low Channel 2422MHz






Middle Channel 2437MHz





High Channel 2452MHz





No.: BCTC/RF-EMC-005 Page: 59 of 67 / / / / Edition: A.3



13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula
Duty Cycle = Ton / (Ton+Toff)

13.3 Test Procedure

- 1.Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

13.4 Test Result


	Duty Cycle	Duty Fator
		(dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	. 0
802.11n(HT40)	1	0

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


No.: BCTC/RF-EMC-005 Page: 60 of 67 / / / Edition: A.3



802.11b

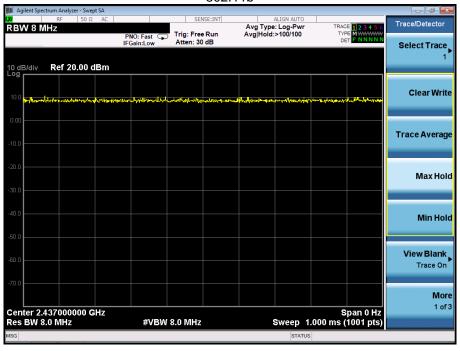




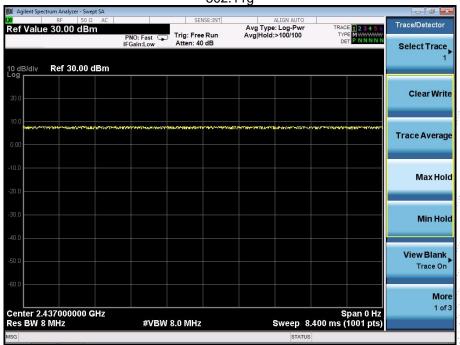


802.11n(HT20)

No.: BCTC/RF-EMC-005 Page: 61 of 67 / / / / / Edition: A.3



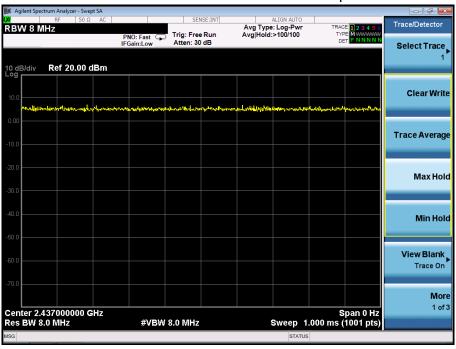



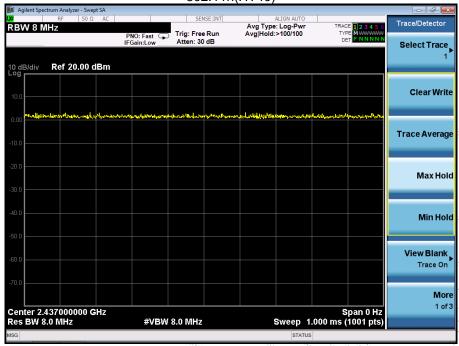

No.: BCTC/RF-EMC-005 Page: 62 of 67 / / / / Edition: A.3




14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result

The EUT antenna is External antenna, fulfill the requirement of this section.

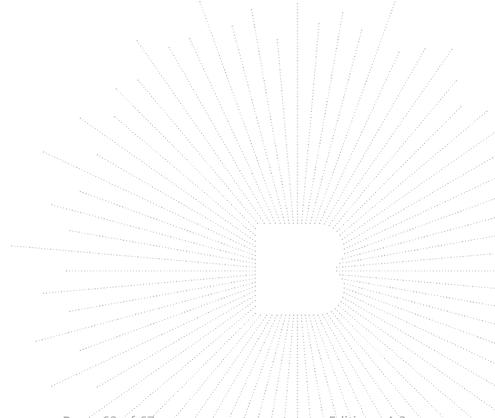


No.: BCTC/RF-EMC-005 Page: 63 of 67 / / / / / Edition: A






15. EUT Photographs

EUT Photo 1

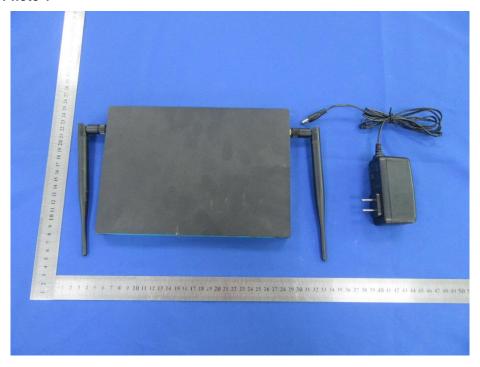

EUT Photo 2

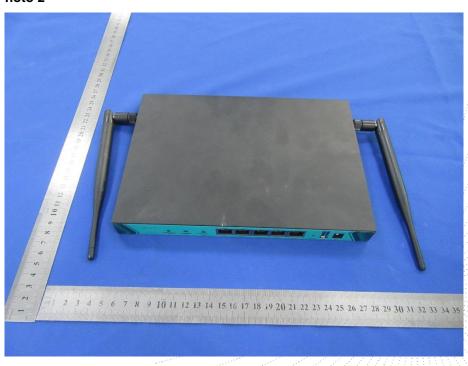



No.: BCTC/RF-EMC-005 Page: 64 of 67 / / / Edition: A.3



16. EUT Test Setup Photographs


Conducted Emission

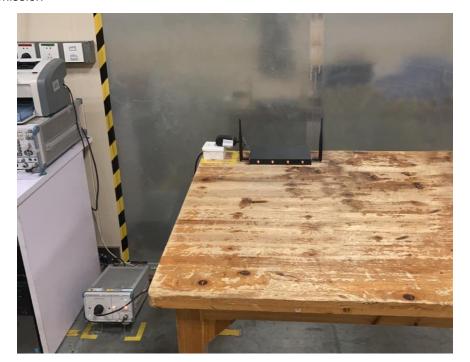


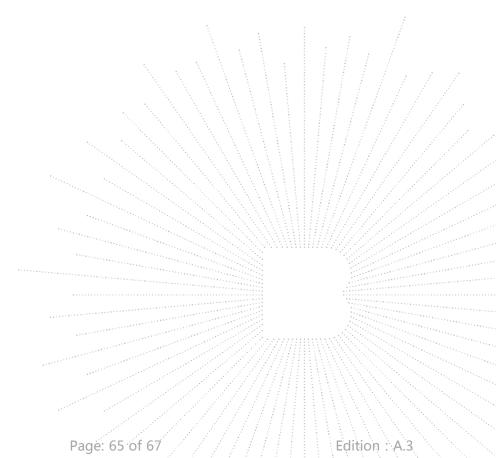

No.: BCTC/RF-EMC-005





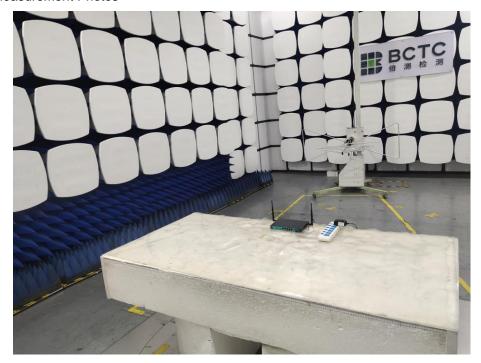



No.: BCTC/RF-EMC-005 Page: 66 of 67 / / / Edition: A.3



STATEMENT

1. The equipment lists are traceable to the national reference standards.

2. The test report can not be partially copied unless prior written approval is issued from our lab.

3. The test report is invalid without stamp of laboratory.

4. The test report is invalid without signature of person(s) testing and authorizing.

5. The test process and test result is only related to the Unit Under Test.

6. The quality system of our laboratory is in accordance with ISO/IEC17025.

7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: bctc@bctc-lab.com.cn

**** END ****

No.: BCTC/RF-EMC-005 Page: 67 of 67 / / / / / Edition: A.3