

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM140900494606
Page: 1 of 120

FCC REPORT

Application No:	SZEM1409004946RF
Applicant:	UNION INFORMATION TECHNOLOGIES (USA) INC
Manufacturer/ Factory:	Shenzhen ACT Industrial Co., Ltd.
Product Name:	Eviant 10 3G
Model No.(EUT):	EVT10Q
Trade Mark:	EVIANT
FCC ID:	2AC7GEVT10Q
Standards:	47 CFR Part 15, Subpart C (2013)
Date of Receipt:	2014-09-10
Date of Test:	2014-09-16 to 2014-11-06
Date of Issue:	2014-11-25

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

This report supersedes our previous report SZEM140900494603, issued on 2014-11-10, which is hereby deemed null and void.

Authorized Signature:



Jack Zhang

EMC Laboratory Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2014-11-10		Original
01		2014-11-25		new

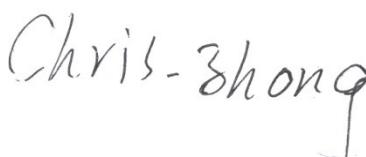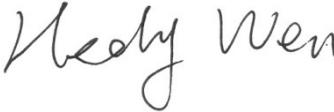Authorized for issue by:				
Tested By				2014-11-06
		(Chris Zhong) /Project Engineer		Date
Prepared By				2014-11-25
		(Hedy Wen) /Clerk		Date
Checked By				2014-11-25
		(Emen Li) /Reviewer		Date

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.4 2009+KDB558074 D01 v03r02	PASS

4 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS.....	7
5.5 TEST LOCATION	7
5.6 TEST FACILITY	8
5.7 DEVIATION FROM STANDARDS.....	8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.10 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA.....	12
6.1 ANTENNA REQUIREMENT.....	12
6.2 CONDUCTED EMISSIONS	13
6.3 CONDUCTED PEAK OUTPUT POWER.....	17
6.4 6dB OCCUPY BANDWIDTH.....	20
6.5 POWER SPECTRAL DENSITY	28
6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	36
6.7 RF CONDUCTED SPURIOUS EMISSIONS	41
6.8 RADIATED SPURIOUS EMISSIONS.....	73
6.8.1 Radiated emission below 1GHz.....	76
6.8.2 Transmitter emission above 1GHz.....	78
6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	85
7 PHOTOGRAPHS - EUT TEST SETUP	119
7.1 RADIATED SPURIOUS EMISSION	119
7.2 CONDUCTED EMISSION	120
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	120

5 General Information

5.1 Client Information

Applicant:	UNION INFORMATION TECHNOLOGIES (USA) INC
Address of Applicant:	20955 Pathfinder Road, Suite 100, Diamond Bar, CA 91765
Manufacturer:	Shenzhen ACT Industrial Co., Ltd.
Address of Manufacturer:	NO.5 Building, Beishan Industrial Park, Beishan Road, Yantian District, Shenzhen
Factory:	Shenzhen ACT Industrial Co., Ltd.
Address of Factory:	NO.5 Building, Beishan Industrial Park, Beishan Road, Yantian District, Shenzhen

5.2 General Description of EUT

Product Name:	Eviant 10 3G	
Model No.:	EVT10Q	
Trade Mark:	EVARIANT	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n(HT20): 11 Channels IEEE 802.11n(HT40): 7 Channels	
Channel Separation:	5MHz	
Type of Modulation:	IEEE for 802.11b: DSSS (CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)	
Sample Type:	Portable production	
EUT Function:	Eviant 10 3G	
Test Power Grade:	11B:8dBm, 11G: 6dBm, 11N: 6dBm (manufacturer declare)	
Test Software of EUT:	QRCT.exe (manufacturer declare)	
Antenna Type:	Integral	
Antenna Gain:	2.3dBi	
Power Supply:	AC adapter:	Model: APS-M009050150L-G Input: 120V~60Hz 0.35A Max Output: 5V 2A
	Battery:	Type: 3.7V Lithium polymer battery
USB Cable:	120cm (Shielded)	

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2422MHz	4	2437MHz	7	2452MHz
2	2427MHz	5	2442MHz		
3	2432MHz	6	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.
Charge + Transmitting mode:	Keep the EUT charging and transmitting with all kind of modulation and all kind of data rate.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Equipment List

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	SEL0162	2015-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	SEL0163	2015-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	SEL0164	2015-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
10	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2015-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16



RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04


RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24
12	Power Meter	Agilent Technologies Inc	U2021XA	MY542900 04	2016-10-31

Note: The calibration interval is one year, all the instruments are valid.




6 Test results and Measurement Data

6.1 Antenna Requirement

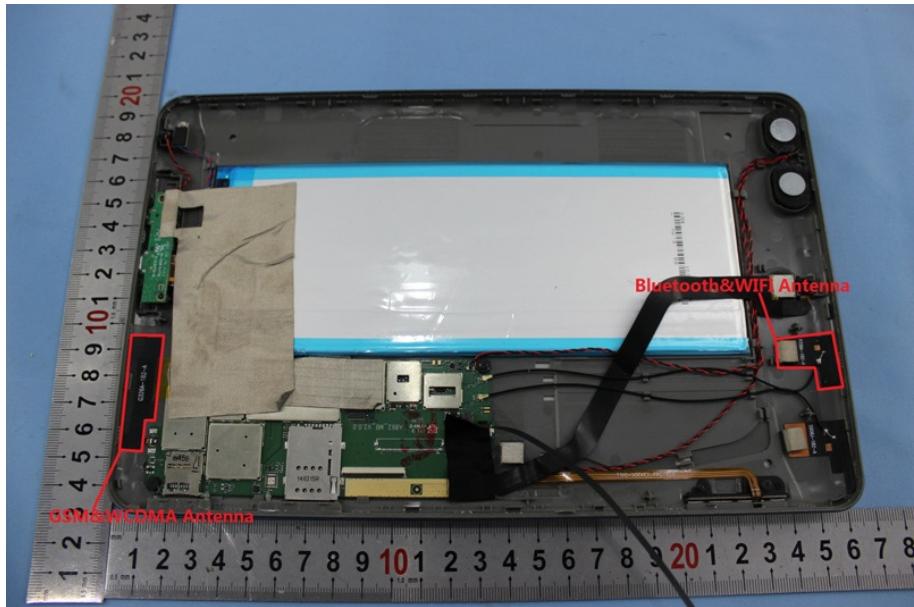Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna:	 <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.3dBi.</p>

6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02					
Test Frequency Range:	150kHz to 30MHz					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak	Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test Procedure:	<ol style="list-style-type: none">1) The mains terminal disturbance voltage test was conducted in a shielded room.2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.					

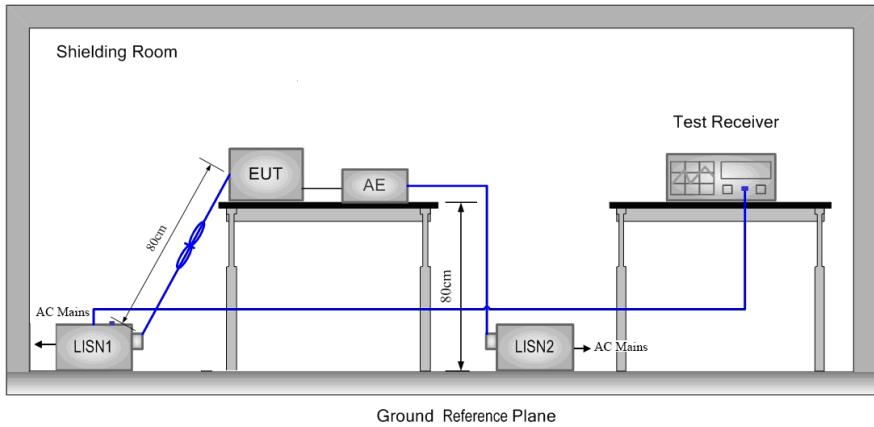
Test Setup:	
Test Mode:	Charge + Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

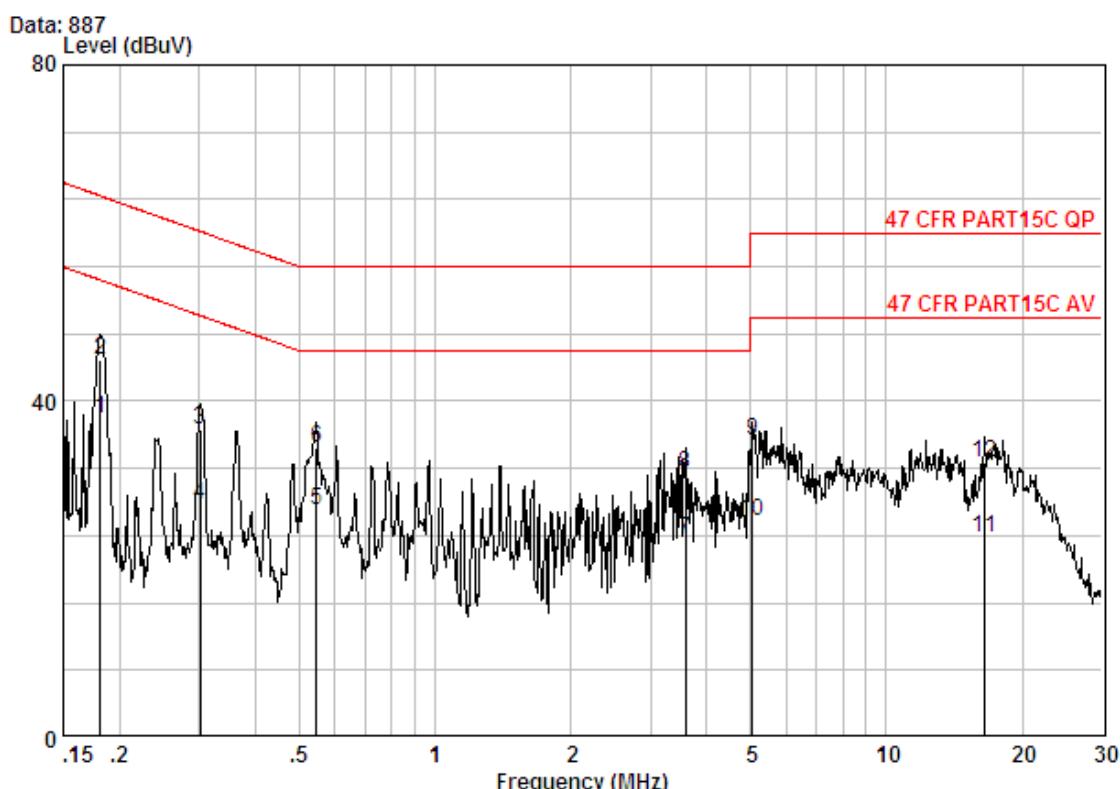

Site : Shielding Room
Condition : 47 CFR PART 15 B QP FCC DOC LINE
Job No. : 4946RF
Mode : AC charge+TX mode

	Freq	Cable	LISN	Read	Limit	Over	Remark
		Loss	Factor	Level	Level	Line	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.18152	0.10	0.10	37.78	37.98	54.42	-16.43 Average
2	0.18152	0.10	0.10	44.71	44.91	64.42	-19.50 QP
3	0.30188	0.10	0.07	36.51	36.67	60.19	-23.52 QP
4	0.30188	0.10	0.07	27.62	27.79	50.19	-22.40 Average
5	0.54644	0.10	0.12	26.86	27.09	46.00	-18.91 Average
6	0.54644	0.10	0.12	34.22	34.44	56.00	-21.56 QP
7	3.584	0.10	0.26	23.11	23.47	46.00	-22.53 Average
8	3.584	0.10	0.26	31.11	31.47	56.00	-24.53 QP
9	5.058	0.10	0.26	35.02	35.39	60.00	-24.61 QP
10	5.058	0.10	0.26	25.46	25.83	50.00	-24.17 Average
11	16.486	0.20	0.47	22.99	23.66	50.00	-26.34 Average
12	16.486	0.20	0.47	31.99	32.66	60.00	-27.34 QP

Neutral Line:

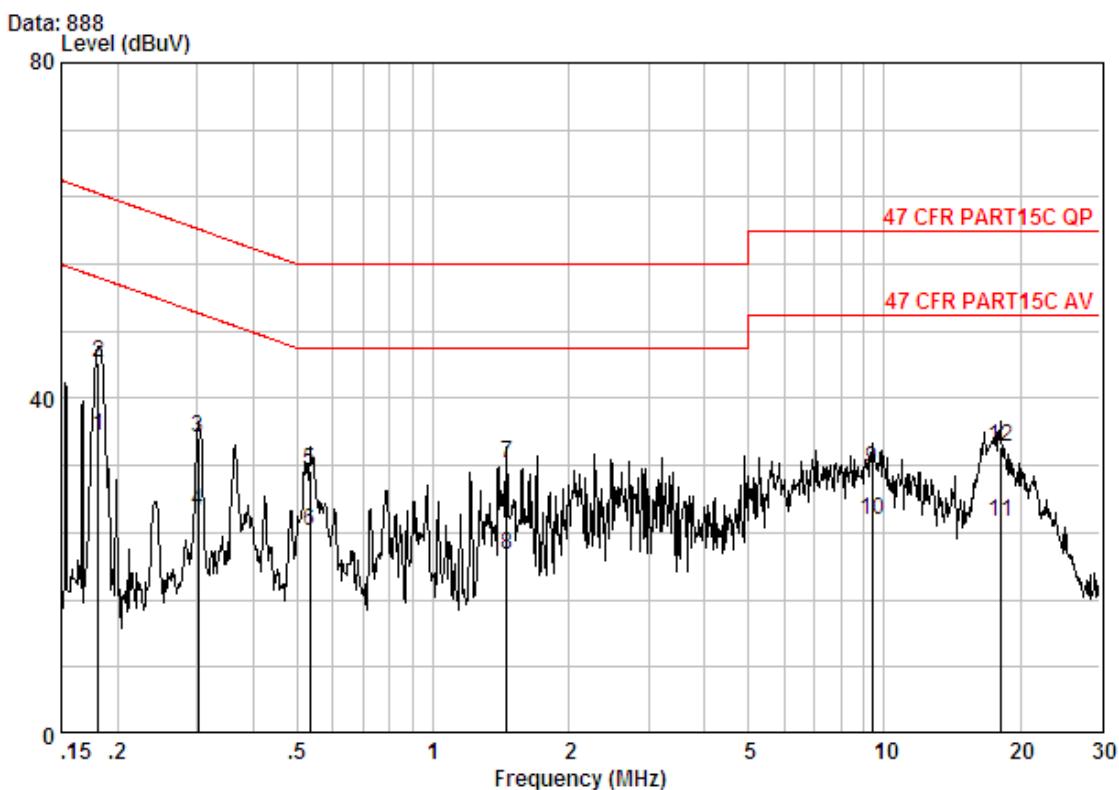


Site : Shielding Room
 Condition : 47 CFR PART 15 B QP FCC DOC NEUTRAL
 Job No. : 4946RF
 Mode : AC charge+TX mode

	Freq	Cable	LISN	Read	Limit		Over
		Loss	Factor	Level	Level	Line	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.18152	0.10	0.08	35.42	35.60	54.42	-18.82 Average
2	0.18152	0.10	0.08	44.08	44.26	64.42	-20.16 QP
3	0.30188	0.10	-0.01	35.15	35.24	60.19	-24.95 QP
4	0.30188	0.10	-0.01	26.48	26.57	50.19	-23.62 Average
5	0.53215	0.10	0.00	31.18	31.29	56.00	-24.71 QP
6	0.53215	0.10	0.00	24.18	24.29	46.00	-21.71 Average
7	1.456	0.10	0.06	32.13	32.29	56.00	-23.71 QP
8	1.456	0.10	0.06	21.13	21.29	46.00	-24.71 Average
9	9.401	0.10	0.19	31.36	31.65	60.00	-28.35 QP
10	9.401	0.10	0.19	25.16	25.45	50.00	-24.55 Average
11	18.039	0.20	0.30	24.80	25.29	50.00	-24.71 Average
12	18.039	0.20	0.30	33.78	34.28	60.00	-25.72 QP

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

6.3 Conducted Peak Output Power

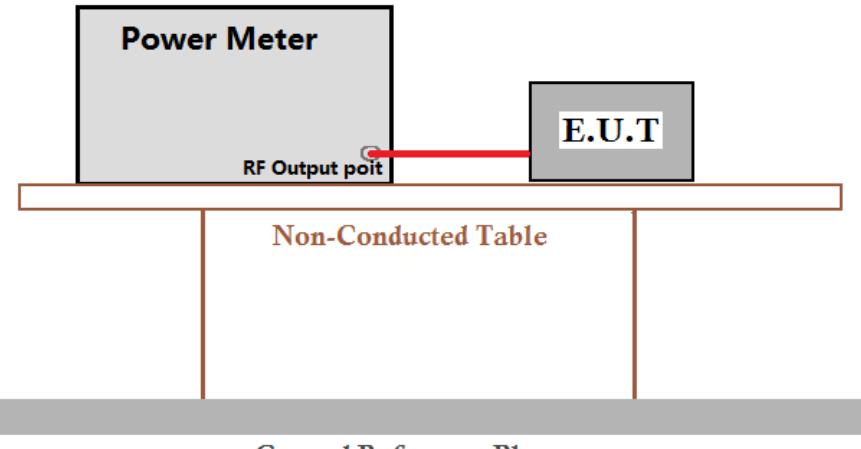Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02
Test Setup:	 <p>The diagram illustrates the test setup for conducted peak output power. A Power Meter is connected to the E.U.T (Equipment Under Test) via an RF Output port. The setup is placed on a Non-Conducted Table, which sits above a Ground Reference Plane.</p>
Remark:	<i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i>
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	30dBm
Test Results:	Pass

Mode		802.11b				
Data Rate	Test Channel	1Mbps	2Mbps	5.5Mbps	11Mbps	
Test results (dBm)	1	21.11	21.24	21.38	21.54	
	7	21.64	21.78	21.89	22.02	
	13	21.89	22.01	22.12	22.25	

Mode		802.11g							
Data Rate	Test Channel	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Test results (dBm)	1	19.41	19.53	19.64	19.78	19.89	20.04	20.13	20.25
	7	20.09	20.21	20.32	20.41	20.53	20.61	20.72	20.84
	13	20.54	20.63	20.74	20.86	21.02	21.11	21.21	21.33
Mode		802.11n (HT20)							
Data Rate	Test Channel	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Test results (dBm)	1	19.41	19.55	19.64	19.78	20.03	20.12	20.23	20.37
	7	20.07	20.33	20.43	20.55	20.64	20.79	20.93	21.02
	13	20.55	20.72	20.88	21.05	21.16	21.27	21.42	21.50

Mode		802.11n (HT40)							
Data Rate	Test Channel	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Test results (dBm)	3	19.43	19.59	19.74	19.88	20.06	20.14	20.24	20.39
	7	20.04	20.13	20.26	20.37	20.59	20.65	20.71	20.80
	11	20.39	20.51	20.58	20.73	20.86	20.97	21.06	21.17

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).

Measurement Data


802.11b mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	21.54	30.00	Pass
Middle	22.02	30.00	Pass
Highest	22.25	30.00	Pass

802.11g mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.25	30.00	Pass
Middle	20.84	30.00	Pass
Highest	21.33	30.00	Pass

802.11n(HT20) mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.37	30.00	Pass
Middle	21.02	30.00	Pass
Highest	21.50	30.00	Pass

802.11n(HT40) mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.39	30.00	Pass
Middle	20.80	30.00	Pass
Highest	21.17	30.00	Pass

6.4 6dB Occupy Bandwidth

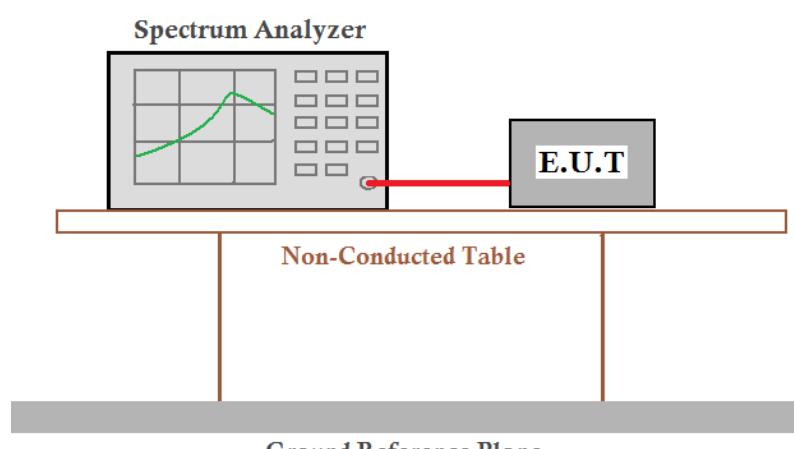Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	≥ 500 kHz
Test Results:	Pass


Measurement Data

802.11b mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	7.500000000	≥500	Pass
Middle	7.596153846	≥500	Pass
Highest	7.500000000	≥500	Pass
802.11g mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	16.586538462	≥500	Pass
Middle	16.634615385	≥500	Pass
Highest	16.634615385	≥500	Pass
802.11n(HT20) mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	17.788461538	≥500	Pass
Middle	17.788461538	≥500	Pass
Highest	17.836538462	≥500	Pass
802.11n(HT40) mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	36.378205128	≥500	Pass
Middle	36.538461538	≥500	Pass
Highest	36.282051282	≥500	Pass




Test plot as follows:


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

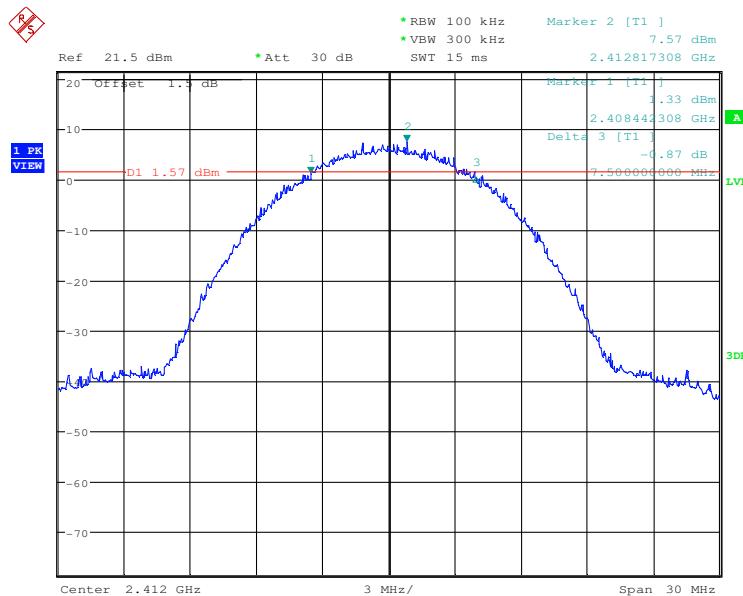


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

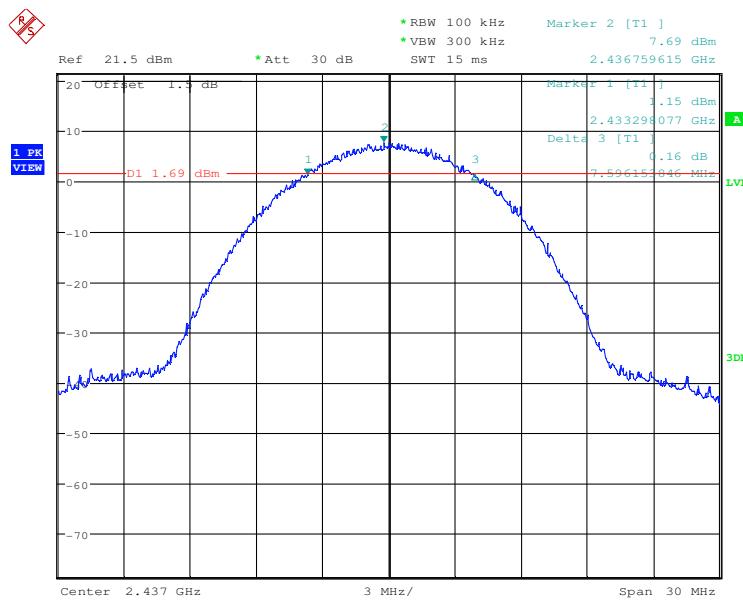


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

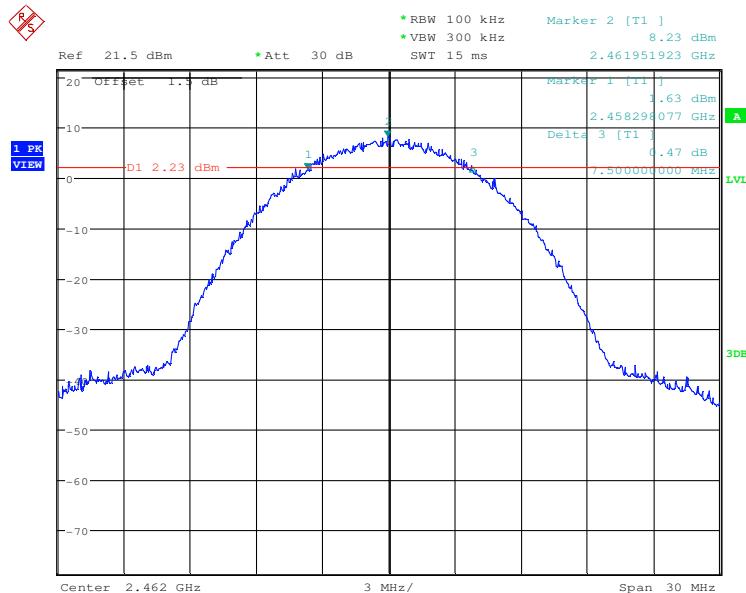


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

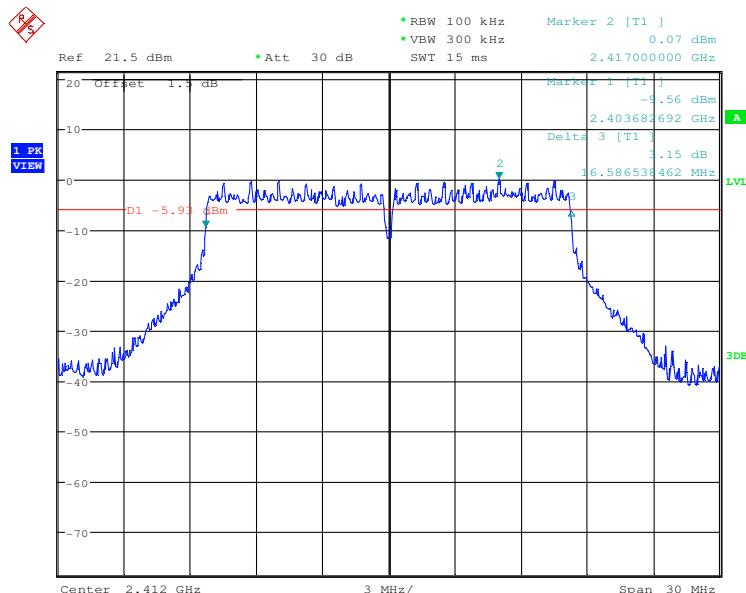


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

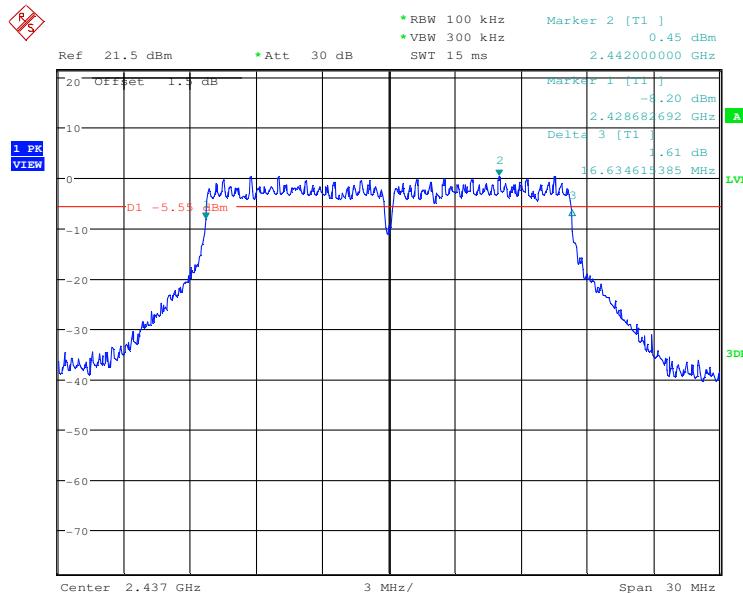


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

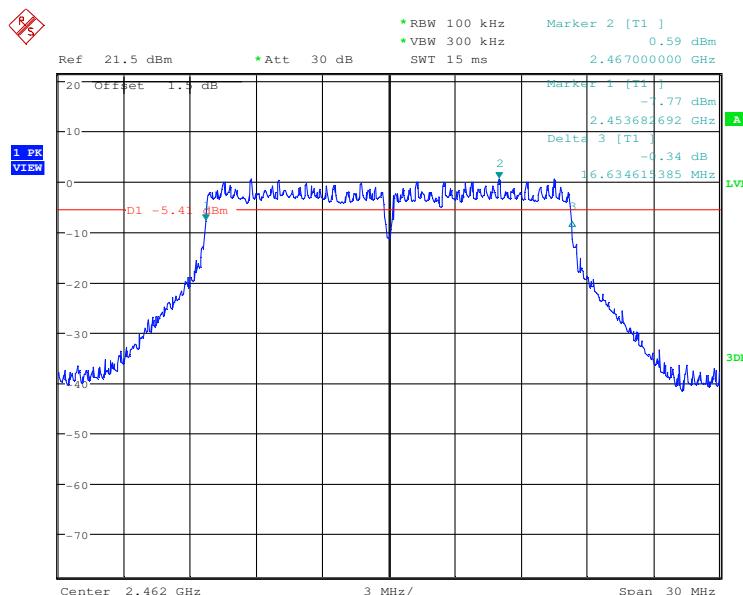


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

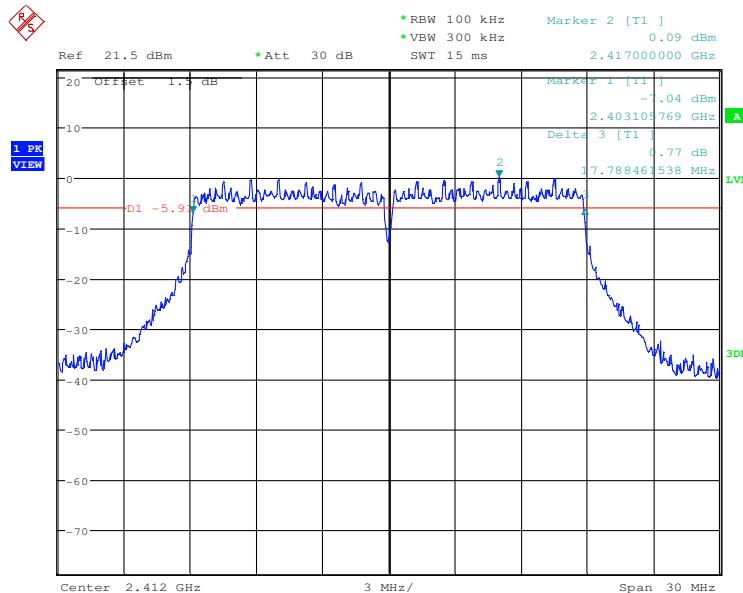


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

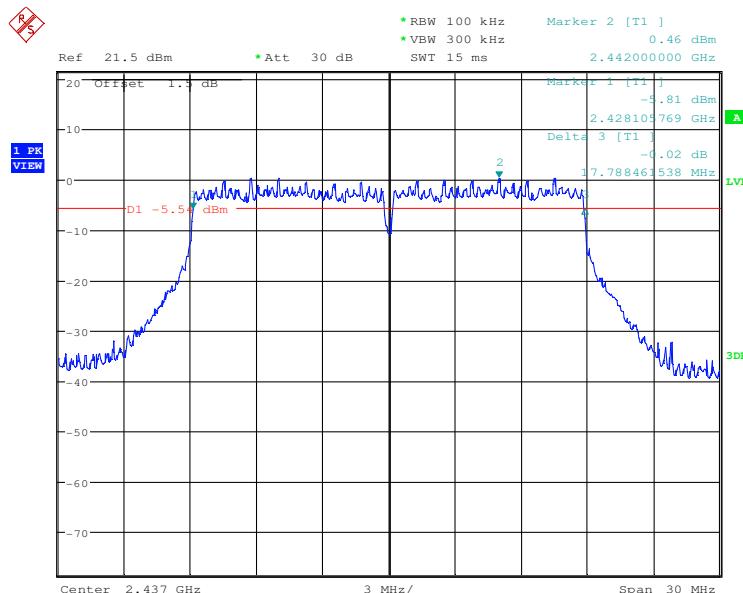


Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

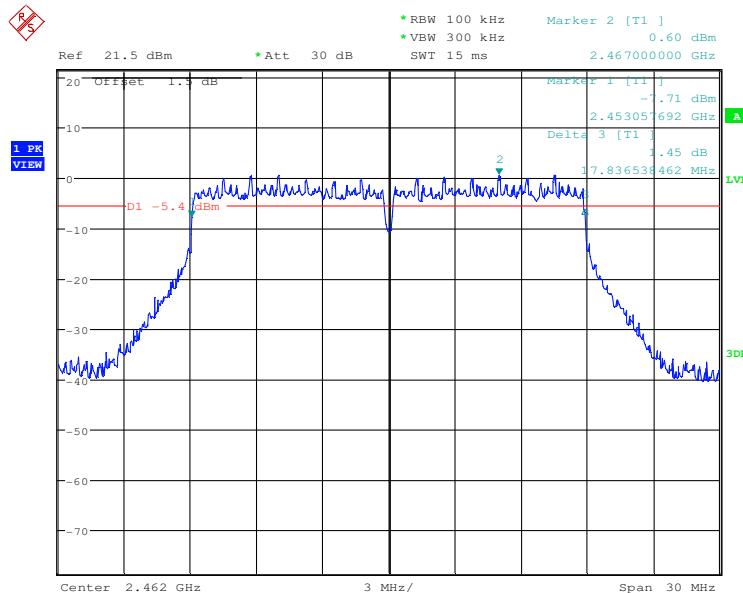


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

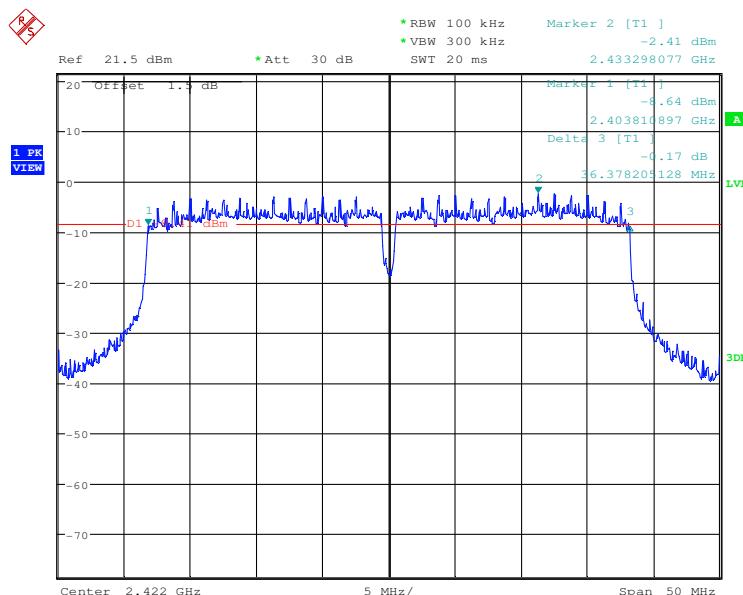


Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

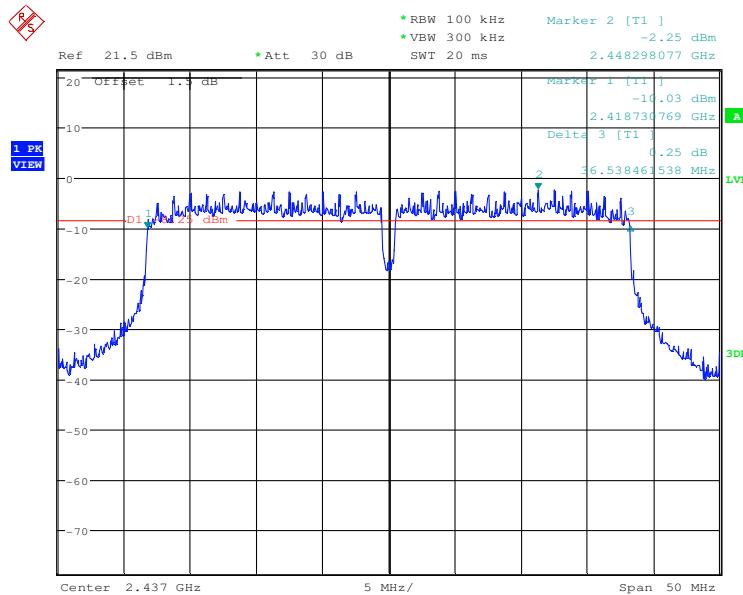

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

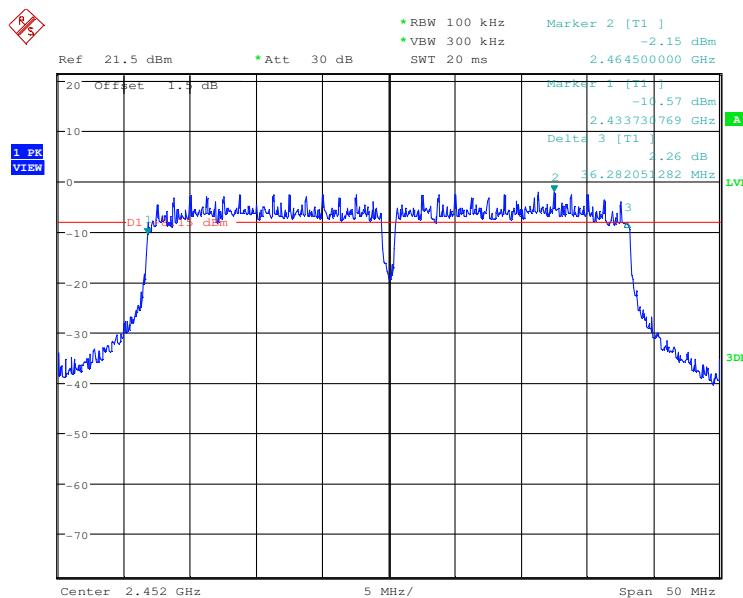

6.5 Power Spectral Density

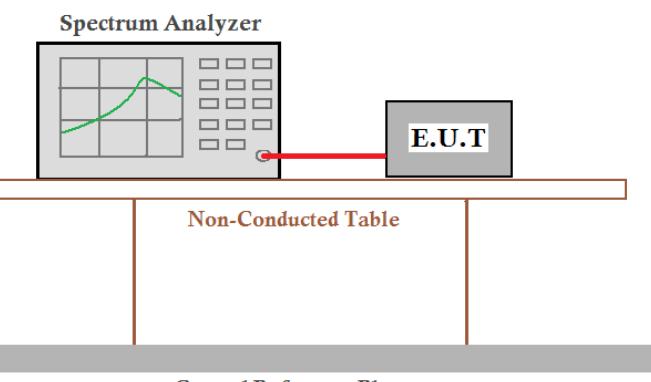Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02
Test Setup:	 <p>Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	≤8.00dBm
Test Results:	Pass

Measurement Data

802.11b mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-8.69	≤8.00	Pass
Middle	-7.67	≤8.00	Pass
Highest	-6.28	≤8.00	Pass


802.11g mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-14.67	≤8.00	Pass
Middle	-14.49	≤8.00	Pass
Highest	-14.18	≤8.00	Pass

802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-14.55	≤8.00	Pass
Middle	-13.87	≤8.00	Pass
Highest	-15.59	≤8.00	Pass


802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-18.87	≤8.00	Pass
Middle	-18.88	≤8.00	Pass
Highest	-17.95	≤8.00	Pass

Test plot as follows:


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

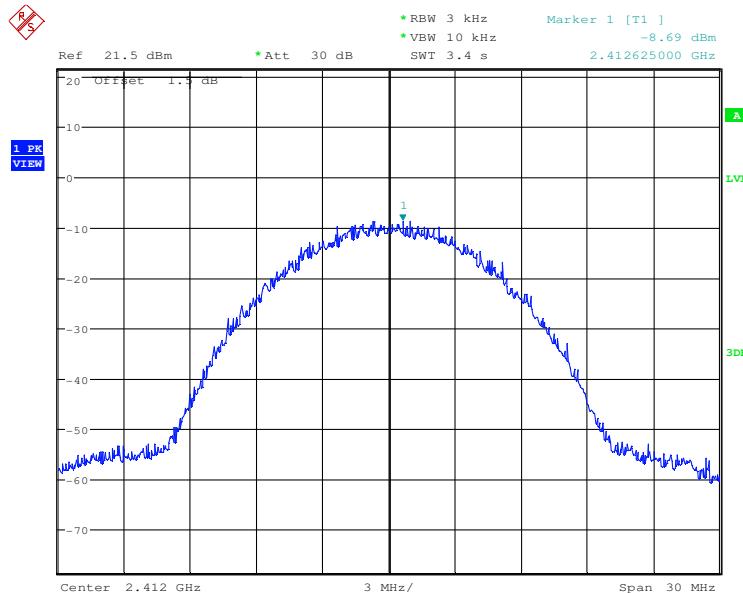


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

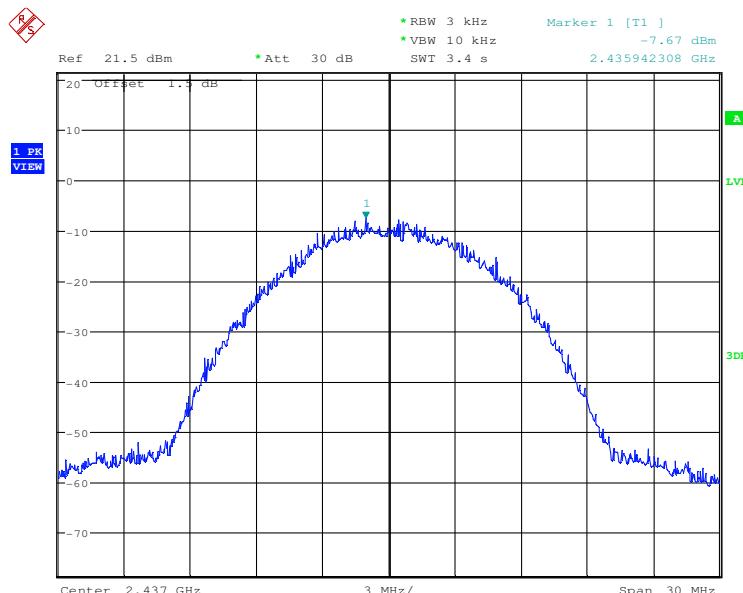


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

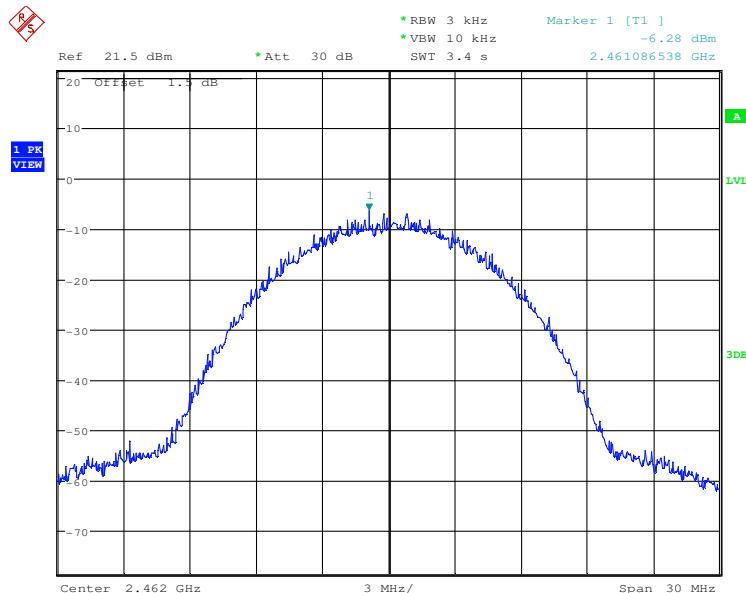


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

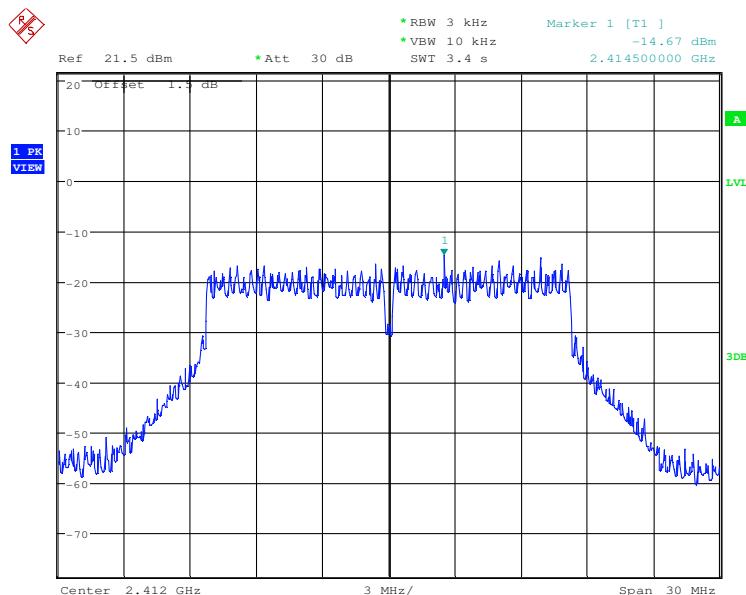


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

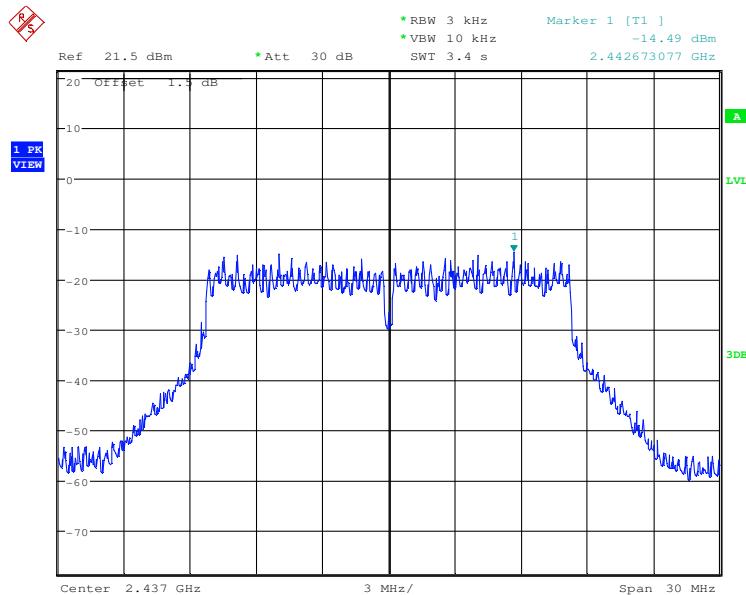


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

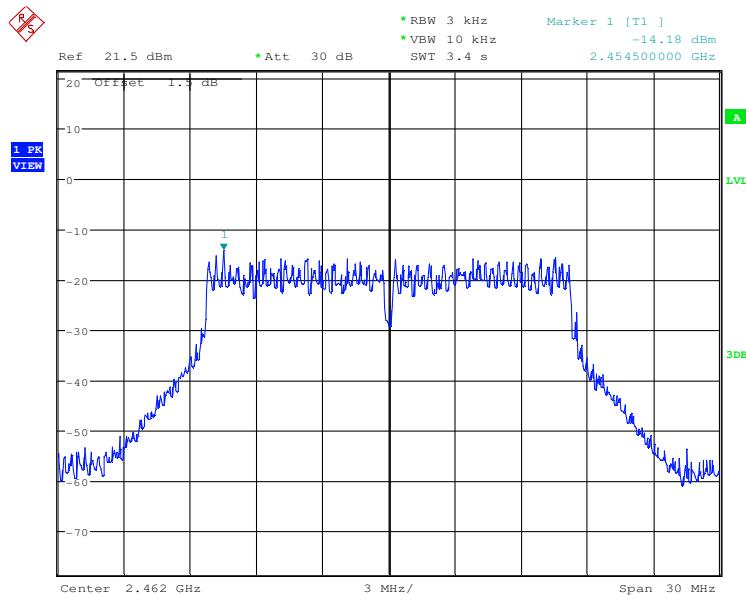


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

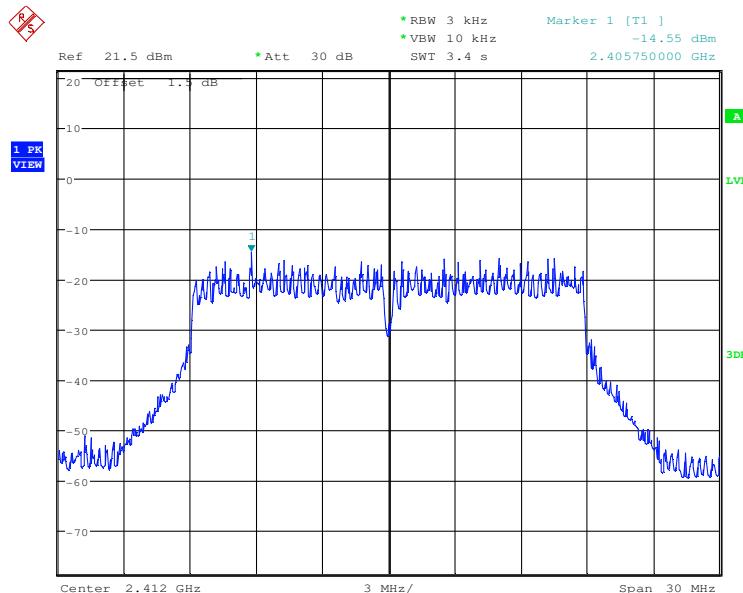


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

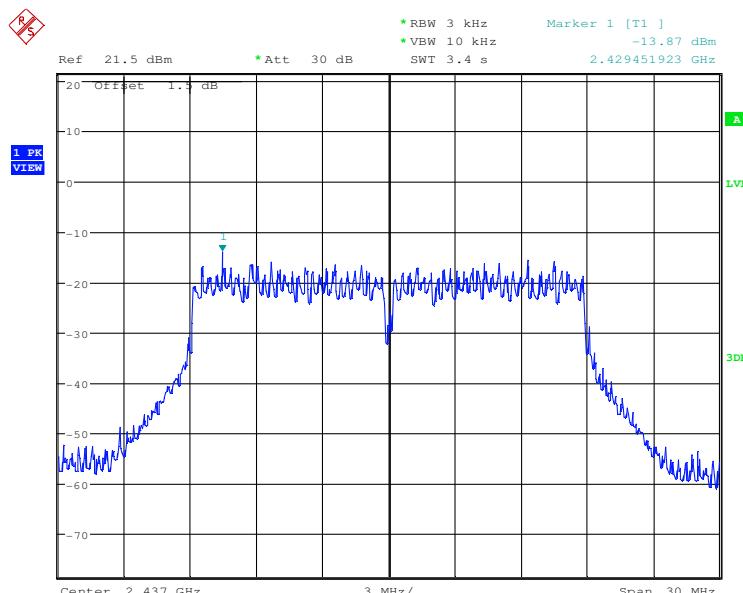


Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

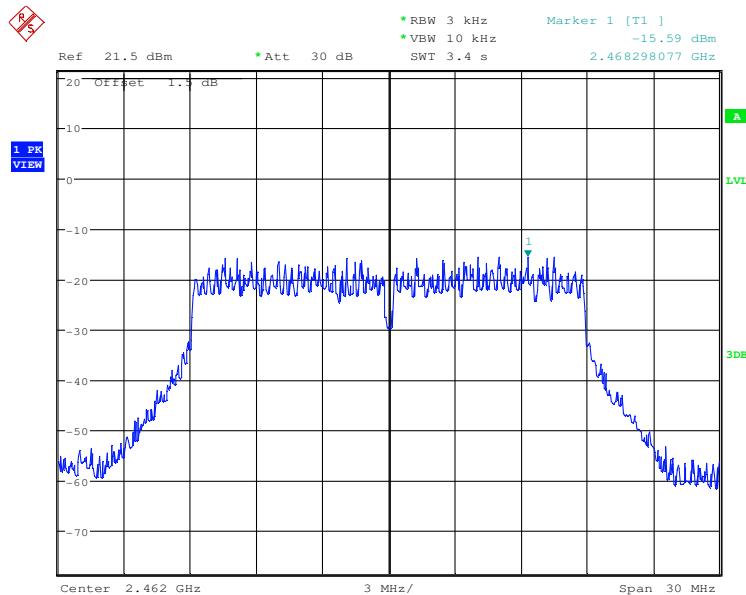


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

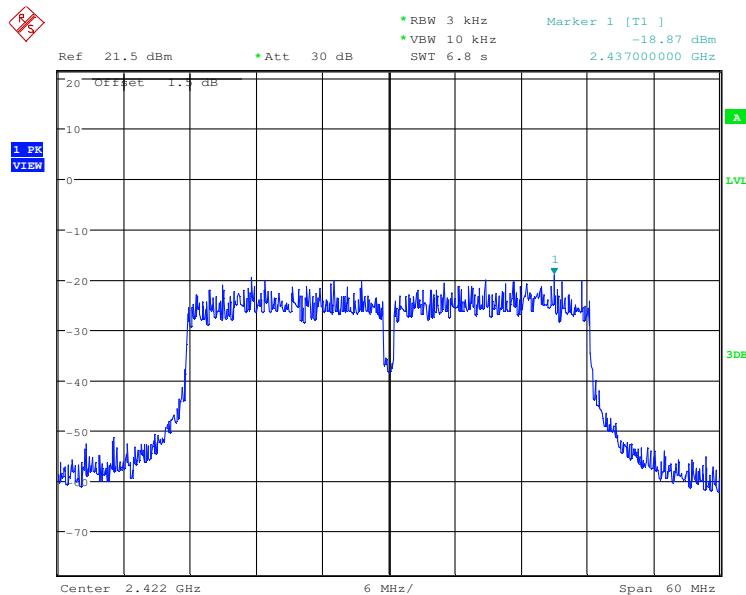


Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

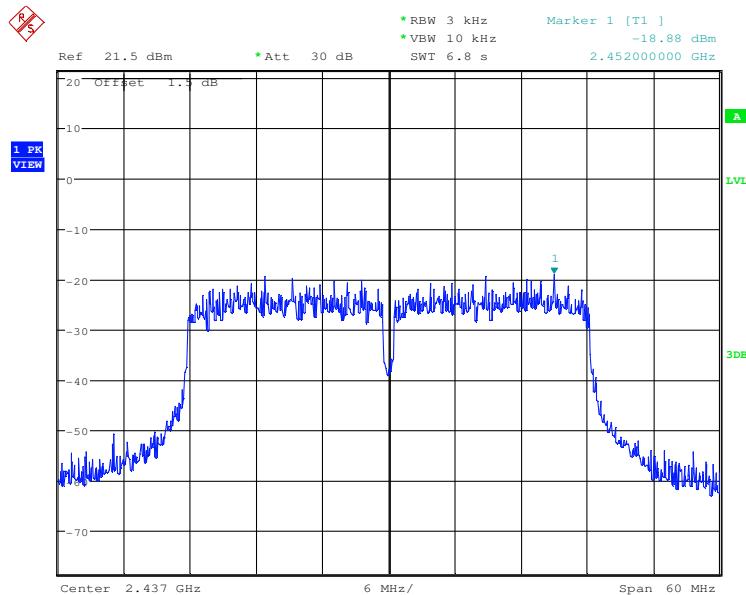

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

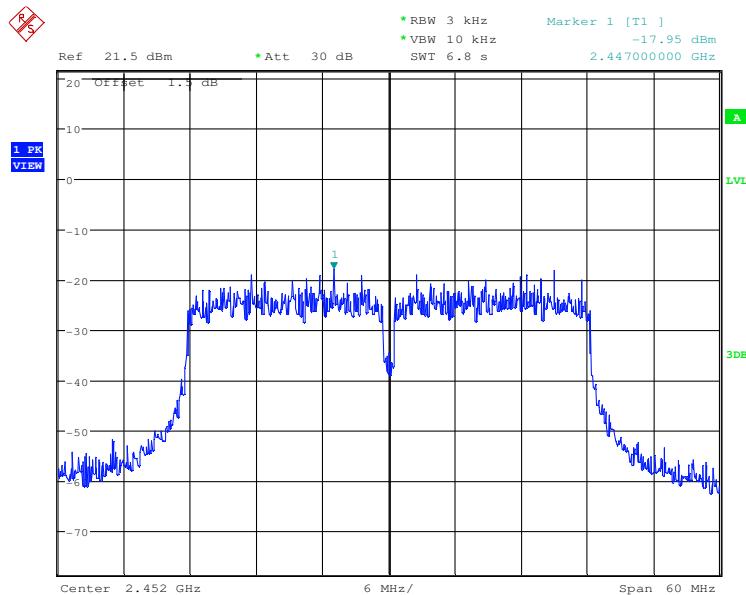


6.6 Band-edge for RF Conducted Emissions

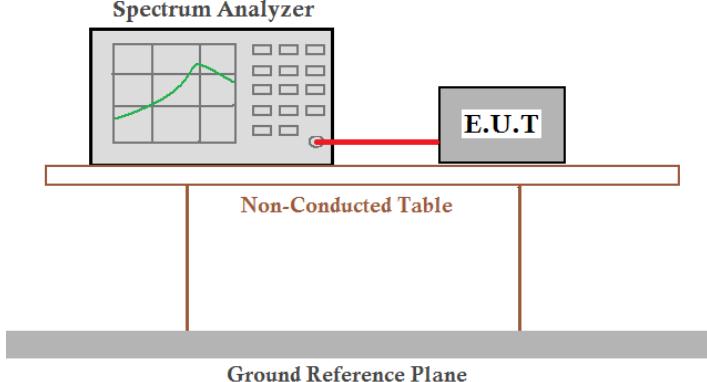
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02
Test Setup:	 <p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Test plot as follows:


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

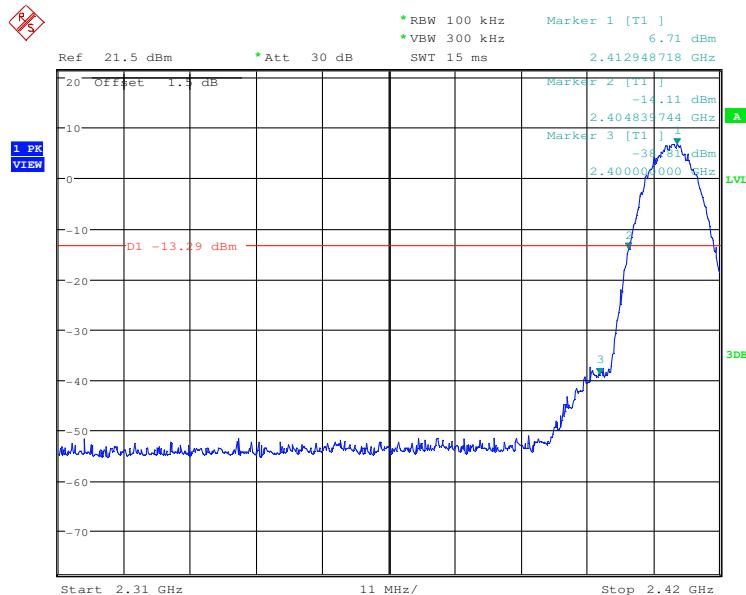


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

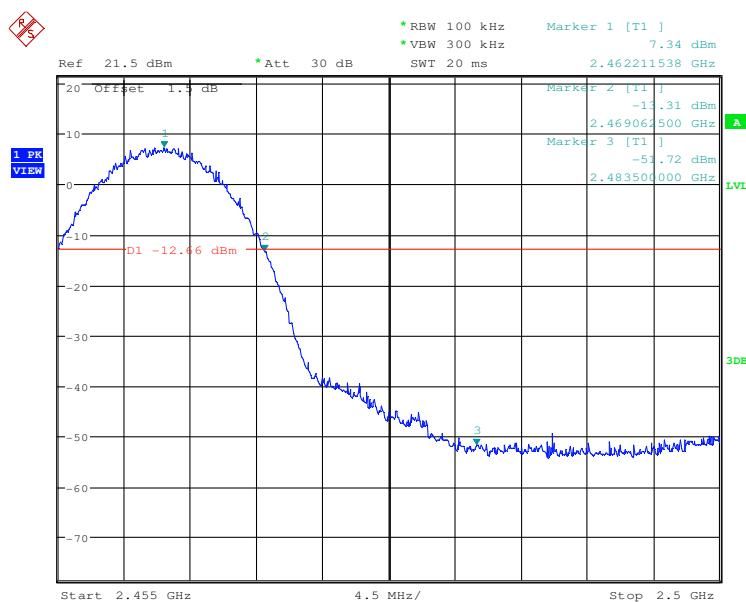


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

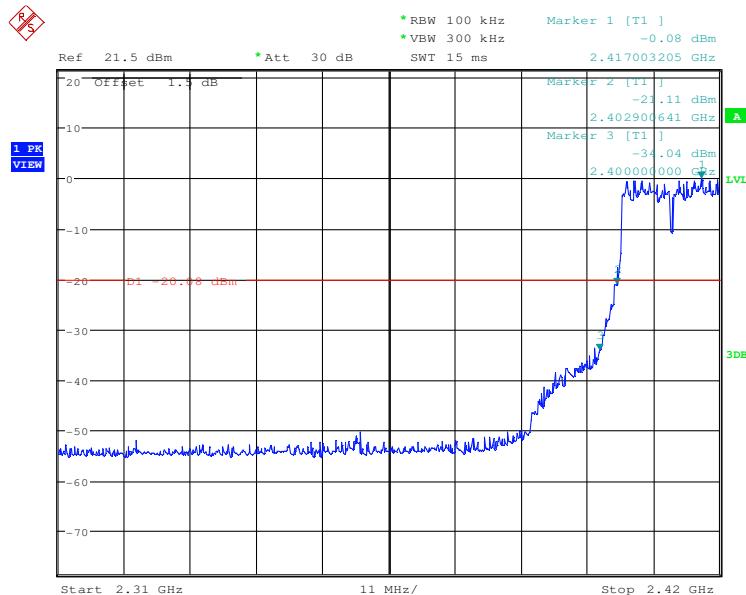


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

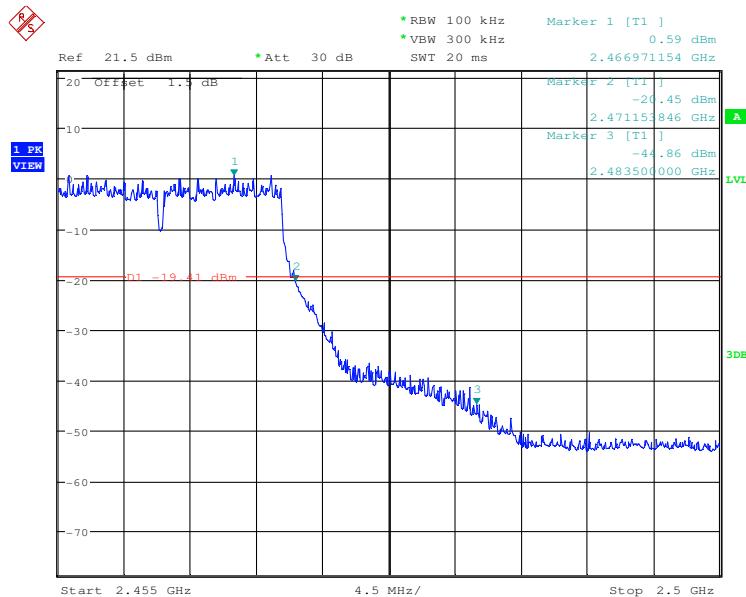


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

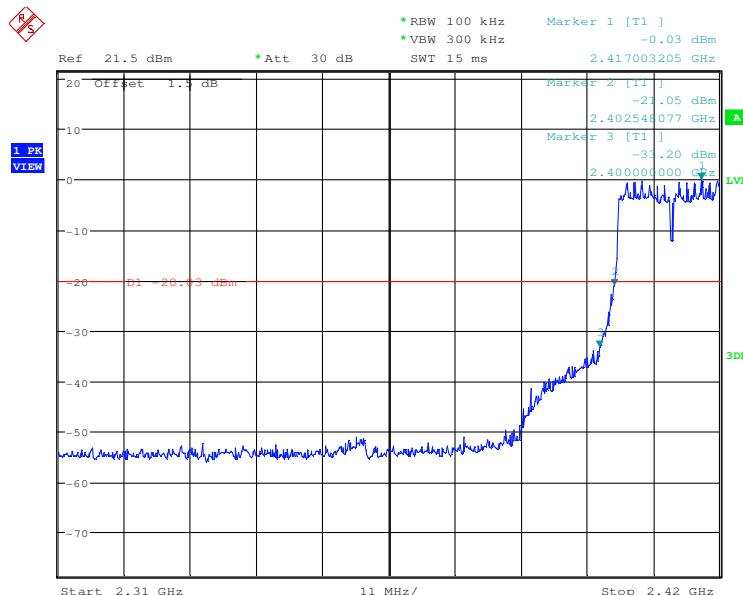


Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

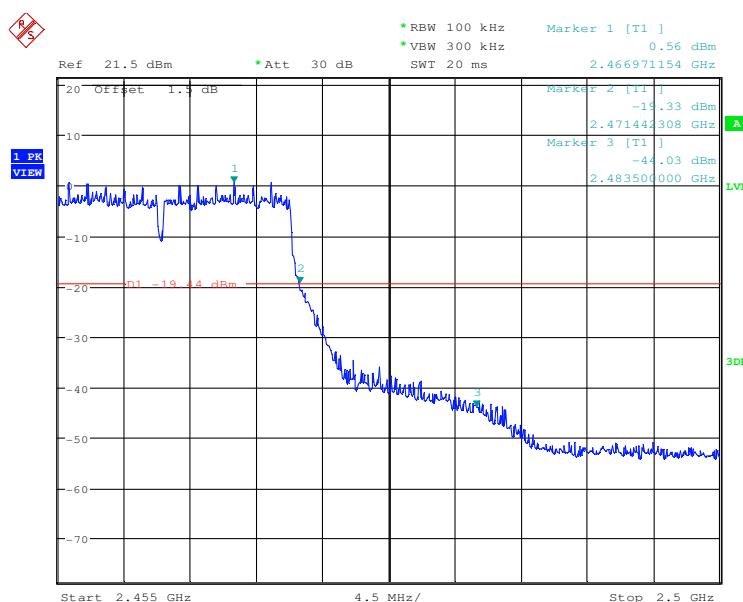


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

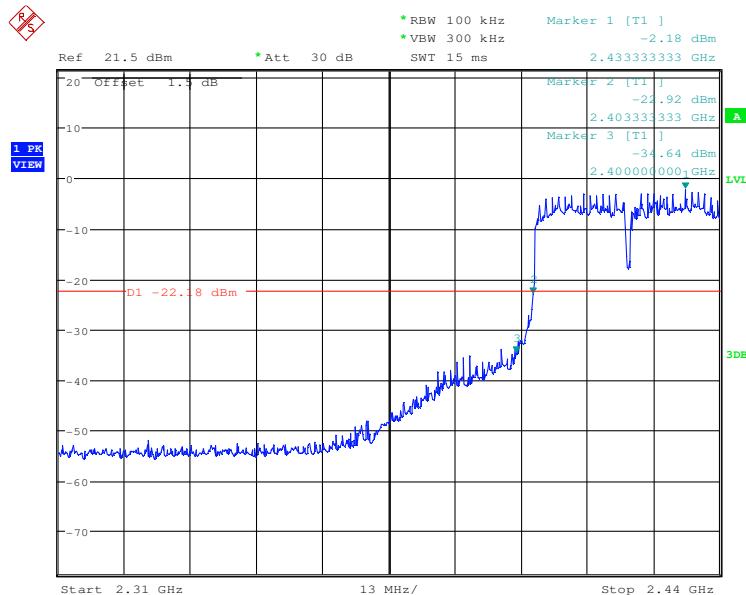

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

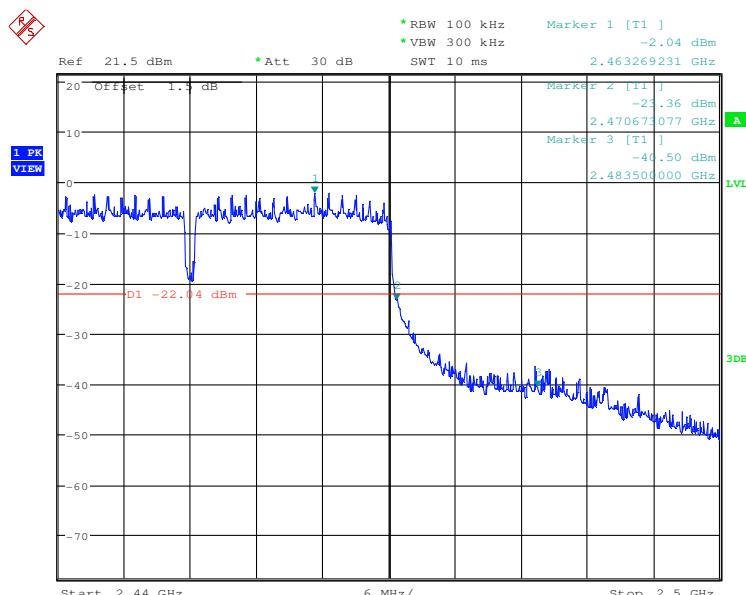



6.7 RF Conducted Spurious Emissions


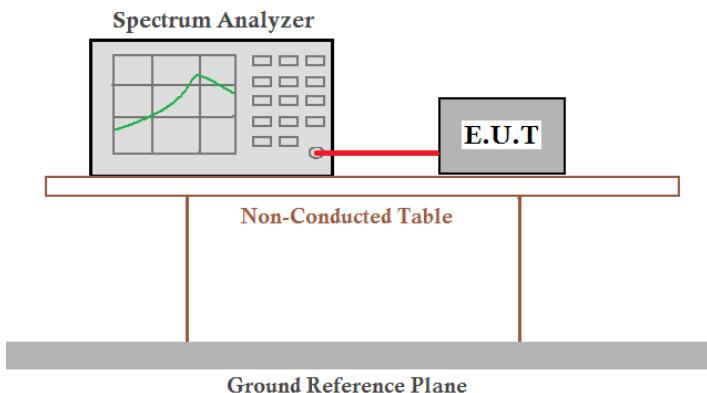
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02
Test Setup:	 <p>Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Test plot as follows:


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

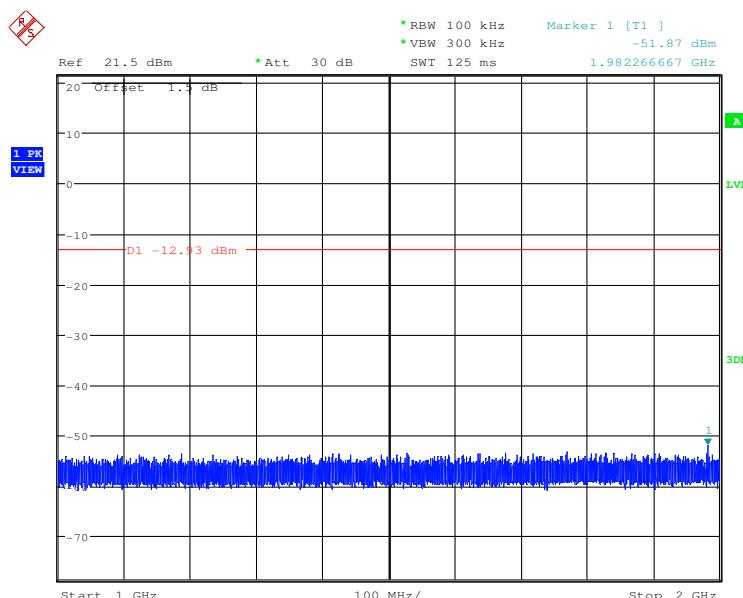
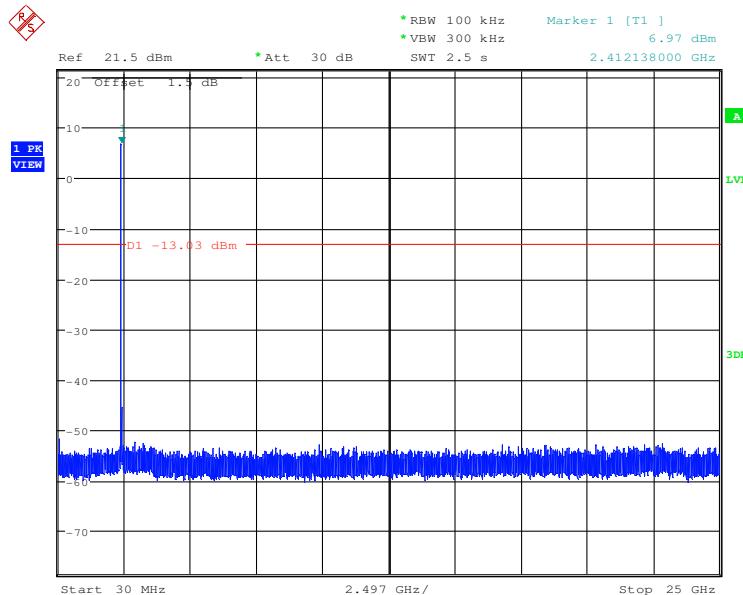


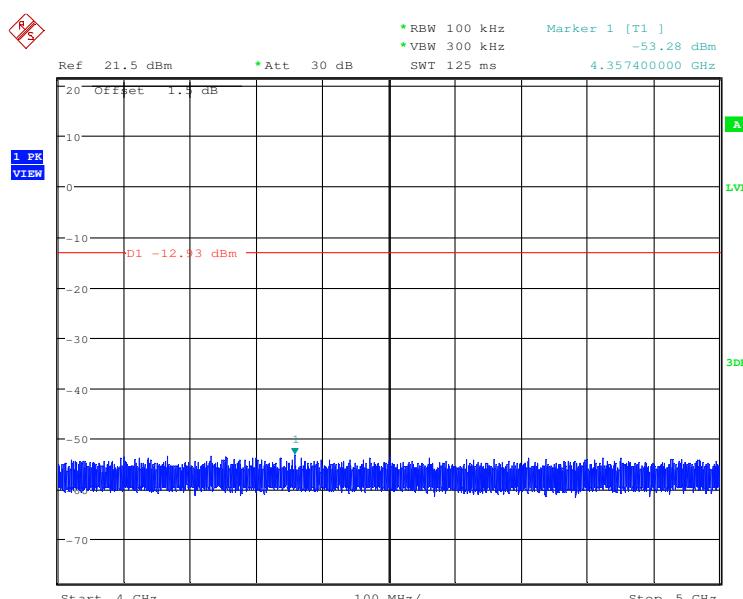
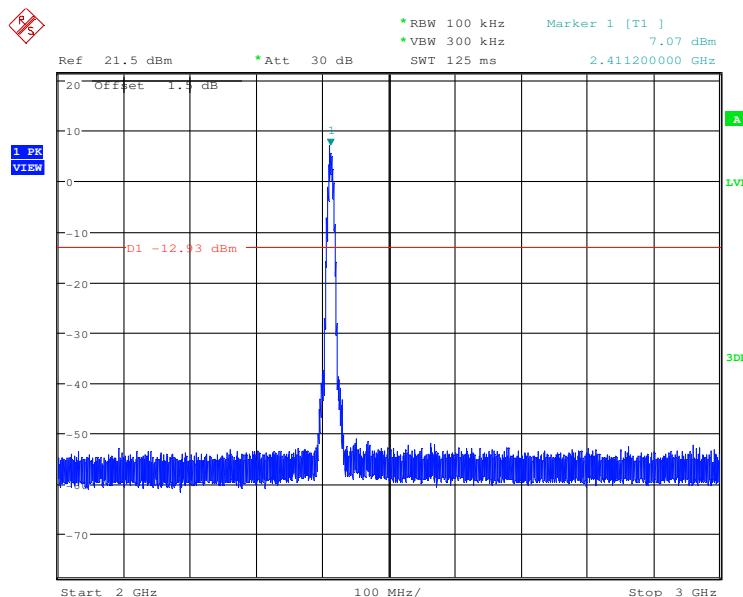


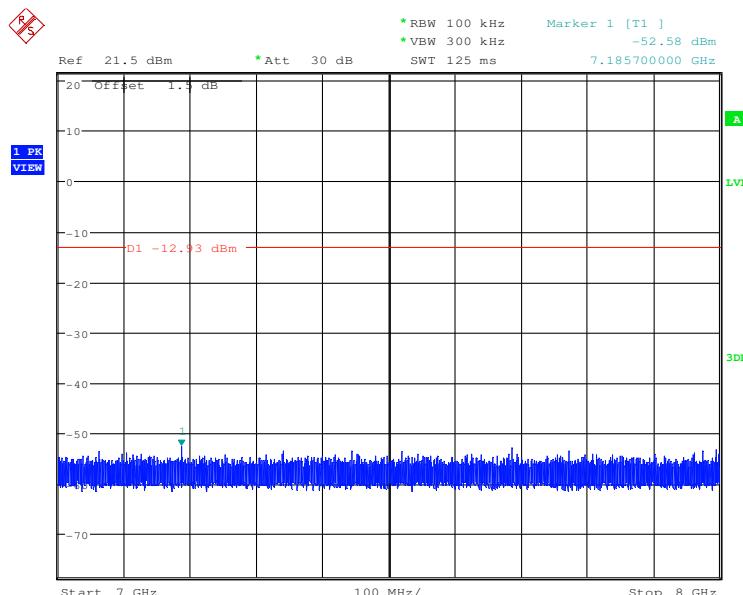



Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------


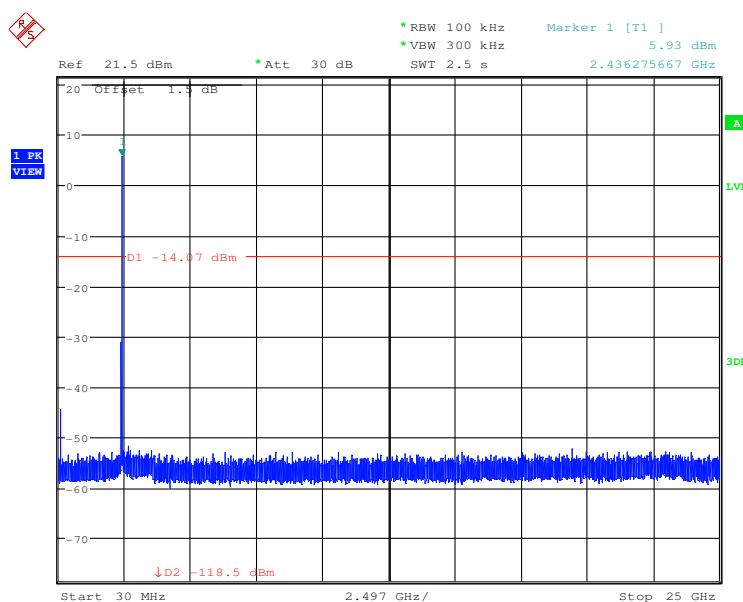


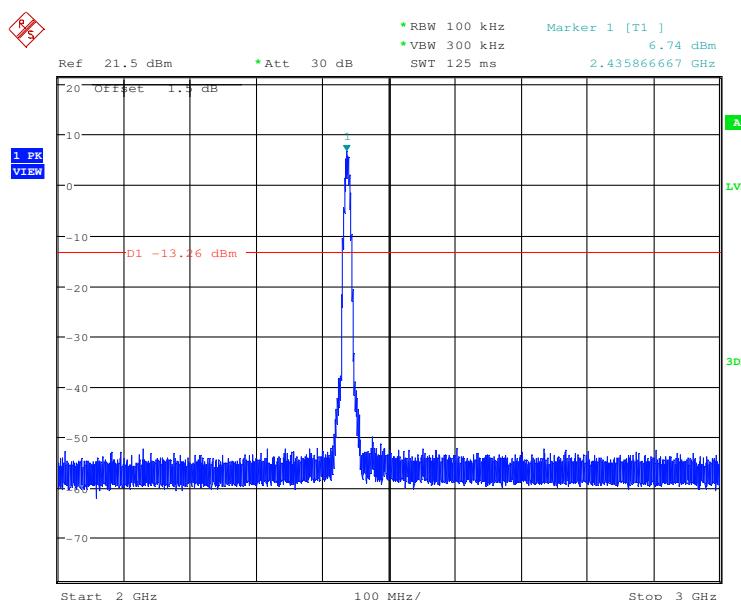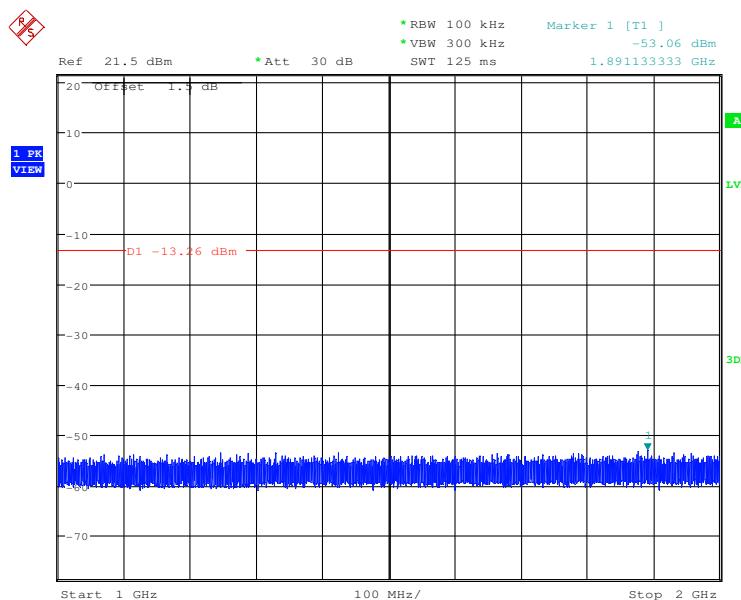


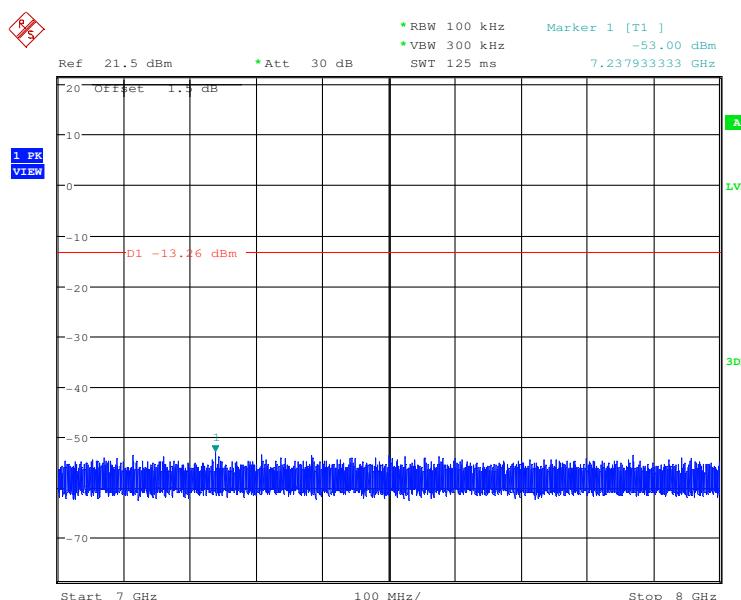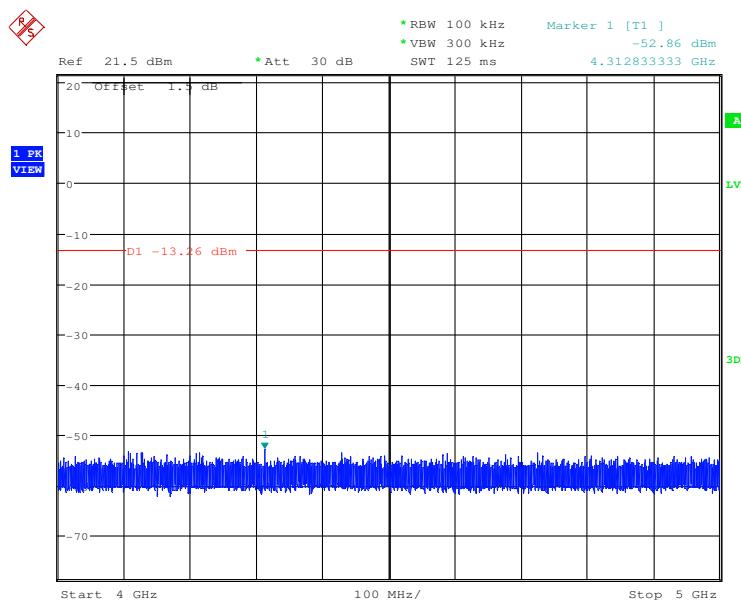


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

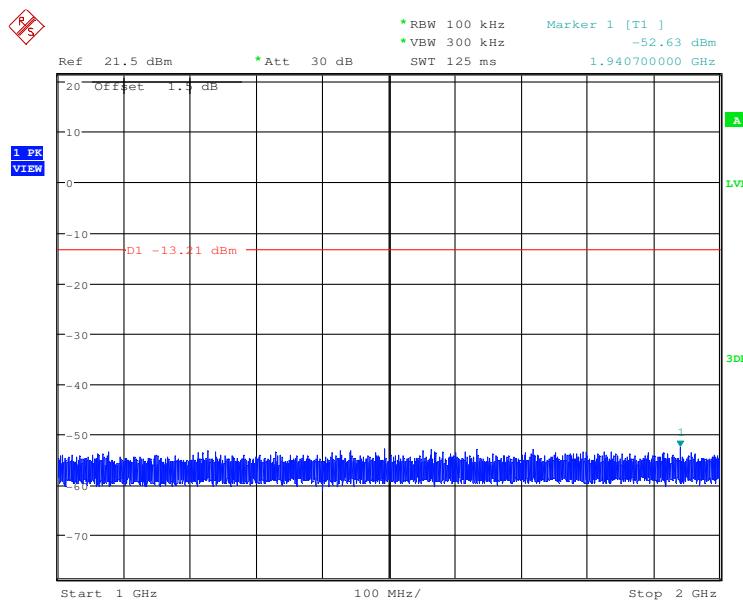
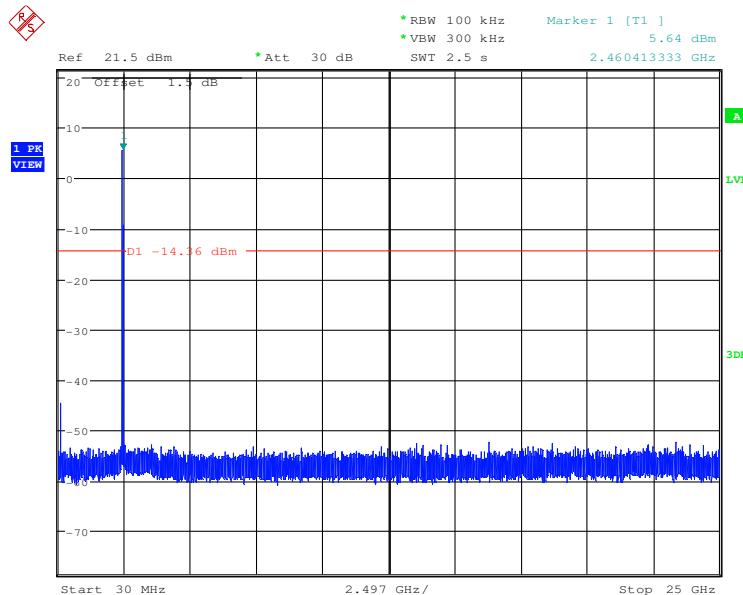


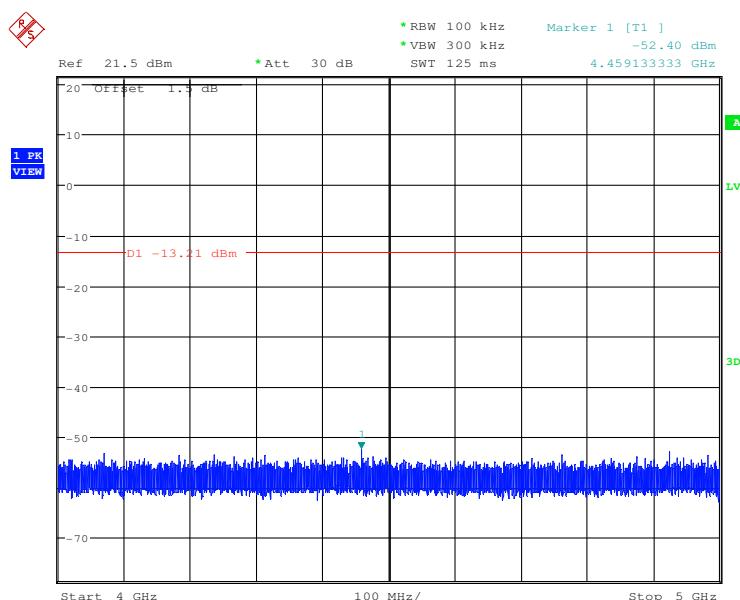
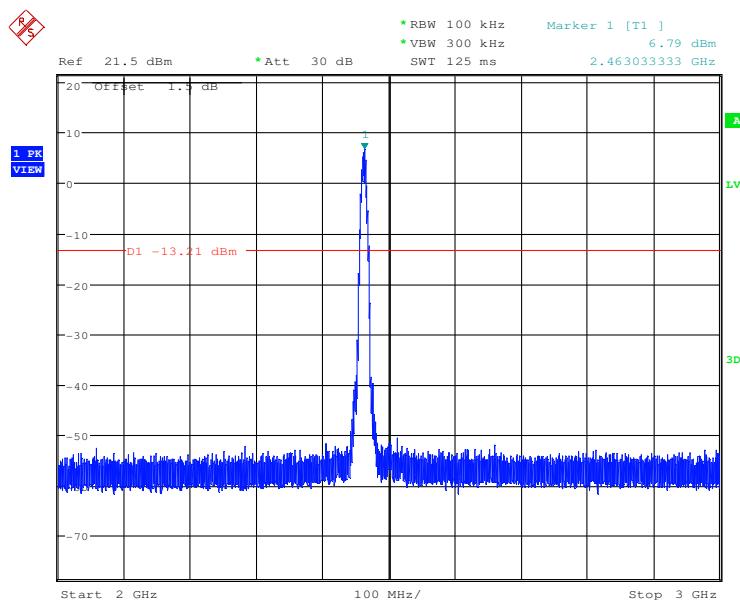


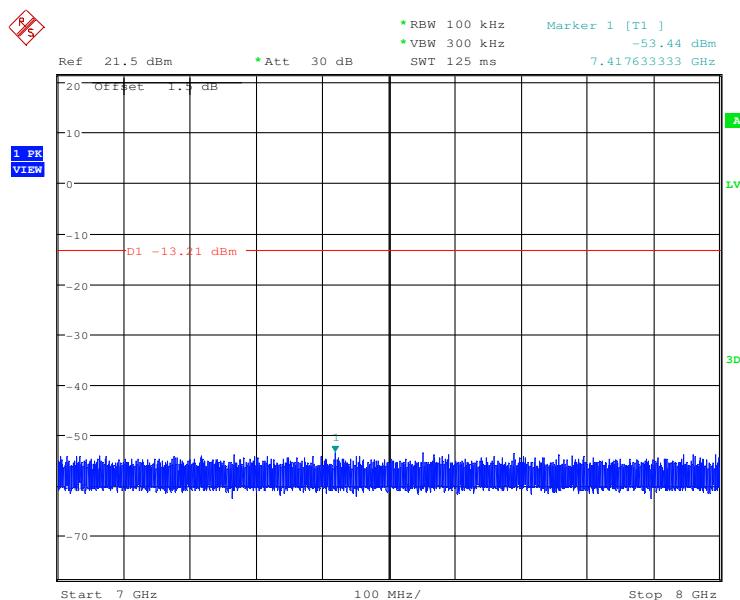



Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------


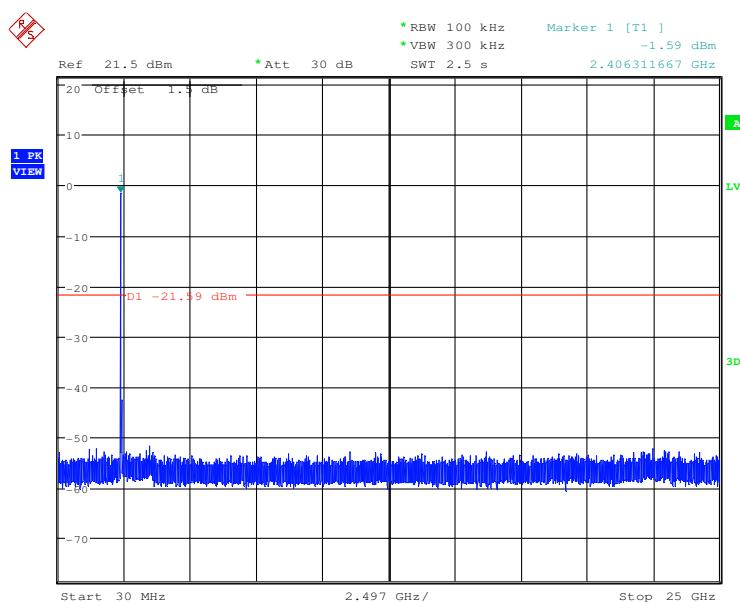


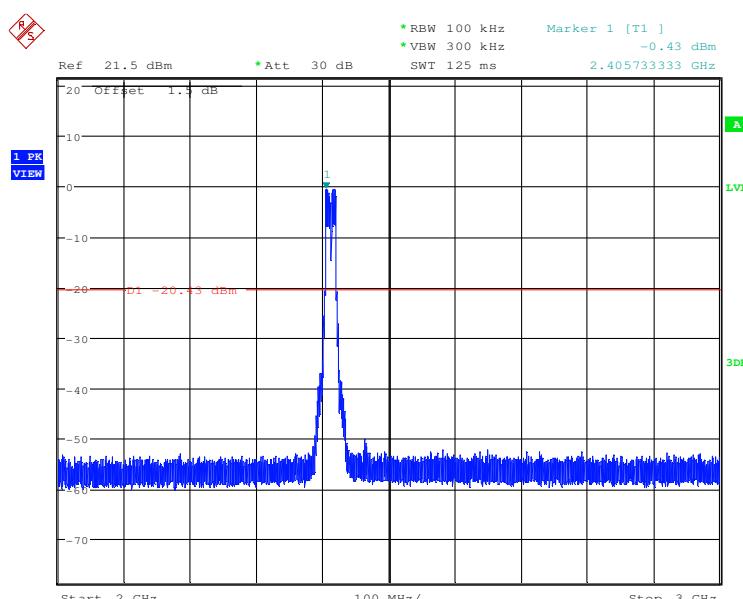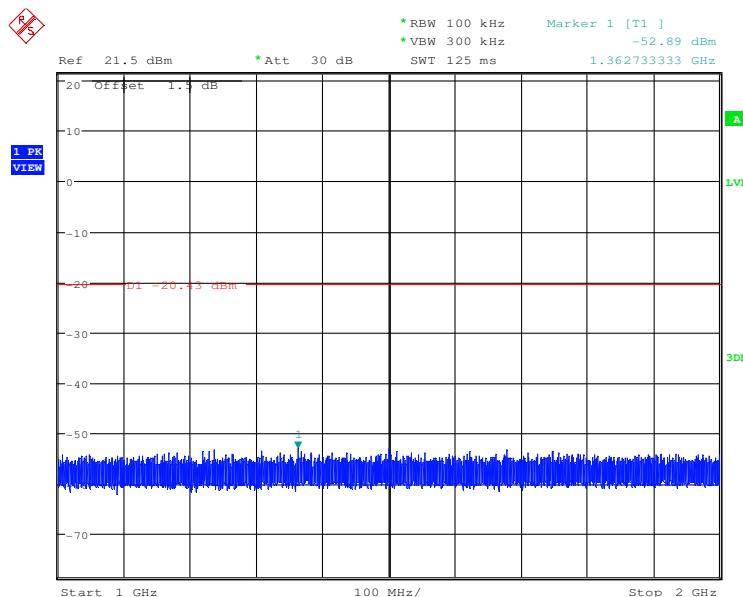


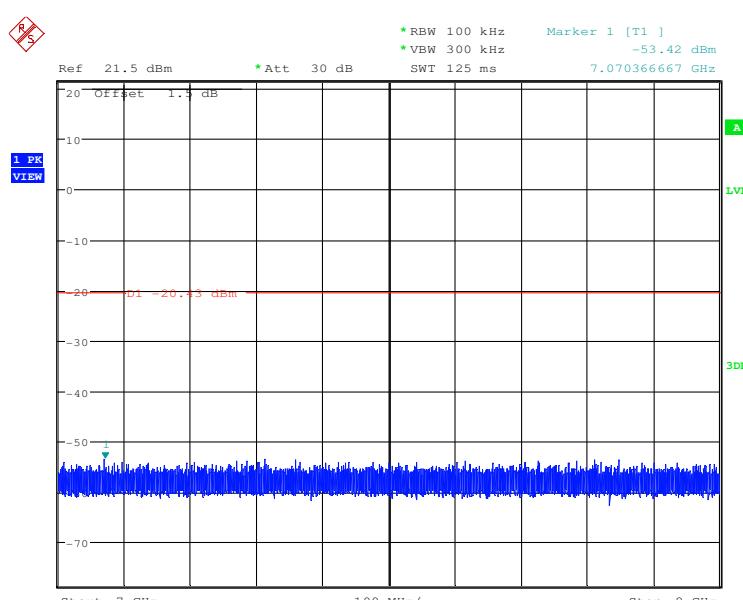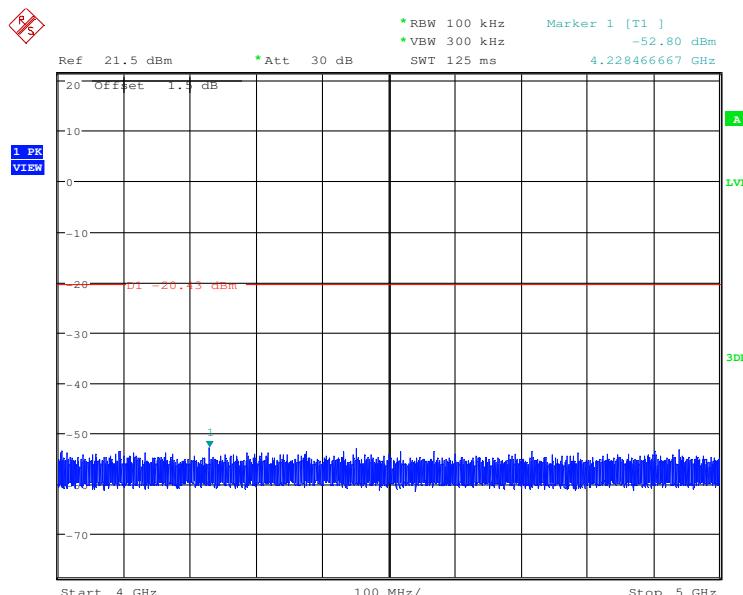



Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

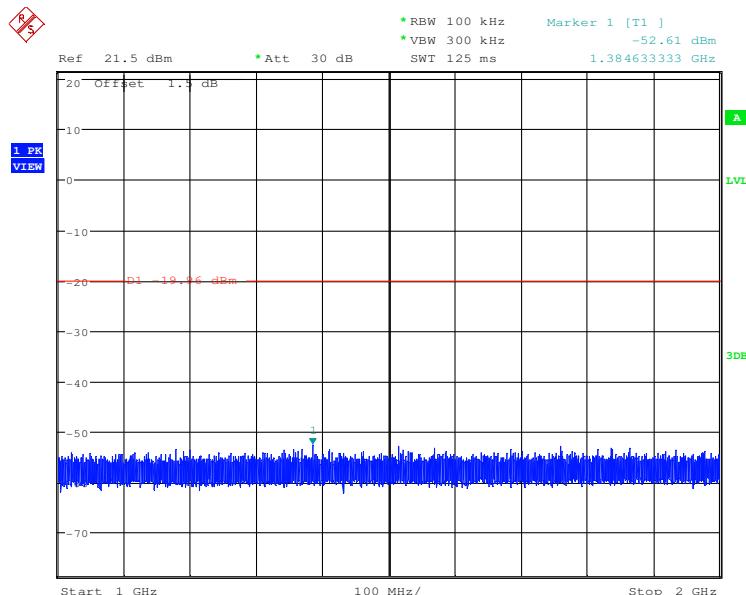
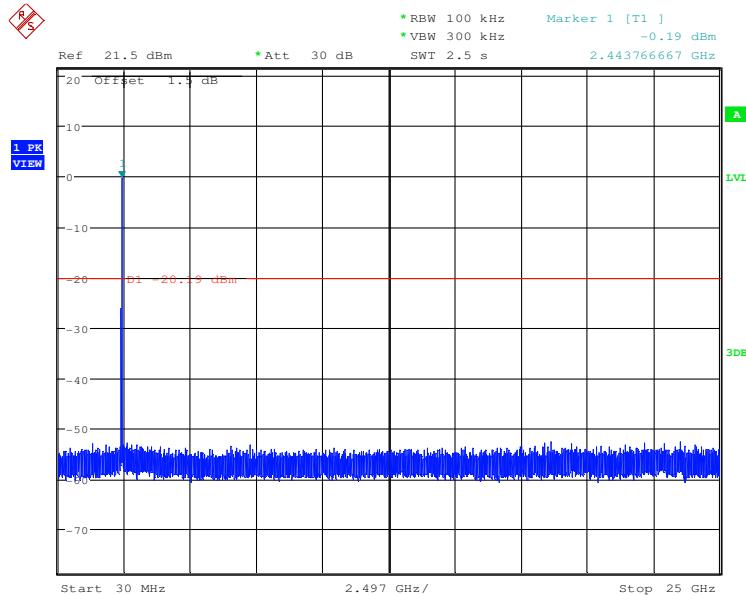


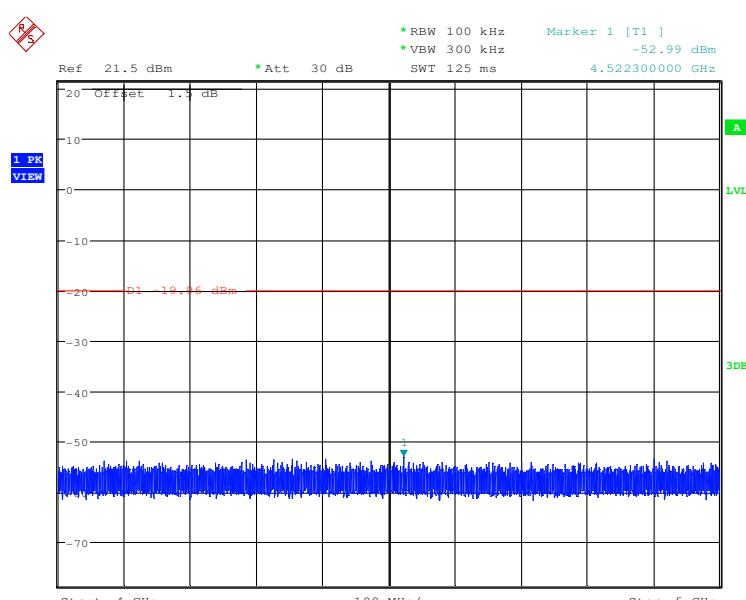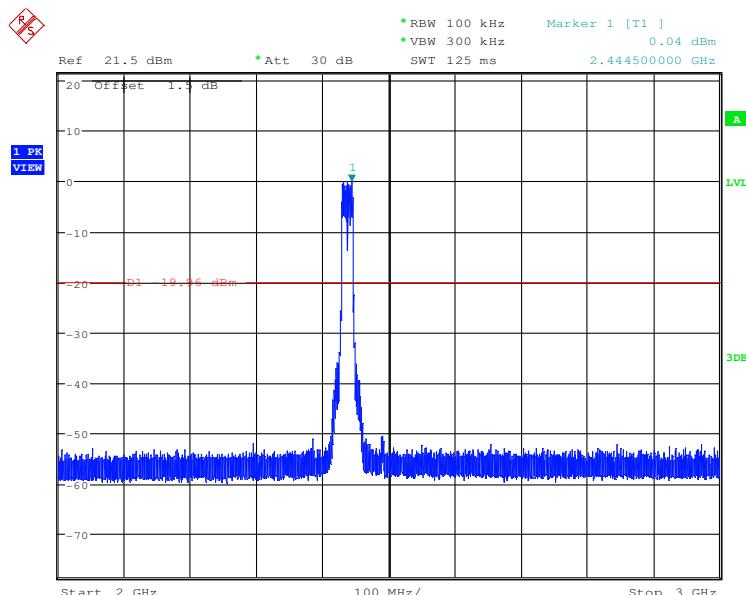


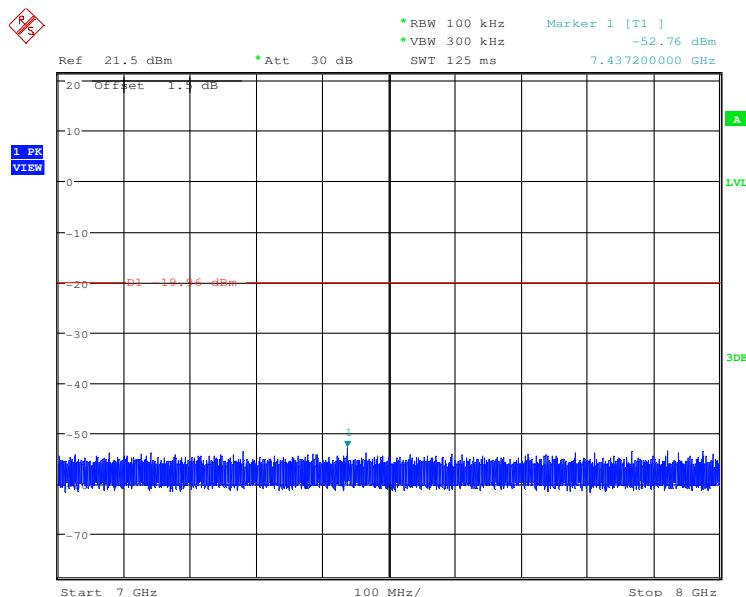


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

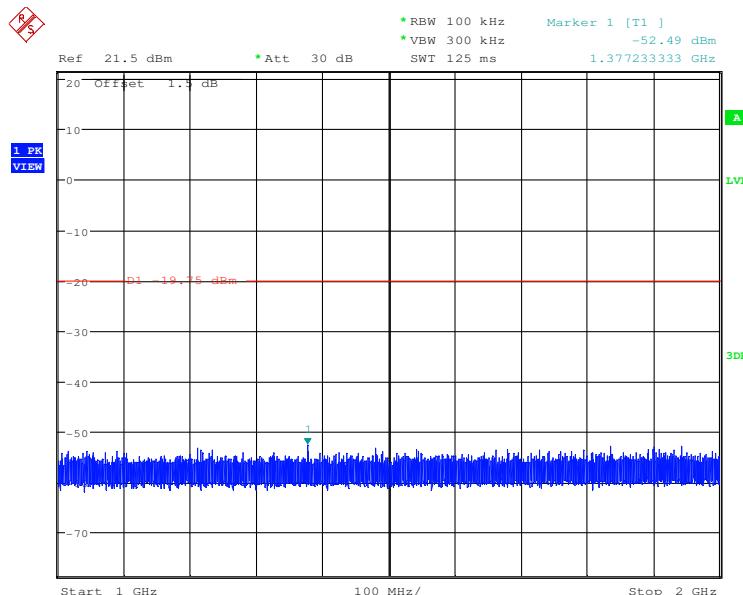
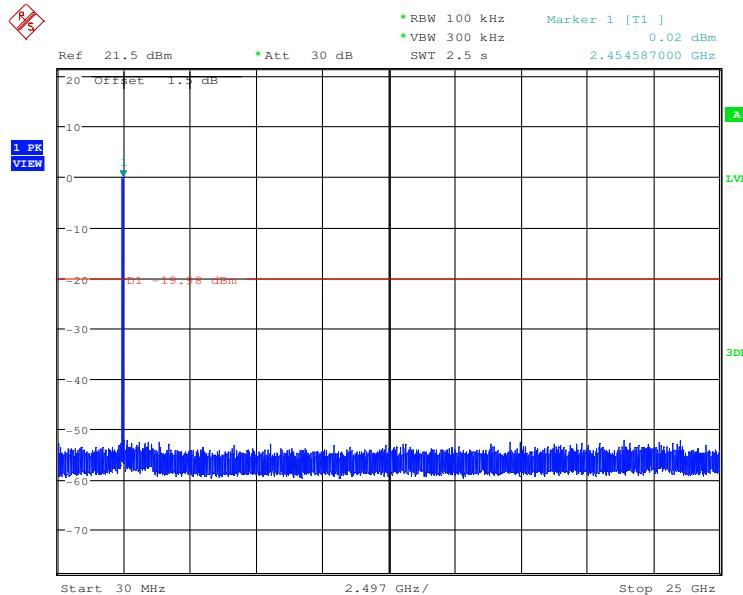


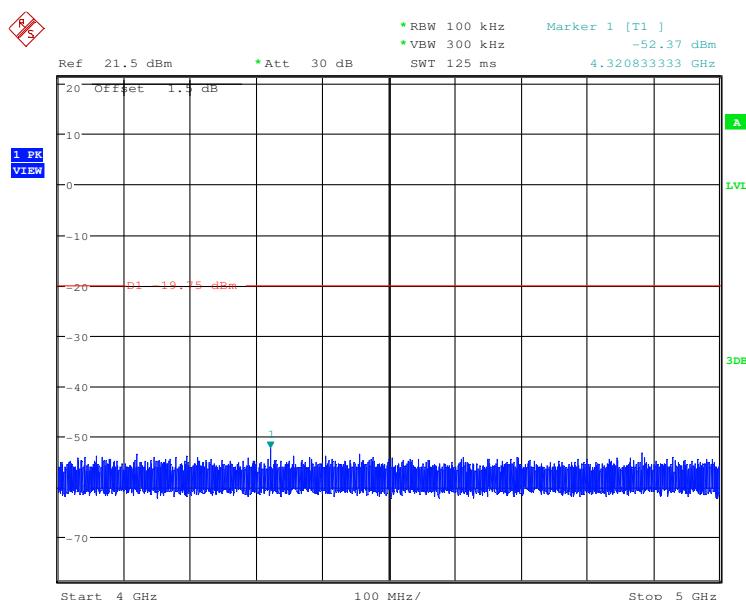
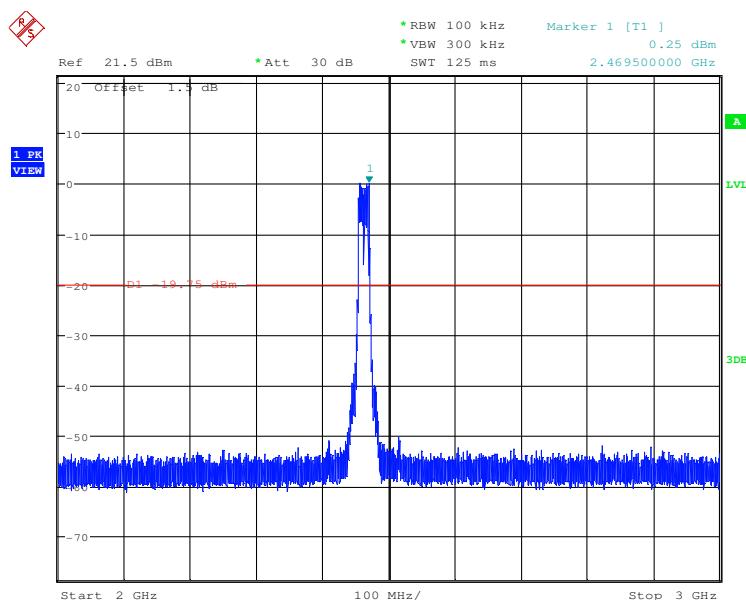


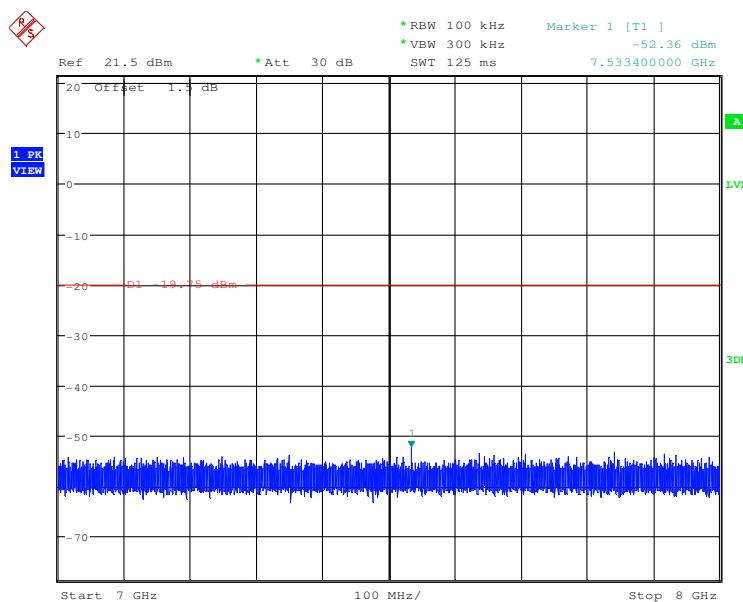



Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------


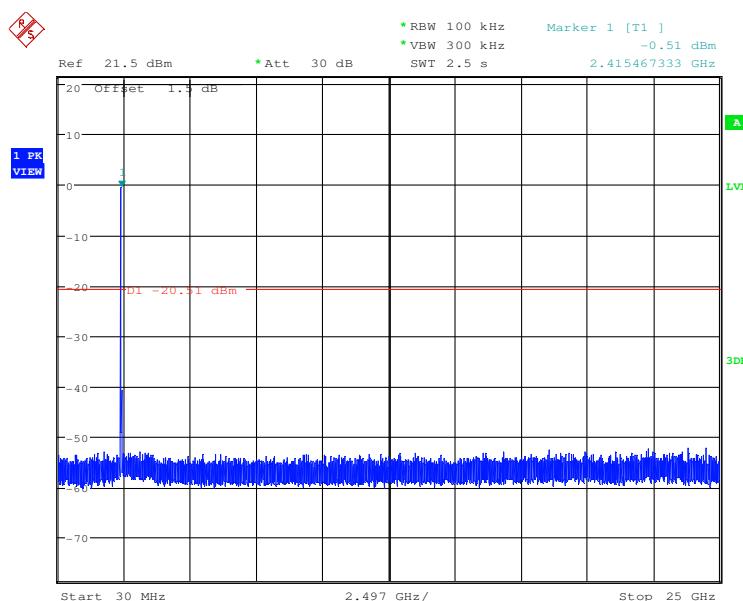


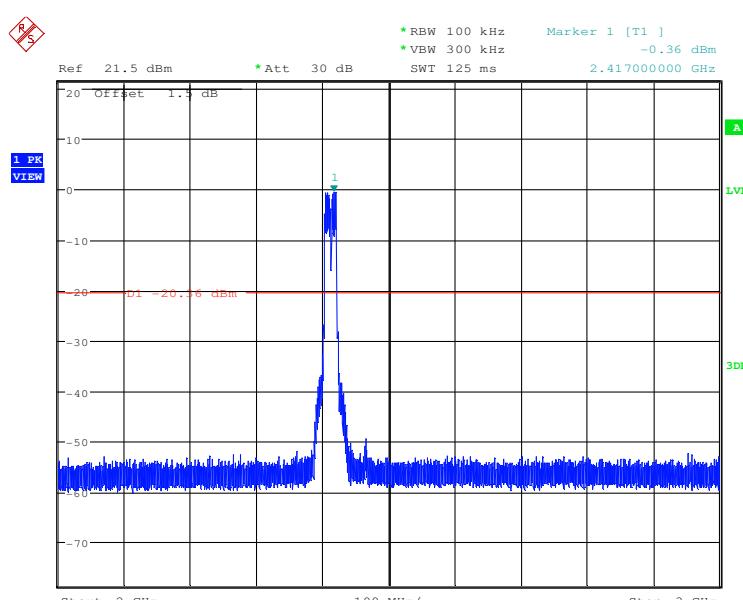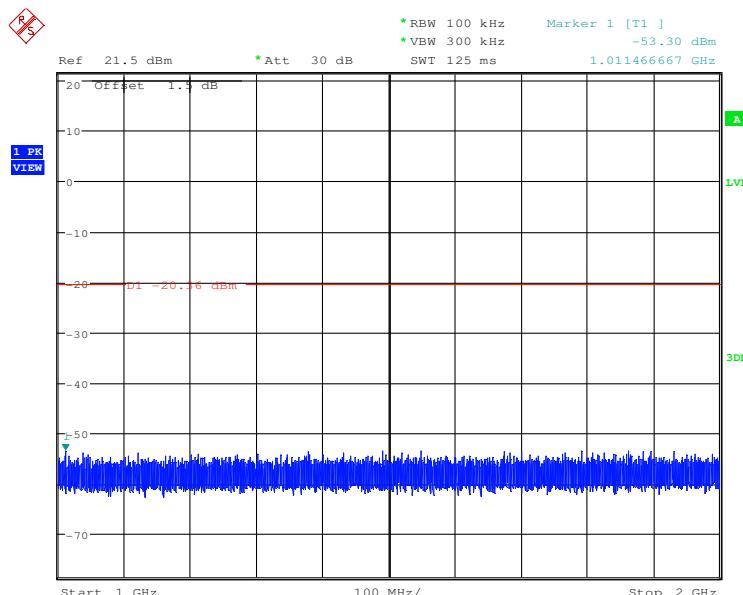


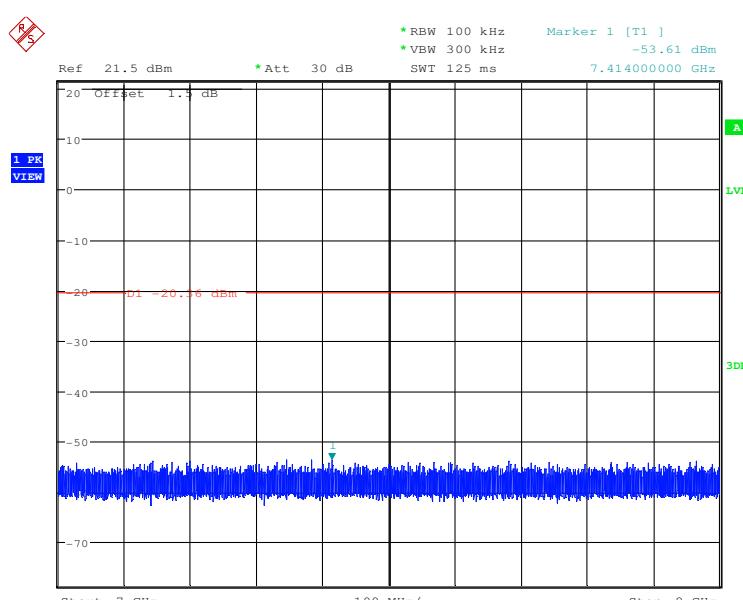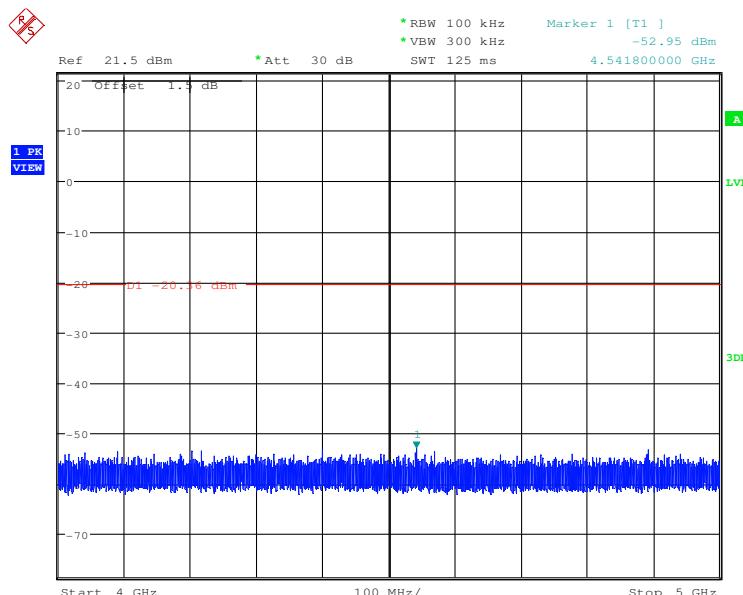


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

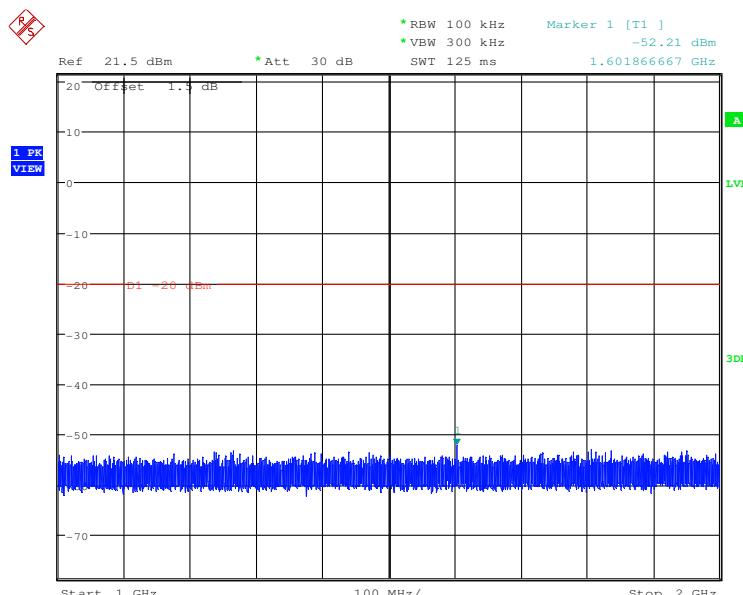
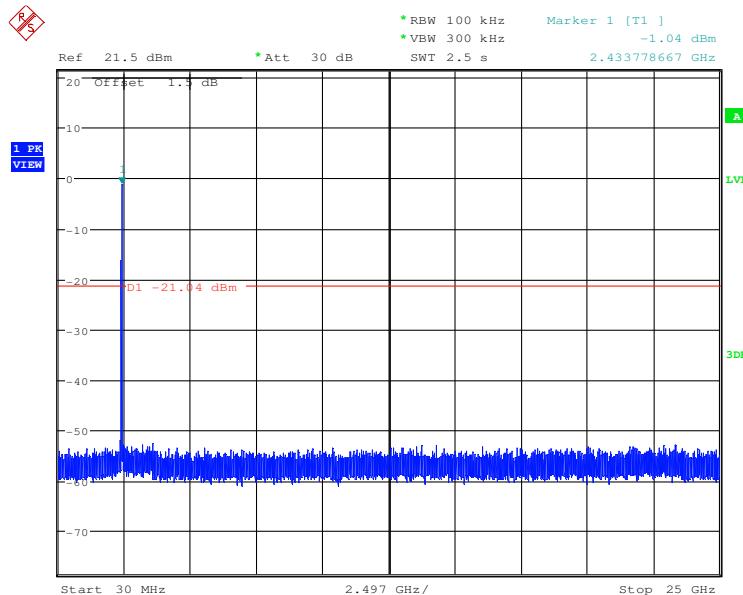


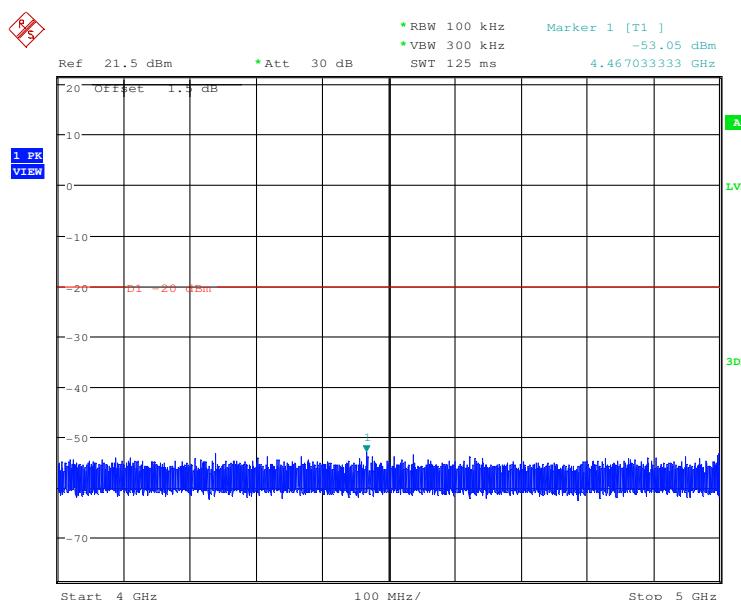
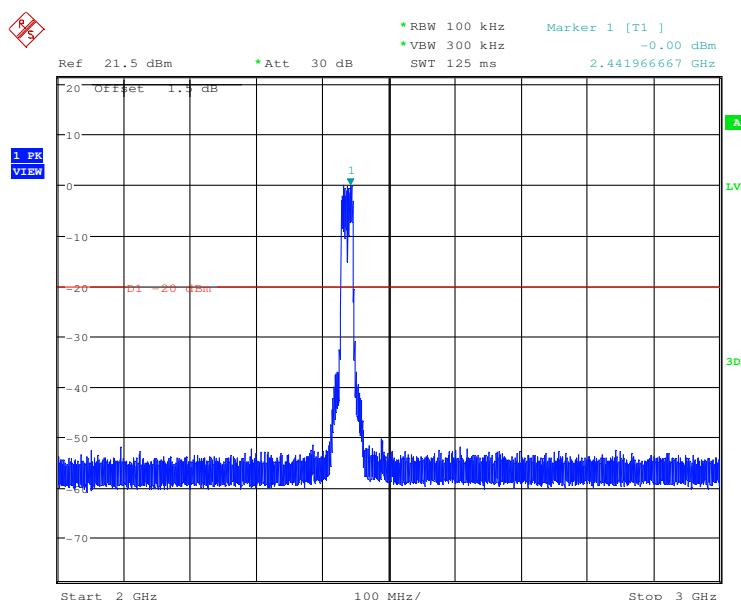


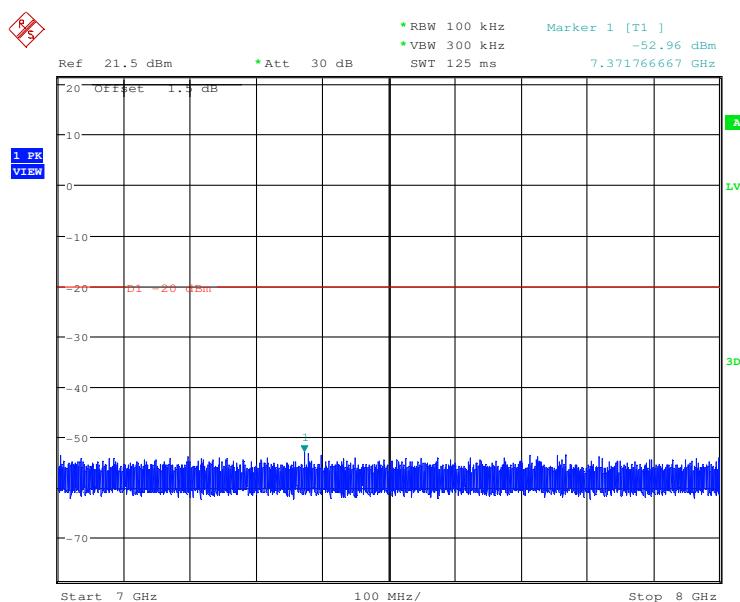



Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------


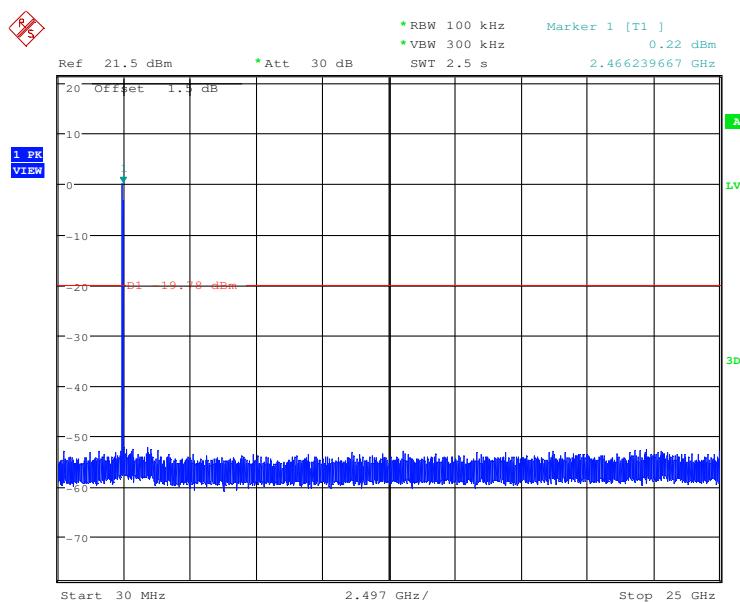


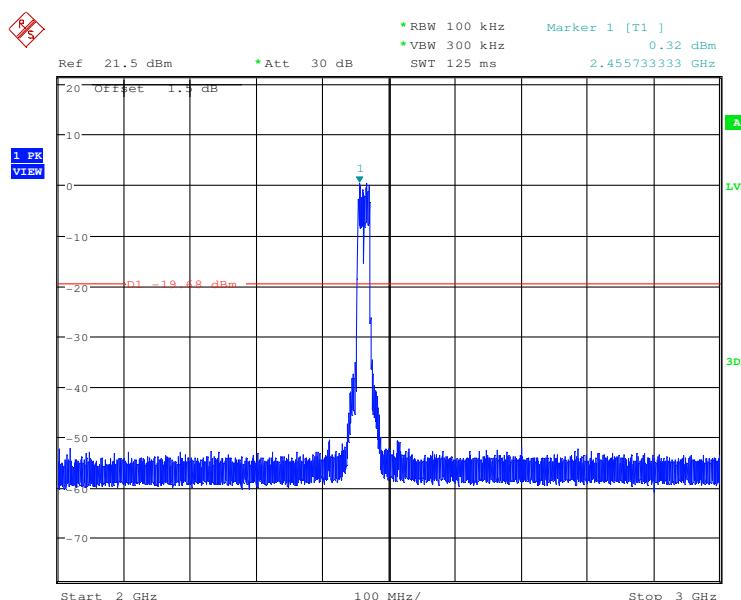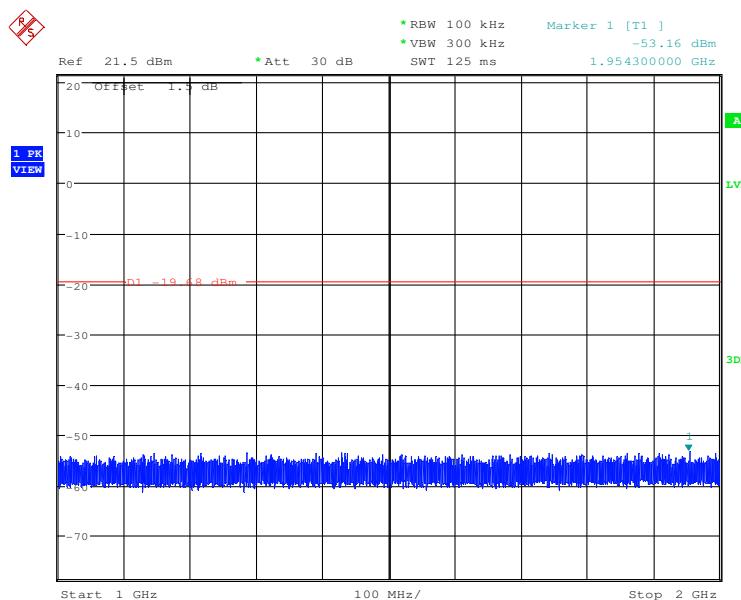


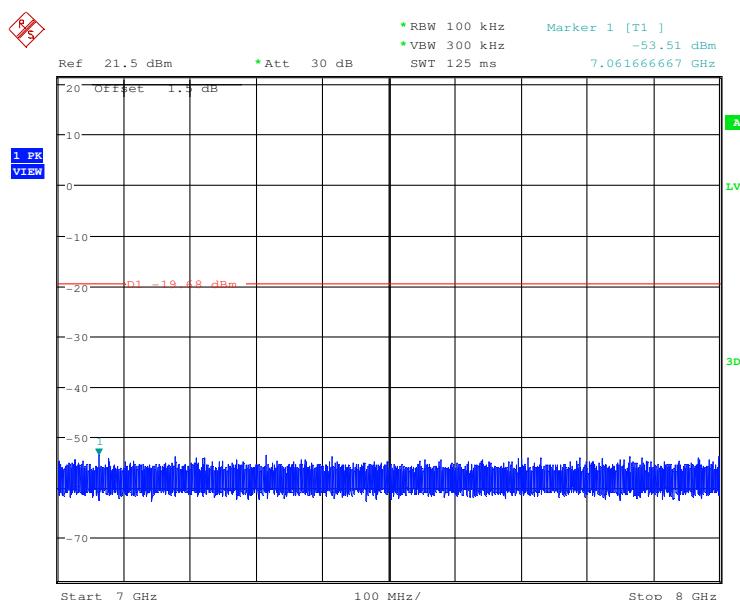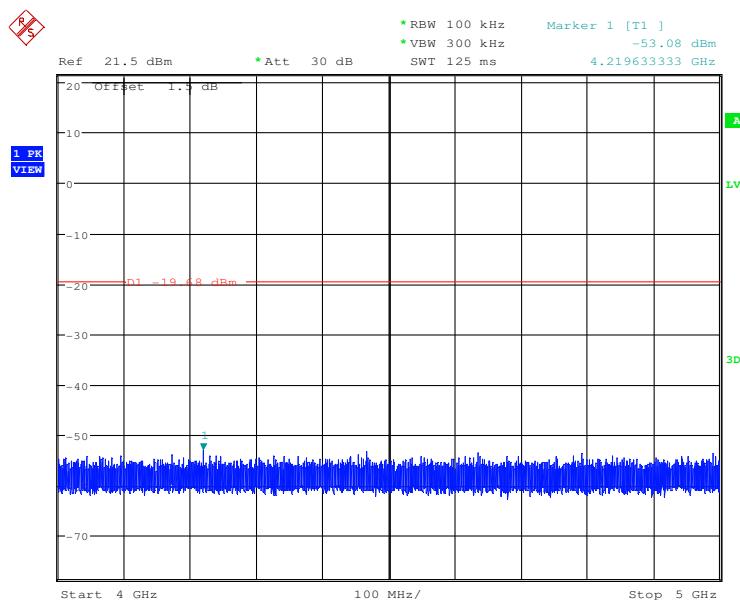


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

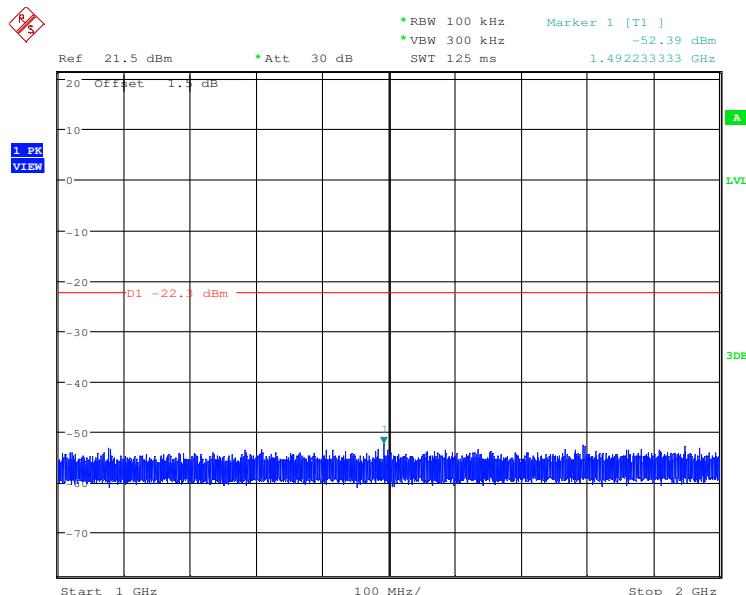
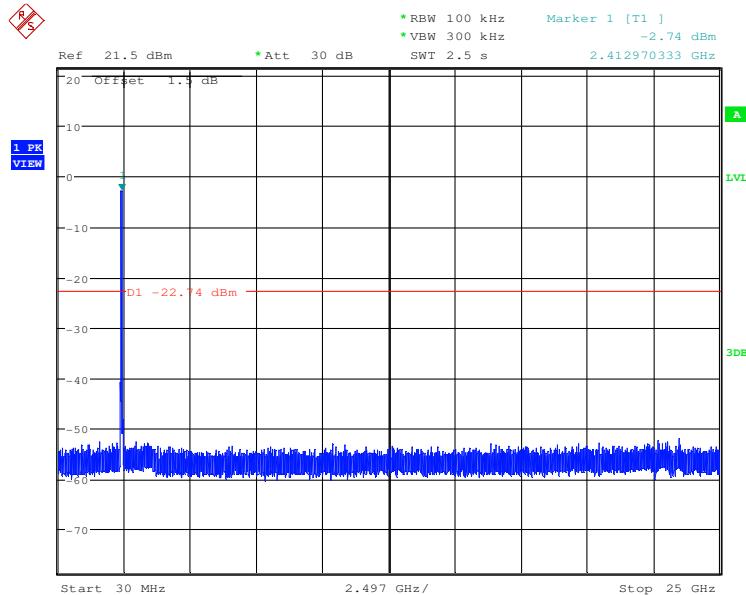


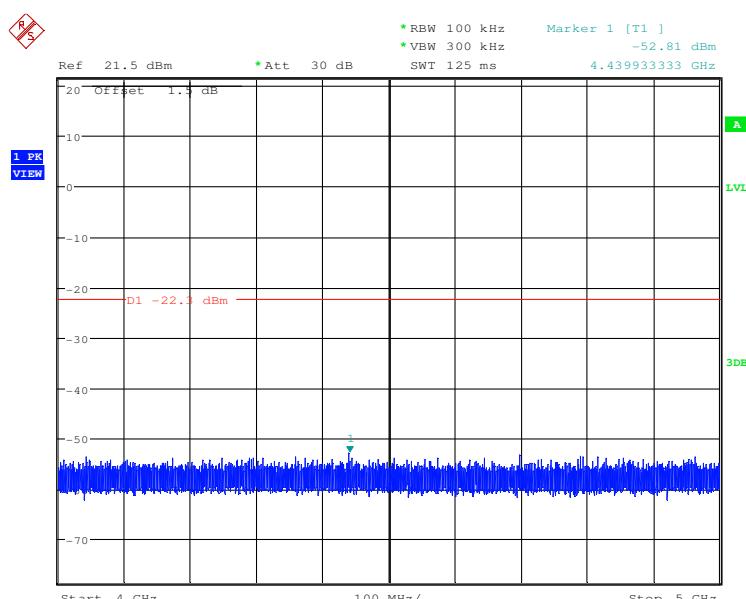
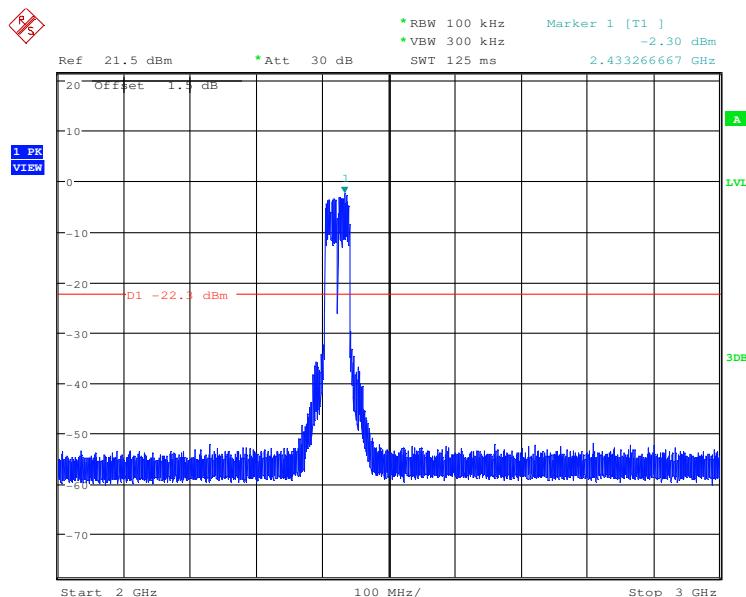


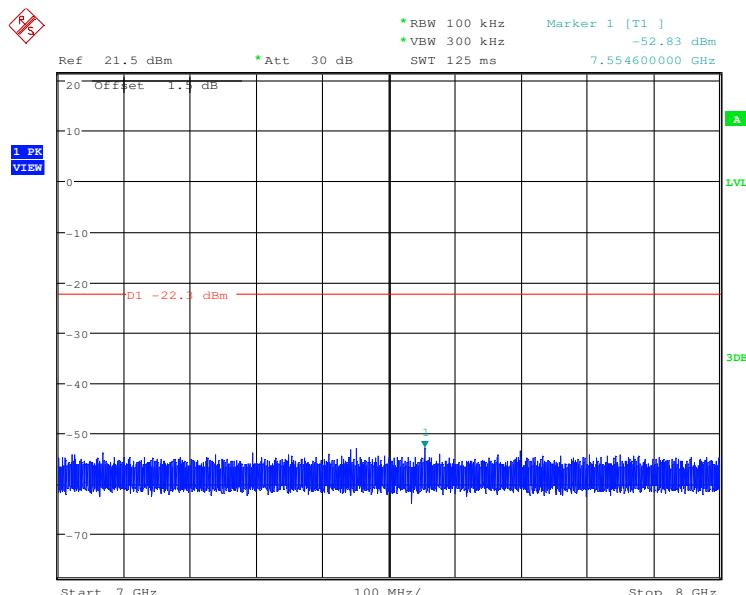



Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------


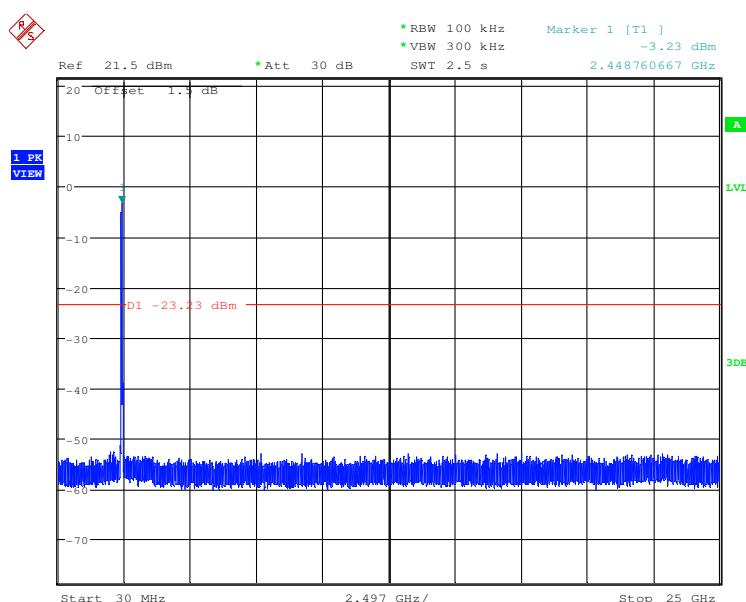


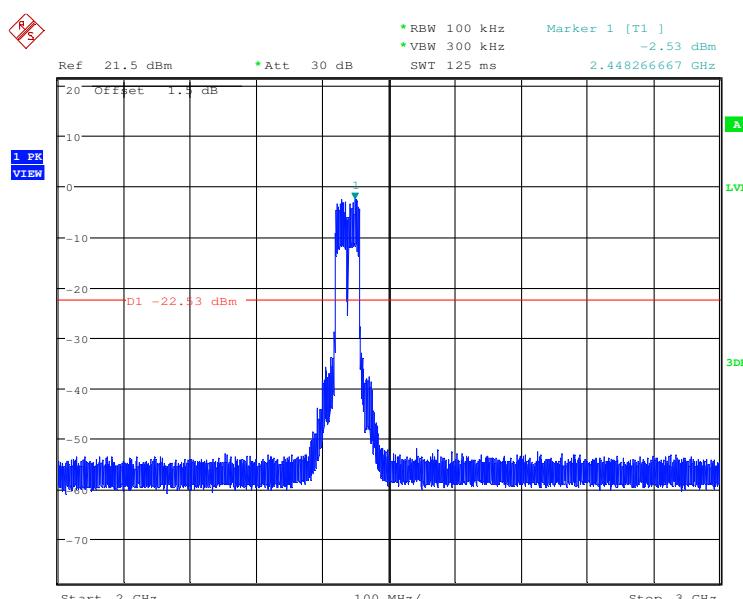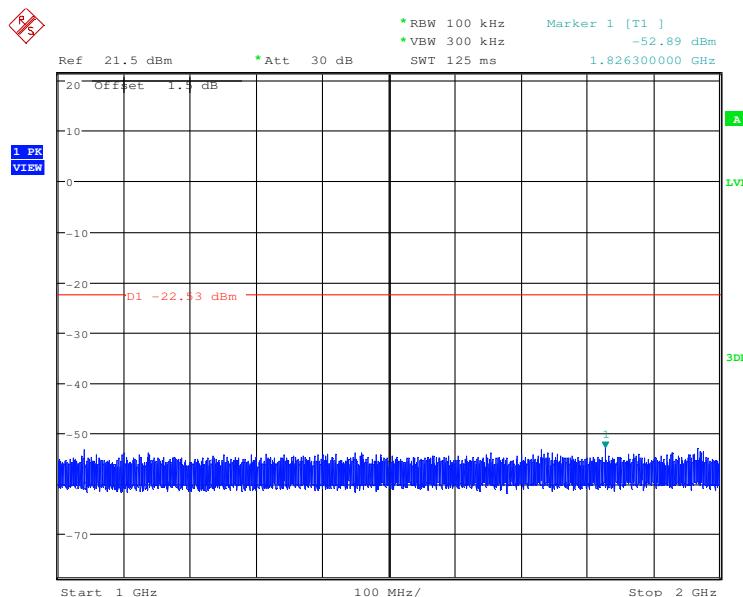


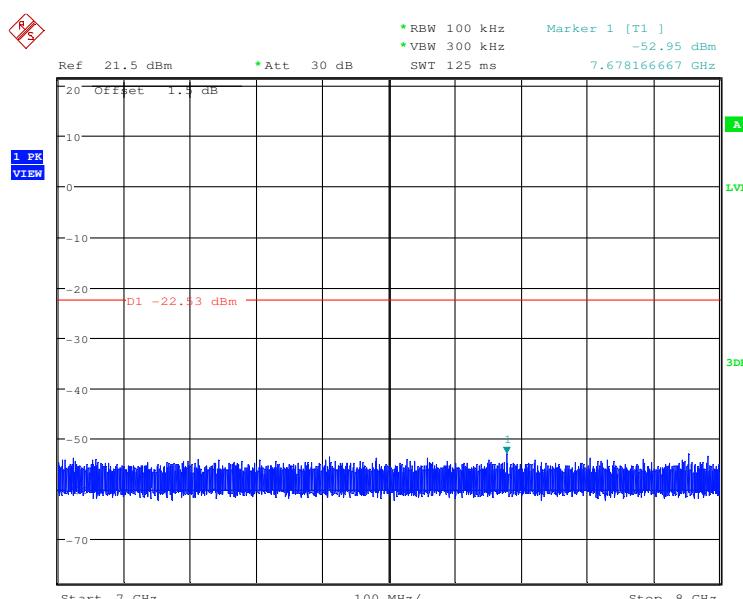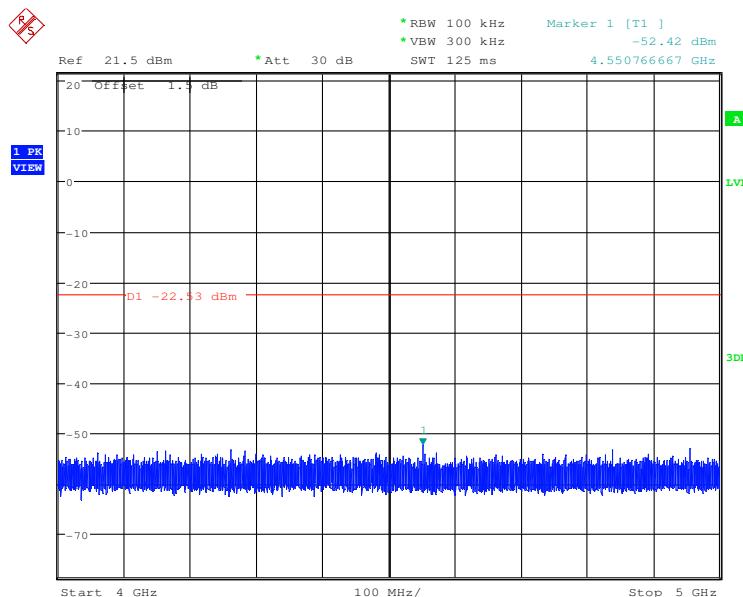

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

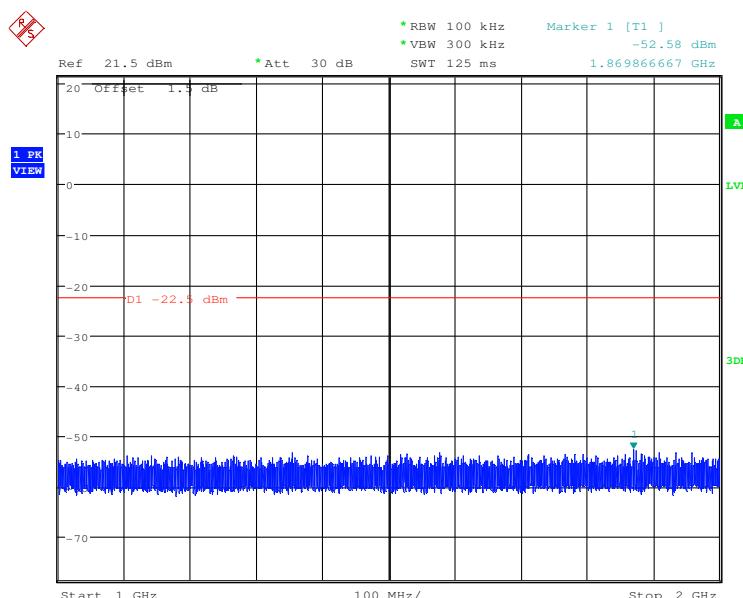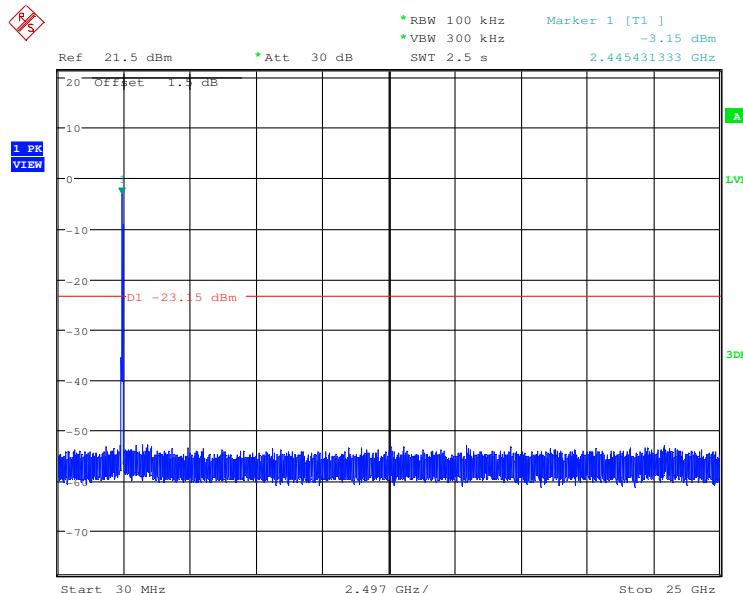

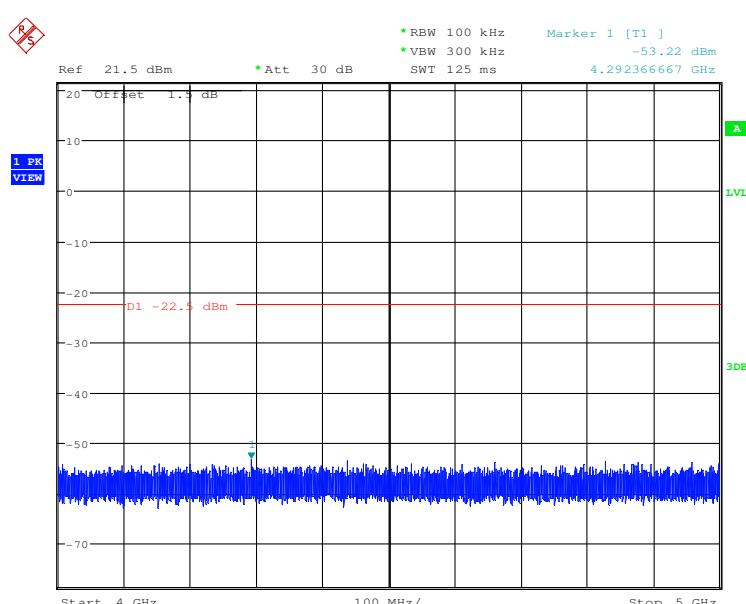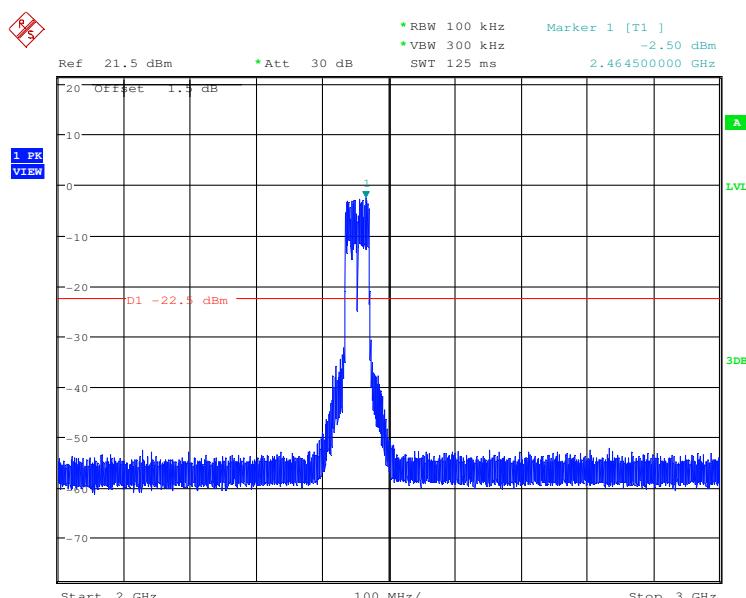

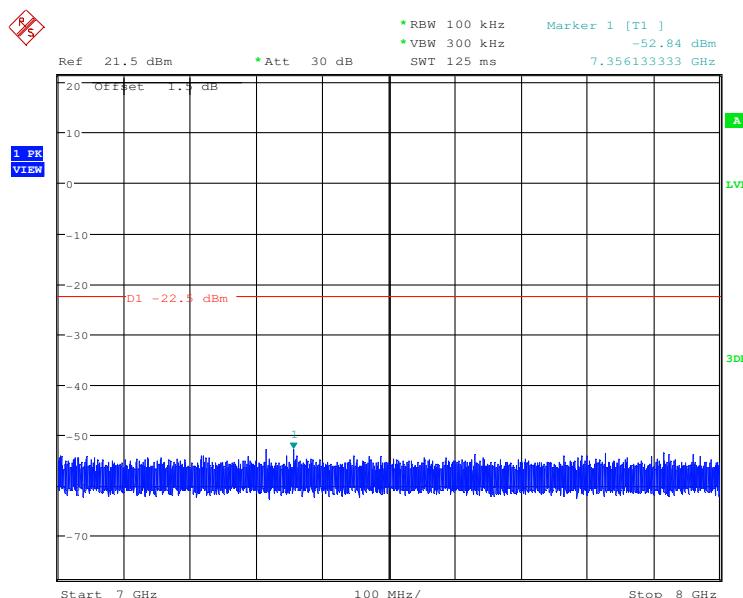**Remark:**

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

6.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:	

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz


Test Procedure:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average

	method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode, Charge +Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case. Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge +Transmitting mode	Vertical

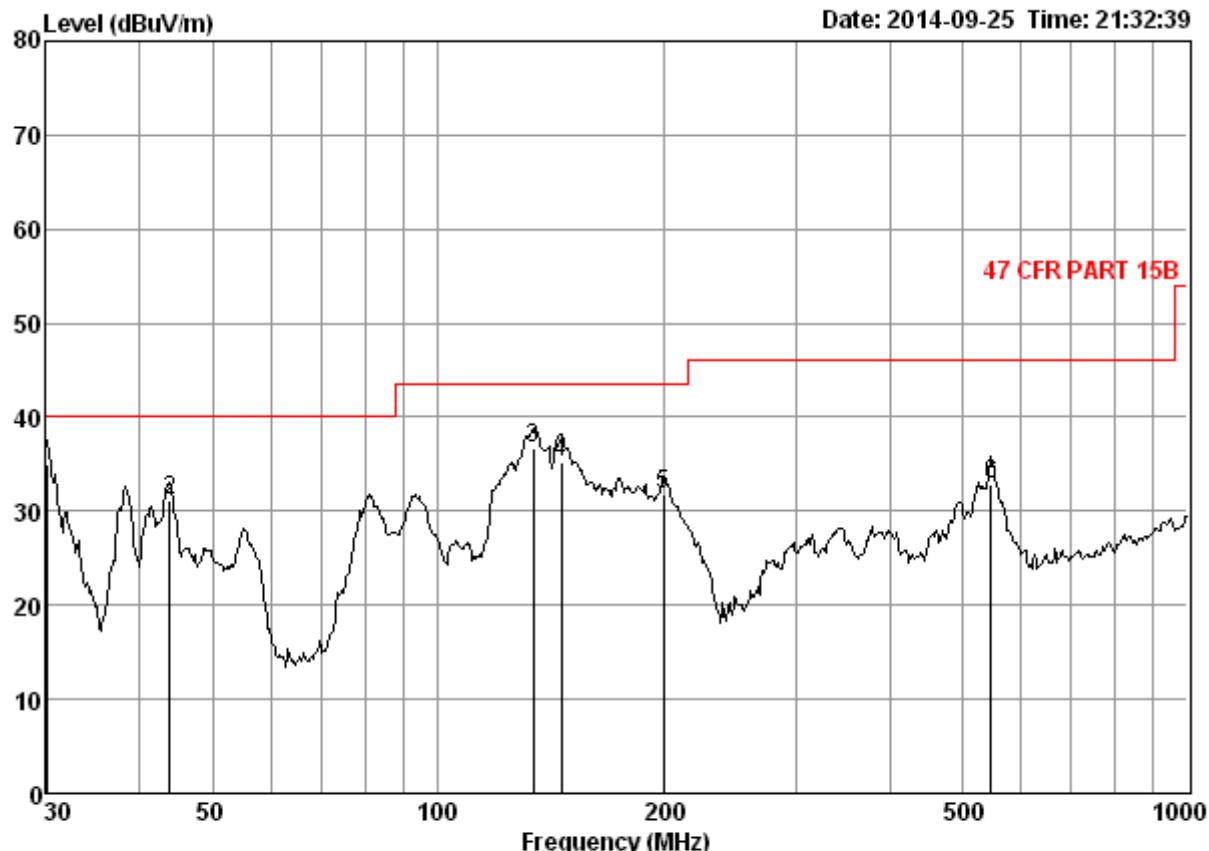


Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 4946RF

Mode : AC Charge+TX mode

Freq	Cable	Antenna	Preamp	Read	Limit	Over	Over	
	Loss	Factor	Factor	Level				
1	30.04	0.60	18.68	27.36	43.00	34.92	40.00	-5.08
2	43.81	0.68	11.42	27.31	46.30	31.09	40.00	-8.91
3	134.09	1.28	7.86	26.99	54.64	36.79	43.50	-6.71
4	145.86	1.31	8.63	26.93	52.20	35.21	43.50	-8.29
5	199.99	1.40	10.20	26.70	46.81	31.71	43.50	-11.79
6	547.10	2.65	18.85	27.62	38.98	32.86	46.00	-13.14

Test mode:	Charge +Transmitting mode	Horizontal
------------	---------------------------	------------

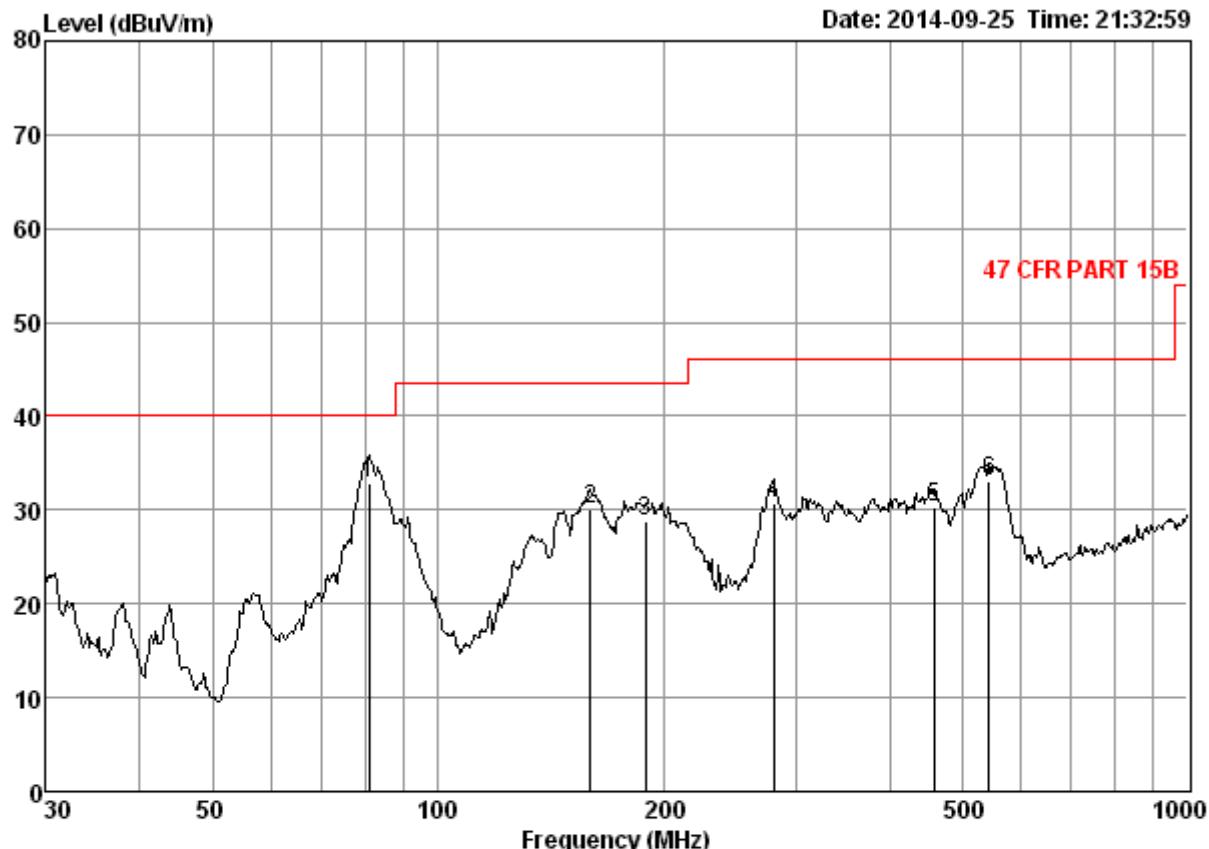

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 4946RF

Mode : AC Charge+TX mode

Freq	Cable	Antenna	Preamp	Read	Limit	Over	Line	Over
	Loss	Factor	Factor	Level				
1	80.93	1.10	7.79	27.23	51.27	32.93	40.00	-7.07
2	159.78	1.34	9.59	26.86	46.09	30.16	43.50	-13.34
3	189.07	1.38	10.08	26.74	44.11	28.83	43.50	-14.67
4	280.02	1.81	13.02	26.45	42.28	30.66	46.00	-15.34
5	459.11	2.45	17.23	27.50	38.05	30.23	46.00	-15.77
6	543.27	2.65	18.79	27.63	39.26	33.07	46.00	-12.93

6.8.2 Transmitter emission above 1GHz

Test mode:	802.11b		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3644.175	5.08	33.03	38.80	45.47	44.78	74	-29.22	Vertical	
4824.000	5.63	34.72	39.24	48.86	49.97	74	-24.03	Vertical	
7236.000	6.78	35.60	39.06	44.62	47.94	74	-26.06	Vertical	
8549.586	6.99	35.89	38.61	44.91	49.18	74	-24.82	Vertical	
9648.000	8.91	37.45	37.91	43.66	52.11	74	-21.89	Vertical	
11574.460	9.55	38.28	38.50	43.23	52.56	74	-21.44	Vertical	
3579.815	5.08	32.98	38.78	45.36	44.64	74	-29.36	Horizontal	
4824.000	5.63	34.72	39.24	45.01	46.12	74	-27.88	Horizontal	
7236.000	6.78	35.60	39.06	44.92	48.24	74	-25.76	Horizontal	
8506.170	6.97	35.86	38.64	43.89	48.08	74	-25.92	Horizontal	
9648.000	8.91	37.45	37.91	42.21	50.66	74	-23.34	Horizontal	
11633.540	9.47	38.33	38.53	43.31	52.58	74	-21.42	Horizontal	

Test mode:	802.11b		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3525.555	4.95	32.92	38.75	44.12	43.24	74	-30.76	Vertical	
4874.000	5.62	34.77	39.26	42.44	43.57	74	-30.43	Vertical	
7311.000	6.74	35.52	39.06	43.22	46.42	74	-27.58	Vertical	
8703.294	7.61	35.94	38.51	42.85	47.89	74	-26.11	Vertical	
9748.000	8.85	37.76	37.85	37.61	46.37	74	-27.63	Vertical	
11457.210	9.88	38.19	38.45	42.23	51.85	74	-22.15	Vertical	
3634.910	5.09	33.03	38.80	45.38	44.70	74	-29.30	Horizontal	
4874.000	5.62	34.77	39.26	45.91	47.04	74	-26.96	Horizontal	
7311.000	6.74	35.52	39.06	44.56	47.76	74	-26.24	Horizontal	
8615.126	7.11	35.91	38.57	44.84	49.29	74	-24.71	Horizontal	
9748.000	8.85	37.76	37.85	43.34	52.10	74	-21.90	Horizontal	
9920.000	9.19	38.27	37.75	41.85	51.56	74	-22.44	Horizontal	



Test mode:		802.11b		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1904.119	3.66	30.95	38.42	44.17	40.36	74	-33.64		Vertical	
3747.656	4.98	33.11	38.85	44.84	44.08	74	-29.92		Vertical	
4944.000	5.60	34.84	39.28	44.47	45.63	74	-28.37		Vertical	
7416.000	6.70	35.42	39.05	45.38	48.45	74	-25.55		Vertical	
9888.000	9.09	38.18	37.77	42.66	52.16	74	-21.84		Vertical	
11933.470	9.34	38.63	38.67	44.14	53.44	74	-20.56		Vertical	
1759.638	3.53	29.93	38.40	43.65	38.71	74	-35.29		Horizontal	
3690.853	5.04	33.07	38.82	44.61	43.90	74	-30.10		Horizontal	
4944.000	5.60	34.84	39.28	49.55	50.71	74	-23.29		Horizontal	
7416.000	6.70	35.42	39.05	44.90	47.97	74	-26.03		Horizontal	
9888.000	9.09	38.18	37.77	41.36	50.86	74	-23.14		Horizontal	
11872.880	9.36	38.57	38.64	43.85	53.14	74	-20.86		Horizontal	

Test mode:		802.11g		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1663.803	2.75	29.50	38.39	50.44	44.30	74	-29.70		Vertical	
3498.735	3.95	32.89	38.74	49.64	47.74	74	-26.26		Vertical	
4824.000	4.31	34.72	39.24	48.59	48.38	74	-25.62		Vertical	
7236.000	5.28	35.60	39.06	48.15	49.97	74	-24.03		Vertical	
9648.000	6.51	37.45	37.91	46.95	53.00	74	-21.00		Vertical	
11574.460	7.50	38.28	38.50	46.63	53.91	74	-20.09		Vertical	
1655.354	2.74	29.46	38.39	50.28	44.09	74	-29.91		Horizontal	
3616.451	4.15	33.01	38.79	49.77	48.14	74	-25.86		Horizontal	
4824.000	4.31	34.72	39.24	47.85	47.64	74	-26.36		Horizontal	
7236.000	5.28	35.60	39.06	47.85	49.67	74	-24.33		Horizontal	
9648.000	6.51	37.45	37.91	46.57	52.62	74	-21.38		Horizontal	
11341.140	7.73	38.14	38.39	46.30	53.78	74	-20.22		Horizontal	



Test mode:		802.11g		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1791.273	3.57	30.06	38.41	44.90	40.12	74	-33.88	Vertical	
3472.118	4.81	32.86	38.73	45.65	44.59	74	-29.41	Vertical	
4874.000	5.62	34.77	39.26	45.56	46.69	74	-27.31	Vertical	
7311.000	6.74	35.52	39.06	44.51	47.71	74	-26.29	Vertical	
9748.000	8.85	37.76	37.85	39.42	48.18	74	-25.82	Vertical	
11428.080	9.96	38.17	38.43	42.57	52.27	74	-21.73	Vertical	
1241.562	3.05	27.59	38.34	44.96	37.26	74	-36.74	Horizontal	
3454.486	4.77	32.84	38.72	46.61	45.50	74	-28.50	Horizontal	
4874.000	5.62	34.77	39.26	45.73	46.86	74	-27.14	Horizontal	
7311.000	6.74	35.52	39.06	47.39	50.59	74	-23.41	Horizontal	
9748.000	8.85	37.76	37.85	43.13	51.89	74	-22.11	Horizontal	
11603.960	9.48	38.30	38.52	44.17	53.43	74	-20.57	Horizontal	

Test mode:		802.11g		Test channel:		Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1773.127	3.55	29.99	38.40	45.10	40.24	74	-33.76	Vertical	
3625.669	5.10	33.02	38.80	46.16	45.48	74	-28.52	Vertical	
4944.000	5.60	34.84	39.28	45.49	46.65	74	-27.35	Vertical	
7416.000	6.70	35.42	39.05	47.52	50.59	74	-23.41	Vertical	
9888.000	9.09	38.18	37.77	42.56	52.06	74	-21.94	Vertical	
11603.960	9.48	38.30	38.52	44.17	53.43	74	-20.57	Vertical	
1668.044	3.41	29.52	38.39	45.41	39.95	74	-34.05	Horizontal	
3681.469	5.05	33.06	38.82	46.41	45.70	74	-28.30	Horizontal	
4944.000	5.60	34.84	39.28	45.84	47.00	74	-27.00	Horizontal	
7416.000	6.70	35.42	39.05	45.72	48.79	74	-25.21	Horizontal	
9888.000	9.09	38.18	37.77	43.21	52.71	74	-21.29	Horizontal	
11399.030	10.04	38.15	38.42	43.14	52.91	74	-21.09	Horizontal	

Test mode:		802.11n(HT20)		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
3662.775	5.07	33.05	38.81	45.69	45.00	74	-29.00	Vertical		
4824.000	5.63	34.72	39.24	50.74	51.85	74	-22.15	Vertical		
6251.257	6.43	36.02	39.16	47.02	50.31	74	-23.69	Vertical		
7236.000	6.78	35.60	39.06	46.96	50.28	74	-23.72	Vertical		
9648.000	8.91	37.45	37.91	44.24	52.69	74	-21.31	Vertical		
11545.040	9.63	38.26	38.49	43.94	53.34	74	-20.66	Vertical		
1706.700	3.46	29.69	38.40	50.35	45.10	74	-28.90	Horizontal		
3525.555	4.95	32.92	38.75	44.83	43.95	74	-30.05	Horizontal		
4824.000	5.63	34.72	39.24	47.75	48.86	74	-25.14	Horizontal		
7236.000	6.78	35.60	39.06	45.38	48.70	74	-25.30	Horizontal		
9648.000	8.91	37.45	37.91	42.96	51.41	74	-22.59	Horizontal		
11370.050	9.97	38.15	38.40	44.10	53.82	74	-20.18	Horizontal		

Test mode:		802.11n(HT20)		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
3873.749	5.03	33.28	38.90	46.91	46.32	74	-27.68	Vertical		
4874.000	5.62	34.77	39.26	49.64	50.77	74	-23.23	Vertical		
6032.401	6.65	36.26	39.18	46.36	50.09	74	-23.91	Vertical		
7311.000	6.74	35.52	39.06	46.51	49.71	74	-24.29	Vertical		
9748.000	8.85	37.76	37.85	43.82	52.58	74	-21.42	Vertical		
12055.600	9.22	38.77	38.75	44.29	53.53	74	-20.47	Vertical		
3795.660	4.93	33.15	38.87	46.30	45.51	74	-28.49	Horizontal		
4874.000	5.62	34.77	39.26	52.26	53.39	74	-20.61	Horizontal		
6017.064	6.68	36.28	39.18	46.05	49.83	74	-24.17	Horizontal		
7311.000	6.74	35.52	39.06	46.62	49.82	74	-24.18	Horizontal		
9748.000	8.85	37.76	37.85	44.17	52.93	74	-21.07	Horizontal		
11515.680	9.71	38.24	38.47	44.27	53.75	74	-20.25	Horizontal		





Test mode:		802.11n(HT20)		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
3489.840	4.86	32.88	38.74	46.50	45.50	74	-28.50		Vertical	
4944.000	5.60	34.84	39.28	47.31	48.47	74	-25.53		Vertical	
6283.164	6.48	35.98	39.15	46.49	49.80	74	-24.20		Vertical	
7416.000	6.70	35.42	39.05	44.97	48.04	74	-25.96		Vertical	
9888.000	9.09	38.18	37.77	43.26	52.76	74	-21.24		Vertical	
11515.680	9.71	38.24	38.47	43.94	53.42	74	-20.58		Vertical	
3873.749	5.03	33.28	38.90	46.96	46.37	74	-27.63		Horizontal	
4944.000	5.60	34.84	39.28	47.22	48.38	74	-25.62		Horizontal	
6032.401	6.65	36.26	39.18	46.80	50.53	74	-23.47		Horizontal	
7416.000	6.70	35.42	39.05	46.35	49.42	74	-24.58		Horizontal	
9888.000	9.09	38.18	37.77	42.64	52.14	74	-21.86		Horizontal	
12086.330	9.17	38.81	38.77	43.91	53.12	74	-20.88		Horizontal	

Test mode:		802.11n(HT40)		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1782.177	3.56	30.02	38.41	47.64	42.81	74	-31.19		Vertical	
3662.775	5.07	33.05	38.81	45.69	45.00	74	-29.00		Vertical	
4844.000	5.62	34.74	39.25	45.58	46.69	74	-27.31		Vertical	
7266.000	6.76	35.57	39.06	45.79	49.06	74	-24.94		Vertical	
9688.000	8.89	37.57	37.88	43.54	52.12	74	-21.88		Vertical	
11545.040	9.63	38.26	38.49	43.94	53.34	74	-20.66		Vertical	
1597.401	3.32	29.18	38.39	46.71	40.82	74	-33.18		Horizontal	
3653.463	5.08	33.04	38.81	45.29	44.60	74	-29.40		Horizontal	
4844.000	5.62	34.74	39.25	47.75	48.86	74	-25.14		Horizontal	
7266.000	6.76	35.57	39.06	45.43	48.70	74	-25.30		Horizontal	
9688.000	8.89	37.57	37.88	42.48	51.06	74	-22.94		Horizontal	
11812.580	9.39	38.51	38.61	44.55	53.84	74	-20.16		Horizontal	



Test mode:		802.11n(HT40)		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1353.804	3.17	27.81	38.36	46.62	39.24	74	-34.76	Vertical	
3607.257	5.12	33.01	38.79	45.25	44.59	74	-29.41	Vertical	
4874.000	5.60	34.84	39.28	48.61	49.77	74	-24.23	Vertical	
7311.000	6.70	35.42	39.05	45.22	48.29	74	-25.71	Vertical	
9748.000	8.85	37.76	37.85	44.16	52.92	74	-21.08	Vertical	
12055.600	9.22	38.77	38.75	44.29	53.53	74	-20.47	Vertical	
1786.719	3.56	30.04	38.41	45.93	41.12	74	-32.88	Horizontal	
3579.815	5.08	32.98	38.78	45.88	45.16	74	-28.84	Horizontal	
4874.000	5.60	34.84	39.28	45.29	46.45	74	-27.55	Horizontal	
7311.000	6.70	35.42	39.05	45.18	48.25	74	-25.75	Horizontal	
9748.000	9.09	38.18	37.77	42.96	52.46	74	-21.54	Horizontal	
11515.680	9.71	38.24	38.47	44.27	53.75	74	-20.25	Horizontal	

Test mode:		802.11n(HT40)		Test channel:		Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1601.472	3.32	29.21	38.39	46.72	40.86	74	-33.14	Vertical	
3616.451	5.11	33.01	38.79	44.82	44.15	74	-29.85	Vertical	
4924.000	5.61	34.82	39.28	44.27	45.42	74	-28.58	Vertical	
7386.000	6.70	35.44	39.05	44.51	47.60	74	-26.40	Vertical	
9848.000	8.97	38.06	37.79	41.04	50.28	74	-23.72	Vertical	
11486.410	9.80	38.22	38.46	43.23	52.79	74	-21.21	Vertical	
1953.211	3.70	31.34	38.42	44.05	40.67	74	-33.33	Horizontal	
3552.582	5.01	32.95	38.76	45.71	44.91	74	-29.09	Horizontal	
4924.000	5.61	34.82	39.28	45.39	46.54	74	-27.46	Horizontal	
7386.000	6.70	35.44	39.05	45.57	48.66	74	-25.34	Horizontal	
9848.000	8.97	38.06	37.79	42.50	51.74	74	-22.26	Horizontal	
12086.330	9.17	38.81	38.77	43.91	53.12	74	-20.88	Horizontal	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.4 2009+KDB558074 D01 v03r02		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

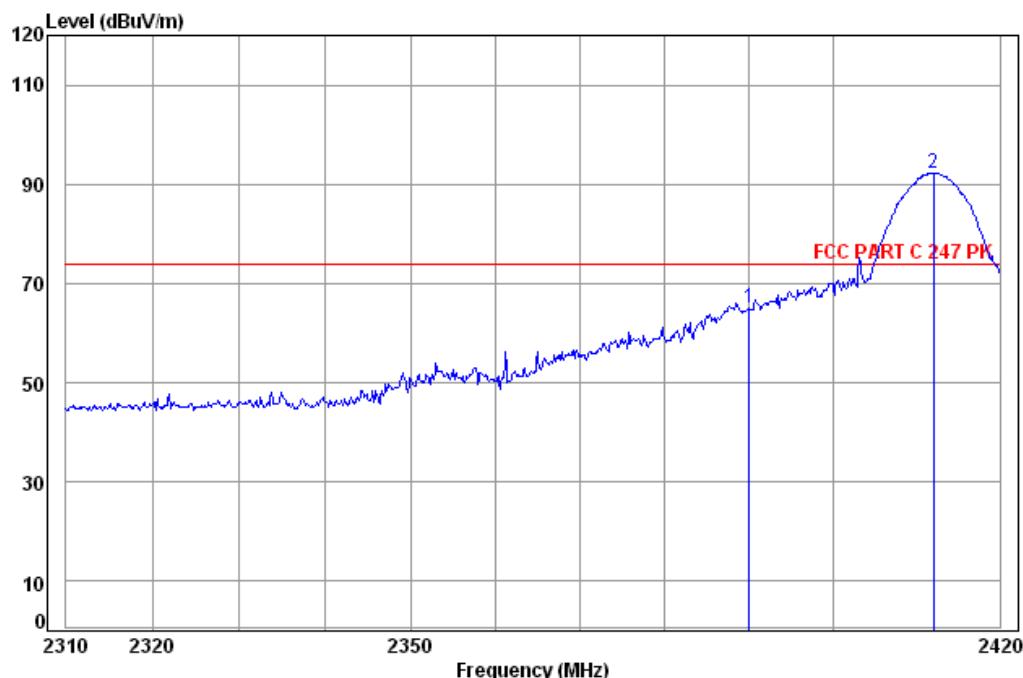
Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none">a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.g. Test the EUT in the lowest channel , the Highest channel.h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode, Charge +Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case. Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Test plot as follows:

Worst case mode:	802.11b(11Mbps)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	-----------------	---------------	--------	---------	------	----------

Data: 35

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : b 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	66.15	64.94	74.00	-9.06
2 pp	2412.02	4.93	32.41	38.46	93.39	92.27	74.00	18.27

Worst case mode:	802.11b(11Mbps)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	-----------------	---------------	--------	---------	------	------------

Data: 33

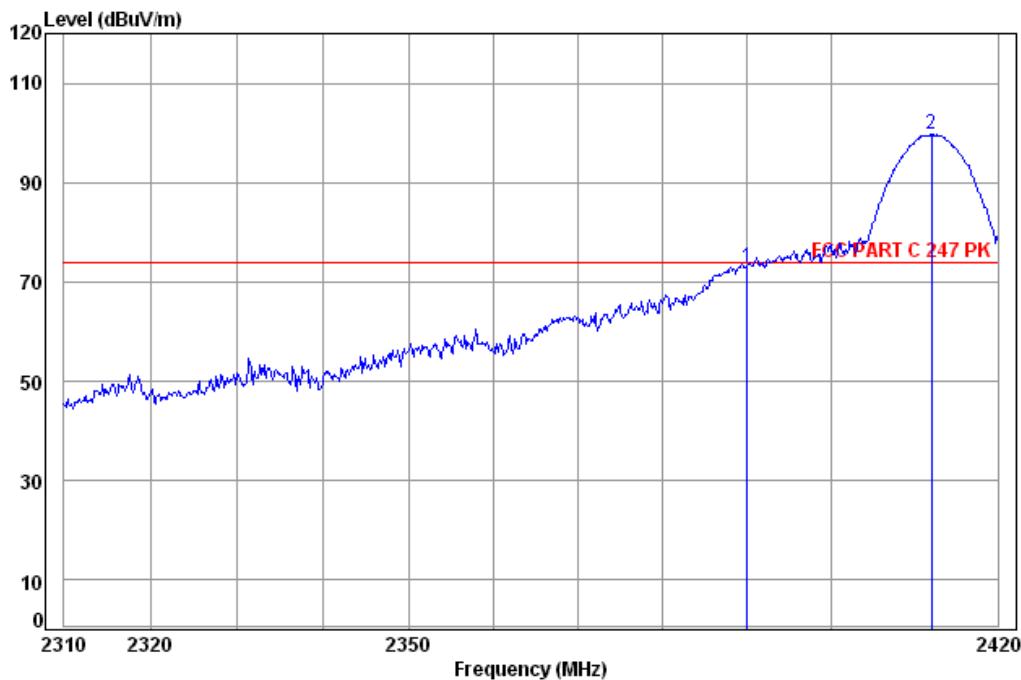

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 4946RF

Mode: : b 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	74.27	73.06	74.00	-0.94
2 pp	2412.02	4.93	32.41	38.46	100.90	99.78	74.00	25.78

Worst case mode:	802.11b(11Mbps)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	-----------------	---------------	--------	---------	---------	----------

Data: 36

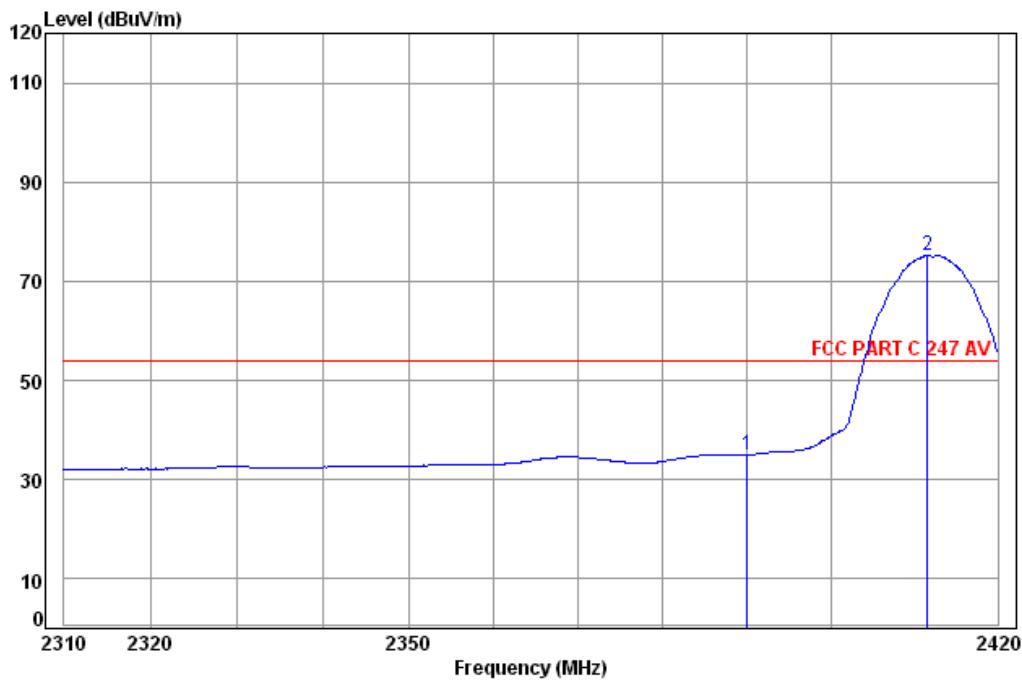

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 4946RF

Mode: : b 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	36.34	35.13	54.00	-18.87
2 pp	2411.57	4.93	32.41	38.46	76.43	75.31	54.00	21.31

Worst case mode:	802.11b(11Mbps)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	-----------------	---------------	--------	---------	---------	------------

Data: 34

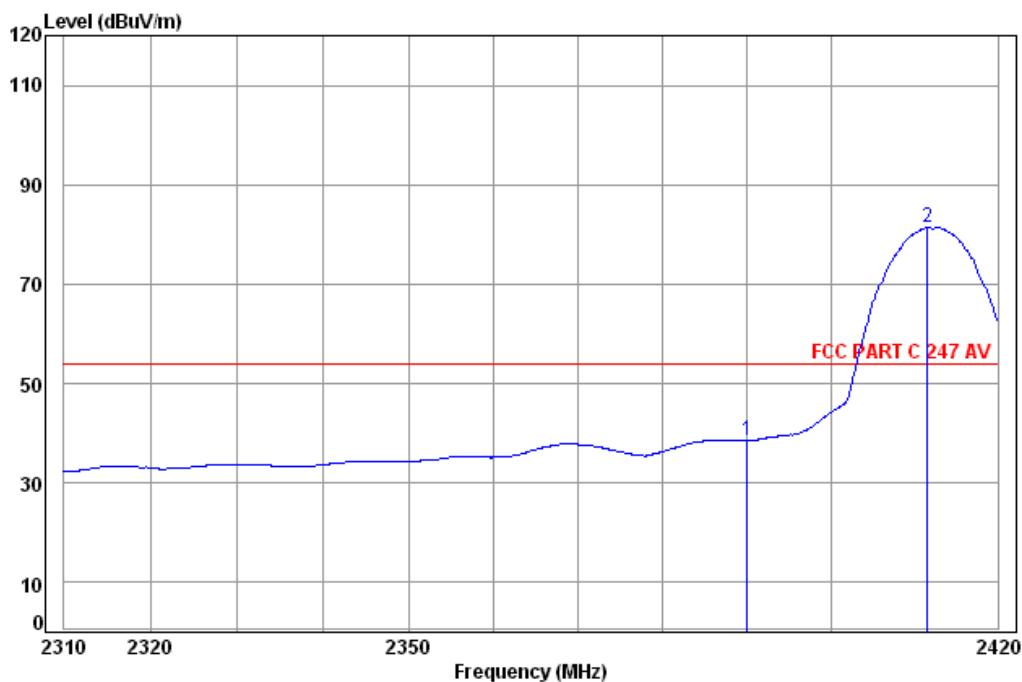

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 4946RF

Mode: : b 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	32.35	38.46	39.76	38.55	54.00 -15.45
2 pp	2411.57	4.93	32.41	32.41	38.46	82.64	81.52	54.00 27.52

Worst case mode:	802.11b(11Mbps)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	-----------------	---------------	---------	---------	------	----------

Data: 39

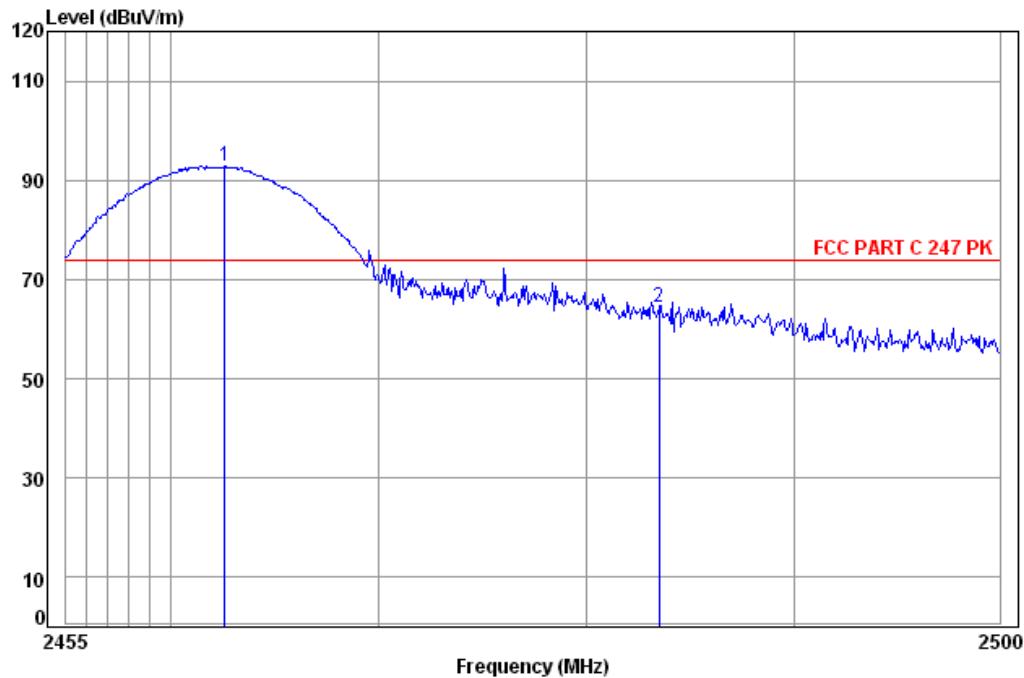

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 4946RF


Mode: : b 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 pp	2462.59	5.00	32.43	38.46	93.95	92.92	74.00	18.92
2	2483.50	5.03	32.44	38.47	65.56	64.56	74.00	-9.44



Worst case mode:	802.11b(11Mbps)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-----------------	---------------	---------	---------	------	------------

Data: 37

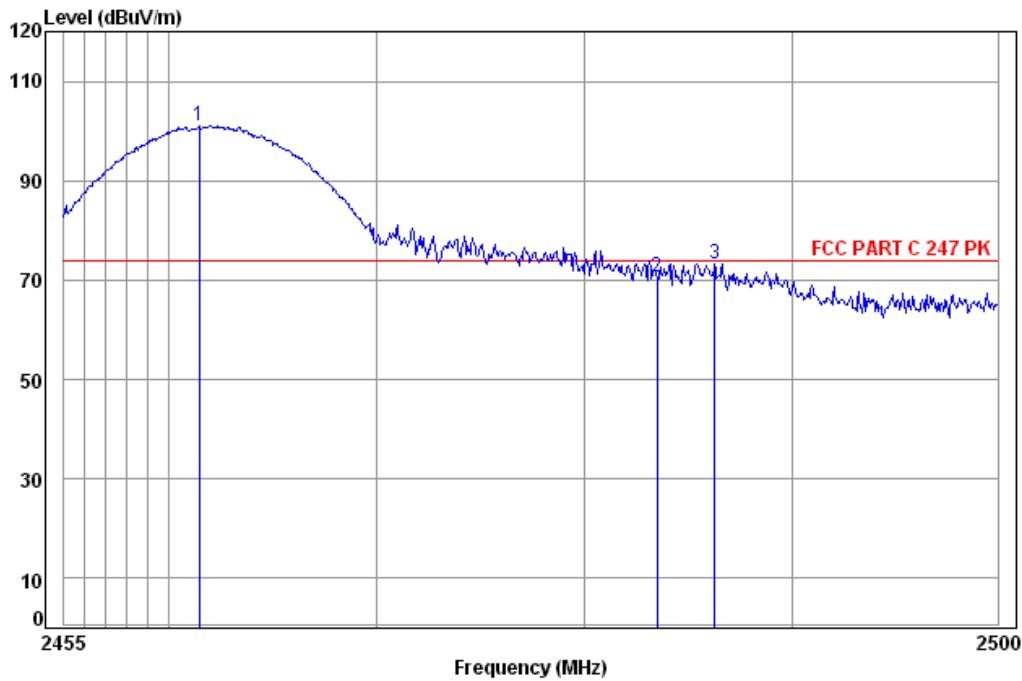

Site : chamber


Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 4946RF

Mode: : b 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.47	5.00	32.43	38.46	102.14	101.11	74.00	27.11
2	2483.50	5.03	32.44	38.47	71.57	70.57	74.00	-3.43
3	2486.28	5.03	32.44	38.47	74.16	73.16	74.00	-0.84

Worst case mode:	802.11b(11Mbps)	Test channel:	Highest	Remark:	Average	Vertical
------------------	-----------------	---------------	---------	---------	---------	----------

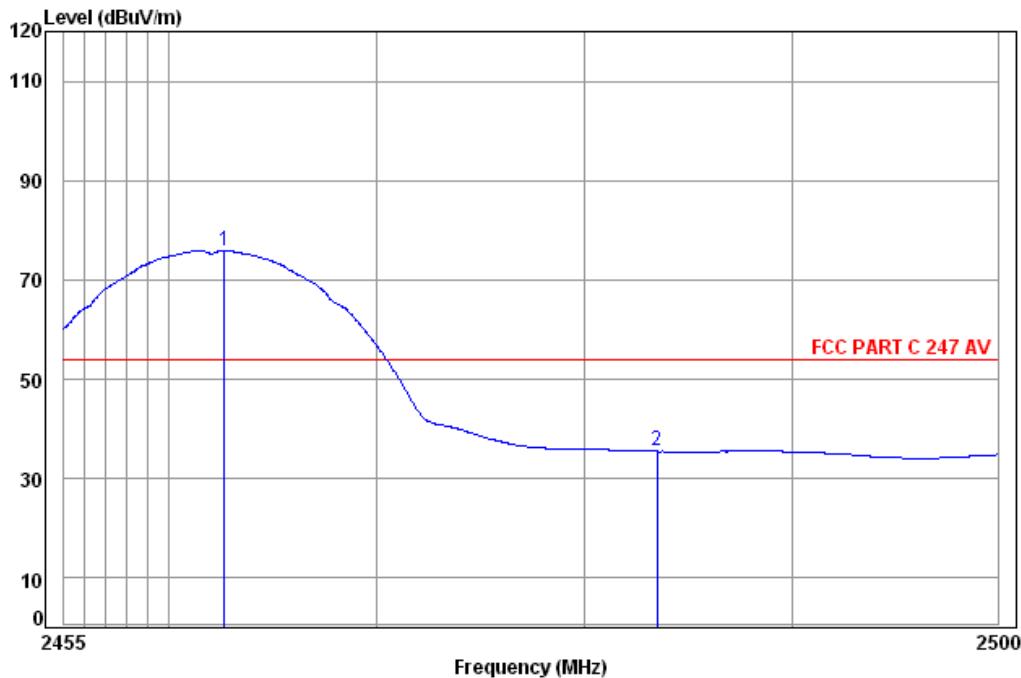Data: 40

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 4946RF

Mode: : b 2462 Bandedge

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
1 pp	2462.68	5.00	32.43	38.46	76.95	75.92	54.00 21.92
2	2483.50	5.03	32.44	38.47	36.49	35.49	54.00 -18.51

Worst case mode:	802.11b(11Mbps)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	-----------------	---------------	---------	---------	---------	------------

Data: 38

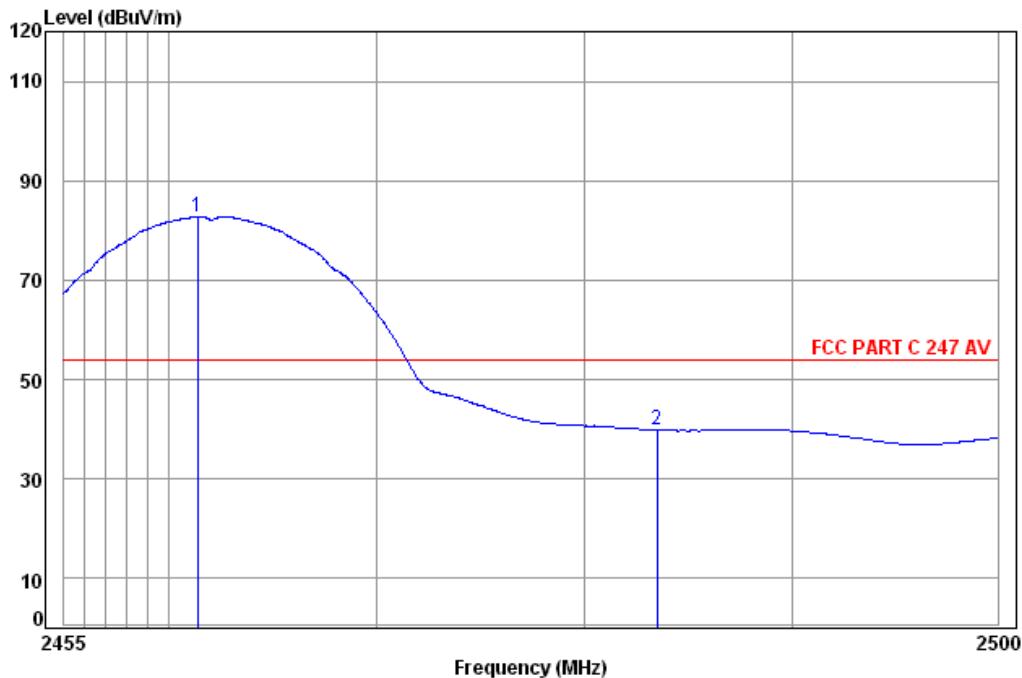

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 4946RF

Mode: : b 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.39	5.00	32.43	38.46	83.85	82.82	54.00	28.82
2	2483.50	5.03	32.44	38.47	40.86	39.86	54.00	-14.14

Worst case mode:	802.11g(54Mbps)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	-----------------	---------------	--------	---------	------	----------

Data: 42

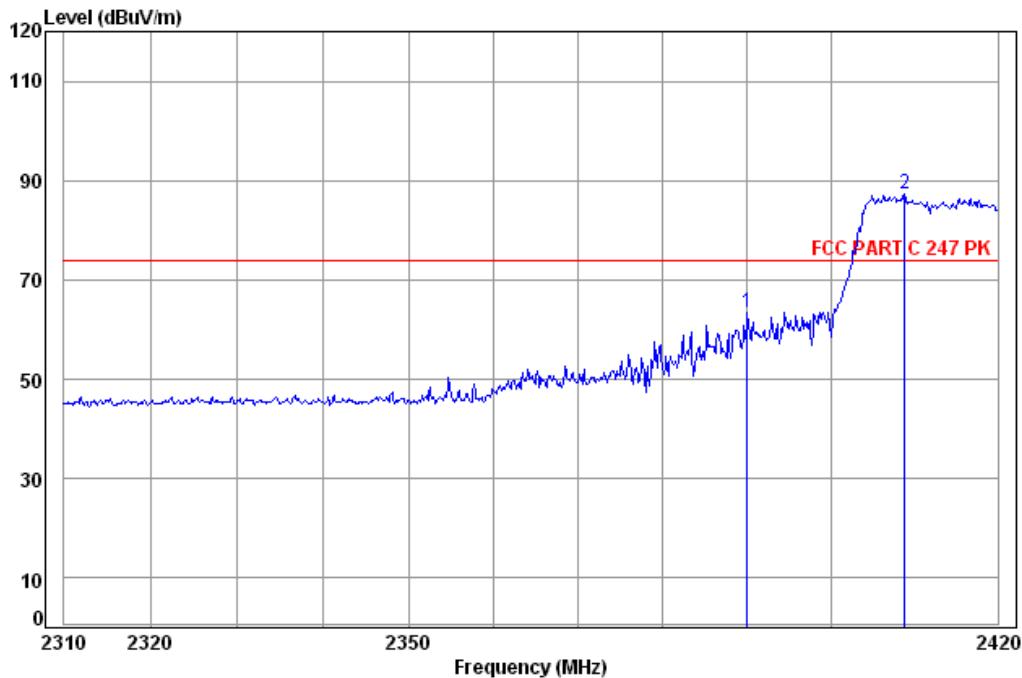

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : g 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	64.48	63.27	74.00	-10.73
2 pp	2408.77	4.93	32.41	38.46	88.56	87.44	74.00	13.44

Worst case mode:	802.11g(54Mbps)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	-----------------	---------------	--------	---------	------	------------

Data: 41

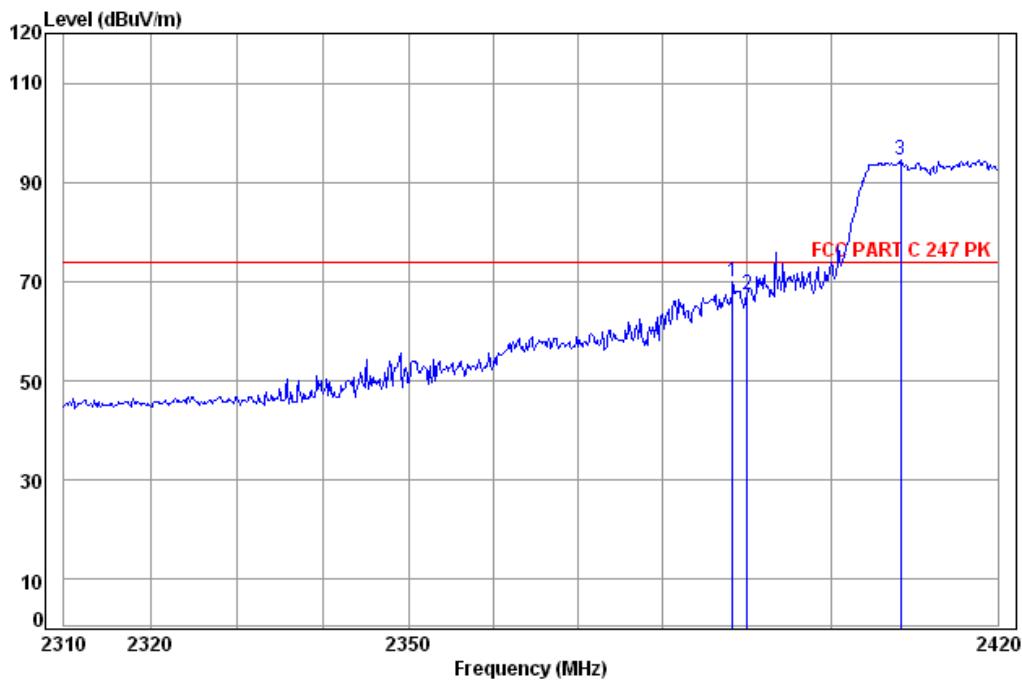

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 4946RF

Mode: : g 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2388.24	4.90	32.33	38.46	71.30	70.07	74.00	-3.93
2	2390.00	4.90	32.35	38.46	68.44	67.23	74.00	-6.77
3 pp	2408.32	4.93	32.41	38.46	95.75	94.63	74.00	20.63

Worst case mode:	802.11g(54Mbps)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	-----------------	---------------	--------	---------	---------	----------

Data: 44

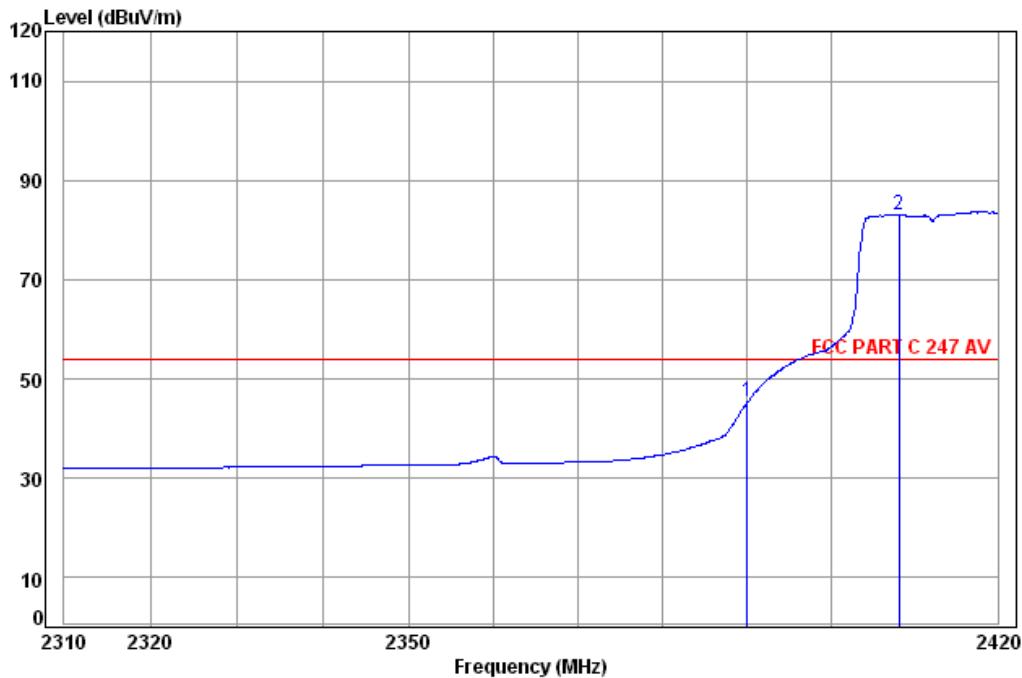

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 4946RF

Mode: : g 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	48.21	45.46	54.00	-8.54
2 pp	2408.10	3.38	32.41	38.46	85.73	83.06	54.00	29.06

Worst case mode:	802.11g(54Mbps)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	-----------------	---------------	--------	---------	---------	------------

Data: 43

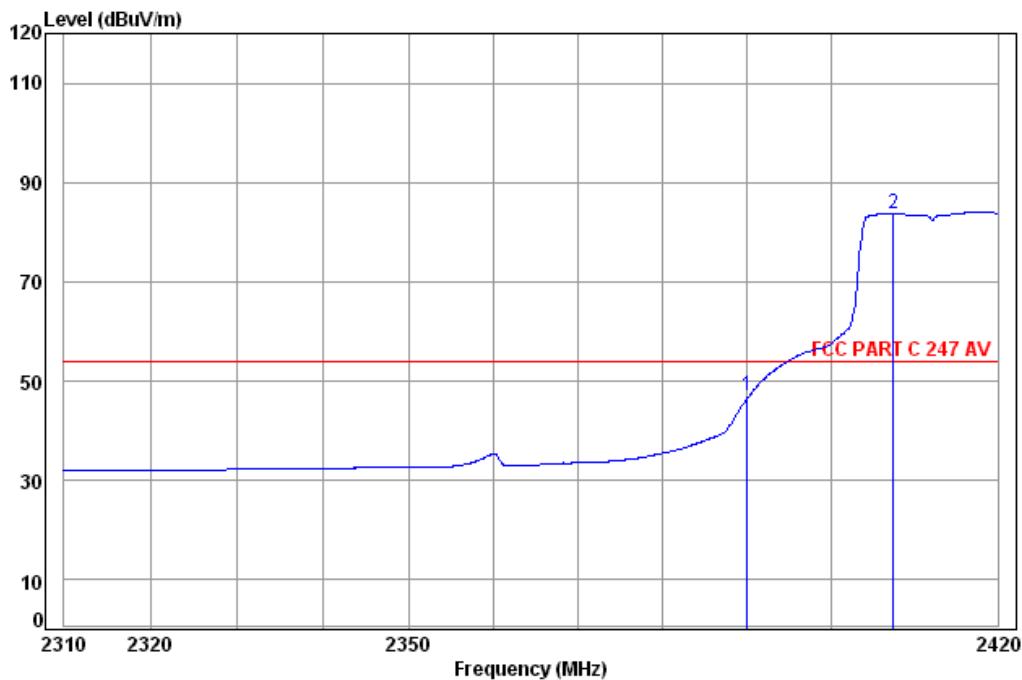

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 4946RF

Mode: : g 2412 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	49.73	46.98	54.00	-7.02
2 pp	2407.42	3.38	32.41	38.46	86.33	83.66	54.00	29.66

Worst case mode:	802.11g(54Mbps)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	-----------------	---------------	---------	---------	------	----------

Data: 46

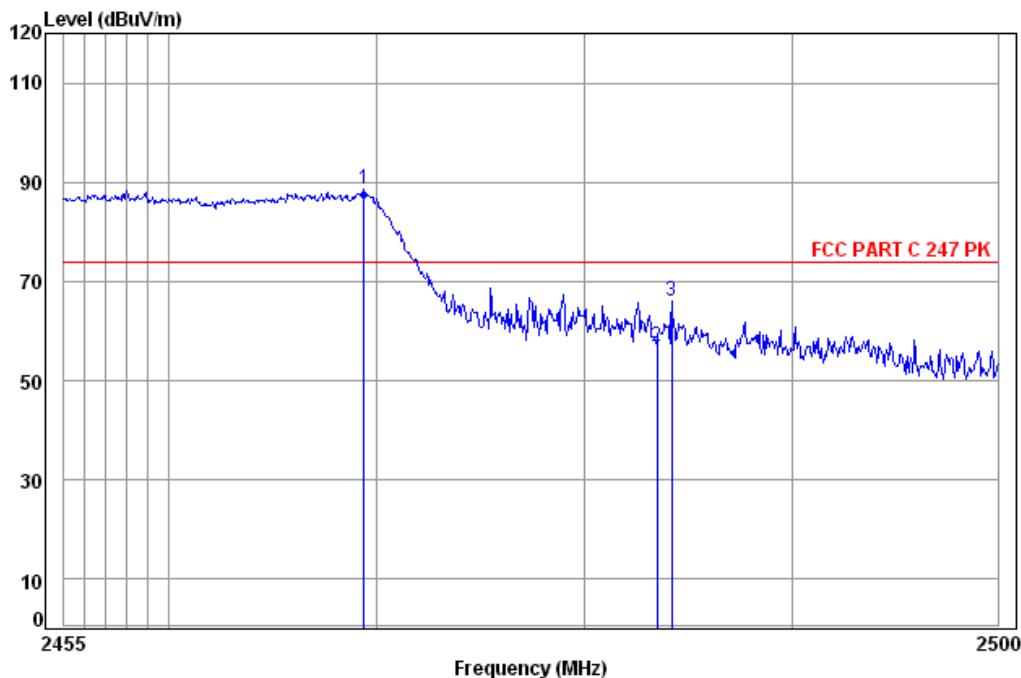

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : g 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 pp	2469.36	5.01	32.43	38.46	89.51	88.49	74.00	14.49
2	2483.50	5.03	32.44	38.47	58.03	57.03	74.00	-16.97
3	2484.20	5.03	32.44	38.47	66.90	65.90	74.00	-8.10

Worst case mode:	802.11g(54Mbps)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-----------------	---------------	---------	---------	------	------------

Data: 45

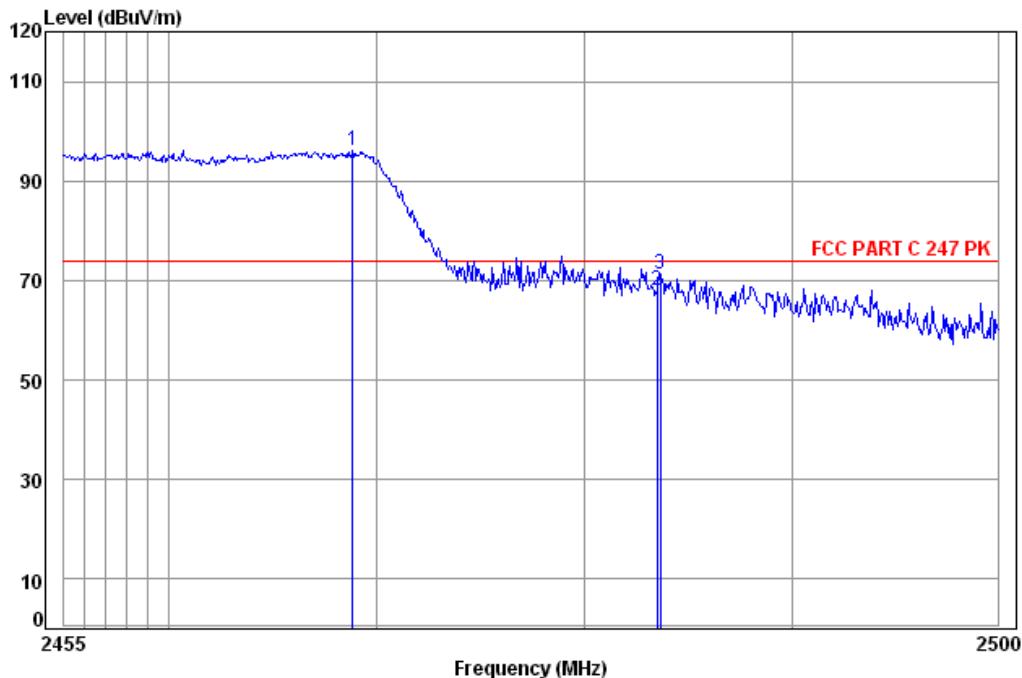

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 4946RF

Mode: : g 2462 Bandedge

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1 pp	2468.82	5.01	32.43	38.46	97.15	96.13	74.00	22.13
2	2483.50	5.03	32.44	38.47	68.98	67.98	74.00	-6.02
3	2483.66	5.03	32.44	38.47	72.17	71.17	74.00	-2.83

Worst case mode:	802.11g(54Mbps)	Test channel:	Highest	Remark:	Average	Vertical
------------------	-----------------	---------------	---------	---------	---------	----------

Data: 48

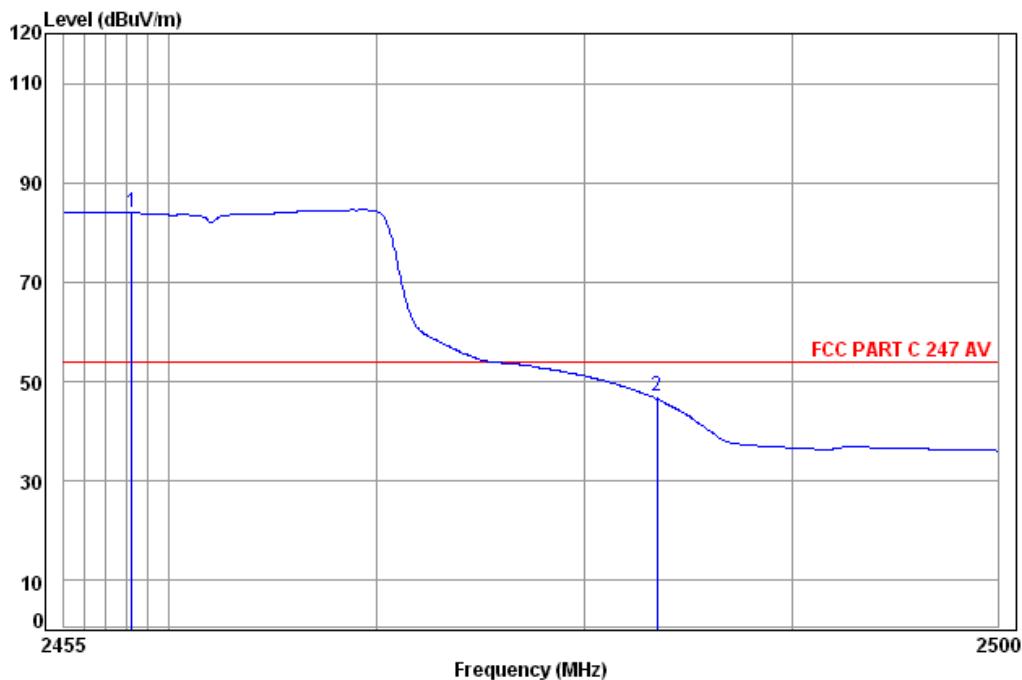

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 4946RF


Mode: : g 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 pp	2458.23	3.44	32.43	38.46	86.56	83.97	54.00	29.97
2	2483.50	3.47	32.44	38.47	49.72	47.16	54.00	-6.84



Worst case mode:	802.11g(54Mbps)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	-----------------	---------------	---------	---------	---------	------------

Data: 47

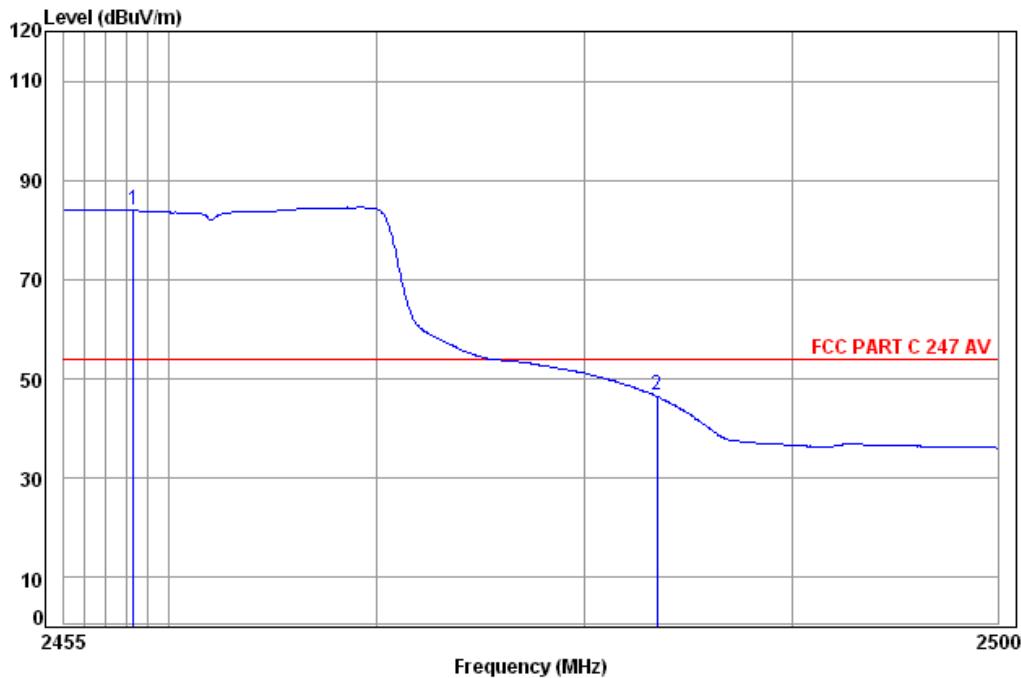

Site : chamber


Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 4946RF

Mode: : g 2462 Bandedge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
1 pp	2458.33	3.44	32.43	38.46	86.53	83.94	54.00	29.94
2	2483.50	3.47	32.44	38.47	49.48	46.92	54.00	-7.08

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------------------------	---------------	--------	---------	------	----------

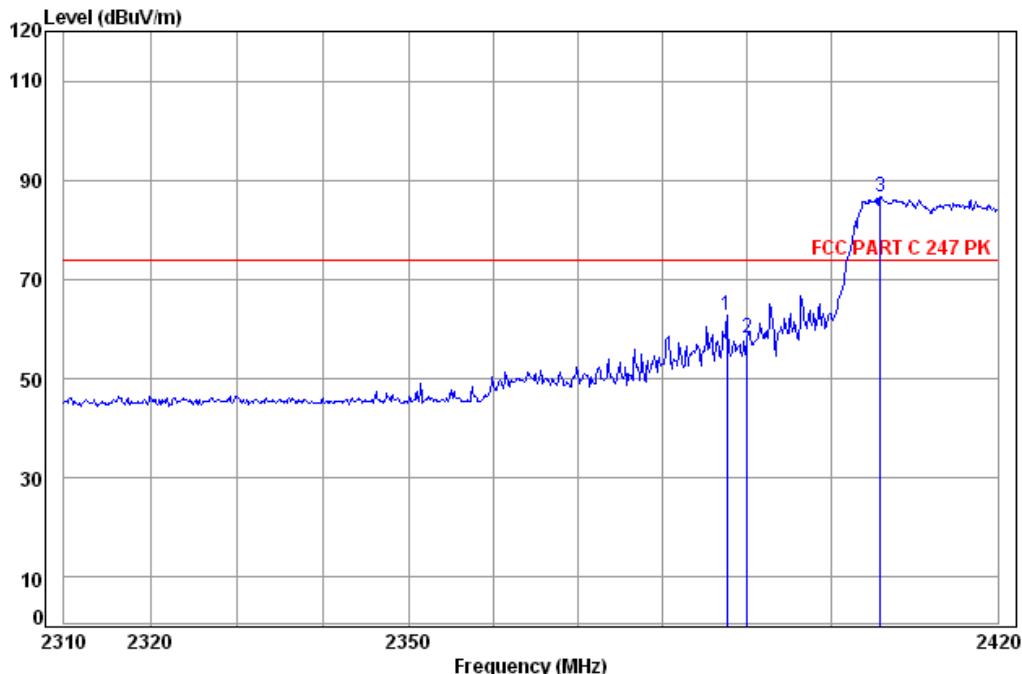Data: 50

Site : chamber


Condition: FCC PART C 247 PK 3m Vertical

Job No: : 4946RF

Mode: : n(HT20) 2412 Bandedge

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2387.57	4.90	32.33	38.46	63.99	62.76	74.00	-11.24
2	2390.00	4.90	32.35	38.46	59.51	58.30	74.00	-15.70
3 pp	2405.86	4.92	32.41	38.46	87.89	86.76	74.00	12.76

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------------------------	---------------	--------	---------	------	------------

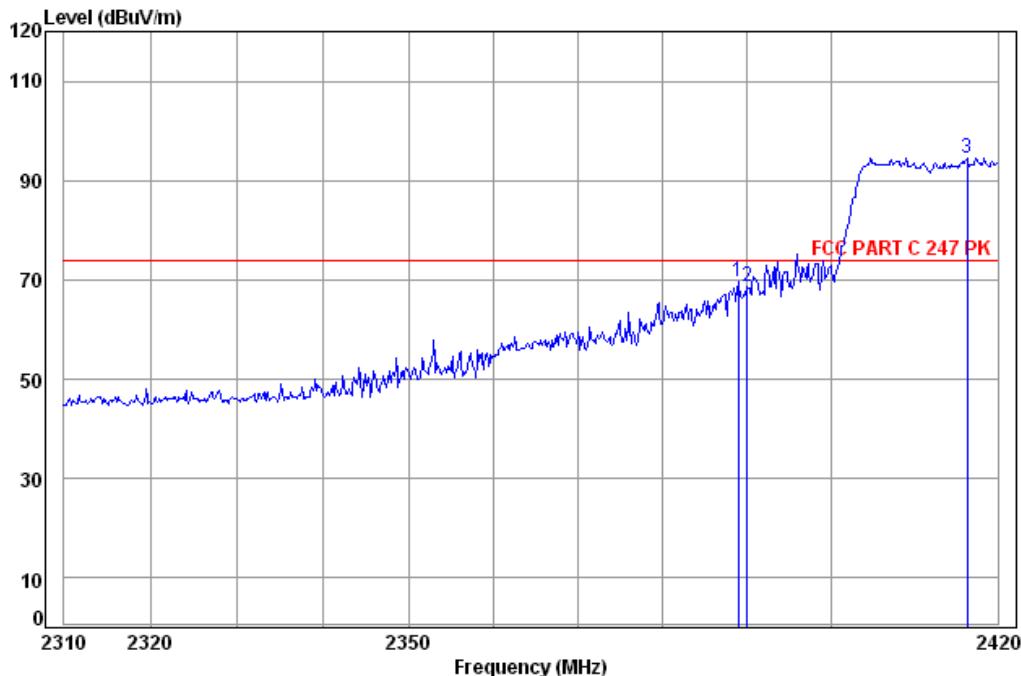Data: 49

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 4946RF

Mode: : n(HT20) 2412 Bandedge

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2388.91	4.90	32.34	38.46	70.94	69.72	74.00	-4.28
2	2390.00	4.90	32.35	38.46	69.76	68.55	74.00	-5.45
3 pp	2416.29	4.94	32.42	38.46	95.67	94.57	74.00	20.57

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	---------------------------	---------------	--------	---------	---------	----------

Data: 52

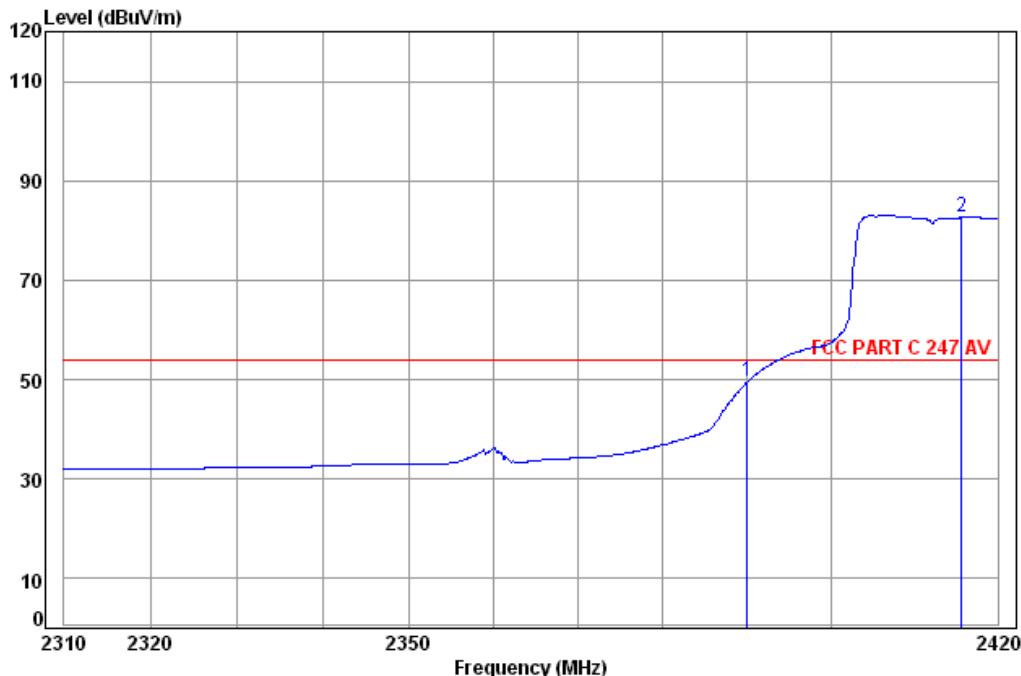

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 4946RF

Mode: : n(HT20) 2412 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1	2390.00	3.36	32.35	38.46	52.57	49.82
2 pp	2415.61	3.39	32.42	38.46	85.30	82.65

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	---------------------------	---------------	--------	---------	---------	------------

Data: 51

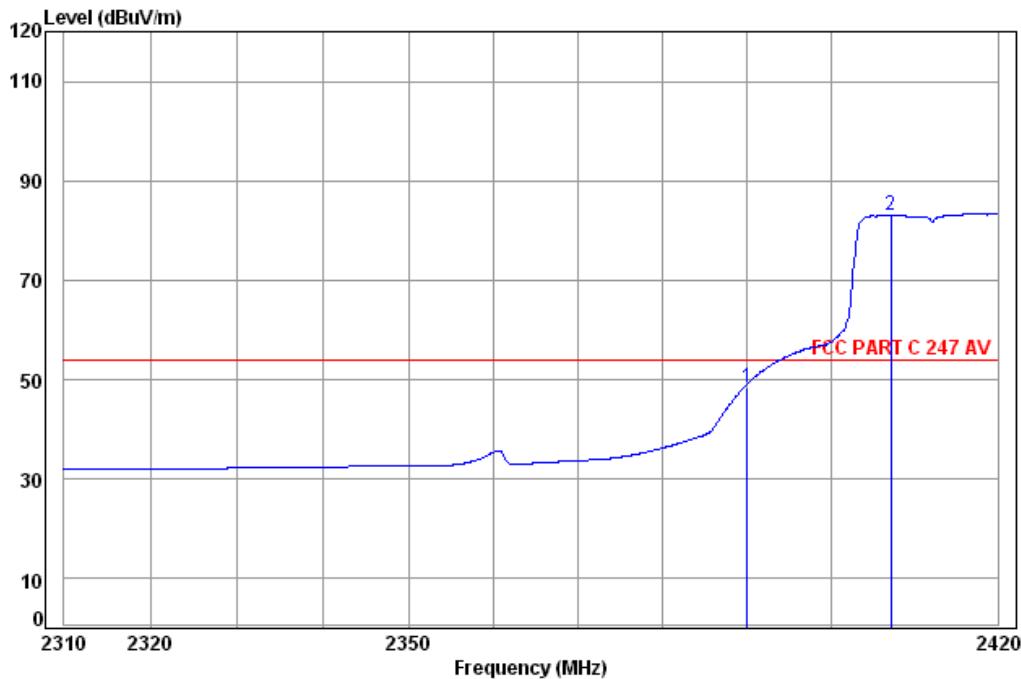

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 4946RF

Mode: : n(HT20) 2412 Bandedge


Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1	2390.00	3.36	32.35	38.46	51.16	48.41
2 pp	2407.20	3.38	32.41	38.46	85.74	83.07

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB

2390.00 3.36 32.35 38.46 51.16 48.41 54.00 -5.59

2407.20 3.38 32.41 38.46 85.74 83.07 54.00 29.07

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------------------------	---------------	---------	---------	------	----------

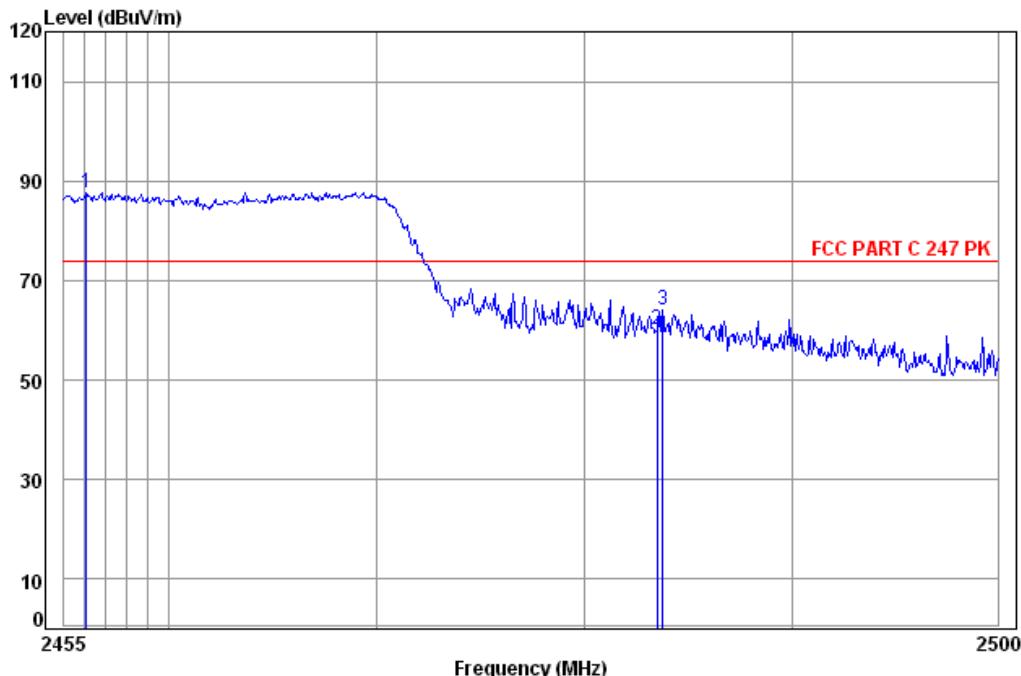Data: 54

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : n(HT20) 2462 Bandedge

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	2456.07	4.99	32.43	38.46	88.70	87.66	74.00	13.66
2		2483.50	5.03	32.44	38.47	61.31	60.31	74.00	-13.69
3		2483.75	5.03	32.44	38.47	64.97	63.97	74.00	-10.03

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------------------------	---------------	---------	---------	------	------------

Data: 53

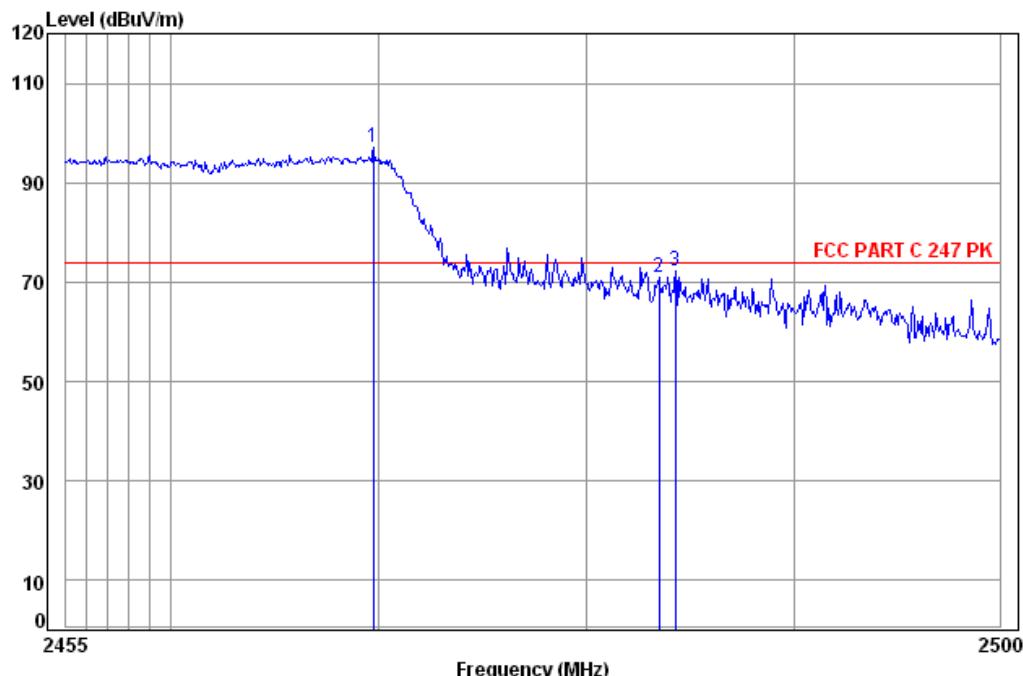

Site : chamber


Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 4946RF

Mode: : n(HT20) 2462 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1 pp	2469.72	5.01	32.44	38.46	98.05	97.04
2	2483.50	5.03	32.44	38.47	71.96	70.96
3	2484.29	5.03	32.44	38.47	73.21	72.21

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Highest	Remark:	Average	Vertical
------------------	---------------------------	---------------	---------	---------	---------	----------

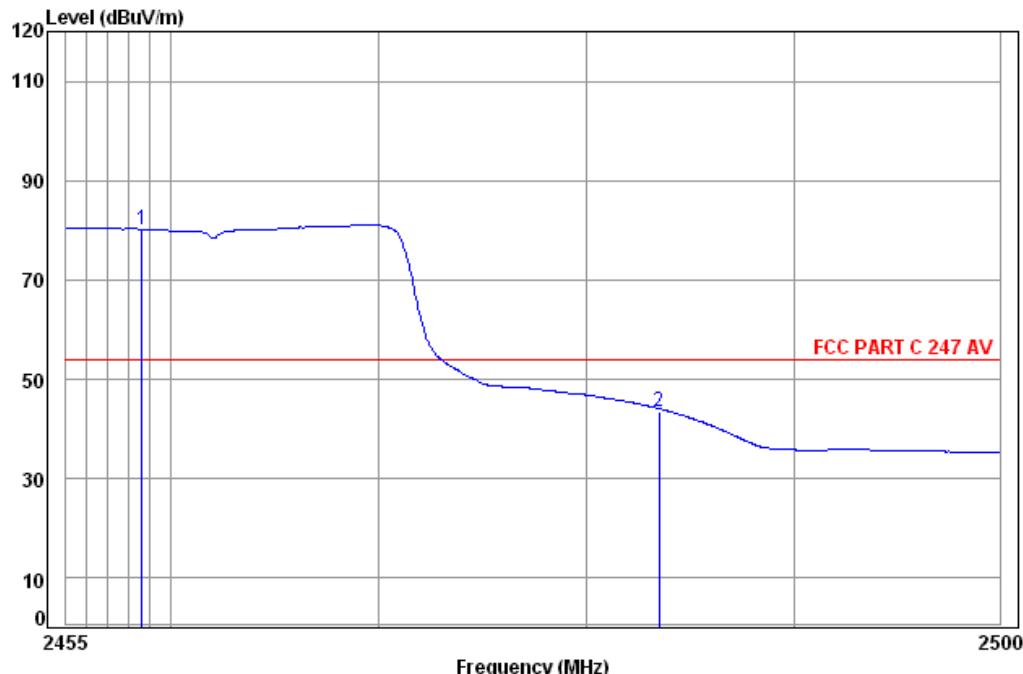Data: 56

Site : chamber


Condition: FCC PART C 247 AV 3m Vertical

Job No: : 4946RF

Mode: : n(HT20) 2462 Bandedge

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
1 pp	2458.63	3.44	32.43	38.46	82.81	80.22	54.00	26.22
2	2483.50	3.47	32.44	38.47	46.13	43.57	54.00	-10.43

Worst case mode:	802.11n(HT20) (65Mbps)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------------------------	---------------	---------	---------	---------	------------

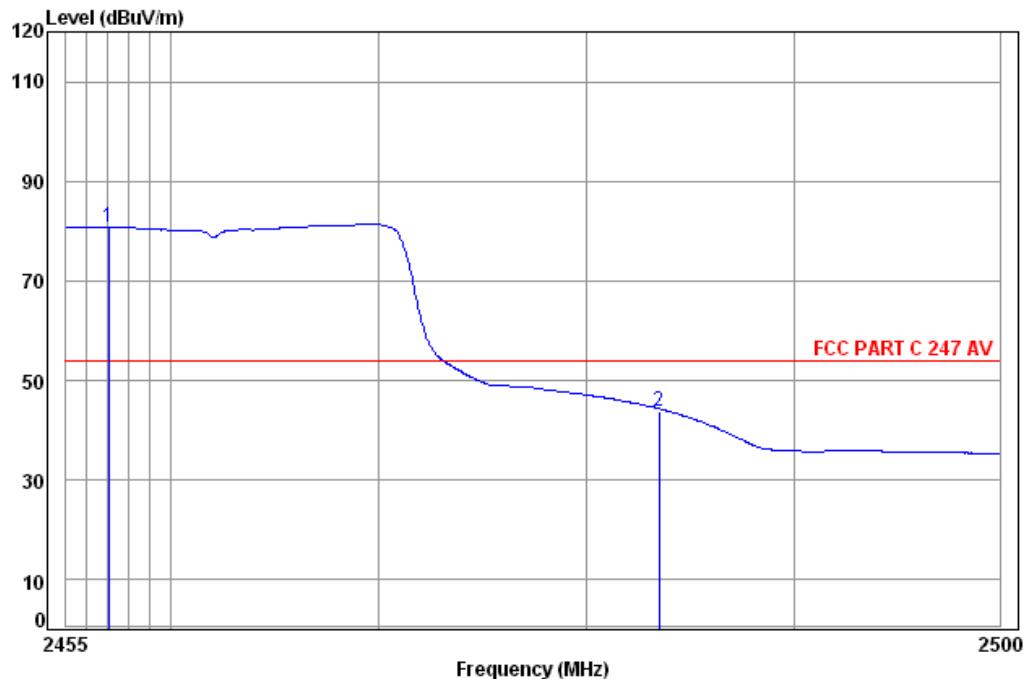Data: 55

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 4946RF

Mode: : n(HT20) 2462 Bandedge

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2457.04	3.44	32.43	38.46	83.32	80.73	54.00	26.73
2	2483.50	3.47	32.44	38.47	46.35	43.79	54.00	-10.21

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	----------------------------	---------------	--------	---------	------	----------

Data: 58

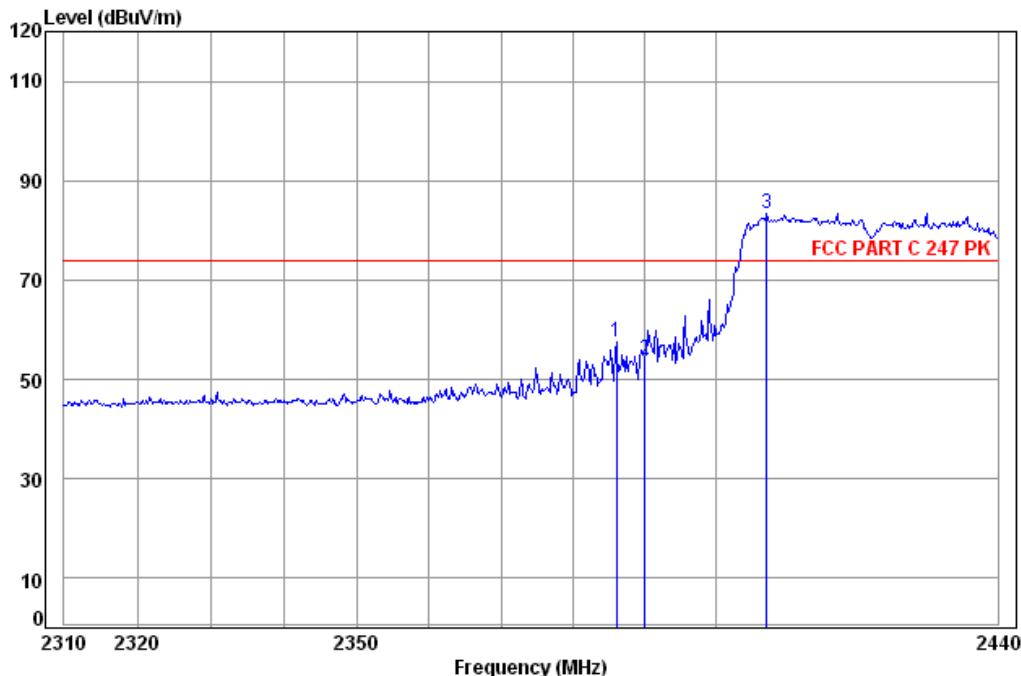

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : n(HT40) 2422 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1	2386.10	4.90	32.32	38.46	58.81	57.57
2	2390.00	4.90	32.35	38.46	55.03	53.82
3 pp	2407.23	4.92	32.41	38.46	84.42	83.29



Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	----------------------------	---------------	--------	---------	------	------------

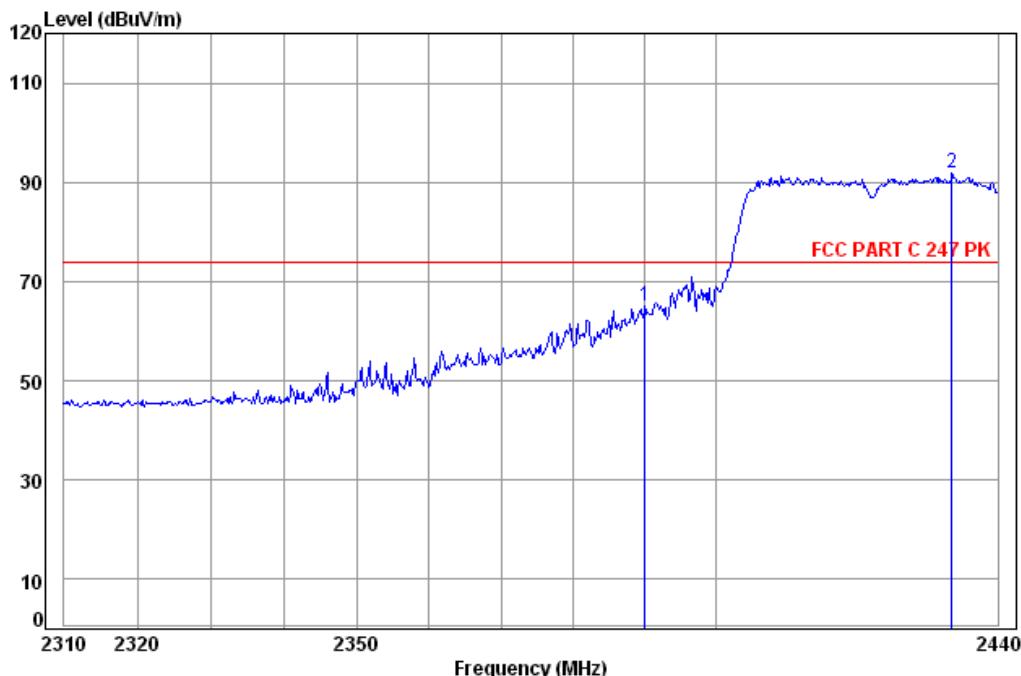Data: 57


Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 4946RF

Mode: : n(HT40) 2422 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit	Over	
				Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	4.90	32.35	38.46	66.40	65.19	74.00 -8.81
2 pp	2433.46	4.96	32.42	38.46	92.83	91.75	74.00 17.75

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	----------------------------	---------------	--------	---------	---------	----------

Data: 60

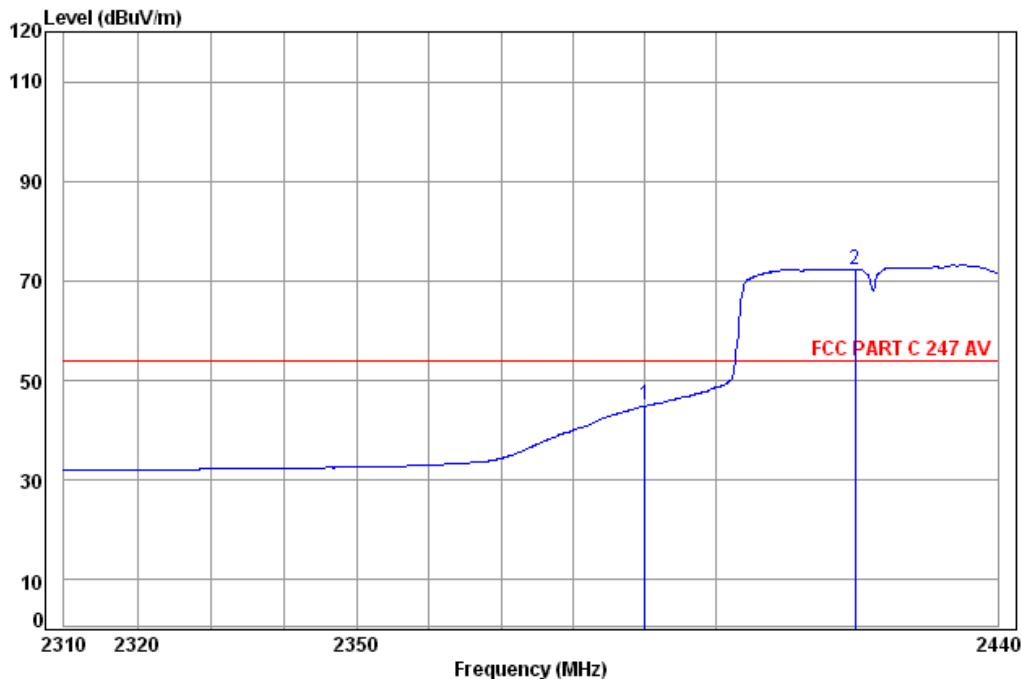

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 4946RF

Mode: : n(HT40) 2422 Bandedge

	Cable Freq	Loss dB	Ant Factor	Preamp Factor	Read Level dB	Limit Level dBuV	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB
1	2390.00	3.36	32.35	38.46	47.86	45.11	54.00	-8.89	
2 pp	2419.65	3.39	32.42	38.46	75.07	72.42	54.00	18.42	

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	----------------------------	---------------	--------	---------	---------	------------

Data: 59

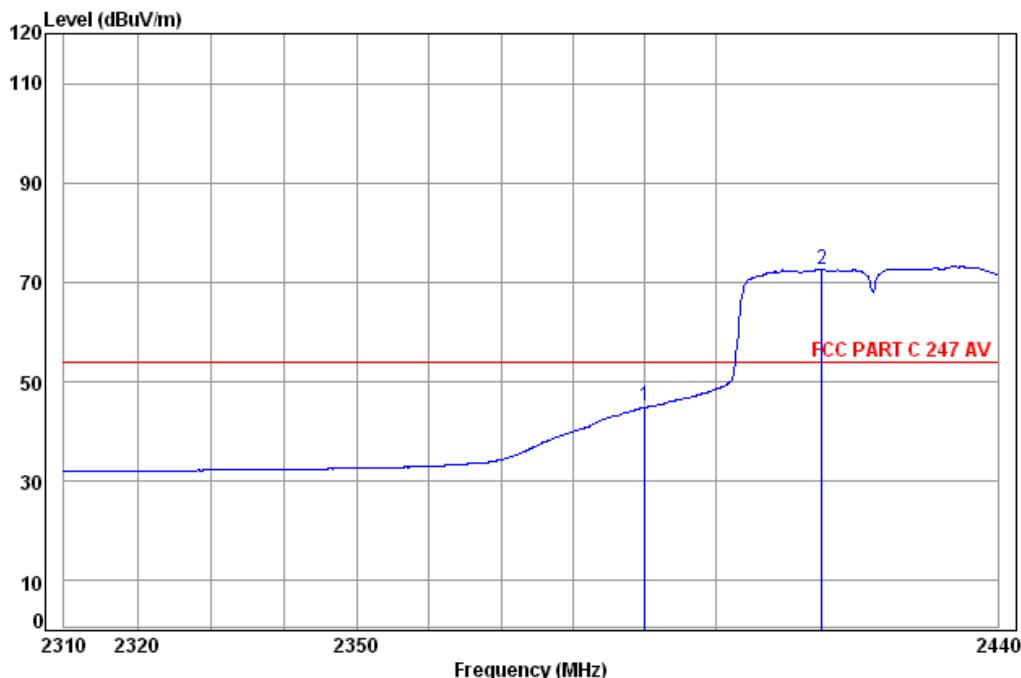

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 4946RF

Mode: : n(HT40) 2422 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1	2390.00	3.36	32.35	38.46	47.84	45.09
2 pp	2415.01	3.39	32.42	38.46	75.28	72.63

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	47.84	45.09	54.00	-8.91
2 pp	2415.01	3.39	32.42	38.46	75.28	72.63	54.00	18.63

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	----------------------------	---------------	---------	---------	------	----------

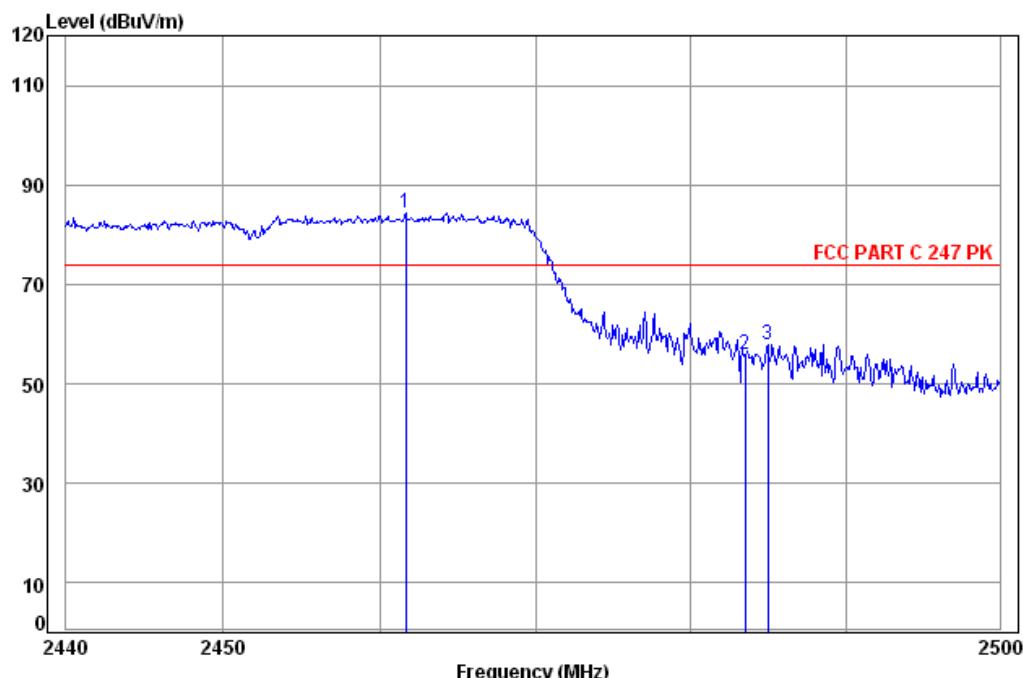Data: 62

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 4946RF

Mode: : n(HT40) 2452 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit	Over		
				Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.67	5.00	32.43	38.46	85.43	84.40	74.00	10.40
2	2483.50	5.03	32.44	38.47	56.84	55.84	74.00	-18.16
3	2484.98	5.03	32.44	38.47	58.96	57.96	74.00	-16.04

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	----------------------------	---------------	---------	---------	------	------------

Data: 61

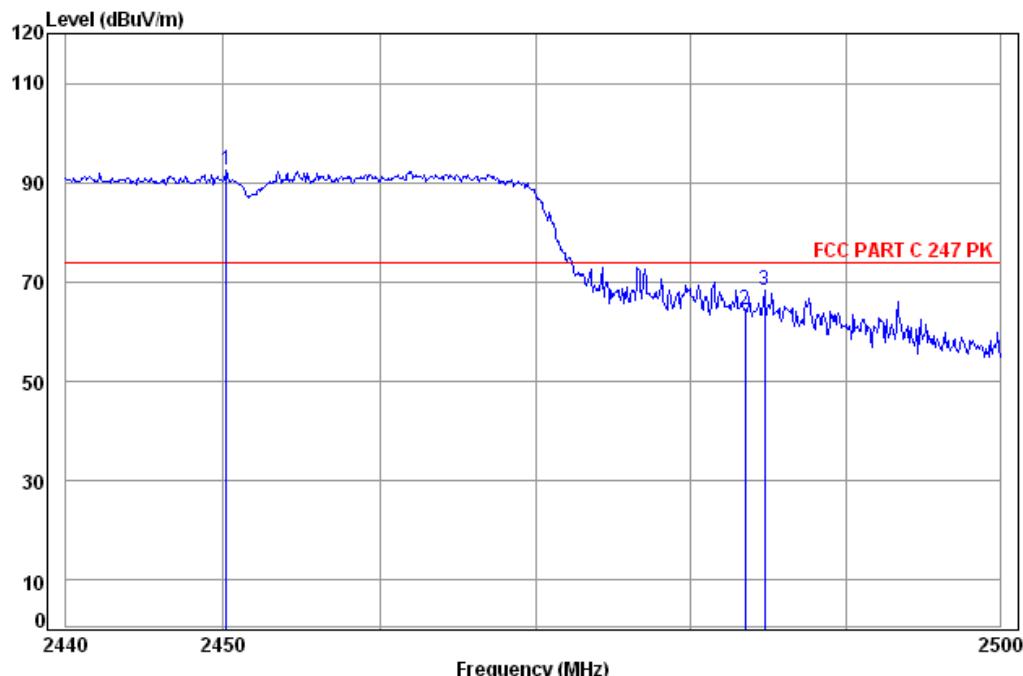

Site : chamber


Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 4946RF

Mode: : n(HT40) 2452 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1 pp	2450.22	4.98	32.43	38.46	93.63	92.58
2	2483.50	5.03	32.44	38.47	65.33	64.33
3	2484.74	5.03	32.44	38.47	69.48	68.48

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Highest	Remark:	Average	Vertical
------------------	----------------------------	---------------	---------	---------	---------	----------

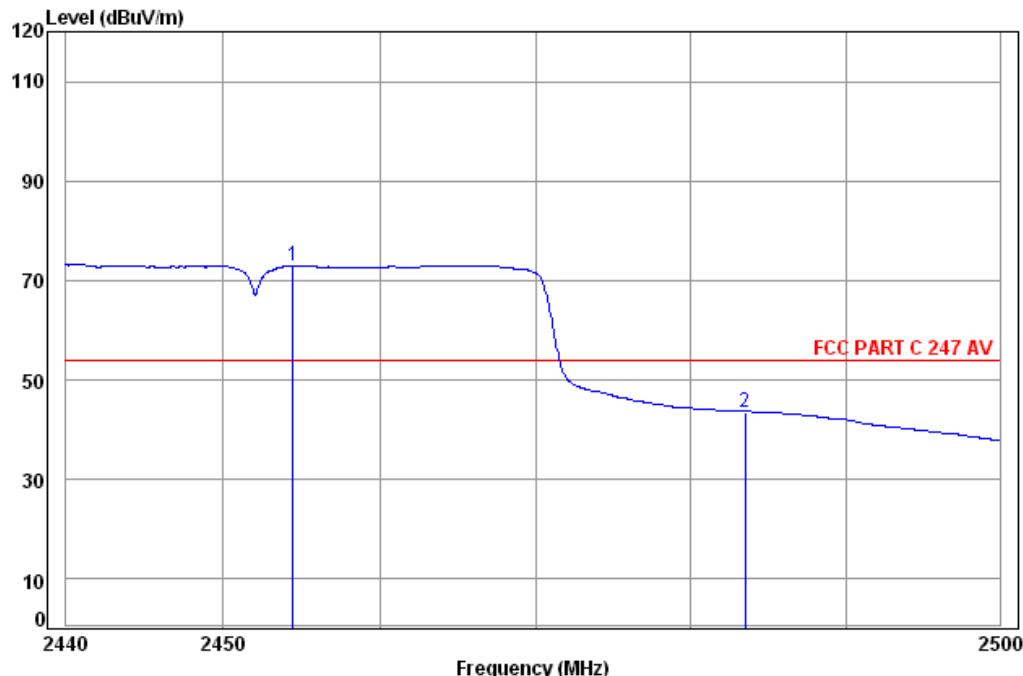Data: 64

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 4946RF


Mode: : n(HT40) 2452 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1 pp	2454.45	3.43	32.43	38.46	75.49	72.89
2	2483.50	3.47	32.44	38.47	46.02	43.46

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB

1 pp	2454.45	3.43	32.43	38.46	75.49	72.89	54.00	18.89
2	2483.50	3.47	32.44	38.47	46.02	43.46	54.00	-10.54

Worst case mode:	802.11n(HT40) (135Mbps)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	----------------------------	---------------	---------	---------	---------	------------

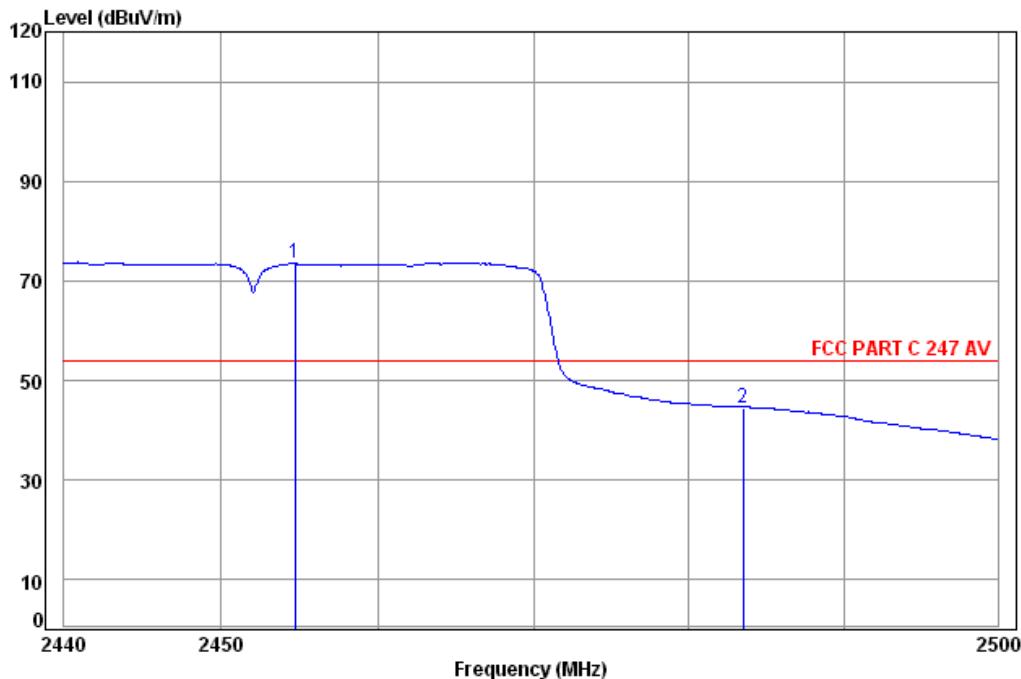Data: 63


Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 4946RF

Mode: : n(HT40) 2452 Bandedge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit	Over		
				Level	Level	Line	Limit	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2454.69	3.43	32.43	38.46	76.05	73.45	54.00	19.45
2	2483.50	3.47	32.44	38.47	47.18	44.62	54.00	-9.38

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

7 Photographs - EUT Test Setup

Test model No.: EVT10Q

7.1 Radiated Spurious Emission



7.2 Conducted Emission



8 Photographs - EUT Constructional Details

Test model No.: EVT10Q

Refer to Report No. SZEM140900494601 for EUT external and internal photos.