

FCC Test Report

Report No.: AGC00947250501FR01

FCC ID : 2ACCU-HD60001

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: OVER EAR BLUETOOTH HEADPHONES

BRAND NAME: PreSonus

MODEL NAME : HD6BT

APPLICANT: PreSonus Audio Electronics, Inc.

DATE OF ISSUE : Aug. 13, 2025

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 82

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 13, 2025	Valid	Initial Release




Table of Contents

1. General Information	
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	8
2.8 Special Accessories	9
2.9 Equipment Modifications	9
2.10 Antenna Requirement	9
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	1′
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	12
4. System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	15
4.5 Summary of Test Results	
5. Description of Test Modes	17
6. RF Output Power Measurement	19
6.1 Provisions Applicable	19
6.2 Measurement Procedure	19
6.3 Measurement Setup (Block Diagram of Configuration)	19
6.4 Measurement Result	20
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	26
7.1 Provisions Applicable	26
7.2 Measurement Procedure	26
7.3 Measurement Setup (Block Diagram of Configuration)	26
7.4 Measurement Results	27
8. Conducted Band Edge and Out-of-Band Emissions	32
8.1 Provisions Applicable	32
8.2 Measurement Procedure	32
8.3 Measurement Setup (Block Diagram of Configuration)	33
8.4 Measurement Results	3/



9. Radiated Spurious Emission	54
9.1 Measurement Limit	54
9.2 Measurement Procedure	54
9.3 Measurement Setup (Block Diagram of Configuration)	57
9.4 Measurement Result	58
10. Number of Hopping Frequency Measurement	67
10.1 Provisions Applicable	67
10.2 Measurement Procedure	67
10.3 Measurement Setup (Block Diagram of Configuration)	67
10.4 Measurement Result	67
11. Time of Occupancy (Dwell Time) Measurement	70
11.1 Provisions Applicable	70
11.2 Measurement Procedure	70
11.3 Measurement Setup (Block Diagram of Configuration)	70
11.4 Measurement Result	70
12. Frequency Separation Measurement	74
12.1 Provisions Applicable	74
12.2 Measurement Procedure	74
12.3 Measurement Setup (Block Diagram of Configuration)	74
12.4 Measurement Result	74
13. AC Power Line Conducted Emission Test	77
13.1 Measurement Limit	77
13.2 Measurement Setup (Block Diagram of Configuration)	77
13.3 Preliminary Procedure of Line Conducted Emission Test	78
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Result	78
Appendix I: Photographs of Test Setup	81
Appendix II: Photographs of Test EUT	81






1. General Information

Applicant	PreSonus Audio Electronics, Inc.			
	Fresorius Addio Electronics, Inc.			
Address	18011 Grand Bay Court, Baton Rouge, Louisiana 70809, United States			
Manufacturer	PreSonus Audio Electronics, Inc.			
Address	18011 Grand Bay Court, Baton Rouge, Louisiana 70809, United States			
Factory	Kanen Electronics Co., Ltd			
Address	No.2, East Liuhua Road, Dongcheng District, 523115, Dongguan, Guangdong,			
Addiess	China			
Product Designation	OVER EAR BLUETOOTH HEADPHONES			
Brand Name	PreSonus			
Test Model	HD6BT			
Series Model(s)	N/A			
Difference Description	N/A			
Date of receipt of test item	May 13, 2025			
Date of Test	May 13, 2025 to Aug. 13, 2025			
Deviation from Standard	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Test Report Form No	AGCER-FCC-BR_EDR-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jasiel Xie	
	Jasiel Xie (Project Engineer)	Aug. 13, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	Aug. 13, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Aug. 13, 2025



Report No.: AGC00947250501FR01 Page 6 of 82

2. Product Information

2.1 Product Technical Description

Technology Type	Classic Bluetooth
Frequency Band	2400M-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK
Number of channels	79 of Channels
Channel Separation	1 MHz
Maximum Transmitter Power	2.881dBm
Hardware Version	V1.1
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	0.32dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402+1*k MHz, k=0,, 78; "f" is the operating frequency (MHz); "k" is the operating channel.					



Page 7 of 82

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2ACCU-HD60001**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.


The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.






2.7 Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Page 9 of 82

2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0.32dBi.



Page 10 of 82

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 82

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V by battery or DC 5V by adapter

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		
Uncertainty of Dwell Time	U _c = ±2 %		




Page 12 of 82

3.5 List of Equipment Used

•	RF Conducted Test System								
Used Equipment No. Test Equipment Manufacturer Model No. Ser					Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025-01-14	2026-01-13		
\boxtimes	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		
\boxtimes	AGC-ER-E091	DC Power Supply	AIDEKESI	IT6720	800103030787810080	2024-03-28	2026-03-27		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2025-05-08	2026-05-07	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-27	2026-03-26	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2025-05-16	2026-05-15	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

A	AC Power Line Conducted Emission							
Used	Used Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-DD)							
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2025-05-08	2026-05-07	
	AGC-EM-A171	Attenuator	Mini-Circuits	UNAT-10A+	DC-6GZ	2024-02-01	2026-01-31	
\boxtimes	AGC-EM-E023	AMN	R&S	ESH2-Z5	100086	2025-05-08	2026-05-07	





• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 14 of 82

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

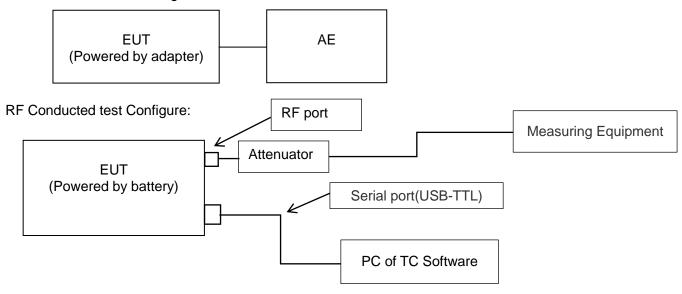



Page 15 of 82

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL	-	
2	Redmi Notebook PC	Redmi	XMA2002-AB	N/A	N/A
3	Adapter	Xiaomi	MDY-16-EA	Input(AC): 100-240V 50/60Hz 2.5A Output(DC): 5V3A/9V3A/11V6.1A/20V5A/20V6A	N/A

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



Page 16 of 82

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass



Page 17 of 82


5. Description of Test Modes

Summary table of Test Cases				
Test Item	Data Rate / Modulation			
iest item	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)			
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered) Mode10: Bluetooth Tx Hopping-1Mbps (Battery powered) Mode11: Bluetooth Tx Hopping-2Mbps (Battery powered) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powered)			
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)			


Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The manufacturer of RF external cable claims that the cable loss is 0.5dB, and the cable loss and attenuator have been compensated into the Corrections Configuration of measuring equipment.
- 6. Input correction factor includes external cable loss and attenuator amplitude compensation. The formula is: Input compensation coefficient (dB) = Cable Loss (dB) + Attenuator attenuation value (dB)

Software Setting Diagram





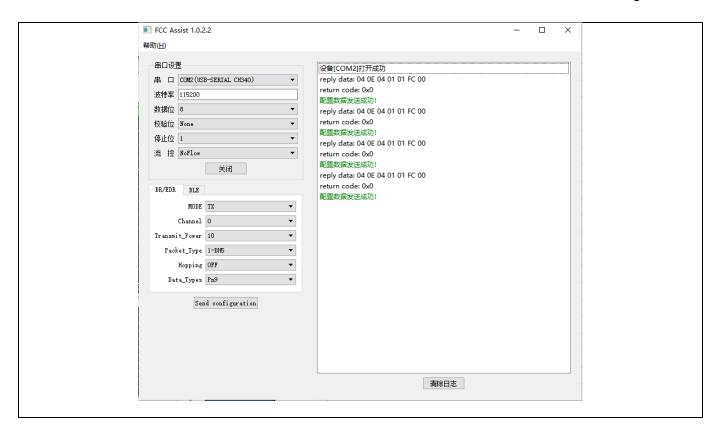



Page 19 of 82

6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.


The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.3 Measurement Setup (Block Diagram of Configuration)

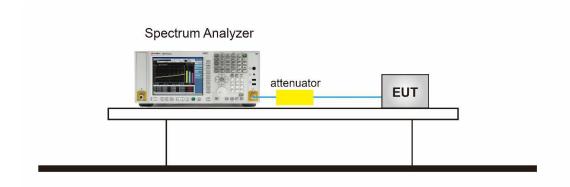




Page 20 of 82

6.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	2.151	≤21	Pass	
GFSK	2441	2.295	≤21	Pass	
	2480	2.035	≤21	Pass	
	2402	2.627	≤21	Pass	
π /4-DQPSK	2441	2.652	≤21	Pass	
	2480	2.346	≤21	Pass	
	2402	2.881	≤21	Pass	
8DPSK	2441	2.859	≤21	Pass	
	2480	2.575	≤21	Pass	






Test Graphs of Conducted Output Power Avg Type: Log-Pwr Avg|Hold: 100/100 Frequency Center Freq 2.402000000 GHz Trig: Free Run #Atten: 40 dB PNO: Fast → IFGain:Low **Auto Tune** Mkr1 2.402 173 GHz 2.151 dBm 10 dB/div Ref 30.00 dBm Center Freq 2.402000000 GHz M Start Freq 2.399500000 GHz Stop Freq 2.404500000 GHz **CF Step** 500,000 kHz <u>Auto</u> Freq Offset 0 Hz Center 2.402000 GHz #Res BW 1.5 MHz Span 5.000 MHz Sweep 1.066 ms (1000 pts) **#VBW 5.0 MHz** Test_Graph_BR_ANT1_2402_1Mbps_Peak Power Frequency Center Freq 2.441000000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run #Atten: 40 dB PNO: Fast ↔ IFGain:Low **Auto Tune** Mkr1 2.440 902 GHz 2.295 dBm Ref 30.00 dBm 10 dB/div Log Center Freq 2.441000000 GHz Start Freq Stop Freq 2.443500000 GHz **CF Step** 500,000 kHz Freq Offset 0 Hz Center 2.441000 GHz #Res BW 1.5 MHz Span 5.000 MHz Sweep 1.066 ms (1000 pts) **#VBW** 5.0 MHz


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2441_1Mbps_Peak Power



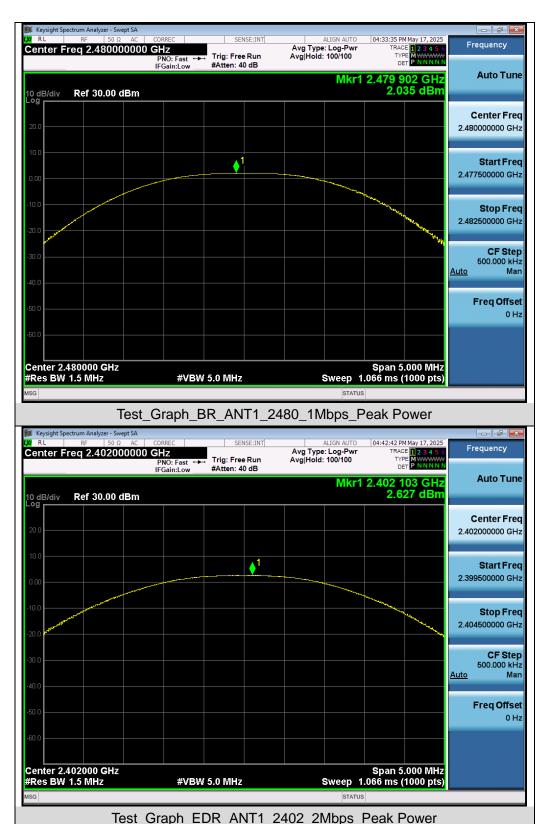



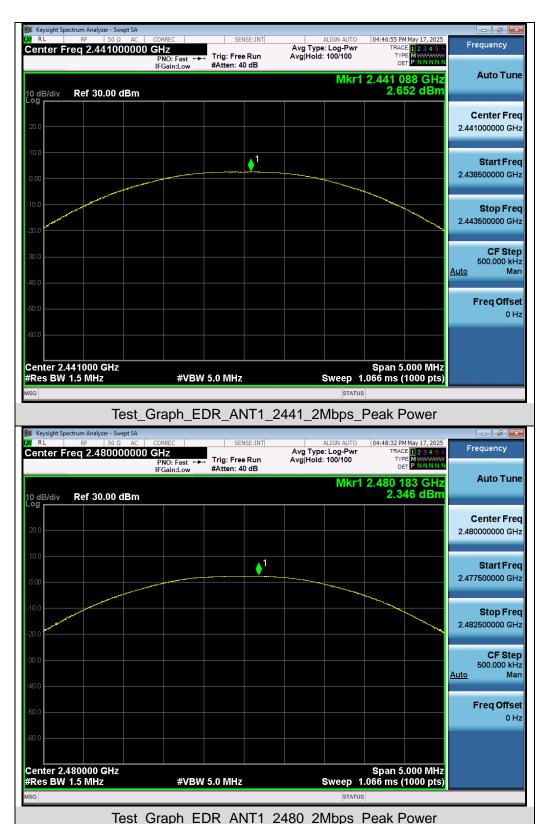











7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW ≥ 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

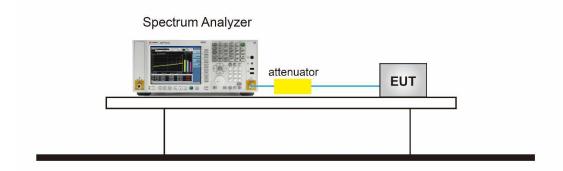





7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.960	1.063	N/A	Pass
GFSK	2441	0.964	1.066	N/A	Pass
	2480	0.963	1.064	N/A	Pass
	2402	1.243	1.334	N/A	Pass
π /4-DQPSK	2441	1.256	1.340	N/A	Pass
	2480	1.261	1.345	N/A	Pass
	2402	1.238	1.309	N/A	Pass
8DPSK	2441	1.242	1.306	N/A	Pass
	2480	1.245	1.301	N/A	Pass

Test Graphs of Occupied Bandwidth and -20 Bandwidth

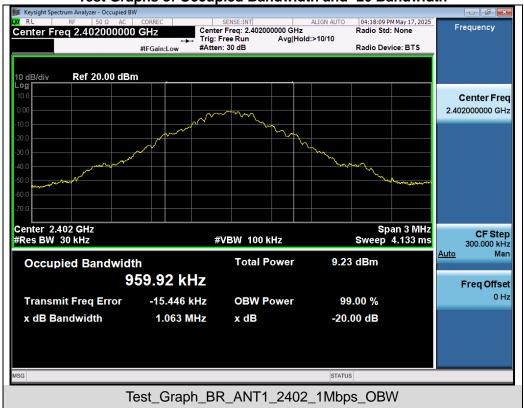



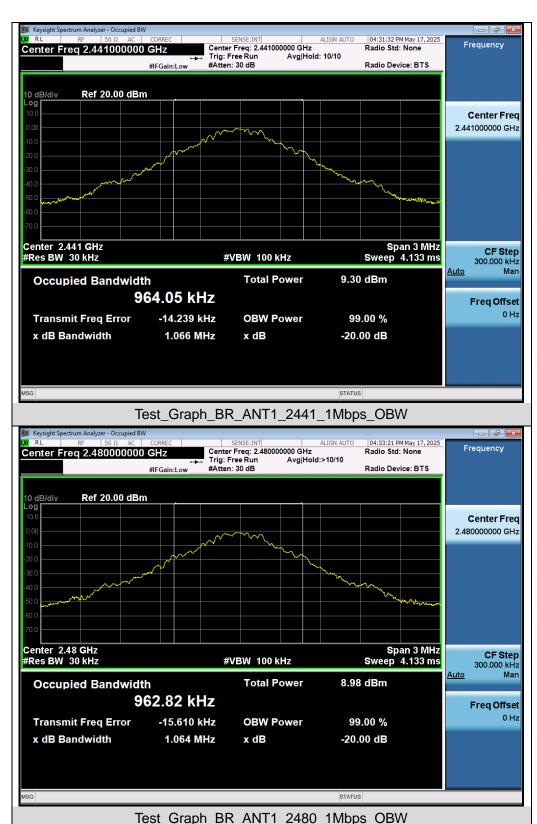










Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



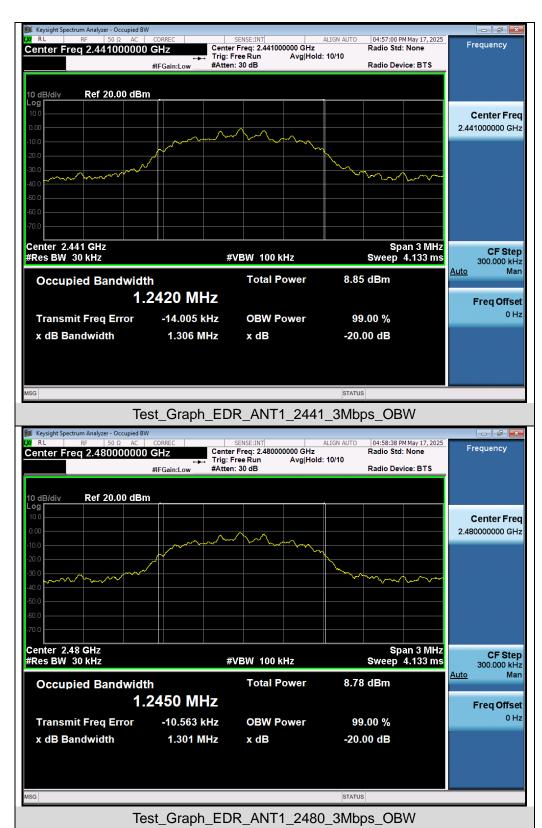

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 32 of 82

8. Conducted Band Edge and Out-of-Band Emissions


8.1 Provisions Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB

8.2 Measurement Procedure


The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- 8. Input compensation coefficient (dB) = Cable Loss (dB) + Attenuator attenuation value (dB)
- Emission level measurement
- Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.
- 9. Input compensation coefficient (dB) = Cable Loss (dB) + Attenuator attenuation value (dB)





8.3 Measurement Setup (Block Diagram of Configuration)

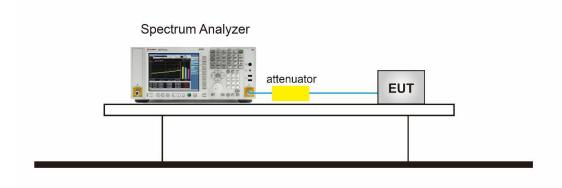







8.4 Measurement Results





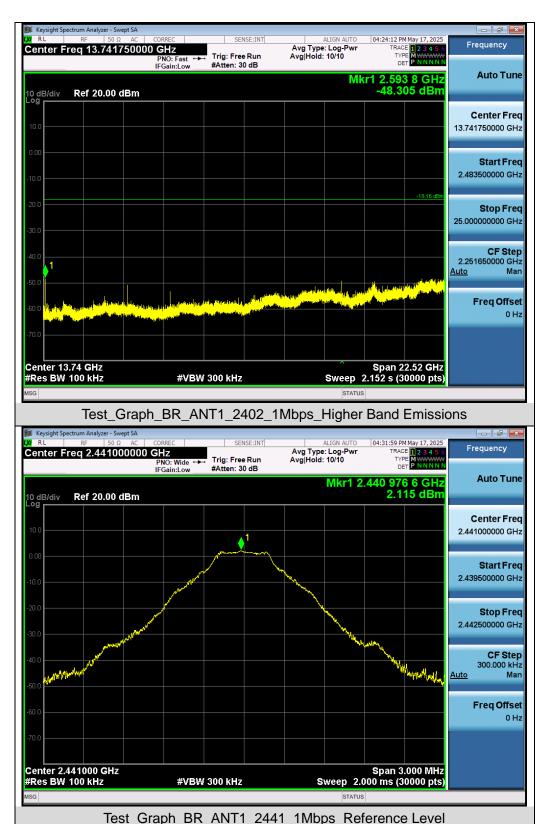




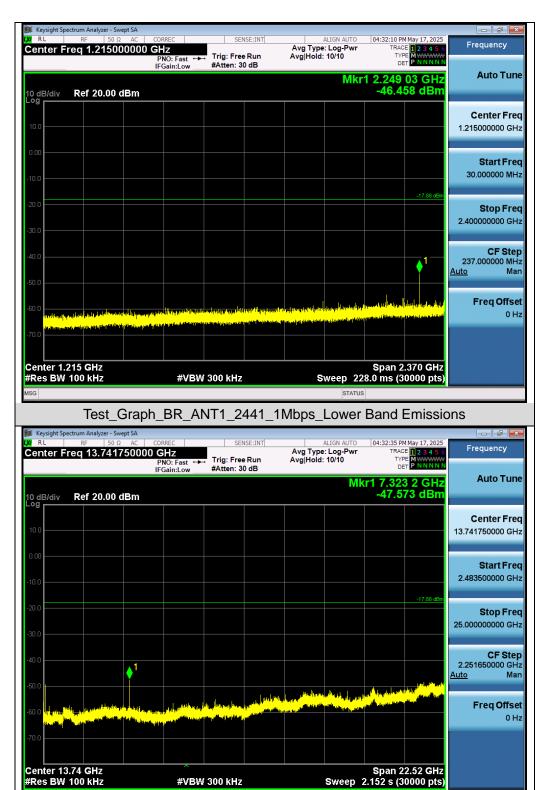


Test_Graph_BR_ANT1_2441_1Mbps_Higher Band Emissions




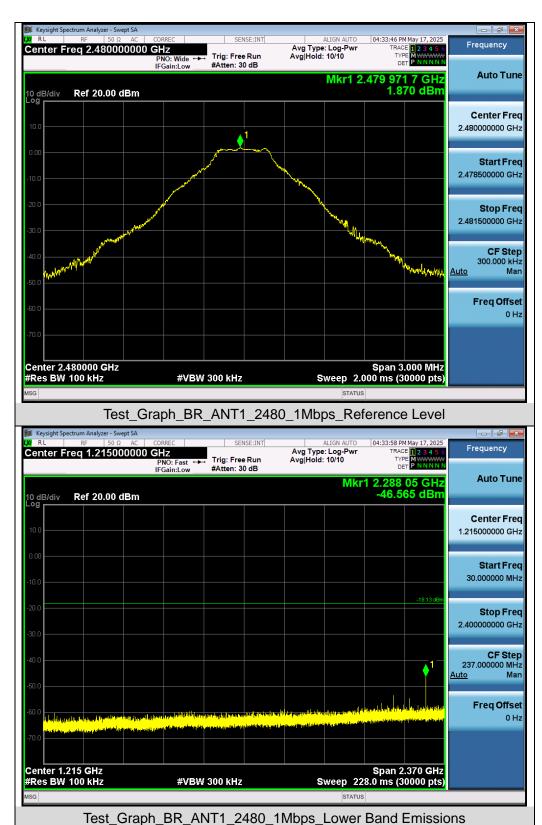



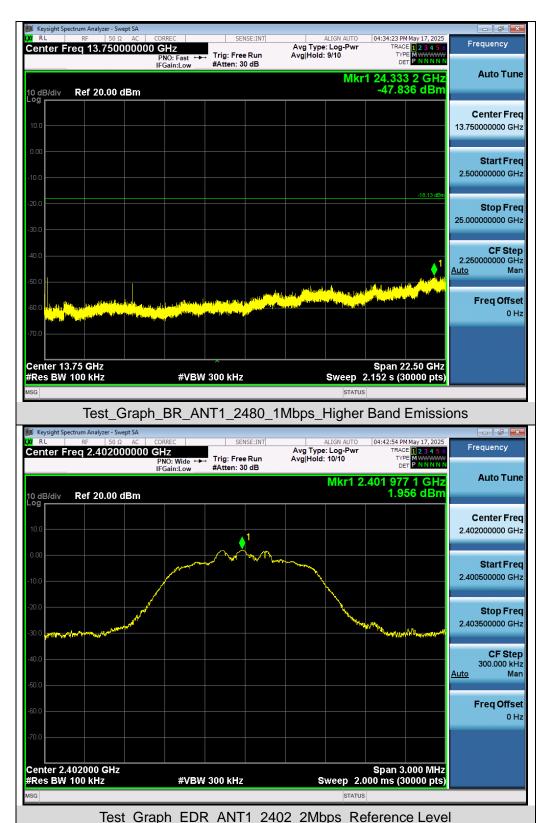



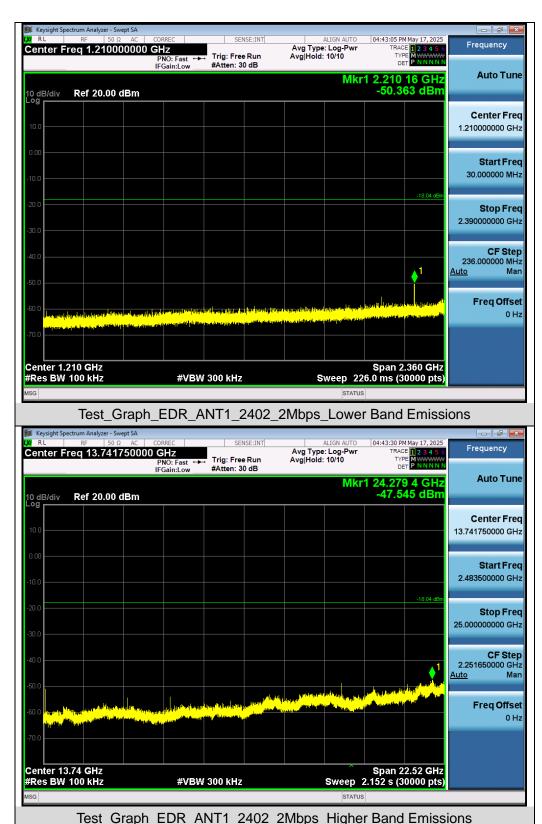







Test_Graph_EDR_ANT1_2441_2Mbps_Lower Band Emissions



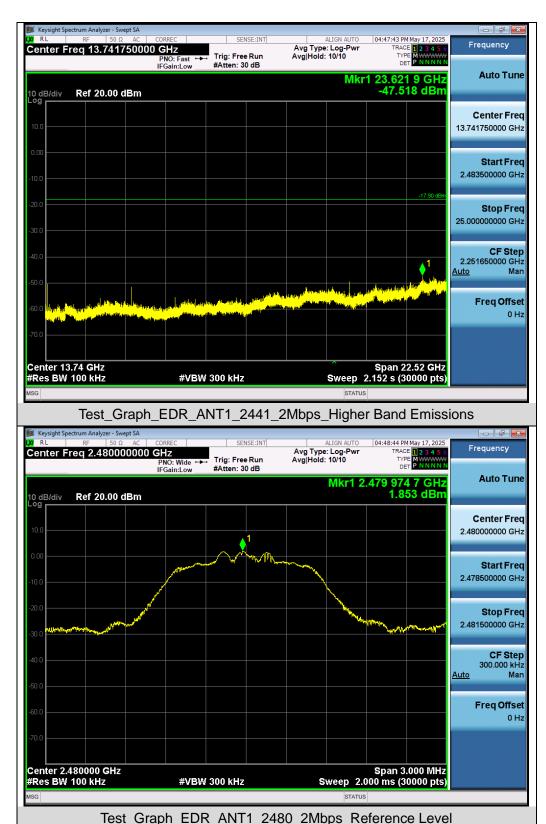



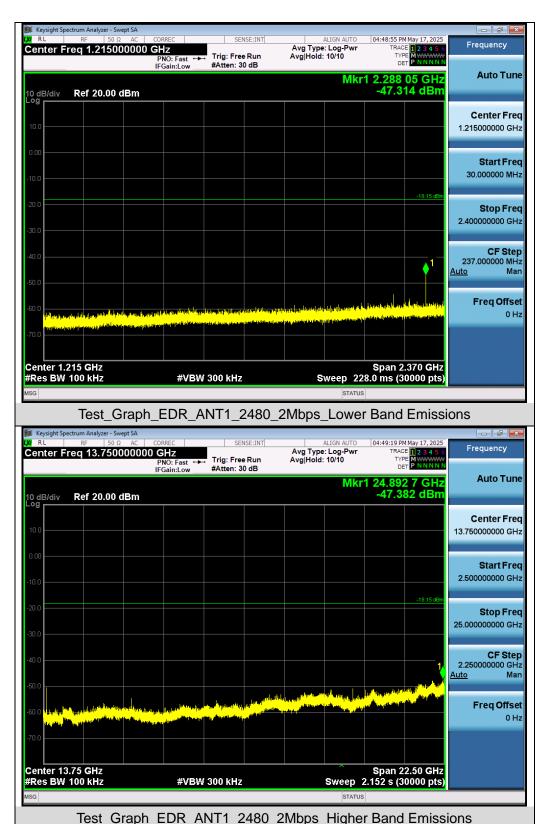













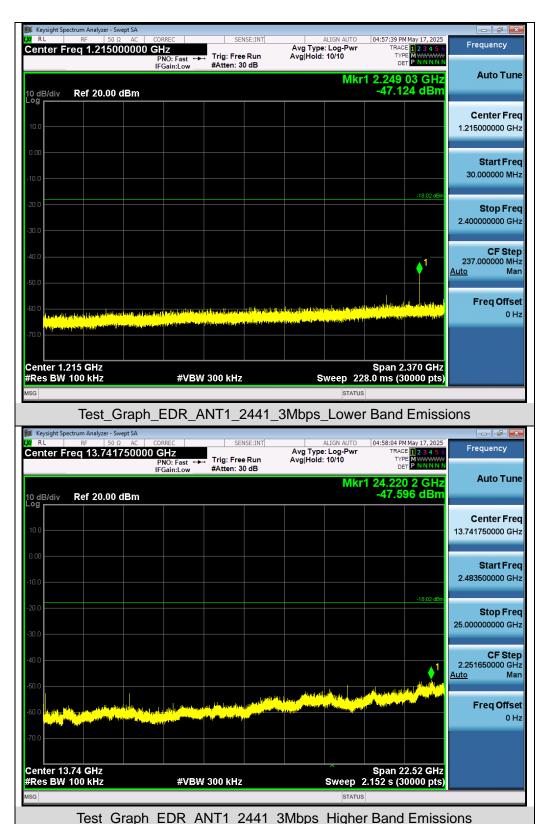








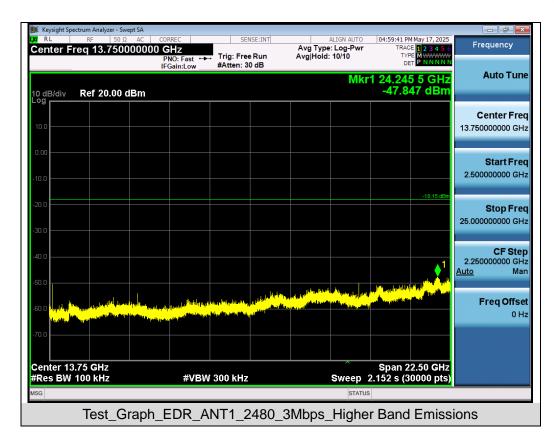






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Center Freq 2.398500000 GHz Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.400 000 0 GHz -41.951 dBm Ref 20.00 dBm Center Freq 2.398500000 GHz Start Freq 2.390000000 GHz Stop Freq 2.407000000 GHz Center 2.398500 GHz #Res BW 100 kHz Span 17.00 MHz Sweep 2.000 ms (30000 pts) #VBW 300 kHz 1.700000 MHz <u>Auto</u> Freq Offset 0 Hz Test_Graph_BR_ANT1_2402_1Mbps_Lower Band Edge Emissions Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Center Freq 2.487500000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast *
IFGain:Low **Auto Tune** Mkr2 2.483 500 0 GHz -59.390 dBm Ref 20.00 dBm Center Freq 2.487500000 GHz Start Freq Stop Freq 2.500000000 GHz Center 2.48750 GHz #Res BW 100 kHz Span 25.00 MHz Sweep 4.000 ms (30000 pts) #VBW 300 kHz 2.500000 MHz Freq Offset 0 Hz


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2480_1Mbps_Higher Band Edge Emissions



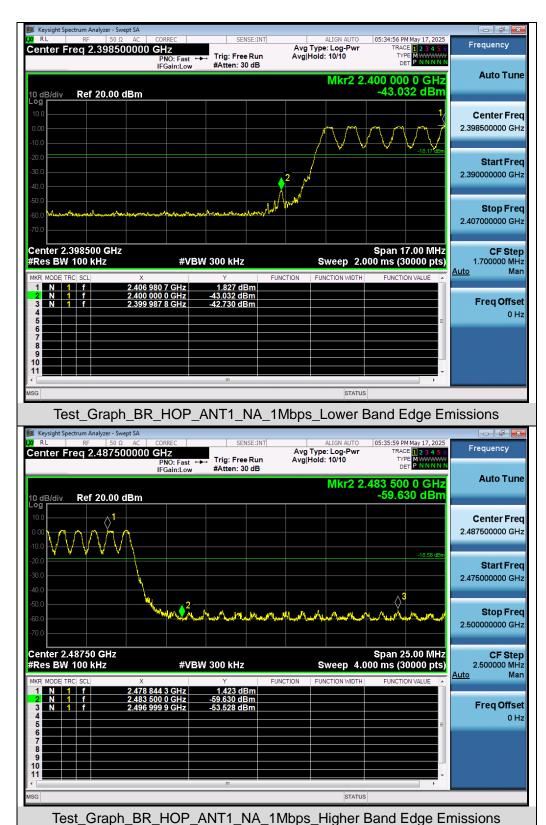




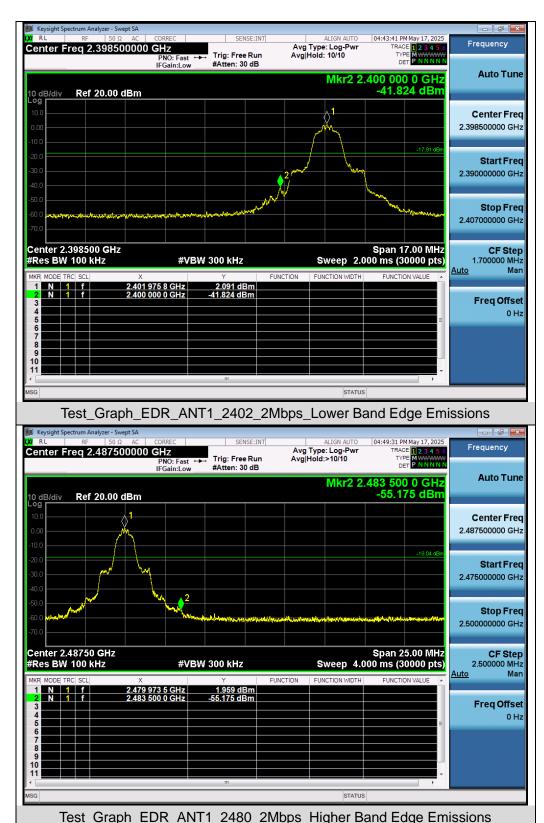








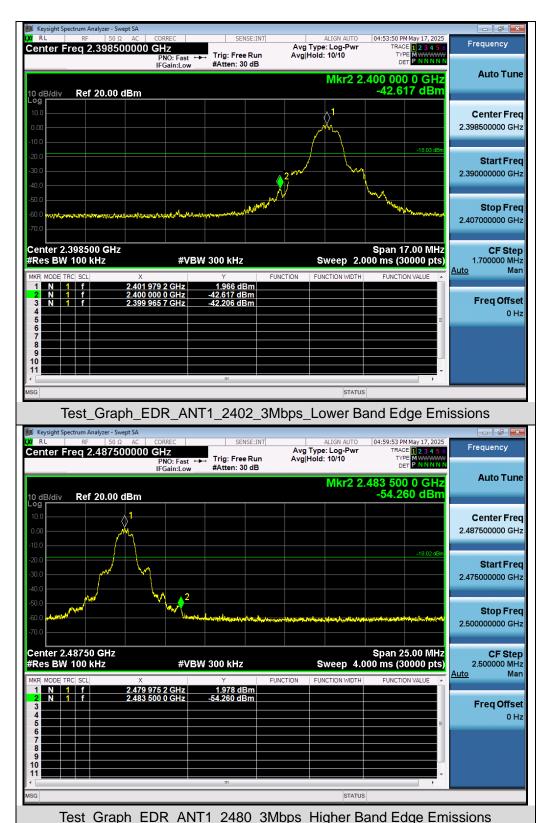



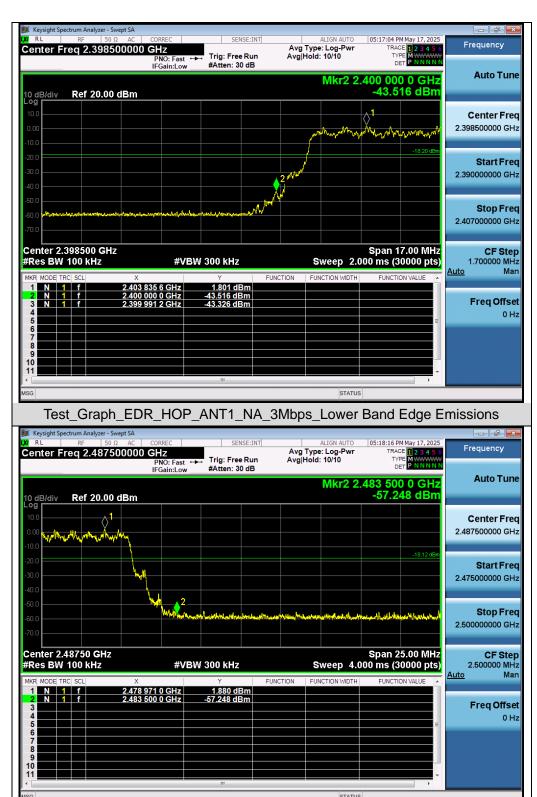

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Higher Band Edge Emissions



Page 54 of 82

9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



Page 55 of 82

- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start ~Stop i requerity	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 56 of 82

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

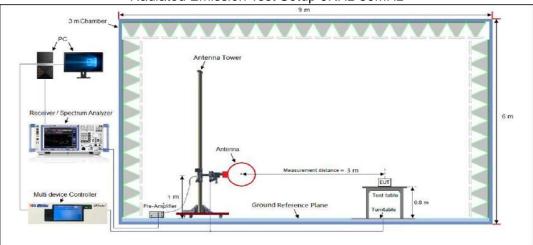


Radiated Emission Test Setup 30MHz-1000MHz

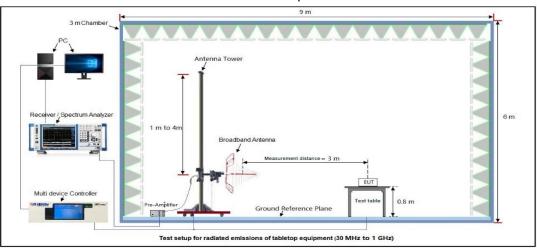

Radiated Emission Test Setup Above 1000MHz

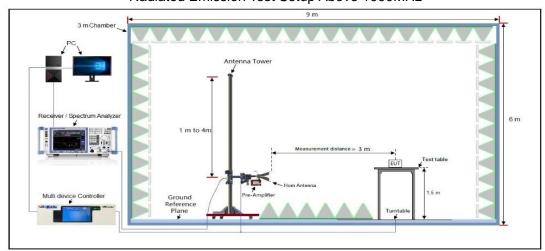






9.4 Measurement Result


Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz							
EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT				
Temperature	23.7℃	Relative Humidity	51.5%				
Pressure	960hPa	Test Voltage	DC 3.7V by battery				
Test Mode	Mode 7	Antenna Polarity	Horizontal				

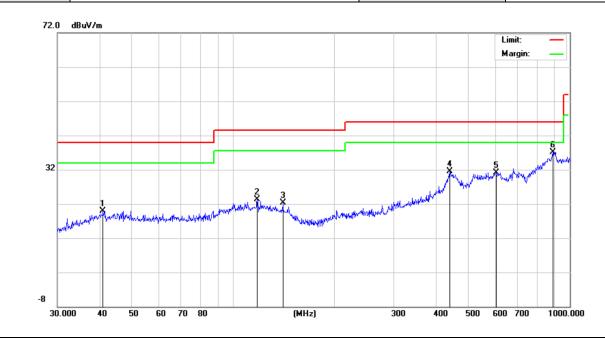


Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.9881	19.86	13.83	40.00	20.14	100	86	Horizontal
2	117.7725	23.26	16.38	43.50	20.24	100	122	Horizontal
3	140.3421	22.23	15.15	43.50	21.27	100	148	Horizontal
4	440.1963	31.52	25.09	46.00	14.48	100	217	Horizontal
5	603.5392	31.12	25.12	46.00	14.88	100	115	Horizontal
6	890.7278	37.11	30.64	46.00	8.89	100	123	Horizontal





Radiated Emission Test Results at 30MHz-1GHz							
EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT				
Temperature	23.7℃	Relative Humidity	51.5%				
Pressure	960hPa	Test Voltage	DC 3.7V by battery				
Test Mode	Mode 7	Antenna Polarity	Vertical				

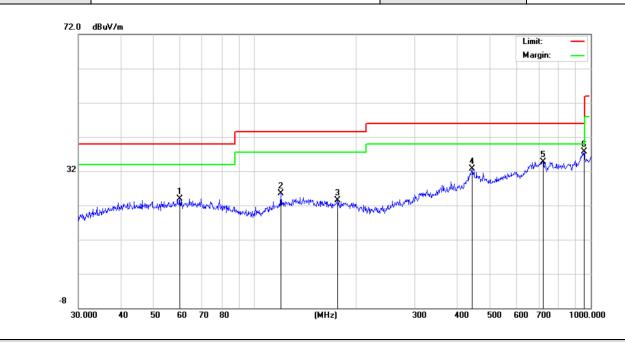

Final D	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	60.0691	23.88	17.10	40.00	16.12	100	127	Vertical
2	119.8556	25.54	17.67	43.50	17.96	100	156	Vertical
3	176.8878	23.55	18.45	43.50	19.95	100	123	Vertical
4	444.8514	32.74	25.88	46.00	13.26	100	241	Vertical
5	721.7259	34.75	28.64	46.00	11.25	100	158	Vertical
6	955.4381	37.65	30.38	46.00	8.35	100	126	Vertical

RESULT: Pass

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.
- 2. All test modes had been pre-tested. The mode 7 is the worst case and recorded in the report.



Page 60 of 82

Radiated Emissions Test Results Above 1GHz

EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.82	0.08	46.9	74	-27.1	peak
4804.000	37.41	0.08	37.49	54	-16.51	AVG
7206.000	41.63	2.21	43.84	74	-30.16	peak
7206.000	32.15	2.21	34.36	54	-19.64	AVG
		_				

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.25	0.08	46.33	74	-27.67	peak
4804.000	37.71	0.08	37.79	54	-16.21	AVG
7206.000	41.63	2.21	43.84	74	-30.16	peak
7206.000	32.95	2.21	35.16	54	-18.84	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS



Page 61 of 82

Radiated Emissions Test Results for Above 1GHz

EUT Name	OVER EAR BLUET HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.23	0.14	45.37	74	-28.63	peak
4882.000	38.51	0.14	38.65	54	-15.35	AVG
7326.000	41.48	2.36	43.84	74	-30.16	peak
7326.000	34.29	2.36	36.65	54	-17.35	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	OVER EAR BLUETOO HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.28	0.14	45.42	74	-28.58	peak
4882.000	37.74	0.14	37.88	54	-16.12	AVG
7323.000	41.42	2.36	43.78	74	-30.22	peak
7323.000	33.39	2.36	35.75	54	-18.25	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS



Page 62 of 82

Radiated Emissions Test Results for Above 1GHz

EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.92	0.22	47.14	74	-26.86	peak
4960.000	38.17	0.22	38.39	54	-15.61	AVG
7440.000	41.43	2.64	44.07	74	-29.93	peak
7440.000	32.63	2.64	35.27	54	-18.73	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	OVER EAR BLUETOOTI HEADPHONES	Model Name	HD6BT
Temperature	23.7℃	Relative Humidity	51.5%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.37	0.22	46.59	74	-27.41	peak
4960.000	38.52	0.22	38.74	54	-15.26	AVG
7440.000	41.38	2.64	44.02	74	-29.98	peak
7440.000	32.61	2.64	35.25	54	-18.75	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.




EUT Name	OVER EAR BLUETO HEADPHONES	Model Name	HD6BT
Temperature	26.5℃	Relative Humidity	60.0%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

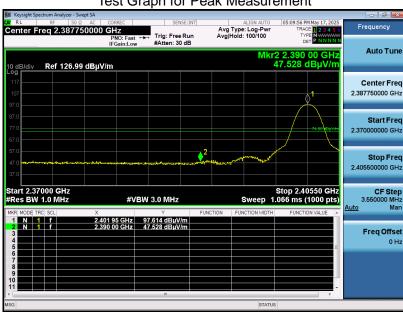

Test Graph for Average Measurement

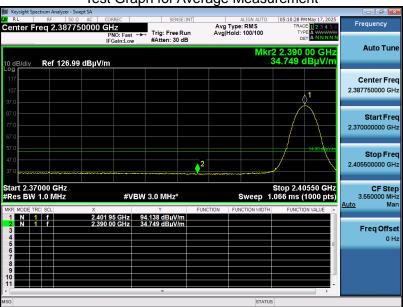


RESULT: PASS






EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	26.5℃	Relative Humidity	60.0%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7	Antenna Polarity	Vertical


Test Graph for Peak Measurement

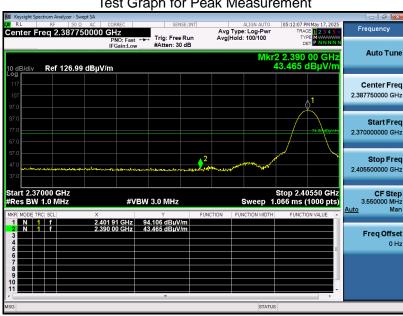

Test Graph for Average Measurement

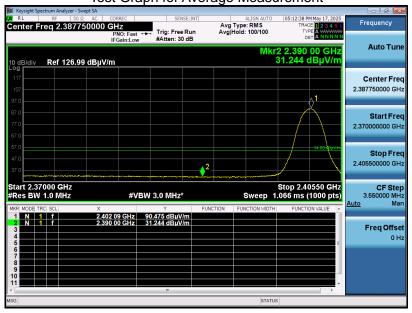

RESULT: PASS





EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	26.5℃	Relative Humidity	60.0%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS



EUT Name	OVER EAR BLUETOOTH HEADPHONES	Model Name	HD6BT
Temperature	26.5℃	Relative Humidity	60.0%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement

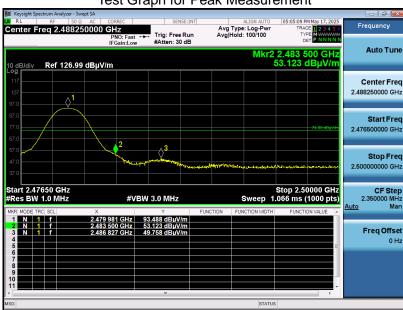

Test Graph for Average Measurement



RESULT: PASS

Note

- 1. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 2. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 67 of 82

10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. $VBW \ge RBW$
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

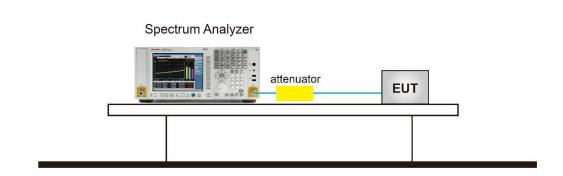

10.4 Measurement Result

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
GFSK Hopping	79	>=15	Pass		
π /4-DQPSK Hopping	79	>=15	Pass		
8DPSK Hopping	79	>=15	Pass		






Test Graphs of Number of Hopping Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Frequency Center Freq 2.441750000 GHz Trig: Free Run #Atten: 40 dB PNO: Fast IFGain:Low **Auto Tune** Mkr1 2.417 13 GHz 2.208 dBm 10 dB/div Ref 30.00 dBm Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz **CF Step** 8.350000 MHz <u>Auto</u> Freq Offset 0 Hz Center 2.44175 GHz #Res BW 200 kHz Span 83.50 MHz Sweep 1.998 ms (1000 pts) **#VBW** 620 kHz Test_Graph_BR_HOP_ANT1_NA_1Mbps_Number of Hopping Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Center Freq 2.441750000 GHz Trig: Free Run #Atten: 40 dB IFGain:Low **Auto Tune** Mkr1 2.443 96 GHz 2.171 dBm Ref 30.00 dBm 10 dB/div Log Center Freq 2.441750000 GHz Start Freq Stop Freq 2.483500000 GHz **CF Step** 8.350000 MHz Man Freq Offset 0 Hz Center 2.44175 GHz #Res BW 200 kHz Span 83.50 MHz Sweep 1.998 ms (1000 pts) **#VBW** 620 kHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Number of Hopping



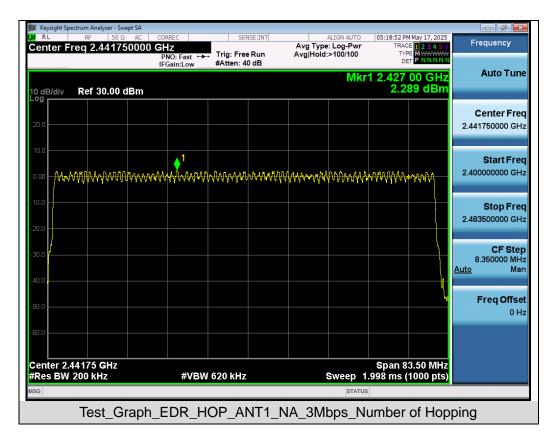



Report No.: AGC00947250501FR01 Page 70 of 82

11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW ≥ RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

11.3 Measurement Setup (Block Diagram of Configuration)

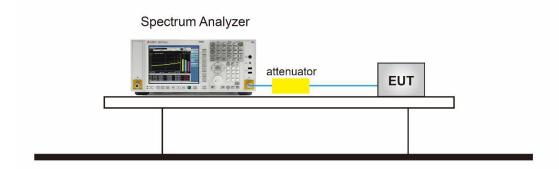


11.4 Measurement Result

Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.892	24.0*4	277.632	400	Pass
2441	2.892	24.0*4	277.632	400	Pass
2480	2.892	29.0*4	335.472	400	Pass






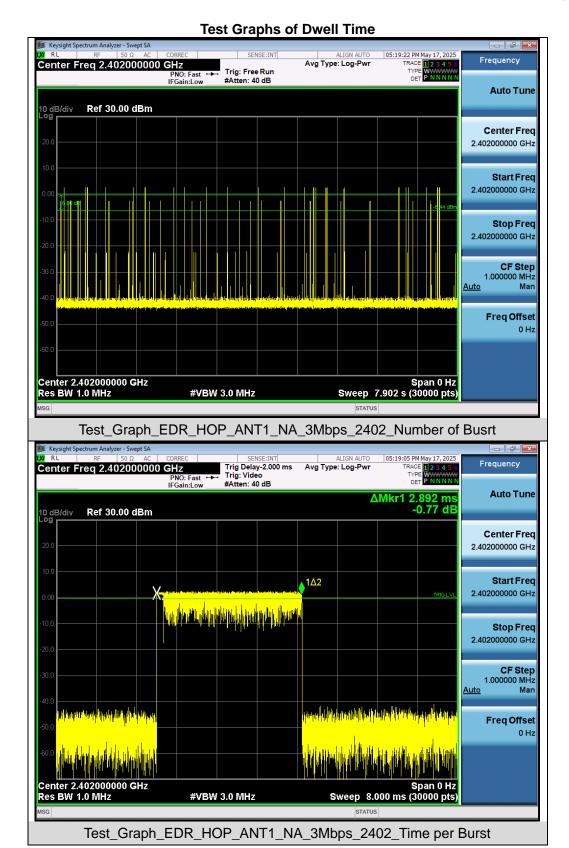

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




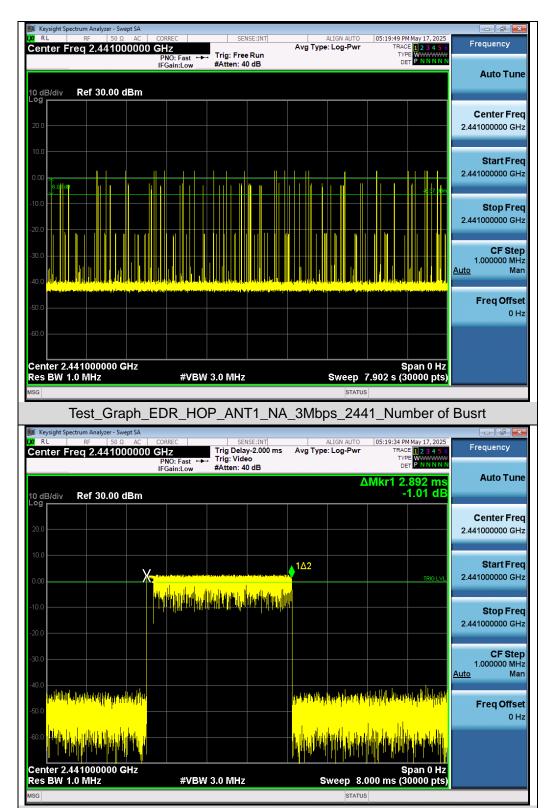

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_2441_Time per Burst

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



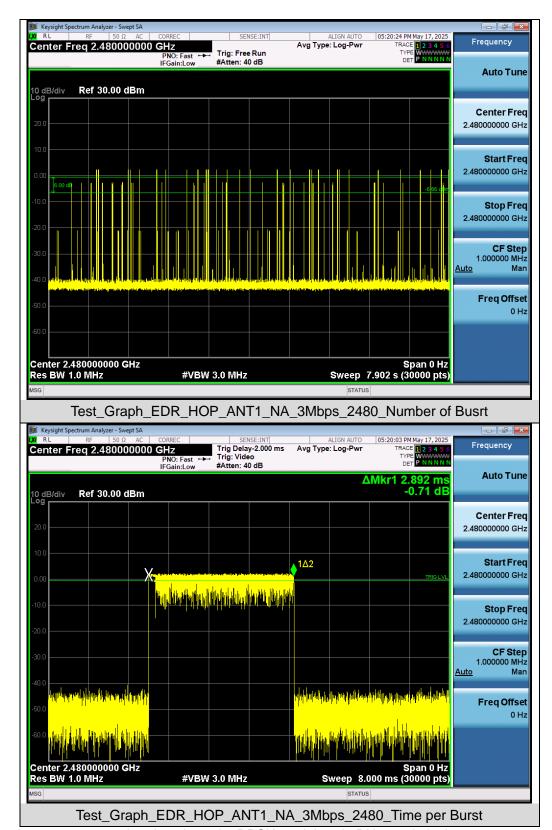

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.