FCC Part 15C

Measurement And Test Report For

CILICO ELECTRONICS CO., LTD

2nd Floor, Building One, Huafeng Science Park, Gonghe Industrial Road No.107, Xi Xiang Street, Baoan District, Shenzhen, china

FCC ID: 2ACEFCT10

May.12, 2014

This Report Concerns: ☐ Original Report	Equipment Type: Barcode Scanner
Report Number:	MTI140225006RF
Test Engineer:	David Chen Tim zhug
Reviewed By:	Tim Zhang Tim Zhang
Approved & Authorized By:	Hebe Lee Hebe Lee
Test Date:	May.07- May.12, 2014
Prepared By:	Shenzhen Microtest Technology Co.,Ltd 6F, Zhongbao Building, Gushu, Bao' an District, Shenzhen, P.R.China Tel: +86-755-8885 0135 Fax: +86-755-8885 0136

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Microtest Technology Co.,Ltd.

TEST RESULT CERTIFICATION		
Applicant's name:	CILICO ELECTRONICS CO., LTD	
Address:	2nd Floor, Building One, Huafeng Science Park, Gonghe Industrial Road No. 107, Xi Xiang Street, Baoan District, 518102, Shenzhen, China	
Manufacture's Name:	CILICO ELECTRONICS CO., LTD	
Address	2nd Floor, Building One, Huafeng Science Park, Gonghe Industrial Road No. 107, Xi Xiang Street, Baoan District, 518102, Shenzhen, China	
Product description		
Product name:	Barcode Scanner	
Model and/or type reference :	CT10	
Serial Model:	CT007	
Standards:	ANSI C63.4:2003, DA 00-705	
Test procedure	FCC Part15.247:2012	

Report No.: MTI140225006RF

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.1 GENERAL DESCRIPTION OF EUT 2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD	14 14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP 3.2.5 EUT OPERATING CONDITIONS	19 20
3.2.6 TEST RESULTS	21
4 . NUMBER OF HOPPING CHANNEL	
	27
4.1 APPLIED PROCEDURES / LIMIT 4.1.1 TEST PROCEDURE	27 27
4.1.1 TEST PROCEDURE 4.1.2 DEVIATION FROM STANDARD	27
4.1.3 TEST SETUP	27
4.1.4 EUT OPERATION CONDITIONS	27
4.1.5 TEST RESULTS	28
5 . AVERAGE TIME OF OCCUPANCY	29

Report No.: MTI140225006RF

Table of Contents

	Page
5.1 APPLIED PROCEDURES / LIMIT 5.1.1 TEST PROCEDURE 5.1.2 DEVIATION FROM STANDARD	29 29 29
5.1.3 TEST SETUP	30
5.1.4 EUT OPERATION CONDITIONS	30
5.1.5 TEST RESULTS	31
6. HOPPING CHANNEL SEPARATION MEASUREMENT	34
6.1 APPLIED PROCEDURES / LIMIT	34
6.1.1 TEST PROCEDURE	34
6.1.2 DEVIATION FROM STANDARD	34
6.1.3 TEST SETUP	34
6.1.4 EUT OPERATION CONDITIONS 6.1.5 TEST RESULTS	34 35
7 . BANDWIDTH TEST	37
7.1 APPLIED PROCEDURES / LIMIT	37
7.1.1 TEST PROCEDURE	3 <i>1</i> 37
7.1.2 DEVIATION FROM STANDARD	37
7.1.3 TEST SETUP	37
7.1.4 EUT OPERATION CONDITIONS	37
7.1.5 TEST RESULTS	38
8 . PEAK OUTPUT POWER TEST	40
8.1 APPLIED PROCEDURES / LIMIT	40
8.1.1 TEST PROCEDURE	40
8.1.2 DEVIATION FROM STANDARD	40
8.1.3 TEST SETUP	40
8.1.4 EUT OPERATION CONDITIONS	40
8.1.5 TEST RESULTS	41
9.100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	43
9.1 DEVIATION FROM STANDARD	43
9.2 TEST SETUP	43
9.3 EUT OPERATION CONDITIONS	43
9.4 TEST RESULTS	44
10 . ANTENNA REQUIREMENT	46
10.1 STANDARD REQUIREMENT	46
10.2 EUT ANTENNA	46
11 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	47

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Report No.: MTI140225006RF Page 5 of 48

1.1 TEST FACILITY

Shenzhen Microtest Technology Co.,Ltd.

Add.: 6F, Zhongbao Building Xiaweiyuan, Gushu, Bao'an, Shenzhen, China.

FCC Registration No.: 384826

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

Report No.: MTI140225006RF Page 6 of 48

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Barcode Scanner		
Trade Name	N/A		
Model Name	CT10		
Serial Model	CT007		
M 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	All the model are the sa	me circuit and RF module,	
Model Difference	except the model name	is different.	
	The EUT is a Barcode S	Scanner	
	Operation Frequency:	2402~2480 MHz	
	Modulation Type:	GFSK	
	Bit Rate of Transmitter	1Mbps	
	Number Of Channel	79 CH	
	Antenna Designation:	Please see Note 3.	
Product Description	Output	BT(1Mbps): -0.999dBm	
P	Power(Conducted):		
	Based on the application, features, or specification		
	exhibited in User's Manual, the EUT is considered as an		
	ITE/Computing Device. More details of EUT technical		
	specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.		
	MODEL: RD0501000-U	SBA-BOG	
Adapter	INPUT: 100-240V~50/60	0Hz 250mA	
	OUTPUT: 5V, 1A		
	Capacitance:1500mAh		
Battery	Rated Voltage:3.7V		
	Charge Limit: 4.2V		
Connecting I/O Port(s)	Please refer to the User	's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Report No.: MTI140225006RF Page 7 of 48

2.

	Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
00	2402	27	2429	54	2456	
01	2403	28	2430	55	2457	
02	2404	29	2431	56	2458	
03	2405	30	2432	57	2459	
04	2406	31	2433	58	2460	
05	2407	32	2434	59	2461	
06	2408	33	2435	60	2462	
07	2409	34	2436	61	2463	
80	2410	35	2437	62	2464	
09	2411	36	2438	63	2465	
10	2412	37	2439	64	2466	
11	2413	38	2440	65	2467	
12	2414	39	2441	66	2468	
13	2415	40	2442	67	2469	
14	2416	41	2443	68	2470	
15	2417	42	2444	69	2471	
16	2418	43	2445	70	2472	
17	2419	44	2446	71	2473	
18	2420	45	2447	72	2474	
19	2421	46	2448	73	2475	
20	2422	47	2449	74	2476	
21	2423	48	2450	75	2477	
22	2424	49	2451	76	2478	
23	2425	50	2452	77	2479	
24	2426	51	2453	78	2480	
25	2427	52	2454			
26	2428	53	2455			

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	1.4	BT Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Normal Link

For Conducted Emission		
Final Test Mode	Description	
Mode 4	Normal Link	

For Radiated Emission		
Final Test Mode	Description	
Mode 1	CH00	
Mode 2	CH39	
Mode 3	CH78	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use new battery.
- (3)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: RDK5875Y				
Frequency	2402 MHz	2441 MHz	2480 MHz		
Parameters	DEF	DEF	DEF		

Report No.: MTI140225006RF Page 9 of 48

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted emission:



Radiated emission:

E-1 EUT

Report No.: MTI140225006RF Page 10 of 48

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Barcode Scanner	N/A	CT10	N/A	EUT
E-2	Adapter	N/A	RD0501000-USBA-BOG	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	80cm	
C-2	NO	NO	10cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Report No.: MTI140225006RF Page 11 of 48

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	Kind of			0	Last	Calibrated	Calibratio
Item	Equipment	Manufacturer	Type No.	Serial No.	calibration	until	n period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-101 80	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619. 05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufactu rer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period
1	Test Receiver	R&S	ESCI	101160	2013.06.06	2014.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 7	2013.06.07	2014.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.07	2014.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2014.06.07	1 year

Report No.: MTI140225006RF Page 12 of 48

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

	Class A (dBuV)		Class B (dBuV)		Standard
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average	Standard
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		

Report No.: MTI140225006RF Page 13 of 48


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

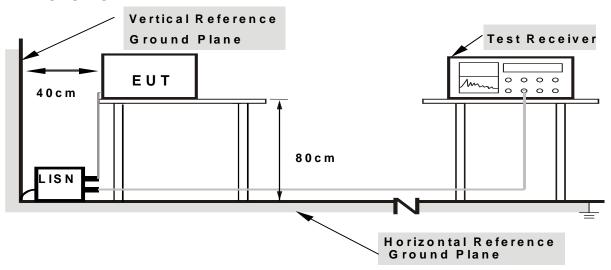

Note: 1. Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

Report No.: MTI140225006RF Page 14 of 48


3.1.6 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V	Test Mode:	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Dotostor Typo
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1780	48.19	9.79	57.98	64.57	-6.59	QP
0.1780	40.28	9.79	50.07	54.57	-4.50	AVG
3.9700	36.19	10.33	46.52	56.00	-9.48	QP
4.0300	31.47	10.33	41.80	46.00	-4.20	AVG

Remark:

All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

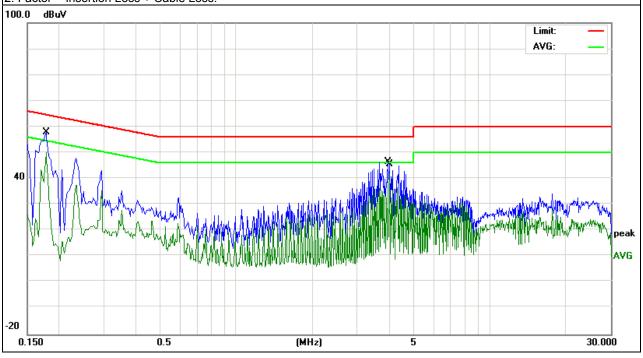


Report No.: MTI140225006RF

EUT:	Barcode Scanner Model Name :		CT10
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V	Test Mode:	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Dotostor Typo
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1739	44.34	9.80	54.14	64.77	-10.63	QP
0.1739	33.90	9.80	43.70	54.77	-11.07	AVG
4.2579	32.24	10.35	42.59	56.00	-13.41	QP
4.4939	25.71	10.36	36.07	46.00	-9.93	AVG

Remark:

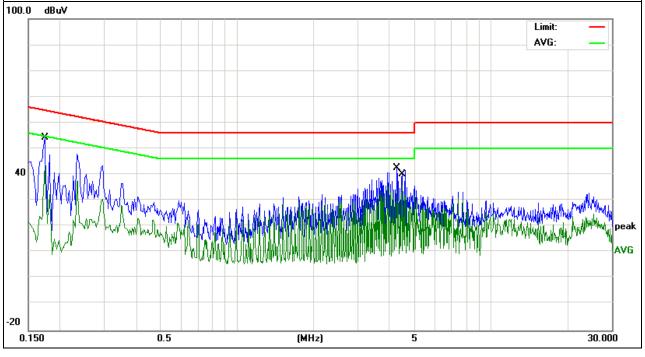

All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

EDEOLIENCY (MHz)	Class A (dBu	ıV/m) (at 3M)	Class B (dBuV/m) (at 3M)		
FREQUENCY (MHz)	PEAK AVERAGE		PEAK	AVERAGE	
Above 1000	80	60	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Report No.: MTI140225006RF Page 17 of 48

Spectrum Parameter	Setting		
Attenuation	Auto		
Start Frequency	1000 MHz		
Stop Frequency	10th carrier harmonic		
RB / VB (emission in restricted	1 MHz / 1 MHz for Dook, 1 MHz / 10Hz for Average		
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average		

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation


Report No.: MTI140225006RF

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

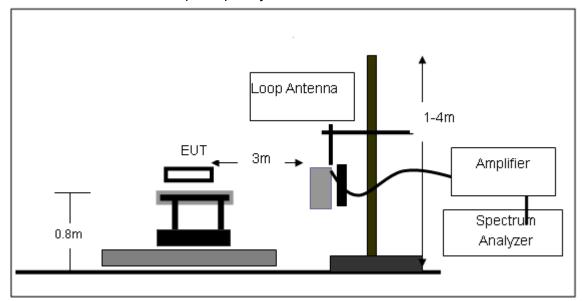


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

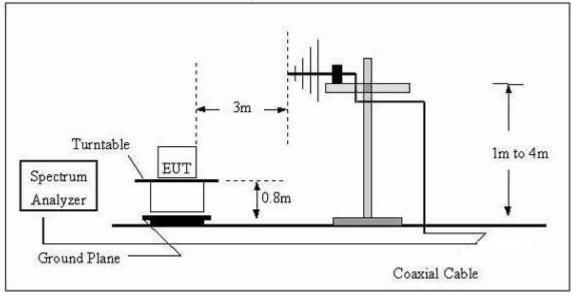

Report No.: MTI140225006RF Page 19 of 48

(C) Radiated Emission Test-Up Frequency Above 1GHz

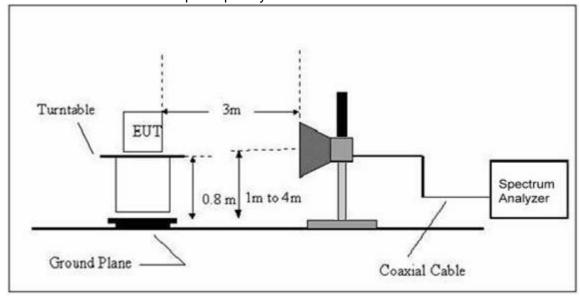

3.2.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


Report No.: MTI140225006RF Page 20 of 48

3.2.6 TEST RESULTS

Conducted Spurious Emissions at Antenna Port:


Low Channel -BDR

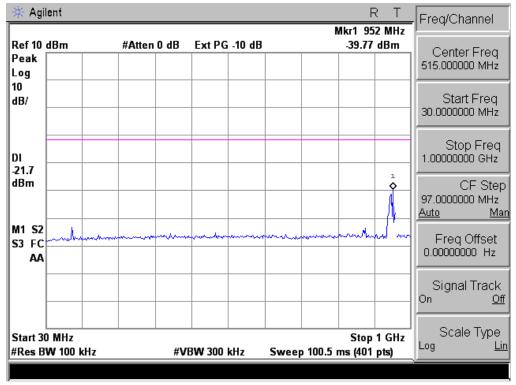


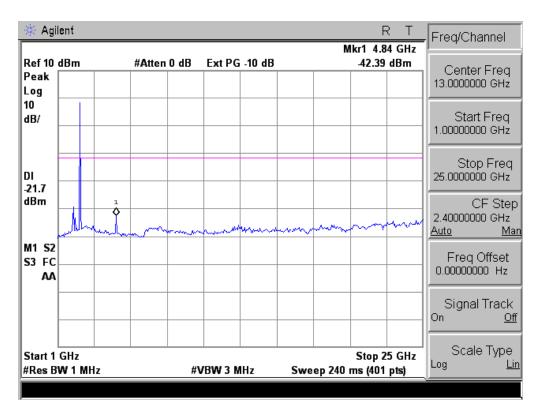



Report No.: MTI140225006RF Page 21 of 48


Middle Channel -BDR

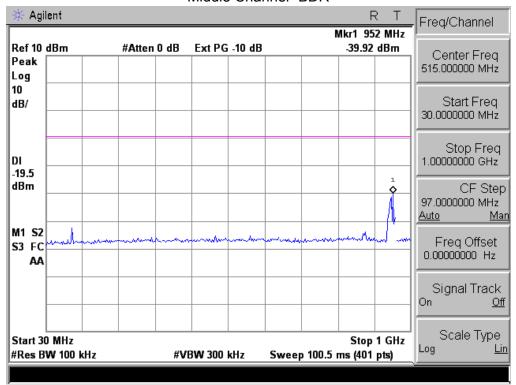

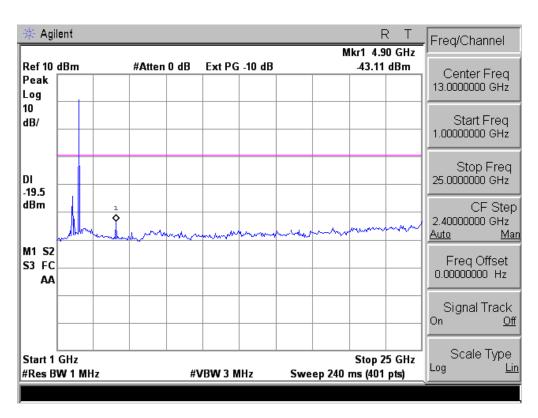



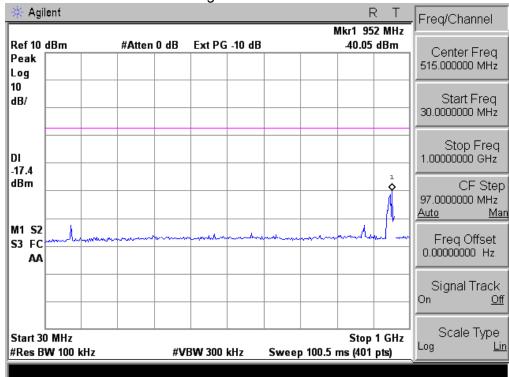

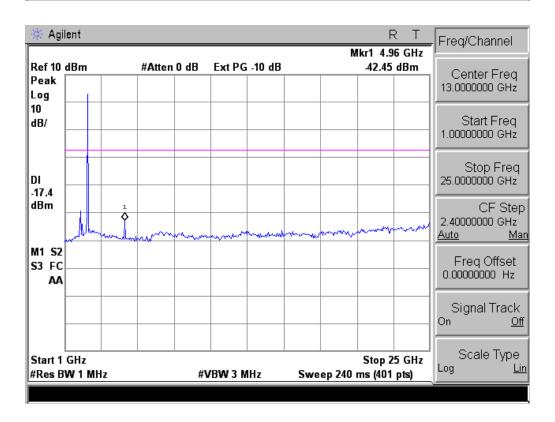

Radiated Spurious Emission (Between 30MHz - 1GHz)

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 4		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	46.9947	17.31	9.62	26.93	40.00	-13.07	QP
V	126.3285	18.31	12.21	30.52	43.50	-12.98	QP
V	177.5089	21.22	10.07	31.29	43.50	-12.21	QP
V	190.4050	21.14	9.01	30.15	43.50	-13.35	QP
V	396.2412	15.84	18.05	33.89	46.00	-12.11	QP
V	670.4891	9.54	23.85	33.39	46.00	-12.61	QP
Н	141.3298	10.30	12.13	22.43	43.50	-21.07	QP
Н	193.0945	15.98	8.98	24.96	43.50	-18.54	QP
Н	265.6757	17.90	14.46	32.36	46.00	-13.64	QP
Н	341.9786	16.91	16.19	33.10	46.00	-12.90	QP
Н	423.5403	13.11	18.94	32.05	46.00	-13.95	QP
Н	890.7278	13.97	27.46	41.43	46.00	-4.57	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

Report No.: MTI140225006RF

Page 24 of 48

Radiated Spurious Emission (Above 1GHz)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type	Comment	
Low Channel (2402 MHz)								
1127.500	68.40	-19.14	49.26	54.00	-4.74	peak	Vertical	
1595.000	61.49	-16.43	45.06	54.00	-8.94	peak	Vertical	
3040.000	61.23	-11.63	49.60	54.00	-4.40	peak	Vertical	
4804.000	53.64	-3.64	50.00	54.00	-4.00	peak	Vertical	
1127.500	71.12	-19.14	51.98	54.00	-2.02	peak	Horizontal	
1595.000	68.06	-16.43	51.63	54.00	-2.37	peak	Horizontal	
3040.000	59.73	-11.63	48.10	54.00	-5.90	peak	Horizontal	
4804.000	51.54	-3.64	47.90	54.00	-6.10	peak	Horizontal	
		М	id Channel (2441 M	Hz)				
1340.000	65.91	-17.48	48.43	54.00	-5.57	peak	Vertical	
2020.000	59.36	-12.92	46.44	54.00	-7.56	peak	Vertical	
2827.500	57.83	-11.73	46.10	54.00	-7.90	peak	Vertical	
4882.000	53.38	-3.68	49.70	54.00	-4.30	peak	Vertical	
1127.500	67.52	-19.14	48.38	54.00	-5.62	peak	Horizontal	
1637.500	61.68	-16.06	45.62	54.00	-8.38	peak	Horizontal	
2487.500	56.21	-12.77	43.44	54.00	-10.56	peak	Horizontal	
4882.000	50.78	-3.68	47.10	54.00	-6.90	peak	Horizontal	
		Hiç	gh Channel (2480 N	1Hz)				
1170.000	63.74	-18.54	45.20	54.00	-8.80	peak	Vertical	
2275.000	63.37	-12.87	50.50	54.00	-3.50	peak	Vertical	
3125.000	55.69	-11.43	44.26	54.00	-9.74	peak	Vertical	
4960.000	51.99	-3.59	48.40	54.00	-5.60	peak	Vertical	
1127.500	69.94	-19.14	50.80	54.00	-3.20	peak	Horizontal	
1340.000	66.40	-17.48	48.92	54.00	-5.08	peak	Horizontal	
1850.000	64.33	-14.64	49.69	54.00	-4.31	peak	Horizontal	
4960.000	52.69	-3.59	49.10	54.00	-4.90	peak	Horizontal	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Report No.: MTI140225006RF Page 25 of 48

Radiated band edge:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type	Comment
	GFSK						
2400	47.68	-13.06	34.62	54	-19.38	peak	Vertical
2400	49.84	-13.06	36.78	54	-17.22	peak	Horizontal
2483.5	47.92	-12.78	35.14	54	-18.86	peak	Vertical
2483.5	49.33	-12.78	36.55	54	-17.45	peak	Horizontal

NOTE: The result(PK) less than AV limite, No need shown AV result.

Report No.: MTI140225006RF Page 26 of 48

4. NUMBER OF HOPPING CHANNEL

4.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C						
Section	Test Item	Limit	Frequency Range (MHz)	Result			
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS			

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1% of the span
VB	VBW ≥ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI140225006RF Page 27 of 48

4.1.5 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

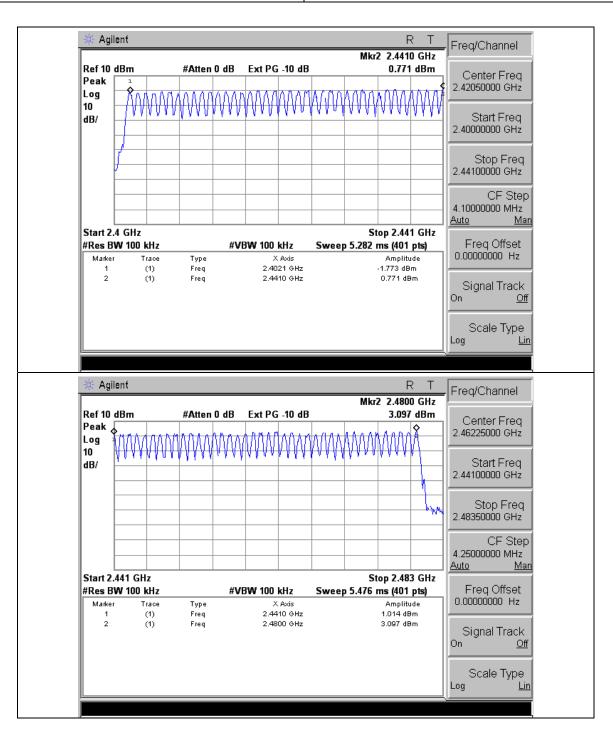

Report No.: MTI140225006RF Page 28 of 48

5. AVERAGE TIME OF OCCUPANCY

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section Test Item Limit Frequency Range (MHz) Result			Result	
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. A Period Time = (channel number)*0.4
 - DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
 - DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
 - DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

5.1.2 DEVIATION FROM STANDARD

No deviation.

Report No.: MTI140225006RF Page 29 of 48

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI140225006RF Page 30 of 48

5.1.5 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39-DH5		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
		(****)	(-)	(-)
DH5	2441 MHz	2.95	0.31	0.4

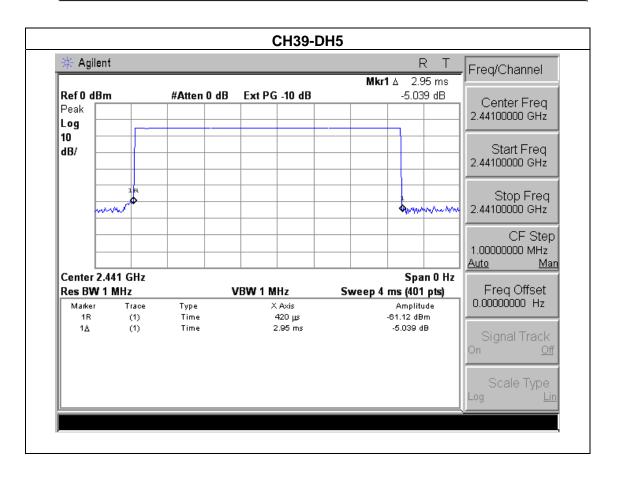

Report No.: MTI140225006RF Page 31 of 48

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39-DH3		


Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
Packet		(ms)	(s)	(s)
DH3	2441 MHz	1.71	0.18	0.4

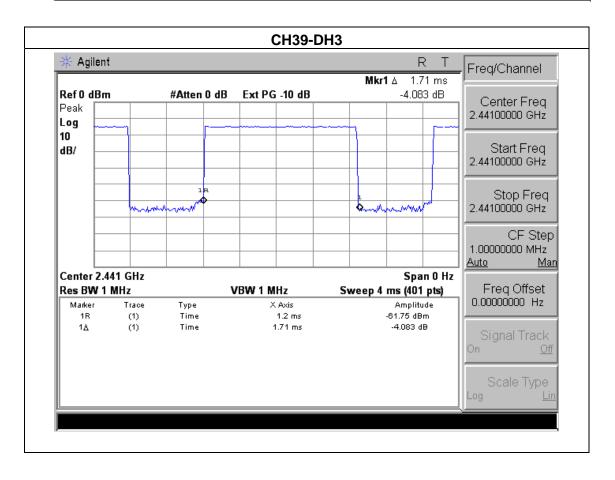

Report No.: MTI140225006RF

EUT:	Barcode Scanner	Model Name :	CT10
Temperature:	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH39-DH1		

Data	Frequency	Pulse Duration	Dwell Time	Limits
Packet	. ,	(ms)	(s)	(s)
DH1	2441 MHz	0.43	0.05	0.4

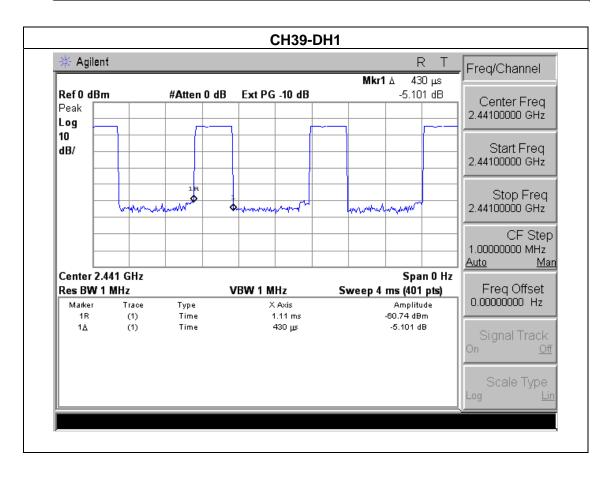

Report No.: MTI140225006RF

6. HOPPING CHANNEL SEPARATION MEASUREMENT

6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency	> Measurement Bandwidth or Channel Separation	
RB	100 kHz (Channel Separation)	
VB	300 kHz (Channel Separation)	
Detector	Peak	
Trace	Max Hold	
Sweep Time	Auto	


6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.


Report No.: MTI140225006RF Page 34 of 48

6.1.5 TEST RESULTS


EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode : CH00 / CH39 /CH78 (1Mbps Mode)			

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.013	Complies
2441 MHz	1.020	Complies
2480 MHz	1.013	Complies

Ch. Separation Limits: >20dB bandwidth

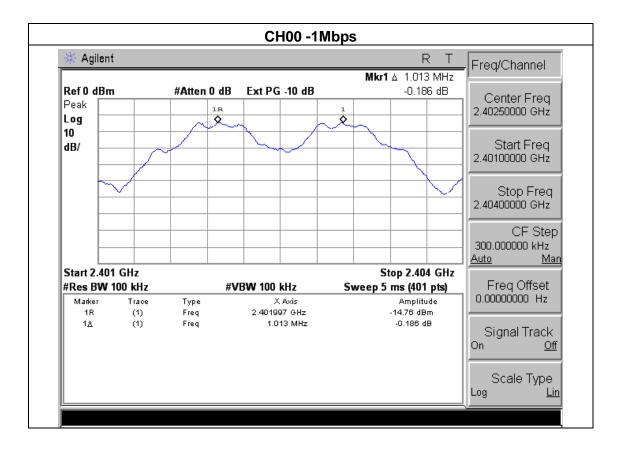

Report No.: MTI140225006RF Page 35 of 48

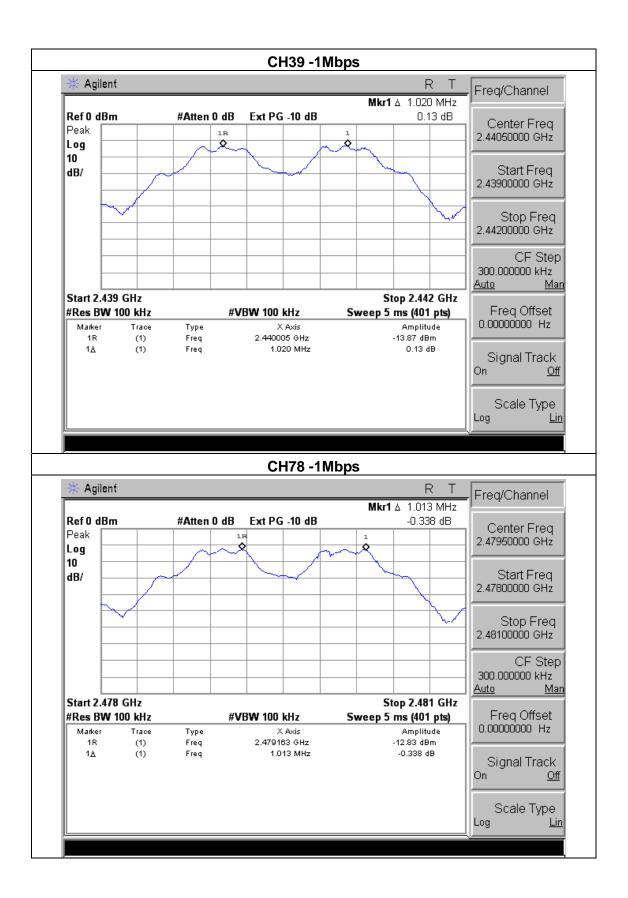

7. BANDWIDTH TEST

7.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C						
Section Test Item Limit		Frequency Range (MHz)	Result				
	15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS		

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	1% of the 20 dB bandwidth
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 1% of the 20 dB bandwidth, VBW≥ RBW, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI140225006RF Page 37 of 48


7.1.5 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(1Mbps)		

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.049	PASS
2441 MHz	1.050	PASS
2480 MHz	1.047	PASS

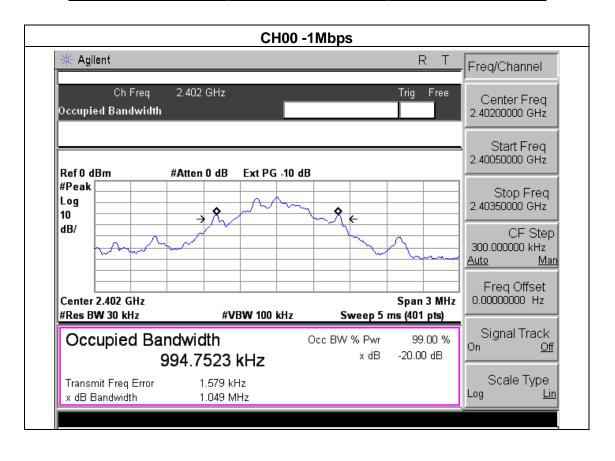

Report No.: MTI140225006RF Page 38 of 48

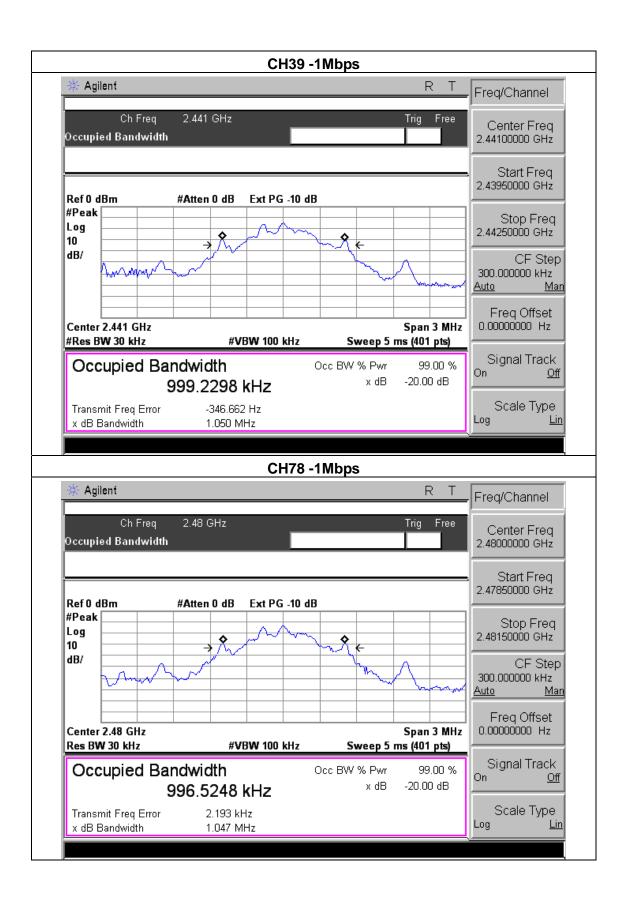

8. PEAK OUTPUT POWER TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section Test Item Limit		Frequency Range Resul			
15.247 (b)(i)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS	

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW > the 20 dB bandwidth of the emission being measured

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: MTI140225006RF Page 40 of 48


8.1.5 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78		

Test Channel	Frequency	Peak Output Power	LIMIT
	(MHz)	(dBm)	(dBm)
CH00	2402	-0.999	20.96
CH39	2441	-1.195	20.96
CH78	2480	-1.804	20.96

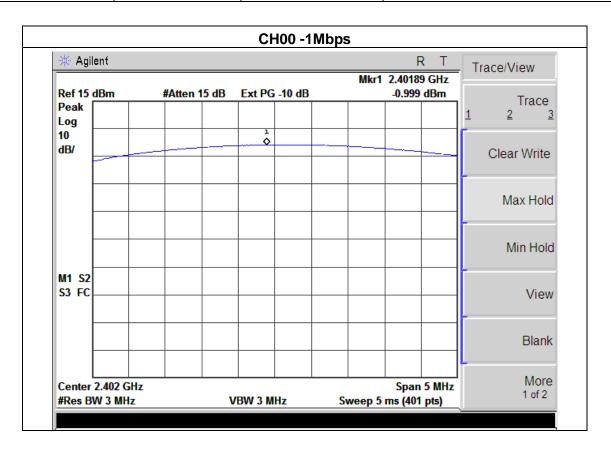

Report No.: MTI140225006RF Page 41 of 48

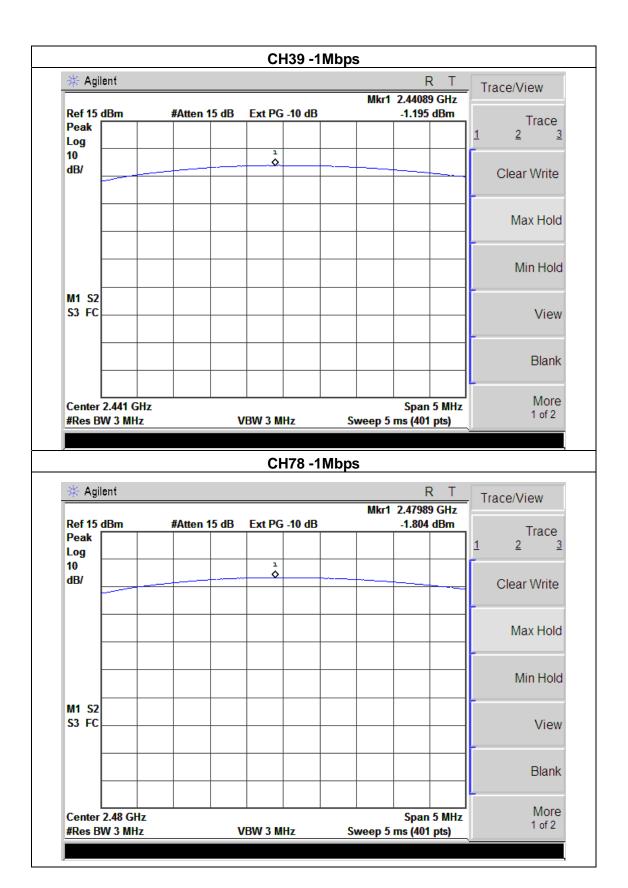

9. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

9.1 DEVIATION FROM STANDARD

No deviation.

9.2 TEST SETUP



9.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


Report No.: MTI140225006RF Page 43 of 48

9.4 TEST RESULTS

EUT:	Barcode Scanner	Model Name :	CT10
Temperature :	25 ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH78		


Frequency	Delta Peak to band emission	>Limit	Result		
Band	(dBc)	(dBc)	Nesuit		
BDR mode (GFSK)					
Left-band	42.06	20	Pass		
Right-band 50.31		20	Pass		

BDR mode (GFSK): Band Edge-Left Side

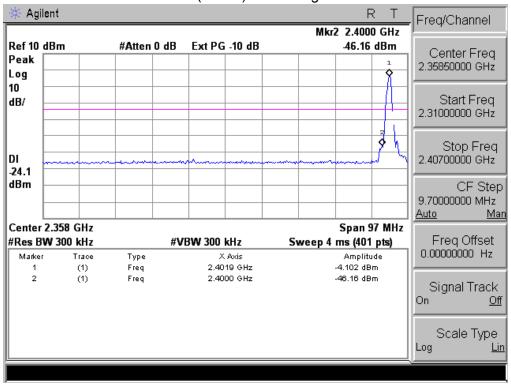

Report No.: MTI140225006RF Page 44 of 48

BDR mode (GFSK): Band Edge-Right Side

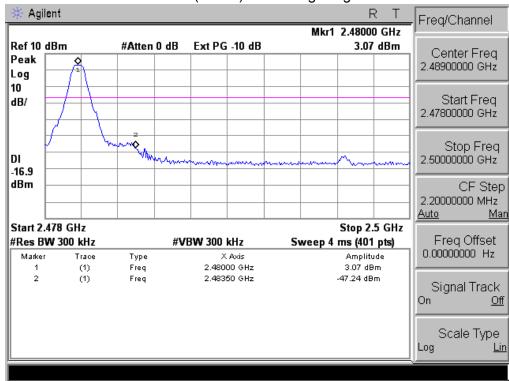

Report No.: MTI140225006RF

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement.

Report No.: MTI140225006RF Page 46 of 48

11. EUT TEST PHOTO

Radiated Measurement Photo





Report No.: MTI140225006RF Page 47 of 48

CONDUCTED EMISSION Photo



Report No.: MTI140225006RF Page 48 of 48