

# RF TEST REPORT

**Applicant** iRay Technology Co., Ltd.

**FCC ID** 2ACHK-01070189

**Product** Wireless Digital Flat Panel Detector

**Model** NDT1417MA

**Report No.** R2305A0584-R2

**Issue Date** August 17, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

---

*Prepared by: Xu Ying*

*Approved by: Xu Kai*

---

## TA Technology (Shanghai) Co., Ltd.

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	10
5.1. Unwanted Emission .....	10
6. Main Test Instruments.....	25
ANNEX A: The EUT Appearance .....	26
ANNEX B: Test Setup Photos .....	27
ANNEX C: FCC class II permissive change application letter .....	28

## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	Not Required <sup>Note 1</sup>
2	Occupied bandwidth	15.407(e)	Not Required <sup>Note 1</sup>
3	Frequency stability	15.407(g)	Not Required <sup>Note 1</sup>
4	Power spectral density	15.407(a)	Not Required <sup>Note 1</sup>
5	Unwanted Emissions	15.407(b)	(802.11a CH36, 802.11n (HT40) CH38, 802.11ac (VHT80) CH42) PASS
6	Conducted Emissions	15.207	Not Required <sup>Note 1</sup>

Date of Testing: June 15, 2023 ~June 21, 2023  
 Date of Sample Received: May 30, 2023

Note:

1. Not Required means after evaluation, test items are no need to recorded, the test results please refers to Original Report.
2. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

**NDT1417MA (Report No.: R2305A0584-R2) is a variant model of Mars1417X (Report No.: R2006A0398-R2).**

Tested case refers to the following table.

Test Case	Variant (NDT1417MA)
Average output power	Verify Maximum output power. Power of new variant is varied due to measurement uncertainty, and sample tolerance of the acceptance range, so they were not recorded in the report.
Power spectral density	Verify Power spectral density, and did not worsen, so they were not recorded in the report.
Unwanted Emission	Tested Unwanted Emissions (802.11a CH36, 802.11n (HT40) CH38, 802.11ac (VHT80) CH42), and recorded in the report.

**This report is used in conjunction with the original report (Report No.: R2006A0398-R2).**

**The detailed product change description please refers to the *FCC class II permissive change application letter*.**

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

<b>Applicant</b>	iRay Technology Co., Ltd.
<b>Applicant address</b>	RM 202, Building 7, No. 590, Ruiqing RD., Pudong, Shanghai, China
<b>Manufacturer</b>	iRay Technology Taicang Ltd.
<b>Manufacturer address</b>	No.33 Xinggang Road, Taicang Port Economic and Technological Development Zone, Taicang, 215434 Jiangsu, China

### 2.2. General information

<b>EUT Description</b>	
Model	NDT1417MA
Lab internal SN	R2305A0584/S01
Hardware Version	A0
Software Version	SDK: 4.4.0.8885 ARM: Core: 2.1.30.18 Kernel: 1.0.5.7 FPGA: 2.11.7.7 MCU: 2.10.0.14
Power Supply	Battery / AC adapter
Antenna Type	Internal Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	Antenna 1: 7.13 dBi Antenna 2: 6.61 dBi
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-3: 5725MHz -5850MHz
Modulation Type	802.11a: OFDM 802.11n (HT20/HT40): OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM
<b>EUT Accessory</b>	
Battery	Manufacturer: iRay Technology Co., Ltd. Model: BATTERY-KV Ratings: 10.8Vdc, 4125mAh
Adapter	Manufacturer: Shenzhen Longxc Power Supply Co., LTD Model: LXCP120-0240500
Charger	Manufacturer: iRay Technology Taicang Ltd. Model: CHARGER-COMBO
DC cable	Manufacturer: iRay Technology Co. Ltd. 15m

## Note:

1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.
2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
3. (a) Manufacturers implements security features in any digitally modulated devices capable of operating in any of the U-NII bands, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software prevents the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers uses means including, but not limited to the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment authorization.  
(b) Manufacturers take steps to ensure that DFS functionality cannot be disabled by the operator of the U-NII device.

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15E (2022) Unlicensed National Information Infrastructure Devices**

**ANSI C63.10-2013**

**Reference standard:**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

**The test software is used MTS8310 V2.0.0.0**

Worst-case data rates are shown as following table.

Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	/
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ac VHT20	MCS0	MCS0	MCS0
802.11ac VHT40	MCS0	MCS0	MCS0
802.11ac VHT80	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Unwanted Emissions	802.11a	--	802.11n HT20/40 802.11ac VHT20/40/80

Note: "O": test all bands

**According to RF Output power results in Original Report, MIMO was selected as the worst antenna for 802.11n HT20/40, 802.11ac VHT20/40/80. SISO Antenna 1 was selected as the worst SISO antenna for 802.11a.**

**Wireless Technology and Frequency Range**

Wireless Technology	Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36
			40
			44
			48
		40 MHz	38
			46
	U-NII-3	80 MHz	42
		20 MHz	149
			153
			157
			161
	40 MHz	165	5825MHz
		151	5755MHz
		159	5795MHz
		80 MHz	155
Does this device support TPC Function? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			

## 5. Test Case Results

### 5.1. Unwanted Emission

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission

is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than  $[1 / (\text{minimum transmitter on time})]$  and no less than 1 Hz.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.


The test is in transmitting mode.

**Test setup**


**9KHz~ 30MHz**

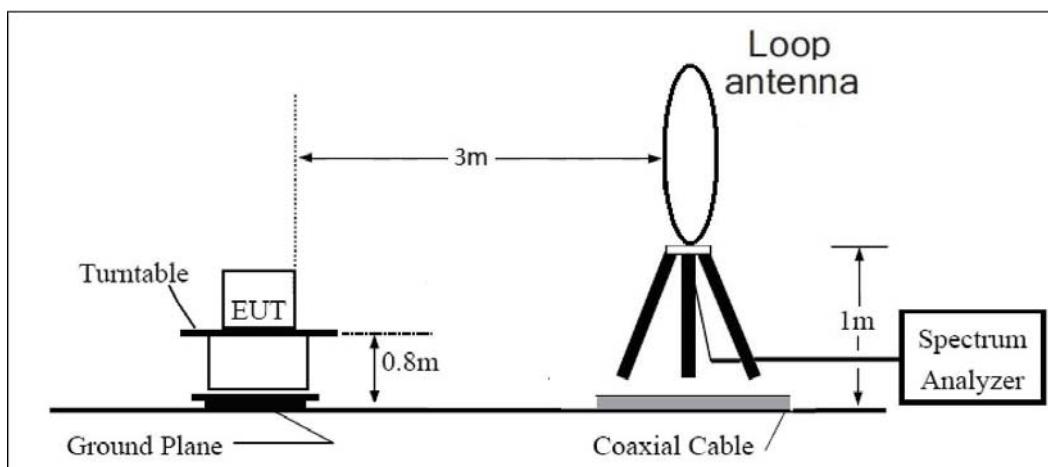

**30MHz~ 1GHz**

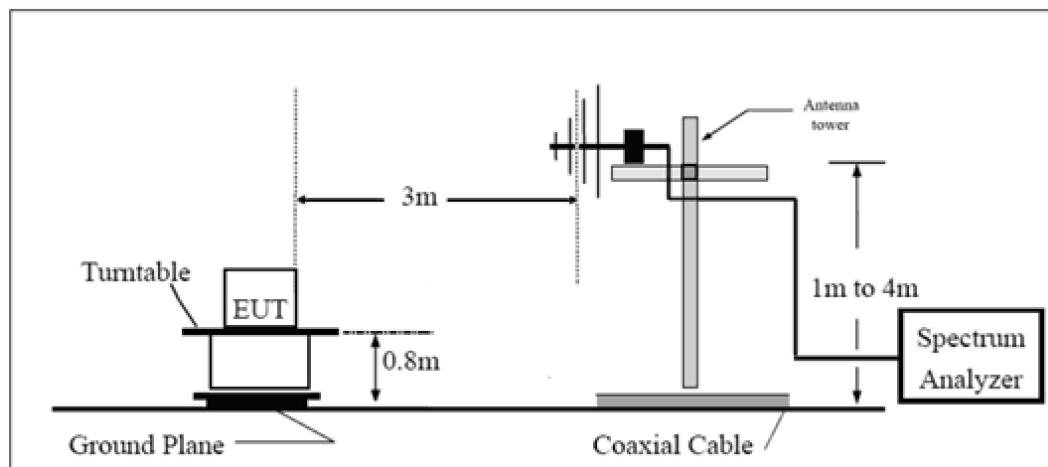

**Above 1GHz**

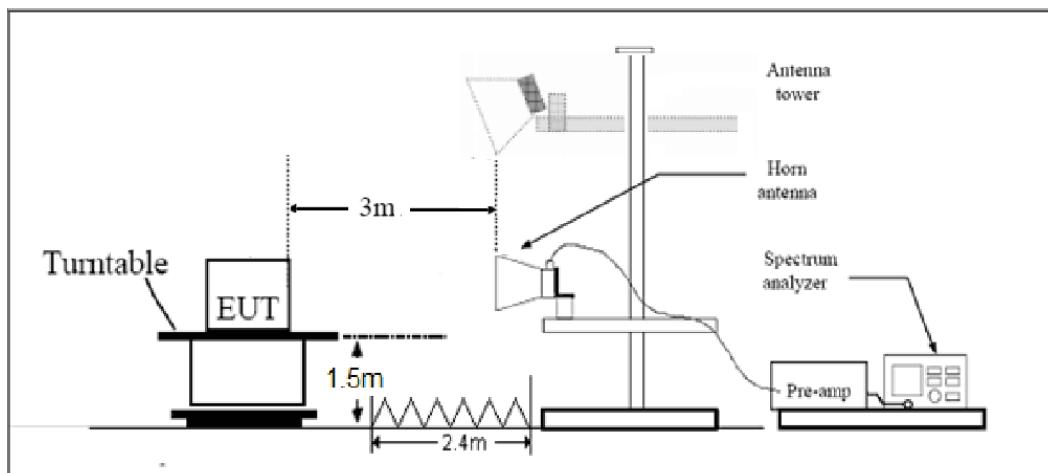

Note: Area side:2.4mX3.6m

## Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB $\mu$ V/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB $\mu$ V/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB $\mu$ V/m).

Note: the following formula is used to convert the EIRP to field strength

§1.  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where  $E$  = field strength and

$d$  = distance at which field strength limit is specified in the rules;

§2.  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for  $d = 3$  meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength( $\mu$ V/m)	Field strength(dB $\mu$ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30–88	100	40
88–216	150	43.5
216–960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

**Test Results:**

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

A symbol ( **dB** **V/** ) in the test plot below means (dB $\mu$ V/m)

**The signal beyond the limit is carrier.**

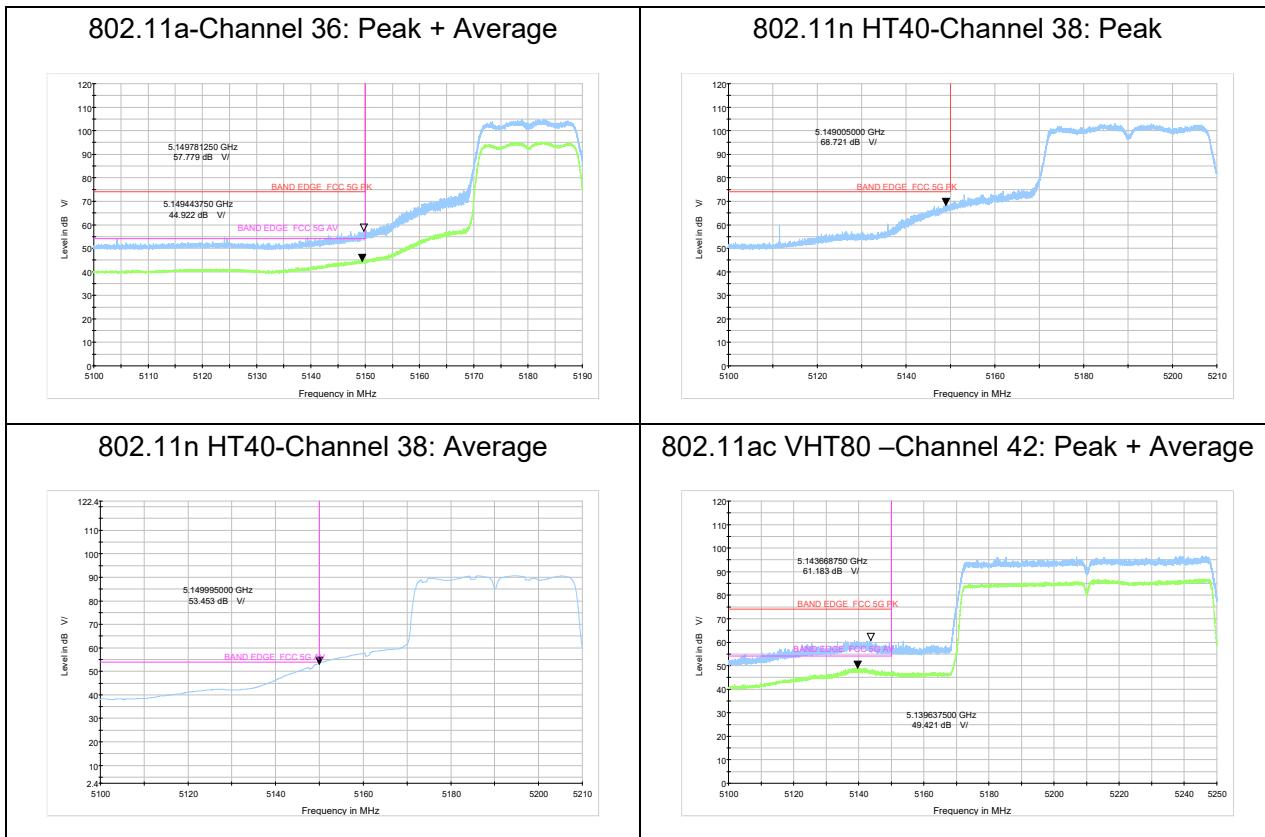**U-NII-1**


## Result of RE


### Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT40), Channel 38 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

#### Continuous TX mode:

A symbol ( in the test plot below means (dB $\mu$ V/m)

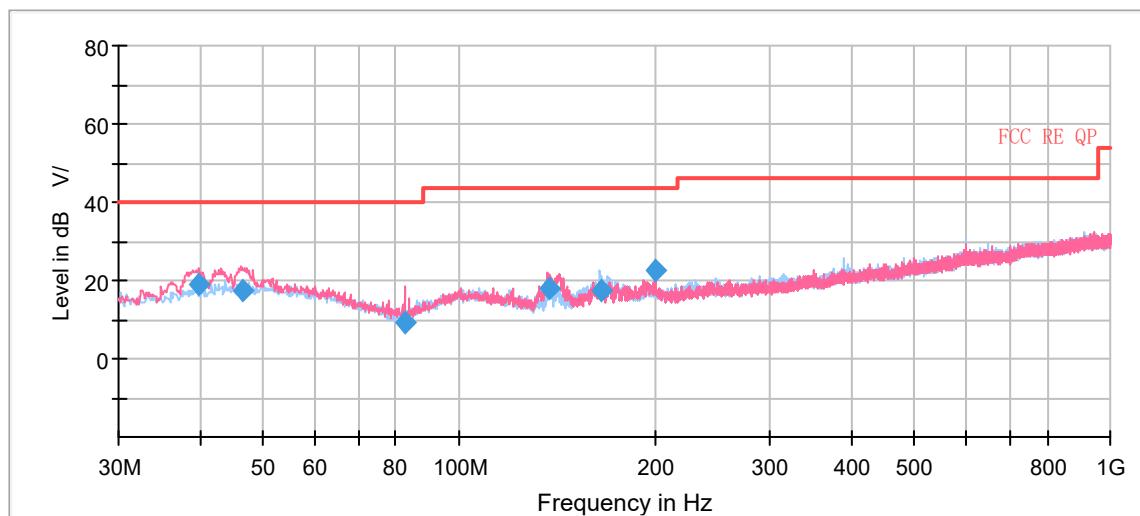


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
39.897500	18.82	40.00	21.18	100.0	V	183.0	19.5
46.488750	17.49	40.00	22.51	100.0	V	325.0	20.4
82.501250	9.42	40.00	30.58	125.0	V	310.0	14.0
137.303750	17.88	43.50	25.62	100.0	V	133.0	14.9
165.028750	17.40	43.50	26.10	175.0	H	81.0	15.5
199.992500	22.56	43.50	20.94	100.0	V	154.0	17.9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

## 802.11a CH36

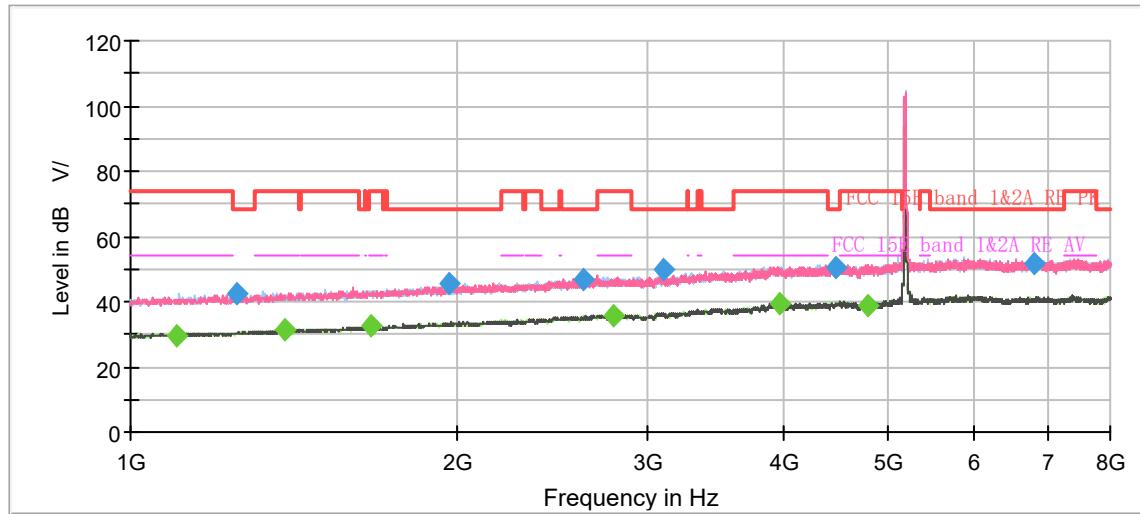


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1105.000000	---	29.75	54.00	24.25	500.0	100.0	H	5.0	-8.4
1252.875000	42.21	---	68.20	25.99	500.0	100.0	H	85.0	-7.4
1385.000000	---	31.46	54.00	22.54	500.0	100.0	H	189.0	-6.6
1668.500000	---	32.40	54.00	21.60	500.0	100.0	V	329.0	-5.1
1966.000000	45.24	---	68.20	22.96	500.0	200.0	V	194.0	-3.6
2619.625000	47.00	---	68.20	21.20	500.0	100.0	V	350.0	-0.6
2785.000000	---	35.98	54.00	18.02	500.0	100.0	H	10.0	0.0
3102.625000	49.91	---	68.20	18.29	500.0	200.0	V	343.0	0.9
3963.625000	---	39.28	54.00	14.72	500.0	100.0	V	294.0	4.4
4459.750000	50.66	---	68.20	17.54	500.0	100.0	H	169.0	5.4
4778.250000	---	39.06	54.00	14.94	500.0	100.0	V	355.0	9.3
6797.750000	51.83	---	68.20	16.37	500.0	100.0	H	0.0	8.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit -MAX Peak/ Average

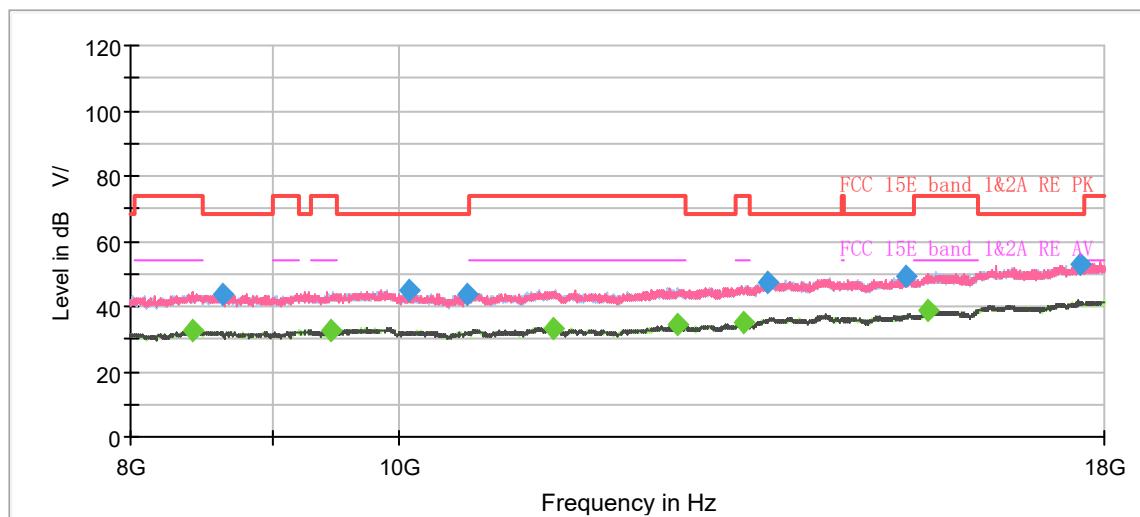

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8427.500000	---	32.39	54.00	21.61	500.0	200.0	V	58.0	0.2
8633.750000	43.60	---	68.20	24.60	500.0	100.0	V	238.0	0.3
9457.500000	---	32.66	54.00	21.34	500.0	200.0	V	104.0	0.6
10088.750000	45.08	---	68.20	23.12	500.0	200.0	V	226.0	0.6
10590.000000	43.65	---	68.20	24.55	500.0	200.0	H	284.0	0.6
11372.500000	---	33.38	54.00	20.62	500.0	100.0	V	344.0	2.4
12621.250000	---	34.30	54.00	19.70	500.0	200.0	H	258.0	13.3
13340.000000	---	35.21	54.00	18.79	500.0	200.0	V	32.0	5.0
13593.750000	47.60	---	68.20	20.60	500.0	100.0	V	178.0	6.6
15262.500000	49.17	---	68.20	19.03	500.0	100.0	V	0.0	8.1
15547.500000	---	38.60	54.00	15.40	500.0	200.0	H	274.0	8.7
17633.750000	53.12	---	68.20	15.08	500.0	100.0	V	359.0	12.8

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**
**2. Margin = Limit -MAX Peak/ Average**

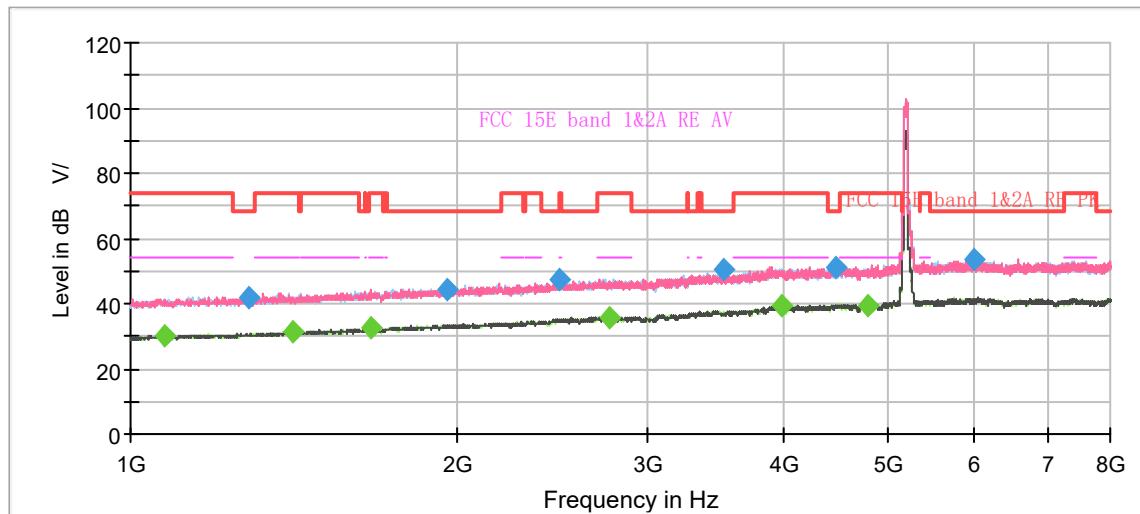**802.11n (HT40) CH38**


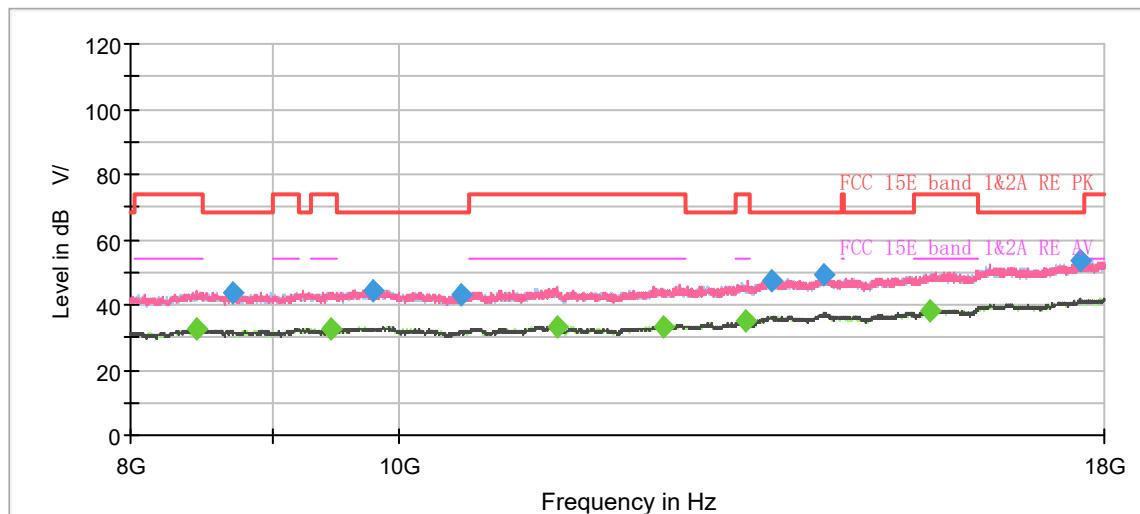
Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1077.000000	---	29.86	54.00	24.14	500.0	100.0	H	135.0	-8.6
1287.000000	42.14	---	68.20	26.06	500.0	200.0	H	300.0	-7.2
1409.500000	---	31.27	54.00	22.73	500.0	200.0	H	237.0	-6.4
1662.375000	---	32.39	54.00	21.61	500.0	200.0	H	163.0	-5.1
1959.000000	44.50	---	68.20	23.70	500.0	100.0	V	257.0	-3.6
2483.125000	47.33	---	68.20	20.87	500.0	200.0	H	324.0	-1.2
2762.250000	---	35.69	54.00	18.31	500.0	200.0	V	181.0	-0.1
3513.875000	50.74	---	68.20	17.46	500.0	200.0	V	21.0	2.6
3979.375000	---	39.20	54.00	14.80	500.0	200.0	H	314.0	4.5
4470.250000	50.80	---	68.20	17.40	500.0	200.0	H	40.0	5.4
4789.625000	---	39.50	54.00	14.50	500.0	200.0	H	242.0	9.3
5995.375000	53.49	---	68.20	14.71	500.0	100.0	H	322.0	8.0

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**


**2. Margin = Limit -MAX Peak/ Average**



Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8448.750000	---	32.63	54.00	21.37	500.0	100.0	V	213.0	0.2
8703.750000	43.75	---	68.20	24.45	500.0	200.0	V	272.0	0.2
9456.250000	---	32.55	54.00	21.45	500.0	100.0	V	188.0	0.6
9785.000000	44.55	---	68.20	23.65	500.0	100.0	V	233.0	1.5
10540.000000	43.37	---	68.20	24.83	500.0	200.0	H	296.0	0.5
11405.000000	---	33.49	54.00	20.51	500.0	100.0	V	351.0	2.5
12470.000000	---	33.25	54.00	20.75	500.0	200.0	H	321.0	13.3
13342.500000	---	35.03	54.00	18.97	500.0	100.0	V	31.0	5.0
13638.750000	47.20	---	68.20	21.00	500.0	100.0	H	71.0	6.9
14240.000000	49.16	---	68.20	19.04	500.0	100.0	H	46.0	7.4
15566.250000	---	38.41	54.00	15.59	500.0	100.0	V	88.0	8.8
17652.500000	53.30	---	68.20	14.90	500.0	100.0	V	139.0	12.9

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**
**2. Margin = Limit -MAX Peak/ Average**

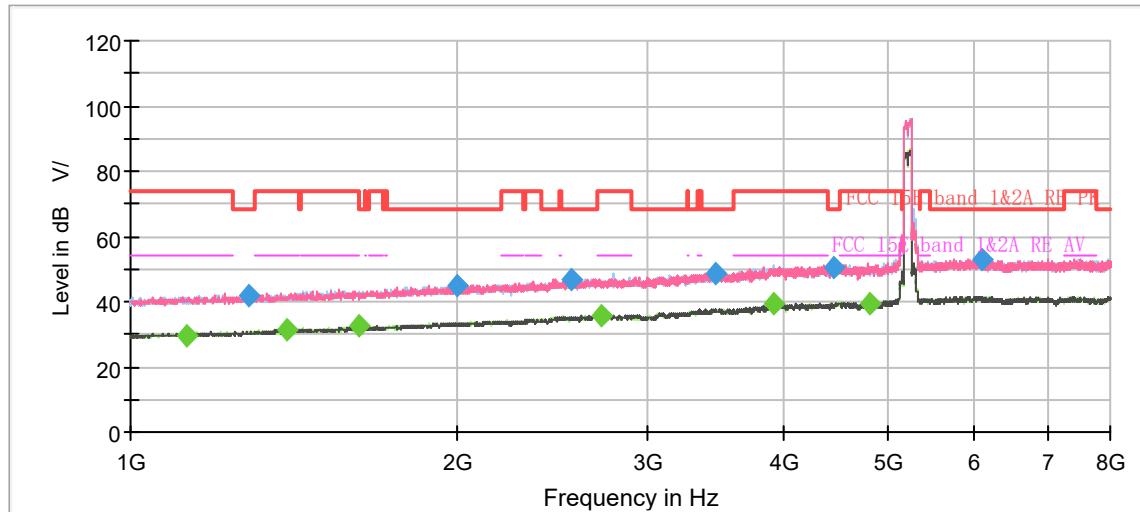**802.11ac (VHT80) CH42**


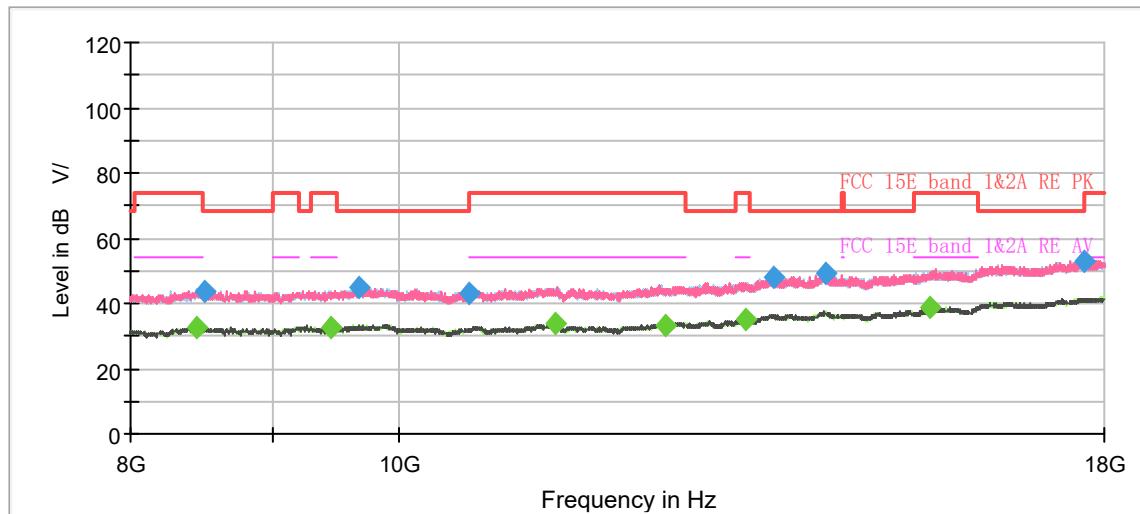
Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1128.625000	---	29.80	54.00	24.20	500.0	200.0	H	38.0	-8.2
1284.375000	41.96	---	68.20	26.24	500.0	100.0	H	13.0	-7.2
1393.750000	---	31.34	54.00	22.66	500.0	200.0	H	124.0	-6.5
1623.000000	---	32.51	54.00	21.49	500.0	200.0	V	293.0	-5.4
1996.625000	45.16	---	68.20	23.04	500.0	100.0	H	212.0	-3.5
2549.625000	46.83	---	68.20	21.37	500.0	200.0	H	43.0	-1.0
2712.375000	---	35.75	54.00	18.25	500.0	200.0	H	68.0	-0.1
3454.375000	48.80	---	68.20	19.40	500.0	200.0	V	250.0	2.4
3917.250000	---	39.17	54.00	14.83	500.0	100.0	H	237.0	4.4
4439.625000	50.58	---	68.20	17.62	500.0	200.0	H	214.0	5.3
4797.500000	---	39.43	54.00	14.57	500.0	100.0	H	28.0	8.8
6095.125000	53.11	---	68.20	15.09	500.0	200.0	V	321.0	8.1

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**

**2. Margin = Limit -MAX Peak/ Average**




Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8448.750000	---	32.71	54.00	21.29	500.0	200.0	H	316.0	0.2
8512.500000	43.70	---	68.20	24.50	500.0	200.0	V	133.0	0.2
9457.500000	---	32.60	54.00	21.40	500.0	200.0	V	0.0	0.6
9677.500000	44.87	---	68.20	23.33	500.0	200.0	H	311.0	1.2
10598.750000	43.31	---	68.20	24.89	500.0	200.0	V	133.0	0.6
11397.500000	---	33.61	54.00	20.39	500.0	100.0	V	331.0	2.5
12486.250000	---	33.35	54.00	20.47	500.0	100.0	H	0.0	13.3
13345.000000	---	35.09	54.00	18.91	500.0	200.0	V	152.0	5.0
13673.750000	47.95	---	68.20	20.25	500.0	100.0	V	297.0	7.0
14267.500000	49.20	---	68.20	19.00	500.0	100.0	V	180.0	7.4
15578.750000	---	38.51	54.00	15.49	500.0	200.0	V	40.0	8.8
17692.500000	53.07	---	68.20	15.13	500.0	100.0	V	213.0	12.9

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**
**2. Margin = Limit -MAX Peak/ Average**

During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11n (HT40), Channel 38 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

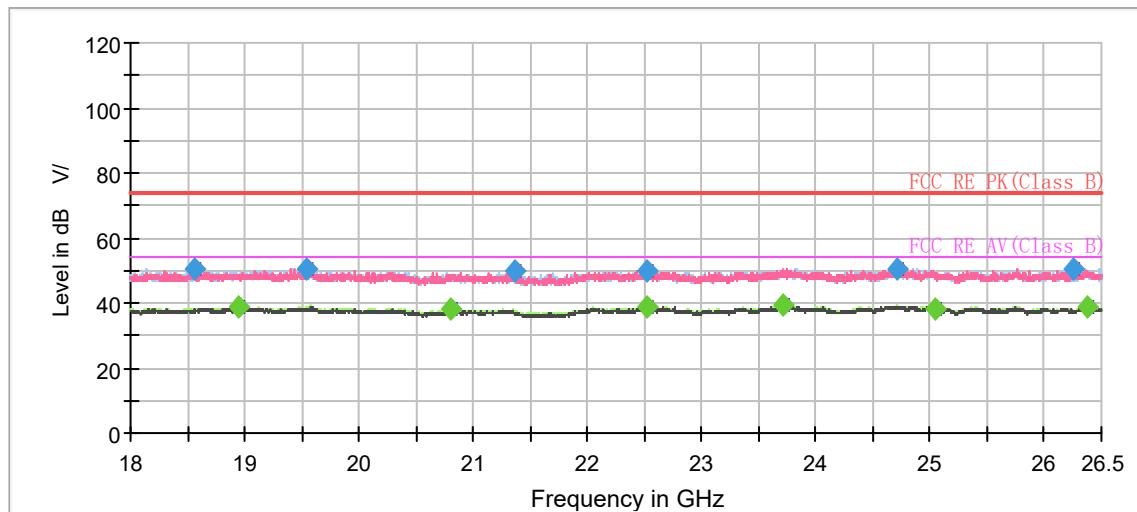


#### Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18557.812500	50.70	---	74.00	23.30	500.0	100.0	V	264.0	-5.7
18938.187500	---	38.52	54.00	15.48	500.0	200.0	H	1.0	-5.6
19548.062500	50.72	---	74.00	23.28	500.0	200.0	H	260.0	-5.3
20797.562500	---	38.04	54.00	15.96	500.0	200.0	H	72.0	-5.1
21361.750000	49.55	---	74.00	24.45	500.0	100.0	V	307.0	-5.3
22518.812500	49.96	---	74.00	24.04	500.0	200.0	H	309.0	-3.9
22524.125000	---	38.80	54.00	15.20	500.0	200.0	H	26.0	-3.9
23721.562500	---	39.41	54.00	14.59	500.0	200.0	H	275.0	-2.4
24708.625000	50.71	---	74.00	23.29	500.0	200.0	V	275.0	-2.1
25036.937500	---	38.11	54.00	15.89	500.0	200.0	H	102.0	-2.5
26251.375000	50.60	---	74.00	23.40	500.0	200.0	H	346.0	-2.3
26379.937500	---	38.90	54.00	15.10	500.0	200.0	H	290.0	-2.3

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**

**2. Margin = Limit-MAX Peak/ Average**

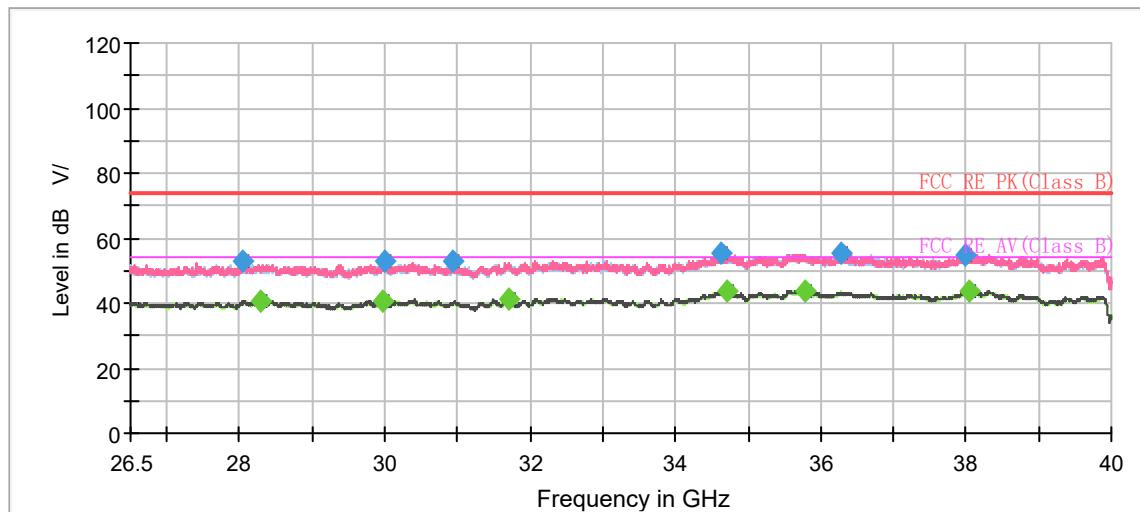

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
28054.187500	52.70	---	74.00	21.30	500.0	200.0	H	255.0	-0.4
28282.000000	---	40.75	54.00	13.25	500.0	100.0	V	71.0	0.0
29972.875000	---	40.90	54.00	13.10	500.0	200.0	V	163.0	-0.4
29999.875000	52.77	---	74.00	21.23	500.0	100.0	V	127.0	-0.4
30938.125000	52.90	---	74.00	21.10	500.0	200.0	V	71.0	-1.6
31704.250000	---	41.47	54.00	12.53	500.0	200.0	H	134.0	-1.7
34630.375000	55.23	---	74.00	18.77	500.0	100.0	V	30.0	2.9
34721.500000	---	43.49	54.00	10.51	500.0	200.0	V	223.0	2.9
35772.812500	---	43.81	54.00	10.19	500.0	200.0	V	301.0	3.2
36292.562500	55.35	---	74.00	18.65	500.0	200.0	V	285.0	3.4
38000.312500	54.67	---	74.00	19.33	500.0	100.0	V	157.0	3.6
38037.437500	---	43.71	54.00	10.29	500.0	200.0	V	285.0	3.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit-MAX Peak/ Average

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV40	101298	2023-05-12	2024-05-11
EMI Test Receiver	R&S	ESCI3	100948	2023-05-12	2024-05-11
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2021-07-26	2024-07-25
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.0	/	/

## ANNEX A: The EUT Appearance

**The EUT Appearance are submitted separately.**

## ANNEX B: Test Setup Photos

**The Test Setup Photos are submitted separately.**

## ANNEX C: FCC class II permissive change application letter

The FCC class II permissive change application letter are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*