

# FCC RADIO TEST REPORT

## FCC ID: 2ACHMAR200

**Product :** Wireless air mouse and keyboard remote controller

**Trade Name :** N/A

**Model Name :** AR200

**Serial Model :** N/A

### **Prepared for**

Infinitec Systems LLC

Office 140, Level 1, Emarat Atrium Bldg, Sheik Zayed Road, Dubai, UAE.

### **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.

Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang  
Road, Dongguan, China

## TEST RESULT CERTIFICATION

**Applicant's name** ..... Infinitec Systems LLC

Address ..... Office 140, Level 1, Emarat Atrium Bldg, Sheik Zayed Road, Dubai, UAE.

**Manufacturer's Name** ..... Infinitec Systems LLC

Address ..... Office 140, Level 1, Emarat Atrium Bldg, Sheik Zayed Road, Dubai, UAE.

### Product description

Product name ..... Wireless air mouse and keyboard remote controller

Model and/or type reference ..... AR200

Serial Model : ..... N/A

**Standards** ..... FCC Part15.247

Test procedure ..... ANSI C63.4-2003

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


**Date of Test** .....

Date (s) of performance of tests ..... 18 Jun. 2014 ~26 Jun. 2014

Date of Issue ..... 26 Jun. 2014


Test Result ..... **Pass**

Testing Engineer : .....



Assistant

Technical Manager : .....



Supervisor

Authorized Signatory : .....



Jacky Ou / Manager

**Table of Contents**

	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BELOW 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	21
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	23
<b>4 . NUMBER OF HOPPING CHANNEL</b>	<b>30</b>
4.1 APPLIED PROCEDURES / LIMIT	30
4.1.1 TEST PROCEDURE	30
4.1.2 DEVIATION FROM STANDARD	30
4.1.3 TEST SETUP	30
4.1.4 EUT OPERATION CONDITIONS	30
4.1.5 TEST RESULTS	31
<b>5 . AVERAGE TIME OF OCCUPANCY</b>	<b>32</b>
5.1 APPLIED PROCEDURES / LIMIT	32

**Table of Contents**

	Page
5.1.1 TEST PROCEDURE	32
5.1.2 DEVIATION FROM STANDARD	32
5.1.3 TEST SETUP	33
5.1.4 EUT OPERATION CONDITIONS	33
5.1.5 TEST RESULTS	34
<b>6 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>36</b>
6.1 APPLIED PROCEDURES / LIMIT	36
6.1.1 TEST PROCEDURE	36
6.1.2 DEVIATION FROM STANDARD	36
6.1.3 TEST SETUP	36
6.1.4 EUT OPERATION CONDITIONS	36
6.1.5 TEST RESULTS	37
<b>7 . BANDWIDTH TEST</b>	<b>39</b>
7.1 APPLIED PROCEDURES / LIMIT	39
7.1.1 TEST PROCEDURE	39
7.1.2 DEVIATION FROM STANDARD	39
7.1.3 TEST SETUP	39
7.1.4 EUT OPERATION CONDITIONS	39
7.1.5 TEST RESULTS	40
<b>8 . PEAK OUTPUT POWER TEST</b>	<b>42</b>
8.1 APPLIED PROCEDURES / LIMIT	42
8.1.1 TEST PROCEDURE	42
8.1.2 DEVIATION FROM STANDARD	42
8.1.3 TEST SETUP	42
8.1.4 EUT OPERATION CONDITIONS	42
8.1.5 TEST RESULTS	43
<b>9 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>44</b>
9.1 DEVIATION FROM STANDARD	44
9.2 TEST SETUP	44
9.3 EUT OPERATION CONDITIONS	44
9.4 TEST RESULTS	46
<b>10 . ANTENNA REQUIREMENT</b>	<b>48</b>
10.1 STANDARD REQUIREMENT	48
10.2 EUT ANTENNA	48
<b>11 . EUT TEST PHOTO</b>	<b>49</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless air mouse and keyboard remote controller														
Trade Name	N/A														
Model Name	AR200														
Serial Model	N/A														
Model Difference	N/A														
Product Description	<p>The EUT is a remote controller</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>2402~2480 MHz</td> </tr> <tr> <td>BT version:</td> <td>3.0</td> </tr> <tr> <td>Modulation Type:</td> <td>GFSK</td> </tr> <tr> <td>Bit Rate of Transmitter</td> <td>1Mbps</td> </tr> <tr> <td>Number Of Channel</td> <td>79 CH</td> </tr> <tr> <td>Antenna Designation:</td> <td>Please see Note 3.</td> </tr> <tr> <td>Output Power(Conducted):</td> <td>BT:0.07dBm</td> </tr> </table>	Operation Frequency:	2402~2480 MHz	BT version:	3.0	Modulation Type:	GFSK	Bit Rate of Transmitter	1Mbps	Number Of Channel	79 CH	Antenna Designation:	Please see Note 3.	Output Power(Conducted):	BT:0.07dBm
Operation Frequency:	2402~2480 MHz														
BT version:	3.0														
Modulation Type:	GFSK														
Bit Rate of Transmitter	1Mbps														
Number Of Channel	79 CH														
Antenna Designation:	Please see Note 3.														
Output Power(Conducted):	BT:0.07dBm														
Channel List	Please refer to the Note 2.														
Adapter	N/A														
Power Supply	DC 4.5V(3*1.5V AAA) by battery														
Connecting I/O Port(s)	Please refer to the User's Manual														

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

We have done pre-test which were needed in NTEK laboratory, and got the results same as the original laboratory test results. Therefore, we used previously reported data in our report.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Integrated Antenna	N/A	-1.0	BT Antenna

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.


## 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: Broadcom		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters	DEF	DEF	DEF

## 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



## 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Wireless air mouse and keyboard remote controller	N/A	AR200	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year
12	Spectrum Analyzer	R&S	FSP	1165.439141	2014.05.13	2015.05.12	1 year

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

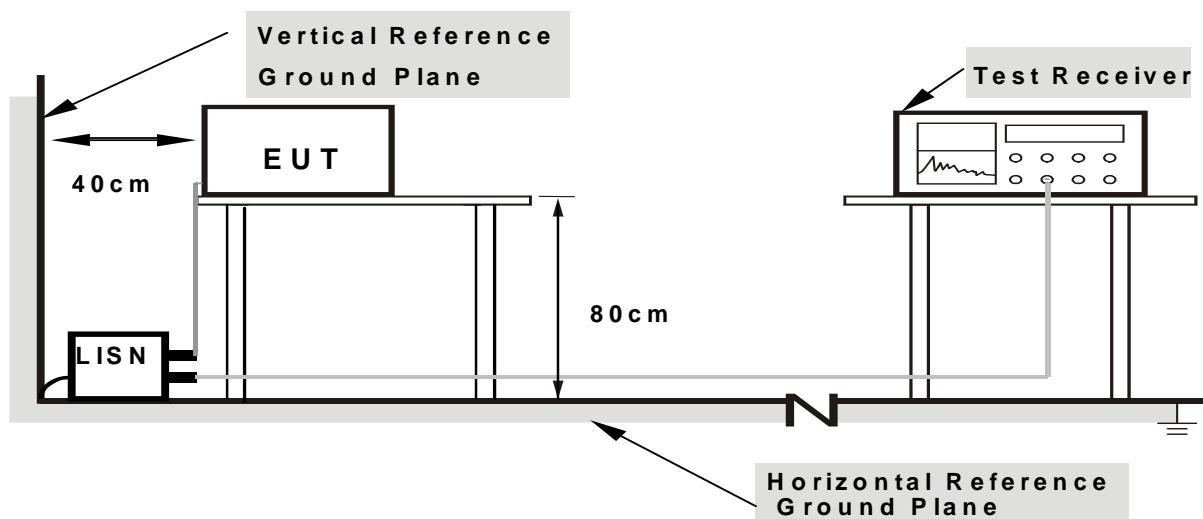

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.6 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode :	N/A

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

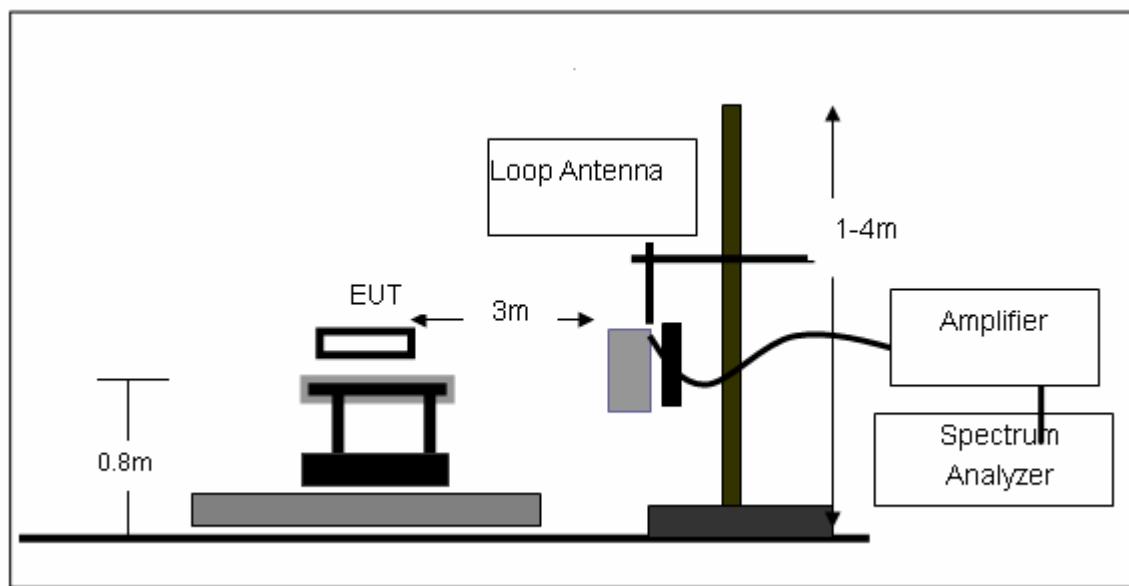

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

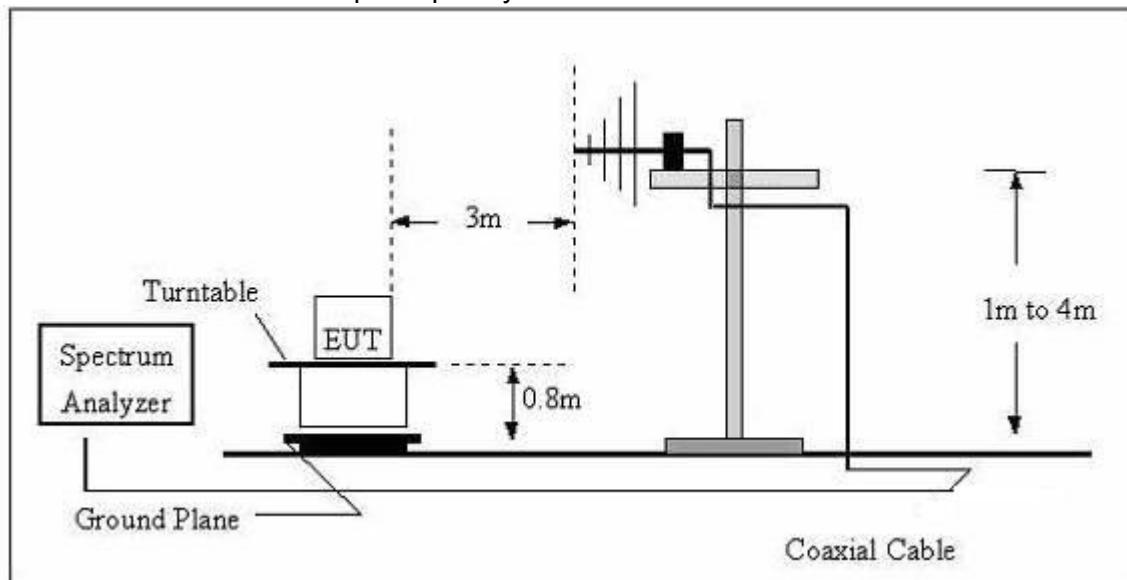

## (C) Radiated Emission Test-Up Frequency Above 1GHz

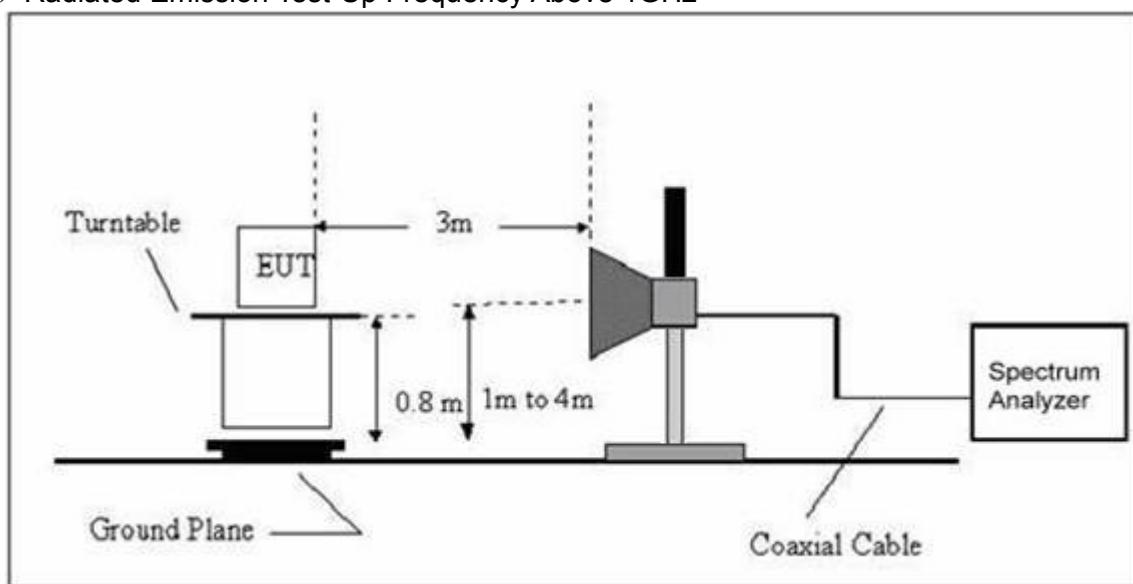**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	TX	Polarization :	---

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 4.5V		

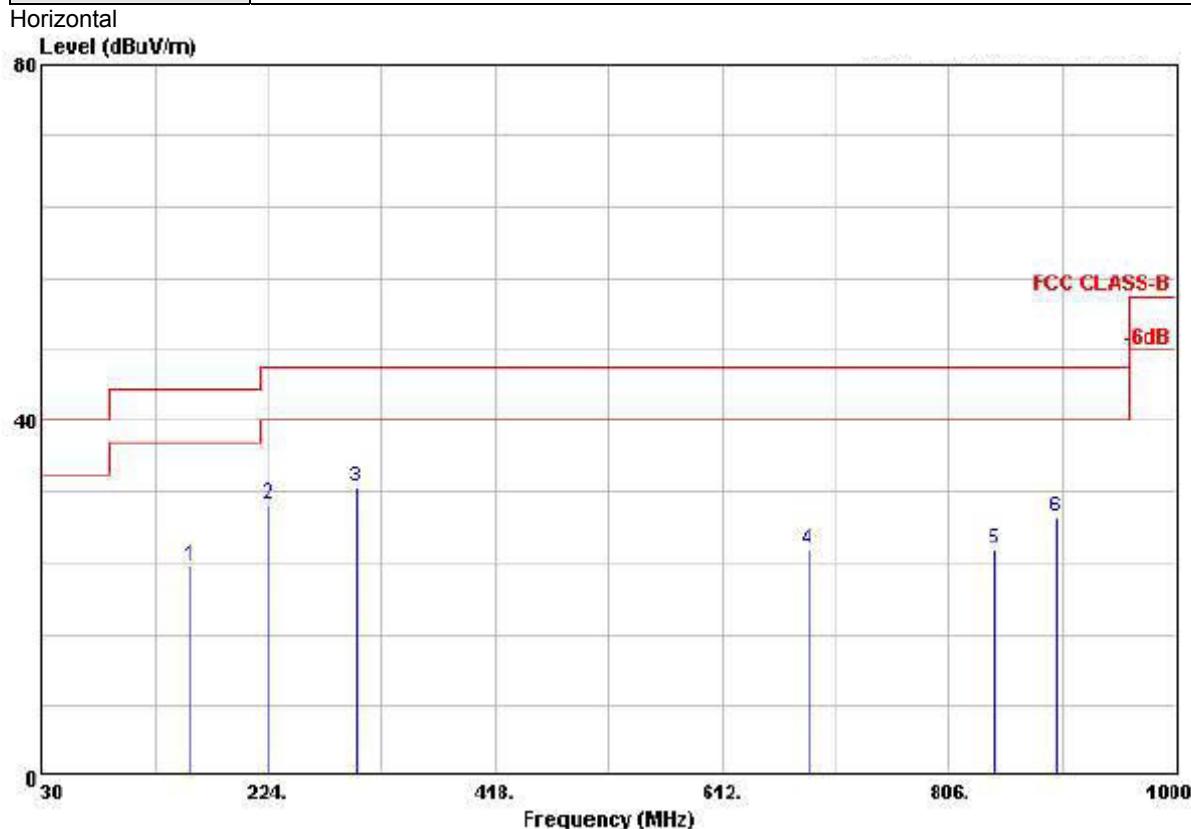

Freq	Level	Over Limit	Line	Read		Cable	Preamp	Ant	Table	
				Antenna	Level Factor				Pos	Pos
MHz	dBuV/n	dB	dBuV/n	dBuV	dB/n	dB	dB	cm	deg	Remark
1	23.58	-19.92	43.50	40.35	9.51	1.68	27.97	---	---	Peak
2	30.55	-15.45	46.00	45.69	10.65	1.97	27.75	---	---	Peak
3	32.56	-13.44	46.00	45.61	12.31	2.24	27.60	100	157	Peak
4	25.49	-20.51	46.00	31.01	20.11	3.40	29.10	---	---	Peak
5	25.51	-20.49	46.00	29.00	21.52	3.84	28.85	---	---	Peak
6	29.15	-16.85	46.00	30.56	23.44	3.95	28.80	---	---	Peak

## Vertical

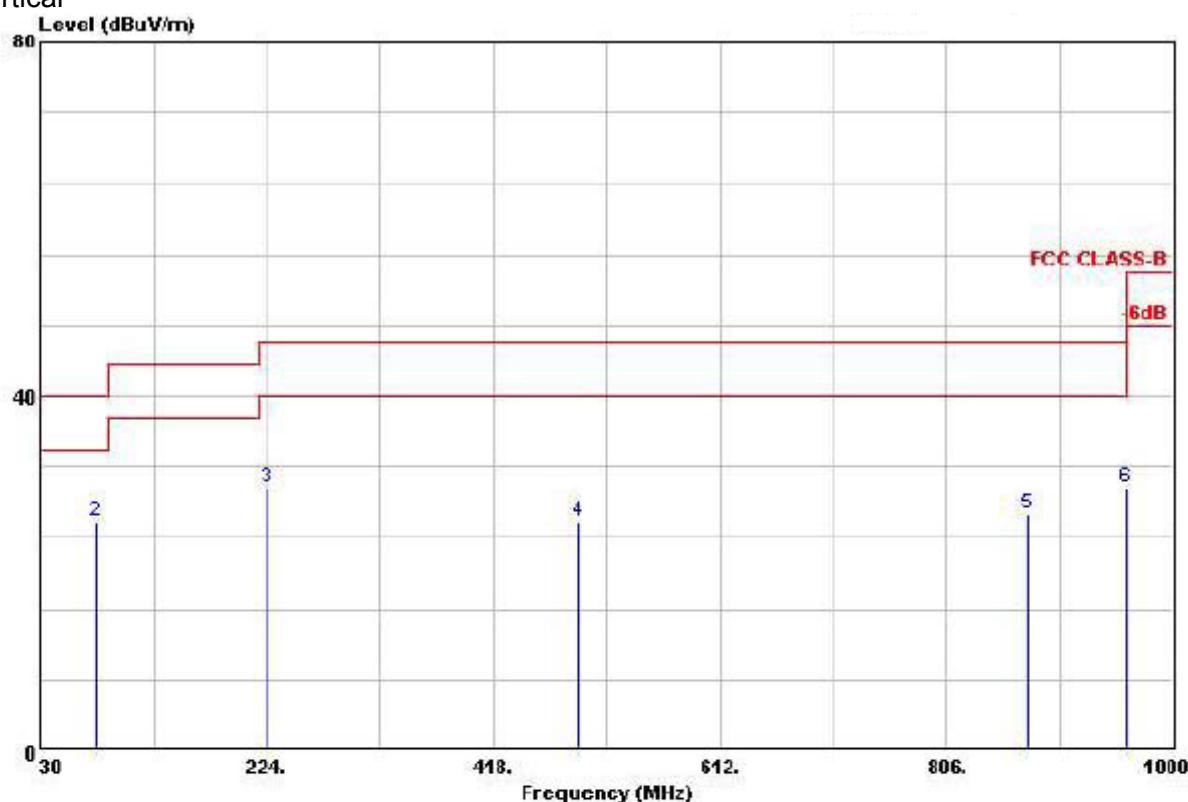

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB	dB	Pos	Pos
1	30.000	22.92	-17.09	40.00	33.92	16.39	0.97	28.25	---	---	Peak
2	77.250	25.78	-14.22	40.00	46.11	6.67	1.25	28.25	100	241	Peak
3	225.210	29.54	-16.46	46.00	44.68	10.65	1.97	27.75	---	---	Peak
4	491.800	25.79	-20.21	46.00	35.13	16.81	2.79	28.94	---	---	Peak
5	875.400	26.65	-19.35	46.00	28.94	22.62	3.92	28.82	---	---	Peak
6	959.400	29.61	-16.39	46.00	29.29	25.01	3.99	28.68	---	---	Peak

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 4.5V		


2402MHz

Horizontal

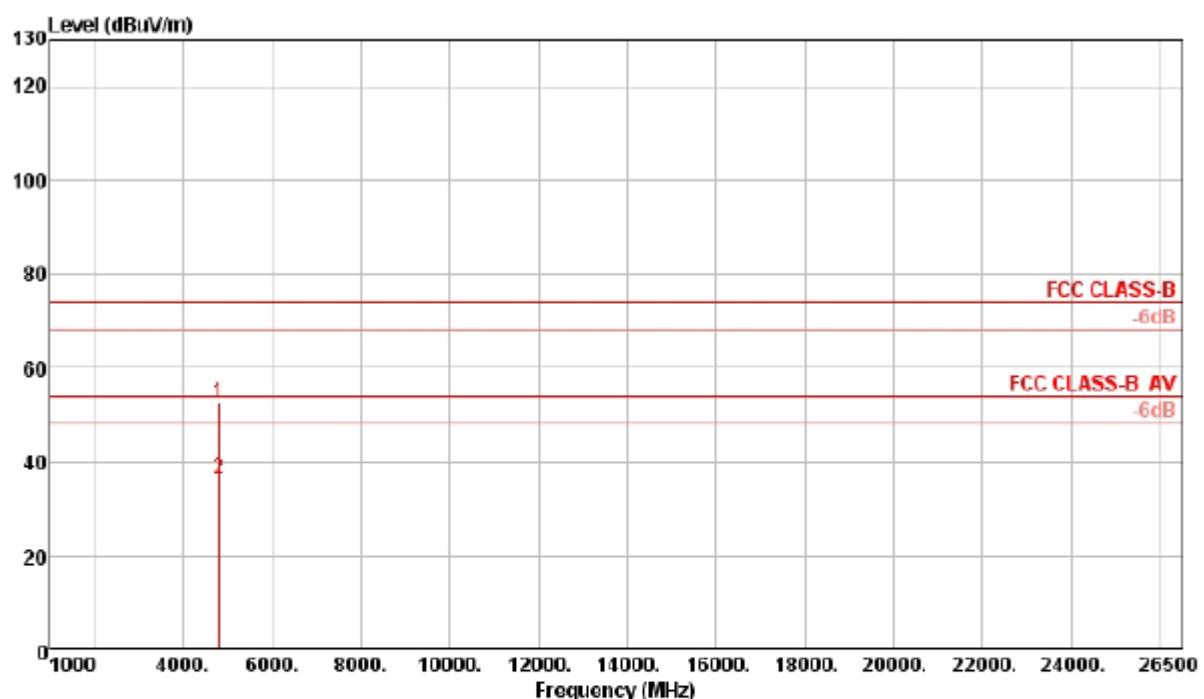


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamplifier	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	4804.00	52.58	74.00	-21.42	50.64	3.96	33.02	35.04	113	197 Peak	HORIZONTAL
2 a	4804.04	36.21	54.00	-17.79	34.27	3.96	33.02	35.04	113	197 Average	HORIZONTAL

## Vertical

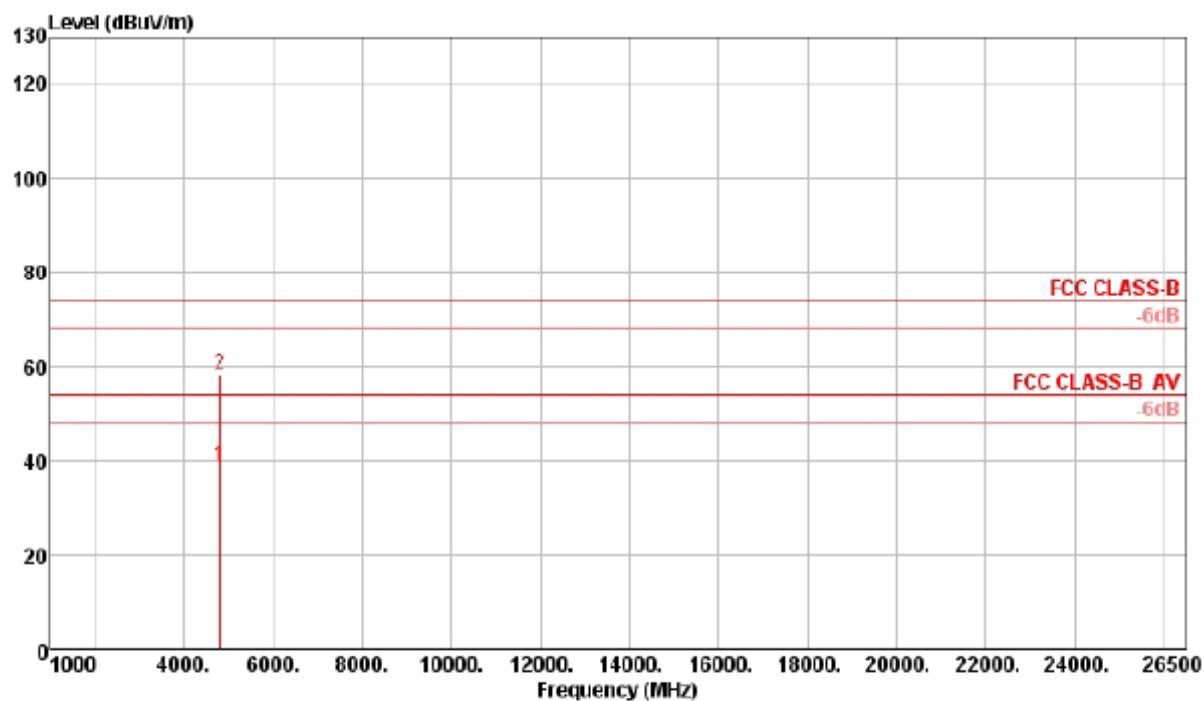


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4803.98	38.87	54.00	-15.13	36.93	3.96	33.02	35.04	83	153 Average	VERTICAL
2 p	4804.04	58.29	74.00	-15.71	56.35	3.96	33.02	35.04	83	153 Peak	VERTICAL

2441MHz

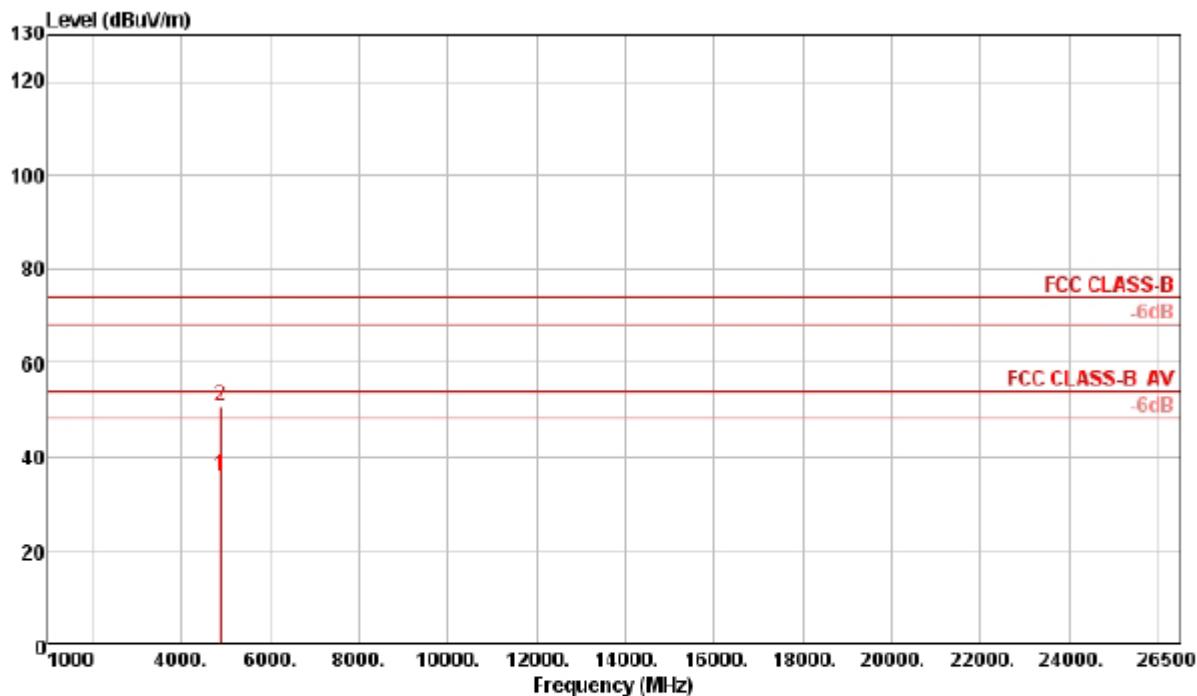*Horizontal*


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4882.05	35.79	54.00	-18.21	33.69	3.97	33.16	35.03	302	176 Average	HORIZONTAL
2 p	4882.23	50.58	74.00	-23.42	48.48	3.97	33.16	35.03	302	176 Peak	HORIZONTAL

## Vertical

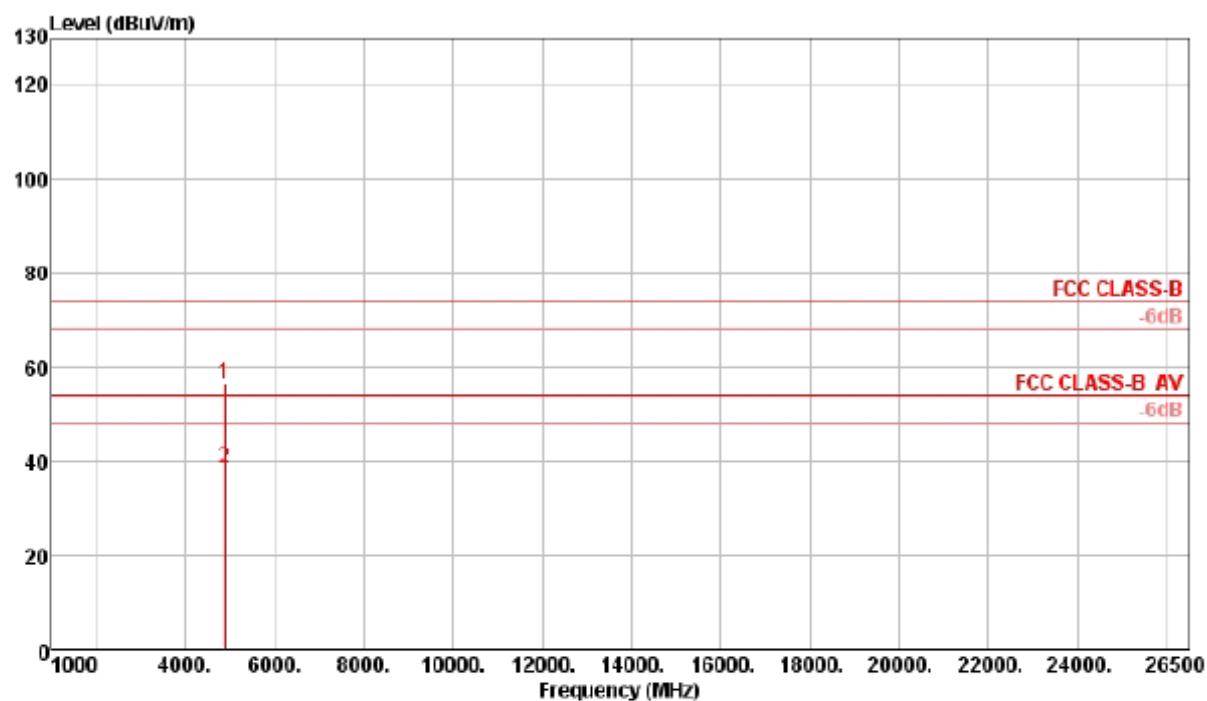


Freq	Level	Limit	Over	Read	Cable	Antenne	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p 4881.96	56.49	74.00	-17.51	54.39	3.97	33.16	35.03	83	100	Peak	VERTICAL
2 a 4882.01	38.31	54.00	-15.69	36.21	3.97	33.16	35.03	83	100	Average	VERTICAL

2480MHz

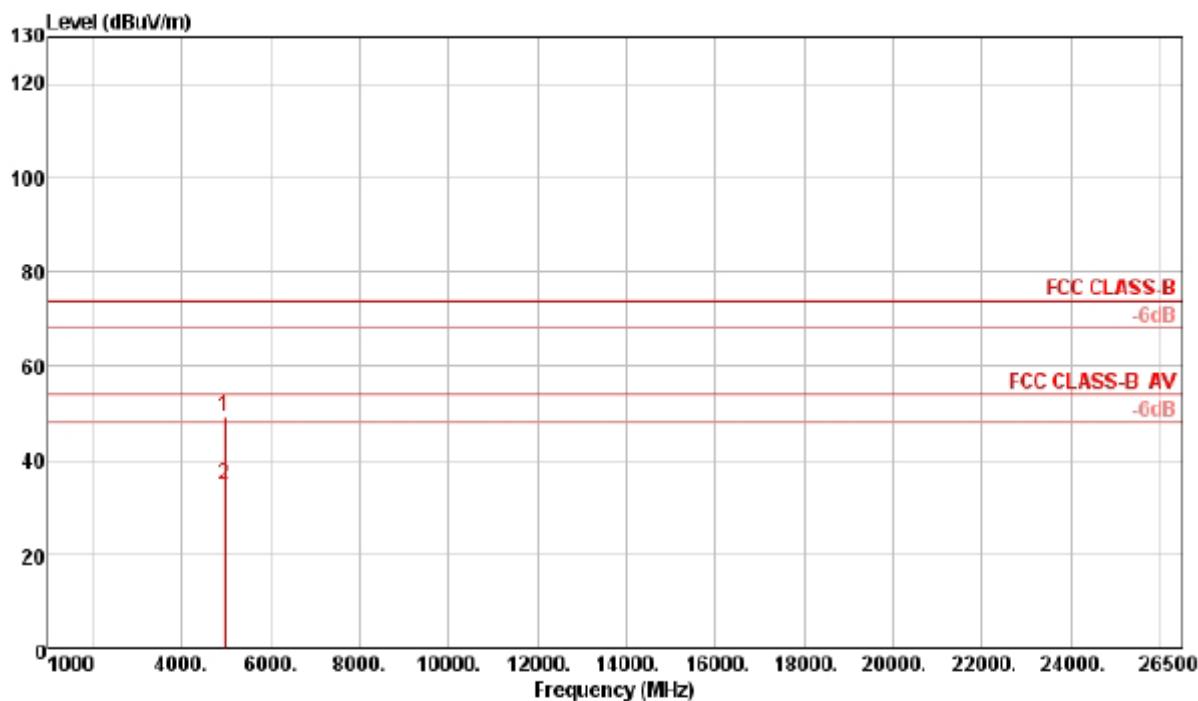*Horizontal*

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
					Line	Limit	Level						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm				
1 p	4959.74	49.31	74.00	-24.69	47.00	3.99	33.33	35.01	203	100	Peak		HORIZONTAL
2 a	4960.05	34.89	54.00	-19.11	32.58	3.99	33.33	35.01	203	100	Average		HORIZONTAL

## Vertical

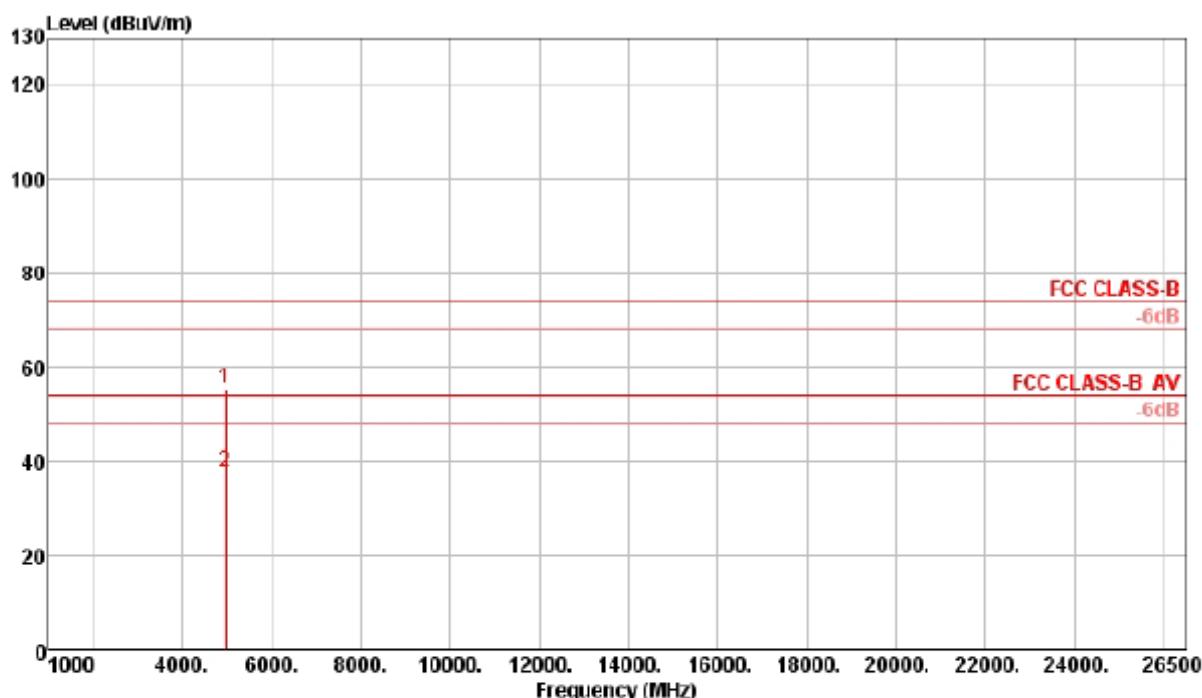

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	4959.93	55.40	74.00	-18.60	53.09	3.99	33.33	35.01	43	188	Peak VERTICAL
2 a	4960.05	37.50	54.00	-16.50	35.19	3.99	33.33	35.01	43	188	Average VERTICAL

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## Band Edge Emission for Bottom Channel

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB	dB/m	deg	cm				
1	2390.00	34.20	54.00	-19.80	3.27	2.76	28.17	0.00	110	100	Average		VERTICAL	
2	2390.00	45.24	74.00	-28.76	14.31	2.76	28.17	0.00	110	100	Peak		VERTICAL	
3 p	2401.88	95.94	74.00			2.76	28.21	0.00	110	100	Peak		VERTICAL	
4 a	2402.24	55.84	54.00			2.76	28.21	0.00	110	100	Average		VERTICAL	

## Band Edge Emission for Top Channel

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB	dB/m	deg	cm				
1 p	2479.88	94.55	74.00			2.81	28.37	0.00	334	100	Peak		VERTICAL	
2 a	2480.18	55.21	54.00			2.81	28.37	0.00	334	100	Average		VERTICAL	
3 !	2483.50	40.59	54.00	-13.41	9.41	2.81	28.37	0.00	334	100	Average		VERTICAL	
4	2483.50	57.17	74.00	-16.83	25.99	2.81	28.37	0.00	334	100	Peak		VERTICAL	

## 4. NUMBER OF HOPPING CHANNEL

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW =100kHz
VB	VBW $\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100kHz, VBW=300kHz, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP

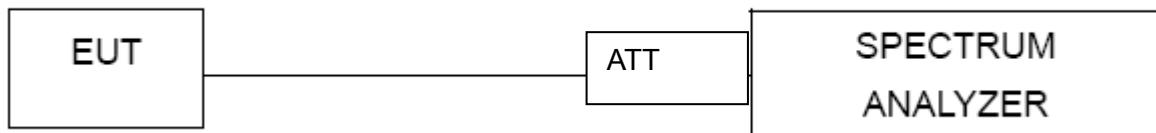


#### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.5 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 4.5V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

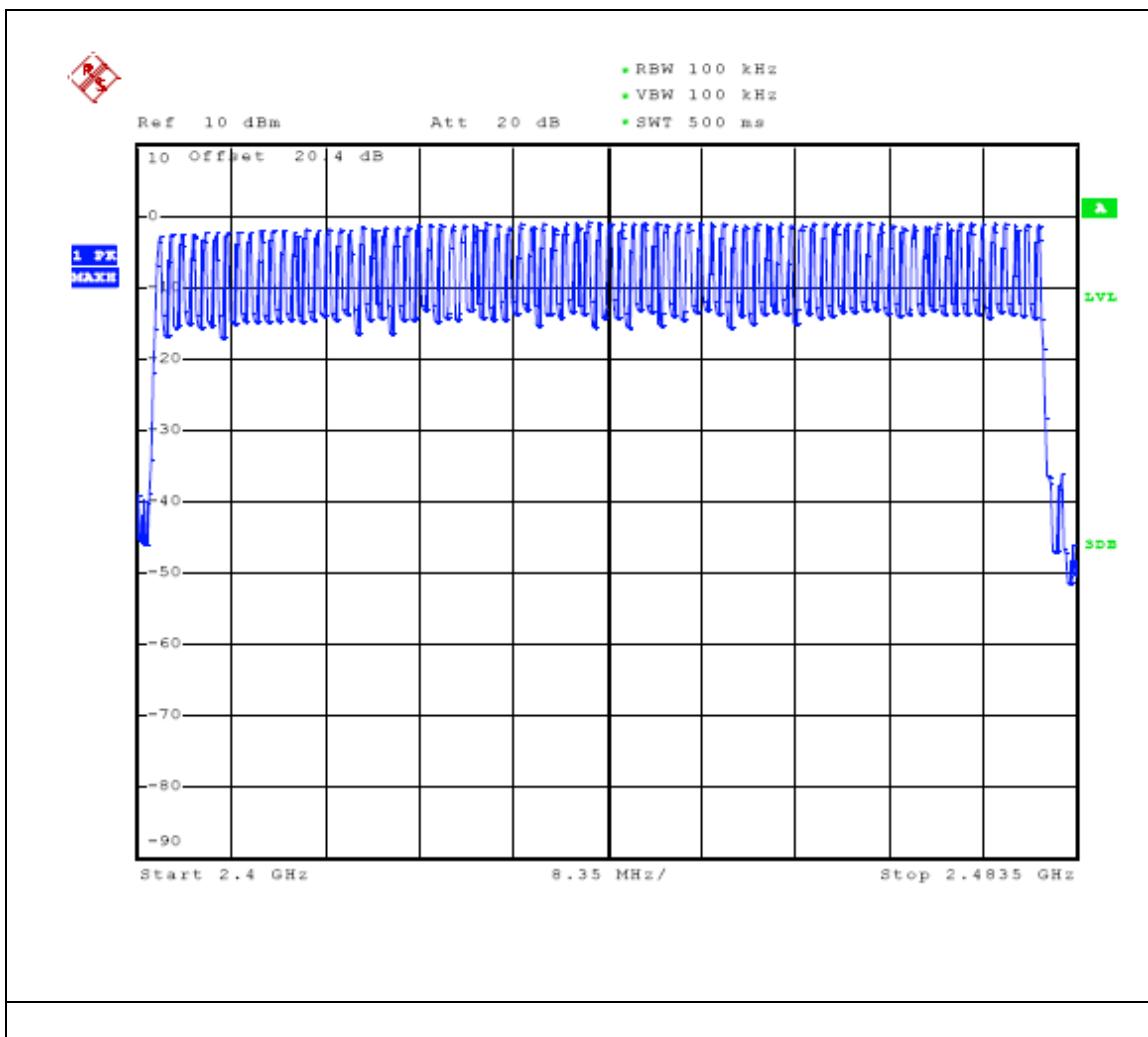

## 5. AVERAGE TIME OF OCCUPANCY

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS


#### 5.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. A Period Time = (channel number)\*0.4  
 DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)  
 DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)  
 DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

### 5.1.3 TEST SETUP

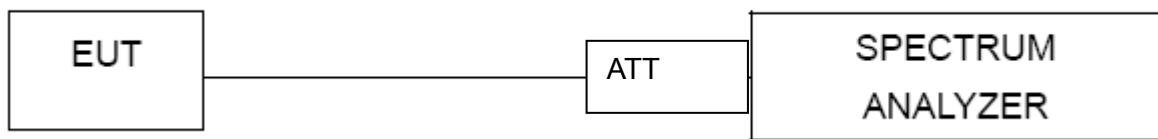


### 5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 4.5V
Test Mode :	CH1-DH5,DH3,DH1		

Data Packet	Frequency	Pulse Duration (us)	Dwell Time (ms)	Limits (s)
DH1	2402 MHz	410	131.2	0.4000
DH3	2402 MHz	1670	265.7	0.4000
DH5	2402 MHz	2920	311.5	0.4000

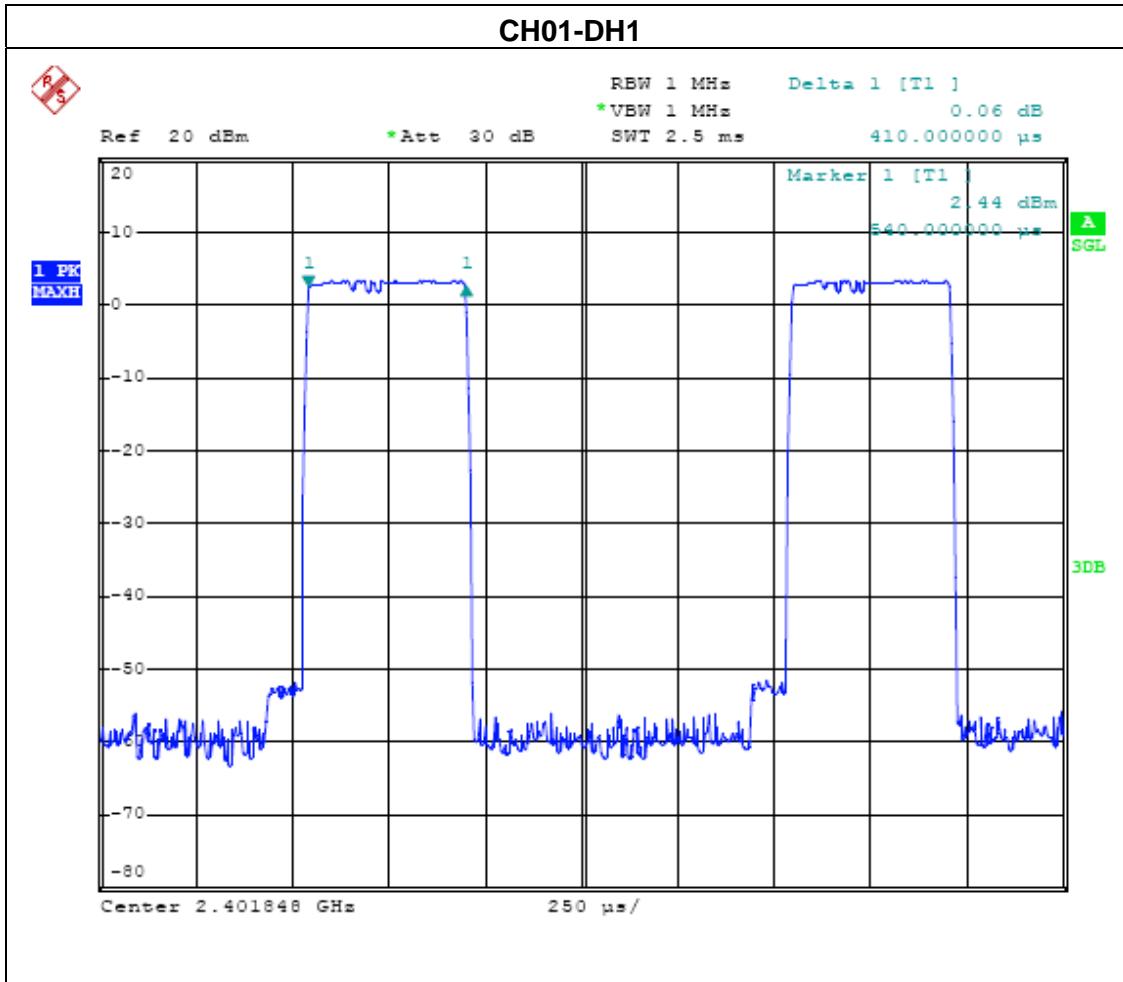

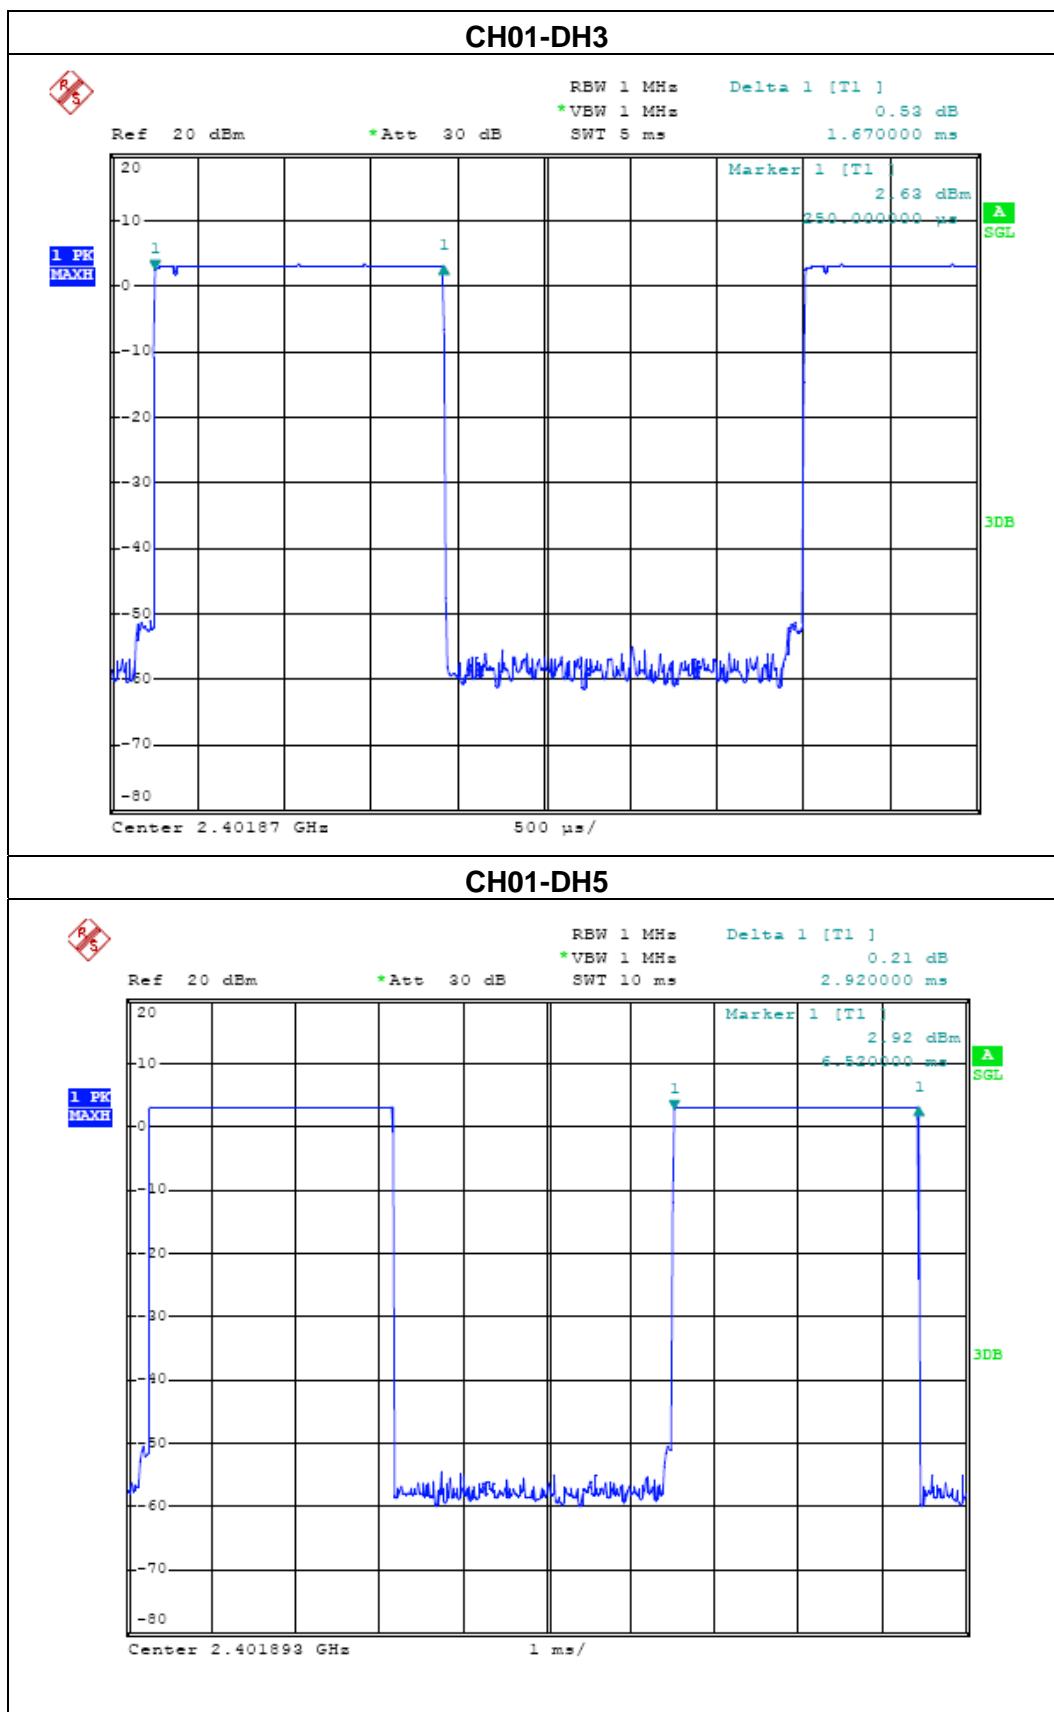

## 6. HOPPING CHANNEL SEPARATION MEASUREMENT

### 6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 6.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

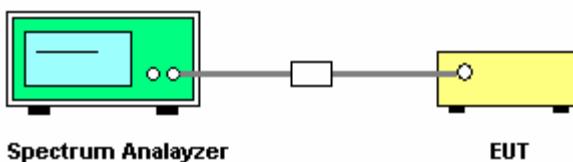

#### 6.1.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.


### 6.1.5 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 4.5V
Test Mode :	CH00 / CH39 /CH78		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.004	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies

Ch. Separation Limits: >20dB bandwidth

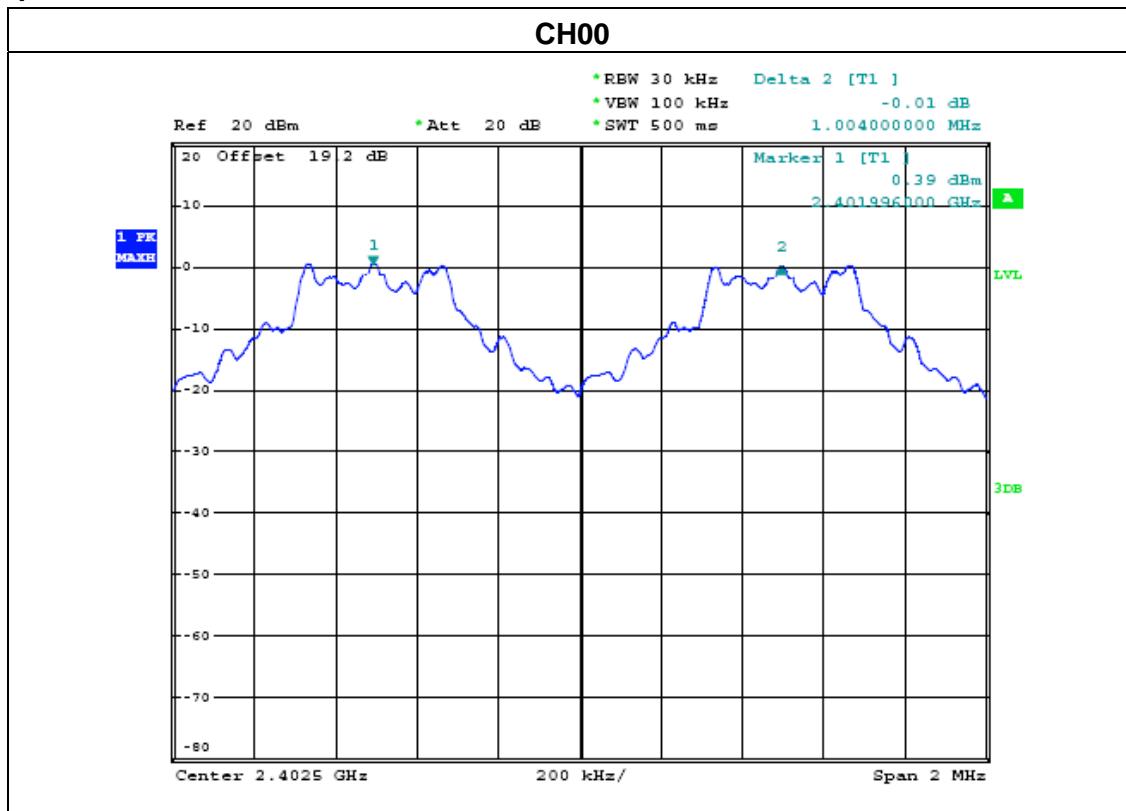

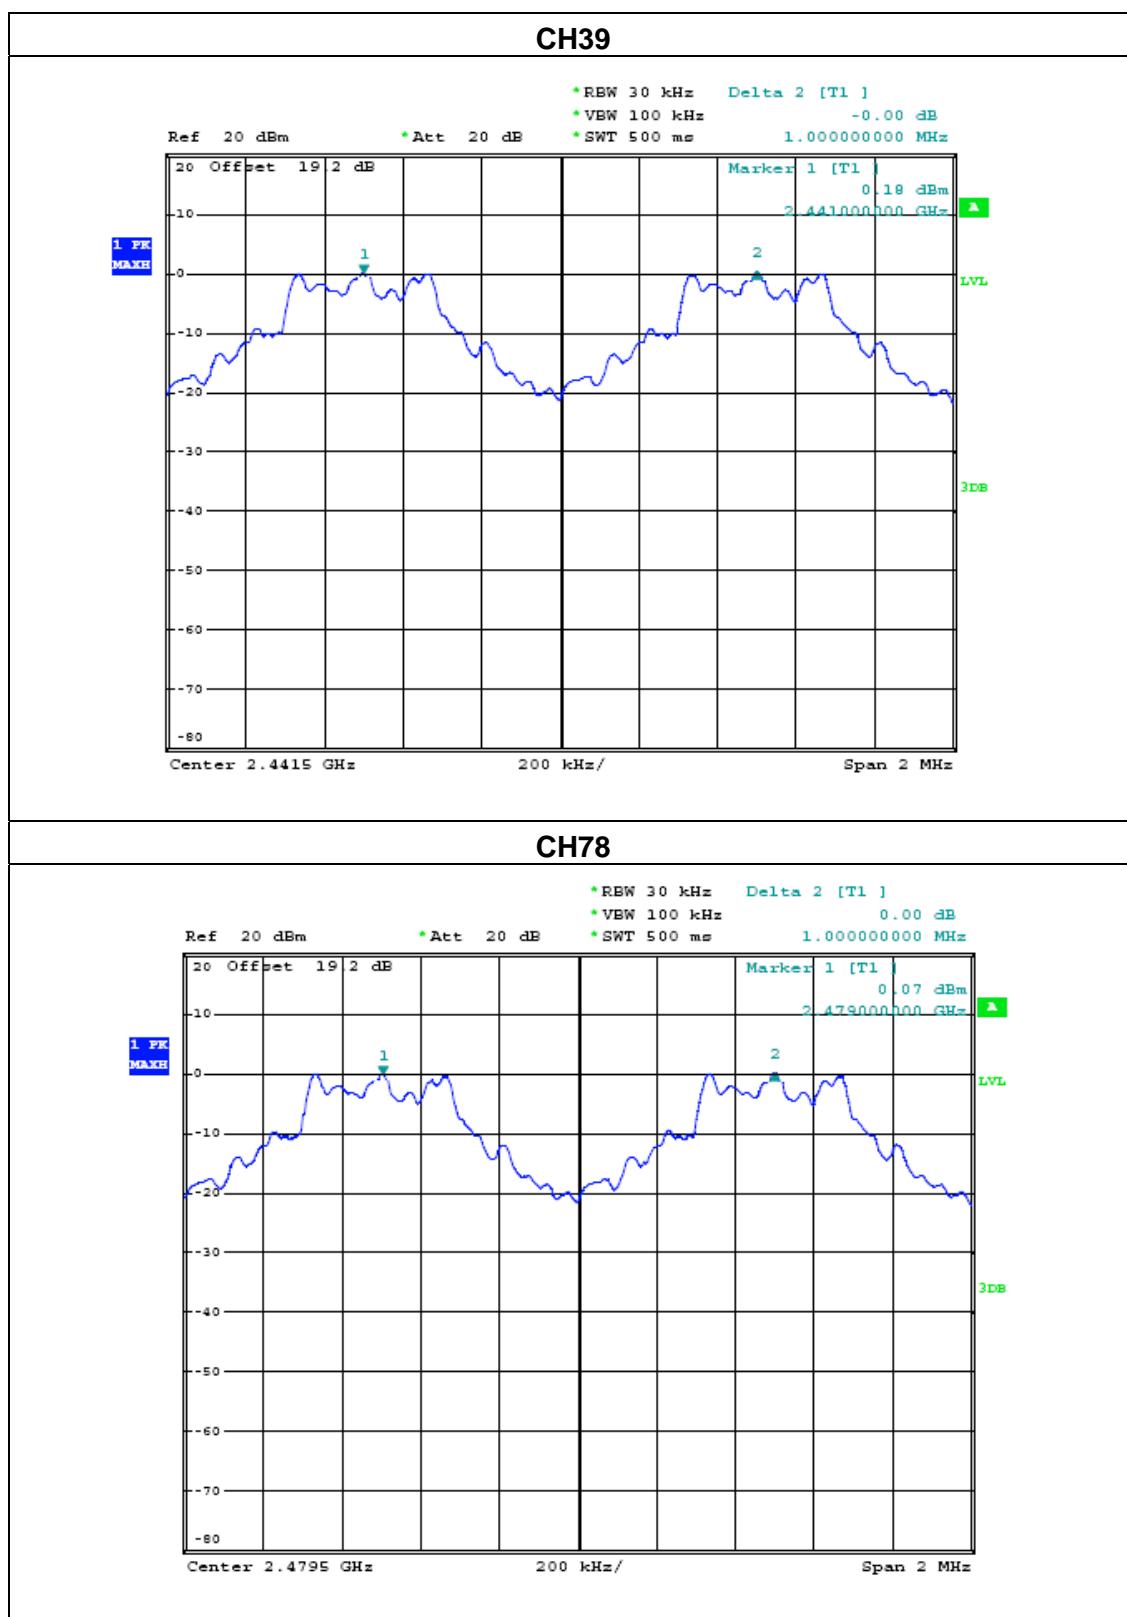

## 7. BANDWIDTH TEST

### 7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

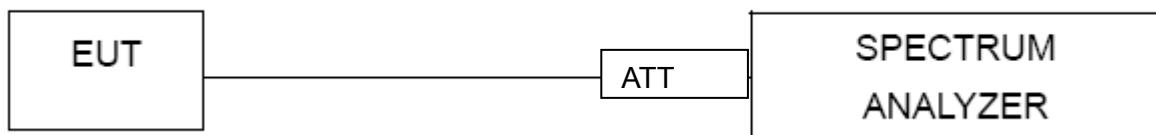


#### 7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.1.5 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 4.5V
Test Mode :	CH00 / CH39 /C78		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	924	PASS
2441 MHz	984	PASS
2480 MHz	932	PASS

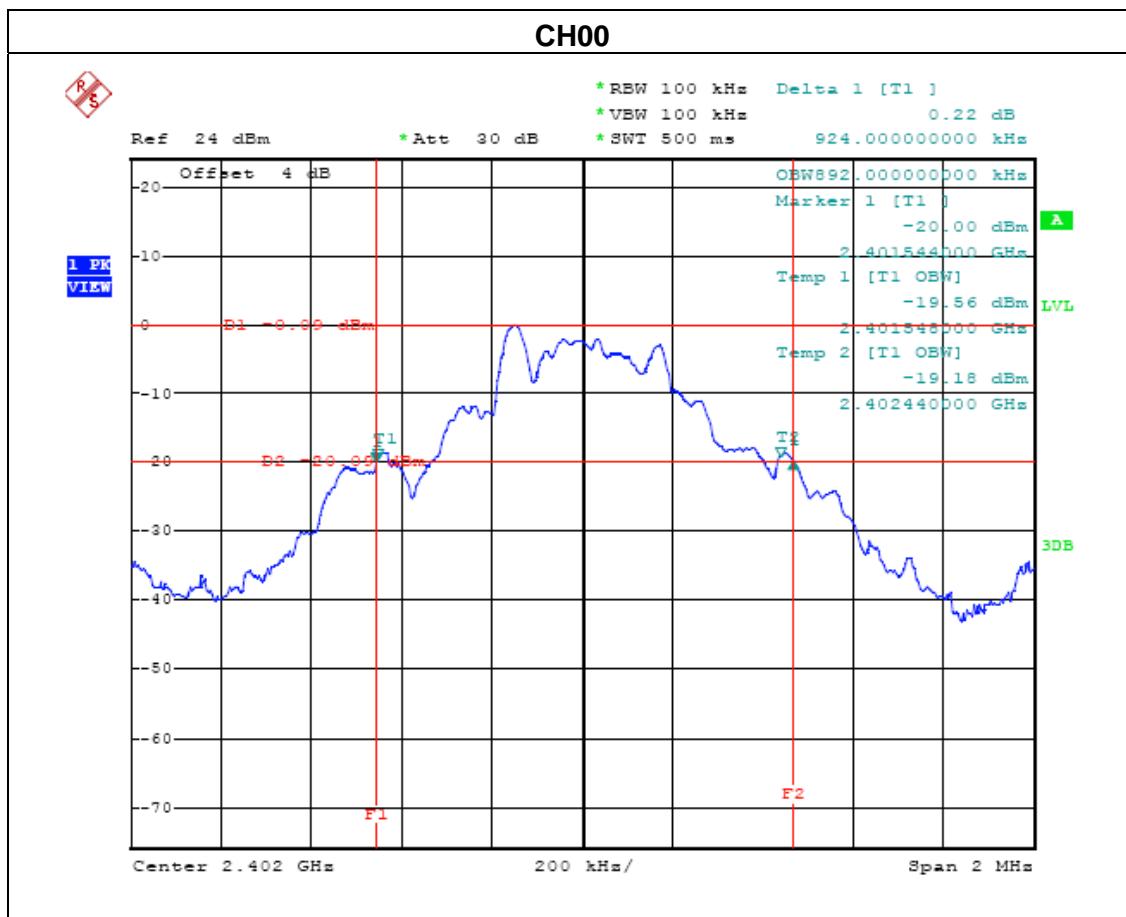

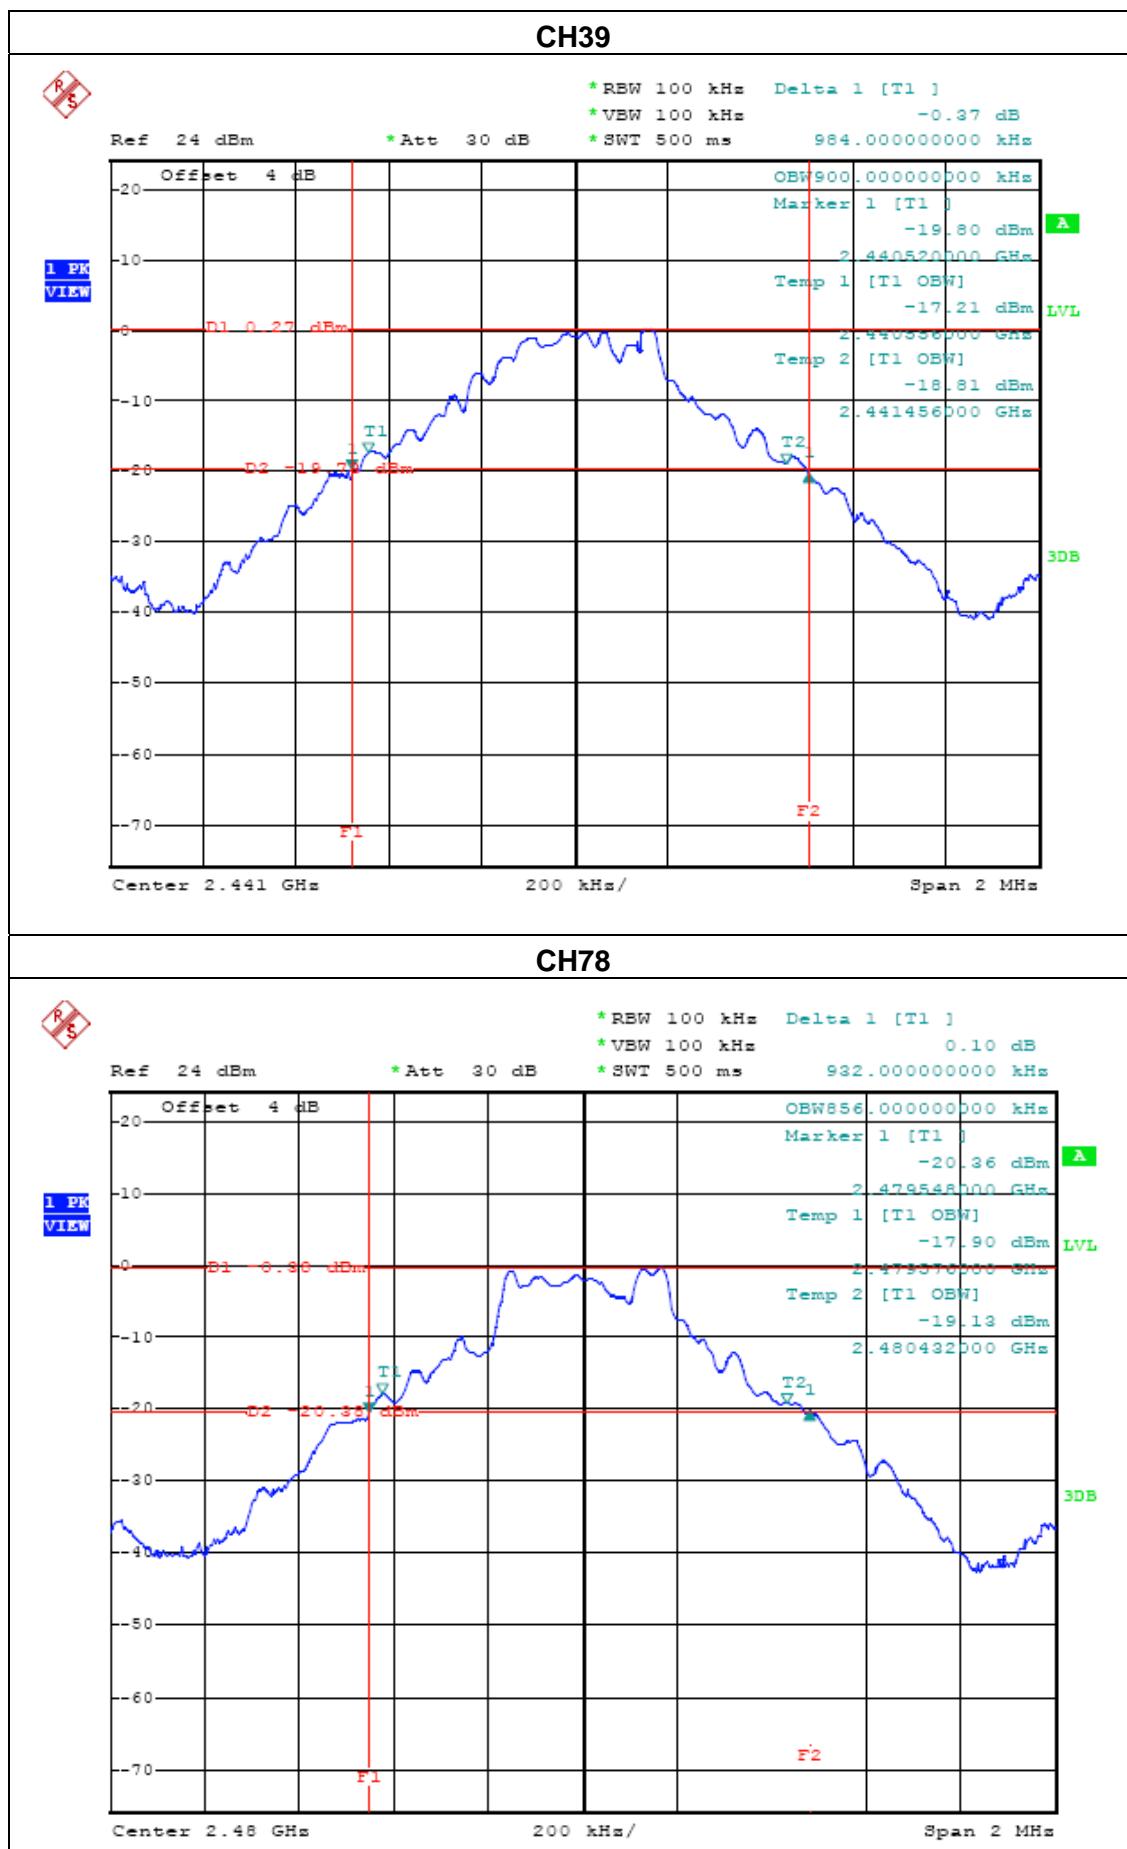

## 8. PEAK OUTPUT POWER TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	0.125 w or 1w	2400-2483.5	PASS

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 $VBW \geq RBW$

Sweep = auto


Detector function = peak

Trace = max hold

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP

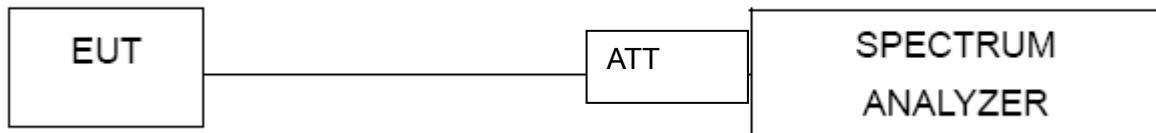

#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 8.1.5 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 4.5V
Test Mode :	CH00/ CH39 /CH78		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH00	2402	0.07	30
CH39	2441	0.02	30
CH78	2480	0.06	30

## 9. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### 9.1 DEVIATION FROM STANDARD

No deviation.

#### 9.2 TEST SETUP

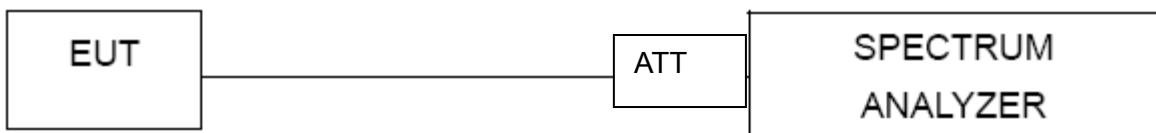



#### 9.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 9.4 TEST RESULTS

EUT :	Wireless air mouse and keyboard remote controller	Model Name :	AR200
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 4.5V

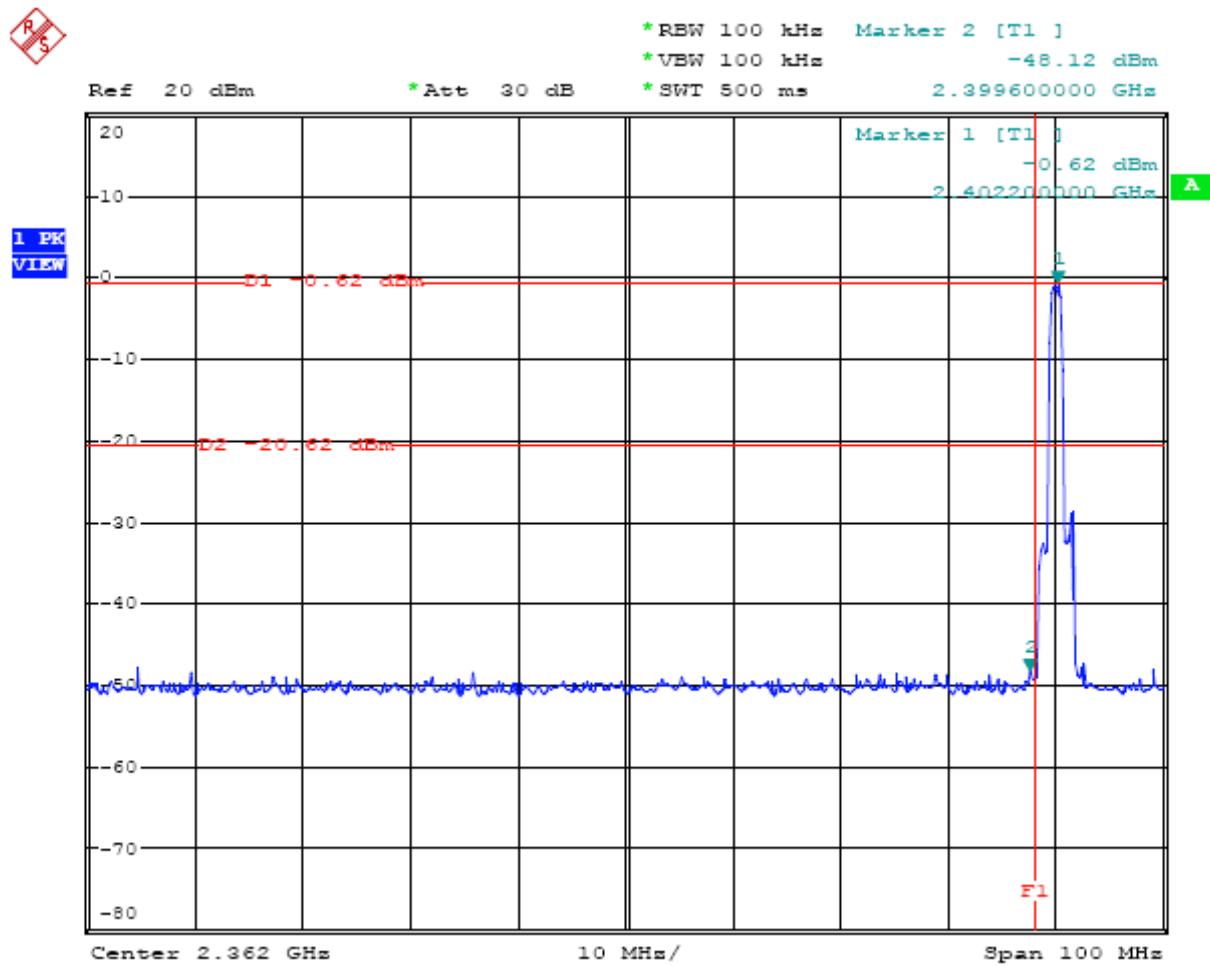

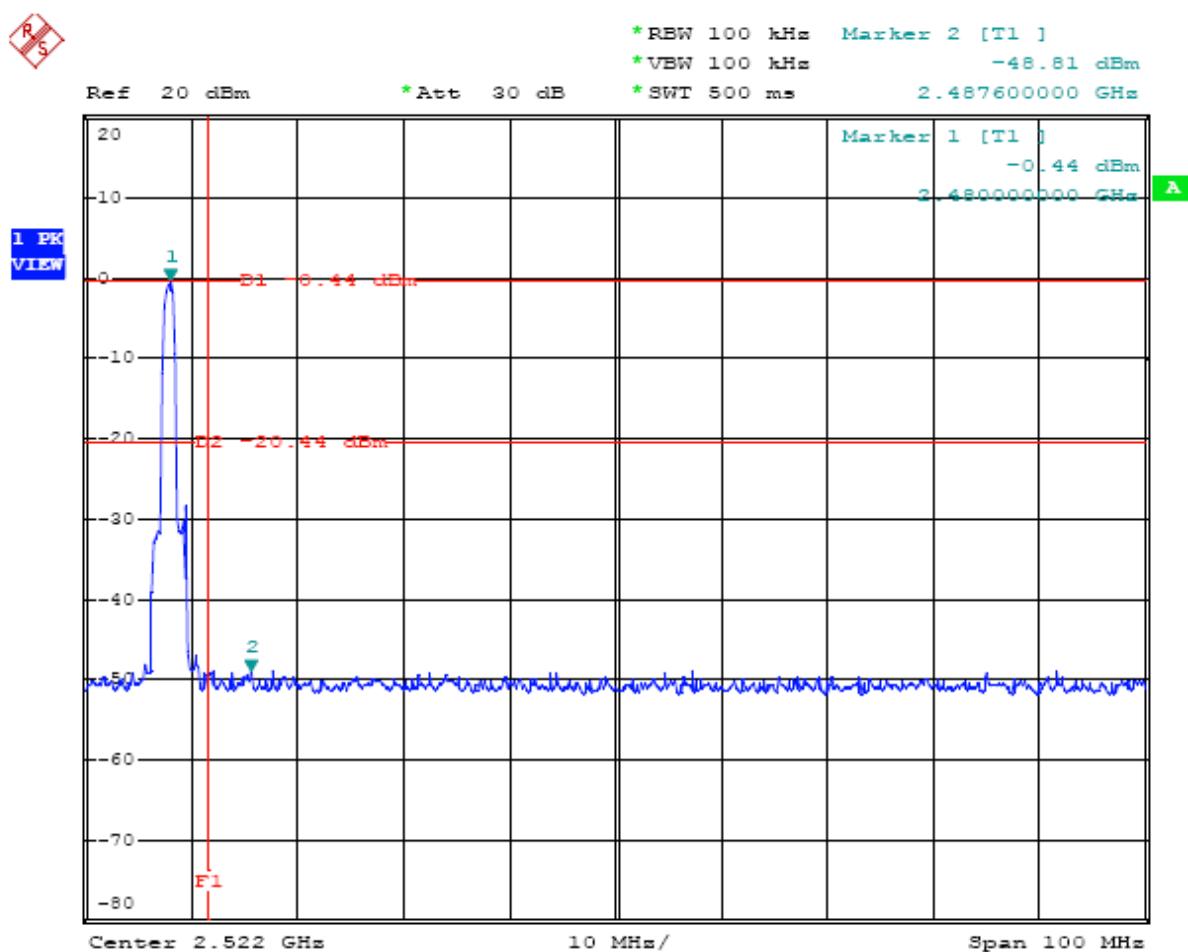

## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is Built-in antenna. It comply with the standard requirement.