

# FCC TEST REPORT (BLUETOOTH)

**REPORT NO.:** RF140213E02A-1

MODEL NO.: Infobox1

FCC ID: 2ACLF-INFOBOX1

RECEIVED: June 09, 2014

**TESTED:** June 18 to 24, 2014

**ISSUED:** June 03, 2015

**APPLICANT:** i-Spy Digital Limited

Rotterdam House, 116 Quayside, ADDRESS:

Newcastle-upon-Tyne, NE1 3DY. UK

Bureau Veritas Consumer Products Services (H.K.) ISSUED BY:

Ltd., Taoyuan Branch Hsin Chu Laboratory

No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, LAB ADDRESS:

Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,

R.O.C.

No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, **TEST LOCATION (1):** 

Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,

Taiwan, R.O.C.

No.49, Ln. 206, Wende Rd., Shangshan Tsuen, **TEST LOCATION (2):** 

Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,

Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Report No.: RF140213E02A-1 1 of 53

Reference No.: 140609E01



# **TABLE OF CONTENTS**

RELEAS	E CONTROL RECORD	4
1	CERTIFICATION	
2	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	7
3	GENERAL INFORMATION	
3.1	GENERAL DESCRIPTION OF EUT (BLUETOOTH)	8
3.2	DESCRIPTION OF TEST MODES	
3.3	TEST MODE APPLICABLITY AND TESTED CHANNEL DETAIL:	_
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	
3.5	DESCRIPTION OF SUPPORT UNITS	
3.6	CONFIGURATION OF SYSTEM UNDER TEST	
4	TEST PROCEDURES AND RESULTS	
4.1	CONDUCTED EMISSION MEASUREMENT	
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	NUMBER OF HOPPING FREQUENCY USED	31
4.3.1	LIMIT OF HOPPING FREQUENCY USED	31
4.3.2	TEST INSTRUMENTS	31
4.3.3	TEST PROCEDURES	
4.3.4	DEVIATION FROM TEST STANDARD	
4.3.5	TEST SETUP	_
4.3.6	TEST RESULTS	
4.4	DWELL TIME ON EACH CHANNEL	
4.4.1	LIMIT OF DWELL TIME USED	
4.4.2	TEST INSTRUMENTS	
4.4.3	TEST PROCEDURES	
4.4.4	DEVIATION FROM TEST STANDARD	
4.4.5	TEST SETUP	_
T.T.U	1LO1 OL101	5

2 of 53



4.4.6	TEST RESULTS	35
4.5	CHANNEL BANDWIDTH	.39
4.5.1	LIMITS OF CHANNEL BANDWIDTH	39
4.5.2	TEST INSTRUMENTS	39
4.5.3	TEST PROCEDURE	39
4.5.4	DEVIATION FROM TEST STANDARD	39
4.5.5	TEST SETUP	40
4.5.6	EUT OPERATING CONDITION	40
4.5.7	TEST RESULTS	41
4.6	HOPPING CHANNEL SEPARATION	.42
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	42
4.6.2	TEST INSTRUMENTS	42
4.6.3	TEST PROCEDURES	42
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	TEST SETUP	42
4.6.6	TEST RESULTS	43
4.7	MAXIMUM PEAK OUTPUT POWER	.44
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.7.2	INSTRUMENTS	44
4.7.3	TEST PROCEDURES	44
4.7.4	DEVIATION FROM TEST STANDARD	
4.7.5	TEST SETUP	45
4.7.6	EUT OPERATING CONDITION	45
4.7.7	TEST RESULTS	46
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT	
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.8.2	TEST INSTRUMENTS	47
4.8.3	TEST PROCEDURE	
4.8.4	DEVIATION FROM TEST STANDARD	
4.8.5	TEST SETUP	
4.8.6	EUT OPERATING CONDITION	47
4.8.7	TEST RESULTS	48
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	
6	INFORMATION ON THE TESTING LABORATORIES	
7	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE LAB	



# **RELEASE CONTROL RECORD**

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140213E02A-1	Original release	June 03, 2015

4 of 53



# 1 CERTIFICATION

**PRODUCT:** DVB-T2 OTT STB

BRAND NAME: Infotu.be™ Messenger

MODEL NO.: Infobox1

**TEST SAMPLE:** MASS-PRODUCTION

**APPLICANT:** i-Spy Digital Limited

**TESTED DATE:** June 18 to 24, 2014

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (Model: Infobox1) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared By: Thorny, Date: June 03, 2015

(Phoenix Huang, Specialist)

🍕 May Chén, Manager )



# 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C								
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK					
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.6dB at 0.17734MHz.					
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.					
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.					
15.247(a)(1)	Hopping Channel Separation     Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.					
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.					
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.4dB at 162.24MHz.					
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.					
15.203	Antenna Requirement	PASS	No antenna connector is used.					

NOTE: 1. Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

6 of 53



# 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



# **3 GENERAL INFORMATION**

# 3.1 GENERAL DESCRIPTION OF EUT (BLUETOOTH)

PRODUCT	DVB-T2 OTT STB
MODEL NO.	Infobox1
POWER SUPPLY	12Vdc from power adapter
MODULATION TYPE	GFSK, $\pi$ /4-DQPSK, 8DPSK
MODULATION TECHNOLOGY	FHSS
DATE RATE	Up to 3Mbps
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
MAX. OUTPUT POWER	8.110 mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	HDMI Cable (shielded, 1.5m) × 2 AV to AV Cable (unshielded, 2.0m) × 1
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter × 1

### NOTE:

- 1. There are Bluetooth 2.1 EDR and WLAN technology used for the EUT.
- 2. Bluetooth 2.1 EDR technology and WLAN technology can not transmit at same time.
- 3. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Ant. Gain (dBi)	Frequency range (GHz to GHz)	Ant. Type	Connecter Type
Unictron	AA055	2	2.4~2.5	Chip	NA

4. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
Atechoem	ADS0248-W 120150	Input: 100-240V, 0.6A, 50/60Hz Output: 12.0V, 1.5A DC output cable(1.5m, unshielded)

5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



# 3.2 DESCRIPTION OF TEST MODES

79 channels are provided for Bluetooth.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

9 of 53



### 3.3 TEST MODE APPLICABLITY AND TESTED CHANNEL DETAIL:

EUT		A	DECODINE			
CONFIGURE MODE	PLC	RE < 1G	RE≥1G	APCM	ОВ	DESCRIPTION
-	V	√	√	V	V	-

Where PLC: Power Line Conducted Emission RE < 1G: Radiated Emission below 1GHz

**RE ≥ 1G:** Radiated Emission above 1GHz **APCM:** Antenna Port Conducted Measurement

**OB:** Conducted Out-Band Emission Measurement

#### **POWER LINE CONDUCTED EMISSION:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	39	FHSS	8DPSK	DH5

# **RADIATED EMISSION TEST (BELOW 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology		Packet Type
0 to 78	39	FHSS	8DPSK	DH5

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5



### **ANTENNA PORT CONDUCTED MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

 $\boxtimes$ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	DH5

### **CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).  $\boxtimes$ 

Following channel(s) was (were) selected for the final test as listed below.

Available Channel				Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	DH5

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY	
PLC	26deg. C, 65%RH	120Vac, 60Hz	Ping Liu	
RE<1G	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng	
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Andy Ho	
<b>APCM</b> 25deg. C, 60%RH		120Vac, 60Hz	Chilin Lin	
ОВ	25deg. C, 60%RH	120Vac, 60Hz	Chilin Lin	

Report No.: RF140213E02A-1 Reference No.: 140609E01

11 of 53

Report Format Version 5.0.0



# 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

# FCC Part 15, Subpart C (15.247) ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



# 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	MOUSE	Agilent	NA	NA	NA
3	MONITOR	DELL	U2410F	CNOJ257M7287 29AG14ML	FCC DoC
4	CD/DVD PLAYER	SONY	DVP-NS718HP	1004056	NA
5	Remote Control	Infotu.be™ Messenger	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS					
1	JTP Cable, 10m					
2	USB Cable, 1.8m					
3	HDMI Cable, shielded, 1.5m					
4	HDMI Cable, shielded, 1.5m / AV to AV Cable, unshielded, 2m					
5	NA					

**NOTE:** All power cords of the above support units are non shielded (1.8m).



# 3.6 CONFIGURATION OF SYSTEM UNDER TEST

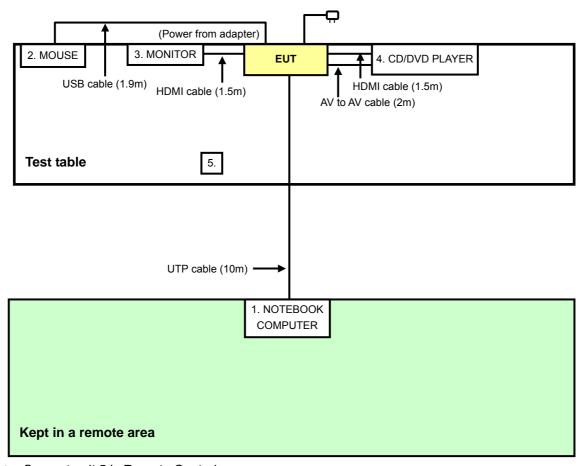

14 of 53

**Note:** Support unit 5 is Remote Control.



# 4 TEST PROCEDURES AND RESULTS

#### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)			
	Quasi-peak	Average		
0.15-0.5	66 to 56	56 to 46		
0.5-5	56	46		
5-30	60	50		

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

# 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10 , 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7.	NA	NA	NA

#### Note:

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: June 18, 2014



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit 20dB) were not recorded.


#### NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

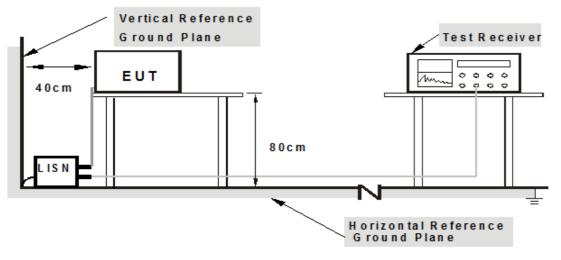

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



# 4.1.6 EUT OPERATING CONDITIONS

1.	Connect the EUT with the support unit 1	(Notebook Computer) which is placed in
	a remote area.	

2.	The communication partner run test program "HyperTerminal paste command" to
	enable EUT under transmission/receiving condition continuously at specific
	channel frequency.

17 of 53




# 4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

	Freq.	Corr.	Readin	g Value	Emissic	n Level	Lir	nit	Mai	gin
No		Factor	[dB	(uV)]	[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.07	56.94	44.88	57.01	44.95	64.61	54.61	-7.60	-9.66
2	0.23203	0.07	47.19	30.78	47.26	30.85	62.38	52.38	-15.11	-21.52
3	0.39219	0.09	48.43	34.75	48.52	34.84	58.02	48.02	-9.50	-13.18
4	0.50547	0.10	47.84	37.03	47.94	37.13	56.00	46.00	-8.06	-8.87
5	0.68516	0.11	44.69	32.56	44.80	32.67	56.00	46.00	-11.20	-13.33
6	1.13672	0.14	42.25	31.74	42.39	31.88	56.00	46.00	-13.61	-14.12

#### **REMARKS:**

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission Level Limit value
- 4. Correction Factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

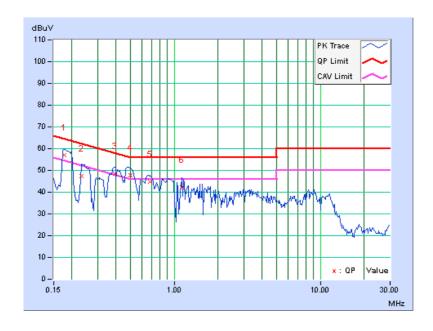

Report No.: RF140213E02A-1

Reference No.: 140609E01




PHASE	Neutral (NI)		Quasi-Peak (QP) / Average (AV)
		FUNCTION	Average (Av)

	Freq.	Corr.	Readin	g Value	Emissio	n Level	Lir	nit	Maı	rgin
No		Factor	[dB	(uV)]	[dB	(uV)]	[dB	(uV)]	(d	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.07	55.71	43.86	55.78	43.93	64.61	54.61	-8.83	-10.68
2	0.39219	0.09	44.82	31.47	44.91	31.56	58.02	48.02	-13.11	-16.46
3	0.49375	0.10	47.02	35.67	47.12	35.77	56.10	46.10	-8.99	-10.34
4	0.68516	0.11	43.73	31.62	43.84	31.73	56.00	46.00	-12.16	-14.27
5	1.03516	0.13	42.05	29.17	42.18	29.30	56.00	46.00	-13.82	-16.70
6	1.30078	0.15	41.05	32.32	41.20	32.47	56.00	46.00	-14.80	-13.53

#### **REMARKS:**

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission Level Limit value
- 4. Correction Factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value

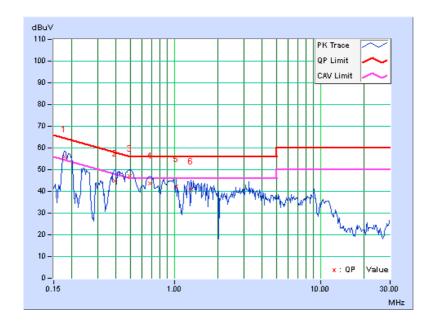



### 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



# 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21,2014	Jan. 20,2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

### Note:

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
- 4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: June 18 to 19, 2014



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

#### NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 1MHz for Peak detection at frequency above 1GHz.

22 of 53

3. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation




#### 4.2.5 TEST SETUP

# <Frequency Range below 1GHz>

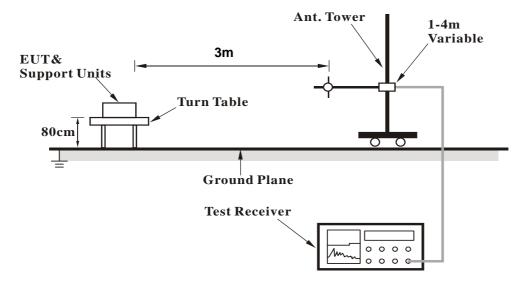

# <Frequency Range above 1GHz>

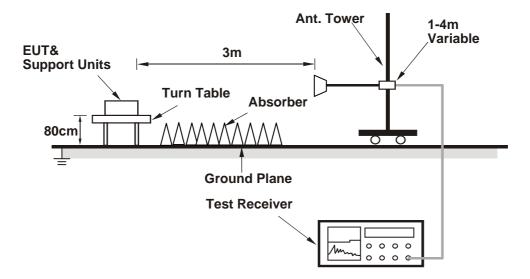

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

# 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



# 4.2.7 TEST RESULTS

#### **BELOW 1GHz WORST-CASE DATA**

#### BT\_8DPSK

CHANNEL	TX Channel 39	DETECTOR	Ouesi Beek (OD)
FREQUENCY RANGE	Below 1GHz	FUNCTION	Quasi-Peak (QP)

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	108.40	36.1 QP	43.5	-7.4	1.37 H	211	52.58	-16.47
2	135.30	34.1 QP	43.5	-9.4	1.24 H	100	48.08	-13.97
3	162.24	40.1 QP	43.5	-3.4	1.75 H	134	53.48	-13.37
4	188.62	37.4 QP	43.5	-6.1	1.86 H	167	53.08	-15.67
5	299.57	36.3 QP	46.0	-9.7	1.67 H	304	48.69	-12.38
6	550.31	36.6 QP	46.0	-9.4	1.33 H	204	42.95	-6.38
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.86	32.8 QP	40.0	-7.3	1.64 V	144	46.29	-13.54
2	135.10	38.4 QP	43.5	-5.1	1.77 V	67	52.39	-13.97
3	135.10 172.64	38.4 QP 39.4 QP	43.5 43.5	-5.1 -4.1	1.77 V 1.55 V	67 98	52.39 53.43	-13.97 -14.02
-				*				
3	172.64	39.4 QP	43.5	-4.1	1.55 V	98	53.43	-14.02

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value



#### **ABOVE 1GHz DATA**

#### **BT\_GFSK**

CHANNEL	TX Channel 0	DETECTOR	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Peak (PK)

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.1 PK	74.0	-24.9	1.37 H	117	17.45	31.65
2	2390.00	19.0 AV	54.0	-35.0	1.37 H	117	-12.65	31.65
3	*2402.00	100.6 PK			1.37 H	117	68.90	31.70
4	*2402.00	70.5 AV			1.37 H	117	38.80	31.70
5	4804.00	47.6 PK	74.0	-26.4	1.00 H	160	8.78	38.82
6	4804.00	17.5 AV	54.0	-36.5	1.00 H	160	-21.32	38.82
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.8 PK	74.0	-28.2	1.01 V	171	14.15	31.65
2	2390.00	15.7 AV	54.0	-38.3	1.01 V	171	-15.95	31.65
3	*2402.00	90.1 PK			1.01 V	171	58.40	31.70
4	*2402.00	60.0 AV			1.01 V	171	28.30	31.70
5	4804.00	47.6 PK	74.0	-26.4	1.05 V	204	8.78	38.82
J								

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB
- 7. Average value = peak reading + 20log(duty cycle).



CHANNEL	TX Channel 39	DETECTOR	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Peak (PK)

		ANTENNA	POLARITY &	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.6 PK			1.35 H	116	66.77	31.83
2	*2441.00	68.5 AV			1.35 H	116	36.67	31.83
3	4882.00	47.8 PK	74.0	-26.2	1.00 H	158	8.72	39.08
4	4882.00	17.7 AV	54.0	-36.3	1.00 H	158	-21.38	39.08
5	7323.00	55.6 PK	74.0	-18.4	1.06 H	332	9.17	46.43
6	7323.00	25.5 AV	54.0	-28.5	1.06 H	332	-20.93	46.43
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.4 PK			1.00 V	174	56.57	31.83
2	*2441.00	58.3 AV			1.00 V	174	26.47	31.83
3	4882.00	47.7 PK	74.0	-26.3	1.00 V	210	8.62	39.08
4	4882.00	17.6 AV	54.0	-36.4	1.00 V	210	-21.48	39.08
5	7323.00	53.5 PK	74.0	-20.5	1.05 V	219	7.07	46.43

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB
- 7. Average value = peak reading + 20log(duty cycle).



CHANNEL	TX Channel 78	DETECTOR	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Peak (PK)

		ANTENNA	POLARITY	& TEST DIS	TANCE: HO	RIZONTAL	AT 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.0 PK			1.32 H	115	65.03	31.97
2	*2480.00	66.9 AV			1.32 H	115	34.93	31.97
3	2493.10	47.9 PK	74.0	-26.1	1.32 H	115	15.88	32.02
4	2493.10	17.8 AV	54.0	-36.2	1.32 H	115	-14.22	32.02
5	4960.00	47.4 PK	74.0	-26.6	1.00 H	156	8.08	39.32
6	4960.00	17.3 AV	54.0	-36.7	1.00 H	156	-22.02	39.32
7	7440.00	55.9 PK	74.0	-18.1	1.00 H	344	9.49	46.41
8	7440.00	25.8 AV	54.0	-28.2	1.00 H	344	-20.61	46.41
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
<b>NO.</b>		LEVEL			HEIGHT	ANGLE	VALUE	FACTOR
	(MHz)	LEVEL (dBuV/m)			HEIGHT (m)	ANGLE (Degree)	VALUE (dBuV)	FACTOR (dB/m)
1	(MHz) *2480.00	LEVEL (dBuV/m) 88.8 PK			HEIGHT (m)	ANGLE (Degree)	VALUE (dBuV) 56.83	FACTOR (dB/m) 31.97
1 2	(MHz) *2480.00 *2480.00	LEVEL (dBuV/m) 88.8 PK 58.7 AV	(dBuV/m)	(dB)	HEIGHT (m)  1.00 V  1.00 V	ANGLE (Degree) 92 92	VALUE (dBuV) 56.83 26.73	FACTOR (dB/m) 31.97 31.97
1 2 3	*2480.00 *2480.00 2493.10	LEVEL (dBuV/m) 88.8 PK 58.7 AV 46.5 PK	(dBuV/m) 74.0	(dB) -27.5	HEIGHT (m)  1.00 V  1.00 V  1.00 V	92 92 92	VALUE (dBuV) 56.83 26.73 14.48	FACTOR (dB/m) 31.97 31.97 32.02
1 2 3 4	*2480.00 *2480.00 2493.10 2493.10	LEVEL (dBuV/m) 88.8 PK 58.7 AV 46.5 PK 16.4 AV	74.0 54.0	-27.5 -37.6	HEIGHT (m)  1.00 V  1.00 V  1.00 V  1.00 V	92 92 92 92 92	VALUE (dBuV) 56.83 26.73 14.48 -15.62	FACTOR (dB/m)  31.97  31.97  32.02  32.02
1 2 3 4 5	*2480.00 *2480.00 2493.10 2493.10 4960.00	LEVEL (dBuV/m) 88.8 PK 58.7 AV 46.5 PK 16.4 AV 48.1 PK	74.0 54.0 74.0	-27.5 -37.6 -25.9	HEIGHT (m)  1.00 V  1.00 V  1.00 V  1.00 V  1.00 V	92 92 92 92 92 92 96	VALUE (dBuV) 56.83 26.73 14.48 -15.62 8.78	FACTOR (dB/m) 31.97 31.97 32.02 32.02 39.32

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB
- 7. Average value = peak reading + 20log(duty cycle).



#### BT\_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz		Peak (PK)

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	2390.00	49.1 PK	74.0	-24.9	1.37 H	177	17.45	31.65		
2	2390.00	19.0 AV	54.0	-35.0	1.37 H	177	-12.65	31.65		
3	*2402.00	100.6 PK			1.37 H	117	68.90	31.70		
4	*2402.00	70.5 AV			1.37 H	117	38.80	31.70		
5	4804.00	46.5 PK	74.0	-27.5	1.09 H	156	7.68	38.82		
6	4804.00	16.4 AV	54.0	-37.6	1.09 H	156	-22.42	38.82		
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO.	I FREQ I I I I I MARGIN I I I I I							CORRECTION FACTOR (dB/m)		
1	2390.00	46.2 PK	74.0	-27.8	1.02 V	174	14.55	31.65		
2	2390.00	16.1 AV	54.0	-37.9	1.02 V	174	-15.55	31.65		
3	*2402.00	91.1 PK			1.02 V	174	59.40	31.70		
4	*2402.00	61.0 AV			1.02 V	174	29.30	31.70		
5	4804.00	47.4 PK	74.0	-26.6	1.01 V	189	8.58	38.82		
6	4804.00	17.3 AV	54.0	-36.7	1.01 V	189	-21.52	38.82		

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB
- 7. Average value = peak reading + 20log(duty cycle).



CHANNEL	TX Channel 39	DETECTOR	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Peak (PK)

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2441.00	96.5 PK			1.12 H	131	64.67	31.83	
2	*2441.00	66.4 AV			1.12 H	131	34.57	31.83	
3	4882.00	46.8 PK	74.0	-27.2	1.03 H	160	7.72	39.08	
4	4882.00	16.7 AV	54.0	-37.3	1.03 H	160	-22.38	39.08	
5	7323.00	55.6 PK	74.0	-18.4	1.00 H	351	9.17	46.43	
6	7323.00	25.5 AV	54.0	-28.5	1.00 H	351	-20.93	46.43	
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M		
NO.	IO. FREQ. LEVEL LIMIT MARGIN HEIGHT ANGLE VALUE FACTOR							CORRECTION FACTOR (dB/m)	
1	*2441.00	88.7 PK			1.01 V	187	56.87	31.83	
2	*2441.00	58.6 AV			1.01 V	187	26.77	31.83	
3	4882.00	47.9 PK	74.0	-26.1	1.03 V	197	8.82	39.08	
						4.0	04.00	20.00	
4	4882.00	17.8 AV	54.0	-36.2	1.03 V	197	-21.28	39.08	
5	4882.00 7323.00	17.8 AV 53.7 PK	54.0 74.0	-36.2 -20.3	1.03 V 1.00 V	197 190	-21.28 7.27	39.08 46.43	

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB

29 of 53

7. Average value = peak reading + 20log(duty cycle).



CHANNEL	TX Channel 78	DETECTOR	Dook (DK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Peak (PK)

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2480.00	94.8 PK			1.11 H	129	62.83	31.97	
2	*2480.00	64.7 AV			1.11 H	129	32.73	31.97	
3	2483.50	46.8 PK	74.0	-27.2	1.11 H	129	14.81	31.99	
4	2483.50	16.7 AV	54.0	-37.3	1.11 H	129	-15.29	31.99	
5	4960.00	46.9 PK	74.0	-27.1	1.03 H	162	7.58	39.32	
6	4960.00	16.8 AV	54.0	-37.2	1.03 H	162	-22.52	39.32	
7	7440.00	55.3 PK	74.0	-18.7	1.06 H	343	8.89	46.41	
8	7440.00	25.2 AV	54.0	-28.8	1.06 H	343	-21.21	46.41	
		ANTENNA	A POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M		
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2480.00	90.0 PK			1.01 V	91	58.03	31.97	
2	*2480.00	59.9 AV			1.01 V	91	27.93	31.97	
3	2483.50	46.0 PK	74.0	-28.0	1.01 V	91	14.01	31.99	
	•			_					
4	2483.50	15.9 AV	54.0	-38.1	1.01 V	91	-16.09	31.99	
4 5	2483.50 4960.00	15.9 AV 47.8 PK	54.0 74.0	-38.1 -26.2	1.01 V 1.08 V	91 200	-16.09 8.48	31.99 39.32	
H									
5	4960.00	47.8 PK	74.0	-26.2	1.08 V	200	8.48	39.32	

#### **REMARKS:**

- 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) Pre-Amplifier Factor(dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission Level Limit value
- 5. " \* ": Fundamental frequency.
- 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: 20log(3.125 / 100)= -30.1 dB

30 of 53

7. Average value = peak reading + 20log(duty cycle).



### 4.3 NUMBER OF HOPPING FREQUENCY USED

#### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. Tested date: June 24, 2014

#### 4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.

31 of 53

- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation




# 4.3.5 TEST SETUP



# 4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer the test result. On the plots, it shows that the hopping frequencies are equally spaced.

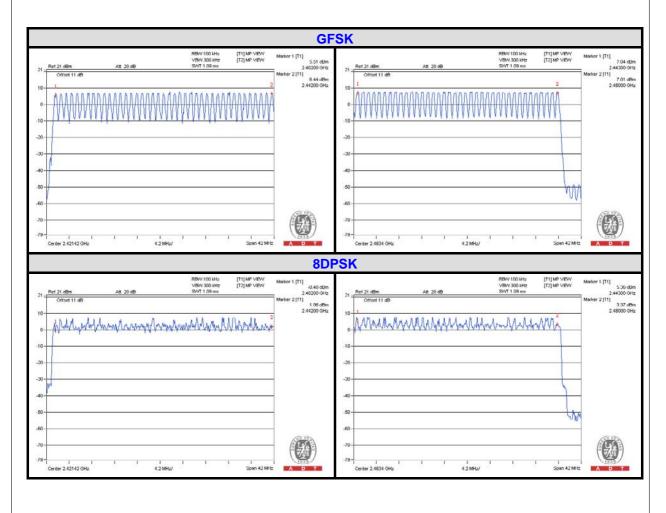



#### 4.4 DWELL TIME ON EACH CHANNEL

#### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. Tested date: June 24, 2014

#### 4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.

33 of 53

e. Repeat above procedures until all different time-slot modes have been completed.



# 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

# 4.4.5 TEST SETUP



34 of 53



# 4.4.6 TEST RESULTS


# For GFSK:

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.47	148.52	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.754	299.3	400
DH5	16 (times / 5 sec) *6.32=101.12 times	3.003	303.66	400

35 of 53

**NOTE:** Test plots of the transmitting time slot are shown on next page.



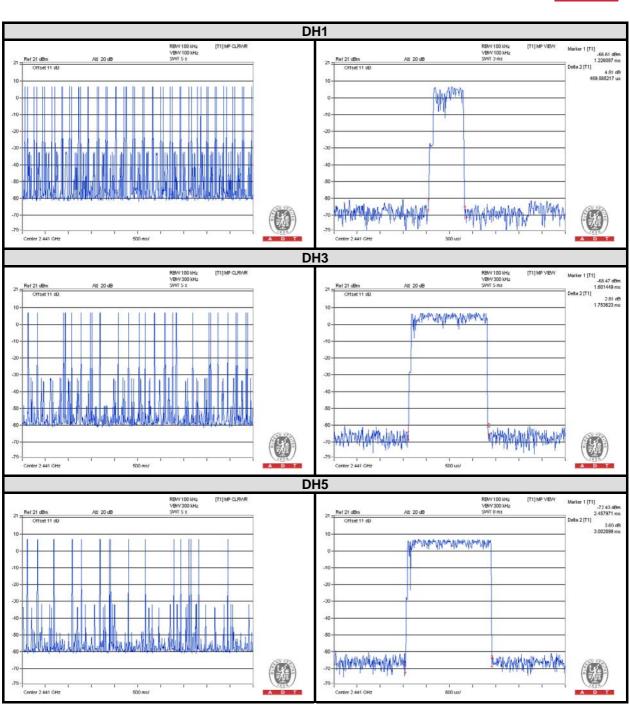




## For 8DPSK:

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.474	149.78	400
DH3	27 (times / 5 sec) *6.32=170.64 times	1.768	301.69	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.003	322.64	400

NOTE: Test plots of the transmitting time slot are shown on next page.

Report No.: RF140213E02A-1 Reference No.: 140609E01 37 of 53



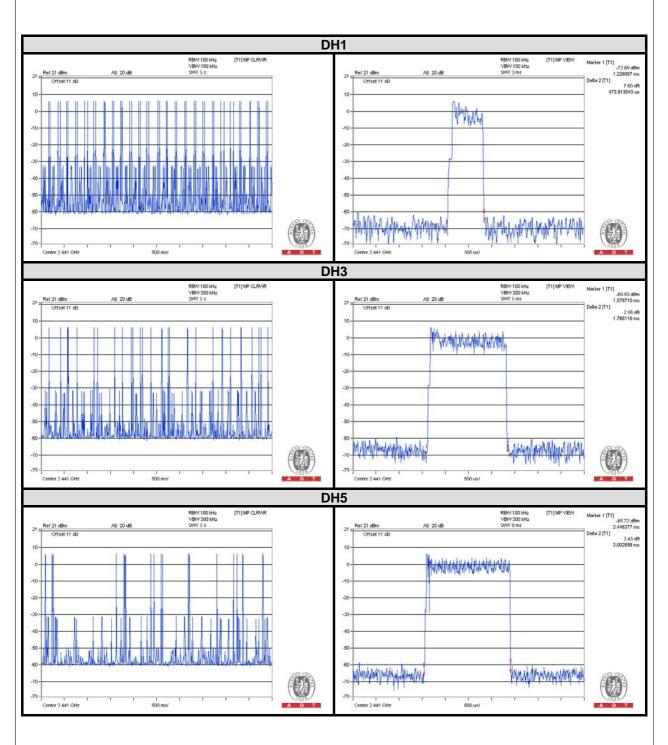



#### 4.5 CHANNEL BANDWIDTH

#### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

#### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. Tested date: June 24, 2014

#### 4.5.3 TEST PROCEDURE


- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation



## 4.5.5 TEST SETUP



## 4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


Report No.: RF140213E02A-1 40 of 53 Report Format Version 5.0.0

Reference No.: 140609E01



## 4.5.7 TEST RESULTS

CHANNEL	FREQUENCY	20dB BANDWIDTH (MHz)		
CHANNEL	(MHz)	GFSK	8DPSK	
0	2402	0.94	1.25	
39	2441	0.94	1.26	
78	2480	0.94	1.26	

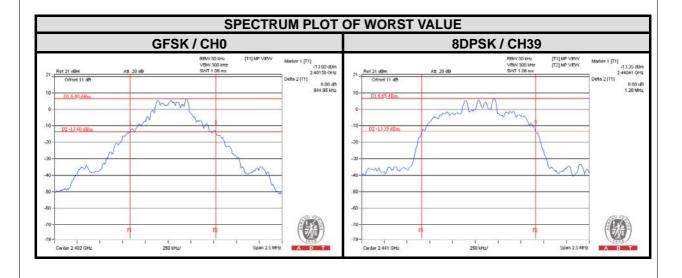

41 of 53



### 4.6 HOPPING CHANNEL SEPARATION

#### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

#### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. Tested date: June 24, 2014


#### 4.6.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP




Report No.: RF140213E02A-1 Reference No.: 140609E01 42 of 53 Report Format Version 5.0.0



# 4.6.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)		20dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)		PASS / FAIL	
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK		
0	2402	1.00	1.01	0.94	1.25	0.63	0.84	PASS	
39	2441	1.00	1.00	0.94	1.26	0.63	0.84	PASS	
78	2480	1.01	1.01	0.94	1.26	0.63	0.84	PASS	

NOTE: The minimum limit is two-third 20dB bandwidth.

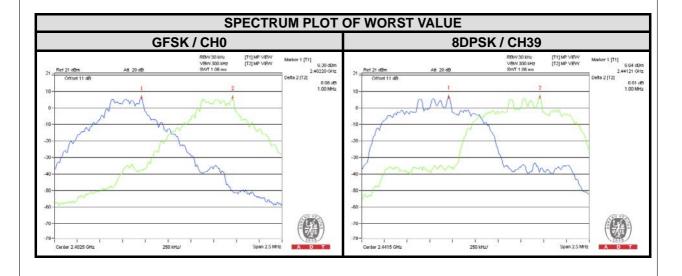



#### 4.7 MAXIMUM PEAK OUTPUT POWER

#### 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

#### 4.7.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 2. Tested date: June 24, 2014

## 4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.

44 of 53

- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

#### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation



## 4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

## 4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

45 of 53



## 4.7.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	OUTPUT POWER (mW)		OUTPUT POWER (dBm)		POWER LIMIT (mW)	PASS / FAIL
	, ,	GFSK	8DPSK	GFSK	8DPSK	, ,	
0	2402	5.916	8.017	7.72	9.04	125	PASS
39	2441	5.957	8.110	7.75	9.09	125	PASS
78	2480	5.715	7.709	7.57	8.87	125	PASS

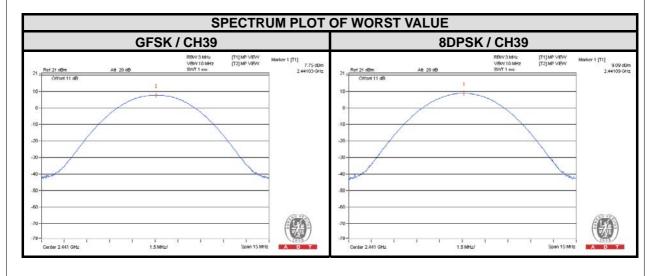

46 of 53



#### 4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

#### 4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

#### Note:

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 2. Tested date: June 24, 2014


#### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

#### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.8.5 TEST SETUP



## 4.8.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

47 of 53

Report No.: RF140213E02A-1

Reference No.: 140609E01




## 4.8.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

48 of 53






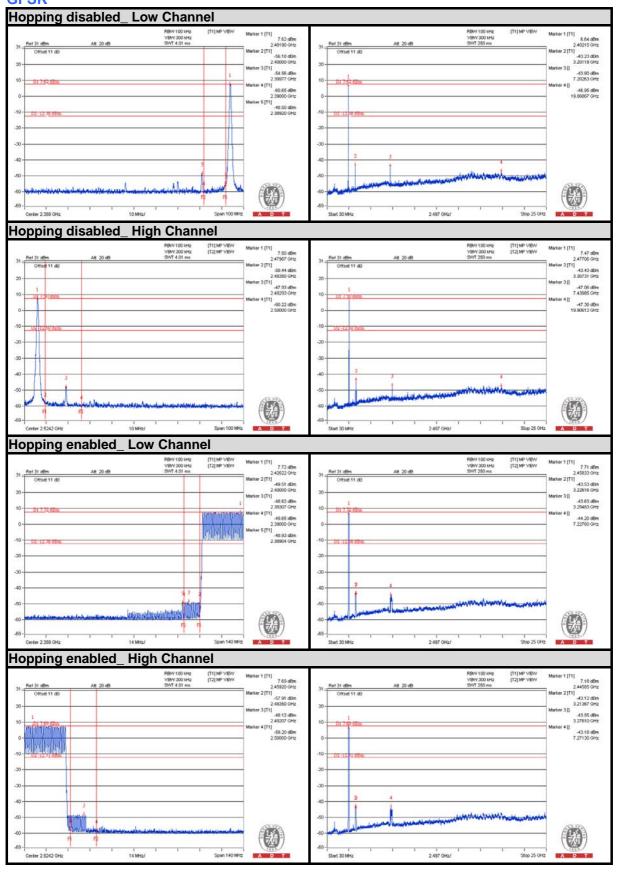



#### 8DPSK

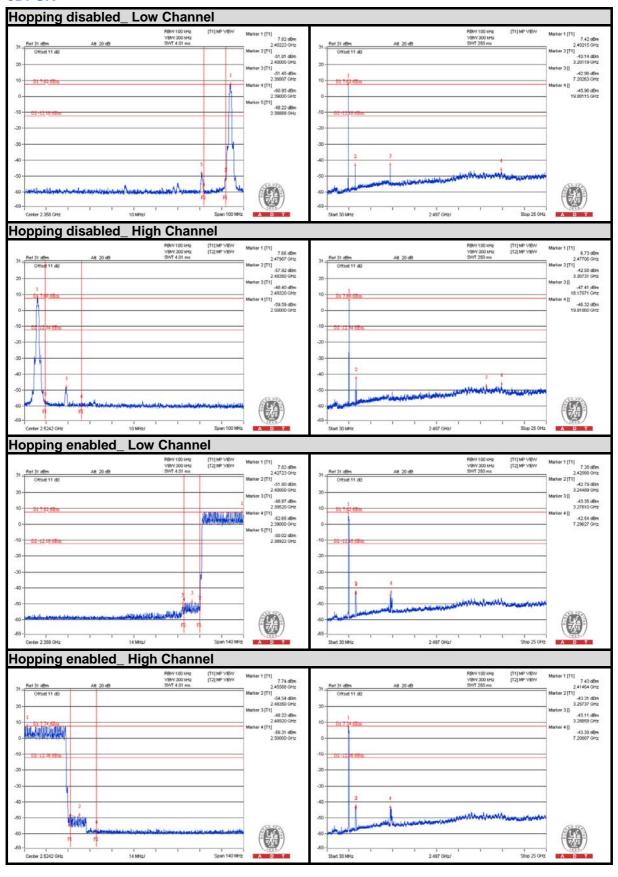



5 PHOTOGRAPHS OF THE TEST CONFIGURATION							
Please refer to the attached file (Test Setup Photo).							



## **6 INFORMATION ON THE TESTING LABORATORIES**

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF Lab:

Tel: 886-2-26052180 Tel: 886-3-5935343 Fax: 886-2-26052943 Fax: 886-3-5935342

## Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

**Email**: <a href="mailto:service.adt@tw.bureauveritas.com">service.adt@tw.bureauveritas.com</a> **Web Site**: <a href="mailto:www.bureauveritas-adt.com">www.bureauveritas-adt.com</a>

The address and road map of all our labs can be found in our web site also.

52 of 53



# 7 APPENDIX A - MODIFICATIONS RECORDERS FOR **ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.	
END	