

FCC Test Report

Report No.: 68.960.14.022.01

FCC ID : 2ACRY-3GI47

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : 2.4inch 3G Feature Phone

BRAND NAME : Cel-ect

MODEL NAME : i47

CLIENT : PERI INTERNATIONAL LIMITED

DATE OF ISSUE : July 29, 2014

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION : V1.0

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 29, 2014	Valid	Original Report



TABLE OF CONTENTS

1.\	VERIFICATION OF COMPLIANCE	5
2.	GENERAL INFORMATION	6
	2.1 PRODUCT DESCRIPTION	
	2.2 RELATED SUBMITTAL(S) / GRANT (S)	
	2.3 TEST METHODOLOGY	
	2.4 TEST FACILITY	
	2.5 MEASUREMENT INSTRUMENTS	
	2.6 SPECIAL ACCESSORIES	
	2.7 EQUIPMENT MODIFICATIONS	9
3.	SYSTEM TEST CONFIGURATION	10
	3.1 EUT CONFIGURATION	10
	3.2 EUT EXERCISE	
	3.3 GENERAL TECHNICAL REQUIREMENTS	10
	3.4 CONFIGURATION OF EUT SYSTEM	1
4.	SUMMARY OF TEST RESULTS	12
5.	DESCRIPTION OF TEST MODES	12
6.	OUTPUT POWER	13
	6.1 Conducted Output Power	13
	6.2 RADIATED OUTPUT POWER	18
	6.3. Peak-to-Average Ratio	20
7. :	SPURIOUS EMISSION	22
	7.1 CONDUCTED SPURIOUS EMISSION	22
	7.2 Radiated Spurious Emission	24
8.	MAINS CONDUCTED EMISSION	27
	8.1 MEASUREMENT METHOD	27
	8.2 PROVISIONS APPLICABLE	27
	8.3 MEASUREMENT RESULT	28
ο Ι	EDECHENCY STABILITY	3(



9.1 MEASUREMENT METHOD	30
9.2 PROVISIONS APPLICABLE	30
9.3 MEASUREMENT RESULT (WORST)	31
10. OCCUPIED BANDWIDTH	33
10.1 MEASUREMENT METHOD	33
10.2 PROVISIONS APPLICABLE	33
10.3 MEASUREMENT RESULT	33
11. EMISSION BANDWIDTH	34
11.1 MEASUREMENT METHOD	34
11.2 PROVISIONS APPLICABLE	34
11.3 MEASUREMENT RESULT	34
12. BAND EDGE	35
12.1 MEASUREMENT METHOD	35
12.2 PROVISIONS APPLICABLE	35
12.3 MEASUREMENT RESULT	35
APPENDIX A	36
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	36
APPENDIX B	49
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	49
EMISSION BANDWIDTH (-26DBC)	49
APPENDIX C	55
TEST PLOTS FOR BAND EDGES	55



1.VERIFICATION OF COMPLIANCE

Applicant	PERI INTERNATIONAL LIMITED
Address	RM 1605C HO KING COMM CTR 2-16 FA YUEN ST MONGKOK KLN HONG KONG
Manufacturer PERI INTERNATIONAL LIMITED	
Address	RM 1605C HO KING COMM CTR 2-16 FA YUEN ST MONGKOK KLN HONG KONG
Product Designation	2.4inch 3G Feature Phone
Brand Name	SEA LION
Test Model	i47
Date of test	July 17, 2014 to July 28, 2014
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Reviewed by: Prepared by:

John Zhi

Johnshi

EMC Project Manager

Alan Xiong

Alem Xing

EMC Project Engineer



2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

2.4inch 3G Feature Phone			
Goloxy1_MB_H401_PBF			
N/A			
☐ GSM 850 ☐ PCS 1900 (U.S. Bands) ☐ GSM 900 ☐ DCS 1800 (Non-U.S. Bands) ☐ UMTS FDD Band II ☐ UMTS FDD Band V (U.S. Bands) ☐ UMTS FDD Band I ☐ UMTS FDD Band VIII (Non-U.S. Bands)			
PIFA Antenna			
GSM / GPRS : GMSK WCDMA : QPSK			
): -3.0dBi(GSM850), -3.0dBi (PCS1900)			
DC 3.7V by Battery			
DC3.7V/1000 mAh			
AC100-240V 50/60 Hz 0.15A			
Adapter Output: DC5V, 500mA			
WCDMA / GSM Card Slot GSM Card Slot			
12			
DC 3.4 V to 4.2 V (Normal: DC3.7 V)			
Extreme Temp. Tolerance -10℃ to +50℃			
*** Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage. Other functions have been performed according to verification procedure except for Bluetooth and			
ı			

Other functions have been performed according to verification procedure except for Bluetooth and MS function. Card 1 can't transmit with Card 2 simultaneously.

We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

^{***} **Note:** The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band V, only these modes were used for all tests.



WCDMA Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average
	(dBm)	(dBm)	Burst Power (dBm)
GSM 850	30.83	32.25	31.46
PCS 1900	28.07	29.19	28.39
UMTS BAND V	22.14	22.94	22.66

GSM Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average
	(dBm)	(dBm)	Burst Power (dBm)
GSM 850	30.73	31.98	31.31
PCS 1900	27.96	29.09	28.27



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: 2ACRY-3GI47, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

2.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District,

Shenzhen, Guangdong, China

FCC register No.: 259865

2.5 MEASUREMENT INSTRUMENTS

NAME OF			SERIAL	Calibration	Calibration
EQUIPMENT	MANUFACTURER	MODEL	NUMBER	Date	Due.
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	July 25, 2014	July 24, 2015
TEST RECEIVER	R&S	ESCI	100694	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	AGILENT	8960	122500087	Oct.21, 2014	Oct.20, 2015
COMMUNICATION TESTER	R&S	CMU200	122500166	Feb.27,2014	Feb.26,2015
SIGNAL GENERATOR	AGILENT	E4438C	MY44260051	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	8389791009	July 25, 2014	July 24, 2015
CLIMATE CHAMBER	ALBATROSS			July 25, 2014	July 24, 2015
Loop Antenna	A.H.	SAS-562B	SEL0097	July 25, 2014	July 24, 2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	June 6, 2014	June 5, 2015
Substitution Antenna	EMCO	3142C		June 6, 2014	June 5, 2015
Substitution Antenna	EM	EM-AH-10180	69	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	67	Apr.19, 2014	Apr.18, 2015
Horn Antenna	A.H. Systems Inc.	SAS-574		June 6, 2014	June 5, 2015



2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules	
4	Output Dower	Conducted output power	2.1046/22.913(a) (2) / 24.232	
l I	Output Power	Radiated output power	(c)	
2	Peak-to-Average	Dook to Average Betie	24 222(4)	
2	Ratio	Peak-to-Average Ratio	24.232(d)	
		Conducted		
3	Spurious Emission	spurious emission	2.1051 / 22.917 / 24.238	
		Radiated spurious emission		
4	Mains Conducted Em	ission	15.107 / 15.207	
5	Frequency Stability		2.1055/22.355 /24.235	
6	Occupied Bandwidth		2.1049 (h)(i)	
7	Emission Bandwidth		22.917(a)/24.238(a)	
8	Band Edge		22.917(a)/24.238(a)	



3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	PERI	FCC ID: FFDD	EUT
2	Adapter	N/A	DC5V / 500mA	Accessory
3	Battery	N/A	DC3.7V / 1000 mAh	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

^{***}Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.



4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result	
		Conducted			
1	Output Power	Output Power	2.1046/22.913(a) (2) /	Pass	
'	Output I ower	Radiated	24.232 (c)	1 833	
		Output Power			
2	Peak-to-Average	Peak-to-Average	24.232(d)	Pass	
2	Ratio	Ratio	24.232(u)	Fa55	
	Spurious Emission	Conducted	2.1051 / 22.917 / 24.238		
3		Spurious Emission		Pass	
3		Radiated			
		Spurious Emission			
4	4 Mains Conducted Emission 5 Frequency Stability 6 Occupied Bandwidth 7 Emission Bandwidth 8 Band Edge		15.107 / 15.207	Pass	
5			2.1055/22.355/24.235	Pass	
6			2.1049 (h)(i)	Pass	
7			22.917(a)/24.238(a)	Pass	
8			22.917(a)/24.238(a)	Pass	

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band. ***Note: GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.



6. OUTPUT POWER

6.1 Conducted Output Power

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS850, GSM/GPRS1900, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

	Conducted Output Power Limits for GSM85 band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	33 dBm (2W) - 2					
	Conducted Output Power Limits for PCS1900 band					
Mode	Nominal Peak Power	Tolerance(dB)				
GSM	30 dBm (1W)	- 2				
	Conducted Output Power Limits for UMTS band V					
Mode Nominal Peak Power		Tolerance(dB)				
WCDMA	24 dBm (0.25W)	- 2				



GSM 850:

Mode	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
Wode	(MHz)	Power	Power		Power	Factor(dB)	Power(dBm)
	824.2	33	32.09	-0.91	31.25	-9	22.25
GSM850	836.6	33	32.25	-0.75	31.46	-9	22.46
	848.8	33	32.13	-0.87	31.38	-9	22.38
GPRS850	824.2	33	32.04	-0.96	31.32	-9	22.32
	836.6	33	32.11	-0.89	31.29	-9	22.29
(1 Slot)	848.8	33	32.03	-0.97	31.24	-9	22.24
GPRS850	824.2	30	29.44	-0.56	28.36	-6	22.36
(2 Slot)	836.6	30	29.22	-0.78	28.45	-6	22.45
(2 3101)	848.8	30	29.46	-0.54	28.38	-6	22.38
GPRS850	824.2	28.23	27.34	-0.89	26.55	-4.26	22.29
(3 Slot)	836.6	28.23	27.43	-0.8	26.38	-4.26	22.12
(3 3101)	848.8	28.23	27.32	-0.91	26.46	-4.26	22.2
GPRS850	824.2	27	26.35	-0.65	25.39	-3	22.39
(4 Slot)	836.6	27	26.48	-0.52	25.23	-3	22.23
(4 3101)	848.8	27	26.21	-0.79	25.57	-3	22.57

PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.08	-0.92	28.31	-9	19.31
GSM1900	1880	30	29.16	-0.84	28.26	-9	19.26
	1909.8	30	29.19	-0.81	28.39	-9	19.39
CDDC1000	1850.2	30	29.16	-0.84	28.28	-9	19.28
GPRS1900	1880	30	29.07	-0.93	28.24	-9	19.24
(1 Slot)	1909.8	30	29.14	-0.86	28.14	-9	19.14
CDDC1000	1850.2	27	26.33	-0.67	25.37	-6	19.37
GPRS1900	1880	27	26.27	-0.73	25.58	-6	19.58
(2 Slot)	1909.8	27	26.35	-0.65	25.43	-6	19.43
CDD C4000	1850.2	25.23	24.42	-0.81	24.26	-4.26	20
GPRS1900	1880	25.23	24.53	-0.7	24.11	-4.26	19.85
(3 Slot)	1909.8	25.23	24.44	-0.79	24.12	-4.26	19.86
CDDC1000	1850.2	24	23.43	-0.57	22.63	-3	19.63
GPRS1900	1880	24	23.26	-0.74	22.55	-3	19.55
(4 Slot)	1909.8	24	23.32	-0.68	22.52	-3	19.52



UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	826.4	24	22.94	-0.46	22.66
WCDMA 850	836.6	24	22.82	-0.58	22.57
RMC -	846.6	24	22.86	-0.64	22.48
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	826.4	24	22.48	-1.52	22.39
WCDMA 850	836.6	24	22.37	-1.63	22.32
AMR -	846.6	24	22.32	-1.68	22.28
LICDDA	826.4	24	22.47	-1.53	22.26
HSDPA	836.6	24	22.36	-1.64	22.13
Subtest 1	846.6	24	22.31	-1.69	22.18
110004	826.4	24	22.54	-1.46	22.41
HSDPA	836.6	24	22.35	-1.65	22.33
Subtest 2	846.6	24	22.42	-1.58	22.38
11000	826.4	24	22.44	-1.56	22.37
HSDPA	836.6	24	22.36	-1.64	22.32
Subtest 3	846.6	24	22.32	-1.68	22.27
11000	826.4	24	22.55	-1.45	22.42
HSDPA	836.6	24	22.37	-1.63	22.29
Subtest 4	846.6	24	22.43	-1.57	22.38
LIGUEA	826.4	24	22.36	-1.64	22.26
HSUPA	836.6	24	22.27	-1.73	22.08
Subtest 1	846.6	24	22.31	-1.69	22.24
1101104	826.4	24	22.36	-1.64	22.27
HSUPA -	836.6	24	22.23	-1.77	22.11
Subtest 2	846.6	24	22.37	-1.63	22.16
1101124	826.4	24	22.39	-1.61	22.27
HSUPA	836.6	24	22.28	-1.72	22.17
Subtest 3	846.6	24	22.24	-1.76	22.12
LICLIDA	826.4	24	22.43	-1.57	22.33
HSUPA	836.6	24	22.38	-1.62	22.24
Subtest 4	846.6	24	22.32	-1.68	22.16
HCHDA	826.4	24	22.44	-1.56	22.34
HSUPA	836.6	24	22.23	-1.77	22.15
Subtest 5	846.6	24	22.27	-1.73	22.16



According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

<u> </u>			
UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM-1,0)	
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVIS3.5		
Note: CM=1 for $\beta / \beta = 12/15$. $\beta / \beta = 24/15$. For all other combinations of DPDCH. DPCCH.			

HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.



The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi..

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)



6.2.3 MEASUREMENT RESULT

	Radiated Power (ERP) for GSM 850				
		Res	sult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	30.75	Horizontal	Pass	
GSM850	836.6	30.83	Horizontal	Pass	
	848.8	30.66	Horizontal	Pass	

Radiated Power (E.I.R.P) for PCS 1900				
	Result			
Mode	Frequency	Max. Peak	Polarization	Conclusion
		E.I.R.P.(dBm)	Of Max. E.I.R.P.	
	1850.2	27.98	Horizontal	Pass
GSM 1900	1880.0	28.01	Horizontal	Pass
	1909.8	28.07	Horizontal	Pass

	Radiated Power (ERP) for UMTS band V				
			Result		
Mode	Frequency	Max. Peak	Polarization	Conclusion	
		E.I.R.P.(dBm)	Of Max. E.I.R.P.		
DMC	826.4	22.14	Horizontal	Pass	
RMC 12.2kbps	836.6	22.06	Horizontal	Pass	
12.28005	846.6	22.03	Horizontal	Pass	

Note: Above is worst mode data.



6.3. Peak-to-Average Ratio

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.6	848.8
(MHz)	024.2	030.0	040.0
Peak-To-Average Ratio (dB)/GSM	0.84	0.79	0.75

Modes		PCS 1900 (GSM)	
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	0.77	0.90	0.80



Modes	UMTS BAND V		
Channel	4357	4408	4458
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.6	846.6
Peak-To-Average Ratio (dB)	0.28	0.25	0.38



7. SPURIOUS EMISSION

7.1 CONDUCTED SPURIOUS EMISSION

7.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850			
Channel	Frequency (MHz)		
128	824.2		
190	836.6		
251	848.8		

Typical Channels for testing of PCS 1900					
Channel	Frequency (MHz)				
512	1850.2				
661	1880.0				
810	1909.8				

Typical Channels for testing of UMTS band V						
Channel	Frequency (MHz)					
4357	826.4					
4408	836.6					
4458	846.6					



7.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

7.1.3 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.




7.2 Radiated Spurious Emission

7.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS 850, GPRS 1900, HSPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

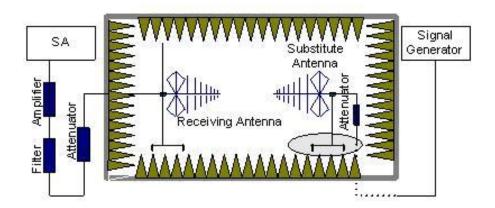

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.



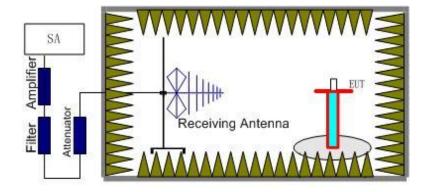

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band V(826.4MHz, 836.6MHz, 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=P_{Mea}+A_{Rpl}

7.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:



7.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results for Channel 251/848.8 MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit(dBm)	Polarity			
1685.23	-36.44	-5.01	-41.45	-13.00	Horizontal			
2456.12	-37.55	-2.18	-39.73	-13.00	Vertical			
3645.78	-37.32	3.46	-33.86	-13.00	Vertical			
4536.58	-36.38	2.79	-33.59	-13.00	Horizontal			

PCS 1900:

	The Worst Test Results for Channel 810/1909.8MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity				
1429.36	-43.32	-3.22	-46.54	-13.00	Vertical				
2563.47	-39.41	-0.24	-39.65	-13.00	Vertical				
3645.26	-37.33	3.98	-33.35	-13.00	Horizontal				
4563.56	-38.32	-2.26	-40.58	-13.00	Vertical				
5689.25	-37.47	-3.12	-40.59	-13.00	Horizontal				

UMTS band V:

The Worst Test Results for Channel 4458/846.6MHz								
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity			
1598.26	-39.72	-2.26	-41.98	-13.00	Vertical			
2365.78	-38.66	-3.12	-41.78	-13.00	Horizontal			
4967.65	-41.42	-1.74	-43.16	-13.00	Horizontal			
6457.86	-38.47	8.74	-29.73	-13.00	Vertical			
7896.56	-41.34	17.89	-23.45	-13.00	Horizontal			

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.



8. MAINS CONDUCTED EMISSION

8.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

8.2 PROVISIONS APPLICABLE


Frequency of Emission (MHz)	Conducted Limit(dBuV)				
, ,	Quasi-Peak	Average			
0.15 – 0.5	66 to 56 *	56 to 46 *			
0.5 – 5	56	46			
5 – 30	60	50			
*Decreases with the logarithm of the frequency.					
*The lower limit shall apply at the transition frequency.					

Note: The GSM850 mode is the worst condition and the test result as following:



8.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L

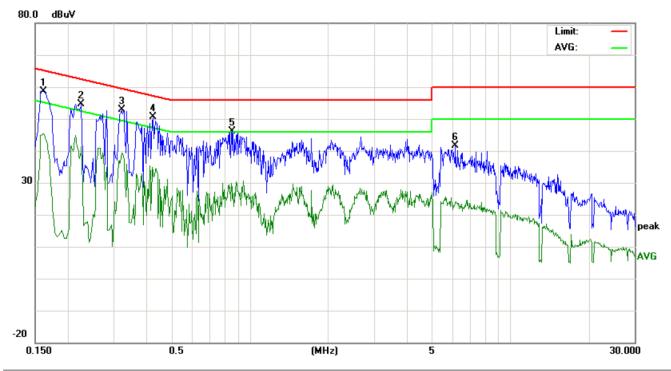

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %


EUT: Mobile Phone

M/N: PERI Mode: Call Note:

No.	Freq.		iding_L (dBuV)		Correct Factor		asuren (dBuV)			nit uV)		rgin dB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QР	AVG		
1	0.1620	48.49		35.30	10.17	58.66		45.47	65.36	55.36	-6.70	-9.89	Р	
2	0.2260	44.37		31.03	10.24	54.61		41.27	62.59	52.59	-7.98	-11.32	Р	
3	0.3220	42.60		29.07	10.30	52.90		39.37	59.65	49.65	-6.75	-10.28	Р	
4	0.4260	40.16		21.87	10.35	50.51		32.22	57.33	47.33	-6.82	-15.11	Р	
5	0.8540	35.76		17.83	10.35	46.11		28.18	56.00	46.00	-9.89	-17.82	Р	
6	6.1660	31.29		13.69	10.29	41.58		23.98	60.00	50.00	-18.42	-26.02	Р	



LINE CONDUCTED EMISSION - N

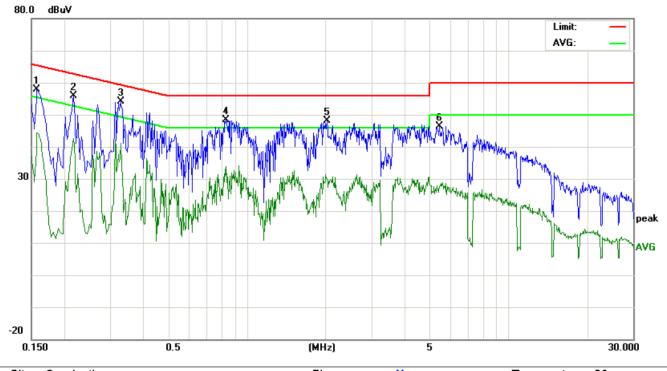

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: Mobile Phone

M/N: PERI Mode: Call Note:

No.	Freq.	1	iding_L (dBuV)		Correct Factor		easuren (dBuV)		I	nit uV)		rgin dB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QР	AVG		
1	0.1580	47.77		34.31	10.17	57.94		44.48	65.56	55.56	-7.62	-11.08	Р	
2	0.2180	45.71		32.48	10.23	55.94		42.71	62.89	52.89	-6.95	-10.18	Р	
3	0.3300	43.94		30.84	10.30	54.24		41.14	59.45	49.45	-5.21	-8.31	Р	
4	0.8340	38.15		23.48	10.32	48.47		33.80	56.00	46.00	-7.53	-12.20	Р	
5	2.0260	37.86		19.80	10.23	48.09		30.03	56.00	46.00	-7.91	-15.97	Р	
6	5.4580	36.25		17.49	10.25	46.50		27.74	60.00	50.00	-13.50	-22.26	Р	

Note: The GSM850 mode is the worst condition.



9. FREQUENCY STABILITY

9.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10 $^{\circ}$ C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10° C increments from - 10° C to + 50° C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10° C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

9.2 PROVISIONS APPLICABLE

9.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.3VDC and 8.5VDC, with a nominal voltage of 7.4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.



9.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

9.3 MEASUREMENT RESULT (WORST)

Frequency Error Against Voltage for GSM850 band							
	GSM						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)					
3.4	17	0.020					
3.7	13	0.016					
4.2	22	0.026					

Frequency Error Against Temperature for GSM850 band						
	GSM					
temperature(℃)	Frequency error(Hz)	Frequency error(ppm)				
-10	27	0.032				
0	26	0.031				
10	22	0.026				
20	29	0.035				
30	24	0.029				
40	21	0.025				
50	24	0.029				
55	26	0.031				

Note: The EUT doesn't work below -10°C



Frequency Error Against Voltage for PCS1900 band							
	GSM						
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)					
3.4	25	0.013					
3.7	21	0.011					
4.2	25	0.013					

Frequency Error Against Voltage for PCS1900 band							
	GSM						
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)					
-10	25	0.013					
0	25	0.013					
10	24	0.013					
20	19	0.010					
30	23	0.012					
40	22	0.012					
50	22	0.012					
55	26	0.014					

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band V			
Voltage(V) Frequency error(Hz) Frequency error(ppm)			
6.3	37	0.044	
7.4	22	0.026	
8.5	24	0.029	

Frequency Error Against Temperature for UMTS band V			
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)	
-10	26	0.031	
0	22	0.026	
10	23	0.028	
20	21	0.025	
30	34	0.041	
40	37	0.044	
50	32	0.038	
55	35	0.042	

Note: The EUT doesn't work below -10°C



10. OCCUPIED BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

10.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM850 band			
	Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	Low Channel	824.2	247.72
	Middle Channel	836.6	245.32
	High Channel	848.8	244.08

Occupied Bandwidth (99%) for PCS1900 band			
	Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
GSM	Low Channel	1850.2	244.08
	Middle Channel	1880.0	243.15
	High Channel	1909.8	245.23

Occupied Bandwidth (99%) for UMTS band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
Low Channel	826.4	4.15	
Middle Channel	836.6	4.17	
High Channel	846.6	4.15	



11. EMISSION BANDWIDTH

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

11.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band			
GSM	Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
	Low Channel	824.2	315.67
	Middle Channel	836.6	310.06
	High Channel	848.8	309.81

Emission Bandwidth (-26dBc) for PCS1900 band			
	Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
GSM	Low Channel	1850.2	310.48
	Middle Channel	1880.0	306.53
	High Channel	1909.8	314.23

Emission Bandwidth (-26dBc) for UMTS band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
Low Channel	826.4	4.67	
Middle Channel	836.6	4.68	
High Channel	846.6	4.64	



12. BAND EDGE

12.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

12.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) and 24.238(a)

12.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges




APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION




CONDUCTED EMISSION IN GSM850 BAND

Conducted Emission Transmitting Mode CH 128 30MHz - 1GHz

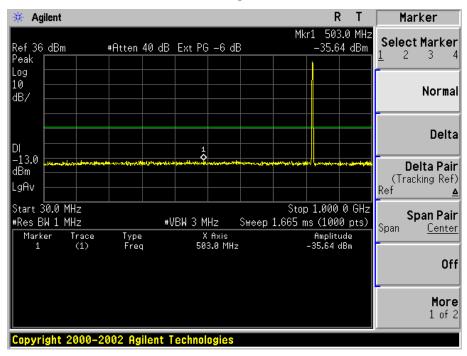


Conducted Emission Transmitting Mode CH 128 1GHz - 9GHz

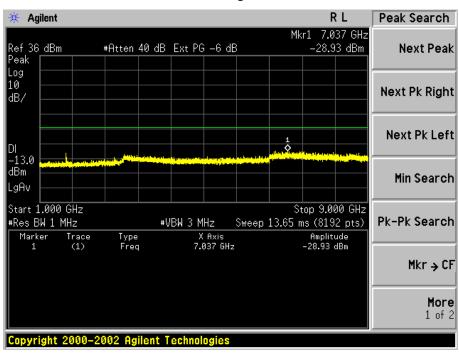




Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

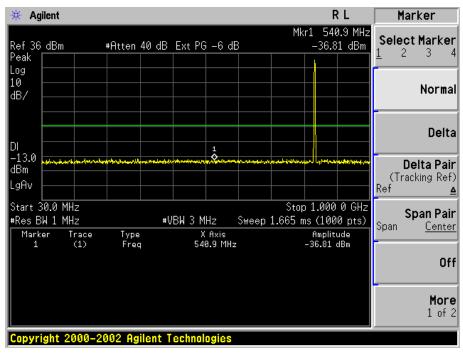


Conducted Emission Transmitting Mode CH 190 1GHz - 9GHz

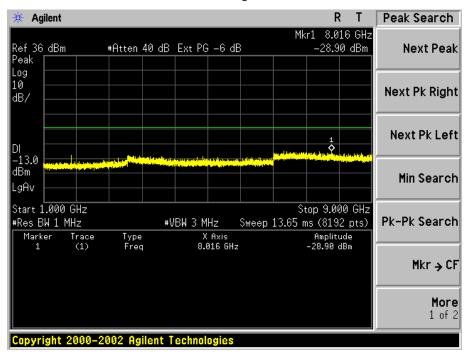




Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

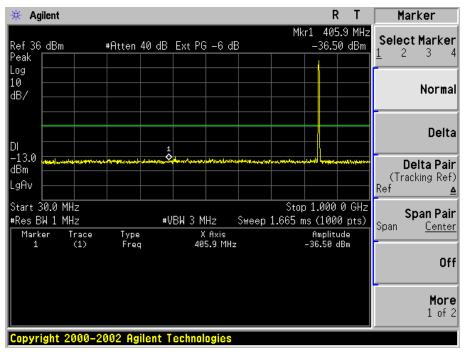


Conducted Emission Transmitting Mode CH 251 1GHz - 9GHz

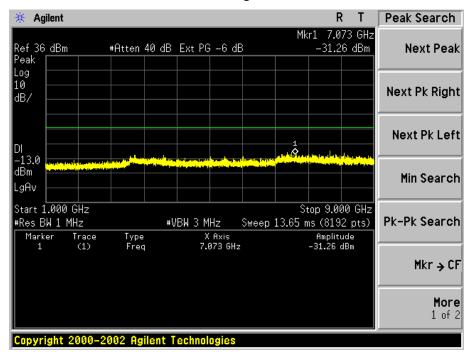




CONDUCTED EMISSION IN PCS1900 BAND

Conducted Emission Transmitting Mode CH 512 30MHz - 1GHz

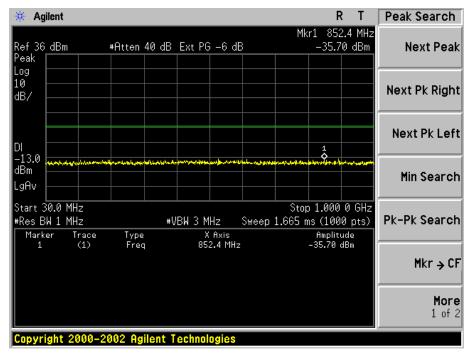


Conducted Emission Transmitting Mode CH 512 1GHz - 7GHz

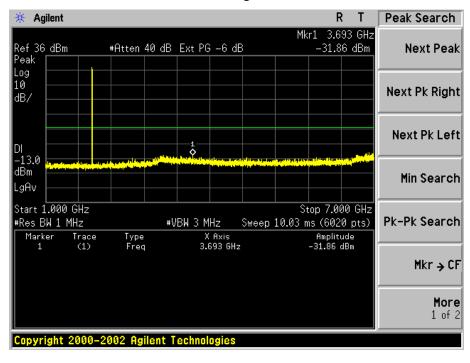




Conducted Emission Transmitting Mode CH 512 7GHz - 13.6GHz

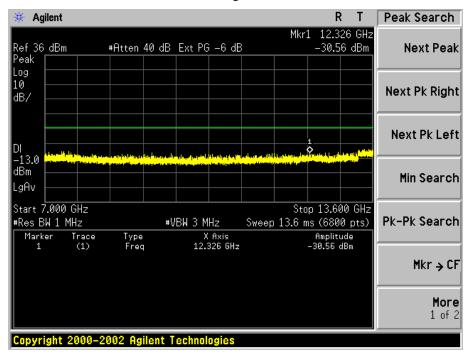


Conducted Emission Transmitting Mode CH 512 13.6GHz – 20GHz

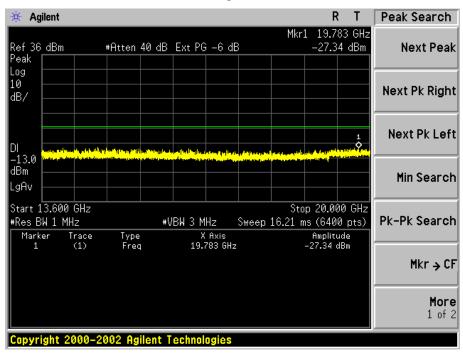




Conducted Emission Transmitting Mode CH 661 30MHz - 1GHz

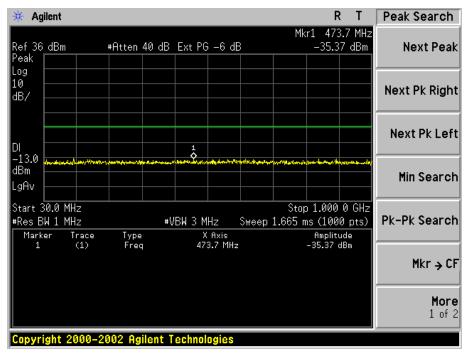


Conducted Emission Transmitting Mode CH 661 1GHz – 7GHz

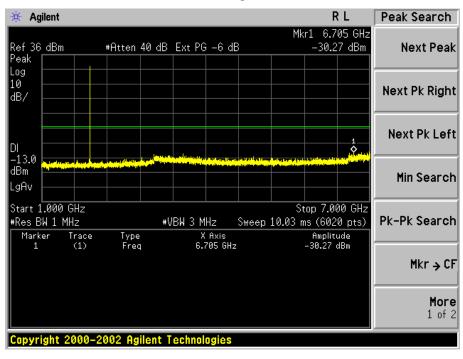




Conducted Emission Transmitting Mode CH 661 7GHz - 13.6GHz

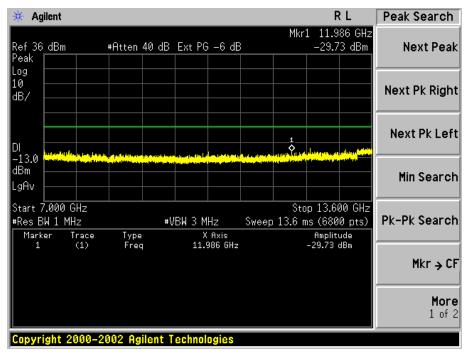


Conducted Emission Transmitting Mode CH 661 13.6GHz – 20GHz

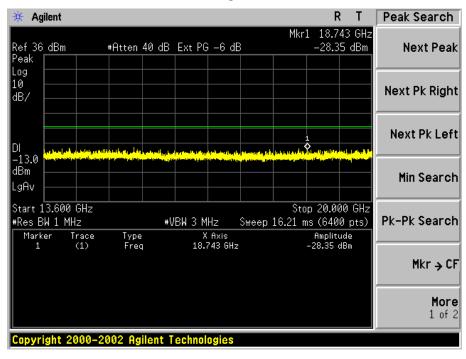




Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

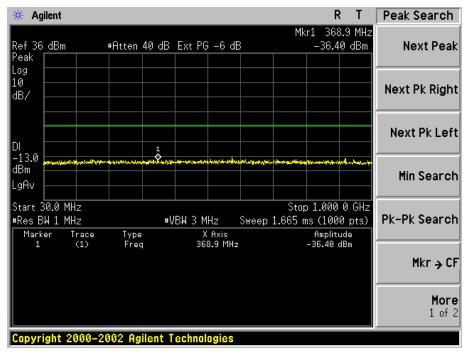


Conducted Emission Transmitting Mode CH 810 1GHz – 7GHz

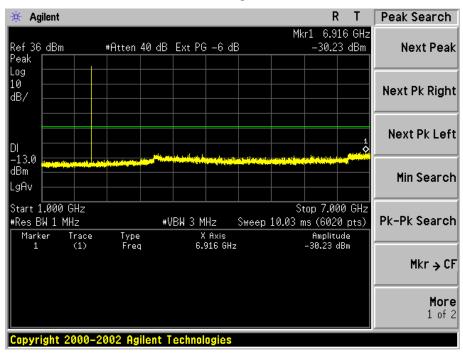




Conducted Emission Transmitting Mode CH 810 7GHz - 13.6GHz

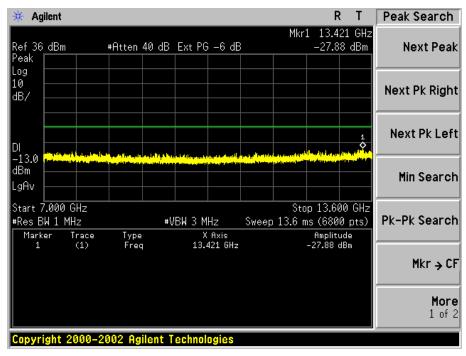


Conducted Emission Transmitting Mode CH 810 13.6GHz – 20GHz

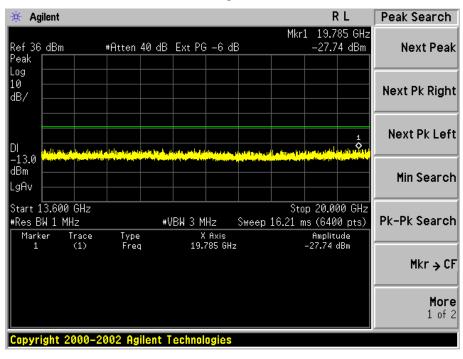




CONDUCTED EMISSION IN UMTS band V

Conducted Emission Transmitting Mode CH 4357 30MHz – 1GHz

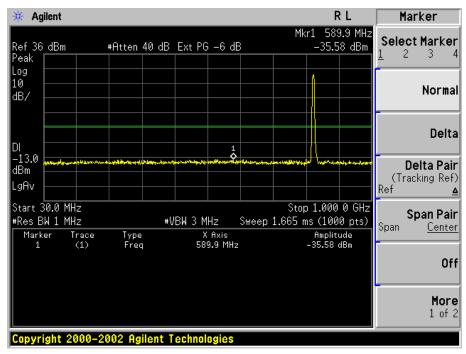


Conducted Emission Transmitting Mode CH 4357 1GHz - 9GHz

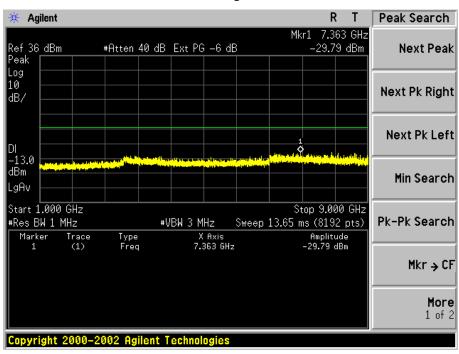




Conducted Emission Transmitting Mode CH 4408 30MHz - 1GHz

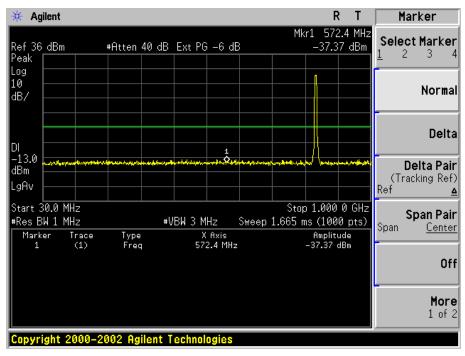


Conducted Emission Transmitting Mode CH 4408 1GHz – 9GHz

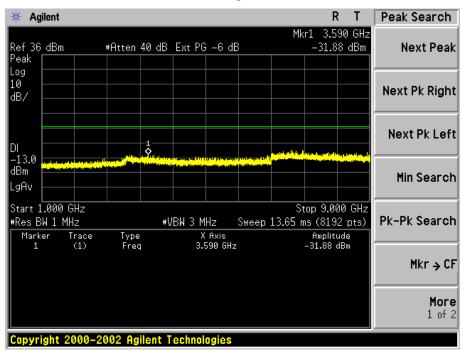




Conducted Emission Transmitting Mode CH 4458 30MHz - 1GHz

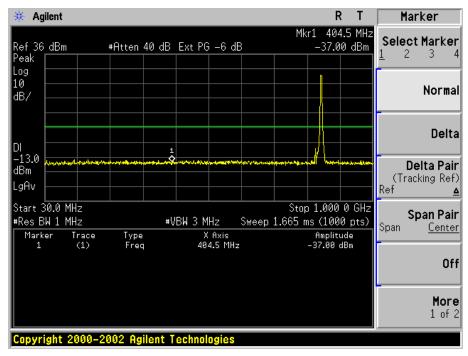

Conducted Emission Transmitting Mode CH 4458 1GHz – 9GHz

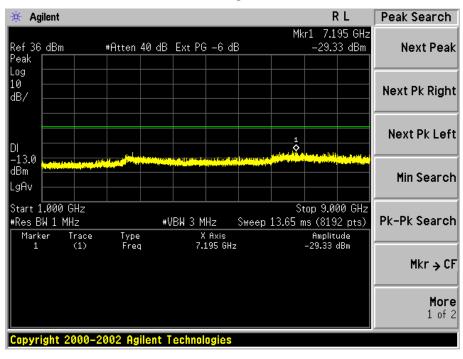


Report No.: 68.960.14.022.01




APPENDIX B TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)



Occupied Bandwidth (99%) GSM 850 BAND CH 128

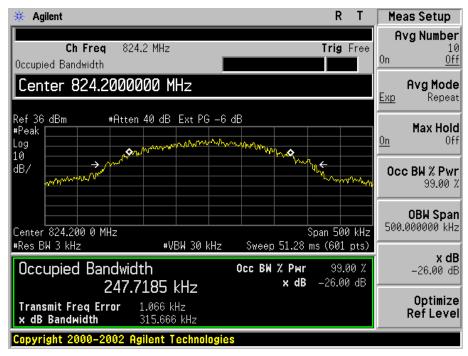


Occupied Bandwidth (99%) GSM 850 BAND CH 190

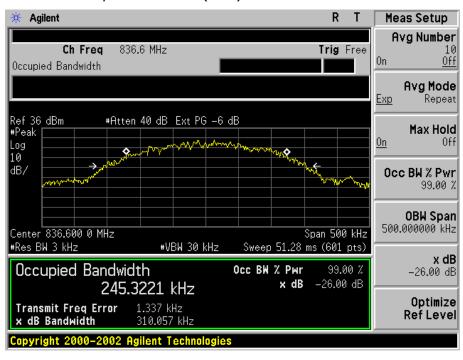




Occupied Bandwidth (99%) GSM 850 BAND CH 251

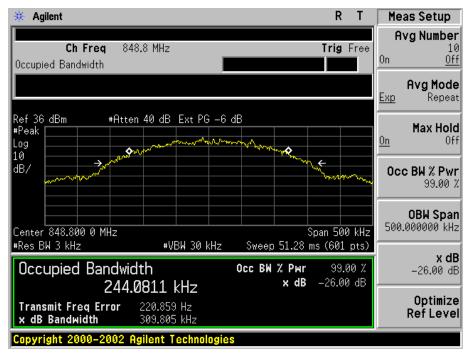


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

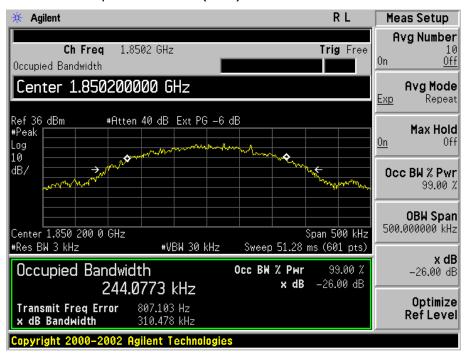




Occupied Bandwidth (99%) PCS 1900 BAND CH 661

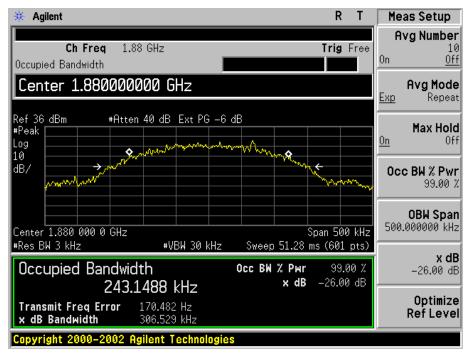


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

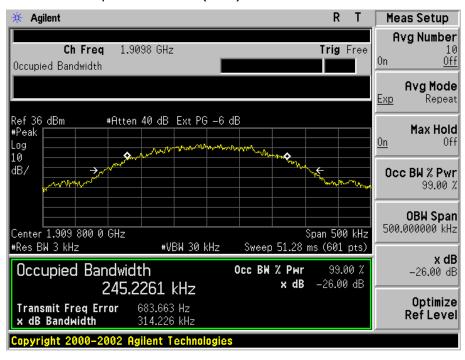




Occupied Bandwidth (99%) UMTS band V CH 4357

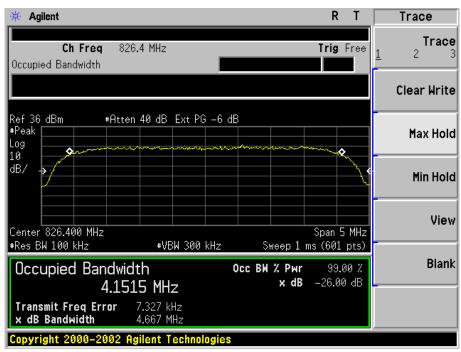


Occupied Bandwidth (99%) UMTS band V CH 4408

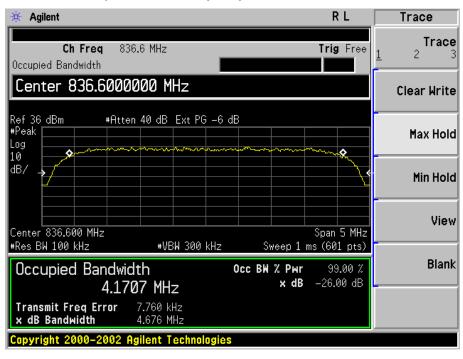

Report No.: 68.960.14.022.01



Occupied Bandwidth (99%) UMTS band V CH 4458

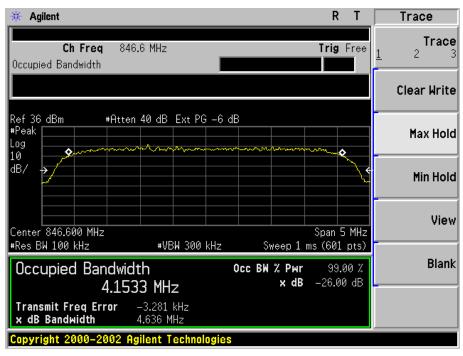


Report No.: 68.960.14.022.01




APPENDIX C TEST PLOTS FOR BAND EDGES



Low Band Edge GSM 850 BAND CH 128

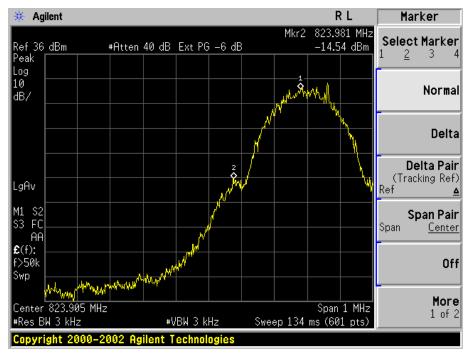


High Band Edge GSM 850 BAND CH 251

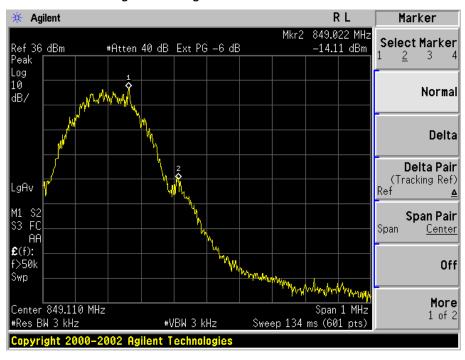




Low Band Edge PCS 1900 BAND CH 512

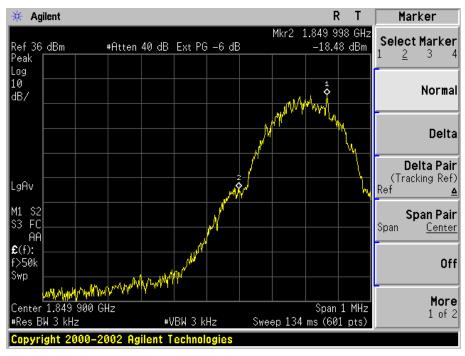


High Band Edge PCS 1900 BAND CH 810

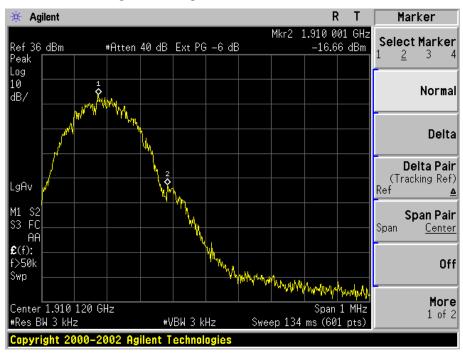



Low Band Edge UMTS BAND V CH 4357

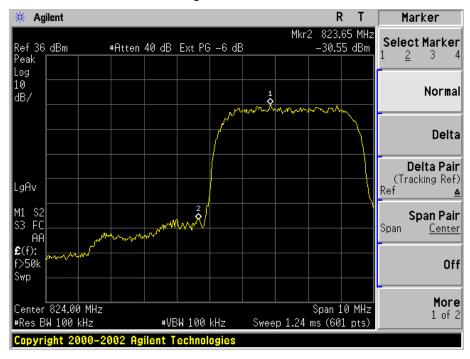

High Band Edge UMTS BAND V CH 4458

