

# FCC Test Report

**Report No.** : 1812C40190212502

---

**Applicant** : Jinan USR IOT Technology Limited

---

**Address** : Floor F1 & Part of Floor F2, Building No.9,  
Diya Shuang Chuang Industrial Zone,  
No.2566, Century Main Road, Gaoxin  
District, Jinan, Shandong, China

---

**Product Name** : 4G Wireless Router

---

**Report Date** : Feb. 25, 2025

---

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	6
1.1. Client Information.....	6
1.2. Description of Device (EUT).....	6
1.3. Auxiliary Equipment Used During Test.....	8
1.4. Operation State.....	8
1.5. Environmental Conditions.....	11
1.6. Test Equipment List.....	12
1.7. Measurement Uncertainty.....	13
1.8. Description of Test Facility.....	13
1.9. Disclaimer.....	14
2. Summary of Test.....	15
2.1. Summary of test result.....	15
3. Conducted Output Power Test.....	17
3.1. Test Standard and Limit.....	17
3.2. Test Setup.....	17
3.3. Test Procedure.....	17
3.4. Test Data.....	17
4. Peak-Average Ratio.....	18
4.1. Test Standard and Limit.....	18
4.2. Test Setup.....	18
4.3. Test Procedure.....	18
4.4. Test Data.....	18
5. Modulation Characteristic.....	19
6. 99% Occupied Bandwidth & 26 dB Bandwidth.....	20
6.1. Test Standard and Limit.....	20
6.2. Test Setup.....	20
6.3. Test Procedure.....	20
6.4. Test Data.....	20
7. Conducted Spurious Emission.....	21
7.1. Test Standard and Limit.....	21
7.2. Test Setup.....	21
7.3. Test Procedure.....	21
7.4. Test Data.....	22
8. Band Edge.....	23
8.1. Test Standard and Limit.....	23
8.2. Test Setup.....	24
8.3. Test Procedure.....	24
8.4. Test Data.....	24



- 9. Radiated Spurious Emission .....25
  - 9.1. Test Standard and Limit.....25
  - 9.2. Test Setup.....25
  - 9.3. Test Procedure.....26
  - 9.4. Test Data.....27
- 10. ERP and EIRP .....57
  - 10.1. Test Standard and Limit .....57
  - 10.2. Test Setup .....57
  - 10.3. Test Procedure .....57
  - 10.4. Test Data .....59
- 11. Frequency stability VS Voltage measurement.....70
  - 11.1. Test Standard and Limit .....70
  - 11.2. Test Setup .....70
  - 11.3. Test Procedure .....70
  - 11.4. Test Data .....70
- 12. Frequency stability VS Temperature measurement .....71
  - 12.1. Test Standard and Limit .....71
  - 12.2. Test Setup .....71
  - 12.3. Test Procedure .....71
  - 12.4. Test Data .....71
- APPENDIX I -- TEST SETUP PHOTOGRAPH.....72
- APPENDIX II -- EXTERNAL PHOTOGRAPH .....72
- APPENDIX III -- INTERNAL PHOTOGRAPH .....72

# TEST REPORT

Applicant : Jinan USR IOT Technology Limited  
Manufacturer : Jinan USR IOT Technology Limited  
Product Name : 4G Wireless Router  
Model No. : USR-G805, USR-G805s-G, USR-G805-ECAUX, USR-G805-ECEUX,  
USR-G805-G, USR-G806s-G, USR-G806s, USR-G807, USR-G807-G,  
USR-G805c, USR-G805c-A, USR-G805c-G, USR-DR185-G, USR-DR185,  
USR-G805h, USR-G805h-G  
Trade Mark : **PUSR**<sup>®</sup>  
Rating(s) : Input: 12V=1A  
  
**Test Standard(s)** : 47 CFR Part 2, 47 CFR Part 22(H), 47 CFR Part 24(E), 47 CFR Part 27(C),  
47 CFR Part 90(S)  
**Test Method(s)** : ANSI C63.26-2015  
KDB 971168 D01 Power Meas License Digital Systems v03r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 22, 47 CFR Part 24, 47 CFR Part 27, 47 CFR Part 90 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt : Dec. 20, 2024  
Date of Test : : Dec. 20, 2024 to Feb. 25, 2024  
Prepared by : :   
: (TuTu Hong)  
Approved & Authorized Signer : :   
: (Kingkong Jin)

### Revision History


Report Version	Description	Issued Date
R00	Original Issue.	Feb. 25, 2025

# 1. General Information

## 1.1. Client Information

Applicant	:	Jinan USR IOT Technology Limited
Address	:	Floor F1 & Part of Floor F2, Building No.9, Diya Shuang Chuang Industrial Zone, No.2566, Century Main Road, Gaoxin District,Jinan, Shandong, China
Manufacturer	:	Jinan USR IOT Technology Limited
Address	:	Floor F1 & Part of Floor F2, Building No.9, Diya Shuang Chuang Industrial Zone, No.2566, Century Main Road, Gaoxin District,Jinan, Shandong, China
Factory	:	Jinan USR IOT Technology Limited
Address	:	Floor F1 & Part of Floor F2, Building No.9, Diya Shuang Chuang Industrial Zone, No.2566, Century Main Road, Gaoxin District,Jinan, Shandong, China

## 1.2. Description of Device (EUT)

Product Name	:	4G Wireless Router
Model No.	:	USR-G805, USR-G805s-G, USR-G805-ECAUX, USR-G805-ECEUX, USR-G805-G, USR-G806s-G, USR-G806s, USR-G807, USR-G807-G, USR-G805c, USR-G805c-A, USR-G805c-G, USR-DR185-G, USR-DR185, USR-G805h, USR-G805h-G (Note: All samples are the same except the model number, so we prepare "USR-G805" for test only.)
Trade Mark	:	
Test Power Supply	:	DC 12V from adapter input AC 120V/60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	Model: TS-A012-120100AF Input: 100-240V~50/60Hz 0.4A Output: 12V=1A Manufacturer: SHENZHEN TRANSIN TECHNOLOGIES CO.,LTD

### RF Specification

Support Band	:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input checked="" type="checkbox"/> FDD Band 7 <input checked="" type="checkbox"/> FDD Band 12 <input checked="" type="checkbox"/> FDD Band 13 <input type="checkbox"/> FDD Band 14 <input type="checkbox"/> FDD Band 17 <input checked="" type="checkbox"/> FDD Band 25 <input checked="" type="checkbox"/> FDD Band 26 <input checked="" type="checkbox"/> TDD Band 38 <input checked="" type="checkbox"/> TDD Band 41 <input checked="" type="checkbox"/> FDD Band 66 <input type="checkbox"/> FDD Band 71
	:	FDD Band 2: 1850.7 MHz – 1909.3 MHz FDD Band 4: 1710.7 MHz – 1754.3 MHz FDD Band 5: 824.7 MHz – 848.3 MHz FDD Band 7: 2502.5 MHz – 2567.5 MHz FDD Band 12: 699.7 MHz – 715.3 MHz FDD Band 13: 779.5 MHz – 784.5 MHz FDD Band 25: 1850.7 MHz – 1914.3 MHz FDD Band 26: 814.7 MHz – 848.3 MHz

		TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2498.5 MHz – 2687.5 MHz FDD Band 66: 1710.7 MHz-1779.3 MHz
Receive Frequency	:	FDD Band 2: 1930.7 MHz – 1989.3 MHz FDD Band 4: 2110.7 MHz – 2154.3 MHz FDD Band 5: 869.7 MHz – 893.3 MHz FDD Band 7: 2622.5 MHz – 2687.5 MHz FDD Band 12: 729.7 MHz – 745.3 MHz FDD Band 13: 748.5 MHz – 753.5 MHz FDD Band 25: 1930.7 MHz – 1994.3 MHz FDD Band 26: 859.7 MHz – 893.3 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2498.5 MHz – 2687.5 MHz FDD Band 66: 2110.7 MHz – 2179.3 MHz
Modulation Type	:	QPSK, 16QAM
Power Class	:	Class 3
Antenna Type	:	Probe Antenna
Antenna Gain(Peak)	:	FDD Band 2: 5.09dBi FDD Band 4: 5.04dBi FDD Band 5: 2.79dBi FDD Band 7: 3.91dBi FDD Band 12: 2.75dBi FDD Band 13: 3.72dBi FDD Band 25: 5.09dBi FDD Band 26: 2.79dBi TDD Band 38: 4.05dBi TDD Band 41: 4.4dBi FDD Band 66: 5.04dBi
<p><b>Remark:</b> 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</p>		

### 1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

### 1.4. Operation State

Test frequency list:

Band	Frequency (MHz)						
FDD Band 2	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	
	Low Range	1.4	18607	1850.7	607	1930.7	
		3	18615	1851.5	615	1931.5	
		5	18625	1852.5	625	1932.5	
		10	18650	1855	650	1935	
		15 [1]	18675	1857.5	675	1937.5	
	20 [1]	18700	1860	700	1940		
	Mid Range	1.4/3/5/10 15 [1]/20 [1]	18900	1880	900	1960	
	High Range	1.4	19193	1909.3	1193	1989.3	
		3	19185	1908.5	1185	1988.5	
		5	19175	1907.5	1175	1987.5	
		10	19150	1905	1150	1985	
		15 [1]	19125	1902.5	1125	1982.5	
	20 [1]	19100	1900	1100	1980		
	FDD Band 4	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
		Low Range	1.4	19957	1710.7	1957	2110.7
			3	19965	1711.5	1965	2111.5
5			19975	1712.5	1975	2112.5	
10			20000	1715	2000	2115	
15			20025	1717.5	2025	2117.5	
20		20050	1720	2050	2120		
Mid Range		1.4/3/5/10/15/20	20175	1732.5	2175	2132.5	
High Range		1.4	20393	1754.3	2393	2154.3	
		3	20385	1753.5	2385	2153.5	
		5	20375	1752.5	2375	2152.5	
		10	20350	1750	2350	2150	
		15	20325	1747.5	2325	2147.5	
20		20300	1745	2300	2145		
FDD Band 5		Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
		Low Range	1.4	20407	824.7	2407	869.7
			3	20415	825.5	2415	870.5
	5		20425	826.5	2425	871.5	
	10 [1]		20450	829	2450	874	
	Mid Range	1.4/3/5 10 [1]	20525	836.5	2525	881.5	
	High Range	1.4	20643	848.3	2643	893.3	
		3	20635	847.5	2635	892.5	
		5	20625	846.5	2625	891.5	
		10 [1]	20600	844	2600	889	



FDD Band 7	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
	Low Range	5		20775	2502.5	2775
10			20800	2505	2800	2625
15			20825	2507.5	2825	2627.5
20 <sup>(1)</sup>			20850	2510	2850	2630
Mid Range	5/10/15		21100	2535	3100	2655
	20 <sup>(1)</sup>					
High Range	5		21425	2567.5	3425	2687.5
	10		21400	2565	3400	2685
	15		21375	2562.5	3375	2682.5
	20 <sup>(1)</sup>		21350	2560	3350	2680

FDD Band 12	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
	Low Range	1.4		23017	699.7	5017
3			23025	700.5	5025	730.5
5 <sup>(1)</sup>			23035	701.5	5035	731.5
10 <sup>(1)</sup>			23060	704	5060	734
Mid Range	1.4/3		23095	707.5	5095	737.5
	5 <sup>(1)</sup> /10 <sup>(1)</sup>					
High Range	1.4		23173	715.3	5173	745.3
	3		23165	714.5	5165	744.5
	5 <sup>(1)</sup>		23155	713.5	5155	743.5
	10 <sup>(1)</sup>		23130	711	5130	741

FDD Band 13	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
	Low Range	5 <sup>(1)</sup>		23205	779.5	5205
10 <sup>(1)</sup>			23230	782	5230	751
Mid Range	5 <sup>(1)</sup> /10 <sup>(1)</sup>		23230	782	5230	751
High Range	5 <sup>(1)</sup>		23255	784.5	5255	753.5
	10 <sup>(1)</sup>		23230	782	5230	751

FDD Band 25	Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]
	Low Range	1.4		26047	1850.7	8047
3			26055	1851.5	8055	1931.5
5			26065	1852.5	8065	1932.5
10			26090	1855	8090	1935
15 <sup>(1)</sup>			26115	1857.5	8115	1937.5
20 <sup>(1)</sup>			26140	1860	8140	1940
Mid Range	1.4/3/5/10		26365	1882.5	8365	1962.5
High Range	15 <sup>(1)</sup> /20 <sup>(1)</sup>					
	1.4		26683	1914.3	8683	1994.3
	3		26675	1913.5	8675	1993.5
	5		26665	1912.5	8665	1992.5
	10		26640	1910	8640	1990
	15 <sup>(1)</sup>		26615	1907.5	8615	1987.5
20 <sup>(1)</sup>		26590	1905	8590	1985	

FDD Band 26 (814-824MHz)	<b>Test Frequency ID</b>	<b>Bandwidth [MHz]</b>	<b>NUL</b>	<b>Frequency of Uplink [MHz]</b>	<b>N<sub>DL</sub></b>	<b>Frequency of Downlink [MHz]</b>
	Low Range	1.4	26697	814.7	8697	859.7
		3	26705	815.5	8705	860.5
		5	26715	816.5	8715	861.5
	Mid Range	1.4/3/5/10	26740	819	8740	864
	High Range	1.4	26783	823.3	8783	868.3
		3	26775	822.5	8775	867.5
5		26765	821.5	8765	866.5	
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36/101 [27] Clause 7.3) is allowed.						
FDD Band 26 (824-849MHz)	<b>Test Frequency ID</b>	<b>Bandwidth [MHz]</b>	<b>N<sub>UL</sub></b>	<b>Frequency of Uplink [MHz]</b>	<b>N<sub>DL</sub></b>	<b>Frequency of Downlink [MHz]</b>
	Low Range	1.4	26797	824.7	8797	869.7
		3	26805	825.5	8805	870.5
		5	26815	826.5	8815	871.5
		10 <sup>[1]</sup>	26840	829	8840	874
		15 <sup>[1]</sup>	26865	831.5	8865	876.5
	Mid Range	1.4/3/5/10 <sup>[1]</sup> 15 <sup>[1]</sup>	26915	836.5	8915	881.5
	High Range	1.4	27033	848.3	9033	893.3
		3	27025	847.5	9025	892.5
		5	27015	846.5	9015	891.5
		10 <sup>[1]</sup>	26990	844	8990	889
		15 <sup>[1]</sup>	26965	841.5	8965	886.5
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
TDD Band 38	<b>Test Frequency ID</b>	<b>Bandwidth [MHz]</b>	<b>EARFCN</b>	<b>Frequency (UL and DL) [MHz]</b>		
	Low Range	5	37775	2572.5		
		10	37800	2575		
		15	37825	2577.5		
		20	37850	2580		
	Mid Range	5/10/15/20	38000	2595		
	High Range	5	38225	2617.5		
		10	38200	2615		
		15	38175	2612.5		
		20	38150	2610		
TDD Band 41	<b>Test Frequency ID</b>	<b>Bandwidth [MHz]</b>	<b>EARFCN</b>	<b>Frequency (UL and DL) [MHz]</b>		
	Low Range	5	39675	2498.5		
		10	39700	2501		
		15	39725	2503.5		
		20	39750	2506		
	Mid Range	5/10/15/20	40620	2593		
	High Range	5	41565	2687.5		
		10	41540	2685		
		15	41515	2682.5		
		20	41490	2680		



Test Frequency ID	Bandwidth [MHz]	NuL	Frequency of Uplink [MHz]	NdL	Frequency of Downlink [MHz]
Low Range	1.4	131979	1710.7	66443	2110.7
	3	131987	1711.5	66451	2111.5
	5	131997	1712.5	66461	2112.5
	10	132022	1715	66486	2115
	15	132047	1717.5	66511	2117.5
20	132072	1720	66536	2120	
Mid Range	1.4/3/5/10/15/20	132197	1732.5	66661	2132.5
High Range	1.4	132415	1754.3	66879	2154.3
	3	132407	1753.5	66871	2153.5
	5	132397	1752.5	66861	2152.5
	10	132372	1750	66836	2150
	15	132347	1747.5	66811	2147.5
20	132322	1745	66786	2145	
Paired High Range2	1.4	132665	1779.3	67129	2179.3
	3	132657	1778.5	67121	2178.5
	5	132647	1777.5	67111	2177.5
	10	132622	1775	67086	2175
	15	132597	1772.5	67061	2172.5
20	132572	1770	67036	2170	

**1.5. Environmental Conditions**

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

### 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	Jan. 17, 2024	1 Year
					Jan. 13, 2025	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
3.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
5.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
					Jan. 14, 2025	1 Year
6.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
7.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Sept. 09, 2024	1 Year
8.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Feb. 04, 2024	1 Year
				MY47420822	Feb. 21, 2025	1 Year
9.	DC Power Supply	LW	TPR-6420D	374470	Oct. 17, 2024	1 Year
10.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 14, 2024	1 Year
11.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	167336	Feb. 04, 2024	1 Year
					Feb. 21, 2025	1 Year
12.	High-Pass Filter	CDKMV	ZHPF-BM110 0-4000-0730	B2015094550	Oct. 17, 2024	1 Year
13.	High-Pass Filter	CDKMV	ZHPF-M3.5-18 G-3834	1307006523	Oct. 17, 2024	1 Year
14.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 16, 2022	3 Year
15.	Double Ridged Horn Antenna	Chengyi Electronics Co., Ltd.	GTH-0118	351600	Nov. 01, 2024	2 Year

### 1.7. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.70dB; Vertical: 4.42dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

### 1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



## 2. Summary of Test

### 2.1. Summary of test result

Description of Test	FCC Rules	Requirements	Result
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h) Part 90.635	N/A	Compliance
Peak-Average Ratio	Part 22.913 Part 24.232 Part 27.50	≤13dB	Compliance
Modulation Characteristics	§ 2.1047	Digital modulation	N/A
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049	OBW: No limit EBW: No limit	Compliance
Conducted Spurious Emission	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691	≤ -13dBm(LTE Band5,26(824-849MHz)) ≤ -13dBm(LTE Band2,25) Refer to clause 7.1 for LTE Band13 ≤ -13dBm(LTE Band12) ≤ -13dBm(LTE Band4,66) ≤ -25dBm(LTE Band7,38,41) ≤ -13dBm(LTE Band26(814-824MHz))	Compliance
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691	≤ -13dBm (LTE Band5, 26(824-849MHz)) ≤ -13dBm (LTE Band2,25) Refer to clause 8.1 for LTE Band13 ≤ -13dBm (LTE Band12) ≤ -13dBm (LTE Band4,66) Refer to clause 8.1 for LTE Band7,38, 41) Refer to clause 8.1 for LTE Band26 (814-824MHz))	Compliance
Frequency stability VS. temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54 Part 90.213	≤ ±2.5ppm	Compliance



Frequency stability VS. voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54 Part 90.213	$\leq \pm 2.5\text{ppm}$	Compliance
ERP and EIRP	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h) Part 90.635	ERP $\leq$ 7W(LTE Band 5,26(824-849MHz)) EIRP $\leq$ 2W(LTE Band 2,25) ERP $\leq$ 3W(LTE Band 13) ERP $\leq$ 3W(LTE Band 12) EIRP $\leq$ 1W(LTE Band 4, 66) EIRP $\leq$ 2W(LTE Band 7,38,41) ERP $\leq$ 100W(LTE Band 26(814-824MHz))	Compliance
Radiated Spurious Emission	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691	$\leq -13\text{dBm}$ (LTE Band5,26(824-849MHz)) $\leq -13\text{dBm}$ (LTE Band2,25) Refer to clause 9.1 for LTE Band13 $\leq -13\text{dBm}$ (LTE Band12) $\leq -13\text{dBm}$ (LTE Band4,66) $\leq -25\text{dBm}$ (LTE Band7,38,41) $\leq -13\text{dBm}$ (LTE Band26(814-824MHz))	Compliance

Note:

1. "N/A" is an abbreviation for Not Applicable.
2. Testing was performed by configuring EUT to maximum output power status, the declared output power class for different






### 3. Conducted Output Power Test

#### 3.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h) Part 90.635
Limit:	N/A

#### 3.2. Test Setup

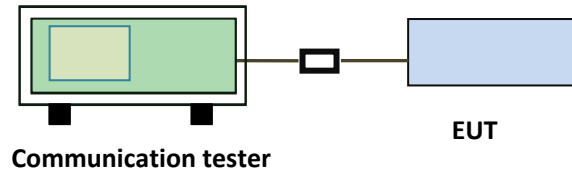

#### 3.3. Test Procedure

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

#### 3.4. Test Data

Pass


Please refer to Appendix A of the Appendix Test Data.

## 4. Peak-Average Ratio

### 4.1. Test Standard and Limit

Applicable Standard:	Part 22.913 Part 24.232 Part 27.50
Limit:	≤13dB

### 4.2. Test Setup

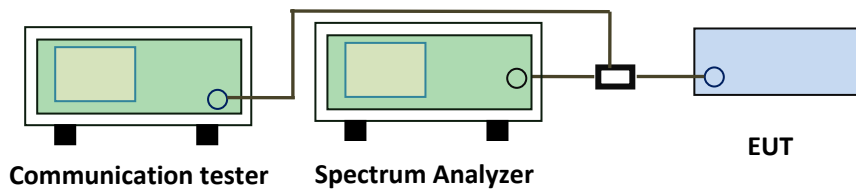

### 4.3. Test Procedure

#### According with KDB 971168 D01 Section 5.7:

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed.
  - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
  - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

### 4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.

## 5. Modulation Characteristic

According to FCC § 2.1047, Part 22H, Part 24E, Part 27C, Part 90S there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.




## 6. 99% Occupied Bandwidth & 26 dB Bandwidth

### 6.1. Test Standard and Limit

Applicable Standard:	Part 2.1049
Limit:	N/A

### 6.2. Test Setup

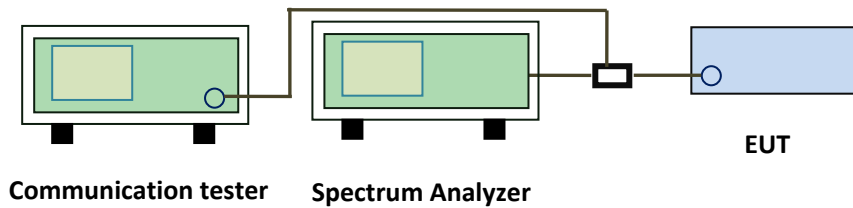

### 6.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:  
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 \* RBW, Detector=Peak,  
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

### 6.4. Test Data

Pass


Please refer to Appendix C of the Appendix Test Data.

## 7. Conducted Spurious Emission

### 7.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691
Limit:	$\leq -13\text{dBm}$ (LTE Band 5,26(824-849MHz)) $\leq -13\text{dBm}$ (LTE Band 2,25) $\leq -13\text{dBm}$ (LTE Band 12,17,71) $\leq -13\text{dBm}$ (LTE Band 4,66) $\leq -25\text{dBm}$ (LTE Band 7,38,41) $\leq -13\text{dBm}$ (LTE Band 26(814-824MHz))  For LTE Band 13: (1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; (2) For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

### 7.2. Test Setup

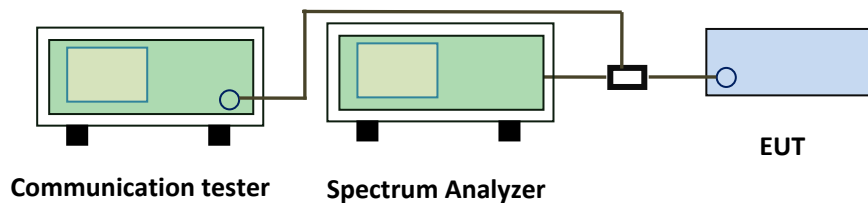

### 7.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:  
 Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto  
 Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto  
 Scan frequency range up to 10<sup>th</sup> harmonic.
4. Record the test plot.

#### 7.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




## 8. Band Edge

### 8.1. Test Standard and Limit

Applicable Standard:	<p>Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691</p>
Limit:	<p>≤ -13dBm (LTE Band 5,26(824-849MHz)) ≤ -13dBm (LTE Band 2,25) ≤ -13dBm (LTE Band 12,17,71) ≤ -13dBm (LTE Band 4,66)</p> <p>For LTE Band 13: (1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB; (2) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.</p> <p>For LTE Band 26(814-824MHz): (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log<sub>10</sub>(f/6.1) decibels or 50 + 10 Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.</p> <p>For LTE Band 7, 38, 41: For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all</p>

frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 8.2. Test Setup

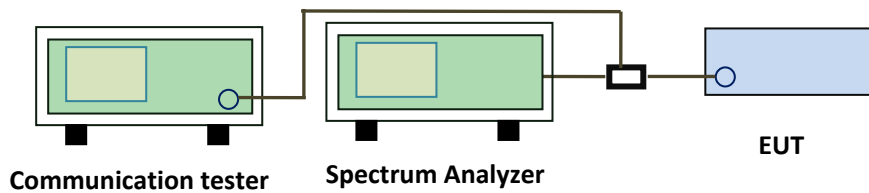

### 8.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:  
RBW=3KHz, VBW = 10KHz, Sweep time= Auto
5. Record the test plot.

### 8.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




## 9. Radiated Spurious Emission

### 9.1. Test Standard and Limit

Applicable Standard:	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691
Limit:	$\leq -13\text{dBm}$ (LTE Band 5,26(824-849MHz)) $\leq -13\text{dBm}$ (LTE Band 2,25) $\leq -13\text{dBm}$ (LTE Band 12, 17, 71) $\leq -13\text{dBm}$ (LTE Band 4,66) $\leq -25\text{dBm}$ (LTE Band 7, 38, 41) $\leq -13\text{dBm}$ (LTE Band 26(814-824MHz))  For LTE Band 13: (1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; (2) For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

### 9.2. Test Setup

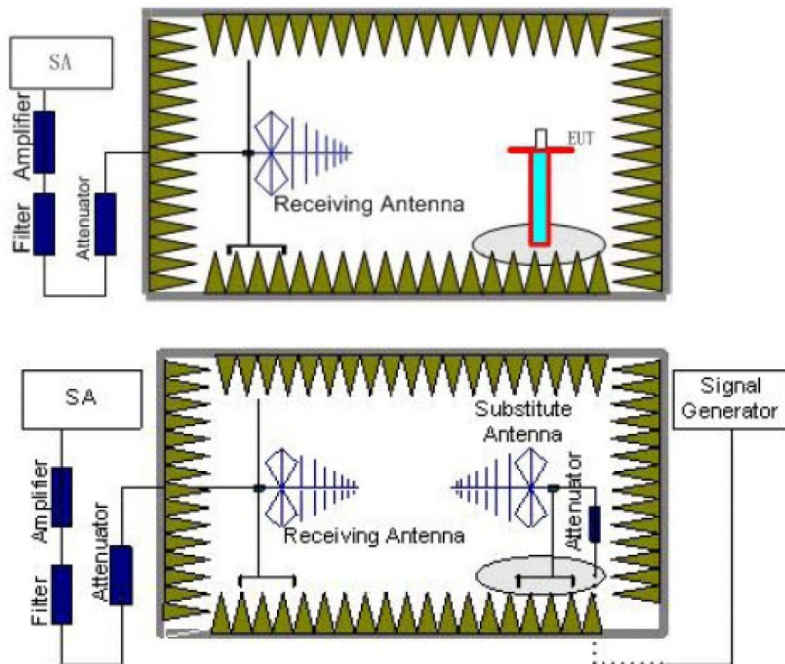

### 9.3. Test Procedure

1. Place the EUT in the center of the turntable.
  - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
  - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:  
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto  
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
  - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
  - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
  - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:  
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$



where

Pe = equivalent emission power in dBm

Ps = source (signal generator) power in dBm

*NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.*

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

### 9.4. Test Data

Pass

Please to see the following pages

All mode are tested, and the report only shows the worst mode of QPSK.

Test frequency through the range from 30MHz to the 10th harmonic, all noise floor will not be recorded in the report.

LTE Band 2								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3701.40	Vertical	-49.74	13.21	-36.53	-13.00	PASS
		5552.10	V	-56.98	16.61	-40.37		
		7402.80	V	-59.15	18.03	-41.12		
		3701.40	Horizontal	-50.07	13.21	-36.86	-13.00	
		5552.10	H	-57.29	16.61	-40.68		
		7402.80	H	-59.41	18.03	-41.38		
	Mid	3760.00	Vertical	-48.64	12.36	-36.28	-13.00	PASS
		5640.00	V	-57.17	17.03	-40.14		
		7520.00	V	-58.75	17.85	-40.90		
		3760.00	Horizontal	-48.92	12.36	-36.56	-13.00	
		5640.00	H	-57.47	17.03	-40.44		
		7520.00	H	-59.00	17.85	-41.15		
	High	3818.60	Vertical	-48.64	12.78	-35.86	-13.00	PASS
		5727.90	V	-57.62	17.86	-39.76		
		7637.20	V	-59.10	18.56	-40.54		
3818.60		Horizontal	-49.19	12.78	-36.41	-13.00		
5727.90		H	-58.16	17.86	-40.30			

		7637.20	H	-59.59	18.56	-41.03		
3MHz	Low	3703.00	Vertical	-48.37	12.78	-35.59	-13.00	PASS
		5554.50	V	-55.68	16.69	-38.99		
		7406.00	V	-58.16	18.18	-39.98		
		3703.00	Horizontal	-48.53	12.78	-35.75	-13.00	PASS
		5554.50	H	-56.20	16.69	-39.51		
		7406.00	H	-58.80	18.18	-40.62		
	Mid	3760.00	Vertical	-47.63	12.79	-34.84	-13.00	PASS
		5640.00	V	-55.00	16.72	-38.28		
		7520.00	V	-57.43	18.22	-39.21		
		3760.00	Horizontal	-47.91	12.79	-35.12	-13.00	PASS
		5640.00	H	-55.79	16.72	-39.07		
		7520.00	H	-58.34	18.22	-40.12		
	High	3817.00	Vertical	-47.08	12.93	-34.15	-13.00	PASS
		5725.50	V	-54.79	17.01	-37.78		
		7634.00	V	-57.29	18.41	-38.88		
		3817.00	Horizontal	-47.39	12.93	-34.46	-13.00	PASS
		5725.50	H	-55.58	17.01	-38.57		
		7634.00	H	-57.65	18.41	-39.24		
5MHz	Low	3705.00	Vertical	-46.66	13.25	-33.41	-13.00	PASS
		5557.50	V	-53.25	16.59	-36.66		
		7410.00	V	-56.16	18.12	-38.04		
		3705.00	Horizontal	-48.27	13.25	-35.02	-13.00	PASS
		5557.50	H	-56.16	16.59	-39.57		
		7410.00	H	-57.85	18.12	-39.73		
	Mid	3760.00	Vertical	-46.08	12.31	-33.77	-13.00	PASS
		5640.00	V	-54.47	17.14	-37.33		
		7520.00	V	-56.58	17.96	-38.62		
		3760.00	Horizontal	-48.16	12.31	-35.85	-13.00	PASS
		5640.00	H	-57.28	17.14	-40.14		
		7520.00	H	-58.12	17.96	-40.16		
	High	3815.00	Vertical	-47.45	12.77	-34.68	-13.00	PASS
		5722.50	V	-55.80	17.82	-37.98		
		7630.00	V	-57.77	18.59	-39.18		
		3815.00	Horizontal	-49.27	12.77	-36.50	-13.00	PASS
		5722.50	H	-58.56	17.82	-40.74		
		7630.00	H	-59.21	18.59	-40.62		

10MHz	Low	3710.00	Vertical	-46.66	12.59	-34.07	-13.00	PASS
		5565.00	V	-54.26	16.61	-37.65		
		7420.00	V	-57.14	18.35	-38.79		
		3710.00	Horizontal	-50.01	12.59	-37.42	-13.00	PASS
		5565.00	H	-57.98	16.61	-41.37		
		7420.00	H	-59.70	18.35	-41.35		
	Mid	3760.00	Vertical	-47.50	12.71	-34.79	-13.00	PASS
		5640.00	V	-54.90	16.65	-38.25		
		7520.00	V	-57.78	18.27	-39.51		
		3760.00	Horizontal	-50.60	12.71	-37.89	-13.00	PASS
		5640.00	H	-58.72	16.65	-42.07		
		7520.00	H	-60.18	18.27	-41.91		
	High	3810.00	Vertical	-47.97	12.91	-35.06	-13.00	PASS
		5715.00	V	-56.08	17.23	-38.85		
		7620.00	V	-58.79	18.59	-40.20		
		3810.00	Horizontal	-50.23	12.91	-37.32	-13.00	PASS
		5715.00	H	-58.97	17.23	-41.74		
		7620.00	H	-60.06	18.59	-41.47		
15MHz	Low	3715.00	Vertical	-47.78	13.21	-34.57	-13.00	PASS
		5572.50	V	-55.06	16.65	-38.41		
		7430.00	V	-58.02	18.29	-39.73		
		3715.00	Horizontal	-50.99	13.21	-37.78	-13.00	PASS
		5572.50	H	-58.82	16.65	-42.17		
		7430.00	H	-60.13	18.29	-41.84		
	Mid	3760.00	Vertical	-47.31	12.39	-34.92	-13.00	PASS
		5640.00	V	-55.92	17.18	-38.74		
		7520.00	V	-58.03	17.99	-40.04		
		3760.00	Horizontal	-49.73	12.39	-37.34	-13.00	PASS
		5640.00	H	-58.89	17.18	-41.71		
		7520.00	H	-59.57	17.99	-41.58		
	High	3805.00	Vertical	-47.42	12.86	-34.56	-13.00	PASS
		5707.50	V	-55.96	17.89	-38.07		
		7610.00	V	-58.06	18.69	-39.37		
		3805.00	Horizontal	-50.77	12.86	-37.91	-13.00	PASS
		5707.50	H	-60.53	17.89	-42.64		
		7610.00	H	-61.22	18.69	-42.53		
20MHz	Low	3720.00	Vertical	-47.70	12.57	-35.13	-13.00	PASS

		5580.00	V	-55.31	16.59	-38.72	-13.00	PASS
		7440.00	V	-58.53	18.67	-39.86		
		3720.00	Horizontal	-50.92	12.57	-38.35		
		5580.00	H	-59.65	16.59	-43.06		
		7440.00	H	-61.55	18.67	-42.88		
		3760.00	Vertical	-48.22	12.76	-35.46		
	Mid	5640.00	V	-55.72	16.69	-39.03	-13.00	PASS
		7520.00	V	-58.53	18.38	-40.15		
		3760.00	Horizontal	-51.40	12.76	-38.64		
		5640.00	H	-59.99	16.69	-43.30		
		7520.00	H	-61.48	18.38	-43.10		
		3800.00	Vertical	-48.02	12.97	-35.05		
	High	5700.00	V	-55.66	17.19	-38.47	-13.00	PASS
		7600.00	V	-58.03	18.28	-39.75		
		3800.00	Horizontal	-51.92	12.97	-38.95		
		5700.00	H	-60.78	17.19	-43.59		
		7600.00	H	-61.63	18.28	-43.35		

LTE Band 4								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3421.40	Vertical	-46.71	12.89	-33.82	-13.00	PASS
		5132.10	V	-54.94	15.86	-39.08		
		6842.80	V	-57.97	18.92	-39.05		
		3421.40	Horizontal	-47.80	12.89	-34.91		
		5132.10	H	-55.96	15.86	-40.10		
		6842.80	H	-58.84	18.92	-39.92		
	Mid	3465.00	Vertical	-45.49	12.49	-33.00	-13.00	PASS
		5197.50	V	-54.02	15.71	-38.31		
		6930.00	V	-56.59	18.26	-38.33		
		3465.00	Horizontal	-46.40	12.49	-33.91		
		5197.50	H	-55.00	15.71	-39.29		
		6930.00	H	-57.41	18.26	-39.15		
	High	3508.60	Vertical	-44.62	13.01	-31.61	-13.00	PASS
		5262.90	V	-52.93	15.89	-37.04		
		7017.20	V	-55.80	18.67	-37.13		



		3508.60	Horizontal	-45.78	13.01	-32.77		
		5262.90	H	-54.09	15.89	-38.20	-13.00	PASS
		7017.20	H	-56.79	18.67	-38.12		
3MHz	Low	3423.00	Vertical	-46.09	12.74	-33.35		
		5134.50	V	-54.27	15.68	-38.59	-13.00	PASS
		6846.00	V	-57.26	18.59	-38.67		
		3423.00	Horizontal	-46.89	12.74	-34.15		
		5134.50	H	-56.07	15.68	-40.39	-13.00	PASS
		6846.00	H	-58.38	18.59	-39.79		
	Mid	3465.00	Vertical	-47.66	12.49	-35.17		
		5197.50	V	-56.30	15.89	-40.41	-13.00	PASS
		6930.00	V	-58.74	18.66	-40.08		
		3465.00	Horizontal	-50.13	12.49	-37.64		
		5197.50	H	-58.74	15.89	-42.85	-13.00	PASS
		6930.00	H	-61.31	18.66	-42.65		
	High	3507.00	Vertical	-49.83	13.44	-36.39		
		5260.50	V	-57.41	15.89	-41.52	-13.00	PASS
		7014.00	V	-59.53	18.39	-41.14		
		3507.00	Horizontal	-52.77	13.44	-39.33		
		5260.50	H	-60.65	15.89	-44.76	-13.00	PASS
		7014.00	H	-62.43	18.39	-44.04		
5MHz	Low	3425.00	Vertical	-47.02	12.87	-34.15		
		5137.50	V	-55.73	15.85	-39.88	-13.00	PASS
		6850.00	V	-57.84	18.93	-38.91		
		3425.00	Horizontal	-51.31	12.87	-38.44		
		5137.50	H	-61.45	15.85	-45.60	-13.00	PASS
		6850.00	H	-62.26	18.93	-43.33		
	Mid	3465.00	Vertical	-47.29	12.47	-34.82		
		5197.50	V	-54.95	15.7	-39.25	-13.00	PASS
		6930.00	V	-57.79	18.29	-39.50		
		3465.00	Horizontal	-51.70	12.47	-39.23		
		5197.50	H	-60.66	15.7	-44.96	-13.00	PASS
		6930.00	H	-61.41	18.29	-43.12		
	High	3505.00	Vertical	-47.14	13.29	-33.85		
		5257.50	V	-55.99	15.86	-40.13	-13.00	PASS
		7010.00	V	-57.29	18.63	-38.66		
		3505.00	Horizontal	-51.89	13.29	-38.60	-13.00	PASS

		5257.50	H	-60.23	15.86	-44.37		
		7010.00	H	-61.25	18.63	-42.62		
10MHz	Low	3430.00	Vertical	-44.86	12.72	-32.14	-13.00	PASS
		5145.00	V	-56.78	15.61	-41.17		
		6860.00	V	-56.64	18.62	-38.02		
		3430.00	Horizontal	-51.58	12.72	-38.86		
		5145.00	H	-60.22	15.61	-44.61		
		6860.00	H	-61.45	18.62	-42.83		
	Mid	3465.00	Vertical	-44.74	12.41	-32.33	-13.00	PASS
		5197.50	V	-57.27	15.92	-41.35		
		6930.00	V	-57.18	18.63	-38.55		
		3465.00	Horizontal	-51.48	12.41	-39.07		
		5197.50	H	-60.70	15.92	-44.78		
		6930.00	H	-61.62	18.63	-42.99		
	High	3500.00	Vertical	-46.00	13.41	-32.59	-13.00	PASS
		5250.00	V	-57.18	15.59	-41.59		
		7000.00	V	-57.09	18.31	-38.78		
		3500.00	Horizontal	-52.68	13.41	-39.27		
		5250.00	H	-60.56	15.59	-44.97		
		7000.00	H	-61.46	18.31	-43.15		
15MHz	Low	3435.00	Vertical	-46.17	12.89	-33.28	-13.00	PASS
		5152.50	V	-56.75	15.86	-40.89		
		6870.00	V	-58.28	18.95	-39.33		
		3435.00	Horizontal	-50.80	12.89	-37.91		
		5152.50	H	-62.11	15.86	-46.25		
		6870.00	H	-59.73	18.95	-40.78		
	Mid	3465.00	Vertical	-48.00	12.49	-35.51	-13.00	PASS
		5197.50	V	-54.53	15.73	-38.80		
		6930.00	V	-59.61	18.31	-41.30		
		3465.00	Horizontal	-48.67	12.49	-36.18		
		5197.50	H	-63.38	15.73	-47.65		
		6930.00	H	-57.76	18.31	-39.45		
	High	3495.00	Vertical	-50.47	13.32	-37.15	-13.00	PASS
		5242.50	V	-53.19	15.88	-37.31		
		6990.00	V	-58.53	18.65	-39.88		
		3495.00	Horizontal	-47.95	13.32	-34.63		
		5242.50	H	-60.53	15.88	-44.65		



		6990.00	H	-57.35	18.65	-38.70		
20MHz	Low	3440.00	Vertical	-47.51	12.74	-34.77	-13.00	PASS
		5160.00	V	-52.42	15.65	-36.77		
		6880.00	V	-58.06	18.64	-39.42		
		3440.00	Horizontal	-48.93	12.74	-36.19		
		5160.00	H	-61.53	15.65	-45.88		
		6880.00	H	-57.70	18.64	-39.06		
	Mid	3465.00	Vertical	-47.60	12.44	-35.16	-13.00	PASS
		5197.50	V	-52.89	15.93	-36.96		
		6930.00	V	-58.23	18.64	-39.59		
		3465.00	Horizontal	-48.88	12.44	-36.44		
		5197.50	H	-62.06	15.93	-46.13		
		6930.00	H	-60.22	18.64	-41.58		
	High	3490.00	Vertical	-50.21	13.43	-36.78	-13.00	PASS
		5235.00	V	-53.89	15.61	-38.28		
		6980.00	V	-59.13	18.34	-40.79		
		3490.00	Horizontal	-51.01	13.43	-37.58		
		5235.00	H	-62.03	15.61	-46.42		
		6980.00	H	-60.95	18.34	-42.61		

LTE Band 5								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	1649.40	Vertical	-43.16	7.29	-35.87	-13.00	PASS
		2474.10	V	-52.75	9.41	-43.34		
		3298.80	V	-56.71	12.69	-44.02		
		1649.40	Horizontal	-45.16	7.29	-37.87		
		2474.10	H	-55.10	9.41	-45.69		
		3298.80	H	-58.85	12.69	-46.16		
	Mid	1673.00	Vertical	-42.60	7.32	-35.28	-13.00	PASS
		2509.50	V	-52.17	9.39	-42.78		
		3346.00	V	-56.15	12.78	-43.37		
		1673.00	Horizontal	-44.58	7.32	-37.26		
		2509.50	H	-54.51	9.39	-45.12		
		3346.00	H	-58.40	12.78	-45.62		
High	1696.60	Vertical	-41.93	7.33	-34.60	-13.00	PASS	

		2544.90	V	-51.69	9.46	-42.23		
		3393.20	V	-55.56	12.71	-42.85		
		1696.60	Horizontal	-42.23	7.33	-34.90		
		2544.90	H	-51.41	9.46	-41.95		
		3393.20	H	-56.05	12.71	-43.34		
3MHz	Low	1651.00	Vertical	-40.73	7.36	-33.37	-13.00	PASS
		2476.50	V	-50.58	9.51	-41.07		
		3302.00	V	-54.59	12.72	-41.87		
		1651.00	Horizontal	-41.45	7.36	-34.09		
		2476.50	H	-50.70	9.51	-41.19		
		3302.00	H	-55.41	12.72	-42.69		
	Mid	1673.00	Vertical	-40.17	7.41	-32.76	-13.00	PASS
		2509.50	V	-50.02	9.52	-40.50		
		3346.00	V	-54.06	12.73	-41.33		
		1673.00	Horizontal	-40.42	7.41	-33.01		
		2509.50	H	-49.83	9.52	-40.31		
		3346.00	H	-54.59	12.73	-41.86		
	High	1695.00	Vertical	-38.95	7.52	-31.43	-13.00	PASS
		2542.50	V	-48.75	9.46	-39.29		
		3390.00	V	-52.99	12.81	-40.18		
		1695.00	Horizontal	-39.54	7.52	-32.02		
		2542.50	H	-48.84	9.46	-39.38		
		3390.00	H	-53.88	12.81	-41.07		
5MHz	Low	1653.00	Vertical	-36.57	7.61	-28.96	-13.00	PASS
		2479.50	V	-47.25	9.49	-37.76		
		3306.00	V	-51.02	12.86	-38.16		
		1653.00	Horizontal	-40.22	7.61	-32.61		
		2479.50	H	-49.43	9.49	-39.94		
		3306.00	H	-54.40	12.86	-41.54		
	Mid	1673.00	Vertical	-37.13	7.72	-29.41	-13.00	PASS
		2509.50	V	-47.71	9.53	-38.18		
		3346.00	V	-51.39	12.84	-38.55		
		1673.00	Horizontal	-40.48	7.72	-32.76		
		2509.50	H	-49.59	9.53	-40.06		
		3346.00	H	-54.50	12.84	-41.66		
	High	1693.00	Vertical	-37.75	7.79	-29.96	-13.00	PASS

		2539.50	V	-48.21	9.53	-38.68		PASS
		3386.00	V	-51.91	12.89	-39.02		
		1693.00	Horizontal	-39.52	7.79	-31.73		
		2539.50	H	-48.63	9.53	-39.10		
		3386.00	H	-53.73	12.89	-40.84		
10MHz	Low	1658.00	Vertical	-37.07	7.81	-29.26	-13.00	PASS
		2487.00	V	-47.65	9.56	-38.09		
		3316.00	V	-51.43	12.91	-38.52		
		1658.00	Horizontal	-40.34	7.81	-32.53		
		2487.00	H	-49.41	9.56	-39.85		
		3316.00	H	-54.39	12.91	-41.48		
	Mid	1673.00	Vertical	-37.69	7.83	-29.86	-13.00	PASS
		2509.50	V	-48.24	9.59	-38.65		
		3346.00	V	-51.99	12.94	-39.05		
		1673.00	Horizontal	-40.55	7.83	-32.72		
		2509.50	H	-49.59	9.59	-40.00		
		3346.00	H	-54.57	12.94	-41.63		
	High	1688.00	Vertical	-37.98	7.89	-30.09	-13.00	PASS
		2532.00	V	-48.48	9.62	-38.86		
		3376.00	V	-52.21	12.96	-39.25		
		1688.00	Horizontal	-40.79	7.89	-32.90		
		2532.00	H	-49.79	9.62	-40.17		
		3376.00	H	-54.73	12.96	-41.77		

LTE Band 7								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
5MHz	Low	5005.00	Vertical	-55.62	15.62	-40.00	-25.00	PASS
		7507.50	V	-58.26	17.86	-40.40		
		10010.00	V	-65.85	23.84	-42.01		
		5005.00	Horizontal	-57.27	15.62	-41.65		
		7507.50	H	-60.29	17.86	-42.43		
		10010.00	H	-67.04	23.84	-43.20		
	Mid	5070.00	Vertical	-54.82	15.66	-39.16	-25.00	PASS
		7605.00	V	-57.04	17.87	-39.17		
		10140.00	V	-64.86	23.88	-40.98		

		5070.00	Horizontal	-55.04	15.66	-39.38		PASS	
		7605.00	H	-58.37	17.87	-40.50			
		10140.00	H	-65.79	23.88	-41.91			
	High		5135.00	Vertical	-52.5	15.69	-36.81		PASS
			7702.50	V	-54.91	17.88	-37.03		
			10270.00	V	-62.86	23.91	-38.95		
		5135.00	Horizontal	-53.51	15.69	-37.82		PASS	
7702.50	H	-56.91	17.88	-39.03					
10270.00	H	-64.57	23.91	-40.66					
10MHz	Low	5010.00	Vertical	-51.46	15.71	-35.75		PASS	
		7515.00	V	-54.05	17.92	-36.13			
		10020.00	V	-62.12	23.94	-38.18			
		5010.00	Horizontal	-54.41	15.71	-38.70		PASS	
		7515.00	H	-57.78	17.92	-39.86			
		10020.00	H	-65.31	23.94	-41.37			
	Mid		5070.00	Vertical	-52.07	15.66	-36.41		PASS
			7605.00	V	-54.62	17.87	-36.75		
			10140.00	V	-62.65	23.88	-38.77		
		5070.00	Horizontal	-55.43	15.66	-39.77		PASS	
		7605.00	H	-58.6	17.87	-40.73			
		10140.00	H	-66.07	23.88	-42.19			
	High		5130.00	Vertical	-53.29	15.79	-37.50		PASS
			7695.00	V	-55.72	17.98	-37.74		
			10260.00	V	-63.73	24.02	-39.71		
		5130.00	Horizontal	-56.26	15.79	-40.47		PASS	
		7695.00	H	-59.37	17.98	-41.39			
		10260.00	H	-66.77	24.02	-42.75			
15MHz	Low	5015.00	Vertical	-49.55	15.81	-33.74		PASS	
		7522.50	V	-56.88	17.96	-38.92			
		10030.00	V	-60.50	24.11	-36.39			
		5015.00	Horizontal	-56.04	15.81	-40.23		PASS	
		7522.50	H	-55.33	17.96	-37.37			
		10030.00	H	-66.52	24.11	-42.41			
	Mid		5070.00	Vertical	-50.06	15.66	-34.40		PASS
			7605.00	V	-51.53	17.87	-33.66		
			10140.00	V	-59.98	23.88	-36.10		
		5070.00	Horizontal	-57.70	15.66	-42.04		PASS	

20MHz		7605.00	H	-60.14	17.87	-42.27						
		10140.00	H	-67.25	23.88	-43.37						
	High		5125.00	Vertical	-49.18	15.88	-33.30	-25.00	PASS			
			7687.50	V	-52.78	18.03	-34.75					
			10250.00	V	-61.29	24.16	-37.13					
			Horizontal	5125.00		-53.34	15.88	-37.46	-25.00	PASS		
				7687.50	H	-56.62	18.03	-38.59				
				10250.00	H	-64.78	24.16	-40.62				
	Low		5020.00	Vertical	-51.28	16.03	-35.25	-25.00	PASS			
			7530.00	V	-57.84	18.11	-39.73					
			10040.00	V	-60.81	24.19	-36.62					
			Horizontal	5020.00		-53.95	16.03			-37.92	-25.00	PASS
				7530.00	H	-53.90	18.11			-35.79		
				10040.00	H	-64.79	24.19			-40.60		
Mid			5070.00	Vertical	-49.79	15.66	-34.13	-25.00	PASS			
			7605.00	V	-51.31	17.87	-33.44					
			10140.00	V	-59.85	23.88	-35.97					
		Horizontal	5070.00		-56.52	15.66	-40.86			-25.00	PASS	
			7605.00	H	-58.38	17.87	-40.51					
			10140.00	H	-65.86	23.88	-41.98					
High		5120.00	Vertical	-49.13	16.15	-32.98	-25.00	PASS				
		7680.00	V	-52.87	18.19	-34.68						
		10240.00	V	-61.31	24.26	-37.05						
	Horizontal	5120.00		-55.03	16.15	-38.88			-25.00	PASS		
		7680.00	H	-57.61	18.19	-39.42						
		10240.00	H	-65.98	24.26	-41.72						

LTE Band 12									
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)	Level (dBm)			
1.4MHz	Low	1399.40	Vertical	-40.28	4.21	-36.07	-13.00	PASS	
		2099.10	V	-48.87	9.12	-39.75			
		2798.80	V	-52.04	11.36	-40.68			
		Horizontal	1399.40		-41.23	4.21	-37.02	-13.00	PASS
			2099.10	H	-49.76	9.12	-40.64		
			2798.80	H	-52.80	11.36	-41.44		
	Mid	1415.00	Vertical	-39.62	4.26	-35.36	-13.00	PASS	

		2122.50	V	-48.23	9.15	-39.08		PASS
		2830.00	V	-51.44	11.39	-40.05		
		1415.00	Horizontal	-40.41	4.26	-36.15		
		2122.50	H	-49.08	9.15	-39.93		
		2830.00	H	-52.16	11.39	-40.77		
		1430.60	Vertical	-38.43	4.29	-34.14		
	High	2145.90	V	-47.08	9.11	-37.97	-13.00	PASS
		2861.20	V	-50.31	11.31	-39.00		
		1430.60	Horizontal	-40.01	4.29	-35.72		
		2145.90	H	-48.64	9.11	-39.53		
		2861.20	H	-51.74	11.31	-40.43		
		1401.00	Vertical	-37.67	4.32	-33.35		
3MHz	Low	2101.50	V	-44.90	9.16	-35.74	-13.00	PASS
		2802.00	V	-48.73	11.35	-37.38		
		1401.00	Horizontal	-38.11	4.32	-33.79		
		2101.50	H	-46.40	9.16	-37.24		
		2802.00	H	-50.58	11.35	-39.23		
		1415.00	Vertical	-35.43	4.26	-31.17		
	Mid	2122.50	V	-42.84	9.15	-33.69	-13.00	PASS
		2830.00	V	-46.53	11.39	-35.14		
		1415.00	Horizontal	-36.23	4.26	-31.97		
		2122.50	H	-45.12	9.15	-35.97		
		2830.00	H	-49.16	11.39	-37.77		
		1429.00	Vertical	-33.60	4.42	-29.18		
	High	2143.50	V	-41.49	9.25	-32.24	-13.00	PASS
		2858.00	V	-45.66	11.46	-34.20		
		1429.00	Horizontal	-34.48	4.42	-30.06		
		2143.50	H	-43.77	9.25	-34.52		
		2858.00	H	-46.67	11.46	-35.21		
		1403.00	Vertical	-31.17	4.13	-27.04		
5MHz	Low	2104.50	V	-38.05	9.06	-28.99	-13.00	PASS
		2806.00	V	-43.03	11.27	-31.76		
		1403.00	Horizontal	-35.82	4.13	-31.69		
		2104.50	H	-46.48	9.06	-37.42		
		2806.00	H	-47.90	11.27	-36.63		
		1415.00	Vertical	-32.35	4.26	-28.09		
	Mid	2122.50	V	-40.08	9.15	-30.93	-13.00	PASS

		2830.00	V	-44.83	11.39	-33.44		PASS		
		1415.00	Horizontal	-38.37	4.26	-34.11				
		2122.50	H	-48.21	9.15	-39.06				
		2830.00	H	-49.28	11.39	-37.89				
	High		1427.00	Vertical	-34.95	4.22	-30.73	-13.00	PASS	
			2140.50	V	-41.97	9.16	-32.81			
			2854.00	V	-46.38	11.32	-35.06			
			Horizontal	1427.00		-40.22	4.22	-36.00	-13.00	PASS
				2140.50	H	-49.98	9.16	-40.82		
				2854.00	H	-50.55	11.32	-39.23		
	10MHz	Low	1408.00	Vertical	-33.26	4.29	-28.97	-13.00	PASS	
			2112.00	V	-41.05	9.19	-31.86			
2816.00			V	-45.27	11.35	-33.92				
1408.00			Horizontal	-42.97	4.29	-38.68				
2112.00			H	-51.84	9.19	-42.65				
2816.00			H	-52.69	11.35	-41.34				
Mid			1415.00	Vertical	-35.31	4.26	-31.05	-13.00	PASS	
			2122.50	V	-42.75	9.15	-33.60			
			2830.00	V	-47.41	11.39	-36.02			
		Horizontal	1415.00		-44.31	4.26	-40.05	-13.00	PASS	
			2122.50	H	-53.85	9.15	-44.70			
			2830.00	H	-54.35	11.39	-42.96			
High			1422.00	Vertical	-36.19	4.36	-31.83	-13.00	PASS	
			2133.00	V	-44.61	9.27	-35.34			
			2844.00	V	-49.43	11.39	-38.04			
		Horizontal	1422.00		-42.75	4.36	-38.39	-13.00	PASS	
			2133.00	H	-53.01	9.27	-43.74			
			2844.00	H	-53.06	11.39	-41.67			



LTE Band 13								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
5MHz	Low	1559.00	Vertical	-59.61	4.98	-54.63	-40.00	PASS
		2338.50	V	-49.30	9.12	-40.18	-13.00	
		3118.00	V	-53.27	12.46	-40.81		
		1559.00	Horizontal	-60.56	4.98	-55.58		
		2338.50	H	-50.19	9.12	-41.07	-13.00	
		3118.00	H	-54.03	12.46	-41.57		
	Mid	1564.00	Vertical	-58.95	5.03	-53.92		-40.00
		2346.00	V	-48.70	9.19	-39.51	-13.00	
		3128.00	V	-52.65	12.47	-40.18		
		1564.00	Horizontal	-59.74	5.03	-54.71		-40.00
		2346.00	H	-49.55	9.19	-40.36	-13.00	
		3128.00	H	-53.37	12.47	-40.90		
	High	1569.00	Vertical	-57.79	5.09	-52.70		-40.00
		2353.50	V	-47.62	9.22	-38.40	-13.00	
		3138.00	V	-51.66	12.53	-39.13		
		1569.00	Horizontal	-59.37	5.09	-54.28		-40.00
		2353.50	H	-49.18	9.22	-39.96	-13.00	
		3138.00	H	-53.09	12.53	-40.56		
10MHz	Mid	1564.00	Vertical	-56.94	5.03	-51.91		-40.00
		2346.00	V	-45.36	9.19	-36.17	-13.00	
		3128.00	V	-49.98	12.47	-37.51		
		1564.00	Horizontal	-57.38	5.03	-52.35		-40.00
		2346.00	H	-46.86	9.19	-37.67	-13.00	
		3128.00	H	-51.83	12.47	-39.36		

LTE Band 25								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3701.40	Vertical	-48.98	13.44	-35.54	-13.00	PASS
		5552.10	V	-55.85	16.65	-39.20		
		7402.80	V	-58.11	17.79	-40.32		
		3701.40	Horizontal	-50.57	13.44	-37.13		



		5552.10	H	-57.34	16.65	-40.69					
		7402.80	H	-59.38	17.79	-41.59					
	Mid		3765.00	Vertical	-47.87	13.52	-34.35	-13.00	PASS		
			5647.50	V	-54.75	16.67	-38.08				
			7530.00	V	-57.12	17.85	-39.27				
			Horizontal	3765.00		-49.19	13.52	-35.67	-13.00	PASS	
				5647.50	H	-56.18	16.67	-39.51			
				7530.00	H	-58.32	17.85	-40.47			
	High		3828.60	Vertical	-45.93	13.61	-32.32	-13.00	PASS		
			5742.90	V	-52.93	16.70	-36.23				
			7657.20	V	-55.39	17.88	-37.51				
			Horizontal	3828.60		-48.57	13.61	-34.96	-13.00	PASS	
				5742.90	H	-55.54	16.70	-38.84			
				7657.20	H	-57.78	17.88	-39.90			
3MHz	Low	3703.00	Vertical	-44.50	13.49	-31.01	-13.00	PASS			
		5554.50	V	-49.14	16.63	-32.51					
		7406.00	V	-52.60	17.80	-34.80					
		Horizontal	3703.00		-45.23	13.49			-31.74	-13.00	PASS
			5554.50	H	-51.65	16.63			-35.02		
			7406.00	H	-55.70	17.80			-37.90		
	Mid		3765.00	Vertical	-40.89	13.52	-27.37	-13.00	PASS		
			5647.50	V	-45.75	16.67	-29.08				
			7530.00	V	-48.91	17.85	-31.06				
			Horizontal	3765.00		-42.22	13.52	-28.70	-13.00	PASS	
				5647.50	H	-49.57	16.67	-32.90			
				7530.00	H	-53.31	17.85	-35.46			
	High		3827.00	Vertical	-37.67	13.63	-24.04	-13.00	PASS		
			5740.50	V	-43.37	16.71	-26.66				
			7654.00	V	-47.33	17.85	-29.48				
			Horizontal	3827.00		-39.14	13.63	-25.51	-13.00	PASS	
				5740.50	H	-47.18	16.71	-30.47			
				7654.00	H	-49.03	17.85	-31.18			
5MHz	Low	3705.00	Vertical	-33.98	13.52	<b>-20.46</b>	-13.00	PASS			
		5557.50	V	-37.89	16.66	-21.23					
		7410.00	V	-43.23	17.82	-25.41					
		3705.00	Horizontal	-41.75	13.52	-28.23			-13.00	PASS	
		5557.50	H	-51.98	16.66	-35.32					

	Mid	7410.00	H	-51.38	17.82	-33.56	-13.00	PASS	
		3765.00	Vertical	-35.73	13.52	-22.21			
		5647.50	V	-41.15	16.67	-24.48			
		7530.00	V	-46.06	17.85	-28.21			
		3765.00	Horizontal	-45.80	13.52	-32.28			
		5647.50	H	-54.74	16.67	-38.07			
	7530.00	H	-53.51	17.85	-35.66	-13.00	PASS		
	High	17330.00	Vertical	-40.28	13.66			-26.62	
		5737.50	V	-44.42	16.80			-27.62	
		7650.00	V	-48.81	17.90			-30.91	
		3825.00	Horizontal	-49.10	13.66			-35.44	
		5737.50	H	-57.81	16.80			-41.01	
		7650.00	H	-55.79	17.90	-37.89			
	10MHz	Low	3710.00	Vertical	-37.23	13.55	-23.68	-13.00	PASS
			5565.00	V	-42.64	16.60	-26.04		
			7420.00	V	-46.85	17.85	-29.00		
			3710.00	Horizontal	-53.48	13.55	-39.93		
			5565.00	H	-60.68	16.60	-44.08		
7420.00			H	-59.27	17.85	-41.42			
Mid		3765.00	Vertical	-40.68	13.52	-27.16	-13.00	PASS	
		5647.50	V	-45.62	16.67	-28.95			
		7530.00	V	-50.36	17.85	-32.51			
		3765.00	Horizontal	-55.74	13.52	-42.22			
		5647.50	H	-64.17	16.67	-47.50			
		7530.00	H	-61.97	17.85	-44.12			
High		3820.00	Vertical	-42.15	13.69	-28.46	-13.00	PASS	
		5730.00	V	-48.70	16.84	-31.86			
		7640.00	V	-53.76	17.88	-35.88			
		3820.00	Horizontal	-53.14	13.69	-39.45			
		5730.00	H	-62.73	16.84	-45.89			
		7640.00	H	-59.85	17.88	-41.97			
15MHz	Low	3715.00	Vertical	-39.71	13.61	-26.10	-13.00	PASS	
		5572.50	V	-46.34	16.61	-29.73			
		7430.00	V	-51.48	17.88	-33.60			
		3715.00	Horizontal	-55.30	13.61	-41.69			
		5572.50	H	-64.60	16.61	-47.99			
		7430.00	H	-61.64	17.88	-43.76			

20MHz	Mid	3765.00	Vertical	-41.30	13.52	-27.78	-13.00	PASS	
		5647.50	V	-47.98	16.67	-31.31			
		7530.00	V	-52.94	17.85	-35.09			
		3765.00	Horizontal	-53.09	13.52	-39.57			
		5647.50	H	-62.45	16.67	-45.78			
		7530.00	H	-60.36	17.85	-42.51			
	High	3815.00	Vertical	-39.80	13.77	-26.03	-13.00	PASS	
		5722.50	V	-44.91	16.87	-28.04			
		7630.00	V	-49.68	17.84	-31.84			
		3815.00	Horizontal	-56.12	13.77	-42.35			
		5722.50	H	-67.15	16.87	-50.28			
		7630.00	H	-64.98	17.84	-47.14			
	20MHz	Low	3720.00	Vertical	-42.46	13.67	-28.79	-13.00	PASS
			5580.00	V	-47.77	16.60	-31.17		
			7440.00	V	-52.11	17.91	-34.20		
			3720.00	Horizontal	-56.46	13.67	-42.79		
			5580.00	H	-67.30	16.60	-50.70		
			7440.00	H	-65.40	17.91	-47.49		
Mid		3765.00	Vertical	-42.64	13.52	-29.12	-13.00	PASS	
		5647.50	V	-48.15	16.67	-31.48			
		7530.00	V	-52.34	17.85	-34.49			
		3765.00	Horizontal	-56.60	13.52	-43.08			
		5647.50	H	-67.61	16.67	-50.94			
		7530.00	H	-65.56	17.85	-47.71			
High		3810.00	Vertical	-40.92	13.81	-27.11	-13.00	PASS	
		5715.00	V	-45.64	16.85	-28.79			
		7620.00	V	-50.42	17.87	-32.55			
		3810.00	Horizontal	-57.20	13.81	-43.39			
		5715.00	H	-68.08	16.85	-51.23			
		7620.00	H	-65.83	17.87	-47.96			

LTE Band 26 (814-824MHz)								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	1629.40	Vertical	-40.01	4.15	-35.86	-13.00	PASS
		2444.10	V	-48.77	9.19	-39.58		
		3258.80	V	-53.37	12.79	-40.58		

		1629.40	Horizontal	-41.19	4.15	-37.04	-13.00	PASS		
		2444.10	H	-49.88	9.19	-40.69				
		3258.80	H	-54.31	12.79	-41.52				
	Mid		1638.00	Vertical	-39.33	4.36	-34.97	-13.00	PASS	
			2457.00	V	-47.99	9.24	-38.75			
			3276.00	V	-52.65	12.85	-39.80			
			Horizontal	1638.00	Horizontal	-40.32	4.36	-35.96	-13.00	PASS
				2457.00	H	-49.05	9.24	-39.81		
				3276.00	H	-53.54	12.85	-40.69		
	High		1646.60	Vertical	-37.67	4.22	-33.45	-13.00	PASS	
			2469.90	V	-46.62	9.25	-37.37			
			3293.20	V	-51.32	12.83	-38.49			
			Horizontal	1646.60	Horizontal	-39.65	4.22	-35.43	-13.00	PASS
				2469.90	H	-48.56	9.25	-39.31		
				3293.20	H	-53.10	12.83	-40.27		
	3MHz	Low	1631.00	Vertical	-36.65	4.18	-32.47	-13.00	PASS	
			2446.50	V	-43.81	9.21	-34.60			
			3262.00	V	-49.29	12.82	-36.47			
1631.00			Horizontal	-37.21	4.18	-33.03				
2446.50			H	-45.68	9.21	-36.47				
3262.00			H	-51.60	12.82	-38.78				
Mid			1638.00	Vertical	-34.12	4.36	-29.76	-13.00	PASS	
			2457.00	V	-41.29	9.24	-32.05			
			3276.00	V	-46.52	12.84	-33.68			
			Horizontal	1638.00	Horizontal	-35.13	4.36	-30.77	-13.00	PASS
				2457.00	H	-44.13	9.24	-34.89		
				3276.00	H	-49.80	12.84	-36.96		
High			1645.00	Vertical	-31.49	4.21	-27.28	-13.00	PASS	
			2467.50	V	-39.54	9.29	-30.25			
			3290.00	V	-45.33	12.83	-32.50			
			Horizontal	1645.00	Horizontal	-32.60	4.21	-28.39	-13.00	PASS
				2467.50	H	-42.37	9.29	-33.08		
				3290.00	H	-46.60	12.83	-33.77		
5MHz	Low	1633.00	Vertical	-28.84	4.22	-24.62	-13.00	PASS		
		2449.50	V	-35.41	9.2	-26.21				
		3266.00	V	-42.28	12.81	-29.47				
		1633.00	Horizontal	-34.64	4.22	-30.42				



	Mid	2449.50	H	-45.89	9.2	-36.69	-13.00	PASS	
		3266.00	H	-48.35	12.81	-35.54			
		1638.00	Vertical	-30.28	4.36	-25.92			
		2457.00	V	-37.87	9.24	-28.63			
		3276.00	V	-44.40	12.84	-31.56			
		1638.00	Horizontal	-37.79	4.36	-33.43			
	High	2457.00	H	-47.97	9.24	-38.73	-13.00	PASS	
		3276.00	H	-49.94	12.84	-37.10			
		1643.00	Vertical	-33.37	4.16	-29.21			
		2464.50	V	-40.25	9.28	-30.97			
		3286.00	V	-46.36	12.79	-33.57			
		1643.00	Horizontal	-39.95	4.16	-35.79			
	10MHz	Mid	2464.50	H	-50.20	9.28	-40.92	-13.00	PASS
			3286.00	H	-51.55	12.79	-38.76		
1638.00			Vertical	-31.27	4.25	-27.02			
2457.00			V	-39.02	9.23	-29.79			
3276.00			V	-44.92	12.77	-32.15			
1638.00			Horizontal	-43.38	4.25	-39.13			
2457.00	H	-52.43	9.23	-43.20	-13.00	PASS			
3276.00	H	-54.16	12.77	-41.39					

LTE Band 26 (824-849MHz)								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	1649.40	Vertical	-40.02	4.31	-35.71	-13.00	PASS
		2474.10	V	-48.75	9.35	-39.40		
		3298.80	V	-53.40	12.95	-40.45		
		1649.40	Horizontal	-41.39	4.31	-37.08		
		2474.10	H	-50.04	9.35	-40.69		
		3298.80	H	-54.50	12.95	-41.55		
	Mid	1673.00	Vertical	-39.20	4.52	-34.68	-13.00	PASS
		2509.50	V	-47.83	9.40	-38.43		
		3346.00	V	-52.55	13.01	-39.54		
		1673.00	Horizontal	-40.34	4.52	-35.82		
		2509.50	H	-49.07	9.40	-39.67		
		3346.00	H	-53.59	13.01	-40.58		

	High	1696.60	Vertical	-37.30	4.38	-32.92	-13.00	PASS		
		2544.90	V	-46.24	9.41	-36.83				
		3393.20	V	-51.01	12.99	-38.02				
			High	1696.60	Horizontal	-39.58	4.38	-35.20	-13.00	PASS
				2544.90	H	-48.50	9.41	-39.09		
				3393.20	H	-53.08	12.99	-40.09		
3MHz	Low			1651.00	Vertical	-36.13	4.34	-31.79	-13.00	PASS
				2476.50	V	-42.98	9.37	-33.61		
				3302.00	V	-48.66	12.98	-35.68		
		Low	1651.00	Horizontal	-36.76	4.34	-32.42	-13.00	PASS	
			2476.50	H	-45.16	9.37	-35.79			
			3302.00	H	-51.34	12.98	-38.36			
	Mid		1673.00	Vertical	-33.17	4.52	-28.65	-13.00	PASS	
			2509.50	V	-40.04	9.40	-30.64			
			3346.00	V	-45.44	13.00	-32.44			
		Mid	1673.00	Horizontal	-34.32	4.52	-29.80	-13.00	PASS	
			2509.50	H	-43.35	9.40	-33.95			
			3346.00	H	-49.25	13.00	-36.25			
	High		1695.00	Vertical	-30.14	4.37	-25.77	-13.00	PASS	
			2542.50	V	-38.00	9.45	-28.55			
			3390.00	V	-44.07	12.99	-31.08			
		High	1695.00	Horizontal	-31.41	4.37	-27.04	-13.00	PASS	
			2542.50	H	-41.30	9.45	-31.85			
			3390.00	H	-45.54	12.99	-32.55			
5MHz	Low		1653.00	Vertical	-27.06	4.38	-22.68	-13.00	PASS	
			2479.50	V	-33.22	9.36	-23.86			
			3306.00	V	-40.53	12.97	-27.56			
		Low	1653.00	Horizontal	-33.77	4.38	-29.39	-13.00	PASS	
			2479.50	H	-45.40	9.36	-36.04			
			3306.00	H	-47.58	12.97	-34.61			
	Mid		1673.00	Vertical	-28.71	4.52	-24.19	-13.00	PASS	
			2509.50	V	-36.07	9.40	-26.67			
			3346.00	V	-42.98	13.00	-29.98			
		Mid	1673.00	Horizontal	-37.41	4.52	-32.89	-13.00	PASS	
			2509.50	H	-47.81	9.40	-38.41			
			3346.00	H	-49.42	13.00	-36.42			





	High	1693.00	Vertical	-32.32	4.32	-28.00	-13.00	PASS			
		2539.50	V	-38.82	9.44	-29.38					
		3386.00	V	-45.27	12.95	-32.32					
				1693.00	Horizontal	-39.94	4.32	-35.62	-13.00	PASS	
				2539.50	H	-50.39	9.44	-40.95			
				3386.00	H	-51.30	12.95	-38.35			
10MHz	Low			1658.00	Vertical	-29.87	4.41	-25.46	-13.00	PASS	
				2487.00	V	-37.40	9.39	-28.01			
				3316.00	V	-43.60	12.93	-30.67			
				1658.00	Horizontal	-43.91	4.41	-39.50	-13.00	PASS	
				2487.00	H	-52.99	9.39	-43.60			
				3316.00	H	-54.33	12.93	-41.40			
				Mid	1673.00	Vertical	-32.99	4.52	-28.47	-13.00	PASS
					2509.50	V	-39.93	9.40	-30.53		
					3346.00	V	-46.70	13.00	-33.70		
					1673.00	Horizontal	-46.00	4.52	-41.48	-13.00	PASS
					2509.50	H	-55.96	9.40	-46.56		
					3346.00	H	-56.74	13.00	-43.74		
				High	1688.00	Vertical	-34.01	4.42	-29.59	-13.00	PASS
					2532.00	V	-42.49	9.45	-33.04		
					3376.00	V	-49.52	12.91	-36.61		
					1688.00	Horizontal	-43.51	4.42	-39.09	-13.00	PASS
					2532.00	H	-54.62	9.45	-45.17		
					3376.00	H	-54.79	12.91	-41.88		
15MHz	Low			1663.00	Vertical	-31.97	4.42	-27.55	-13.00	PASS	
				2494.50	V	-40.55	9.35	-31.20			
				3326.00	V	-47.59	12.95	-34.64			
				1663.00	Horizontal	-45.44	4.42	-41.02	-13.00	PASS	
				2494.50	H	-56.34	9.35	-46.99			
				3326.00	H	-56.38	12.95	-43.43			
				Mid	1673.00	Vertical	-33.52	4.52	-29.00	-13.00	PASS
					2509.50	V	-41.97	9.40	-32.57		
					3346.00	V	-48.92	13.00	-35.92		
					1673.00	Horizontal	-43.70	4.52	-39.18	-13.00	PASS
					2509.50	H	-54.48	9.40	-45.08		
					3346.00	H	-55.35	13.00	-42.35		



	High	1683.00	Vertical	-31.94	4.45	-27.49	-13.00	PASS
		2524.50	V	-39.15	9.41	-29.74		
		3366.00	V	-46.01	12.90	-33.11		
		1683.00	Horizontal	-46.03	4.45	-41.58	-13.00	PASS
		2524.50	H	-58.38	9.41	-48.97		
		3366.00	H	-59.25	12.90	-46.35		

LTE Band 38								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
5MHz	Low	5145.00	Vertical	-55.66	15.71	-39.95	-25.00	PASS
		7717.50	V	-58.51	17.88	-40.63		
		10290.00	V	-62.4	24.11	-38.29		
		5145.00	Horizontal	-56.8	15.71	-41.09	-25.00	PASS
		7717.50	H	-59.58	17.88	-41.70		
		10290.00	H	-63.31	24.11	-39.20		
	Mid	5190.00	Vertical	-54.78	15.69	-39.09	-25.00	PASS
		7785.00	V	-57.72	17.90	-39.82		
		10380.00	V	-62.46	24.93	-37.53		
		5190.00	Horizontal	-55.73	15.69	-40.04	-25.00	PASS
		7785.00	H	-58.75	17.90	-40.85		
		10380.00	H	-63.33	24.93	-38.40		
	High	5235.00	Vertical	-53.36	15.73	-37.63	-25.00	PASS
		7852.50	V	-56.45	17.96	-38.49		
		10470.00	V	-60.47	24.20	-36.27		
		5235.00	Horizontal	-55.26	15.73	-39.53	-25.00	PASS
		7852.50	H	-58.33	17.96	-40.37		
		10470.00	H	-62.19	24.20	-37.99		
10MHz	Low	5150.00	Vertical	-52.45	15.76	-36.69	-25.00	PASS
		7725.00	V	-53.72	17.90	-35.82		
		10300.00	V	-58.41	24.09	-34.32		
		5150.00	Horizontal	-52.98	15.76	-37.22	-25.00	PASS
		7725.00	H	-55.53	17.90	-37.63		
		10300.00	H	-60.65	24.09	-36.56		
	Mid	5190.00	Vertical	-49.77	15.69	-34.08	-25.00	PASS

		7785.00	V	-51.26	17.90	-33.36		
		10380.00	V	-56.56	24.93	-31.63		
		5190.00	Horizontal	-50.73	15.69	-35.04		
		7785.00	H	-54	17.90	-36.10		
		10380.00	H	-59.74	24.93	-34.81		
	High	5230.00	Vertical	-47.49	15.80	-31.69		
		7845.00	V	-51.33	17.98	-33.35		
		10460.00	V	-55.72	24.15	-31.57		
		5230.00	Horizontal	-49.05	15.80	-33.25		
		7845.00	H	-52.72	17.98	-34.74		
		10460.00	H	-56.56	24.15	-32.41		

15MHz	Low	5155.00	Vertical	-49.88	15.76	-34.12			
		7732.50	V	-49.88	17.96	-31.92			
		10310.00	V	-56.31	24.92	-31.39			
		5155.00	Horizontal	-54.93	15.76	-39.17			
		7732.50	H	-59.07	17.96	-41.11			
		10310.00	H	-63.19	24.92	-38.27			-25.00
	Mid	5190.00	Vertical	-51.03	15.69	-35.34			
		7785.00	V	-53.59	17.90	-35.69			
		10380.00	V	-56.67	24.93	-31.74			
		5190.00	Horizontal	-53.64	15.69	-37.95			
		7785.00	H	-55.97	17.90	-38.07			
		10380.00	H	-61.25	24.93	-36.32			-25.00
	High	5225.00	Vertical	-47.61	15.75	-31.86			
		7837.50	V	-51.41	17.94	-33.47			
		10450.00	V	-55.79	24.11	-31.68			
		5225.00	Horizontal	-51.27	15.75	-35.52			
		7837.50	H	-54.79	17.94	-36.85			
		10450.00	H	-58.12	24.11	-34.01			-25.00
	20MHz	Low	5160.00	Vertical	-47.65	15.64	-32.01		
			7740.00	V	-48.63	17.85	-30.78		
			10320.00	V	-55.94	24.87	-31.07		
			5160.00	Horizontal	-58.03	15.64	-42.39		
			7740.00	H	-61.16	17.85	-43.31		
			10320.00	H	-65.67	24.87	-40.80		

Mid	5190.00	Vertical	-53.53	15.69	-37.84	-25.00	PASS
	7785.00	V	-55.68	17.90	-37.78		
	10380.00	V	-59.19	24.93	-34.26		
	5190.00	Horizontal	-55.29	15.69	-39.60	-25.00	PASS
	7785.00	H	-58.43	17.90	-40.53		
	10380.00	H	-63.19	24.93	-38.26		
High	5220.00	Vertical	-48.49	15.70	-32.79	-25.00	PASS
	7830.00	V	-53.44	17.88	-35.56		
	10440.00	V	-58.10	24.00	-34.10		
	5220.00	Horizontal	-49.23	15.70	-33.53	-25.00	PASS
	7830.00	H	-53.57	17.88	-35.69		
	10440.00	H	-56.47	24.00	-32.47		

LTE Band 41								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
5MHz	Low	5075.00	Vertical	-55.53	15.64	-39.89	-25.00	PASS
		7612.50	V	-58.44	17.82	-40.62		
		10150.00	V	-61.43	23.83	-37.60		
		5075.00	Horizontal	-56.67	15.64	-41.03	-25.00	PASS
		7612.50	H	-59.51	17.82	-41.69		
		10150.00	H	-62.34	23.83	-38.51		
	Mid	5180.00	Vertical	-54.72	15.69	-39.03	-25.00	PASS
		7770.00	V	-57.77	17.96	-39.81		
		10360.00	V	-61.04	24.20	-36.84		
		5180.00	Horizontal	-55.67	15.69	-39.98	-25.00	PASS
		7770.00	H	-58.8	17.96	-40.84		
		10360.00	H	-61.91	24.20	-37.71		
	High	5305.00	Vertical	-53.53	15.96	-37.57	-25.00	PASS
		7957.50	V	-57.12	18.64	-38.48		
		10610.00	V	-59.87	24.29	-35.58		
		5305.00	Horizontal	-55.43	15.96	-39.47	-25.00	PASS
		7957.50	H	-59	18.64	-40.36		
		10610.00	H	-61.59	24.29	-37.30		
10MHz	Low	5080.00	Vertical	-52.28	15.65	-36.63	-25.00	PASS

		7620.00	V	-53.64	17.83	-35.81		PASS
		10160.00	V	-57.48	23.85	-33.63		
		5080.00	Horizontal	-52.81	15.65	-37.16		
		7620.00	H	-55.45	17.83	-37.62		
		10160.00	H	-59.72	23.85	-35.87		
	Mid	5180.00	Vertical	-49.71	15.69	-34.02	-25.00	PASS
		7770.00	V	-51.31	17.96	-33.35		
		10360.00	V	-55.14	24.20	-30.94		
		5180.00	Horizontal	-50.67	15.69	-34.98		
		7770.00	H	-54.05	17.96	-36.09		
		10360.00	H	-58.32	24.20	-34.12		
	High	5300.00	Vertical	-47.43	15.80	-31.63	-25.00	PASS
		7950.00	V	-51.98	18.64	-33.34		
		10600.00	V	-55.17	24.29	-30.88		
		5300.00	Horizontal	-48.99	15.80	-33.19		
		7950.00	H	-53.37	18.64	-34.73		
		10600.00	H	-56.01	24.29	-31.72		
	15MHz	Low	5085.00	Vertical	-49.73	15.67	-34.06	-25.00
7627.50			V	-49.75	17.84	-31.91		
10170.00			V	-54.55	23.85	-30.70		
5085.00			Horizontal	-54.78	15.67	-39.11		
7627.50			H	-58.94	17.84	-41.10		
10170.00			H	-61.43	23.85	-37.58		
Mid		5180.00	Vertical	-50.97	15.69	-35.28	-25.00	PASS
		7770.00	V	-53.64	17.96	-35.68		
		10360.00	V	-55.25	24.20	-31.05		
		5180.00	Horizontal	-53.58	15.69	-37.89		
		7770.00	H	-56.02	17.96	-38.06		
		10360.00	H	-59.83	24.20	-35.63		
High		5295.00	Vertical	-47.31	15.51	-31.80	-25.00	PASS
		7942.50	V	-52.12	18.66	-33.46		
		10590.00	V	-55.29	24.30	-30.99		
		5295.00	Horizontal	-50.97	15.51	-35.46		
		7942.50	H	-55.50	18.66	-36.84		
		10590.00	H	-57.62	24.30	-33.32		
20MHz	Low	5090.00	Vertical	-47.62	15.67	-31.95	-25.00	PASS

		7635.00	V	-48.61	17.84	-30.77		
		10180.00	V	-54.24	23.86	-30.38		
		5090.00	Horizontal	-58.00	15.67	-42.33		
		7635.00	H	-61.14	17.84	-43.30		
		10180.00	H	-63.97	23.86	-40.11		
	Mid	5180.00	Vertical	-53.47	15.69	-37.78	-25.00	PASS
		7770.00	V	-55.73	17.96	-37.77		
		10360.00	V	-57.77	24.20	-33.57		
		5180.00	Horizontal	-55.23	15.69	-39.54	-25.00	PASS
		7770.00	H	-58.48	17.96	-40.52		
		10360.00	H	-61.77	24.20	-37.57		
	High	5290.00	Vertical	-48.71	15.98	-32.73	-25.00	PASS
		7935.00	V	-54.20	18.65	-35.55		
		10580.00	V	-57.75	24.34	-33.41		
		5290.00	Horizontal	-49.45	15.98	-33.47	-25.00	PASS
		7935.00	H	-54.33	18.65	-35.68		
		10580.00	H	-56.12	24.34	-31.78		



LTE Band 66								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
1.4MHz	Low	3421.40	Vertical	-48.15	12.41	-35.74	-13.00	PASS
		5132.10	V	-55.13	15.69	-39.44		
		6842.80	V	-59.43	18.95	-40.48		
		3421.40	Horizontal	-49.48	12.41	-37.07		
		5132.10	H	-56.38	15.69	-40.69		
		6842.80	H	-60.49	18.95	-41.54		
	Mid	3465.00	Vertical	-47.20	12.46	-34.74	-13.00	PASS
		5197.50	V	-54.21	15.71	-38.50		
		6930.00	V	-58.57	18.97	-39.60		
		3465.00	Horizontal	-48.31	12.46	-35.85		
		5197.50	H	-55.41	15.71	-39.70		
		6930.00	H	-59.57	18.97	-40.60		
	High	3508.60	Vertical	-45.53	12.49	-33.04	-13.00	PASS
		5262.90	V	-52.71	15.76	-36.95		
		7017.20	V	-57.15	19.02	-38.13		
		3508.60	Horizontal	-47.74	12.49	-35.25		
		5262.90	H	-54.90	15.76	-39.14		
		7017.20	H	-59.14	19.02	-40.12		
3MHz	Low	3423.00	Vertical	-44.47	12.53	-31.94	-13.00	PASS
		5134.50	V	-49.62	15.79	-33.83		
		6846.00	V	-54.98	19.12	-35.86		
		3423.00	Horizontal	-45.08	12.53	-32.55		
		5134.50	H	-51.73	15.79	-35.94		
		6846.00	H	-57.57	19.12	-38.45		
	Mid	3465.00	Vertical	-41.35	12.46	-28.89	-13.00	PASS
		5197.50	V	-46.67	15.71	-30.96		
		6930.00	V	-51.69	18.97	-32.72		
		3465.00	Horizontal	-42.47	12.46	-30.01		
		5197.50	H	-49.87	15.71	-34.16		
		6930.00	H	-55.38	18.97	-36.41		
High	3507.00	Vertical	-38.69	12.59	-26.10	-13.00	PASS	
	5260.50	V	-44.78	15.84	-28.94			

		7014.00	V	-50.59	19.19	-31.40		PASS
		3507.00	Horizontal	-39.92	12.59	-27.33		
		5260.50	H	-47.96	15.84	-32.12		
		7014.00	H	-52.01	19.19	-32.82		
5MHz	Low	3425.00	Vertical	-35.22	12.12	<b>-23.10</b>	-13.00	PASS
		5137.50	V	-40.11	15.72	-24.39		
		6850.00	V	-47.02	19.03	-27.99		
		3425.00	Horizontal	-41.73	12.12	-29.61		
		5137.50	H	-51.90	15.72	-36.18		
		6850.00	H	-53.84	19.03	-34.81		
	Mid	3465.00	Vertical	-37.02	12.46	-24.56	-13.00	PASS
		5197.50	V	-42.82	15.71	-27.11		
		6930.00	V	-49.31	18.97	-30.34		
		3465.00	Horizontal	-45.46	12.46	-33.00		
		5197.50	H	-54.19	15.71	-38.48		
		6930.00	H	-55.54	18.97	-36.57		
	High	3505.00	Vertical	-40.45	12.19	-28.26	-13.00	PASS
		5257.50	V	-45.53	15.79	-29.74		
		7010.00	V	-51.84	19.23	-32.61		
		3505.00	Horizontal	-47.84	12.19	-35.65		
		5257.50	H	-56.73	15.79	-40.94		
		7010.00	H	-57.67	19.23	-38.44		
10MHz	Low	3430.00	Vertical	-38.03	12.23	-25.80	-13.00	PASS
		5145.00	V	-44.23	15.82	-28.41		
		6860.00	V	-50.27	19.26	-31.01		
		3430.00	Horizontal	-51.64	12.23	-39.41		
		5145.00	H	-59.33	15.82	-43.51		
		6860.00	H	-60.66	19.26	-41.40		
	Mid	3465.00	Vertical	-41.17	12.46	-28.71	-13.00	PASS
		5197.50	V	-46.56	15.71	-30.85		
		6930.00	V	-52.92	18.97	-33.95		
		3465.00	Horizontal	-53.79	12.46	-41.33		
		5197.50	H	-62.08	15.71	-46.37		
		6930.00	H	-62.63	18.97	-43.66		
	High	3500.00	Vertical	-42.15	12.35	-29.80	-13.00	PASS
		5250.00	V	-49.17	15.89	-33.28		



		7000.00	V	-56.12	19.35	-36.77		PASS
		3500.00	Horizontal	-51.36	12.35	-39.01		
		5250.00	H	-60.91	15.89	-45.02		
		7000.00	H	-61.21	19.35	-41.86		
15MHz	Low	3435.00	Vertical	-40.21	12.39	-27.82	-13.00	PASS
		5152.50	V	-47.41	15.92	-31.49		
		6870.00	V	-54.25	19.39	-34.86		
		3435.00	Horizontal	-53.27	12.39	-40.88		
		5152.50	H	-62.70	15.92	-46.78		
		6870.00	H	-62.75	19.39	-43.36		
	Mid	3465.00	Vertical	-41.69	12.46	-29.23	-13.00	PASS
		5197.50	V	-48.52	15.71	-32.81		
		6930.00	V	-55.07	18.97	-36.10		
		3465.00	Horizontal	-51.56	12.46	-39.10		
		5197.50	H	-60.64	15.71	-44.93		
		6930.00	H	-61.29	18.97	-42.32		
	High	3495.00	Vertical	-40.28	12.52	-27.76	-13.00	PASS
		5242.50	V	-45.60	15.53	-30.07		
		6990.00	V	-52.87	19.49	-33.38		
		3495.00	Horizontal	-53.95	12.52	-41.43		
		5242.50	H	-64.23	15.53	-48.70		
		6990.00	H	-65.69	19.49	-46.20		
20MHz	Low	3440.00	Vertical	-42.66	12.59	-30.07	-13.00	PASS
		5160.00	V	-48.28	15.58	-32.70		
		6880.00	V	-54.89	19.53	-35.36		
		3440.00	Horizontal	-54.46	12.59	-41.87		
		5160.00	H	-64.70	15.58	-49.12		
		6880.00	H	-66.08	19.53	-46.55		
	Mid	3465.00	Vertical	-42.86	12.46	-30.40	-13.00	PASS
		5197.50	V	-48.72	15.71	-33.01		
		6930.00	V	-54.62	18.97	-35.65		
		3465.00	Horizontal	-54.62	12.46	-42.16		
		5197.50	H	-65.07	15.71	-49.36		
		6930.00	H	-65.74	18.97	-46.77		
	High	3490.00	Vertical	-41.43	12.71	-28.72	-13.00	PASS
		5235.00	V	-46.47	15.72	-30.75		


		6980.00	V	-53.65	19.63	-34.02		
		3490.00	Horizontal	-55.18	12.71	-42.47	-13.00	PASS
		5235.00	H	-65.37	15.72	-49.65		
		6980.00	H	-66.65	19.63	-47.02		

## 10. ERP and EIRP

### 10.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h) Part 90.635
Limit:	ERP ≤ 7W(38.45dBm) (LTE Band 5,26(824-849MHz)) EIRP ≤ 2W(33.00dBm) (LTE Band 2,25) ERP ≤ 3W(34.77dBm) (LTE Band 13) ERP ≤ 3W(34.77dBm) (LTE Band 12,17,71) EIRP ≤ 1W(30.00dBm) (LTE Band 4,66) EIRP ≤ 2W(33.00dBm) (LTE Band 7,38,41) ERP ≤ 100W(50.00dBm) (LTE Band 26(814-824MHz))

### 10.2. Test Setup

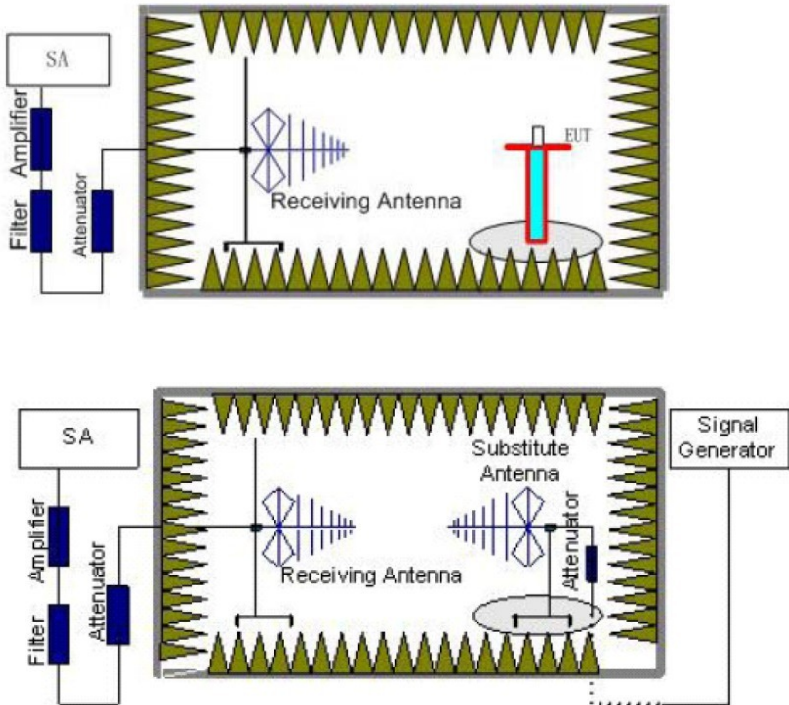

### 10.3. Test Procedure

1. Place the EUT in the center of the turntable.
  - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz,

- the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
- b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
  3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
  4. Receiver or Spectrum set as follow:  
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto  
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
  5. Each emission under consideration shall be evaluated:
    - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
    - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
    - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
    - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
    - e) Record the measured emission amplitude level and frequency
  6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
  7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
  8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
  9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
  10. For each emission that was detected and measured in the initial test
    - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
    - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
    - c) Record the output power level of the signal generator when equivalence is achieved in step b).
  11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
  12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:  
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where



Pe = equivalent emission power in dBm

Ps = source (signal generator) power in dBm

*NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.*

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

**10.4. Test Data**

Pass

Please to see the following pages

LTE Band 2						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	22.63	19.86	33.00	PASS
		Mid	23.02	19.74		
		High	23.04	19.97		
	16QAM	Low	17.57	15.39		PASS
		Mid	18.15	15.79		
		High	17.91	16.28		
3MHz	QPSK	Low	22.01	18.68	33.00	PASS
		Mid	22.62	19.71		
		High	22.37	19.49		
	16QAM	Low	19.22	17.08		PASS
		Mid	19.06	16.65		
		High	17.98	16.66		
5MHz	QPSK	Low	24.72	21.26	33.00	PASS
		Mid	25.06	20.90		
		High	25.53	21.26		
	16QAM	Low	19.91	16.73		PASS
		Mid	20.14	17.00		
		High	19.78	17.37		
10MHz	QPSK	Low	24.61	21.49	33.00	PASS
		Mid	24.96	21.14		
		High	25.40	21.75		
	16QAM	Low	19.79	17.08		PASS
		Mid	20.04	17.53		

		High	19.68	17.73		
15MHz	QPSK	Low	23.73	20.09	33.00	PASS
		Mid	24.31	20.93		
		High	24.43	21.04		
	16QAM	Low	21.15	18.55		PASS
		Mid	20.70	18.16		
		High	19.52	17.93		
20MHz	QPSK	Low	24.20	20.52	33.00	PASS
		Mid	25.02	21.49		
		High	25.15	21.49		
	16QAM	Low	21.84	19.49		PASS
		Mid	21.28	18.63		
		High	20.07	18.17		

LTE Band 4						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.40	21.32	30.00	PASS
		Mid	24.15	21.96		
		High	24.42	21.59		
	16QAM	Low	18.53	17.74		PASS
		Mid	19.16	18.47		
		High	19.16	18.39		
3MHz	QPSK	Low	24.31	21.31	30.00	PASS
		Mid	23.97	21.44		
		High	23.74	21.26		
	16QAM	Low	19.15	18.69		PASS
		Mid	19.62	17.36		
		High	19.81	18.84		
5MHz	QPSK	Low	25.62	22.48	30.00	PASS
		Mid	25.96	23.07		
		High	26.16	22.78		
	16QAM	Low	20.18	18.55		PASS
		Mid	20.61	20.42		
		High	20.37	19.02		
10MHz	QPSK	Low	24.66	22.13	30.00	PASS
		Mid	25.18	22.70		

	16QAM	High	25.41	22.34	30.00	PASS
		Low	19.47	18.38		
		Mid	19.99	19.04		
		High	19.85	18.86		
15MHz	QPSK	Low	25.64	22.00	30.00	PASS
		Mid	25.06	22.10		
		High	24.78	21.97		
	16QAM	Low	20.14	19.18		PASS
		Mid	20.49	18.53		
		High	20.53	19.22		
20MHz	QPSK	Low	25.77	22.13	30.00	PASS
		Mid	25.56	22.33		
		High	25.22	22.09		
	16QAM	Low	20.10	19.34		PASS
		Mid	20.97	18.39		
		High	21.07	19.57		

LTE Band 5						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.07	21.90	38.45	PASS
		Mid	23.77	22.19		
		High	23.72	22.21		
	16QAM	Low	19.39	18.24		PASS
		Mid	19.60	18.95		
		High	19.70	18.53		
3MHz	QPSK	Low	<b>25.45</b>	20.87	38.45	PASS
		Mid	24.83	21.09		
		High	23.92	20.75		
	16QAM	Low	19.17	19.49		PASS
		Mid	19.58	18.45		
		High	19.68	18.11		
5MHz	QPSK	Low	24.55	21.44	38.45	PASS
		Mid	24.22	21.67		
		High	23.35	21.12		
	16QAM	Low	20.43	19.54		PASS
		Mid	20.19	19.75		
		High	20.08	19.56		



10MHz	QPSK	Low	24.40	21.49	38.45	PASS
		Mid	24.08	21.72		
		High	23.25	21.15		
	16QAM	Low	20.45	18.79		PASS
		Mid	20.78	19.56		
		High	20.97	19.19		

LTE Band 7						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	23.19	20.51	33.00	PASS
		Mid	23.65	20.32		
		High	23.43	20.30		
	16QAM	Low	17.44	15.44		PASS
		Mid	17.92	15.70		
		High	17.81	16.26		
10MHz	QPSK	Low	22.77	19.25	33.00	PASS
		Mid	22.94	20.10		
		High	22.79	19.84		
	16QAM	Low	18.78	16.93		PASS
		Mid	18.58	16.36		
		High	18.62	17.09		
15MHz	QPSK	Low	25.52	22.07	33.00	PASS
		Mid	<b>26.34</b>	21.85		
		High	26.16	21.72		
	16QAM	Low	20.00	16.91		PASS
		Mid	20.10	17.03		
		High	19.86	17.45		
20MHz	QPSK	Low	25.39	22.32	33.00	PASS
		Mid	25.99	22.00		
		High	25.88	22.14		
	16QAM	Low	19.03	16.65		PASS
		Mid	19.72	17.36		
		High	19.33	17.51		

LTE Band 12						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.05	20.30	34.77	PASS
		Mid	23.31	20.15		
		High	23.64	20.39		
	16QAM	Low	17.12	15.06		PASS
		Mid	17.61	15.52		
		High	17.63	16.06		
3MHz	QPSK	Low	22.33	18.92	34.77	PASS
		Mid	22.85	20.11		
		High	22.86	19.83		
	16QAM	Low	19.07	17.05		PASS
		Mid	18.68	16.53		
		High	17.72	16.52		
5MHz	QPSK	Low	25.49	21.94	34.77	PASS
		Mid	25.70	21.51		
		High	26.55	21.90		
	16QAM	Low	19.86	16.63		PASS
		Mid	19.94	16.94		
		High	19.82	17.33		
10MHz	QPSK	Low	25.37	22.20	34.77	PASS
		Mid	25.58	21.79		
		High	26.41	22.47		
	16QAM	Low	19.72	17.04		PASS
		Mid	19.82	17.55		
		High	19.71	17.76		

LTE Band 13						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	23.05	21.14	34.77	PASS
		Mid	23.42	21.04		
		High	23.51	21.29		
	16QAM	Low	17.12	15.90		PASS
		Mid	17.72	16.41		
		High	17.50	16.96		

10MHz	QPSK	Mid	22.33	19.76	34.77	PASS
	16QAM	Mid	22.96	21.00		

LTE Band 25						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.02	20.19	33.00	PASS
		Mid	23.45	20.06		
		High	23.54	20.33		
	16QAM	Low	17.09	14.95		PASS
		Mid	17.75	15.43		
		High	17.53	16.00		
3MHz	QPSK	Low	22.30	18.81	33.00	PASS
		Mid	22.99	20.02		
		High	22.76	19.77		
	16QAM	Low	19.04	16.94		PASS
		Mid	18.82	16.44		
		High	17.62	16.46		
5MHz	QPSK	Low	25.46	21.83	33.00	PASS
		Mid	25.84	21.42		
		High	26.45	21.84		
	16QAM	Low	19.83	16.52		PASS
		Mid	20.08	16.85		
		High	19.72	17.27		
10MHz	QPSK	Low	25.34	22.09	33.00	PASS
		Mid	25.72	21.70		
		High	26.31	22.41		
	16QAM	Low	19.69	16.93		PASS
		Mid	19.96	17.46		
		High	19.61	17.70		
15MHz	QPSK	Low	24.32	20.47	33.00	PASS
		Mid	24.97	21.44		
		High	25.17	21.58		
	16QAM	Low	21.30	18.66		PASS
		Mid	20.74	18.21		
		High	19.43	17.94		
20MHz	QPSK	Low	24.87	20.97	33.00	PASS
		Mid	25.81	22.10		

	16QAM	High	26.02	22.12	PASS
		Low	22.10	19.76	
		Mid	21.43	18.76	
		High	20.07	18.22	

LTE Band 26 (814-824MHz)						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.02	20.19	50.00	PASS
		Mid	23.45	20.06		
		High	23.54	20.33		
	16QAM	Low	17.09	14.95		PASS
		Mid	17.75	15.43		
		High	17.53	16.00		
3MHz	QPSK	Low	22.30	18.81	50.00	PASS
		Mid	22.99	20.02		
		High	22.76	19.77		
	16QAM	Low	19.04	16.94		PASS
		Mid	18.82	16.44		
		High	17.62	16.46		
5MHz	QPSK	Low	25.46	21.83	50.00	PASS
		Mid	25.84	21.42		
		High	26.45	21.84		
	16QAM	Low	19.83	16.52		PASS
		Mid	20.08	16.85		
		High	19.72	17.27		
10MHz	QPSK	Mid	25.34	22.09	50.00	PASS
	16QAM	Mid	25.72	21.70		

LTE Band 26 (824-849MHz)						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	20.91	18.42	38.45	PASS
		Mid	21.15	18.40		
		High	20.92	18.46		
	16QAM	Low	19.55	17.22		PASS
		Mid	19.84	17.33		
		High	19.54	17.46		

3MHz	QPSK	Low	20.75	18.11	38.45	PASS
		Mid	21.05	18.39		
		High	20.74	18.33		
	16QAM	Low	19.99	17.67		PASS
		Mid	20.08	17.56		
		High	19.55	17.57		
5MHz	QPSK	Low	21.47	18.80	38.45	PASS
		Mid	21.70	18.71		
		High	21.59	18.81		
	16QAM	Low	20.18	17.58		PASS
		Mid	20.38	17.66		
		High	20.04	17.75		
10MHz	QPSK	Low	21.45	18.86	38.45	PASS
		Mid	21.67	18.78		
		High	21.56	18.94		
	16QAM	Low	20.15	17.68		PASS
		Mid	20.35	17.80		
		High	20.02	17.85		
15MHz	QPSK	Low	21.22	18.49	38.45	PASS
		Mid	21.51	18.72		
		High	21.30	18.75		
	16QAM	Low	20.51	18.07		PASS
		Mid	20.52	17.97		
		High	19.97	17.91		

LTE Band 38						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	21.10	18.63	33.00	PASS
		Mid	21.34	18.52		
		High	21.09	18.58		
	16QAM	Low	19.45	17.17		PASS
		Mid	19.75	17.23		
		High	19.41	17.37		
10MHz	QPSK	Low	20.90	18.25	33.00	PASS
		Mid	21.21	18.51		
		High	20.87	18.42		

	16QAM	Low	19.99	17.73		PASS
		Mid	20.04	17.51		
		High	19.43	17.50		
15MHz	QPSK	Low	21.78	19.09	33.00	PASS
		Mid	22.01	18.90		
		High	21.90	19.00		
	16QAM	Low	20.21	17.61		PASS
		Mid	20.40	17.63		
		High	20.02	17.72		
20MHz	QPSK	Low	21.75	19.16	33.00	PASS
		Mid	21.97	18.98		
		High	21.86	19.16		
	16QAM	Low	20.18	17.72		PASS
		Mid	20.37	17.80		
		High	19.99	17.85		

LTE Band 41						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	22.50	19.75	33.00	PASS
		Mid	22.88	19.64		
		High	22.88	19.86		
	16QAM	Low	17.71	15.52		PASS
		Mid	18.28	15.90		
		High	18.03	16.36		
10MHz	QPSK	Low	21.92	18.64	33.00	PASS
		Mid	22.51	19.61		
		High	22.25	19.40		
	16QAM	Low	19.28	17.13		PASS
		Mid	19.14	16.72		
		High	18.10	16.73		
15MHz	QPSK	Low	24.47	21.07	33.00	PASS
		Mid	24.81	20.74		
		High	25.23	21.08		
	16QAM	Low	19.92	16.78		PASS
		Mid	20.16	17.05		

		High	19.80	17.39		
20MHz	QPSK	Low	24.38	21.29	33.00	PASS
		Mid	24.72	20.96		
		High	25.11	21.54		
	16QAM	Low	19.81	17.12		PASS
		Mid	20.07	17.54		
		High	19.71	17.74		

LTE Band 66						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	22.69	19.91	30.00	PASS
		Mid	23.08	19.79		
		High	23.11	20.02		
	16QAM	Low	17.50	15.32		PASS
		Mid	18.09	15.73		
		High	17.85	16.24		
3MHz	QPSK	Low	22.05	18.70	30.00	PASS
		Mid	22.67	19.75		
		High	22.43	19.53		
	16QAM	Low	19.20	17.06		PASS
		Mid	19.03	16.62		
		High	17.93	16.63		
5MHz	QPSK	Low	24.83	21.34	30.00	PASS
		Mid	25.17	20.98		
		High	25.66	21.34		
	16QAM	Low	19.90	16.69		PASS
		Mid	20.13	16.97		
		High	19.76	17.35		
10MHz	QPSK	Low	24.72	21.58	30.00	PASS
		Mid	25.07	21.22		
		High	25.53	21.84		
	16QAM	Low	19.78	17.05		PASS
		Mid	20.02	17.51		
		High	19.67	17.73		
15MHz	QPSK	Low	23.82	20.15	30.00	PASS
		Mid	24.40	21.00		




	16QAM	High	24.54	21.11	30.00	PASS
		Low	21.18	18.57		
		Mid	20.71	18.17		
		High	19.51	17.93		
20MHz	QPSK	Low	24.30	20.59	30.00	PASS
		Mid	25.13	21.57		
		High	25.28	21.58		
	16QAM	Low	21.88	19.53		PASS
		Mid	21.31	18.65		
		High	20.07	18.17		

## 11. Frequency stability VS Voltage measurement

### 11.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54 Part 90.213
Limit:	$\leq \pm 2.5\text{ppm}$

### 11.2. Test Setup

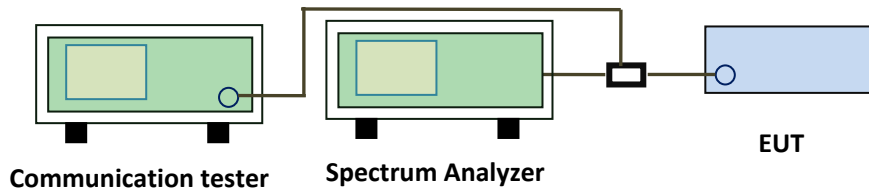

### 11.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C.
4. The power supply voltage to the EUT was varied  $\pm 15\%$  of the nominal value measured at the input to the EUT.
5. Record the maximum frequency change.

### 11.4. Test Data

Pass


Please refer to Appendix F of the Appendix Test Data.

## 12. Frequency stability VS Temperature measurement

### 12.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54 Part 90.213
Limit:	≤ ±2.5ppm

### 12.2. Test Setup

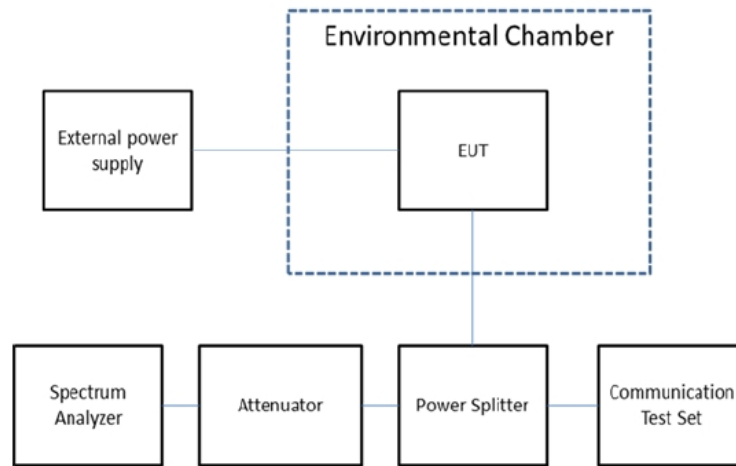

### 12.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of +50°C reached.

### 12.4. Test Data

Pass

Please refer to Appendix G of the Appendix Test Data.

## **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_Licensed

## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----