
FCC Test Report

Report No.: AGC03079160301FE03

FCC ID : 2AD29B29

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Bluetooth Wireless Sport Headsets Earbuds

BRAND NAME : AUKEY, seedforce

MODEL NAME : b29

CLIENT : Shenzhen Ximiemie Electronics Co.,Ltd.

DATE OF ISSUE : Apr.13, 2016

STANDARD(S) : FCC Part 15 Rules

TEST PROCEDURE(S)

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.13, 2016	Valid	Original Report

TABLE OF CONTENTS


1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCIES.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. ALL TEST EQUIPMENT LIST	10
8. RADIATED EMISSION	12
8.1 TEST LIMIT.....	12
8.2. MEASUREMENT PROCEDURE	13
8.3. TEST SETUP	15
8.4. TEST RESULT	17
9. BAND EDGE EMISSION	45
9.1. MEASUREMENT PROCEDURE	45
9.2 TEST SETUP	45
9.3 RADIATED TEST RESULT	46
10. 20DB BANDWIDTH.....	54
10.1. MEASUREMENT PROCEDURE	54
10.2. TEST SET-UP	54
10.3. LIMITS AND MEASUREMENT RESULTS.....	54
11. FCC LINE CONDUCTED EMISSION TEST	63
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	63
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	63
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	64
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	64
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	65
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	69
APPENDIX B: PHOTOGRAPHS OF EUT	72

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Ximiemie Electronics Co.,Ltd.
Address	3 Floor, Bldg 3, Zhongtai Technology Park, Donghuan1 Road, Longhua District, Shenzhen, 518109, China.
Manufacturer	Shenzhen Ximiemie Electronics Co.,Ltd.
Address	3 Floor, Bldg 3, Zhongtai Technology Park, Donghuan1 Road, Longhua District, Shenzhen, 518109, China.
Product Designation	Bluetooth Wireless Sport Headsets Earbuds
Brand Name	AUKEY, seedforce
Test Model	b29
Date of test	Apr.01, 2016 to Apr.09, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By 
Time Huang(Huang Nanhui) Apr.13, 2016

Reviewed By 
Forrest Lei(Lei Yonggang) Apr.13, 2016

Approved By 
Solger Zhang(Zhang Hongyi)
Authorized Officer Apr.13, 2016

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.06dBm(Max)
Bluetooth Version	V 4.1
Modulation	GFSK ,π /4-DQPSK, 8DPSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	ZBXOricomw.GHF3-V2
Software Version	N/A
Antenna Designation	Ceramic Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 3.7V
Note: The USB port only used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

The screenshot shows the BlueTest3 software window. The 'Test Mode' list on the left includes PAUSE, RADIO STATUS, RADIO STATUS FULL, TXSTART, TXDATA1 (selected), TXDATA2, TXDATA3, TXDATA4, RXSTART1, RXSTART2, and RXDATA1. The 'Test Arguments' section on the right has input fields for 'LD Freq. (MHz)' set to 2480 and 'Power (Ext, Int)' set to 255 and 15. On the far right are buttons for 'Close', 'Execute', 'Cold Reset', and 'Warm Reset'. Below these is the 'Test Results' section with checkboxes for 'Save to file' and 'Browse for file', a 'Display' section with radio buttons for 'Standard' (selected) and 'Bit Error', and a text field containing '\logfile.txt'. The bottom half of the window is a large text area displaying a log of test results, including multiple 'Chip warm reset' and 'BLE radio test TX' entries, some marked as 'successful' and others as 'failed'. The final line in the log is 'Radio Test TXDATA1 successful'.

BlueTest3

Test Mode

- PAUSE
- RADIO STATUS
- RADIO STATUS FULL
- TXSTART
- TXDATA1**
- TXDATA2
- TXDATA3
- TXDATA4
- RXSTART1
- RXSTART2
- RXDATA1

Test Arguments

LD Freq. (MHz) 2480

Power (Ext, Int) 255 15

Close

Execute

Cold Reset

Warm Reset

Test Results

☐ Save to file

Display : ☒ Standard ☐ Bit Error


\logfile.txt

Chip warm reset : success
BLE radio test TX successful
BLE radio test TX successful
BLE radio test TX failed
BLE radio test TX failed
Chip warm reset : failed
BLE radio test TX failed
Chip warm reset : success
BLE radio test TX successful
BLE radio test TX successful
BLE radio test TX failed
Chip warm reset : failed
Chip warm reset : success
BLE radio test TX successful
BLE radio test TX successful
BLE radio test TX successful
Sent Command Varid 5004, parameters: 0004 09B0 FFOF 0000 0000 0000
Radio Test TXDATA1 failed
Chip warm reset : failed
Chip warm reset : success
Sent Command Varid 5004, parameters: 0004 09B0 FFOF 0000 0000 0000
Radio Test TXDATA1 successful

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: Normal operation

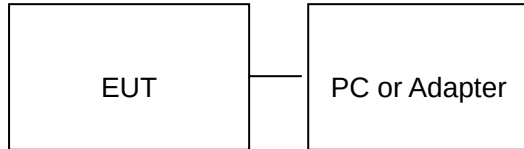

Note: Owing to the EUT has own battery, Testing will be performed while PC or Adapter remove.

Configure 2: (Control continuous TX)

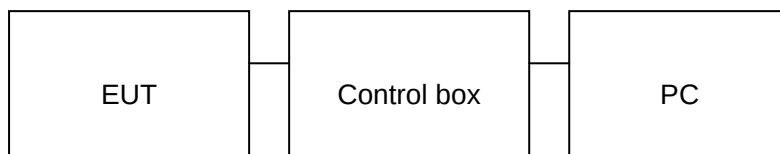

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Wireless Sport Headsets Earbuds	AUKEY, seedforce	2AD29B29	EUT
2	PC	Dell	A1465	A.E
3	Control box	N/A	N/A	A.E
4	USB Cable	N/A	m, unshielded	A.E
5	AC adapter	ETPCA-050100U3W	1.1m,unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz to 40 GHz.

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

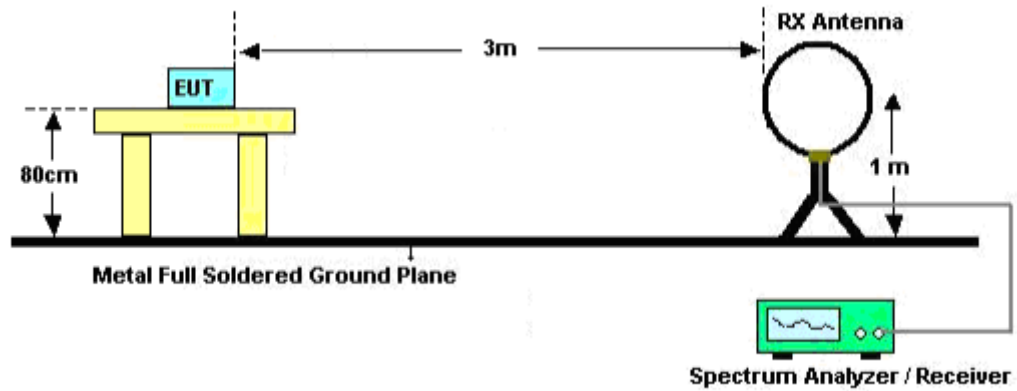

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

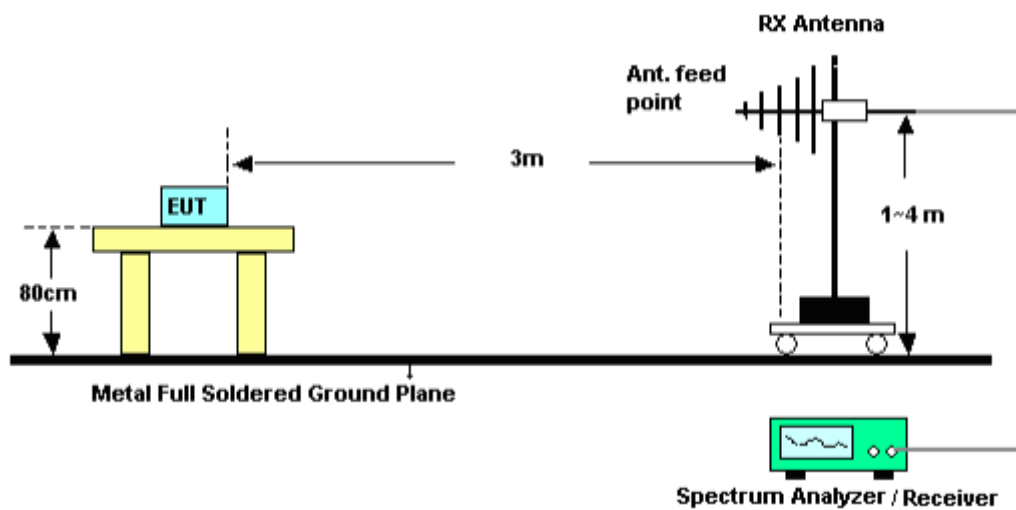

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

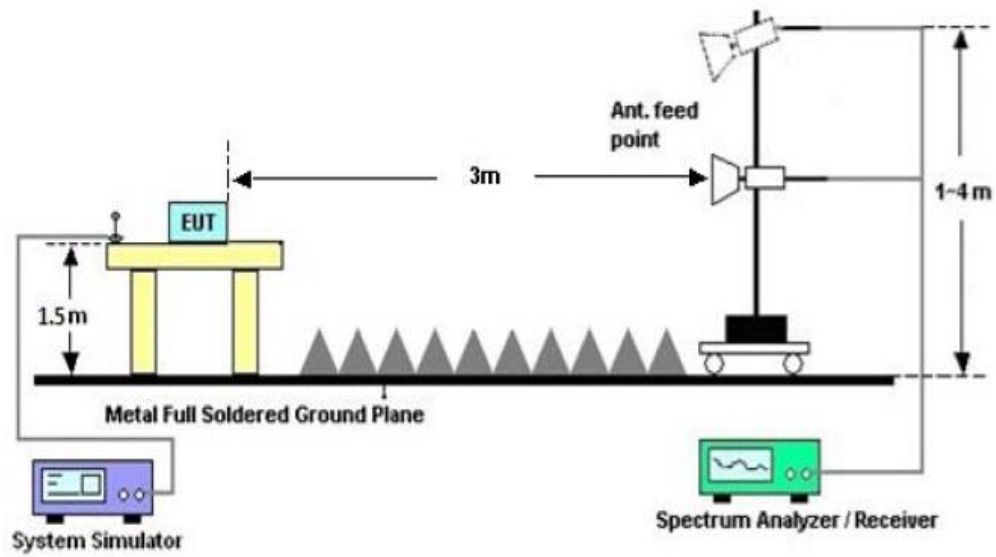

8.4. TEST RESULT


(Worst modulation:GFSK)
FOR BR/EDR

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

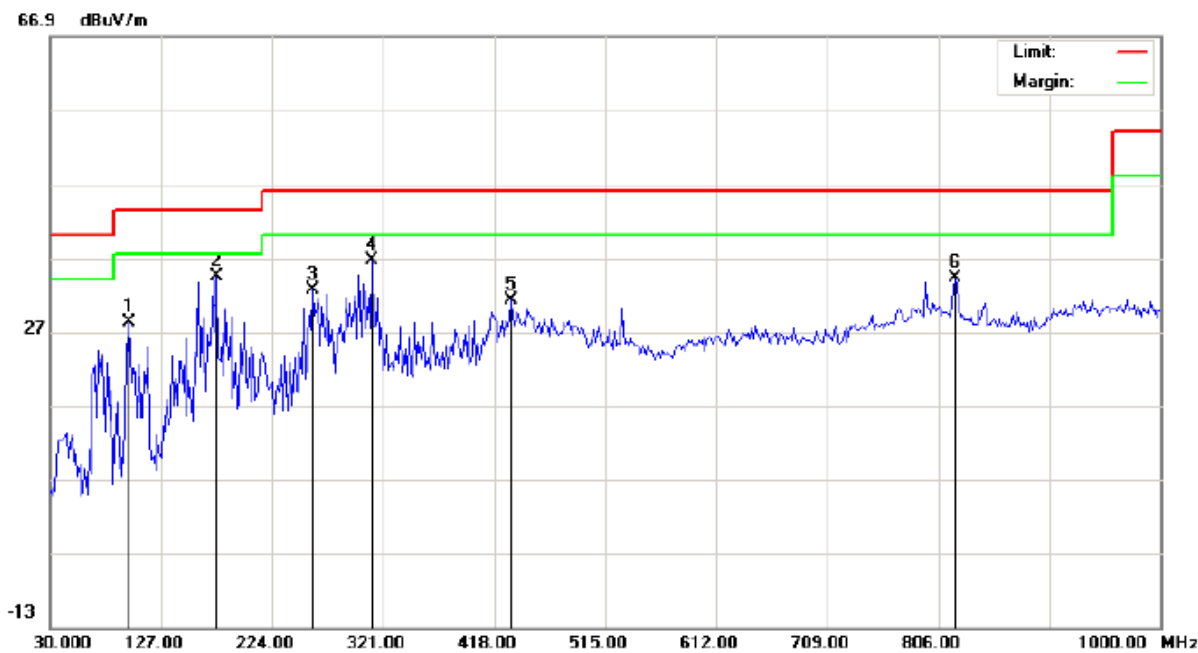

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Wireless Sport Headsets Earbuds
M/N:b29
Mode:Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.5
Humidity: 55.4 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	18.18	10.00	28.18	43.50	-15.32	peak			
2	*	175.5000	23.49	10.90	34.39	43.50	-9.11	peak			
3		259.5667	24.17	8.53	32.70	46.00	-13.30	peak			
4		311.3000	20.40	16.16	36.56	46.00	-9.44	peak			
5		432.5500	11.10	20.06	31.16	46.00	-14.84	peak			
6		820.5500	6.84	27.32	34.16	46.00	-11.84	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

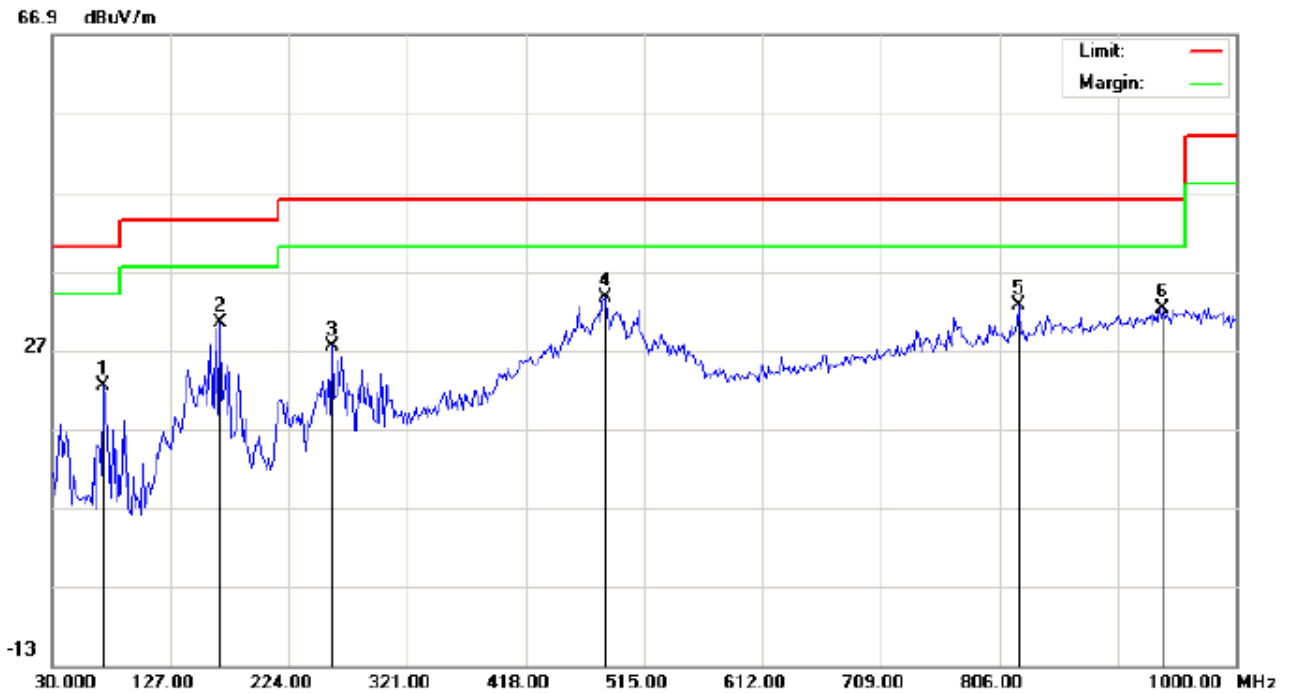

Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	18.56	3.76	22.32	40.00	-17.68	peak			
2		167.4167	15.47	14.86	30.33	43.50	-13.17	peak			
3		259.5667	13.23	14.19	27.42	46.00	-18.58	peak			
4	*	482.6667	12.71	20.94	33.65	46.00	-12.35	peak			
5		822.1667	5.32	27.32	32.64	46.00	-13.36	peak			
6		940.1833	2.54	29.73	32.27	46.00	-13.73	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1

Polarization: *Horizontal*

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29


Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	17.68	10.00	27.68	43.50	-15.82	peak			
2		159.3333	23.67	10.49	34.16	43.50	-9.34	peak			
3		259.5667	24.17	8.53	32.70	46.00	-13.30	peak			
4	*	311.3000	21.40	16.16	37.56	46.00	-8.44	peak			
5		432.5500	12.10	20.06	32.16	46.00	-13.84	peak			
6		820.5500	6.84	27.32	34.16	46.00	-11.84	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

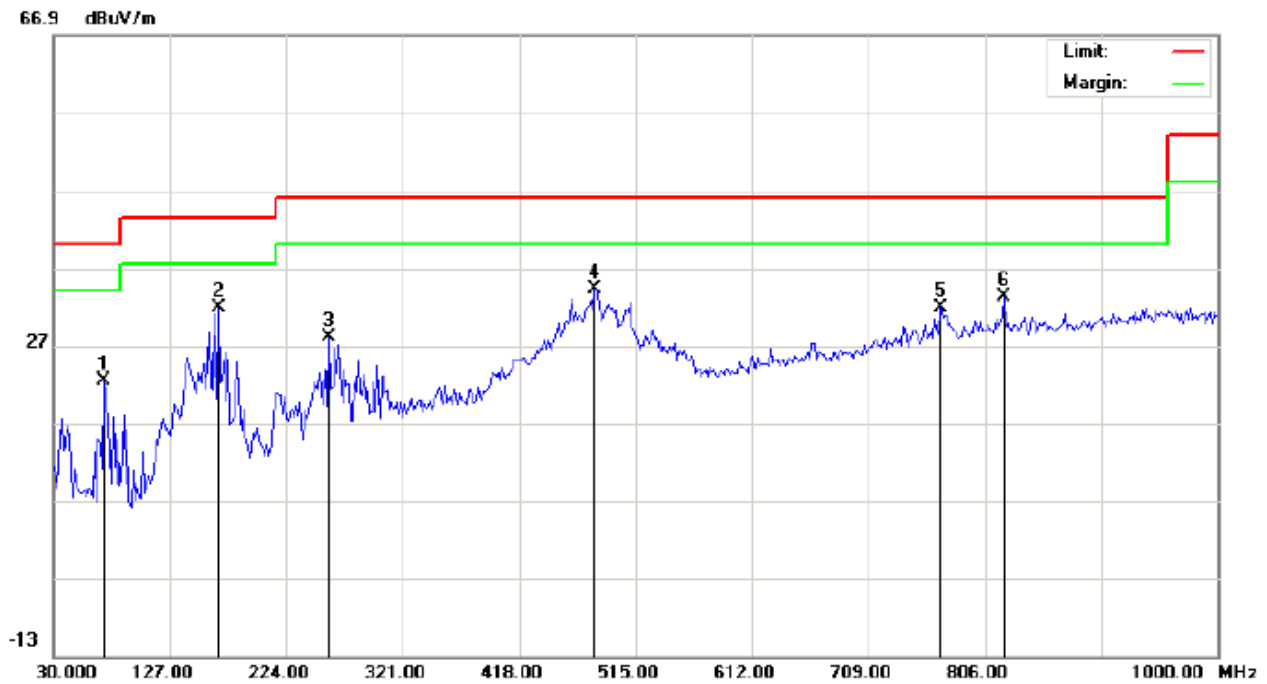

Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	18.56	3.76	22.32	40.00	-17.68	peak			
2	*	167.4167	16.97	14.86	31.83	43.50	-11.67	peak			
3		259.5667	13.73	14.19	27.92	46.00	-18.08	peak			
4		481.0500	13.22	20.93	34.15	46.00	-11.85	peak			
5		768.8167	5.01	26.89	31.90	46.00	-14.10	peak			
6		822.1667	5.82	27.32	33.14	46.00	-12.86	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

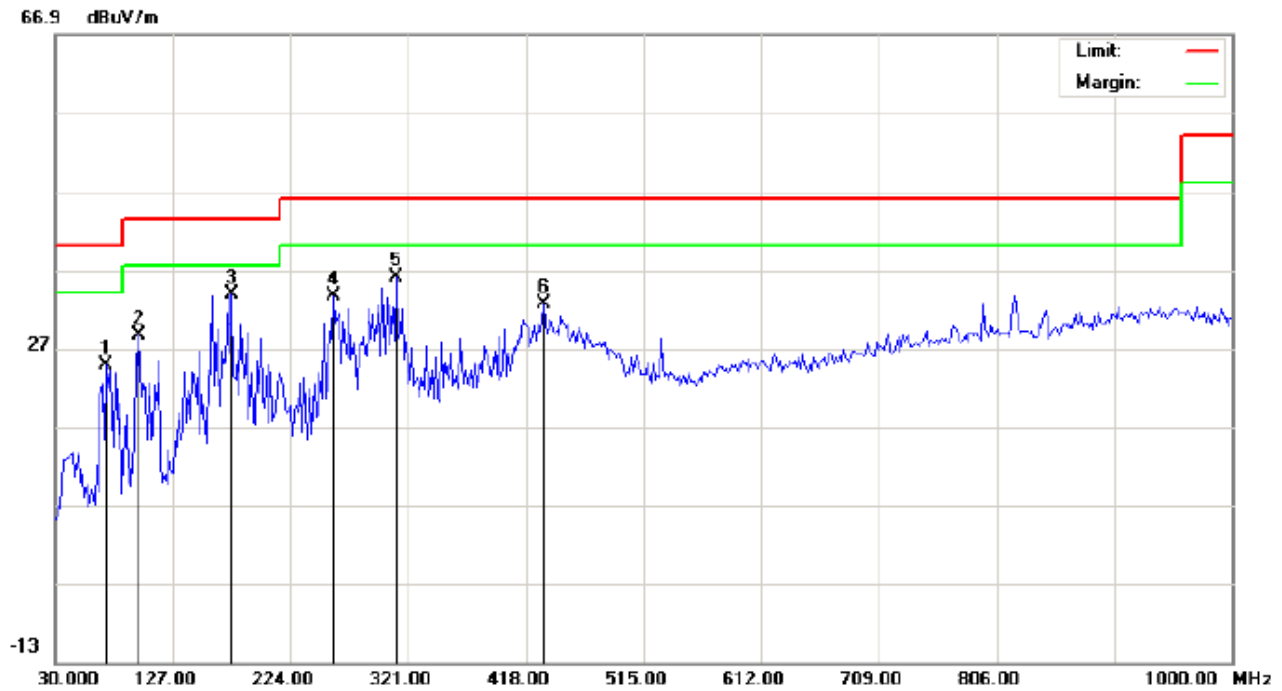

Site: site #1

Polarization: *Horizontal*

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29


Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	16.62	8.28	24.90	40.00	-15.10	peak			
2		99.5167	18.68	10.00	28.68	43.50	-14.82	peak			
3	*	175.5000	22.99	10.90	33.89	43.50	-9.61	peak			
4		259.5667	25.17	8.53	33.70	46.00	-12.30	peak			
5		311.3000	19.90	16.16	36.06	46.00	-9.94	peak			
6		432.5500	12.60	20.06	32.66	46.00	-13.34	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

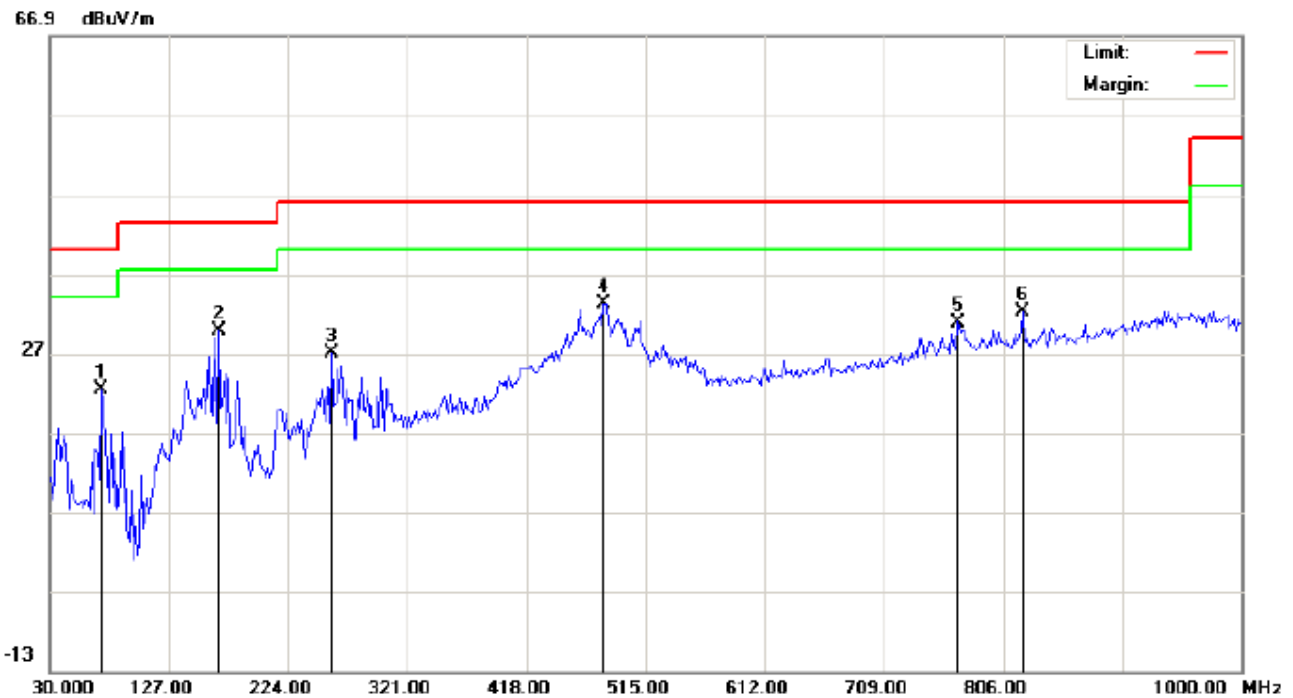

Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	18.56	3.76	22.32	40.00	-17.68	peak			
2		167.4167	14.97	14.86	29.83	43.50	-13.67	peak			
3		259.5667	12.73	14.19	26.92	46.00	-19.08	peak			
4	*	481.0500	12.22	20.93	33.15	46.00	-12.85	peak			
5		768.8167	4.01	26.89	30.90	46.00	-15.10	peak			
6		822.1667	4.82	27.32	32.14	46.00	-13.86	peak			


RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

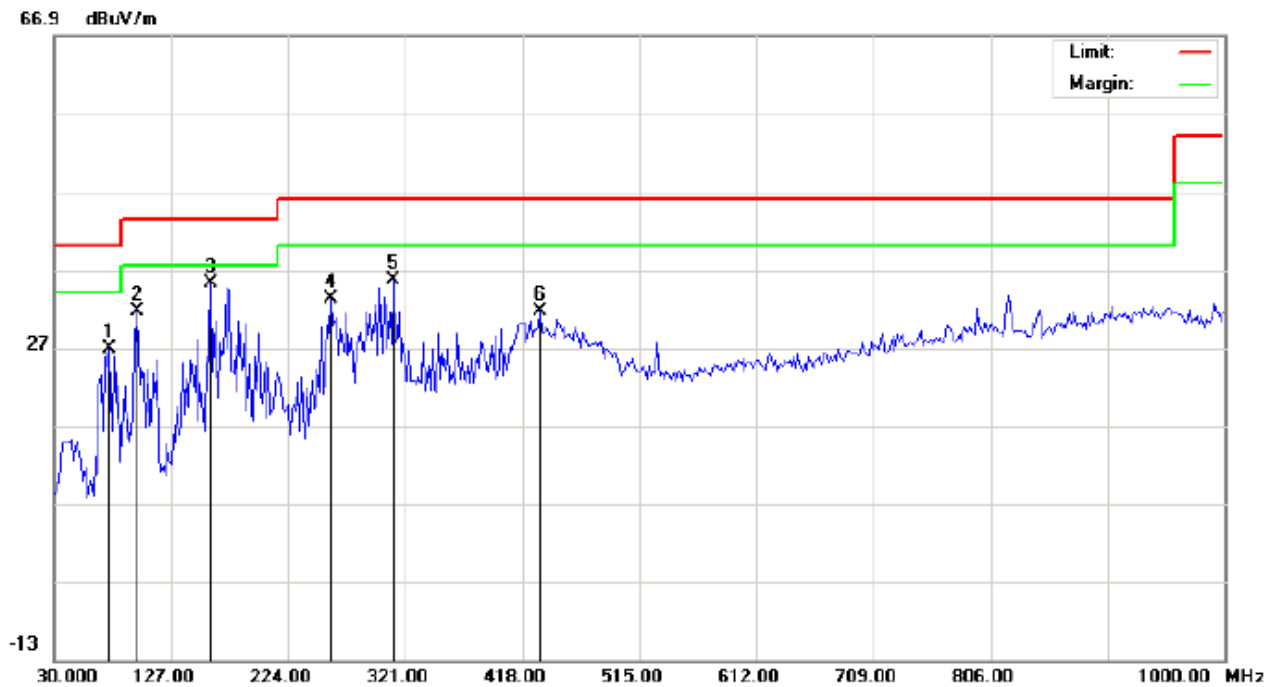RADIATED EMISSION BELOW 1GHZ**RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		75.2667	21.68	5.12	26.80	40.00	-13.20	peak			
2		99.5167	21.68	10.00	31.68	43.50	-11.82	peak			
3	*	159.3333	24.67	10.49	35.16	43.50	-8.34	peak			
4		259.5667	24.67	8.53	33.20	46.00	-12.80	peak			
5		311.3000	19.39	16.16	35.55	46.00	-10.45	peak			
6		432.5500	11.60	20.06	31.66	46.00	-14.34	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	22.56	3.76	26.32	40.00	-13.68	peak			
2		167.4167	16.46	14.86	31.32	43.50	-12.18	peak			
3		259.5667	14.23	14.19	28.42	46.00	-17.58	peak			
4		461.6500	12.69	20.72	33.41	46.00	-12.59	peak			
5	*	492.3667	13.22	21.05	34.27	46.00	-11.73	peak			
6		768.8167	4.51	26.89	31.40	46.00	-14.60	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

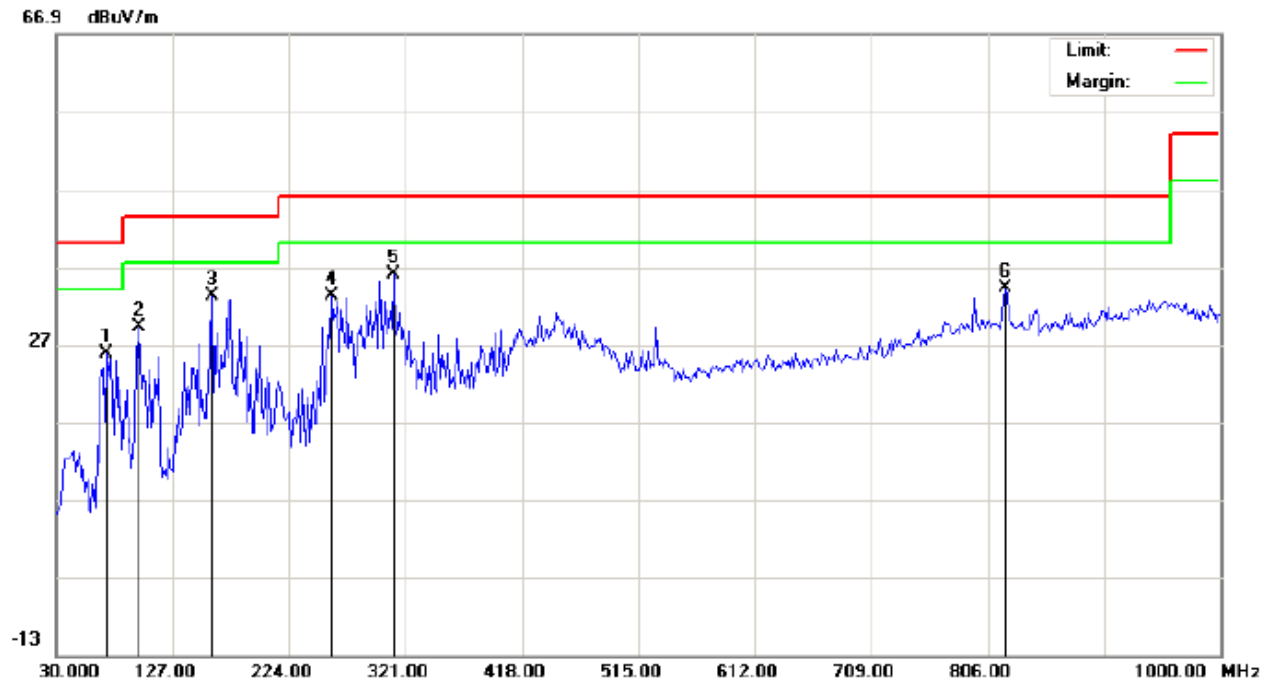

Site: site #1

Polarization: *Horizontal*

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	17.62	8.28	25.90	40.00	-14.10	peak			
2		99.5167	19.18	10.00	29.18	43.50	-14.32	peak			
3		159.3333	22.67	10.49	33.16	43.50	-10.34	peak			
4		259.5667	24.67	8.53	33.20	46.00	-12.80	peak			
5	*	311.3000	19.89	16.16	36.05	46.00	-9.95	peak			
6		820.5500	6.84	27.32	34.16	46.00	-11.84	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	20.06	3.76	23.82	40.00	-16.18	peak			
2		141.5500	10.76	15.21	25.97	43.50	-17.53	peak			
3	*	167.4167	17.47	14.86	32.33	43.50	-11.17	peak			
4		259.5667	15.23	14.19	29.42	46.00	-16.58	peak			
5		461.6500	11.69	20.72	32.41	46.00	-13.59	peak			
6		768.8167	4.51	26.89	31.40	46.00	-14.60	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

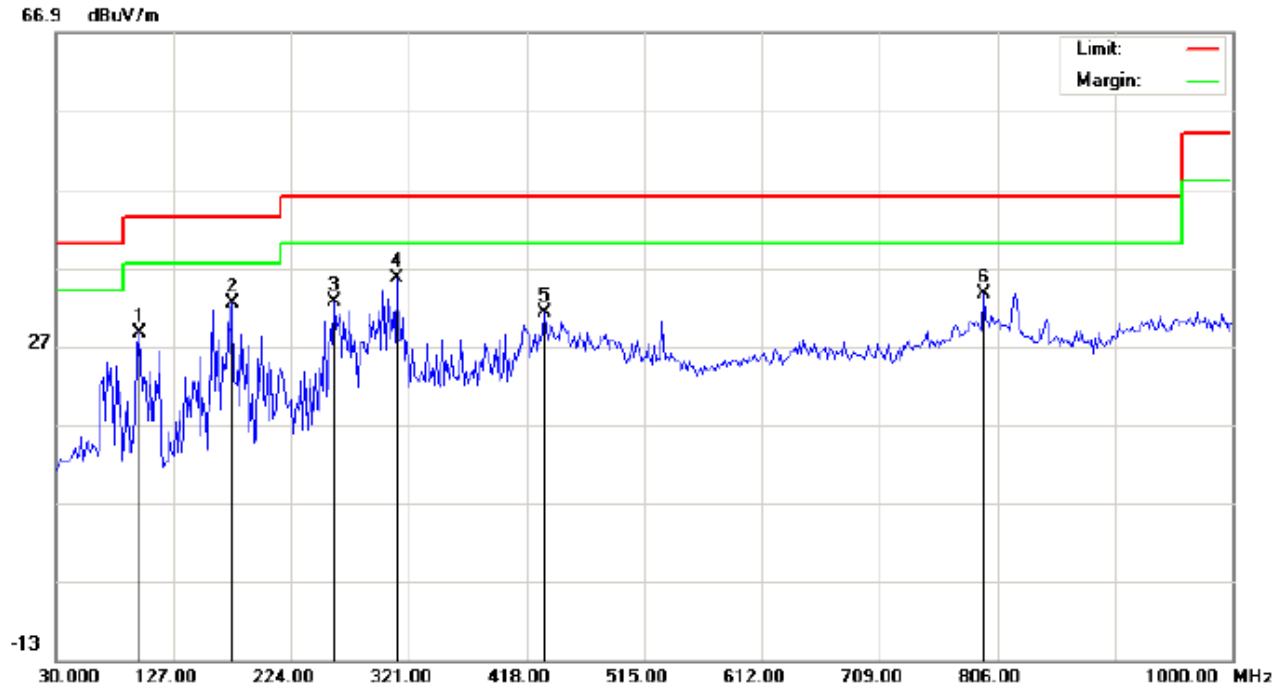

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Wireless Sport Headsets Earbuds
M/N:b29
Mode:High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.5
Humidity: 55.4 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	18.68	10.00	28.68	43.50	-14.82	peak			
2		175.5000	21.49	10.90	32.39	43.50	-11.11	peak			
3		259.5667	24.17	8.53	32.70	46.00	-13.30	peak			
4	*	311.3000	19.39	16.16	35.55	46.00	-10.45	peak			
5		432.5500	11.10	20.06	31.16	46.00	-14.84	peak			
6		794.6833	6.31	27.25	33.56	46.00	-12.44	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

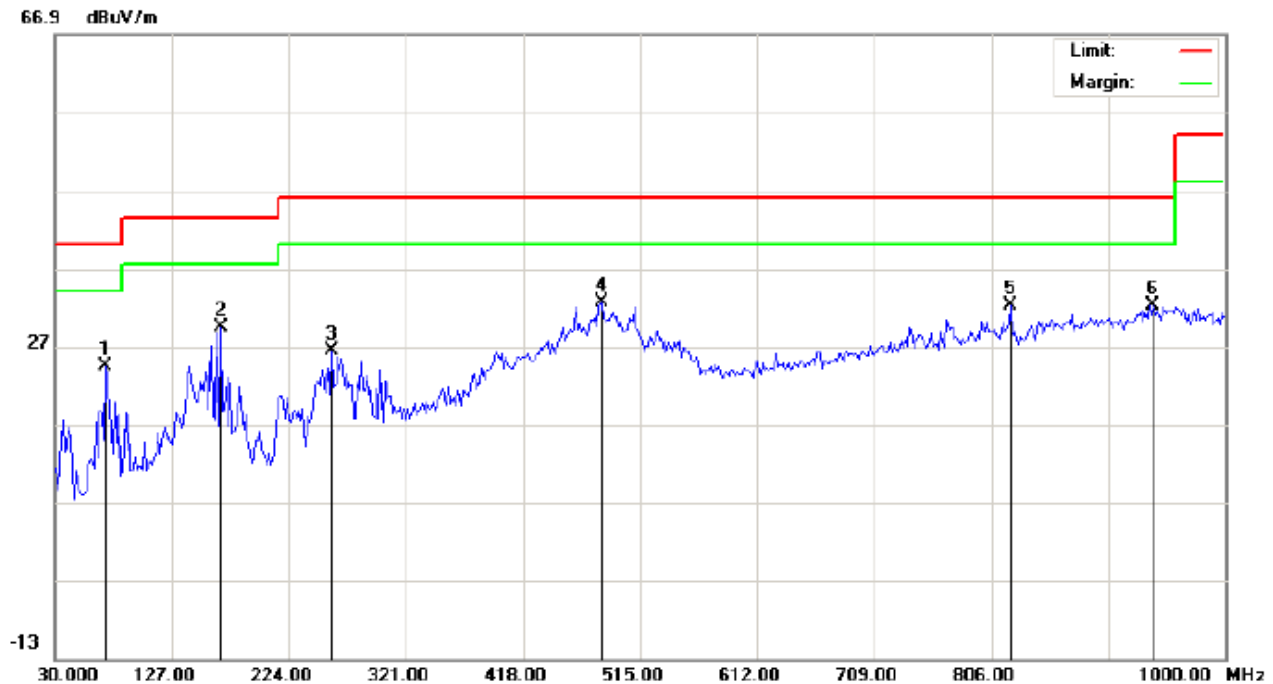

Site: site #1

Polarization: **Vertical**

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode:High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	20.56	3.76	24.32	40.00	-15.68	peak			
2		167.4167	14.46	14.86	29.32	43.50	-14.18	peak			
3		259.5667	12.23	14.19	26.42	46.00	-19.58	peak			
4	*	482.6667	11.71	20.94	32.65	46.00	-13.35	peak			
5		822.1667	4.81	27.32	32.13	46.00	-13.87	peak			
6		940.1833	2.54	29.73	32.27	46.00	-13.73	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ
(Worst modulation: GFSK)
FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

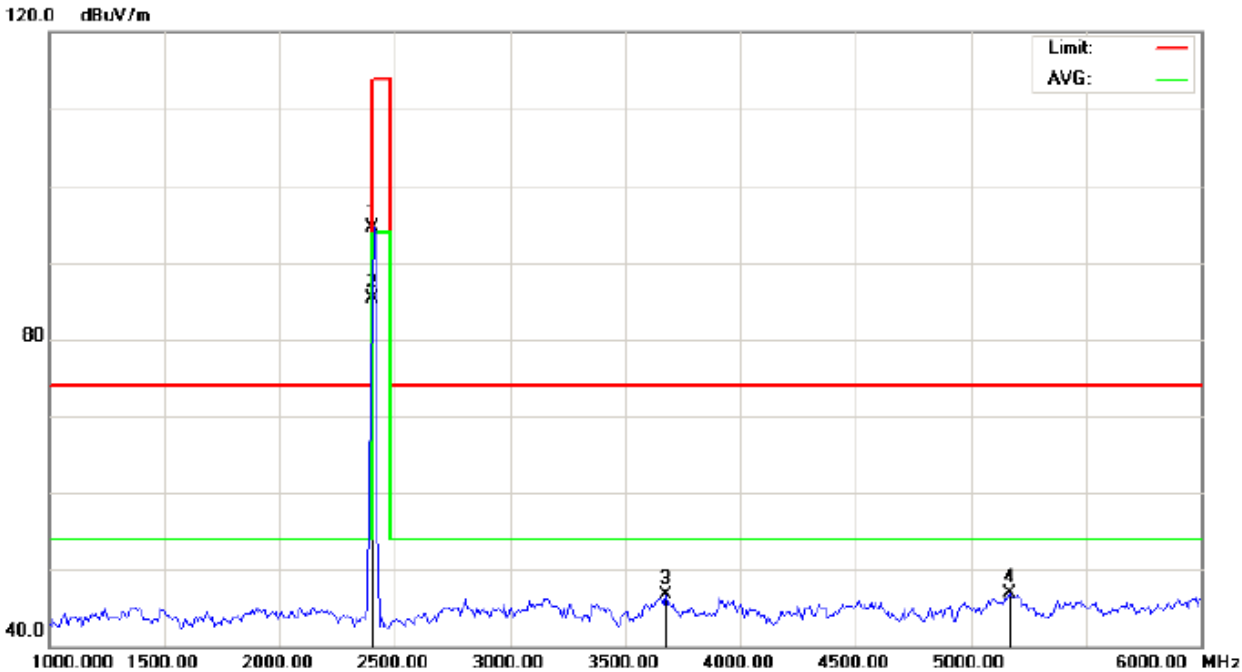


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
M/N:b29
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.25	-9.68	94.57	114.00	-19.43	peak			
2	*	2402.000	95.05	-9.68	85.37	94.00	-8.63	AVG	100	135	
3		3675.000	53.45	-6.81	46.64	74.00	-27.36	peak			
4		5166.667	48.72	-1.80	46.92	74.00	-27.08	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

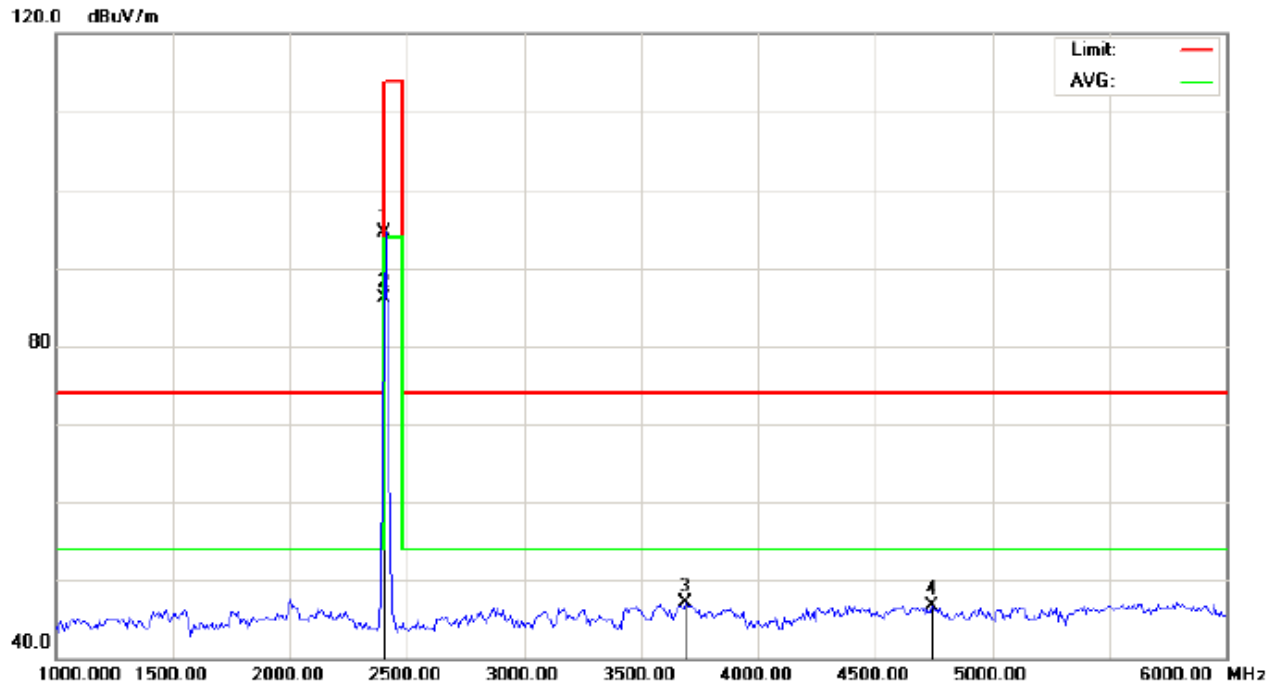

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.13	-9.68	94.45	114.00	-19.55	peak			
2	*	2402.000	95.86	-9.68	86.18	94.00	-7.82	AVG	150	318	
3		3691.667	53.83	-6.71	47.12	74.00	-26.88	peak			
4		4741.667	49.10	-2.48	46.62	74.00	-27.38	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

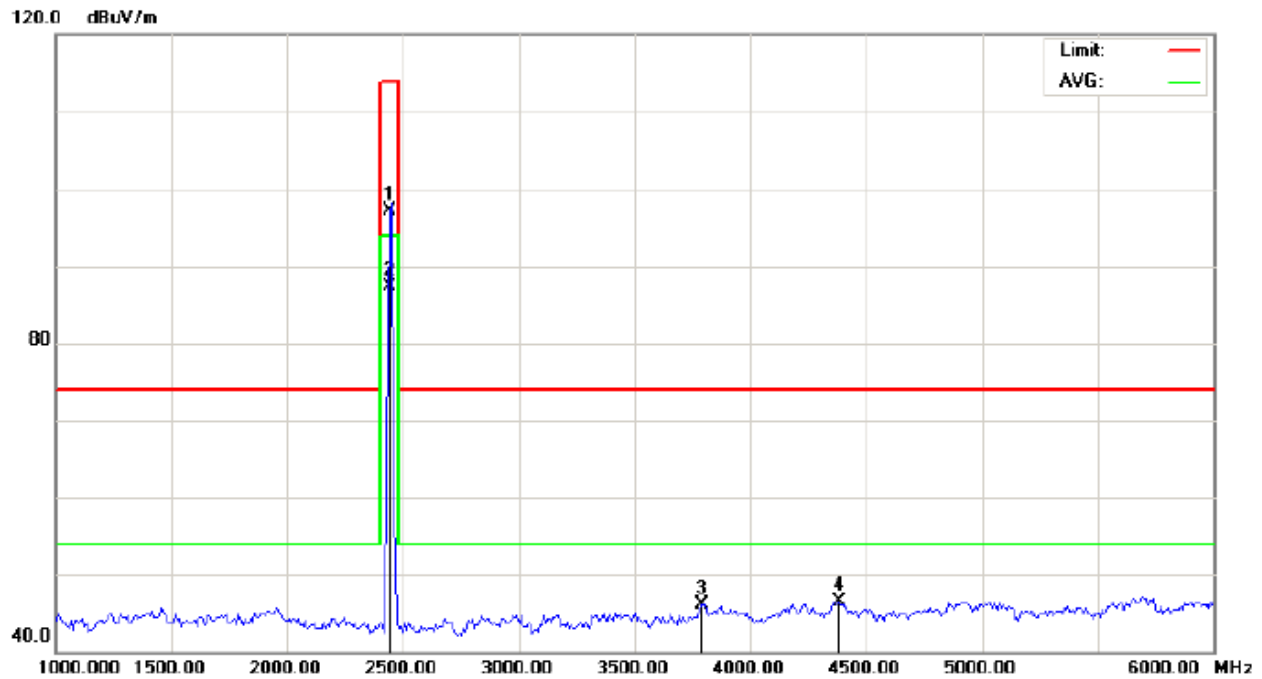

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	106.79	-9.63	97.16	114.00	-16.84	peak			
2	*	2441.000	97.02	-9.63	87.39	94.00	-6.61	AVG	100	154	
3		3791.667	52.14	-6.09	46.05	74.00	-27.95	peak			
4		4383.333	49.92	-3.51	46.41	74.00	-27.59	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

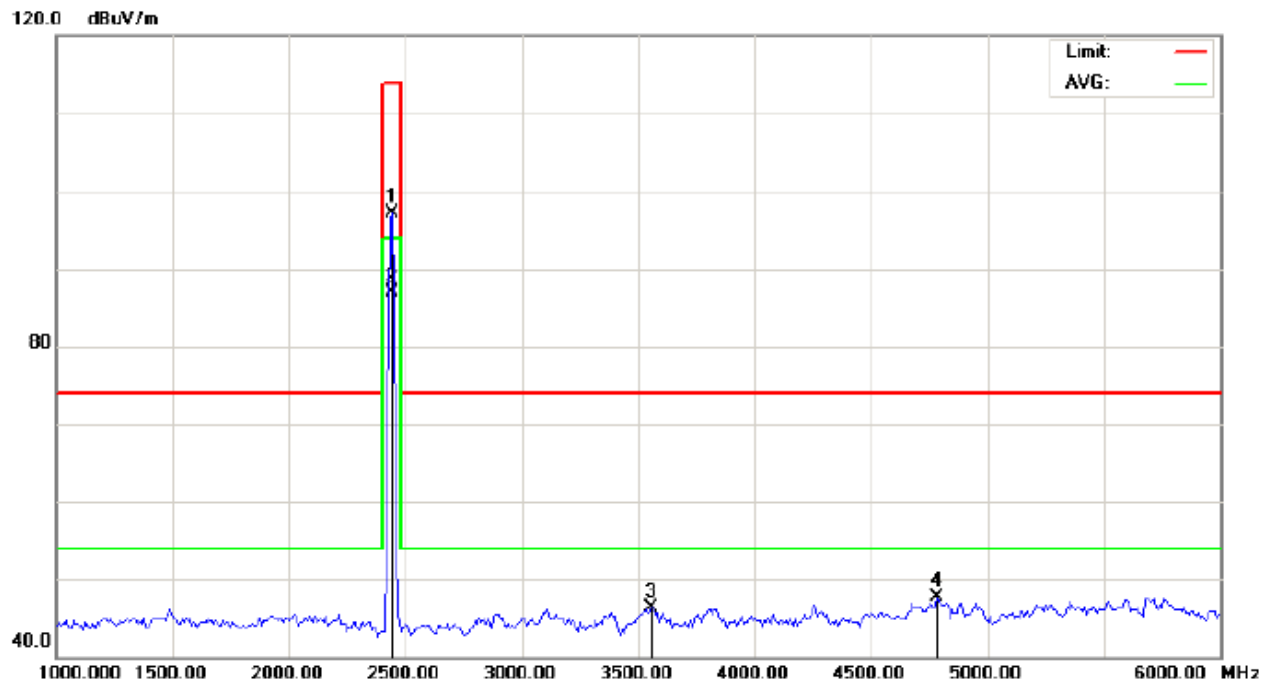

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	106.73	-9.63	97.10	114.00	-16.90	peak			
2	*	2441.000	96.60	-9.63	86.97	94.00	-7.03	AVG	150	38	
3		3558.333	53.78	-7.53	46.25	74.00	-27.75	peak			
4		4783.333	50.14	-2.37	47.77	74.00	-26.23	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

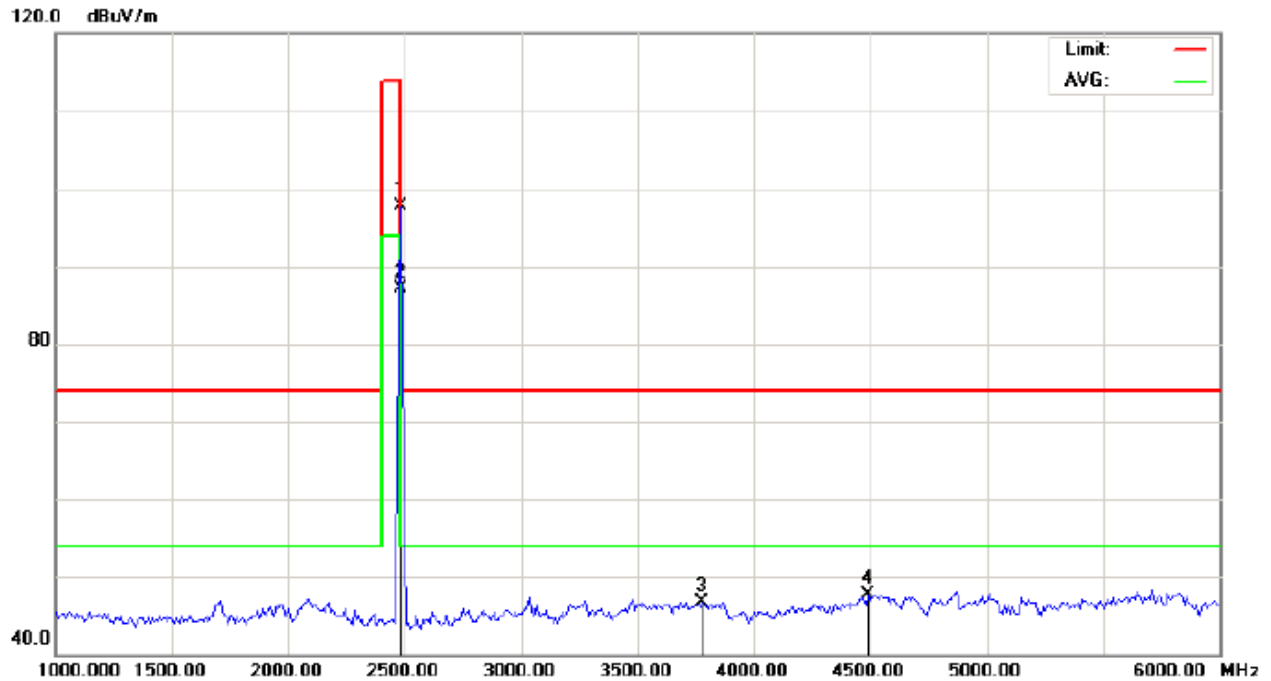


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
M/N:b29
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.37	-9.59	97.78	114.00	-16.22	peak			
2	*	2480.000	96.67	-9.59	87.08	94.00	-6.92	AVG	100	147	
3		3775.000	52.99	-6.20	46.79	74.00	-27.21	peak			
4		4491.667	50.93	-3.14	47.79	74.00	-26.21	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

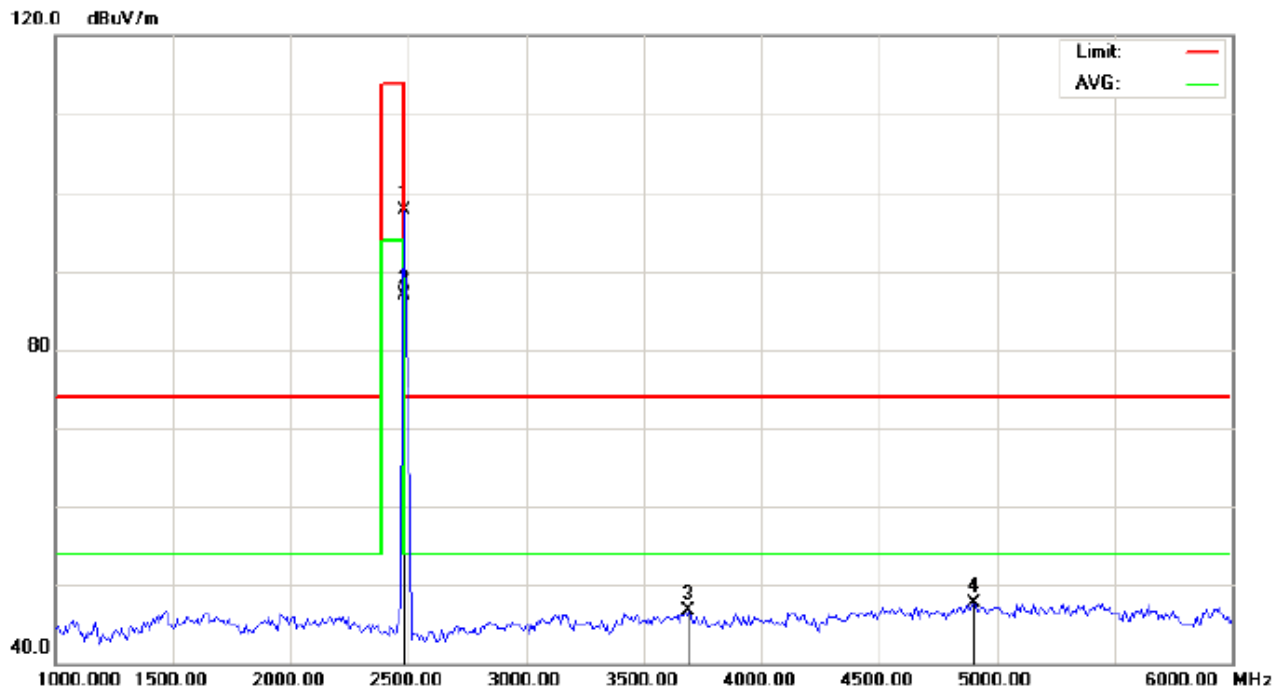

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
 M/N:b29
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.26	-9.59	97.67	114.00	-16.33	peak			
2	*	2480.000	96.57	-9.59	86.98	94.00	-7.02	AVG	150	314	
3		3691.667	53.31	-6.71	46.60	74.00	-27.40	peak			
4		4900.000	49.68	-2.06	47.62	74.00	-26.38	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal(GFSK)

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.25	-9.68	94.57	114	-19.43	Horizontal
2402	104.13	-9.68	94.45	114	-19.55	Vertical
2441	106.79	-9.63	97.16	114	-16.84	Horizontal
2441	106.73	-9.63	97.10	114	-16.90	Vertical
2480	107.37	-9.59	97.78	114	-16.22	Horizontal
2480	107.26	-9.59	97.67	114	-16.33	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.05	-9.68	85.37	94	-8.63	Horizontal
2402	95.86	-9.68	86.18	94	-7.82	Vertical
2441	97.02	-9.63	87.39	94	-6.61	Horizontal
2441	96.60	-9.63	86.97	94	-7.03	Vertical
2480	96.67	-9.59	87.08	94	-6.92	Horizontal
2480	96.57	-9.59	86.98	94	-7.02	Vertical

Field strength of the fundamental signal($\pi/4$ -DQPSK)

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.05	-9.68	93.37	114	-20.63	Horizontal
2402	102.86	-9.68	93.18	114	-20.82	Vertical
2441	105.75	-9.63	96.12	114	-17.88	Horizontal
2441	105.8	-9.63	96.17	114	-17.83	Vertical
2480	105.94	-9.59	96.35	114	-17.65	Horizontal
2480	106.1	-9.59	96.51	114	-17.49	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.74	-9.68	84.06	94	-9.94	Horizontal
2402	93.95	-9.68	84.27	94	-9.73	Vertical
2441	94.64	-9.63	85.01	94	-8.99	Horizontal
2441	94.3	-9.63	84.67	94	-9.33	Vertical
2480	94.73	-9.59	85.14	94	-8.86	Horizontal
2480	94.73	-9.59	85.14	94	-8.86	Vertical

Field strength of the fundamental signal(8DPSK)

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	102.22	-9.68	92.54	114	-21.46	Horizontal
2402	102.01	-9.68	92.33	114	-21.67	Vertical
2441	105.00	-9.63	95.37	114	-18.63	Horizontal
2441	105.05	-9.63	95.42	114	-18.58	Vertical
2480	104.78	-9.59	95.19	114	-18.81	Horizontal
2480	104.95	-9.59	95.36	114	-18.64	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.35	-9.68	82.67	94	-11.33	Horizontal
2402	93.12	-9.68	83.44	94	-10.56	Vertical
2441	94.12	-9.63	84.49	94	-9.51	Horizontal
2441	94.15	-9.63	84.52	94	-9.48	Vertical
2480	94.56	-9.59	84.97	94	-9.03	Horizontal
2480	94.86	-9.59	85.27	94	-8.73	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

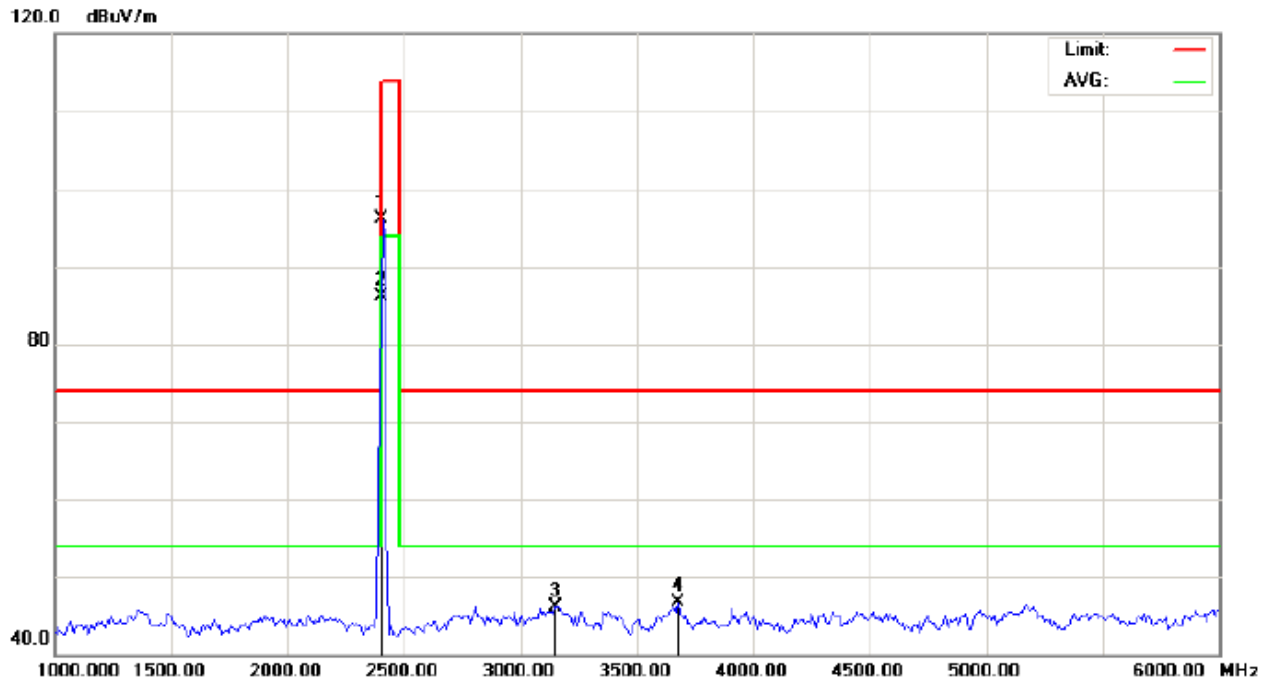


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
M/N:b29
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.82	-9.68	96.14	114.00	-17.86	peak			
2	*	2402.000	95.71	-9.68	86.03	94.00	-7.97	AVG	100	135	
3		3150.000	54.30	-8.22	46.08	74.00	-27.92	peak			
4		3675.000	53.45	-6.81	46.64	74.00	-27.36	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

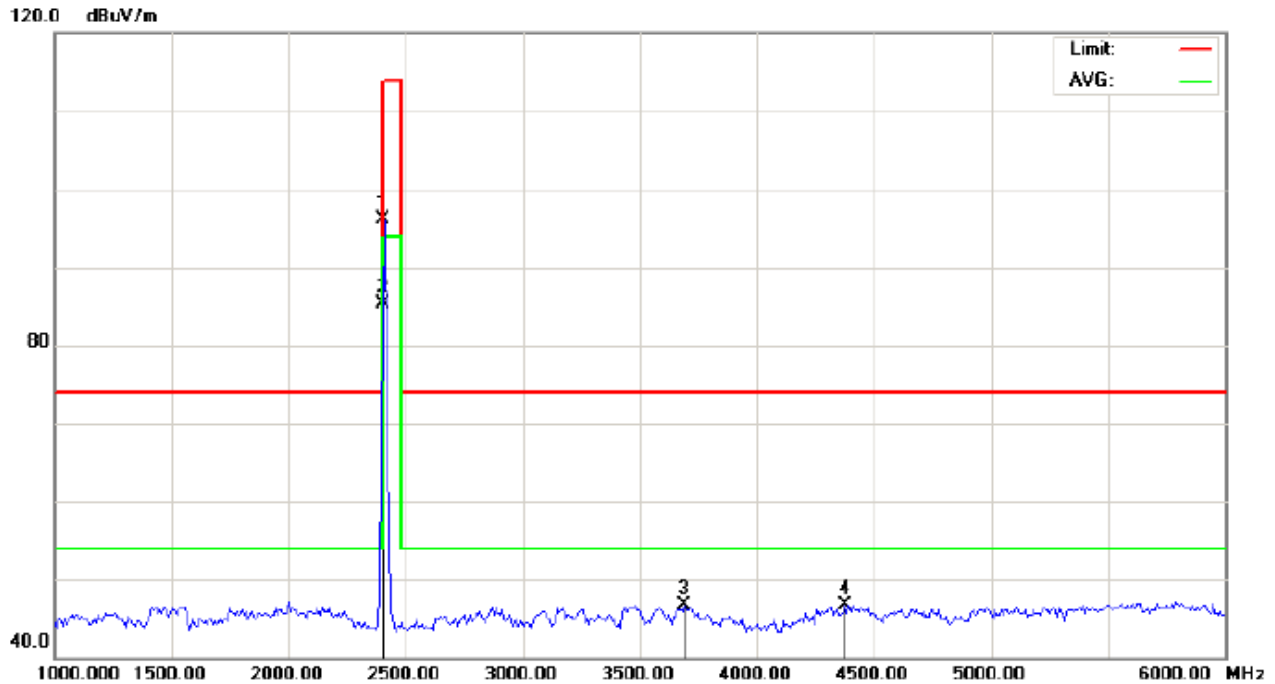


Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
 M/N: b29
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.73	-9.68	96.05	114.00	-17.95	peak			
2	*	2402.000	95.05	-9.68	85.37	94.00	-8.63	AVG	100	310	
3		3691.667	53.33	-6.71	46.62	74.00	-27.38	peak			
4		4375.000	50.20	-3.53	46.67	74.00	-27.33	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

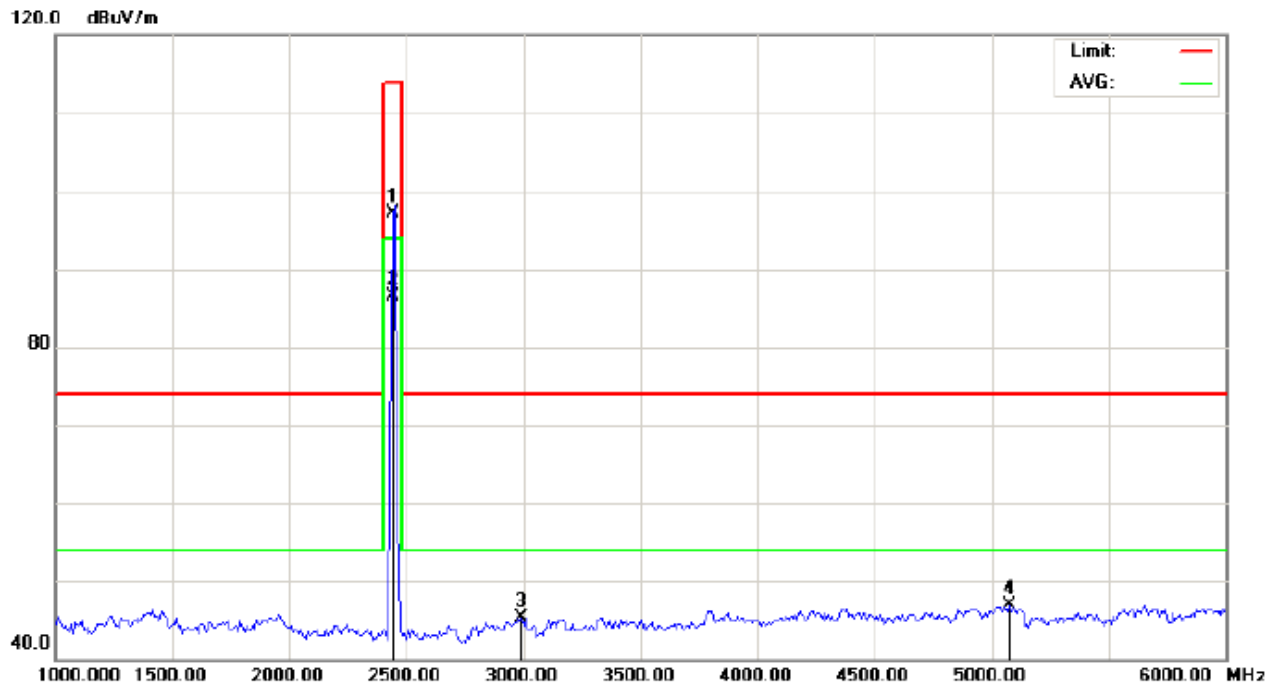

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	106.79	-9.63	97.16	114.00	-16.84	peak			
2	*	2440.000	96.10	-9.63	86.47	94.00	-7.53	AVG	150	341	
3		2991.667	53.65	-8.38	45.27	74.00	-28.73	peak			
4		5075.000	48.62	-1.80	46.82	74.00	-27.18	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

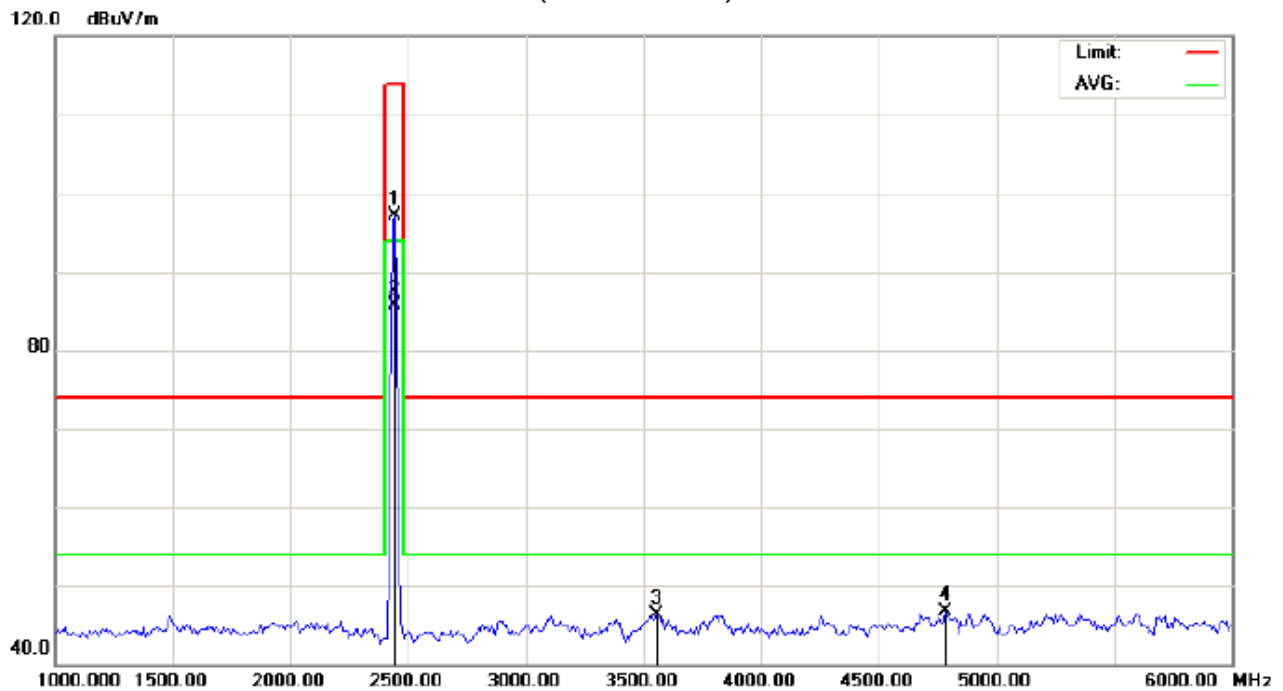

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	106.73	-9.63	97.10	114.00	-16.90	peak			
2	*	2440.000	95.42	-9.63	85.79	94.00	-8.21	AVG	150	31	
3		3558.333	53.78	-7.53	46.25	74.00	-27.75	peak			
4		4783.333	49.14	-2.37	46.77	74.00	-27.23	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

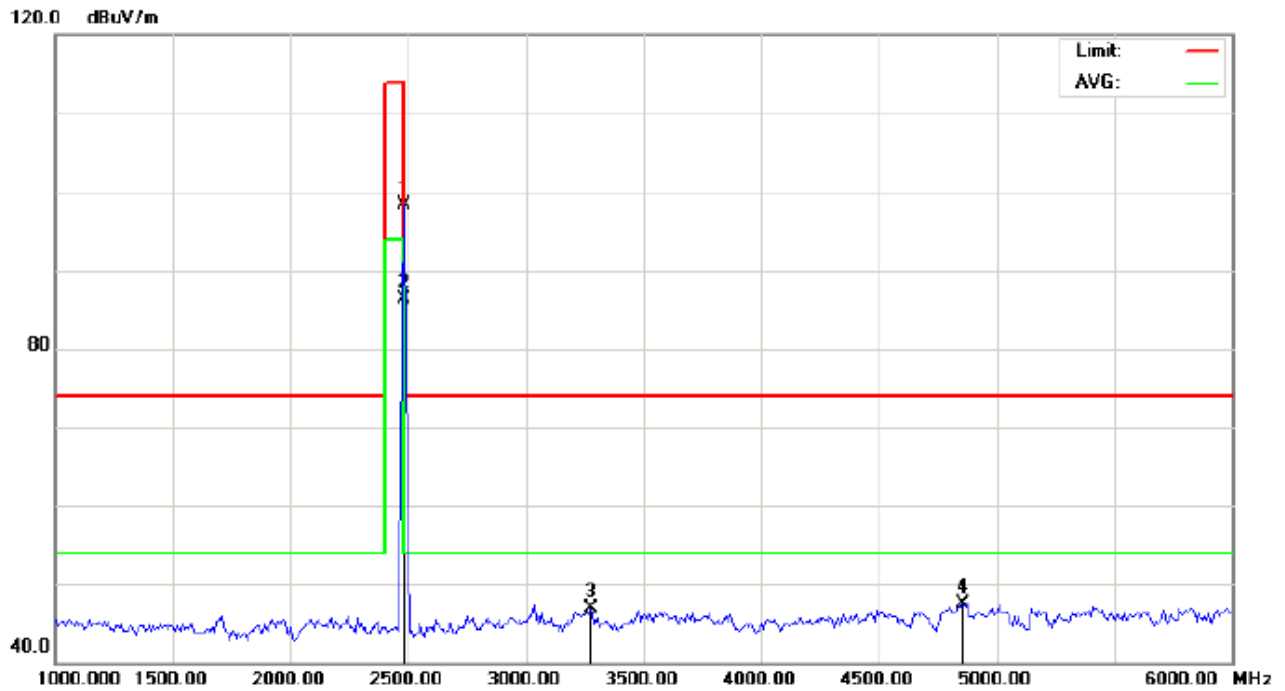

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance: 3m

M/N:b29


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.85	-9.59	98.26	114.00	-15.74	peak			
2	*	2480.000	95.96	-9.59	86.37	94.00	-7.63	AVG	100	274	
3		3275.000	54.98	-8.10	46.88	74.00	-27.12	peak			
4		4858.333	49.59	-2.17	47.42	74.00	-26.58	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

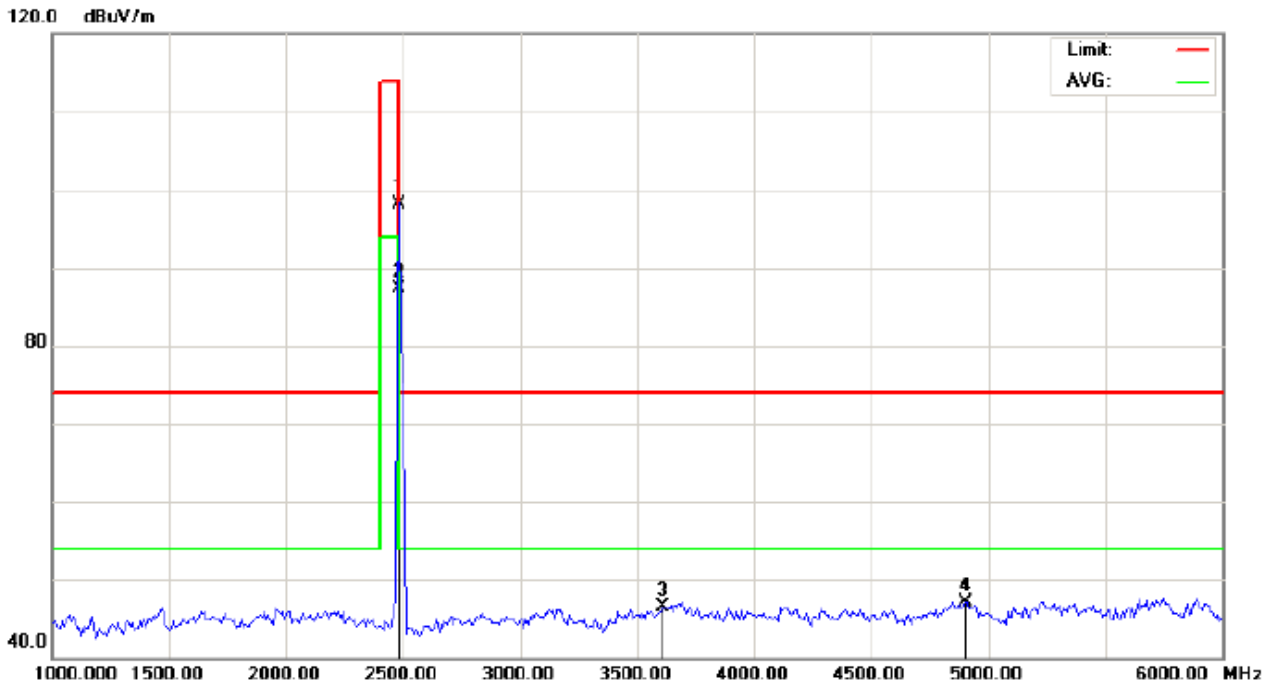

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Bluetooth Wireless Sport Headsets Earbuds Distance: 3m
 M/N:b29
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.77	-9.59	98.18	114.00	-15.82	peak			
2	*	2480.000	96.98	-9.59	87.39	94.00	-6.61	AVG	150	19	
3		3608.333	53.72	-7.22	46.50	74.00	-27.50	peak			
4		4900.000	49.18	-2.06	47.12	74.00	-26.88	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	105.82	-9.68	96.14	114	-17.86	Horizontal
2402	105.73	-9.68	96.05	114	-17.95	Vertical
2440	106.79	-9.63	97.16	114	-16.84	Horizontal
2440	106.73	-9.63	97.10	114	-16.90	Vertical
2480	107.85	-9.59	98.26	114	-15.74	Horizontal
2480	107.77	-9.59	98.18	114	-15.82	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.71	-9.68	86.03	94	-7.97	Horizontal
2402	95.05	-9.68	85.37	94	-8.63	Vertical
2440	96.10	-9.63	86.47	94	-7.53	Horizontal
2440	95.42	-9.63	85.79	94	-8.21	Vertical
2480	95.96	-9.59	86.37	94	-7.63	Horizontal
2480	96.98	-9.59	87.39	94	-6.61	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

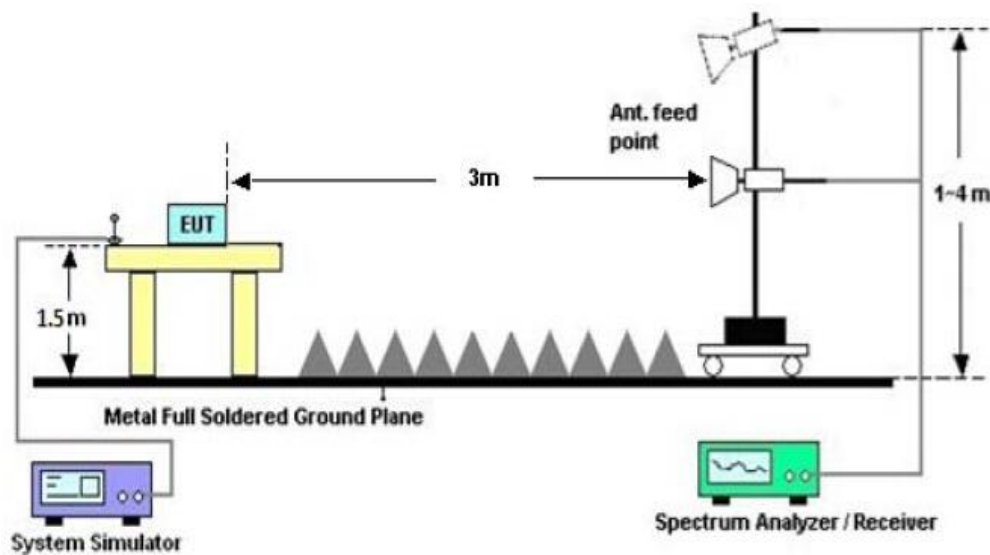


9.3 RADIATED TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

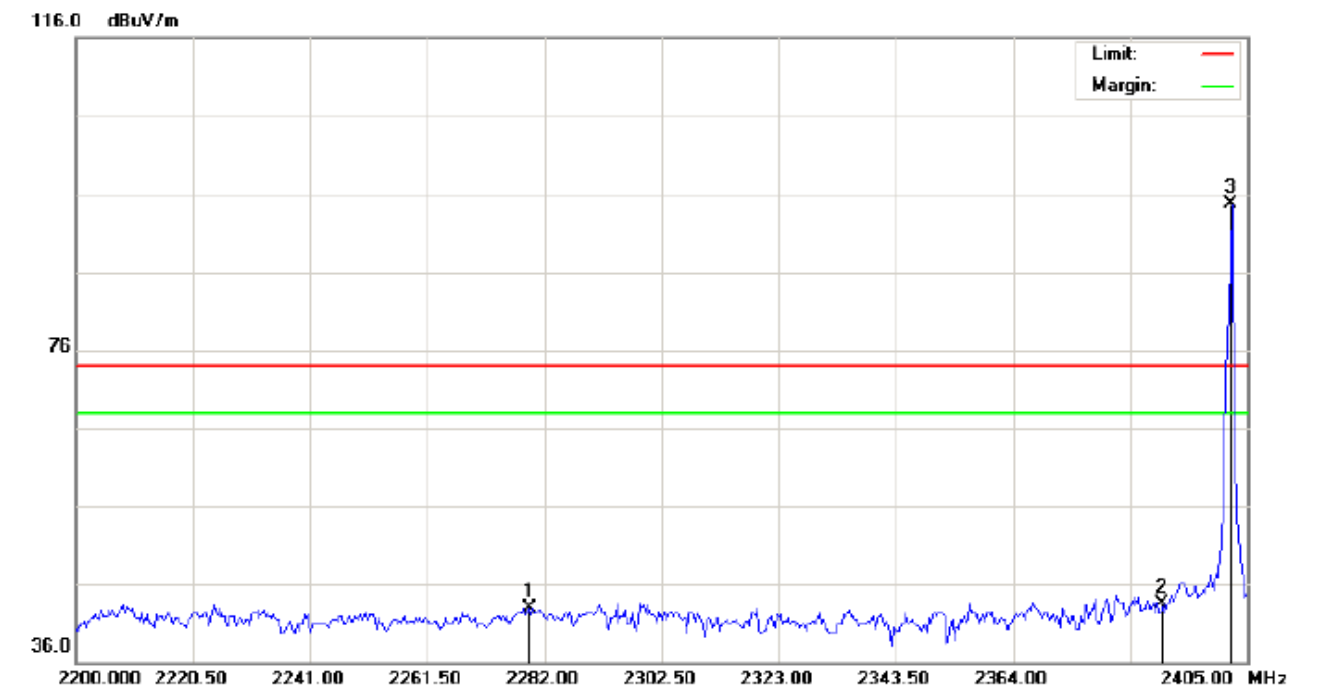

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Bluetooth Wireless Sport Headsets Earbuds	Distance:	
M/N:b29		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2279.267	32.68	10.19	42.87	74.00	-31.13	peak			
2		2390.000	33.12	10.31	43.43	74.00	-30.57	peak			
3	*	2402.000	84.41	10.32	94.73	74.00	20.73	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

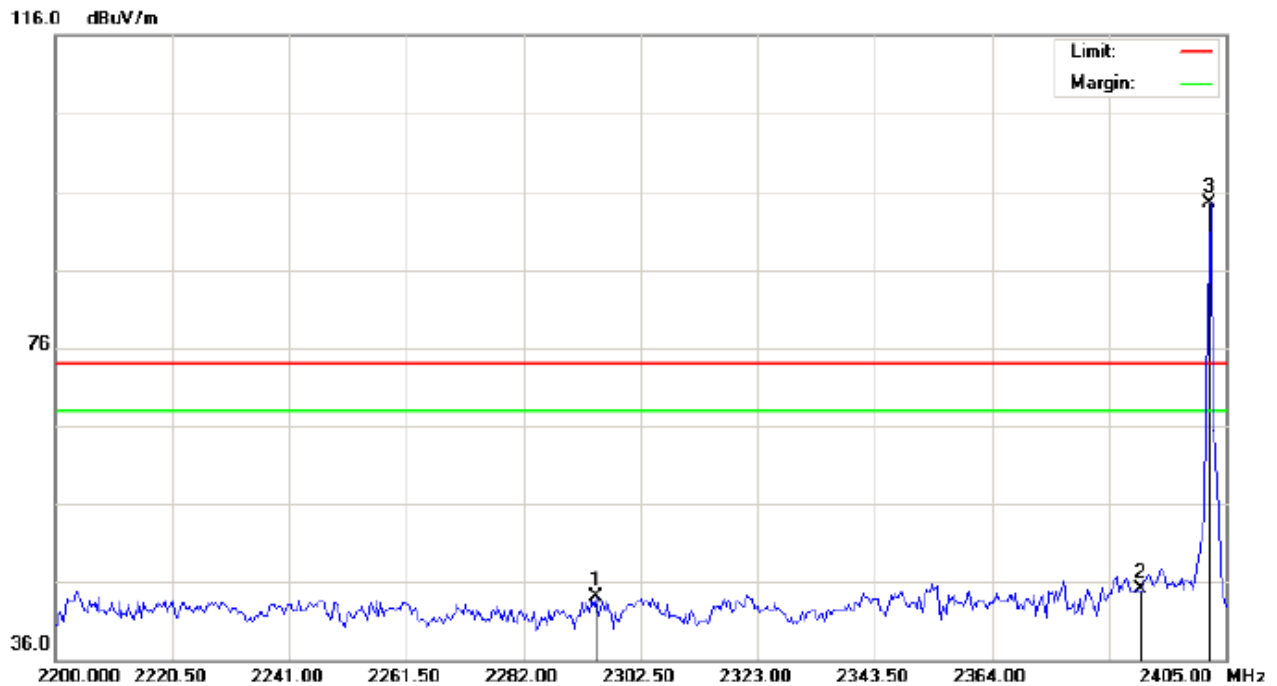

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:


M/N:b29

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2294.642	33.88	10.20	44.08	74.00	-29.92	peak			
2		2390.000	34.85	10.31	45.16	74.00	-28.84	peak			
3	*	2402.000	84.26	10.32	94.58	74.00	20.58	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

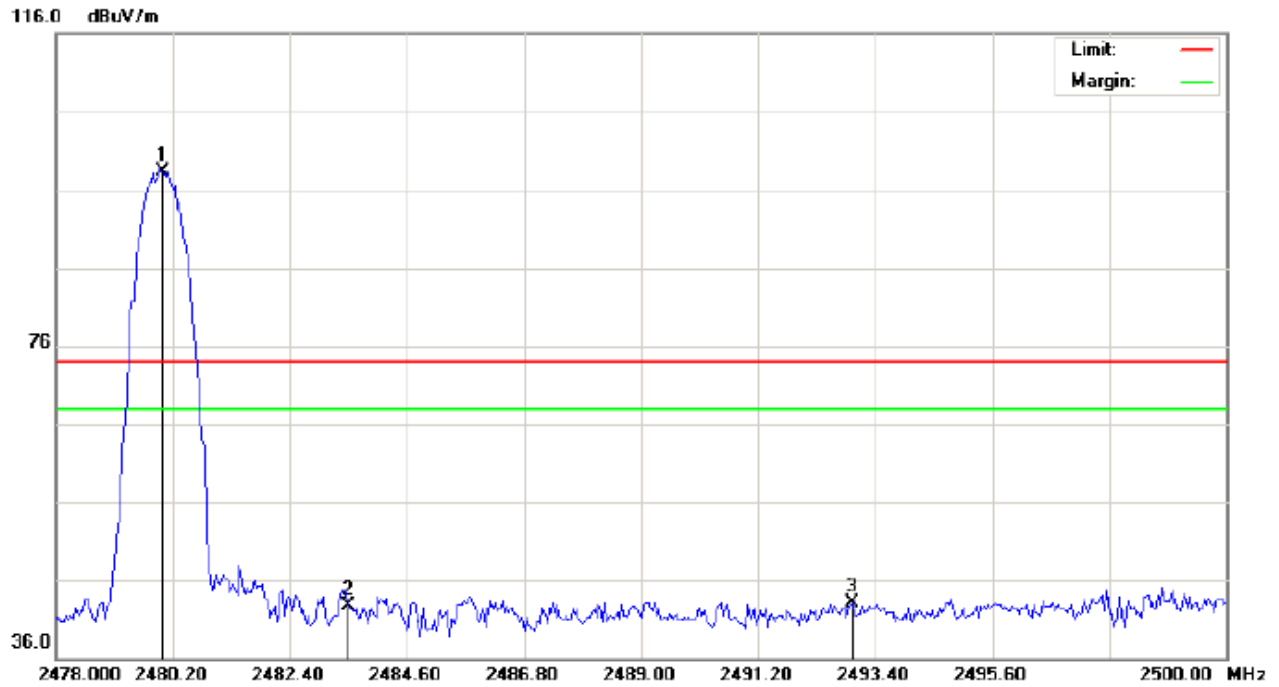

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:


M/N:b29

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.96	10.41	98.37	74.00	24.37	peak			
2		2483.500	32.25	10.41	42.66	74.00	-31.34	peak			
3		2492.960	32.61	10.42	43.03	74.00	-30.97	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

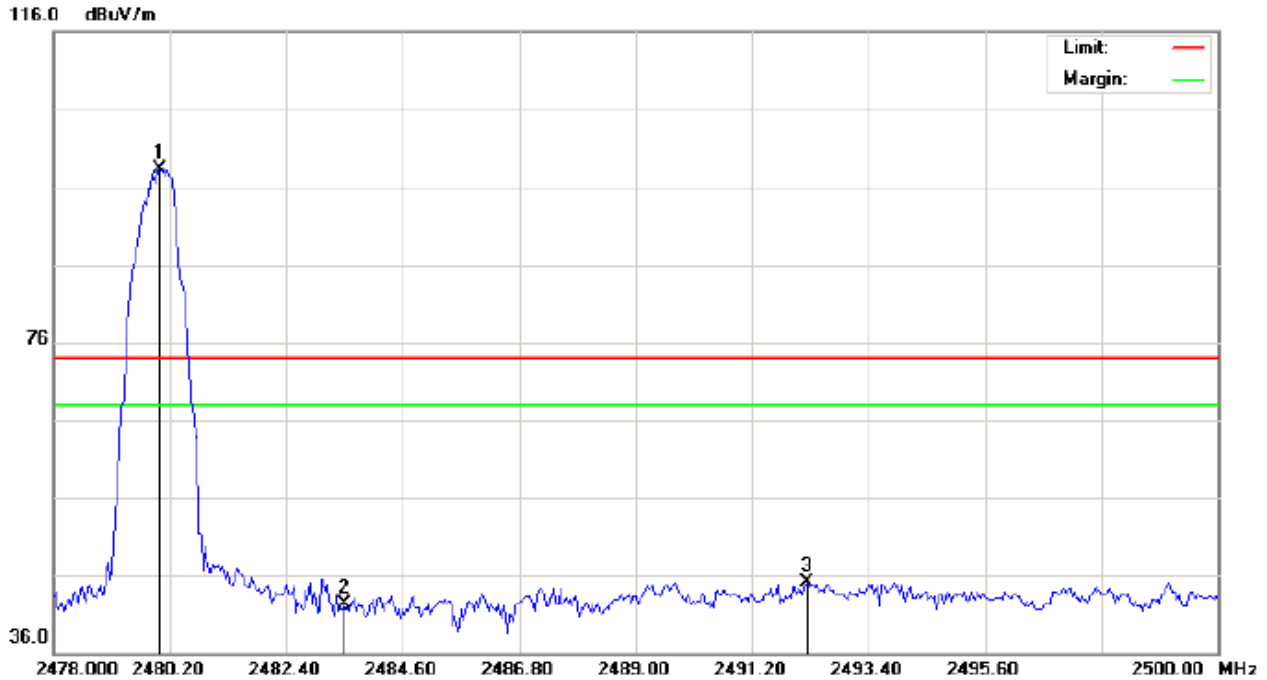

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:

M/N:b29

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.85	10.41	98.26	74.00	24.26	peak			
2		2483.500	31.87	10.41	42.28	74.00	-31.72	peak			
3		2492.227	34.71	10.42	45.13	74.00	-28.87	peak			

RESULT: PASS**Note:** The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2294.642	33.34	10.20	43.54	74.00	-30.46	peak			
2		2390.000	33.62	10.31	43.93	74.00	-30.07	peak			
3	*	2402.000	85.91	10.32	96.23	74.00	22.23	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

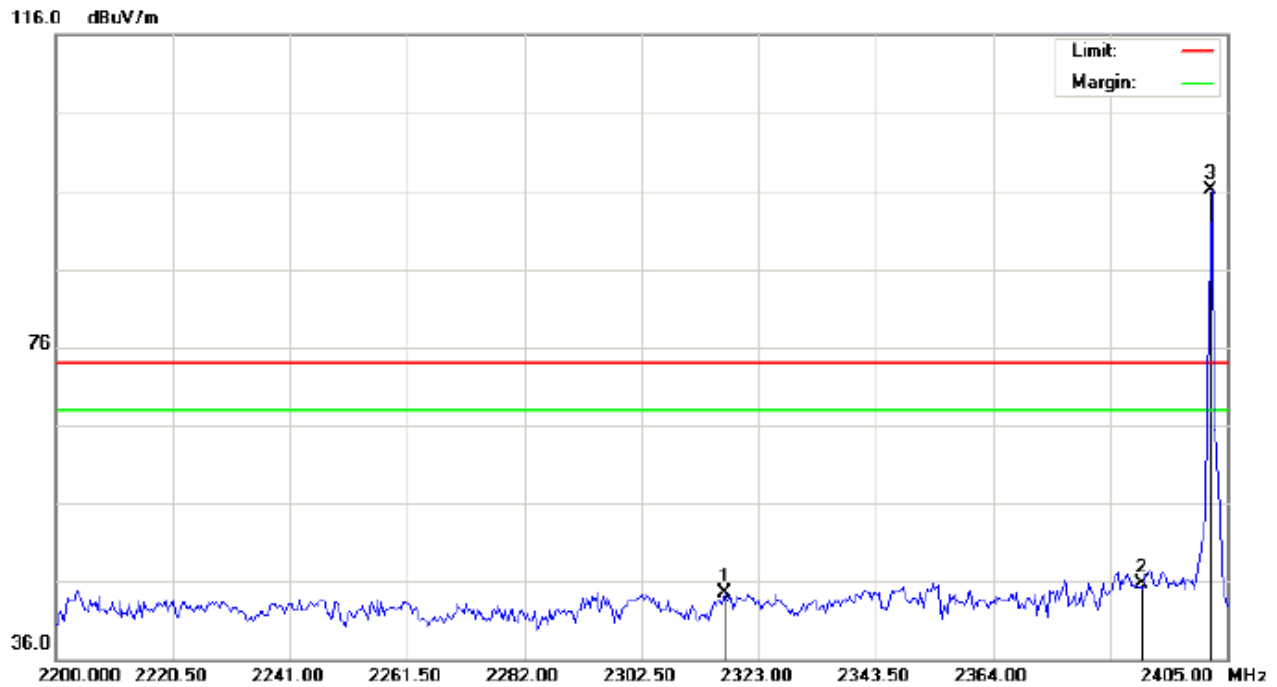

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:


M/N:b29

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2317.192	34.23	10.23	44.46	74.00	-29.54	peak			
2		2390.000	35.35	10.31	45.66	74.00	-28.34	peak			
3	*	2402.000	85.76	10.32	96.08	74.00	22.08	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

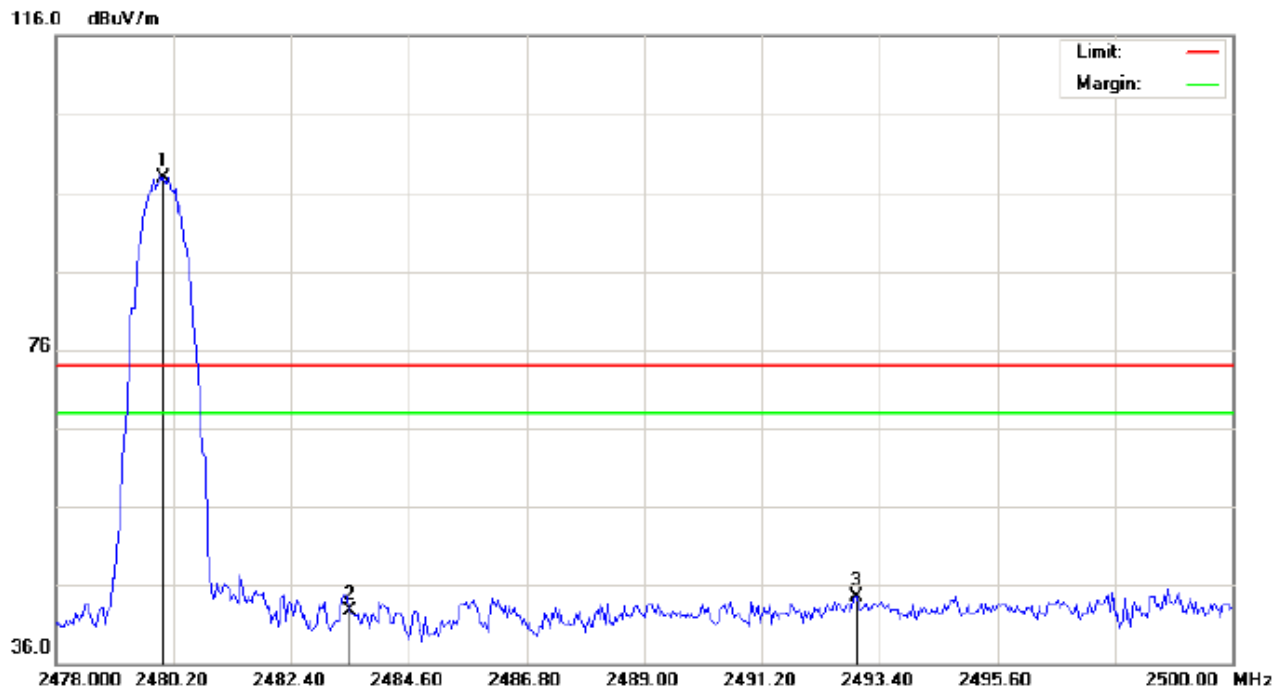

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT:Bluetooth Wireless Sport Headsets Earbuds

Distance:


M/N:b29

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.46	10.41	97.87	74.00	23.87	peak			
2		2483.500	32.25	10.41	42.66	74.00	-31.34	peak			
3		2492.960	34.11	10.42	44.53	74.00	-29.47	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

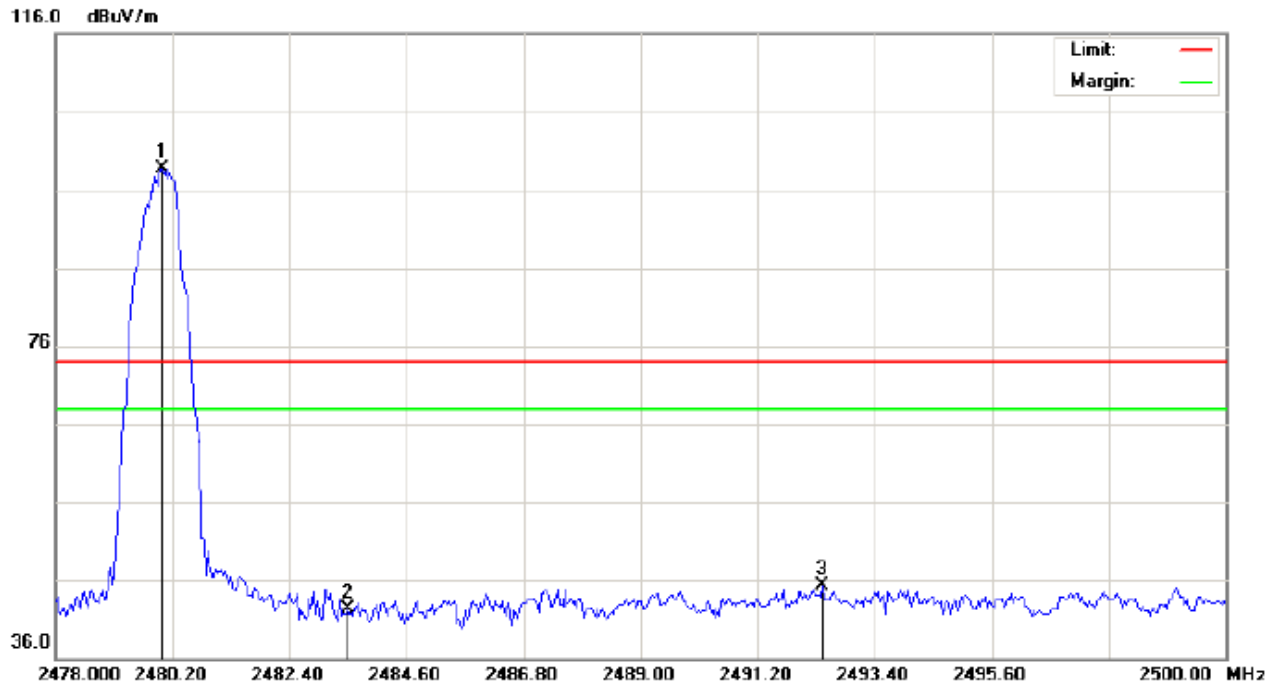

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT:Bluetooth Wireless Sport Headsets Earbuds Distance:
 M/N:b29
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.35	10.41	98.76	74.00	24.76	peak			
2		2483.500	31.87	10.41	42.28	74.00	-31.72	peak			
3		2492.410	34.91	10.42	45.33	74.00	-28.67	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

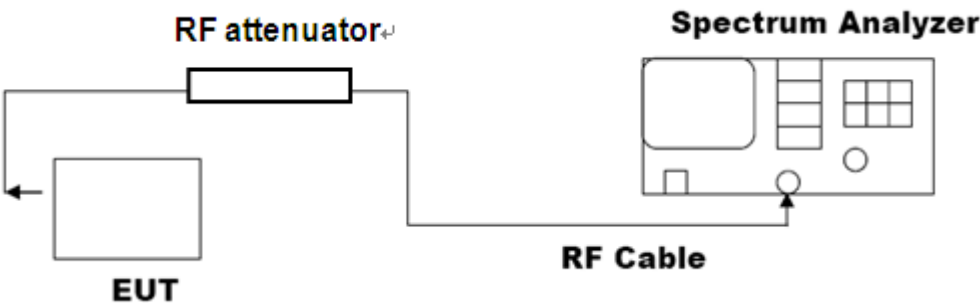


Note: The EUT has been used temporary antenna connector for testing.

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.618	PASS
	Middle Channel	1.139	PASS
	High Channel	1.166	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

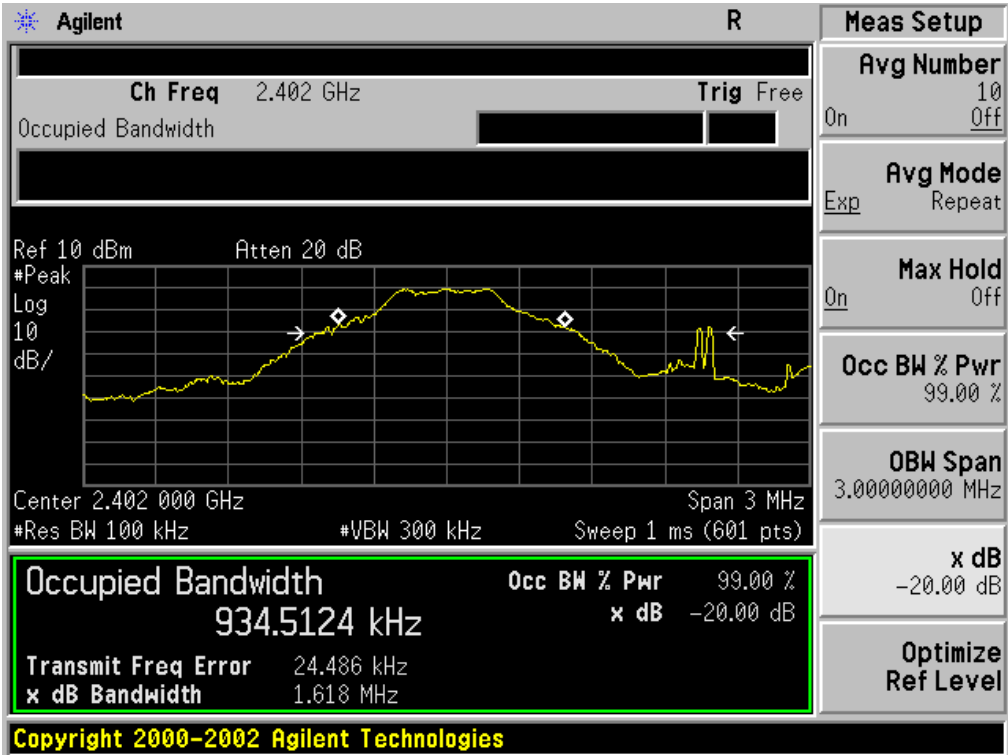

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

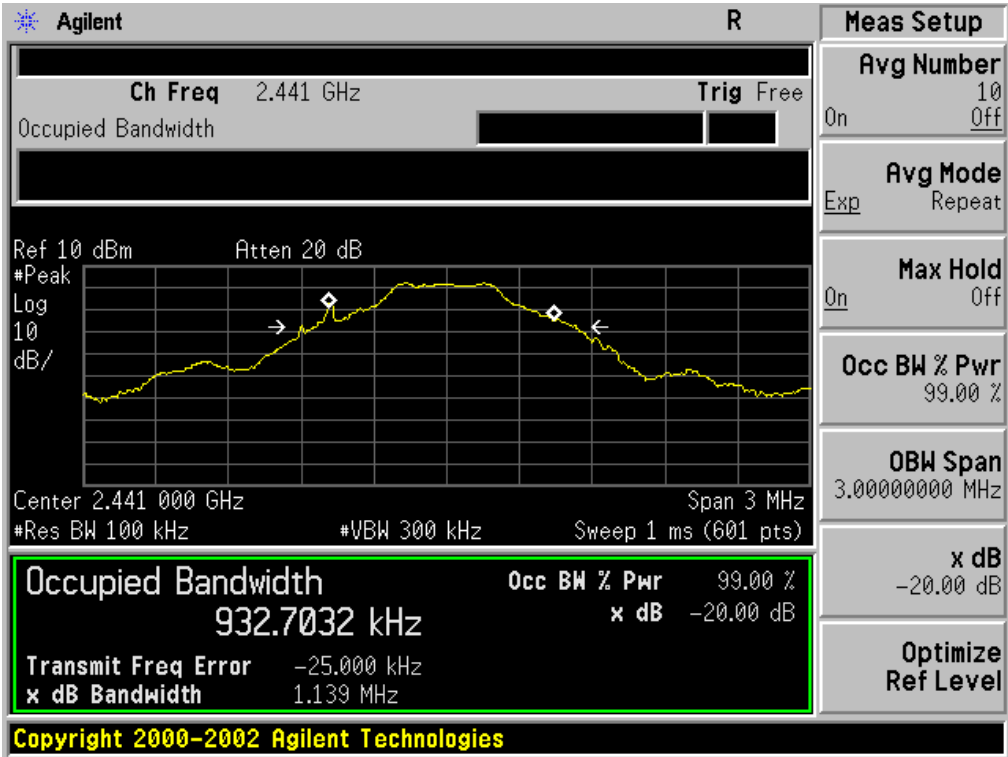


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

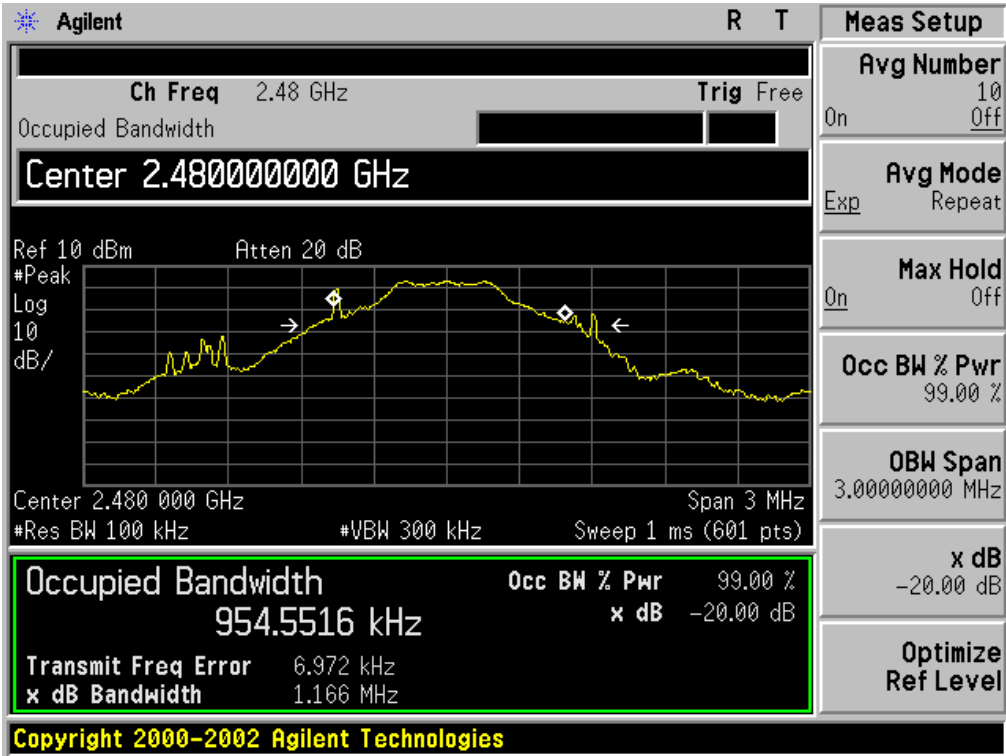


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	2.173	PASS
	Middle Channel	1.314	PASS
	High Channel	1.344	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

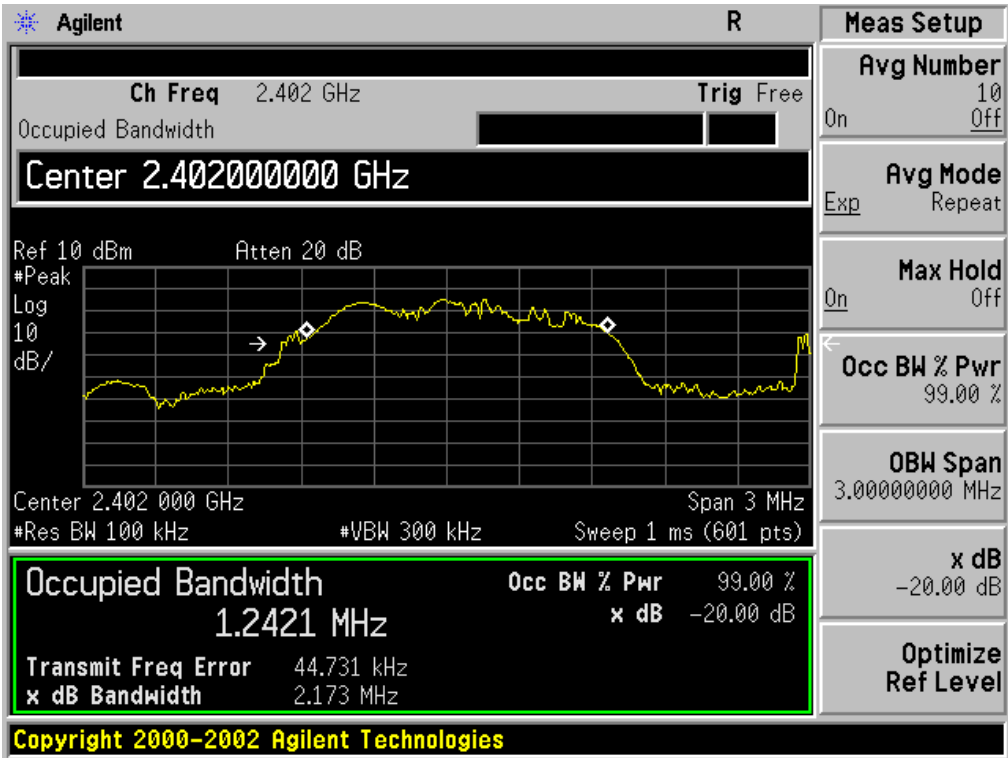

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

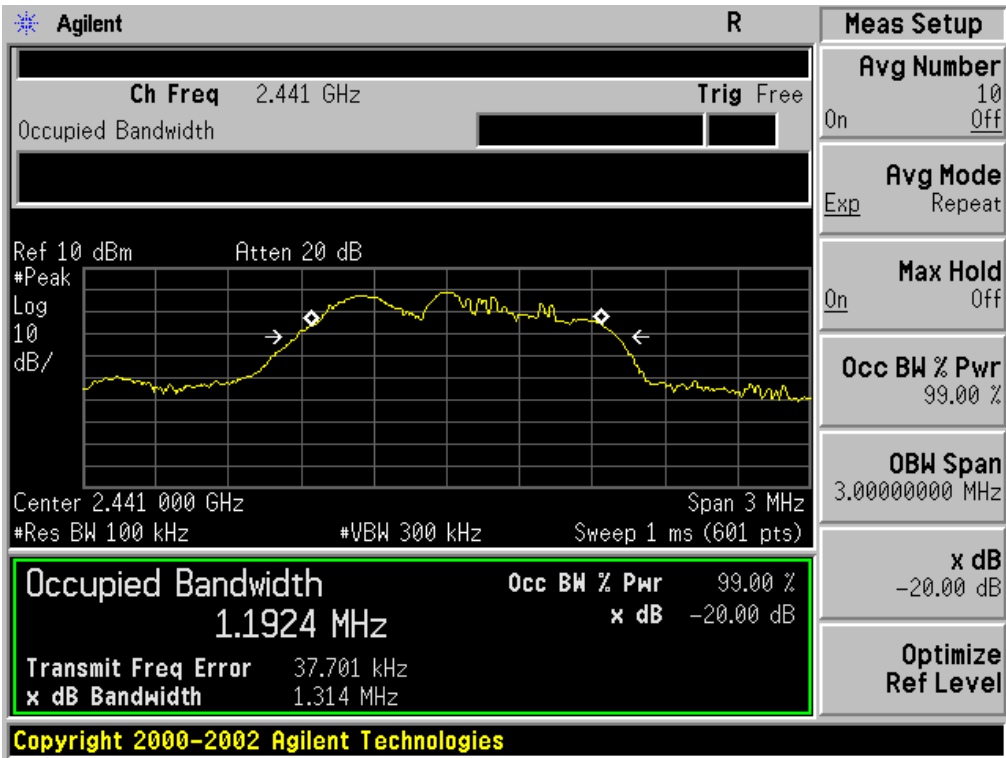


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

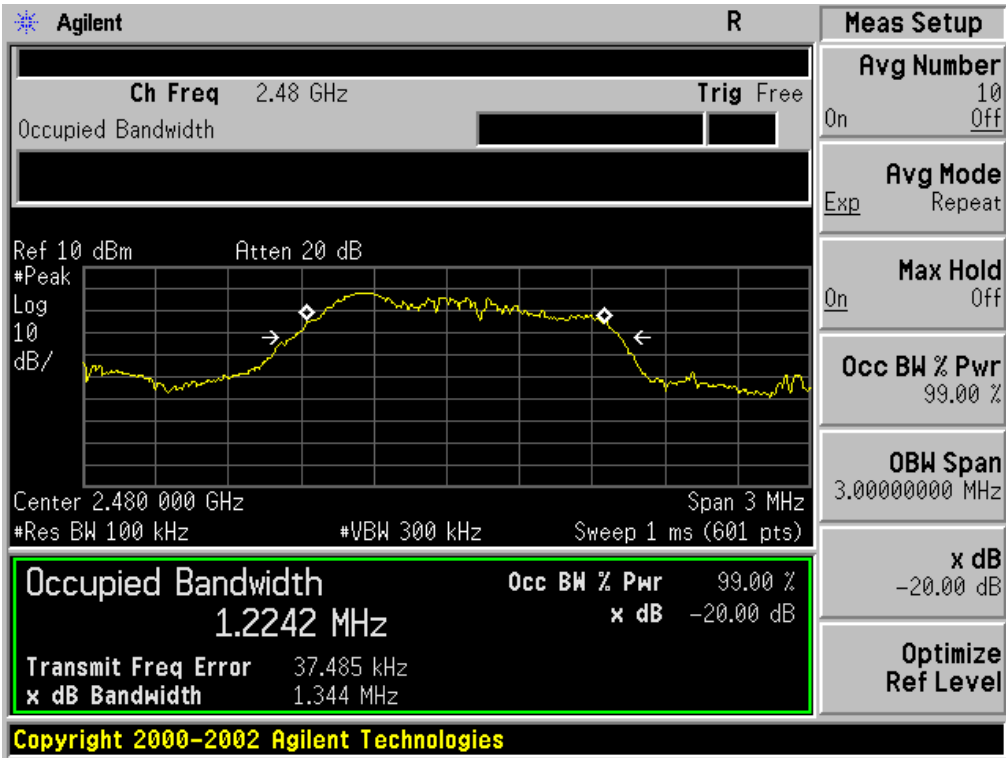


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.345	PASS
	Middle Channel	1.342	PASS
	High Channel	1.332	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

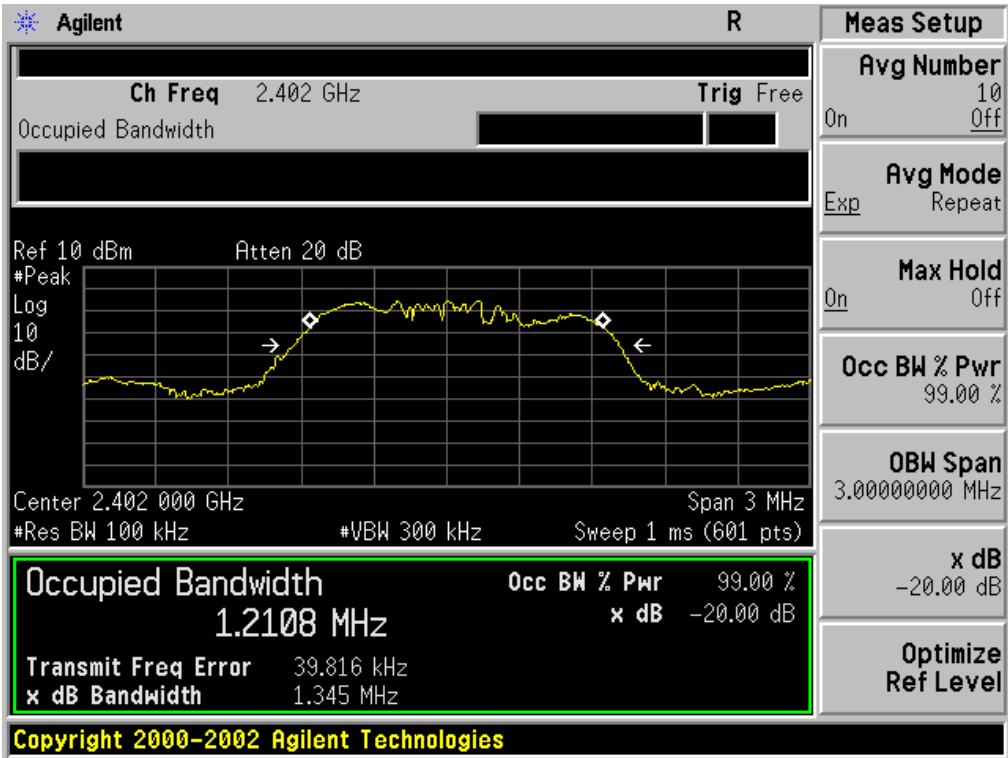

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

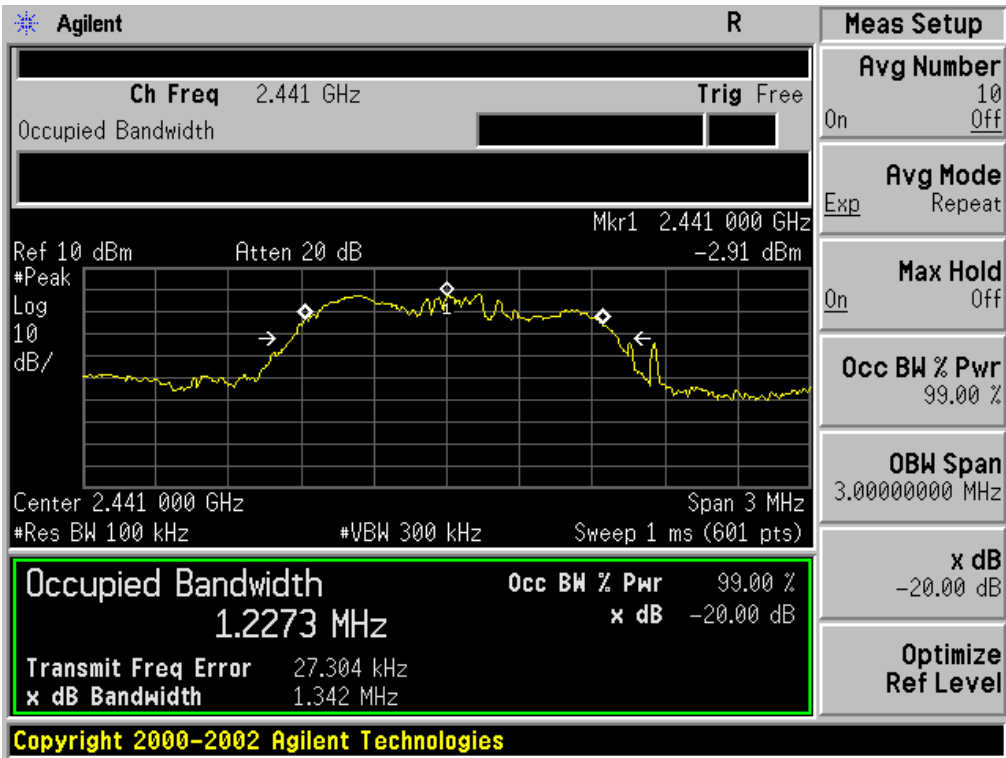


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

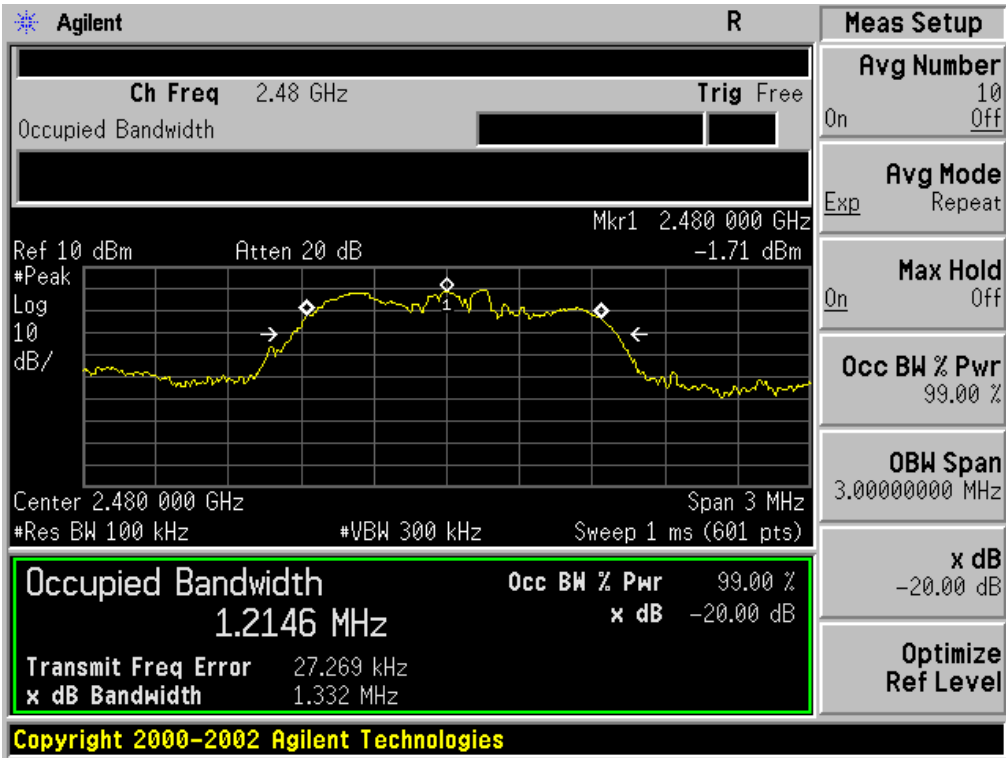


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.205	PASS
	Middle Channel	1.210	PASS
	High Channel	1.194	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

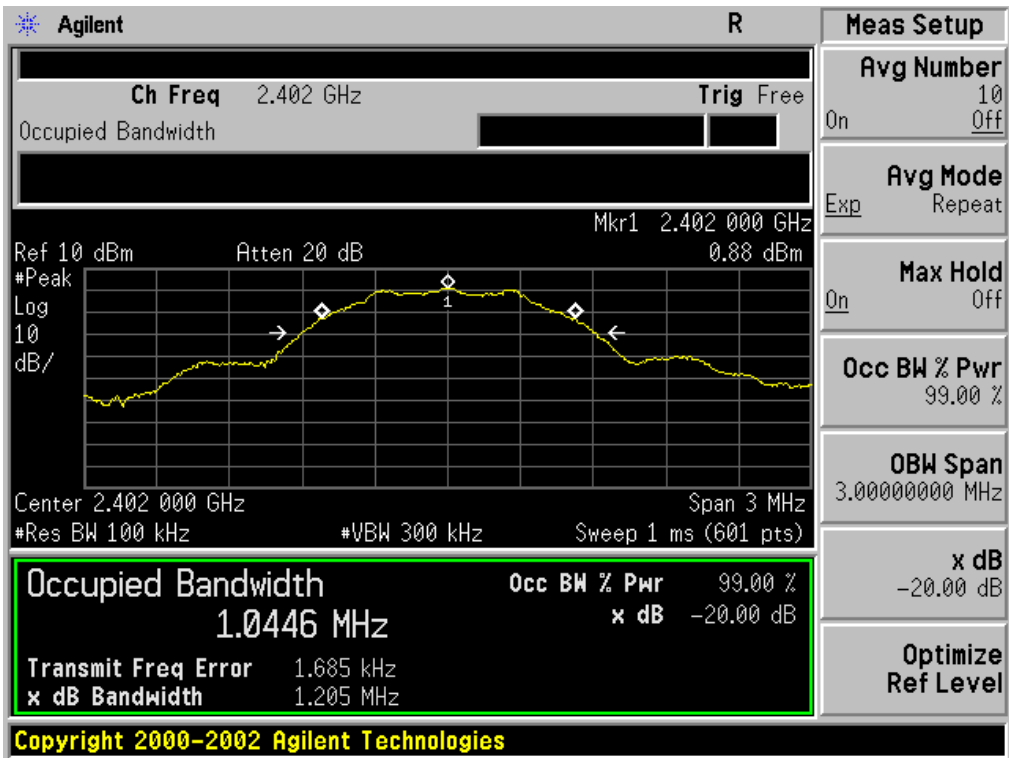

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

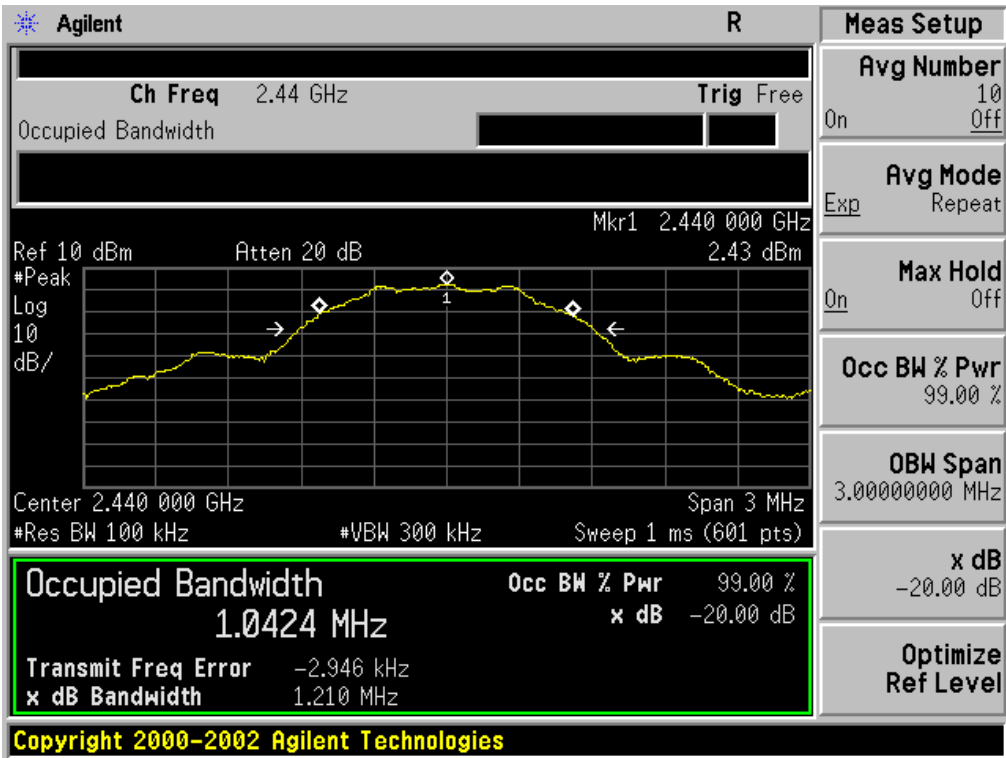

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

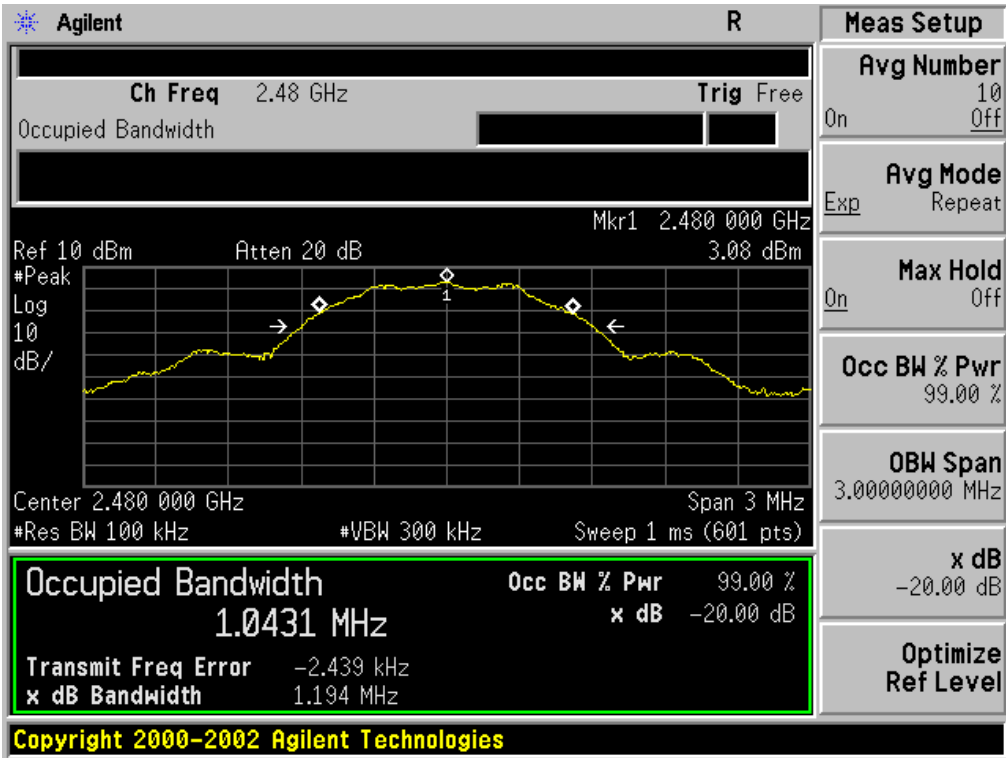

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

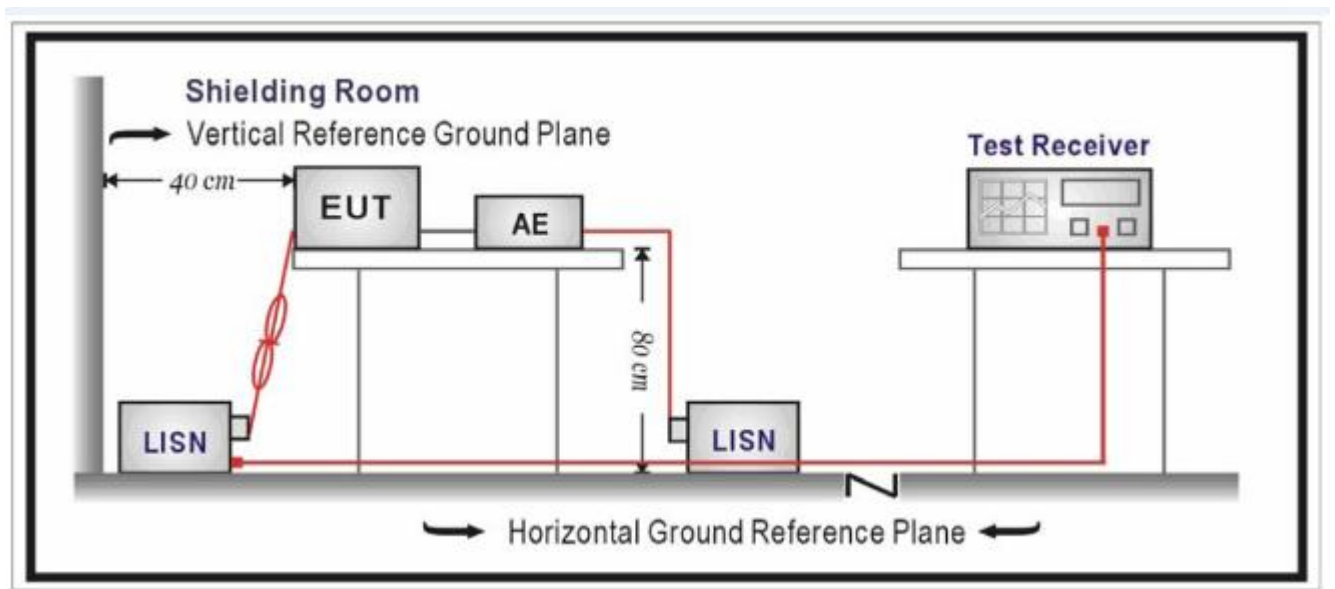

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
 3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

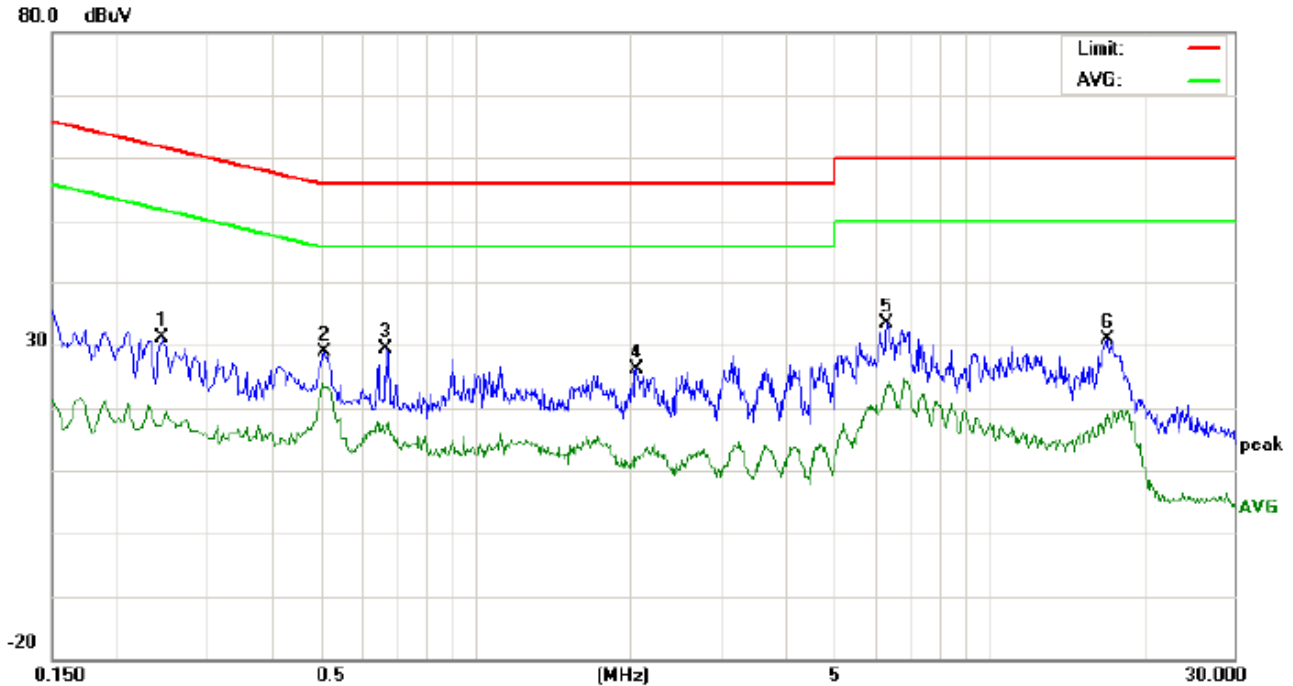

Site: Conduction

Phase: **L1**

Temperature: 24.1

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 55.1 %

EUT:Bluetooth Wireless Sport Headsets Earbuds


M/N:b29

Mode:BT Link with charging

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2459	20.87		7.30	10.27	31.14		17.57	61.89	51.89	-30.75	-34.32	P	
2	0.5100	18.42		13.10	10.39	28.81		23.49	56.00	46.00	-27.19	-22.51	P	
3	0.6700	18.93		6.89	10.34	29.27		17.23	56.00	46.00	-26.73	-28.77	P	
4	2.0579	15.81		1.32	10.24	26.05		11.56	56.00	46.00	-29.95	-34.44	P	
5	6.3379	23.11		13.38	10.29	33.40		23.67	60.00	50.00	-26.60	-26.33	P	
6	17.0094	20.65		8.67	10.13	30.78		18.80	60.00	50.00	-29.22	-31.20	P	

Line Conducted Emission Test Line 2-N

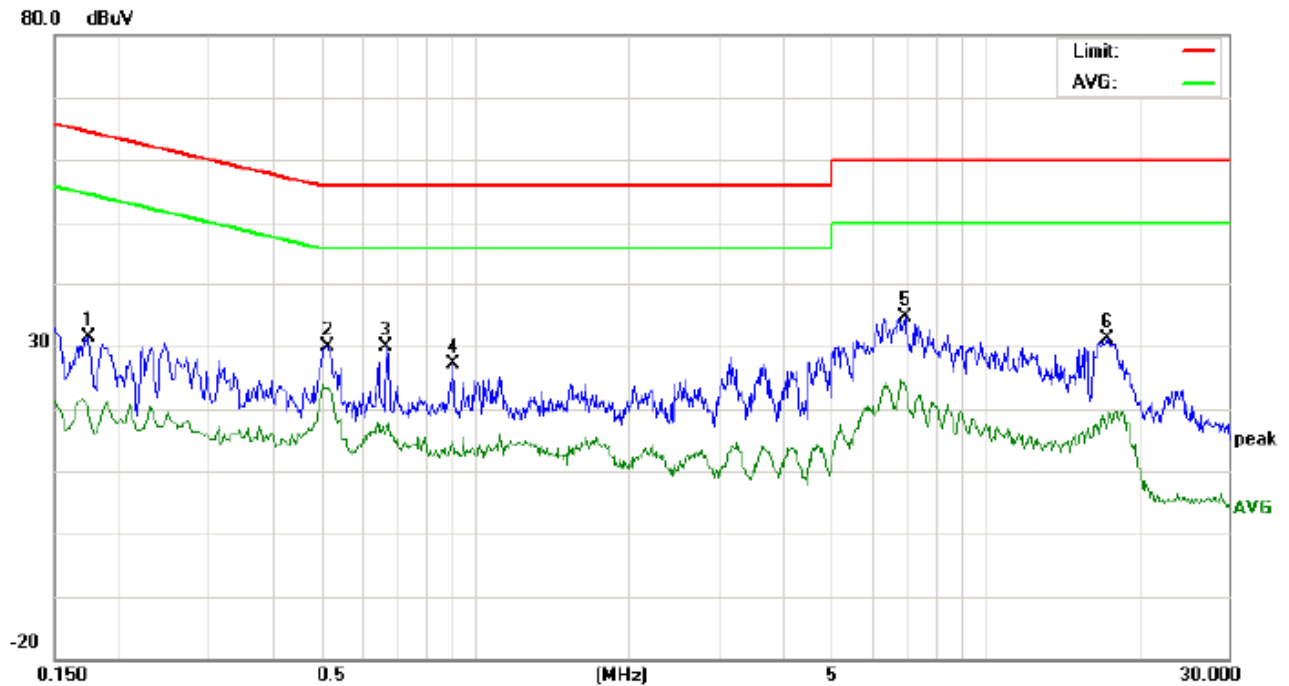


Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT:Bluetooth Wireless Sport Headsets Earbuds
M/N:b29
Mode:BT Link with charging
Note:

Phase: **N**
Power:
Temperature: 24.1
Humidity: 55.1 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1737	21.15		10.19	10.19	31.34		20.38	64.78	54.78	-33.44	-34.40	P	
2	0.5140	19.55		12.90	10.39	29.94		23.29	56.00	46.00	-26.06	-22.71	P	
3	0.6700	19.43		6.89	10.34	29.77		17.23	56.00	46.00	-26.23	-28.77	P	
4	0.9060	16.75		4.43	10.41	27.16		14.84	56.00	46.00	-28.84	-31.16	P	
5	6.9698	24.16		13.36	10.36	34.52		23.72	60.00	50.00	-25.48	-26.28	P	
6	17.3536	21.05		7.63	10.13	31.18		17.76	60.00	50.00	-28.82	-32.24	P	

FOR BLE


Line Conducted Emission Test Line 1-L

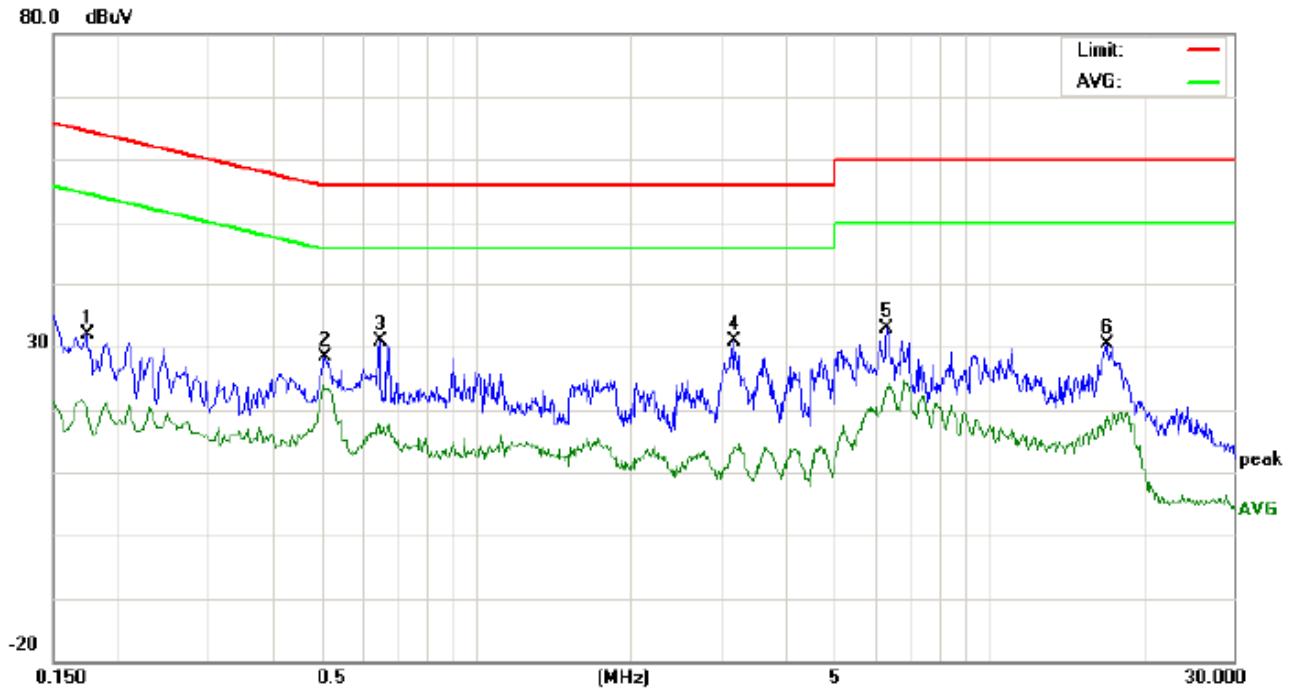

Site: Conduction Phase: **L1** Temperature: 24.1
Limit: FCC Class B Conduction(QP) Power: Humidity: 55.1 %
EUT:Bluetooth Wireless Sport Headsets Earbuds
M/N:b29
Mode:BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1737	21.65		10.19	10.19	31.84		20.38	64.78	54.78	-32.94	-34.40	P	
2	0.5100	17.92		13.10	10.39	28.31		23.49	56.00	46.00	-27.69	-22.51	P	
3	0.6500	20.47		6.80	10.33	30.80		17.13	56.00	46.00	-25.20	-28.87	P	
4	3.1739	20.30		3.28	10.54	30.84		13.82	56.00	46.00	-25.16	-32.18	P	
5	6.3379	22.61		13.38	10.29	32.90		23.67	60.00	50.00	-27.10	-26.33	P	
6	17.0092	20.15		8.67	10.13	30.28		18.80	60.00	50.00	-29.72	-31.20	P	

Line Conducted Emission Test Line 2-N

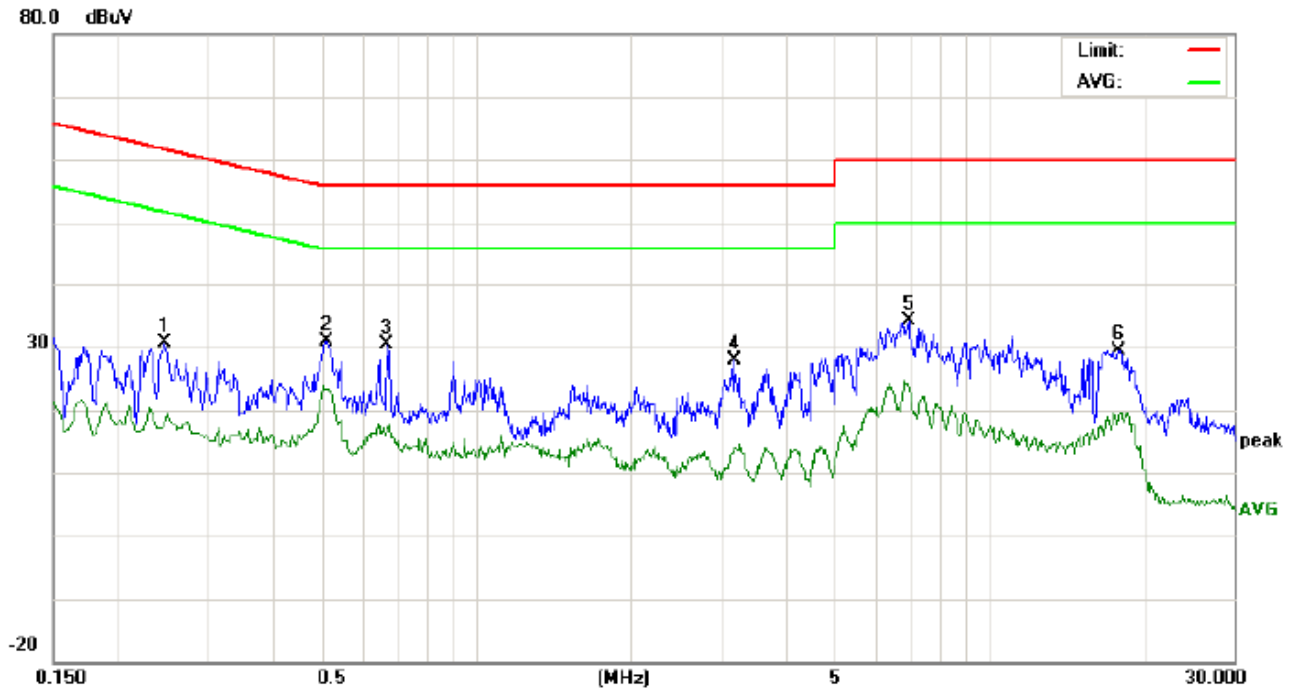

Site: Conduction Phase: **N** Temperature: 24.1
Limit: FCC Class B Conduction(QP) Power: Humidity: 55.1 %
EUT:Bluetooth Wireless Sport Headsets Earbuds
M/N:b29
Mode:BT Link with charging
Note:



No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2467	20.37		7.64	10.27	30.64		17.91	61.86	51.86	-31.22	-33.95	P	
2	0.5100	20.49		13.09	10.39	30.88		23.48	56.00	46.00	-25.12	-22.52	P	
3	0.6700	19.93		6.89	10.34	30.27		17.23	56.00	46.00	-25.73	-28.77	P	
4	3.1739	17.30		3.28	10.54	27.84		13.82	56.00	46.00	-28.16	-32.18	P	
5	6.9698	23.66		13.36	10.36	34.02		23.72	60.00	50.00	-25.98	-26.28	P	
6	17.9419	19.38		8.40	10.12	29.50		18.52	60.00	50.00	-30.50	-31.48	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP



FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

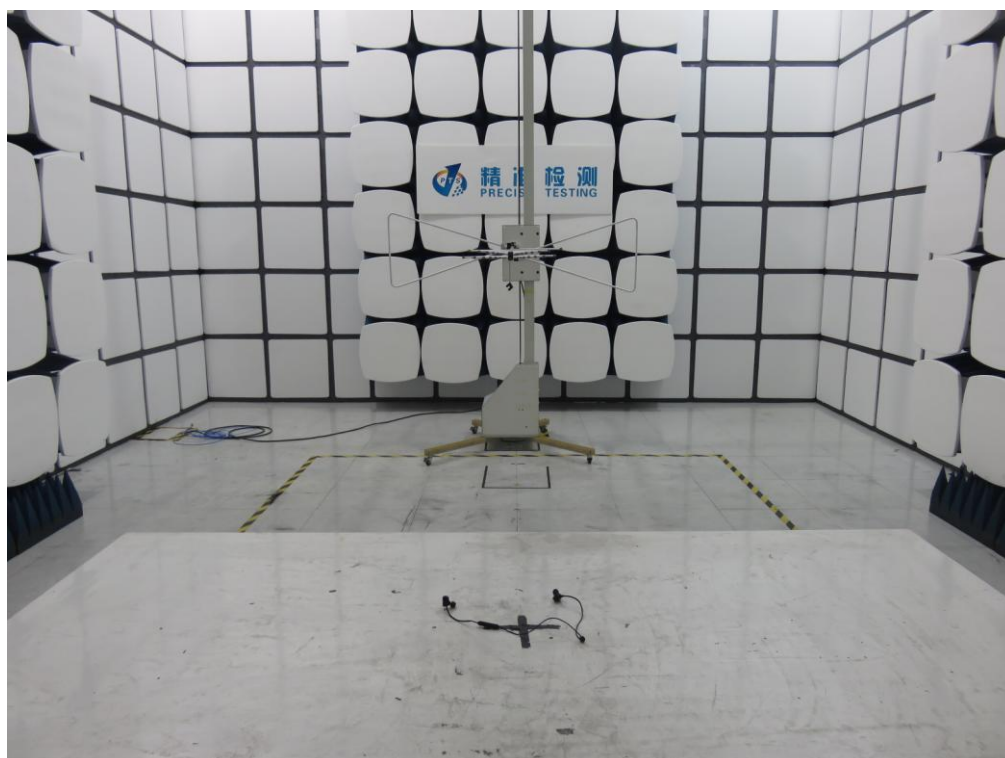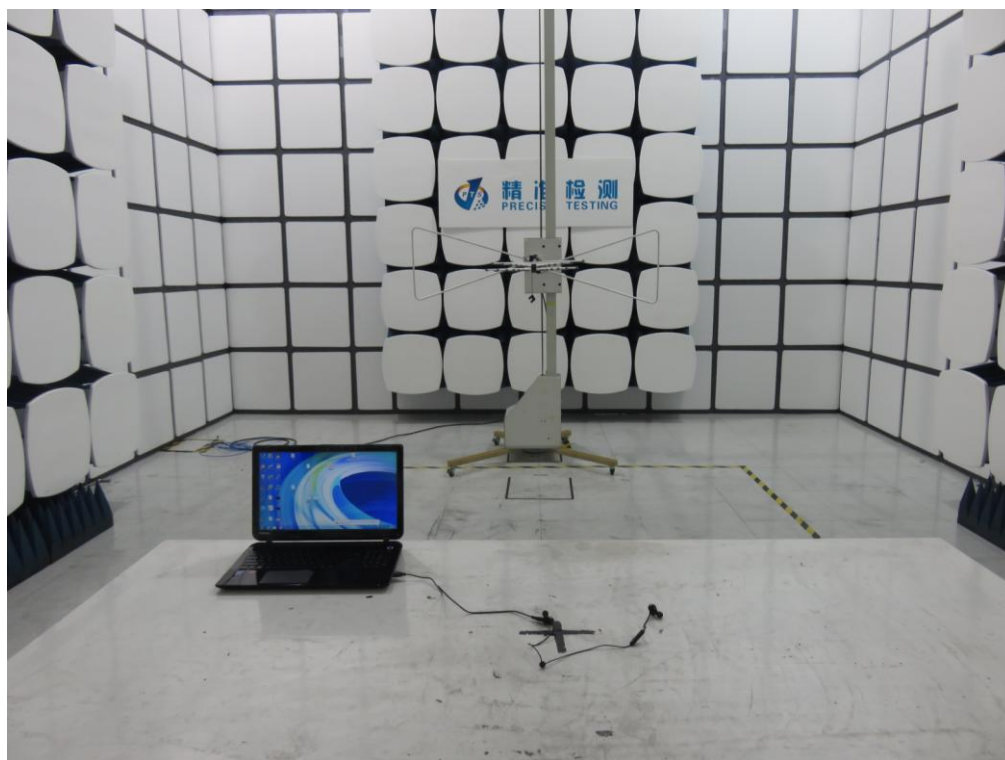

FCC RADIATED EMISSION ABOVE 1G TEST SETUP

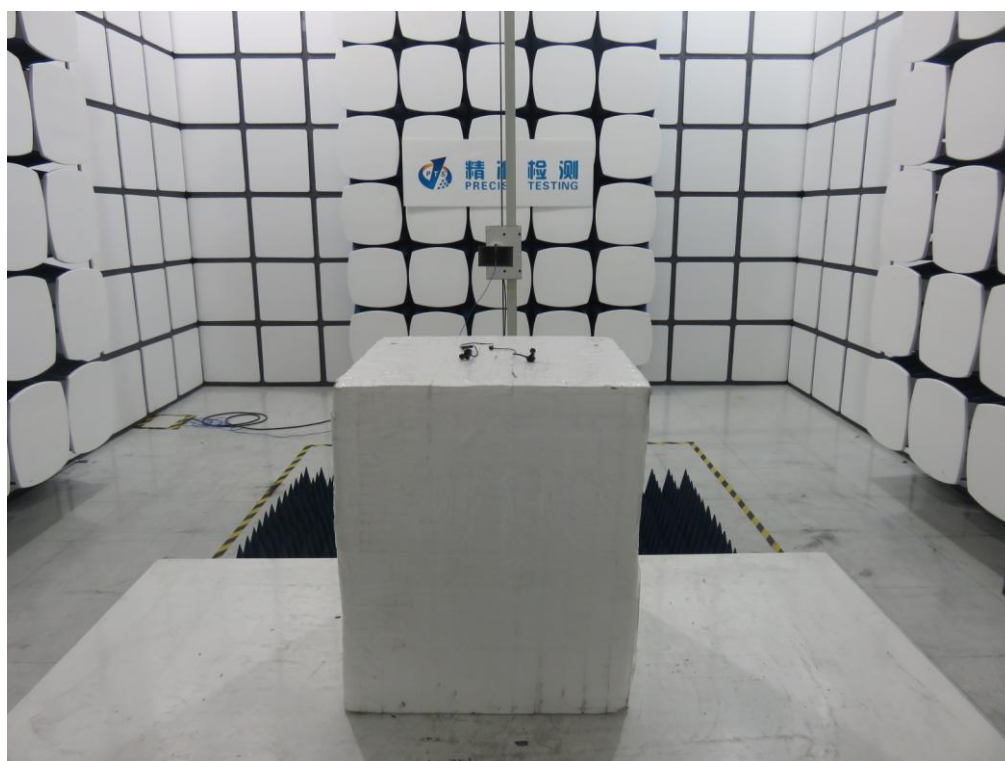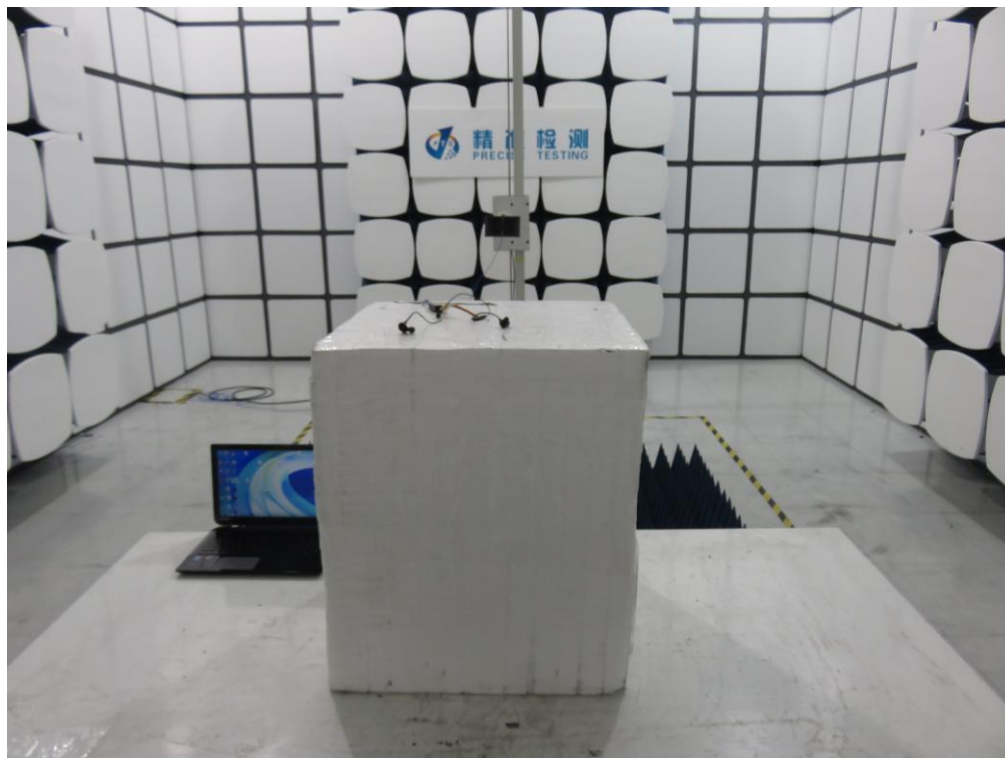

APPENDIX B: PHOTOGRAPHS OF EUT

All VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

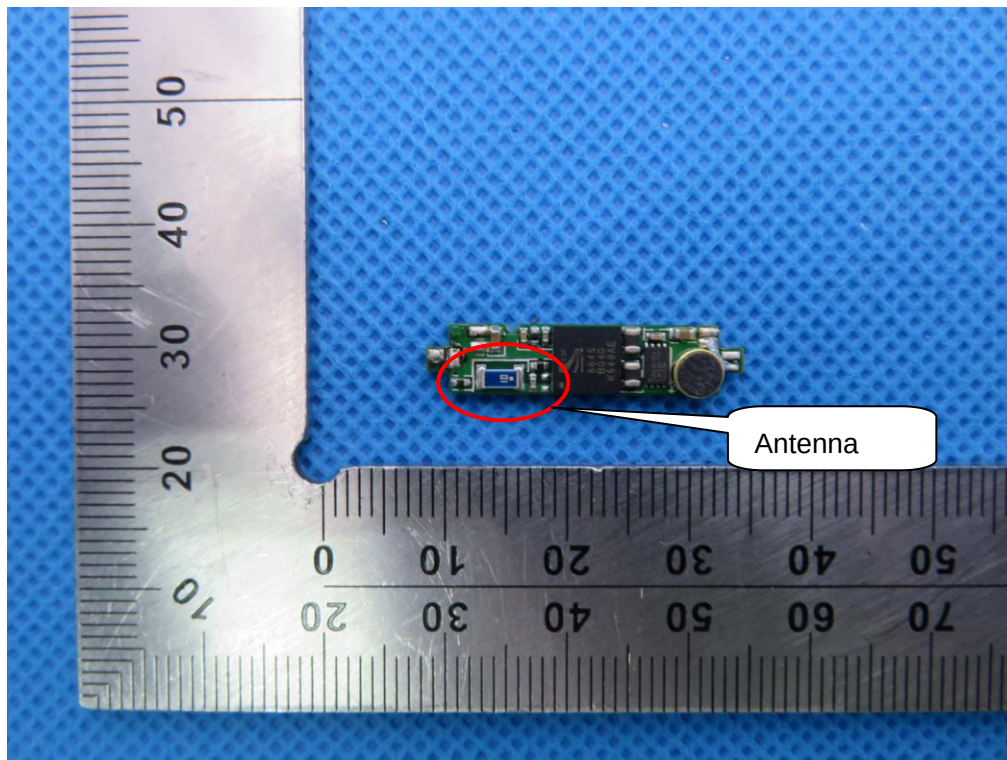


INTERNAL VIEW OF EUT-2

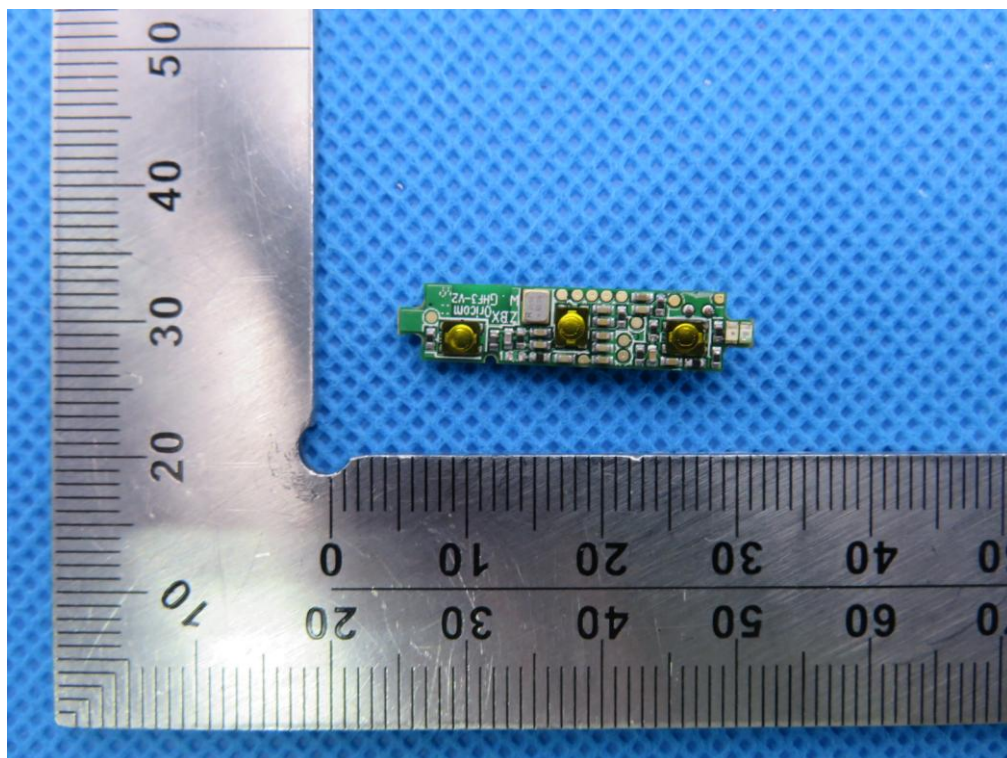


INTERNAL VIEW OF EUT-3

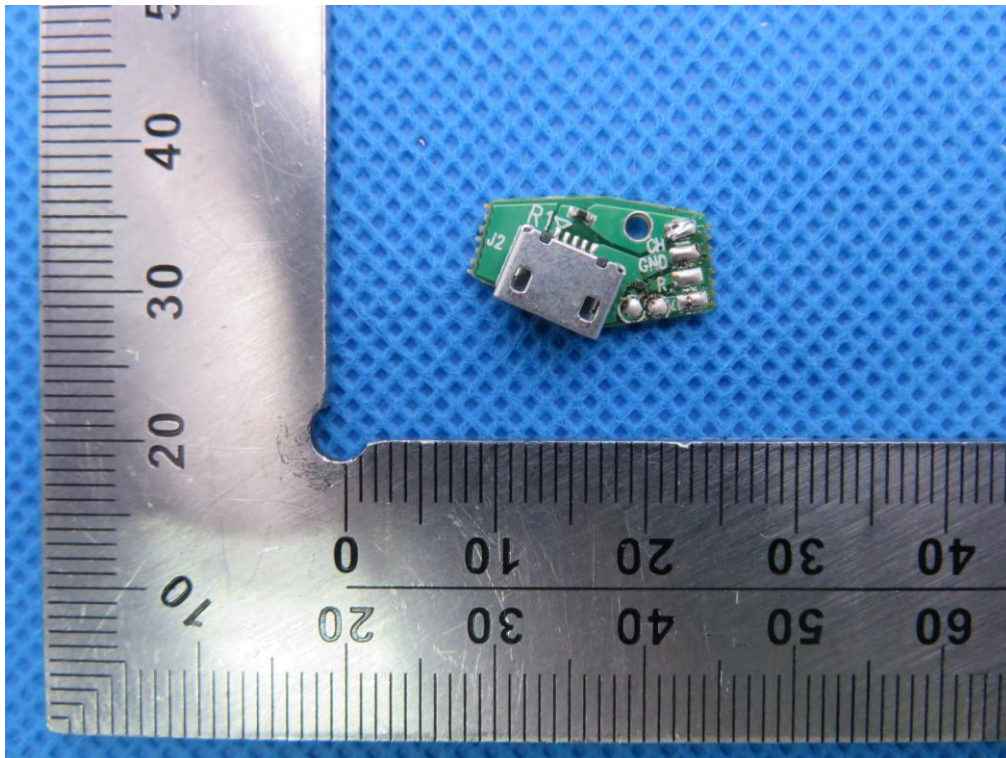


INTERNAL VIEW OF EUT-4

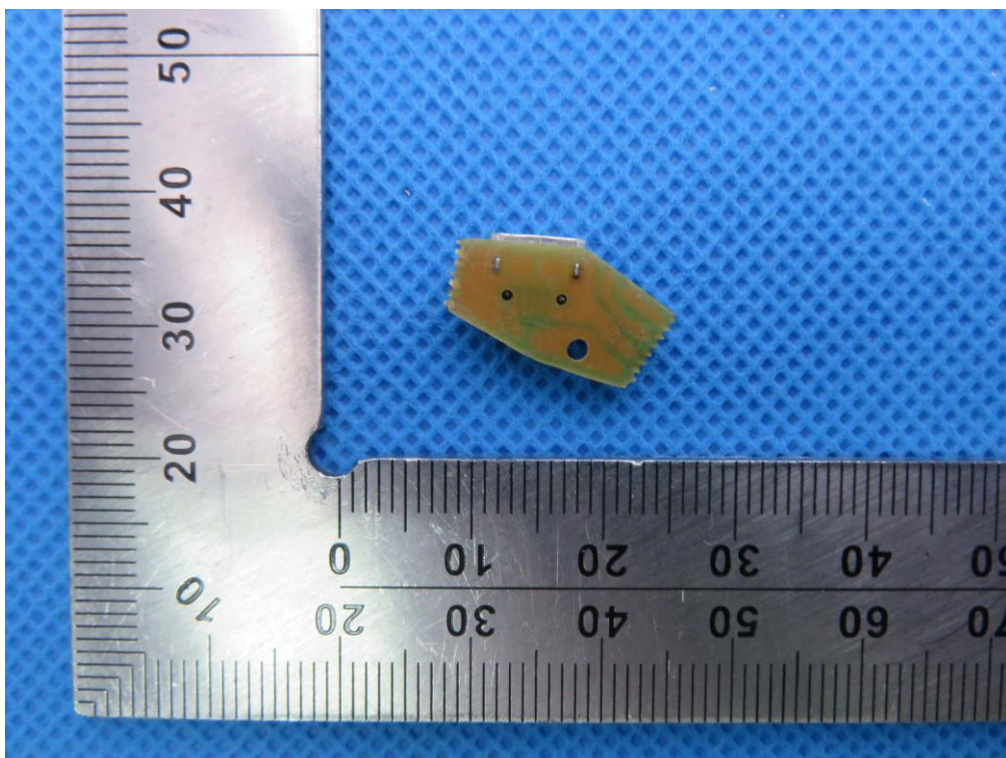

INTERNAL VIEW OF EUT-5

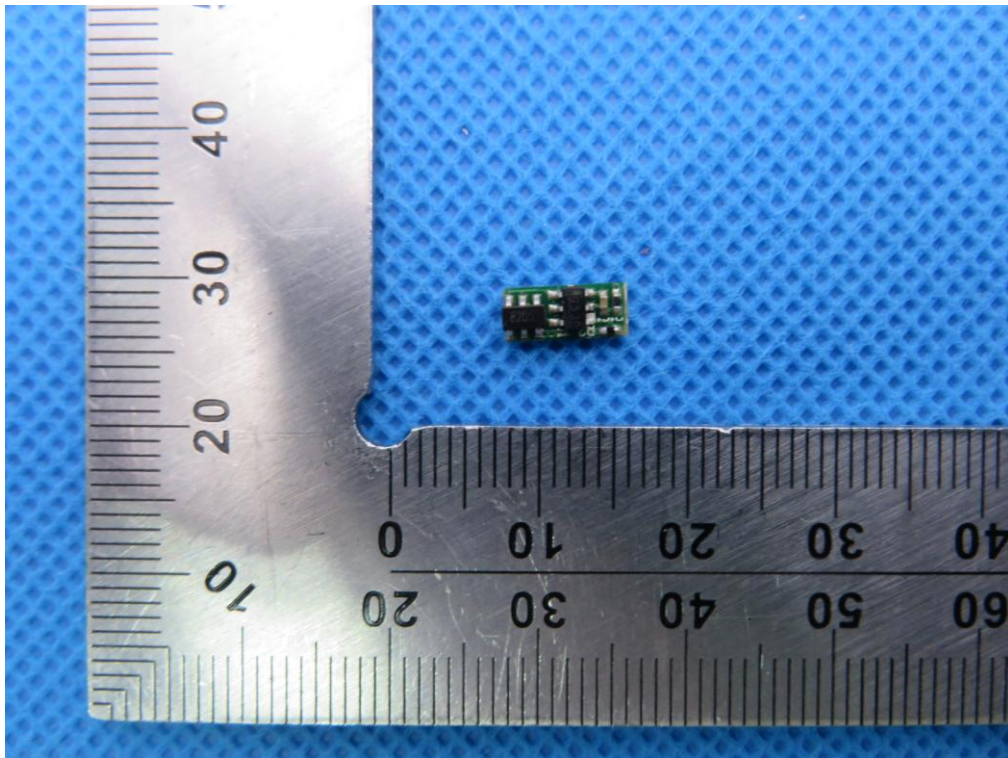

INTERNAL VIEW OF EUT-6

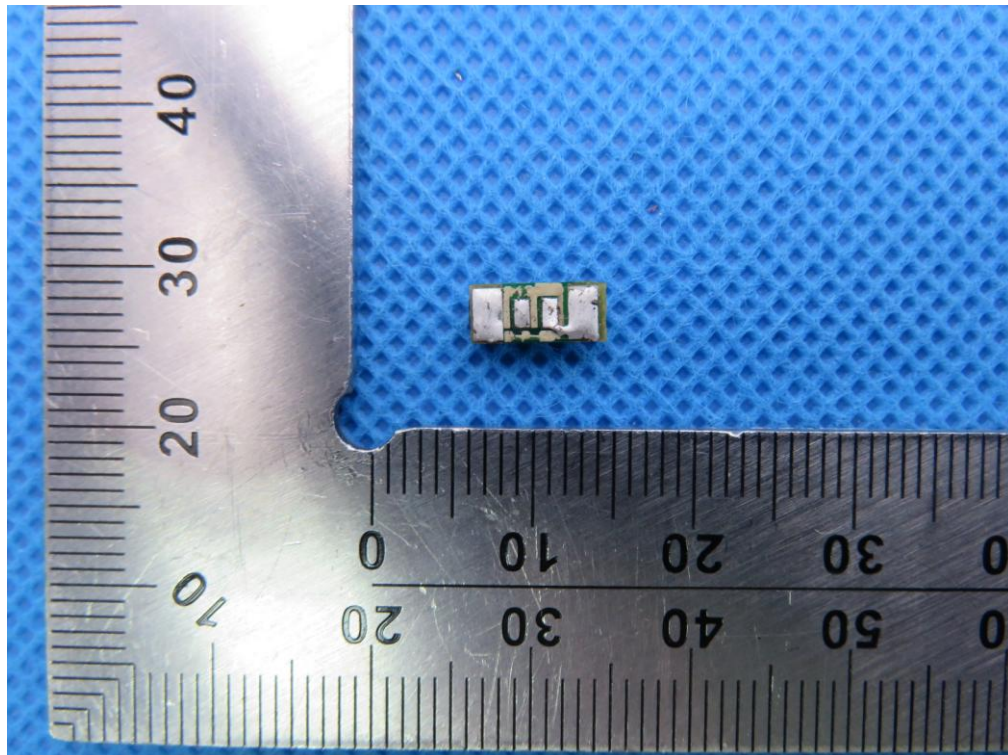

-----END OF REPORT-----