

TEST REPORT

of

FCC Part 15 Subpart C §15.209, §15.231
IC RSS-210 Issue 9, RSS-Gen Issue 5

FCC ID: 2AD5KMWB300
IC Certification: 22232-MWB300

Equipment Under Test : SMARTKEY BAND

Model Name : MWB-300A7

Variant Model Name : MWB-300A3

Applicant : PARTRON CO., LTD.

Manufacturer : PARTRON CO., LTD.

Date of Receipt : 2019.05.22

Date of Test(s) : 2019.05.27 ~ 2019.06.18

Date of Issue : 2019.07.04

In the configuration tested, the EUT complied with the standards specified above.

Tested By:




Date:

2019.07.04

Jinhyoung Cho

Technical
Manager:



Date:

2019.07.04

Jungmin Yang

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

TABLE OF CONTENTS

1. General Information -----	3
2. Field Strength of Fundamental and Spurious Emission-----	7
3. Bandwidth of Operation Frequency-----	15
4. Occupied Bandwidth-----	17
5. Transmission Time-----	19
6. Duty Cycle Correction Factor-----	21
7. Antenna Requirement-----	23

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901
FAX : +82 31 688 0921

1.2. Details of Applicant

Applicant : PARTRON CO., LTD.
Address : 22, Samsung1-ro 2-gil, Hwaseong-si, Gyeonggi-do, Korea
Contact Person : Byun, Jae-beom
Phone No. : +82 31 201 7906

1.3. Details of Manufacturer

Company : Same as applicant
Address : Same as applicant

1.4. Description of EUT

Kind of Product	SMARTKEY BAND
Model Name	MWB-300A7
Variant Model Name	MWB-300A3
Power Supply	DC 3.7 V
Frequency Range	Tx: 433.92 MHz, Rx: 125.00 kHz
Modulation Type	FSK
Number of Channel	1
Antenna Type	PCB Antenna

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMBV100A	255834	Jun. 10, 2019	Annual	Jun. 10, 2020
Spectrum Analyzer	R&S	FSV30	103210	Dec. 05, 2018	Annual	Dec. 05, 2019
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 21, 2018	Annual	Sep. 21, 2019
Preamplifier	H.P.	8447F	2944A03909	Aug. 07, 2018	Annual	Aug. 07, 2019
Preamplifier	Agilent	8449B	3008A01932	Feb. 22, 2019	Annual	Feb. 22, 2020
High Pass Filter	Mini-Circuits	NHP-800+	V8207600724	Mar. 08, 2019	Annual	Mar. 08, 2020
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40ss	7	Mar. 12, 2019	Annual	Mar. 12, 2020
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 23, 2017	Biennial	Aug. 23, 2019
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF907	100145	Jan. 31, 2019	Biennial	Jan. 31, 2021
Test Receiver	R&S	ESU26	100109	Jan. 31, 2019	Annual	Jan. 31, 2020
Controller	Innco systems GmbH	CONTROLLER CO3000/963/3 CO3000-4P	8330516/L	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Antenna Master	Innco systems GmbH	MA4640-XP-ET	MA4640/536/3 8330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SUCOFLEX	104 (3 m)	MY3258414	Jan. 04, 2019	Semi-annual	Jul. 04, 2019
Coaxial Cable	SUCOFLEX	104 (10 m)	MY3145814	Jan. 04, 2019	Semi-annual	Jul. 04, 2019

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

Applied standard: FCC Part15 Subpart C, IC RSS-210 Issue 9, RSS-Gen Issue 5			
Section in FCC	Section in IC	Test Item	Result
15.209(a) 15.231(b)	RSS-210 Issue 9, A.1, Table A1 RSS-Gen Issue 5, 8.9	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
15.231(c)	-	Bandwidth of Operation Frequency	Complied
15.231(a)	RSS-210 Issue 9, A.1.1	Transmission Time	Complied
-	RSS-210 Issue 9, A.1.3 RSS-Gen Issue 5, 6.7	Occupied Bandwidth	Complied
15.207	RSS-Gen Issue 5 8.8	AC Power Line Conducted Emission	N/A ¹⁾

Note:

1) The AC power line test was not performed because the EUT does not operate while charging.

1.7. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty (dB)
Occupied Bandwidth	± 9.66 kHz
Radiated Disturbance, 9 kHz to 30 MHz	± 3.59 dB
Radiated Disturbance, below 1 GHz	± 5.88 dB
Radiated Disturbance, above 1 GHz	± 5.94 dB

Uncertainty figures are valid to a confidence level of 95 %.

1.8. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501/RF-RTL013989	2019.06.24	Initial
1	F690501/RF-RTL013989-1	2019.07.04	Revised test report

1.9. Description of Variant Model

	Basic Model	Variant Model
	MWB-300A7	MWB-300A3
Immobilizer	3D	3D
Transponder	HT-2, HT-3, HT-AES, HT-Pro	HT-2, HT-3, HT-AES, HT-Pro
EROM	16 KB / 24 KB / 32 KB	16 KB / 24 KB / 32 KB
EEPROM	2048B	2048B
Package	HVQFN32, HVQFN40	HVQFN32
LF cap tune	No	No
LF polling	yes	No
LF 3D Boost Mode (0.1mVpp, 14μ A)	No	No
Mechanical Motion Sensor IF	yes	No

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


2. Field Strength of Fundamental and Spurious Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 30 MHz.

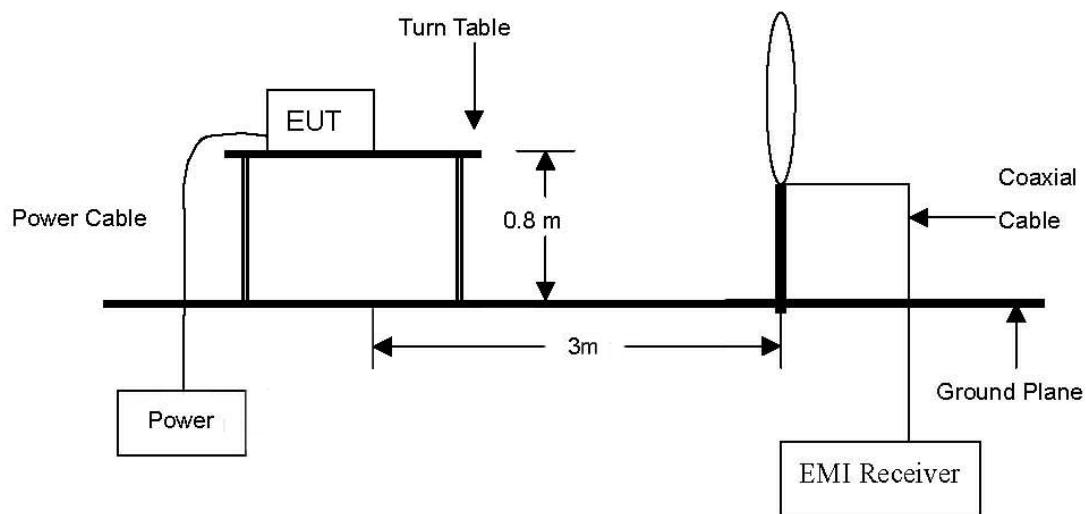

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

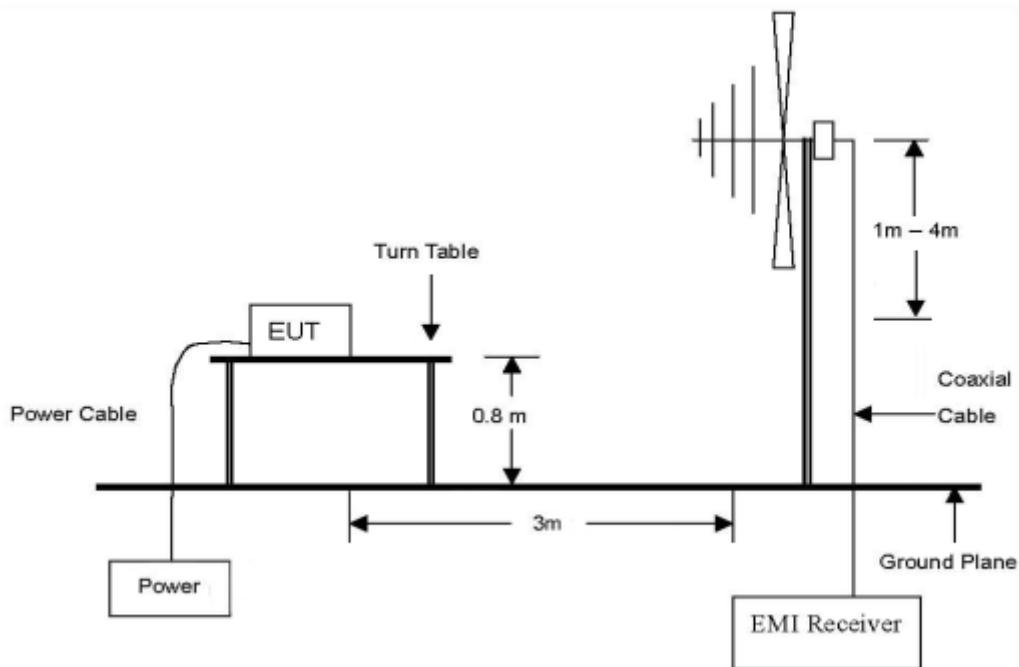

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

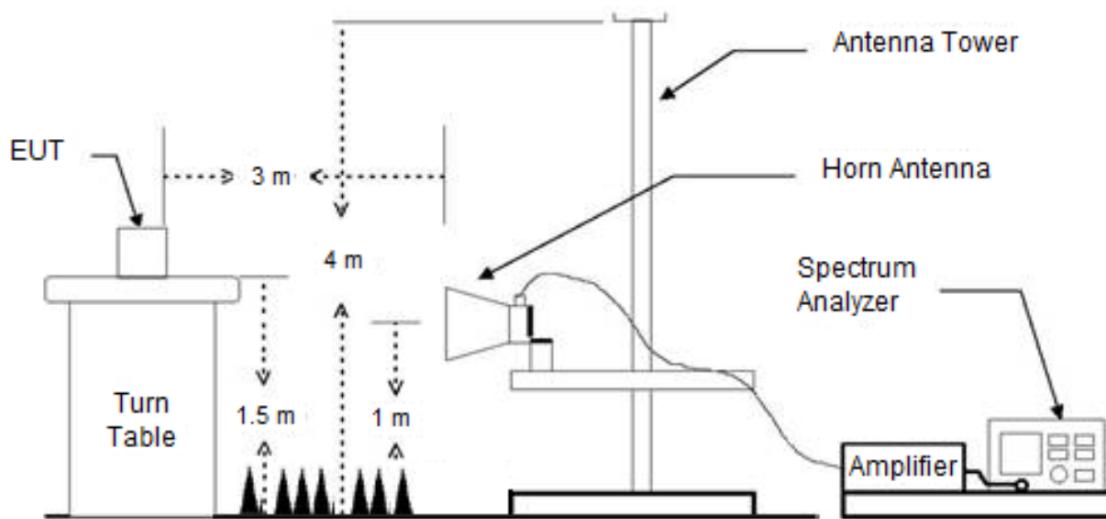

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2. Limit

2.2.1. FCC

2.2.1.1. Radiated Emission Limits; general requirements.

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

2.2.1.2. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

According to §15.231(b), in addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2.2. IC

2.2.2.1. Transmitter Emission Limits

According to RSS-Gen Issue 5, 8.9.

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 - General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength (μ V/m at 3 m)
30-88	100
88-216	150
216-960	200
Above 960	500

Table 6 - General field strength limits at frequencies below 30 MHz

Frequency	Magnetic Field Strength (H-Field) (μ A/m)	Measurement Distance (m)
9-490 kHz ¹	6.37/F (F in kHz)	300
490-1 705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2.2.2.2. Momentarily Operated Devices

According to A.1 of RSS-210 Issue 9.

The frequency bands and field strength limits in tables A1 and A2 of this annex are reserved exclusively for the transmission of a control signal, such as that used with alarm systems, door openers, remote switches, etc. Data may be sent with a control signal. Radio control of toys or model aircraft, as well as continuous transmissions, such as voice or video, are not permitted, except as provided in Section A.1.4 below.

Table A1 - Permissible Field Strength Limits for Momentarily Operated Devices

Fundamental Frequency (MHz), Excluding Restricted Frequency Bands Specified in RSS-Gen	Field Strength of the Fundamental Emissions (μ V/m at 3 m)
70-130	1,250
130-174	1,250 to 3,750*
174-260 ^(Note 1)	3,750
260-470 ^(Note 1)	3,750 to 12,500*
Above 470	12,500

* Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Frequency Strength (μ V/m) = (56.82 x f) - 6136

For 260-470 MHz: Frequency Strength (μ V/m) = (41.67 x f) - 7083

Note 1: Frequency bands 225-328.6 MHz and 335.4-399.9 MHz are designated for the exclusive use of the Government of Canada. Manufacturers should be aware of possible harmful interference and degradation of their licence-exempt radio equipment in these frequency bands.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013

2.3.1. Test Procedures for emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

2.3.3. Test Procedures for emission above 1 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1 GHz.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.4. Test Result

Ambient temperature : $(23 \pm 1)^\circ\text{C}$

Relative humidity : 47 % R.H.

2.4.1. Field Strength of Fundamental


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Frequency (MHz)	Detect Mode	Ant. Pol.	Reading (dB μ V)	AF (dB/m)	CL (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
433.96	Peak	V	48.22	22.18	5.37	75.77	100.83	25.06
433.96	Average	V	40.48	22.18	5.37	68.03	80.83	12.80

Remark:

1. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is **Y – axis**.
Definition of DUT for three orthogonal planes is described in the test setup photos.
2. 3 m Limit (dB μ V/m) = $20\log[41.67(F_{\text{MHz}}) - 7083] = 80.83$
3. Result = Reading + Antenna Factor + Cable Loss
4. Average Reading = Peak Reading + Duty Cycle Correction Factor
5. Duty Cycle Correction Factor: $20\log(T_{\text{on}} / 100 \text{ ms}) = 20\log(41.01 / 100) = -7.74$
 - $T_{\text{on}} = 41.01 \text{ ms}$.
 - $T_{\text{on+off}} = 100 \text{ ms}$ (pulse train is 100 ms instead of 168 ms).

- Test plot

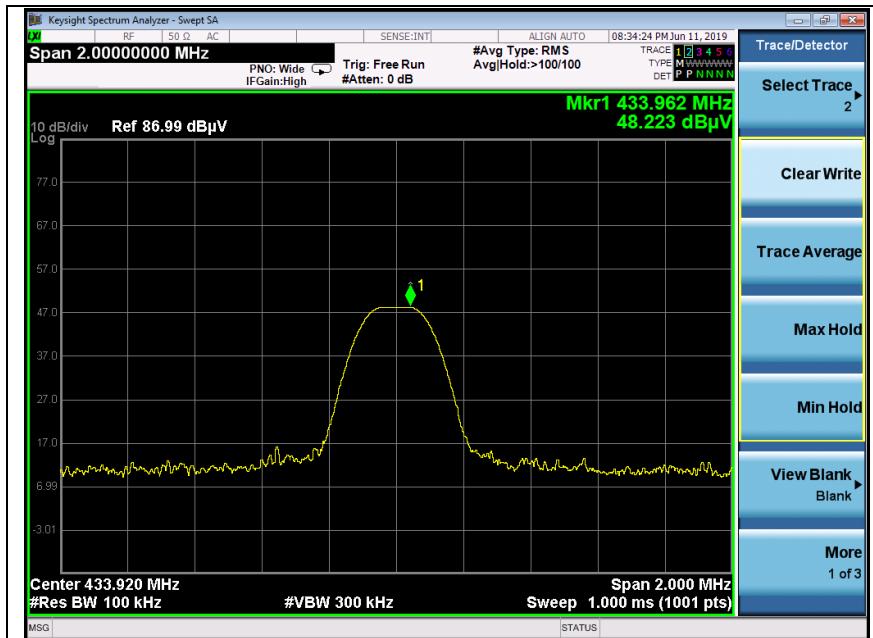

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.4.2. Spurious Emission

The following table shows the highest levels of radiated emissions.

The frequency spectrum from 9 kHz to 4 400 MHz was investigated.


Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 0.009	Not detected	-	-	-	-	-	-	-

Remark;

1. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is X – axis.
Definition of DUT for three orthogonal planes is described in the test setup photos.
2. 3 m Limit (dB μ V/m) = $20\log[41.67(F_{\text{MHz}}) - 7083] - 20$ dB μ V/m = 60.83 dB μ V/m
3. Correction Factors = AF + AMP + CL
4. Actual = Reading + AF + AMP + CL
5. Average Reading = Peak Reading + Duty Cycle Correction Factor
6. Duty Cycle Correction Factor: $20\log(T_{\text{on}} / 100 \text{ ms}) = 20\log(41.01 / 100) = -7.74$
- $T_{\text{on}} = 41.01 \text{ ms}$.
- $T_{\text{on+off}} = 100 \text{ ms}$ (pulse train is 100 ms instead of 168 ms).
7. “*” means the restricted band.
8. According to § 15.31(o), Emission levels are not reported much lower than the limits by over 20 dB.

3. Bandwidth of Operation Frequency

3.1. Test Setup

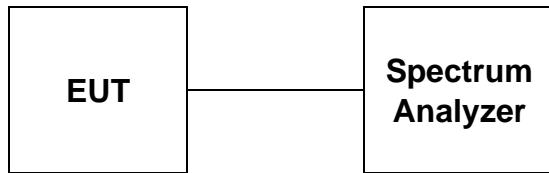

3.2. Limit

According to §15.231(c), the bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

3.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.
3. The bandwidth of fundamental frequency was measured and recorded.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


3.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Frequency (MHz)	Bandwidth of Operation Frequency (kHz)	Limit (kHz)	Remark
433.92	97.680	1 084.80	The point 20 dB down from the modulated carrier

- Test plot

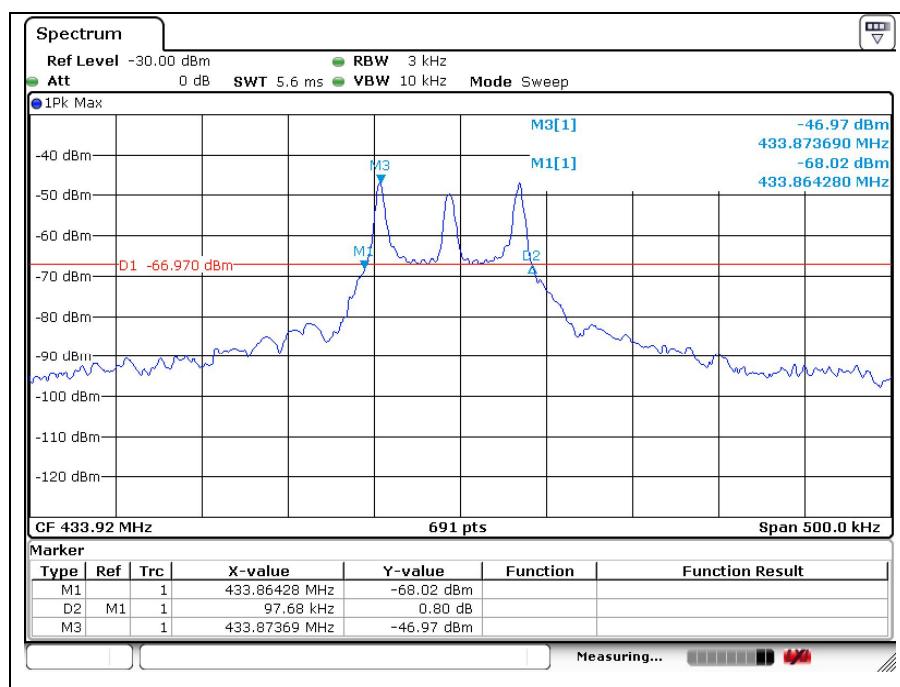

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

4. Occupied Bandwidth

4.1. Test Setup

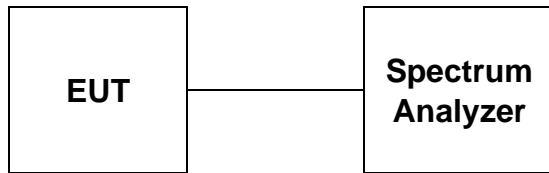

4.2. Limit

According to A.1.3 of RSS-210 Issue 9, the 99 % bandwidth of momentarily operated devices shall be less or equal to 0.25 % of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99 % bandwidth shall be less or equal to 0.5 % of the centre frequency.

4.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.
3. The bandwidth of fundamental frequency was measured and recorded.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


4.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
433.92	95.514	1 084.80	99 % Occupied bandwidth

- Test plot

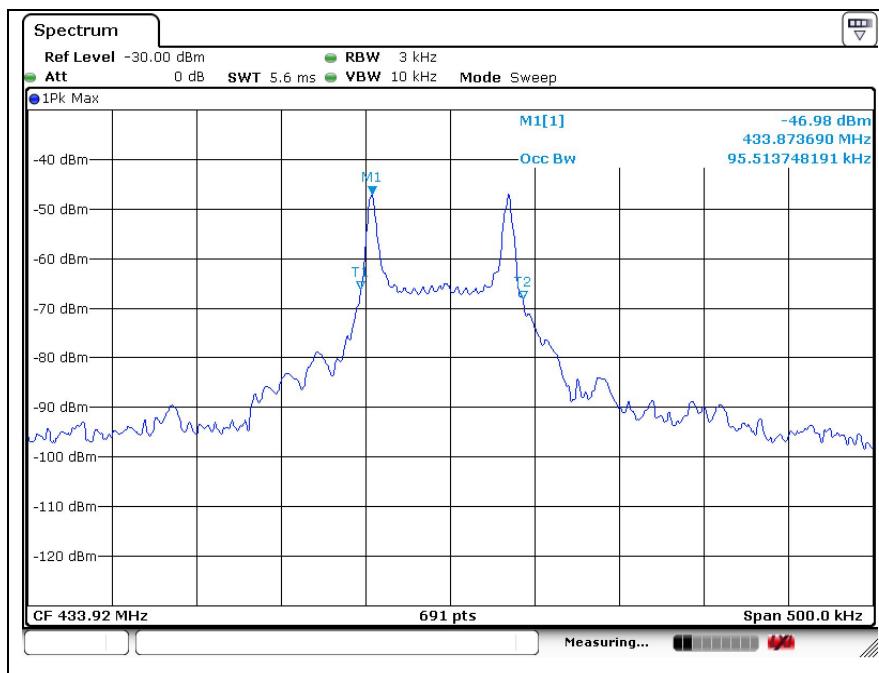

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

5. Transmission Time

5.1. Test Setup

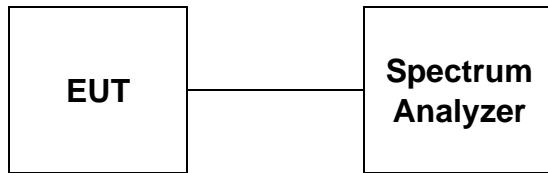

5.2. Limit

5.2.1. FCC

According to §15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.2.2. IC

According to A1.1 (a) of RSS-210 Issue 9, a manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

5.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 1 MHz, VBW = 1 MHz, Span = 0 Hz, Sweep Time = 10 sec.
3. The bandwidth of fundamental frequency was measured and recorded.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


5.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Frequency (MHz)	Transmission Time (sec)	Limit (sec)	Remark
433.92	0.39	Same or less than 5	Pass

- Test plot

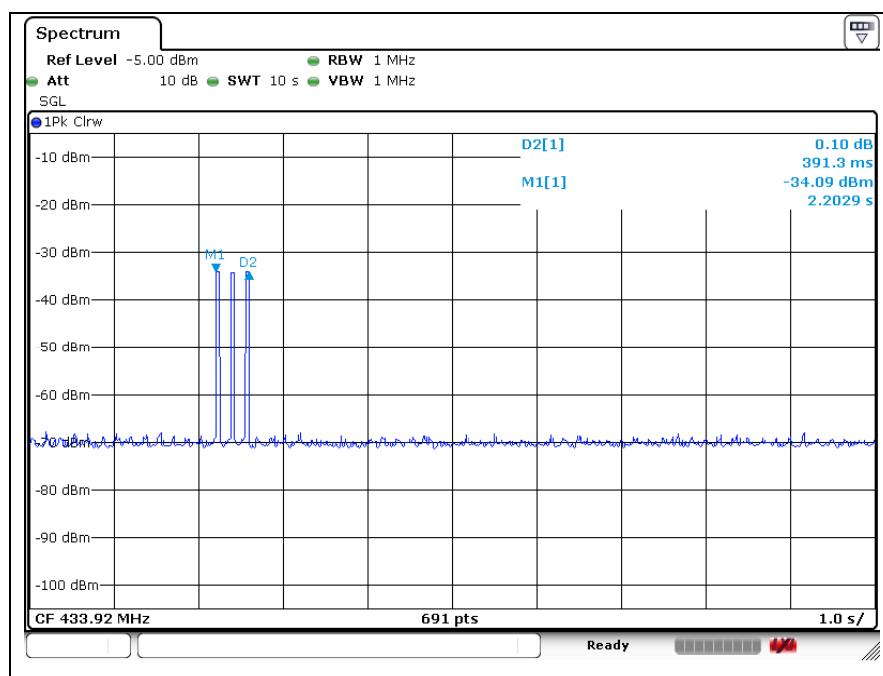

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

6. Duty Cycle Correction Factor

6.1. Test Setup

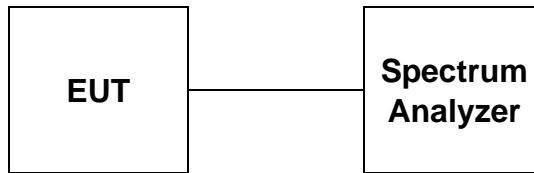

6.2. Limit

None (No dedicated Limit specified in the Rules)

6.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW = 1 MHz, VBW = Auto, Span = 0 Hz, Sweep Time = 0.5 sec.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

6.4. Test Result

Ambient temperature : $(23 \pm 1)^\circ\text{C}$

Relative humidity : 47 % R.H.

CALCULATION:

$$\text{Average Reading} = \text{Peak Reading} (\text{dB}_{\mu\text{V}/\text{m}}) + 20\log(\text{Duty Cycle})$$

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured;

$T_{\text{on+off}}$	T_{on}	$M\% = (T_{\text{on}} / T_{\text{on+off}}) * 100\%$	Duty Correction Factor
100 ms	41.01 ms	41.01	-7.74 dB

$$T_{\text{on+off}} = 100 \text{ ms}$$


$$T_{\text{on}} = 41.01 \text{ ms}$$

$$\text{Duty Cycle} = 20\log(T_{\text{on}} / T_{\text{on+off}}) = 20\log(0.4101) = -7.74 \text{ dB}$$

Remark:

- $T_{\text{on}} = 41.01 \text{ ms}$.
- $T_{\text{on+off}} = 100 \text{ ms}$ (pulse train is 100 ms instead of 168 ms).

- Test plot

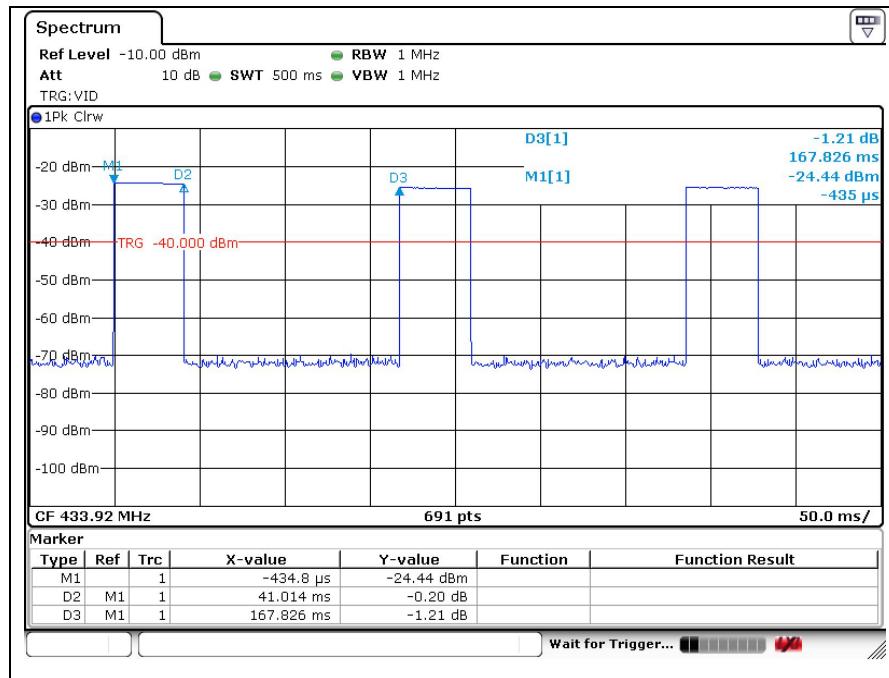

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2. Antenna Connected Construction

Antenna used in this product is PCB Antenna with gain of -11.48 dB i.

- End of the Test Report -

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)