

RF TEST REPORT



Report No.: 16070480-FCC-R2

Supersede Report No.: N/A

Applicant	MOBIWIRE MOBILES (NINGBO) CO.,LTD	
Product Name	Mobile phone	
Model No.	Övn SMART VALUE	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	April 28 to May 10, 2016	
Issue Date	May 20, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Winnie Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070480-FCC-R2
Page	3 of 61

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION	11
6.3 20DB BANDWIDTH.....	15
6.4 PEAK OUTPUT POWER.....	19
6.5 NUMBER OF HOPPING CHANNEL.....	23
6.6 TIME OF OCCUPANCY (DWELL TIME)	25
6.7 BAND EDGE & RESTRICTED BAND	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	43
ANNEX A. TEST INSTRUMENT.....	49
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	50
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	56
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	60
ANNEX E. DECLARATION OF SIMILARITY	61

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070480-FCC-R2	NONE	Original	May 11, 2016
16070480-FCC-R2	V1	Update trademark	May 20, 2016

2. Customer information

Applicant Name	MOBIWIRE MOBILES (NINGBO) CO.,LTD
Applicant Add	No.999,Dacheng East Road,Fenghua City,Zhejiang
Manufacturer	MOBIWIRE MOBILES (NINGBO) CO.,LTD
Manufacturer Add	No.999,Dacheng East Road,Fenghua City,Zhejiang

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: 

Serial Model: N/A

Date EUT received: April 27, 2016

Test Date(s): April 28 to May 10, 2016

Equipment Category : DSS

GSM850: -3dBi

PCS1900: -1dBi

UMTS-FDD Band V: -3dBi

UMTS-FDD Band II: -1dBi

Bluetooth/BLE/WIFI: -2dBi

LTE Band IV: -3dBi

LTE Band VII: -2dBi

GPS:-2dBi

GSM / GPRS: GMSK

EGPRS: GMSK,8PSK

UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Antenna Gain: Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

LTE Band: QPSK, 16QAM

GPS:BPSK

Type of Modulation:

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies):	WIFI:802.11b/g/n(20M): 2412-2462 MHz WIFI:802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz LTE Band IV TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz GPS RX:1575.42 MHz
-------------------------------	--

Max. Output Power: 3.988dBm

GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band II : 277CH
WIFI :802.11b/g/n(20M): 11C
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Number of Channels:	WIFI :802.11b/g/n(20M): 11CH
	WIFI :802.11n(40M): 7CH
	Bluetooth: 79CH
	BLE: 40CH
	GPS:1CH

Port: Power Port, Earphone Port, USB Port

Adapter:
Model: OWN SMART VALUE
Input: AC 100-240V; 50/60Hz;0.2A
Output: DC 5.0V,1A
Battery:
Model: OWN SMART VALUE
Spec:3.8V,2100mAh,7.98Wh
Limited charger voltage :4.35V

Trade Name : _____

öun

GPRS/EGPRS Multi-slot class

8/10/12

Test Report	16070480-FCC-R2
Page	8 of 61

FCC ID:

2ADA4VALUE

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is -2dBi for Bluetooth/BLE/WIFI/GPS.

A permanently attached PIFA antenna for GSM/PCS and UMTS, the gain is -3dBi for GSM850, -1dBi for PCS1900,-3dBi for UMTS-FDD Band V,-1dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for LTE, the gain is -3dBi for LTE Band IV, -2dBi for LTE Band VII.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

Requirement(s):

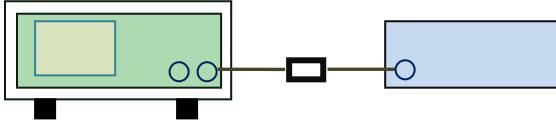Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A



Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.0050	0.970	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.0050	0.684	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.0050	0.677	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.0050	0.865	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.0050	0.865	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.0050	0.865	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.0050	0.874	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.0050	0.877	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.0050	0.867	Pass
	Adjacency Channel	2479			


Test Plots

Channel Separation measurement result

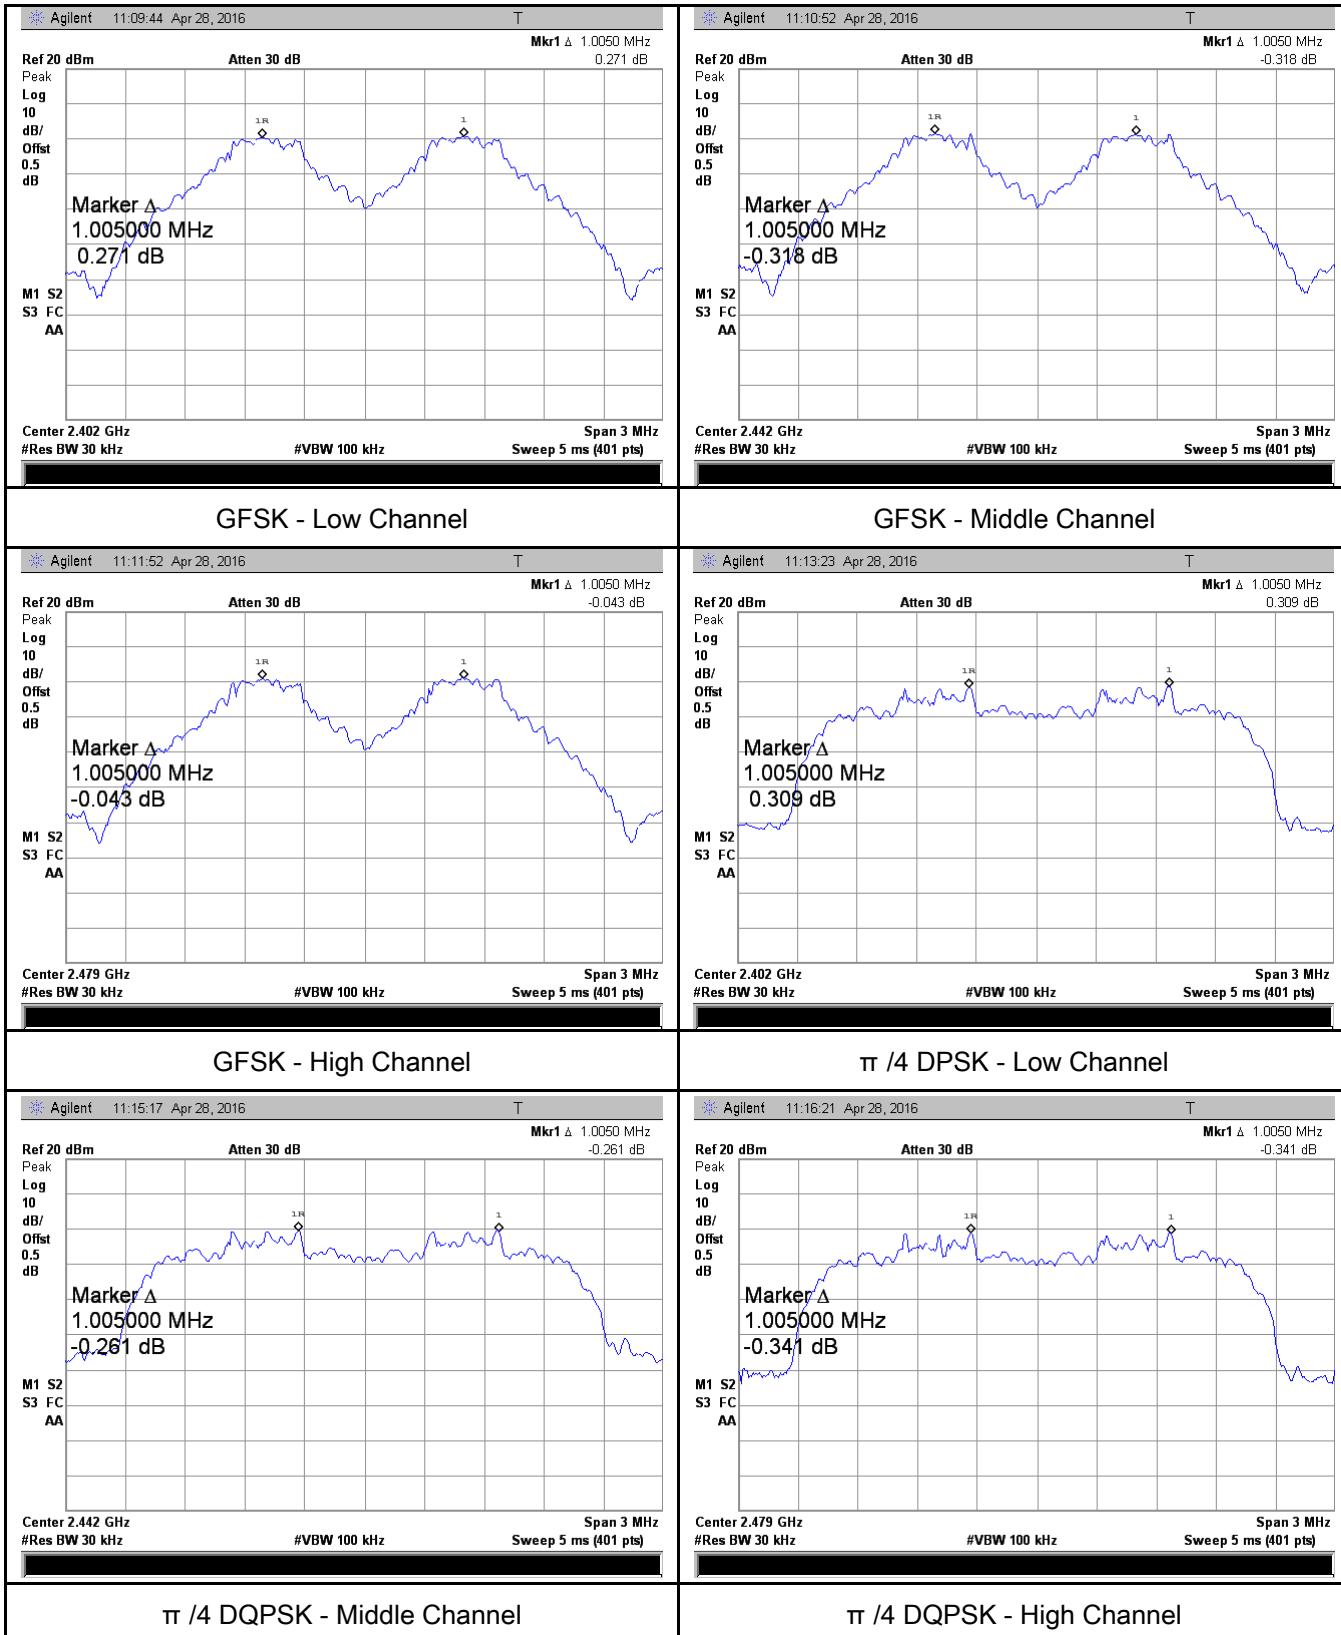

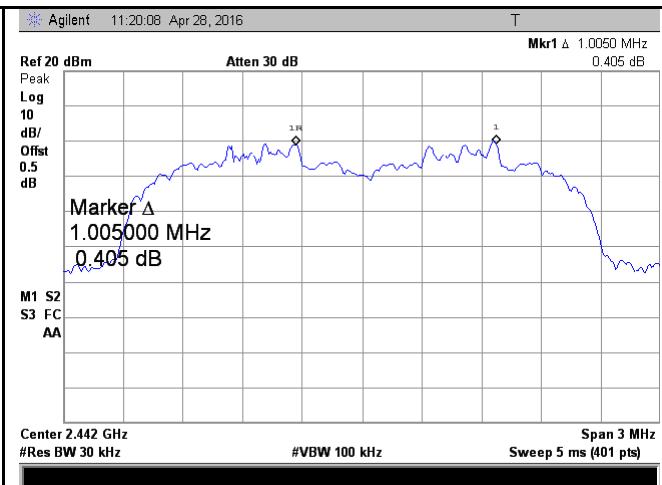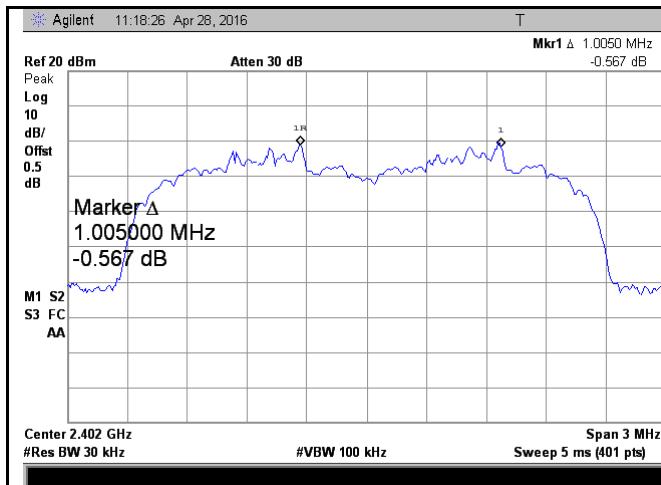

8DPSK - Low Channel

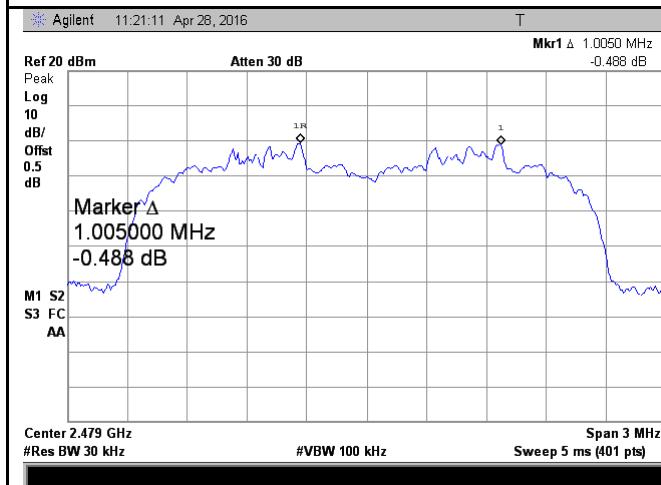


8DPSK - Middle Channel

8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

Requirement(s):

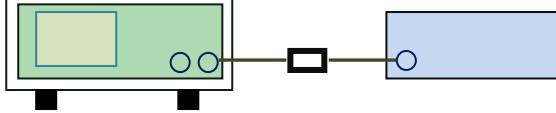Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.970	0.8883
	Mid	2441	1.026	0.8913
	High	2480	1.015	0.8861
$\pi/4$ DQPSK	Low	2402	1.297	1.1738
	Mid	2441	1.297	1.1769
	High	2480	1.297	1.1674
8-DPSK	Low	2402	1.311	1.1912
	Mid	2441	1.315	1.1968
	High	2480	1.301	1.1741

Test Plots

20dB Bandwidth measurement result

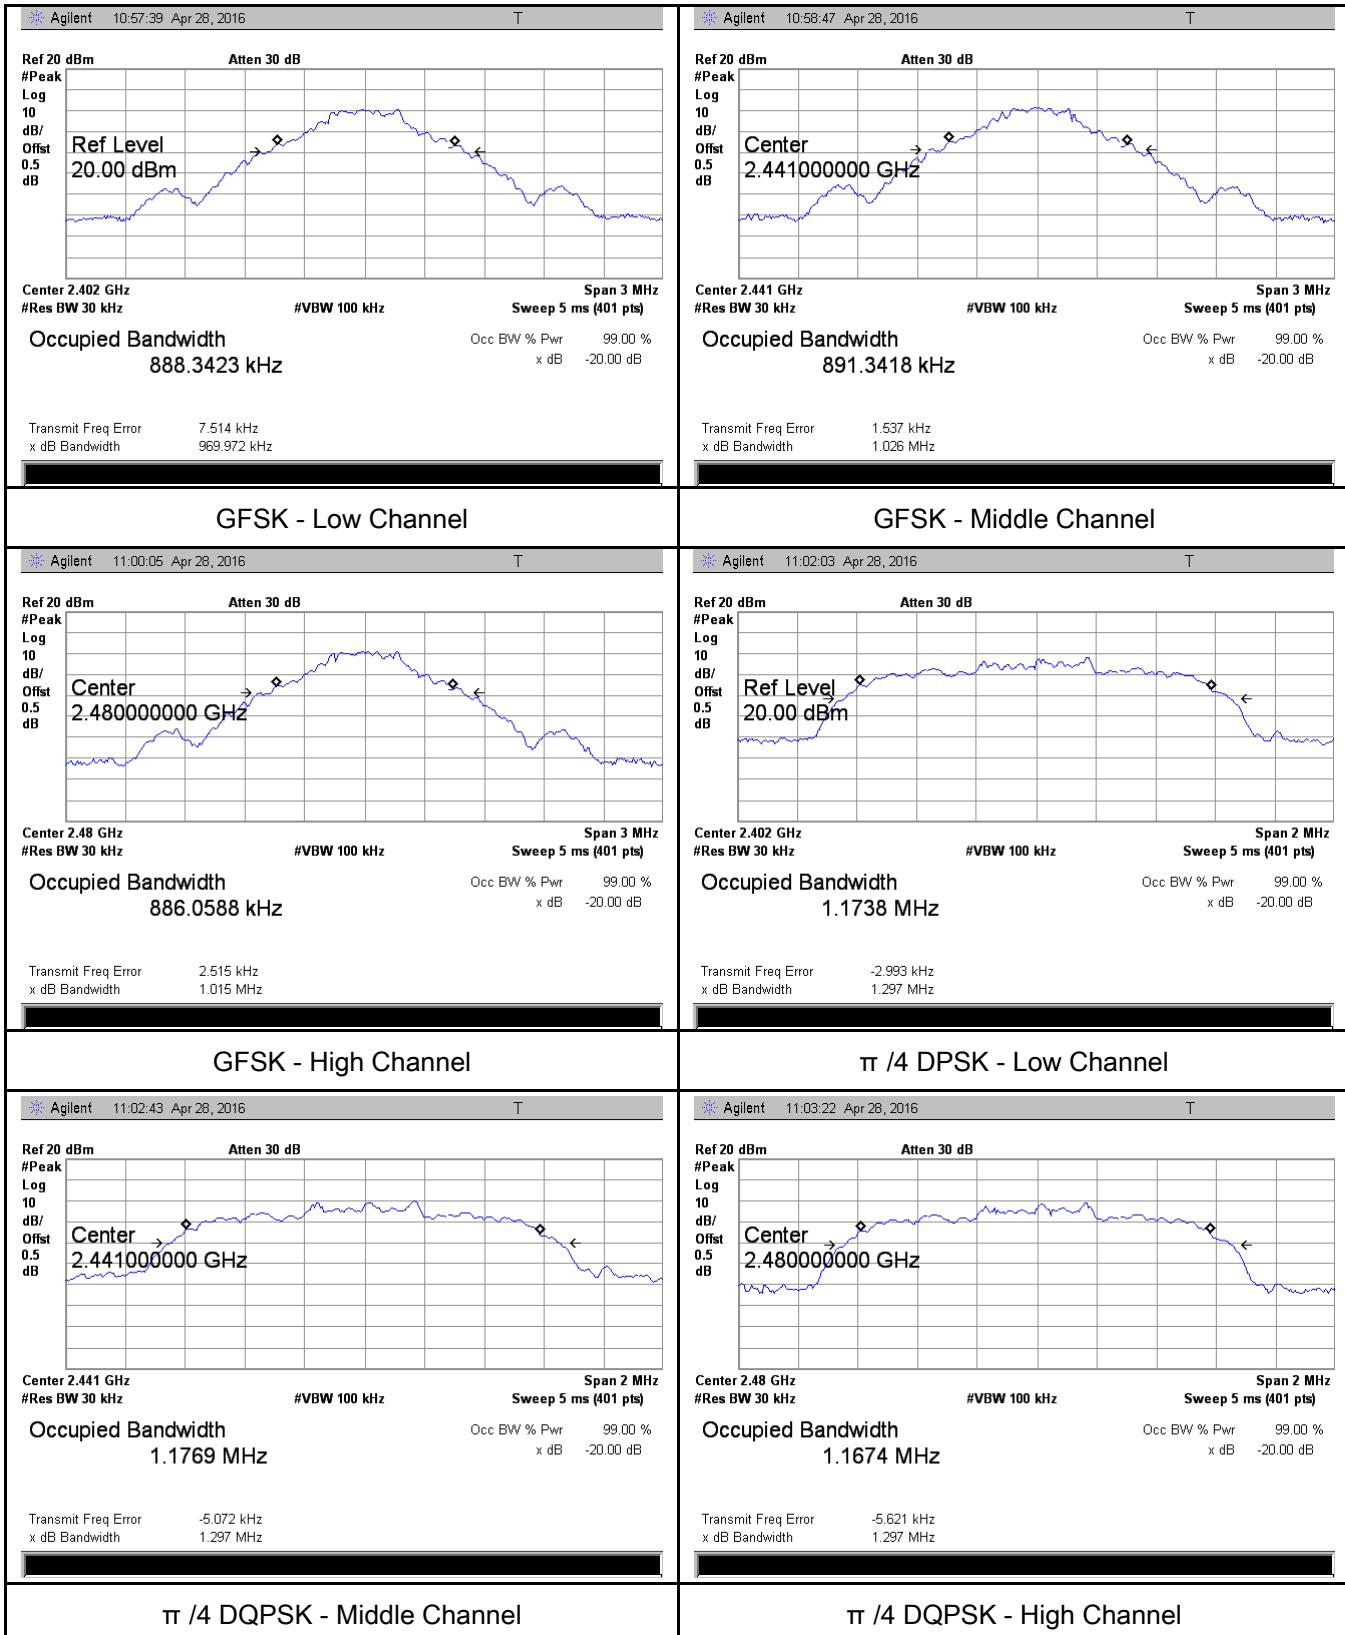


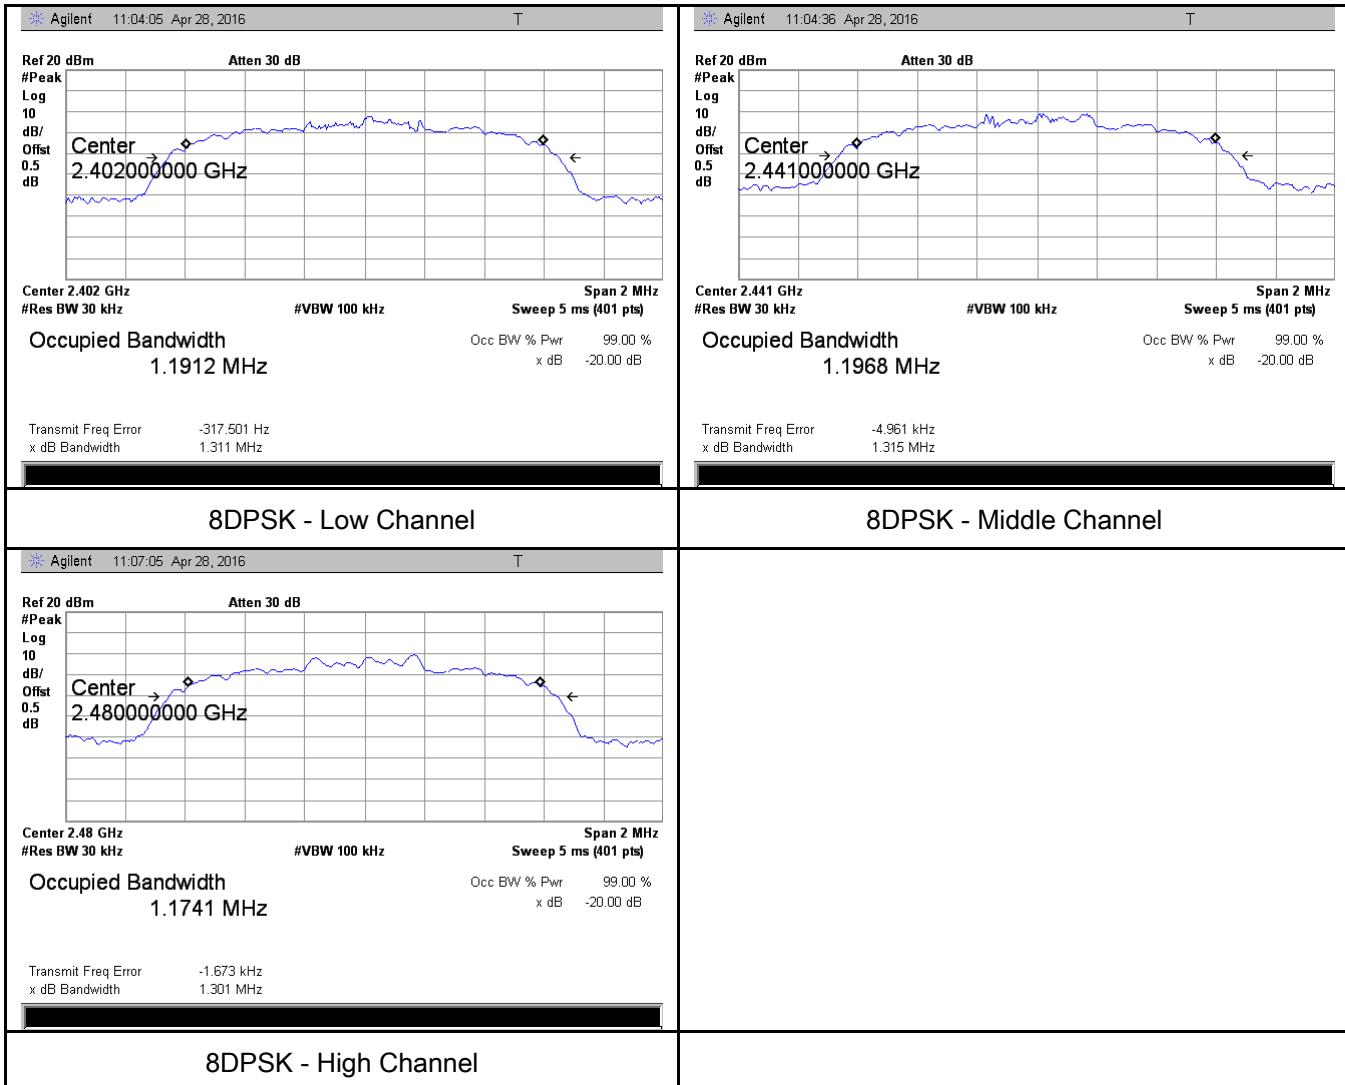

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

Requirement(s):

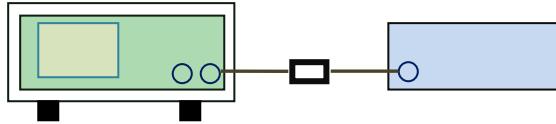Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. 	

	<p>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A



Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	3.005	1000	Pass
		Mid	2441	3.988	125	Pass
		High	2480	3.658	125	Pass
	$\pi/4$ DQPSK	Low	2402	2.189	125	Pass
		Mid	2441	3.330	125	Pass
		High	2480	2.691	125	Pass
	8-DPSK	Low	2402	2.365	125	Pass
		Mid	2441	3.447	125	Pass
		High	2480	2.955	125	Pass


Test Plots

Output Power measurement result

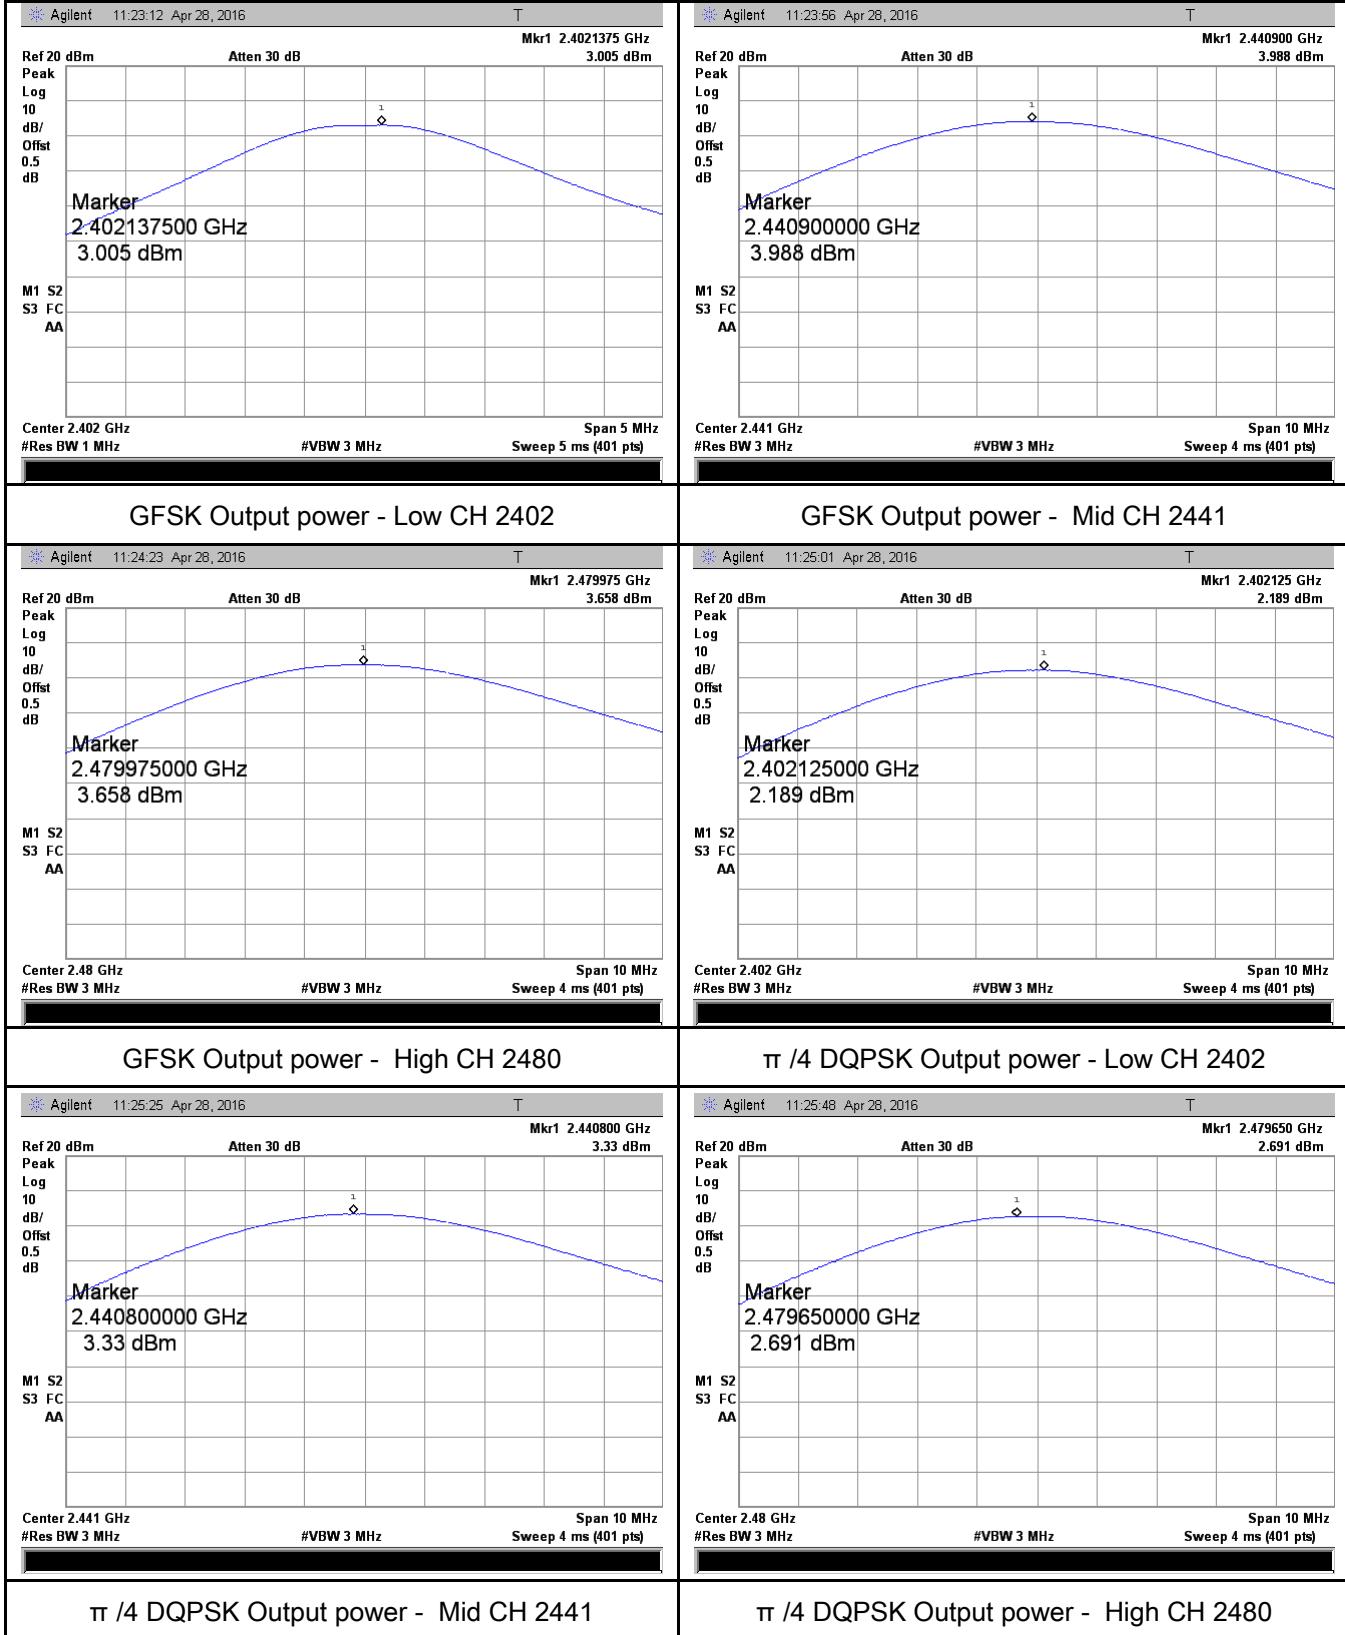


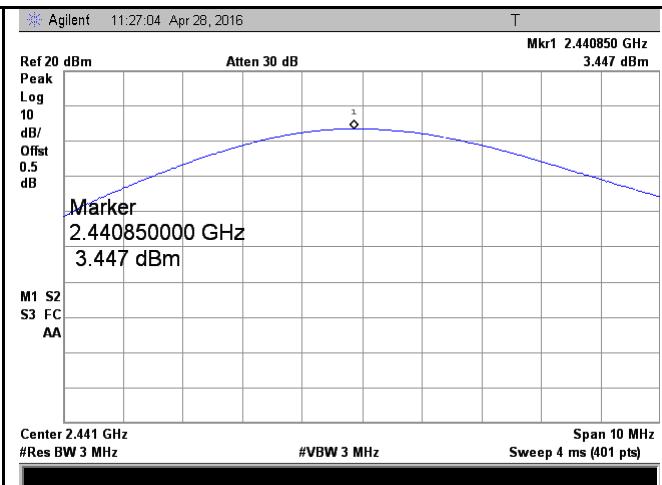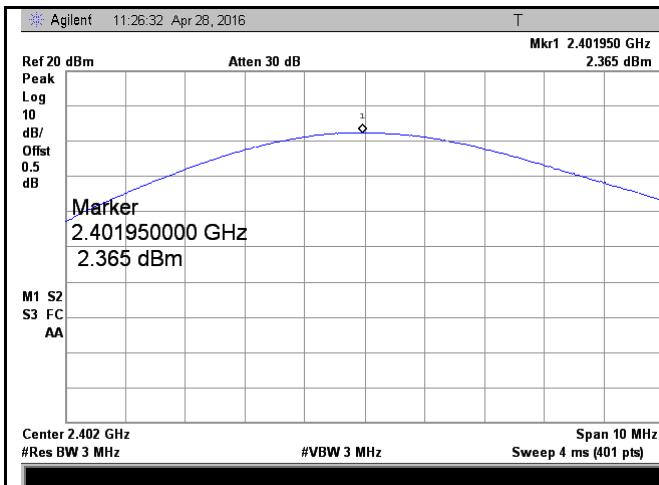

8DPSK Output power - Low CH 2402

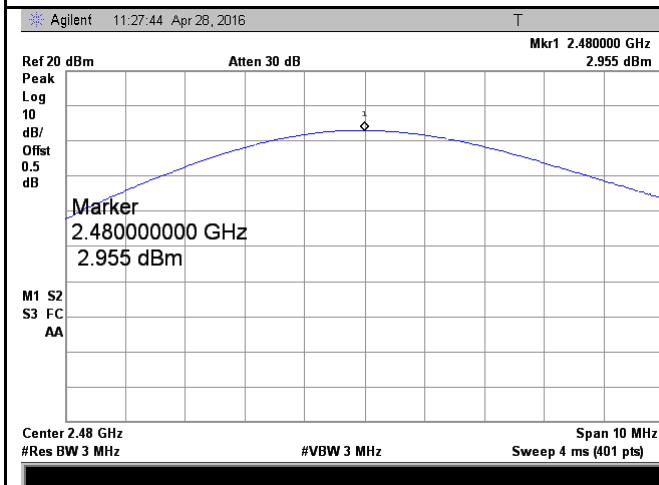

8DPSK Output power - Mid CH 2441

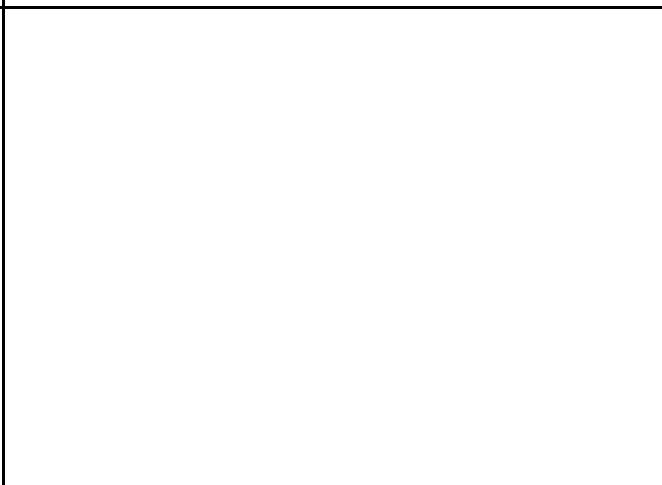


8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

Requirement(s):

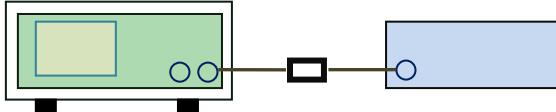
Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail
Test Data	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	N/A
Test Plot	<input checked="" type="checkbox"/>	Yes (See below)	<input type="checkbox"/>	N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

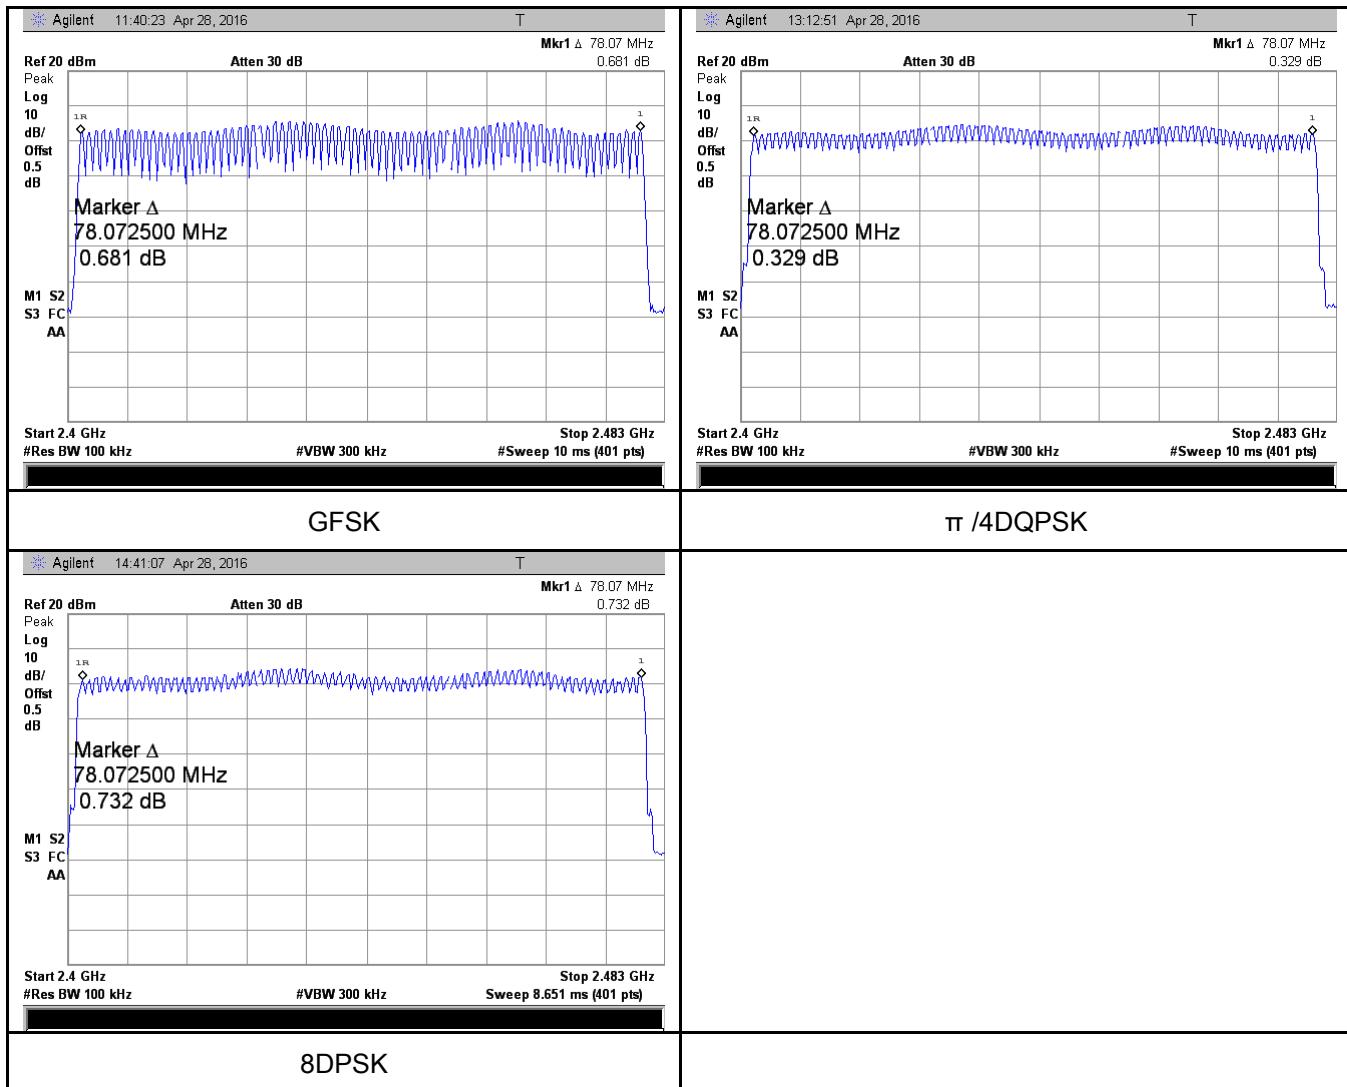

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	April 28, 2016
Tested By :	Winnie Zhang

Requirement(s):

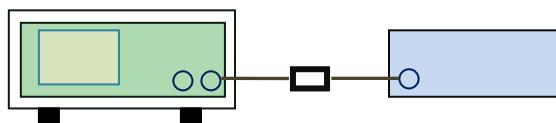Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Dwell Time measurement result



Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.850	304.000	400	Pass
		Mid	2.850	304.000	400	Pass
		High	2.875	306.667	400	Pass
	$\pi/4$ DQPSK	Low	2.850	304.000	400	Pass
		Mid	2.850	304.000	400	Pass
		High	2.850	304.000	400	Pass
	8-DPSK	Low	2.875	306.667	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass

Note: Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$


Test Plots

Dwell Time measurement result

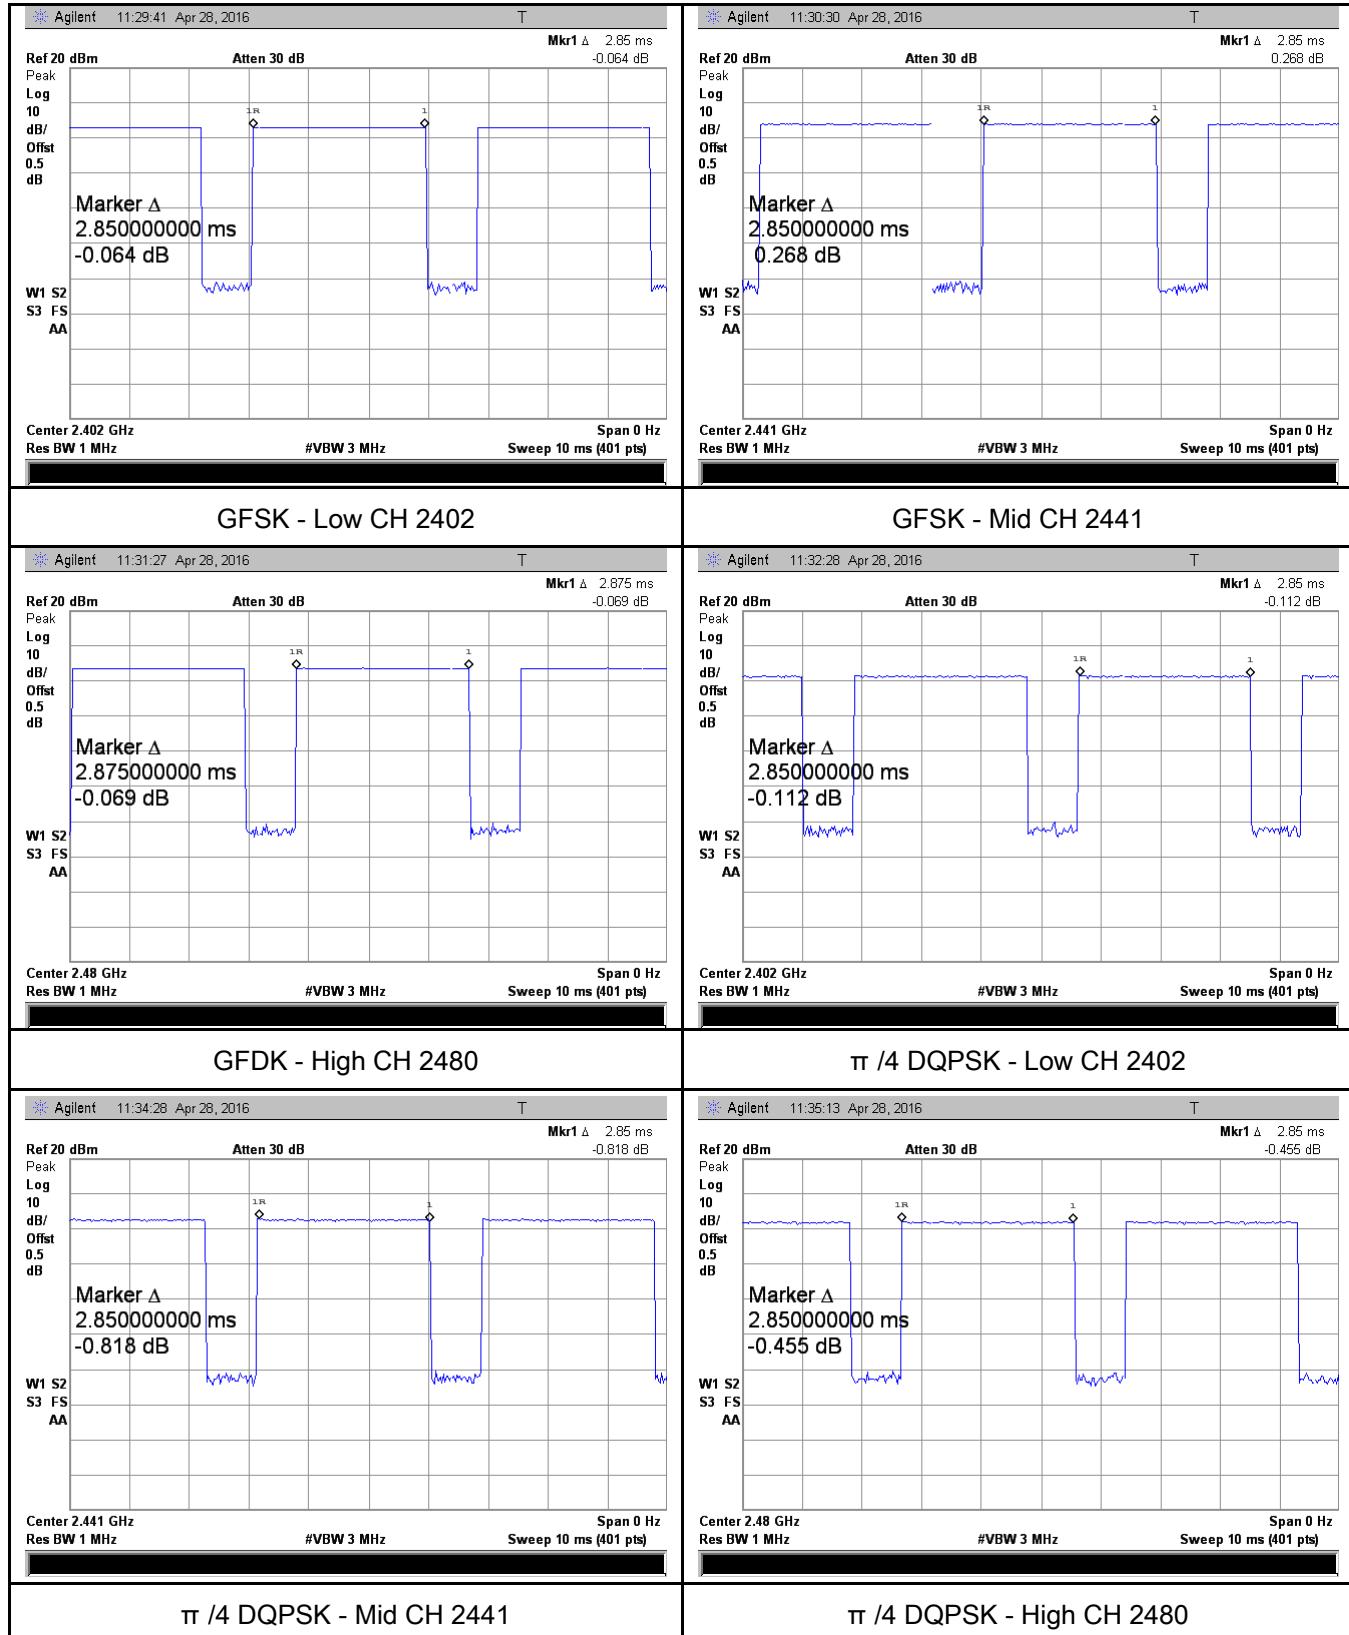


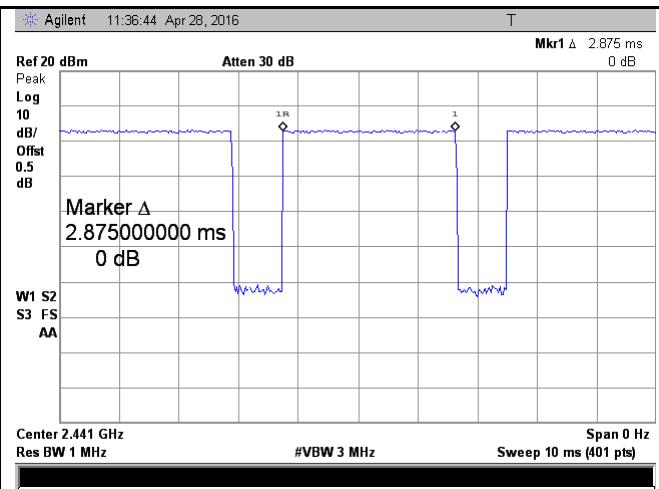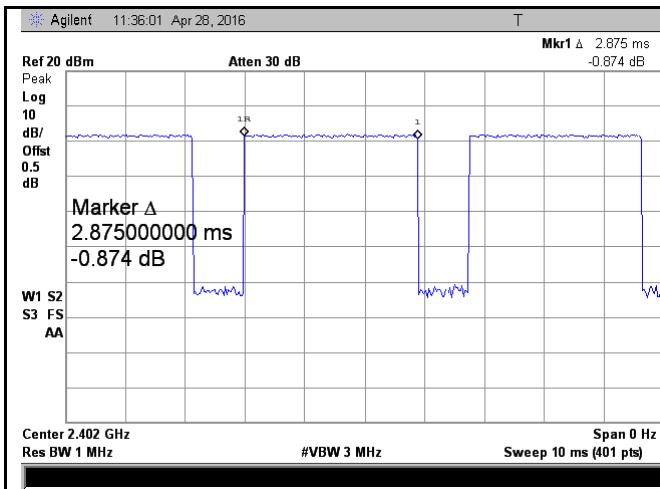

8DPSK - Low CH 2402

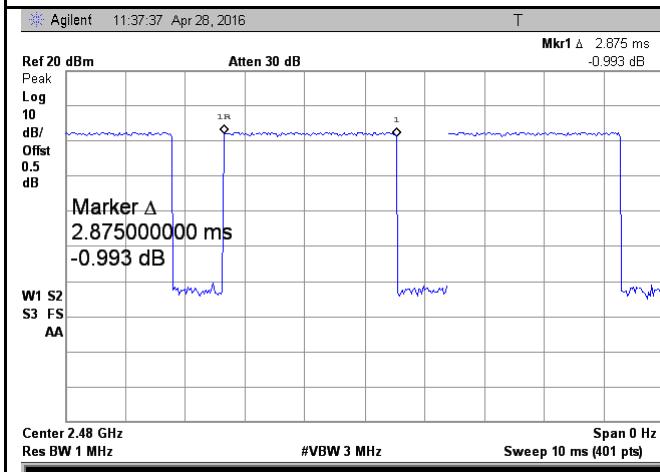

8DPSK - Mid CH 2441

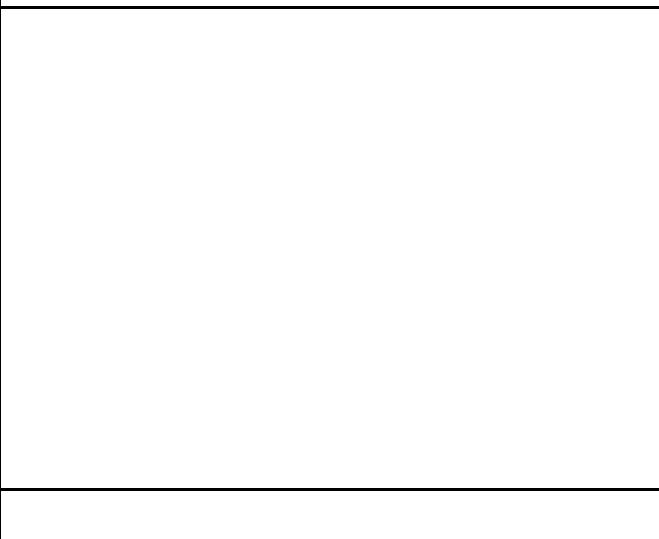


8DPSK - High CH 2480

6.7 Band Edge & Restricted Band

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

Requirement(s):

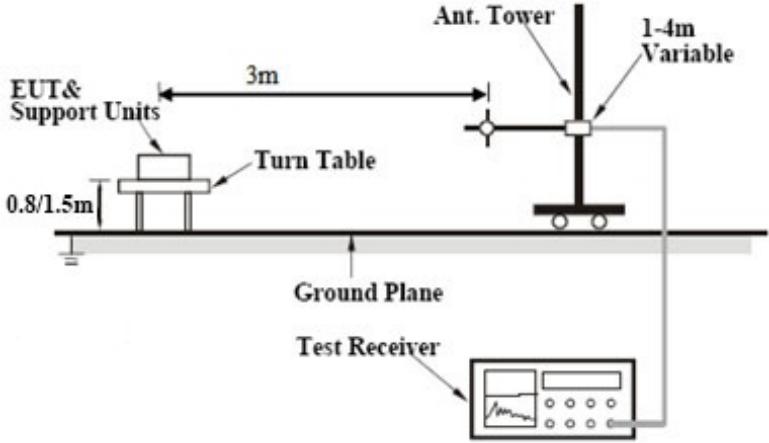Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An 'EUT & Support Units' is positioned on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. A 'Test Receiver' is connected to the EUT. A '1-4m Variable' antenna is mounted on a vertical 'Ant. Tower' located 3m away from the EUT. The entire setup is shown on a horizontal surface.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A


Test Plot Yes (See below) N/A

Test Plots

GFSK Mode:

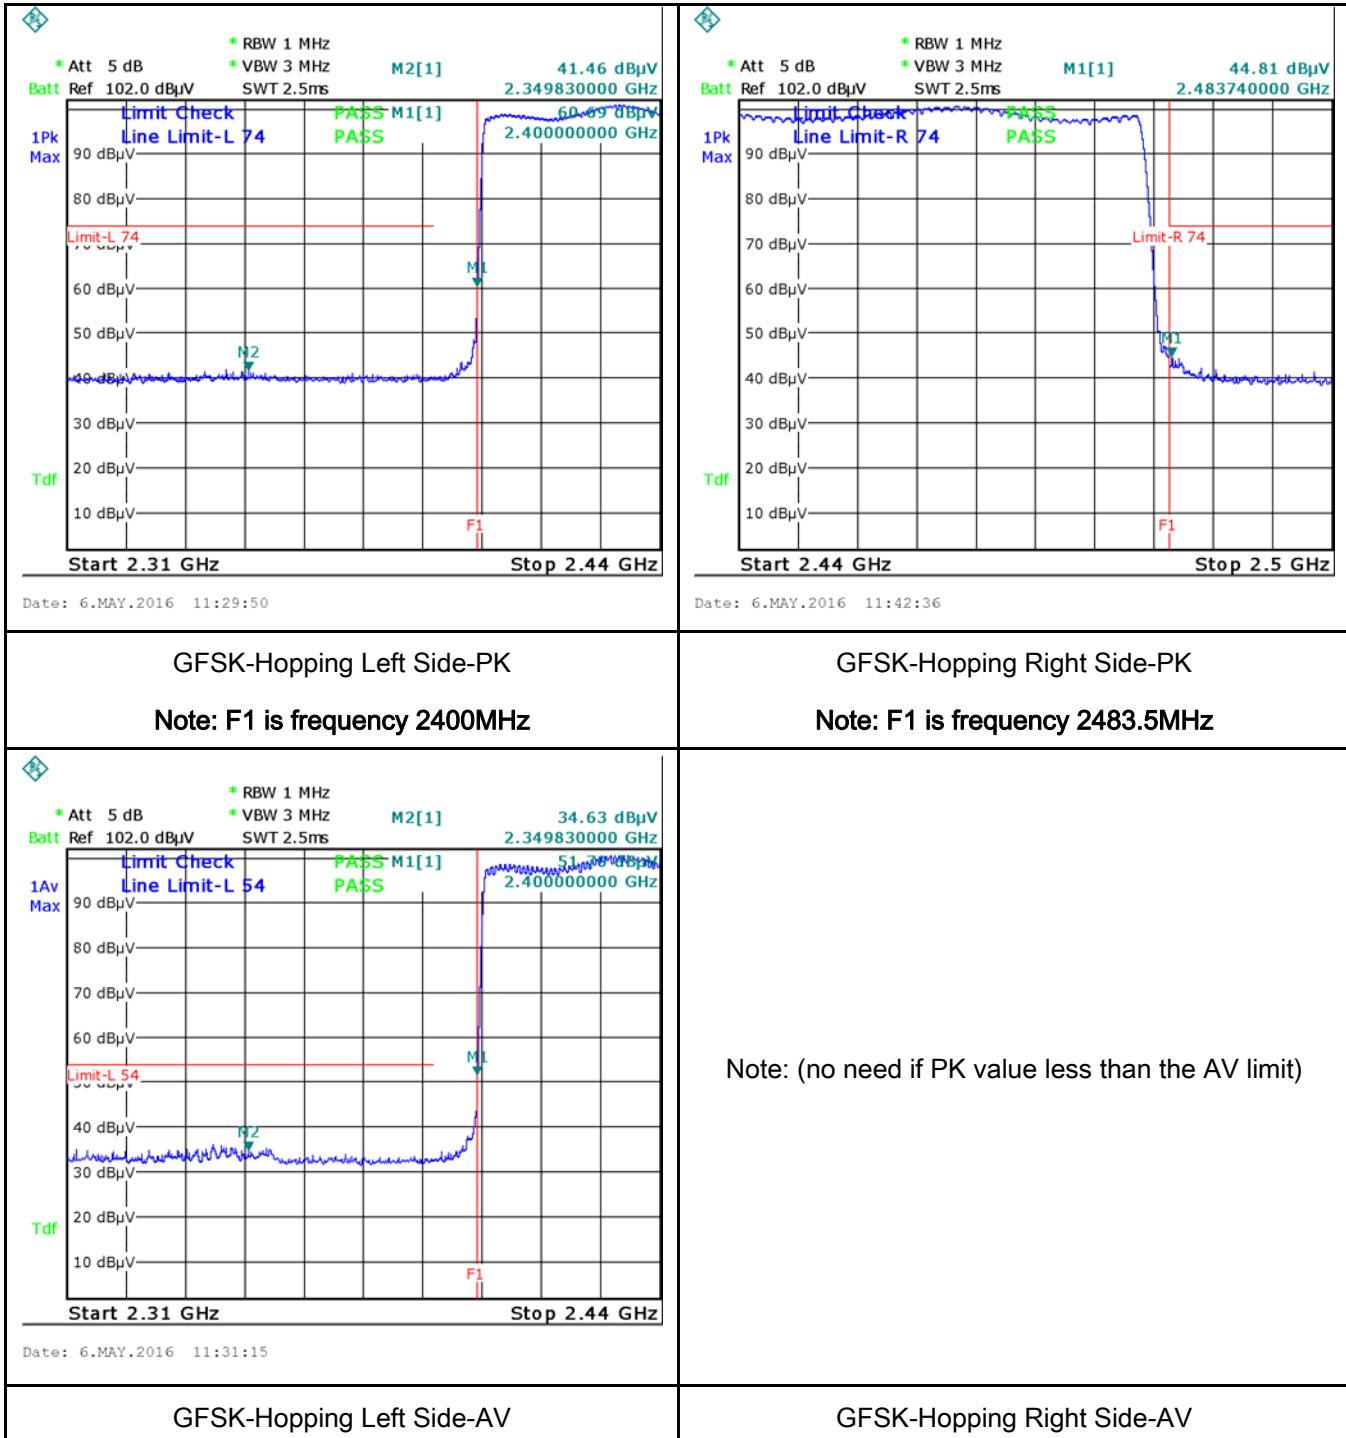


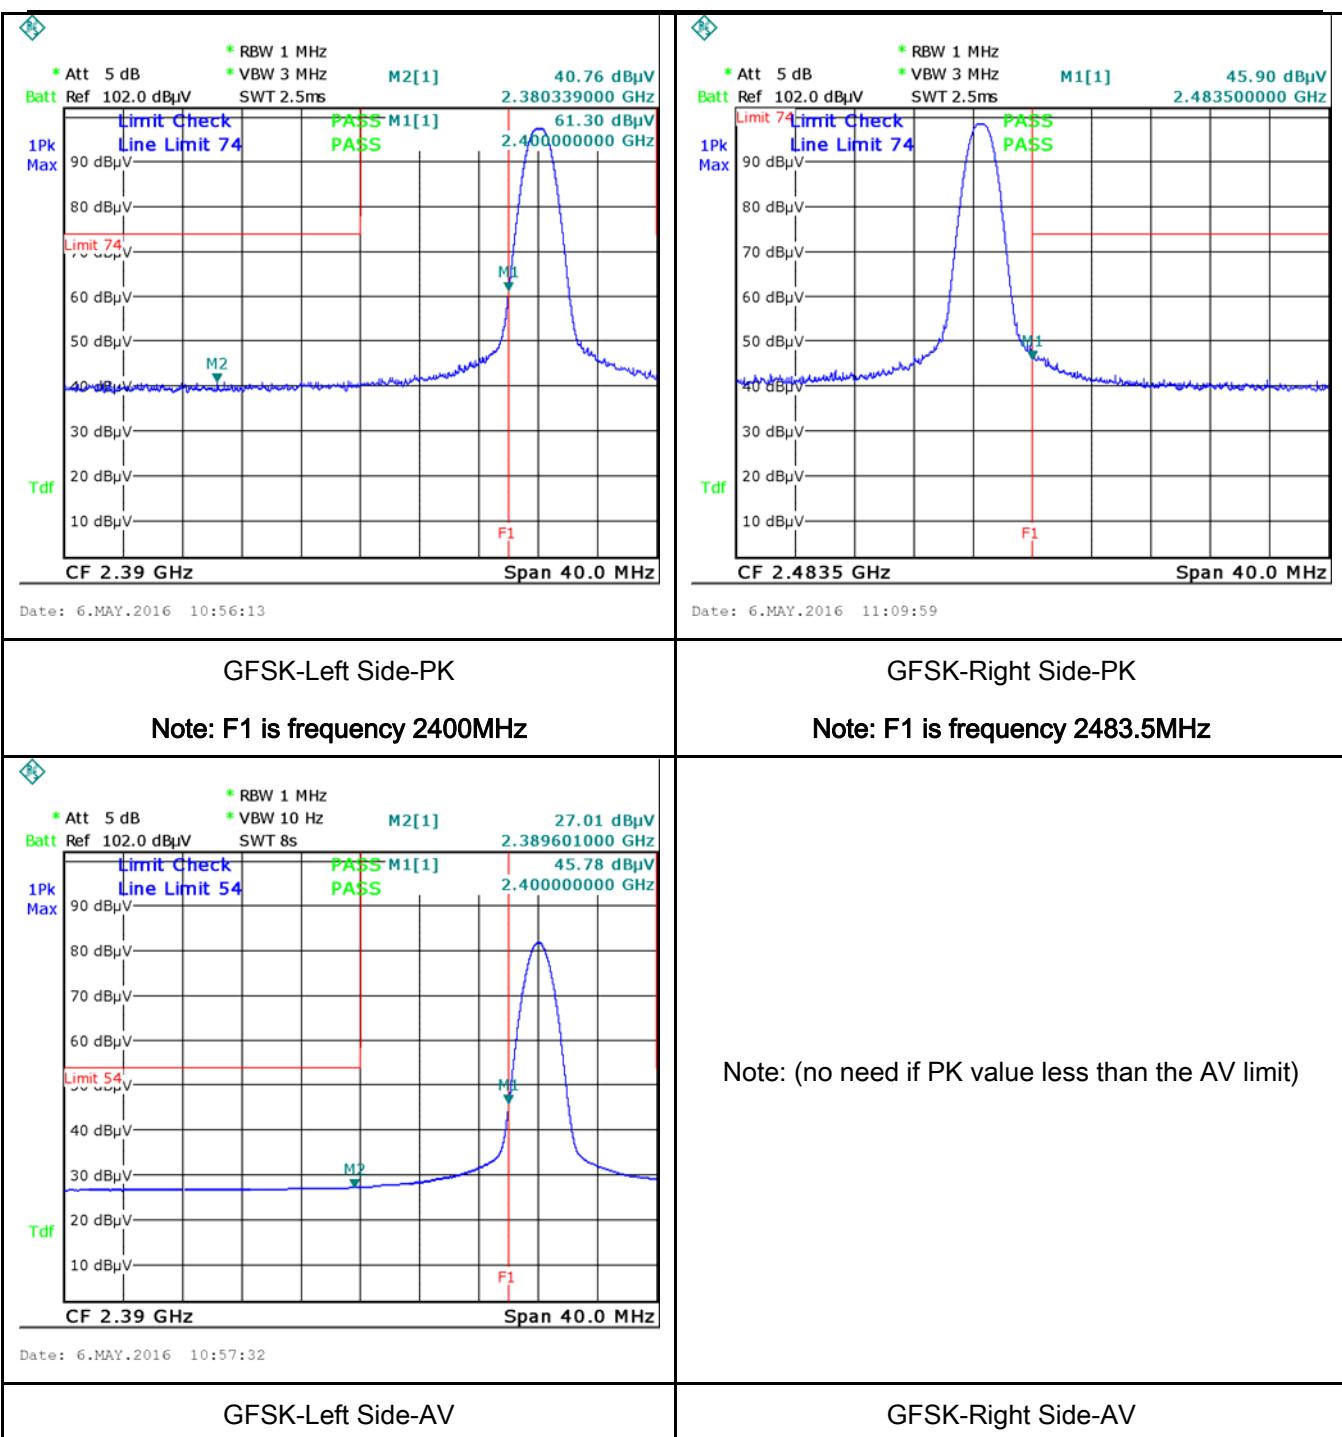

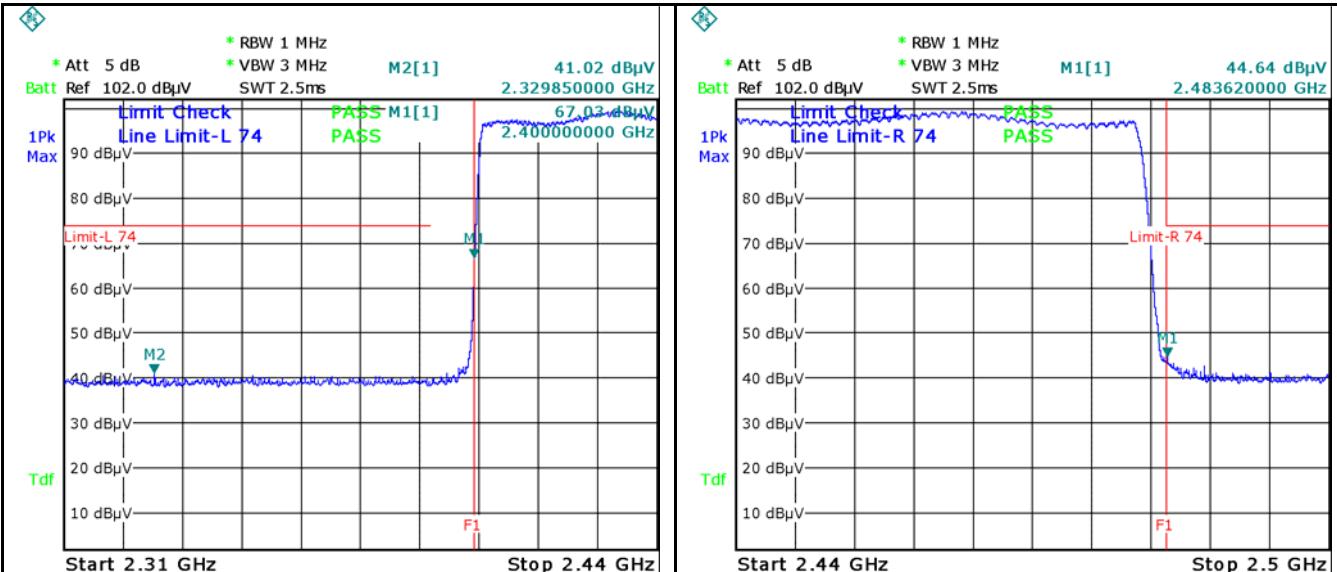$\pi/4$ DQPSK Mode:


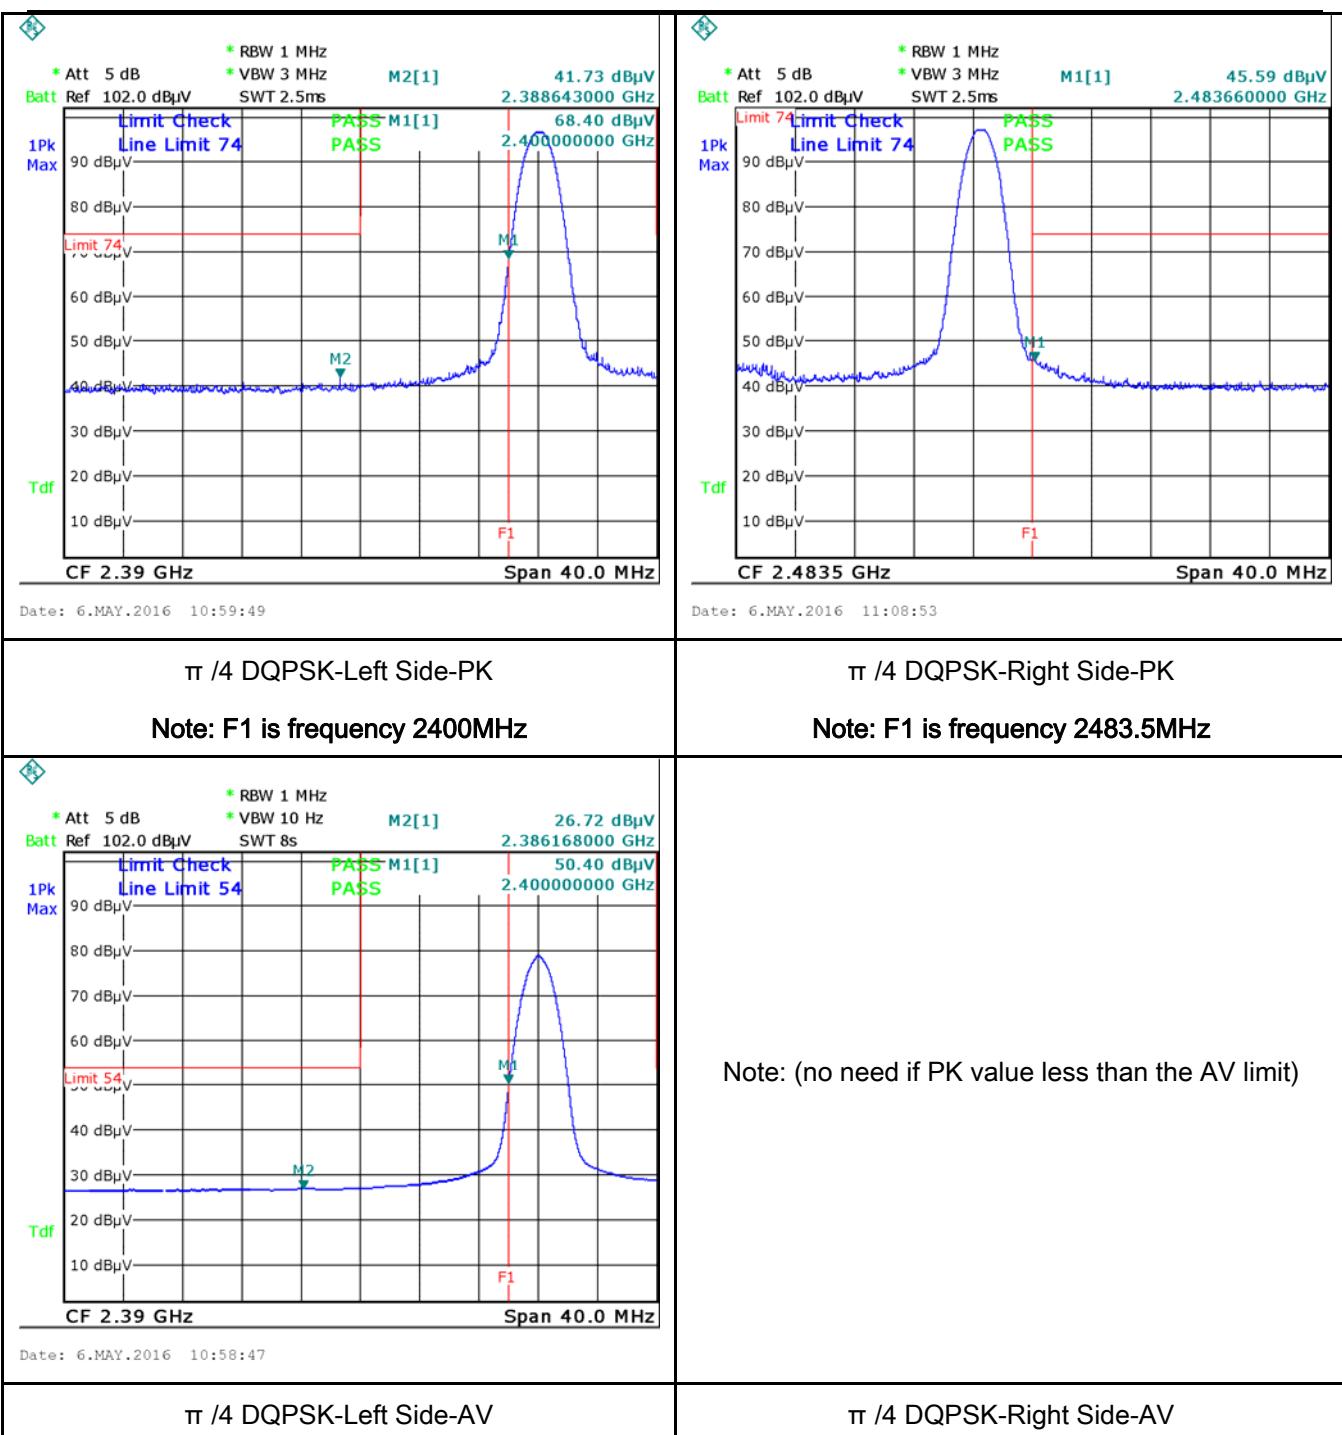
Date: 6.MAY.2016 11:37:06

Date: 6.MAY.2016 11:41:38



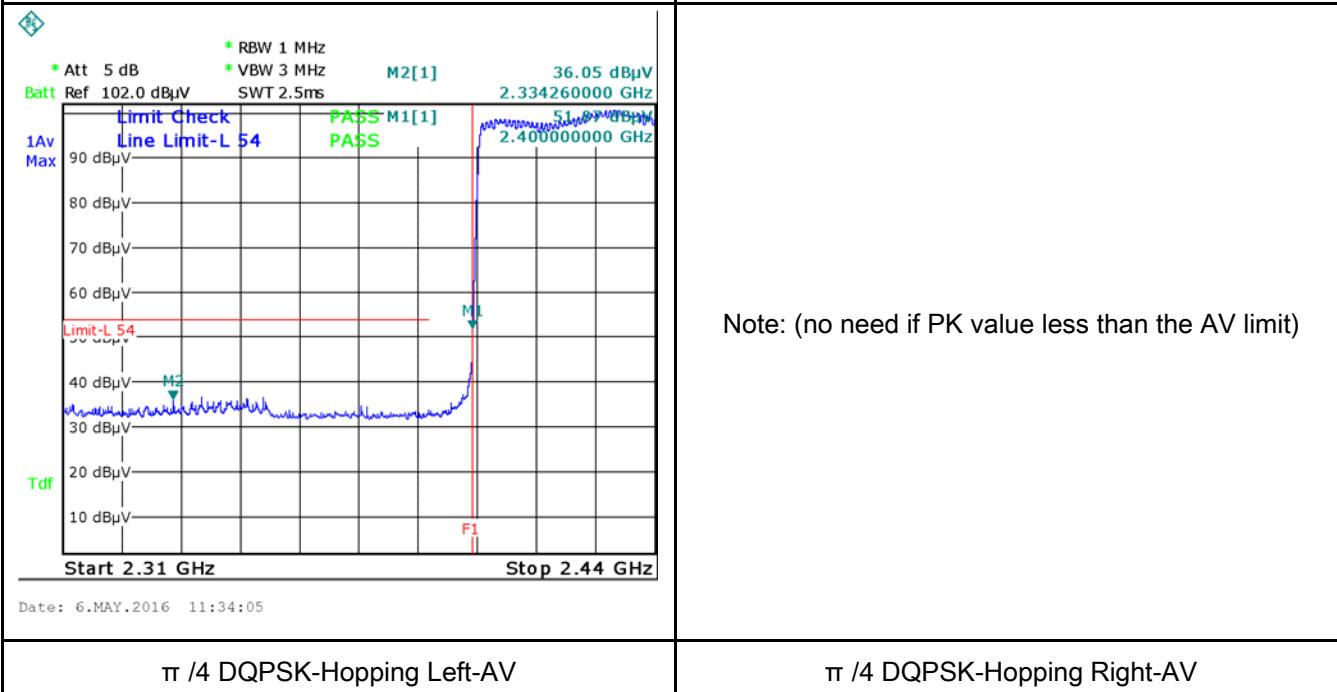
 $\pi/4$ DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz
 $\pi/4$ DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz


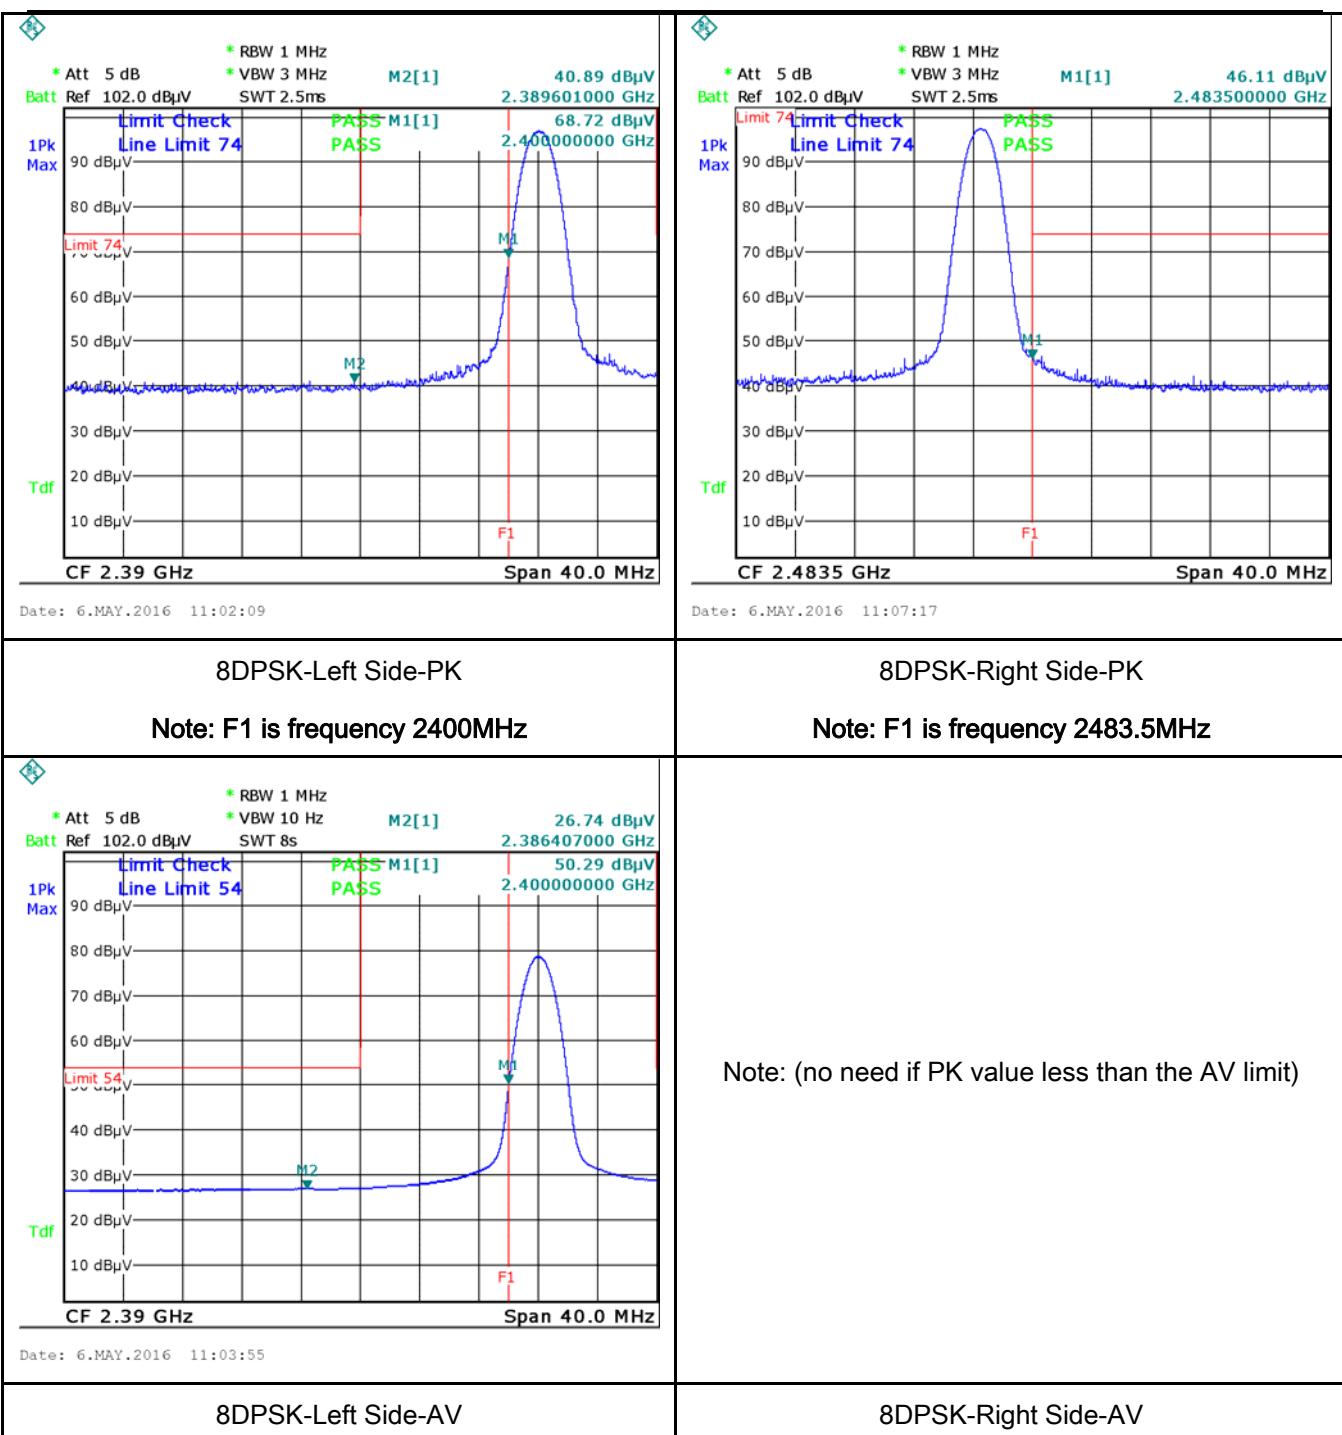
Date: 6.MAY.2016 11:34:05

 $\pi/4$ DQPSK-Hopping Left-AV
 $\pi/4$ DQPSK-Hopping Right-AV



8-DPSK Mode:

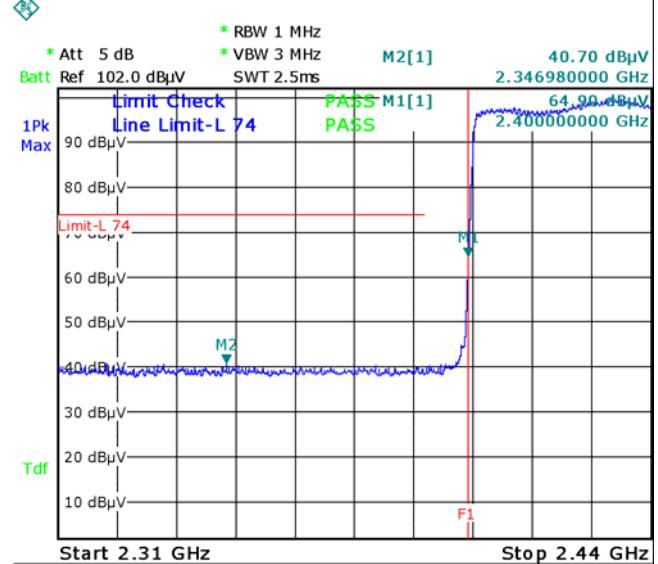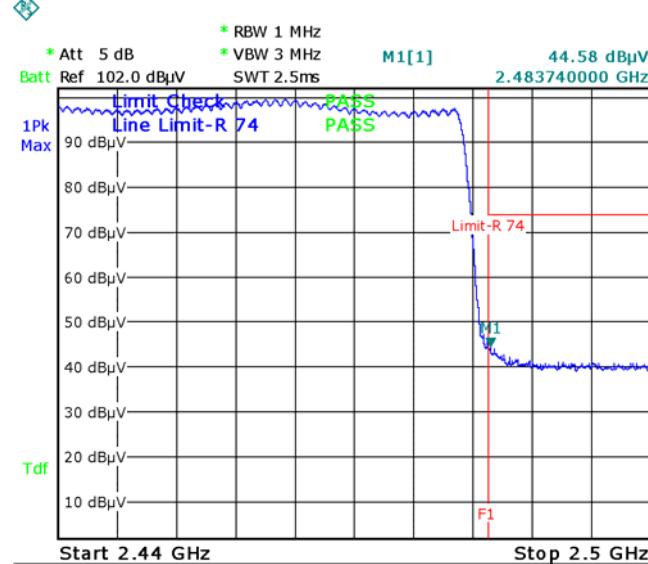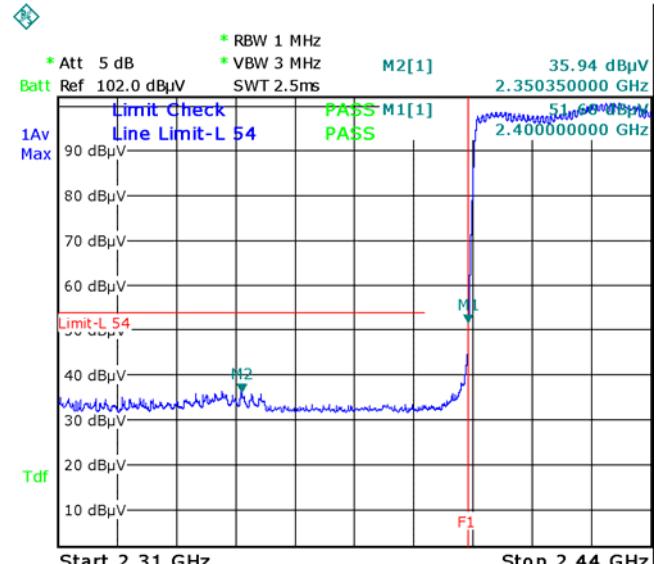 <p>RBW 1 MHz Att 5 dB VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M2[1] 40.70 dBμV 2.346980000 GHz</p> <p>1Pk Max</p> <p>Limit Check: PASS M1[1] PASS</p> <p>Line Limit-L 74</p> <p>90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf</p> <p>Start 2.31 GHz Stop 2.44 GHz</p>	 <p>RBW 1 MHz Att 5 dB VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M1[1] 44.58 dBμV 2.483740000 GHz</p> <p>1Pk Max</p> <p>Limit Check: PASS M1[1] PASS</p> <p>Line Limit-R 74</p> <p>90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf</p> <p>Start 2.44 GHz Stop 2.5 GHz</p>
<p>Date: 6.MAY.2016 11:38:00</p> <p>8DPSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>Date: 6.MAY.2016 11:40:09</p> <p>8DPSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>RBW 1 MHz Att 5 dB VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M2[1] 35.94 dBμV 2.350350000 GHz</p> <p>1Av Max</p> <p>Limit Check: PASS M1[1] PASS</p> <p>Line Limit-L 54</p> <p>90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf</p> <p>Start 2.31 GHz Stop 2.44 GHz</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Date: 6.MAY.2016 11:35:28</p> <p>8DPSK-Hopping Left-AV</p>	<p>8DPSK-Hopping Right-AV</p>



6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

Requirement(s):


Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup																	
Procedure	<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

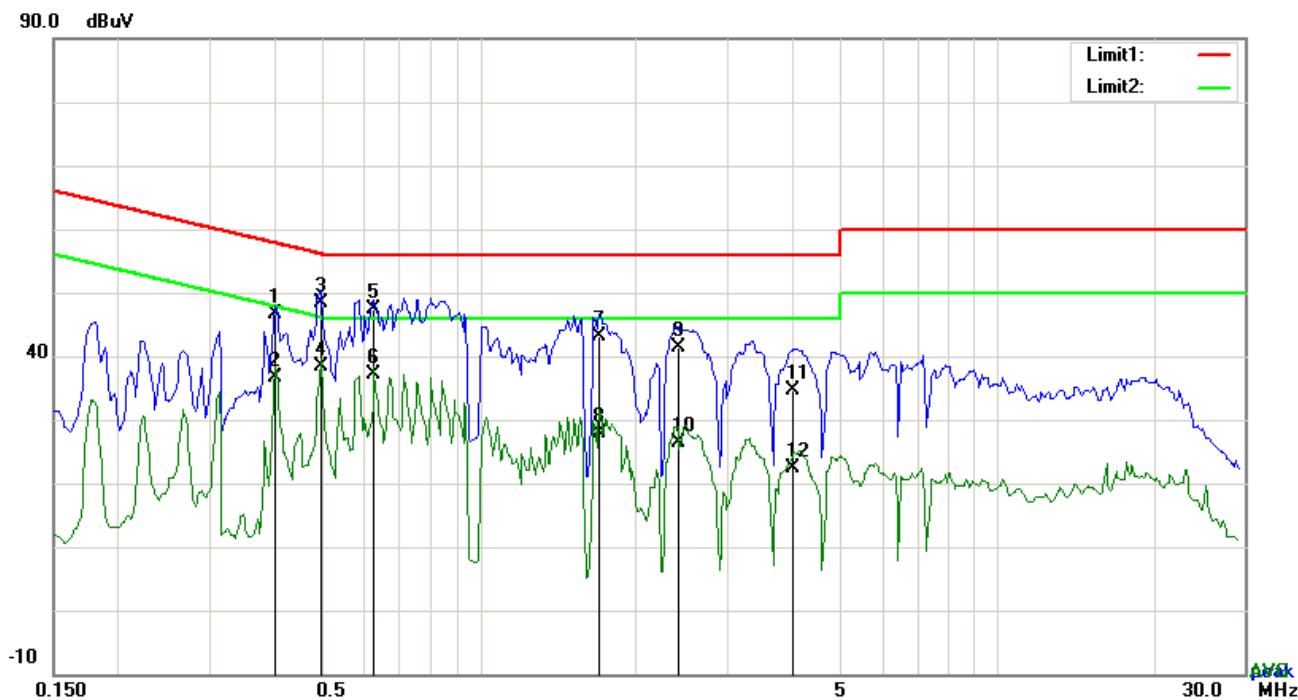


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.4035	36.57	QP	10.03	46.60	57.78	-11.18
2	L1	0.4035	26.71	AVG	10.03	36.74	47.78	-11.04
3	L1	0.4932	38.43	QP	10.03	48.46	56.11	-7.65
4	L1	0.4932	28.27	AVG	10.03	38.30	46.11	-7.81
5	L1	0.6258	37.42	QP	10.03	47.45	56.00	-8.55
6	L1	0.6258	27.14	AVG	10.03	37.17	46.00	-8.83
7	L1	1.7022	32.97	QP	10.04	43.01	56.00	-12.99
8	L1	1.7022	17.75	AVG	10.04	27.79	46.00	-18.21
9	L1	2.4159	31.30	QP	10.05	41.35	56.00	-14.65
10	L1	2.4159	16.45	AVG	10.05	26.50	46.00	-19.50
11	L1	4.0335	24.64	QP	10.07	34.71	56.00	-21.29
12	L1	4.0335	12.30	AVG	10.07	22.37	46.00	-23.63


Test Mode: Transmitting Mode

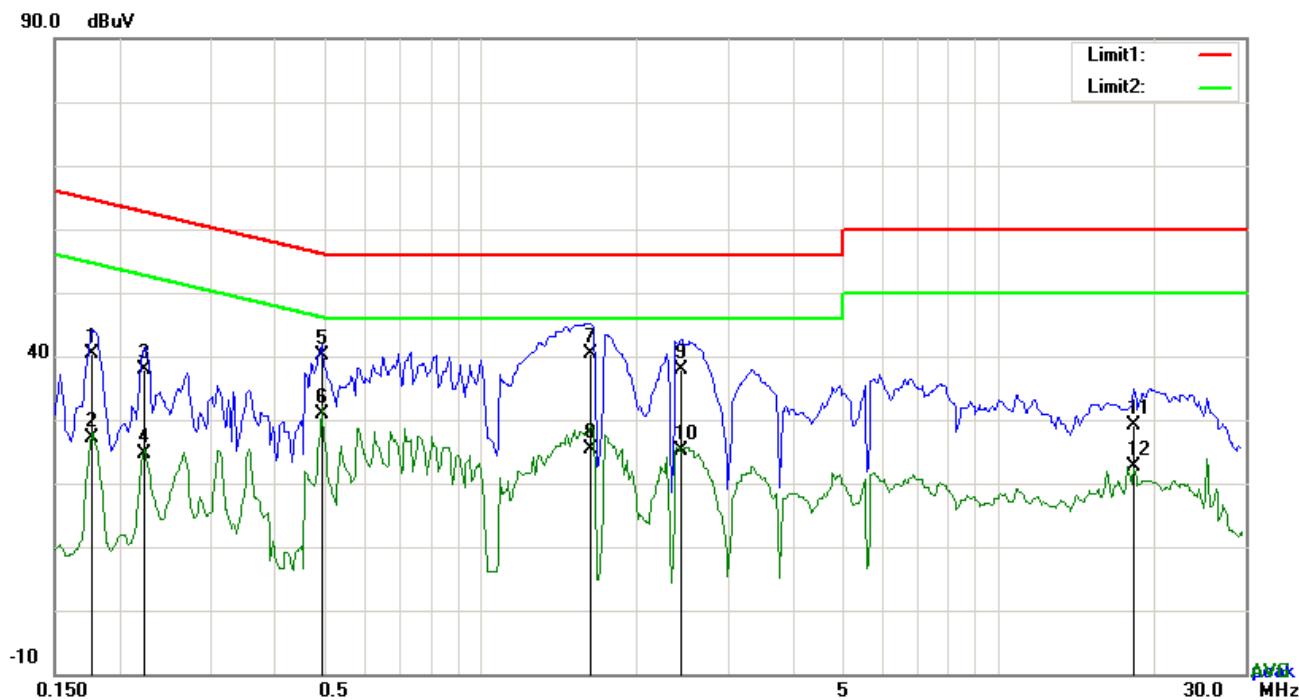

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1773	30.28	QP	10.02	40.30	64.61	-24.31
2	N	0.1773	17.20	AVG	10.02	27.22	54.61	-27.39
3	N	0.2241	27.90	QP	10.02	37.92	62.67	-24.75
4	N	0.2241	14.67	AVG	10.02	24.69	52.67	-27.98
5	N	0.4932	30.22	QP	10.02	40.24	56.11	-15.87
6	N	0.4932	20.76	AVG	10.02	30.78	46.11	-15.33
7	N	1.6320	30.36	QP	10.04	40.40	56.00	-15.60
8	N	1.6320	15.37	AVG	10.04	25.41	46.00	-20.59
9	N	2.4471	27.89	QP	10.04	37.93	56.00	-18.07
10	N	2.4471	15.03	AVG	10.04	25.07	46.00	-20.93
11	N	18.2451	18.98	QP	10.24	29.22	60.00	-30.78
12	N	18.2451	12.32	AVG	10.24	22.56	50.00	-27.44

Test Mode: Transmitting Mode

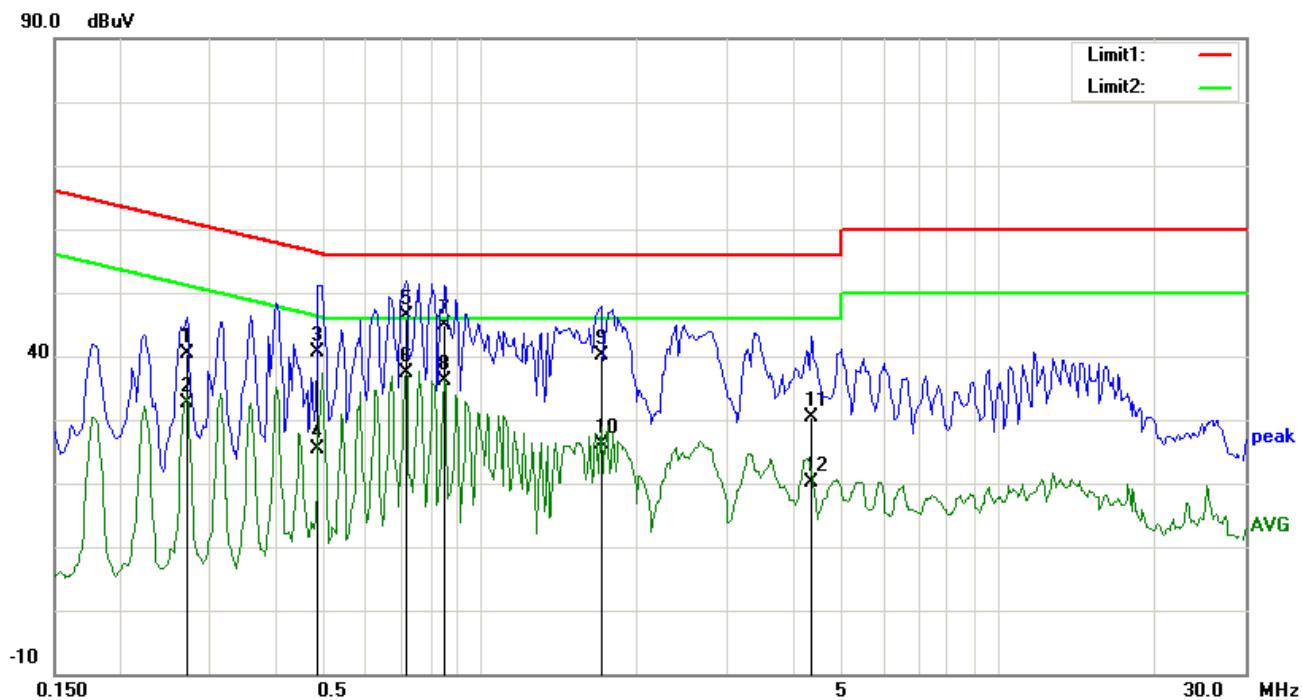


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2709	30.47	QP	10.03	40.50	61.09	-20.59
2	L1	0.2709	22.51	AVG	10.03	32.54	51.09	-18.55
3	L1	0.4854	30.54	QP	10.03	40.57	56.25	-15.68
4	L1	0.4854	15.43	AVG	10.03	25.46	46.25	-20.79
5	L1	0.7194	36.36	QP	10.03	46.39	56.00	-9.61
6	L1	0.7194	27.39	AVG	10.03	37.42	46.00	-8.58
7	L1	0.8520	34.80	QP	10.03	44.83	56.00	-11.17
8	L1	0.8520	25.99	AVG	10.03	36.02	46.00	-9.98
9	L1	1.7100	30.05	QP	10.04	40.09	56.00	-15.91
10	L1	1.7100	16.13	AVG	10.04	26.17	46.00	-19.83
11	L1	4.3416	20.26	QP	10.07	30.33	56.00	-25.67
12	L1	4.3416	10.18	AVG	10.07	20.25	46.00	-25.75

Test Mode: Transmitting Mode

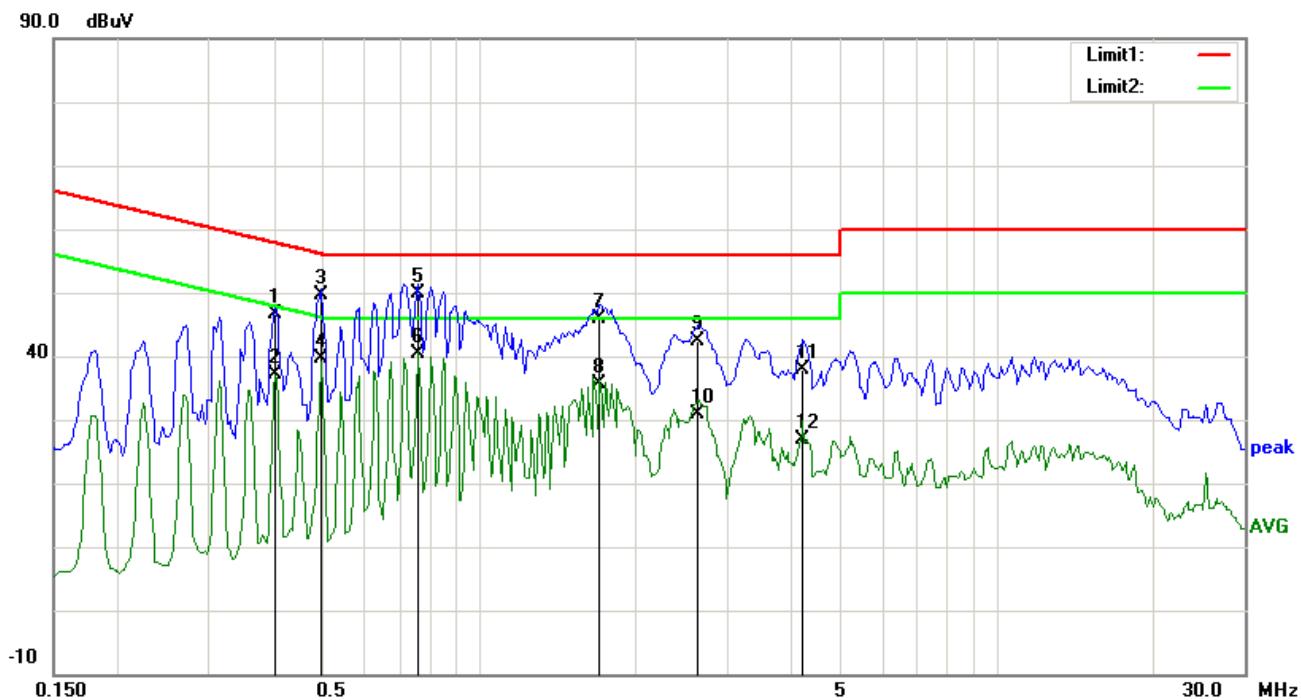

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.4035	36.62	QP	10.02	46.64	57.78	-11.14
2	N	0.4035	27.04	AVG	10.02	37.06	47.78	-10.72
3	N	0.4932	39.66	QP	10.02	49.68	56.11	-6.43
4	N	0.4932	29.73	AVG	10.02	39.75	46.11	-6.36
5	N	0.7623	39.80	QP	10.03	49.83	56.00	-6.17
6	N	0.7623	30.38	AVG	10.03	40.41	46.00	-5.59
7	N	1.7022	35.95	QP	10.04	45.99	56.00	-10.01
8	N	1.7022	25.49	AVG	10.04	35.53	46.00	-10.47
9	N	2.6460	32.31	QP	10.05	42.36	56.00	-13.64
10	N	2.6460	20.95	AVG	10.05	31.00	46.00	-15.00
11	N	4.2207	27.73	QP	10.06	37.79	56.00	-18.21
12	N	4.2207	16.83	AVG	10.06	26.89	46.00	-19.11

6.9 Radiated Spurious Emissions & Restricted Band

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	May 06, 2016
Tested By :	Winnie Zhang

Requirement(s):

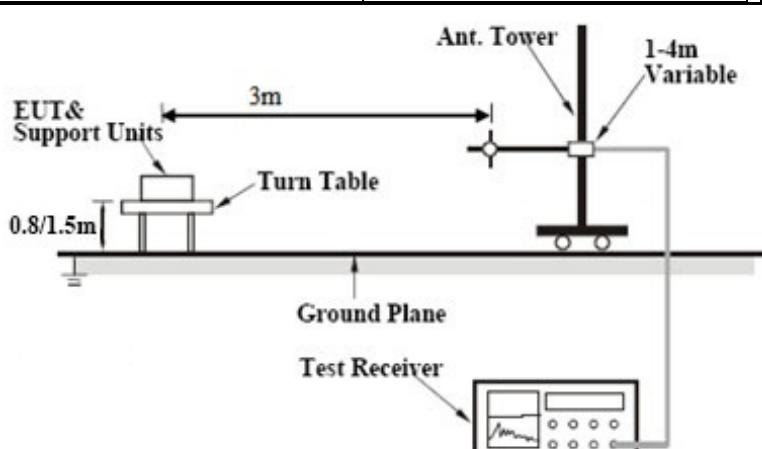Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup for radiated spurious emissions. A 'Turn Table' is positioned on a 'Ground Plane'. A 'EUT & Support Units' is mounted on the turn table. A 'Ant. Tower' is connected to the EUT and is height-adjustable, with a '1-4m Variable' height indicator. A 'Test Receiver' is connected to the tower and is shown with a waveform display. The distance between the EUT and the turn table is 0.8/1.5m, and the distance between the turn table and the antenna tower is 3m.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 											


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

Below 1GHz

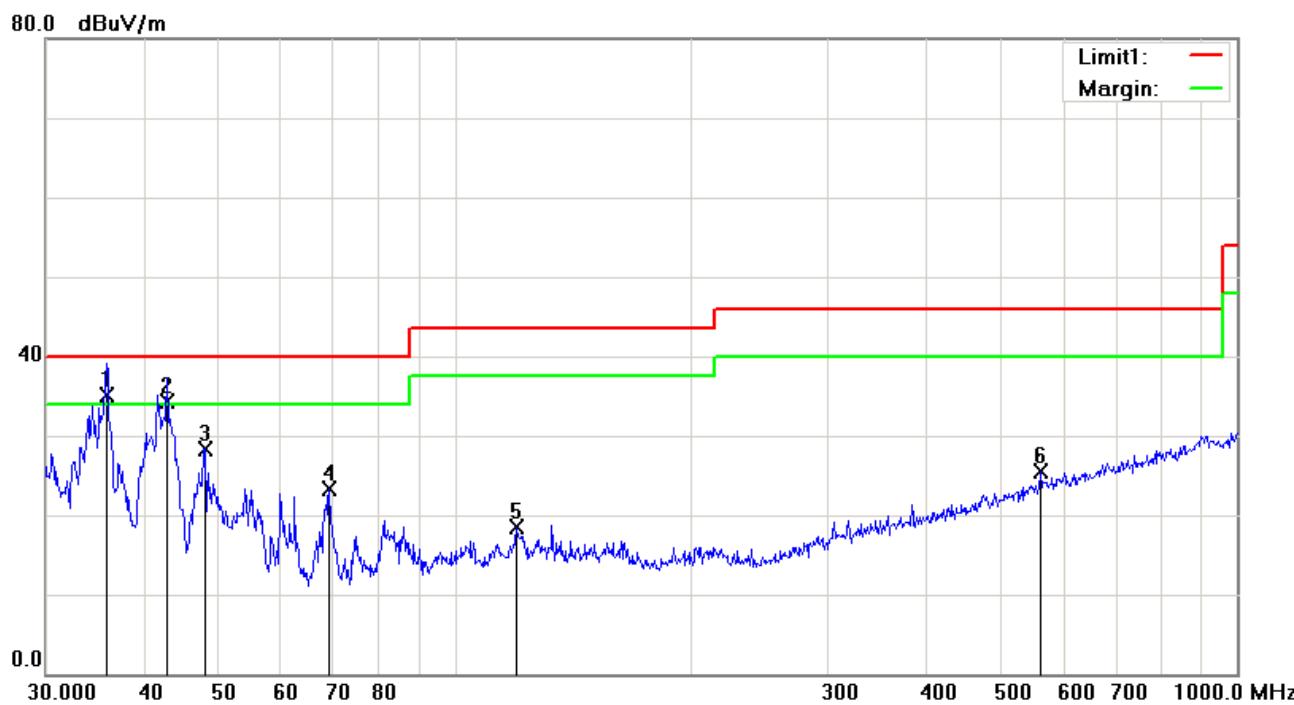


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	35.8747	39.68	QP	-4.58	35.10	40.00	-4.90	100	198
2	H	42.8998	43.82	QP	-9.53	34.29	40.00	-5.71	100	359
3	H	47.9940	40.63	peak	-12.28	28.35	40.00	-11.65	100	104
4	H	69.1141	36.93	peak	-13.66	23.27	40.00	-16.73	100	205
5	H	119.8556	25.77	peak	-7.33	18.44	43.50	-25.06	100	269
6	H	560.6928	26.19	peak	-0.64	25.55	46.00	-20.45	100	130

Below 1GHz

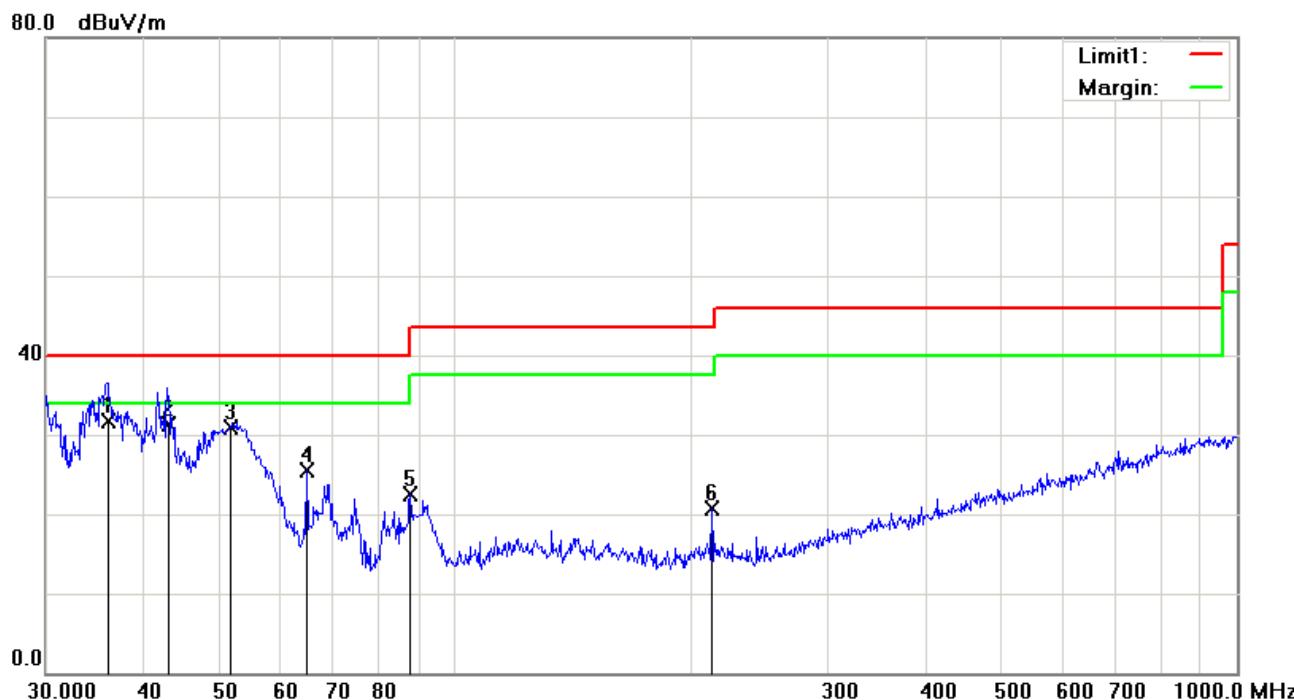

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree
1	V	36.1272	36.47	QP	-4.76	31.71	40.00	-8.29	100	147
2	V	43.0505	40.85	QP	-9.63	31.22	40.00	-8.78	100	49
3	V	51.6616	44.35	peak	-13.37	30.98	40.00	-9.02	100	94
4	V	64.6594	39.47	peak	-14.00	25.47	40.00	-14.53	100	0
5	V	87.7248	35.86	peak	-13.43	22.43	40.00	-17.57	100	162
6	V	213.0151	29.54	peak	-8.86	20.68	43.50	-22.82	100	169

Above 1GHz
Test Mode: Transmitting Mode

Mode: GFSK (Worst Case)
Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	38.26	AV	V	33.83	6.86	31.72	47.23	54	-6.77
4804	37.81	AV	H	33.83	6.86	31.72	46.78	54	-7.22
4804	48.19	PK	V	33.83	6.86	31.72	57.16	74	-16.84
4804	47.66	PK	H	33.83	6.86	31.72	56.63	74	-17.37
2718	41.53	AV	V	31.29	5.81	32.15	46.48	54	-7.52
2718	41.27	AV	H	31.29	5.81	32.15	46.22	54	-7.78
2718	50.11	PK	V	31.29	5.81	32.15	55.06	74	-18.94
2718	50.38	PK	H	31.29	5.81	32.15	55.33	74	-18.67

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	38.35	AV	V	33.86	6.82	31.82	47.21	54	-6.79
4882	37.92	AV	H	33.86	6.82	31.82	46.78	54	-7.22
4882	48.25	PK	V	33.86	6.82	31.82	57.11	74	-16.89
4882	47.88	PK	H	33.86	6.82	31.82	56.74	74	-17.26
2724	41.61	AV	V	31.16	5.77	32.03	46.51	54	-7.49
2724	41.39	AV	H	31.16	5.77	32.03	46.29	54	-7.71
2724	50.03	PK	V	31.16	5.77	32.03	54.93	74	-19.07
2724	50.28	PK	H	31.16	5.77	32.03	55.18	74	-18.82

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	38.15	AV	V	33.9	6.76	31.92	46.89	54	-7.11
4960	37.91	AV	H	33.9	6.76	31.92	46.65	54	-7.35
4960	48.28	PK	V	33.9	6.76	31.92	57.02	74	-16.98
4960	47.76	PK	H	33.9	6.76	31.92	56.5	74	-17.5
2713	41.33	AV	V	31.16	5.63	32.14	45.98	54	-8.02
2713	41.09	AV	H	31.16	5.63	32.14	45.74	54	-8.26
2713	50.28	PK	V	31.16	5.63	32.14	54.93	74	-19.07
2713	50.14	PK	H	31.16	5.63	32.14	54.79	74	-19.21

Note:

- 1, The testing has been conformed to $10*2480\text{MHz}=24,800\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice , GPRS and EGPRS mode were investigating. The results above show only the worse cases.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo





EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo






Mainboard with Shielding - Rear View



Mainboard without Shielding – Rear View



Small Mainboard - Front View

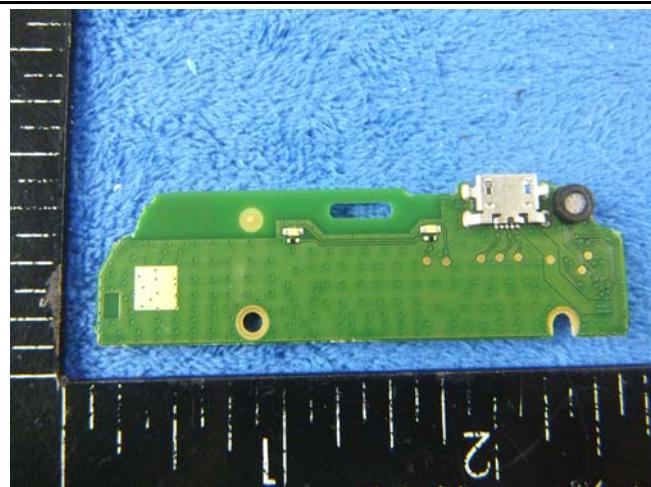

Small Mainboard - Rear View



LCD – Front View




LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View




WIFI/BT/BLE/GPS - Antenna View

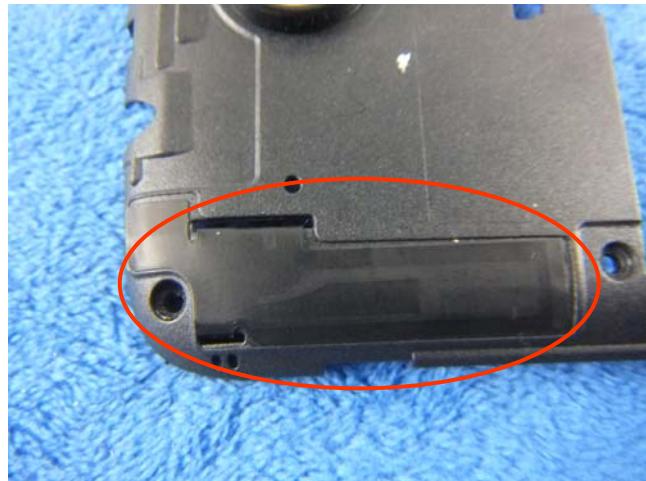

LTE - Antenna View


Annex B.iii. Photograph: Test Setup Photo

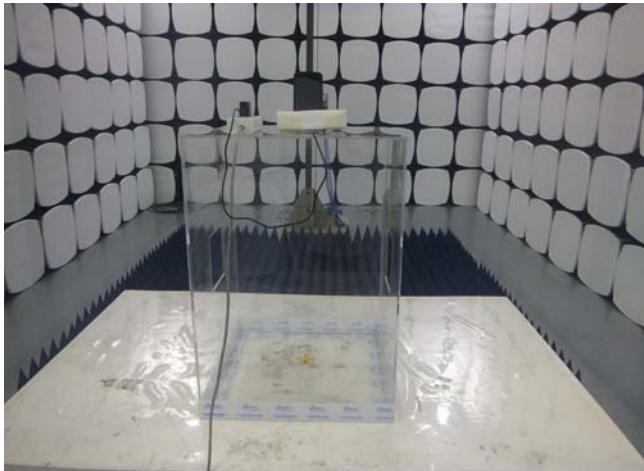 A photograph showing a wooden table in a test chamber. Various electronic equipment and cables are connected to the table. The floor of the chamber is covered with a reflective material.	 A photograph showing a side view of the test setup. A white rectangular device is mounted on a wooden table, with cables running along the table's edge.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph showing a white table in a test chamber. A device is mounted on a stand on the table, with a red cross-shaped antenna mounted on top. The floor is covered with a reflective material.	 A photograph showing a white table in a test chamber. A device is mounted on a stand in a clear plastic enclosure. The floor is covered with a reflective material.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

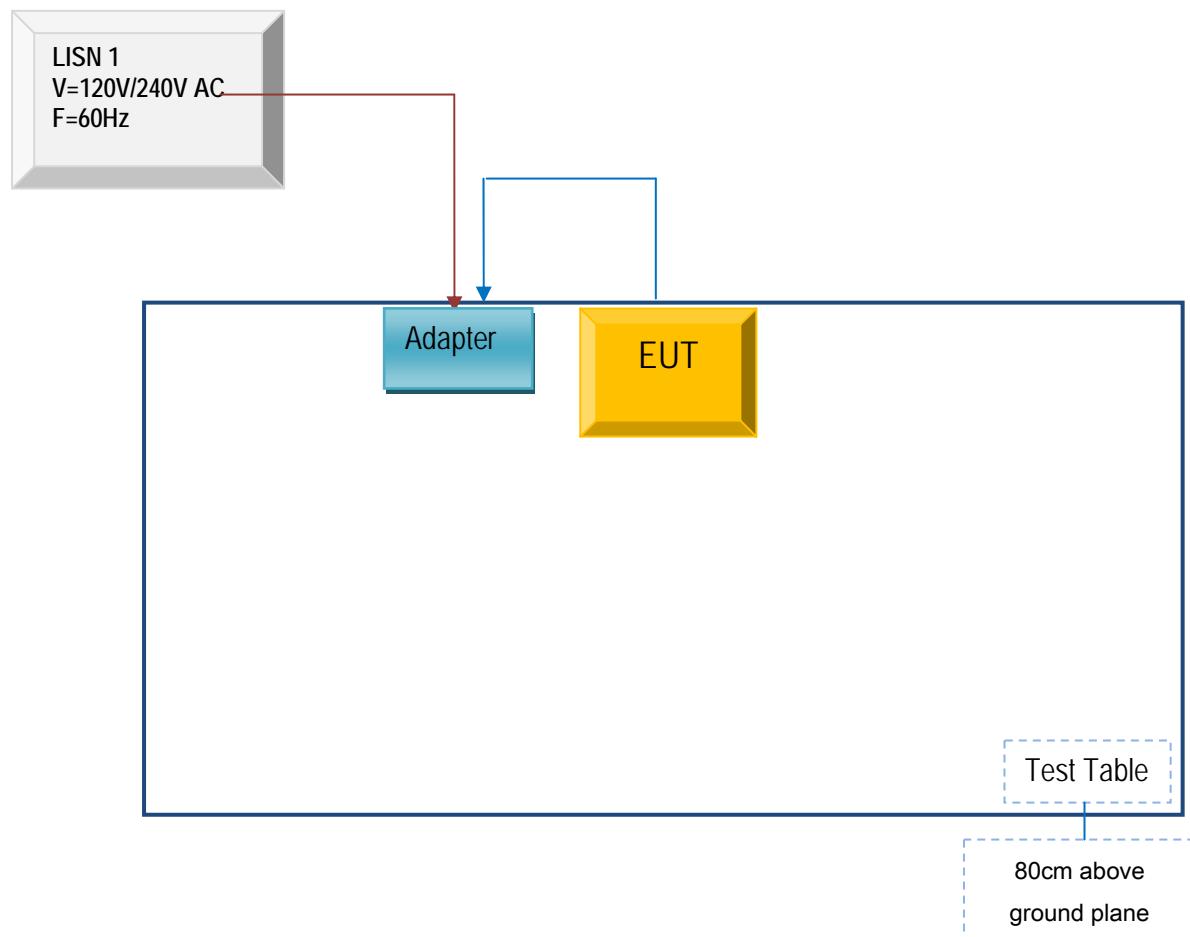

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

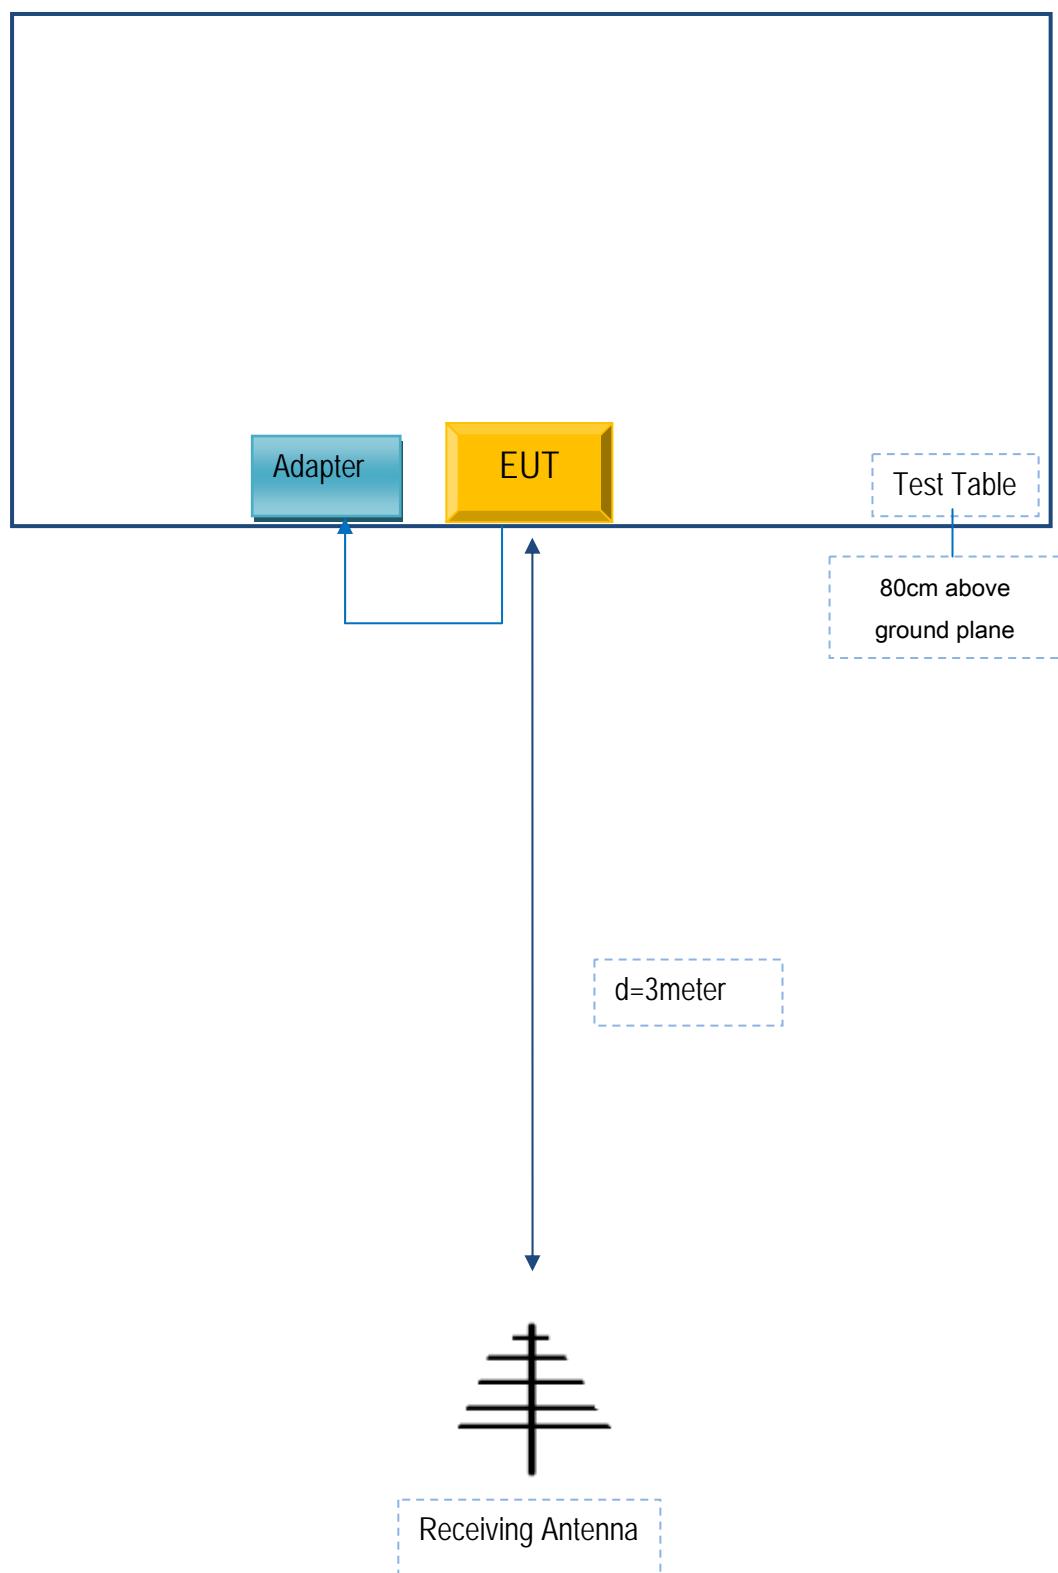

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

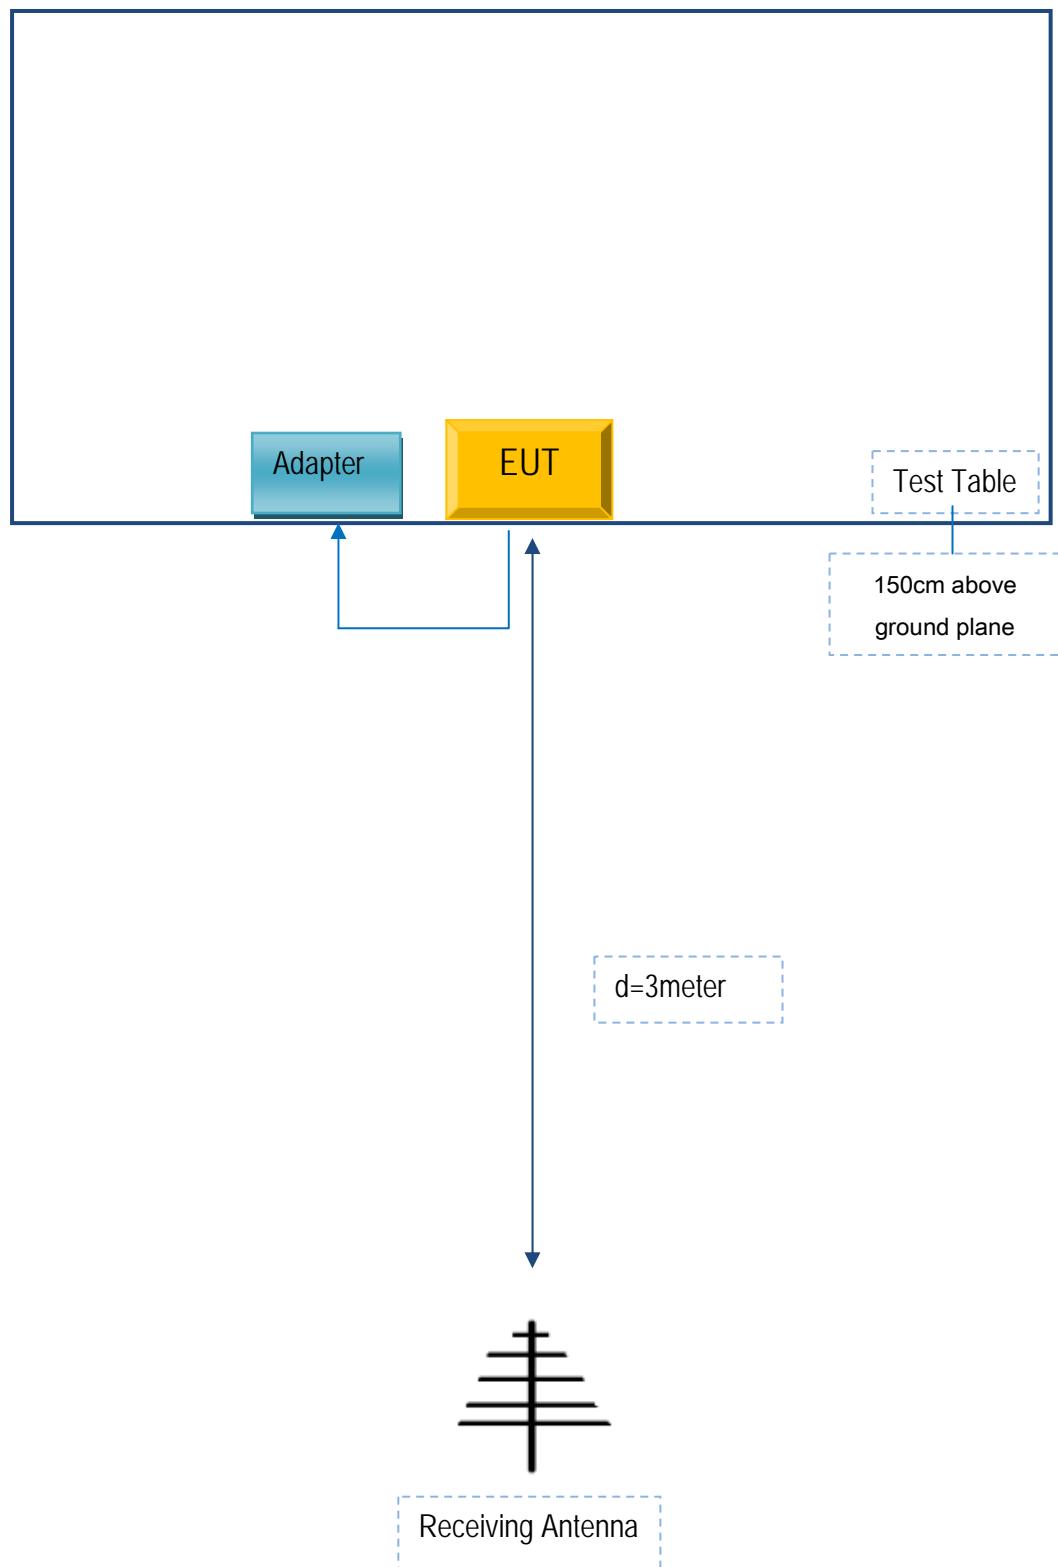

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
MOBIWIRE MOBILES (NINGBO) CO.,LTD	Adapter	OWN SMART VALUE	C20160122

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	C20160122

Test Report	16070480-FCC-R2
Page	60 of 61

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Annex E. DECLARATION OF SIMILARITY

N/A