

## **Certification Test Report**

**FCC ID: 2ADCB-BLMF1  
IC: 6715C-BLMF1**

**FCC Rule Part: 15.247  
IC Radio Standards Specification: RSS-247**

**ACS Report Number: 15-0266.W06.1A**

Manufacturer: Acuity Brands Lighting, Inc.  
Model: BLMF1

Test Begin Date: July 16, 2015  
Test End Date: July 21, 2015

Report Issue Date: August 6, 2015



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

A handwritten signature in black ink, appearing to read "Kirby Munroe".

Reviewed by:  
**Kirby Munroe**  
**Director, Wireless Certifications**  
**ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.  
**This report contains 22 pages**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS .....	4
<b>2</b>	<b>TEST FACILITIES.....</b>	<b>5</b>
2.1	LOCATION .....	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS .....	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION .....	6
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	6
2.3.2	<i>Open Area Tests Site (OATS) .....</i>	7
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION .....	8
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>8</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>9</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>10</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>10</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>11</b>
7.1	ANTENNA REQUIREMENT – FCC 15.203 .....	11
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207, IC: RSS-GEN 8.8 .....	11
7.2.1	<i>Measurement Results .....</i>	11
7.3	6dB / 99% BANDWIDTH – FCC 15.247(A)(2), IC: RSS-247 5.2(1) .....	14
7.3.1	<i>Measurement Procedure.....</i>	14
7.3.2	<i>Measurement Results .....</i>	14
7.4	FUNDAMENTAL EMISSION OUTPUT POWER – FCC 15.247(B)(3), IC: RSS-247 5.4(4) .....	16
7.4.1	<i>Measurement Procedure.....</i>	16
7.4.2	<i>Measurement Results .....</i>	16
7.5	EMISSION LEVELS – FCC 15.247(D), 15.205, 15.209; IC RSS-247 5.5, RSS-GEN 8.9/8.10 .....	17
7.5.1	<i>Emissions into Non-restricted Frequency Bands.....</i>	17
7.5.1.1	<i>Measurement Procedure.....</i>	17
7.5.1.2	<i>Measurement Results .....</i>	17
7.5.2	<i>Emissions into Restricted Frequency Bands.....</i>	19
7.5.2.1	<i>Measurement Procedure.....</i>	19
7.5.2.2	<i>Duty Cycle Correction .....</i>	19
7.5.2.3	<i>Measurement Results .....</i>	19
7.5.2.4	<i>Sample Calculation: .....</i>	20
7.6	MAXIMUM POWER SPECTRAL DENSITY IN THE FUNDAMENTAL EMISSION – FCC 15.247(E) IC: RSS-247 A5.2(2) .....	21
7.6.1	<i>Measurement Procedure.....</i>	21
7.6.2	<i>Measurement Results .....</i>	21
<b>8</b>	<b>CONCLUSION .....</b>	<b>22</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-247.

### 1.2 Product Description

The BLMF1 module provides indoor geo-location information via Bluetooth Smart (Bluetooth Low Energy). The BLMF1 is connected to a luminaire driver used to power LED lighting, serving as a single beacon to provide 1-way communication with a user's device to define their physical location.

There are two antenna options, depending on the luminaire and casing enclosure (metal or plastic). An external PIFA is used for metal enclosure casing and an internal Chip antenna is used for plastic casing systems.

#### Technical Information:

Detail	Description
Frequency Range	2402 – 2480 MHz
Number of Channels	40
Modulation Format	GFSK
Operating Voltage	3.3 V
Antenna Type / Gain	Internal Chip / -0.5dBi External Inverted F (PIFA) / 2dBi

#### Manufacturer Information:

Acuity Brands  
One Lithonia Way  
Conyers, GA 30012

EUT Serial Numbers: CDCSMT001-00001 (Radiated), CDCSMT001-00002 (RF Conducted)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

### 1.3 Test Methodology and Considerations

For radiated emissions three orientations of the EUT were evaluated to determine worst case. The worst case orientation was determined to be the X orientation for spurious emissions and Y orientation for band edges with the external antenna. The worst case orientation was determined to be the Z orientation for spurious emissions and X orientation for band edges with the chip antenna.

For AC power line conducted emissions testing, the EUT was evaluated with a typical host.

Multiple antenna types are available for use with the EUT. The highest gain of each antenna type was evaluated for compliance.

Software power setting during test: 4 dBm

Software version number during test: 1.0-127-63

## 2 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277  
Industry Canada Lab Code: IC 4175A  
VCCI Member Number: 1831  
• VCCI OATS Registration Number R-1526  
• VCCI Conducted Emissions Site Registration Number: C-1608

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

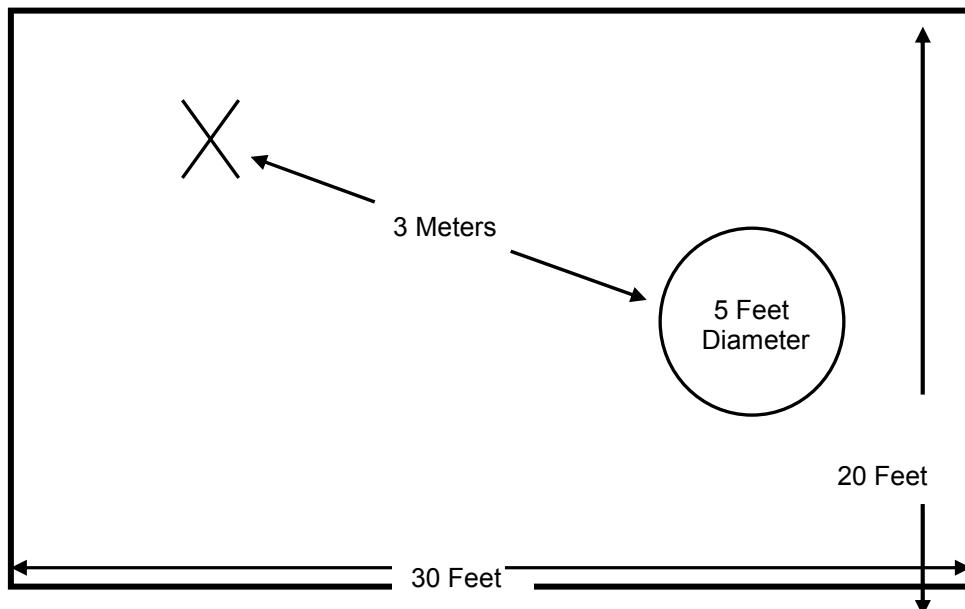


Figure 2.3-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

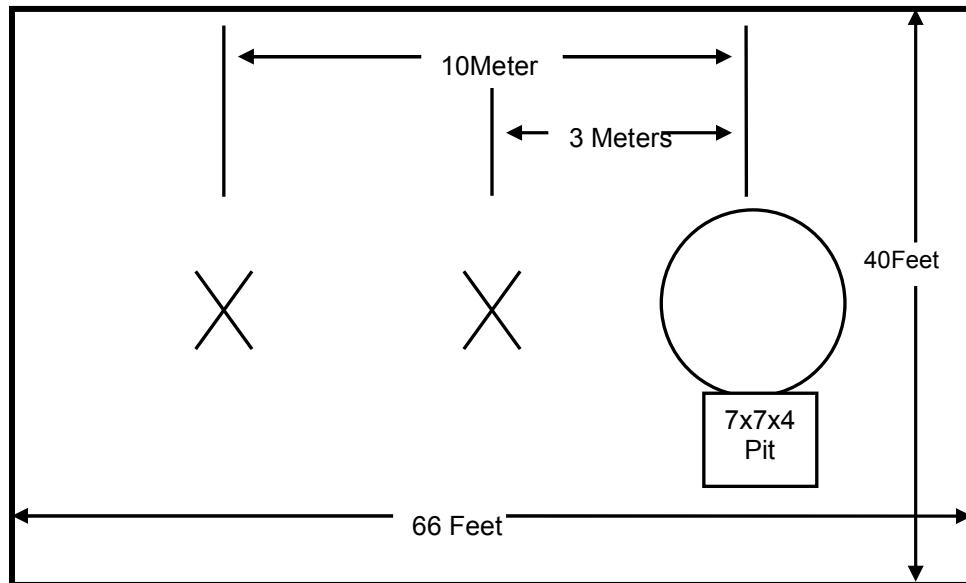


Figure 2.3-2: Open Area Test Site

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

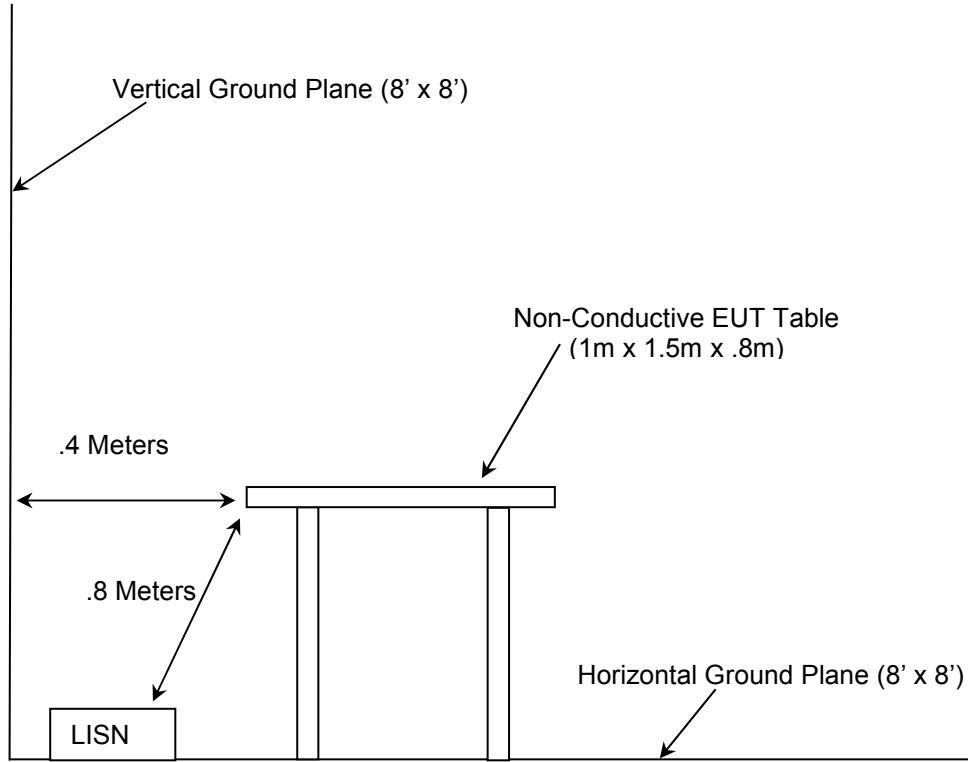


Figure 2.4-1: AC Mains Conducted EMI Site

## 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v03r03 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, June 9, 2015
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2015
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2015
- ❖ Industry Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**


AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	7/14/2015	7/14/2016
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	7/14/2015	7/14/2016
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	2/10/2015	2/10/2017
73	Agilent	8447D	Amplifiers	2727A05624	7/15/2015	7/15/2016
167	ACS	Chamber EMI Cable Set	Cable Set	167	10/28/2014	10/28/2015
168	Hewlett Packard	11947A	Attenuators	44829	1/19/2015	1/19/2016
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	3/3/2015	3/3/2016
316	Rohde Schwarz	ESH3-Z5	LISN	861189-010	10/30/2014	10/30/2015
324	ACS	Belden	Cables	8214	5/5/2015	5/5/2016
334	Rohde&Schwarz	3160-09	Antennas	49404	11/4/2010	NCR
335	Suhner Sucoflex	SF-102A	Cables	882/2A	7/14/2015	7/14/2016
338	Hewlett Packard	8449B	Amplifiers	3008A01111	7/30/2013	8/30/2015
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	7/13/2015	7/13/2016
345	Suhner Sucoflex	102A	Cables	1077/2A	7/14/2015	7/14/2016
412	Electro Metrics	LPA-25	Antennas	1241	7/24/2014	7/24/2016
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	11/5/2014	11/5/2015
432	Microwave Circuits	H3G020G4	Filters	264066	5/20/2015	5/20/2016
616	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	N/A	9/10/2014	9/10/2015
622	Rohde & Schwarz	FSV40	Analyzers	101338	7/15/2015	7/15/2016
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	10/30/2014	10/30/2015

## 5 SUPPORT EQUIPMENT

**Table 5-1: Support Equipment**

Item	Equipment Type	Manufacturer	Model/Part Number	Serial Number
1	9Vdc Battery	Energizer	552	N/A
2	LED Driver	eldoLED	ECOdrive 568/M	231C14

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

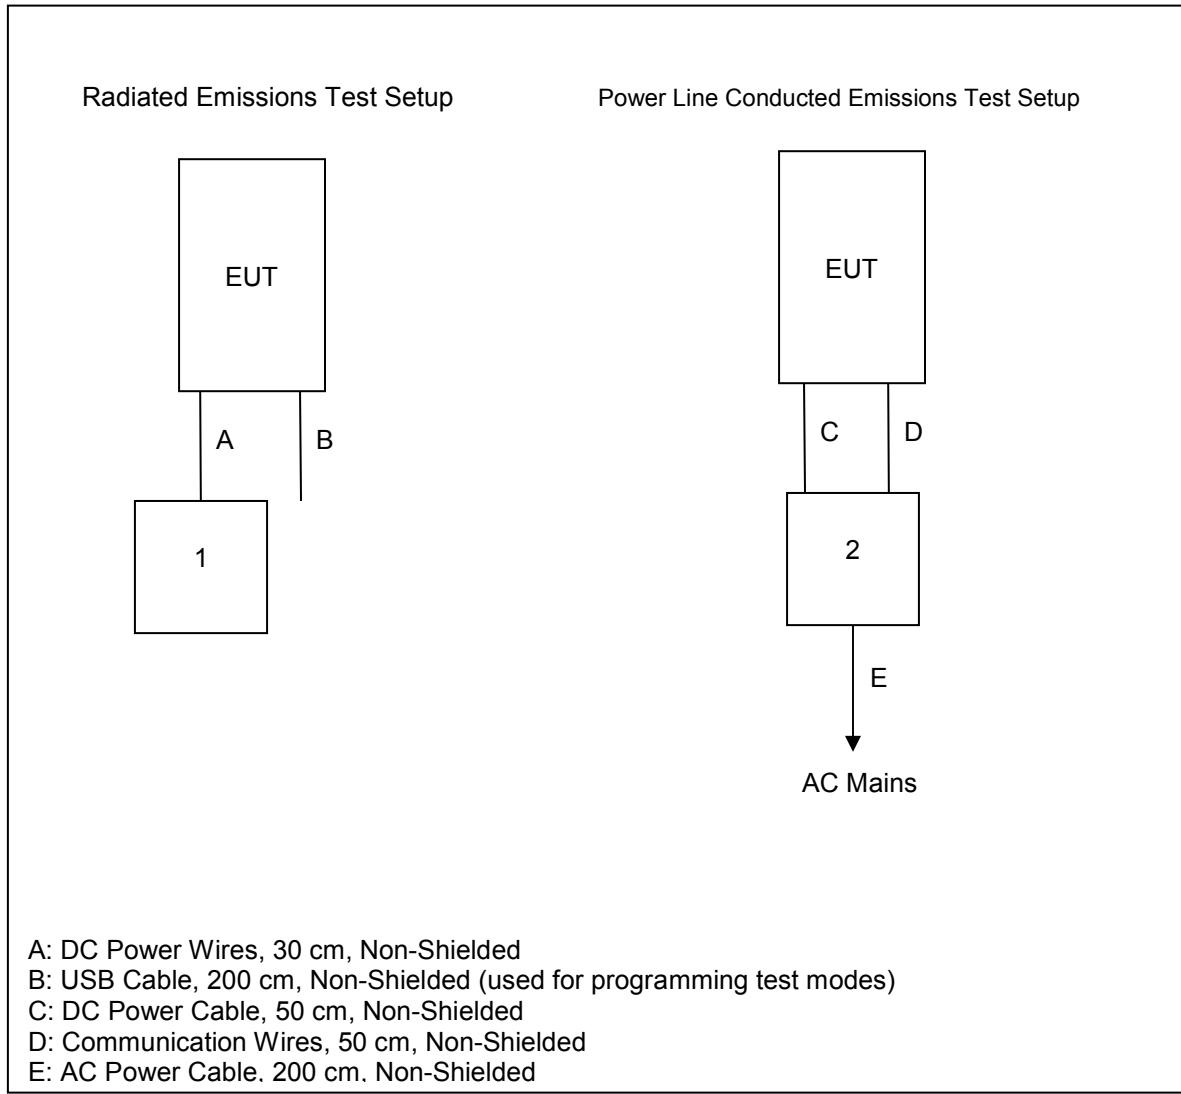

**Figure 6-1: Test Setup Block Diagram**

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC 15.203

The EUT utilizes either an internal chip antenna with a peak gain of -0.5dBi that is integral to the device and cannot be removed or replaced by the end user, or an external printed inverted F antenna (PIFA) with a peak gain of 2dBi and is coupled to the EUT via a U.FL connector.

### 7.2 Power Line Conducted Emissions – FCC 15.207, IC: RSS-Gen 8.8

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**

**Margin = Applicable Limit - Corrected Reading**

#### 7.2.1 Measurement Results

Table 7.2.2-1: Conducted EMI Results Line 1 – Chip Antenna

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.154533	---	25.35	55.73	30.38	L1	10.1
0.154533	47.11	---	65.73	18.62	L1	10.1
0.186973	---	25.03	54.02	28.99	L1	10.1
0.186973	46.23	---	64.05	17.82	L1	10.1
0.239780	---	25.63	51.87	26.24	L1	10.1
0.239780	45.85	---	61.91	16.06	L1	10.1
0.344890	---	26.38	48.88	22.50	L1	10.1
0.344890	48.90	---	58.91	10.01	L1	10.1
1.455210	---	18.78	46.00	27.22	L1	10.2
1.455210	41.25	---	56.00	14.75	L1	10.2
1.887074	---	32.14	46.00	13.86	L1	10.2
1.887074	47.22	---	56.00	8.78	L1	10.2

Table 7.2.2-2: Conducted EMI Results Line 2 – Chip Antenna

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.233768	---	25.71	52.08	26.37	N	10.1
0.233768	45.77	---	62.12	16.35	N	10.1
0.348397	---	25.92	48.80	22.88	N	10.1
0.348397	48.45	---	58.83	10.38	N	10.1
1.136774	---	32.15	46.00	13.85	N	10.1
1.136774	47.65	---	56.00	8.35	N	10.1
1.441684	---	17.76	46.00	28.24	N	10.2
1.441684	40.27	---	56.00	15.73	N	10.2
2.246192	---	22.79	46.00	23.21	N	10.2
2.246192	41.53	---	56.00	14.47	N	10.2
2.632966	---	26.85	46.00	19.15	N	10.2
2.632966	43.33	---	56.00	12.67	N	10.2

Table 7.2.2-3: Conducted EMI Results Line 1 – External Antenna

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.177646	---	25.41	54.47	29.06	L1	10.1
0.177646	46.54	---	64.49	17.95	L1	10.1
0.200000	---	24.63	53.43	28.80	L1	10.1
0.200000	45.72	---	63.46	17.74	L1	10.1
0.216533	---	24.08	52.74	28.66	L1	10.1
0.216533	44.86	---	62.77	17.91	L1	10.1
0.221543	---	24.04	52.54	28.50	L1	10.1
0.221543	44.64	---	62.58	17.94	L1	10.1
0.269439	---	24.32	50.89	26.57	L1	10.1
0.269439	43.44	---	60.93	17.49	L1	10.1
0.289078	---	24.10	50.31	26.21	L1	10.1
0.289078	43.51	---	60.35	16.84	L1	10.1

Table 7.2.2-4: Conducted EMI Results Line 2 – External Antenna

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.206212	---	24.92	53.16	28.24	N	10.1
0.206212	46.13	---	63.19	17.06	N	10.1
0.224385	---	24.67	52.43	27.76	N	10.1
0.224385	45.30	---	62.47	17.17	N	10.1
0.250701	---	25.42	51.49	26.07	N	10.1
0.250701	44.67	---	61.53	16.86	N	10.1
0.271944	---	24.79	50.81	26.02	N	10.1
0.271944	43.67	---	60.85	17.18	N	10.1
0.325651	---	23.72	49.34	25.62	N	10.1
0.325651	43.72	---	59.37	15.65	N	10.1
0.435972	---	17.20	47.04	29.84	N	10.1
0.435972	40.76	---	57.06	16.30	N	10.1

### 7.3 6dB / 99% Bandwidth – FCC 15.247(a)(2), IC: RSS-247 5.2(1)

#### 7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r03. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to  $\geq 3$  times the RBW. The trace was set to max hold with a peak detector active. The ndB down function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

#### 7.3.2 Measurement Results

Table 7.3.2-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	706.48	1235.13
2440	806.47	2325.59
2480	775.14	2526.25

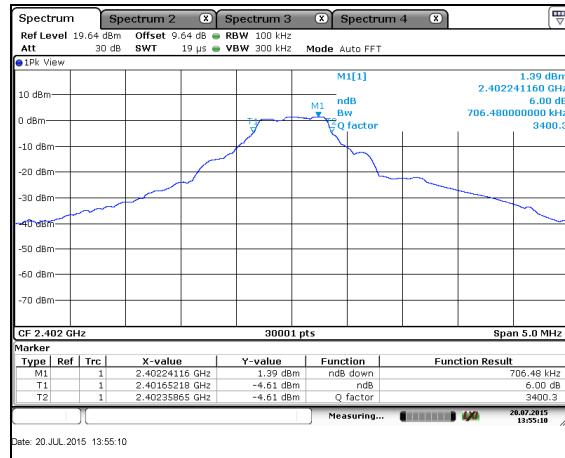


Figure 7.3.2-1: 6dB Bandwidth Plot – LCH




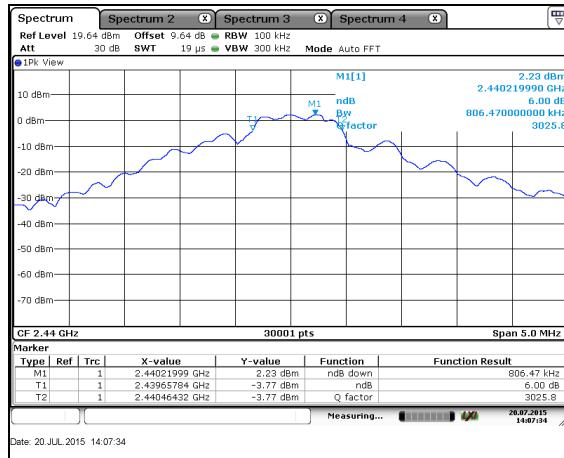


Figure 7.3.2-2: 6dB Bandwidth Plot – MCH

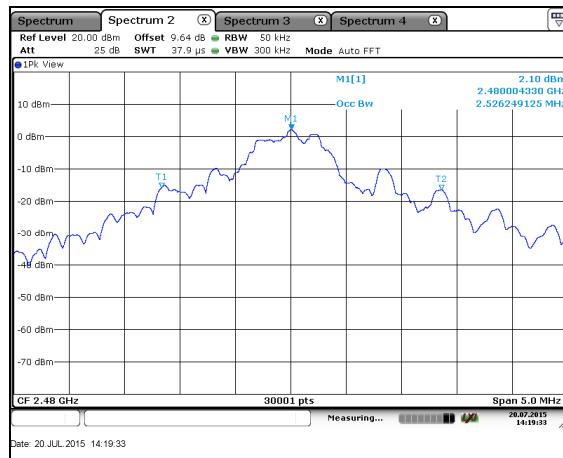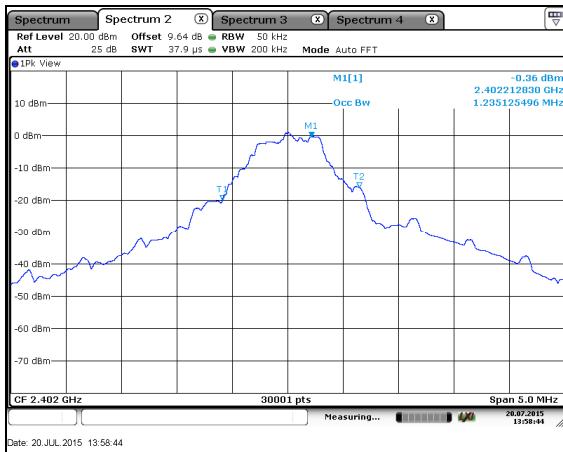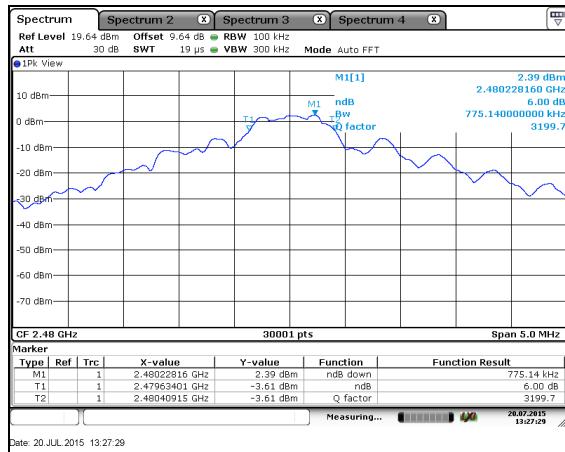

## 7.4 Fundamental Emission Output Power – FCC 15.247(b)(3), IC: RSS-247 5.4(4)

### 7.4.1 Measurement Procedure

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r03 utilizing the  $\text{RBW} \geq \text{DTS}$  bandwidth method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The resolution bandwidth was set  $\geq \text{DTS}$  bandwidth and the VBW was set to 3 times the resolution bandwidth. The span was set to at least 3 times the resolution bandwidth. A peak detector was used.

### 7.4.2 Measurement Results

Table 7.4.2-1: Maximum Peak Conducted Output Power

Frequency [MHz]	Level [dBm]
2402	1.45
2440	2.28
2480	2.42

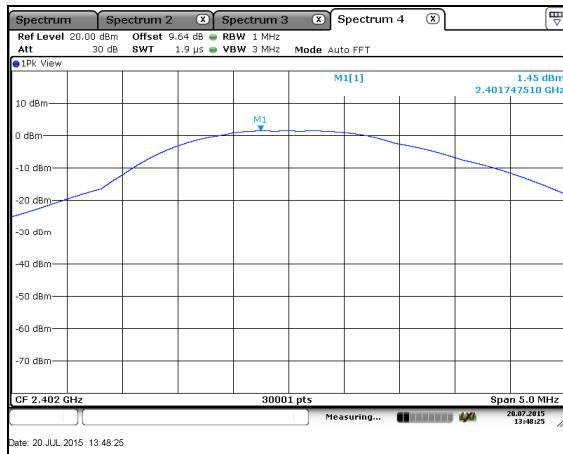


Figure 7.4.2-1: Peak Output Power – LCH

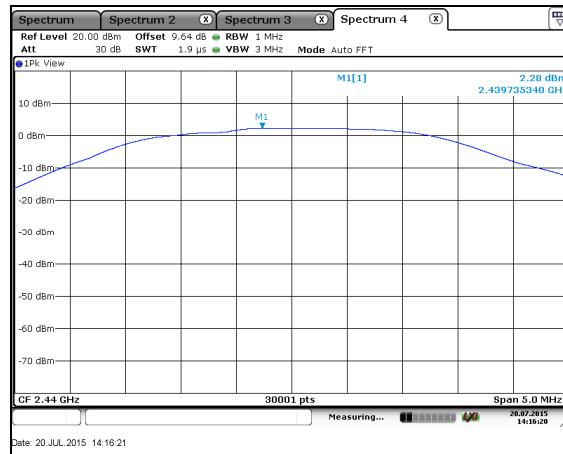


Figure 7.4.2-2: Peak Output Power – MCH

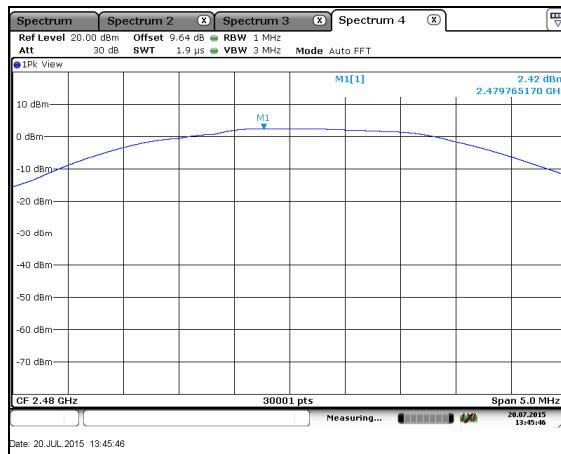


Figure 7.4.2-3: Peak Output Power – HCH

## 7.5 Emission Levels – FCC 15.247(d), 15.205, 15.209; IC RSS-247 5.5, RSS-Gen 8.9/8.10

### 7.5.1 Emissions into Non-restricted Frequency Bands

#### 7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r03. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to  $\geq$  300 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

#### 7.5.1.2 Measurement Results

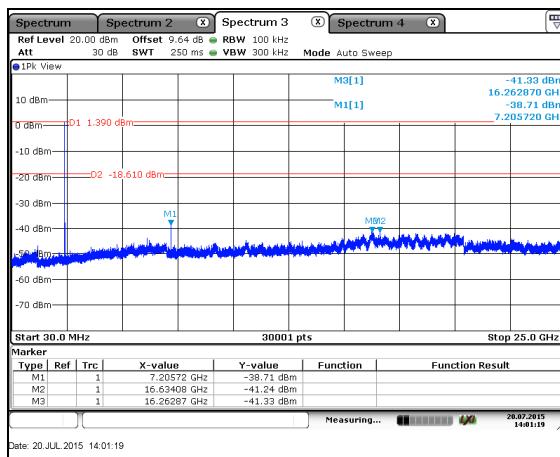


Figure 7.5.1.2-1: 30 MHz – 25 GHz – LCH

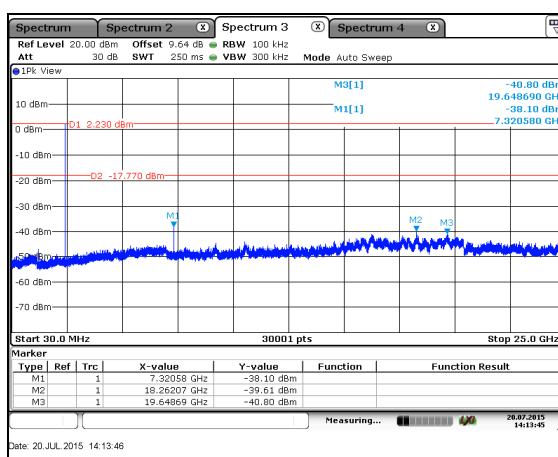


Figure 7.5.1.2-2: 30 MHz – 25 GHz – MCH

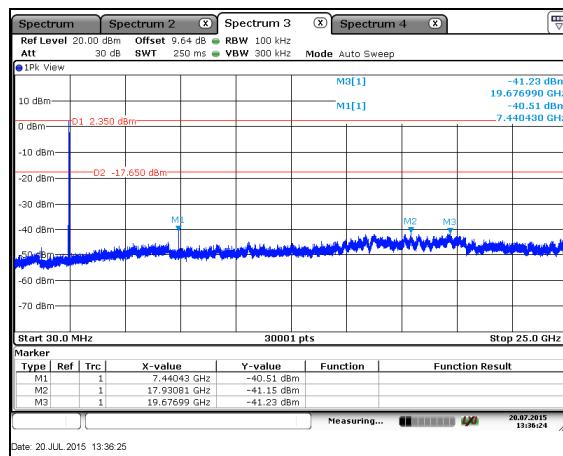


Figure 7.5.1.2-3: 30 MHz – 25 GHz – HCH

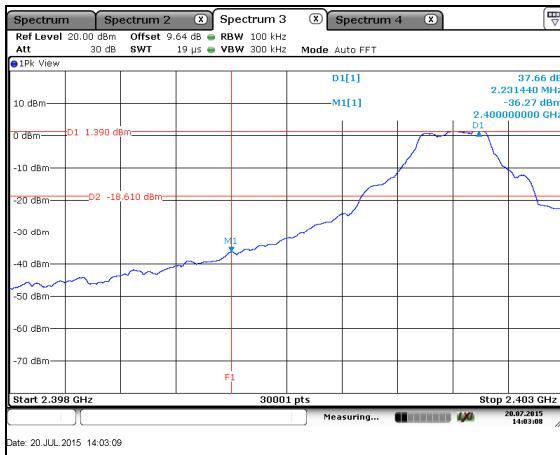


Figure 7.5.1.2-4: Lower Band-edge - LCH

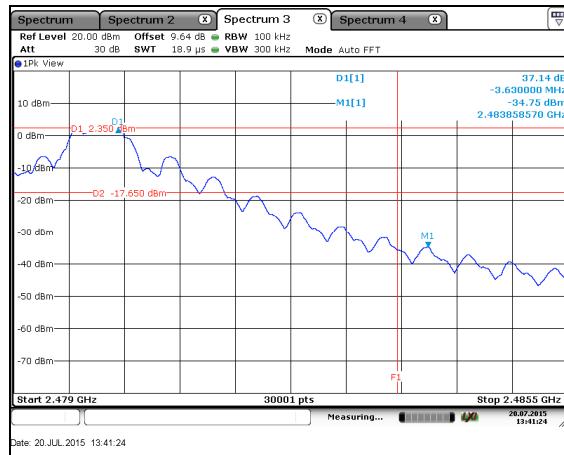


Figure 7.5.1.2-5: Upper Band-edge - HCH

## 7.5.2 Emissions into Restricted Frequency Bands

### 7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

### 7.5.2.2 Duty Cycle Correction

For average radiated measurements, using a 0.376% duty cycle, the measured level was reduced by a factor 48.49dB. The duty cycle correction factor is determined using the formula:  $20\log (.376/100) = -48.49\text{dB}$ . A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the application for certification.

### 7.5.2.3 Measurement Results

**Table 7.5.2.3-1: Radiated Spurious Emissions Tabulated Data – External Antenna**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel</b>										
4804	50.44	43.56	V	1.17	51.61	-3.77	74.0	54.0	22.4	57.8
<b>Middle Channel</b>										
7320	51.63	42.87	H	7.76	59.39	2.13	74.0	54.0	14.6	51.9
7320	52.85	44.52	V	7.76	60.61	3.78	74.0	54.0	13.4	50.2
<b>High Channel</b>										
2483.5	67.58	36.52	H	-6.08	61.50	-18.05	74.0	54.0	12.5	72.1
2483.5	79.80	43.84	V	-6.08	73.72	-10.73	74.0	54.0	0.3	64.7
4960	46.61	36.09	H	1.35	47.96	-11.06	74.0	54.0	26.0	65.1
7440	52.34	42.97	H	7.84	60.18	2.31	74.0	54.0	13.8	51.7
7440	53.69	45.54	V	7.84	61.53	4.88	74.0	54.0	12.5	49.1

**Table 7.5.2.3-2: Radiated Spurious Emissions Tabulated Data – Chip Antenna**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel</b>										
2387.8	52.86	34.95	H	-6.60	46.26	-20.15	74.0	54.0	27.7	74.1
2387.8	49.05	34.85	V	-6.60	42.45	-20.25	74.0	54.0	31.6	74.2
4804	51.07	43.54	H	1.17	52.24	-3.79	74.0	54.0	21.8	57.8
4804	51.03	43.36	V	1.17	52.20	-3.97	74.0	54.0	21.8	58.0
<b>Middle Channel</b>										
4880	46.11	35.11	V	1.25	47.36	-12.13	74.0	54.0	26.6	66.1
7320	46.08	35.52	H	7.76	53.84	-5.22	74.0	54.0	20.2	59.2
7320	48.01	38.03	V	7.76	55.77	-2.71	74.0	54.0	18.2	56.7
<b>High Channel</b>										
2483.5	76.82	41.15	H	-6.08	70.74	-13.42	74.0	54.0	3.3	67.4
2483.5	71.44	37.77	V	-6.08	65.36	-16.80	74.0	54.0	8.6	70.8
4960	46.89	34.65	V	1.35	48.24	-12.50	74.0	54.0	25.8	66.5
7440	46.25	35.23	H	7.84	54.09	-5.43	74.0	54.0	19.9	59.4
7440	50.03	39.80	V	7.84	57.87	-0.86	74.0	54.0	16.1	54.9

**7.5.2.4 Sample Calculation:**

$$R_C = R_U + C_{FT}$$

Where:

C<sub>FT</sub> = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)R<sub>U</sub> = Uncorrected ReadingR<sub>C</sub> = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level: 50.44 + 1.17 = 51.61dBuV/m

Margin: 74.0dBuV/m – 51.61dBuV/m = 22.4dB

**Example Calculation: Average**

Corrected Level: 43.56 + 1.17 - 48.49 = -3.77dBuV

Margin: 54.0dBuV + 3.77dBuV = 57.8dB

## 7.6 Maximum Power Spectral Density in the Fundamental Emission – FCC 15.247(e) IC: RSS-247 A5.2(2)

### 7.6.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r03 utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the occupied bandwidth. The trace was set to max hold with a peak detector active.

### 7.6.2 Measurement Results

Table 7.6.2-1: Peak Power Spectral Density

Frequency (MHz)	PSD Level (dBm)
2402	-10.13
2440	-9.42
2480	-11.23

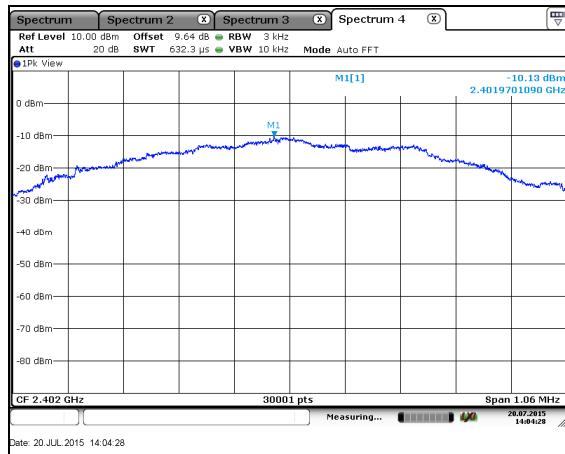


Figure 7.6.2-1: PSD Plot – LCH

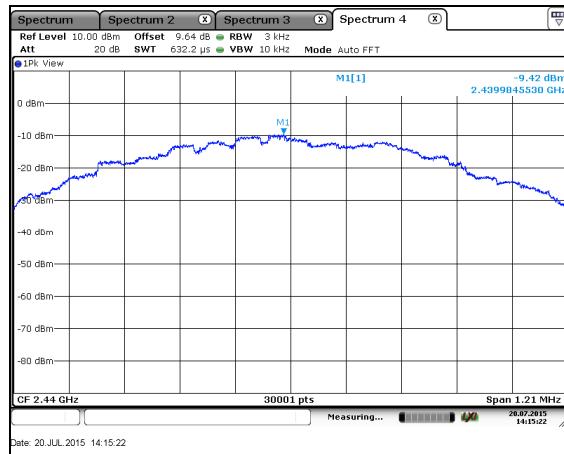


Figure 7.6.2-2: PSD Plot – MCH

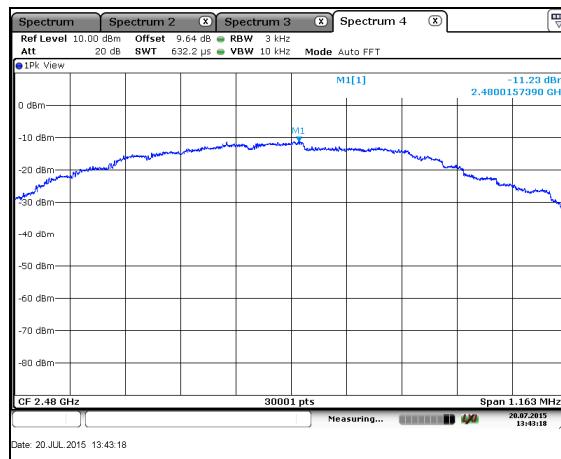


Figure 7.6.2-3: PSD Plot – HCH

**8 CONCLUSION**

In the opinion of ACS, Inc. the BLMF1, provided by Acuity Brands Lighting, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-247.

**END REPORT**