

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.




FOR

## Anti-lost wristband

ISSUED TO

Guangzhou Aide medical technology Co., Ltd.

1509, Building A, Science Park of Sun Yat-sen University, No. 135  
Xingangxi Road, Haizhu district, Guangzhou, China

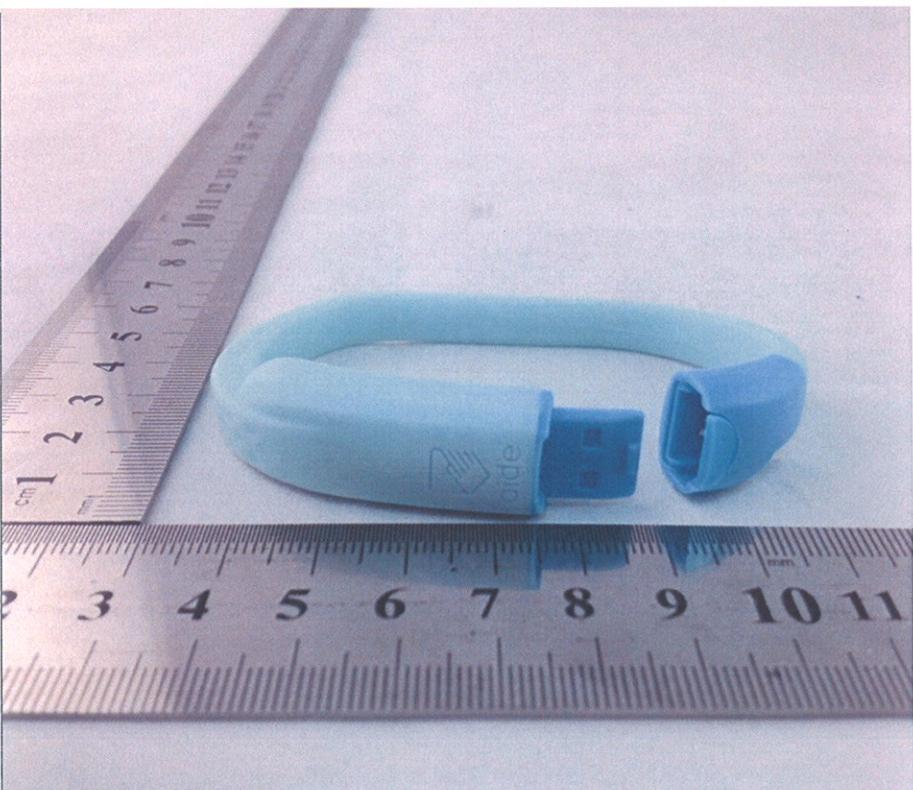

Prepared by: Zhang Yanqing  
(Reporting Specialist)

Date Nov 7, 2014

Approved by: Wei Yanquan  
(Chief Engineer)

Date Nov 7, 2014

Report No.:	BL-SZ1490127-601
EUT Type:	Anti-lost wristband
Model Name:	AD-AL-I
Brand Name:	Aide
Test Standard:	47 CFR Part 15 Subpart C
FCC ID:	2ADDI-ALW
Test conclusion:	PASS
Test Date:	Oct 10, 2014 ~ Nov 6, 2014
Date of Issue:	Nov 7, 2014

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

**Revision History**

Version	Issue Date	Revisions
Rev. 01	Nov 7, 2014	Initial Issue

**TABLE OF CONTENTS**

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory.....	5
1.2	Identification of the Responsible Testing Location.....	5
1.3	Test Environment Condition .....	5
1.4	Announce.....	6
2	PRODUCT INFORMATION .....	7
2.1	Applicant .....	7
2.2	Manufacturer .....	7
2.3	General Description for Equipment under Test (EUT) .....	7
2.4	Technical Information .....	7
2.5	Ancillary Equipment.....	8
3	SUMMARY OF TEST RESULTS .....	9
3.1	Test Standards.....	9
3.2	Verdict.....	9
4	GENERAL TEST CONFIGURATIONS .....	10
4.1	Test Environments .....	10
4.2	Test Equipment List.....	10
4.3	Test Configurations .....	11
4.4	Description of Test Setup .....	11
4.4.1	For Antenna Port Test .....	11
4.4.2	For AC Power Supply Port Test.....	11
4.4.3	For Radiated Test (Below 30MHz).....	12
4.4.4	For Radiated Test (30MHz-1GHz) .....	12
4.4.5	For Radiated Test (Above 1GHz) .....	13
4.5	Test Conditions .....	14
5	TEST ITEMS .....	15

5.1	Antenna Requirements.....	15
5.1.1	Standard Applicable .....	15
5.1.2	Antenna Anti-Replacement Construction .....	15
5.1.3	Antenna Gain .....	15
5.2	Output Power .....	16
5.2.1	Test Limit.....	16
5.2.2	Test Procedure.....	16
5.3	6dB Bandwidth .....	17
5.3.1	Limit.....	17
5.3.2	Test Procedure.....	17
5.4	Conducted Spurious Emission .....	18
5.4.1	Limit.....	18
5.4.2	Test Procedure.....	18
5.5	Radiated Spurious Emission .....	20
5.5.1	Limit.....	20
5.5.2	Test Procedure.....	20
5.6	Band Edge .....	21
5.6.1	Limit.....	21
5.6.2	Test Procedure.....	21
5.7	Power Spectral density (PSD) .....	22
5.7.1	Limit.....	22
5.7.2	Test Procedure.....	22
ANNEX A	TEST RESULT .....	23
A.1	Output Power .....	23
A.2	Bandwidth .....	24
A.3	Conducted Spurious Emissions.....	25
A.4	Radiated Emission .....	28
A.5	Band Edge .....	42
A.6	Power Spectral Density (PSD) .....	43
ANNEX B	TEST SETUP PHOTOS .....	44
B.1	Conducted Emissions Test Photo.....	44

B.2	Radiated Test Photo.....	45
ANNEX C	EUT PHOTOS .....	48
C.1	Appearance of the EUT .....	48
C.2	Inside of the EUT .....	51

## 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

### 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6683 3402
Fax Number	+86 755 6182 4271

### 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

### 1.3 Test Environment Condition

Ambient Temperature	15 to 35°C
Ambient Relative Humidity	30 to 60%
Ambient Pressure	86 to 106 kPa

## 1.4 Announce

- (1) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (2) The test report is invalid if there is any evidence and/or falsification.
- (3) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (4) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant

Applicant	Guangzhou Aide medical technology Co.,Ltd
Address	1509, Building A,Science Park of Sun Yat-sen University, No. 135 Xingangxi Road, Haizhu district, Guangzhou, China

### 2.2 Manufacturer

Manufacturer	Guangzhou Aide medical technology Co.,Ltd
Address	1509, Building A,Science Park of Sun Yat-sen University, No. 135 Xingangxi Road, Haizhu district, Guangzhou, China

### 2.3 General Description for Equipment under Test (EUT)

EUT Type	Anti-lost wristband
Model Name	AD-AL-I
Hardware Version	V1.0.3
Software Version	V1.0.0
Network and Wireless connectivity	Bluetooth 4.0 Low Energy (BLE)
About the Product	The equipment is Anti-lost wristband, it contains Bluetooth 4.0 Low Energy (BLE) operating at 2.4GHz ISM band.

### 2.4 Technical Information

Modulation Technology	FHSS
Modulation Type	GFSK
Transfer Rate	1Mbps
Frequency Range	The frequency range used is 2402MHz - 2480MHz; The frequency block is 2400MHz to 2483.5MHz.
Number of channel	40 (at intervals of 2MHz)
Tested Channel	0 (2402MHz), 19 (2440MHz), 39 (2480MHz).
Antenna Type	Ceramic Chip Antenna
Antenna Gain	0dBi

Note: The above EUT information in section 2.3 and 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

## 2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	pinnuo
	Model No	350926L
	Serial No	(N/A. marked #1 by test site)
	Capacitance	60mAh
	Rated Voltage	3.7V
	Extreme Voltage	Low: 3.3V / High: 4.2V

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (12-30-13 Edition)	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v03r02	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
3	ANSI C63.4-2009	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203 15.247(b)	Note1	PASS
2	Output Power	15.247(b)	ANNEX A.1	PASS
3	6dB Bandwidth	15.247(a)	ANNEX A.2	PASS
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	PASS
5	Conducted Emission	15.207	Note2	N/A
6	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.4	PASS
7	Band Edge	15.247(d)	ANNEX A.5	PASS
8	Power spectral density (PSD)	15.247(e)	ANNEX A.6	PASS

Note 1: Please refer to section 5.1.

Note 2: The EUT only support by battery, Conducted Emission was not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity (%)	30 -60		
Atmospheric Pressure (kPa)	86-106		
Temperature	NT (Normal Temperature)	+20°C to +25°C	
	LT (Low Temperature)	-20°C	
	HT (High Temperature)	+55°C	
Working Voltage of the EUT	NV (Normal Voltage)	3.7V	
	LV (Low Voltage)	3.3V	
	HV (High Voltage)	4.2V	

### 4.2 Test Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2014.07.07	2015.07.06
Spectrum Analyzer	ROHDE&SCHWARZ	FSL3	103640/003	2014.07.07	2015.07.06
Power Splitter	KMW	DCPD-LDC	1305003215	2014.07.07	2015.07.06
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2014.07.07	2015.07.06
Attenuator (20dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2014.07.07	2015.07.06
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2014.07.07	2015.07.06
Test Antenna-Loop(9kHz-30MHz)	SCHWARZBECK	FMZB 1519	1519-037	2013.07.02	2015.07.01
Test Antenna-Bi-Log(30MHz-3G Hz)	SCHWARZBECK	VULB 9163	9163-624	2013.07.03	2015.07.02
Test Antenna-Horn(1-18GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2013.07.02	2015.07.01
Test Antenna-Horn(15-26.5GHz)	SCHWARZBECK	BBHA 9170	9170-305	2013.07.02	2015.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2014.10.07	2015.10.06

## 4.3 Test Configurations


Test Configurations (TC) NO.	Description	
	Signal Description	Operating Frequency
Transmitter		
TC01	FHSS modulation, GFSK	Ch No. 0/ 2402MHz
TC02	FHSS modulation, GFSK	Ch No.19/ 2440MHz
TC03	FHSS modulation, GFSK	Ch No. 39/ 2480MHz

## 4.4 Description of Test Setup


### 4.4.1 For Antenna Port Test

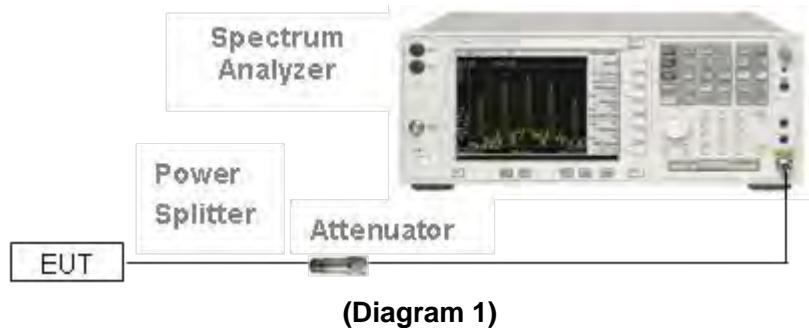

### 4.4.2 For AC Power Supply Port Test

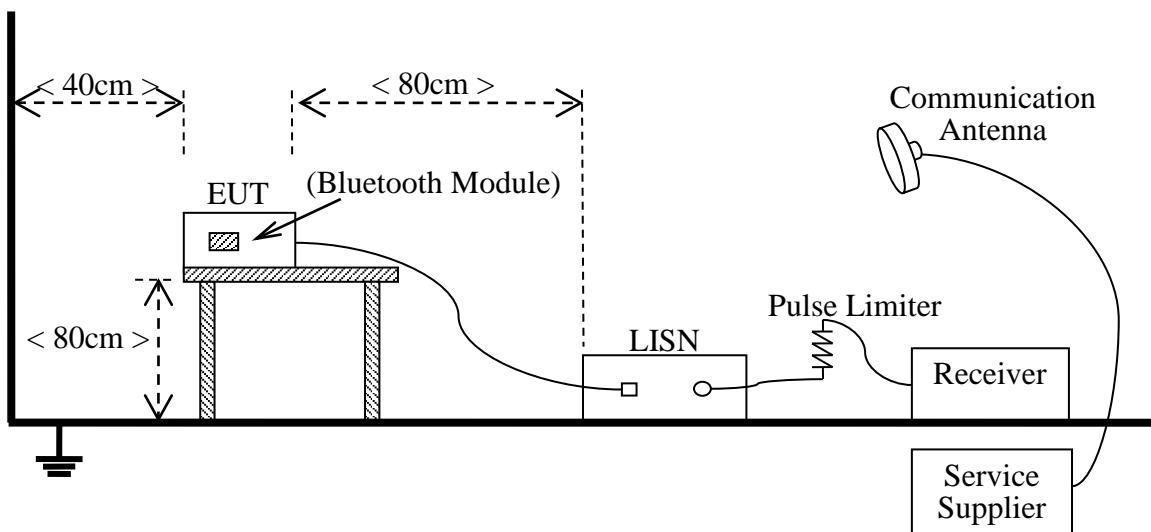


#### 4.4.3 For Radiated Test (Below 30MHz)

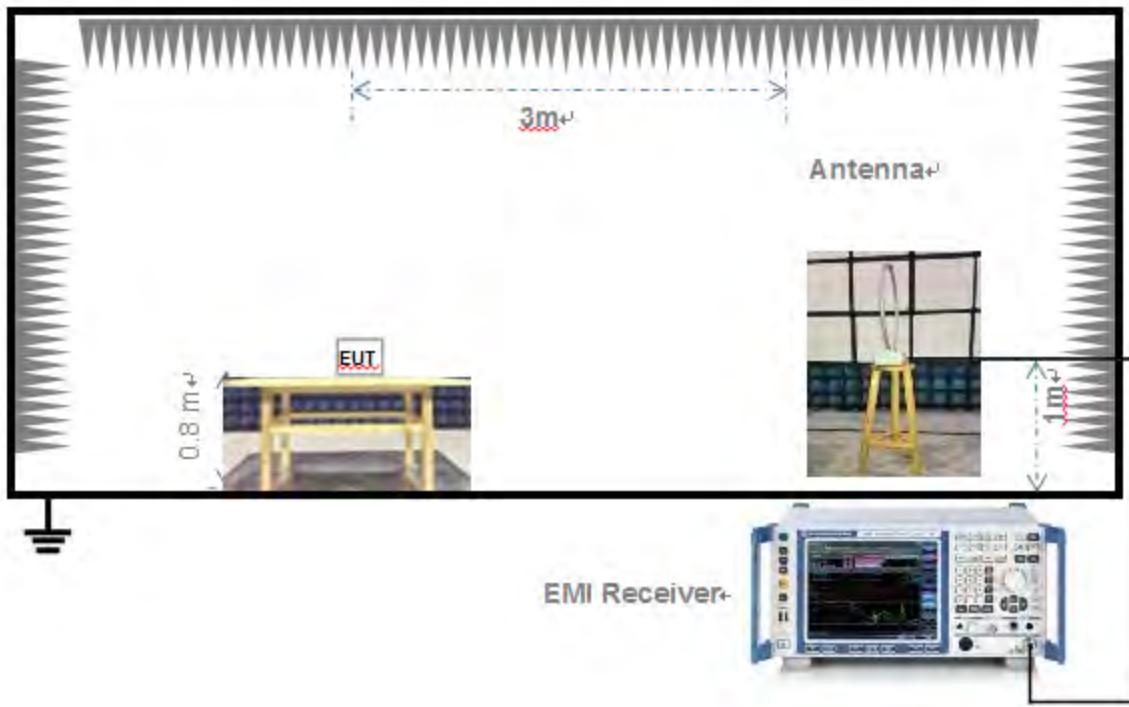


(Diagram 3)

#### 4.4.4 For Radiated Test (30MHz-1GHz)

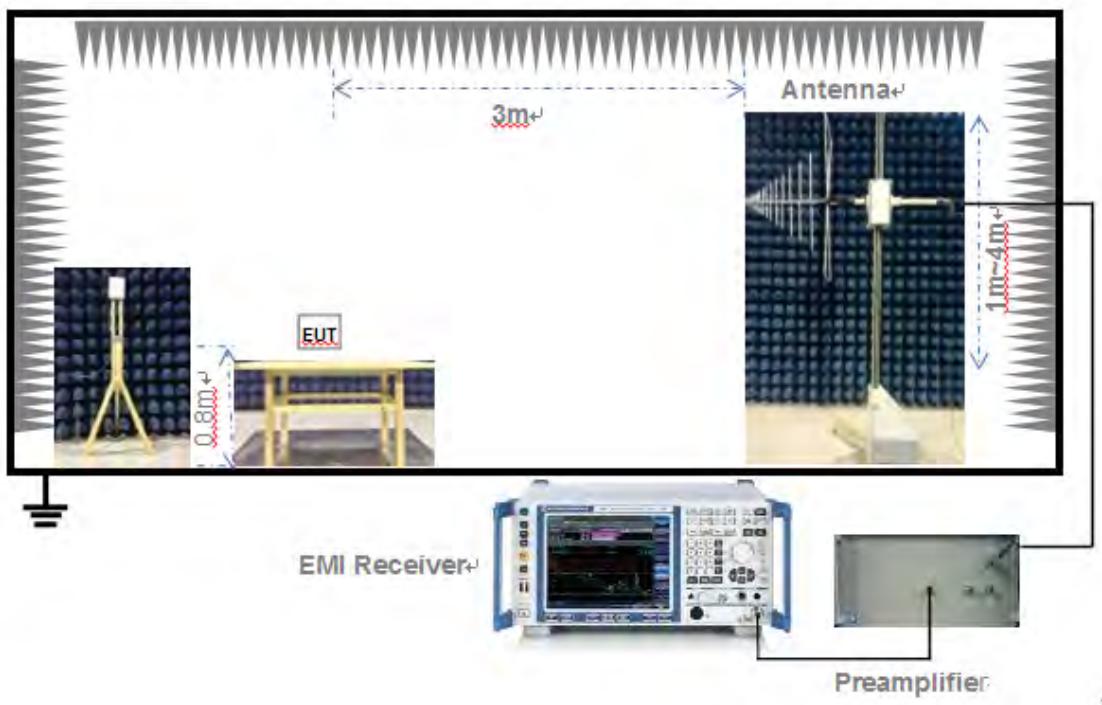

(Diagram 4)

#### 4.4.5 For Radiated Test (Above 1GHz)

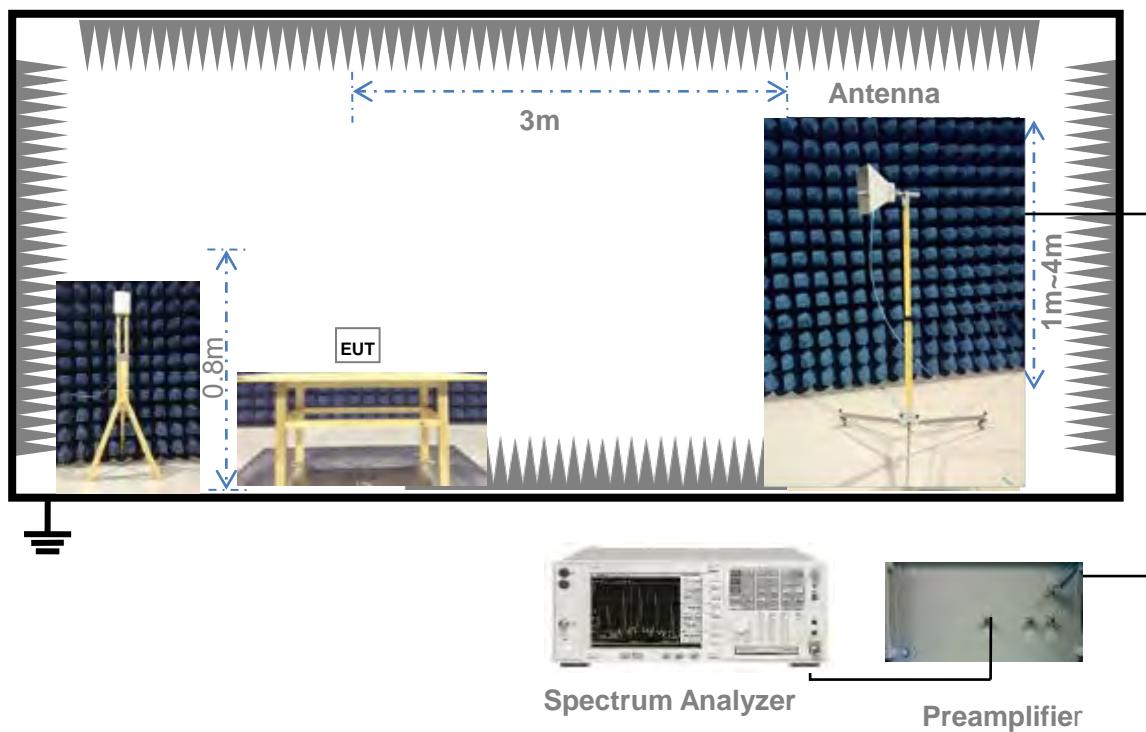

(Diagram 5)

## 4.5 Test Conditions

Test Case	Test Conditions		
	Test Env.	Test Setup <sup>Note 1</sup>	Test Configuration <sup>Note 2</sup>
Peak Output Power	NTNV	Test Setup 1	TC01~TC03
Occupied Bandwidth	NTNV	Test Setup 1	TC01~TC03
Conducted Spurious Emission	NTNV	Test Setup 1	TC01~TC03
Conducted Emission	NTNV	Test Setup 2	TC01~TC03
Radiated Spurious Emission	NTNV	Test Setup 3 Test Setup 4 Test Setup 5	TC01~TC03
Band Edge	NTNV	Test Setup 1	TC01, TC03
Power spectral density (PSD)	NTNV	Test Setup 2	TC01~TC03

Note:

1. Please refer to section 4.4 for test setup details.
2. Please refer to section 4.3 for test setup details.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Standard Applicable

FCC §15.203 & 15.247(b)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	An embedded-in antenna design is used.

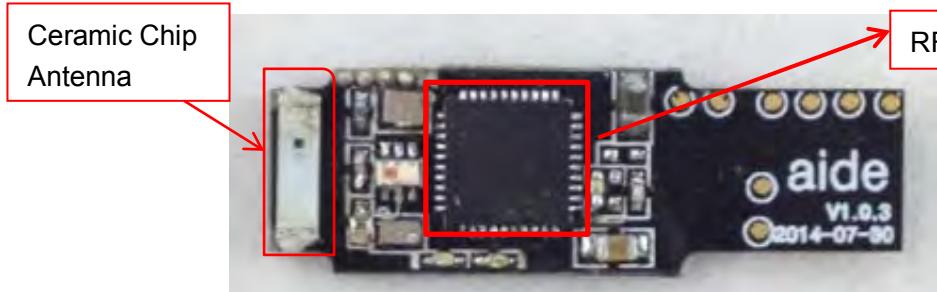Reference Documents	Item
Photo	

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

### 5.2.2 Test Procedure

#### Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW  $\geq$  DTS bandwidth.

Set VBW  $\geq 3 \times$  RBW.

Set span  $\geq 3 \times$  RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

## 5.3 6dB Bandwidth

### 5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

#### Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

### Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

## 5.5 Radiated Spurious Emission

### 5.5.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dB<sub>u</sub>V/m@3m (AV) and 74dB<sub>u</sub>V/m@3m (PK).

### 5.5.2 Test Procedure

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

## 5.6 Band Edge

### 5.6.1 Limit

FCC §15.209&15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.6.2 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency ( $f_{\text{emission}}$ )  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by  $f_{\text{emission}} \pm 0.5$  MHz.

## 5.7 Power Spectral density (PSD)

### 5.7.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 5.7.2 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## ANNEX A TEST RESULT

### A.1 Output Power


Note: The EUT was Continuous transmit, so, the duty cycle was 100%.

#### Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	-17.35	0.02	30	1000	PASS
Middle	-17.89	0.02			PASS
High	-18.43	0.01			PASS

#### Peak Power Test Plots


##### LOW CHANNEL

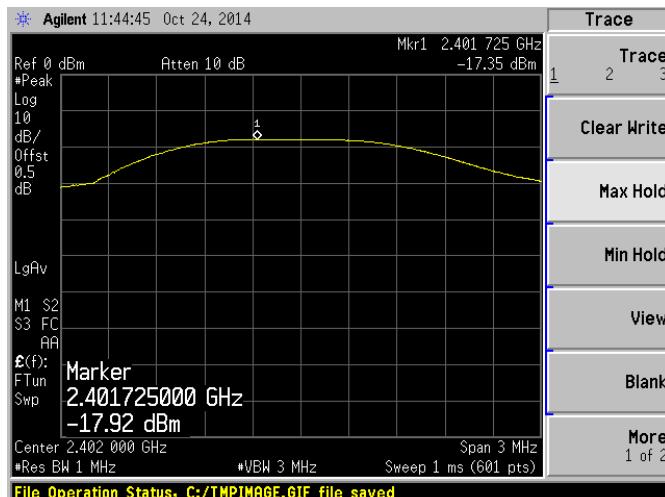

##### MID CHANNEL

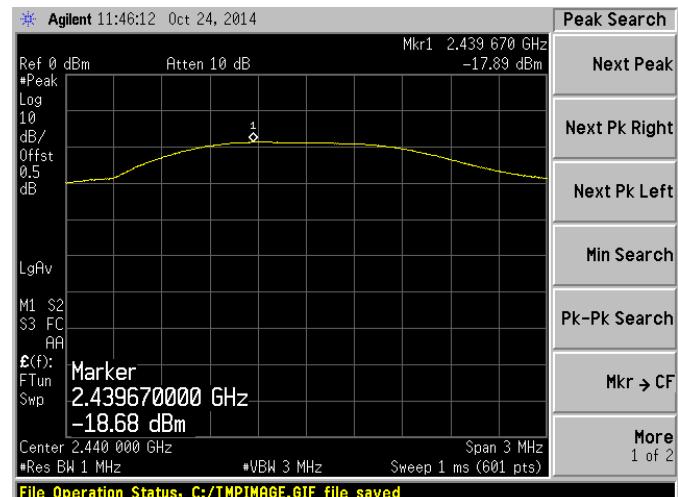

##### HIGH CHANNEL

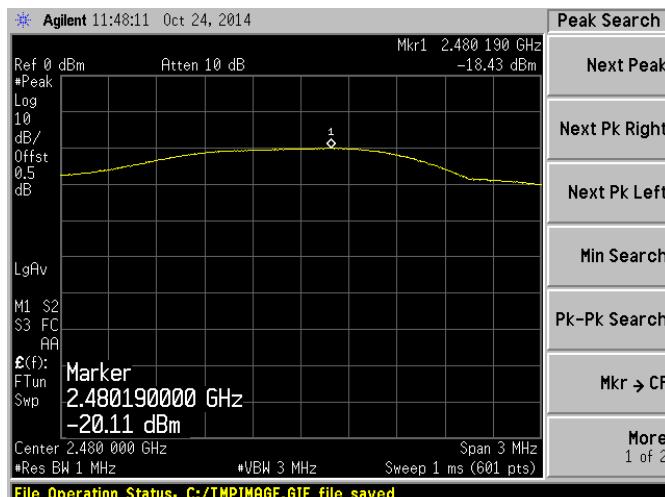


## A.2 Bandwidth

### Test Data


Channel	6 dB Bandwidth (kHz)	Limits (kHz)
Low	718.413	≥500
Middle	677.550	≥500
High	697.020	≥500

### Test plots


#### LOW CHANNEL

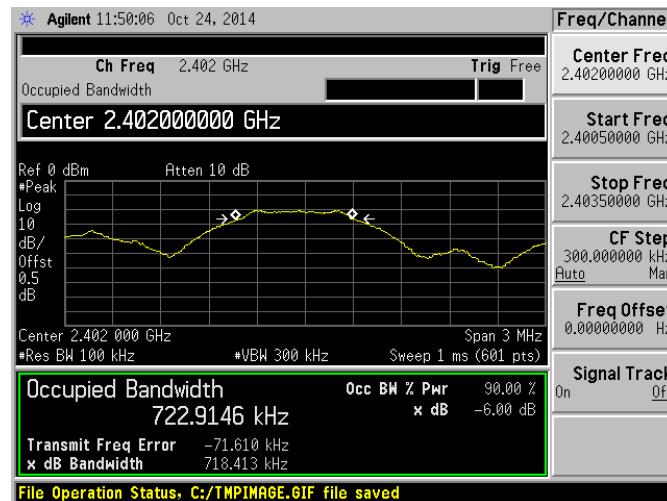

#### MID CHANNEL

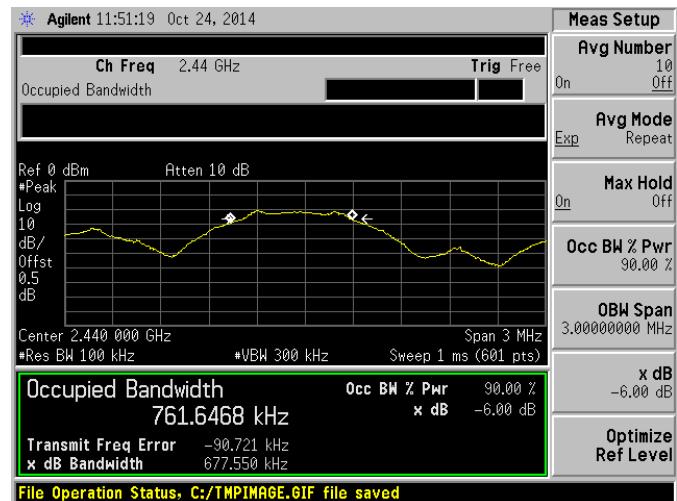

#### HIGH CHANNEL

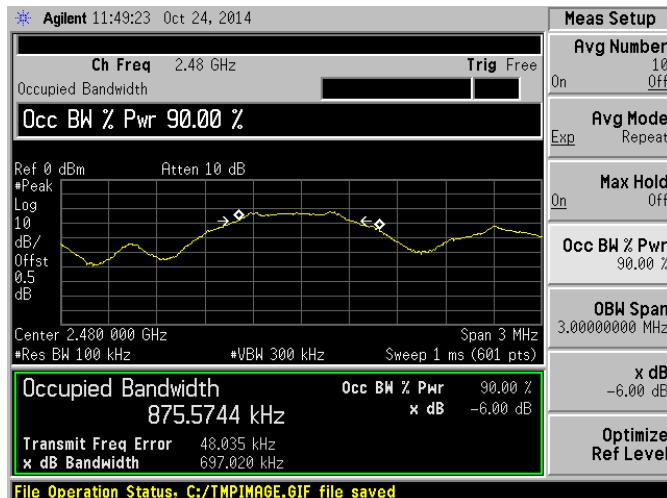


### A.3 Conducted Spurious Emissions

#### Test Data


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-45.50	-21.12	-41.1	PASS
Middle	-46.13	-21.21	-41.2	PASS
High	-45.89	-22.80	-42.8	PASS

#### Test Plots


##### LOW CHANNEL CARRIER LEVEL

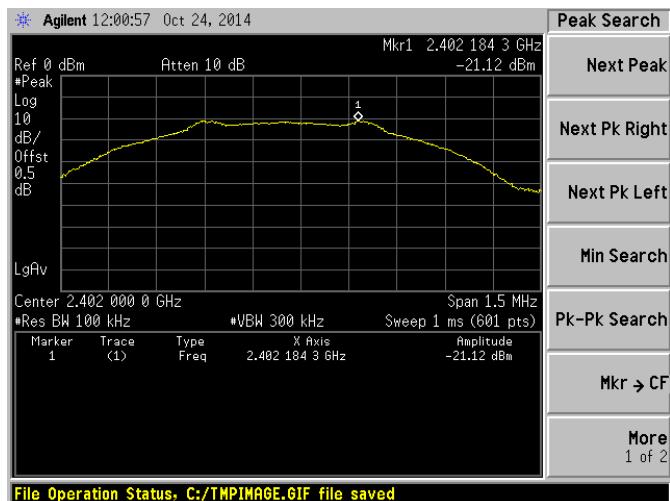


##### LOW CHANNEL, SPURIOUS 30MHz~3GHz

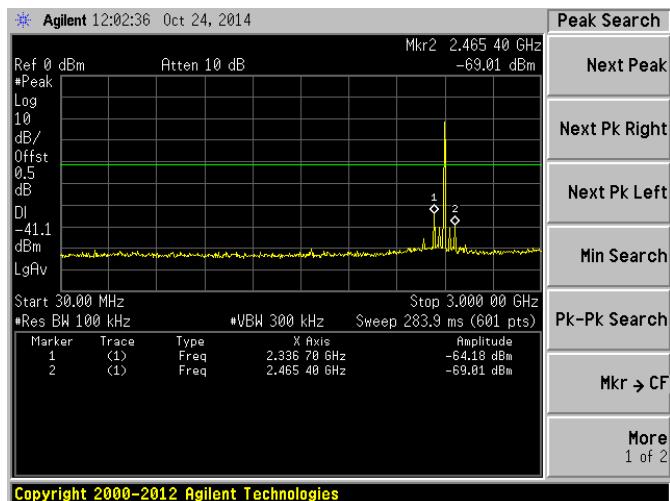


##### LOW CHANNEL, SPURIOUS 2GHz~25GHz

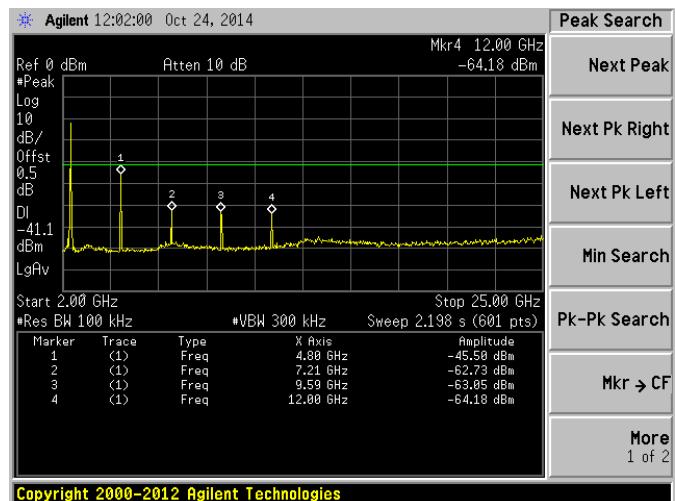


## MID CHANNEL CARRIER LEVEL

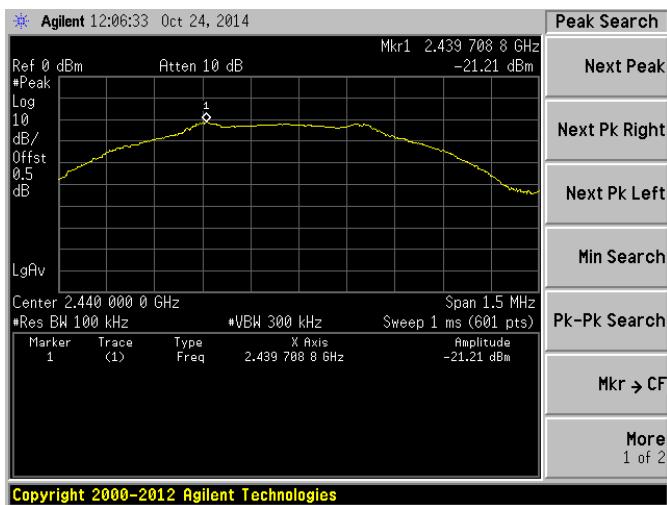


## MID CHANNEL, SPURIOUS 30MHz~3GHz

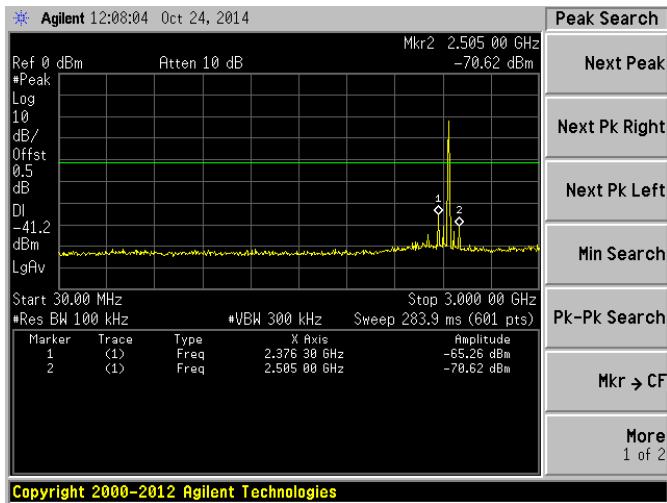


## MID CHANNEL, SPURIOUS 2GHz~25GHz

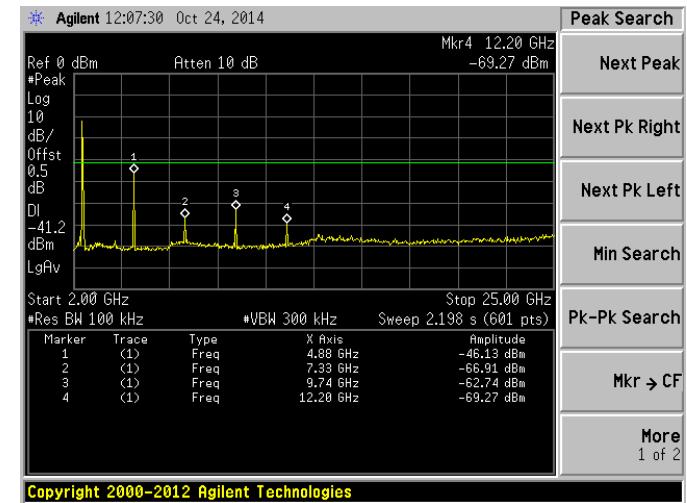


## HIGH CHANNEL CARRIER LEVEL

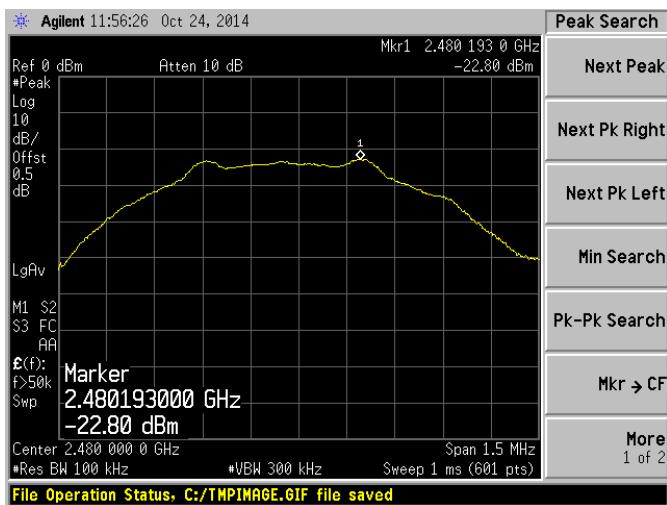

## HIGH CHANNEL, SPURIOUS 30MHz~3GHz

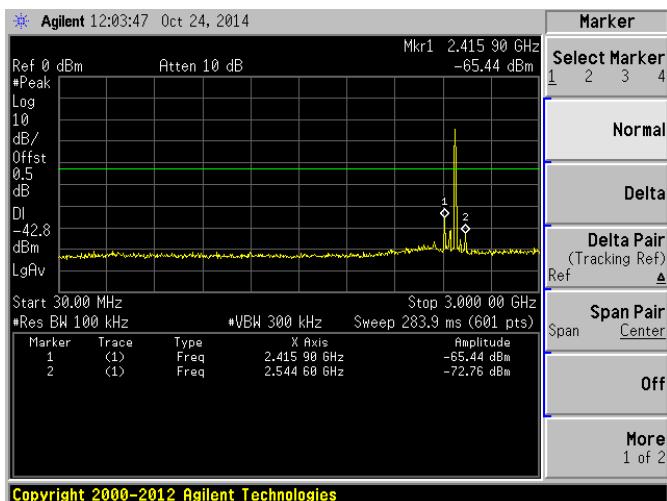

## HIGH CHANNEL, SPURIOUS 2GHz~25GHz

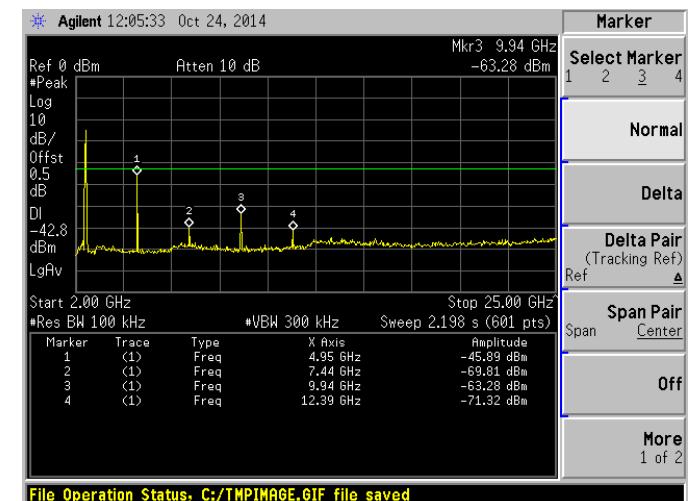

## A.4 Radiated Emission


Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1GHz, According the ANSI C63.4-2009, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### The worst data of 30 MHz to 1GHz

#### 30MHz to 1GHz, ANT V

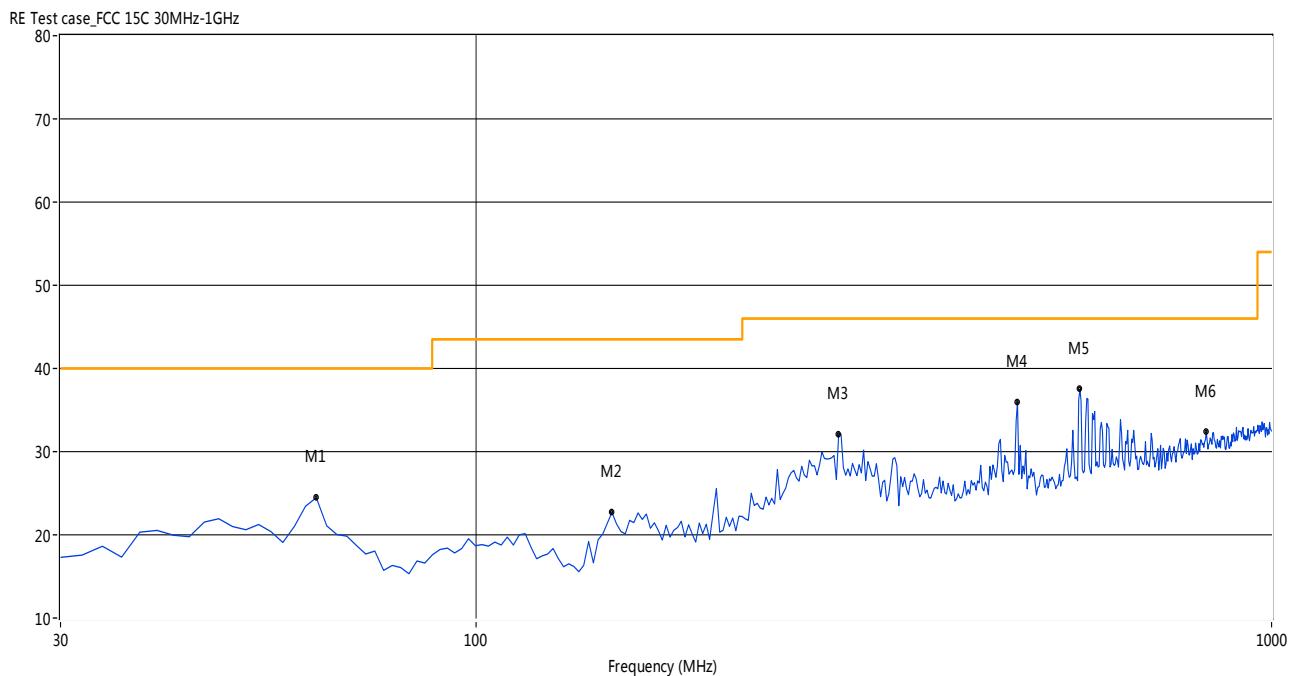

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
62.91	24.47			-20.13	--	40.0	--	15.53	36.90	100	Vertical	PASS
148.10	22.69			-23.50	--	43.5	--	20.81	62.80	100	Vertical	PASS
285.57	32.14			-18.05	--	46.0	--	13.86	359.40	100	Vertical	PASS
479.18	35.97			-13.96	--	46.0	--	10.03	58.80	100	Vertical	PASS
574.05	37.51			-12.14	--	46.0	--	8.49	140.90	100	Vertical	PASS
827.68	32.44			-7.07	--	46.0	--	13.56	49.90	100	Vertical	PASS

## 30MHz to 1GHz, ANT H

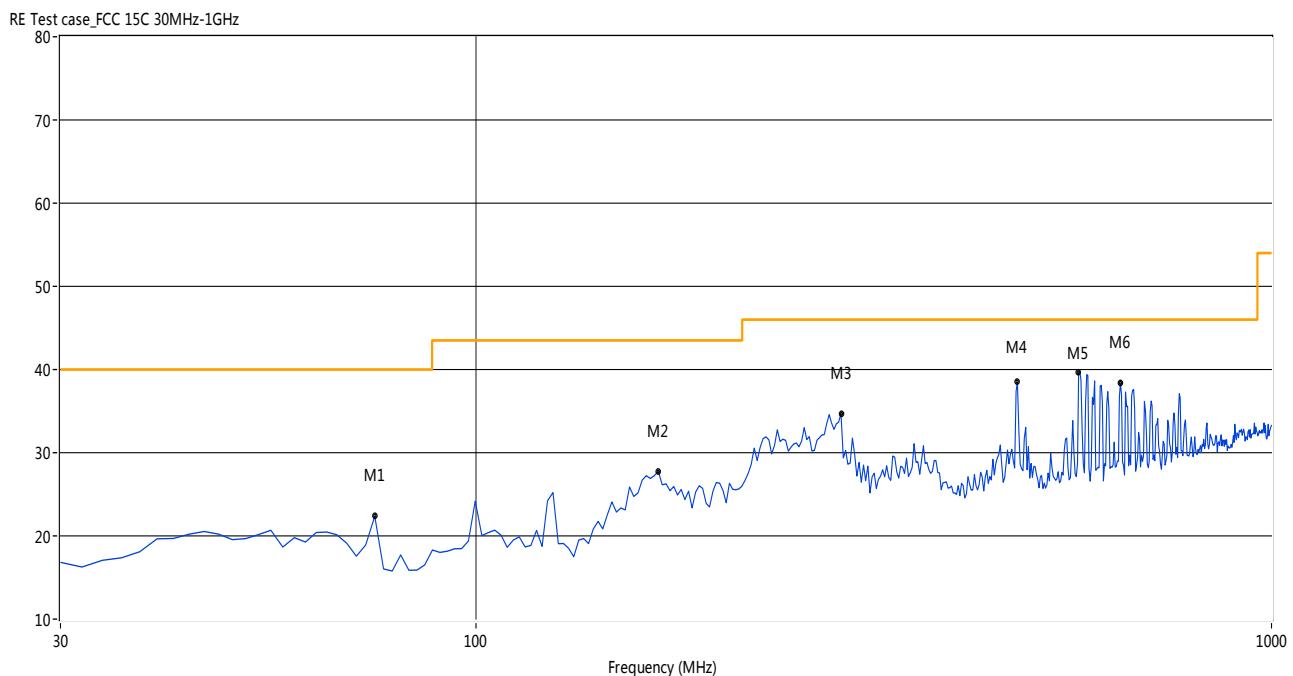


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
74.53	22.36			-24.20	--	40.0	--	17.64	19.60	100	Horizontal	PASS
169.40	27.78			-22.70	--	43.5	--	15.72	123.70	100	Horizontal	PASS
287.50	34.73			-18.23	--	46.0	--	11.27	360.00	100	Horizontal	PASS
479.18	38.47			-13.96	--	46.0	--	7.53	28.50	100	Horizontal	PASS
572.12	39.70			-11.96	--	46.0	--	6.30	50.00	100	Horizontal	PASS
645.69	38.35			-10.45	--	46.0	--	7.65	54.10	100	Horizontal	PASS

Note: The marked spikes near 2400MHz with circle should be ignored because they are Fundamental signal.


Test Data and Plots(1GHz ~ 10th Harmonic)

LOW CHANNEL 1GHz to 6GHz, ANT V

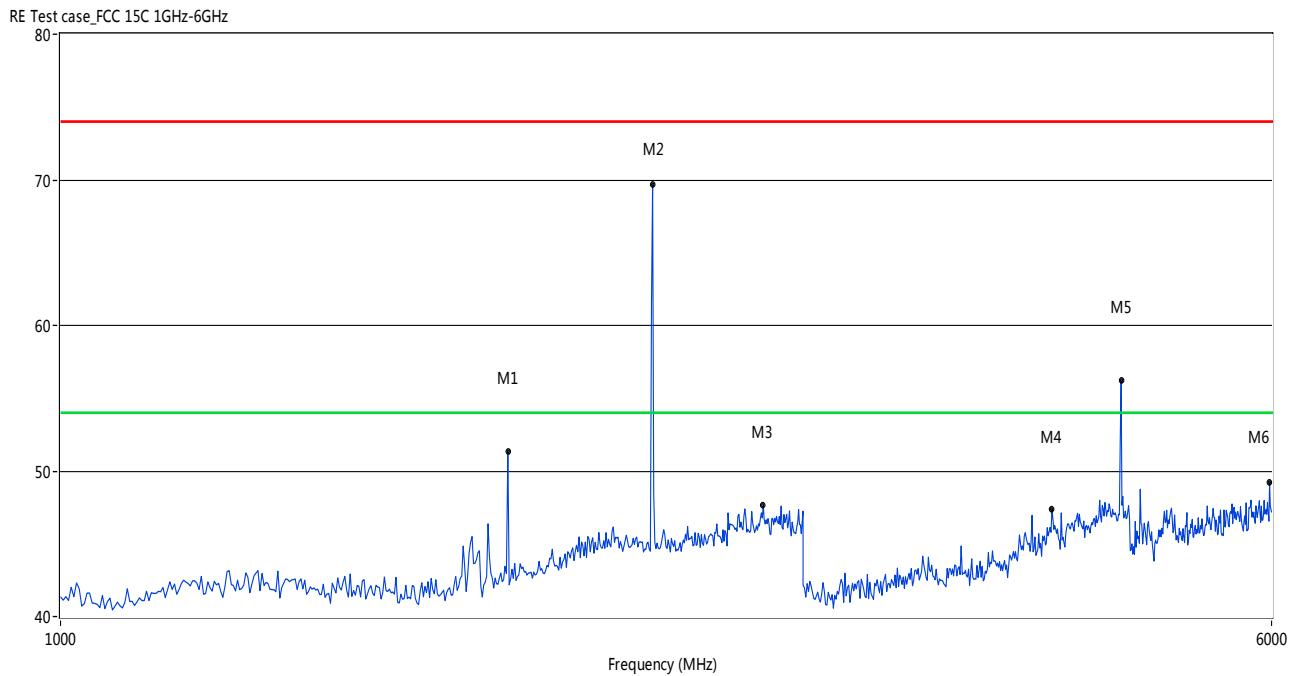


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1938.12	51.37			-2.75	74.0	--	54.0	2.63	284.00	100	Vertical	PASS
2401.20	69.71			-1.26	74.0	--	54.0	-15.71	338.60	100	Vertical	N/A
2828.34	47.65			1.49	74.0	--	54.0	6.35	43.70	100	Vertical	PASS
4335.33	47.38			11.72	74.0	--	54.0	6.62	211.60	100	Vertical	PASS
4802.40	56.25		50.48	13.25	74.0	--	54.0	-2.25	34.80	100	Vertical	PASS
5982.04	49.24			14.98	74.0	--	54.0	4.76	252.80	100	Vertical	PASS

## LOW CHANNEL 1GHz to 6GHz, ANT H

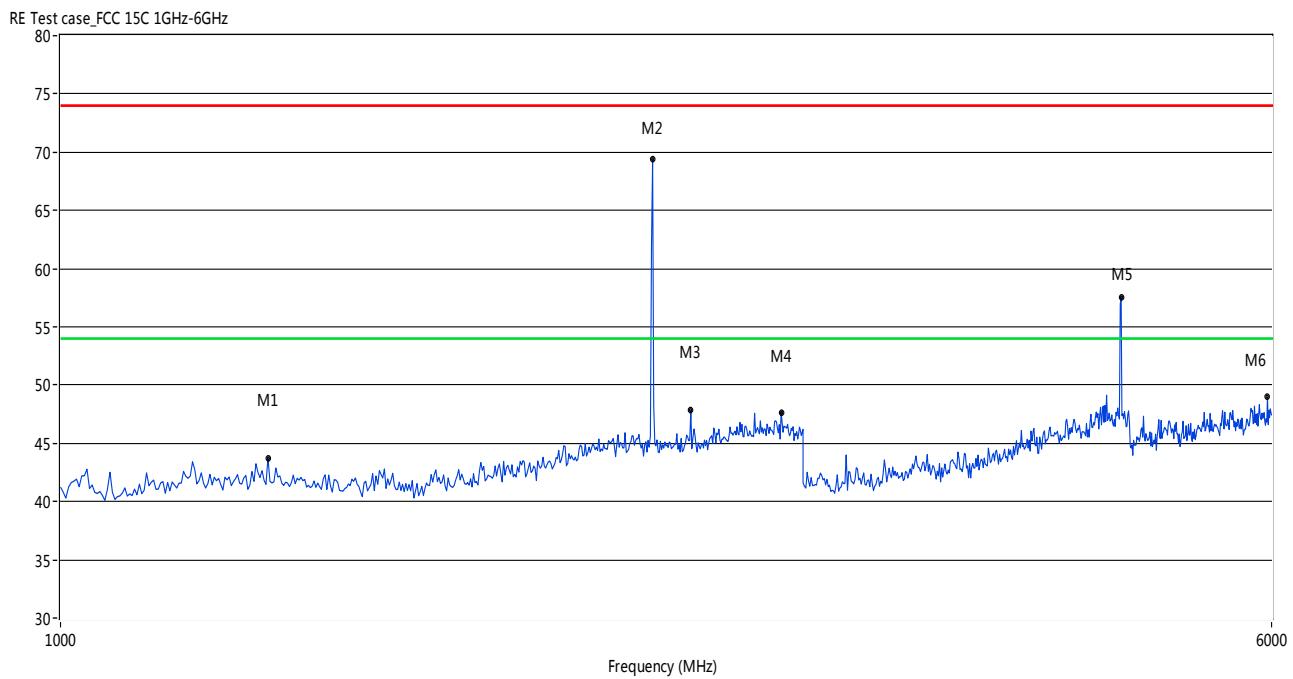


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1359.28	43.74			-5.17	74.0	--	54.0	10.26	280.20	100	Horizontal	PASS
2401.20	69.42			-1.26	74.0	--	54.0	-15.42	39.30	100	Horizontal	N/A
2540.92	47.82			-0.44	74.0	--	54.0	6.18	178.30	100	Horizontal	PASS
2904.19	47.65			1.87	74.0	--	54.0	6.35	136.80	100	Horizontal	PASS
4804.40	57.57		50.23	13.25	74.0	--	54.0	-3.57	349.90	100	Horizontal	PASS
5964.07	48.99			15.06	74.0	--	54.0	5.01	135.30	100	Horizontal	PASS

## LOW CHANNEL 6GHz to 25GHz, ANT V

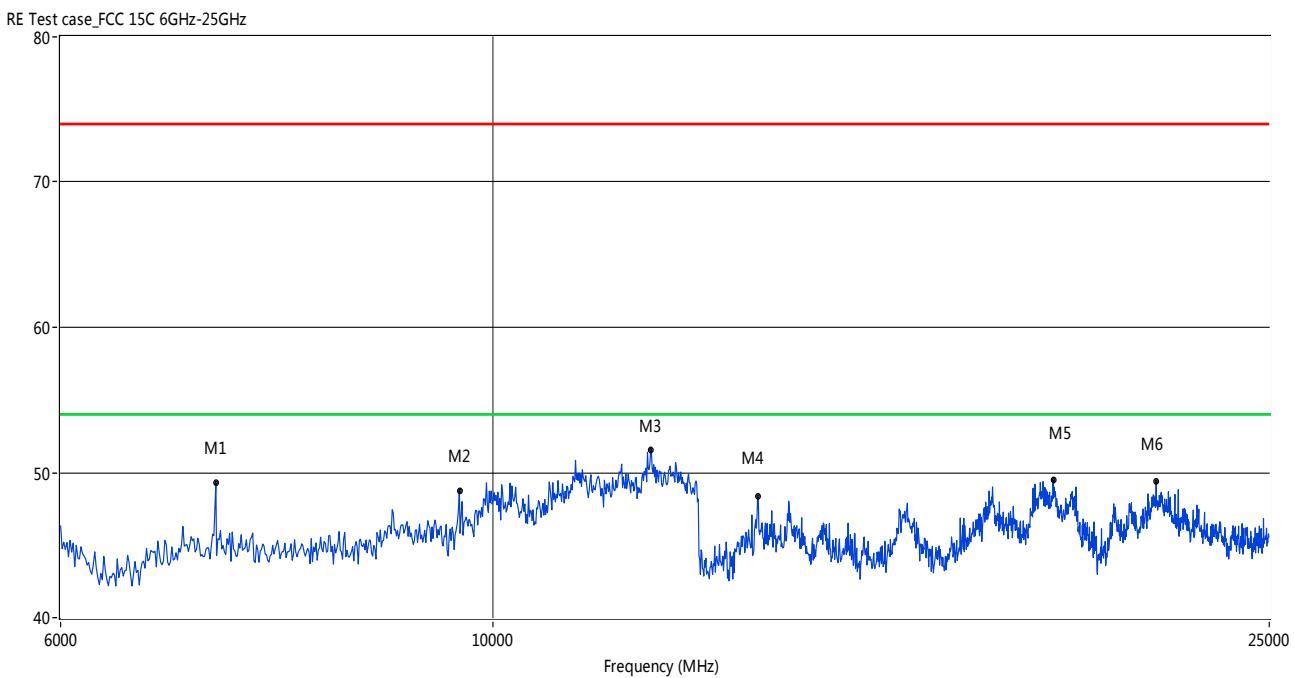


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7206.75	49.30			14.44	74.0	--	54.0	4.70	317.90	100	Vertical	PASS
9608.24	48.77			17.40	74.0	--	54.0	5.23	285.90	100	Vertical	PASS
12042.43	51.55			20.83	74.0	--	54.0	2.45	216.60	100	Vertical	PASS
13665.14	48.38			9.63	74.0	--	54.0	5.62	-0.20	100	Vertical	PASS
19369.38	49.48			13.09	74.0	--	54.0	4.52	-0.00	100	Vertical	PASS
21875.21	49.40			12.63	74.0	--	54.0	4.60	89.00	100	Vertical	PASS

## LOW CHANNEL 6GHz to 25GHz, ANT H

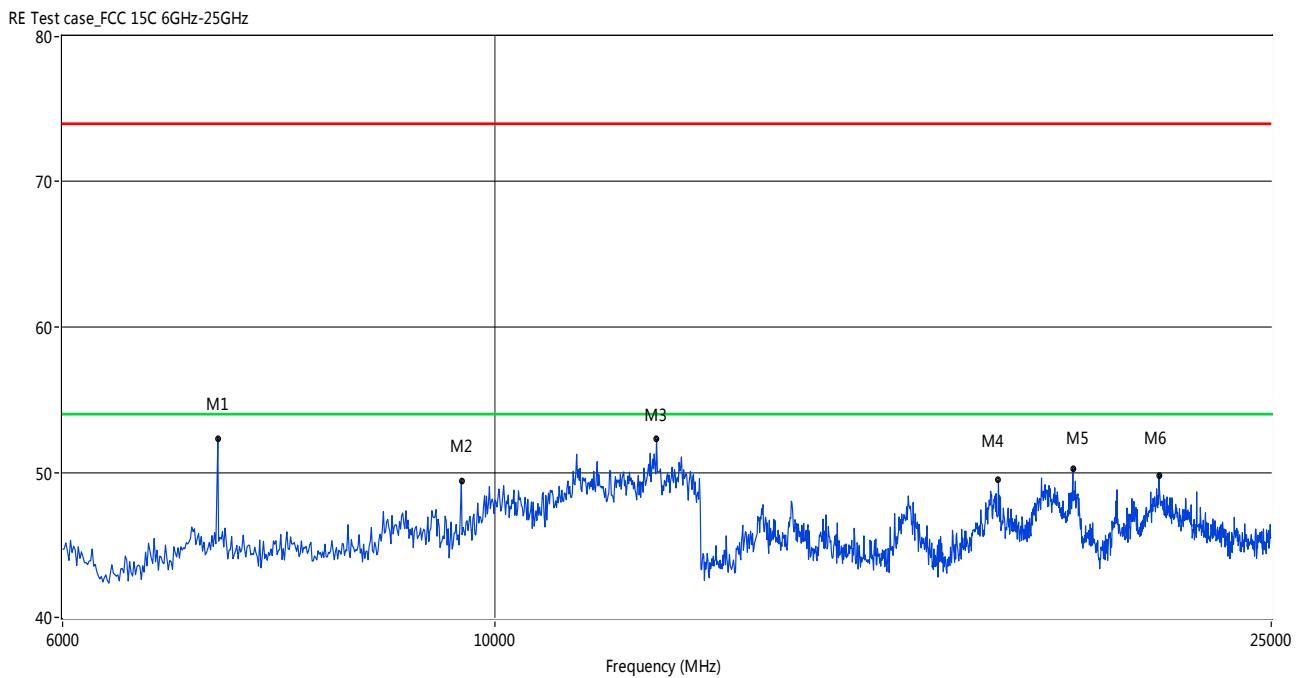


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7206.75	49.30			14.44	74.0	--	54.0	4.70	317.90	100	Horizontal	PASS
9608.24	48.77			17.40	74.0	--	54.0	5.23	285.90	100	Horizontal	PASS
12098.59	52.28			20.77	74.0	--	54.0	1.72	355.00	100	Horizontal	PASS
18116.06	49.45			12.97	74.0	--	54.0	4.55	359.30	100	Horizontal	PASS
19778.70	50.24			13.29	74.0	--	54.0	3.76	24.50	100	Horizontal	PASS
21895.17	49.78			12.59	74.0	--	54.0	4.22	-0.20	100	Horizontal	PASS

## MID CHANNEL 1GHz to 6GHz, ANT V

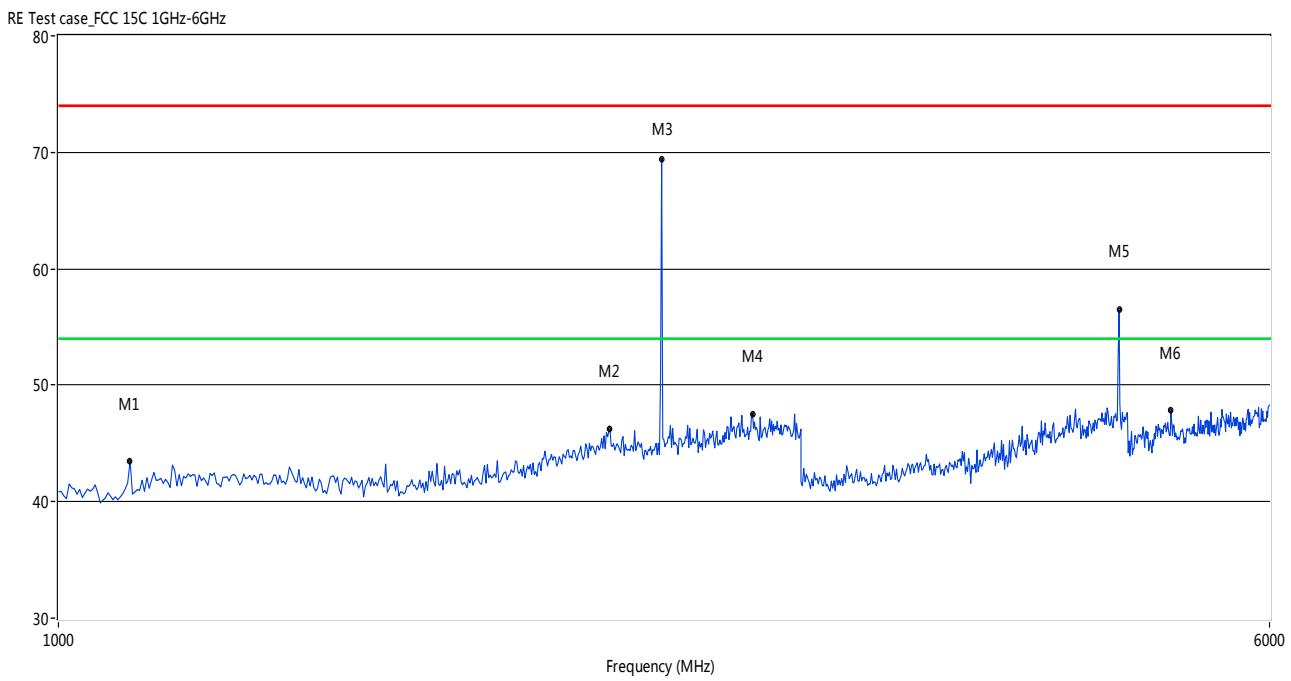


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1111.78	43.50			-6.30	74.0	--	54.0	10.50	204.60	100	Vertical	PASS
2261.48	46.20			-0.58	74.0	--	54.0	7.80	199.80	100	Vertical	PASS
2440.12	69.41			-0.69	74.0	--	54.0	-15.41	326.70	100	Vertical	N/A
2792.41	47.56			1.65	74.0	--	54.0	6.44	53.90	100	Vertical	PASS
4802.40	56.49		49.53	13.24	74.0	--	54.0	-2.49	38.90	100	Vertical	PASS
5185.63	47.82			14.39	74.0	--	54.0	6.18	241.90	100	Vertical	PASS

## MID CHANNEL 1GHz to 6GHz, ANT H

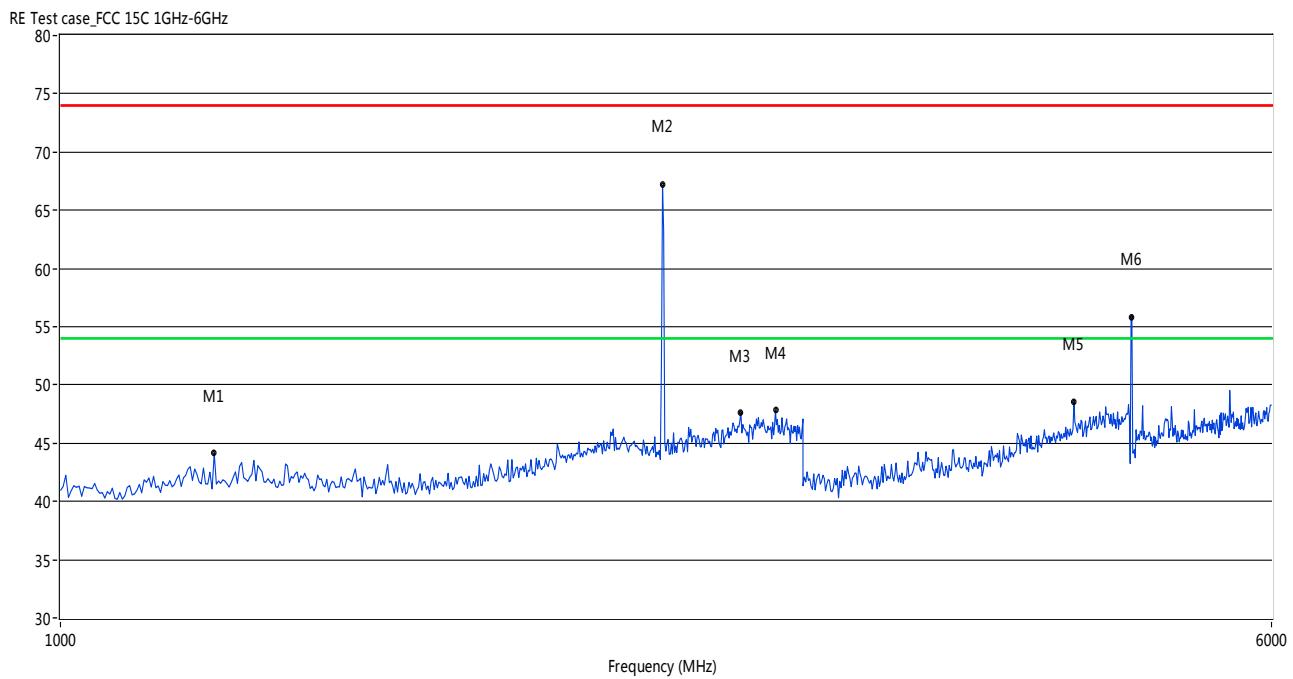


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1255.49	44.15			-5.32	74.0	--	54.0	9.85	233.50	100	Horizontal	PASS
2437.13	67.16			-0.83	74.0	--	54.0	-13.16	65.30	100	Horizontal	N/A
2736.53	47.64			1.16	74.0	--	54.0	6.36	223.80	100	Horizontal	PASS
2880.24	47.81			1.76	74.0	--	54.0	6.19	346.60	100	Horizontal	PASS
4479.04	48.56			12.04	74.0	--	54.0	5.44	143.60	100	Horizontal	PASS
4880.24	56.04		49.68	13.24	74.0	--	54.0	-2.04	309.00	100	Horizontal	PASS

## MID CHANNEL 6GHz to 25GHz, ANT V

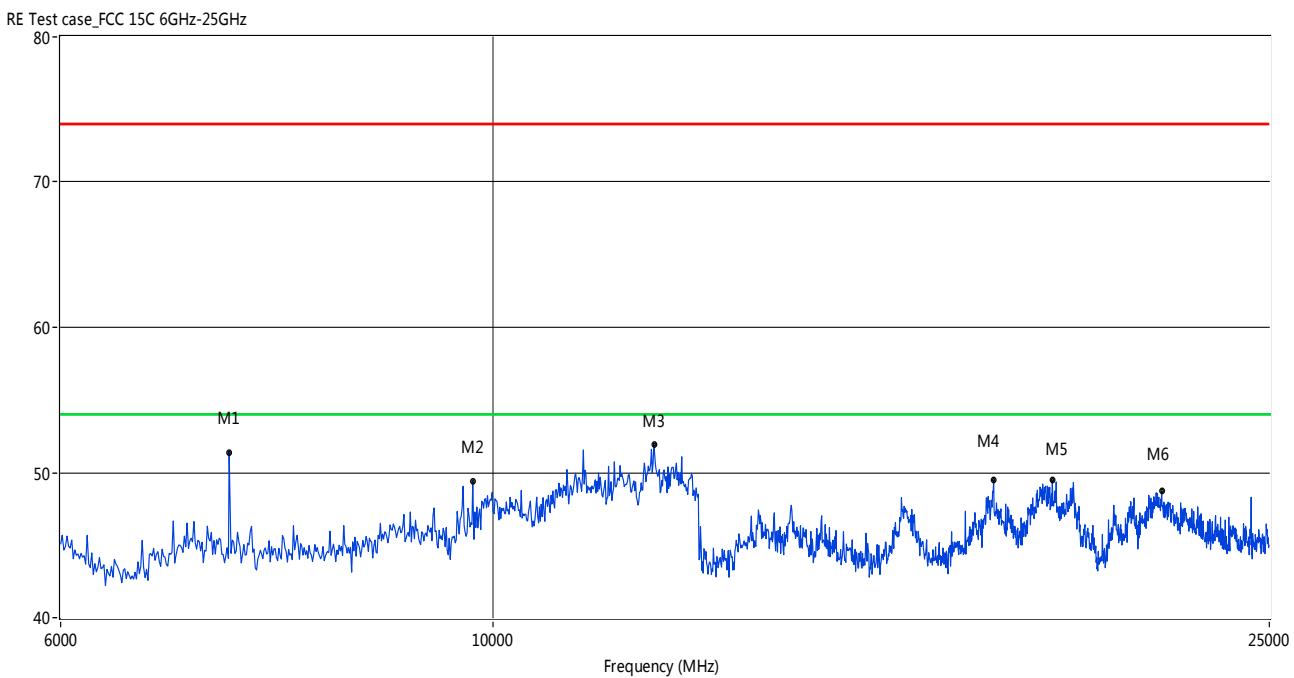


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7320.29	51.39			14.18	74.0	--	54.0	2.61	160.60	100	Vertical	PASS
9760.48	49.39			17.94	74.0	--	54.0	4.61	257.30	100	Vertical	PASS
12087.35	51.95			20.78	74.0	--	54.0	2.05	181.50	100	Vertical	PASS
18053.66	49.48			13.16	74.0	--	54.0	4.52	122.00	100	Vertical	PASS
19349.42	49.47			13.21	74.0	--	54.0	4.53	211.50	100	Vertical	PASS
22014.97	48.73			12.37	74.0	--	54.0	5.27	319.20	100	Vertical	PASS

## MID CHANNEL 6GHz to 25GHz, ANT H

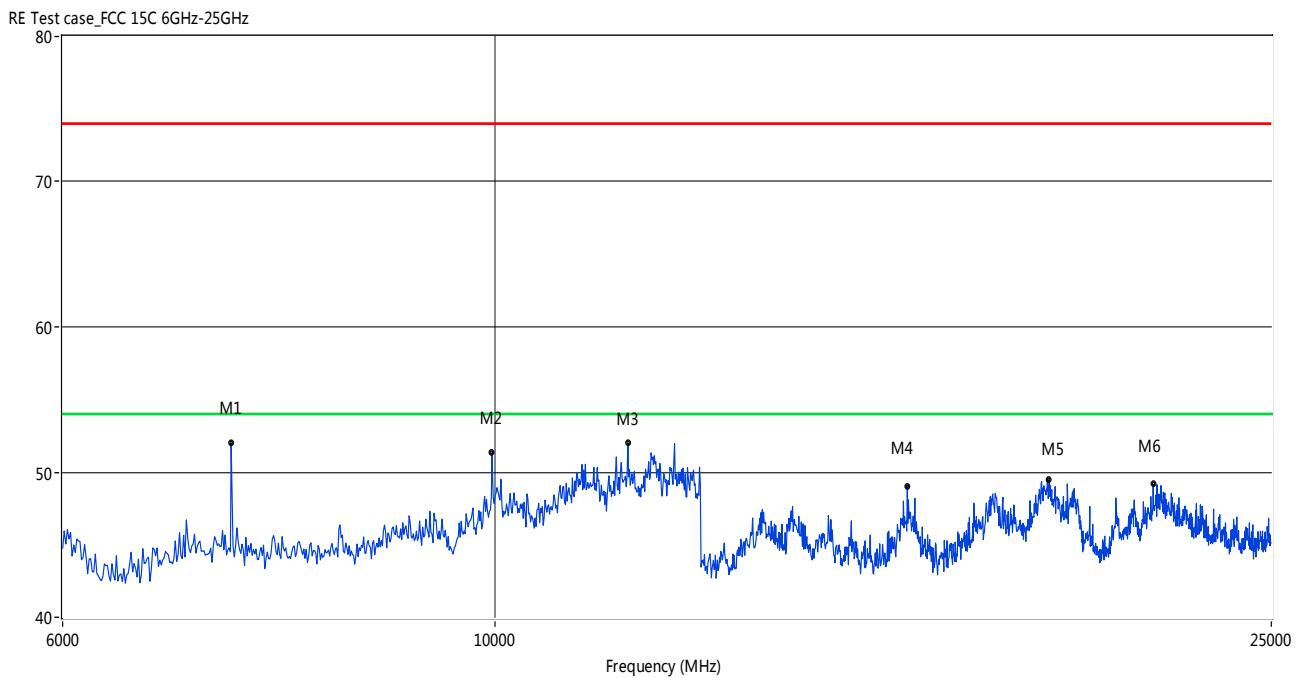


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7320.29	51.39			14.18	74.0	--	54.0	2.61	160.60	100	Horizontal	PASS
9960.64	51.31			19.25	74.0	--	54.0	2.69	147.10	100	Horizontal	PASS
11694.26	51.98			20.51	74.0	--	54.0	2.02	136.40	100	Horizontal	PASS
16264.98	49.06			11.53	74.0	--	54.0	4.94	271.70	100	Horizontal	PASS
19229.62	49.49			13.94	74.0	--	54.0	4.51	19.80	100	Horizontal	PASS
21745.42	49.17			12.43	74.0	--	54.0	4.83	154.00	100	Horizontal	PASS

## HIGH CHANNEL 1GHz to 6GHz, ANT V

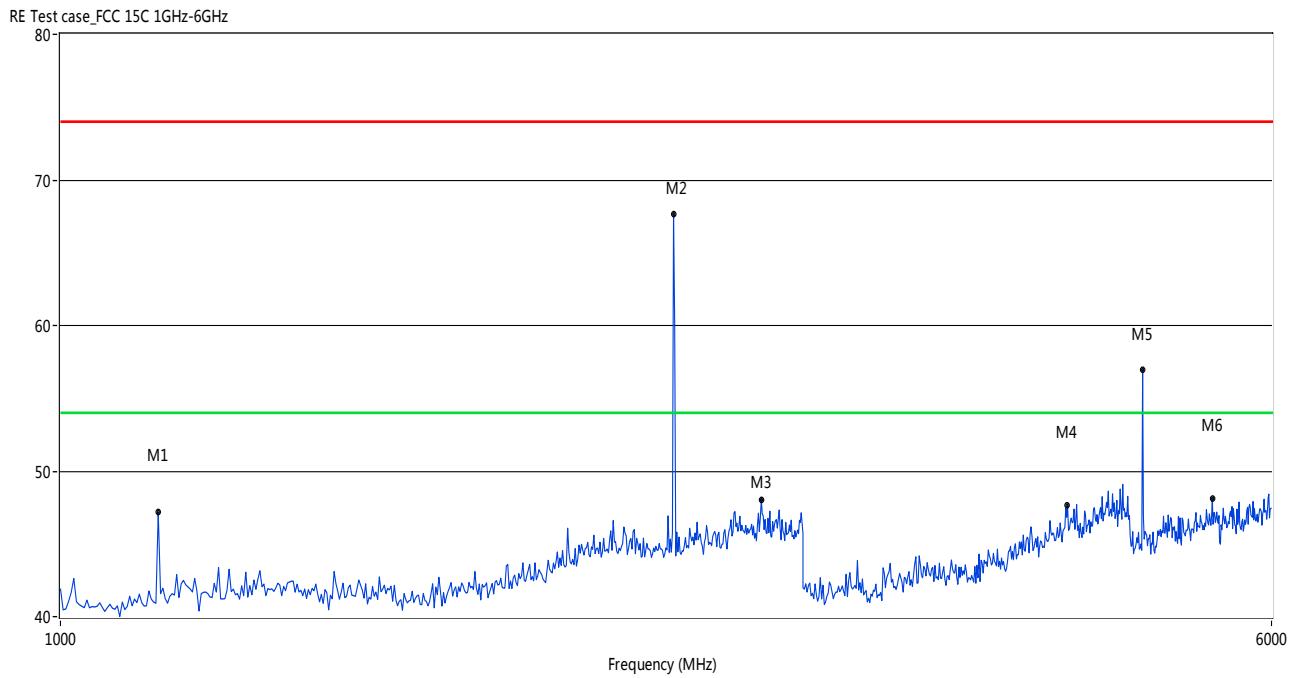


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1155.69	47.15			-6.34	74.0	--	54.0	6.85	66.50	100	Vertical	PASS
2480.05	67.68			-0.77	74.0	--	54.0	-13.68	339.10	100	Vertical	N/A
2820.36	48.04			1.50	74.0	--	54.0	5.96	221.60	100	Vertical	PASS
4437.13	47.69			11.79	74.0	--	54.0	6.31	122.90	100	Vertical	PASS
4960.08	57.00		47.87	13.61	74.0	--	54.0	-3.00	242.50	100	Vertical	PASS
5497.01	48.13			14.71	74.0	--	54.0	5.87	131.00	100	Vertical	PASS

## HIGH CHANNEL 1GHz to 6GHz, ANT H

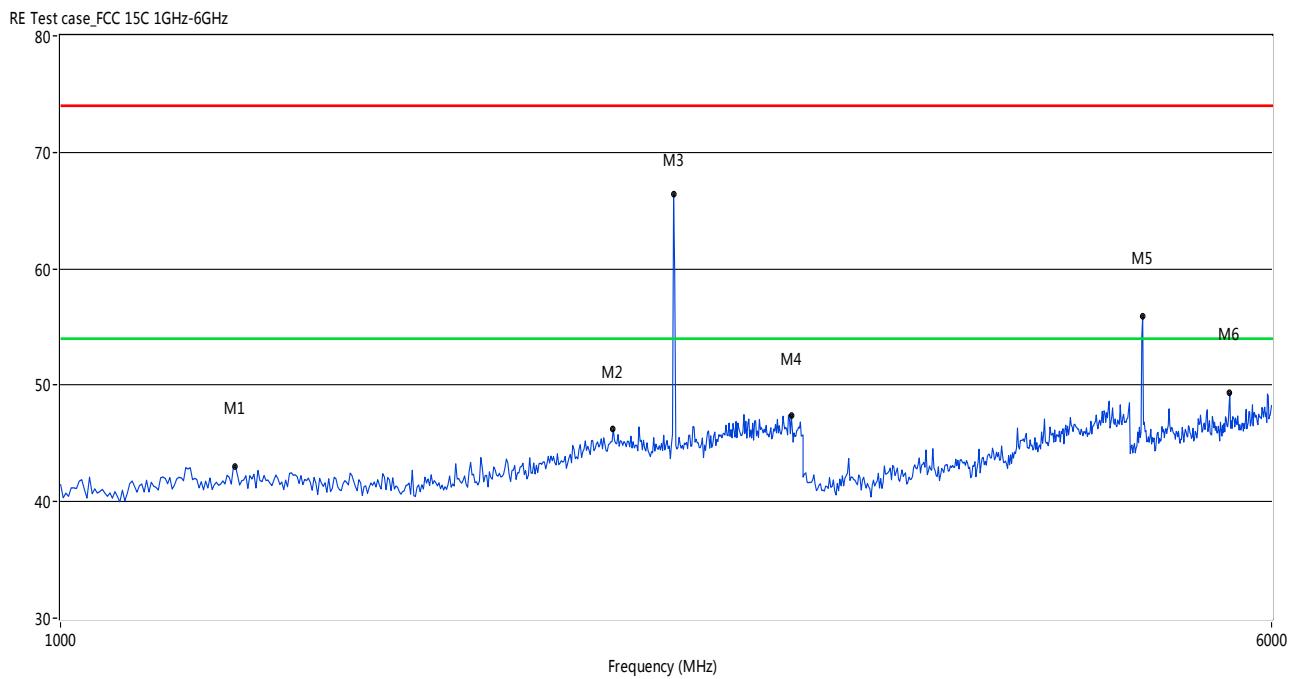


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1295.41	43.02			-5.18	74.0	--	54.0	10.98	222.30	100	Horizontal	PASS
2265.47	46.22			-0.63	74.0	--	54.0	7.78	269.70	100	Horizontal	PASS
2480.05	66.41			-0.77	74.0	--	54.0	-12.41	66.60	100	Horizontal	N/A
2948.10	47.42			1.92	74.0	--	54.0	6.58	316.30	100	Horizontal	PASS
4960.08	55.91		47.35	13.61	74.0	--	54.0	-1.91	304.50	100	Horizontal	PASS
5640.72	49.34			14.92	74.0	--	54.0	4.66	313.00	100	Horizontal	PASS

## HIGH CHANNEL 6GHz to 25GHz, ANT V

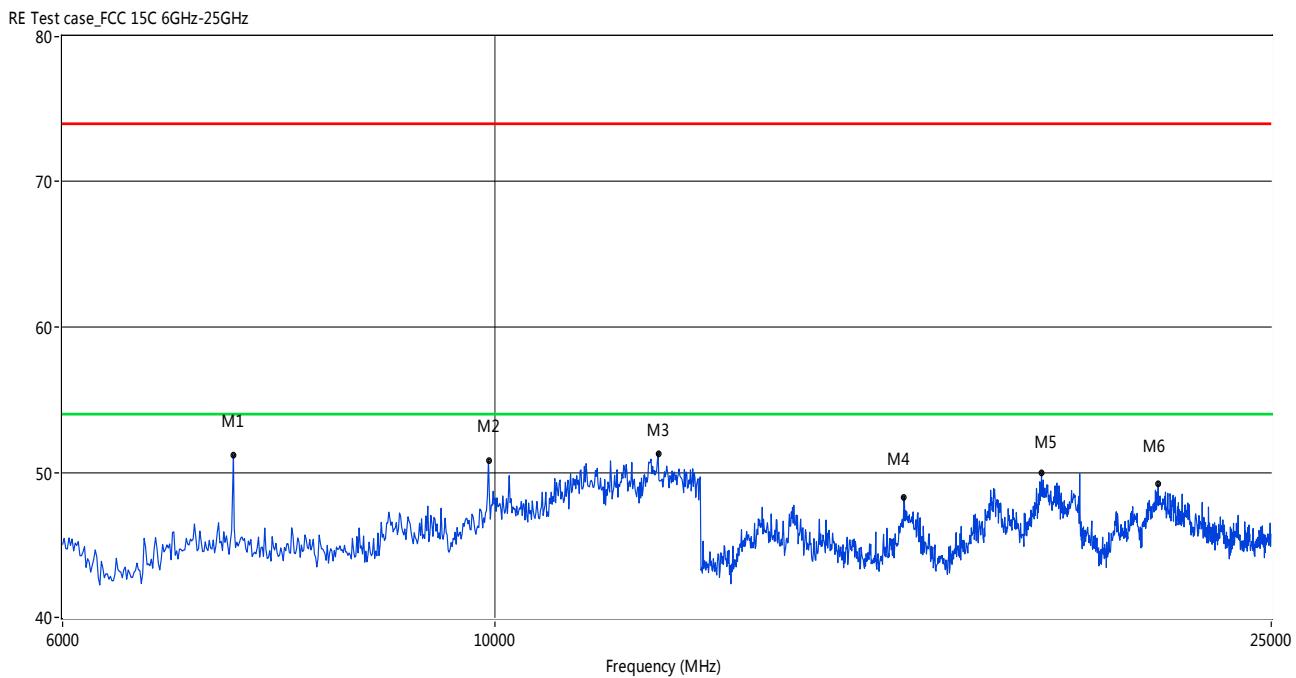

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7340.52	51.15			14.19	74.0	--	54.0	2.85	266.80	100	Vertical	PASS
9920.72	50.81			19.09	74.0	--	54.0	3.19	336.60	100	Vertical	PASS
12121.05	51.28			20.75	74.0	--	54.0	2.72	180.70	100	Vertical	PASS
16202.58	48.27			11.35	74.0	--	54.0	5.73	211.50	100	Vertical	PASS
19059.90	49.92			13.60	74.0	--	54.0	4.08	252.20	100	Vertical	PASS
21875.21	49.19			12.63	74.0	--	54.0	4.81	37.90	100	Vertical	PASS

## HIGH CHANNEL 6GHz to 25GHz, ANT H

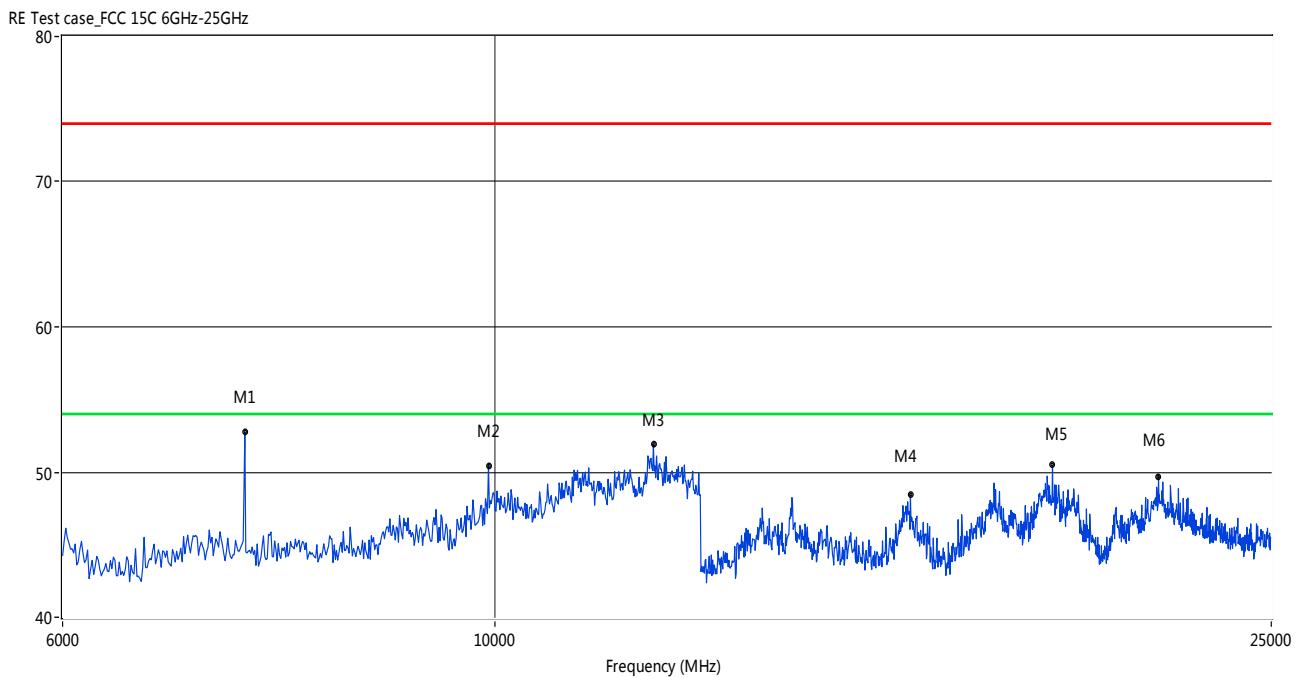

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7440.60	52.74			14.21	74.0	--	54.0	1.26	247.80	100	Horizontal	PASS
9920.72	50.81			19.09	74.0	--	54.0	3.19	336.60	100	Horizontal	PASS
12053.66	51.91			20.82	74.0	--	54.0	2.09	269.70	100	Horizontal	PASS
16327.37	48.43			11.70	74.0	--	54.0	5.57	157.30	100	Horizontal	PASS
19309.48	50.49			13.46	74.0	--	54.0	3.51	57.40	100	Horizontal	PASS
21885.19	49.68			12.61	74.0	--	54.0	4.32	325.20	100	Horizontal	PASS


## A.5 Band Edge

### Test Data


The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

### Test Plots


#### LOW CHANNEL, Reference level

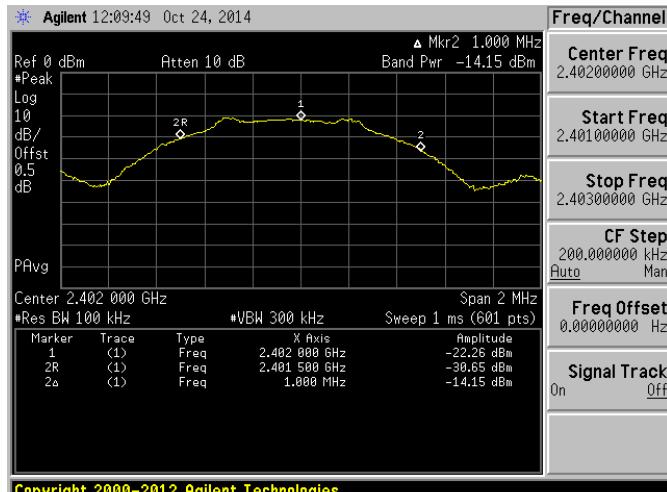


#### LOW CHANNEL, Band Edge

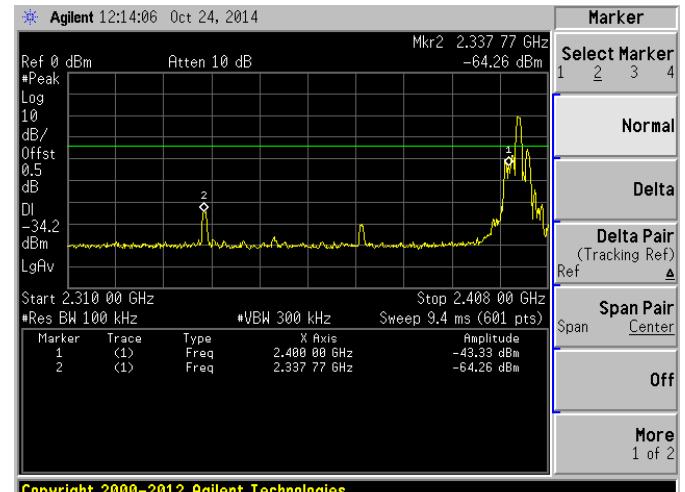

#### HIGH CHANNEL, Reference level

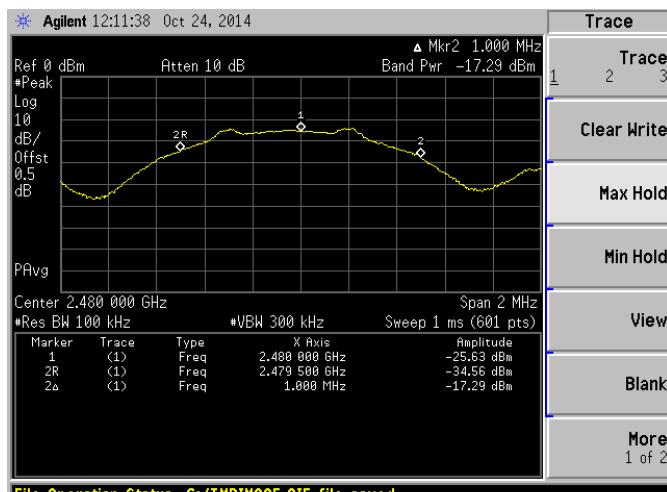

#### HIGH CHANNEL, Band Edge

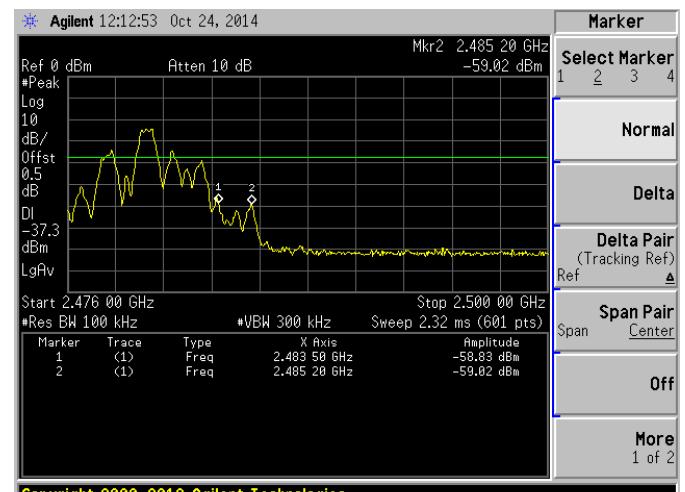


## A.6 Power Spectral Density (PSD)

### Test Data


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-30.37	8
Middle	-33.53	8
High	-34.29	8

### Test plots


#### LOW CHANNEL

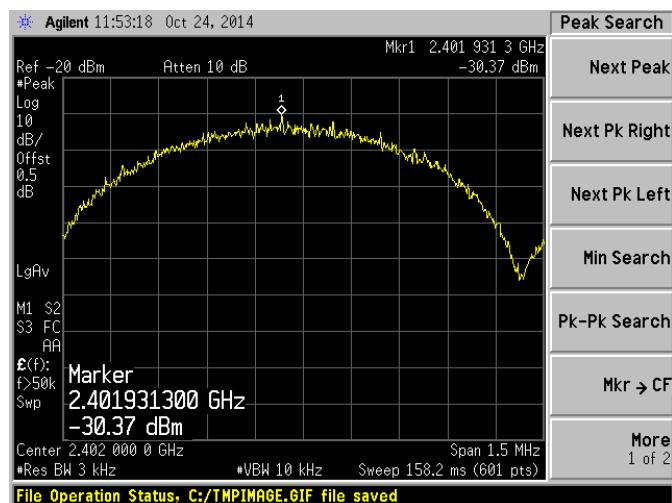

#### MID CHANNEL

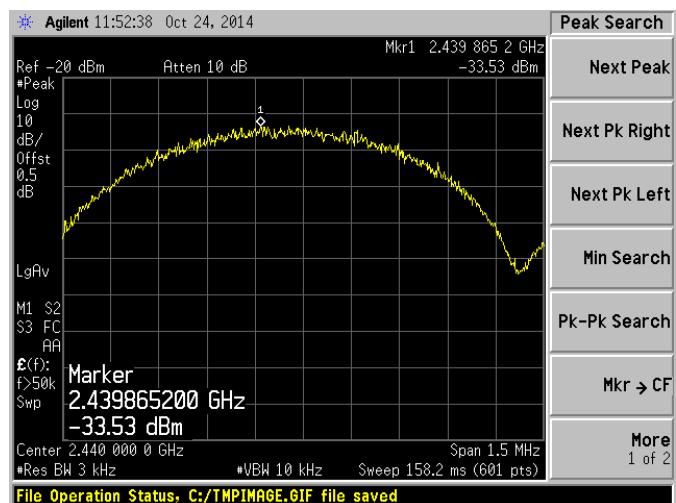


#### HIGH CHANNEL

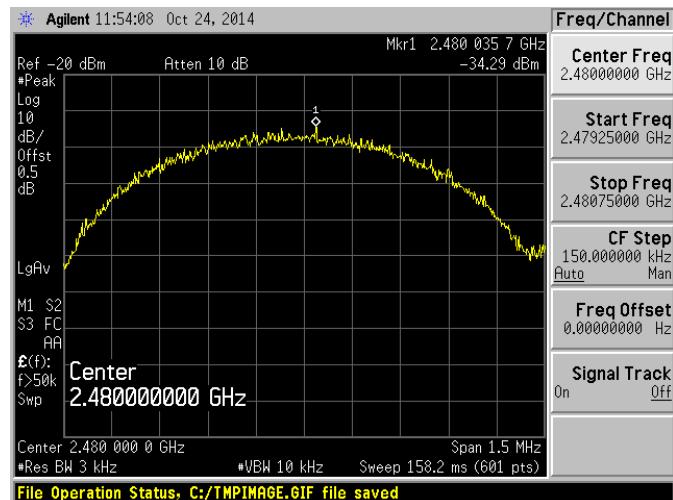

Freq/Channel
Center Freq 2.480000000 GHz
Start Freq 2.479250000 GHz
Stop Freq 2.480750000 GHz
CF Step 150.000000 kHz
Auto Man
Freq Offset 0.0000000 Hz
Signal Track On Off

## ANNEX B TEST SETUP PHOTOS

### B.1 Conducted Emissions Test Photo

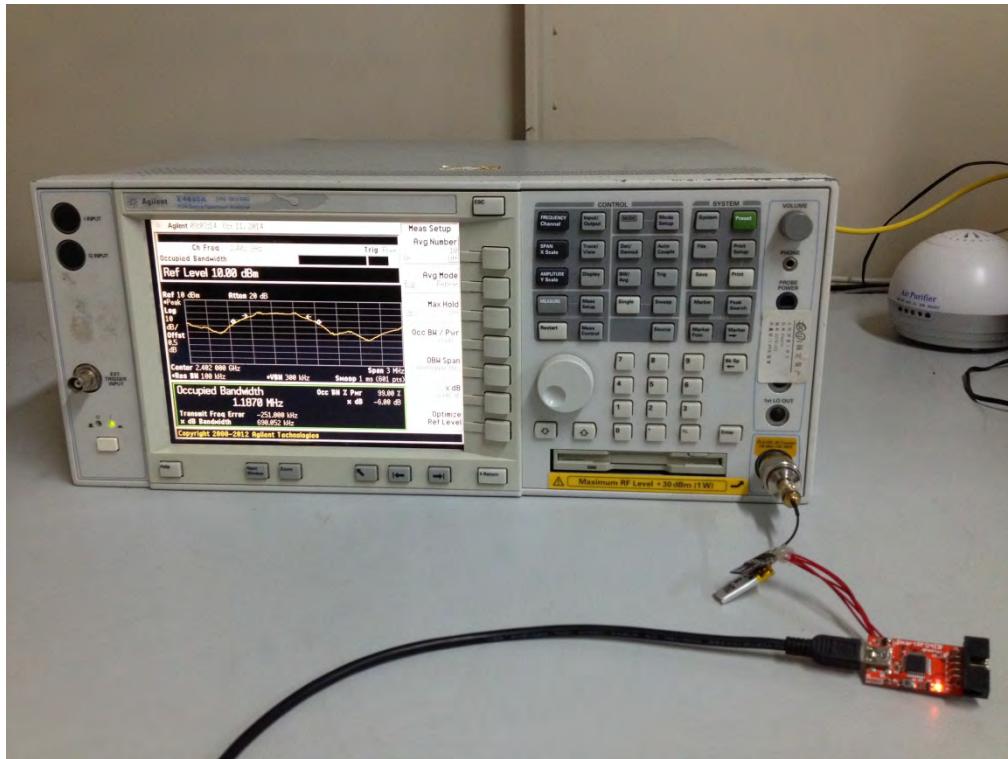


## B.2 Radiated Test Photo



Below 30MHz



30MHz to 1GHz

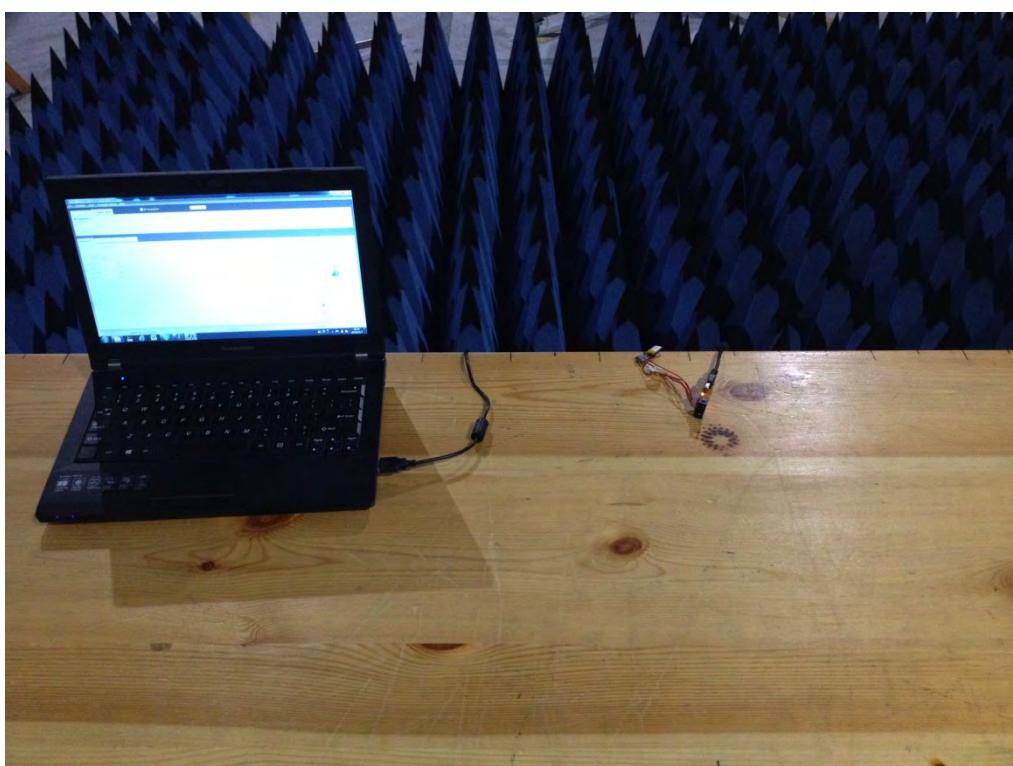


Above 1GHz

## ANNEX C EUT PHOTOS


### C.1 Appearance of the EUT




THE FRONT OF EUT

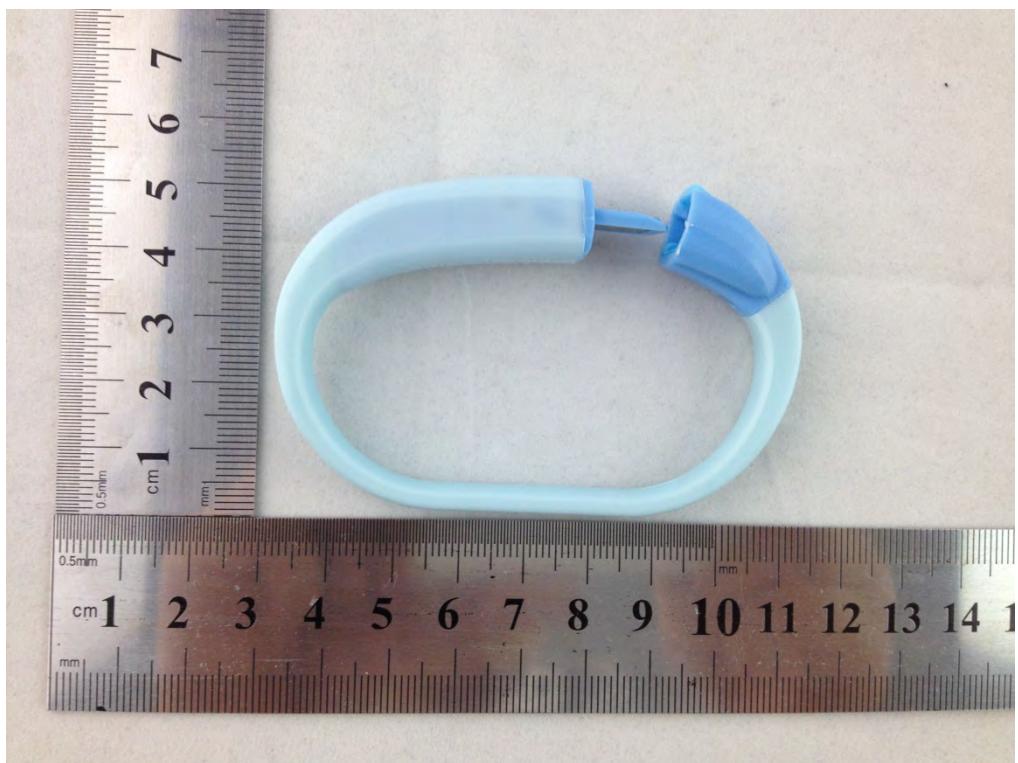


THE BACK OF EUT

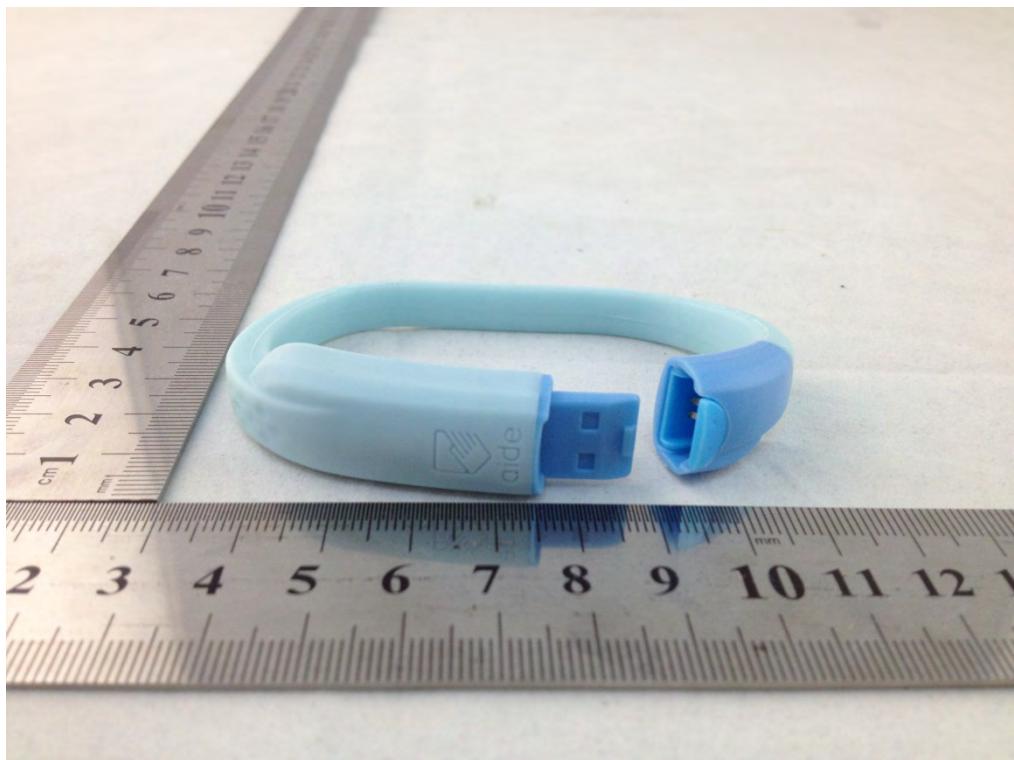


THE LEFT OF EUT

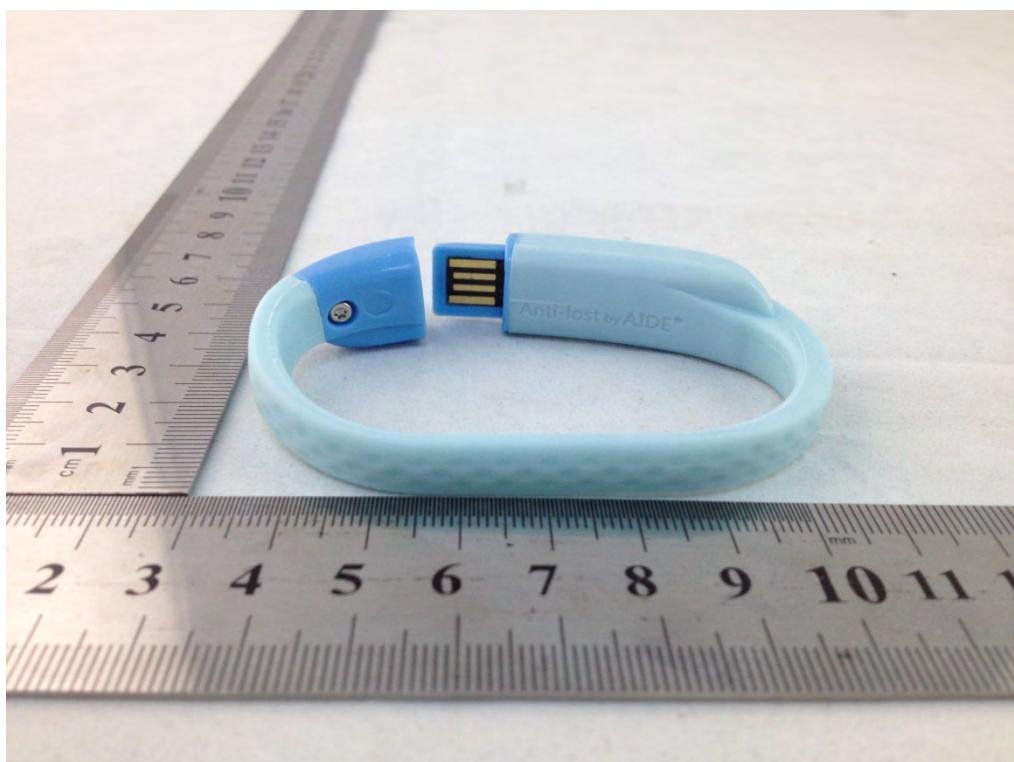

THE RIGHT OF EUT

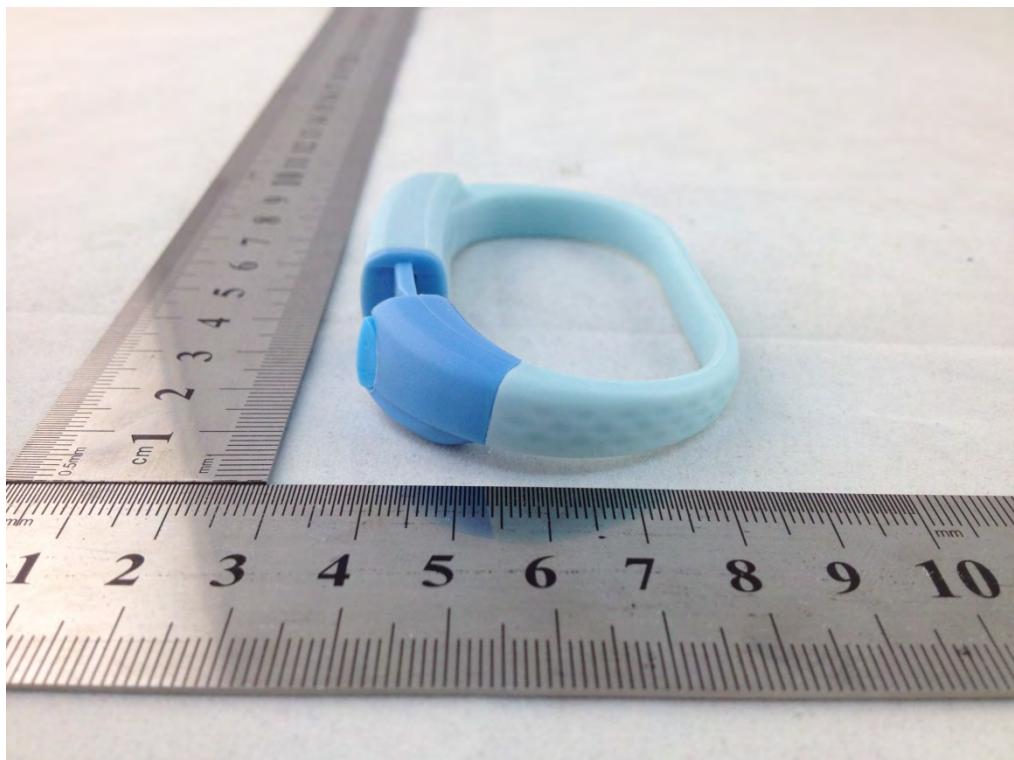


THE UP OF EUT

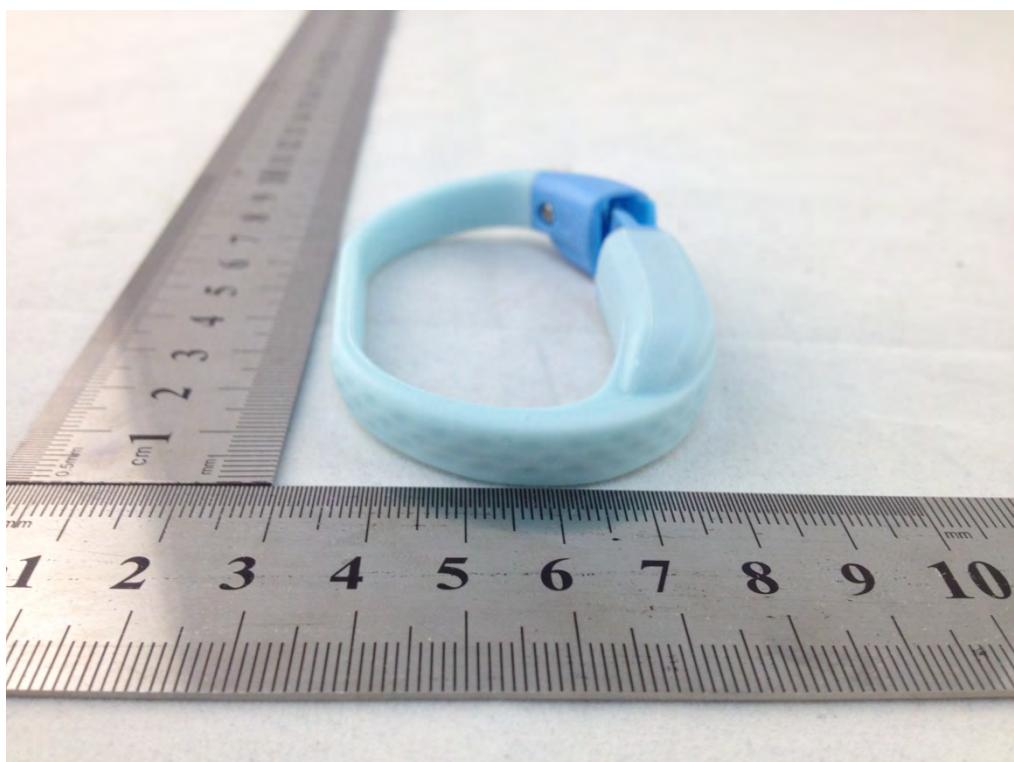


THE DOWN OF EUT


## C.2 Inside of the EUT

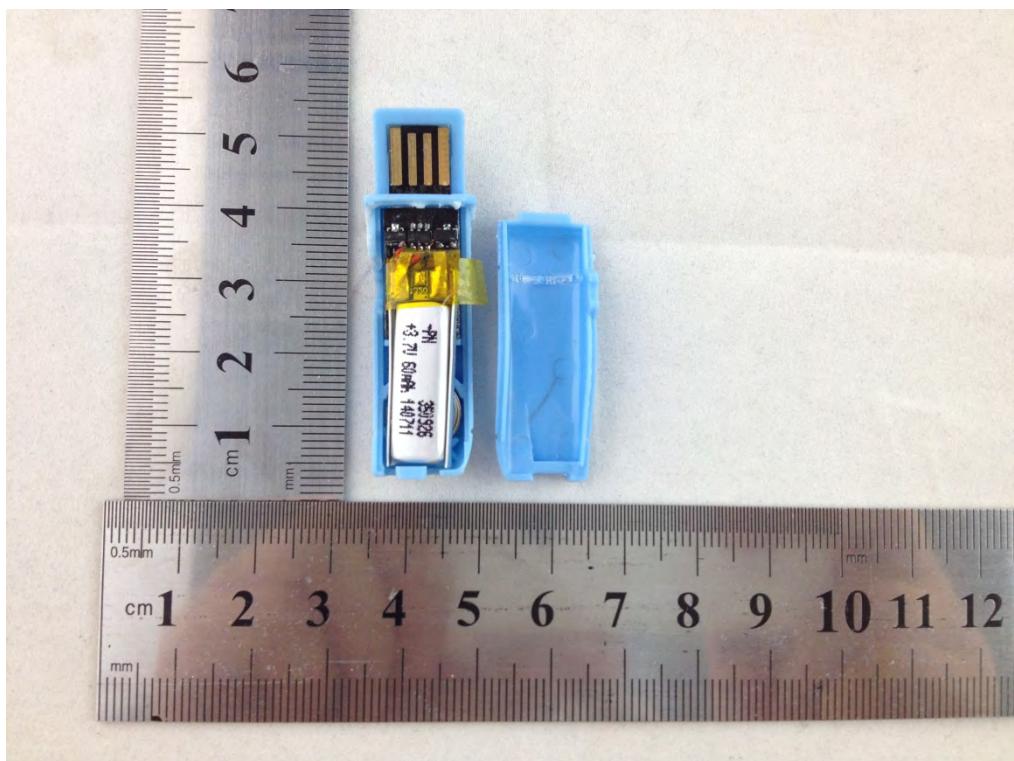


EUT UNCOVER VIEW 1

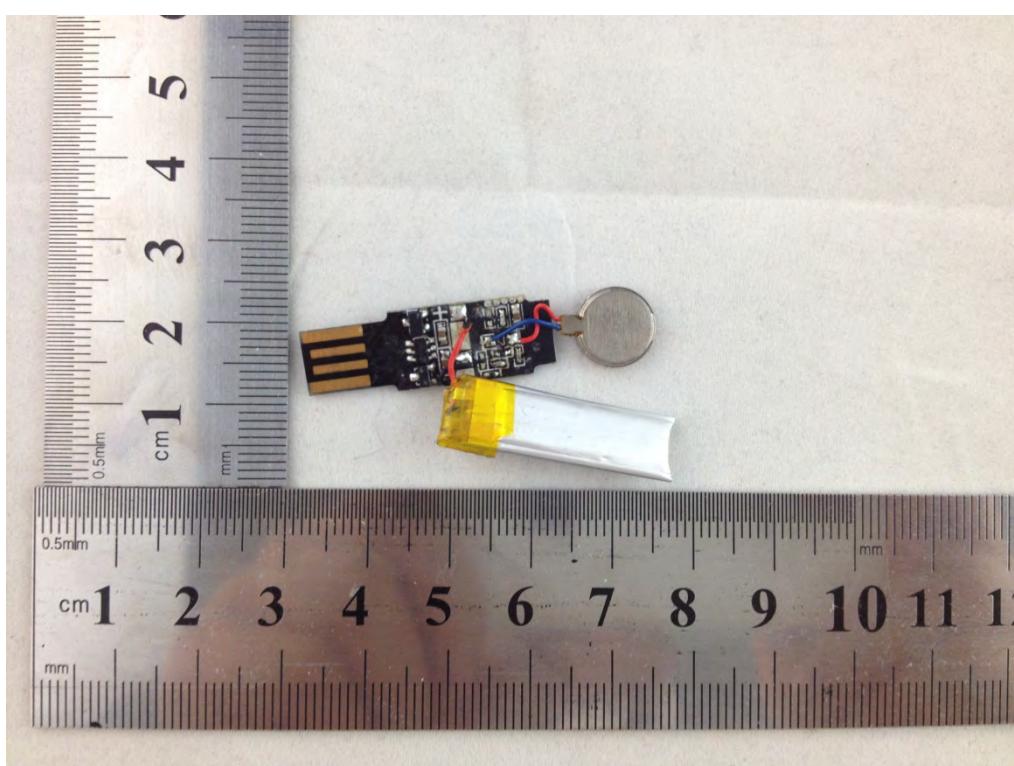


EUT UNCOVER VIEW 2

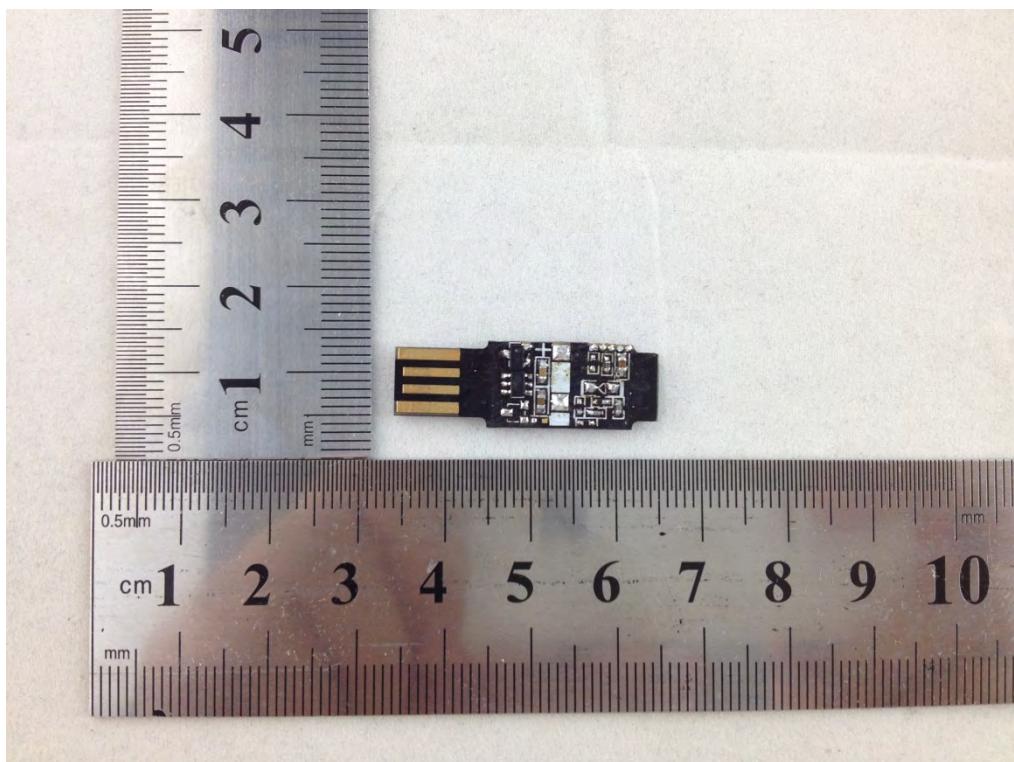

MAIN BOARD TOP VIEW

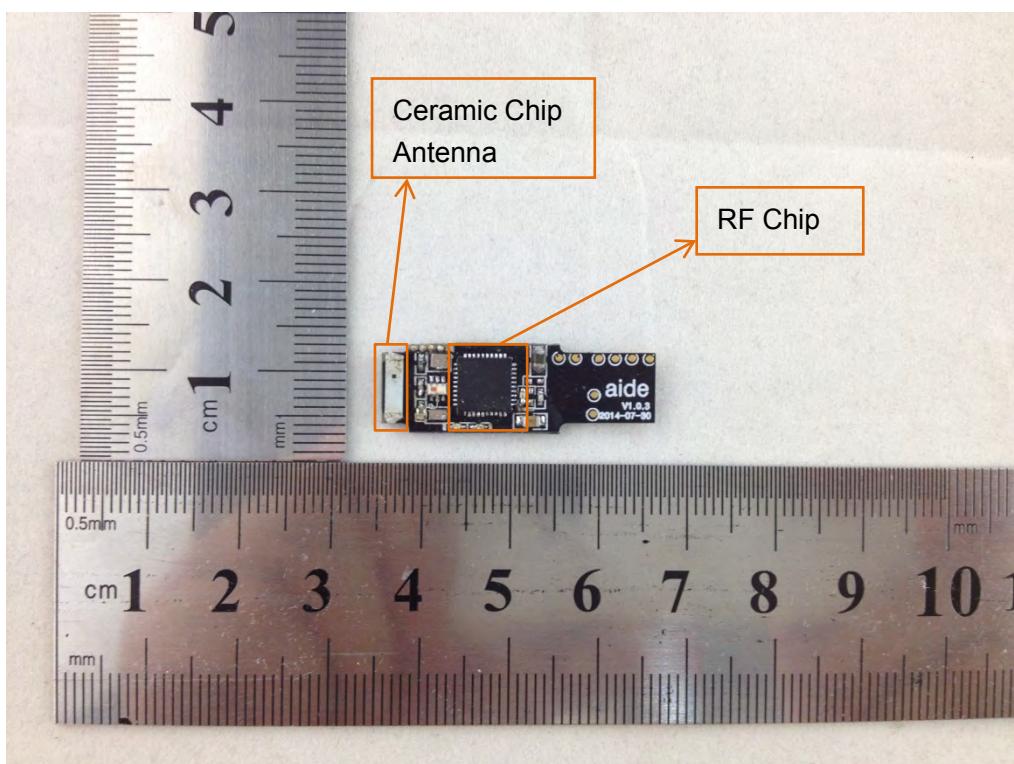

MAIN BOARD BACK VIEW

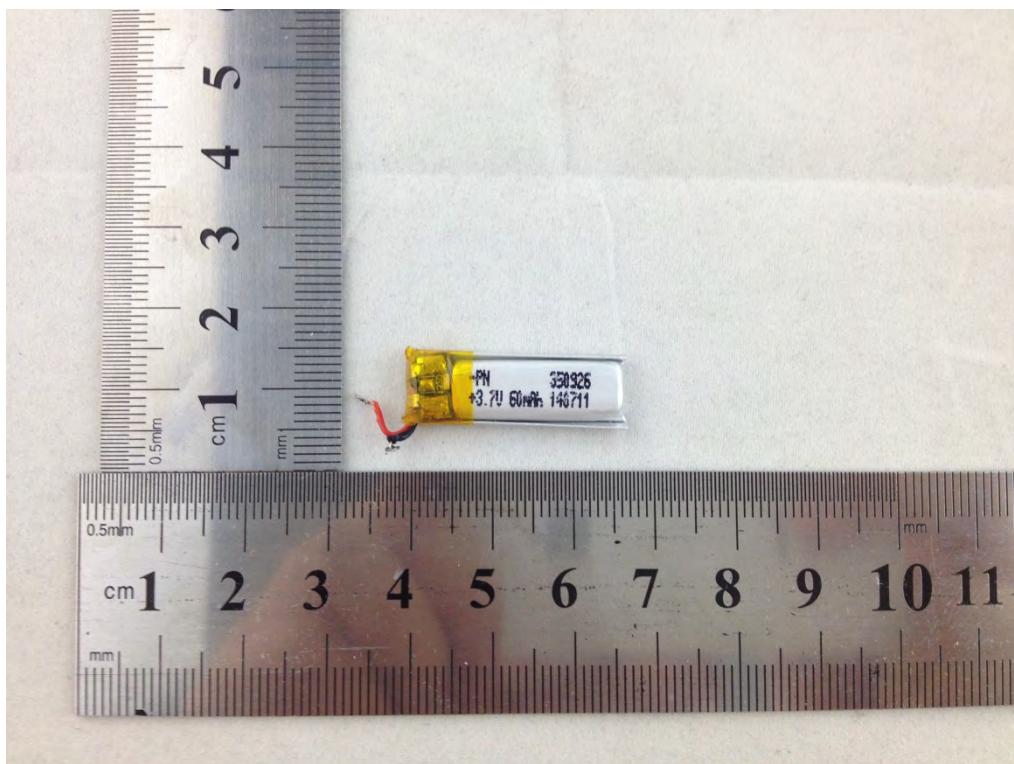

BATTERY

--END OF REPORT--