

SAR TEST REPORT

FCC 47 CFR Part 2.1093
Industry Canada RSS-102
RF-Exposure evaluation of portable equipment

Report Reference No. : G0M-1410-4225-TFC093SR-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Panasonic Avionics Corporation

Address : 26200 Enterprise Way
92630 Lake Forest

Test specification:

Standard..... : FCC 47 CFR Part 2 §2.1093
FCC OET Bulletin 65 Supplement C 01-01
IEEE Std. 1528 - 2003
IEEE Std. 1528 - 2013
IC RSS-102 Issue 4
Safety Code 6 (2009)

Non-standard test method.....: None

Test scope..... : complete Radio compliance test

Equipment under test (EUT):

Product description W-LAN Module

Model No. J3FYY0000061

Additional Model(s) None

Brand Name(s) None

Hardware version Rev. NEW

Firmware / Software version Ver. 14.68.29.p26

FCC-ID: 2ADHS-M12011

IC: 12465A-M12011

Test result **Passed**

Test Report No.: G0M-1410-4225-TFC093SR-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- neither assessed nor tested.....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object.....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2015-02-02

Date (s) of performance of tests: 2015-02-02 - 2015-02-03

Compiled by: Matthias Handrik

Tested by (+ signature): Matthias Handrik
(Responsible for Test)

Approved by (+ signature).....: Christian Weber

Date of issue: 2015-02-19

Total number of pages: 78

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2015-02-19	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1	Equipment photos	7
1.2	Equipment setup photos	11
1.3	Reference Documents	13
1.4	Supporting Equipment Used During Testing	14
1.5	Supported standalone operating modes	15
1.6	Conducted Power Values	16
1.7	Standalone Operational Mode Test Exclusion	18
1.8	SAR value estimation for multi-transmitter evaluation	19
1.9	Supported concurrent (multi-transmitter) operating modes	20
1.10	Supported use cases	21
1.11	Radio Test Modes	22
1.12	Test Positions	23
1.13	Test Equipment Used During Testing	24
2	RESULT SUMMARY	25
3	DEFINITIONS	26
3.1	Controlled Exposure	26
3.2	Uncontrolled Exposure	26
3.3	Localized SAR	26
4	LOCALIZED SAR MEASUREMENT EQUIPMENT	27
4.1	Complete SAR DASY5 Measurement System	27
4.2	Robot Arm	29
4.3	Data Acquisition Electronics	29
4.4	Isotropic E-Field Probe ≤ 3 GHz	30
4.5	Isotropic E-Field Probe ≤ 6 GHz	31
4.6	Test phantom and positioner	32
4.7	System Validation Dipoles	33
5	SINGLE-BAND SAR MEASUREMENT	34
5.1	General measurement description	34
5.2	SAR measurement description	34
5.3	Reference lines and points for Handsets	35
5.4	Test positions relative to the Head	36
5.5	Test positions relative to the human body	37

5.6	Measurement Uncertainty	38
6	TEST CONDITIONS AND RESULTS	39
6.1	Recipes for Tissue Simulating Liquids	39
6.2	Test Conditions and Results – Tissue Validation	40
6.3	Test Conditions and Results – System Validation	42
6.4	Test Conditions and Results – Standalone SAR Measurement	43
6.1	Test Conditions and Results – Multi-band SAR Evaluation	44
ANNEX A	Calibration Documents	45
ANNEX B	System Validation Reports	75
ANNEX C	SAR Measurement Reports	77

1 Equipment (Test item) Description

Description	W-LAN Module	
Model	J3FYY0000061	
Additional Model(s)	None	
Brand Name(s)	None	
Serial number	G342818	
Hardware version	Rev. NEW	
Software / Firmware version	Ver. 14.68.29.p26	
FCC-ID	2ADHS-M12011	
IC	12465A-M12011	
Equipment type	End product	
Prototype or production unit	Identical Prototype	
Device category	Fixed	
Environment	General public	
Radio technologies	Bluetooth, Bluetooth Low Energy, WLAN IEEE 802.11a,n	
Operating frequency ranges	Bluetooth : 2402 – 2480 MHz Bluetooth Low Energy : 2402 – 2480 MHz IEEE 802.11 a,n : 5180 – 5240 MHz (20 MHz)	
Modulations	GFSK, $\pi/4$ -DQPSK, 8-DPSK, BPSK, QPSK, 16-QAM, 64-QAM	
Antenna: Bluetooth, Bluetooth Low Energy	Type	integrated
	Model	A5010000092
	Manufacturer	Panasonic Corporation
	Gain	4dBi (costumer declaration)
Antenna 2x: IEEE 802.11 a,n (P1, P3)	Type	integrated
	Model	A5010000093
	Manufacturer	Panasonic Corporation
	Gain	5dBi (costumer declaration)
Power supply	V_{NOM}	28 VDC
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Accessories	None	
Manufacturer	Panasonic Corporation 2-15, Matsuba-cho 571-0056 Kadoma City Japan	


1.1 Equipment photos




EUT BOTTOM



EUT WLAN-Antenna

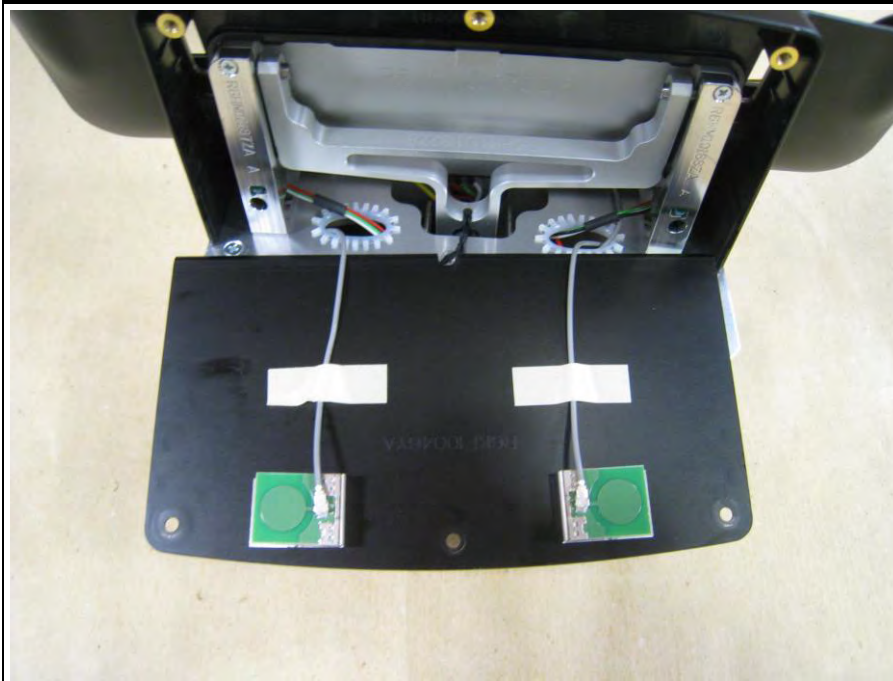


EUT PCB FRONT

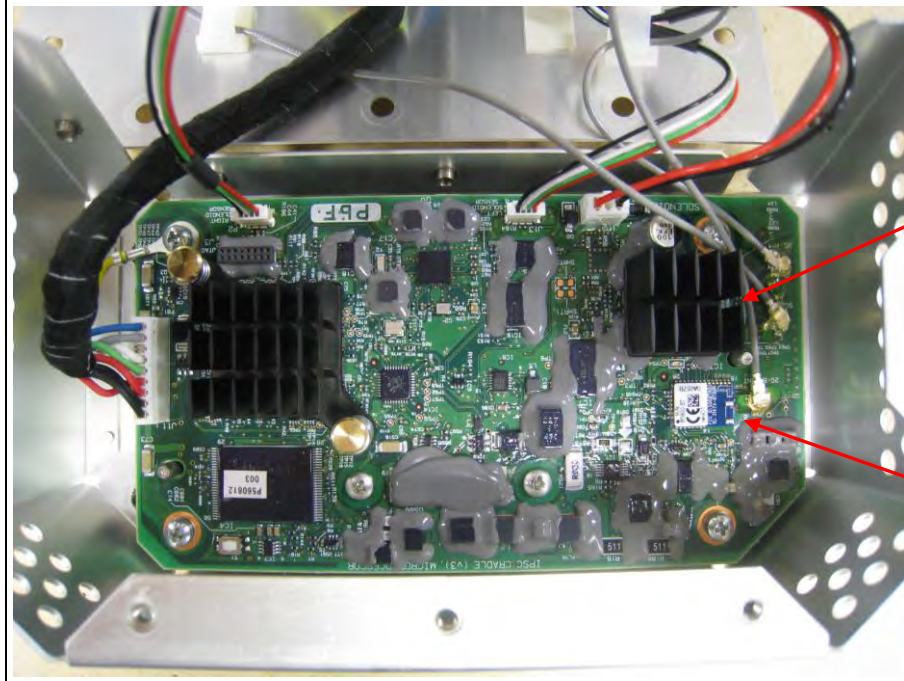


WLAN
MODULE

BLUETOOTH
MODULE


EUT PCB BACK

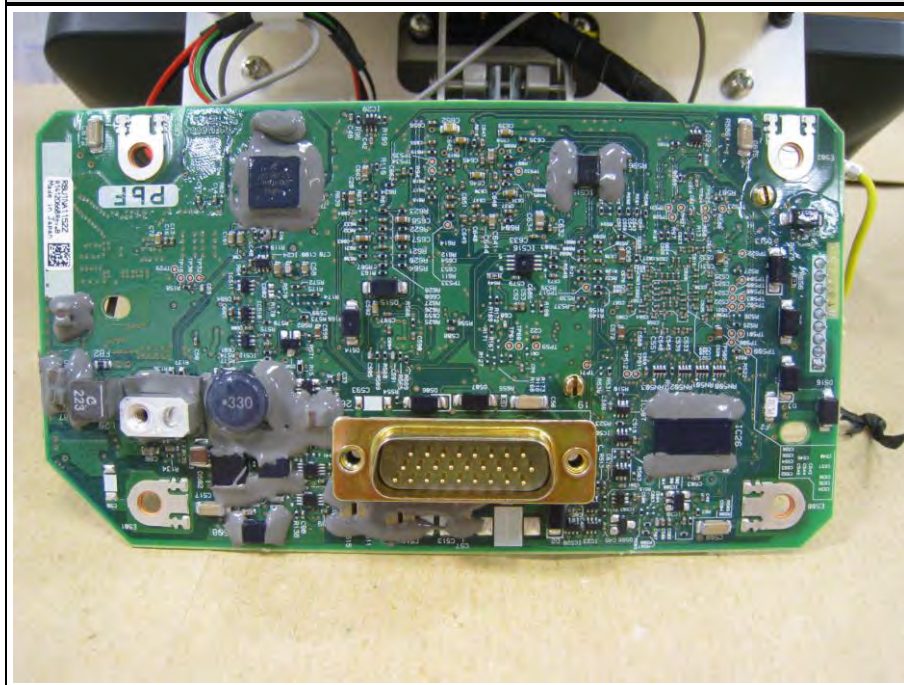


EUT Bluetooth antenna position

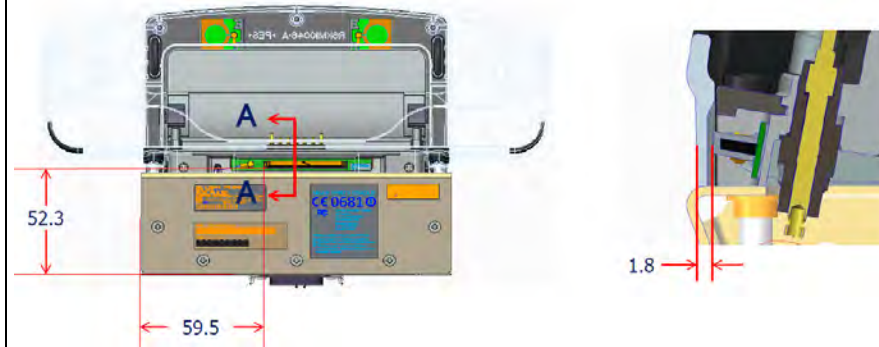

EUT WLAN antenna position

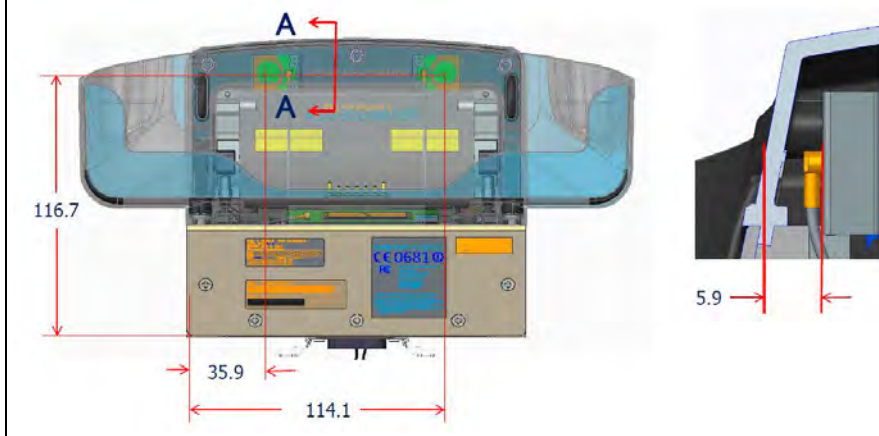

1.2 Equipment setup photos

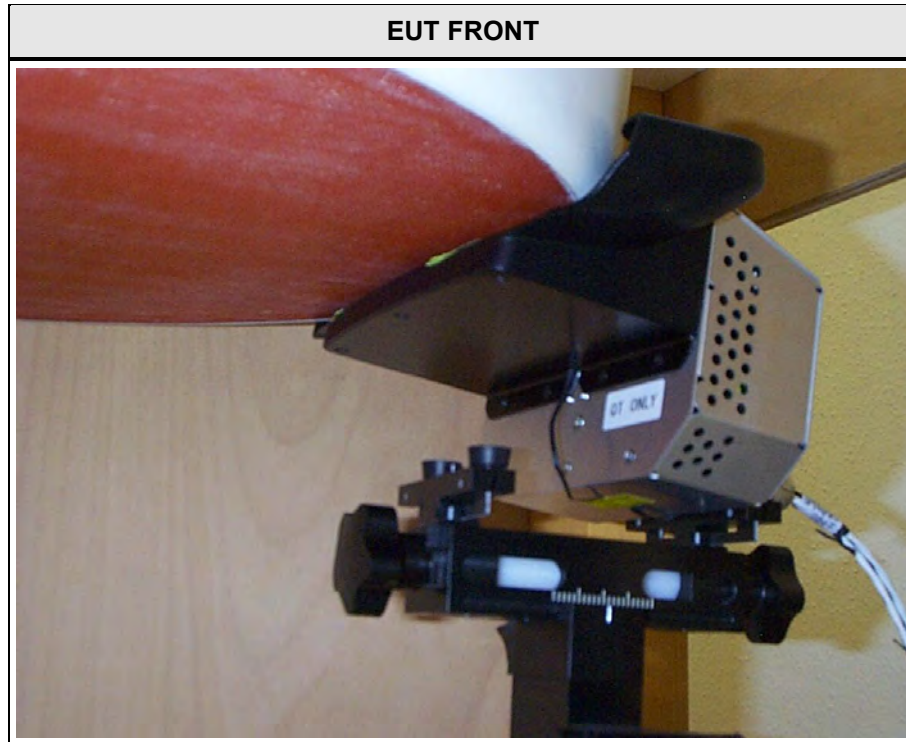

EUT TOP



1.3 Reference Documents

Document
KDB Publication 447498 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB Publication 648474 : SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
KDB Publication 648474 : Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas
KDB Publication 865664 : SAR measurement procedures for devices operating between 100 MHz to 6 GHz
KDB Publication 941225: SAR Measurement Procedures for 3G Devices
KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB Publication 941225: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
KDB Publication 941225: SAR Test Consideration for LTE Handsets and Data Modems
KDB Publication 447498 : SAR Measurement Procedures for USB Dongle Transmitters
KDB Publication 248227 : SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB Publication 450824 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Supported standalone operating modes

Mode	Modulation	Frequency range	Duty cycle
Bluetooth	GFSK	2402 – 2480 MHz	78%
Bluetooth Low Energy	GFSK	2402 – 2480 MHz	13.9%
802.11a/n 20 MHz	OFDM	5180 – 5240 MHz	100%

1.6 Conducted Power Values

According to KDB 447498 D01 v05r02 the conducted power values of all operating modes have been measured in order to determine the worst case source-based averaged power values.

The conducted power values for the various operating modes of the WiFi transmitter were measured according to KDB 248227 D01 v01r02

Bluetooth

Bluetooth							
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]			Source-based time averaged Power [dBm]		
		BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
		DH5	2-DH5	3-DH5	DH5	2-DH5	3-DH5
0	2402	4.80	0.90	0.90	3.69	-0.21	-0.21
39	2441	7.10	3.80	3.70	5.99	4.88	2.59
78	2480	8.40	5.40	5.50	7.29	6.18	4.39

Bluetooth Low Energy

Bluetooth Low Energy			
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]	Source-based time averaged Power [dBm]
		GFSK	GFSK
0	2402	4.35	-4.22
19	2440	5.45	-3.12
39	2480	7.98	-0.59

IEEE 802.11a

IEEE 802.11a / Antenna P3											
Mode	Band	Channel	Frequency	Source-based time average power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
IEEE 802.11a	U-NII-1	36	5180	7.09	7.13	7.04	7.07	6.89	7.66	7.85	7.51
		40	5200	8.10	8.00	8.04	8.11	7.85	7.98	8.18	7.84
		44	5220	7.99	7.95	7.96	7.94	7.77	7.91	8.11	7.77
		48	5240	8.35	8.33	8.35	8.34	8.14	8.27	8.26	8.16

IEEE 802.11n

IEEE 802.11n / 20 MHz / Long Guard Interval / 1 Stream Antenna P3													
Mode	Band	Channel	Frequency	Bandwidth [MHz]	Guard Interval [ns]	Source-based time average power [dBm]							
						Data Rate [Mbps]							
						MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
IEEE 802.11n	U-NII-1	36	5180	20	400/800	6.5	13	19.5	26	39	52	58.5	65
		7.27	7.32			7.31	7.28	7.31	7.28	7.29	7.27		
		8.20	7.72			7.72	7.74	7.74	7.77	7.87	7.83		
		8.04	8.05			8.07	8.12	8.14	8.12	8.14			
		8.60	8.13			8.63	8.65	8.63	8.65	8.21	8.68		

IEEE 802.11n

IEEE 802.11n / 20 MHz / Long Guard Interval / 2 Streams Antenna P3-P1													
Mode	Band	Channel	Frequency	Bandwidth [MHz]	Guard Interval [ns]	Source-based time average power [dBm]							
						Data Rate [Mbps]							
						MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
IEEE 802.11n	U-NII-1	36	5180	20	400/800	13	26	39	52	78	104	117	130
		6.94/8.52	7.3/9.11			7.32/8.8	7.43/8.81	7.41/8.8	7.4/8.79	7.38/8.77	7.39/8.77		
		7.62/9.47	7.74/9.15			7.57/8.96	8.11/9.49	8.12/9.50	7.66/9.04	8.12/9.52	7.64/9.03		
		7.4/9.7	7.85/9.69			7.80/9.65	7.72/9.6	7.74/9.6	7.72/9.57	7.73/9.57	7.7/9.55		
		8.04/10.03	8.39/9.97			8.35/9.94	8.31/9.9	8.3/9.88	8.29/9.89	8.27/9.87	8.24/9.85		

IEEE 802.11a

IEEE 802.11a / Antenna P1											
Mode	Band	Channel	Frequency	Source-based time average power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
IEEE 802.11a	U-NII-1	36	5180	9.60	9.10	9.05	9.03	8.89	8.94	9.17	8.96
		40	5200	9.72	9.27	9.25	9.24	9.14	9.20	9.49	9.26
		44	5220	9.75	9.77	9.74	9.72	9.57	9.67	9.91	9.73
		48	5240	10.15	10.17	10.13	10.14	10.00	10.08	10.14	10.12

IEEE 802.11n

IEEE 802.11n / 20 MHz / Long Guard Interval / 1 Stream Antenna P1													
Mode	Band	Channel	Frequency	Bandwidth [MHz]	Guard Interval [ns]	Source-based time average power [dBm]							
						Data Rate [Mbps]							
						MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
IEEE 802.11n	U-NII-1	36	5180	20	800	6.5	13	19.5	26	39	52	58.5	65
		8.90	8.89			8.88	8.87	8.87	8.86	8.85	8.85		
		9.24	9.24			9.22	9.21	9.22	9.24	9.23	9.23		
		9.64	9.62			9.64	9.65	9.64	9.67	9.66	9.67		
		10.04	10.05			10.03	10.03	10.04	10.02	10.04	10.07		

In n-mode (HT 20, MCS8-15) the antenna P1 and antenna P3 are both active at the same time. MCS 8 represent the lowest Data Rate.

According to KDB 248227 v01r02 SAR measurements are performed for 802.11a and the data rate of 9 Mbps.

According to KDB 248227 v01r02 SAR measurements are performed for 802.11n and the data rate of MCS8.

1.7 Standalone Operational Mode Test Exclusion

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the test exclusion power condition is given by

$$\frac{\text{max Power, mW}}{\text{test distance, mm}} \cdot \sqrt{f_{\text{GHz}}} \leq 3.0$$

for test separation distance $\leq 50\text{mm}$. For test separation distances $> 50\text{mm}$, the SAR test exclusion threshold is:

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot \frac{f[\text{MHz}]}{150},$$

$$100 \text{ MHz} < f < 1500 \text{ MHz}$$

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot 10,$$

$$1500 \text{ MHz} < f < 6 \text{ GHz}$$

Mode	Pmax [mW]	Antenna	Top		Left		Right		Bottom		Back		Front	
			Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [nW]
Bluetooth; DH5, 2480MHz	5.36	BT	5	10	100	596	100	596	52	96	50	96	5	10
Bluetooth LE;	0.87	BT	5	10	100	596	100	596	52	96	50	96	5	10
IEEE 802.11a; 5240MHz, 9Mbps	10.4	WLAN (P1)	5	7	180	1366	80	366	116.7	666	7.5	7	5.9	7
IEEE 802.11a; 5240MHz, 6Mbps	6.84	WLAN (P3)	5	7	80	366	180	1366	116.7	666	7.5	7	5.9	7
IEEE 802.11n; 5240MHz, MCS8	10.07	WLAN (P1/P3)	5	7	80	366	80	366	116.7	666	7.5	7	5.9	7

For all operating modes for which the maximum source-based average output power is larger than the corresponding SAR test exclusion threshold power level (blue fields in table above), SAR measurement was performed.

1.8 SAR value estimation for multi-transmitter evaluation

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the estimated SAR is given by

$$\frac{\max Power \text{ (including tune up tolerance), mW}}{\min. test separation distance, mm} \cdot \sqrt{\frac{f_{GHz}}{x}} \leq 0.4 \frac{W}{kg}$$

x=7.5 for 1-g SAR, and x=18.75 for 10-g SAR, for test separation ≤ 50mm.

For test separation distance > 50mm, the estimated SAR value is 0.4 W/kg

Mode	Pmax [mW]	Antenna	Top		Left		Right		Bottom		Back		Front	
			Antenna distance to user [mm]	estimated SAR	Antenna distance to user [mm]	estimated SAR	Antenna distance to user [mm]	estimated SAR	Antenna distance to user [mm]	estimated SAR	Antenna distance to user [mm]	estimated SAR	Antenna distance to user [mm]	estimated SAR
Bluetooth; DHS, 2480MHz	5.36	BT	5	0.292	100	0.4	100	0.4	52	0.4	50	0.029	5	0.292
Bluetooth LE	0.87	BT	5	0.103	100	0.4	100	0.4	52	0.4	50	0.01	5	0.103

1.9 Supported concurrent (multi-transmitter) operating modes

The ability of all other transmitters to transmit simultaneously is given in the following table:

	Bluetooth	Bluetooth Low Energy	WLAN a/n
Bluetooth	N/A	N/A	Yes
Bluetooth Low Energy	N/A	N/A	Yes
WLAN a/n	Yes	Yes	N/A

1.10 Supported use cases

Use case	Distance to human body	corresponding test configuration
EUT placed near the human body	0 mm (worst case)	close proximity to the human body

1.11 Radio Test Modes

Mode	Settings
Bluetooth	Mode = DH5 Duty cycle = 78% Power level = maximum Antenna = integrated
Bluetooth Low Energy	Modulation = GFSK Duty cycle = 13.9% Power level = maximum Antenna = integrated
IEEE 802.11a	Mode = 802.11a 20MHz Duty cycle = 100% Data rate = 9 Mbps Power level = 12 (Test software setting) Antenna = integrated
IEEE 802.11a,n	Mode = 802.11a/n 20MHz Duty cycle = 100% Data rate = MCS8 Power level = 12 (Test software setting) Antenna = integrated

1.12 Test Positions

Position	Description
FRONT-0MM	EUT front side directly touching the phantom.
BACK-0MM	EUT rear side directly touching the phantom.
TOP-0MM	EUT top side directly touching the phantom.

1.13 Test Equipment Used During Testing

SAR Measurement					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5 Measurement Server	Schmid & Partner		EF00273	functional test	functional test
Control Pendant	Stäubli		EF00274	functional test	functional test
Dell Computer	Schmid & Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid & Partner	DAE3V1	EF00276	2014-09	2015-09
Dosimetric E-Field Probe	Schmid & Partner	ET3DV6	EF00279	2014-09	2015-09
Dosimetric E-Field Probe	Schmid & Partner	EX3DV4	EF00826	2014-09	2015-09
System Validation Kit	Schmid & Partner	D300V3	EF00299	2012-09	2015-09
System Validation Kit	Schmid & Partner	D450V3	EF00300	2012-09	2015-09
System Validation Kit	Schmid & Partner	D900V2	EF00281	2012-09	2015-09
System Validation Kit	Schmid & Partner	D1800V2	EF00282	2012-09	2015-09
System Validation Kit	Schmid & Partner	D1900V2	EF00283	2012-09	2015-09
System Validation Kit	Schmid & Partner	D2450V2	EF00284	2012-09	2015-09
System Validation Kit	Schmid & Partner	D5GHZV2	EF00827	2012-11	2015-11
Flat phantom	Schmid & Partner	V 4.4	EF00328	no calibration required	no calibration required
Oval flat phantom	Schmid & Partner	ELI 4	EF00289	functional test	functional test
Mounting Device	Schmid & Partner	V 3.1	EF00287	functional test	functional test
Millivoltmeter	Rohde & Schwarz	URV 5	EF00126	2013-08	2016-08
Power sensor	Rohde & Schwarz	NRV-Z2	EF00125	2013-04	2015-04
RF signal generator	Rohde & Schwarz	SMP 02	EF00165	2013-05	2015-05
Insertion unit	Rohde & Schwarz	URV5-Z4	EF00322	2014-09	2015-09
Directional Coupler	HP	HP 87300B	EF00288	functional test	functional test
Radio Communication Tester	Rohde & Schwarz	CMD65	EF00625	ICO (initial calibration only)	ICO (initial calibration only)
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	EF00304	2014-05	2015-05
Network Analyzer 300 kHz to 3 GHz	Agilent	8752C	EF00140	2014-06	2015-06
Dielectric Probe Kit	Agilent	85070C	EF00291	functional test	functional test
Dielectric Probe Kit	SPEAG	DAK-3.5	EF00945	2014-09	2015-09
DAK Measurement Software	SPEAG	DAKS	EF00965	-	-
Thermometer	LKM electronic GmbH	DTM3000	EF00967	2014-09	2015-09

2 Result Summary

OET Bulletin 65 Supplement C, RSS-102					
Product Specific Standard Section	Requirement – Test	Reference Method	Maximum SAR [W/kg]	Result	Remarks
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Single-band conformity	KDB Publication 447498 KDB Publication 248227 KDB Publication 865664	0.737	PASS	
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Multi-band conformity	KDB Publication 447498 KDB Publication 648474 KDB Publication 865664	1.029	PASS	
Remarks:					

3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ_t), expressed in watts per kilogram (W/kg)

$$\text{SAR} = d/dt (dW/dm) = d/dt (dW/\rho_t dV) = \sigma/\rho_t |E_t|^2$$

where

$$dW/dt = \int_V E \cdot J \, dV = \int_V \sigma E^2 \, dV$$

3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

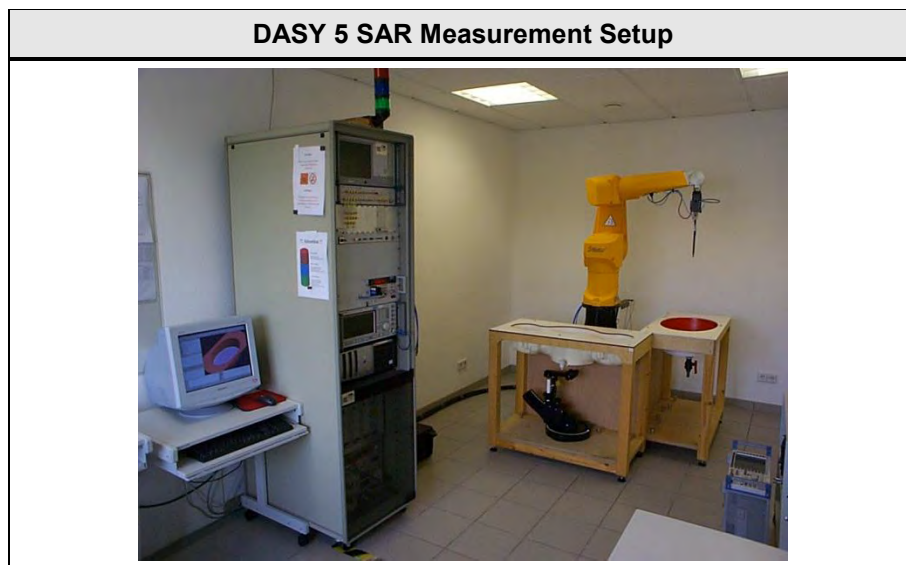

The following Diagram show the elements involved in the measurement setup.

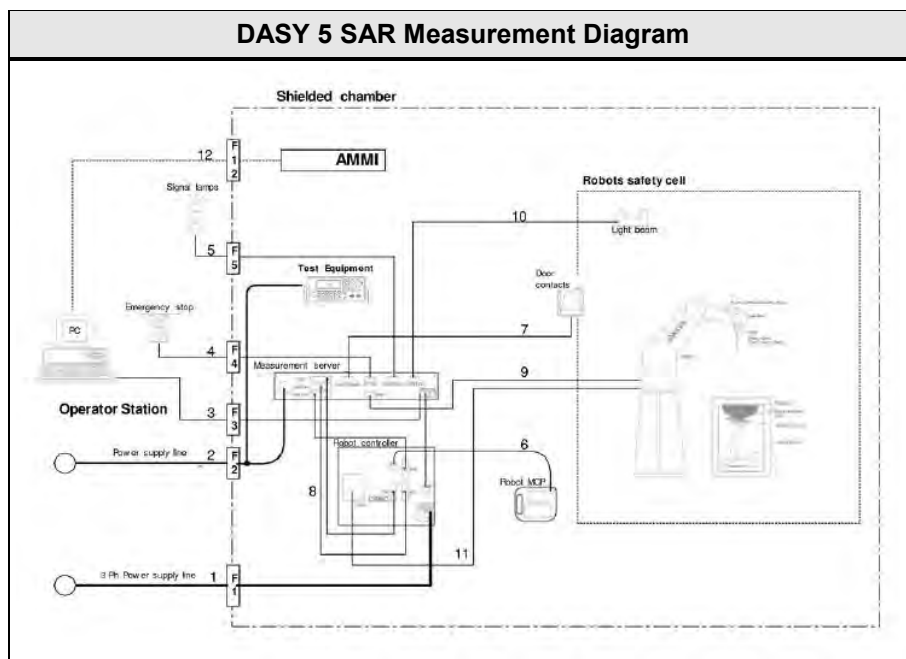

The DASY5 system for performing compliance tests consists of the following items:


DASY5 SAR Measurement System	
Device	Description:
RX90BL	A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.
Probe Alignment Unit	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
Teach Pendant	The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures
Signal Lamps	External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).
DAE	The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
E-Field Probes	Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.
EOC	The electro-optical converter (EOC) performs the conversion between optical and electrical signals
Measurement Server	The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.
Control Computer	A computer operating Windows 2000 or Windows NT with DASY 4 Software.
Control Software	DASY4 and SEMCAD post processing Software
SAM Twin Phantom	The SAM twin phantom enabling testing left-hand and right-hand usage.
Flat Phantom	Flat Phantom (only for body-mounted transceivers operating below 800 MHz).
Tissue simulating liquid	Tissue simulating liquid mixed according to the given recipes.
Device Holder	The device holder for handheld mobile phones.
System Validation Dipoles	System validation dipoles allowing to validate the proper functioning of the system.

4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

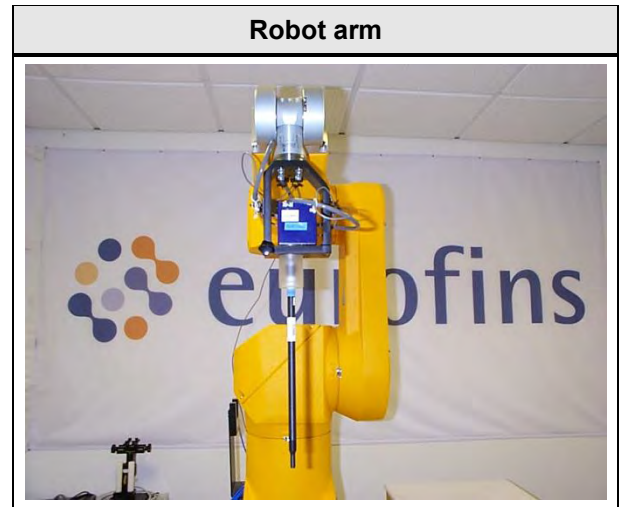

4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

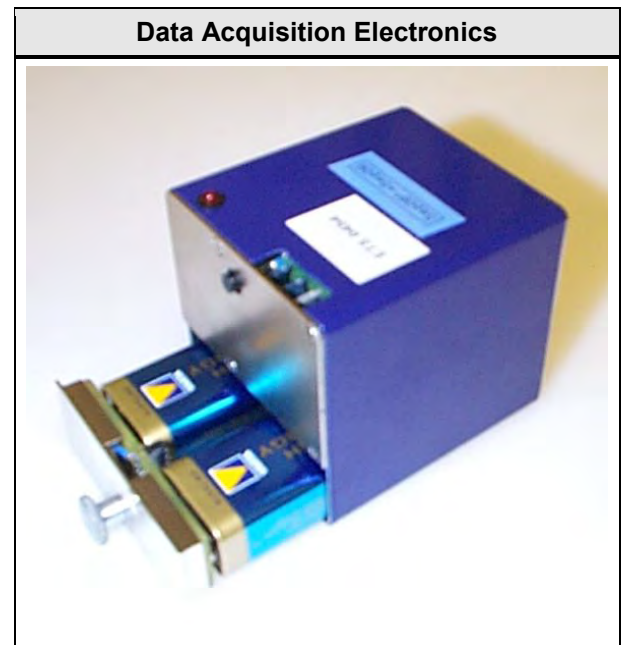

4.4 Isotropic E-Field Probe ≤ 3 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 2.5 GHz,
In brain and muscle simulating tissue at
Frequencies of 835MHz, 900MHz, 1800MHz,
1900 MHz and 2450 MHz

Frequency:

10MHz to > 3 GHz,
Linearity ± 0.2 dB (30MHz to 3GHz)

Directivity:

± 0.2 dB in HSL (rotation around probe axis)
 ± 0.4 dB in HSL (rotation normal to probe axis)

Dynamic Range:

5 μ W/g to > 100 mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 330mm (Tip: 16mm),
Tip Diameter: 6.8mm (Body: 12mm),
Distance from probe tip to dipole centers: 2.7mm

Application:

General dosimetry up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms



4.5 Isotropic E-Field Probe ≤ 6 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 6 GHz,
In brain and muscle simulating tissue at
Frequencies of 5200, 5500, 5800

Frequency:

10MHz to 6GHz,
Linearity ± 0.2 dB (30MHz to 6GHz)

Directivity:

± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range:

10 μ W/g to > 100mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 337mm (Tip: 20mm),
Tip Diameter: 2.5mm (Body: 12mm),
Distance from probe tip to dipole centers: 1mm

Application:


General dosimetry up to 6 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms



4.6 Test phantom and positioner


The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.

The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.

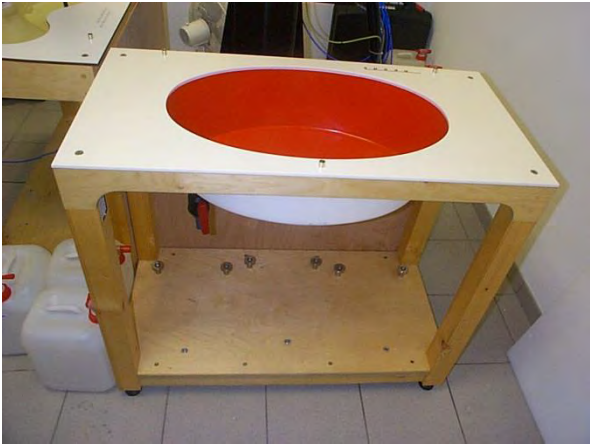Probe Positioner	SAM Twin Phantom
	
ELI4 phantom	Flat phantom
	

4.7 System Validation Dipoles

A set of calibration dipoles (D900V2, D1900V2, D2450V2, D5GHzV2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

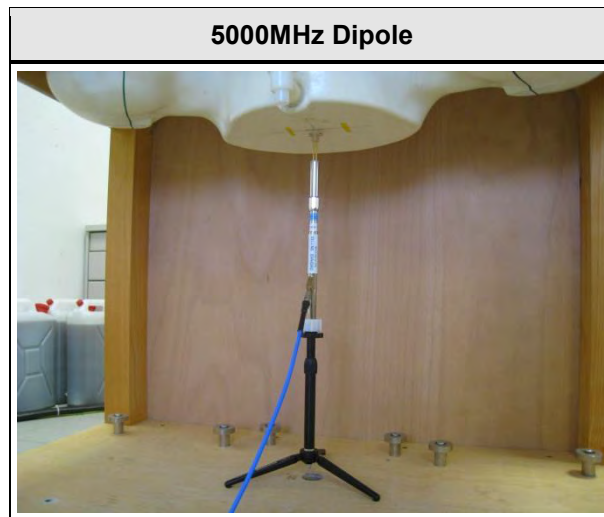

5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, then the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)



The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.

At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.

5.3 Reference lines and points for Handsets


For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.

According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

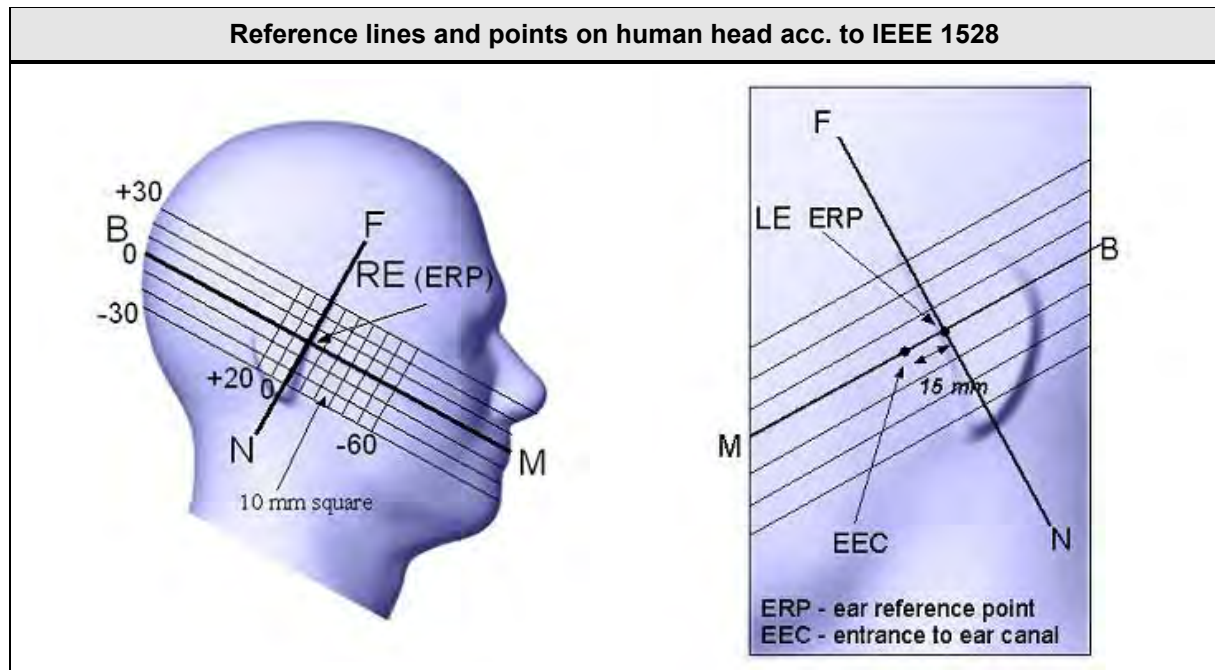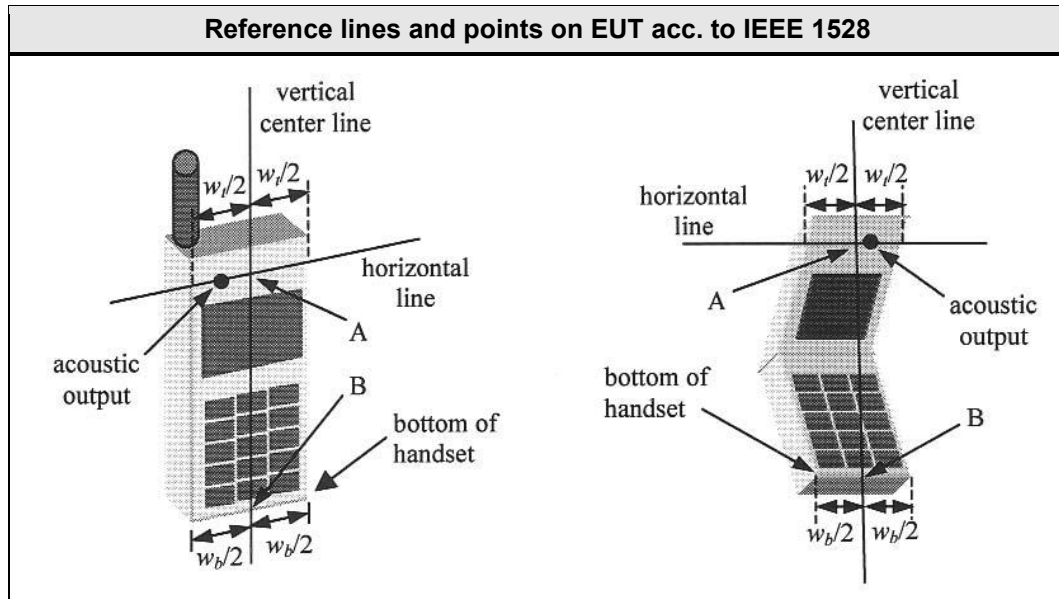

5.4 Test positions relative to the Head


Cheek position

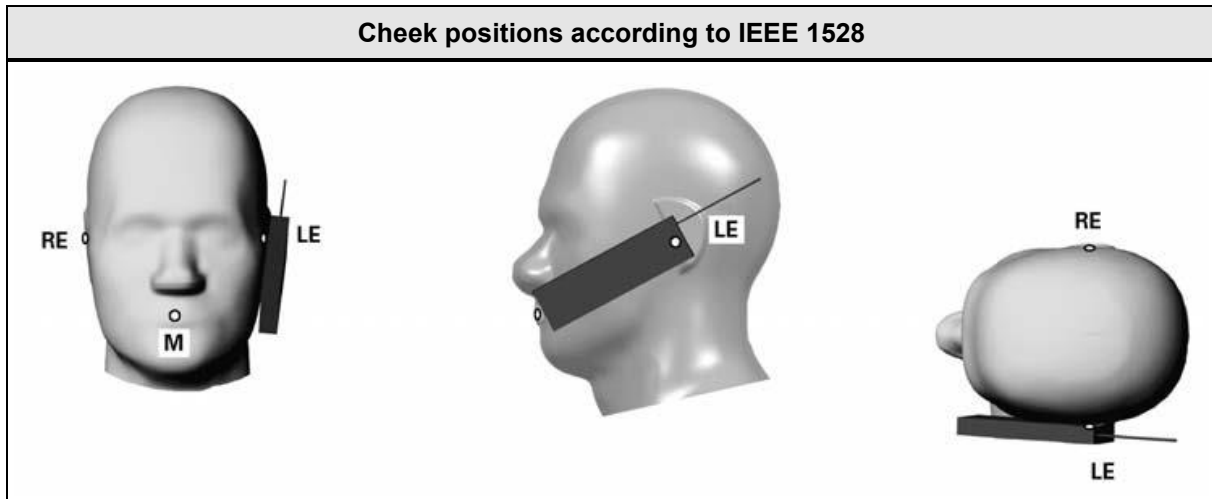

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


Tilt position

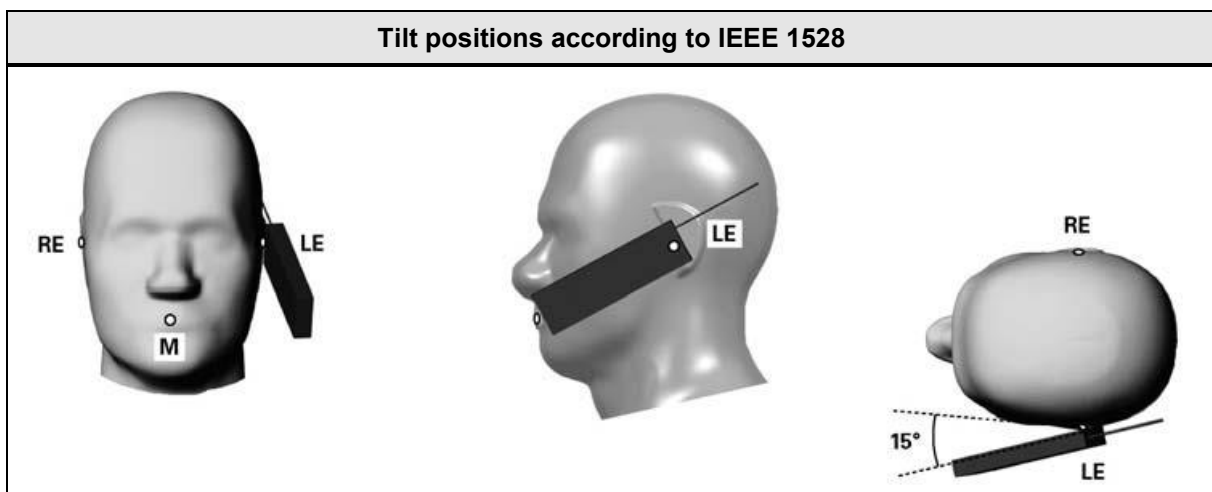

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° . Then the handset is rotated around the horizontal line by 15° .

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head

5.5 Test positions relative to the human body

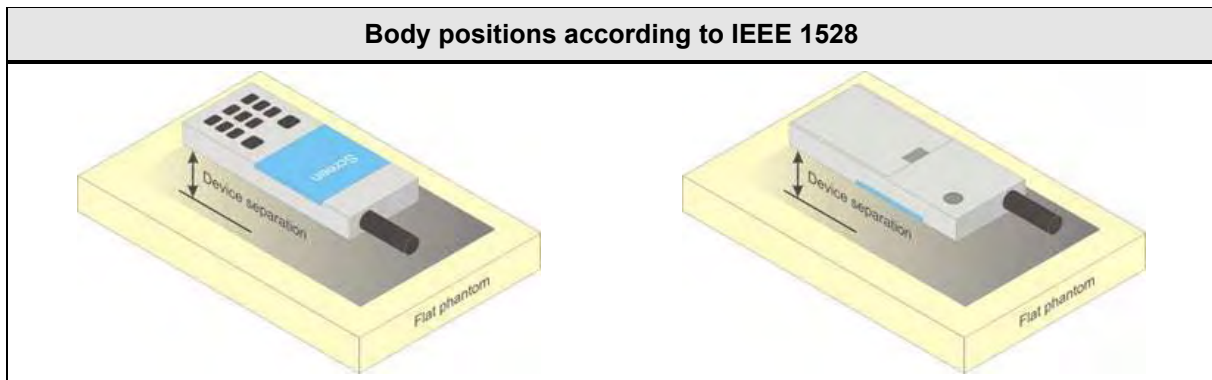

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

5.6 Measurement Uncertainty

Measurement Uncertainty according to IEEE 1528							
Error Description	Uncertainty Value	Probability Distribution	Div.	c _i (1g)	c _i (10g)	Std. Unc. 1g	Std. Unc. 10g
Measurement System							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
Test Sample Related							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Phantom and Setup Related							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
Expanded Standard Uncertainty						±25.6%	±25.4%

6 Test Conditions and Results

6.1 Recipes for Tissue Simulating Liquids

Body Tissue Simulating Liquids					
Ingredient	M 450-B weight (%)	M 900-B weight (%)	M 1800-B weight (%)	M 1950-A weight (%)	M 2450-B weight (%)
Water	46.21	50.75	70.17	69.79	68.64
Sugar	51.17	48.21			
Cellulose	0.18				
Salt	2.34		0.39	0.2	
Preventol	0.08	0.1			
DGBE			29.44	30	31.37
Head Tissue Simulating Liquids					
Ingredient	HSL 450-A weight (%)	HSL 900-B weight (%)	HSL 1800-F weight (%)	HSL 1950-B weight (%)	HSL 2450-B weight (%)
Water	38.91	40.29	55.24	55.41	55
Sugar	56.93	57.9			
Cellulose	0.25	0.24			
Salt	3.79	1.38	0.31	0.08	
Preventol	0.12	0.18			
DGBE			44.45	44.51	45

Water: deionized water, resistivity $\geq 16 \text{ M}\Omega$

Sugar: refined white sugar

Salt: pure NaCl

Cellulose: Hydroxyethyl-cellulose

Preservative: Preventol D-7

DGBE: Diethylenglycol-monobuthyl ether


The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., IEEE 1528-2003, IEC 62209-1)

The HBBL3-6GHz and MBBL 3-6 GHz liquids are direct from Speag.

6.2 Test Conditions and Results – Tissue Validation

Tissue Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102					Verdict: PASS
Test according to measurement reference		Reference Method			
		OET Bulletin 65 Supplement C			
Target Values					
Frequency [MHz]	Head		Body		Permitted tolerance [%]
	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	
150	52.3	0.76	61.9	0.80	$\leq \pm 5$
300	45.3	0.87	58.2	0.92	$\leq \pm 5$
450	43.5	0.87	56.7	0.94	$\leq \pm 5$
835	41.5	0.90	55.2	0.97	$\leq \pm 5$
900	41.5	0.97	55.0	1.05	$\leq \pm 5$
915	41.5	0.98	55.0	1.06	$\leq \pm 5$
1450	40.5	1.20	54.0	1.30	$\leq \pm 5$
1610	40.3	1.29	53.8	1.40	$\leq \pm 5$
1800 – 2000	40.0	1.40	53.3	1.52	$\leq \pm 5$
2450	39.2	1.80	52.7	1.95	$\leq \pm 5$
3000	38.5	2.40	52.0	2.73	$\leq \pm 5$
5200	36.0	4.66	49.0	5.30	$\leq \pm 5$
5500	35.6	4.96	48.6	5.65	$\leq \pm 5$
5800	35.3	5.27	48.2	6.00	$\leq \pm 5$

Test setup

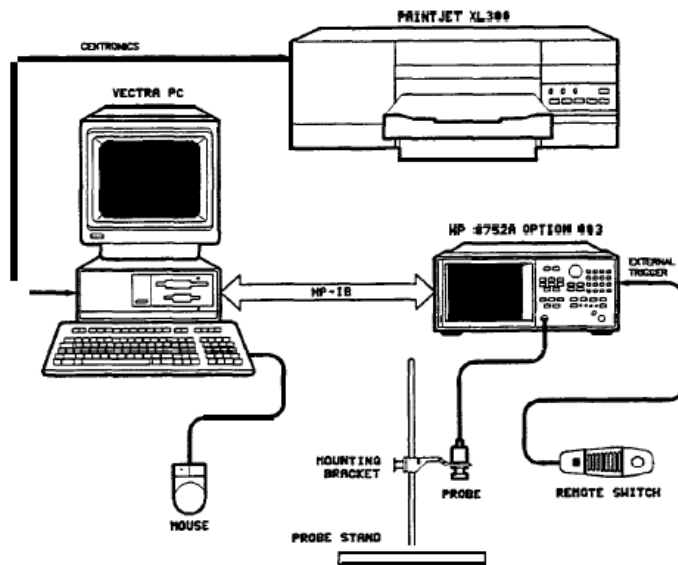

Test procedure


1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined

Test results

Frequency [MHz]	Tissue	Measured ϵ_r	Target ϵ_r	Delta ϵ_r [%]	Measured σ [S/m]	Target σ [S/m]	Delta σ [%]
5200	Body	46.64	49.00	-04.82	5.41	5.30	02.08
*5240	Body	46.50	48.96	-05.00	5.44	5.35	01.68

Comments: Measured WLAN Channel

6.3 Test Conditions and Results – System Validation

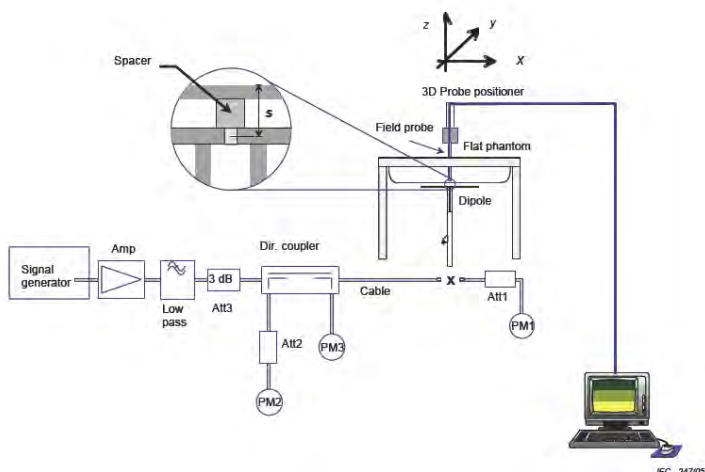System Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102				Verdict: PASS
Test according to measurement reference	Reference Method			
	OET Bulletin 65 Supplement C / IEEE 1528			
Test frequency range	Tested frequencies			
	2450 MHz , 5200 MHz			
Test mode	unmodulated CW			
Target Values				
Frequency [MHz]	Target SAR value [W/kg (1g)]		Permitted tolerance [%]	
5200	7.42 @ 100mW		≤ ±10	
The target reference values are taken from the calibration sheets (see annex)				
Test setup				
				
Test procedure				
1. The dipole antenna input power is set to 250mW 2. The reference dipole is positioned under the phantom 3. With the dipole antenna powered the SAR value is measured 4. The measured SAR values are compared to the target SAR values				
Test results				
Frequency [MHz]	Input power [mW]	Measured SAR value [W/kg (1g)]	Target SAR value [W/kg (1g)]	Delta [%]
5200	100	8.13	7.42	09.57
Comments:				

6.4 Test Conditions and Results – Standalone SAR Measurement

Standalone SAR acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102							Verdict: PASS	
Test according to measurement reference			Reference Method					
			FCC OET Bulletin 65 Supplement C / IC RSS-102 Issue 4					
Room temperature			22.0 – 22.6 °C					
Liquid depth			15.5 cm					
Environment			general public					
Limits								
Region			Occupational SAR values [W/kg]		General public SAR values [W/kg]			
Whole body average SAR			0.4		0.08			
Localized SAR (Head and trunk) SAR averaging mass = 10g			8		1.6			
Localized SAR (Limbs) SAR averaging mass = 10g			20		4			
Test results								
Mode	Position	Channel	Frequency [MHz]	Drift [dB]	Scaling Factor*	Measured SAR [W/kg (1g)]	Reported SAR [W/kg (1g)] **	SAR Limit [W/kg (1g)]
9Mbps, Antenna P1	BACK 0mm	48	5240	-0.00	1.585	0.073	0.116	1.6
9Mbps, Antenna P1	FRONT 0mm	48	5240	0.08	1.585	0.318	0.504	1.6
9Mbps, Antenna P1	TOP 0mm	48	5240	-0.06	1.585	0.299	0.474	1.6
MCS8, Antenna P1/P3	BACK 0mm	48	5240	0.11	1.585	0.065	0.103	1.6
MCS8, Antenna P1/P3	FRONT 0mm	48	5240	-0.06	1.585	0.465	0.737	1.6
MCS8, Antenna P1/P3	TOP 0mm	48	5240	0.00	1.585	0.153	0.243	1.6
Overall maximum SAR value [W/kg (1g)]							0.737	1.6
Comments:*tune up tolerance / conducted power = scaling factor								
** attached measurement plot: highest SAR value for the communication system								

SAR measurements were started with the highest power channel of the transmission band under investigation. Other measurement channels were omitted when the SAR value of the highest power channel was below 0.8 W/kg according to KDB 248227 v01r02.

According to KDB 865664 D02 v01r01 only the SAR plots for the highest SAR results for each EUT configuration and operating condition are given in the “SAR Results” part of the report.

6.1 Test Conditions and Results – Multi-band SAR Evaluation

Multi-band SAR Evaluation acc. to FCC / IC						Verdict: PASS		
Limits								
Region			Occupational SAR values [W/kg]		General public SAR values [W/kg]			
Whole body average SAR			0.4		0.08			
Localized SAR (Head and trunk) SAR averaging mass = 10g			8		1.6			
Localized SAR (Limbs) SAR averaging mass = 10g			20		4			
Test results								
Position	Bluetooth	Bluetooth Low Energy	Max. SAR: IEEE 802.11a Antenna P1	Max. SAR: IEEE 802.11n	Sum of 1g SAR	Ri (mm)	SPLSR	Sketch
Back	0.029		0.116		0.145	N/A	N/A	N/A
Top	0.292		0.474		0.766	N/A	N/A	N/A
Front	0.292		0.504		0.796	N/A	N/A	N/A
Back		0.010	0.116		0.126	N/A	N/A	N/A
Top		0.103	0.474		0.577	N/A	N/A	N/A
Front		0.103	0.504		0.607	N/A	N/A	N/A
Back	0.029			0.103	0.132	N/A	N/A	N/A
Top	0.292			0.243	0.535	N/A	N/A	N/A
Front	0.292			0.737	1.029	N/A	N/A	N/A
Back		0.010		0.103	0.113	N/A	N/A	N/A
Top		0.103		0.243	0.346	N/A	N/A	N/A
Front		0.103		0.737	0.840	N/A	N/A	N/A
Overall maximum SAR value [W/kg (1g)]					1.029			

ANNEX A Calibration Documents



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **DAE3-522_Sep14**

CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 522**

Calibration procedure(s) **QA CAL-06.v28**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **September 17, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	01-Oct-13 (No:13976)	Oct-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-14 (in house check)	In house check: Jan-15
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-14 (in house check)	In house check: Jan-15

Calibrated by: **Dominique Steffen** **Technician** **Signature**

Approved by: **Fin Bornholt** **Deputy Technical Manager**

Issued: September 17, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV , full range = -100...+300 mV
Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.208 ± 0.02% (k=2)	403.882 ± 0.02% (k=2)	404.721 ± 0.02% (k=2)
Low Range	3.96428 ± 1.50% (k=2)	3.95728 ± 1.50% (k=2)	3.97367 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	56.5 ° ± 1 °
---	--------------

Appendix (Additional assessments outside the scope of SCS108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200036.59	-0.80	-0.00
Channel X + Input	20007.79	3.33	0.02
Channel X - Input	-20000.37	5.45	-0.03
Channel Y + Input	200037.53	0.19	0.00
Channel Y + Input	20004.45	0.10	0.00
Channel Y - Input	-20001.11	4.89	-0.02
Channel Z + Input	200039.93	2.29	0.00
Channel Z + Input	20002.07	-2.13	-0.01
Channel Z - Input	-20005.14	0.85	-0.00

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.68	-0.01	-0.00
Channel X + Input	200.76	0.21	0.11
Channel X - Input	-198.84	0.67	-0.34
Channel Y + Input	2000.56	0.01	0.00
Channel Y + Input	200.46	-0.01	-0.00
Channel Y - Input	-199.17	0.26	-0.13
Channel Z + Input	2000.50	0.01	0.00
Channel Z + Input	199.91	-0.66	-0.33
Channel Z - Input	-201.19	-1.73	0.87

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-3.99	-5.30
	- 200	7.38	5.55
Channel Y	200	0.38	-0.28
	- 200	-0.60	-0.29
Channel Z	200	15.86	15.99
	- 200	-17.84	-18.37

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-1.68	-1.76
Channel Y	200	7.39	-	-1.38
Channel Z	200	6.24	5.61	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15741	16854
Channel Y	15714	14825
Channel Z	16054	16288

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	1.56	0.18	2.94	0.60
Channel Y	0.07	-1.10	1.20	0.53
Channel Z	0.39	-0.91	1.96	0.57

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

EF00876

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S
C
S** Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Eurofins**

Certificate No: **EX3-3893_Sep14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3893**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: September 24, 2014			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3893

Manufactured: October 9, 2012
Calibrated: September 24, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.56	0.42	0.33	± 10.1 %
DCP (mV) ^B	97.9	101.7	96.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	128.8	±3.3 %
		Y	0.0	0.0	1.0		129.5	
		Z	0.0	0.0	1.0		143.2	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	39.0	1.96	7.50	7.50	7.50	0.28	0.97	± 12.0 %
5200	36.0	4.66	5.42	5.42	5.42	0.30	1.80	± 13.1 %
5500	35.6	4.96	5.05	5.05	5.05	0.35	1.80	± 13.1 %
5800	35.3	5.27	4.78	4.78	4.78	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
2600	52.5	2.16	7.52	7.52	7.52	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.64	4.64	4.64	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.25	4.25	4.25	0.40	1.90	± 13.1 %
5800	48.2	6.00	4.32	4.32	4.32	0.45	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

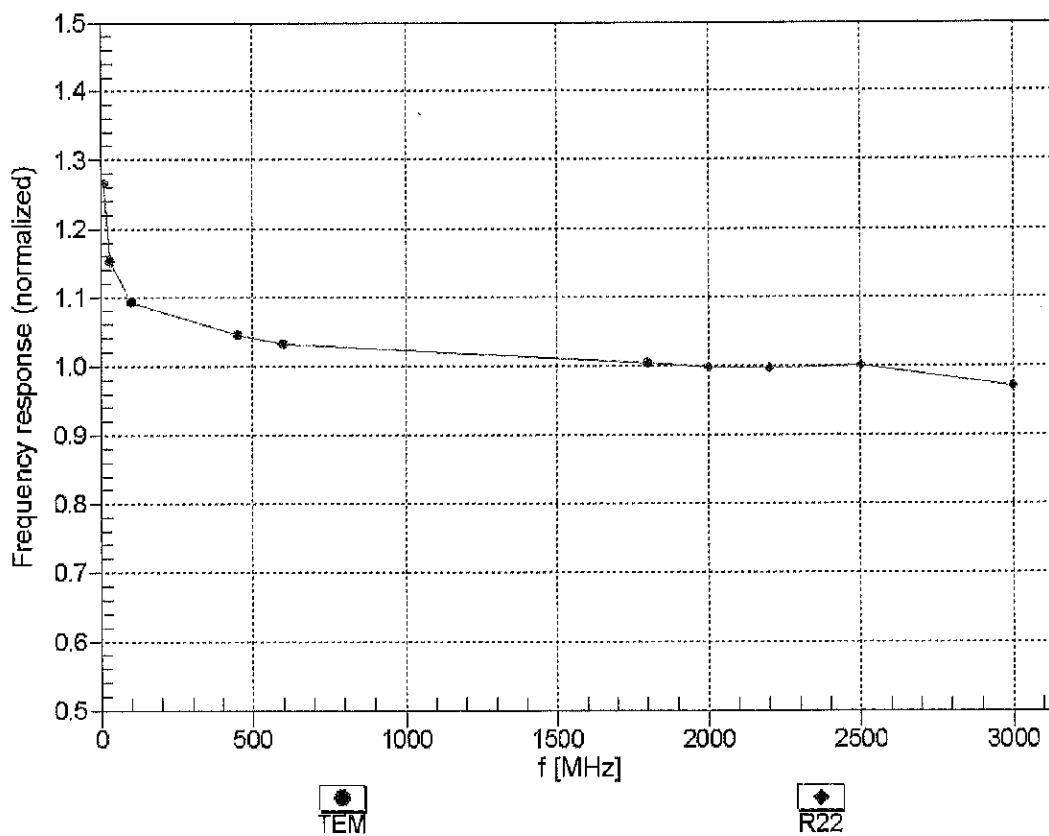



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


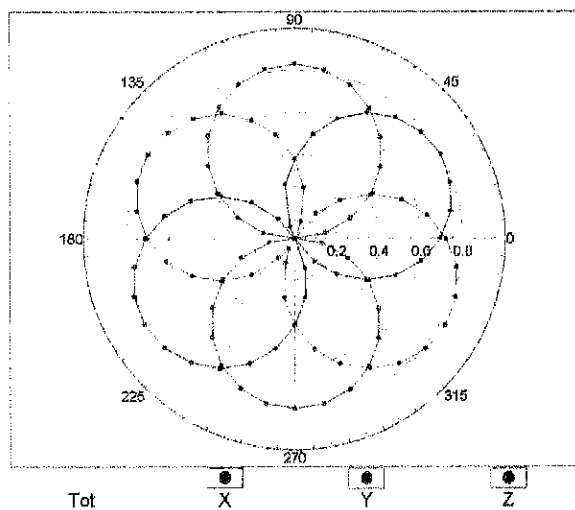


f=1800 MHz,R22

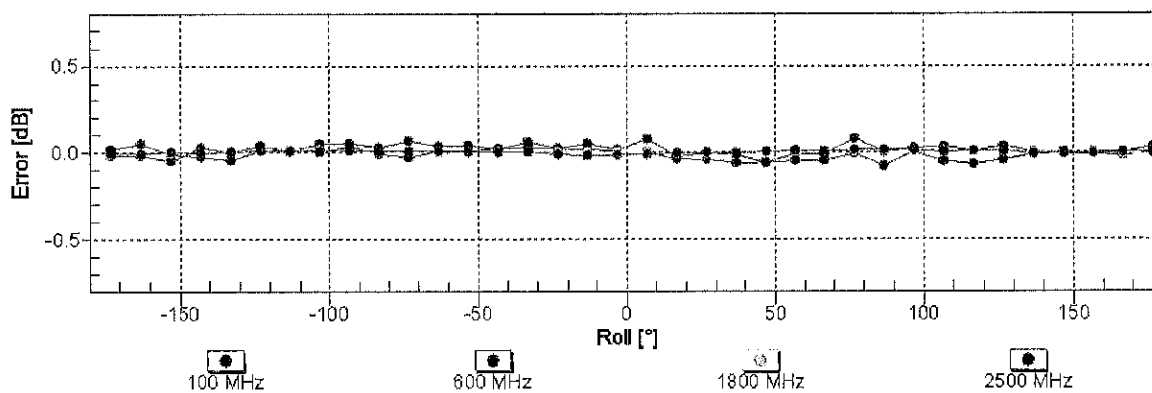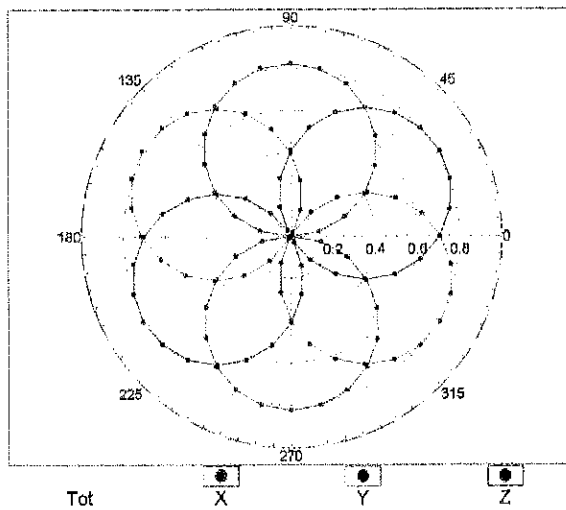


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)

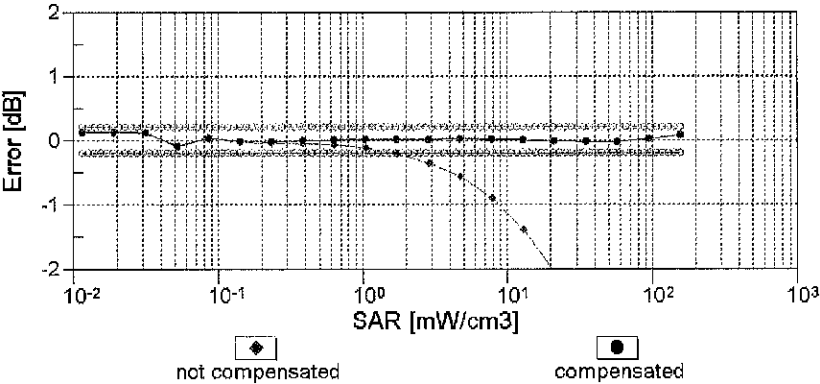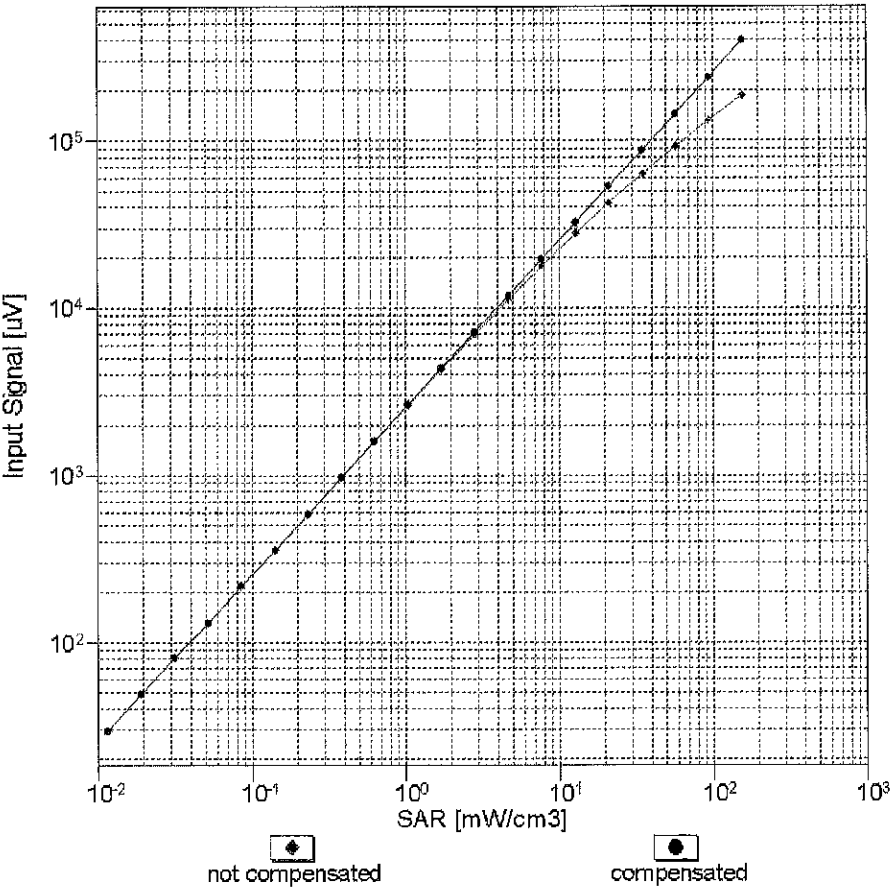


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

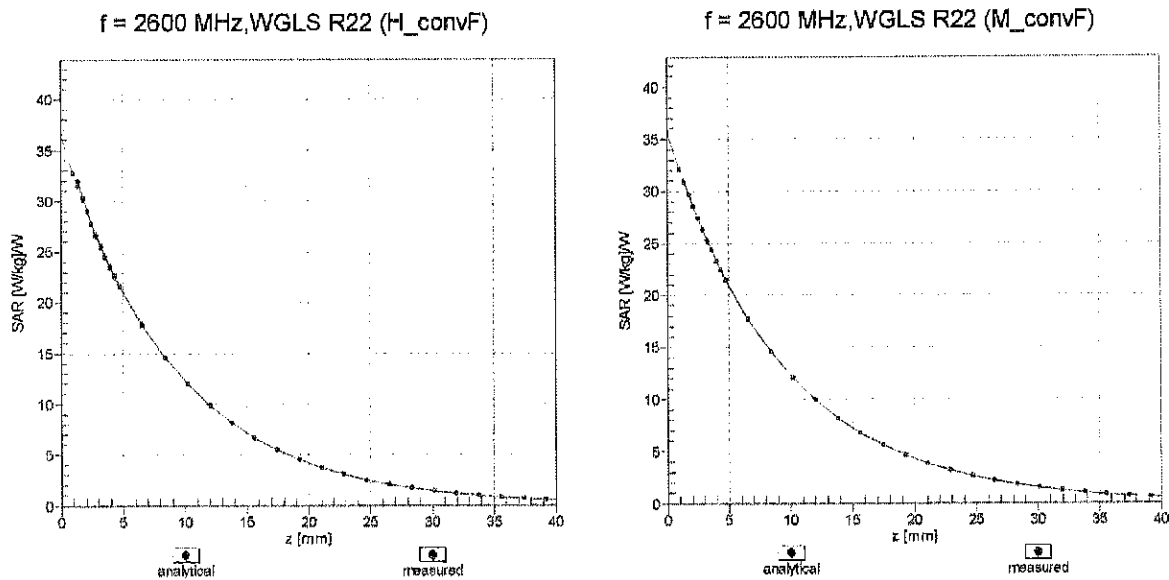

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

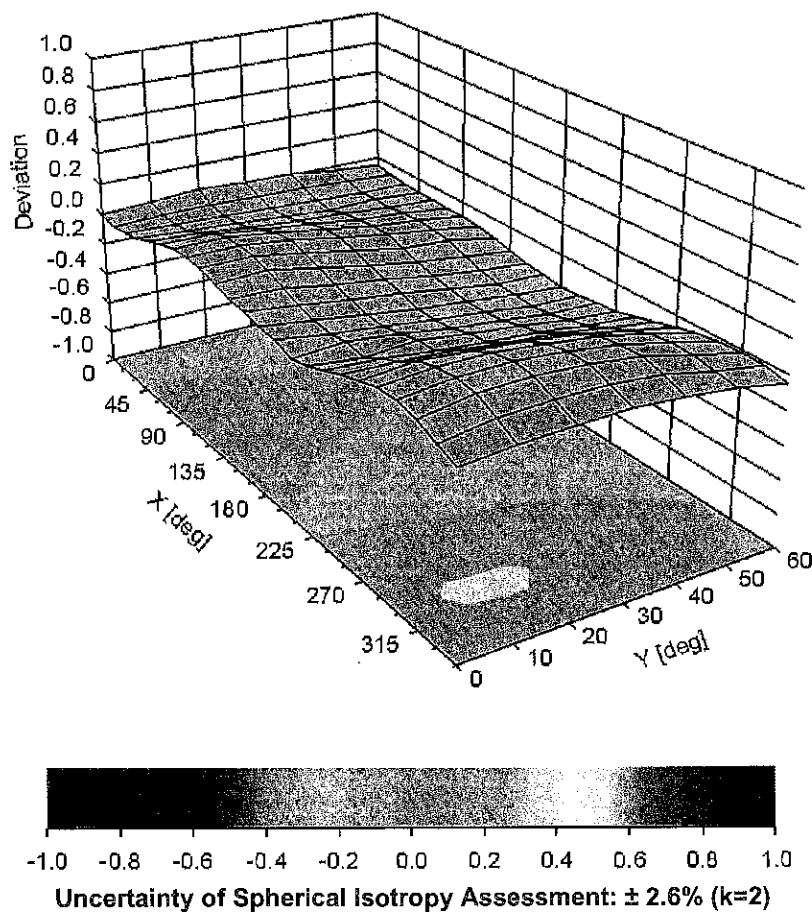

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-23.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **D5GHzV2-1140_Nov12**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1140**

Calibration procedure(s) **QA CAL-22.v1**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **November 13, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	30-Dec-11 (No. EX3-3503_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: November 13, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.8 $\pm$ 6 %	4.53 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.99 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.3 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.4 $\pm$ 6 %	4.83 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.9 W / kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	5.15 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.35 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.73 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.97 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	45.9 ± 6 %	6.13 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	48.6 Ω - 7.5 j Ω
Return Loss	- 22.2 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	53.3 Ω - 0.6 j Ω
Return Loss	- 29.8 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.6 Ω - 1.8 j Ω
Return Loss	- 23.8 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.6 Ω - 6.9 j Ω
Return Loss	- 22.9 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	54.2 Ω + 0.6 j Ω
Return Loss	- 27.7 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	57.4 Ω - 1.2 j Ω
Return Loss	- 23.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 07, 2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1140

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.53$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.83$ mho/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.15$ mho/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 30.12.2011, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.81, 4.81, 4.81); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.376 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.330 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8.46 W/kg; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 19.7 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.000 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.2 W/kg


SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

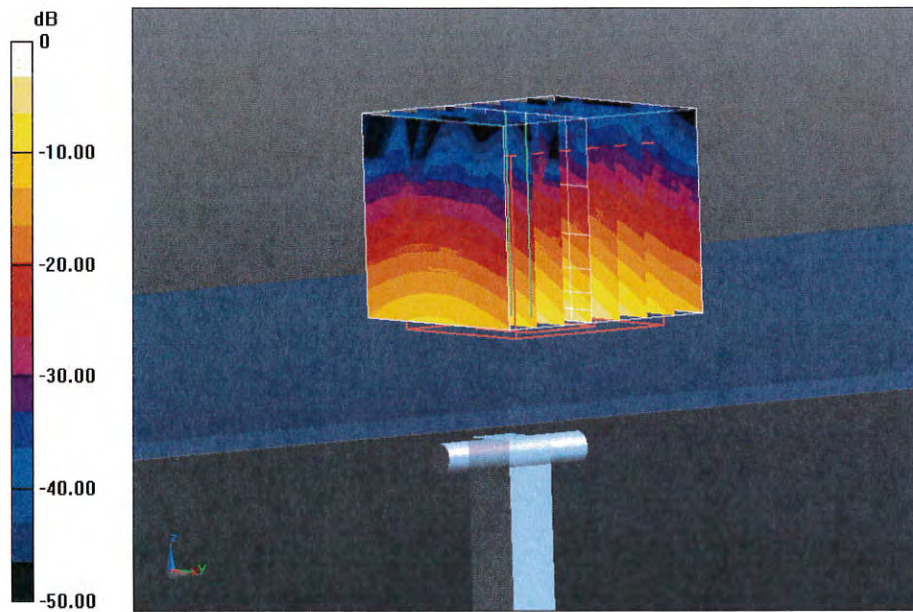

0 dB = 18.6 W/kg = 12.70 dBW/kg

Impedance Measurement Plot for Head TSL

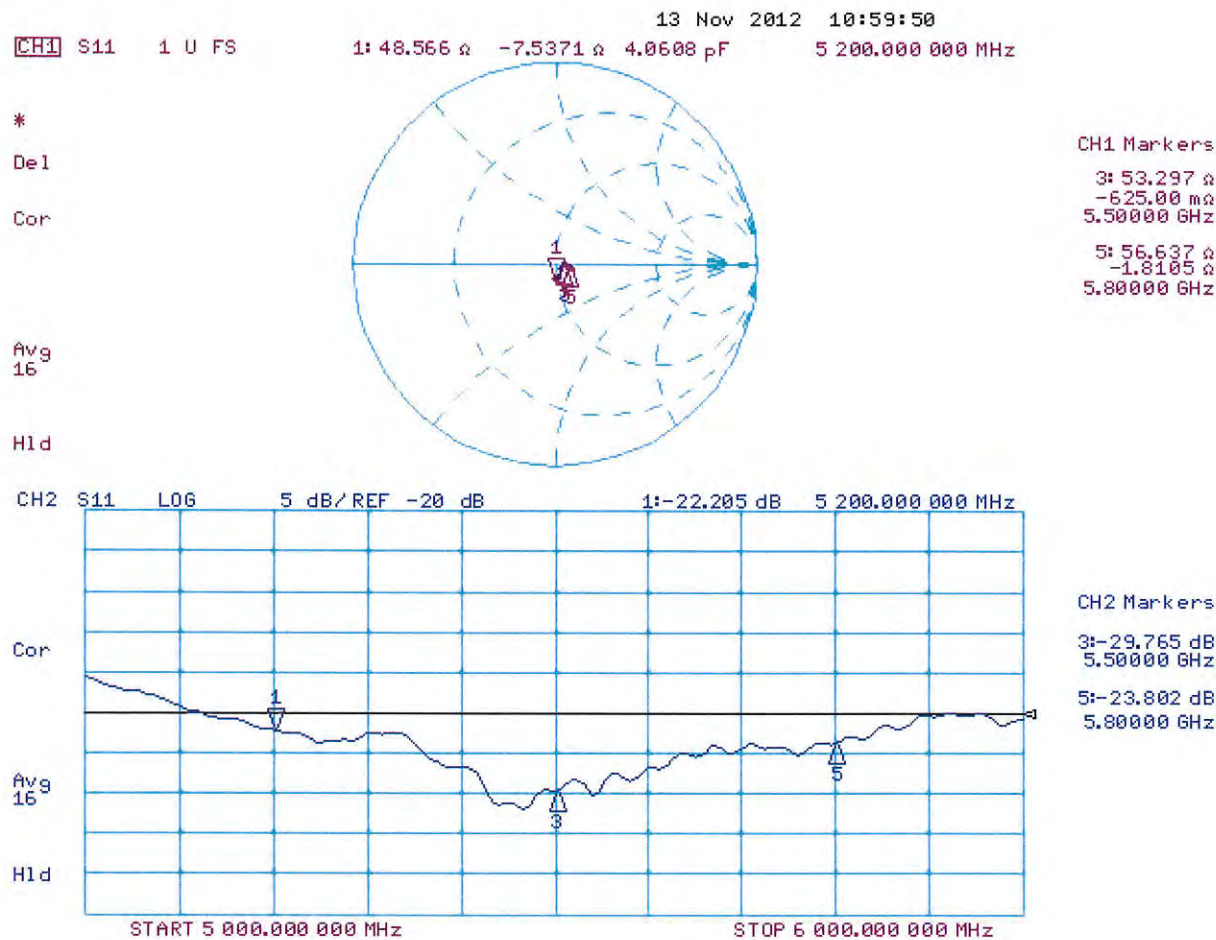

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1140

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.73$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.13$ mho/m; $\epsilon_r = 45.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2011, ConvF(4.43, 4.43, 4.43); Calibrated: 30.12.2011, ConvF(4.38, 4.38, 4.38); Calibrated: 30.12.2011;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.434 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.004 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 34.8 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.8 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.978 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 34.8 W/kg


SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

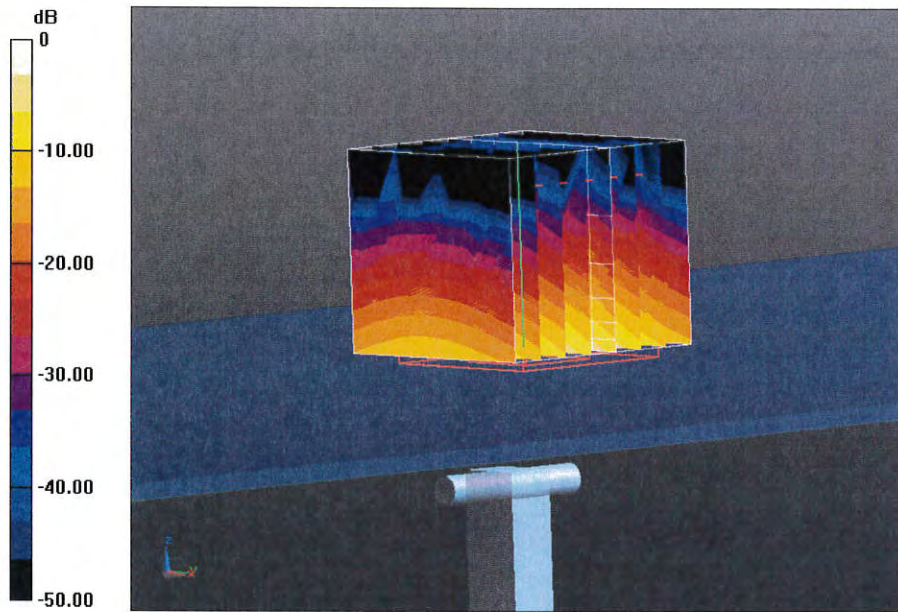

0 dB = 18.7 W/kg = 12.72 dBW/kg

Impedance Measurement Plot for Body TSL

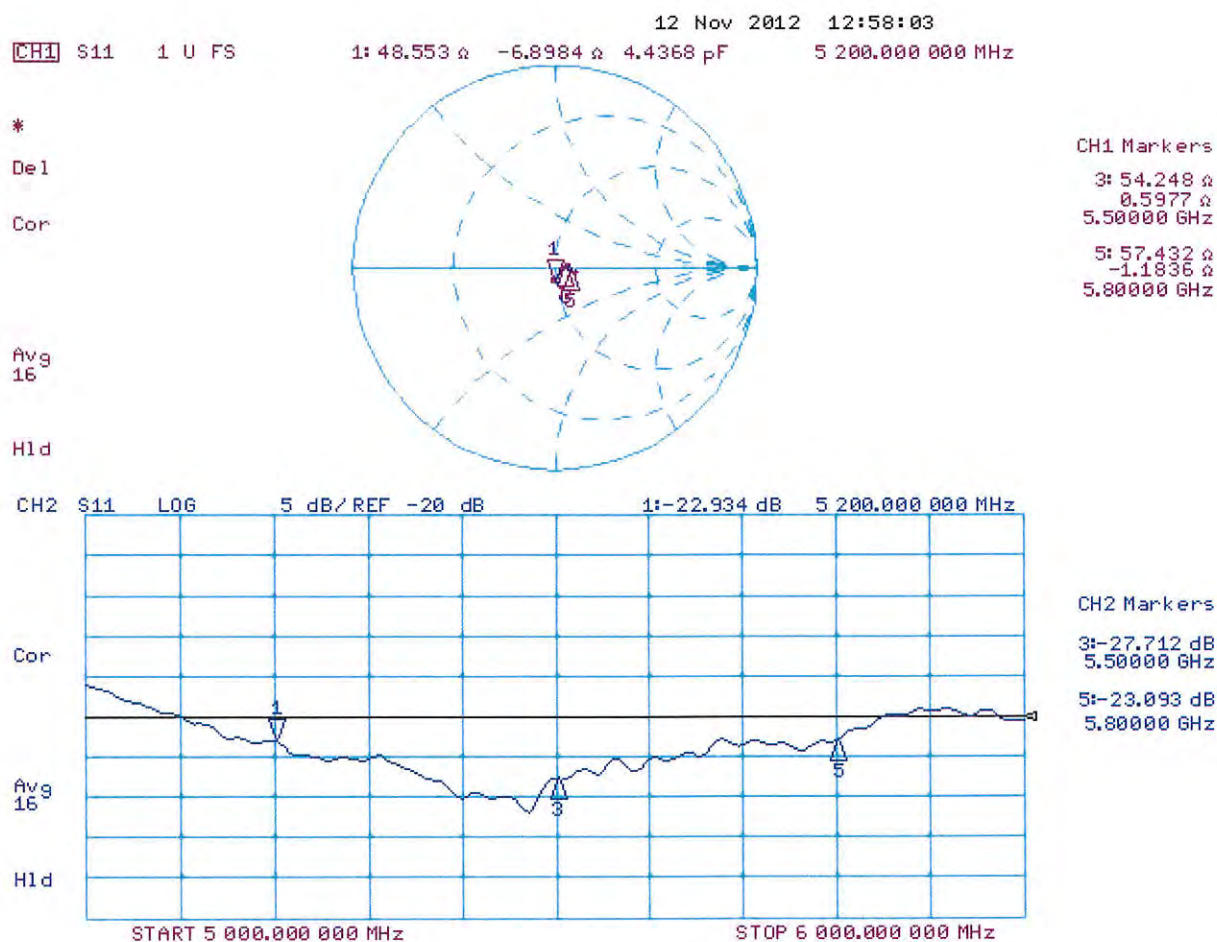

ANNEX B System Validation Reports

Test Laboratory: Eurofins Product Service GmbH

SystemPerformanceCheck-MSL 5200_03_02_2015

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx

Communication System: UID 0 - n/a, CW; Frequency: 5200 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 46.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3893; ConvF(4.64, 4.64, 4.64); Calibrated: 9/24/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- DASYS2 52.8.6(1115); SEMCAD X 14.6.9(7117)

System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200

MHz/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.2 W/kg

System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200


MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 69.288 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

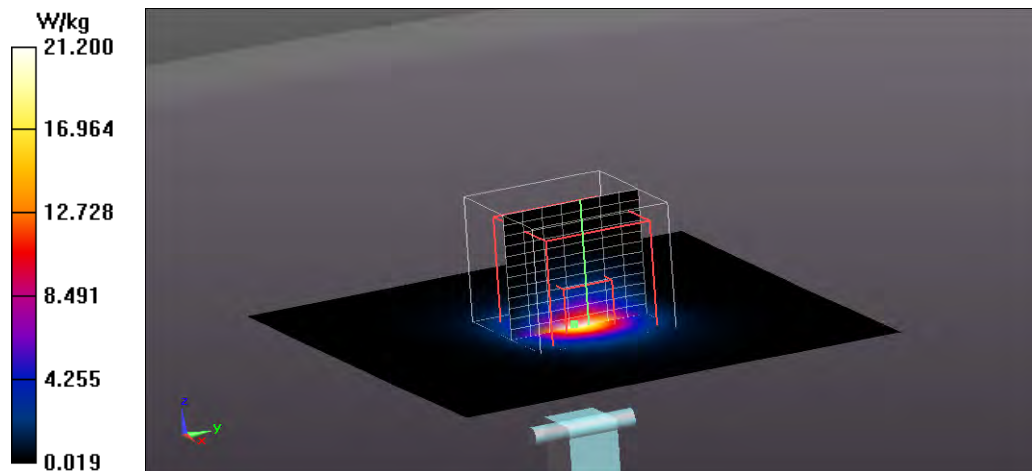

ANNEX C SAR Measurement Reports

Test Laboratory: Eurofins Product Service GmbH

5_2GHz Ch 48 MCS8 Antenna P1-P3 FRONT 0mm

DUT: In-flight entertainment system on commercial aircraft; Type: IPSC 3 Cradle / RD-NA1152-01; Serial: -

Communication System: UID 0 - n/a, IEEE 802.11a/h WiFi 5 GHz (MCS8); Frequency: 5240 MHz
Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.437$ S/m; $\epsilon_r = 46.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3893; ConvF(4.64, 4.64, 4.64); Calibrated: 9/24/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- DASYS2 52.8.6(1115); SEMCAD X 14.6.9(7117)

Flat-Section MSL/Flat Section 0mm/Area Scan (201x241x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Flat-Section MSL/Flat Section 0mm/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.025 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

