

---

# FCC Test Report

---

Report No.: AGC01475141003FE02

**FCC ID** : 2ADKWLEAGOOLEAD5  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : WCDMA/GSM MOBILE PHONE  
**BRAND NAME** : LEAGOO, iGlo  
**MODEL NAME** : Lead5, K510  
**CLIENT** : LEAGOO Int'l Co., Limited.  
**DATE OF ISSUE** : Nov.24, 2014  
**STANDARD(S)** : FCC Part 22H & 24E Rules  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



**REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.24, 2014	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1 PRODUCT DESCRIPTION.....	6
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
2.3 TEST METHODOLOGY .....	8
2.4 TEST FACILITY.....	8
2.5 MEASUREMENT INSTRUMENTS .....	8
2.6 SPECIAL ACCESSORIES.....	9
2.7 EQUIPMENT MODIFICATIONS .....	9
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
3.1 EUT CONFIGURATION.....	10
3.2 EUT EXERCISE.....	10
3.3 GENERAL TECHNICAL REQUIREMENTS.....	10
3.4 CONFIGURATION OF EUT SYSTEM.....	11
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>5. DESCRIPTION OF TEST MODES.....</b>	<b>12</b>
<b>6. OUTPUT POWER .....</b>	<b>13</b>
6.1 CONDUCTED OUTPUT POWER .....	13
6.2 RADIATED OUTPUT POWER.....	20
6.3. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS .....	23
APPENDIX A: MODULATION CHARACTERISTICS.....	25
<b>7. OCCUPIED BANDWIDTH .....</b>	<b>33</b>
7.1 MEASUREMENT METHOD .....	33
7.2 PROVISIONS APPLICABLE .....	33
7.3 MEASUREMENT RESULT.....	34
APPENDIX B: BANDWIDTH .....	34
<b>8. BAND EDGE.....</b>	<b>61</b>
8.1 MEASUREMENT METHOD .....	61
8.2 PROVISIONS APPLICABLE.....	61

<b>8.3 MEASUREMENT RESULT .....</b>	62
APPENDIX C: BAND EDGES COMPLIANCE.....	62
<b>9. SPURIOUS EMISSION .....</b>	<b>78</b>
9.1 CONDUCTED SPURIOUS EMISSION .....	78
APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL .....	79
9.2 RADIATED SPURIOUS EMISSION.....	151
<b>10. MAINS CONDUCTED EMISSION .....</b>	<b>155</b>
10.1 MEASUREMENT METHOD .....	155
10.2 PROVISIONS APPLICABLE .....	155
10.3 MEASUREMENT RESULT.....	156
<b>11. FREQUENCY STABILITY.....</b>	<b>158</b>
11.1 MEASUREMENT METHOD .....	158
11.2 PROVISIONS APPLICABLE.....	158
11.3 MEASUREMENT RESULT.....	160
Appendix E:Frequency Stability .....	160
<b>PHOTOGRAPHS OF TEST SETUP .....</b>	<b>175</b>
<b>PHOTOGRAPHS OF EUT .....</b>	<b>177</b>

## 1. VERIFICATION OF COMPLIANCE

<b>Applicant</b>	LEAGOO Int'l Co., Limited.
<b>Address</b>	RM 43B, Block C, Electronic & Technology Building, Shennan Middle Road, Futian, Shenzhen, China.
<b>Manufacturer</b>	Shenzhen ODX Telecom Equipment Co., Ltd.
<b>Address</b>	2nd Floor of Building B, HongLianYing Technology Park, No.286 of SiLi Road, DaBuXiang Community, Longhua New District, Shenzhen, China.
<b>Product Designation</b>	WCDMA/GSM MOBILE PHONE
<b>Brand Name</b>	LEAGOO, iGlo
<b>Test Model</b>	Lead5
<b>Series Model</b>	K510
<b>Difference description</b>	All the same except for the model name.
<b>Date of test</b>	Nov.17, 2014 to Nov.21, 2014
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal

### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By :

*Matt Zhang*

Matt Zhang

Nov.24, 2014

Reviewed By :

*Kidd Yang*

Kidd Yang

Nov.24, 2014

Approved By:

*Solger Zhang*

Solger Zhang

Nov.24, 2014

## 2. GENERAL INFORMATION

### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	WCDMA/GSM MOBILE PHONE
Hardware version:	V2.1 RJK301_OTD_V0.9.4.1_S0619
Software version:	RJK301_W_K510_LEAGOO_82_KK_V0.4.4.1_S1105
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V (U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII (Non-U.S. Bands)
Antenna:	PIFA Antenna
Antenna gain:	-1.0dBi(GSM/WCDMA 850), -0.8dBi (GSM/WCDMA 1900)
Power Supply:	DC 3.8V by Battery
Battery parameter:	DC3.8V/2000 mAh
Adapter Input:	AC100-240V 50/60Hz
Adapter Output:	DC5V, 1000mA
Dual Card:	WCDMA / GSM Card Slot GSM Card Slot
GRPS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.7 V)
Extreme Temp. Tolerance	-10°C to +50°C
*** Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage. Other functions have been performed according to verification procedure except for Bluetooth and MS function. Card 1 can't transmit with Card 2 simultaneously.	

\*\*\* **Note:** The maximum power levels are GSM for MCS-4: GMSK link, EDGE for MCS-9:8PSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

**WCDMA Card Slot:**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.63	32.44	31.82
PCS 1900	27.78	29.58	28.89
UMTS BAND II	21.75	23.38	22.77
UMTS BAND V	21.68	23.44	22.79

**GSM Card Slot:**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.27	31.94	31.35
PCS 1900	27.32	29.13	28.39

## 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ADKWLEAGOOLEAD5**, filing to comply with the FCC Part 22H&24E requirements.

## 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

## 2.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

FCC register No.: 259865

## 2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	Feb.17,2014	Feb.16,2015
TEST RECEIVER	R&S	ESCI	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	AGILENT	8960	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	R&S	CMU200	July 25, 2014	July 24, 2015
SIGNAL GENERATOR	AGILENT	E4438C	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	July 25, 2014	July 24, 2015
CLIMATE CHAMBER	ALBATROSS	--	July 25, 2014	July 24, 2015
Loop Antenna	A.H.	SAS-562B	May 10, 2014	May 09, 2015
WIDEBAND FREQUENCY ANTENNA	SCHWARZBECK	VULB9168	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EMCO	3142C	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EM	EM-AH-10180	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	Feb.17,2014	Feb.16,2015
Horn Antenna	A.H. Systems Inc.	SAS-574	June 6, 2014	June 5, 2015
Radiation Cable 1	Sat	RE1	June 4, 2014	June 3, 2015
Radiation Cable 2	Sat	RE2	June 4, 2014	June 3, 2015
Conduction Cable	Sat	CE1	June 4, 2014	June 3, 2015

## **2.6 SPECIAL ACCESSORIES**

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

## **2.7 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/22.913(a) (2) / 24.232 (c)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
4	Mains Conducted Emission		15.107 / 15.207
5	Frequency Stability		2.1055/22.355 /24.235
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(a)/24.238(a)
8	Band Edge		22.917(a)/24.238(a)

### 3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	WCDMA/GSM MOBILE PHONE	Lead5	FCCID:2ADKWLEAGOOLEAD5	EUT
2	Adapter	LA100-US	DC5.0V / 1000mA	Accessory
3	Battery	Lead5	DC3.8V / 2000 mAh	Accessory
4	Earphone	Lead5	N/A	Accessory
5	USB Cable	Lead5	N/A	Accessory

\*\*\*Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

#### 4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/22.913(a) (2) / 24.232 (c)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
4	Mains Conducted Emission		15.107 / 15.207	Pass
5	Frequency Stability		2.1055/22.355 /24.235	Pass
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass
8	Band Edge		22.917(a)/24.238(a)	Pass

#### 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

**\*\*\*Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

## 6. OUTPUT POWER

### 6.1 CONDUCTED OUTPUT POWER

#### 6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM850/EDGE band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	33 dBm (2W)	- 2
EDGE	27 dBm(0.5W)	±2
Conducted Output Power Limits for PCS1900/EDGE band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	30 dBm (1W)	- 2
EDGE	26 dBm (0.4W)	±2
Conducted Output Power Limits for UMTS band II		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band V		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2

**GSM 850:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33	32.44	-0.56	31.82	-9	22.82
	836.6	33	32.38	-0.62	31.77	-9	22.77
	848.8	33	32.34	-0.66	31.7	-9	22.7
GPRS850 (1 Slot)	824.2	33	32.39	-0.61	31.68	-9	22.68
	836.6	33	32.33	-0.67	31.65	-9	22.65
	848.8	33	32.24	-0.76	31.61	-9	22.61
GPRS850 (2 Slot)	824.2	30	29.71	-0.29	28.93	-6	22.93
	836.6	30	29.68	-0.32	28.86	-6	22.86
	848.8	30	29.66	-0.34	28.79	-6	22.79
GPRS850 (3 Slot)	824.2	28.23	27.76	-0.47	26.92	-4.26	22.66
	836.6	28.23	27.64	-0.59	26.86	-4.26	22.6
	848.8	28.23	27.61	-0.62	26.82	-4.26	22.56
GPRS850 (4 Slot)	824.2	27	26.65	-0.35	25.94	-3	22.94
	836.6	27	26.62	-0.38	25.88	-3	22.88
	848.8	27	26.55	-0.45	25.79	-3	22.79

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	26.72	26.21
	189	836.6	26.69	26.15
	251	848.8	26.58	26.06
EDGE (2 Slot)	128	824.2	25.46	24.86
	189	836.6	25.44	24.83
	251	848.8	25.41	24.75
EDGE (3 Slot)	128	824.2	23.68	23.16
	189	836.6	23.63	23.12
	251	848.8	23.61	23.08
EDGE (4 Slot)	128	824.2	22.78	22.27
	189	836.6	22.73	22.21
	251	848.8	22.64	22.16

**PCS 1900:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	30	<b>29.58</b>	-0.42	28.89	-9	19.89
	1880	30	29.47	-0.53	28.83	-9	19.83
	1909.8	30	29.43	-0.57	28.78	-9	19.78
GPRS1900 (1 Slot)	1850.2	30	29.32	-0.68	28.57	-9	19.57
	1880	30	29.28	-0.72	28.53	-9	19.53
	1909.8	30	29.25	-0.75	28.51	-9	19.51
GPRS1900 (2 Slot)	1850.2	27	26.69	-0.31	25.92	-6	19.92
	1880	27	26.59	-0.41	25.89	-6	19.89
	1909.8	27	26.53	-0.47	25.86	-6	19.86
GPRS1900 (3 Slot)	1850.2	25.23	24.64	-0.59	23.89	-4.26	19.63
	1880	25.23	24.56	-0.67	23.81	-4.26	19.55
	1909.8	25.23	24.49	-0.74	23.77	-4.26	19.51
GPRS1900 (4 Slot)	1850.2	24	23.72	-0.28	22.95	-3	19.95
	1880	24	23.67	-0.33	22.88	-3	19.88
	1909.8	24	23.63	-0.37	22.86	-3	19.86

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	25.73	25.19
	661	1880	25.67	25.13
	810	1909.8	25.62	25.11
EDGE (2 Slot)	512	1850.2	24.74	24.22
	661	1880	24.68	24.15
	810	1909.8	24.63	24.08
EDGE (3 Slot)	512	1850.2	22.62	22.16
	661	1880	22.61	22.09
	810	1909.8	22.57	22.04
EDGE (4 Slot)	512	1850.2	21.64	21.13
	661	1880	21.59	21.07
	810	1909.8	21.54	21.02

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1900 RMC	1852.6	24	<b>23.38</b>	-0.62	22.77
	1880	24	23.31	-0.69	22.72
	1907.4	24	23.28	-0.72	22.66
WCDMA 1900 AMR	1852.6	24	22.73	-1.27	22.26
	1880	24	22.67	-1.33	22.18
	1907.4	24	22.62	-1.38	22.14
HSDPA Subtest 1	1852.6	24	22.63	-1.37	22.15
	1880	24	22.61	-1.39	22.12
	1907.4	24	22.56	-1.44	22.08
HSDPA Subtest 2	1852.6	24	22.65	-1.35	22.14
	1880	24	22.62	-1.38	22.13
	1907.4	24	22.61	-1.39	22.11
HSDPA Subtest 3	1852.6	24	22.66	-1.34	22.17
	1880	24	22.58	-1.42	22.09
	1907.4	24	22.73	-1.27	22.25
HSDPA Subtest 4	1852.6	24	22.71	-1.29	22.21
	1880	24	22.66	-1.34	22.18
	1907.4	24	22.63	-1.37	22.15
HSUPA Subtest 1	1852.6	24	22.73	-1.27	22.25
	1880	24	22.65	-1.35	22.17
	1907.4	24	22.62	-1.38	22.13
HSUPA Subtest 2	1852.6	24	22.74	-1.26	22.29
	1880	24	22.71	-1.29	22.21
	1907.4	24	22.67	-1.33	22.16
HSUPA Subtest 3	1852.6	24	22.75	-1.25	22.28
	1880	24	22.64	-1.36	22.13
	1907.4	24	22.58	-1.42	22.11
HSUPA Subtest 4	1852.6	24	22.73	-1.27	22.24
	1880	24	22.62	-1.38	22.16
	1907.4	24	22.61	-1.39	22.13
HSUPA Subtest 5	1852.6	24	22.69	-1.31	22.19
	1880	24	22.64	-1.36	22.15
	1907.4	24	22.56	-1.44	22.04

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 850 RMC	826.6	24	<b>23.44</b>	-0.56	22.79
	836.4	24	23.38	-0.62	22.75
	846.4	24	23.29	-0.71	22.67
WCDMA 850 AMR	826.6	24	22.67	-1.33	22.24
	836.4	24	22.64	-1.36	22.18
	846.4	24	22.59	-1.41	22.11
HSDPA Subtest 1	826.6	24	22.73	-1.27	22.32
	836.4	24	22.66	-1.34	22.17
	846.4	24	22.63	-1.37	22.12
HSDPA Subtest 2	826.6	24	22.77	-1.23	22.23
	836.4	24	22.68	-1.32	22.16
	846.4	24	22.64	-1.36	22.12
HSDPA Subtest 3	826.6	24	22.76	-1.24	22.25
	836.4	24	22.72	-1.28	22.23
	846.4	24	22.69	-1.31	22.19
HSDPA Subtest 4	826.6	24	22.72	-1.28	22.27
	836.4	24	22.68	-1.32	22.23
	846.4	24	22.64	-1.36	22.18
HSUPA Subtest 1	826.6	24	22.72	-1.28	22.31
	836.4	24	22.71	-1.29	22.21
	846.4	24	22.66	-1.34	22.15
HSUPA Subtest 2	826.6	24	22.65	-1.35	22.16
	836.4	24	22.62	-1.38	22.14
	846.4	24	22.69	-1.31	22.09
HSUPA Subtest 3	826.6	24	22.76	-1.24	22.26
	836.4	24	22.73	-1.27	22.21
	846.4	24	22.63	-1.37	22.18
HSUPA Subtest 4	826.6	24	22.74	-1.26	22.31
	836.4	24	22.72	-1.28	22.26
	846.4	24	22.61	-1.39	22.12
HSUPA Subtest 5	826.6	24	22.69	-1.31	22.18
	836.4	24	22.64	-1.36	22.15
	846.4	24	22.59	-1.41	22.04

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)

Note: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

## 6.2 RADIATED OUTPUT POWER

### 6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl}=P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power=PM_{ea}+AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi..}$

### 6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850/EDGE	<=38.45 dBm (7W)
PCS 1900/EDGE	<=33 dBm (2W)
UMTS BAND II	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)

### 6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850/EDGE 8				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	30.63	Horizontal	Pass
	836.6	30.61	Horizontal	Pass
	848.8	30.57	Horizontal	Pass
	824.2	28.56	Vertical	Pass
	836.6	28.46	Vertical	Pass
	848.8	28.42	Vertical	Pass
EDGE	824.2	25.72	Horizontal	Pass
	836.6	25.66	Horizontal	Pass
	848.8	25.59	Horizontal	Pass
	824.2	25.55	Vertical	Pass
	836.6	25.53	Vertical	Pass
	848.8	25.47	Vertical	Pass

Radiated Power (E.I.R.P) for PCS 1900/EDGE 8				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM 1900	1850.2	27.78	Horizontal	Pass
	1880.0	27.69	Horizontal	Pass
	1909.8	27.62	Horizontal	Pass
	1850.2	26.56	Vertical	Pass
	1880.0	26.49	Vertical	Pass
	1909.8	26.43	Vertical	Pass
EDGE	1850.2	24.72	Horizontal	Pass
	1880.0	24.68	Horizontal	Pass
	1909.8	24.59	Horizontal	Pass
	1850.2	23.62	Vertical	Pass
	1880.0	23.58	Vertical	Pass
	1909.8	23.53	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
RMC 12.2kbps	1852.6	<b>21.75</b>	Horizontal	Pass
	1880	21.69	Horizontal	Pass
	1907.4	21.62	Horizontal	Pass
	1852.6	21.58	Vertical	Pass
	1880	21.54	Vertical	Pass
	1907.4	21.51	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.6	<b>21.68</b>	Horizontal	Pass
	836.4	21.64	Horizontal	Pass
	846.4	21.53	Horizontal	Pass
	826.6	21.46	Vertical	Pass
	836.4	21.39	Vertical	Pass
	846.4	21.35	Vertical	Pass

Note: Above is worst mode data.

## 6.3. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS

### 6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPK. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### 6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 6.3.3 MEASUREMENT RESULT

Modes		GSM850(GSM)		
Channel	128	190	251	
	(Low)	(Mid)	(High)	
Frequency (MHz)	824.2	836.6	848.8	
Peak-To-Average Ratio (dB)/GSM	0.62	0.61	0.64	
Peak-To-Average Ratio (dB)/EDGE	0.51	0.54	0.52	

Modes		PCS 1900 (GSM)		
Channel	512	661	810	
	(Low)	(Mid)	(High)	
Frequency (MHz)	1850.2	1880	1909.8	
Peak-To-Average Ratio (dB)/GSM	0.69	0.64	0.65	
Peak-To-Average Ratio (dB)/EDGE	0.54	0.54	0.51	

Modes	UMTS BAND II		
Channel	9663	9800	9937
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.6	1880	1907.4
Peak-To-Average Ratio (dB)	0.61	0.59	0.62

Modes	UMTS BAND V		
Channel	4358	4407	4457
	(Low)	(Mid)	(High)
Frequency (MHz)	826.6	836.6	846.4
Peak-To-Average Ratio (dB)	0.65	0.63	0.62

## APPENDIX A: MODULATION CHARACTERISTICS

Test Mode	Test Modes description
GSM/TM1	GSM system, GSM,GMSK modulation
GSM/TM2	GSM system, GPRS,GMSK modulation
GSM/TM3	GSM system,EDGE,8PSK modulation
Test Mode	Test Modes description
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation


### Test Results

#### For GSM

Test Band=GSM850


Test Mode=GSM/TM1

Test Channel=MCH

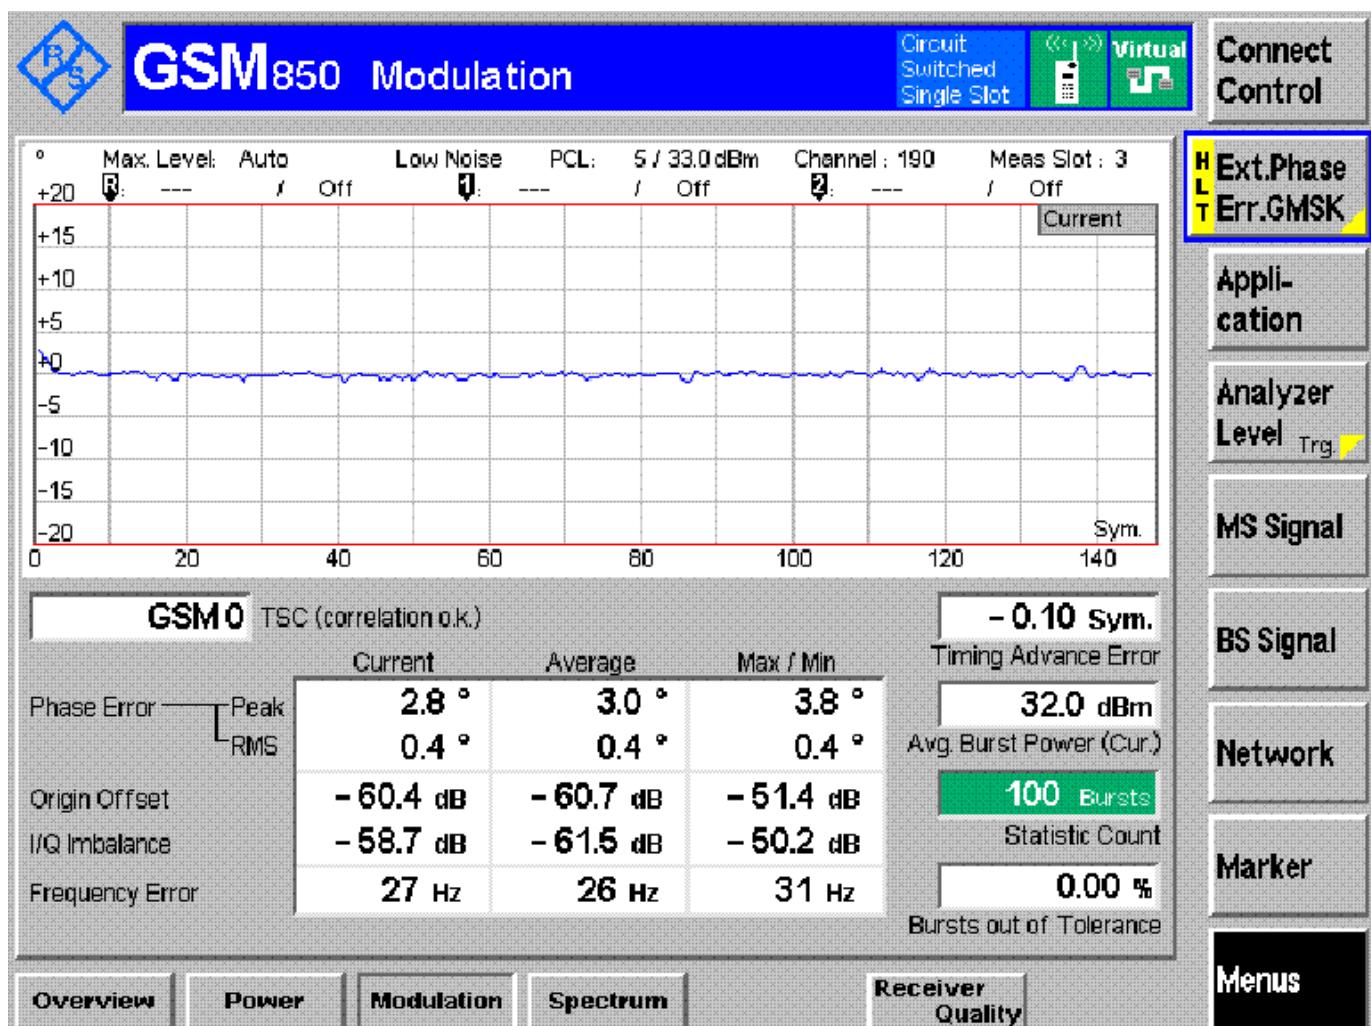


Test Mode=GSM/TM2

Test Channel=MCH

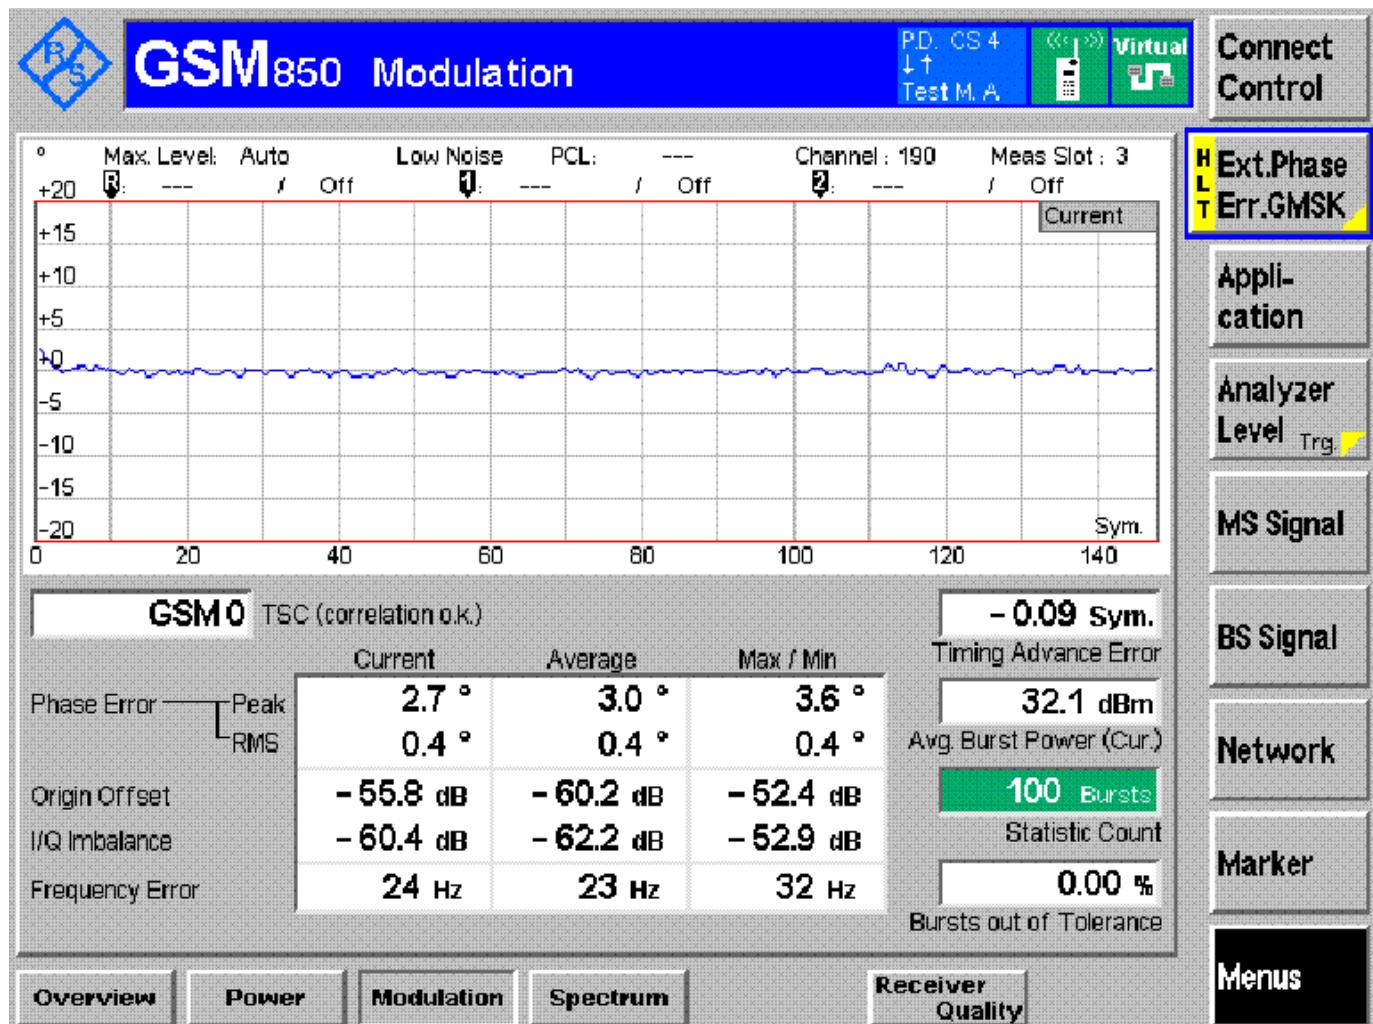

Test Mode=GSM/TM3


Test Channel=MCH

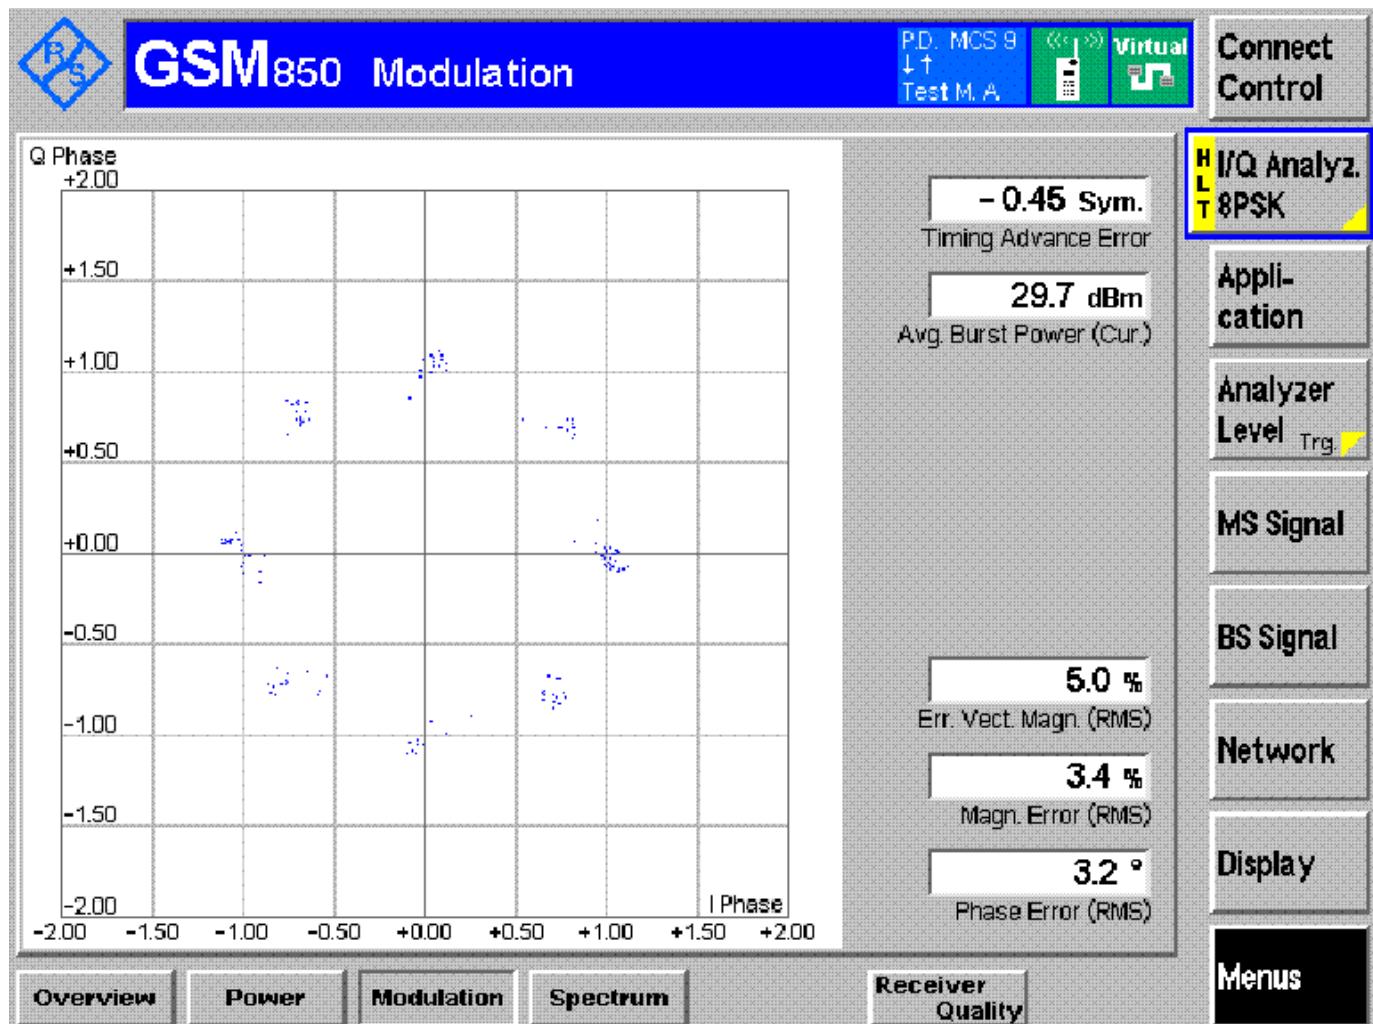

Test Band=GSM1900


Test Mode=GSM/TM1

Test Channel=MCH

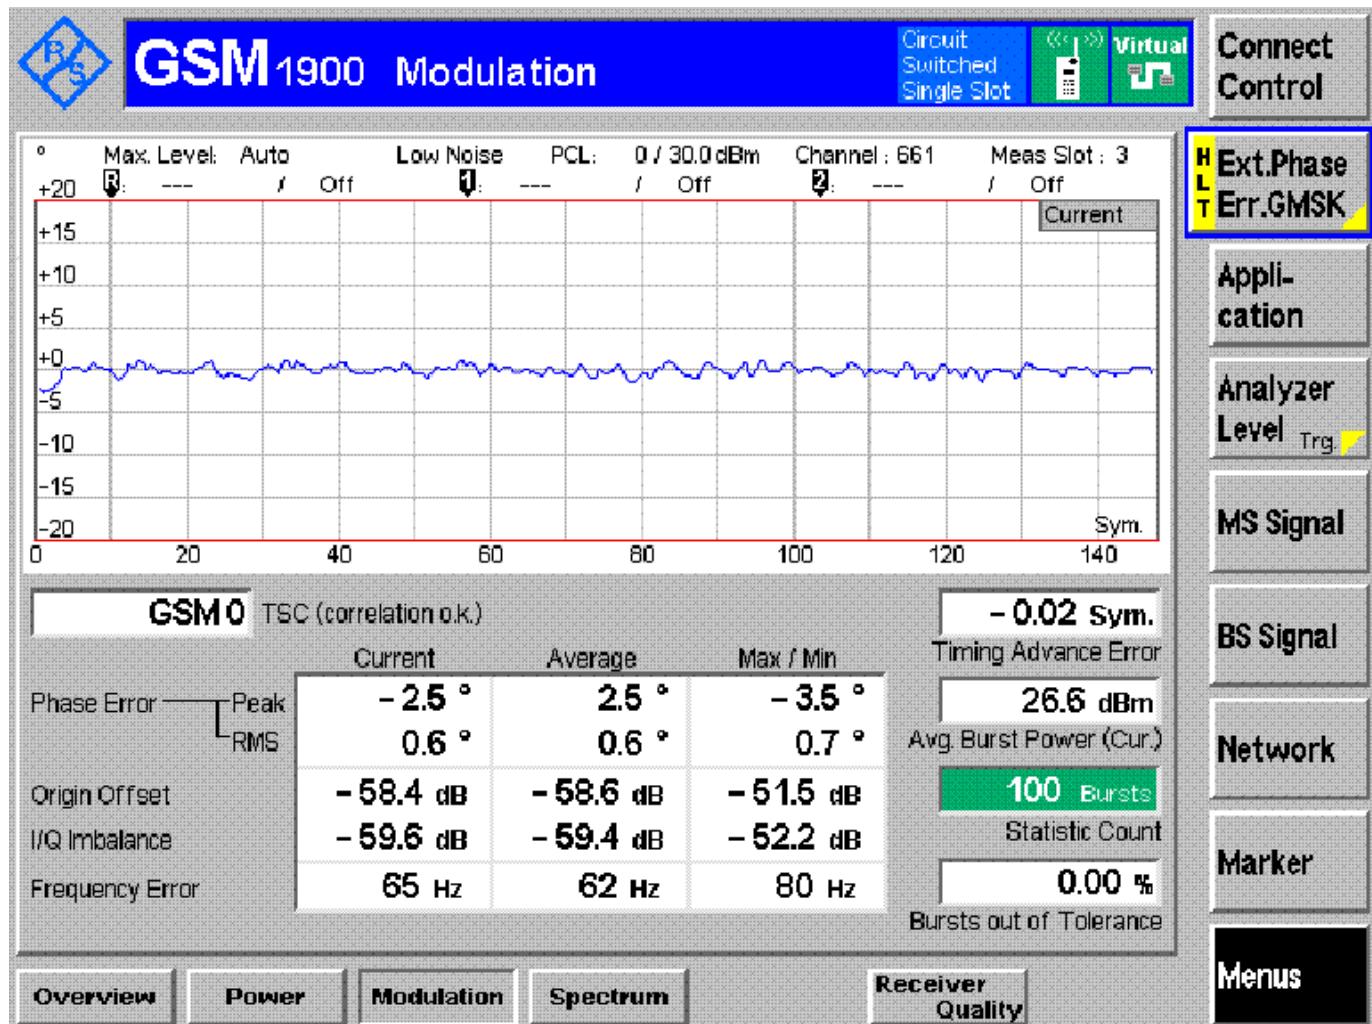


Test Mode=GSM/TM2

Test Channel=MCH

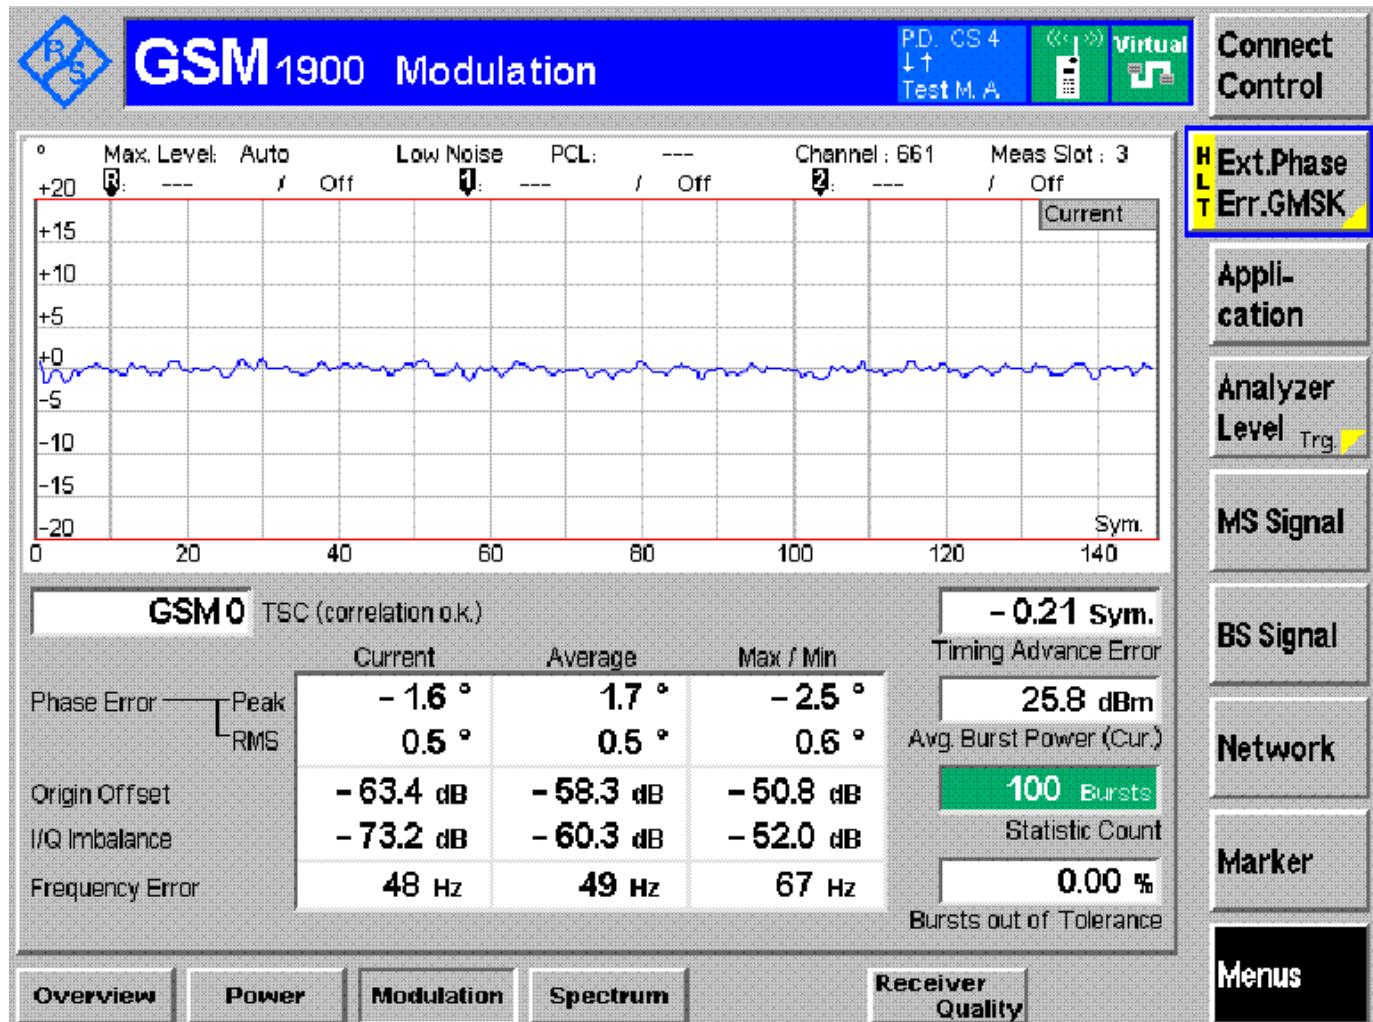

Test Mode=GSM/TM3

Test Channel=MCH

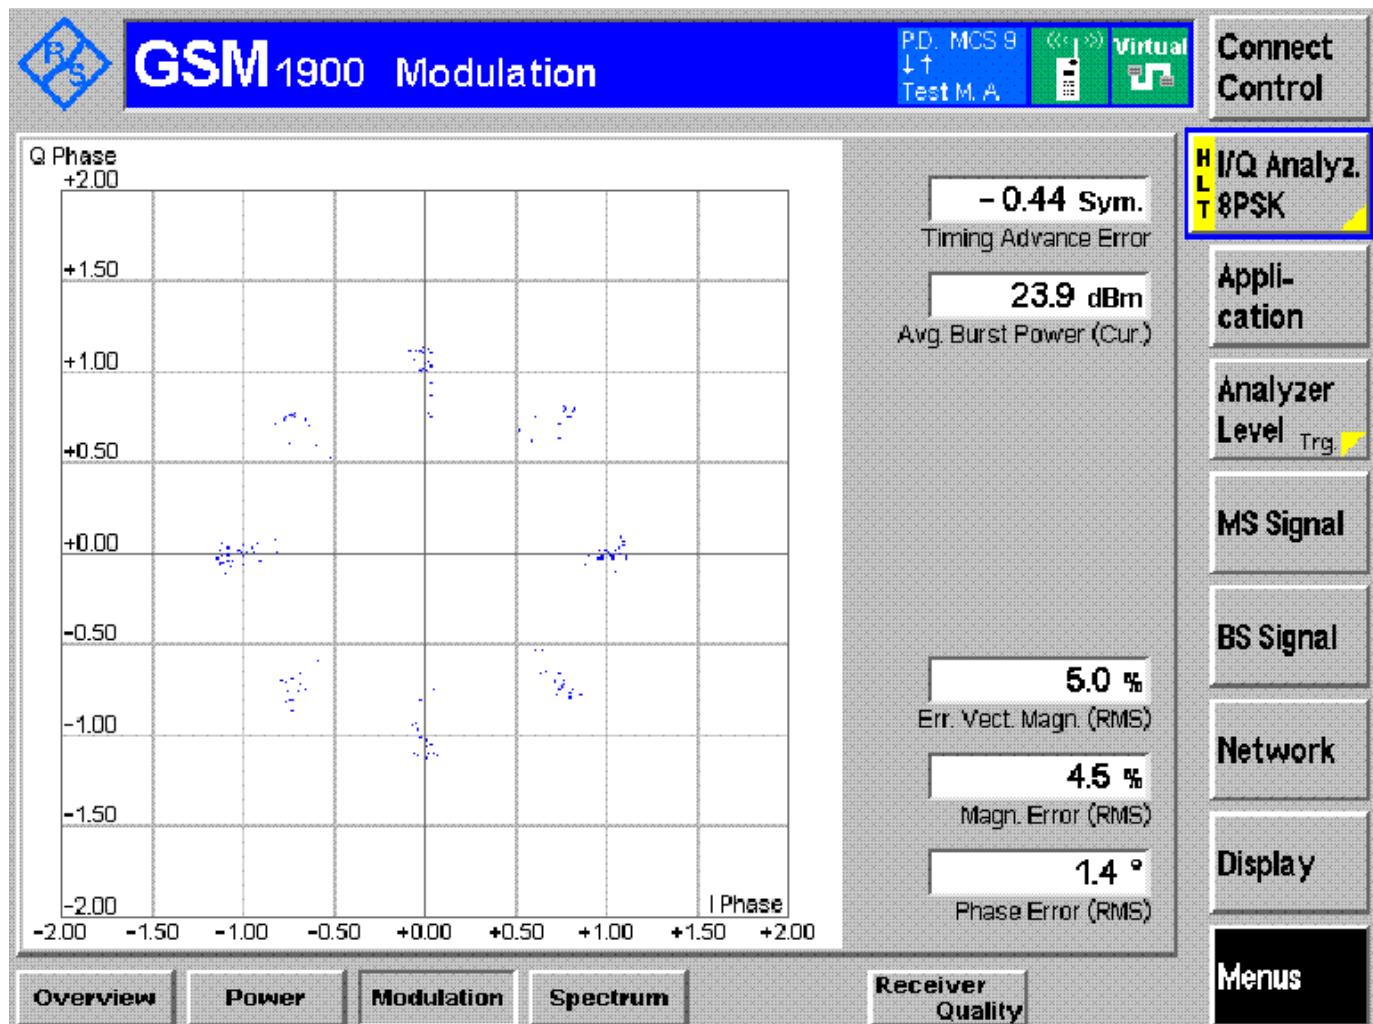


For WCDMA

Test Band=WCDMA850

Test Mode=UMTS/TM1


Test Channel=MCH

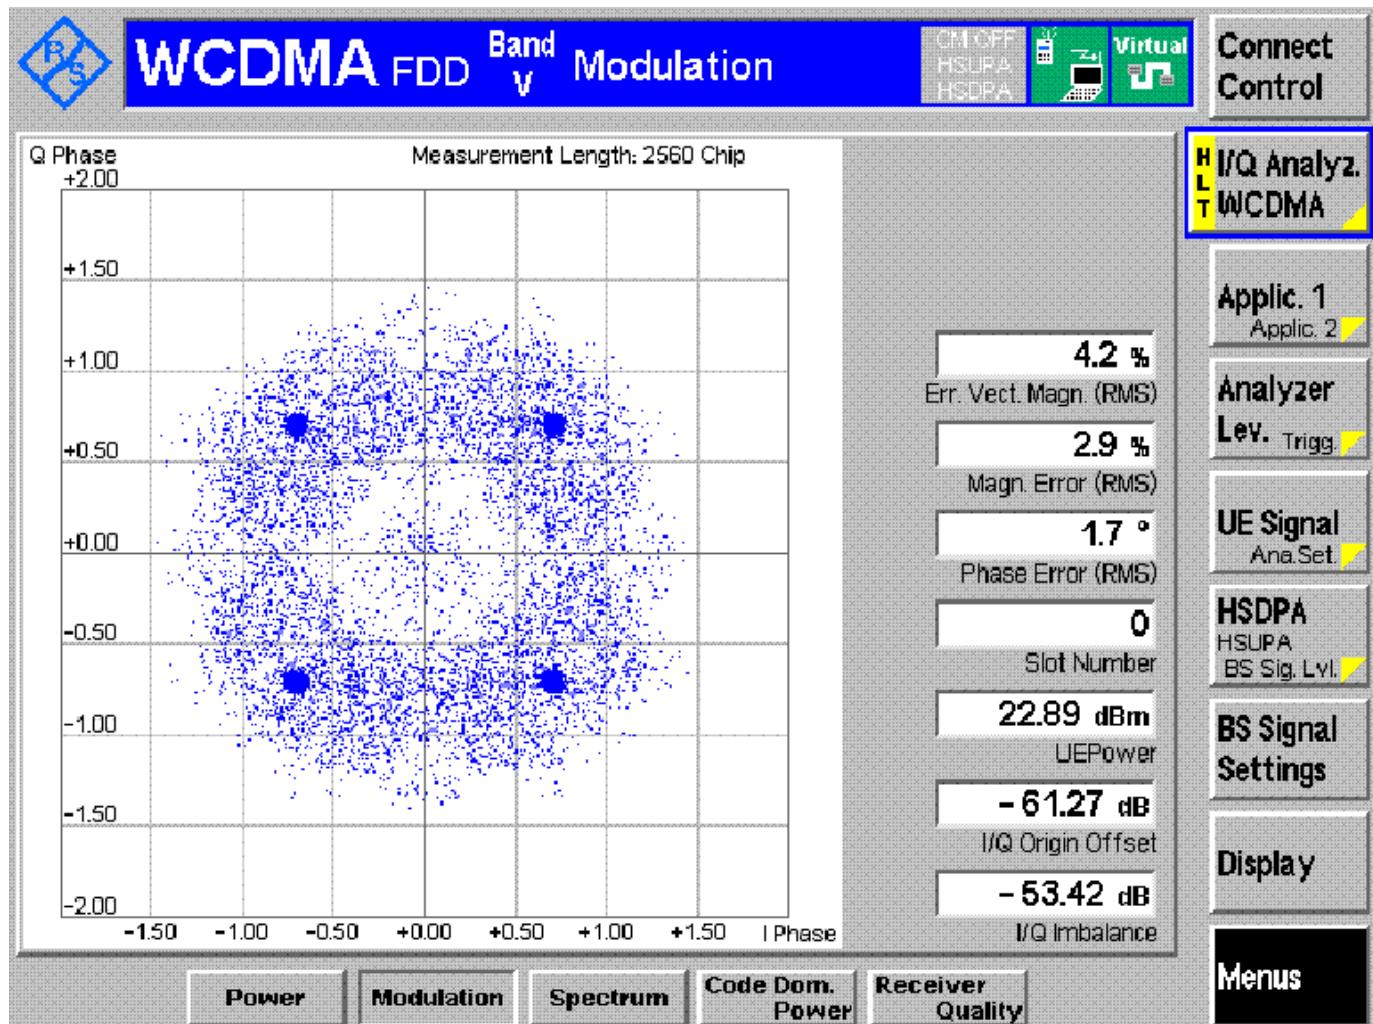

Test Band=WCDMA1900

Test Mode=UMTS/TM1

Test Channel=MCH

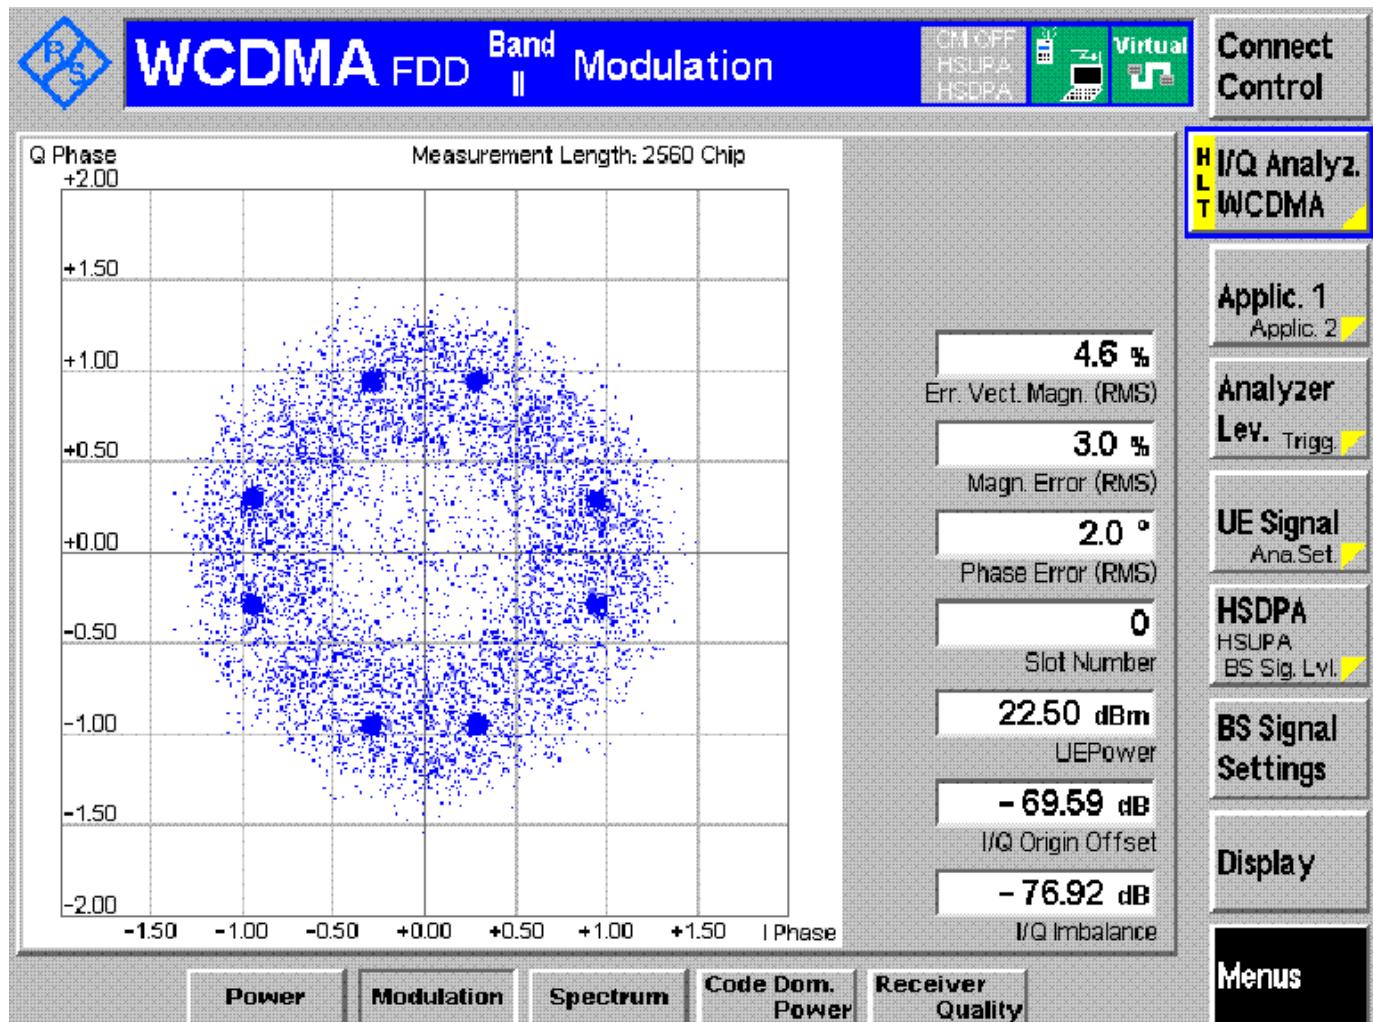

## **7. OCCUPIED BANDWIDTH**

### **7.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **7.2 PROVISIONS APPLICABLE**

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 7.3 MEASUREMENT RESULT

### APPENDIX B: BANDWIDTH

#### Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM/TM1	LCH	244.06	313.13	PASS
		MCH	244.30	315.59	PASS
		HCH	244.10	315.97	PASS
	GSM/TM2	LCH	245.52	313.13	PASS
		MCH	244.79	315.59	PASS
		HCH	244.34	315.97	PASS
	GSM/TM3	LCH	253.07	320.96	PASS
		MCH	256.01	332.02	PASS
		HCH	258.43	325.48	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM/TM1	LCH	247.37	314.19	PASS
		MCH	241.92	310.01	PASS
		HCH	246.85	312.42	PASS
	GSM/TM2	LCH	244.87	316.95	PASS
		MCH	244.58	316.72	PASS
		HCH	243.45	306.46	PASS
	GSM/TM3	LCH	255.83	336.63	PASS
		MCH	258.60	329.94	PASS
		HCH	260.88	325.86	PASS

## For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=LCH

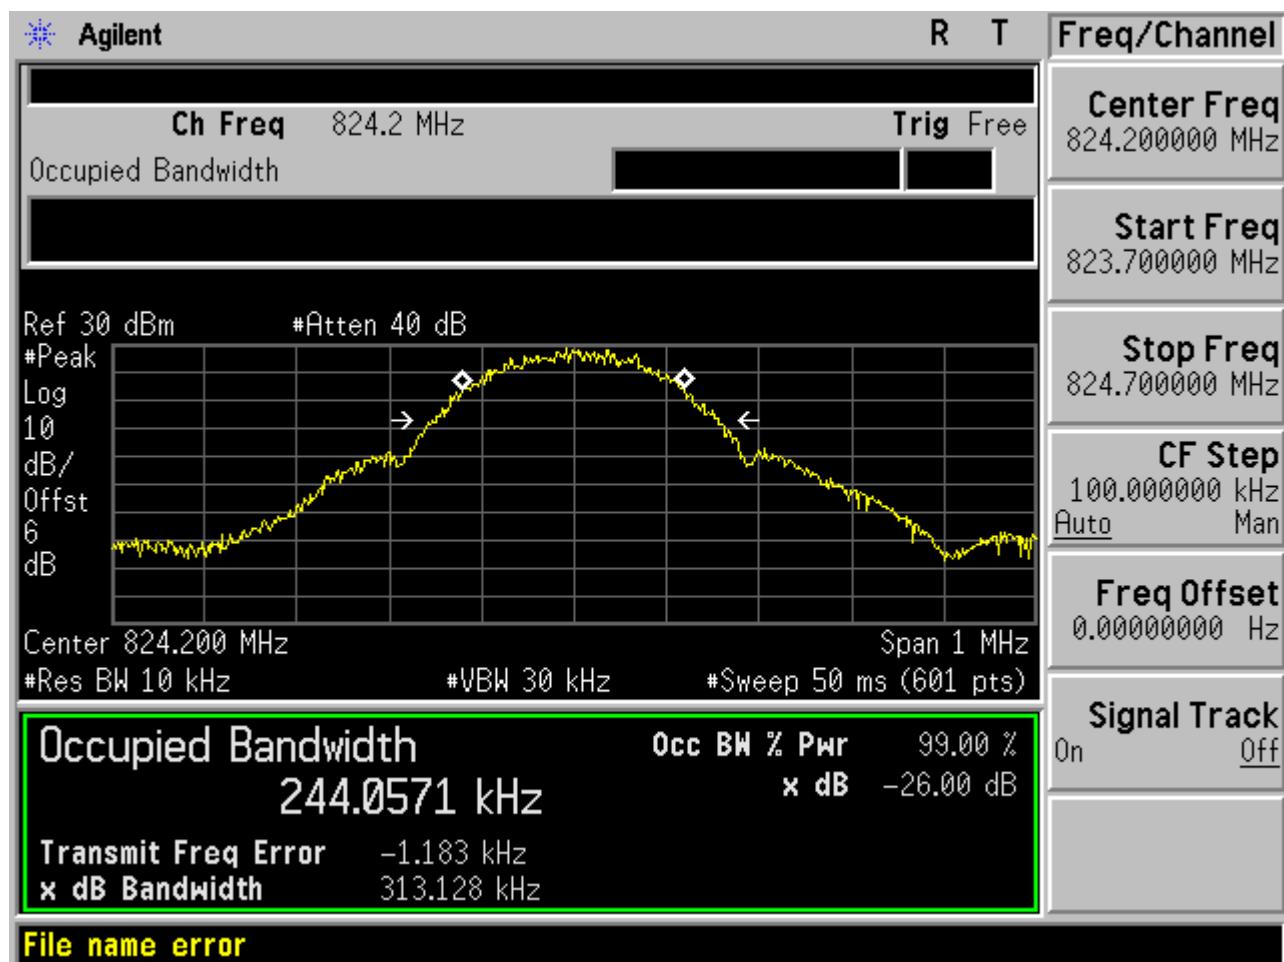

Test Channel=MCH

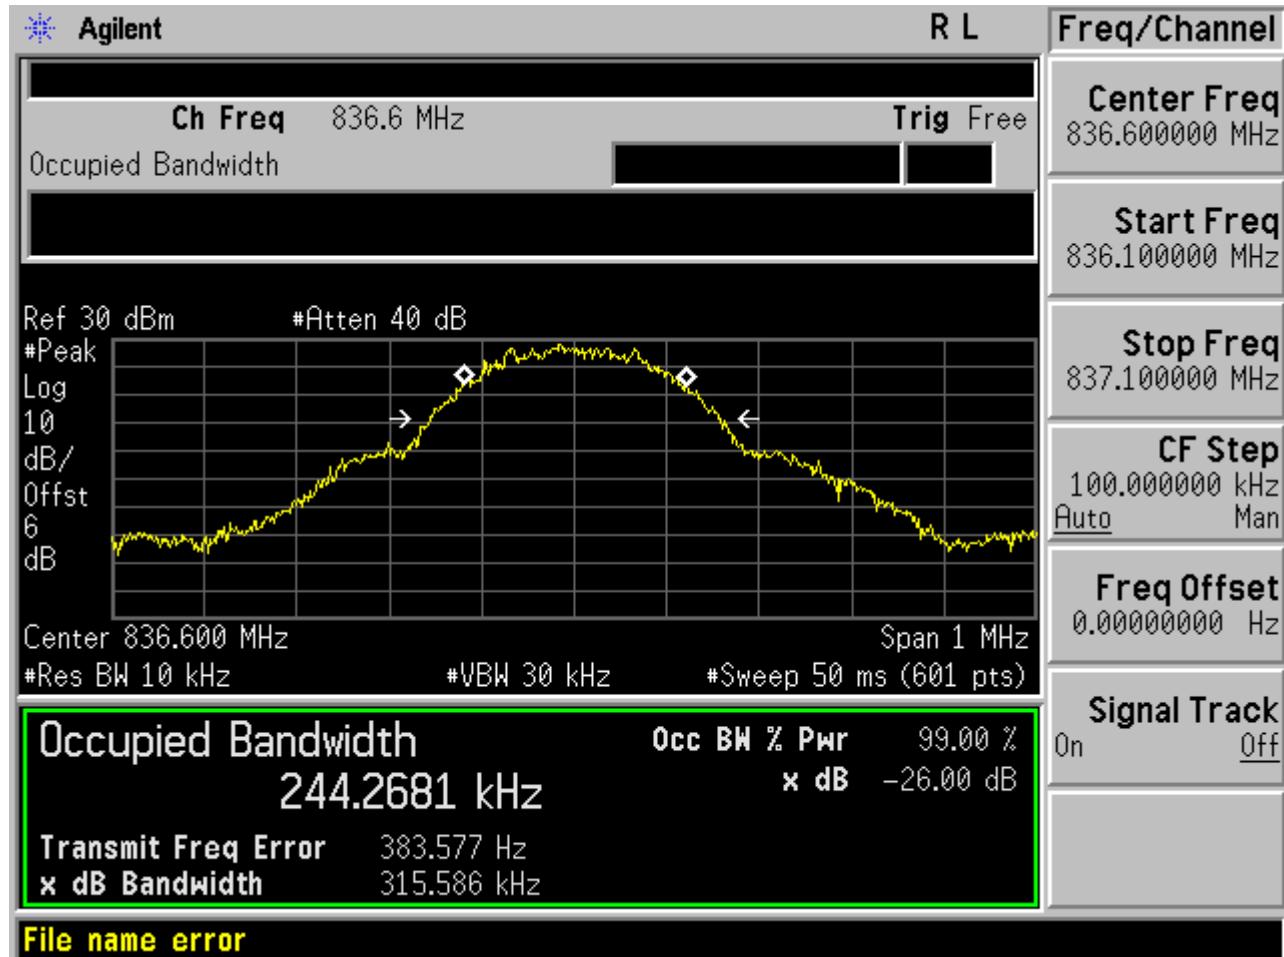


Test Channel=HCH

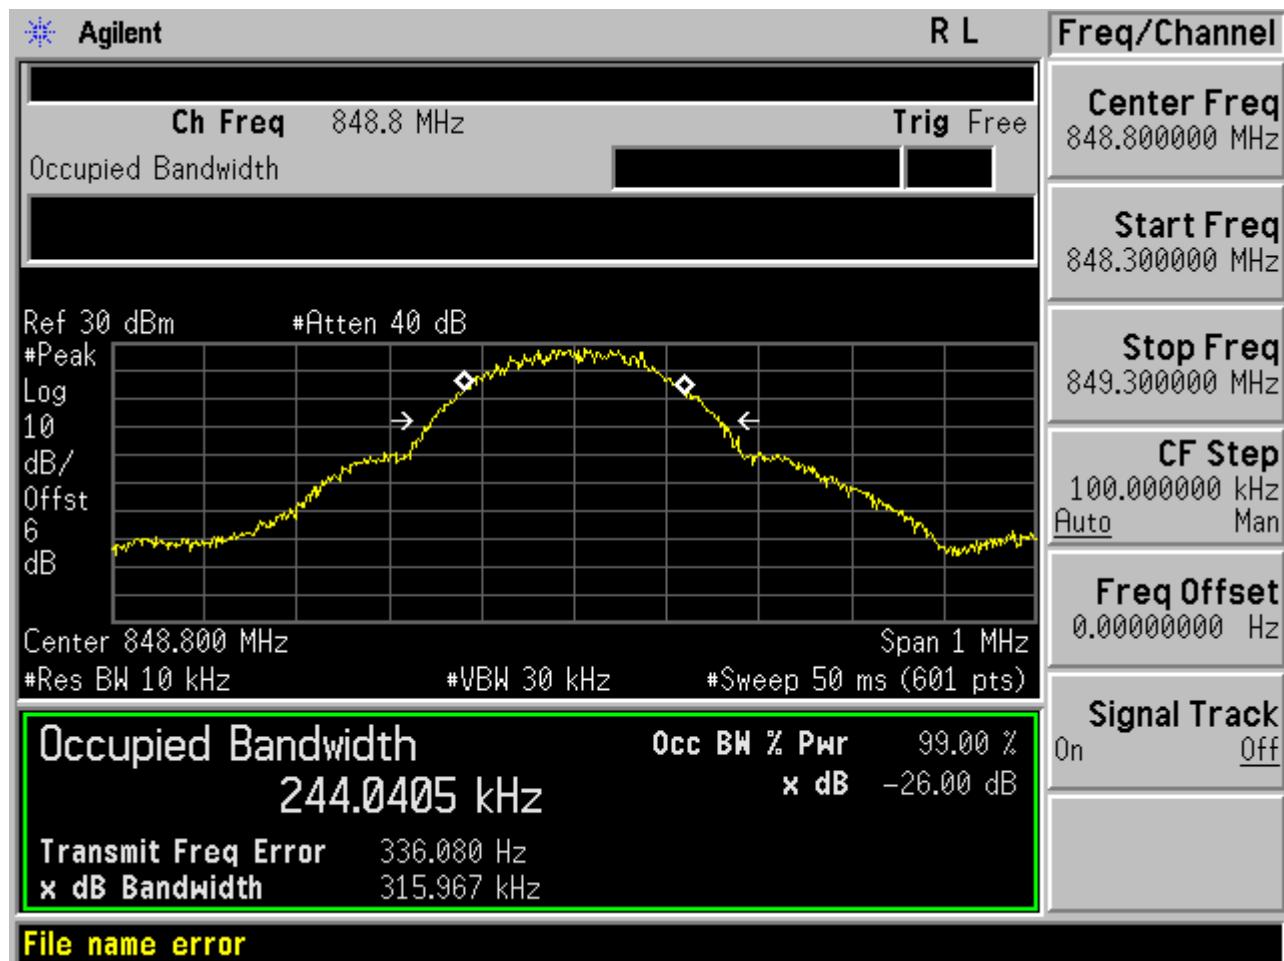


Test Band=GSM850

Test Mode=GSM/TM2


Test Channel=LCH

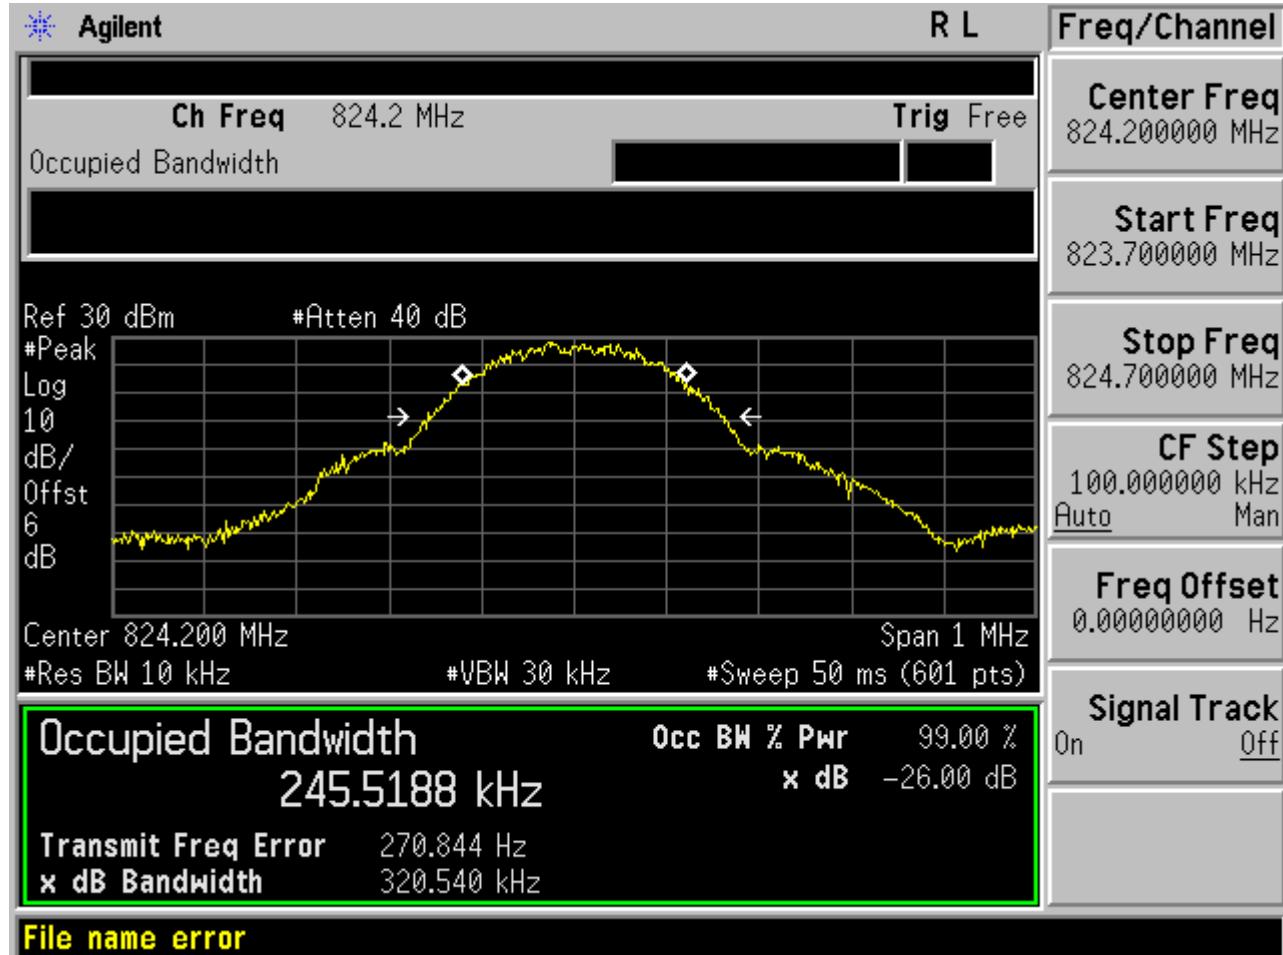

Test Channel=MCH

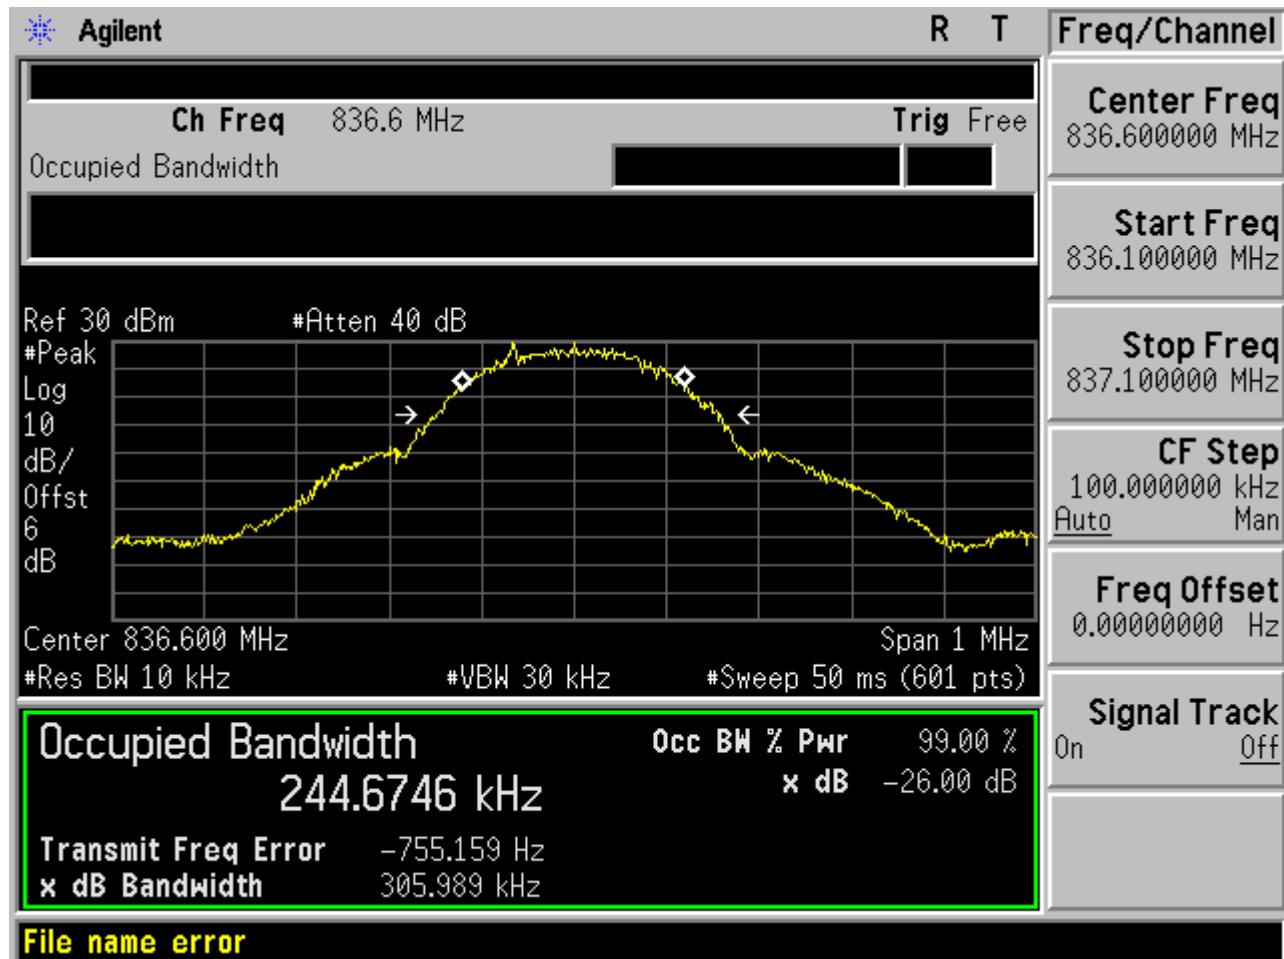


Test Channel=HCH

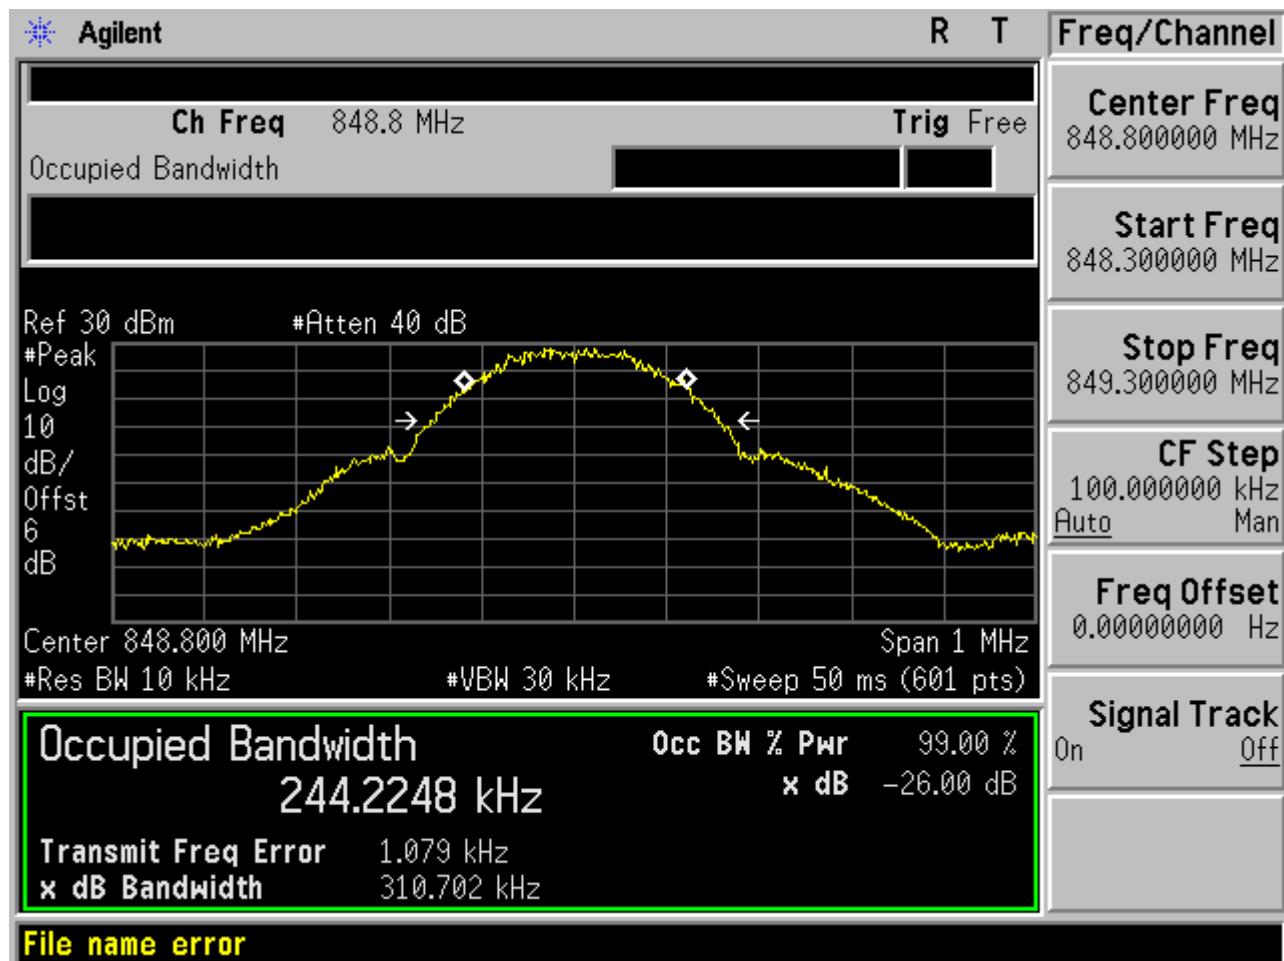


Test Band=GSM850

Test Mode=GSM/TM3


Test Channel=LCH

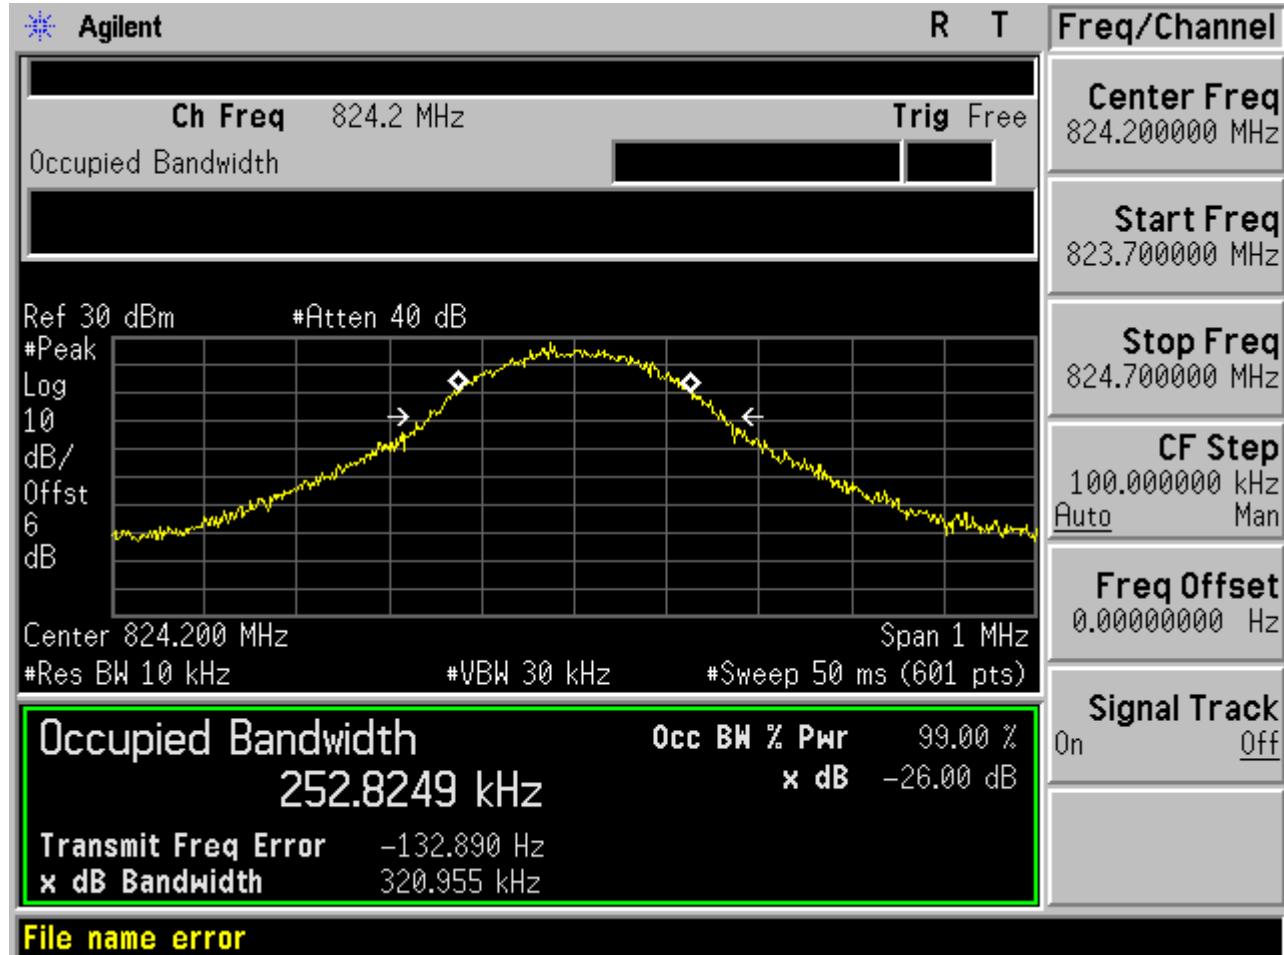

Test Channel=MCH

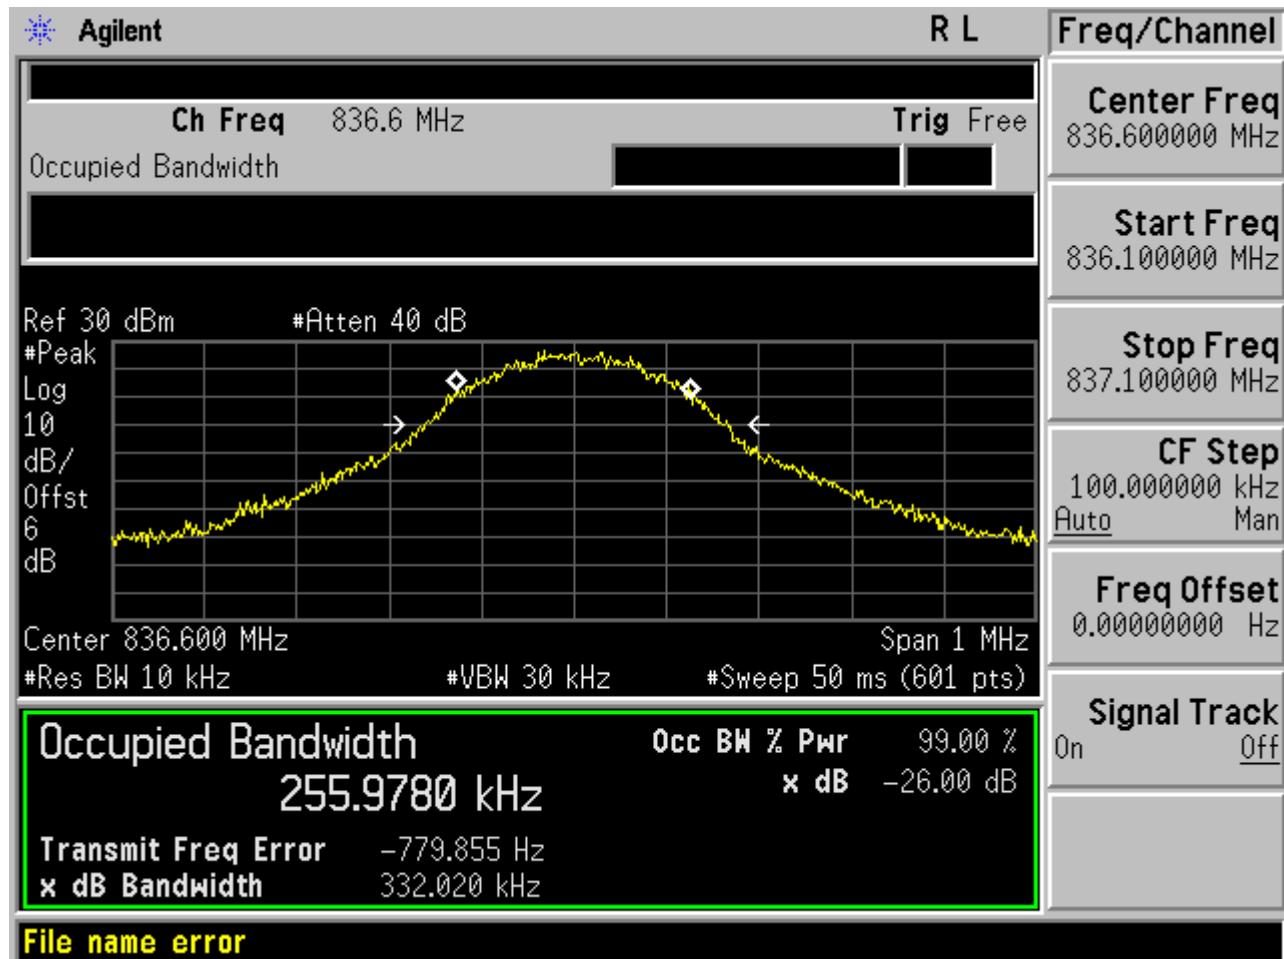


Test Channel=HCH

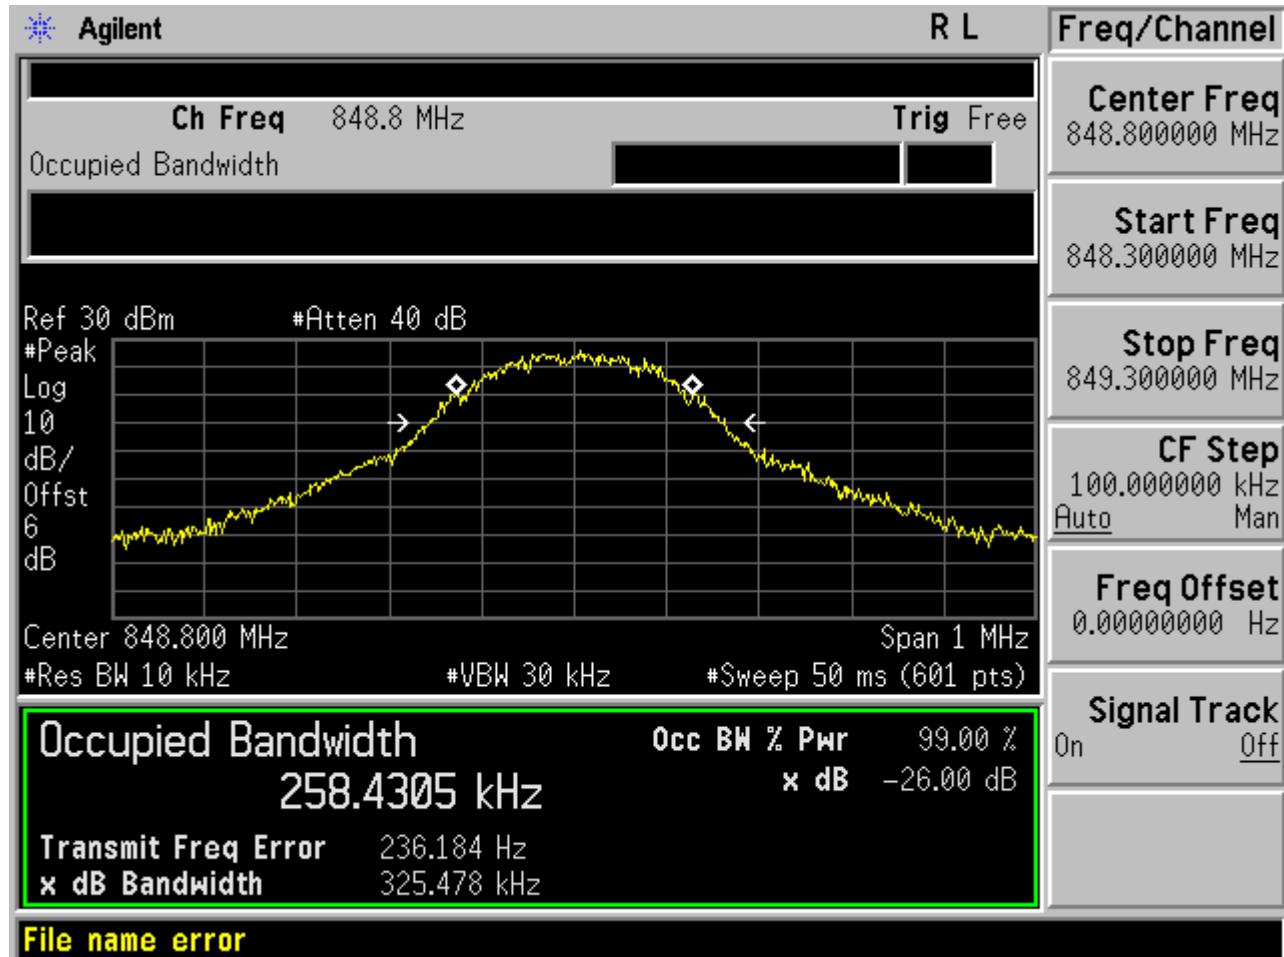


Test Band=GSM1900

Test Mode=GSM/TM1


Test Channel=LCH

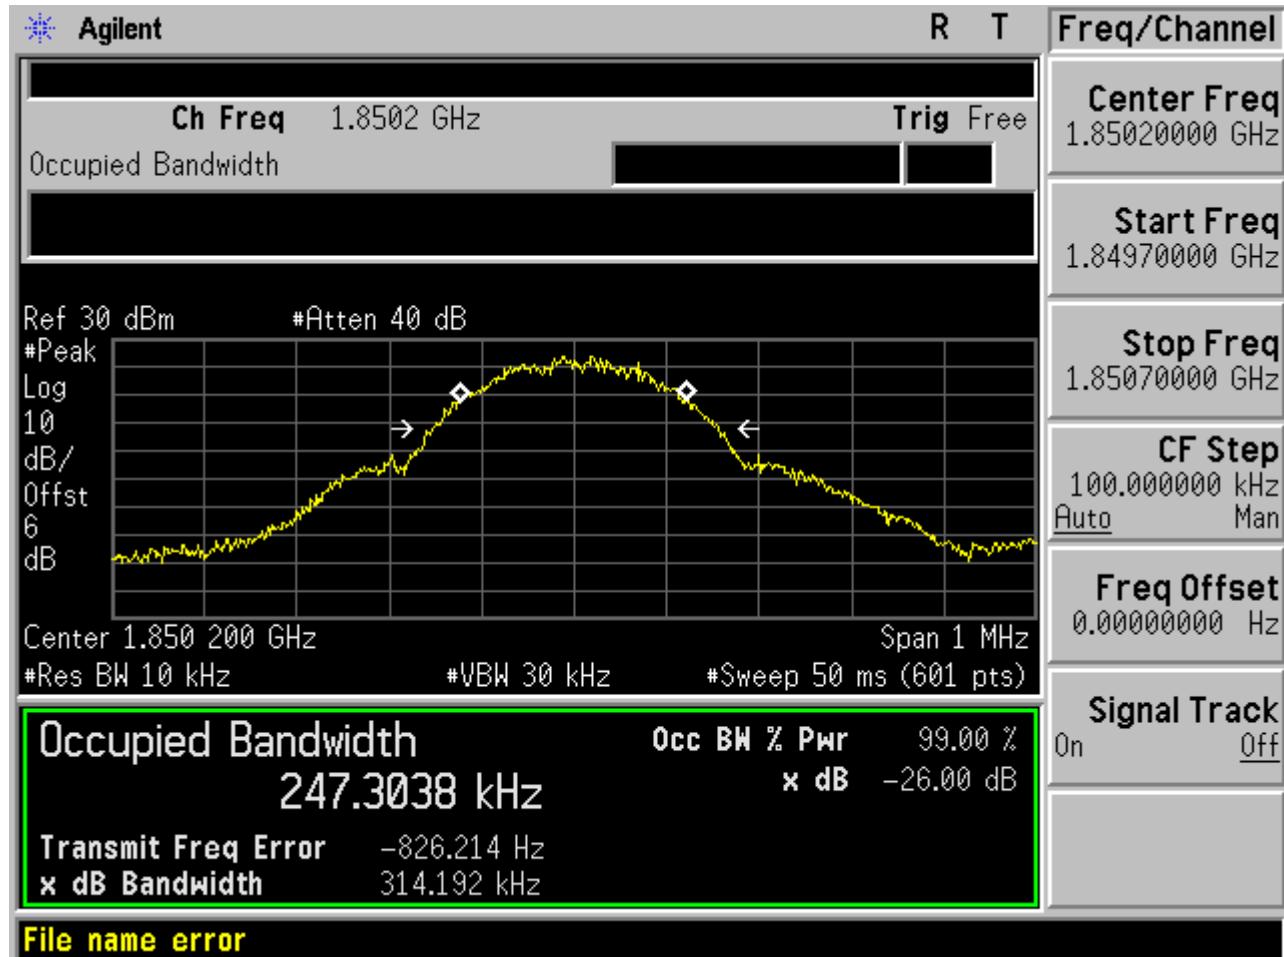

Test Channel=MCH

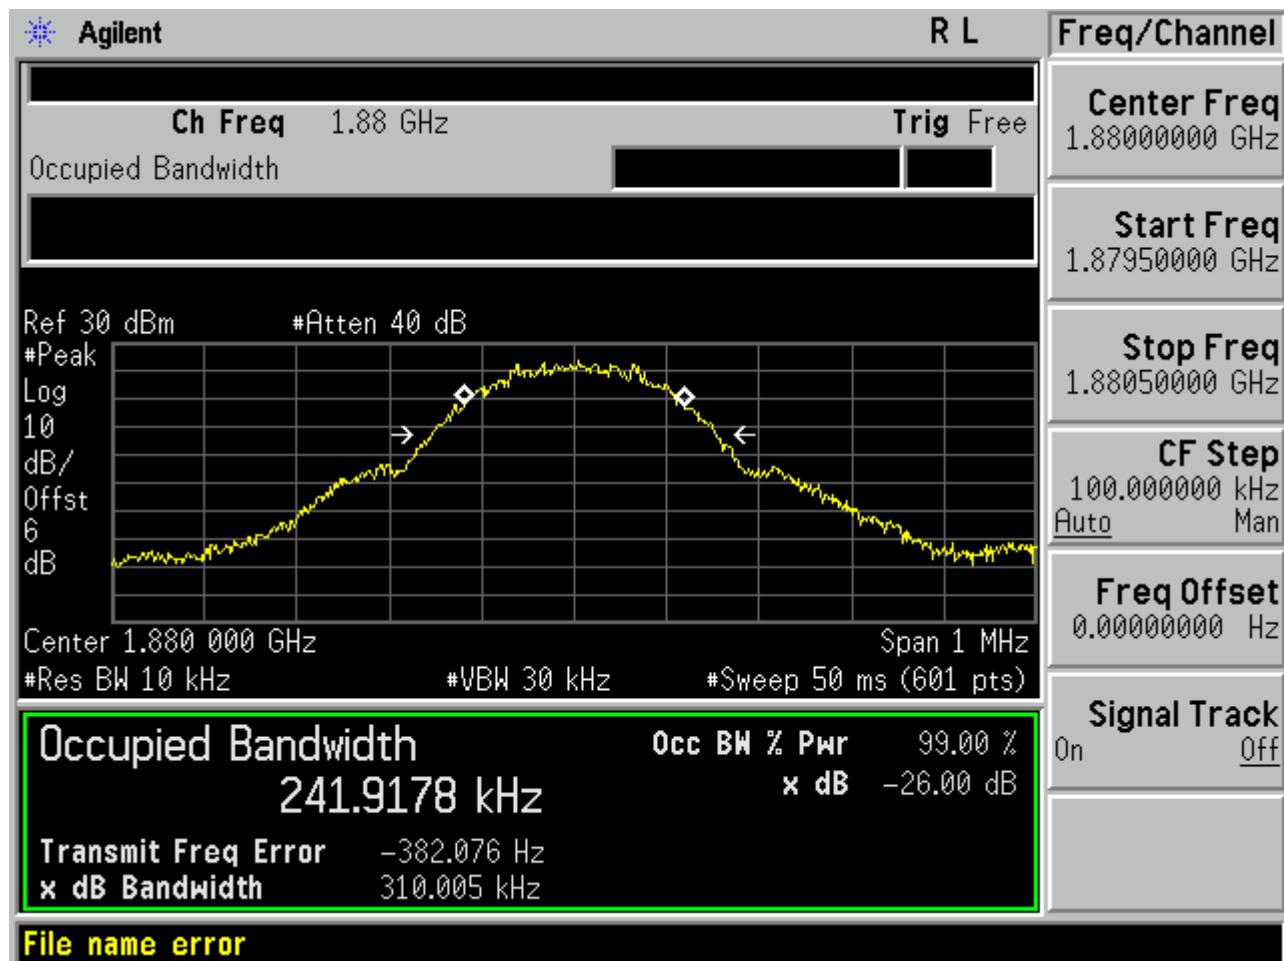


Test Channel=HCH

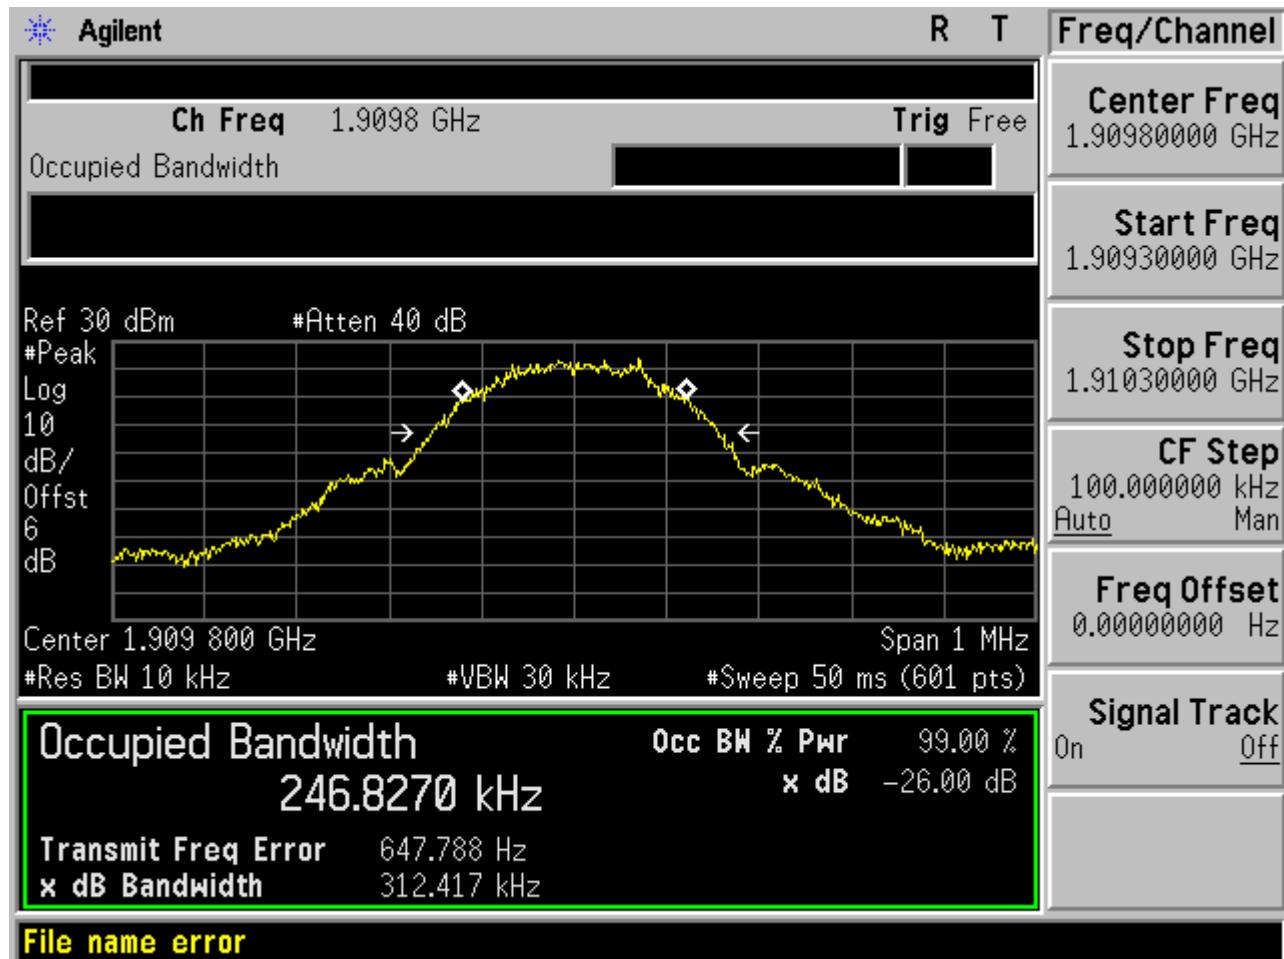


Test Mode=GSM/TM2


Test Channel=LCH

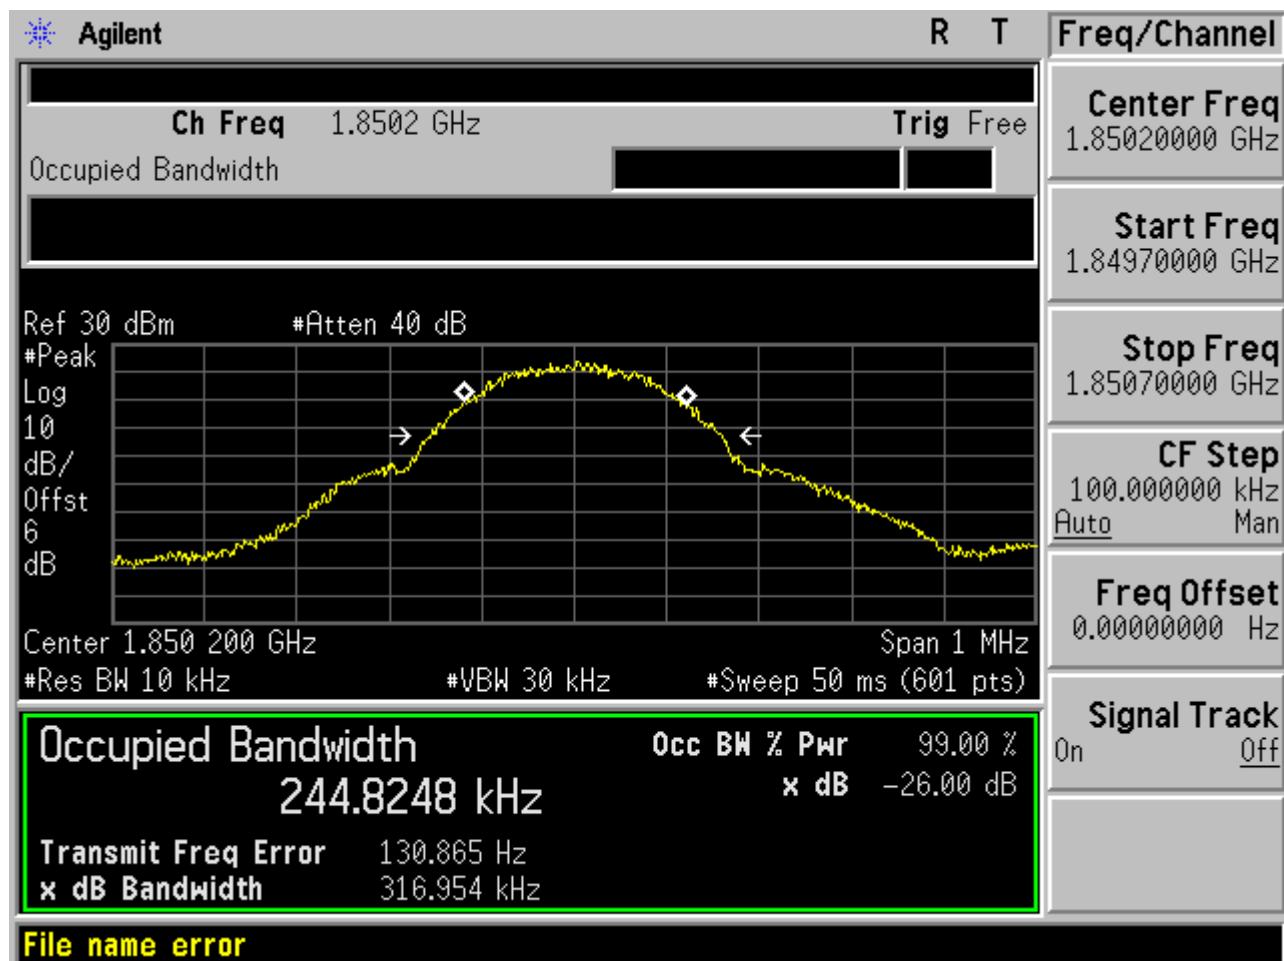

Test Channel=MCH

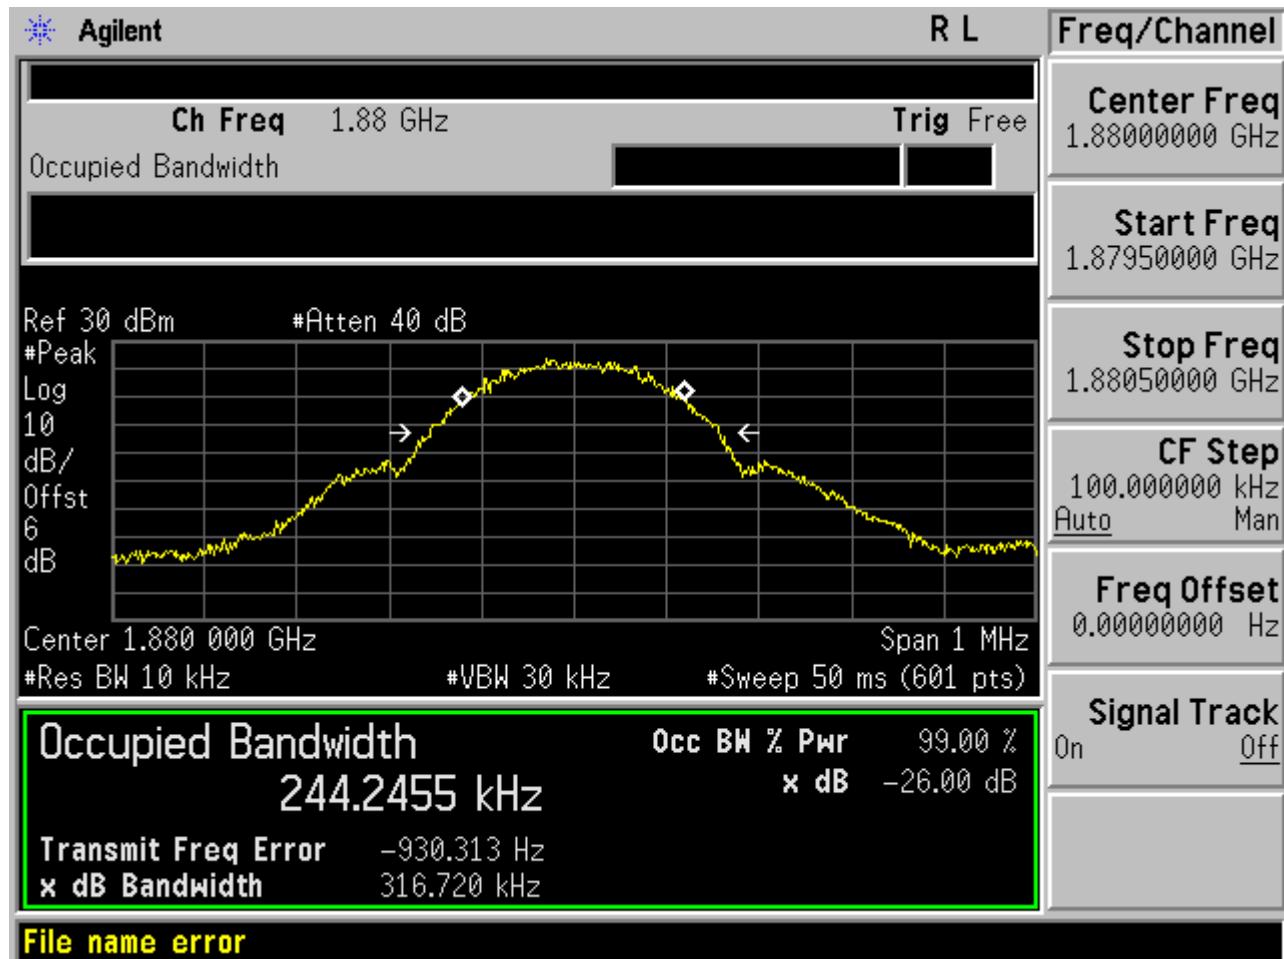


Test Channel=HCH

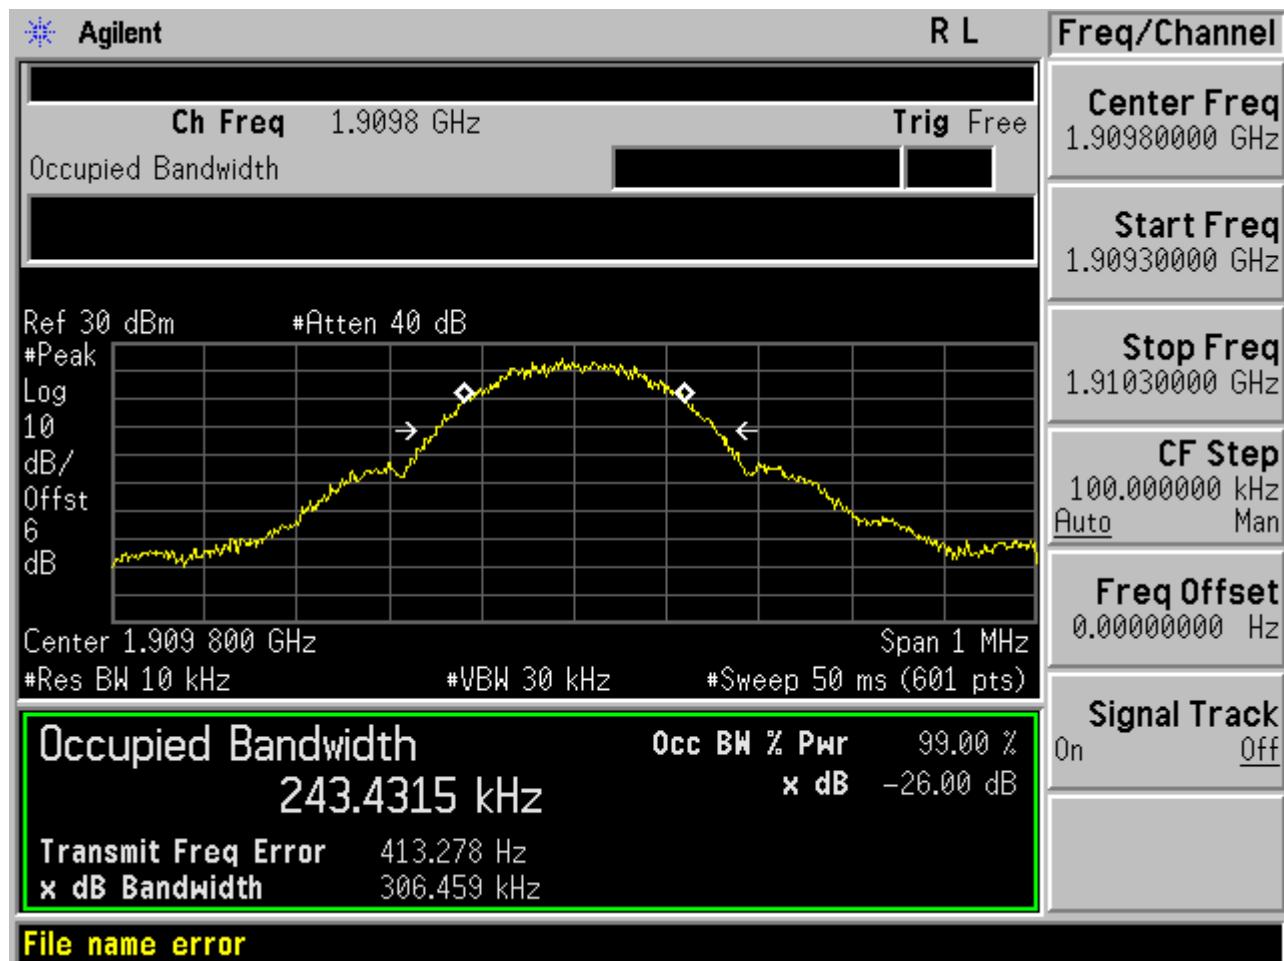


Test Mode=GSM/TM3


Test Channel=LCH

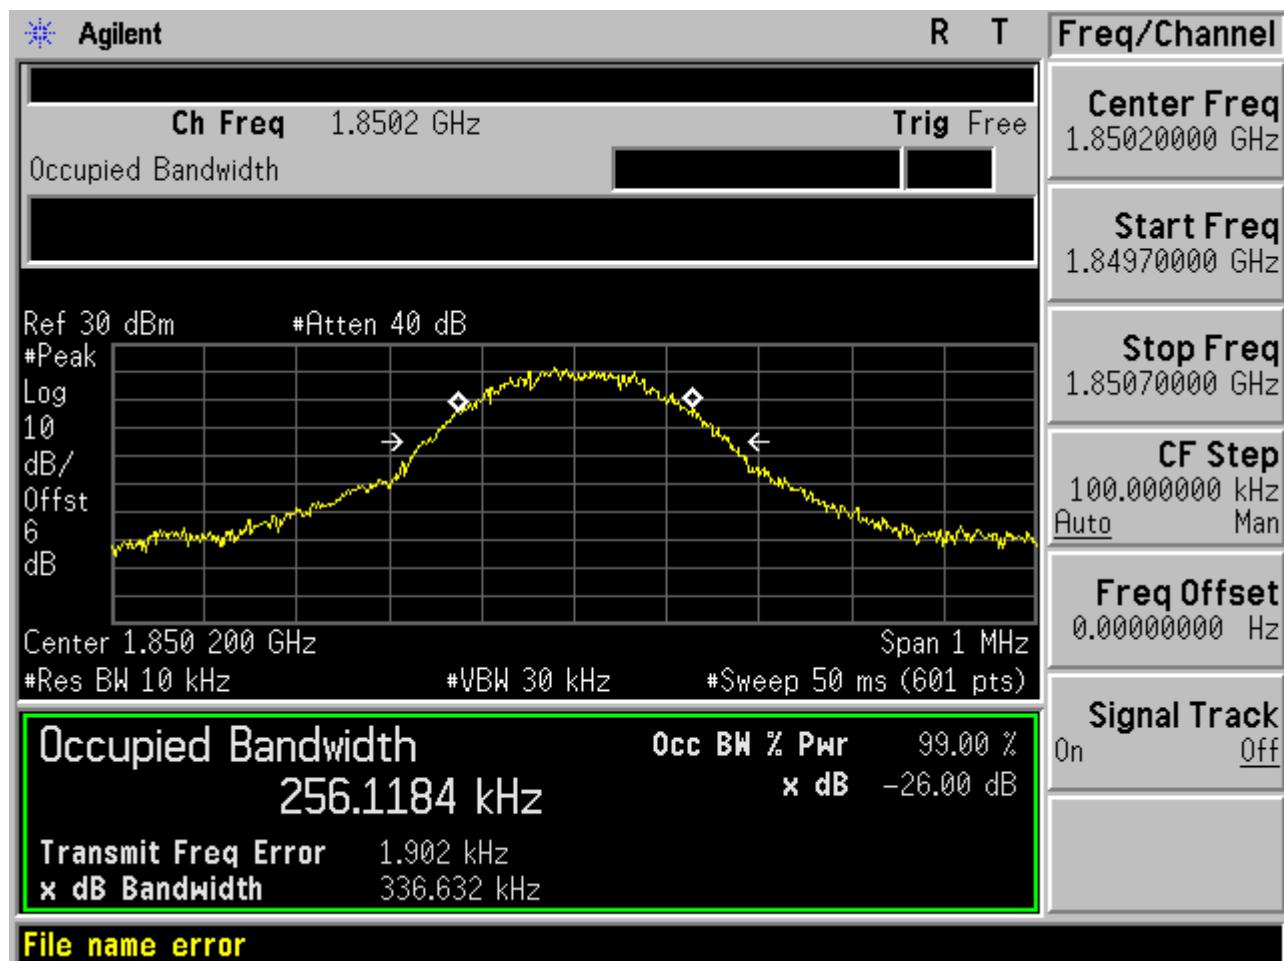

Test Channel=MCH

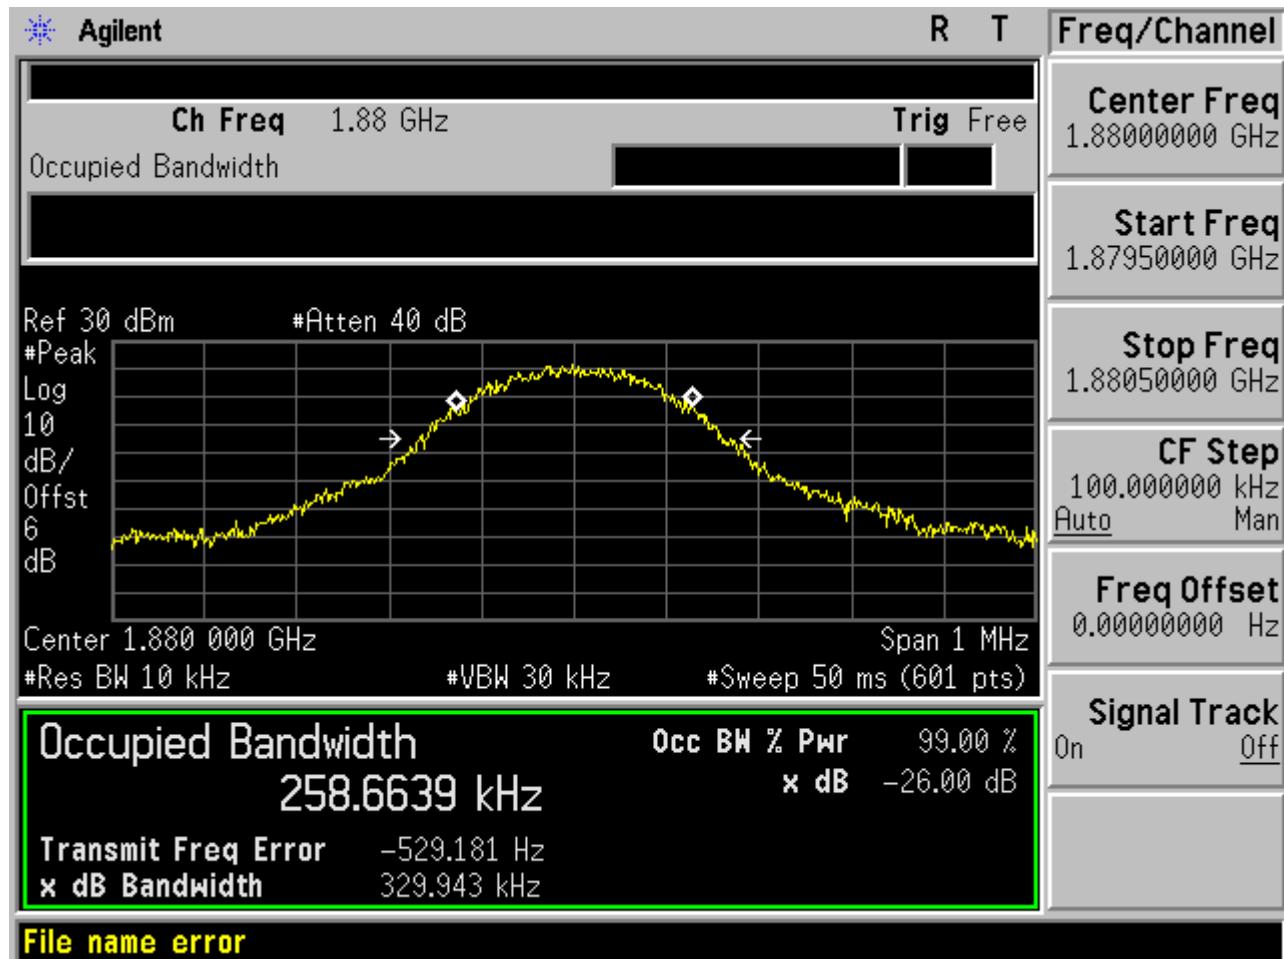

Test Channel=HCH

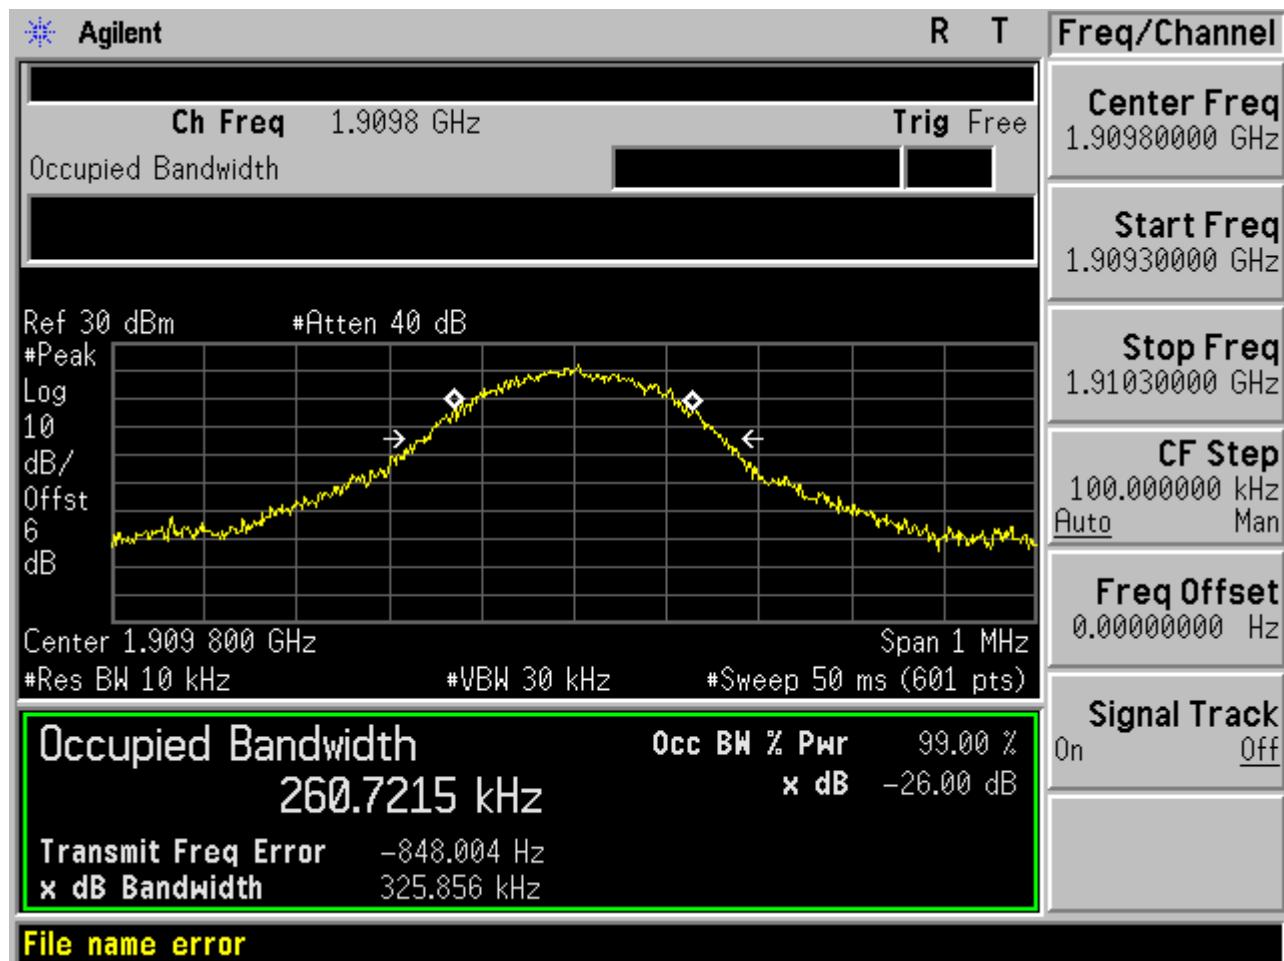

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA8 50	UMTS/TM1	LCH	4141.84	4673.29	PASS
		MCH	4146.74	4673.45	PASS
		HCH	4159.69	4693.01	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA1 900	UMTS/TM1	LCH	4147.26	4680.68	PASS
		MCH	4149.43	4699.40	PASS
		HCH	4144.28	4692.82	PASS

## For WCDMA


Test Band=WCDMA850

Test Mode=UMTS/TM1


Test Channel=LCH

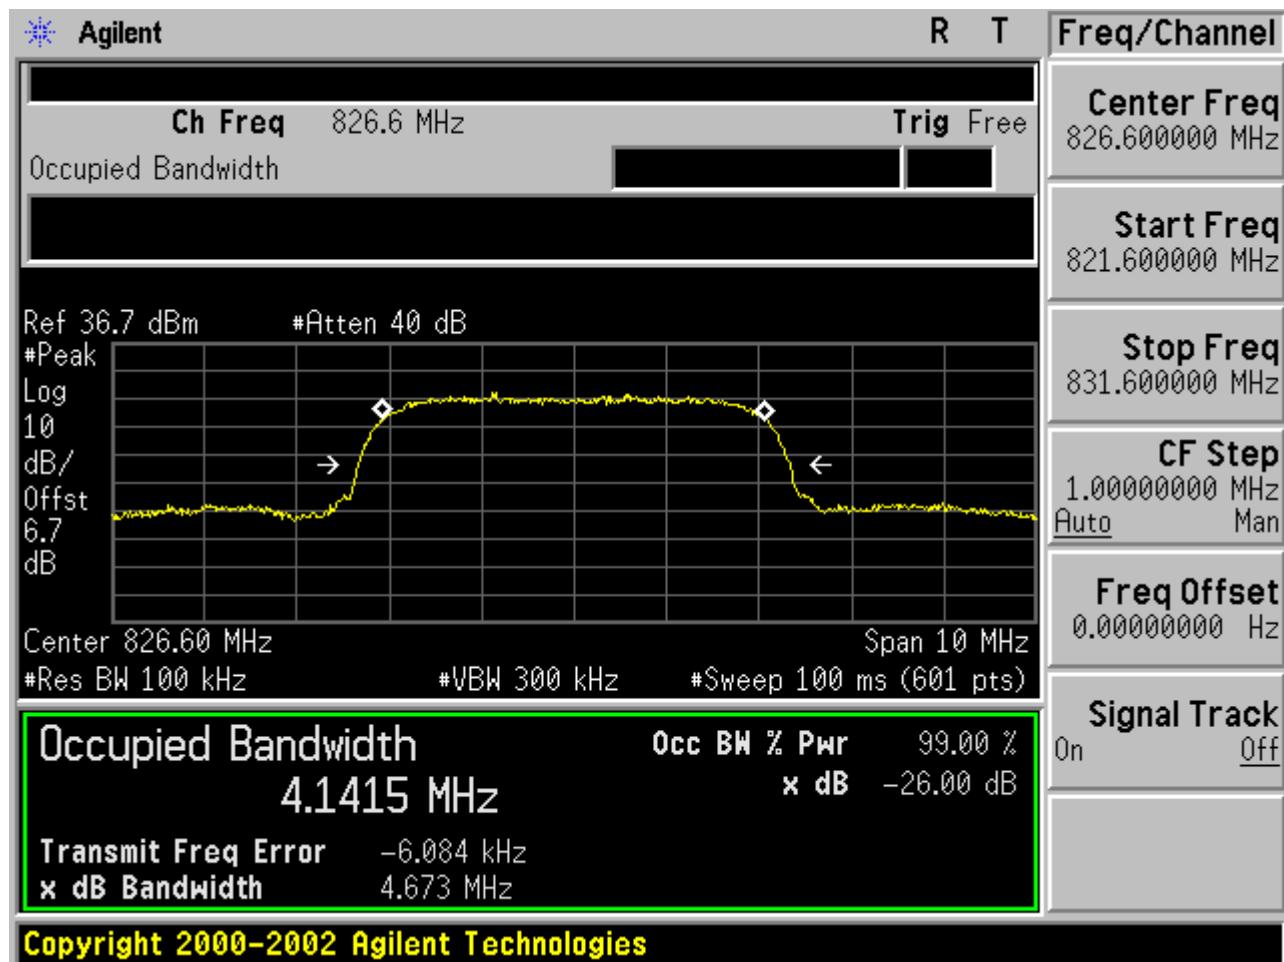

Test Channel=MCH

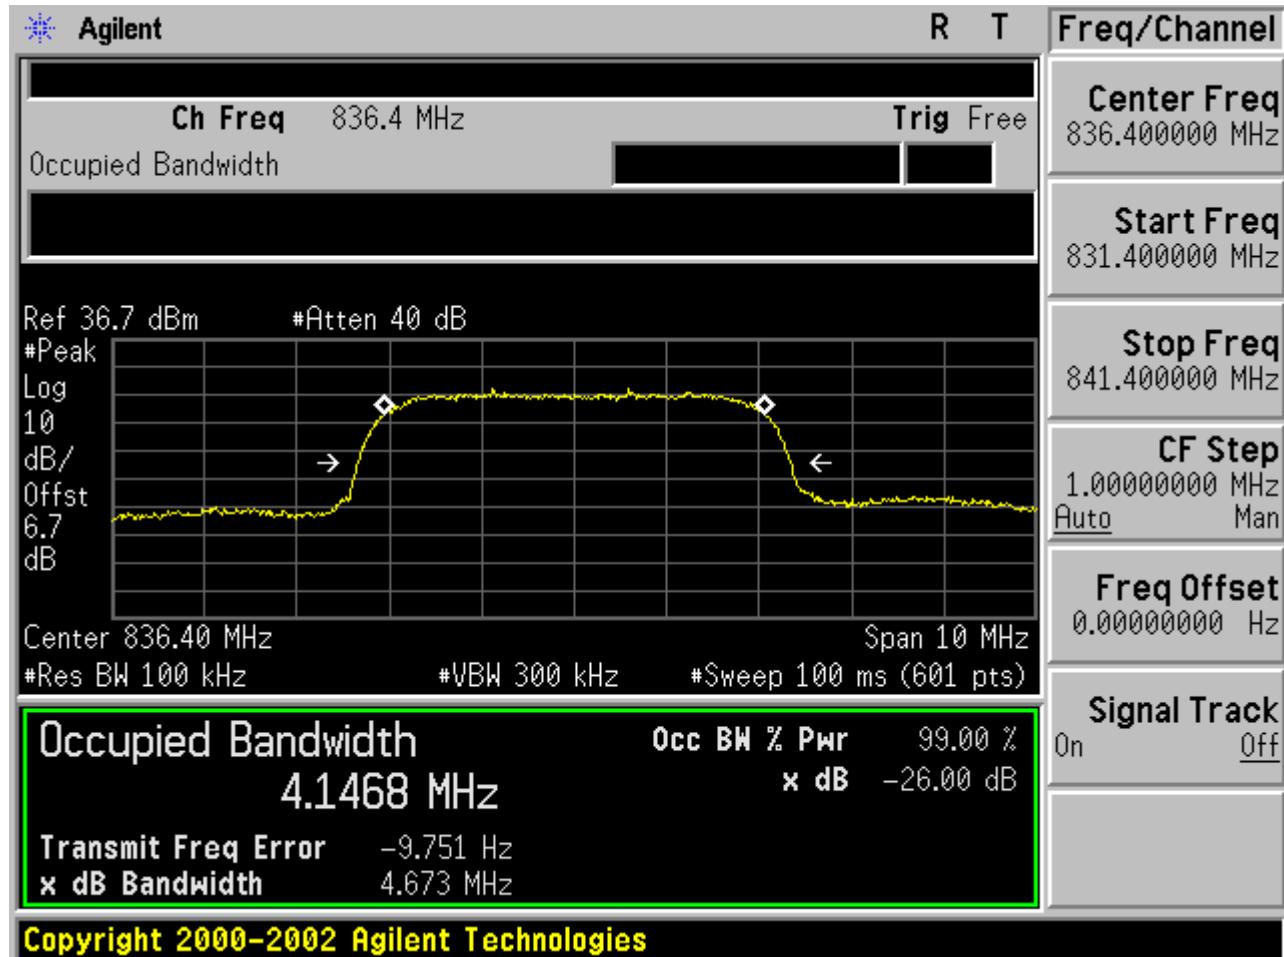


Test Channel=HCH

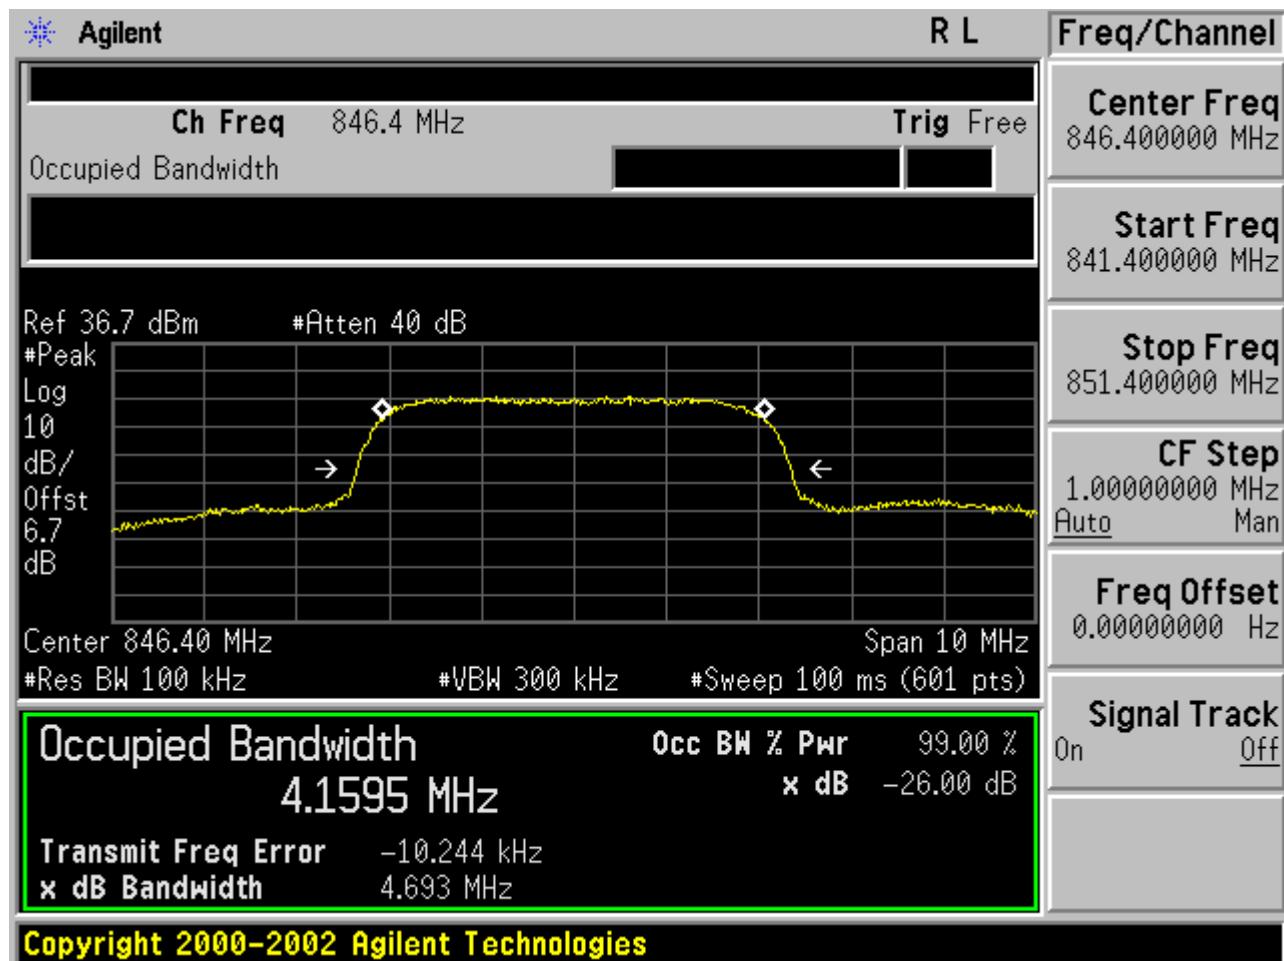


Test Band=WCDMA1900

Test Mode=UMTS/TM1


Test Channel=LCH

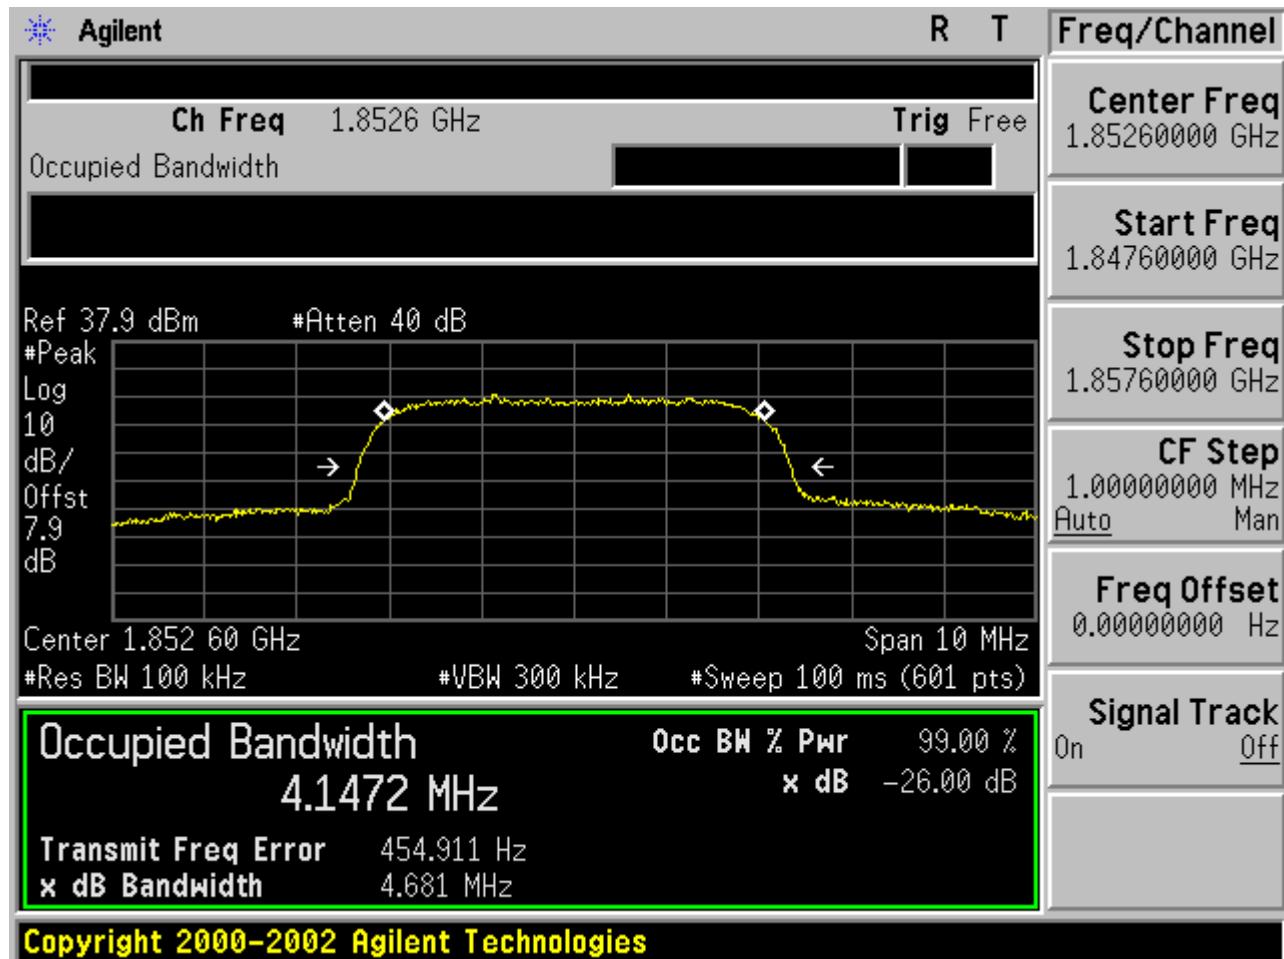

Test Channel=MCH

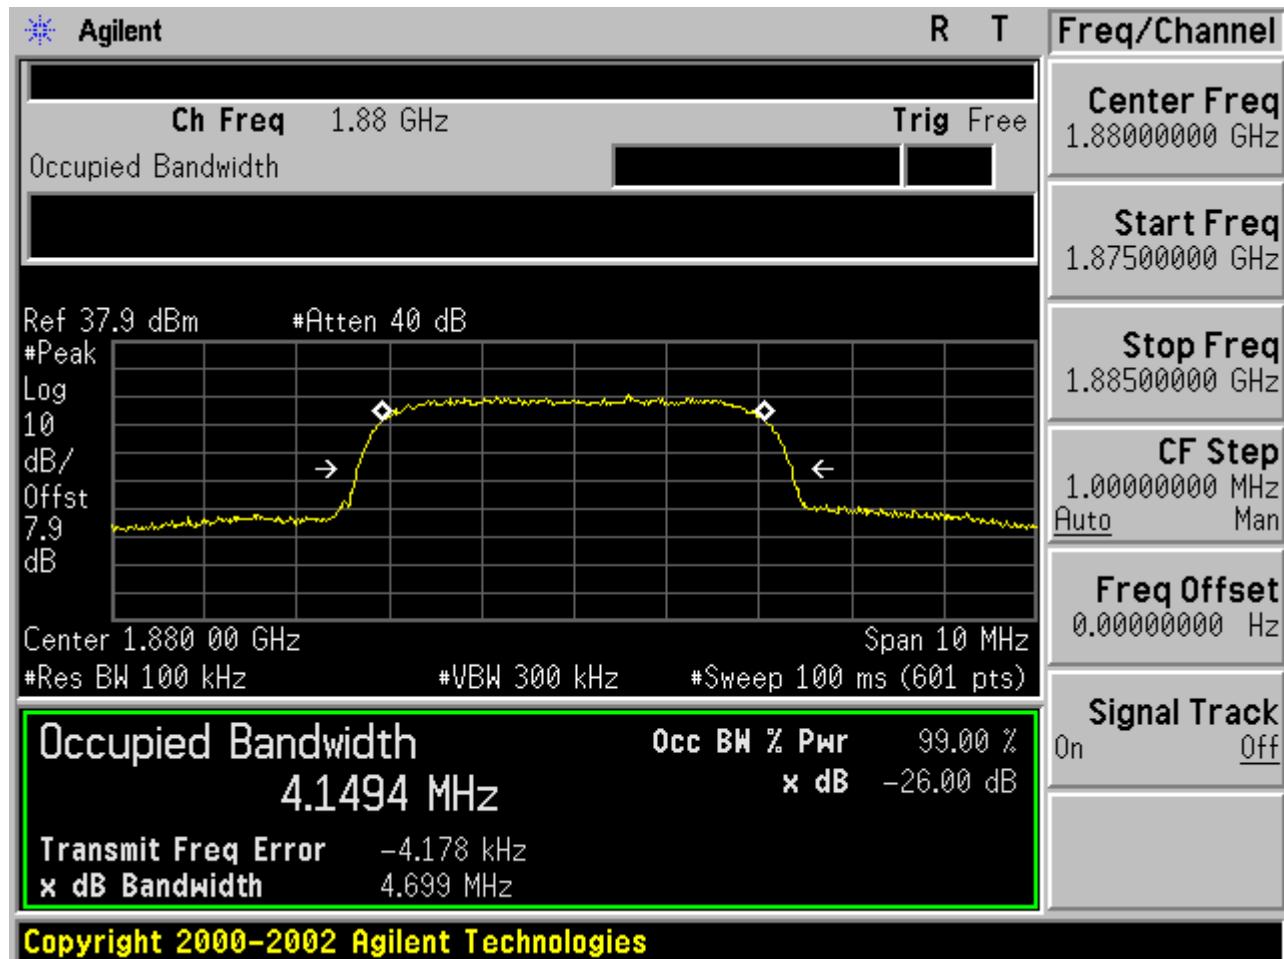

Test Channel=HCH

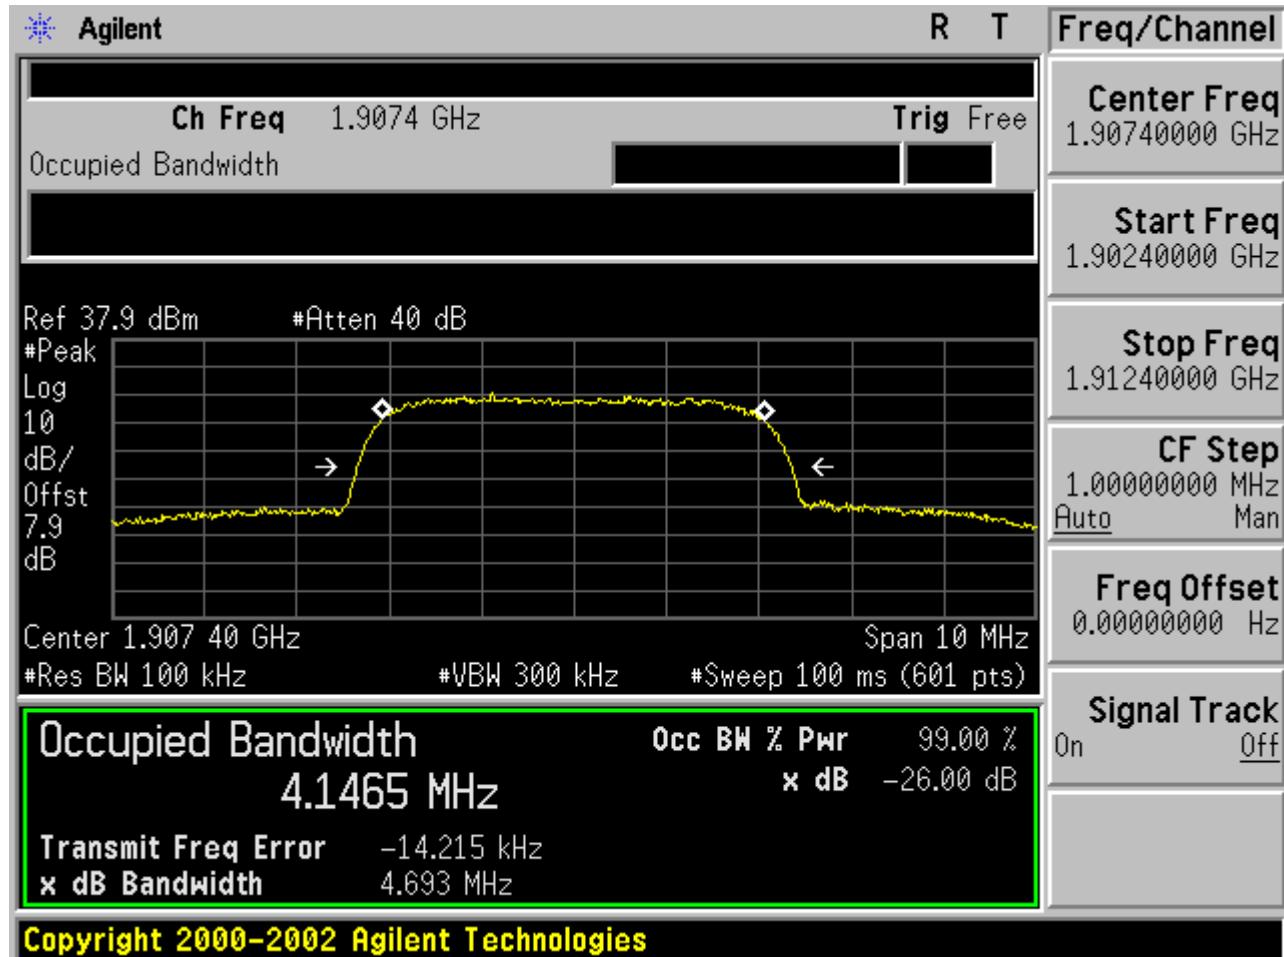

## **8. BAND EDGE**

### **8.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **8.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of 22.917(a) and 24.238(a)

### 8.3 MEASUREMENT RESULT

## APPENDIX C: BAND EDGES COMPLIANCE


### Test Results

#### For GSM


Test Band=GSM850

Test Mode=GSM/TM1

Test Channel=LCH

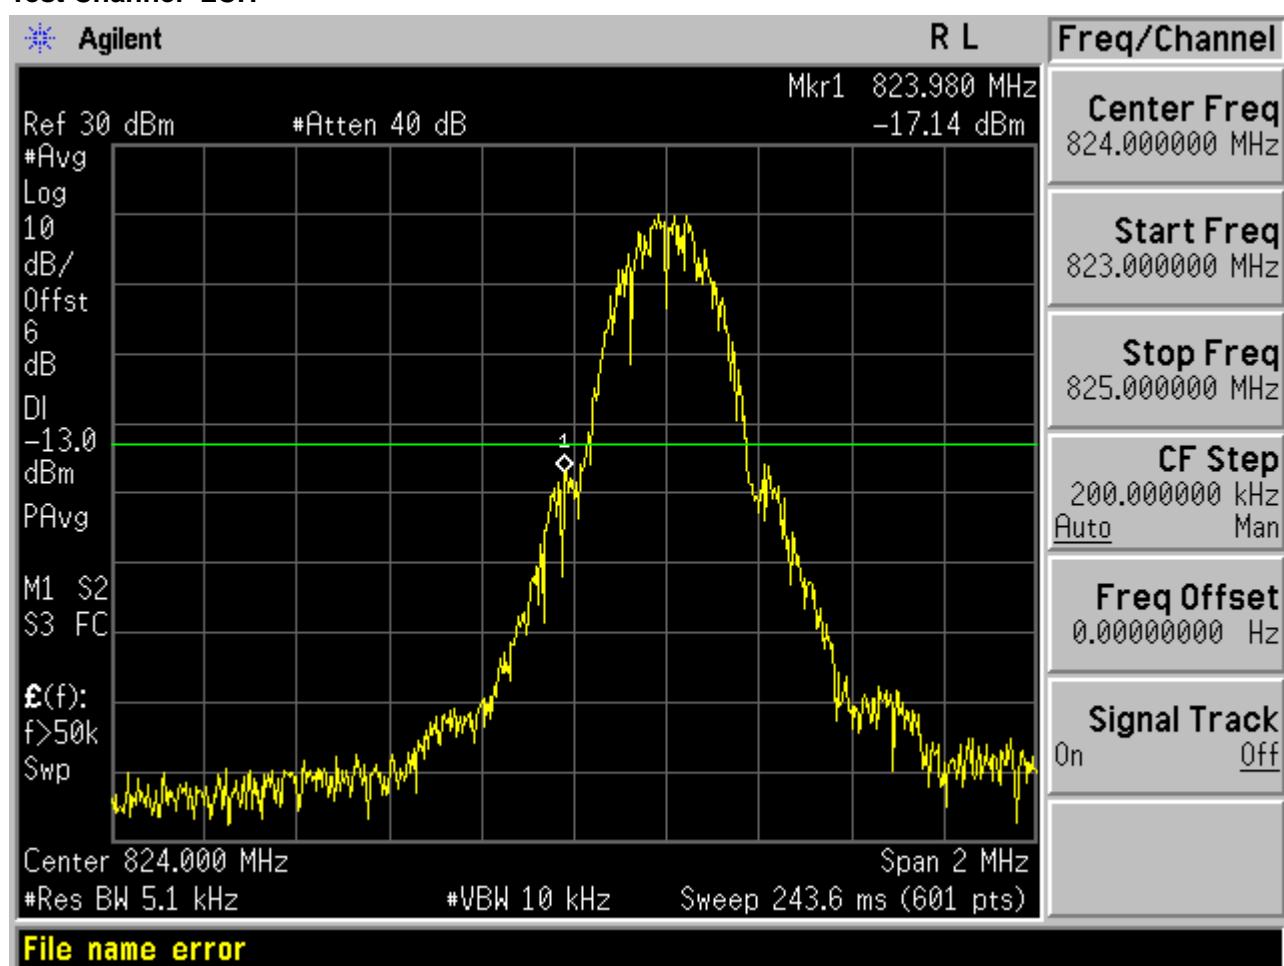


Test Channel=HCH

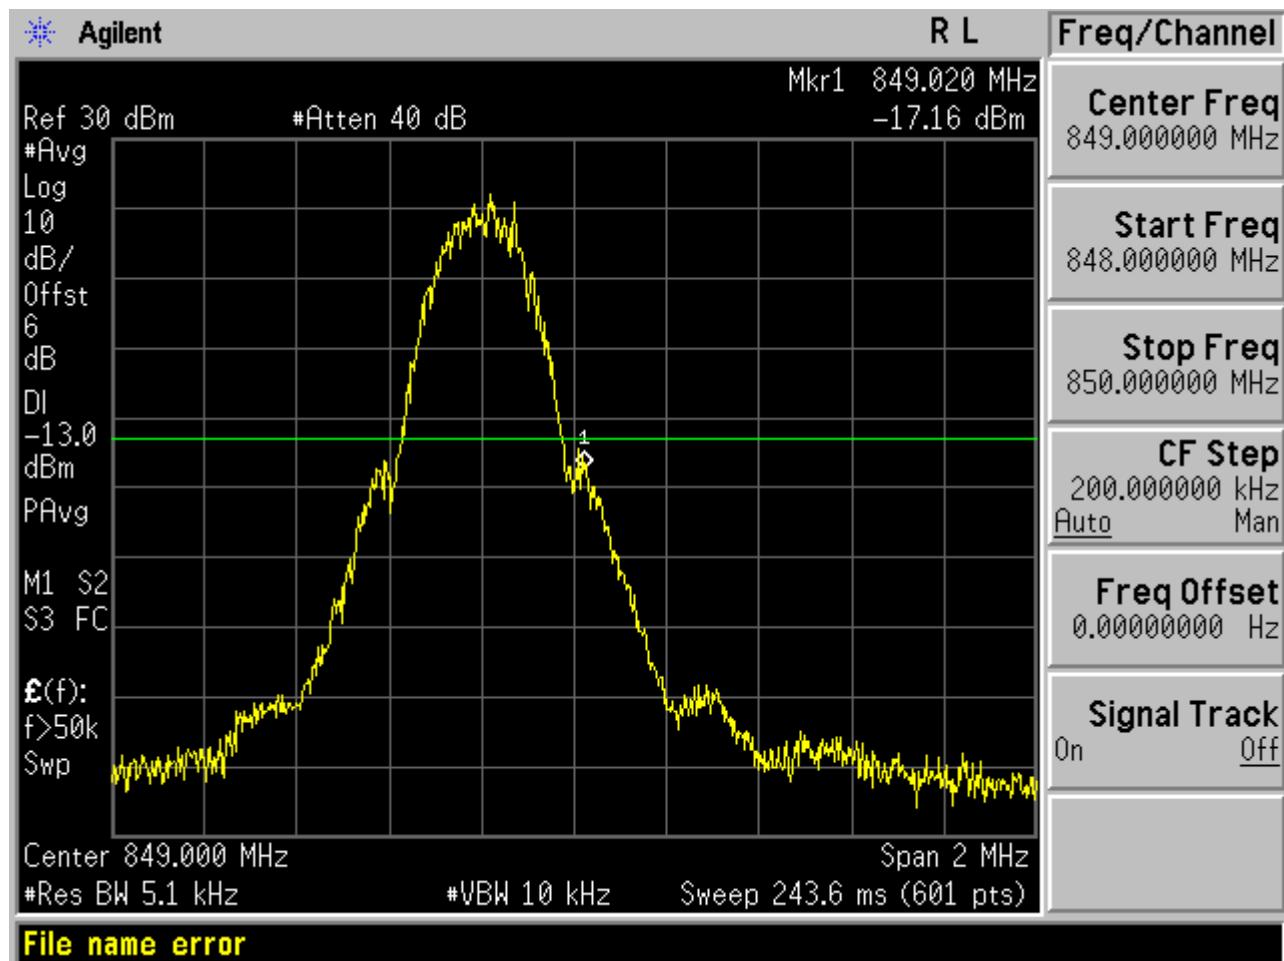


Test Mode=GSM/TM2

Test Channel=LCH

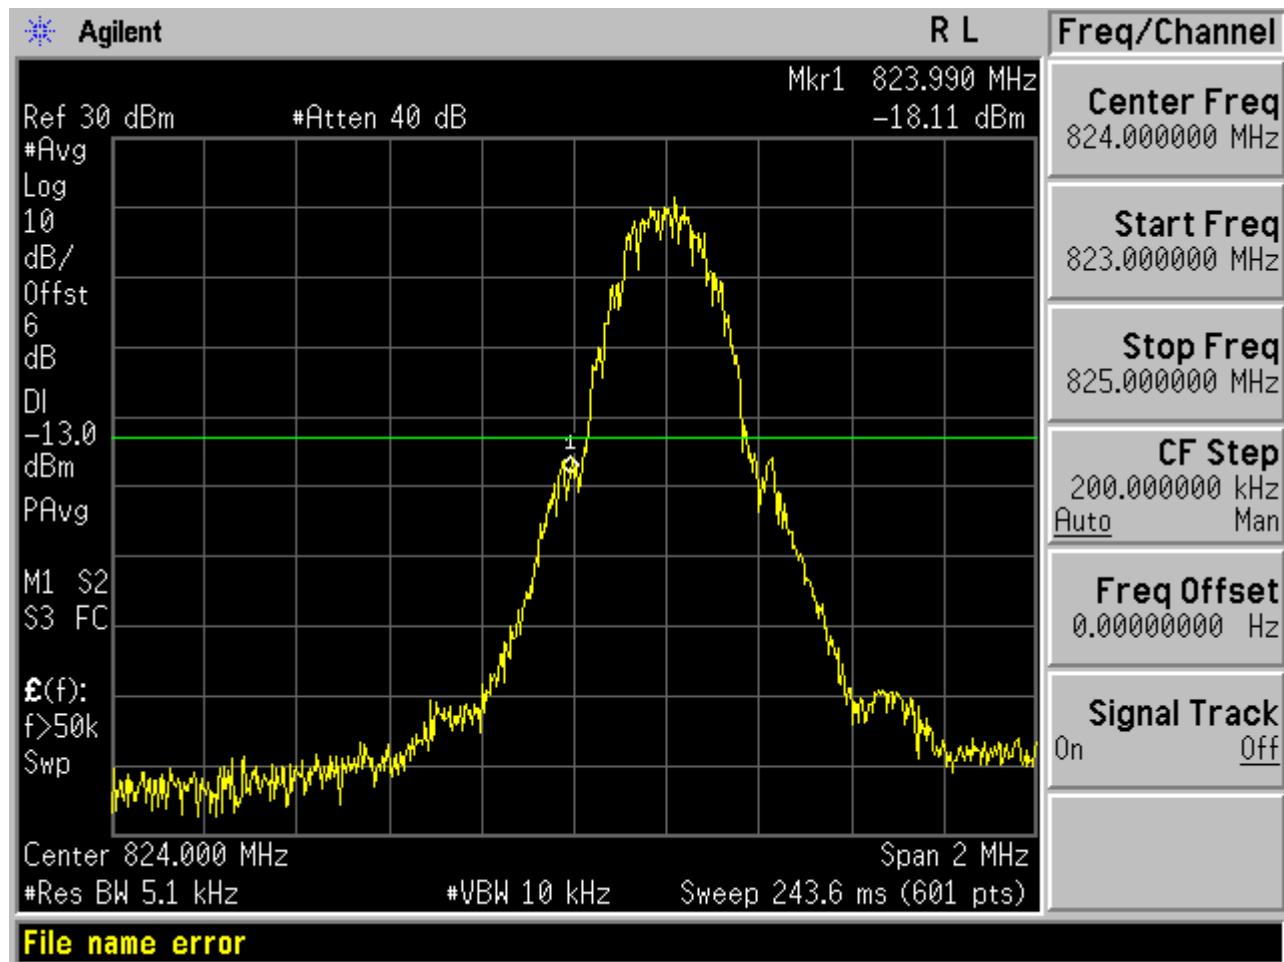


Test Channel=HCH

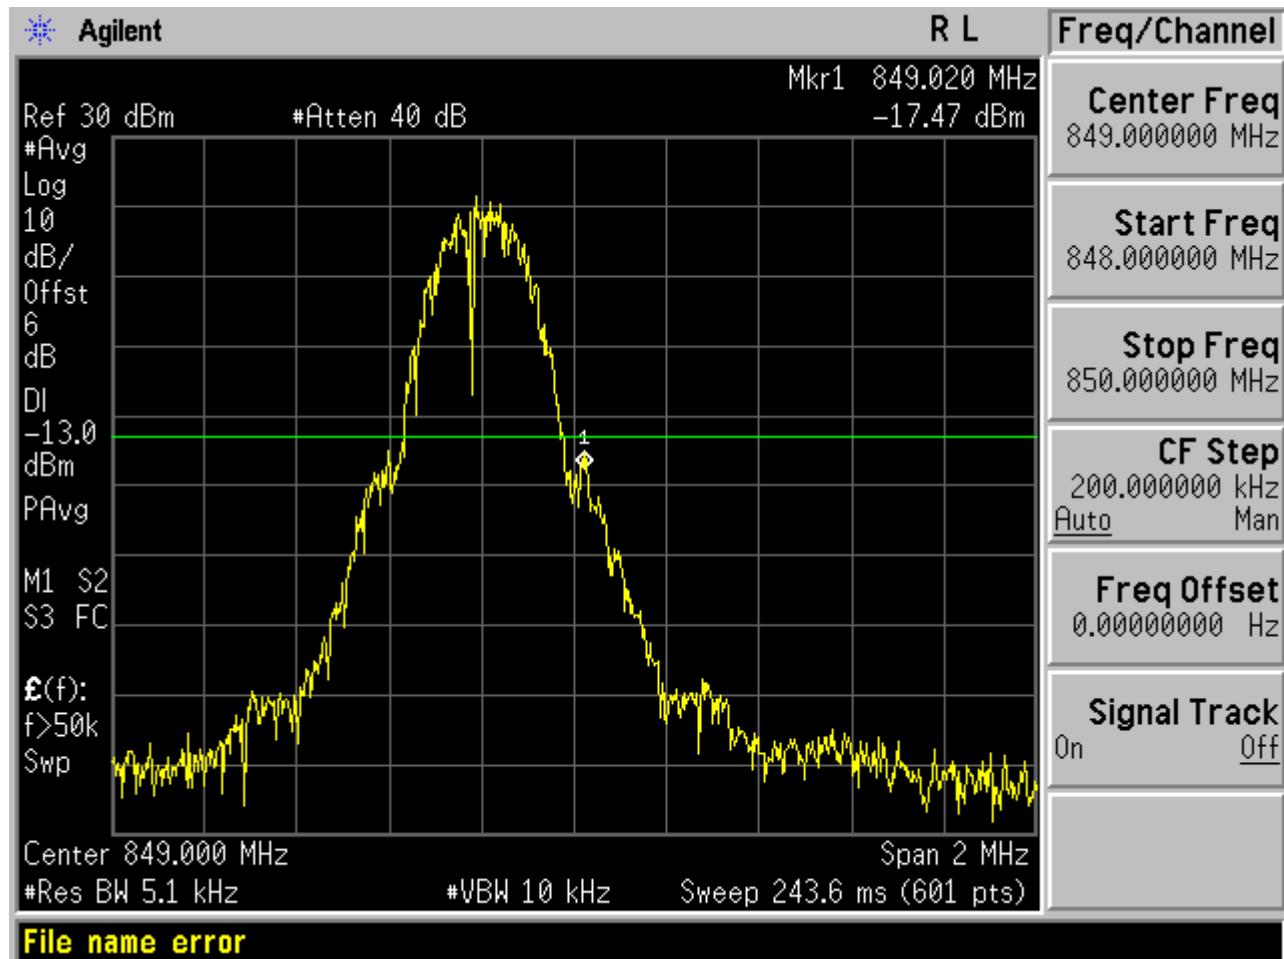


Test Mode=GSM/TM3

Test Channel=LCH

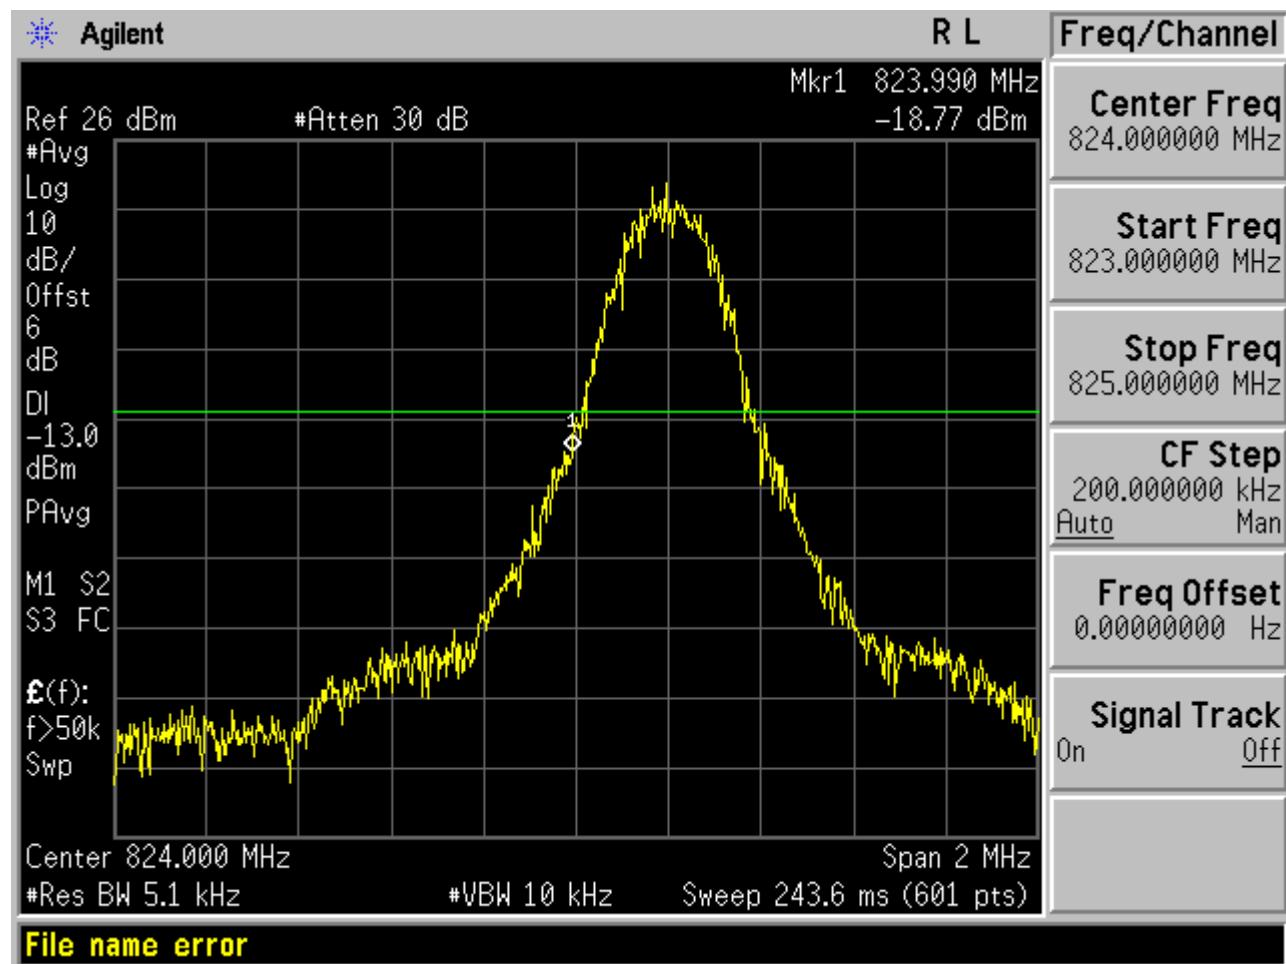


Test Channel=HCH

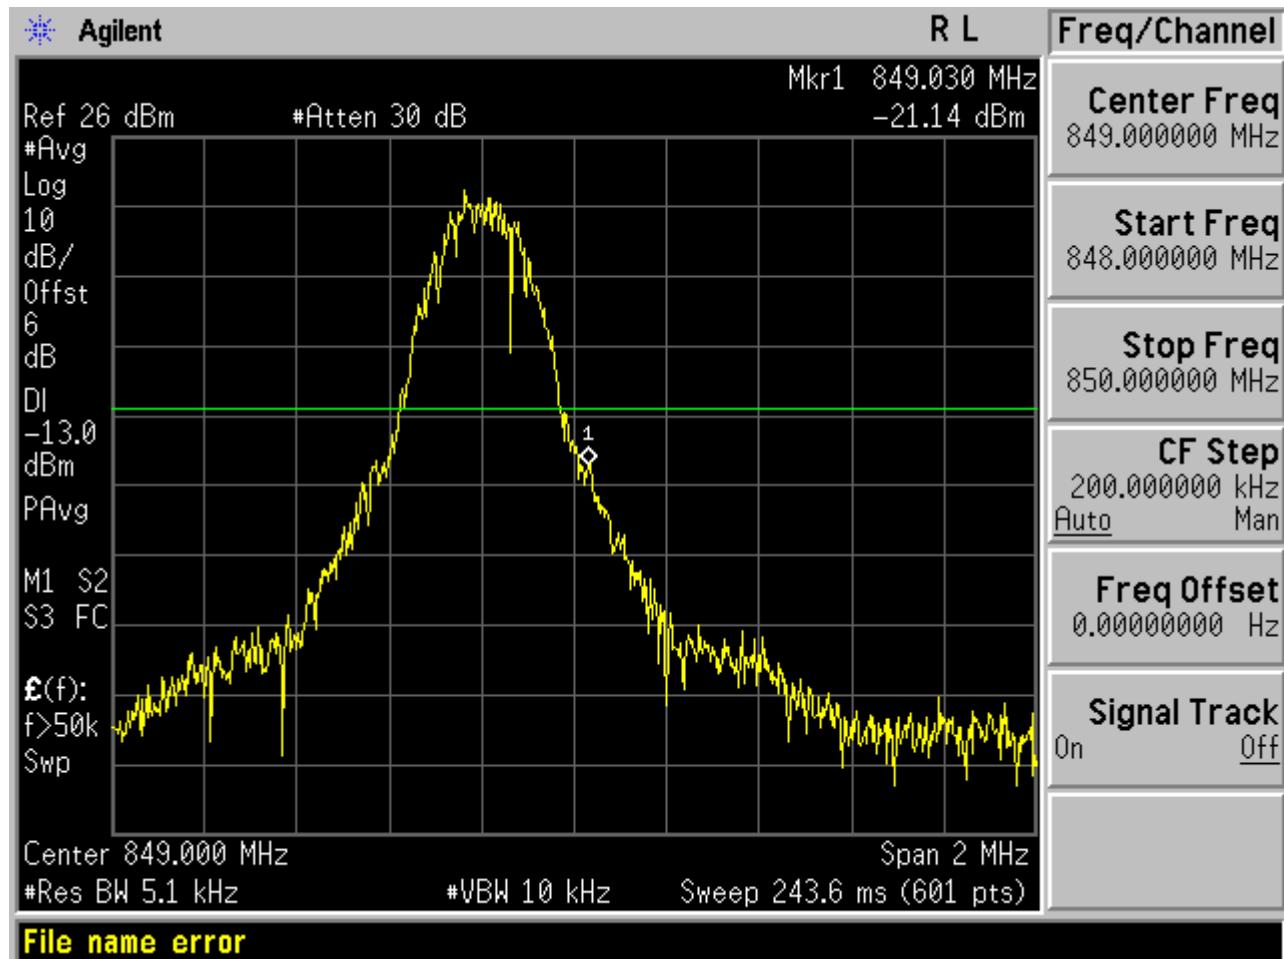


Test Band=GSM1900

Test Mode=GSM/TM1

Test Channel=LCH

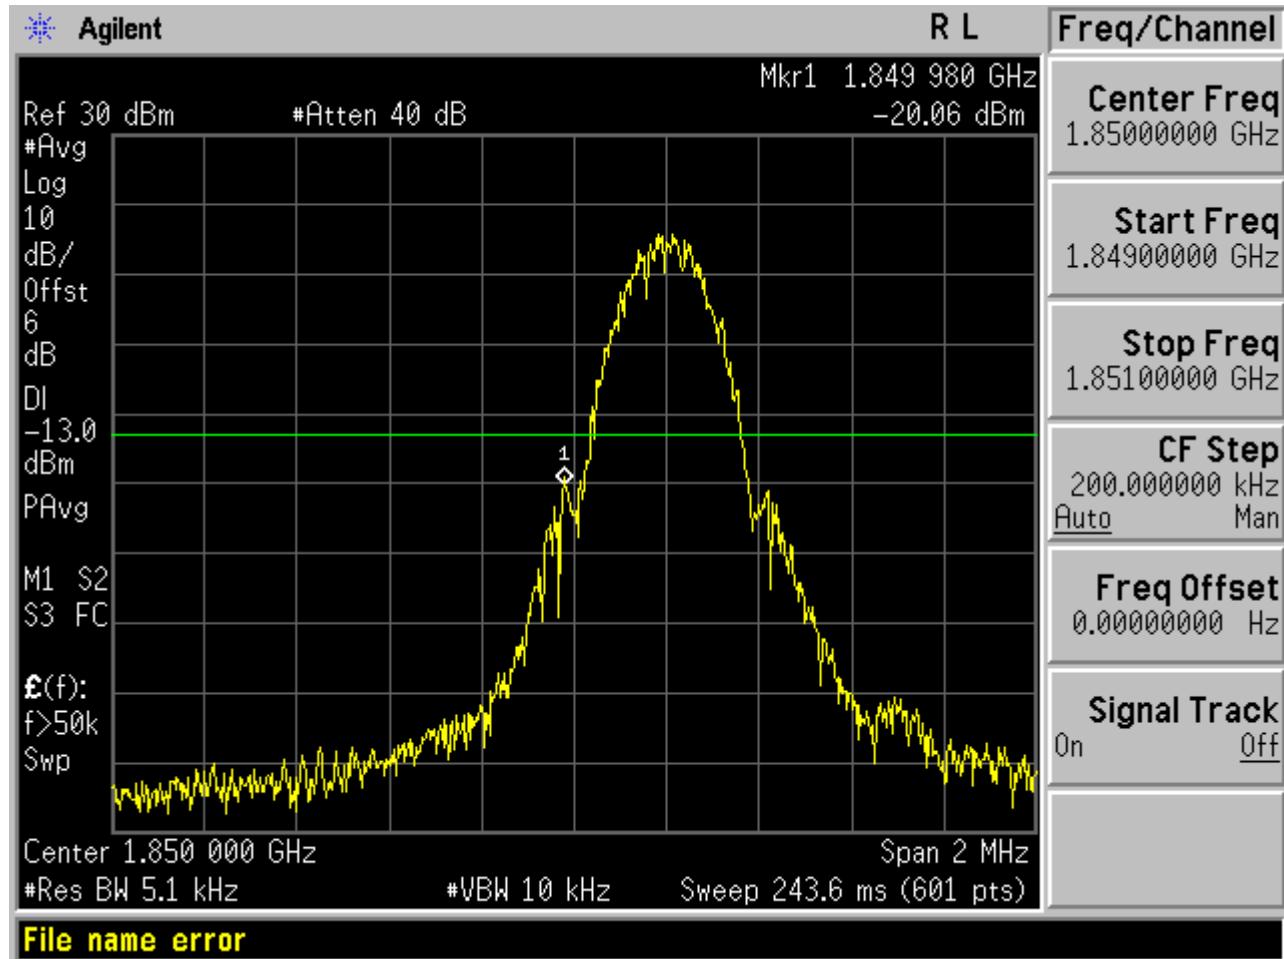


Test Channel=HCH

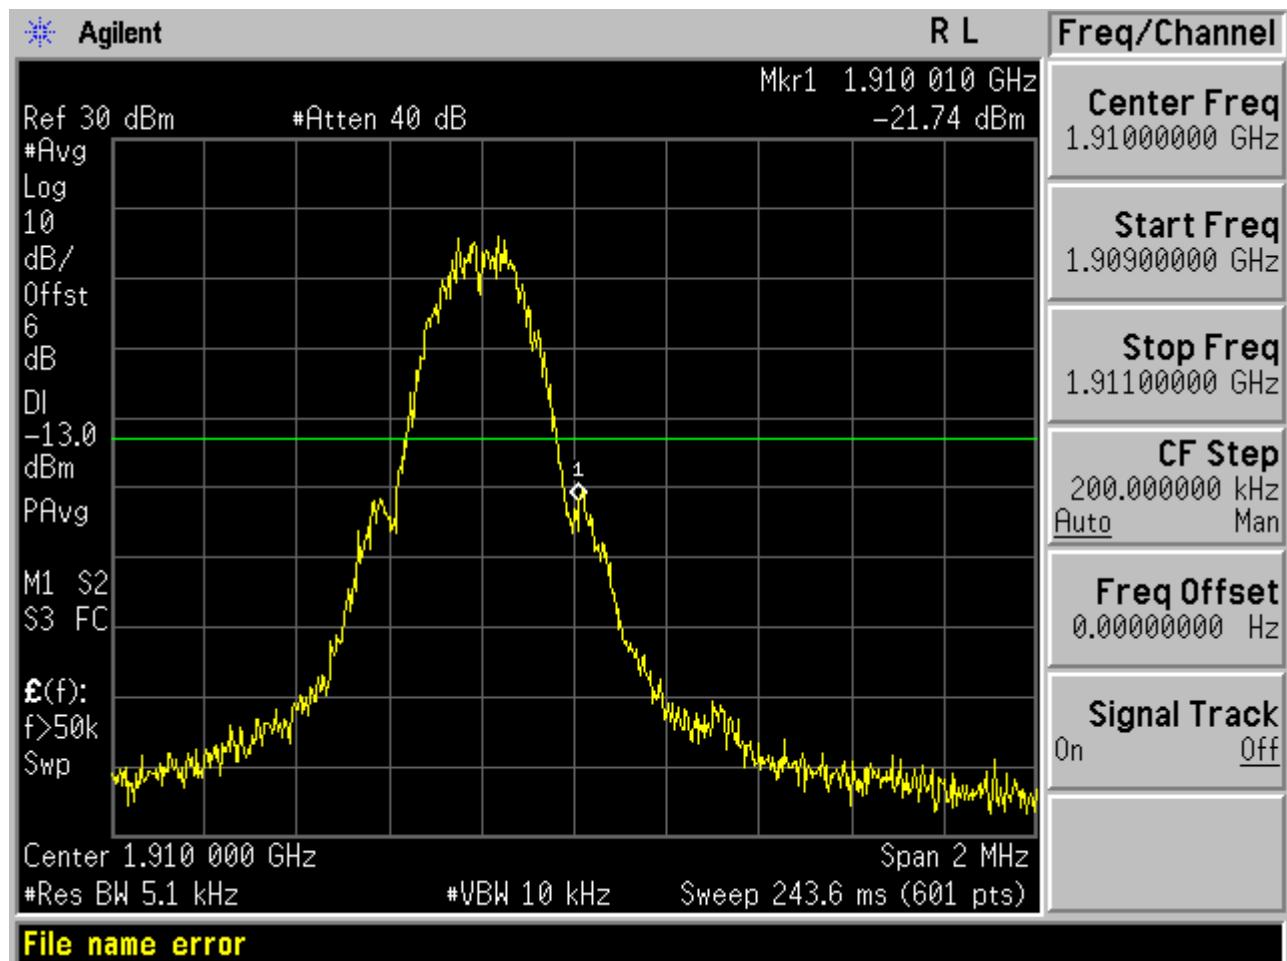


Test Mode=GSM/TM2

Test Channel=LCH

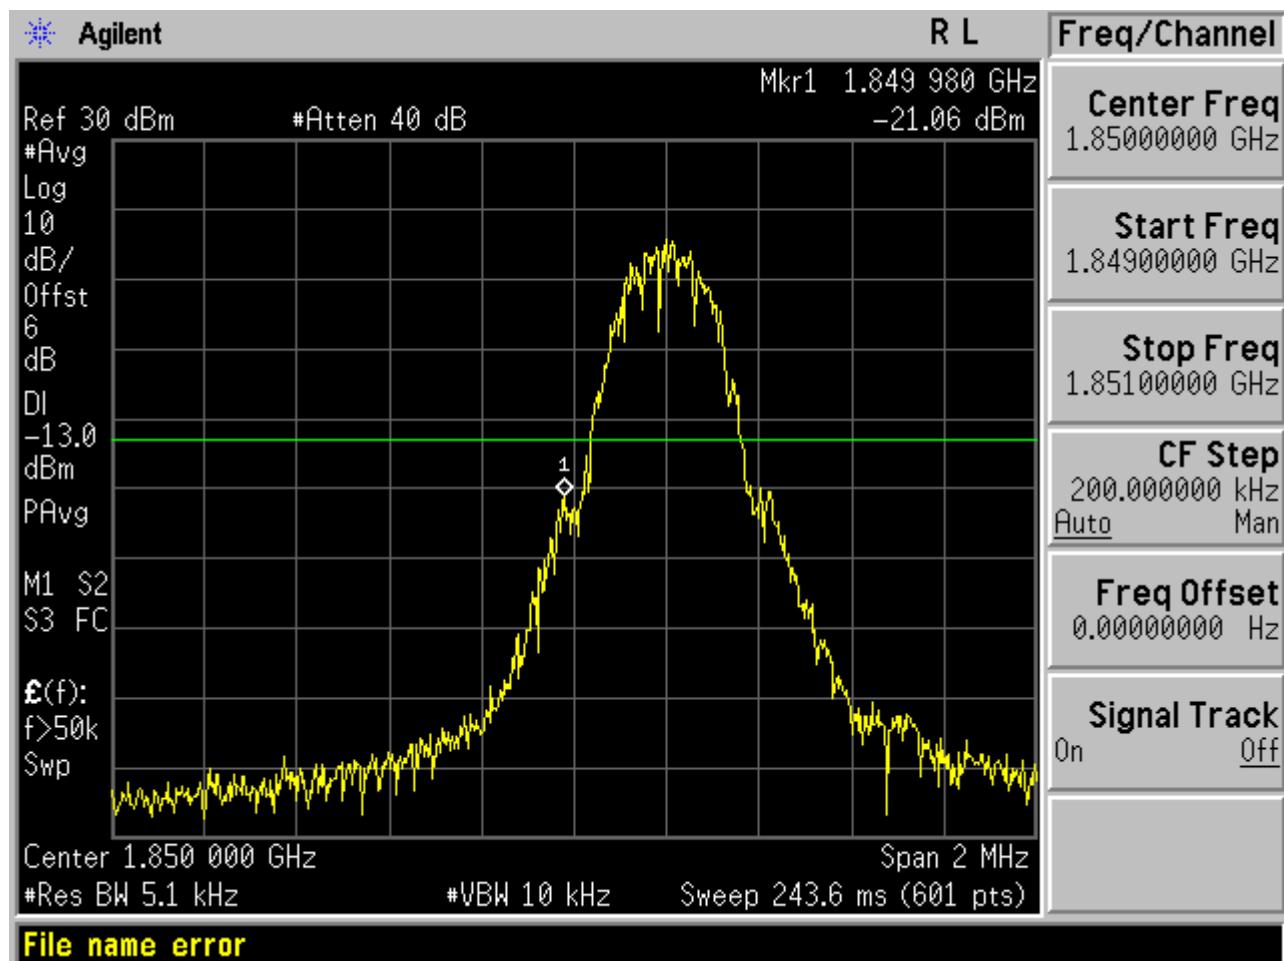


Test Channel=HCH

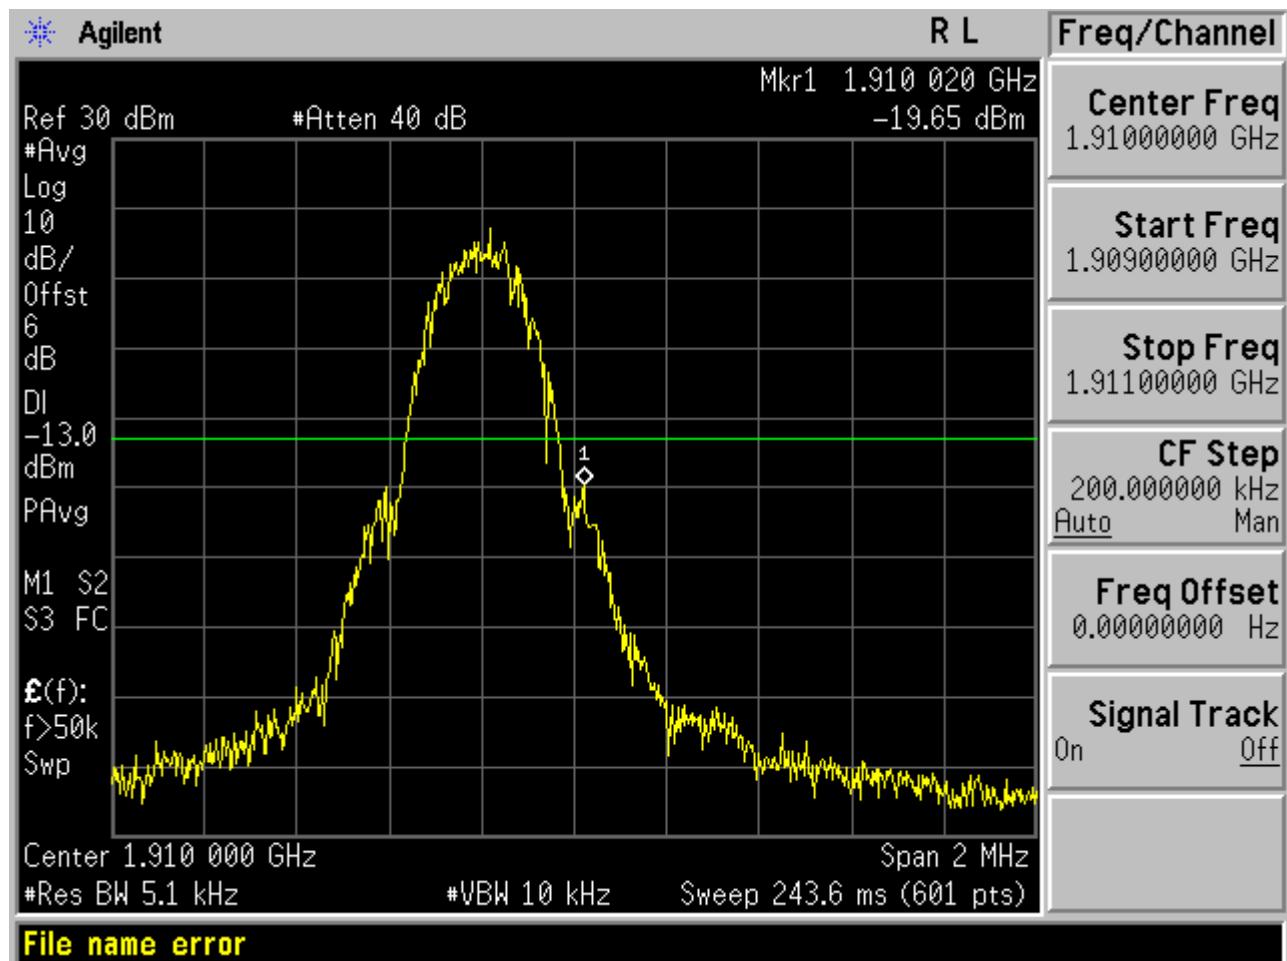


Test Mode=GSM/TM3

Test Channel=LCH

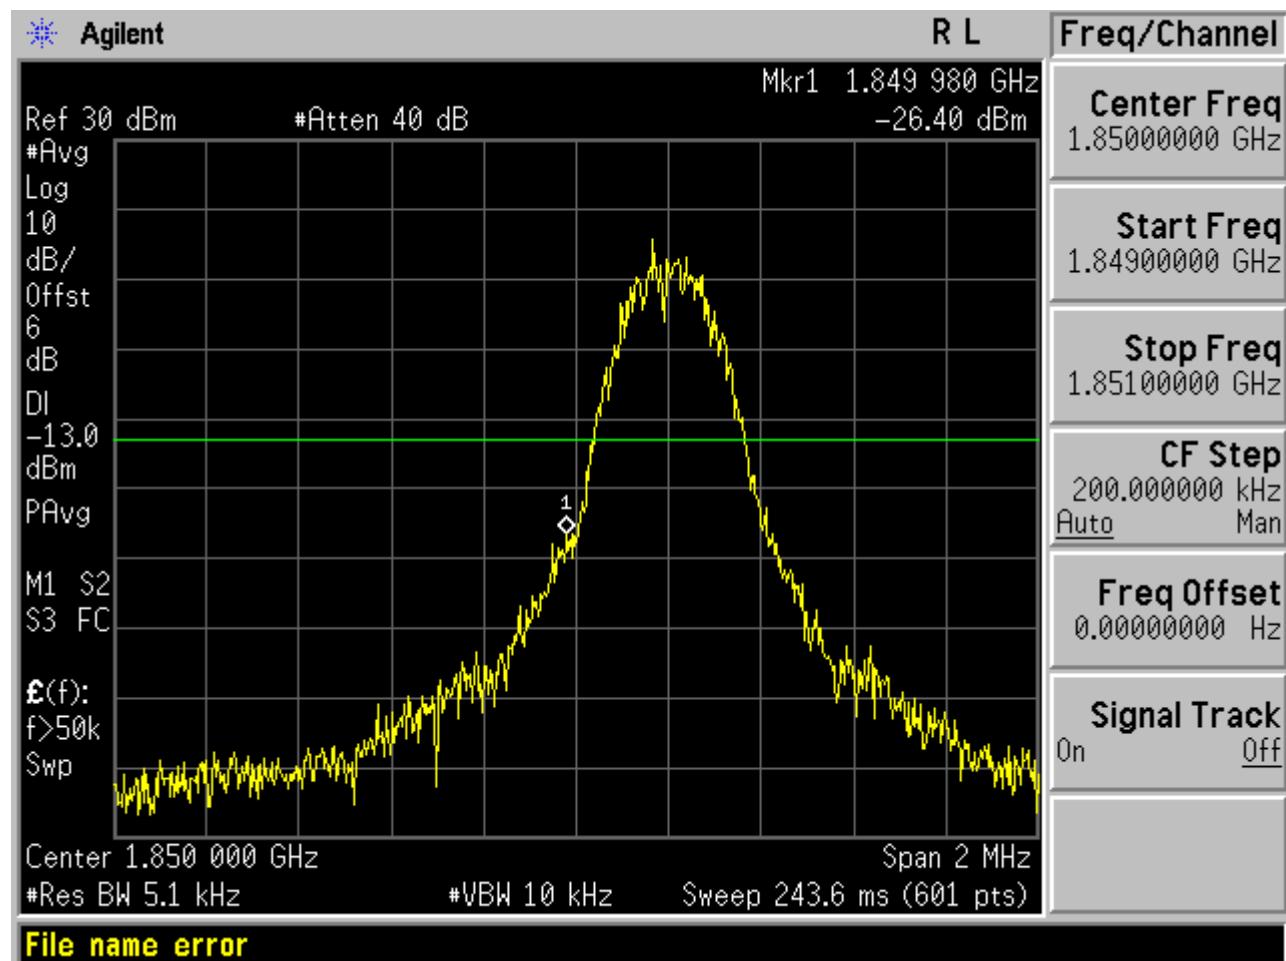

Test Channel=HCH

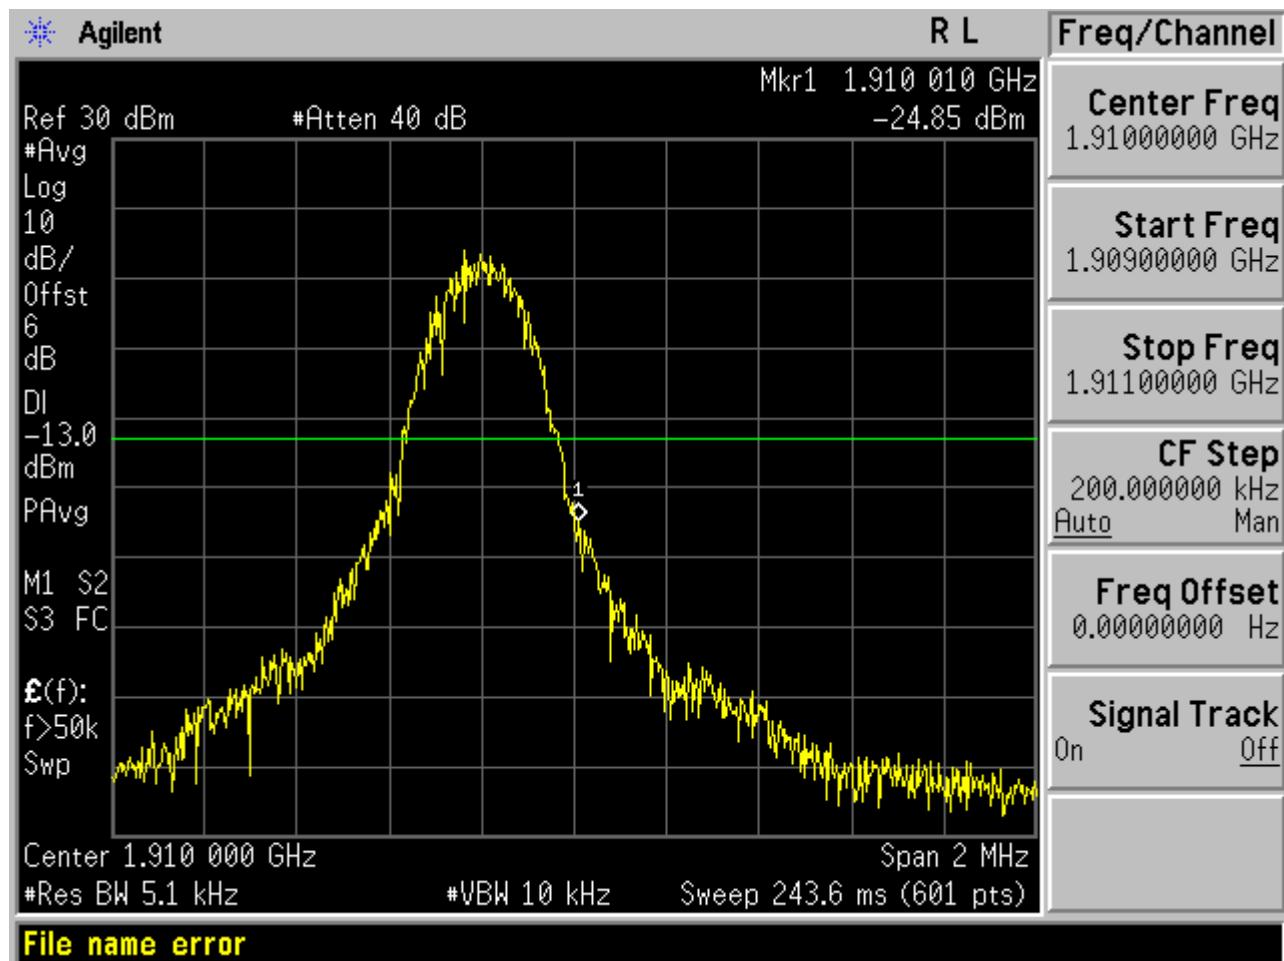


For WCDMA


Test Band=WCDMA850

Test Mode=UMTS/TM1

Test Channel=LCH

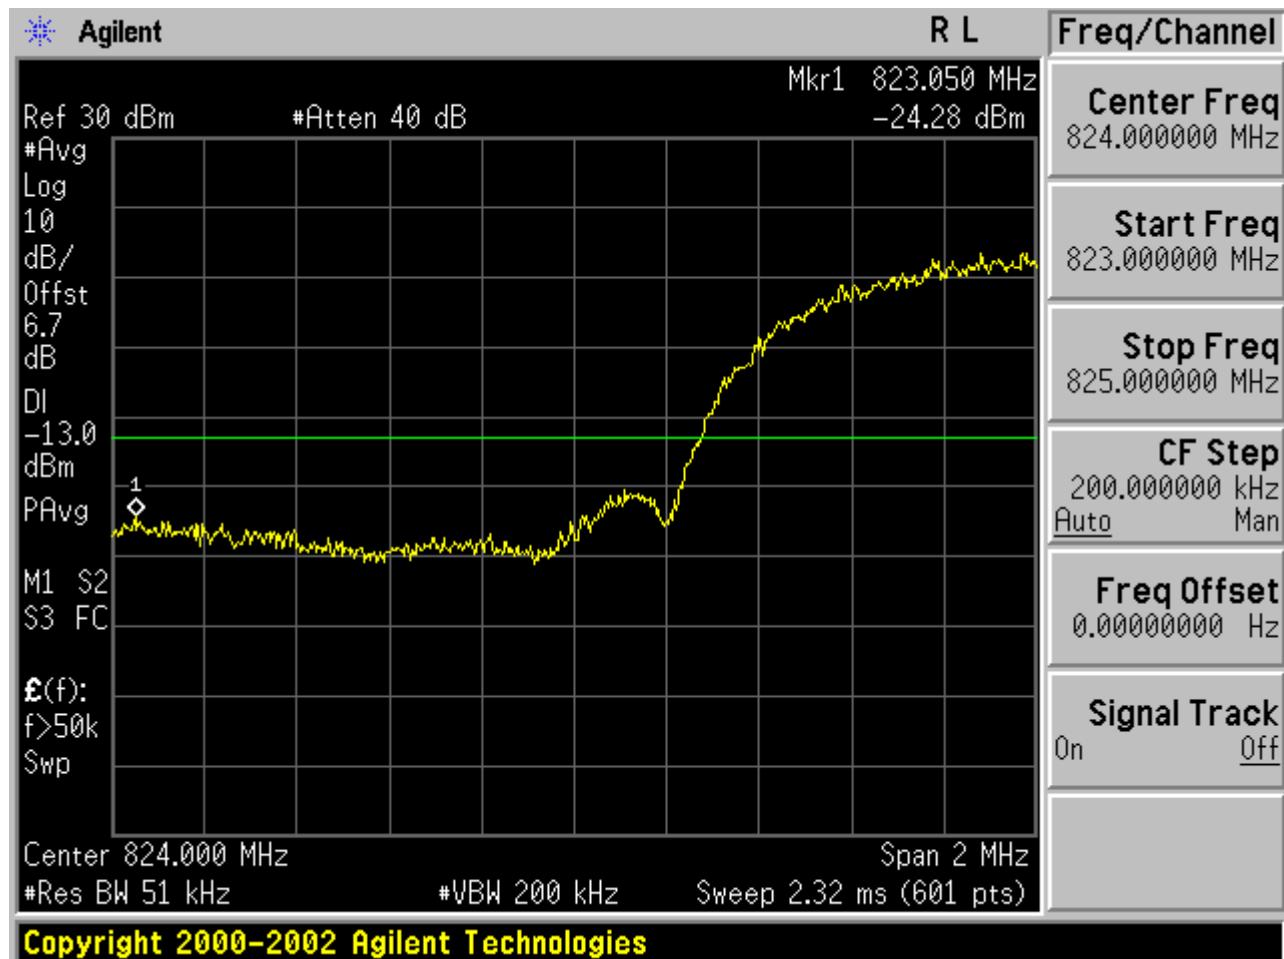


Test Channel=HCH

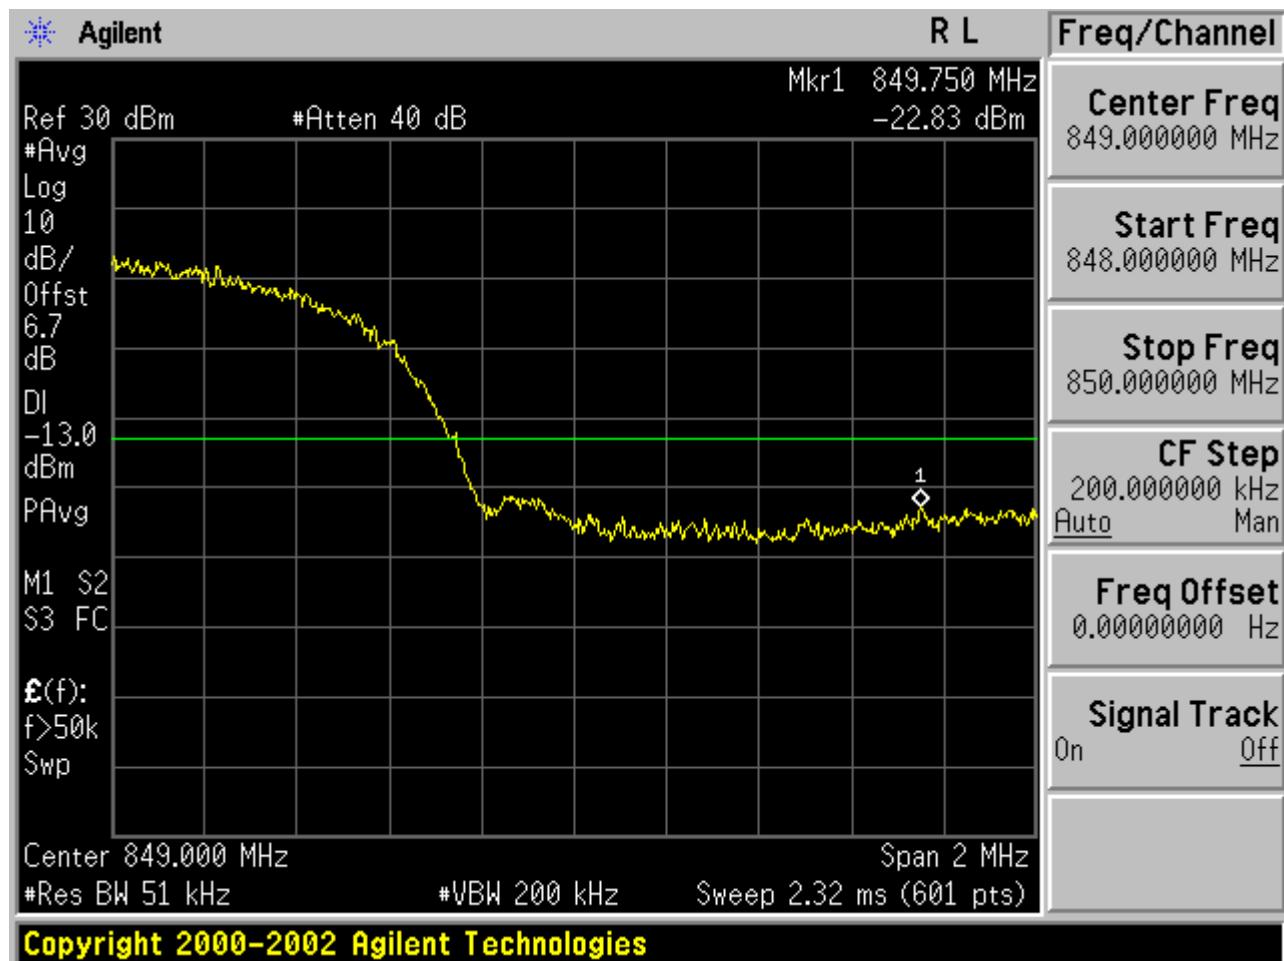


Test Band=WCDMA1900

Test Mode=UMTSTM1

Test Channel=LCH

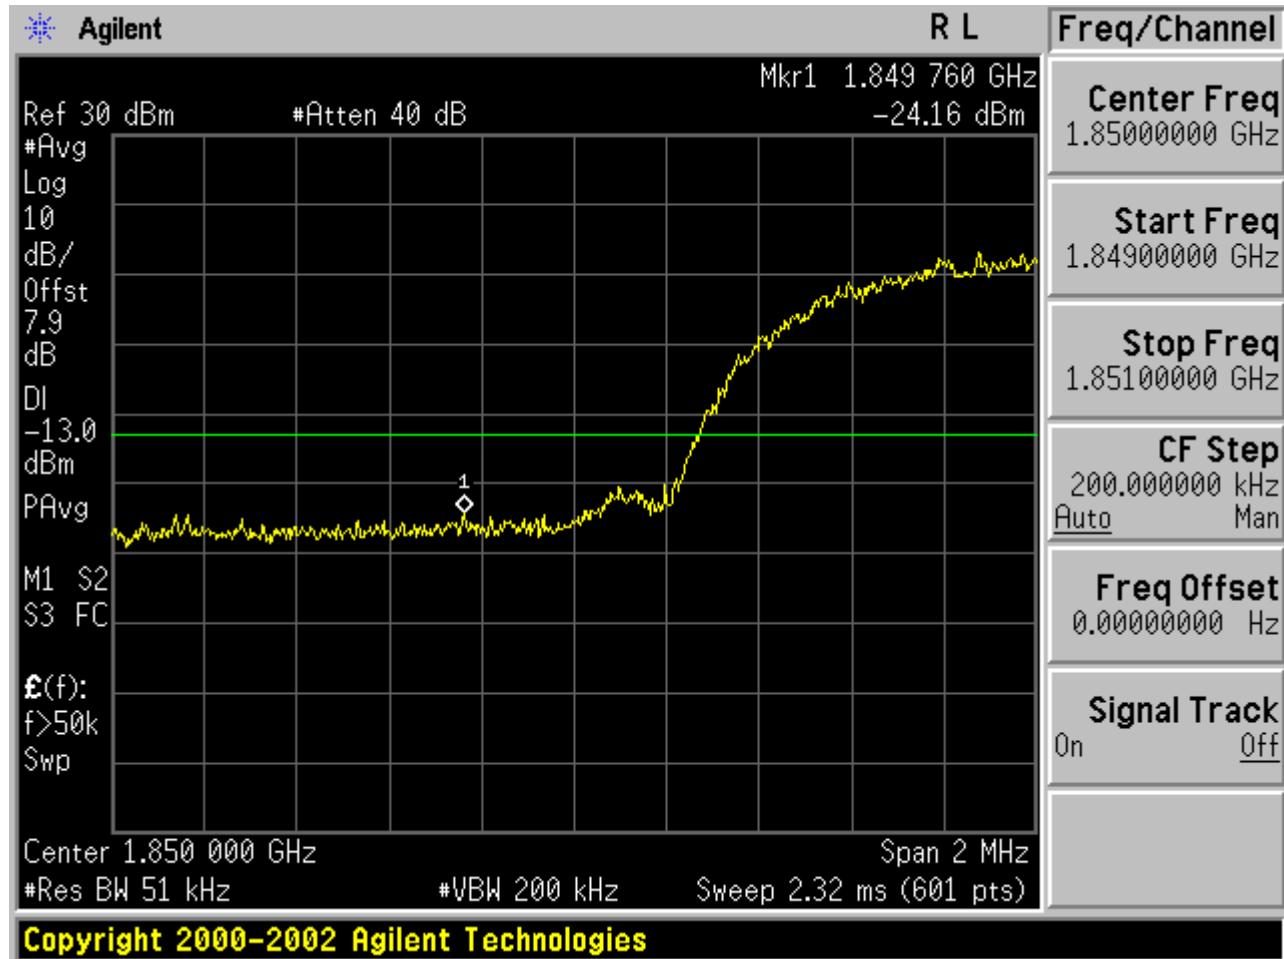

Test Channel=HCH

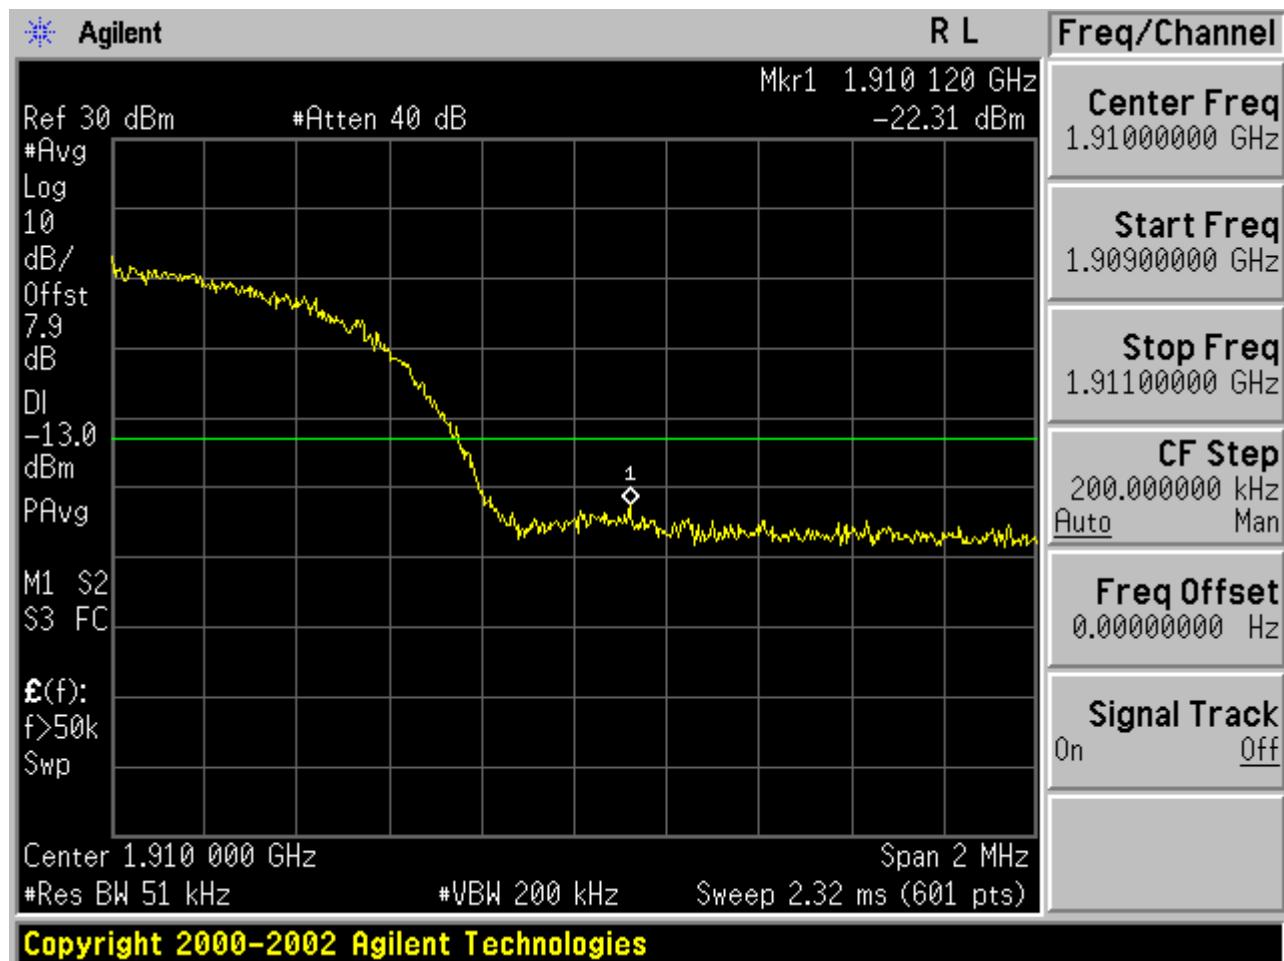

## 9. SPURIOUS EMISSION

### 9.1 CONDUCTED SPURIOUS EMISSION

#### 9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850/EDGE 8	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900/EDGE 8	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9663	1852.6
9800	1880
9937	1907.4

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4358	826.6
4407	836.4
4457	846.4

### 9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 9.1.3 MEASUREMENT RESULT


#### APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL


##### Test Results

Test Band=GSM850


Test Mode=GSM/TM1


Test Channel=LCH

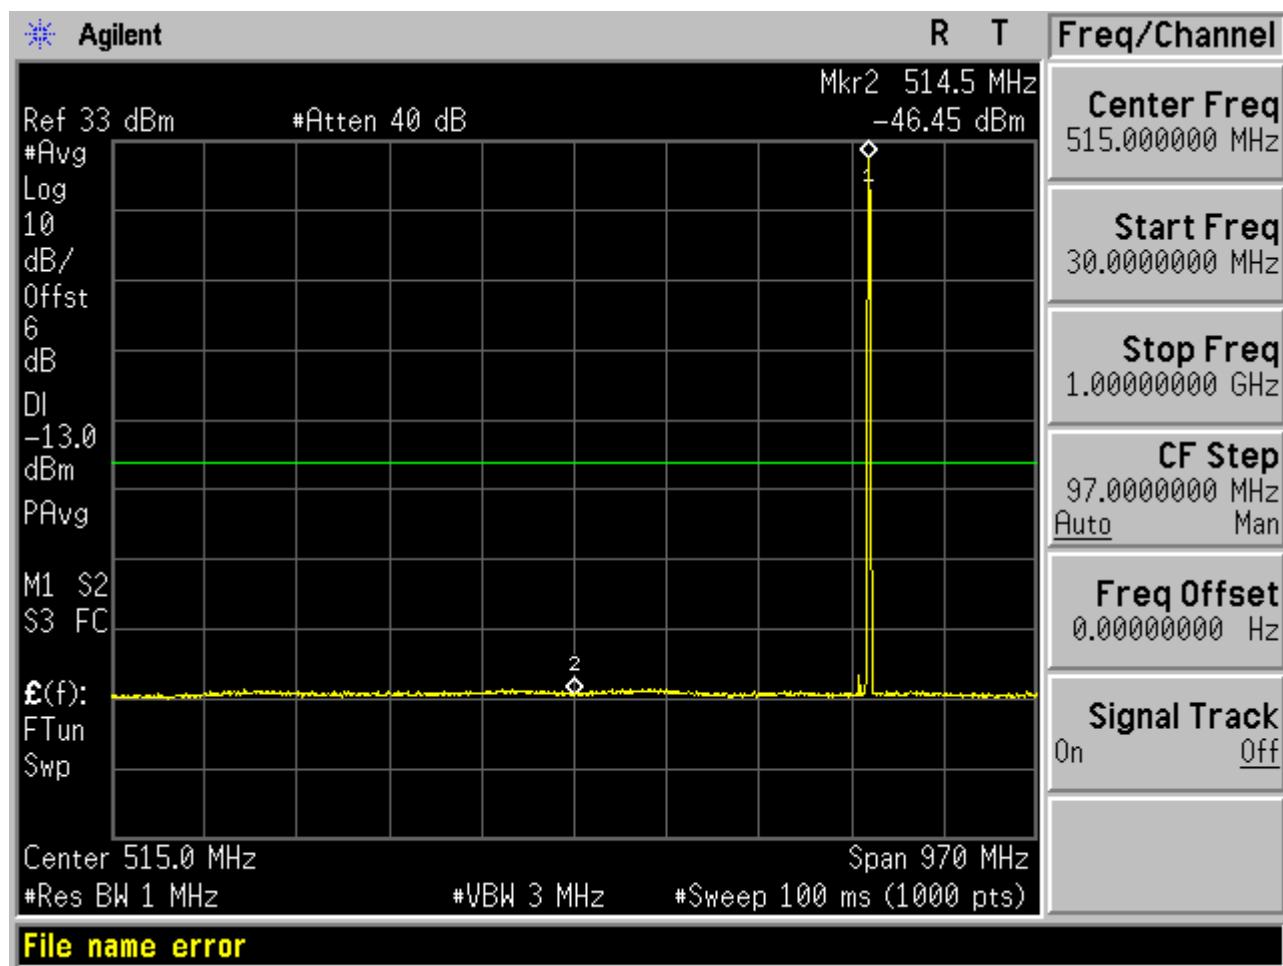

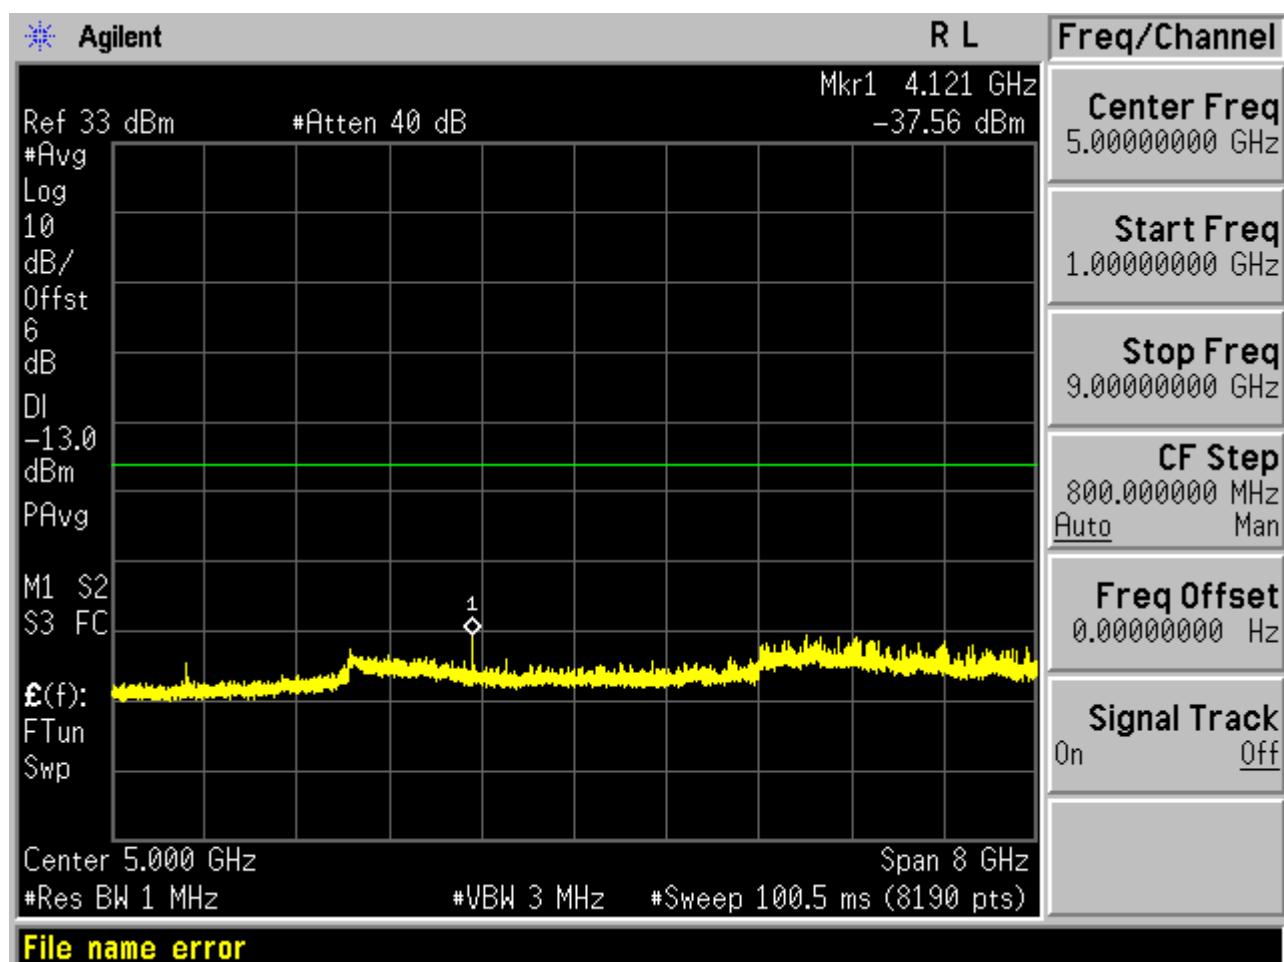



Test Channel=MCH

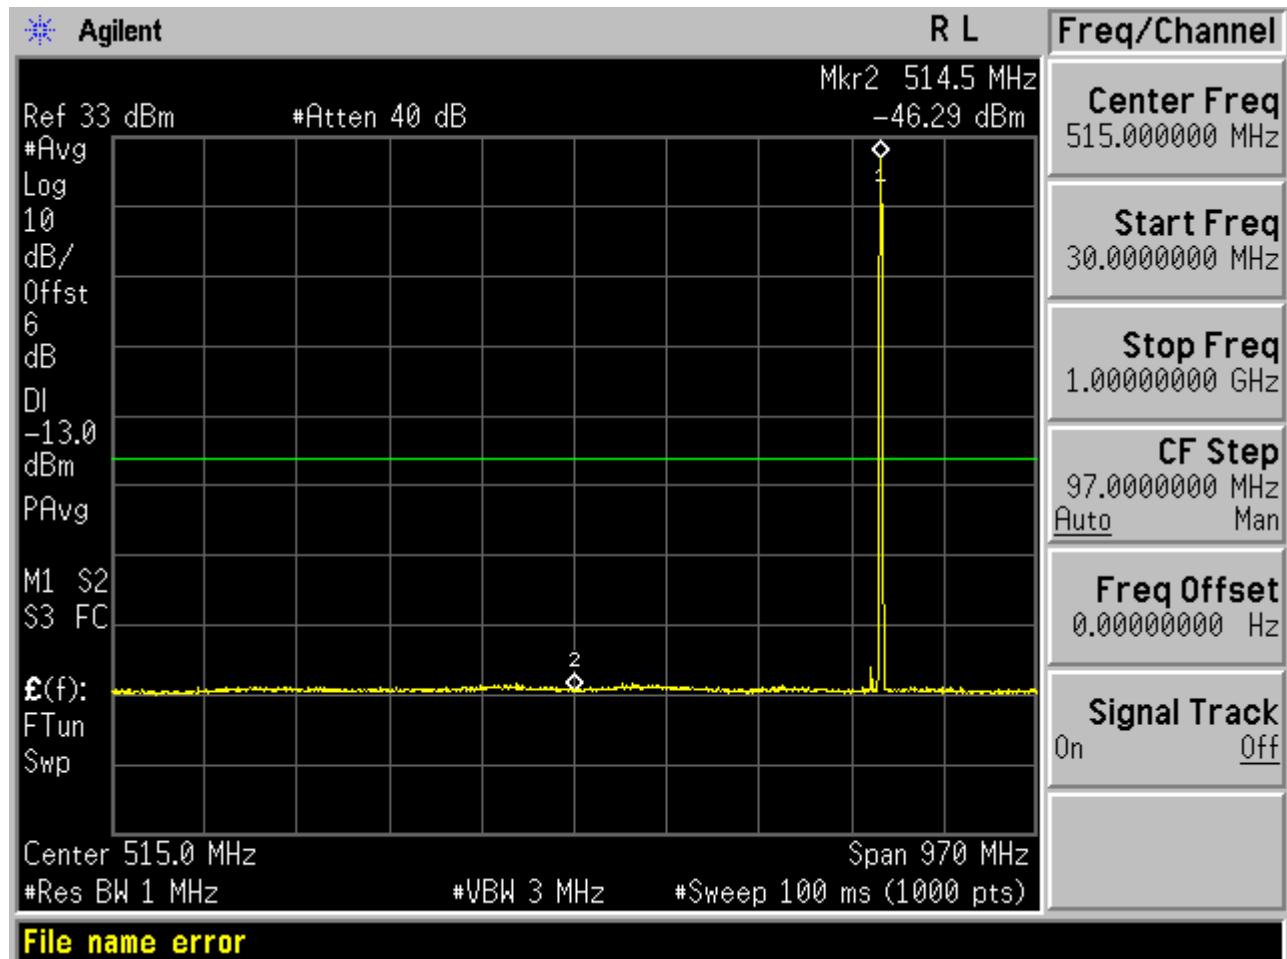

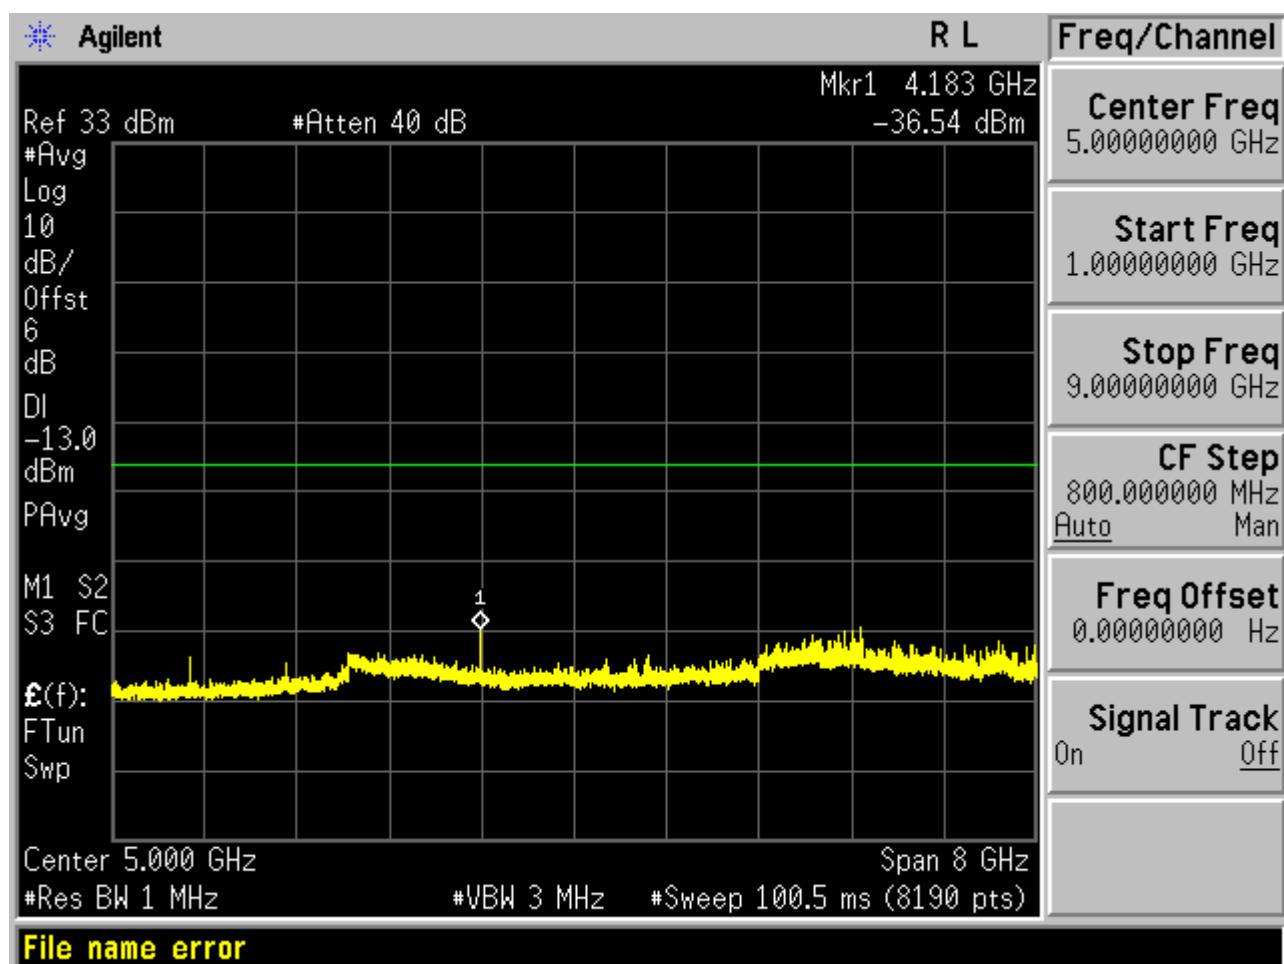


Test Channel=HCH

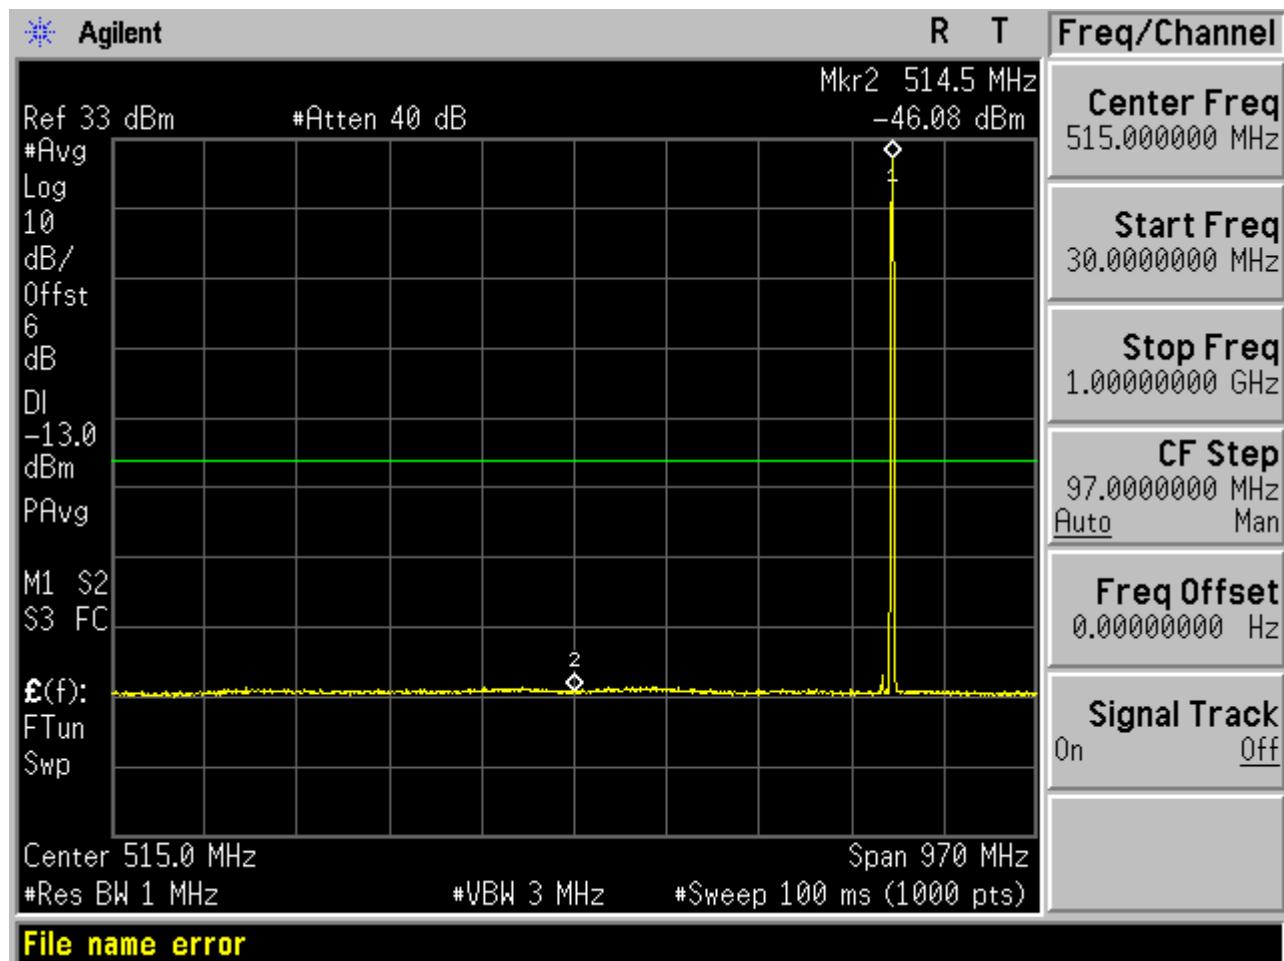


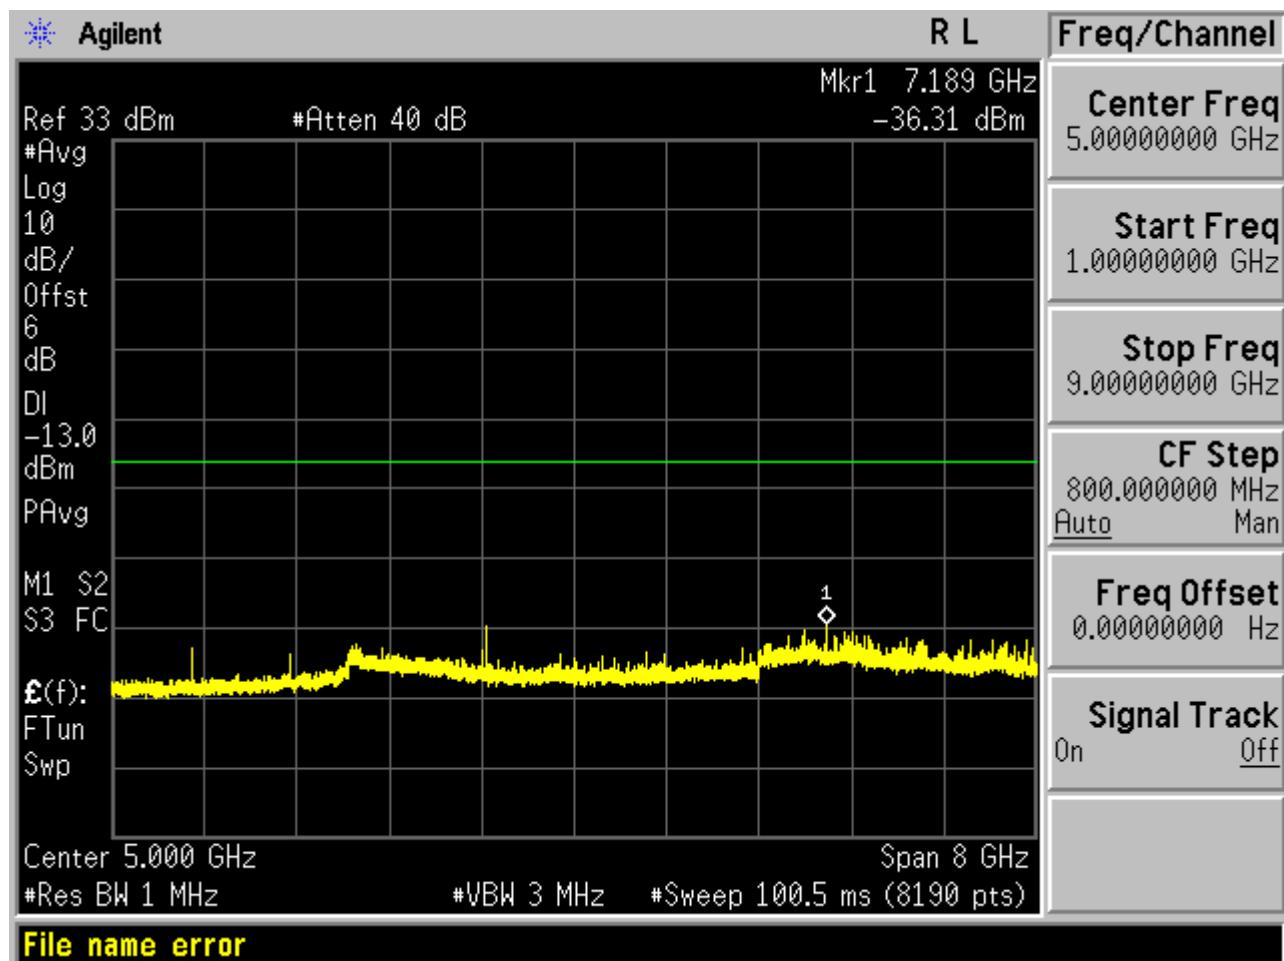


Test Mode=GSM/TM2


Test Channel=LCH

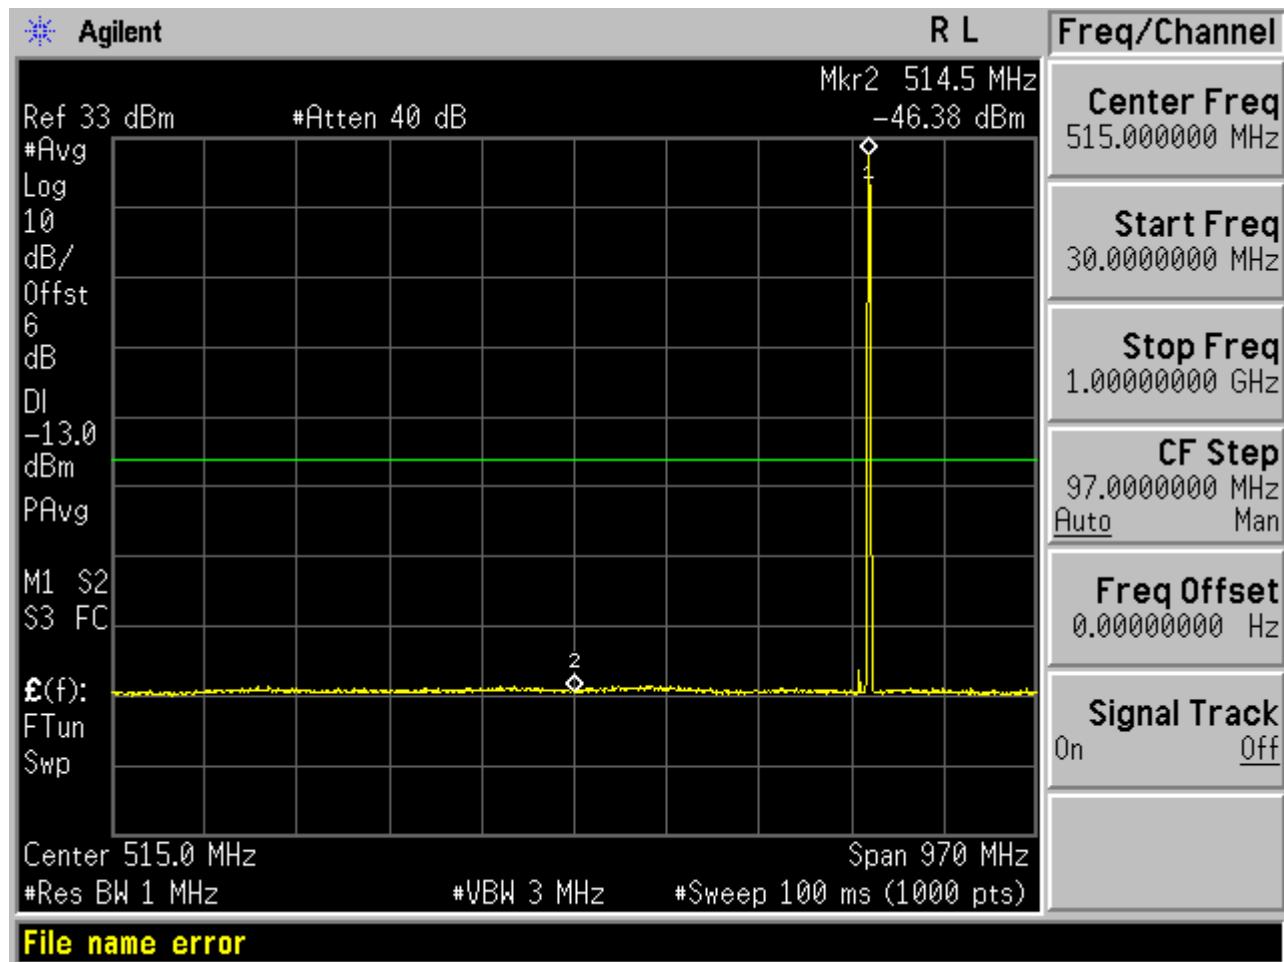

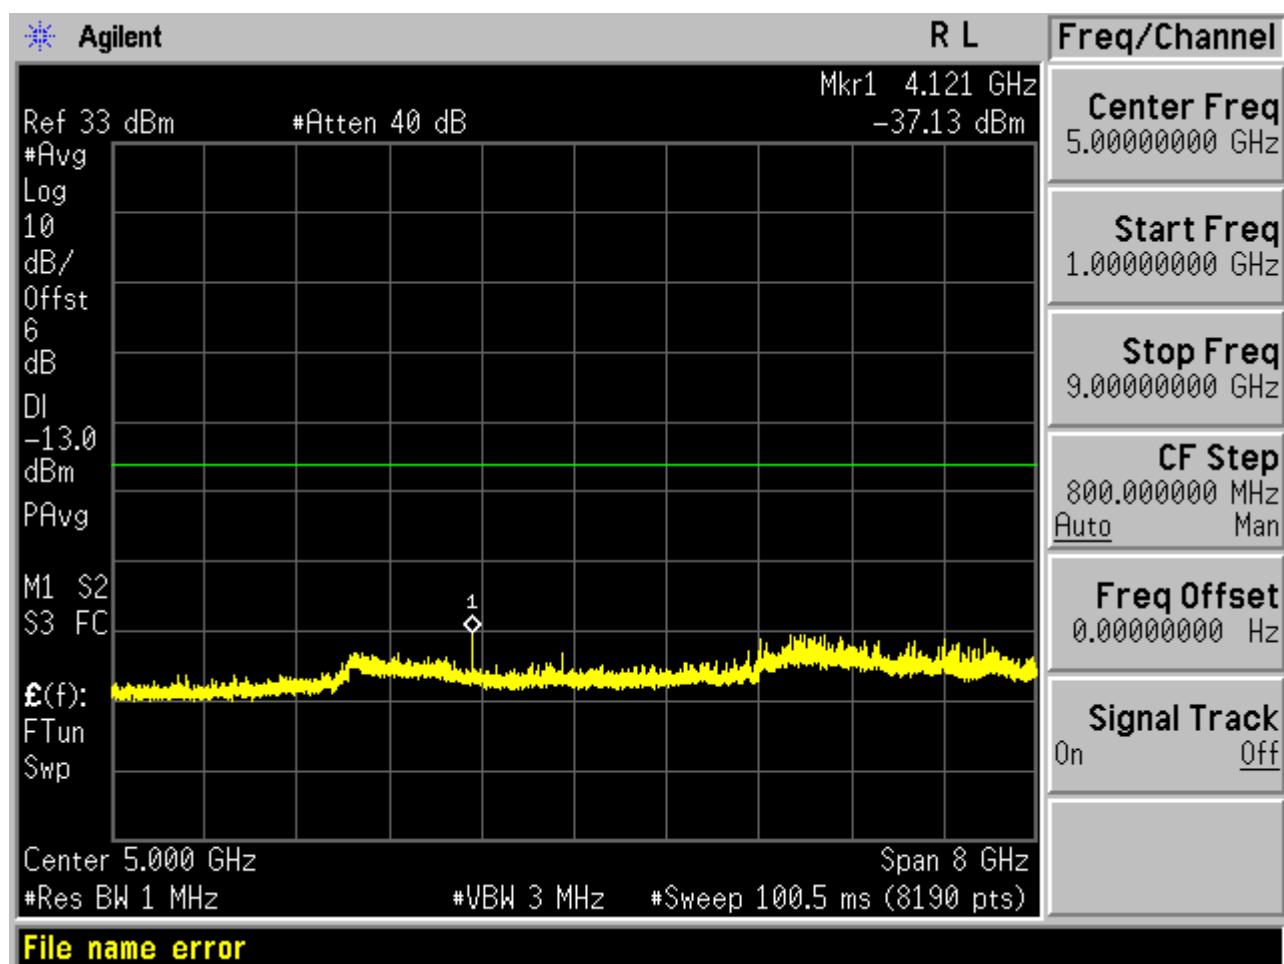



Test Channel=MCH

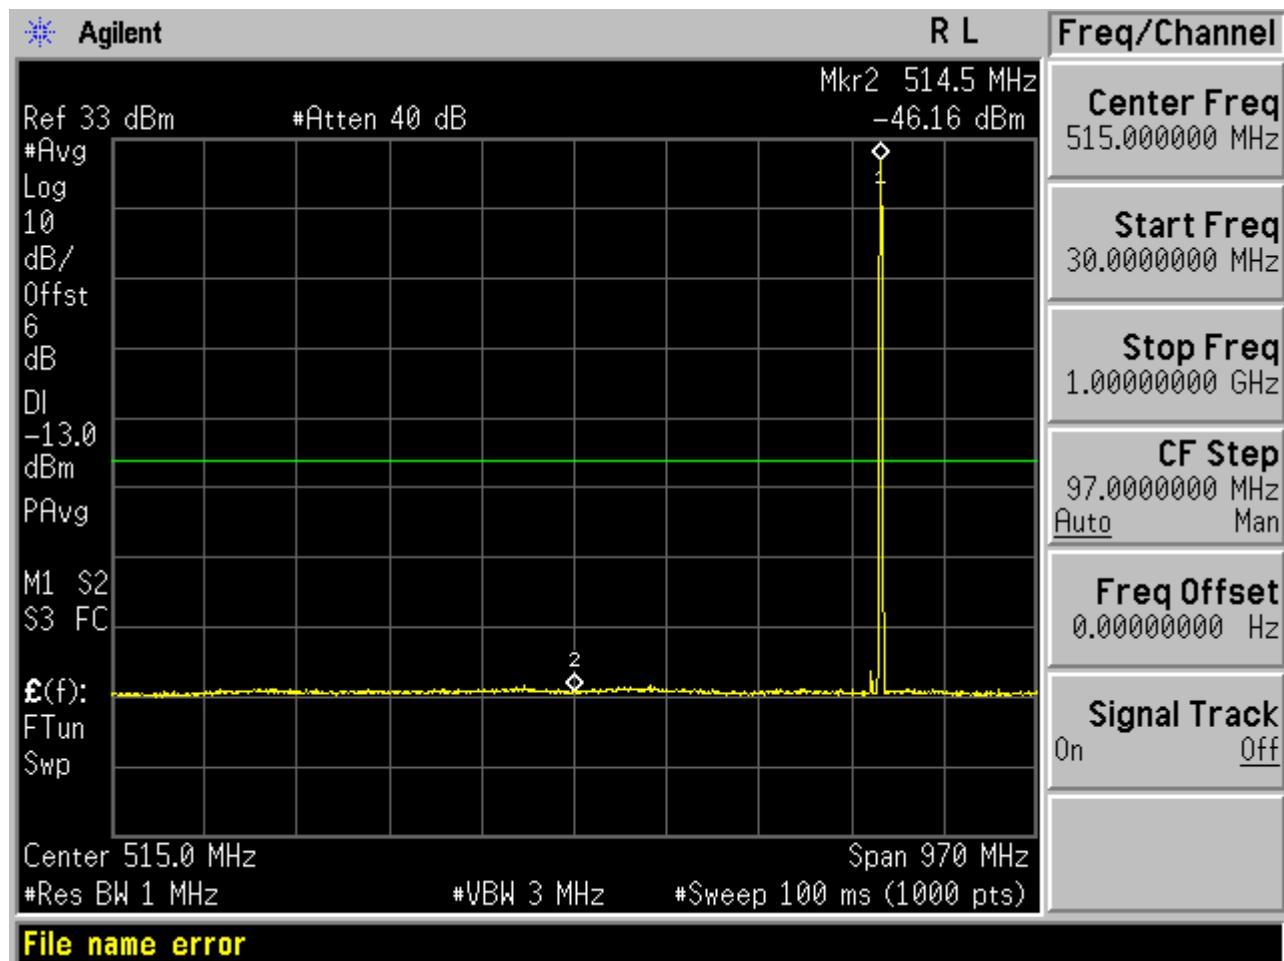

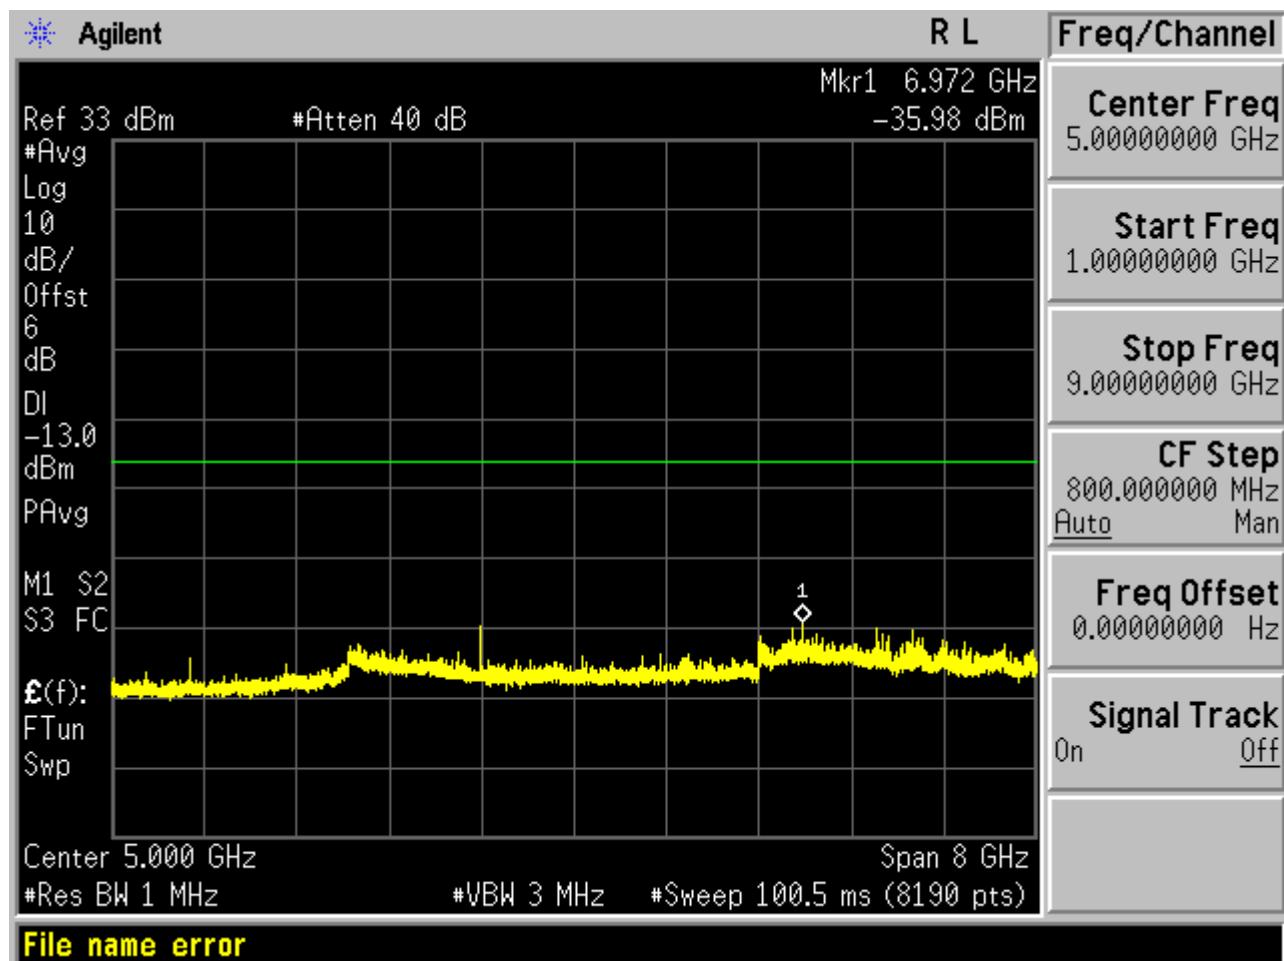


Test Channel=HCH

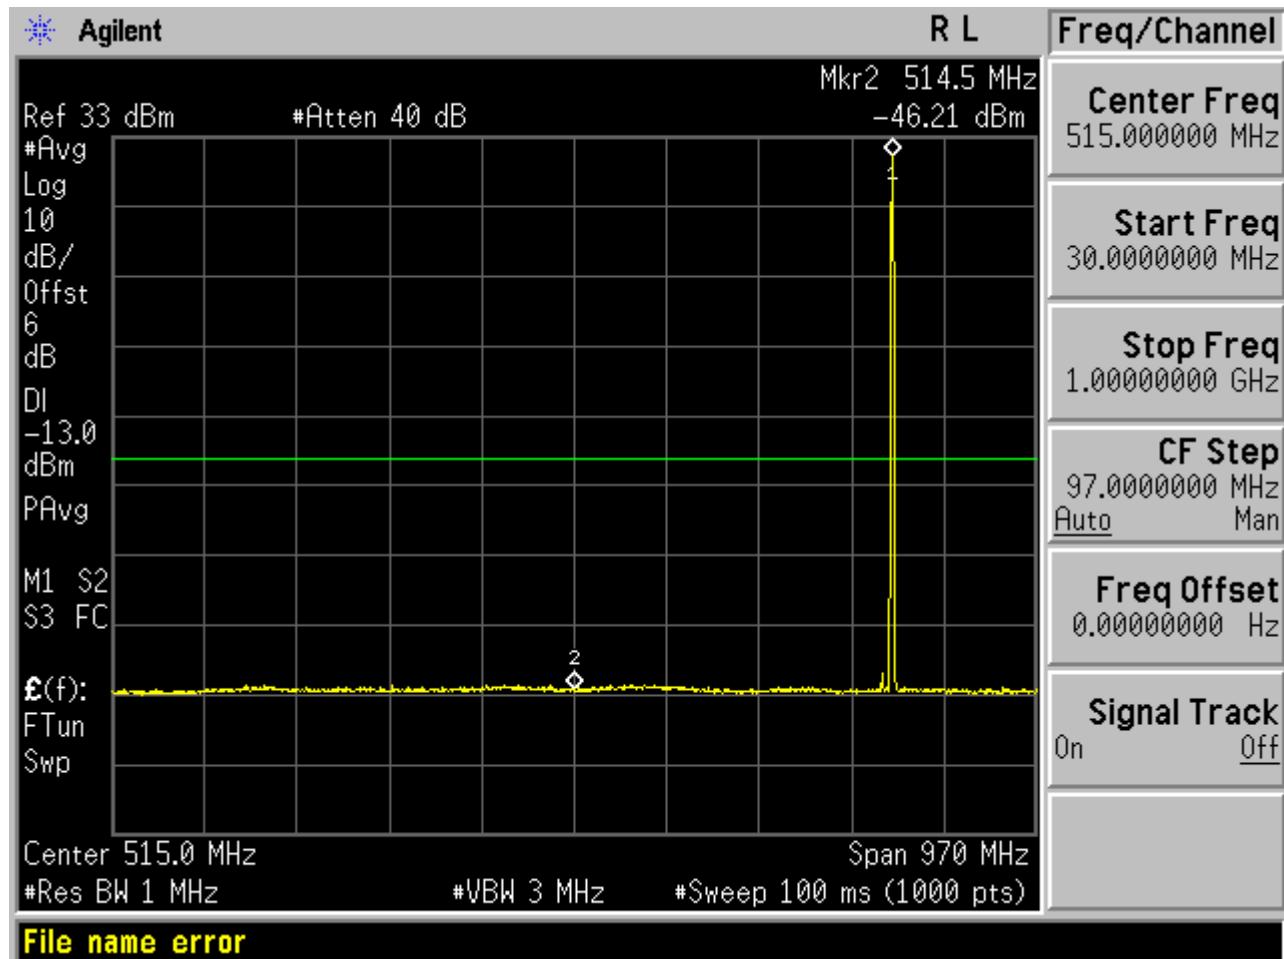


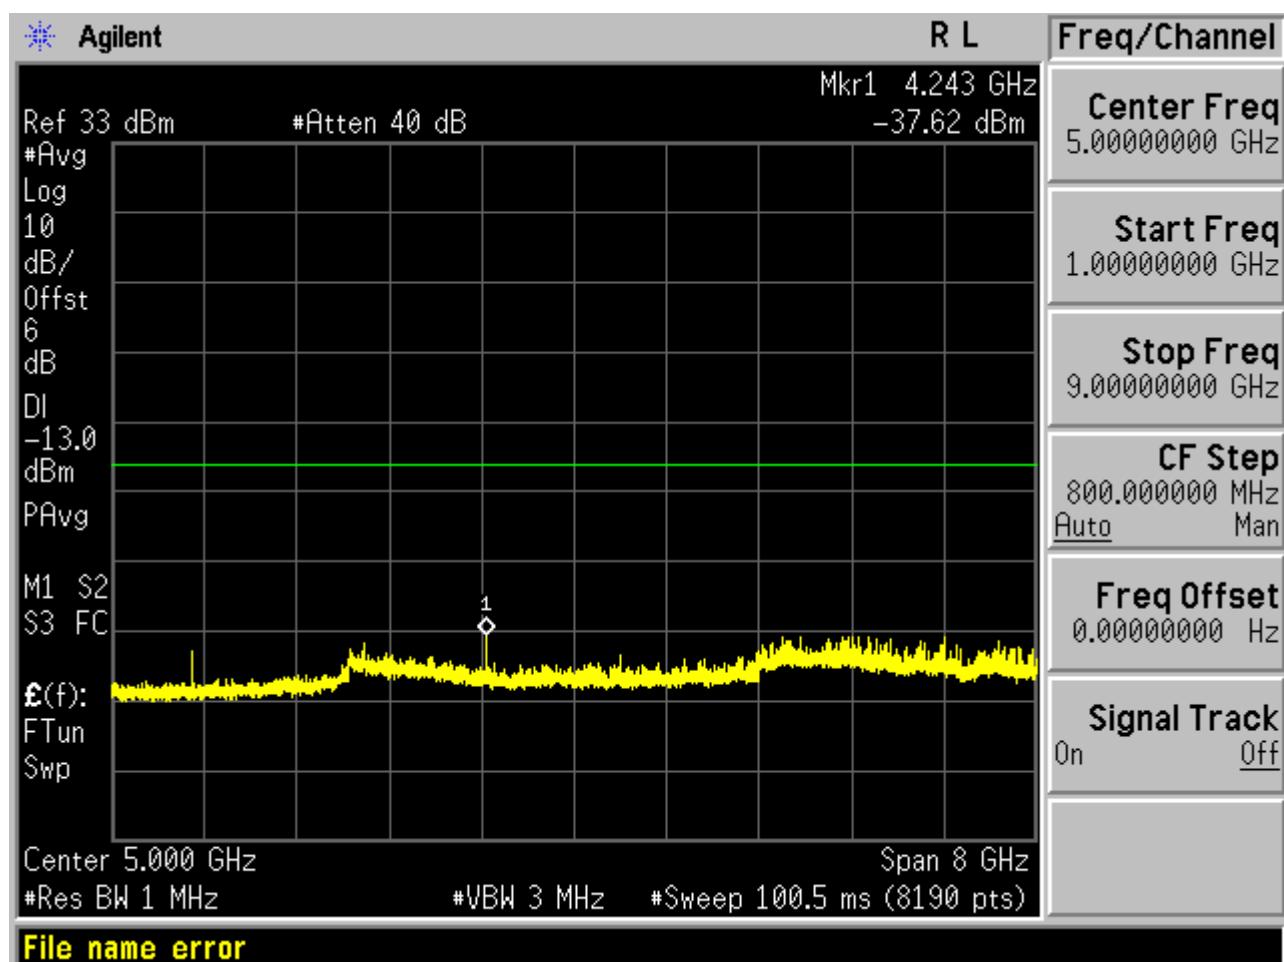


Test Mode=GSM/TM3


Test Channel=LCH

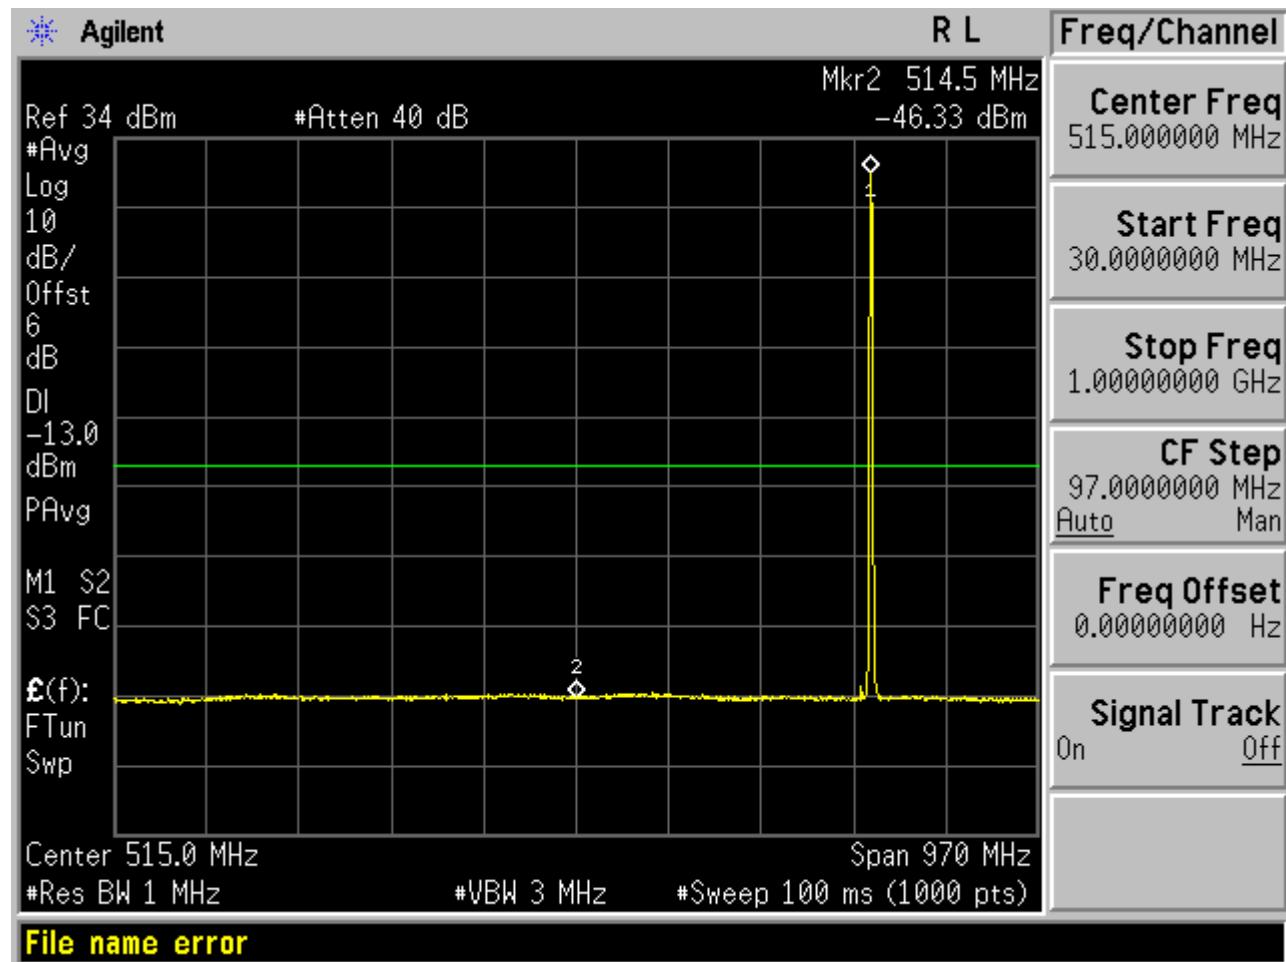

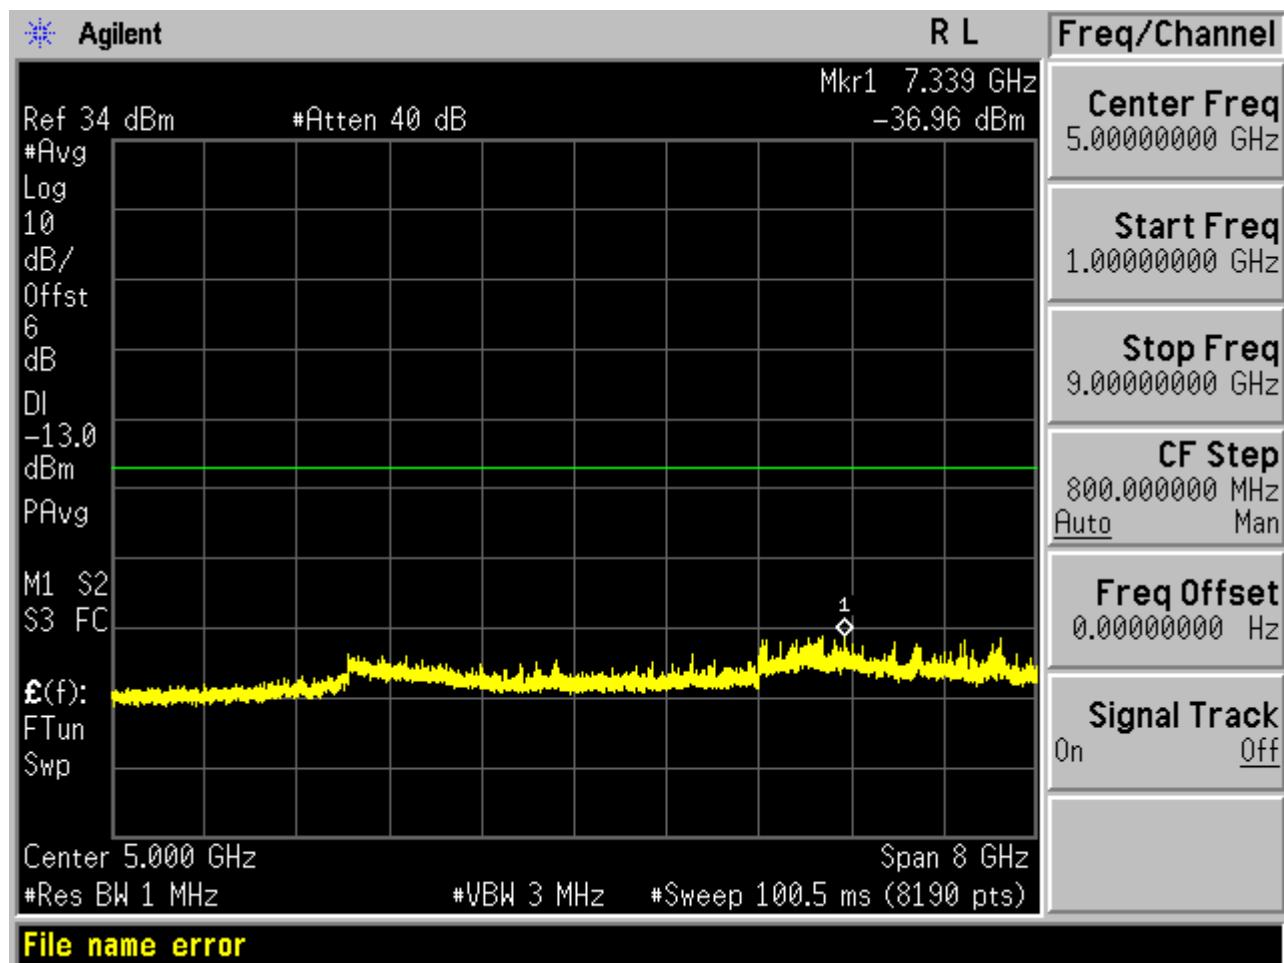



Test Channel=MCH

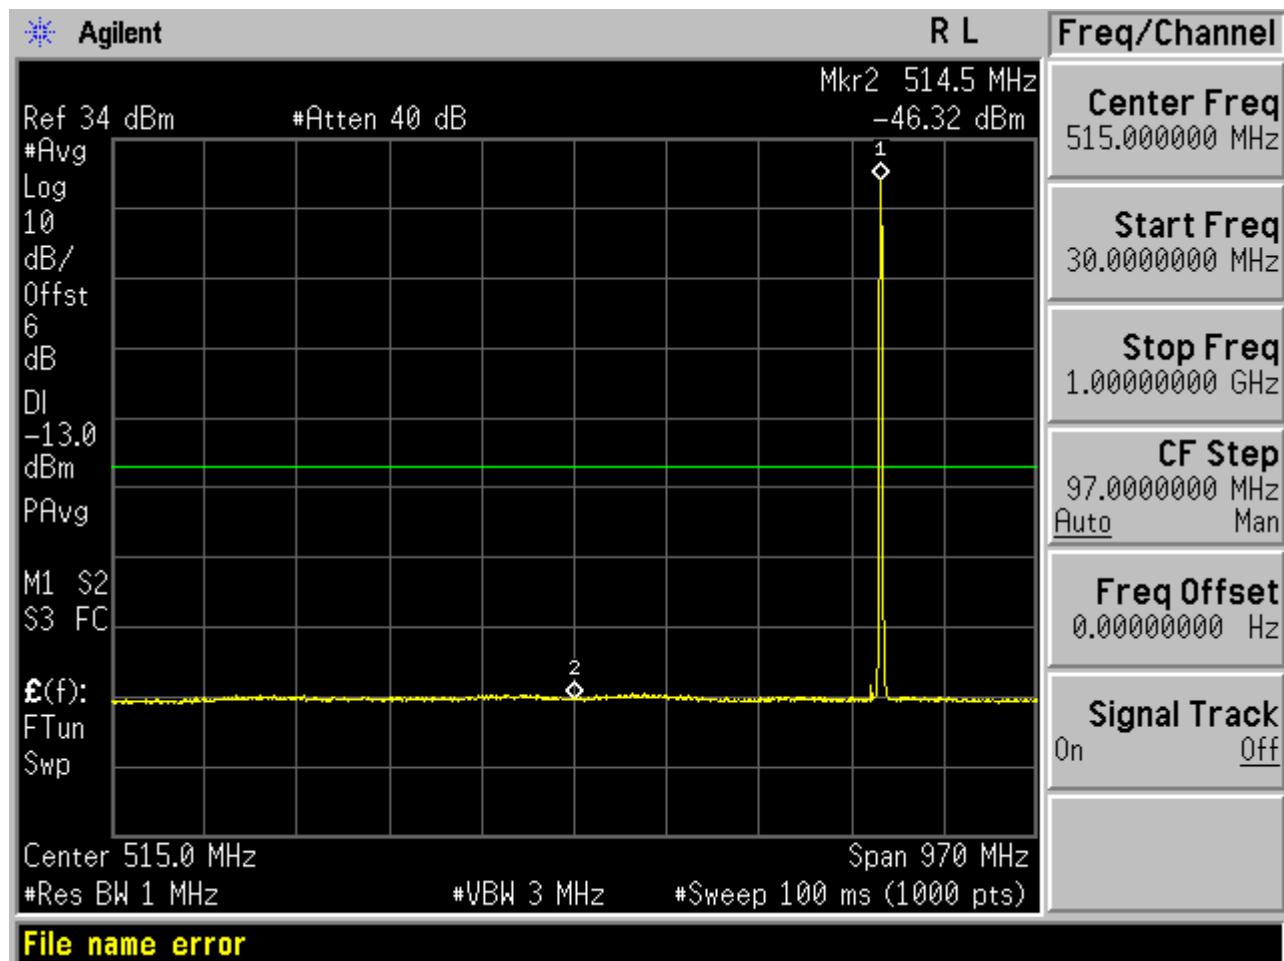

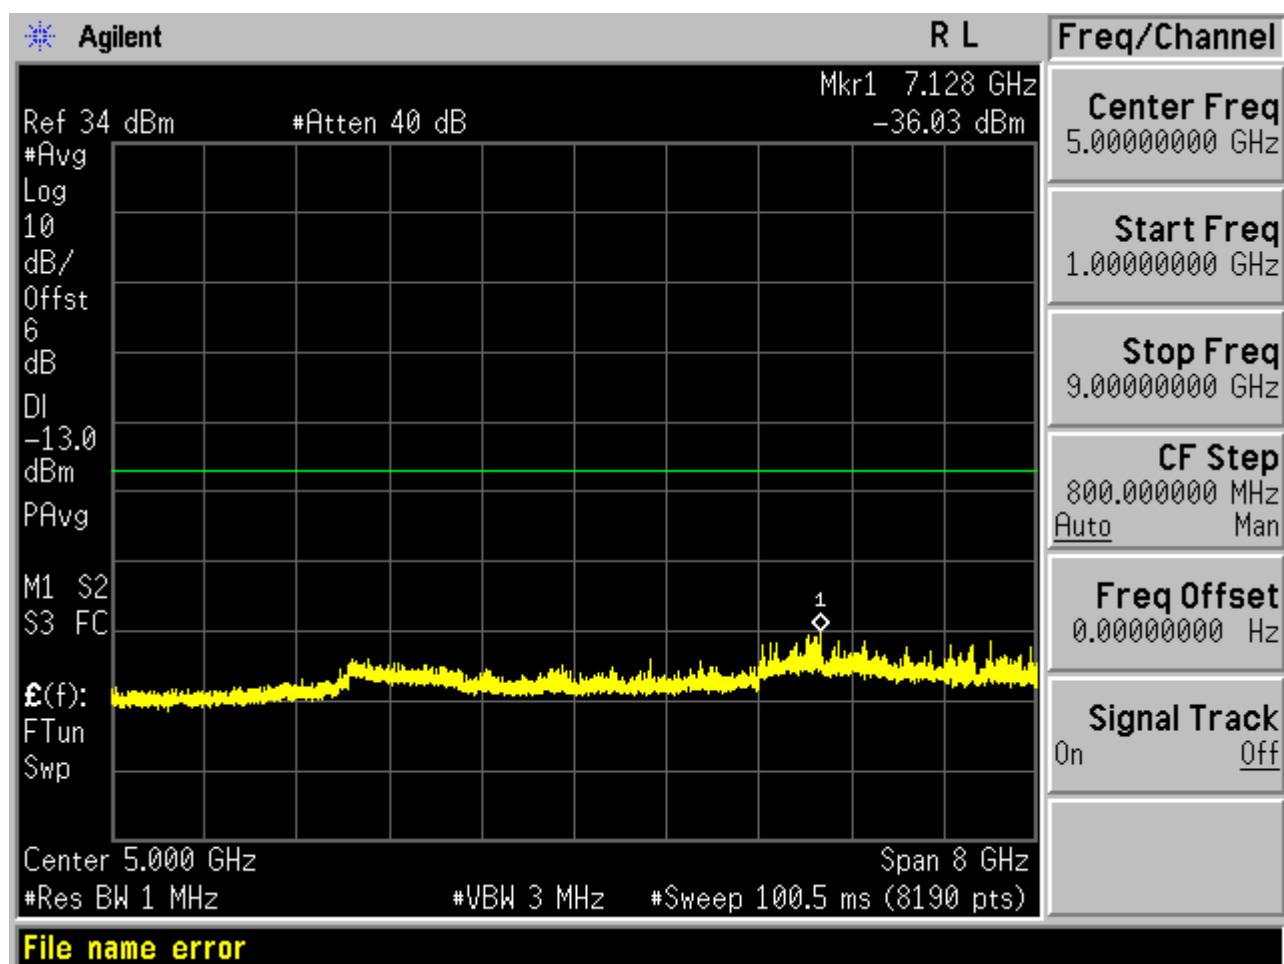

Test Channel=HCH

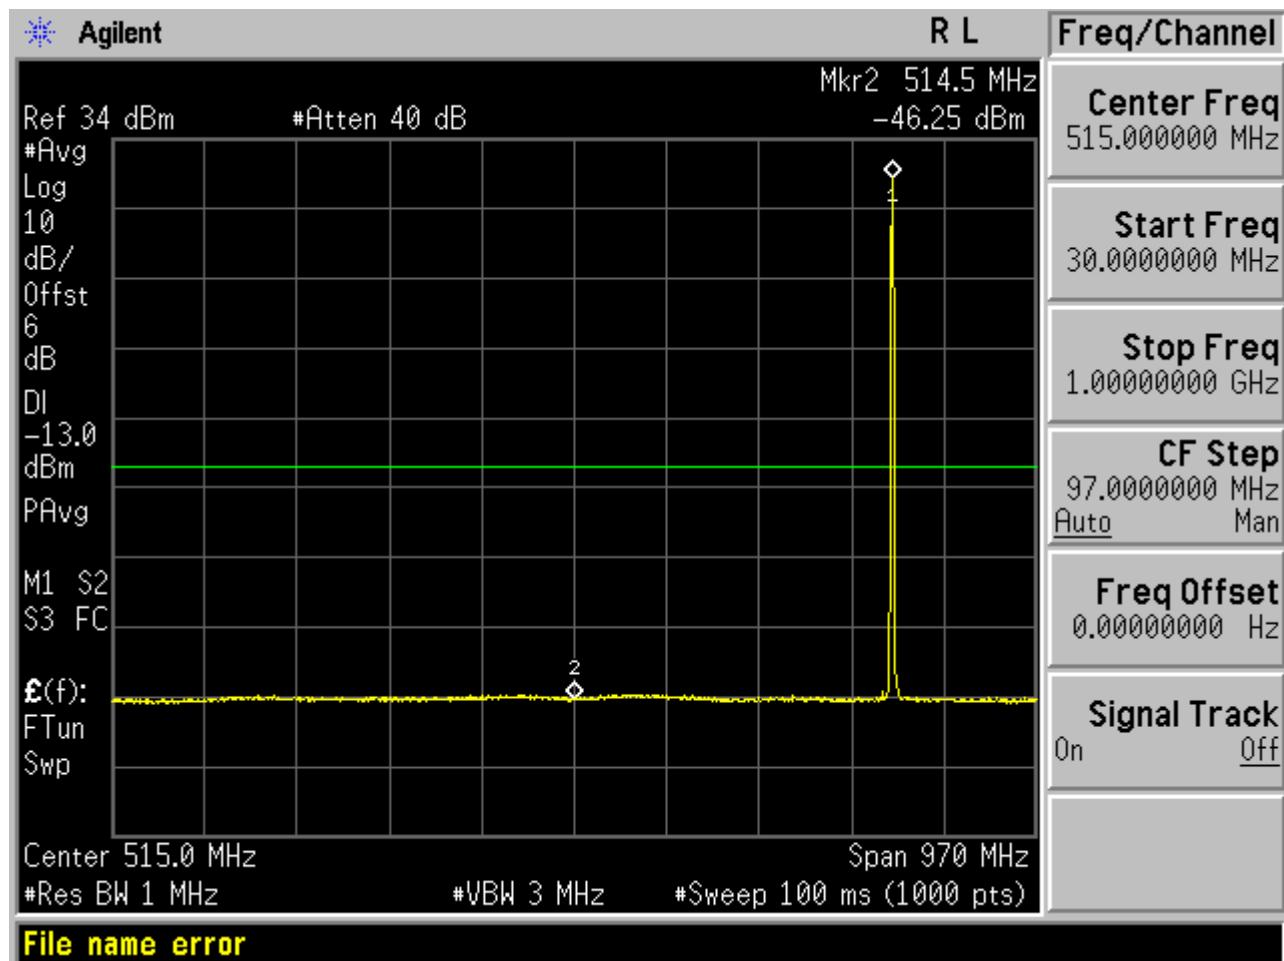


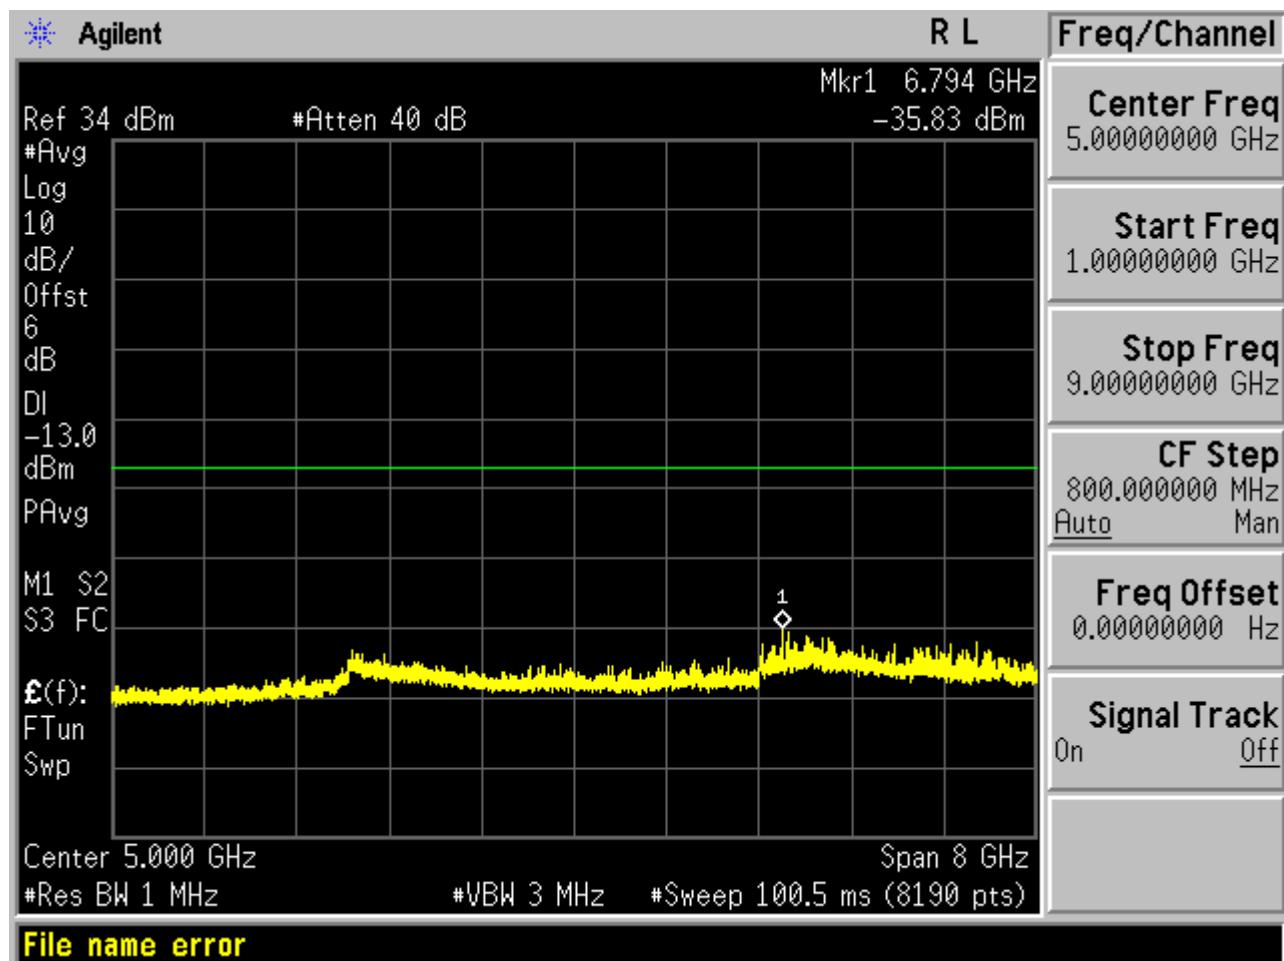



Test Band=GSM1900


Test Mode=GSM/TM1

Test Channel=LCH

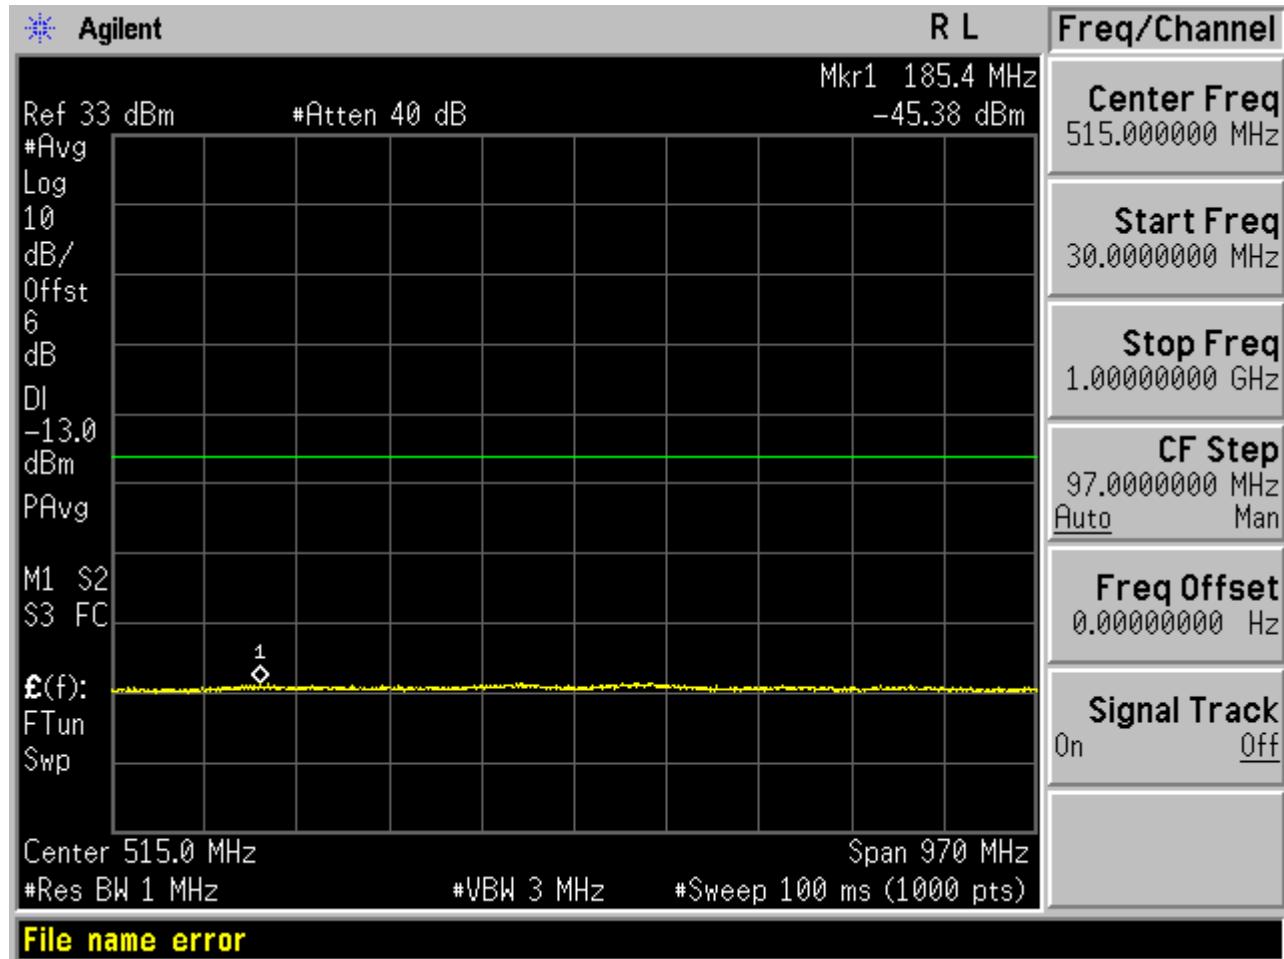


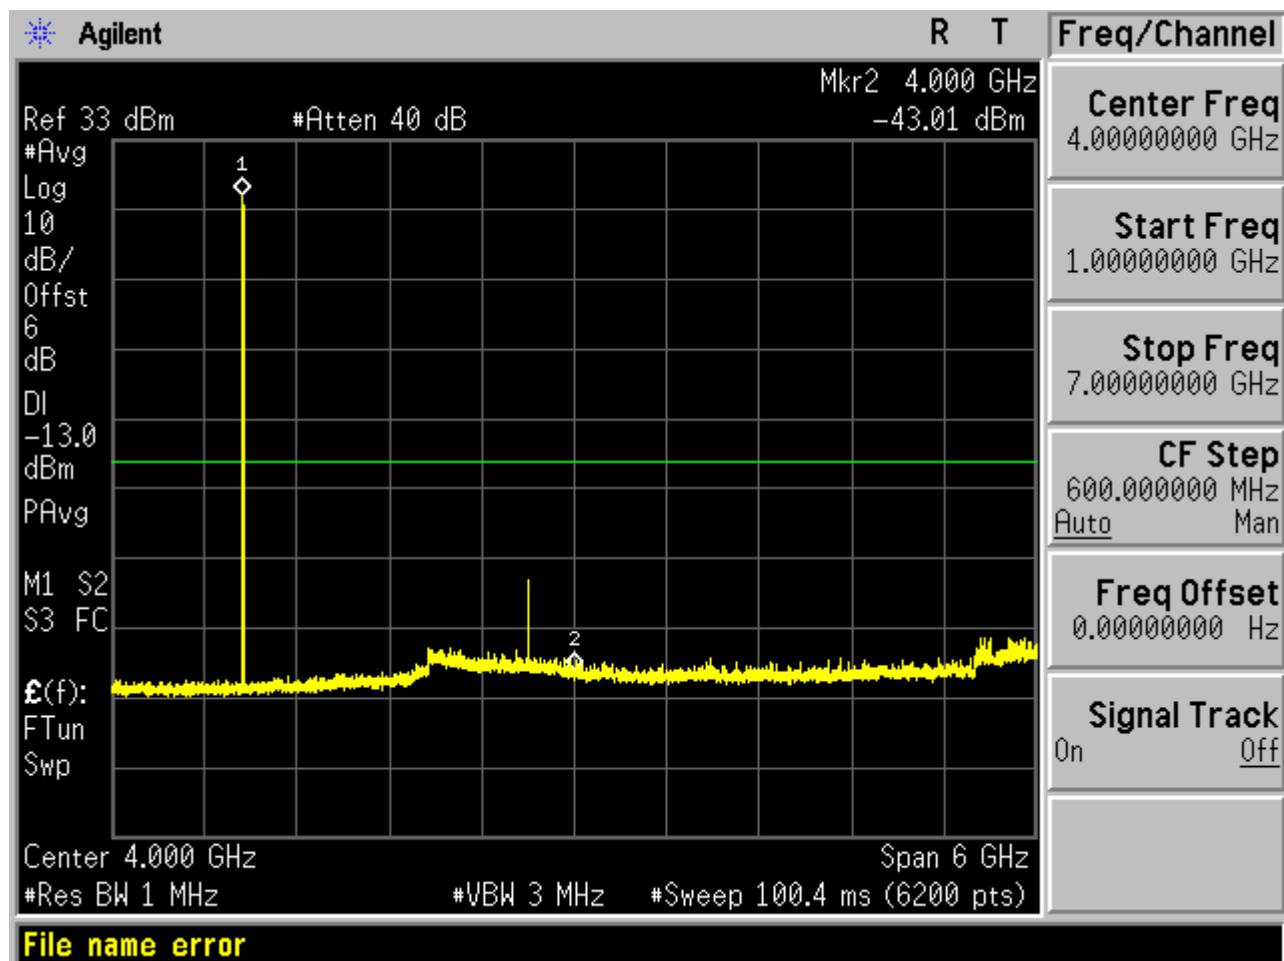


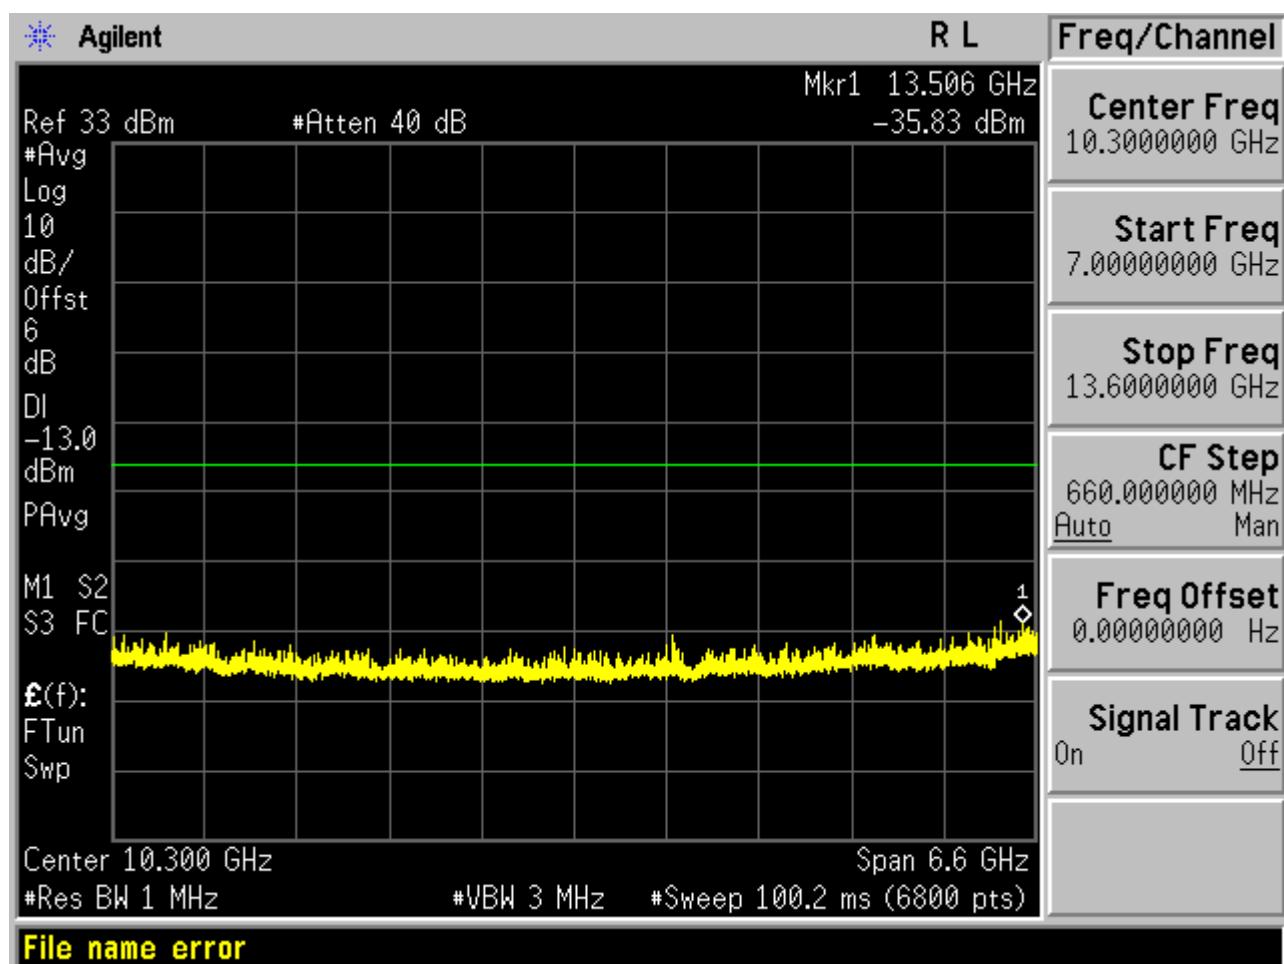


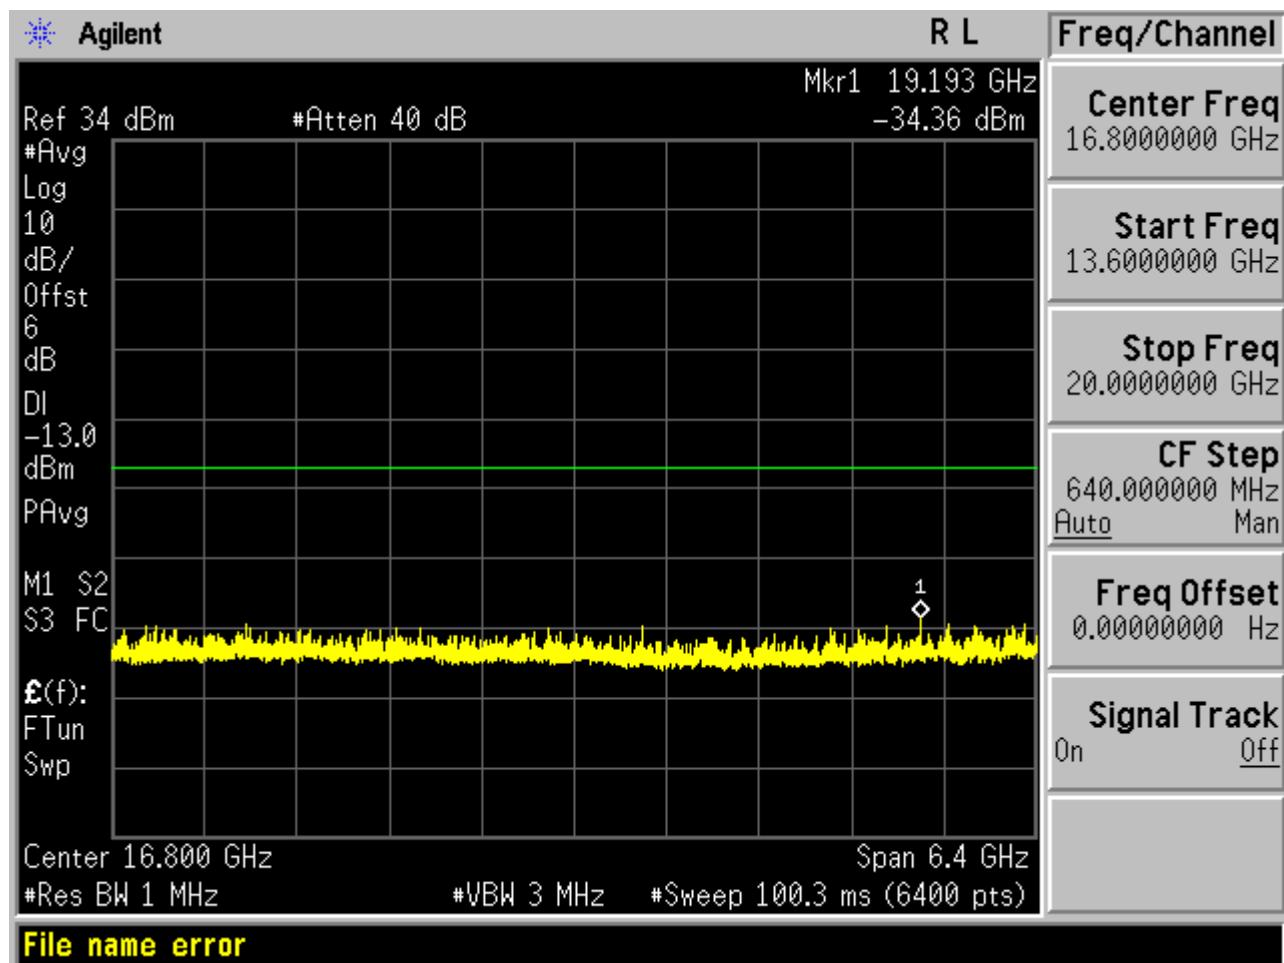


Test Channel=MCH

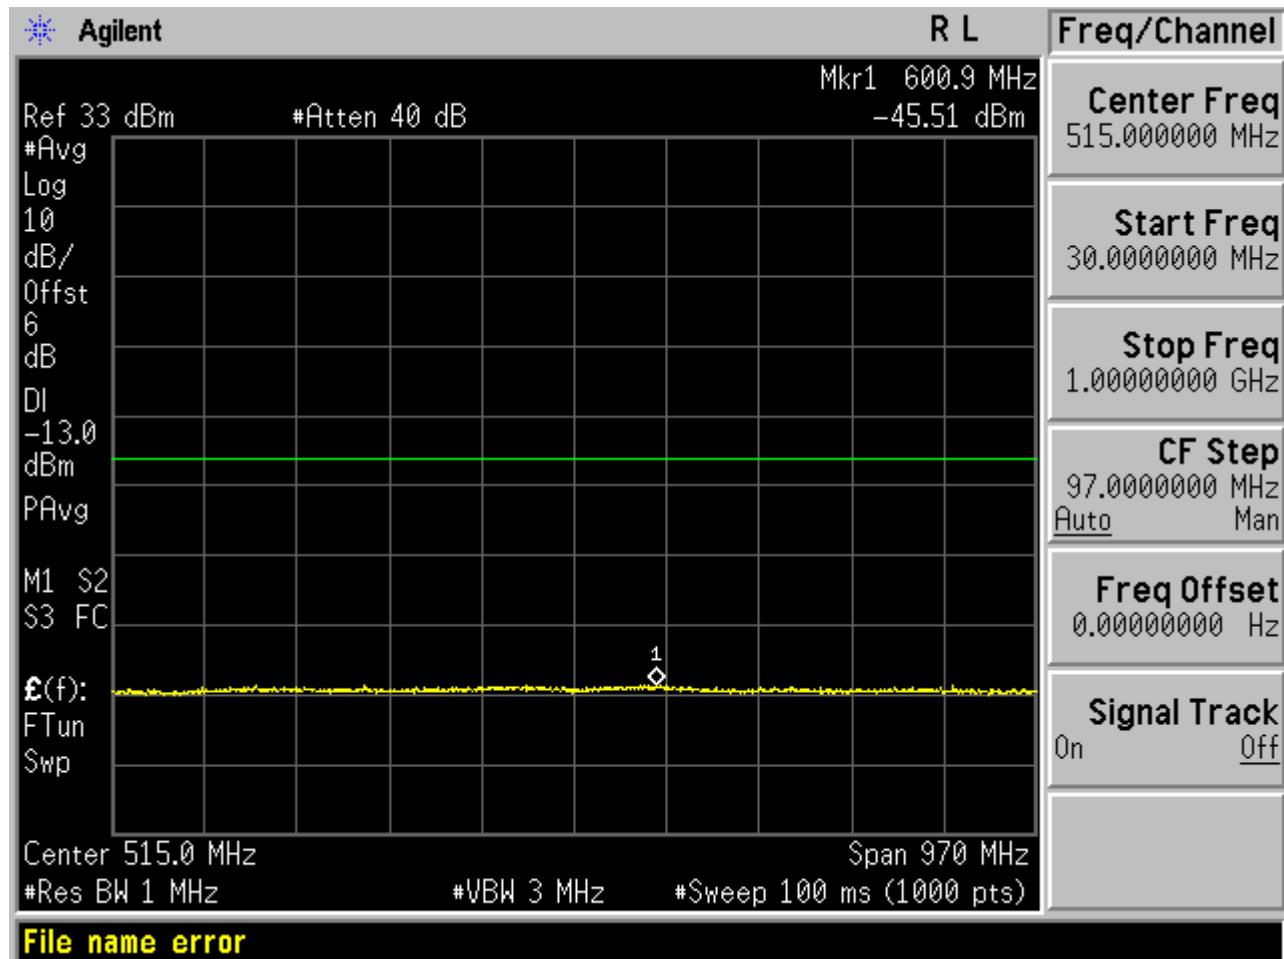


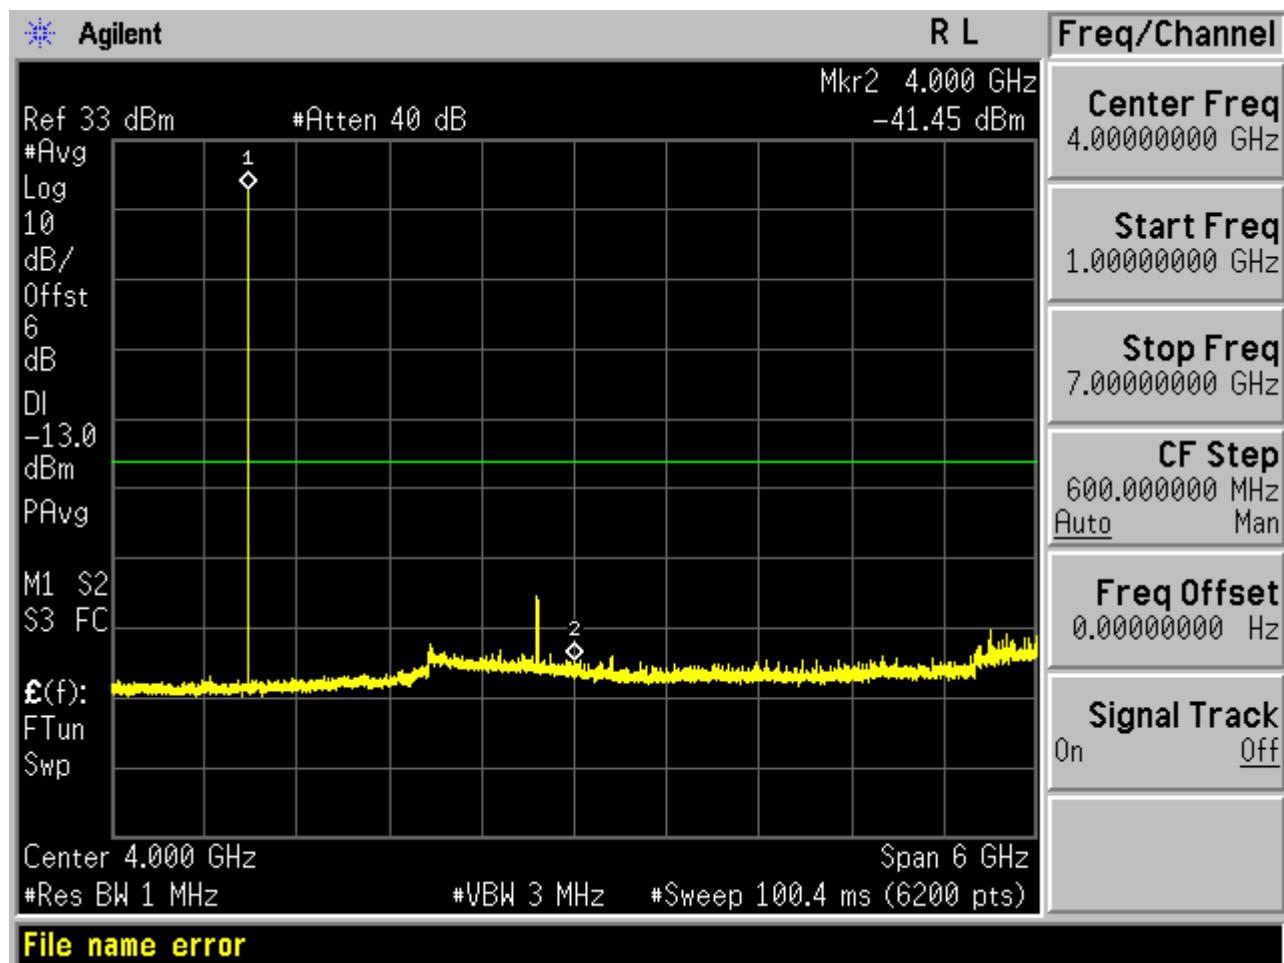


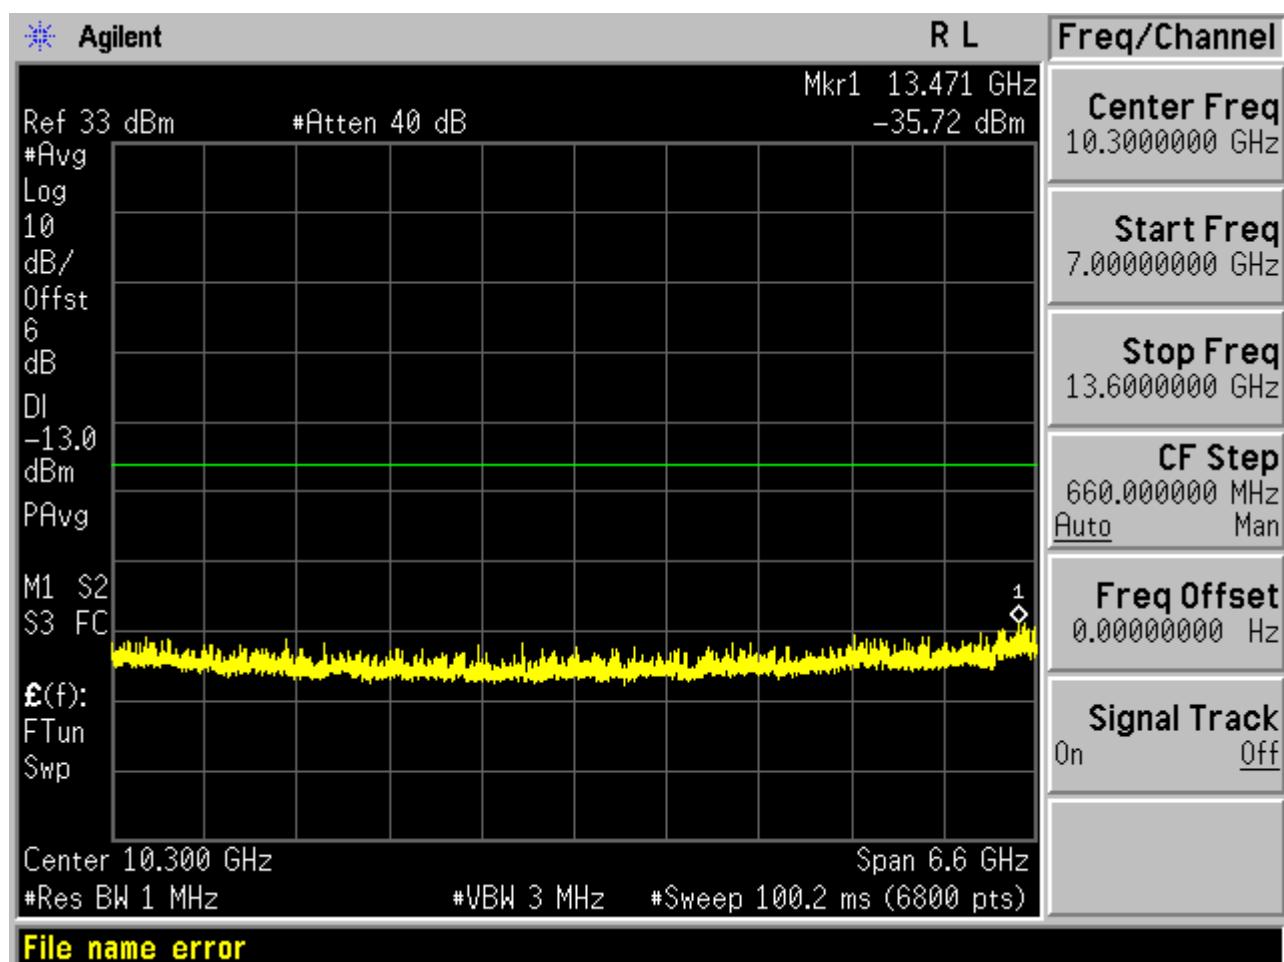


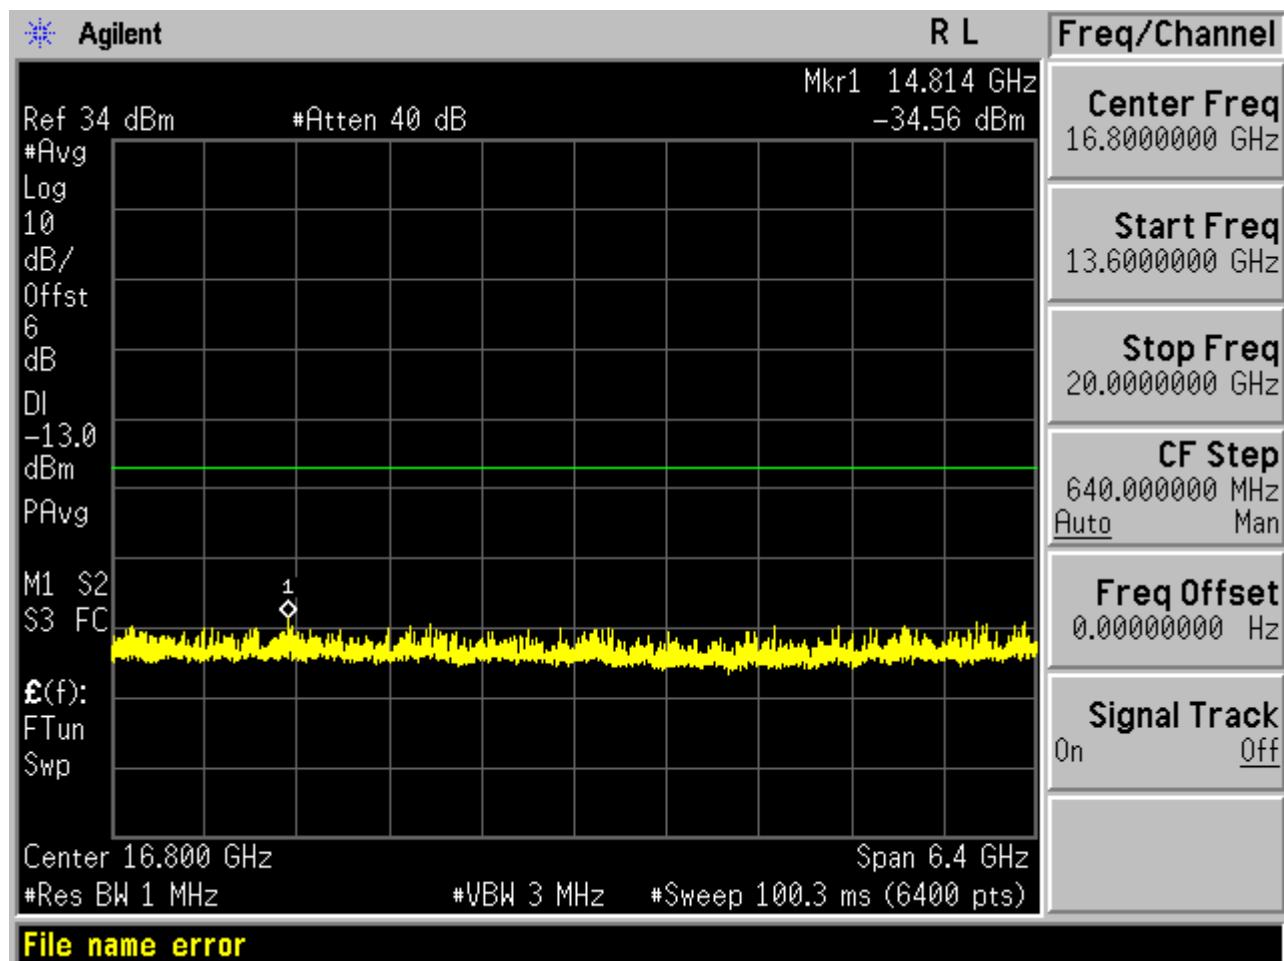


Test Channel=HCH

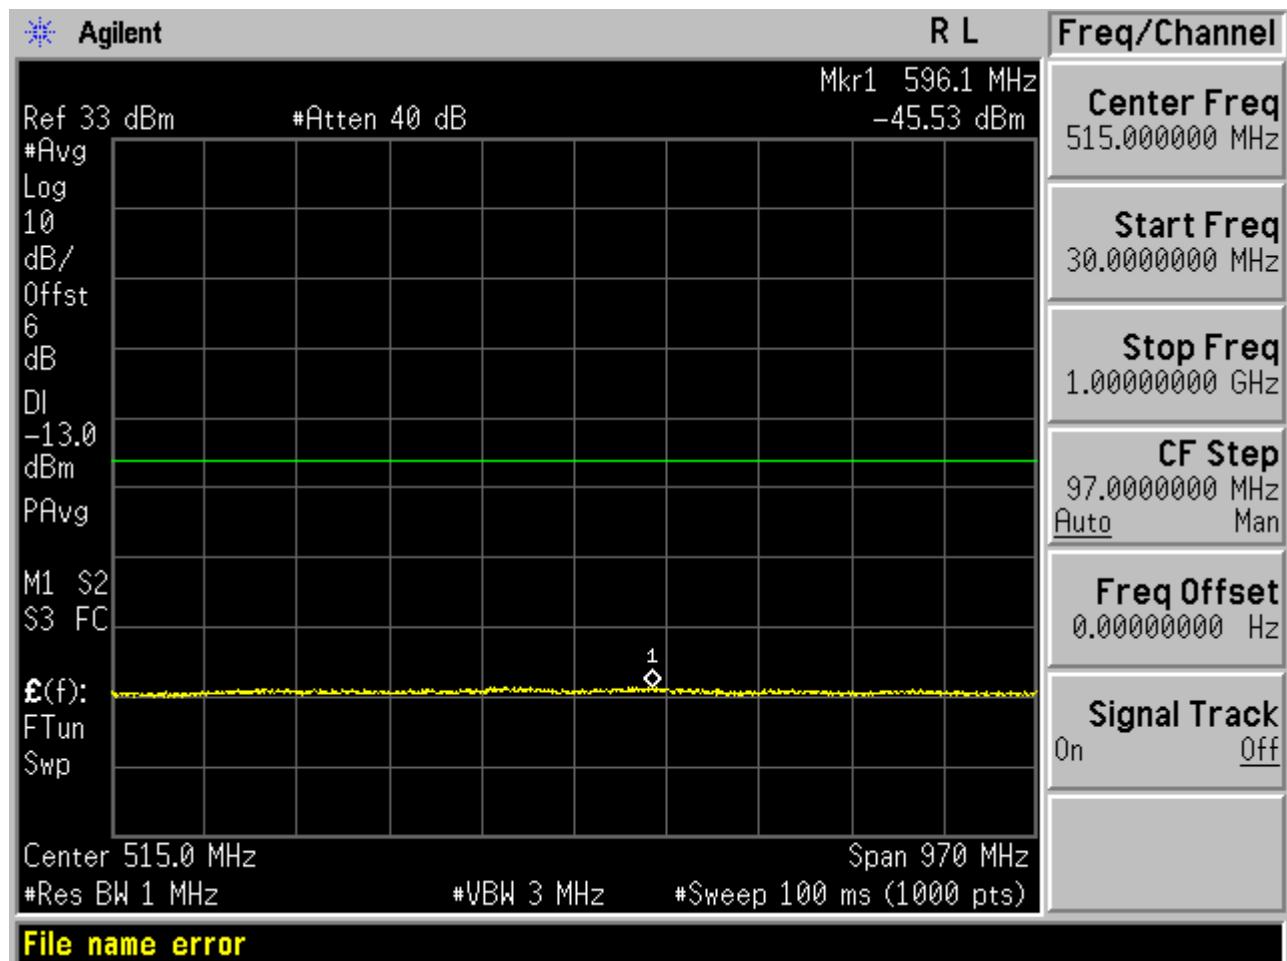

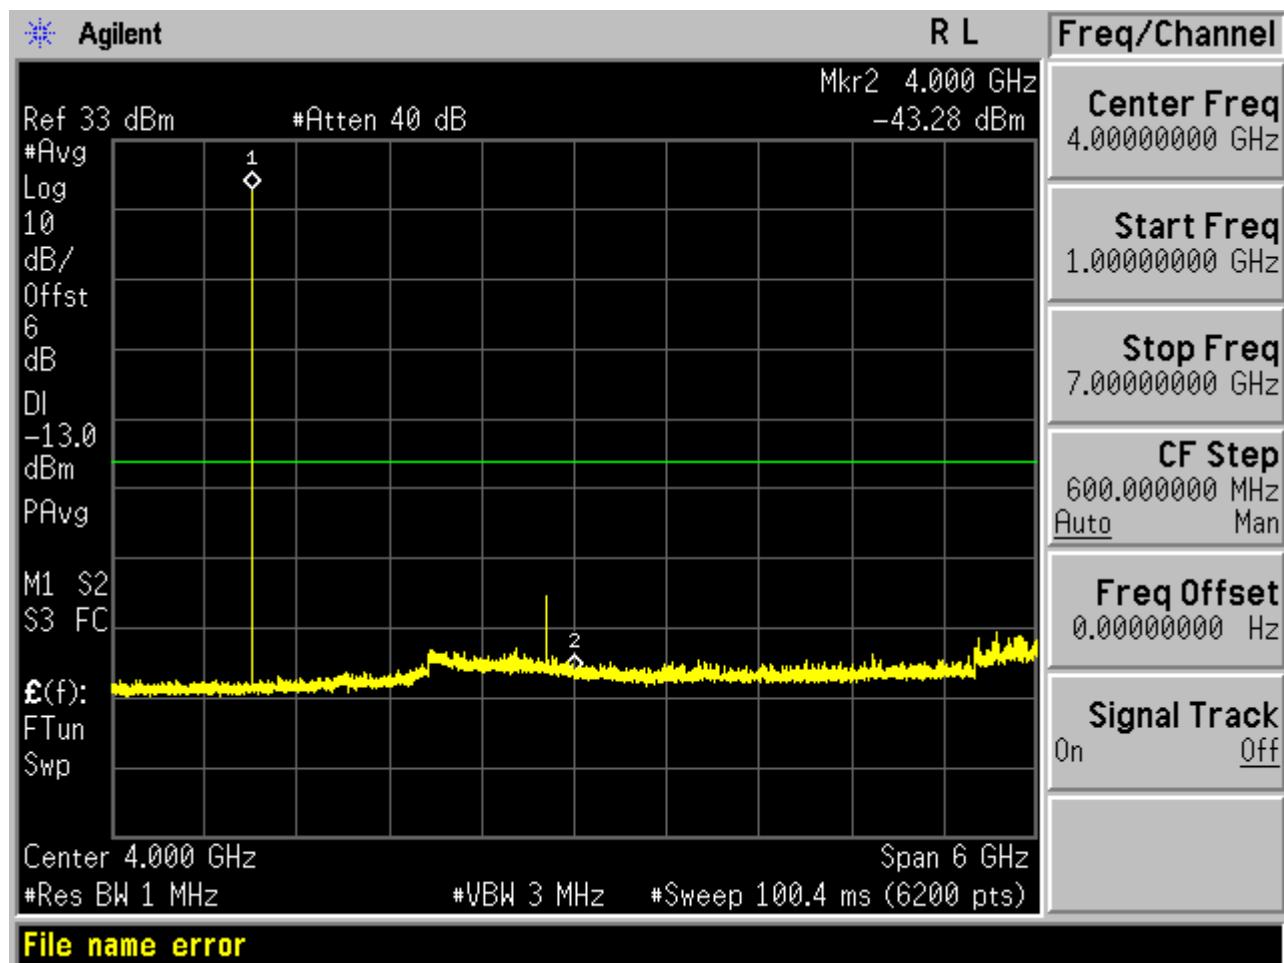


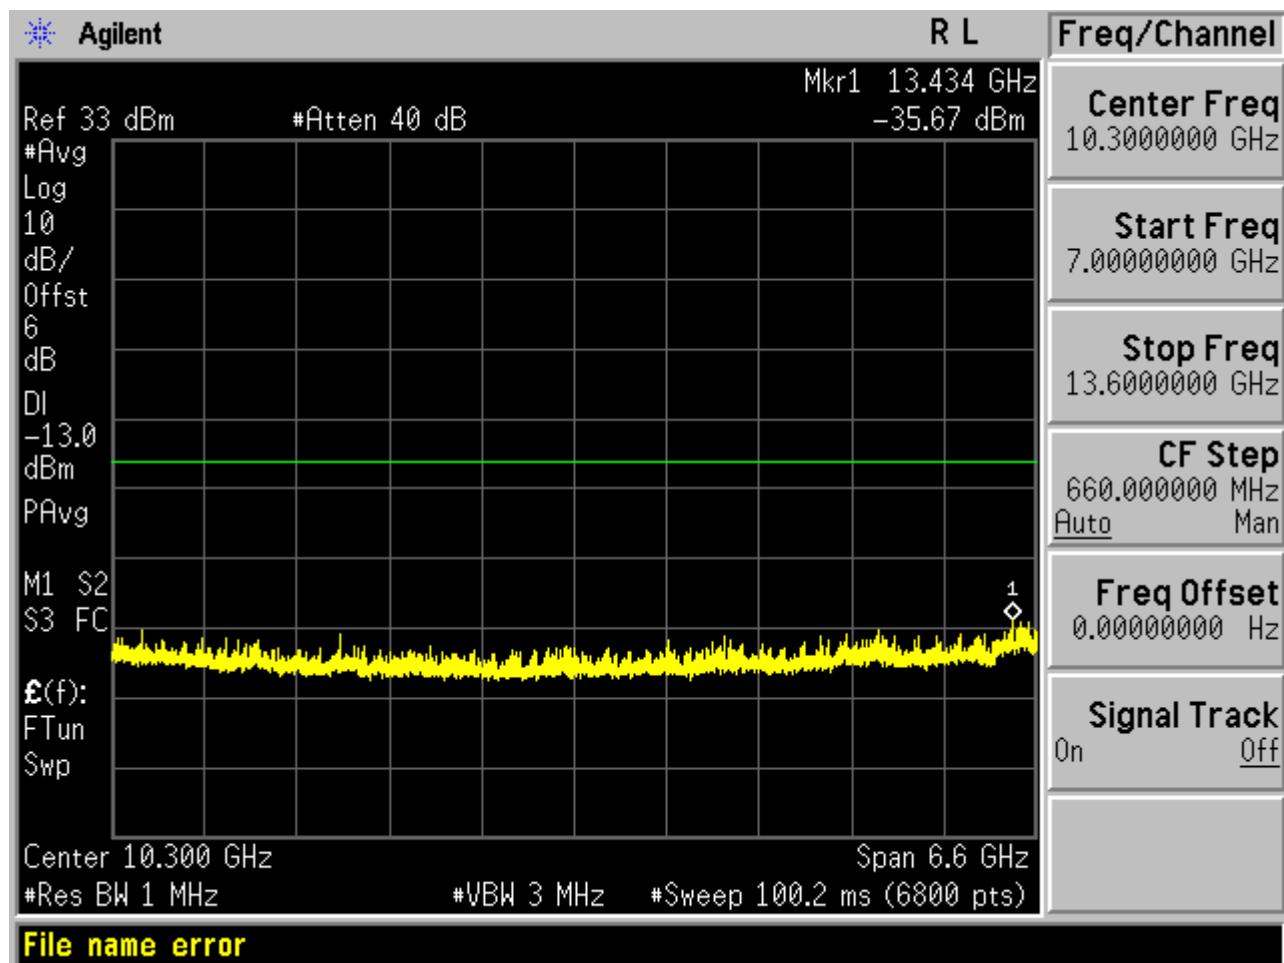


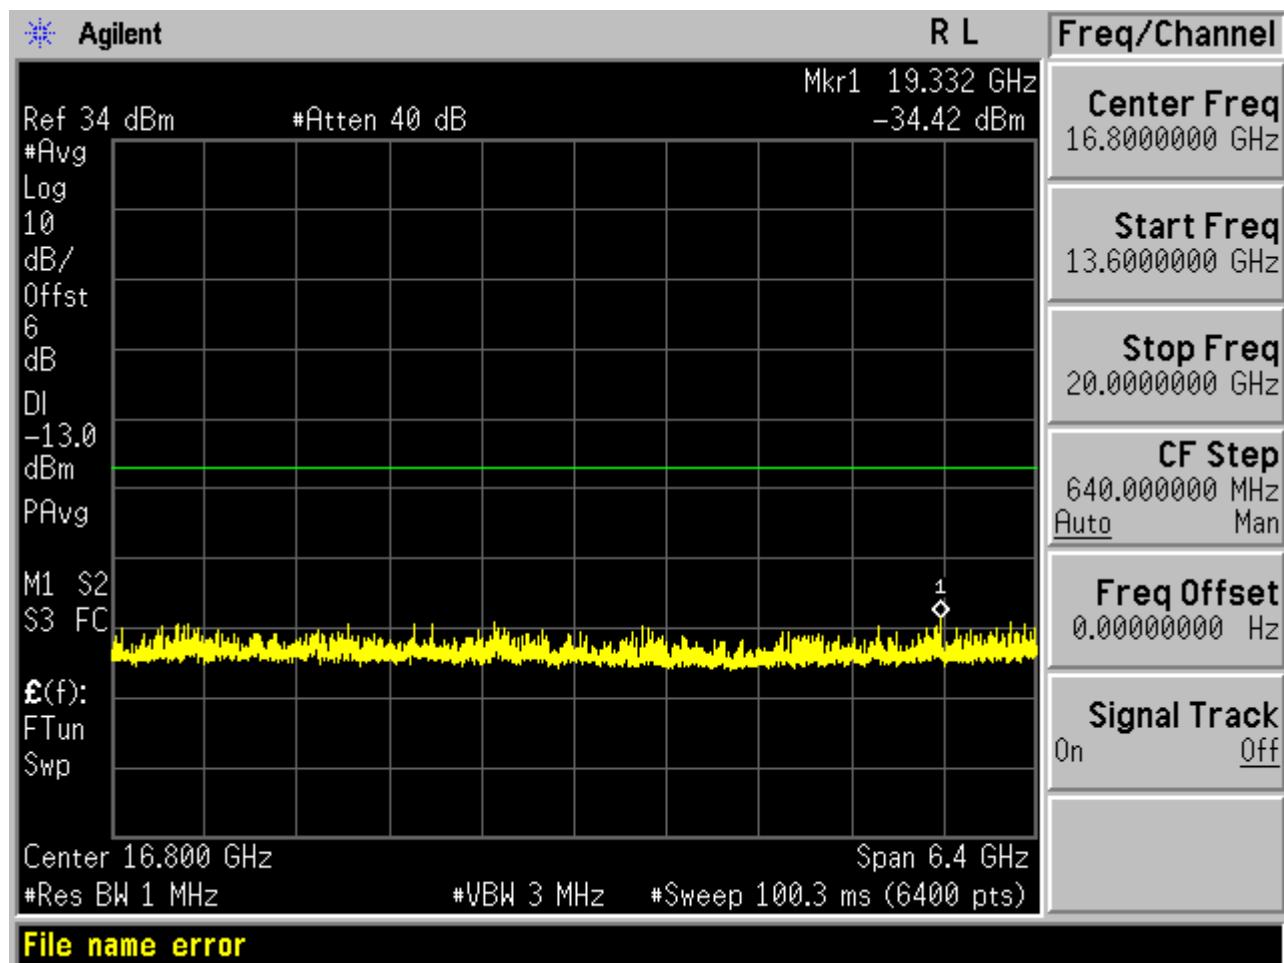



Test Mode=GSM/TM2

Test Channel=LCH

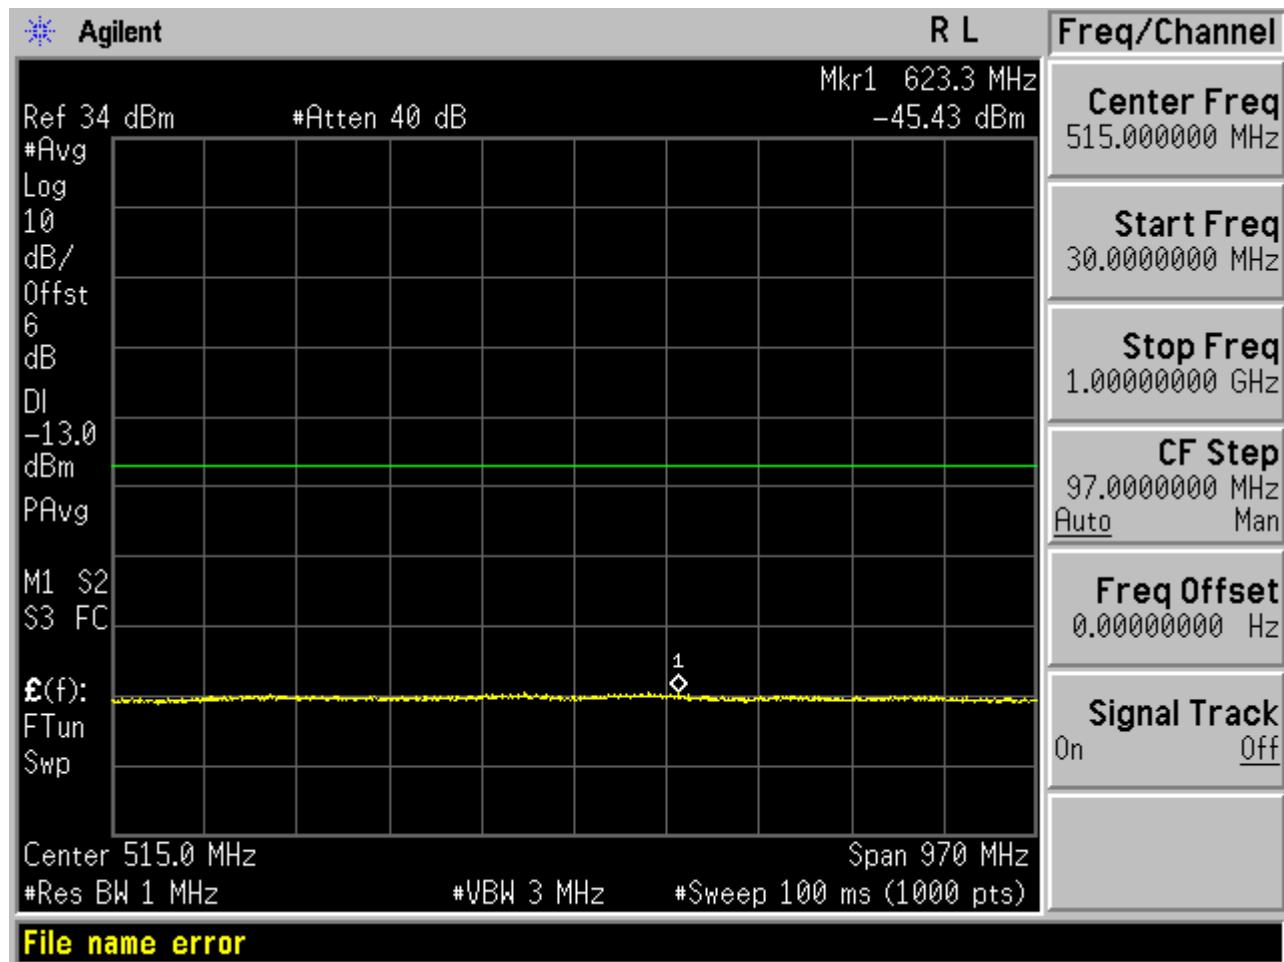


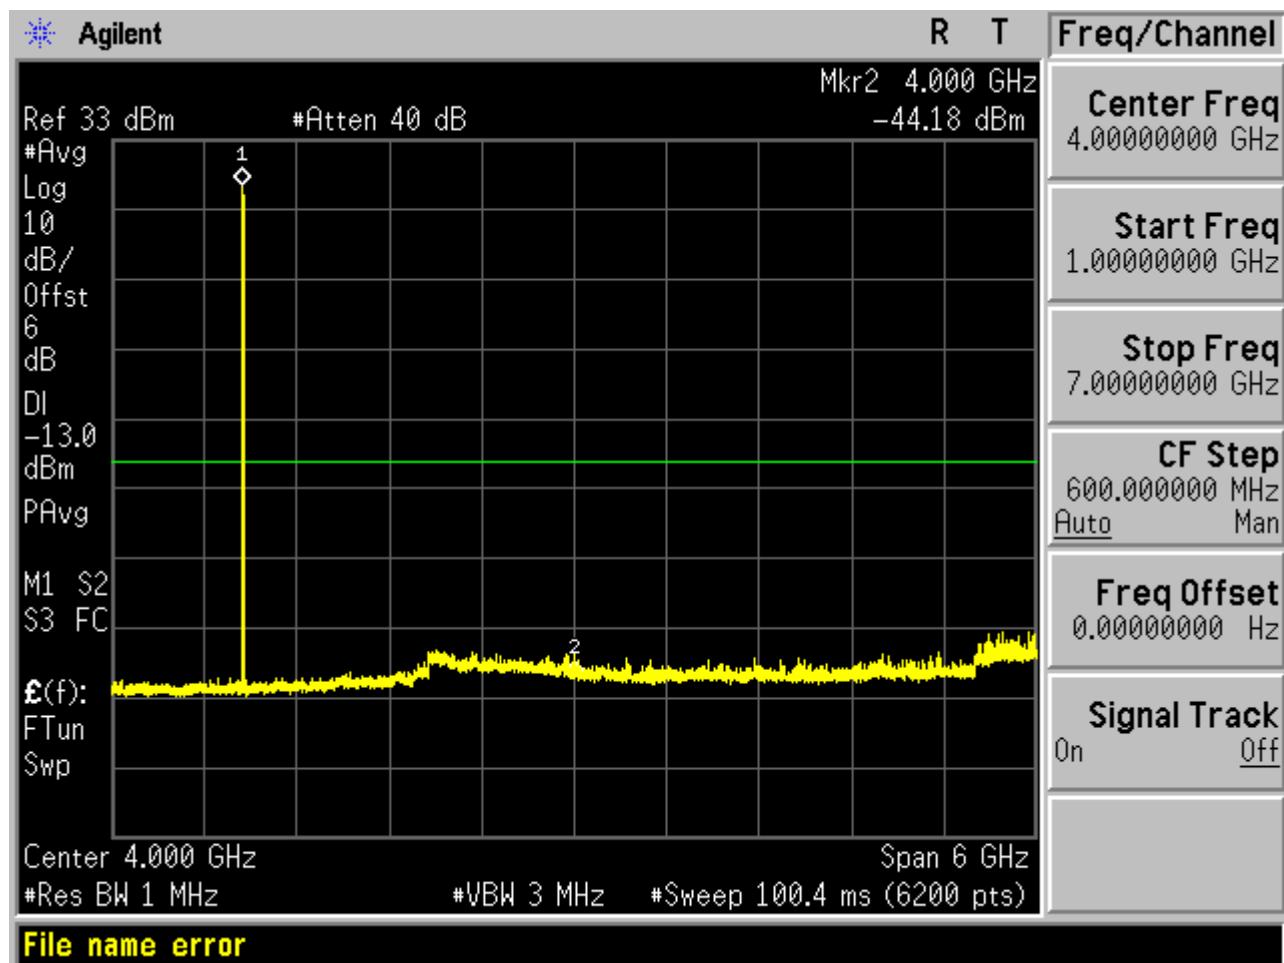


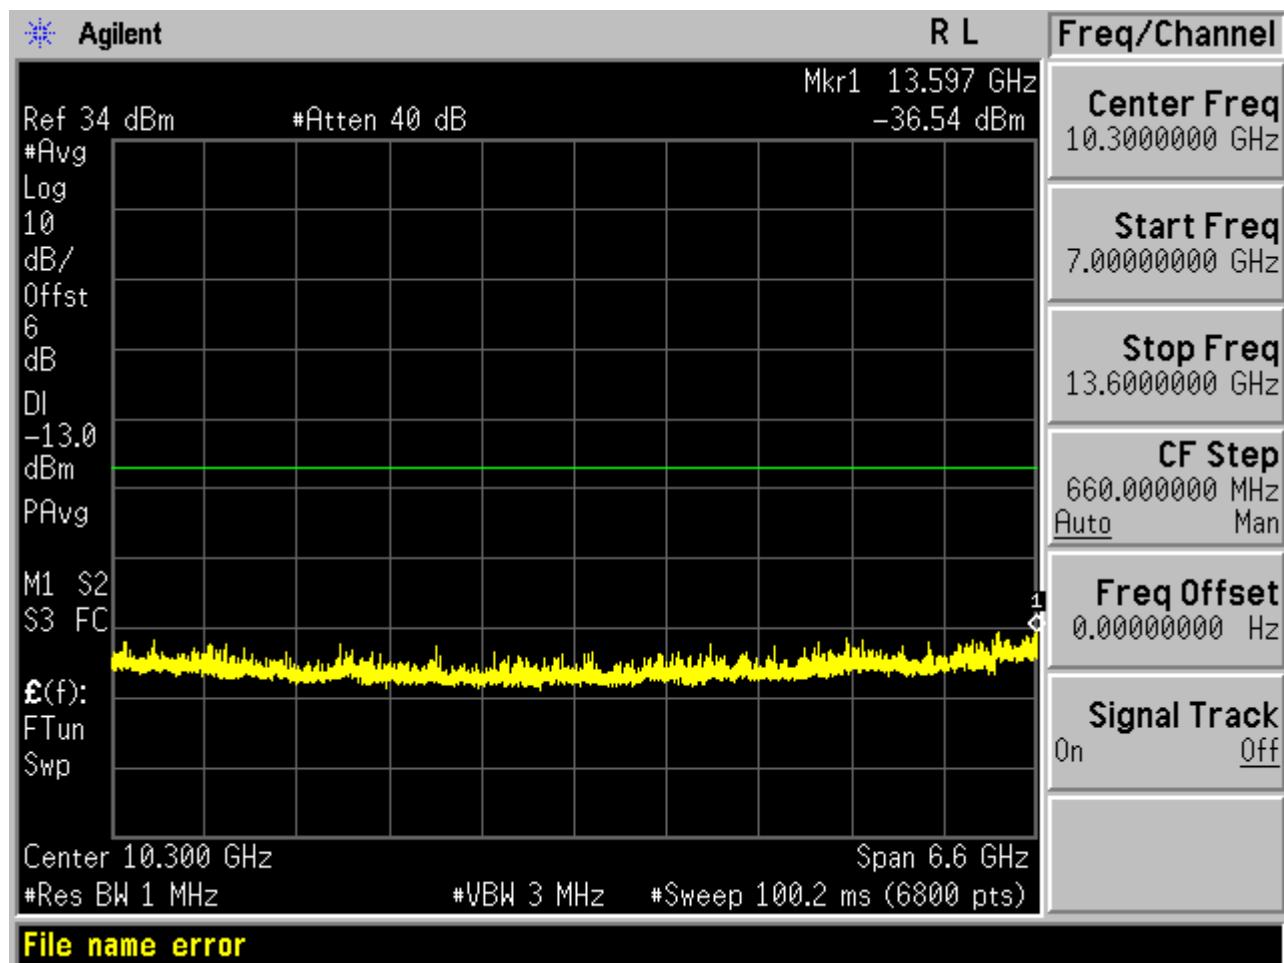


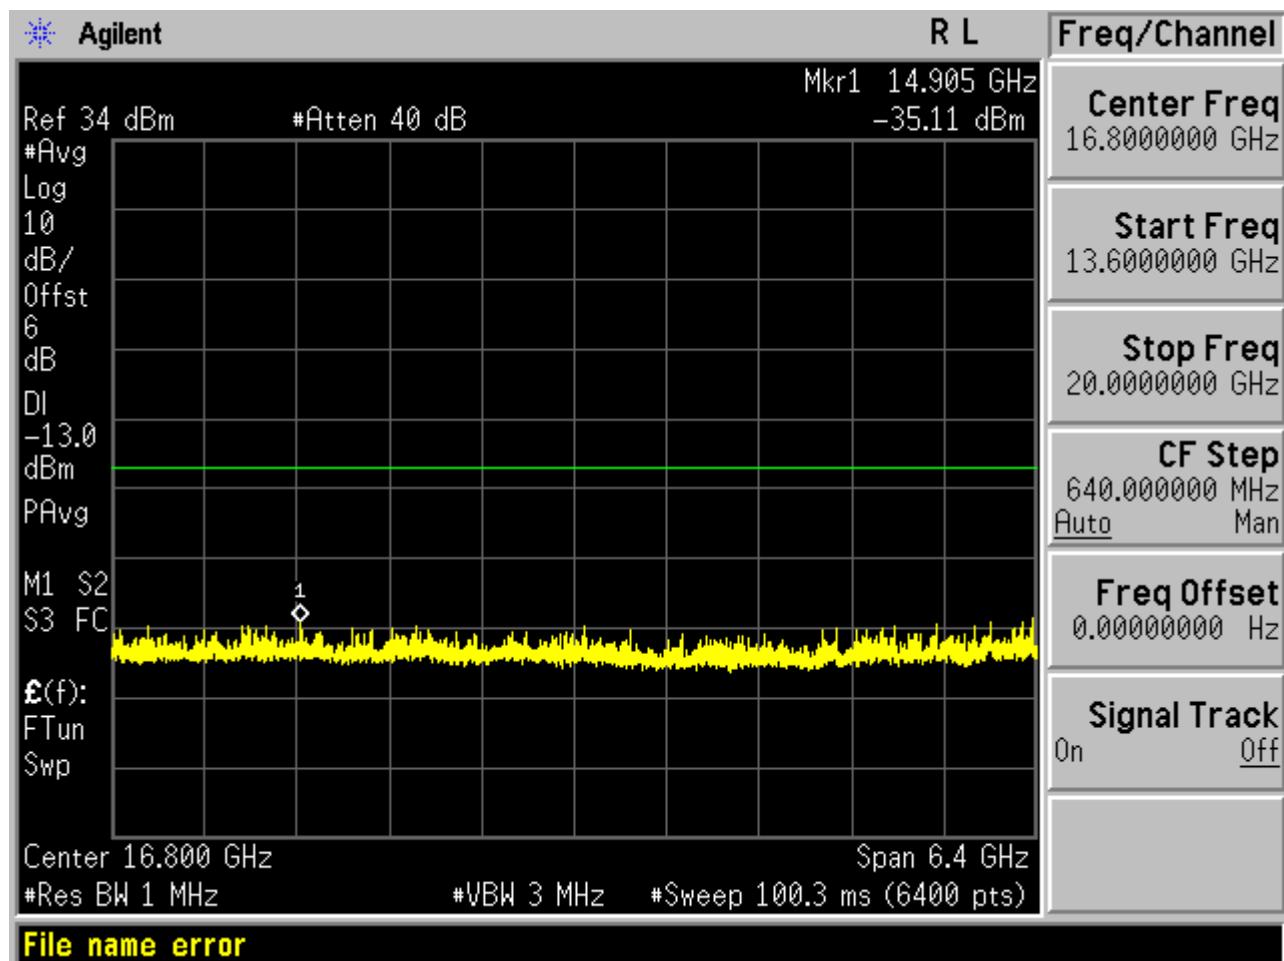


Test Channel=MCH

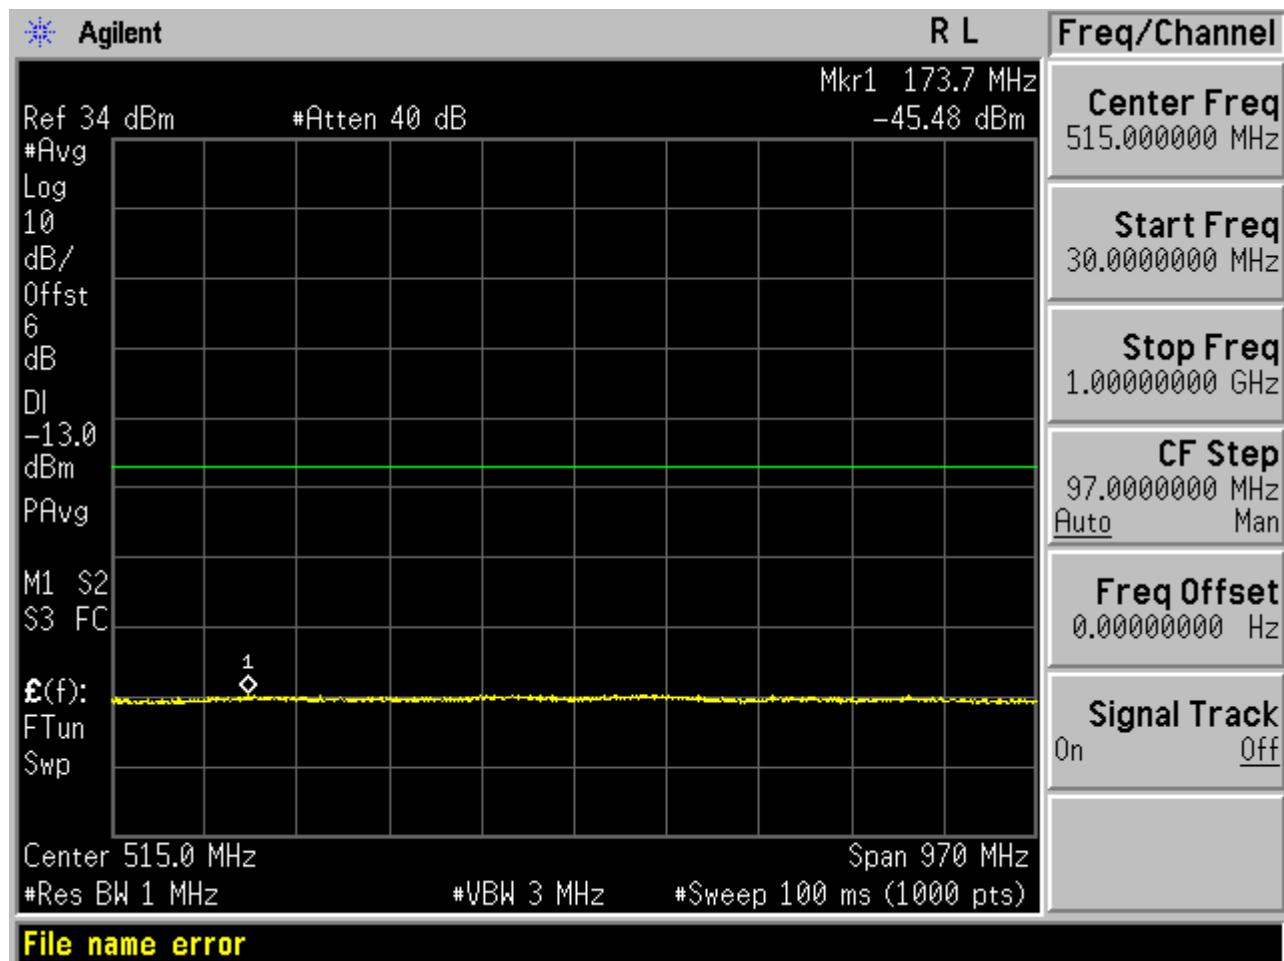


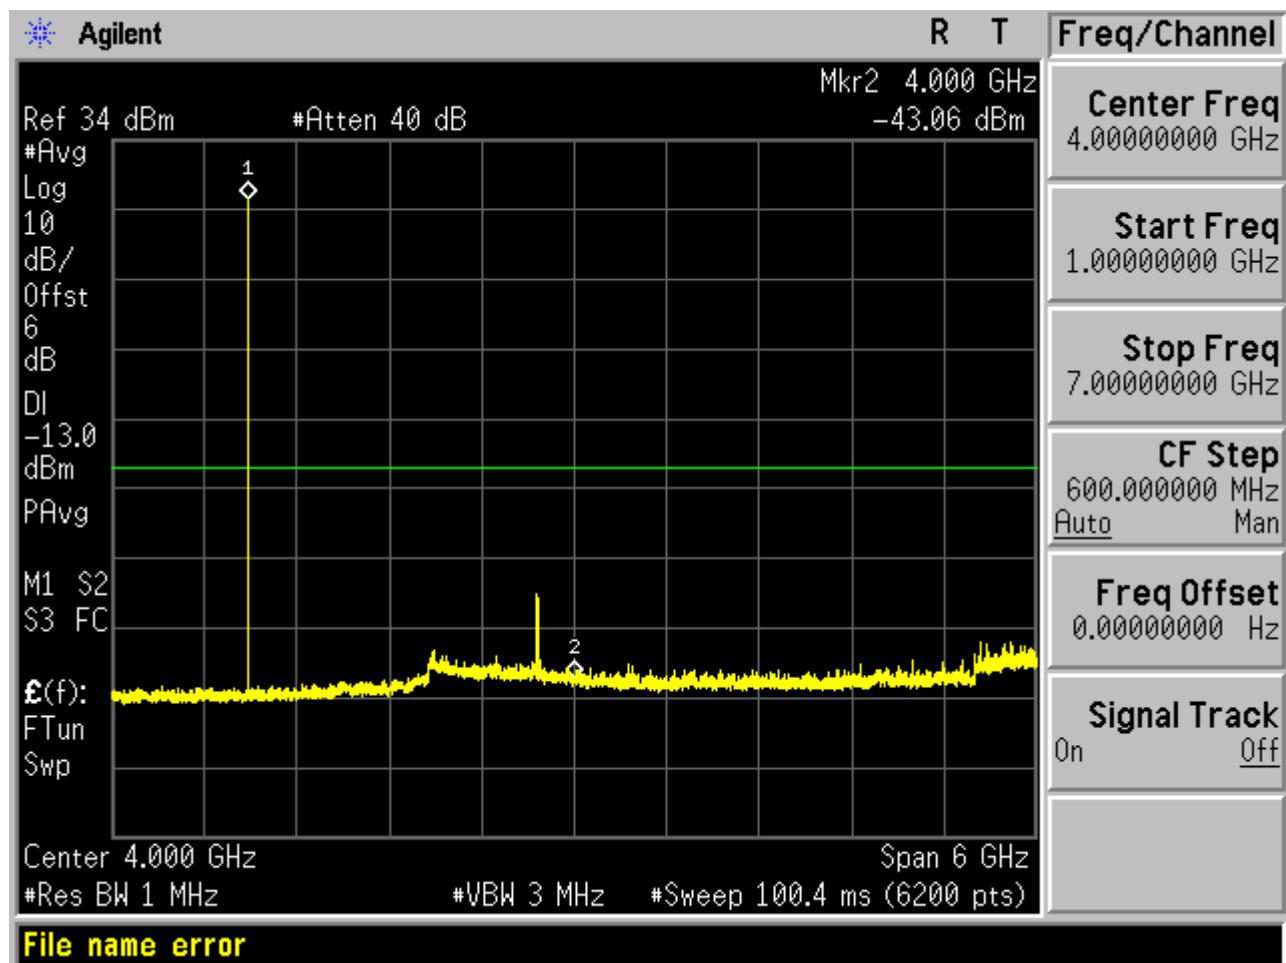


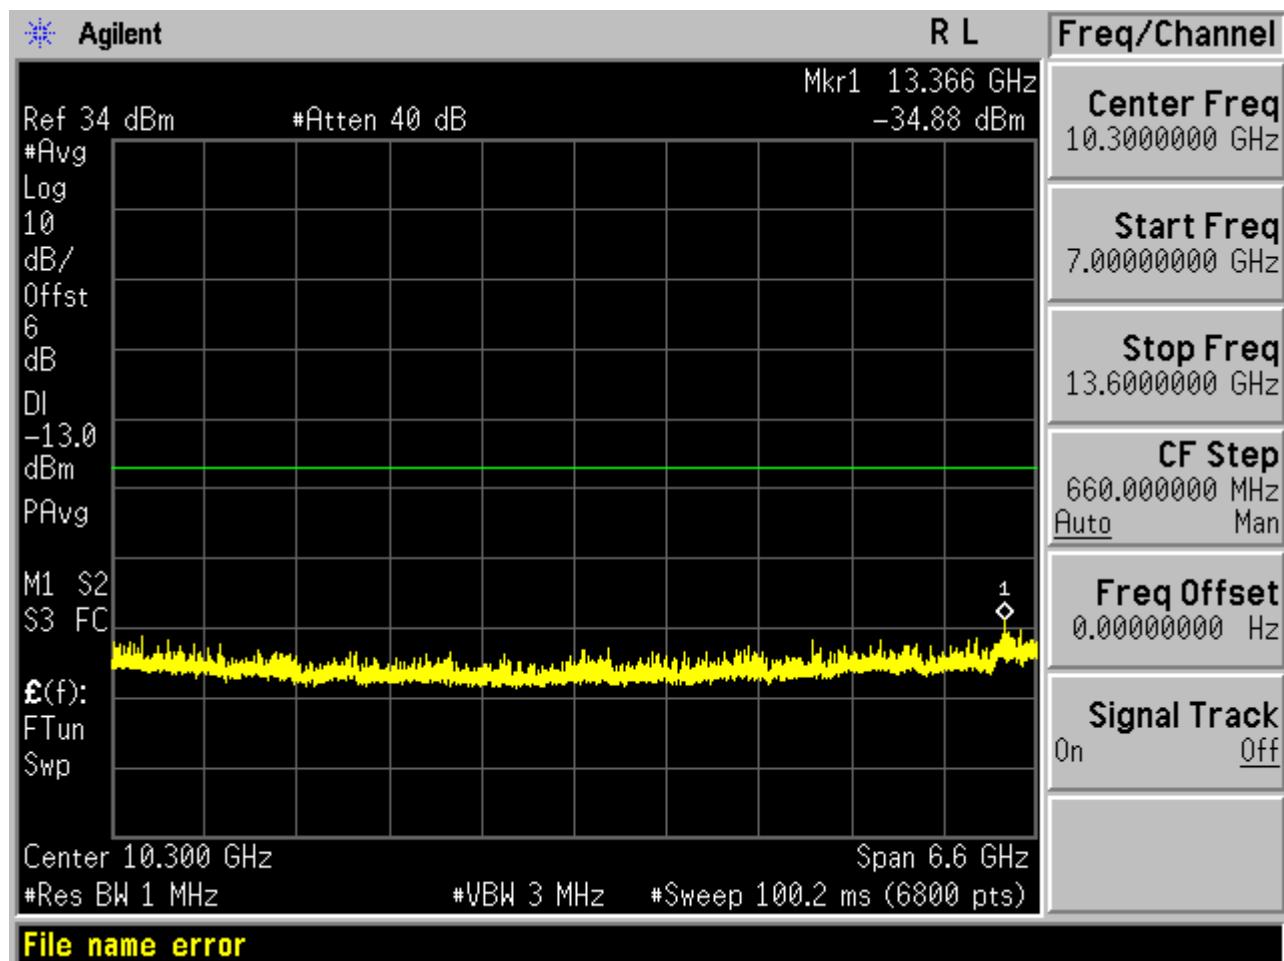


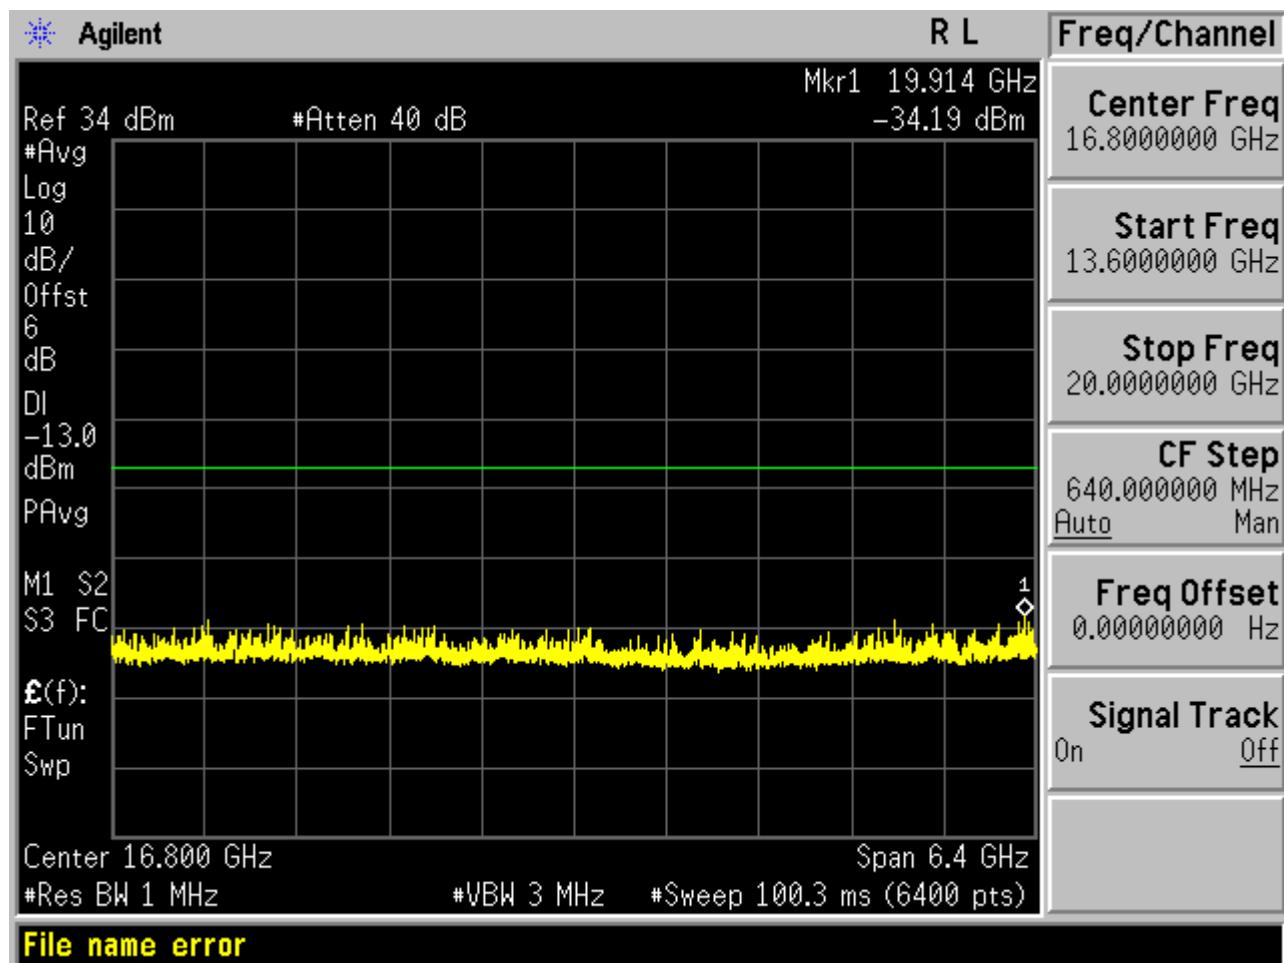


Test Channel=HCH

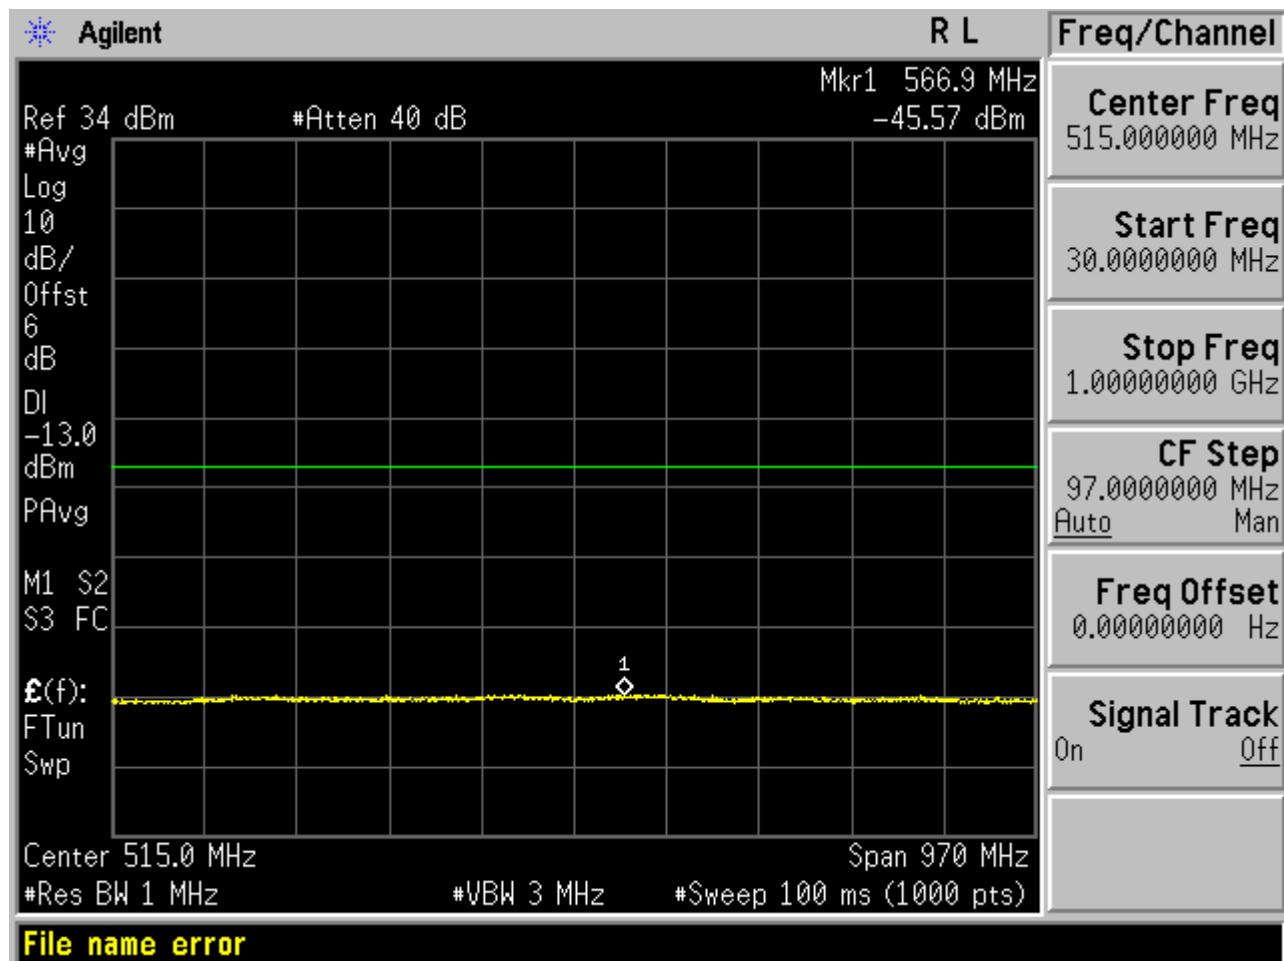

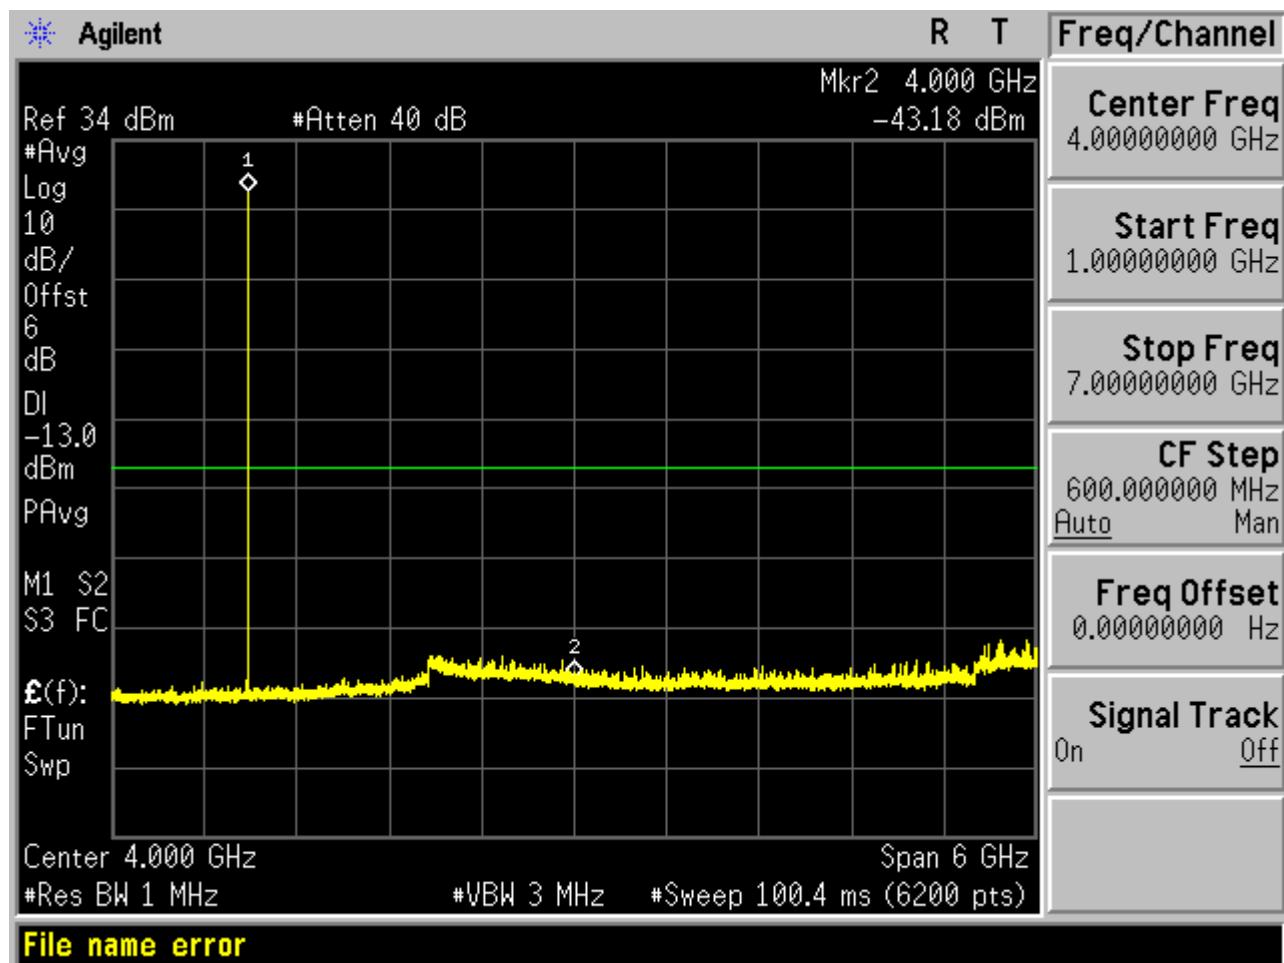


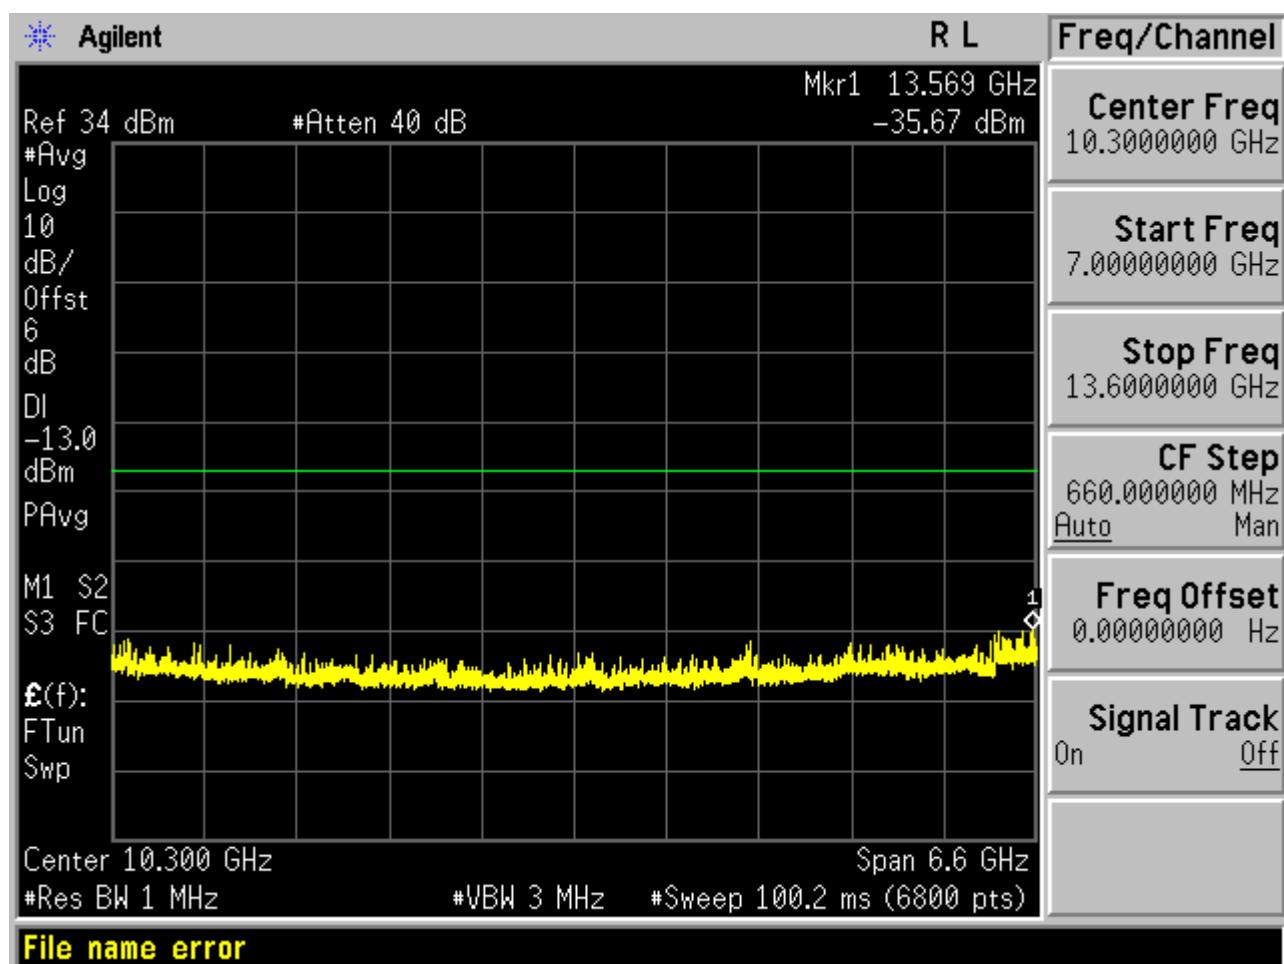


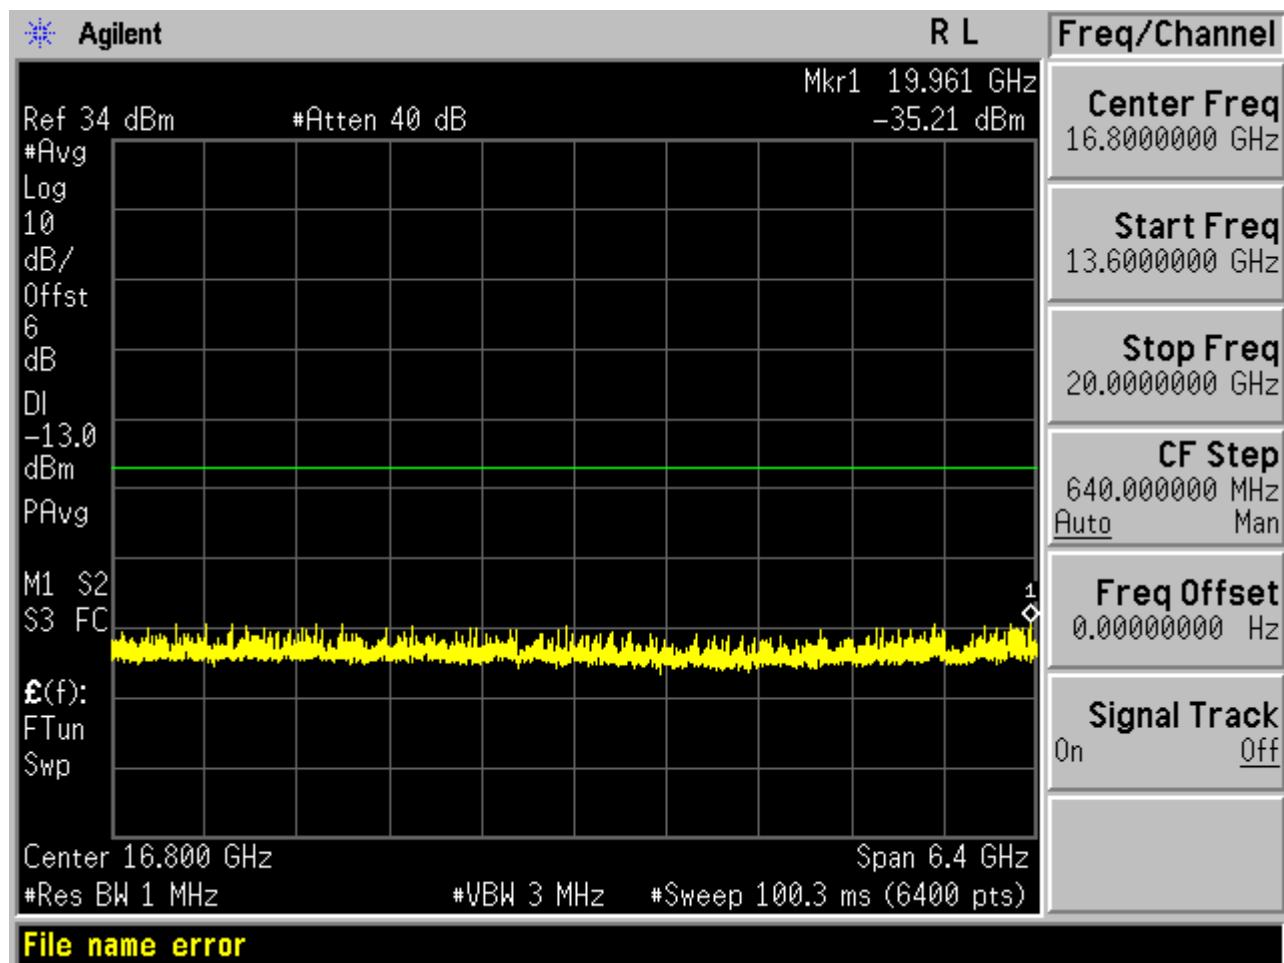



Test Mode=GSM/TM3

Test Channel=LCH

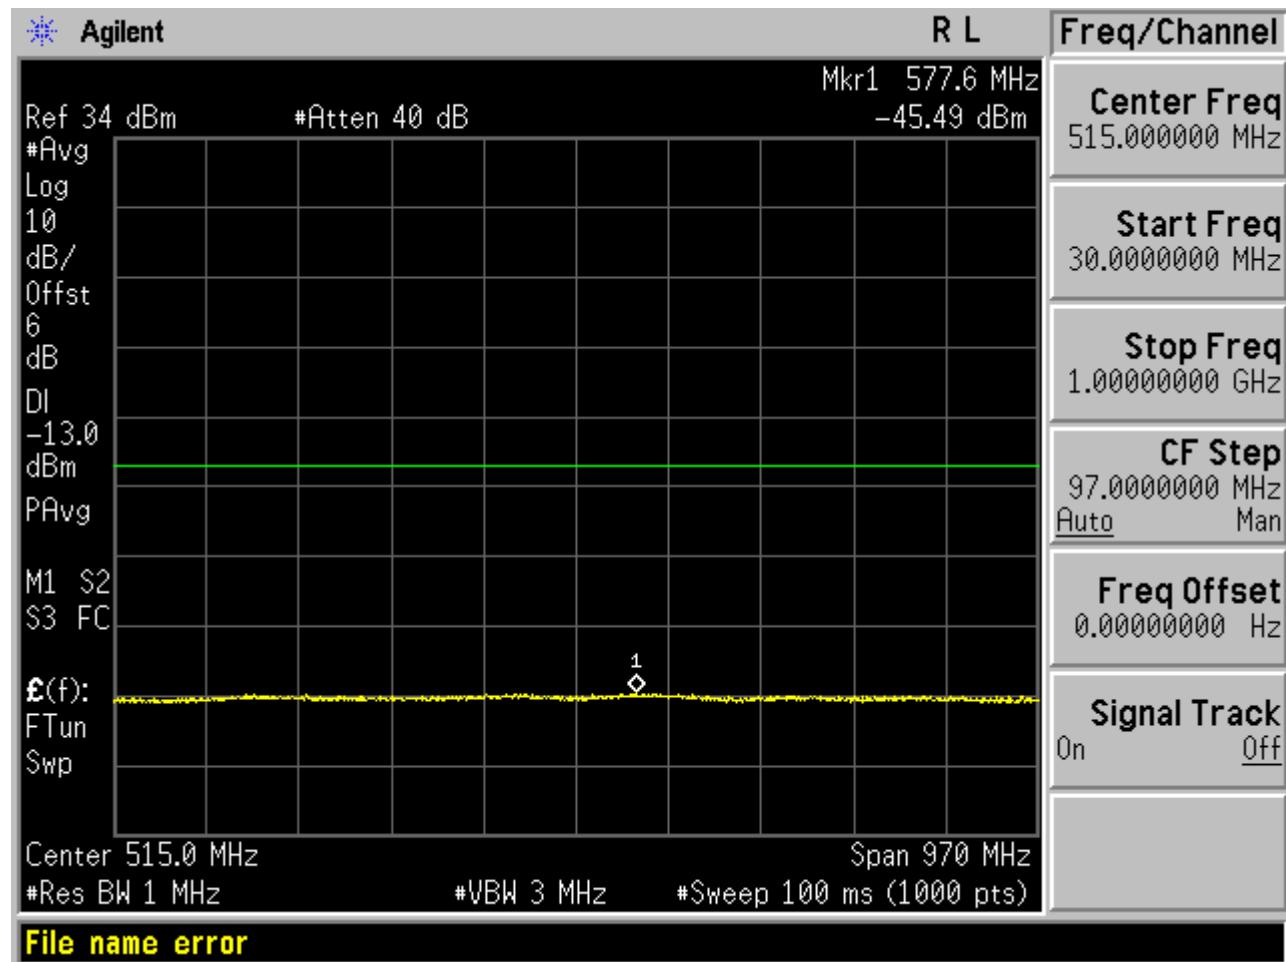


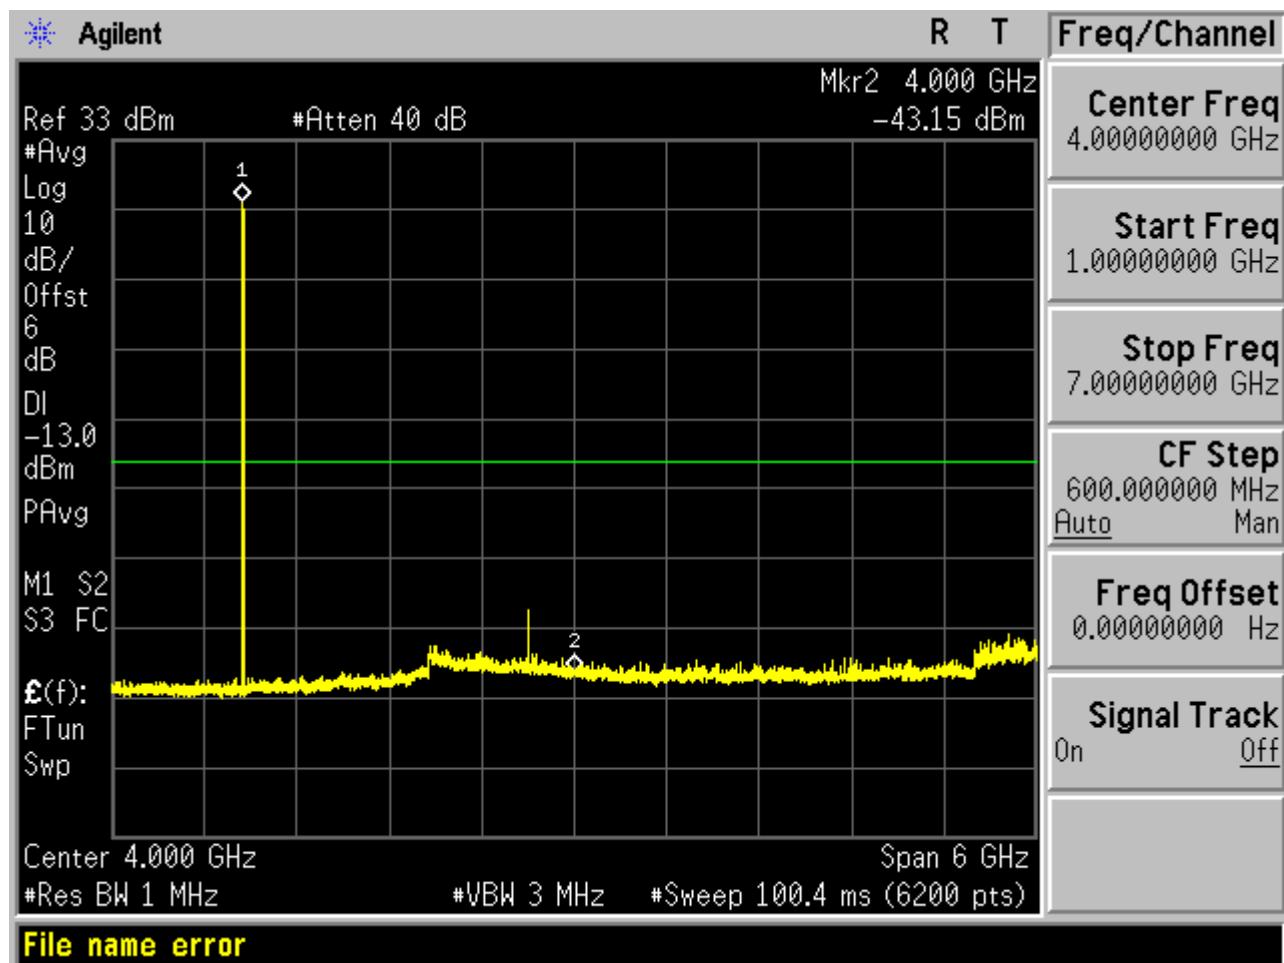


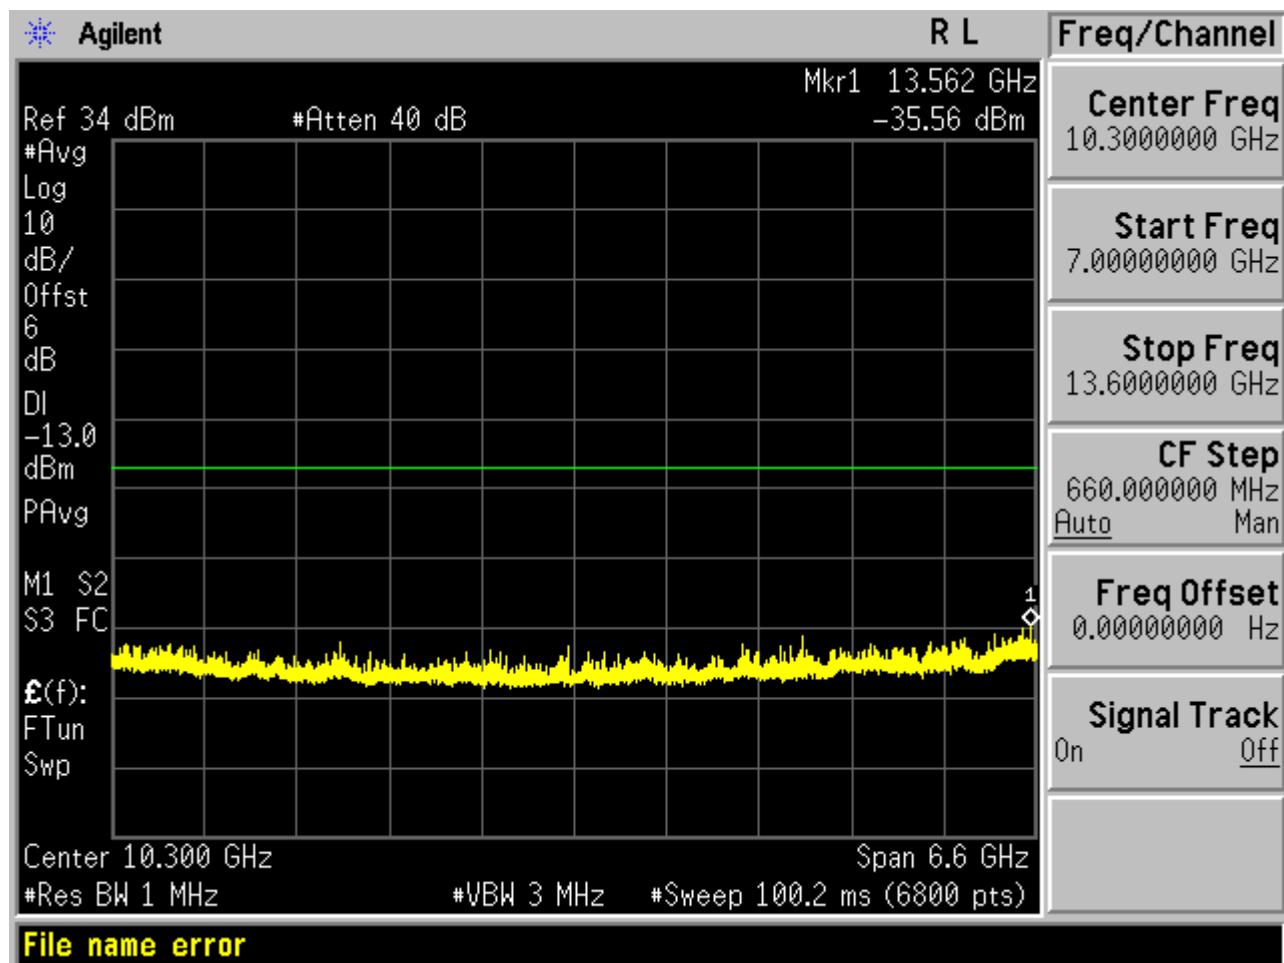


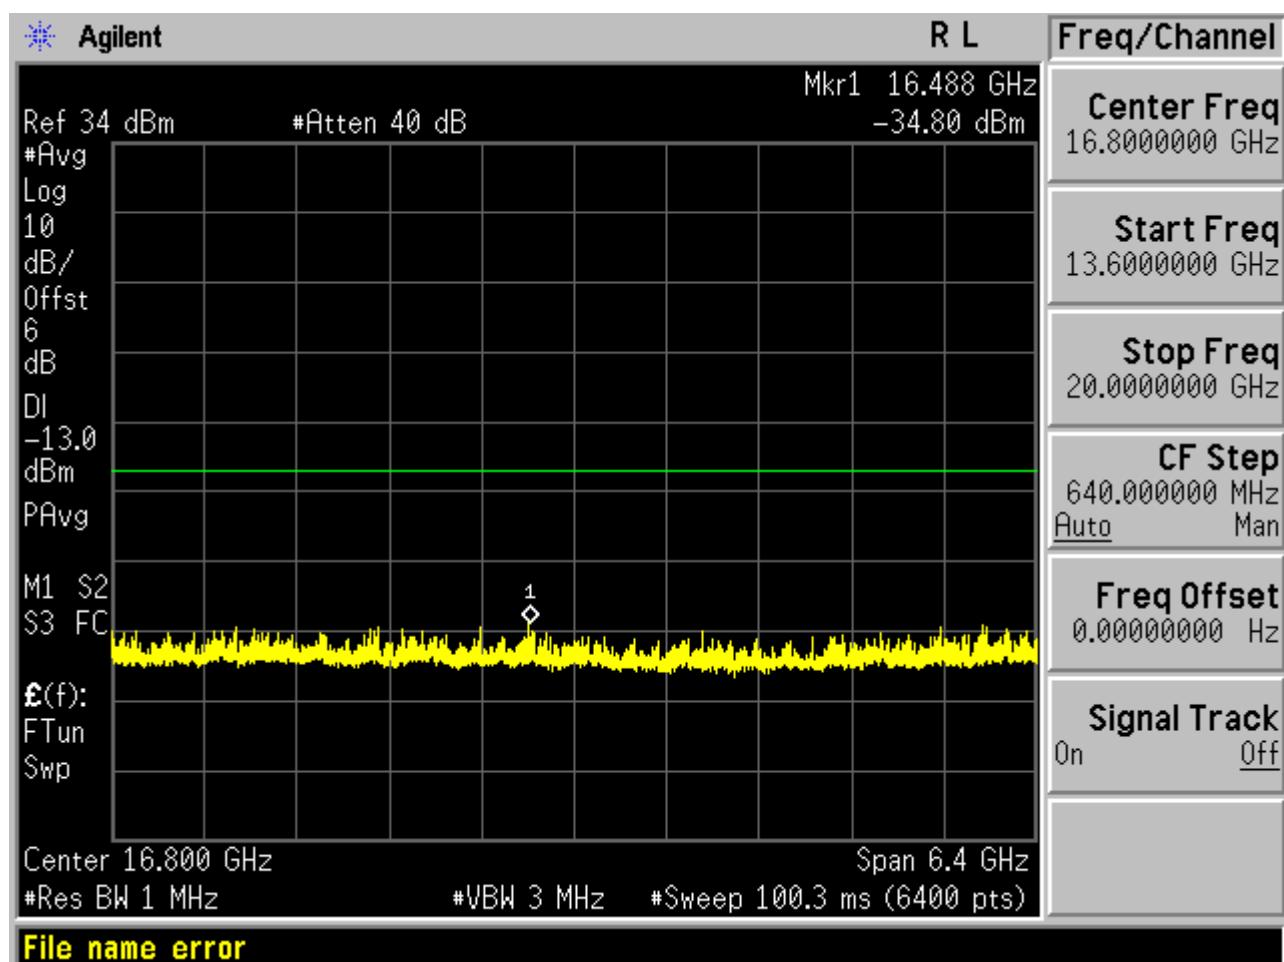


Test Channel=MCH

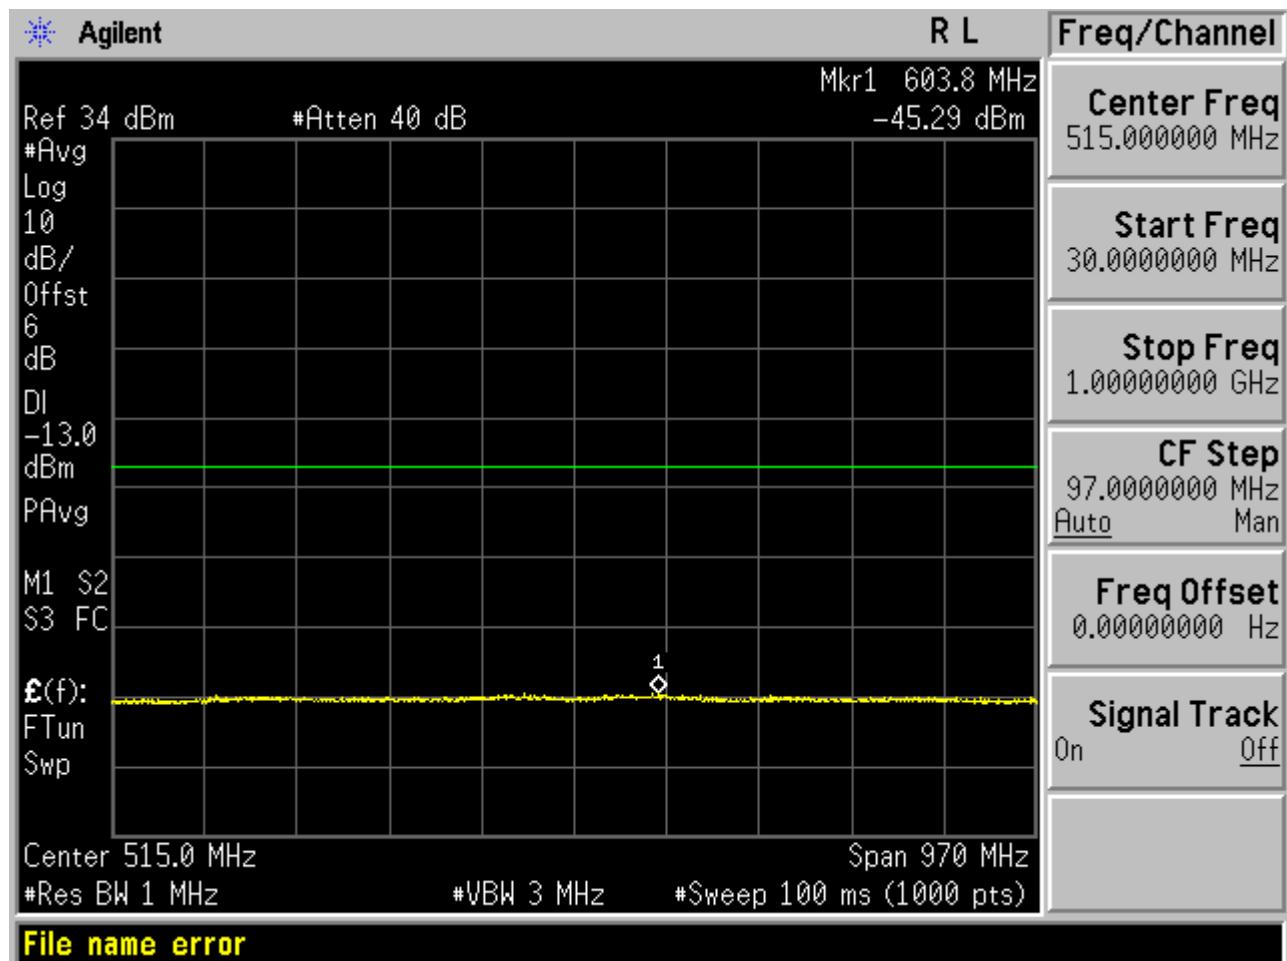


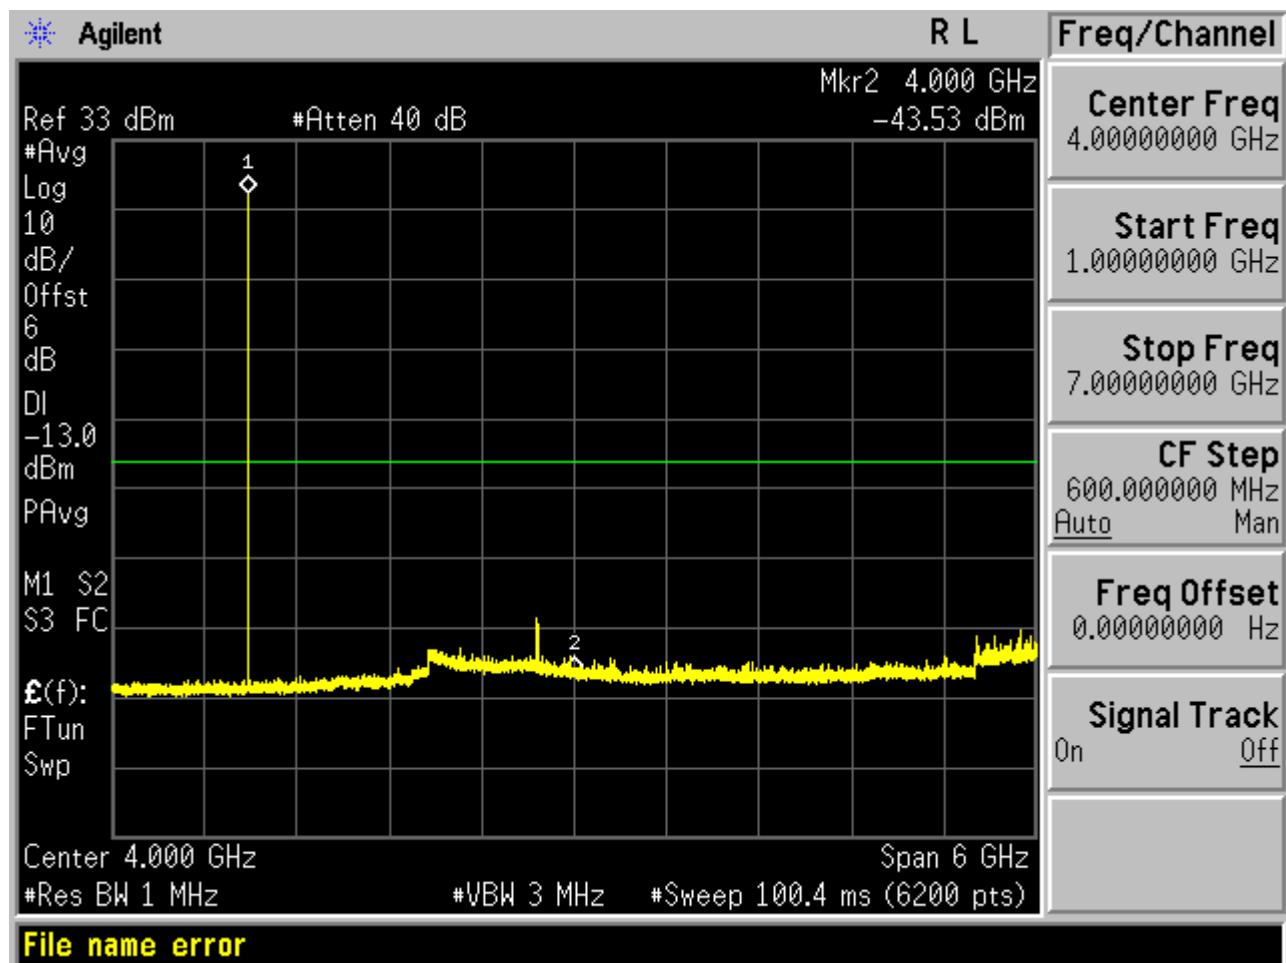


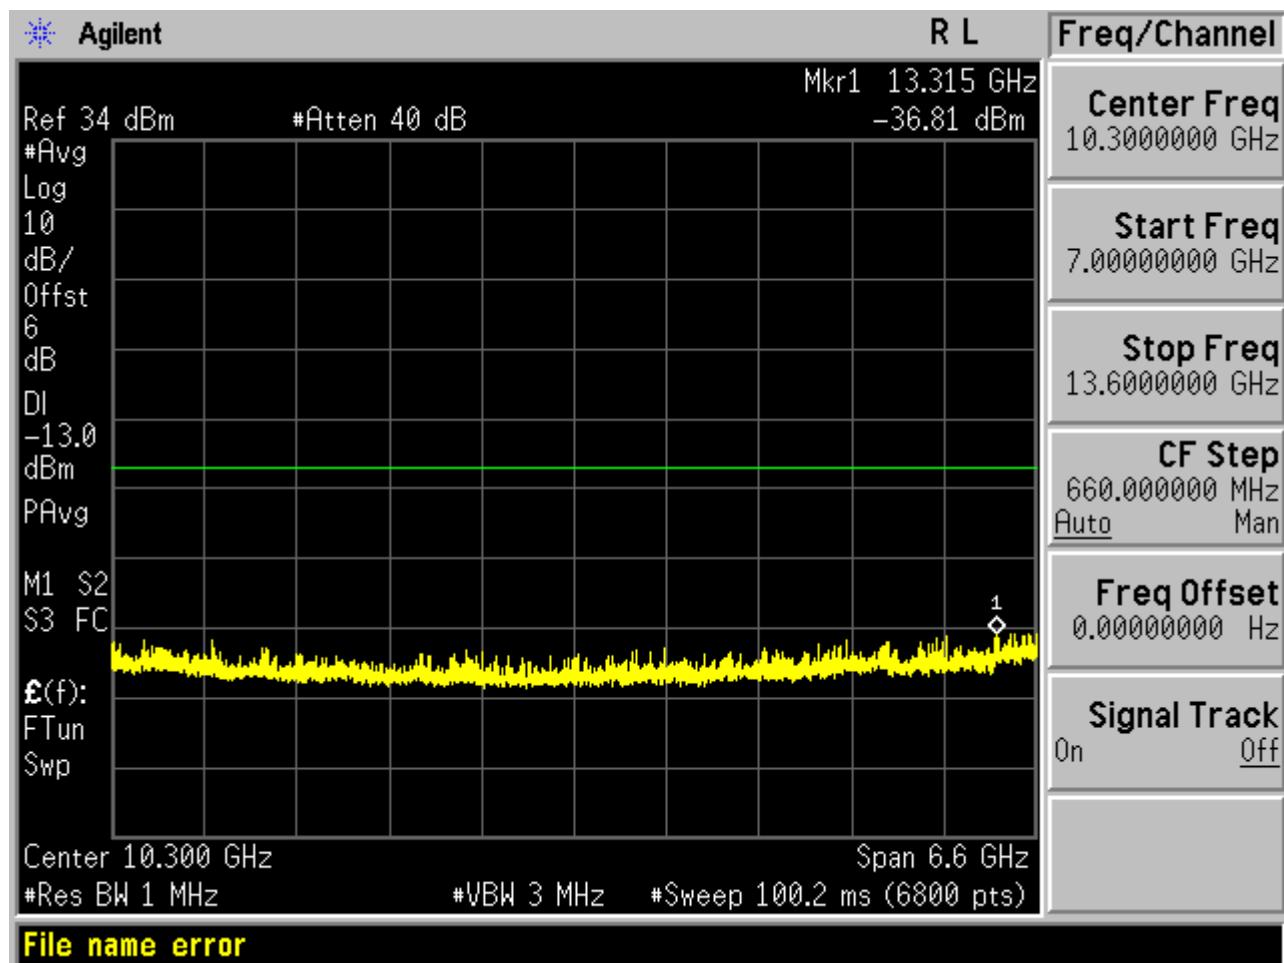


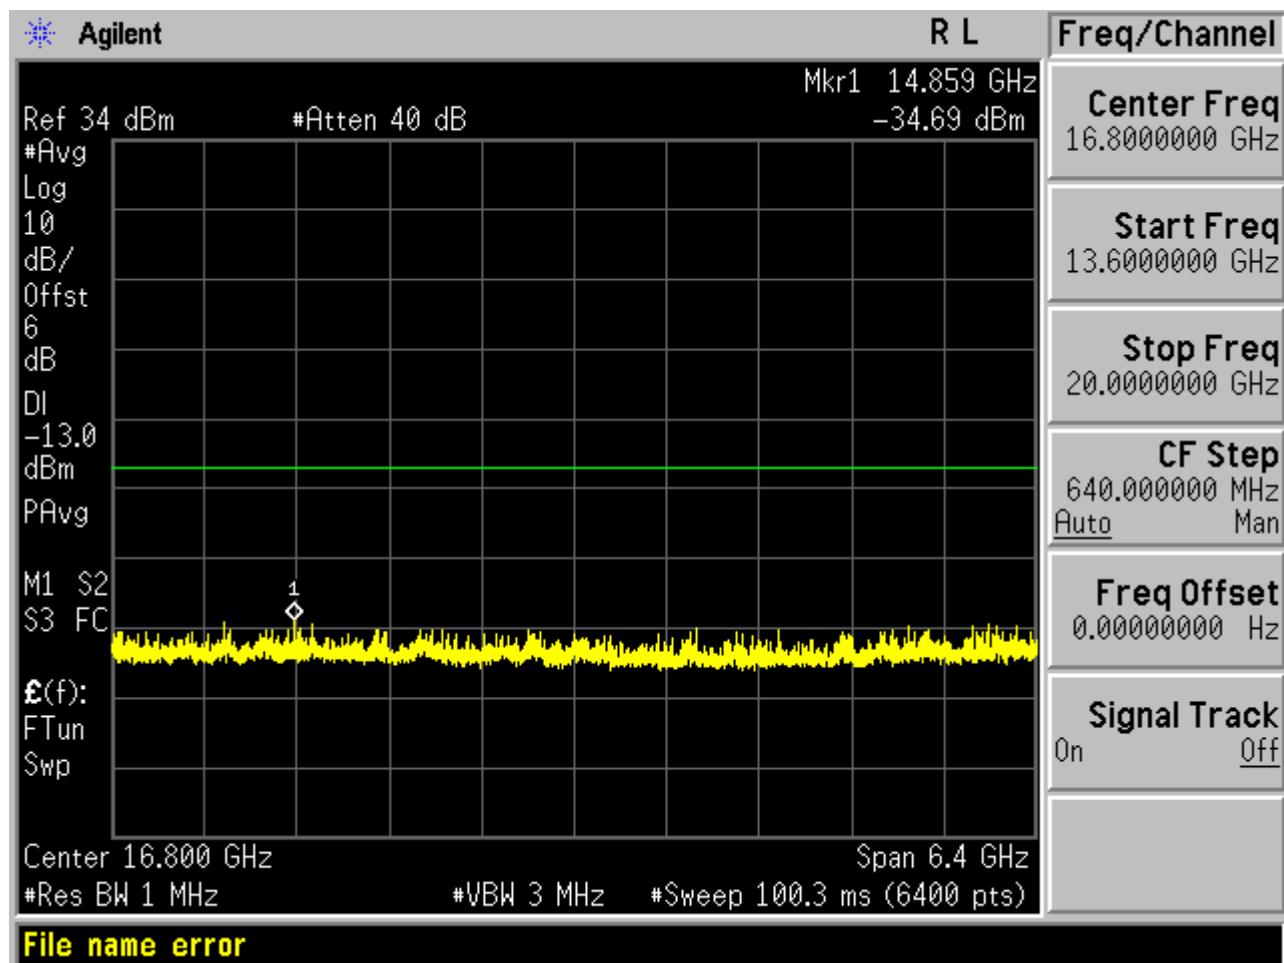


Test Channel=HCH

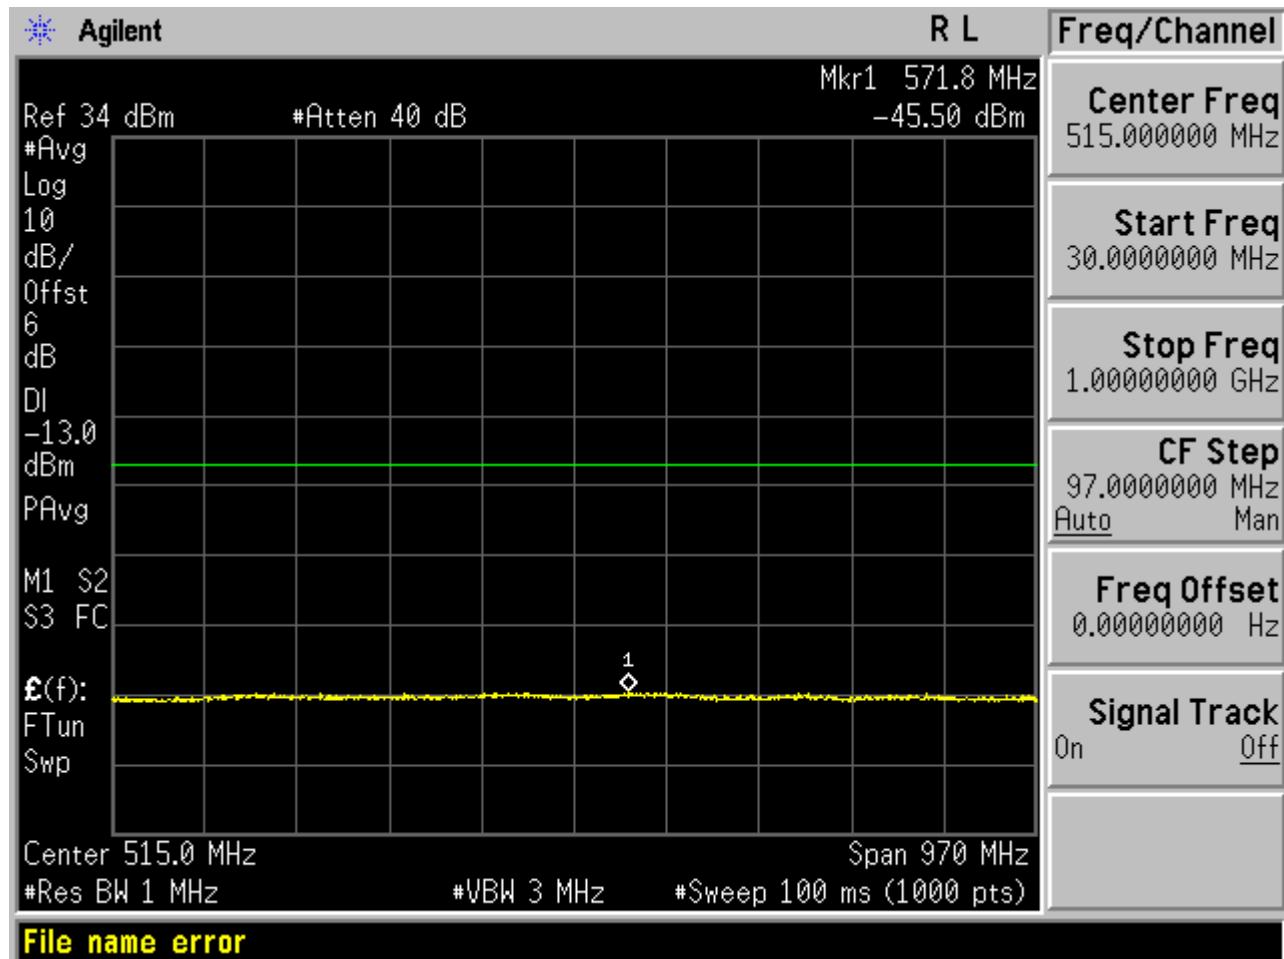

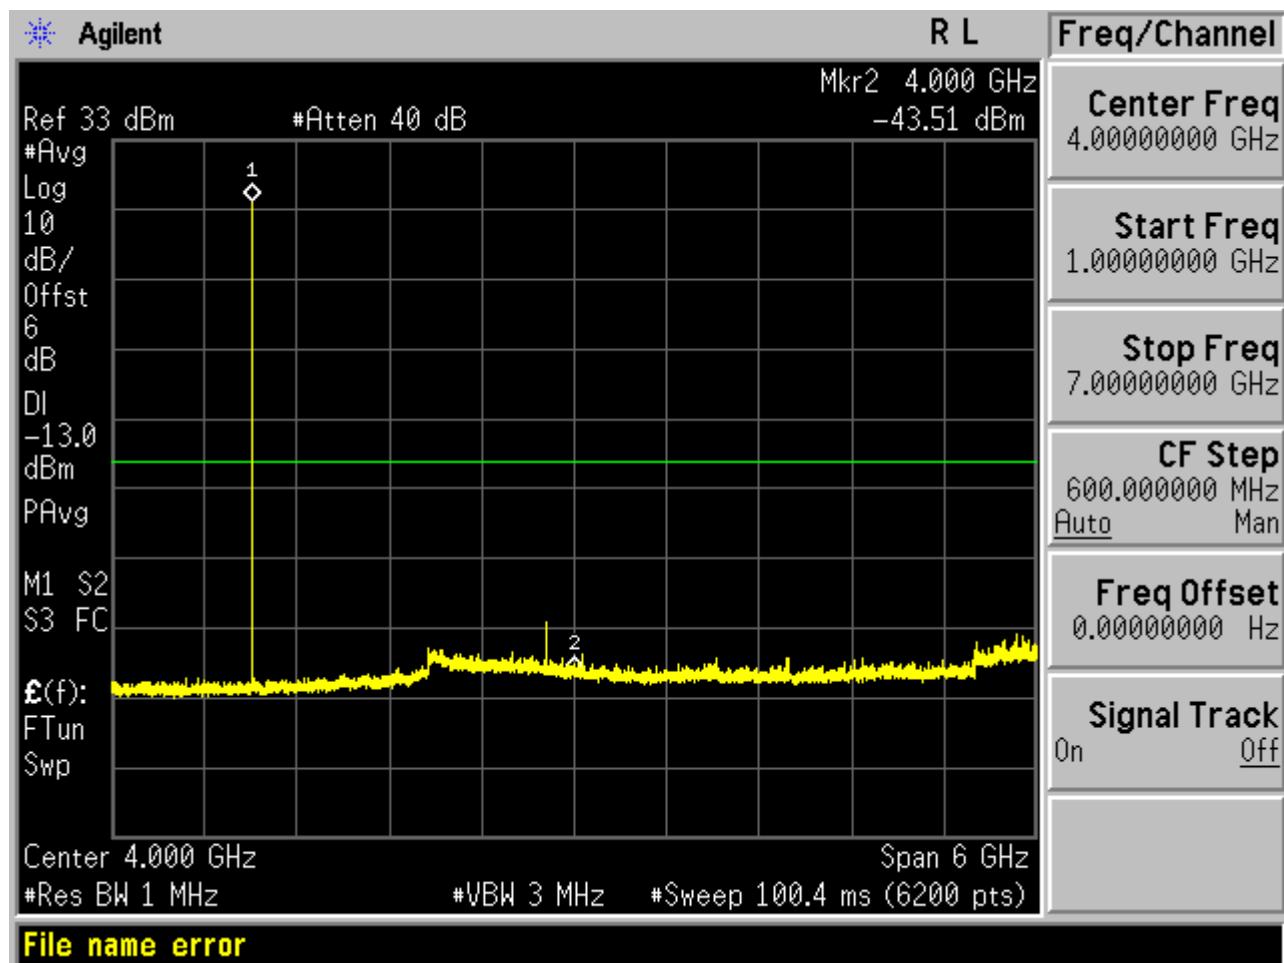

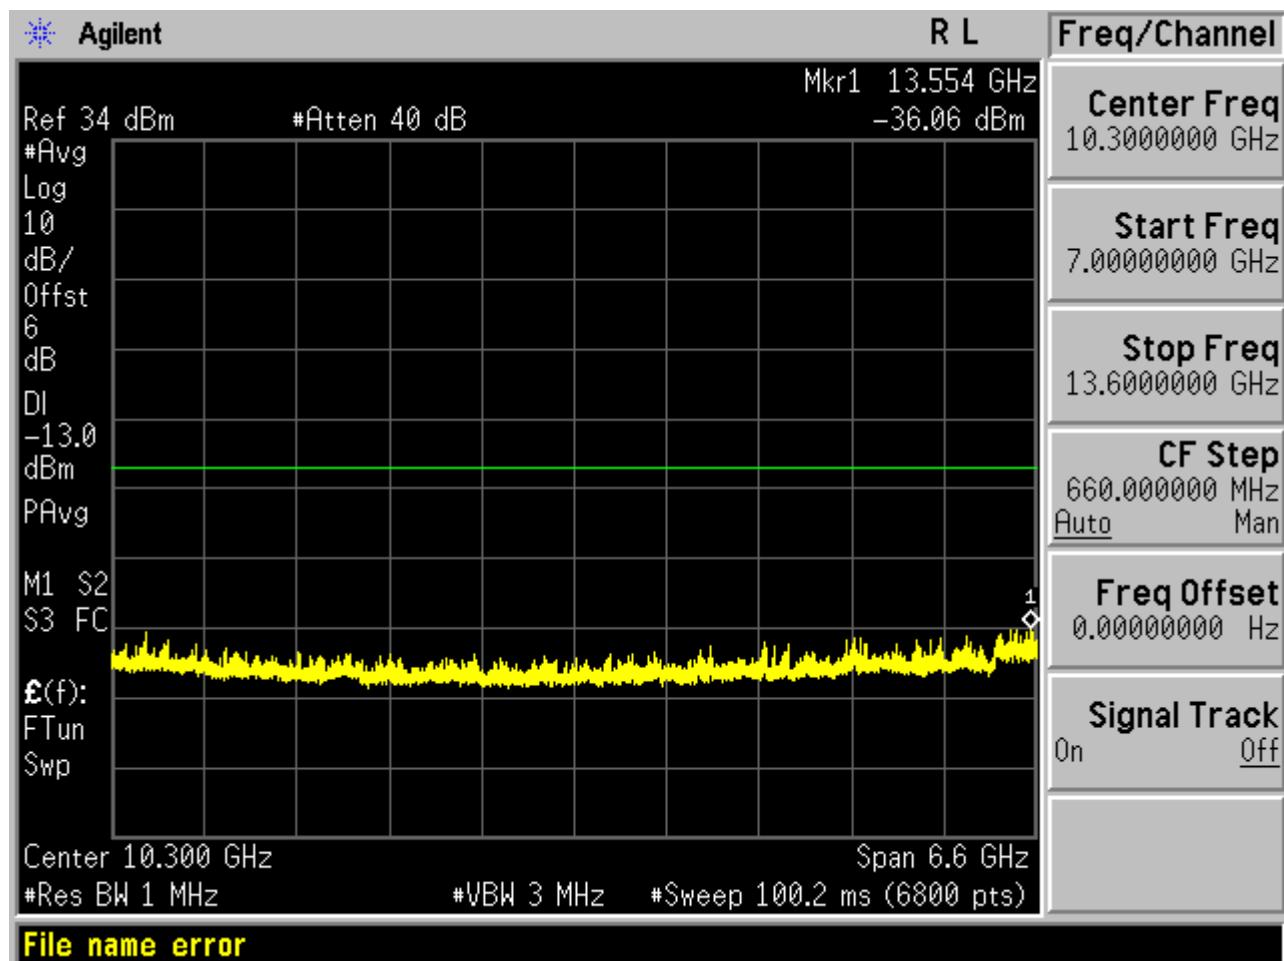


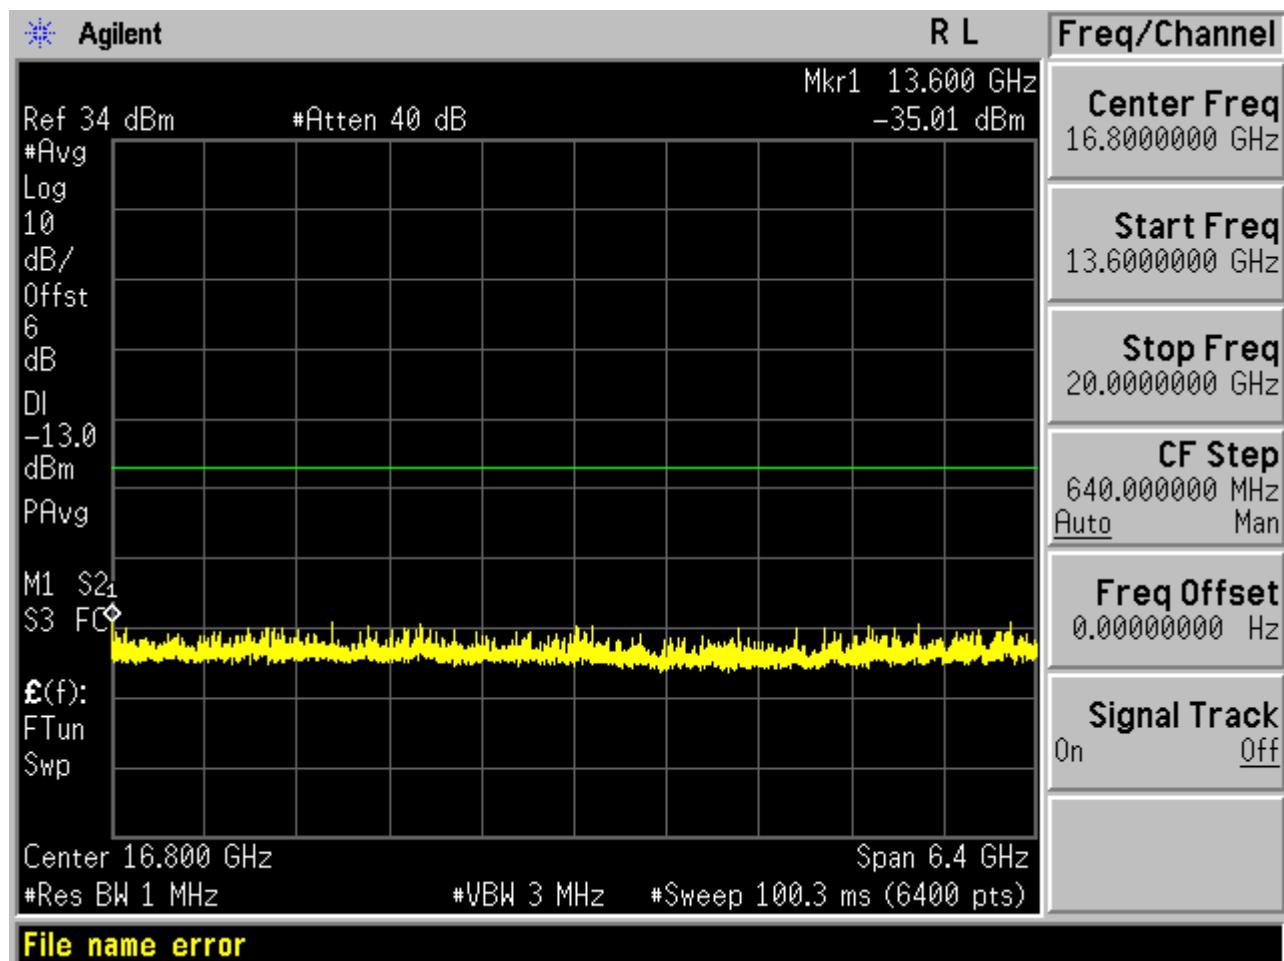


Test Band=WCDMA850


Test Mode=UMTS/TM1


Test Channel=LCH

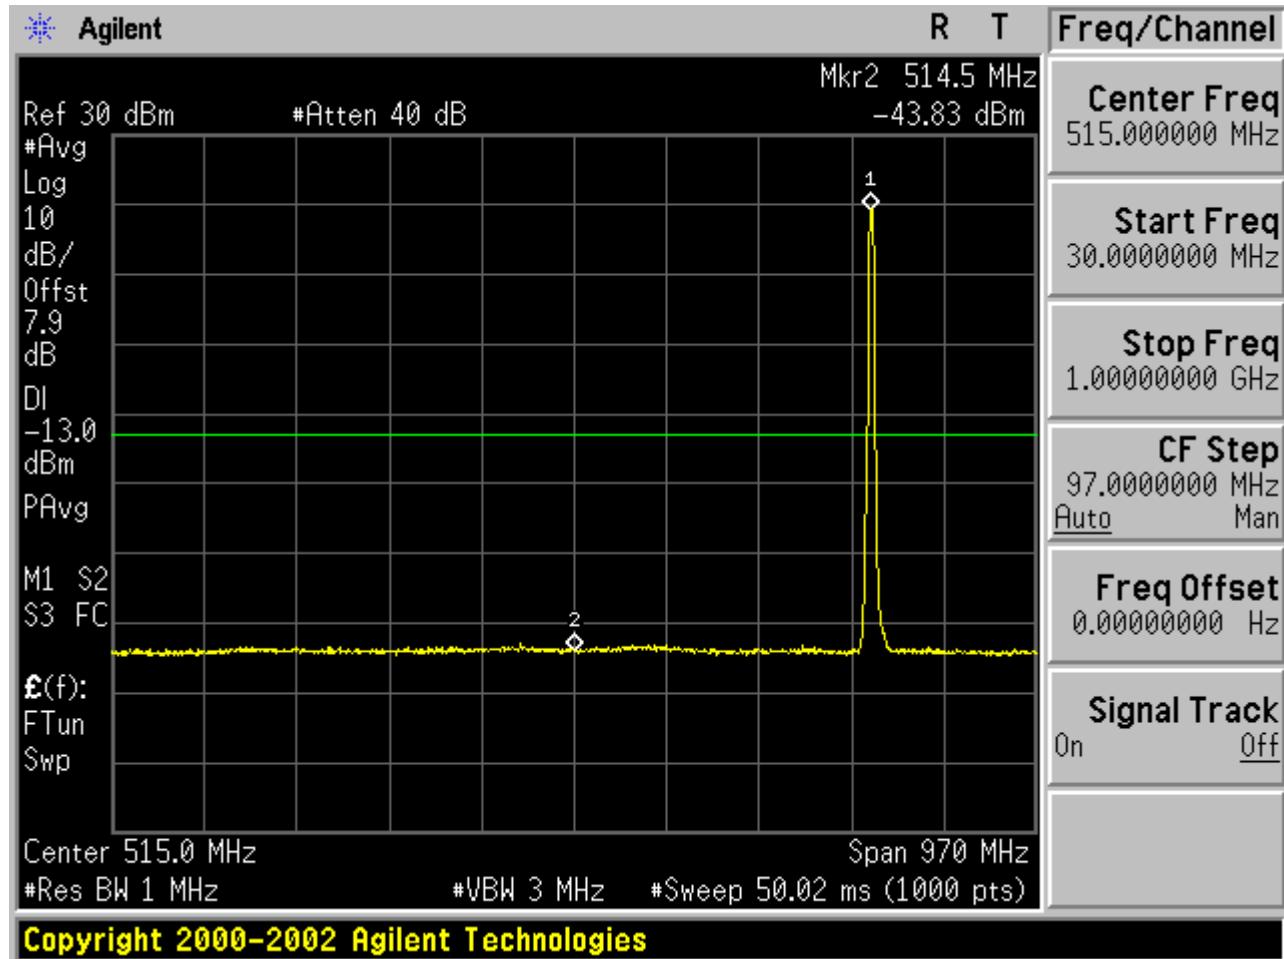

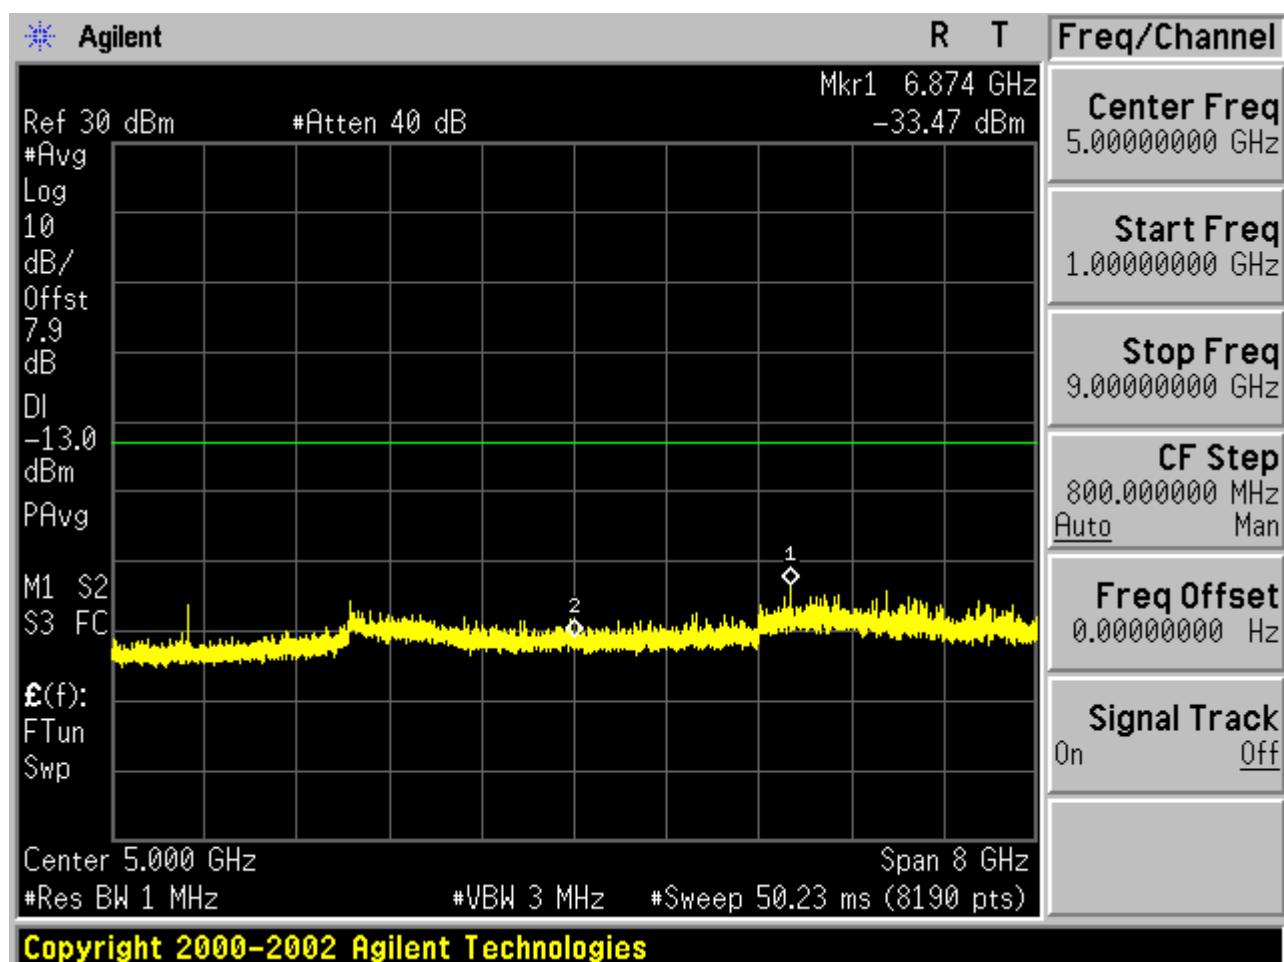



Test Channel=MCH

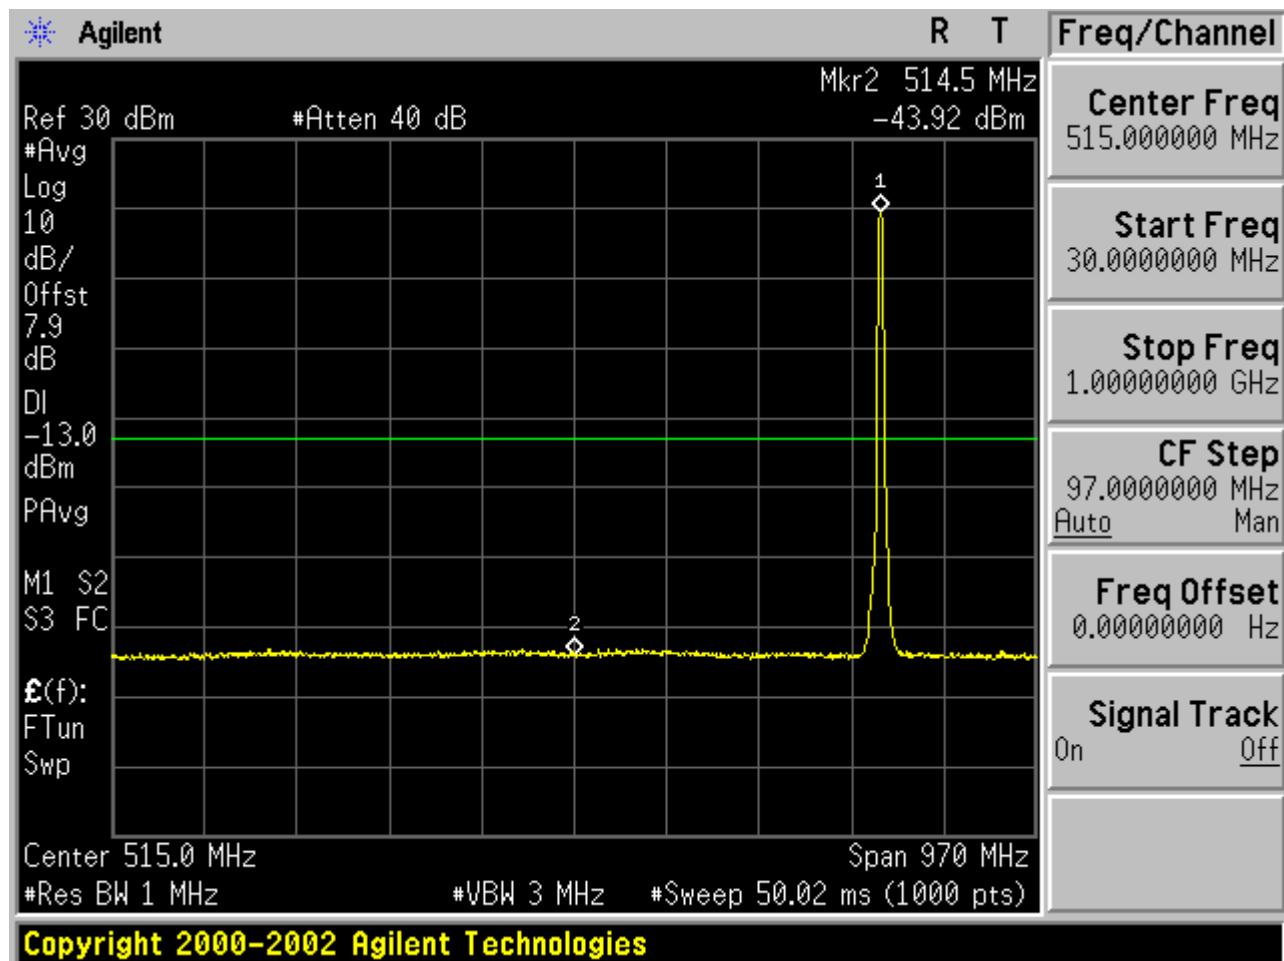

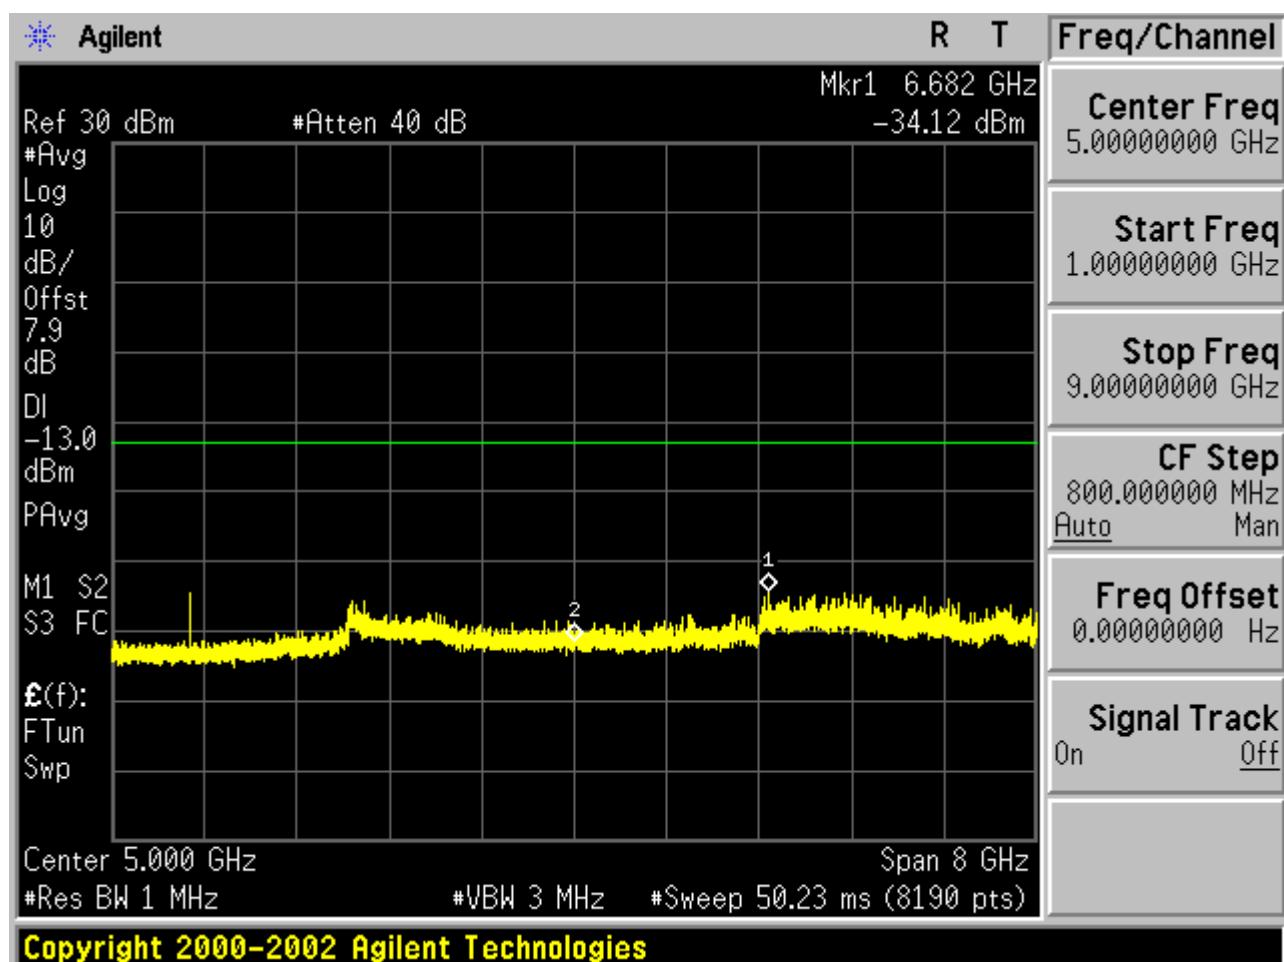

Test Channel=HCH

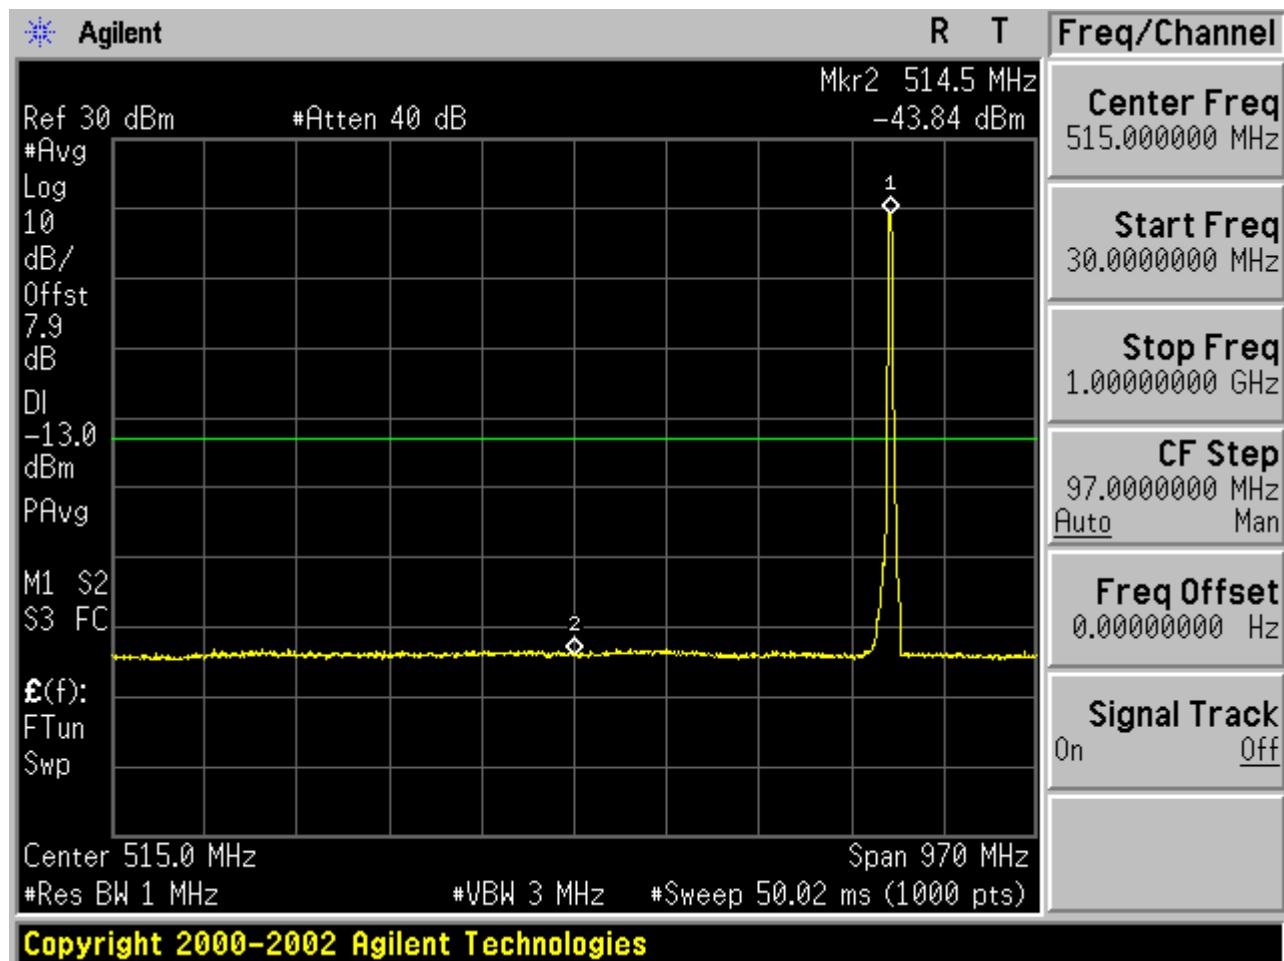


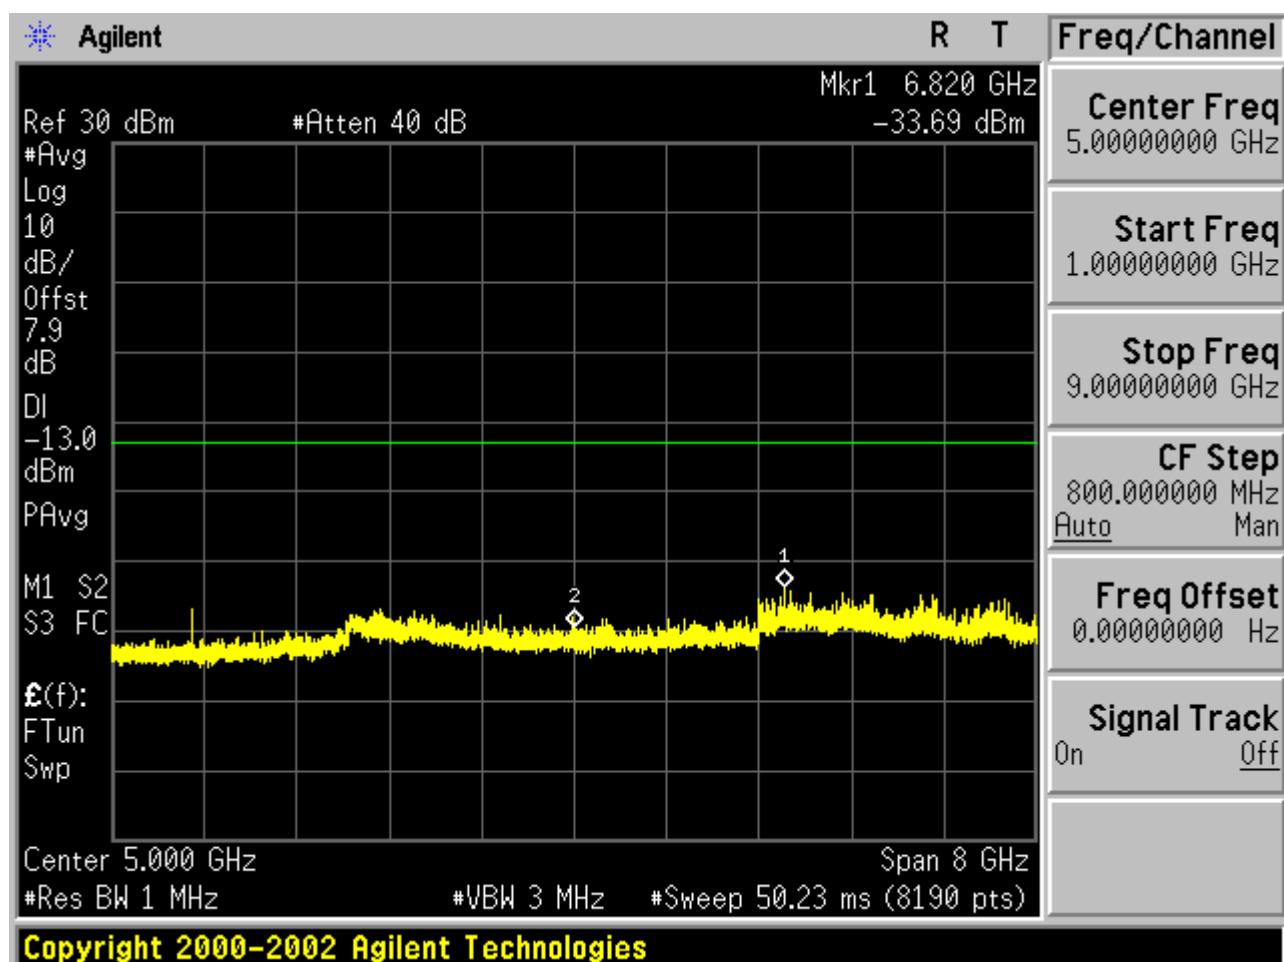



Test Band=WCDMA1900


Test Mode=UMTS/TM1

Test Channel=LCH

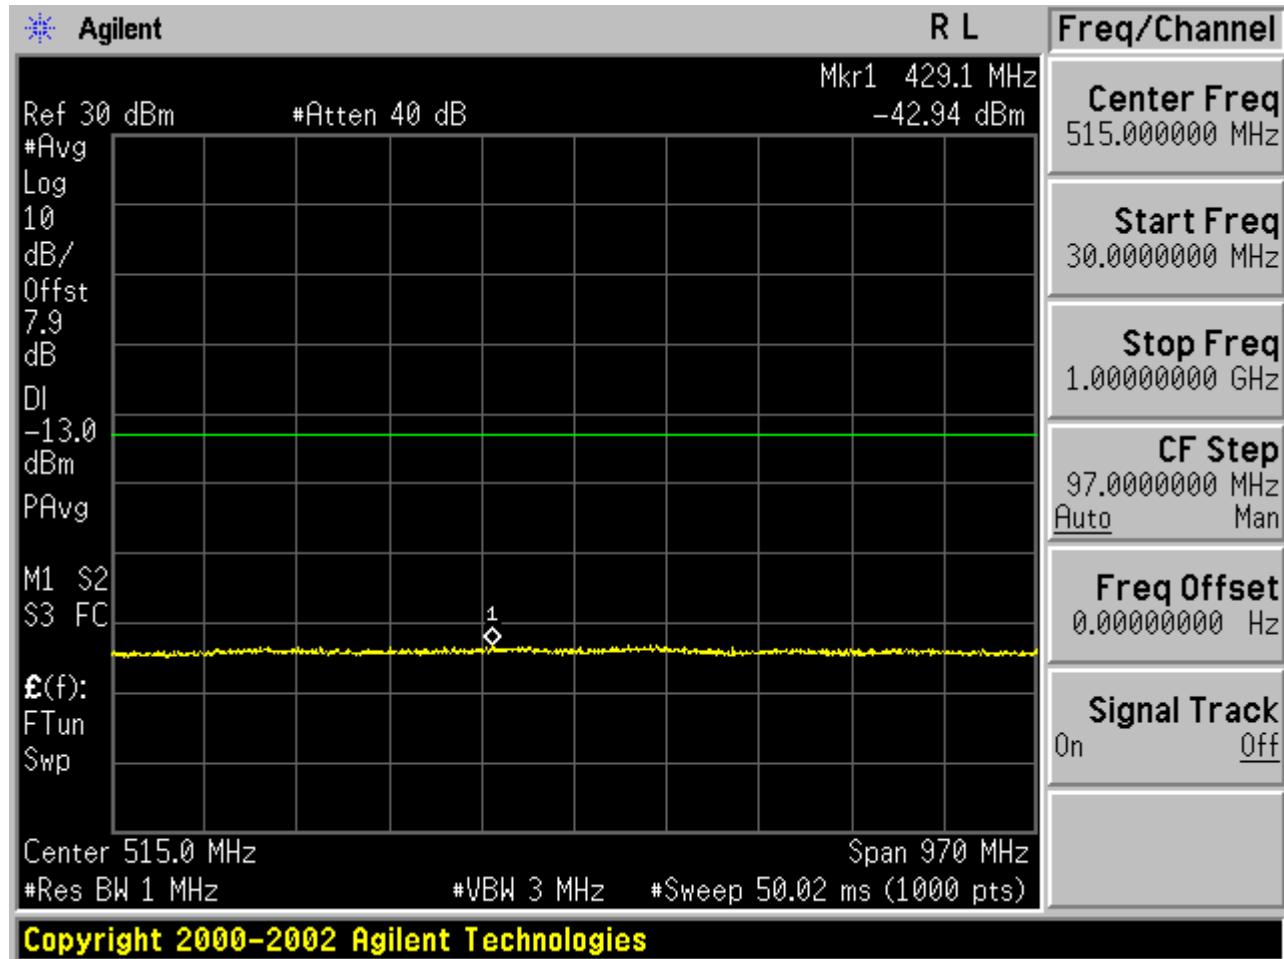


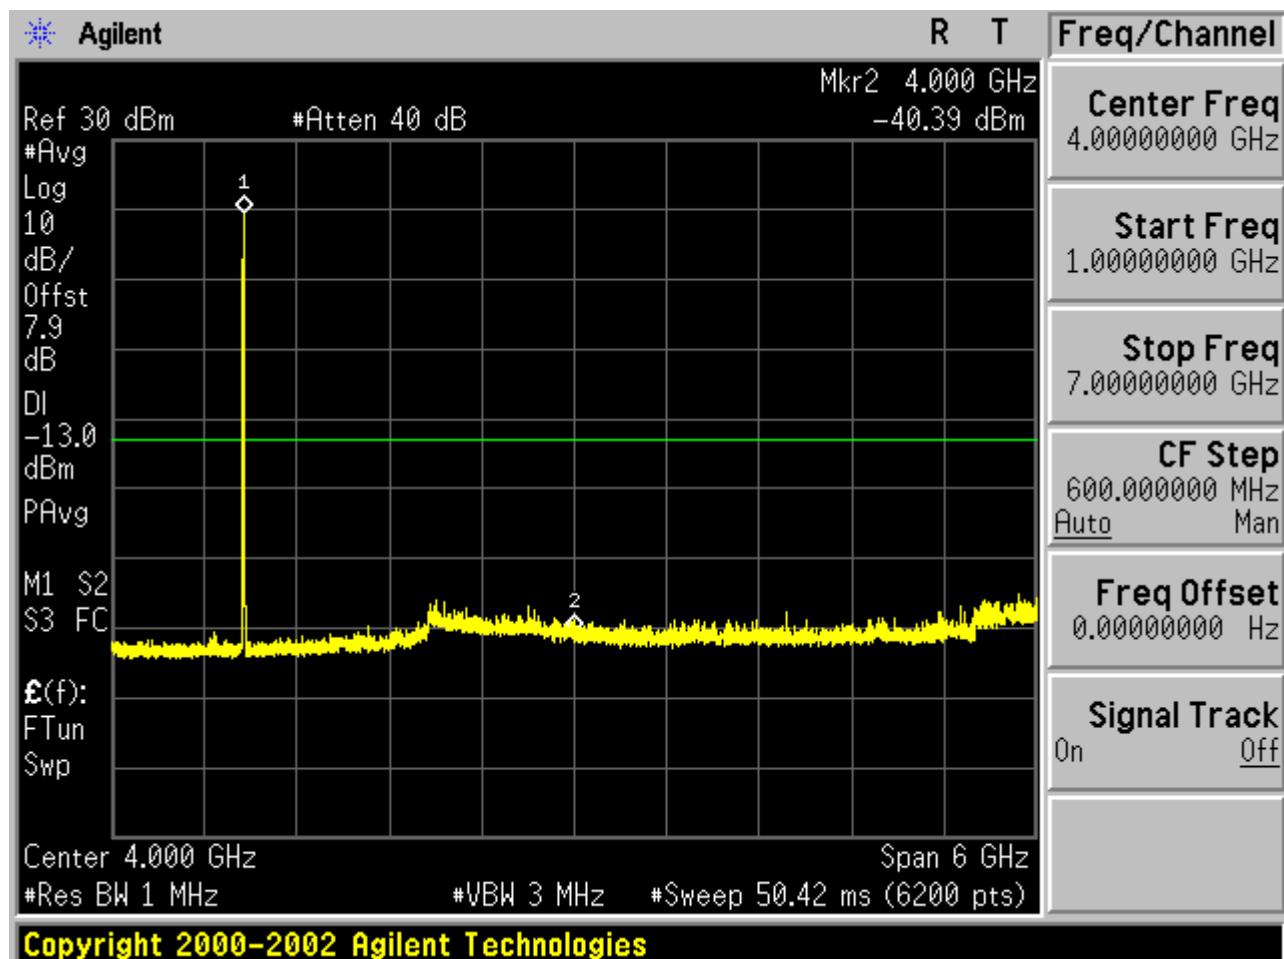


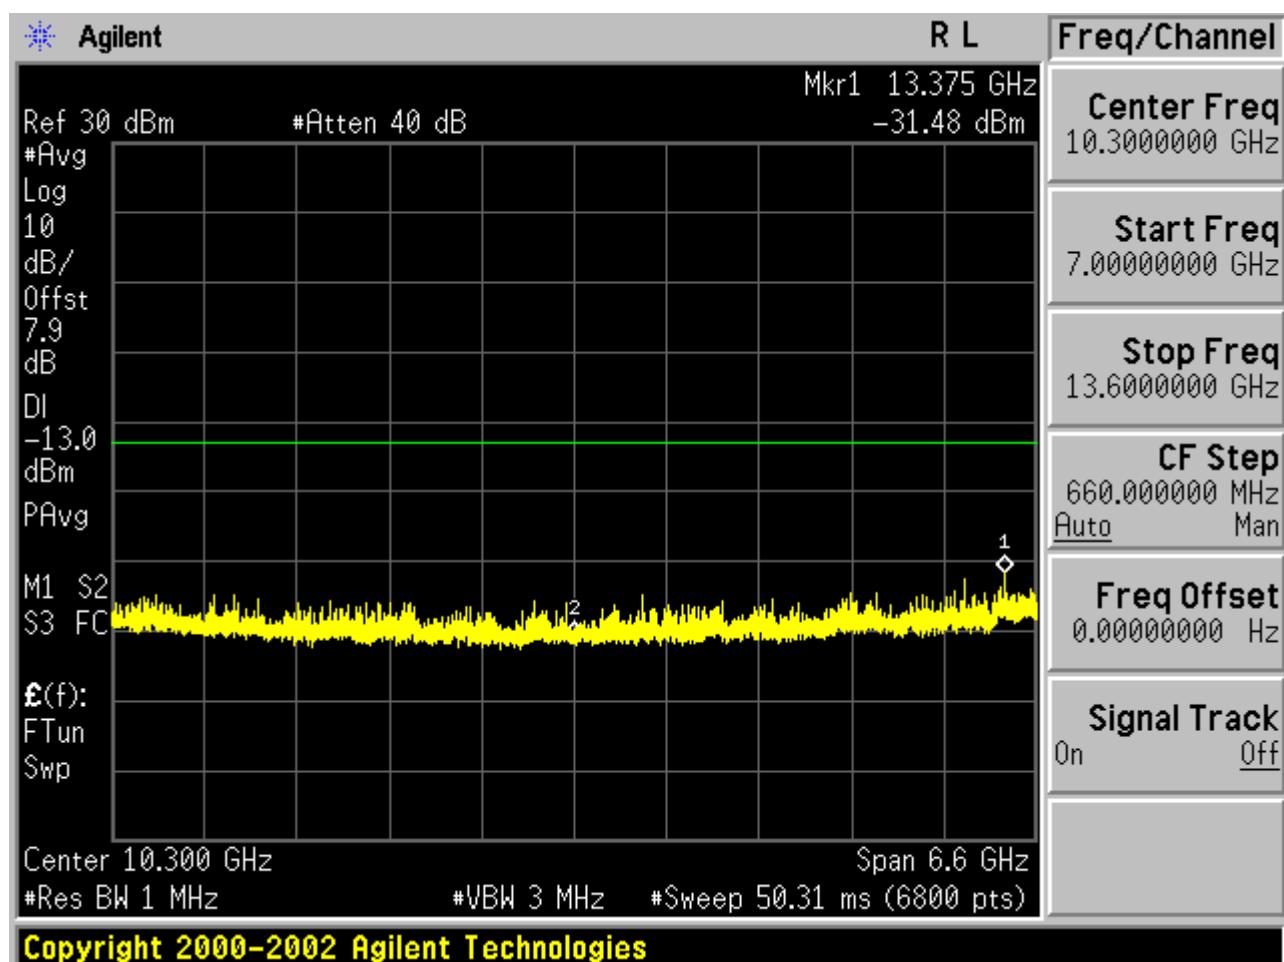


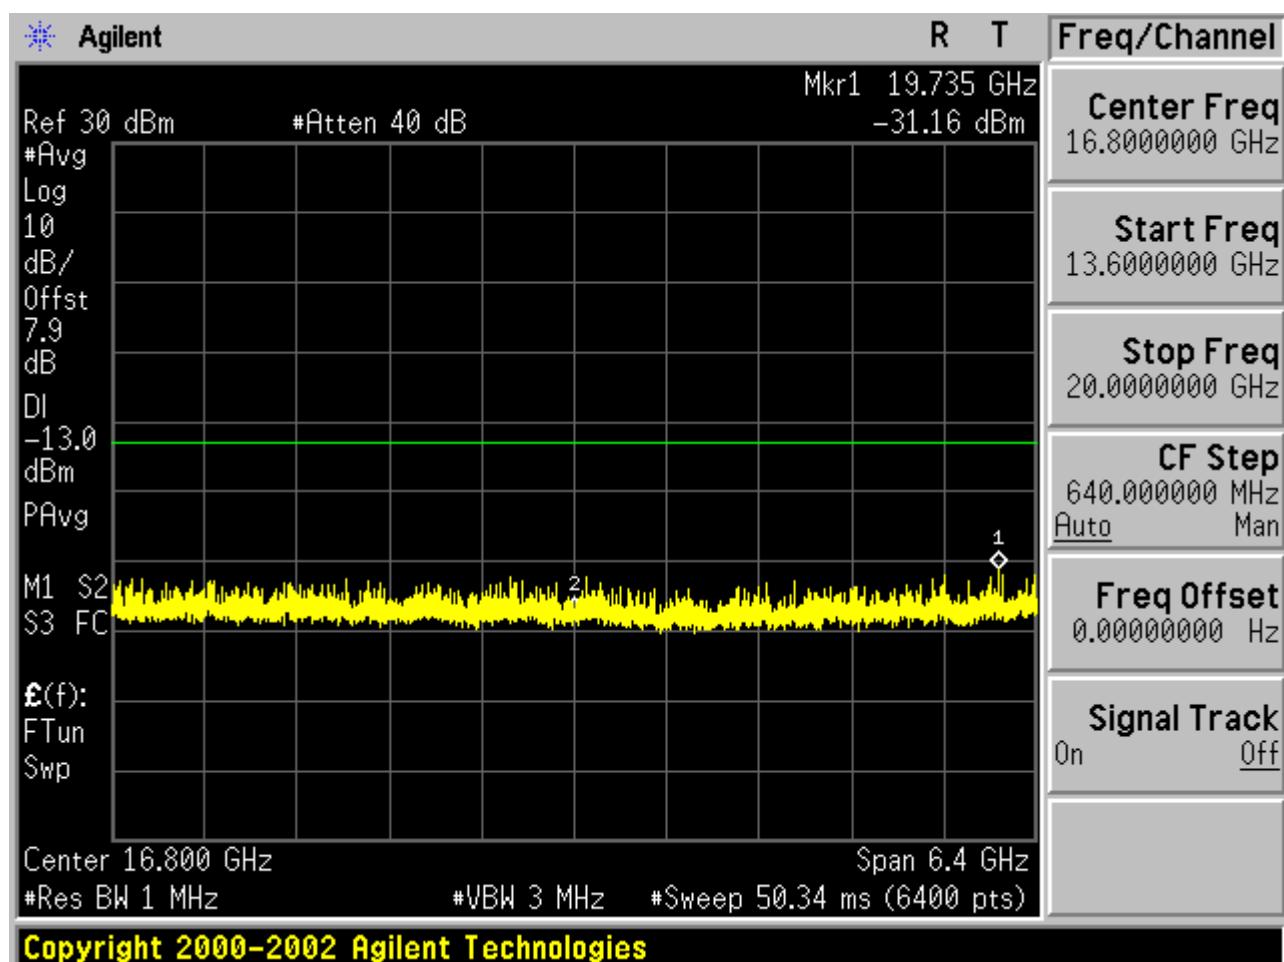


Test Channel=MCH

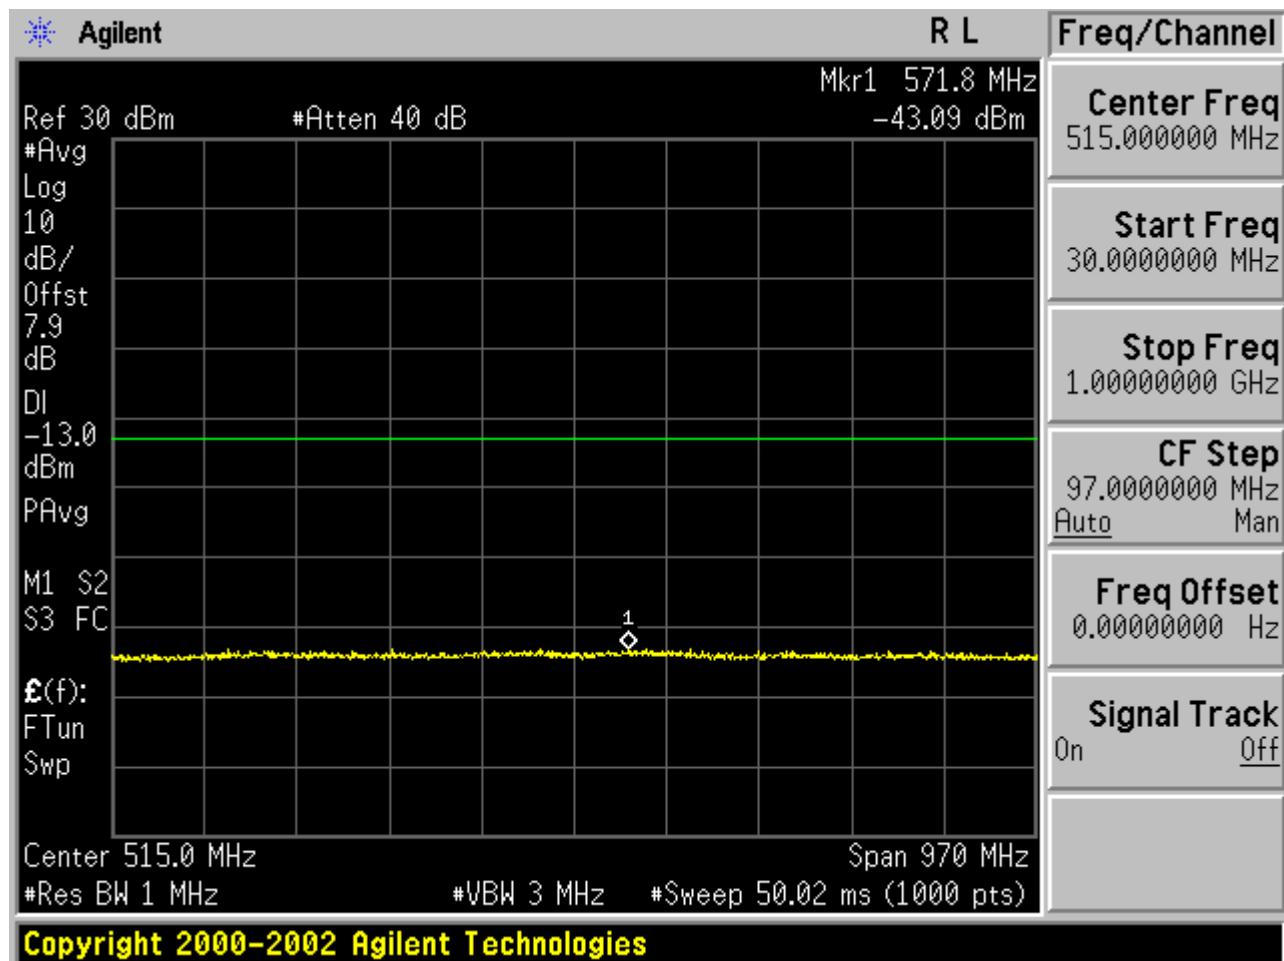


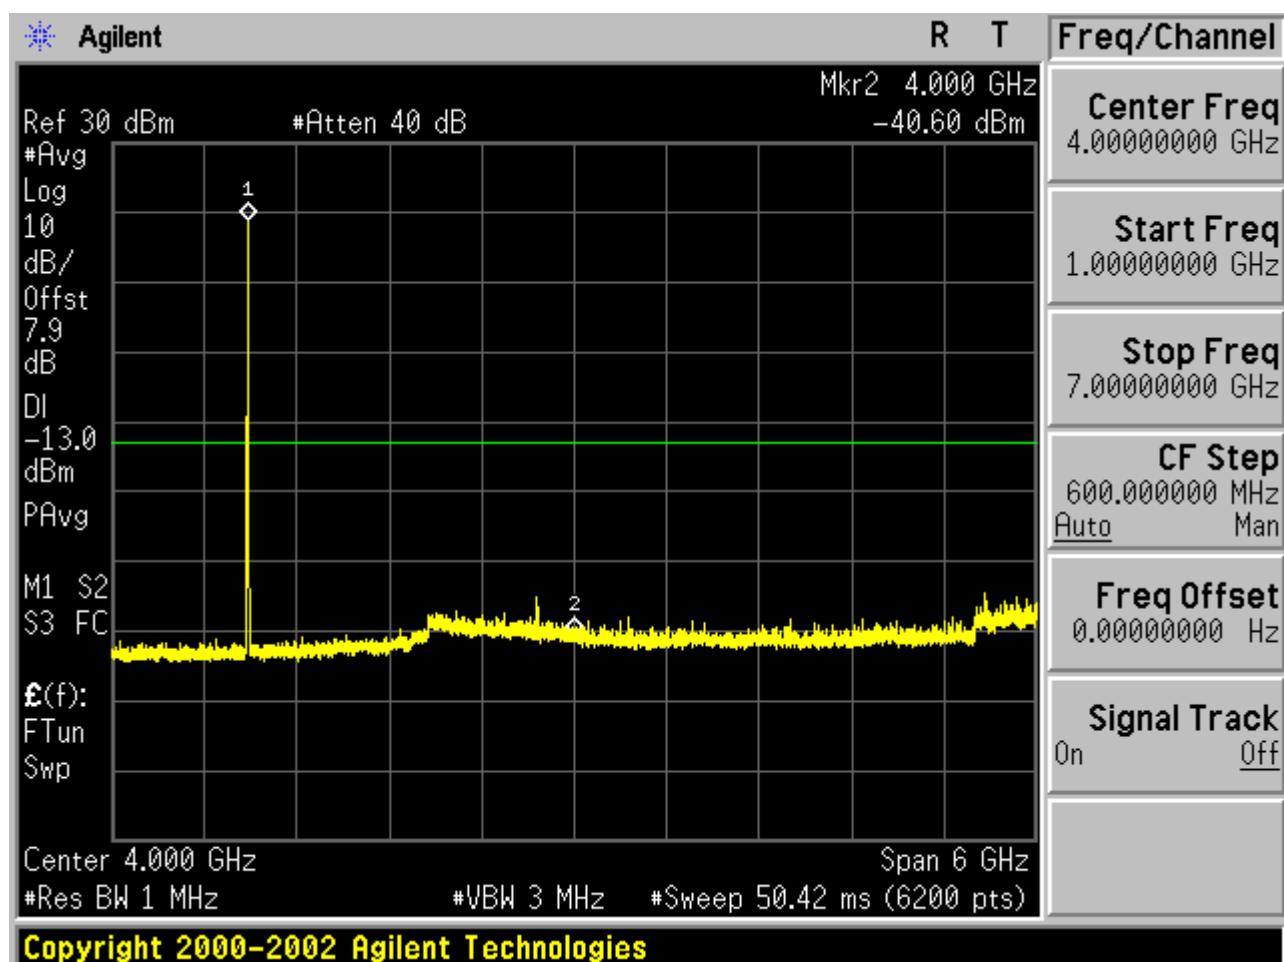


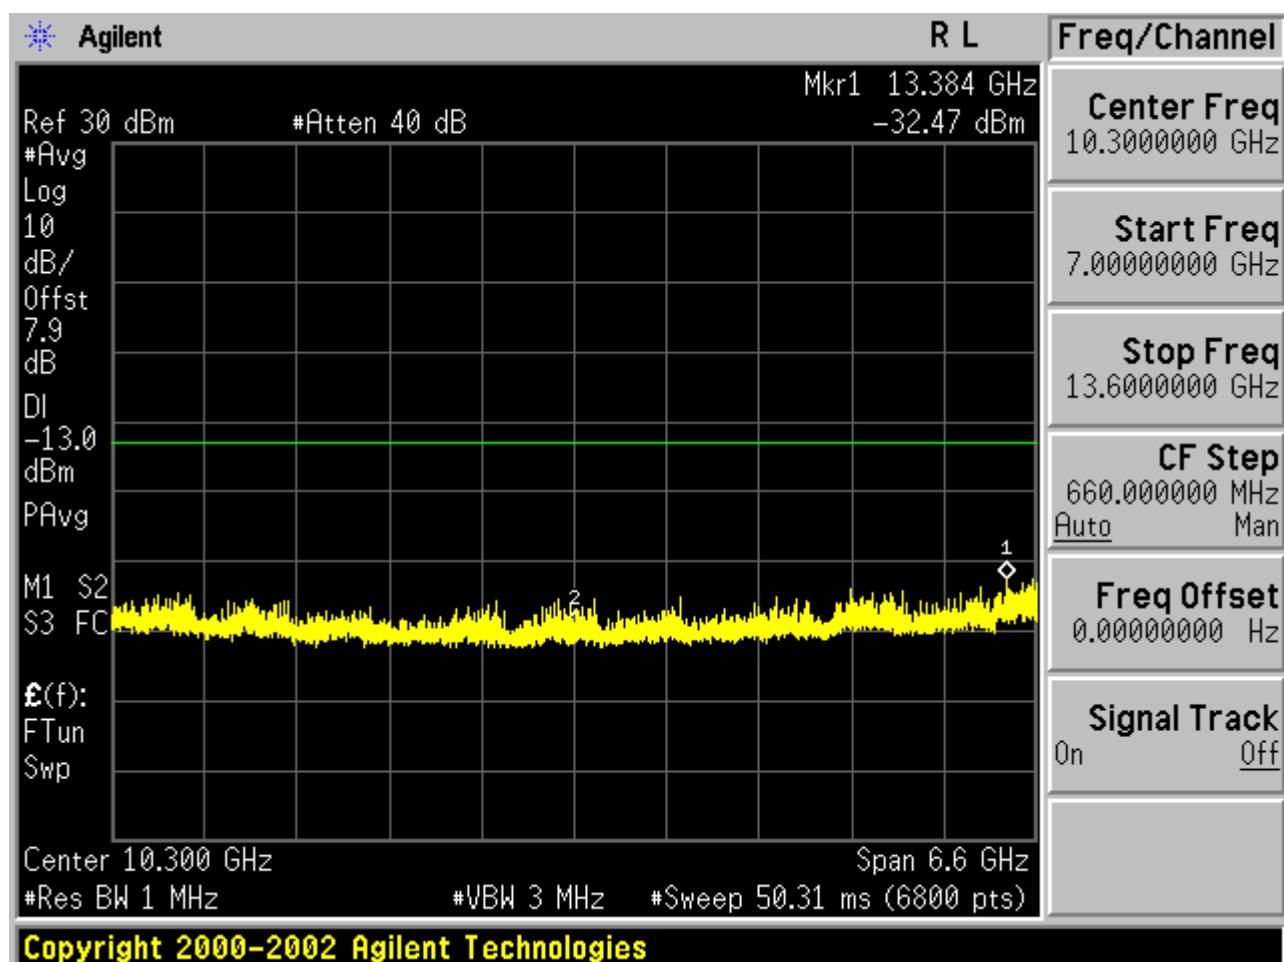


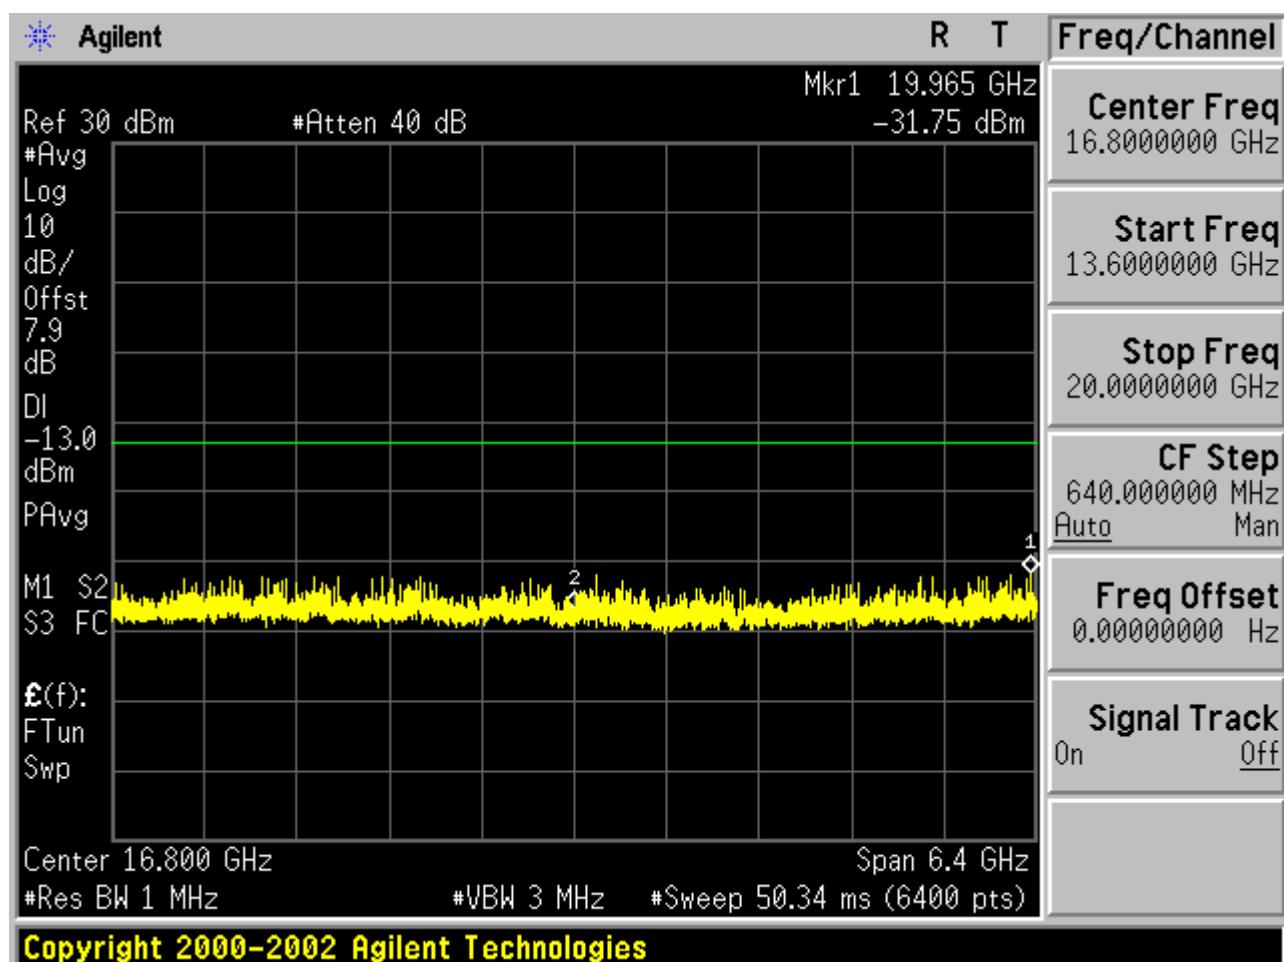


Test Channel=HCH

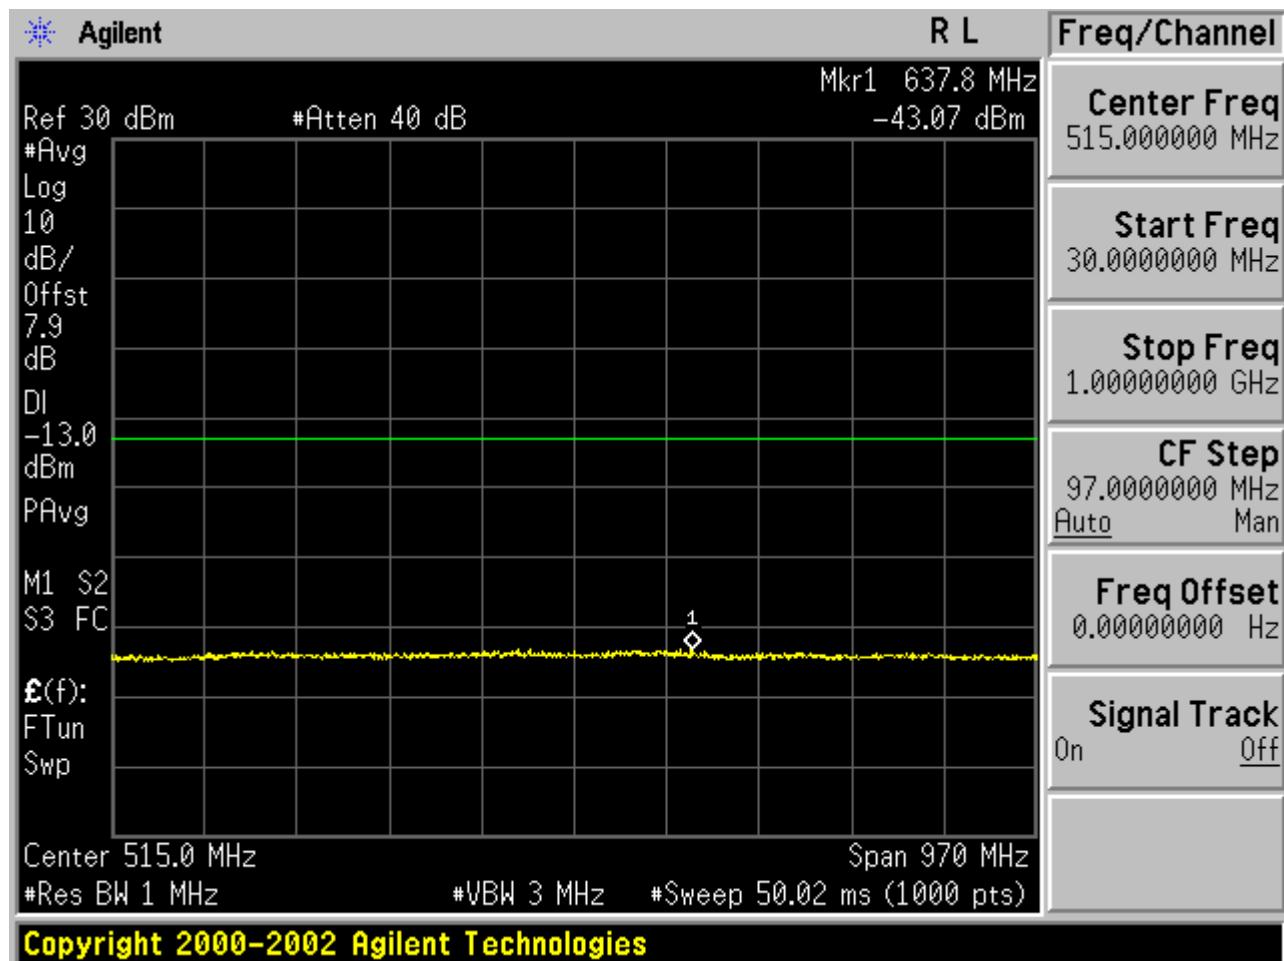

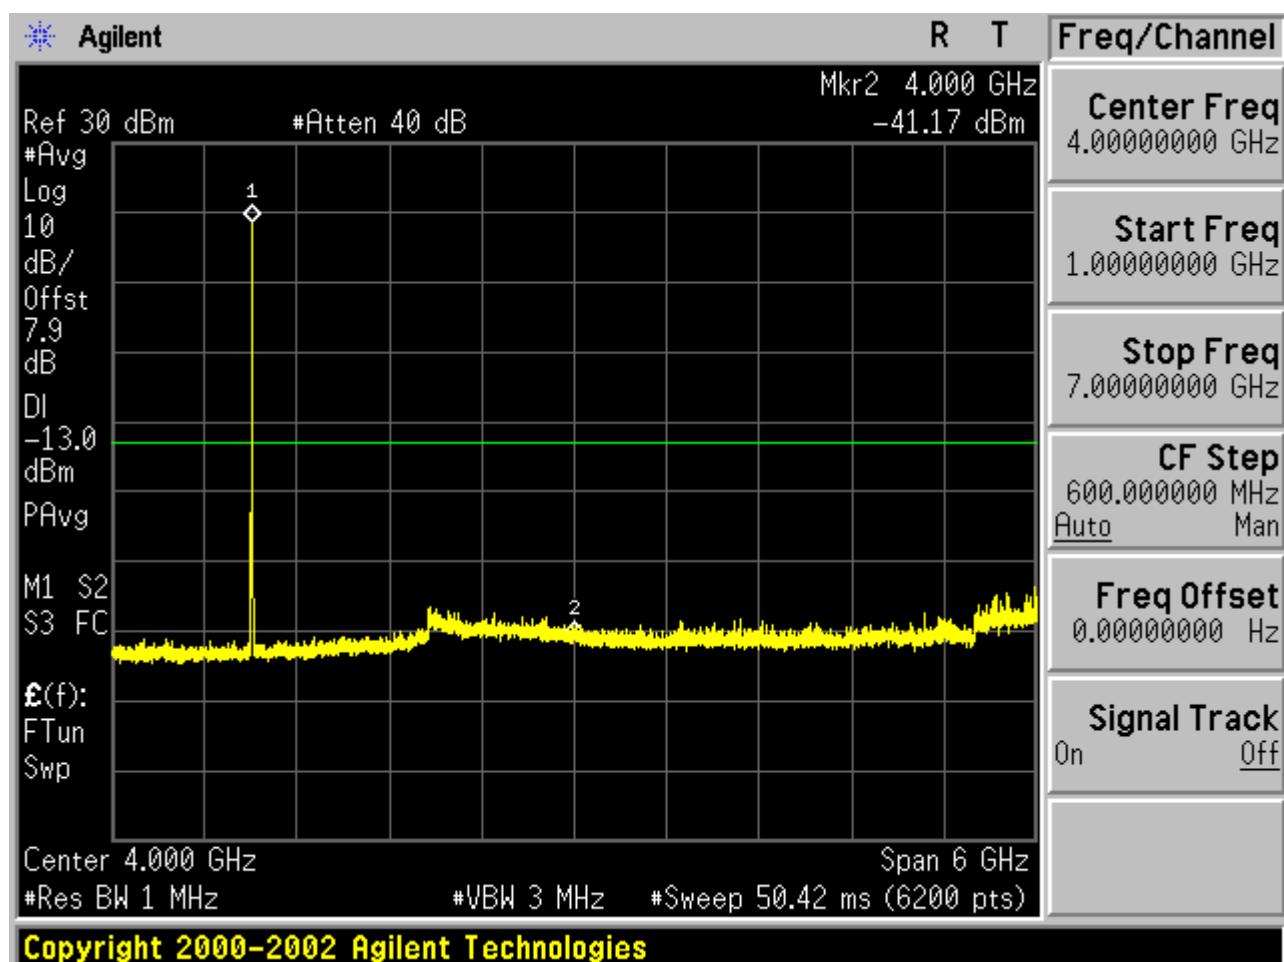

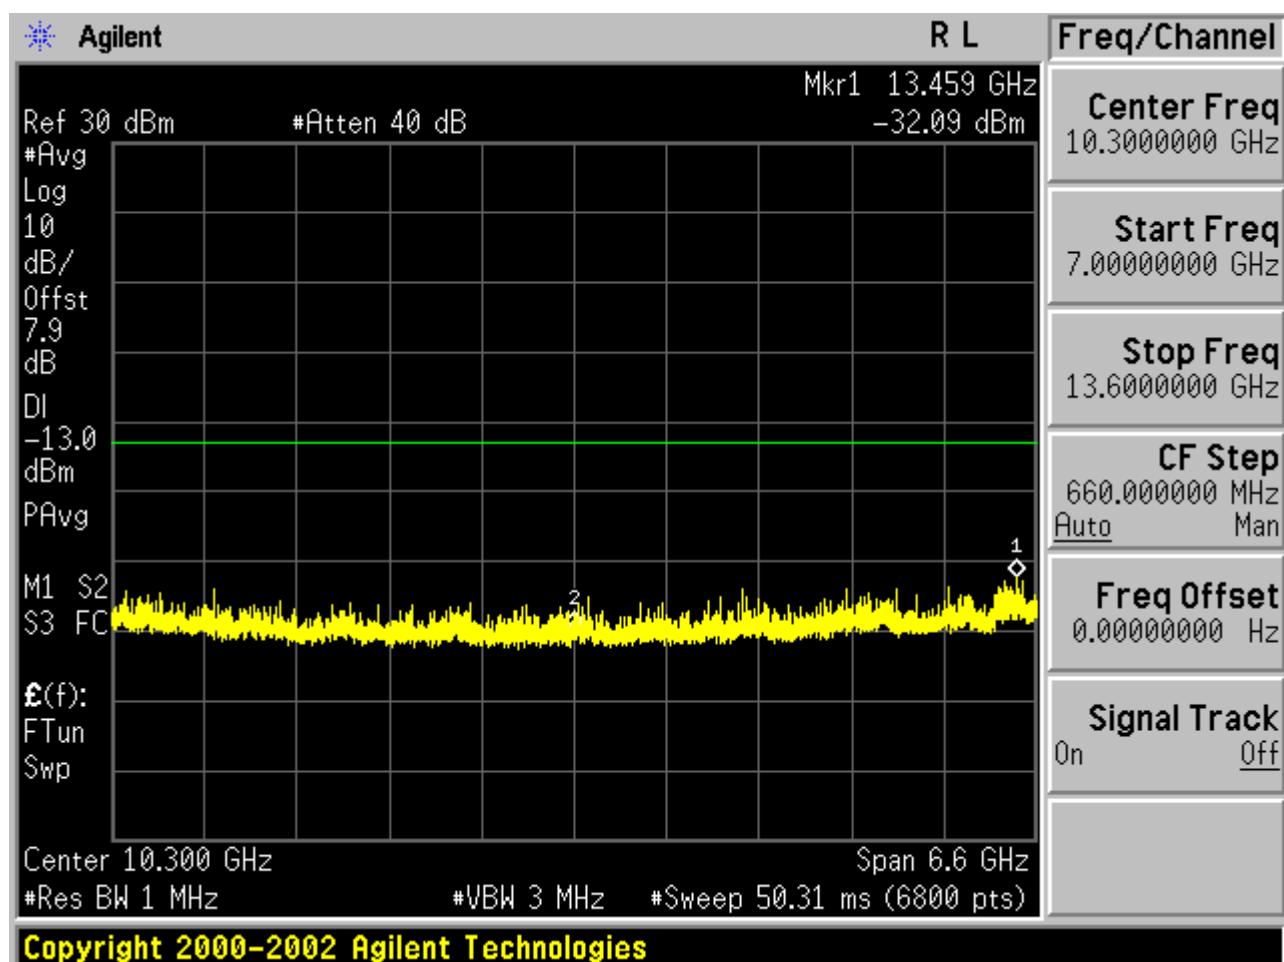

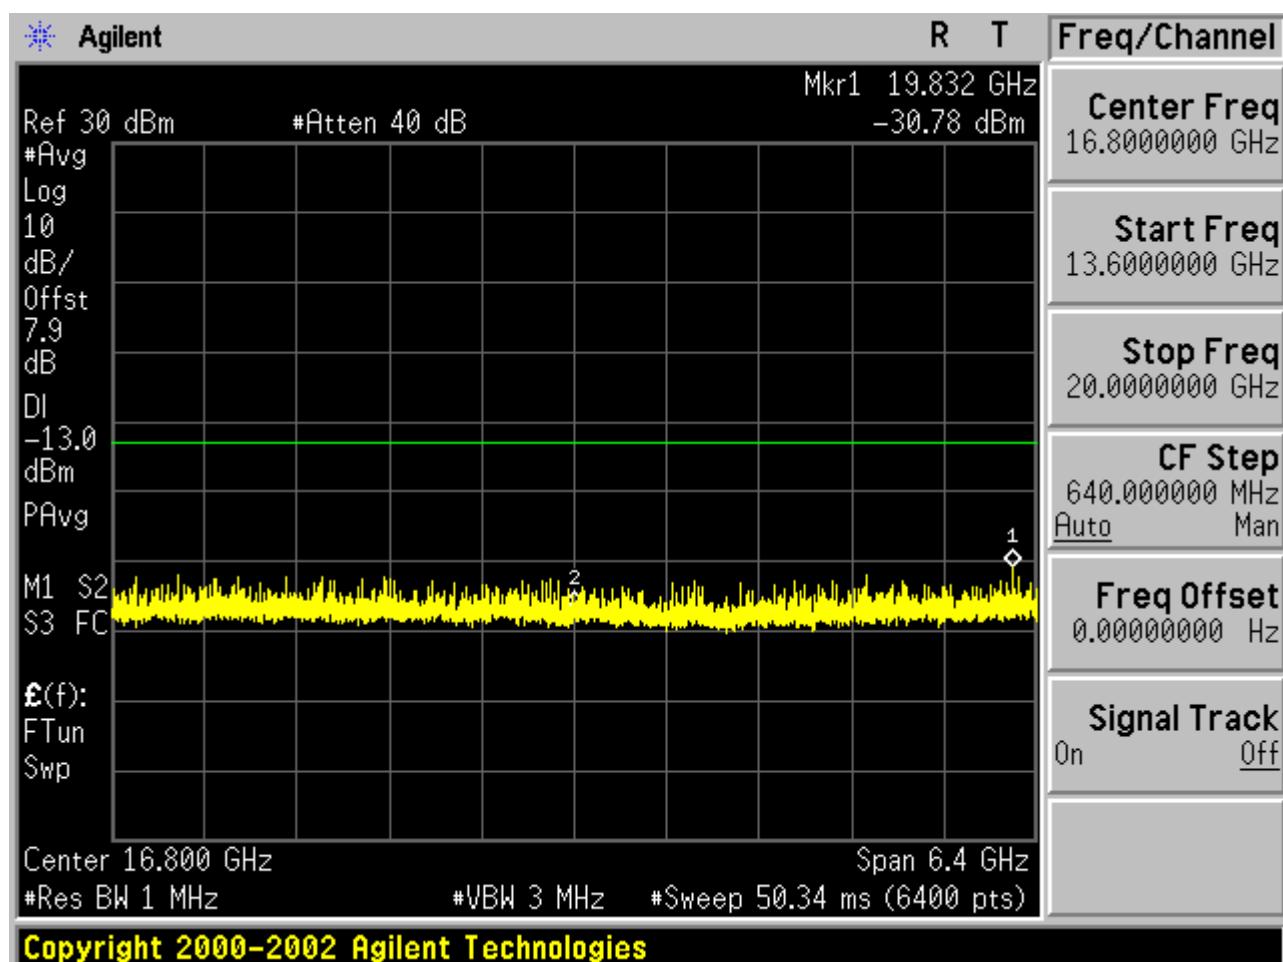

**Note:** 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.


## 9.2 RADIATED SPURIOUS EMISSION

### 9.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS/EGPRS 850, GPRS/EGPRS 1900, HSPA band II, HSPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  
$$RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$$
 The SA is calibrated using following setup.

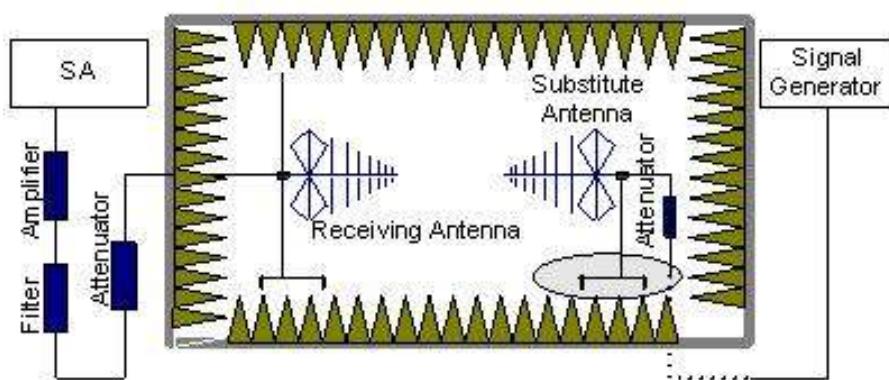

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

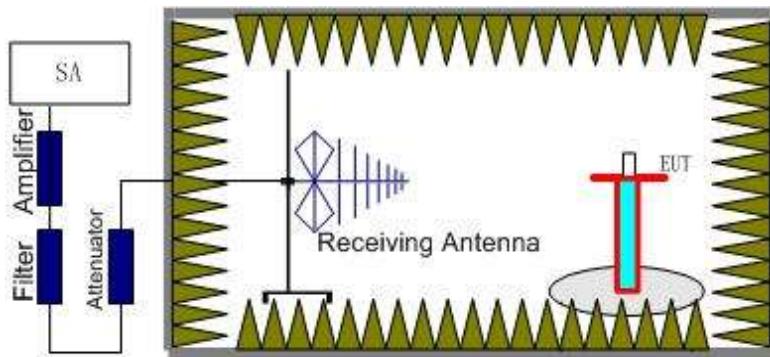

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.6MHz, 1880MHz, 1907.4MHz), UMTS band V(826.6MHz, 836.4MHz, 846.4MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $\text{Power} = P_{\text{Mea}} + A_{RPL}$

### 9.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

### 9.2.3 MEASUREMENT RESULT

#### GSM 850:

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1685.23	-43.93	-5.01	-48.94	-13.00	Horizontal
2456.12	-43.53	-2.18	-45.71	-13.00	Vertical
3645.78	-46.48	3.46	-43.02	-13.00	Vertical
4536.58	-45.55	2.79	-42.76	-13.00	Horizontal

#### GSM 850(EDGE 8):

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1696.28	-46.59	-2.26	-48.85	-13.00	Horizontal
2162.19	-47.67	-3.12	-50.79	-13.00	Vertical
3645.78	-48.23	-1.74	-49.97	-13.00	Vertical
9257.65	-45.61	8.46	-37.15	-13.00	Horizontal

#### PCS 1900:

The Worst Test Results for Channel 810/1909.8MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1429.36	-44.38	-3.22	-47.60	-13.00	Vertical
2563.47	-46.47	-0.24	-46.71	-13.00	Vertical
3645.26	-45.21	3.98	-41.23	-13.00	Horizontal
4563.56	-47.69	11.56	-36.13	-13.00	Vertical
5689.25	-46.77	17.89	-28.88	-13.00	Horizontal

**PCS 1900(EDGE 8):**

<b>The Worst Test Results for Channel 810/1909.8MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1430.15	-53.82	2.7	-51.12	-13.00	Vertical
9367.91	-53.39	11.6	-41.79	-13.00	Vertical
13356.68	-54.48	14.89	-39.59	-13.00	Horizontal
15249.71	-54.29	13.87	-40.42	-13.00	Vertical
17913.63	-55.73	19.76	-35.97	-13.00	Horizontal

**UMTS band II:**

<b>The Worst Test Results for Channel 9938/1907.4MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.66	-2.25	-40.91	-13.00	Vertical
9548.50	-39.28	-3.03	-42.31	-13.00	Horizontal
13367.40	-42.23	-1.87	-44.1	-13.00	Horizontal
15277.80	-42.35	8.52	-33.83	-13.00	Vertical
17931.60	-44.31	18.7	-25.61	-13.00	Horizontal

**UMTS band V:**

<b>The Worst Test Results for Channel 4458/846.4MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1598.26	-41.83	-2.26	-44.09	-13.00	Vertical
2365.78	-39.18	-3.12	-42.3	-13.00	Horizontal
4967.65	-42.42	-1.74	-44.16	-13.00	Horizontal
6457.86	-41.68	8.74	-32.94	-13.00	Vertical
7896.56	-42.37	17.89	-24.48	-13.00	Horizontal

**Note:** ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The “Factor” value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

## 10. MAINS CONDUCTED EMISSION

### 10.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

### 10.2 PROVISIONS APPLICABLE


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\*Decreases with the logarithm of the frequency.  
\*The lower limit shall apply at the transition frequency.

**Note:** The GSM850 mode is the worst condition and the test result as following:

### 10.3 MEASUREMENT RESULT


#### LINE CONDUCTED EMISSION – L

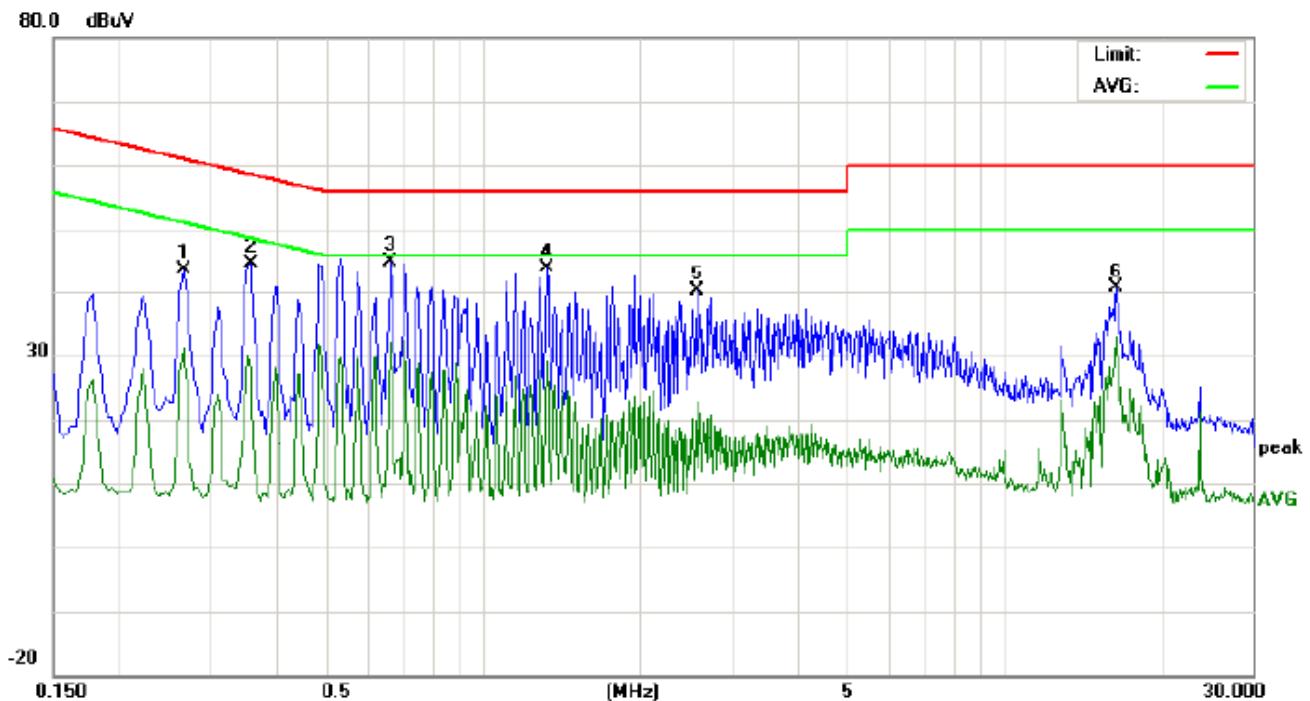

Site: Conduction Phase: **L1** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: WCDMA/GSM MOBILE PHONE  
 M/N: Lead5  
 Mode: Call  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2660	33.22		20.93	10.28	43.50		31.21	61.24	51.24	-17.74	-20.03	P	
2	0.3580	34.29		17.76	10.31	44.60		28.07	58.77	48.77	-14.17	-20.70	P	
3	0.6660	34.44		21.77	10.34	44.78		32.11	56.00	46.00	-11.22	-13.89	P	
4	1.3300	33.50		18.83	10.38	43.88		29.21	56.00	46.00	-12.12	-16.79	P	
5	2.5700	29.66		12.05	10.45	40.11		22.50	56.00	46.00	-15.89	-23.50	P	
6	16.4220	30.40		22.71	10.12	40.52		32.83	60.00	50.00	-19.48	-17.17	P	

LINE CONDUCTED EMISSION – N

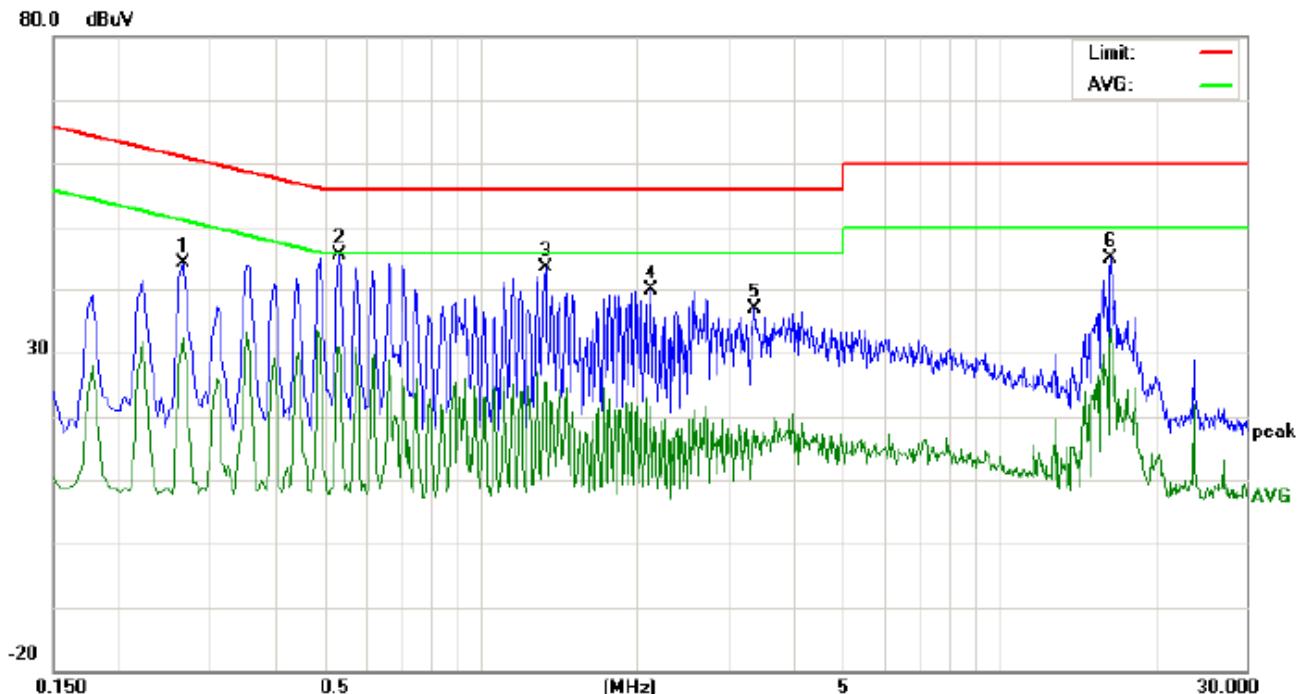

Site: Conduction Phase: **N** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: WCDMA/GSM MOBILE PHONE  
 M/N: Lead5  
 Mode: Call  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.2660	34.03		22.10	10.28	44.31		32.38	61.24	51.24	-16.93	-18.86	P	
2	0.5340	35.17		20.45	10.37	45.54		30.82	56.00	46.00	-10.46	-15.18	P	
3	1.3340	33.36		14.92	10.38	43.74		25.30	56.00	46.00	-12.26	-20.70	P	
4	2.1340	29.68		11.27	10.28	39.96		21.55	56.00	46.00	-16.04	-24.45	P	
5	3.3740	26.43		7.35	10.52	36.95		17.87	56.00	46.00	-19.05	-28.13	P	
6	16.4140	35.03		23.72	10.12	45.15		33.84	60.00	50.00	-14.85	-16.16	P	

**Note:** The GSM850 mode is the worst condition.

## 11. FREQUENCY STABILITY

### 11.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +55°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +55°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +55°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 11.2 PROVISIONS APPLICABLE

#### 11.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 6.3VDC and 8.5VDC, with a nominal voltage of 7.4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### **11.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

### 11.3 MEASUREMENT RESULT

#### Appendix E:Frequency Stability

##### Test Results

###### Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM8 50	TM 1	LCH	TN	VL	30.41	0.04	±2.5	PASS
			TN	VN	29.38	0.04	±2.5	PASS
			TN	VH	32.74	0.04	±2.5	PASS
		MCH	TN	VL	30.03	0.04	±2.5	PASS
			TN	VN	35.19	0.04	±2.5	PASS
			TN	VH	31.12	0.04	±2.5	PASS
		HCH	TN	VL	32.80	0.04	±2.5	PASS
			TN	VN	29.57	0.03	±2.5	PASS
			TN	VH	31.70	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM850	TM2	LCH	TN	VL	30.80	0.04	±2.5	PASS
			TN	VN	30.09	0.04	±2.5	PASS
			TN	VH	26.35	0.03	±2.5	PASS
		MCH	TN	VL	28.80	0.03	±2.5	PASS
			TN	VN	29.44	0.04	±2.5	PASS
			TN	VH	27.89	0.03	±2.5	PASS
		HCH	TN	VL	33.32	0.04	±2.5	PASS
			TN	VN	26.15	0.03	±2.5	PASS
			TN	VH	28.67	0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM850	TM3	LCH	TN	VL	45.78	0.06	±2.5	PASS
			TN	VN	39.29	0.05	±2.5	PASS
			TN	VH	41.04	0.05	±2.5	PASS
		MCH	TN	VL	39.71	0.05	±2.5	PASS
			TN	VN	42.75	0.05	±2.5	PASS
			TN	VH	42.29	0.05	±2.5	PASS
		HCH	TN	VL	40.03	0.05	±2.5	PASS
			TN	VN	42.29	0.05	±2.5	PASS
			TN	VH	39.78	0.05	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM1900	TM1	LCH	TN	VL	74.13	0.04	±2.5	PASS
			TN	VN	61.92	0.03	±2.5	PASS
			TN	VH	66.64	0.04	±2.5	PASS
		MCH	TN	VL	67.67	0.04	±2.5	PASS
			TN	VN	61.60	0.03	±2.5	PASS
			TN	VH	68.32	0.04	±2.5	PASS
		HCH	TN	VL	69.87	0.04	±2.5	PASS
			TN	VN	81.88	0.04	±2.5	PASS
			TN	VH	78.65	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM190 0	TM2	LCH	TN	VL	64.89	0.04	±2.5	PASS
			TN	VN	71.48	0.04	±2.5	PASS
			TN	VH	70.32	0.04	±2.5	PASS
		MCH	TN	VL	59.21	0.03	±2.5	PASS
			TN	VN	74.45	0.04	±2.5	PASS
			TN	VH	66.25	0.04	±2.5	PASS
		HCH	TN	VL	68.38	0.04	±2.5	PASS
			TN	VN	67.15	0.04	±2.5	PASS
			TN	VH	74.13	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM190 0	TM3	LCH	TN	VL	73.03	0.04	±2.5	PASS
			TN	VN	62.93	0.03	±2.5	PASS
			TN	VH	69.96	0.04	±2.5	PASS
		MCH	TN	VL	66.93	0.04	±2.5	PASS
			TN	VN	70.48	0.04	±2.5	PASS
			TN	VH	61.63	0.03	±2.5	PASS
		HCH	TN	VL	77.58	0.04	±2.5	PASS
			TN	VN	69.38	0.04	±2.5	PASS
			TN	VH	74.68	0.04	±2.5	PASS

**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM850	TM1	LCH	VN	-30	30.80	0.04	$\pm 2.5$	PASS
			VN	-20	30.67	0.04	$\pm 2.5$	PASS
			VN	-10	31.51	0.04	$\pm 2.5$	PASS
			VN	0	32.09	0.04	$\pm 2.5$	PASS
			VN	10	35.84	0.04	$\pm 2.5$	PASS
			VN	20	35.00	0.04	$\pm 2.5$	PASS
			VN	30	30.61	0.04	$\pm 2.5$	PASS
			VN	40	29.25	0.04	$\pm 2.5$	PASS
			VN	50	31.77	0.04	$\pm 2.5$	PASS
GSM850	TM1	MCH	VN	-30	31.90	0.04	$\pm 2.5$	PASS
			VN	-20	32.03	0.04	$\pm 2.5$	PASS
			VN	-10	33.13	0.04	$\pm 2.5$	PASS
			VN	0	34.03	0.04	$\pm 2.5$	PASS
			VN	10	32.35	0.04	$\pm 2.5$	PASS
			VN	20	32.22	0.04	$\pm 2.5$	PASS
			VN	30	31.77	0.04	$\pm 2.5$	PASS
			VN	40	31.25	0.04	$\pm 2.5$	PASS
			VN	50	31.06	0.04	$\pm 2.5$	PASS
GSM850	TM1	HCH	VN	-30	33.13	0.04	$\pm 2.5$	PASS
			VN	-20	33.00	0.04	$\pm 2.5$	PASS
			VN	-10	36.03	0.04	$\pm 2.5$	PASS
			VN	0	33.90	0.04	$\pm 2.5$	PASS
			VN	10	32.41	0.04	$\pm 2.5$	PASS
			VN	20	33.71	0.04	$\pm 2.5$	PASS
			VN	30	29.57	0.03	$\pm 2.5$	PASS
			VN	40	29.57	0.03	$\pm 2.5$	PASS
			VN	50	35.51	0.04	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM850	TM2	LCH	VN	-30	27.64	0.03	$\pm 2.5$	PASS
			VN	-20	19.18	0.02	$\pm 2.5$	PASS
			VN	-10	21.57	0.03	$\pm 2.5$	PASS
			VN	0	21.63	0.03	$\pm 2.5$	PASS
			VN	10	26.54	0.03	$\pm 2.5$	PASS
			VN	20	24.09	0.03	$\pm 2.5$	PASS
			VN	30	21.11	0.03	$\pm 2.5$	PASS
			VN	40	22.28	0.03	$\pm 2.5$	PASS
			VN	50	22.92	0.03	$\pm 2.5$	PASS
			VN	-30	29.96	0.04	$\pm 2.5$	PASS
GSM850	TM2	MCH	VN	-20	30.28	0.04	$\pm 2.5$	PASS
			VN	-10	20.60	0.02	$\pm 2.5$	PASS
			VN	0	24.60	0.03	$\pm 2.5$	PASS
			VN	10	22.15	0.03	$\pm 2.5$	PASS
			VN	20	21.70	0.03	$\pm 2.5$	PASS
			VN	30	24.99	0.03	$\pm 2.5$	PASS
			VN	40	25.18	0.03	$\pm 2.5$	PASS
			VN	50	21.63	0.03	$\pm 2.5$	PASS
			VN	-30	33.00	0.04	$\pm 2.5$	PASS
			VN	-20	23.96	0.03	$\pm 2.5$	PASS
GSM850	TM2	HCH	VN	-10	19.76	0.02	$\pm 2.5$	PASS
			VN	0	24.47	0.03	$\pm 2.5$	PASS
			VN	10	22.21	0.03	$\pm 2.5$	PASS
			VN	20	25.31	0.03	$\pm 2.5$	PASS
			VN	30	31.12	0.04	$\pm 2.5$	PASS
			VN	40	24.86	0.03	$\pm 2.5$	PASS
			VN	50	18.02	0.02	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM850	TM3	LCH	VN	-30	36.10	0.04	$\pm 2.5$	PASS
			VN	-20	39.78	0.05	$\pm 2.5$	PASS
			VN	-10	36.94	0.04	$\pm 2.5$	PASS
			VN	0	29.77	0.04	$\pm 2.5$	PASS
			VN	10	33.25	0.04	$\pm 2.5$	PASS
			VN	20	43.26	0.05	$\pm 2.5$	PASS
			VN	30	40.65	0.05	$\pm 2.5$	PASS
			VN	40	34.03	0.04	$\pm 2.5$	PASS
			VN	50	39.55	0.05	$\pm 2.5$	PASS
			VN	-30	34.45	0.04	$\pm 2.5$	PASS
GSM850	TM3	MCH	VN	-20	36.42	0.04	$\pm 2.5$	PASS
			VN	-10	40.55	0.05	$\pm 2.5$	PASS
			VN	0	39.91	0.05	$\pm 2.5$	PASS
			VN	10	32.93	0.04	$\pm 2.5$	PASS
			VN	20	44.23	0.05	$\pm 2.5$	PASS
			VN	30	33.22	0.04	$\pm 2.5$	PASS
			VN	40	34.03	0.04	$\pm 2.5$	PASS
			VN	50	41.10	0.05	$\pm 2.5$	PASS
			VN	-30	40.58	0.05	$\pm 2.5$	PASS
			VN	-20	33.19	0.04	$\pm 2.5$	PASS
GSM850	TM3	HCH	VN	-10	41.87	0.05	$\pm 2.5$	PASS
			VN	0	38.97	0.05	$\pm 2.5$	PASS
			VN	10	33.64	0.04	$\pm 2.5$	PASS
			VN	20	42.29	0.05	$\pm 2.5$	PASS
			VN	30	30.99	0.04	$\pm 2.5$	PASS
			VN	40	36.87	0.04	$\pm 2.5$	PASS
			VN	50	34.29	0.04	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM190 0	TM1	LCH	VN	-30	58.82	0.03	$\pm 2.5$	PASS
			VN	-20	75.42	0.04	$\pm 2.5$	PASS
			VN	-10	69.80	0.04	$\pm 2.5$	PASS
			VN	0	65.48	0.04	$\pm 2.5$	PASS
			VN	10	69.87	0.04	$\pm 2.5$	PASS
			VN	20	74.58	0.04	$\pm 2.5$	PASS
			VN	30	70.71	0.04	$\pm 2.5$	PASS
			VN	40	74.39	0.04	$\pm 2.5$	PASS
			VN	50	66.77	0.04	$\pm 2.5$	PASS
GSM190 0	TM1	MCH	VN	-30	75.94	0.04	$\pm 2.5$	PASS
			VN	-20	72.06	0.04	$\pm 2.5$	PASS
			VN	-10	75.48	0.04	$\pm 2.5$	PASS
			VN	0	68.58	0.04	$\pm 2.5$	PASS
			VN	10	76.52	0.04	$\pm 2.5$	PASS
			VN	20	74.84	0.04	$\pm 2.5$	PASS
			VN	30	72.77	0.04	$\pm 2.5$	PASS
			VN	40	69.16	0.04	$\pm 2.5$	PASS
			VN	50	75.68	0.04	$\pm 2.5$	PASS
GSM190 0	TM1	HCH	VN	-30	73.93	0.04	$\pm 2.5$	PASS
			VN	-20	73.93	0.04	$\pm 2.5$	PASS
			VN	-10	71.67	0.04	$\pm 2.5$	PASS
			VN	0	85.88	0.04	$\pm 2.5$	PASS
			VN	10	76.00	0.04	$\pm 2.5$	PASS
			VN	20	72.71	0.04	$\pm 2.5$	PASS
			VN	30	87.24	0.05	$\pm 2.5$	PASS
			VN	40	80.84	0.04	$\pm 2.5$	PASS
			VN	50	79.10	0.04	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM190 0	TM2	LCH	VN	-30	57.86	0.03	$\pm 2.5$	PASS
			VN	-20	60.44	0.03	$\pm 2.5$	PASS
			VN	-10	50.82	0.03	$\pm 2.5$	PASS
			VN	0	63.02	0.03	$\pm 2.5$	PASS
			VN	10	54.82	0.03	$\pm 2.5$	PASS
			VN	20	56.18	0.03	$\pm 2.5$	PASS
			VN	30	58.89	0.03	$\pm 2.5$	PASS
			VN	40	65.02	0.04	$\pm 2.5$	PASS
			VN	50	50.69	0.03	$\pm 2.5$	PASS
GSM190 0	TM2	MCH	VN	-30	64.51	0.03	$\pm 2.5$	PASS
			VN	-20	51.21	0.03	$\pm 2.5$	PASS
			VN	-10	45.65	0.02	$\pm 2.5$	PASS
			VN	0	51.21	0.03	$\pm 2.5$	PASS
			VN	10	59.34	0.03	$\pm 2.5$	PASS
			VN	20	52.43	0.03	$\pm 2.5$	PASS
			VN	30	57.02	0.03	$\pm 2.5$	PASS
			VN	40	42.10	0.02	$\pm 2.5$	PASS
			VN	50	66.51	0.04	$\pm 2.5$	PASS
GSM190 0	TM2	HCH	VN	-30	75.48	0.04	$\pm 2.5$	PASS
			VN	-20	60.31	0.03	$\pm 2.5$	PASS
			VN	-10	57.15	0.03	$\pm 2.5$	PASS
			VN	0	69.16	0.04	$\pm 2.5$	PASS
			VN	10	51.85	0.03	$\pm 2.5$	PASS
			VN	20	67.61	0.04	$\pm 2.5$	PASS
			VN	30	58.44	0.03	$\pm 2.5$	PASS
			VN	40	63.67	0.03	$\pm 2.5$	PASS
			VN	50	67.67	0.04	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
GSM190 0	TM3	LCH	VN	-30	57.76	0.03	$\pm 2.5$	PASS
			VN	-20	51.01	0.03	$\pm 2.5$	PASS
			VN	-10	61.54	0.03	$\pm 2.5$	PASS
			VN	0	47.40	0.03	$\pm 2.5$	PASS
			VN	10	66.73	0.04	$\pm 2.5$	PASS
			VN	20	48.14	0.03	$\pm 2.5$	PASS
			VN	30	74.74	0.04	$\pm 2.5$	PASS
			VN	40	54.21	0.03	$\pm 2.5$	PASS
			VN	50	61.47	0.03	$\pm 2.5$	PASS
GSM190 0	TM3	MCH	VN	-30	65.80	0.04	$\pm 2.5$	PASS
			VN	-20	47.40	0.03	$\pm 2.5$	PASS
			VN	-10	52.11	0.03	$\pm 2.5$	PASS
			VN	0	52.76	0.03	$\pm 2.5$	PASS
			VN	10	46.17	0.02	$\pm 2.5$	PASS
			VN	20	48.24	0.03	$\pm 2.5$	PASS
			VN	30	71.77	0.04	$\pm 2.5$	PASS
			VN	40	52.59	0.03	$\pm 2.5$	PASS
			VN	50	50.69	0.03	$\pm 2.5$	PASS
GSM190 0	TM3	HCH	VN	-30	71.22	0.04	$\pm 2.5$	PASS
			VN	-20	64.38	0.03	$\pm 2.5$	PASS
			VN	-10	64.02	0.03	$\pm 2.5$	PASS
			VN	0	55.18	0.03	$\pm 2.5$	PASS
			VN	10	52.76	0.03	$\pm 2.5$	PASS
			VN	20	58.34	0.03	$\pm 2.5$	PASS
			VN	30	61.67	0.03	$\pm 2.5$	PASS
			VN	40	69.29	0.04	$\pm 2.5$	PASS
			VN	50	83.81	0.04	$\pm 2.5$	PASS

**Frequency Error vs. Voltage:**

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 850	TM1	LCH	TN	VL	14.88	0.02	$\pm 2.5$	PASS
			TN	VN	11.67	0.01	$\pm 2.5$	PASS
			TN	VH	16.48	0.02	$\pm 2.5$	PASS
		MCH	TN	VL	19.91	0.02	$\pm 2.5$	PASS
			TN	VN	11.67	0.02	$\pm 2.5$	PASS
			TN	VH	16.71	0.02	$\pm 2.5$	PASS
		HCH	TN	VL	13.50	0.02	$\pm 2.5$	PASS
			TN	VN	11.67	0.02	$\pm 2.5$	PASS
			TN	VH	14.19	0.02	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 1900	TM1	LCH	TN	VL	35.93	0.02	$\pm 2.5$	PASS
			TN	VN	35.93	0.02	$\pm 2.5$	PASS
			TN	VH	36.39	0.02	$\pm 2.5$	PASS
		MCH	TN	VL	38.68	0.02	$\pm 2.5$	PASS
			TN	VN	35.93	0.02	$\pm 2.5$	PASS
			TN	VH	46.01	0.02	$\pm 2.5$	PASS
		HCH	TN	VL	47.61	0.02	$\pm 2.5$	PASS
			TN	VN	35.93	0.02	$\pm 2.5$	PASS
			TN	VH	55.85	0.03	$\pm 2.5$	PASS

**Frequency Error vs. Temperature:**


Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
WCDMA 850	TM1	LCH	VN	-30	20.83	0.03	±2.5	PASS
			VN	-20	14.42	0.02	±2.5	PASS
			VN	-10	17.40	0.02	±2.5	PASS
			VN	0	16.25	0.02	±2.5	PASS
			VN	10	13.96	0.02	±2.5	PASS
			VN	20	12.59	0.02	±2.5	PASS
			VN	30	13.50	0.02	±2.5	PASS
			VN	40	15.79	0.02	±2.5	PASS
			VN	50	19.00	0.02	±2.5	PASS
WCDMA 850	TM1	MCH	VN	-30	10.99	0.01	±2.5	PASS
			VN	-20	12.13	0.01	±2.5	PASS
			VN	-10	19.45	0.02	±2.5	PASS
			VN	0	14.19	0.02	±2.5	PASS
			VN	10	15.34	0.02	±2.5	PASS
			VN	20	9.16	0.01	±2.5	PASS
			VN	30	15.11	0.02	±2.5	PASS
			VN	40	19.68	0.02	±2.5	PASS
			VN	50	18.77	0.02	±2.5	PASS
WCDMA 850	TM1	HCH	VN	-30	13.50	0.02	±2.5	PASS
			VN	-20	16.25	0.02	±2.5	PASS
			VN	-10	15.34	0.02	±2.5	PASS
			VN	0	18.77	0.02	±2.5	PASS
			VN	10	13.50	0.02	±2.5	PASS
			VN	20	13.73	0.02	±2.5	PASS
			VN	30	20.60	0.02	±2.5	PASS
			VN	40	-9.38	-0.01	±2.5	PASS
			VN	50	21.51	0.03	±2.5	PASS


Test Band	Test Mode	Test Channel	Test Volt.	Test Temp .	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm )	Verdict
WCDMA 1900	TM1	LCH	VN	-30	42.57	0.02	$\pm 2.5$	PASS
			VN	-20	55.16	0.03	$\pm 2.5$	PASS
			VN	-10	45.78	0.02	$\pm 2.5$	PASS
			VN	0	38.22	0.02	$\pm 2.5$	PASS
			VN	10	39.60	0.02	$\pm 2.5$	PASS
			VN	20	30.67	0.02	$\pm 2.5$	PASS
			VN	30	44.17	0.02	$\pm 2.5$	PASS
			VN	40	39.60	0.02	$\pm 2.5$	PASS
			VN	50	39.83	0.02	$\pm 2.5$	PASS
WCDMA 1900	TM1	MCH	VN	-30	41.43	0.02	$\pm 2.5$	PASS
			VN	-20	39.37	0.02	$\pm 2.5$	PASS
			VN	-10	41.89	0.02	$\pm 2.5$	PASS
			VN	0	43.95	0.02	$\pm 2.5$	PASS
			VN	10	43.49	0.02	$\pm 2.5$	PASS
			VN	20	40.28	0.02	$\pm 2.5$	PASS
			VN	30	46.92	0.02	$\pm 2.5$	PASS
			VN	40	41.89	0.02	$\pm 2.5$	PASS
			VN	50	41.66	0.02	$\pm 2.5$	PASS
WCDMA 1900	TM1	HCH	VN	-30	41.20	0.02	$\pm 2.5$	PASS
			VN	-20	52.64	0.03	$\pm 2.5$	PASS
			VN	-10	45.55	0.02	$\pm 2.5$	PASS
			VN	0	52.19	0.03	$\pm 2.5$	PASS
			VN	10	41.43	0.02	$\pm 2.5$	PASS
			VN	20	41.20	0.02	$\pm 2.5$	PASS
			VN	30	51.73	0.03	$\pm 2.5$	PASS
			VN	40	53.79	0.03	$\pm 2.5$	PASS
			VN	50	47.15	0.02	$\pm 2.5$	PASS

**PHOTOGRAPHS OF TEST SETUP**  
**CONDUCTED EMISSION**




**RADIATED SPURIOUS EMISSION**

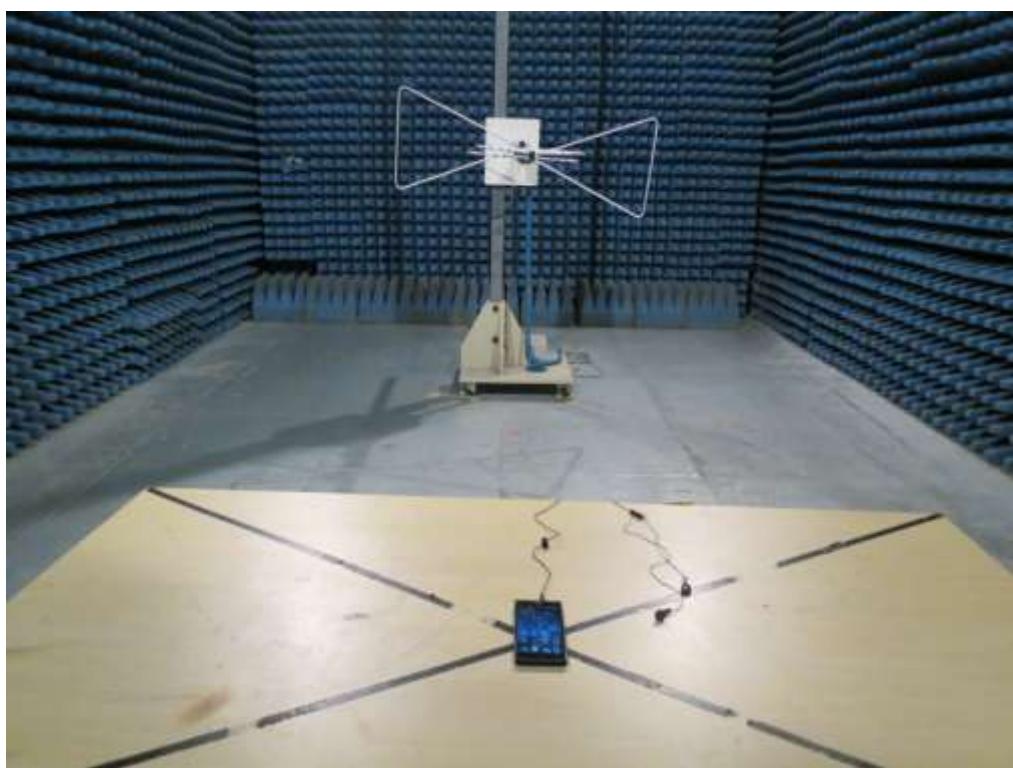

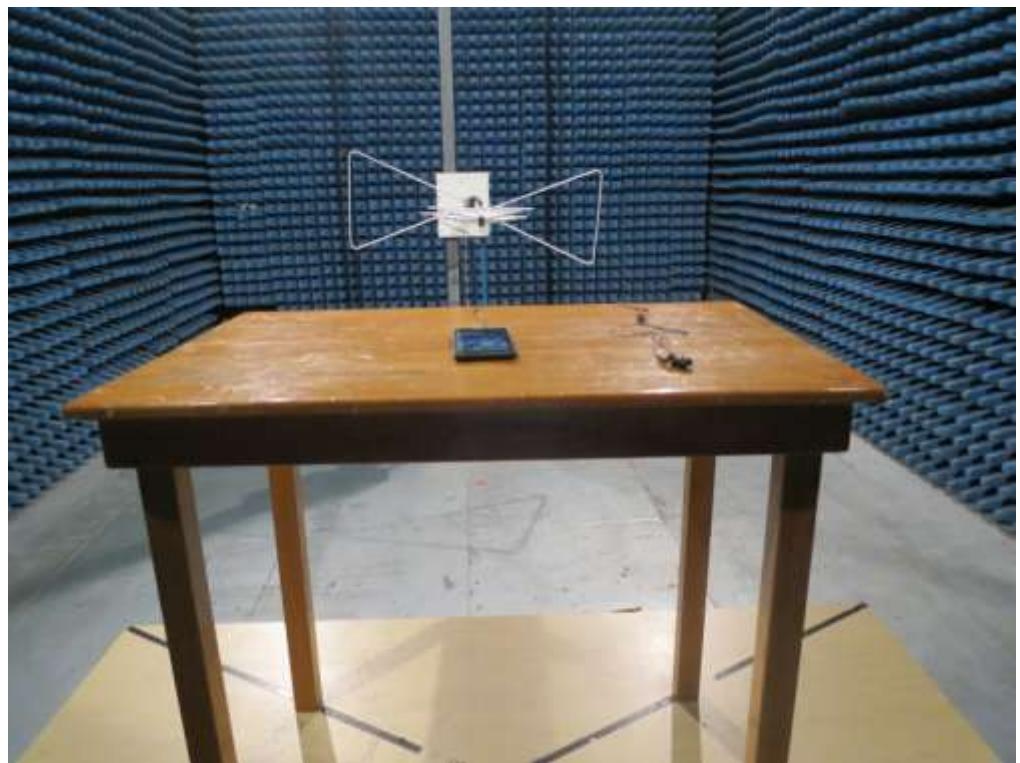

**PHOTOGRAPHS OF EUT**  
**TOTAL VIEW OF EUT**

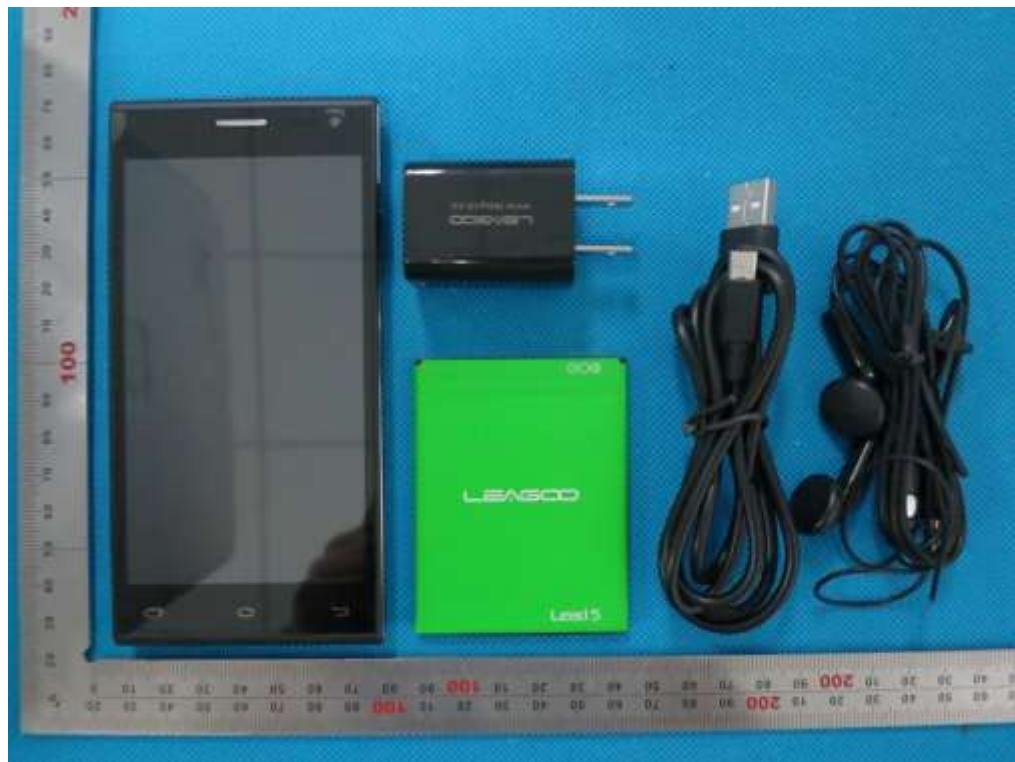

**TOP VIEW OF EUT**



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT

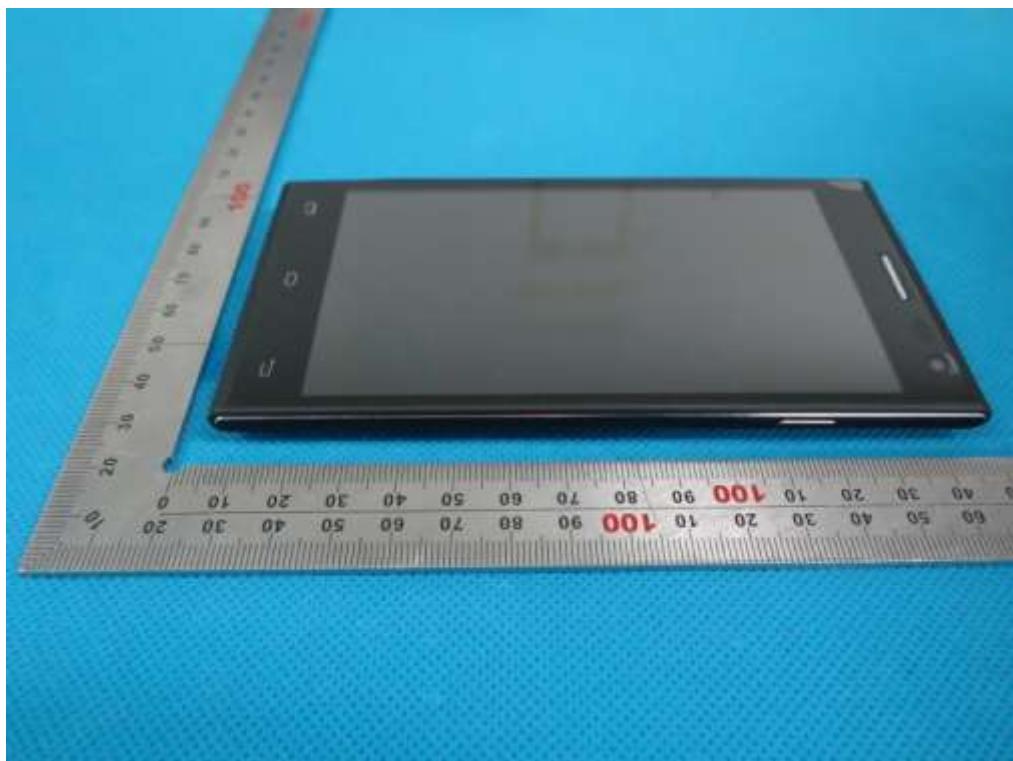


BT&WIFI  
Antenna


OPEN VIEW OF EUT-1



OPEN VIEW OF EUT-2

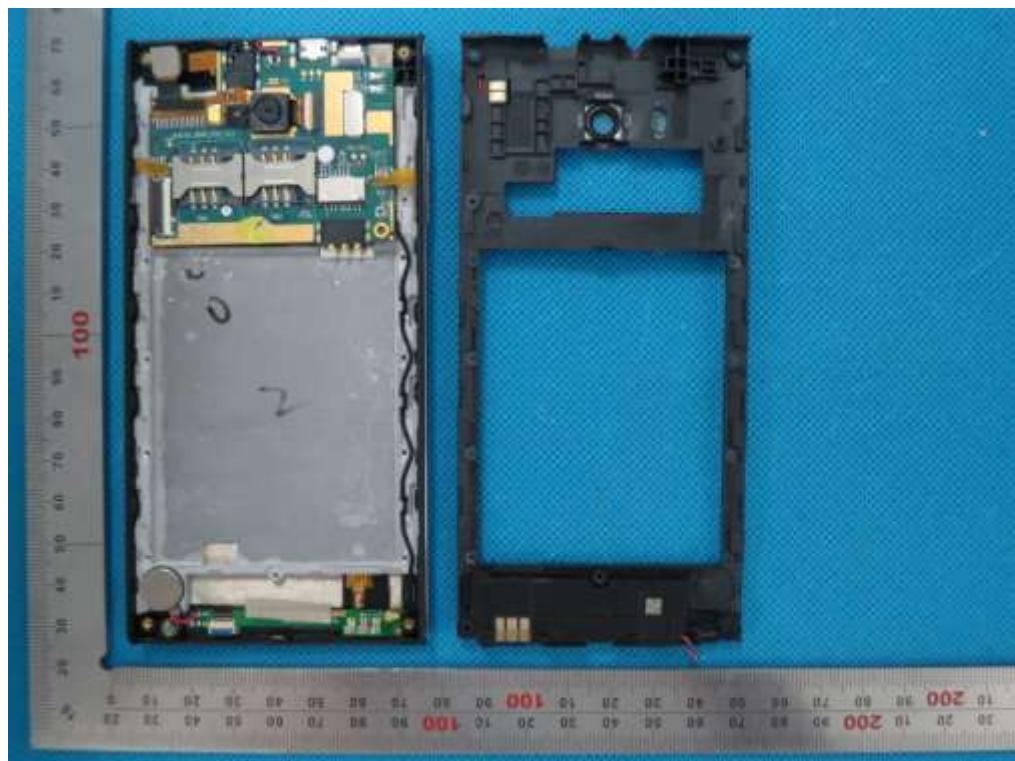


OPEN VIEW OF EUT-3

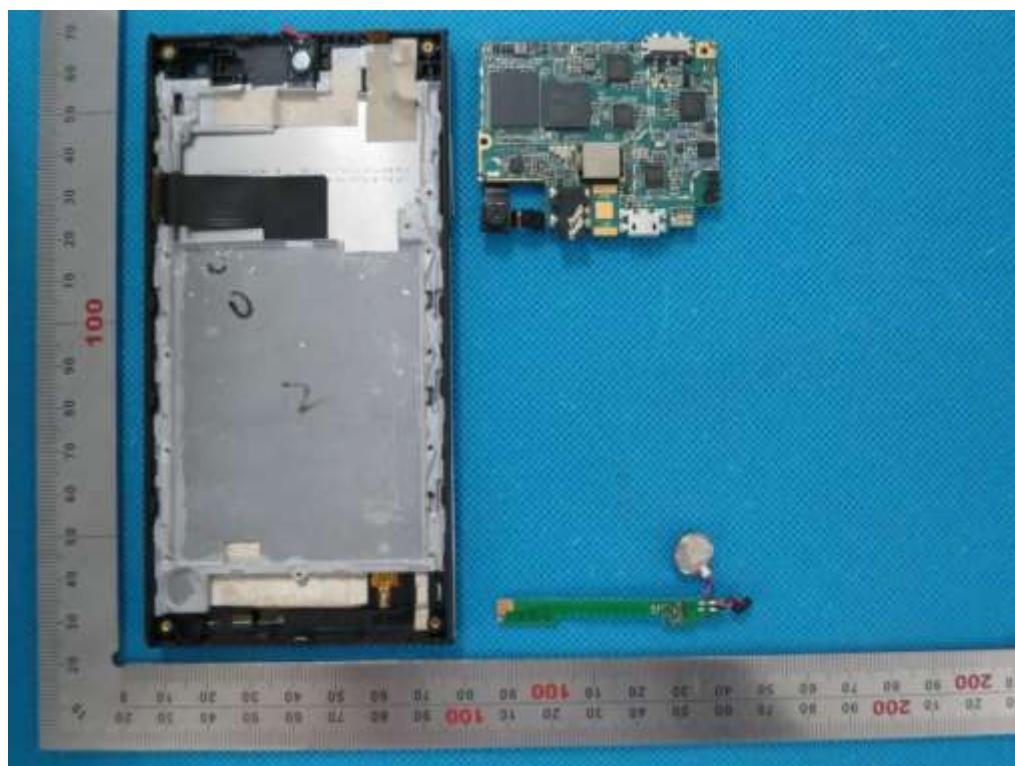

INTERNAL VIEW OF EUT-1



INTERNAL VIEW OF EUT-2

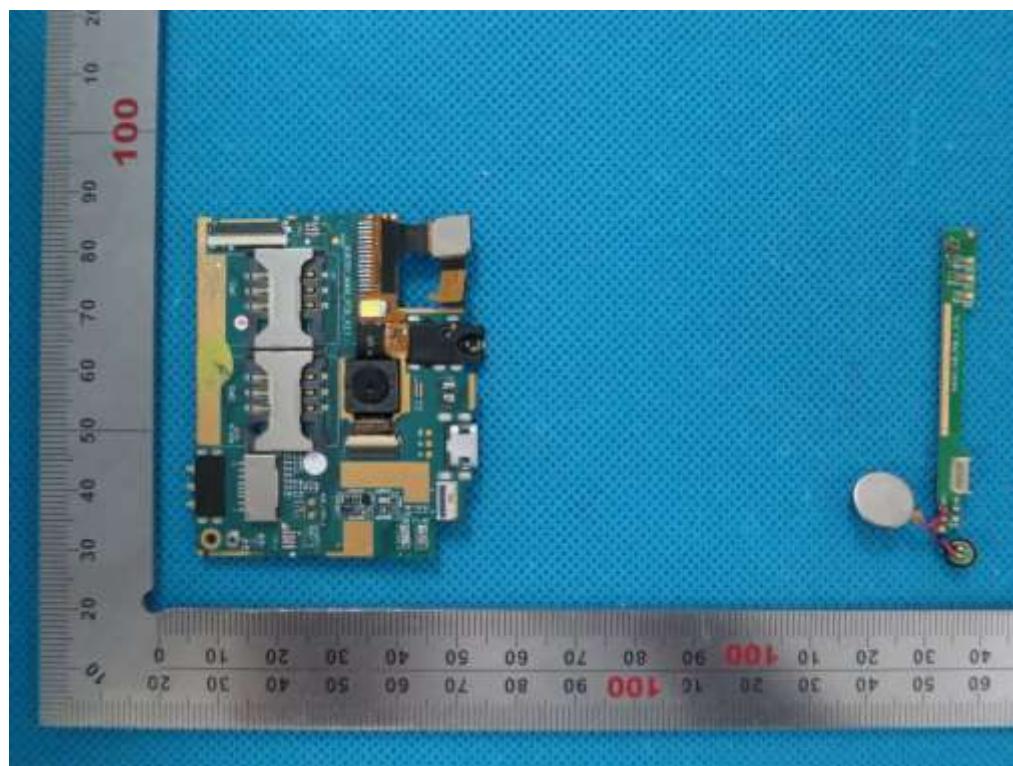

----END OF REPORT----