



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2024/11/27

Temperature:22 °C

-20.0 dBm

Time: 下午 02:23:53

Humidity:55 %

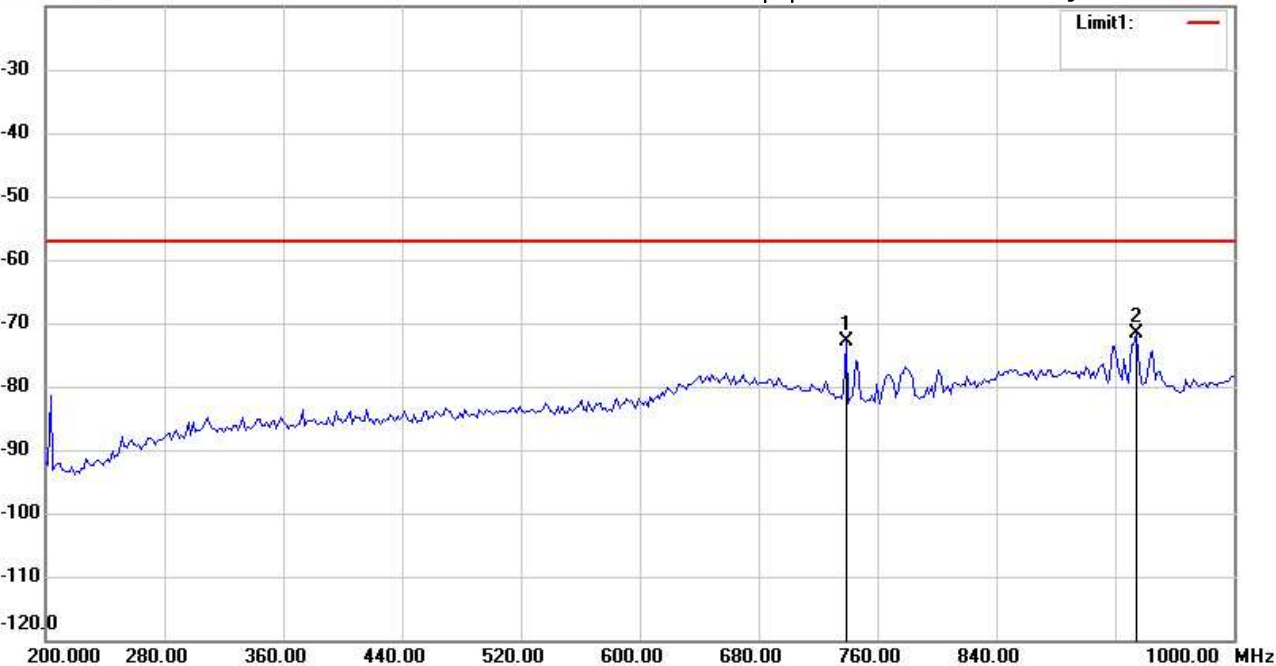

Site : 966A Chamber

Condition : ETSI EN300_422-RX_Spurious

EUT : W6M22409-23762

M/N:

Test Mode : Rx 607MHz

Note :

Polarization: **Horizontal**

Power : 3.7 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	738.6774	-68.17	peak	-4.72	-72.89	-57.00	150	165	-15.89	
*	934.2685	-68.49	peak	-3.10	-71.59	-57.00	150	85	-14.59	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2024/11/27

Temperature:22 °C

-20.0 dBm

Time: 下午 02:26:21

Humidity:55 %

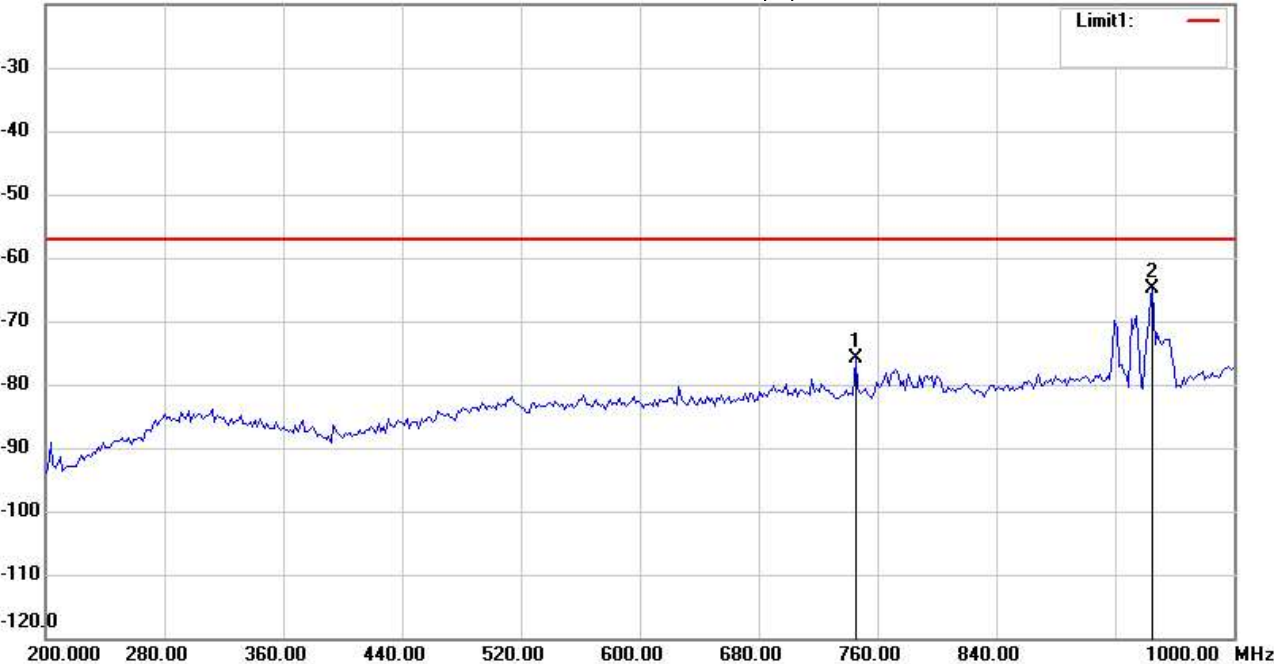

Site : 966A Chamber

Condition : ETSI EN300_422-RX_Spurious

EUT : W6M22409-23762

M/N:

Test Mode : Rx 607MHz

Note :

Polarization: Vertical

Power : 3.7 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	745.0902	-71.64	peak	-4.29	-75.93	-57.00	150	330	-18.93	
*	945.4910	-61.77	peak	-3.20	-64.97	-57.00	150	270	-7.97	



Address: No. 99, Sec. 1, Balian Rd., Xizhi Dist., New Taipei City
Tel: +886-2-2646-1508
Fax: +886-2-2646-1533

Radiated Emission Measurement

Operator: Sora

File : 3

Data : #1


Date: 2024/11/27

Temperature: 22 °C

-20.0 dBm

Time: 上午 10:28:32

Humidity: 55 %

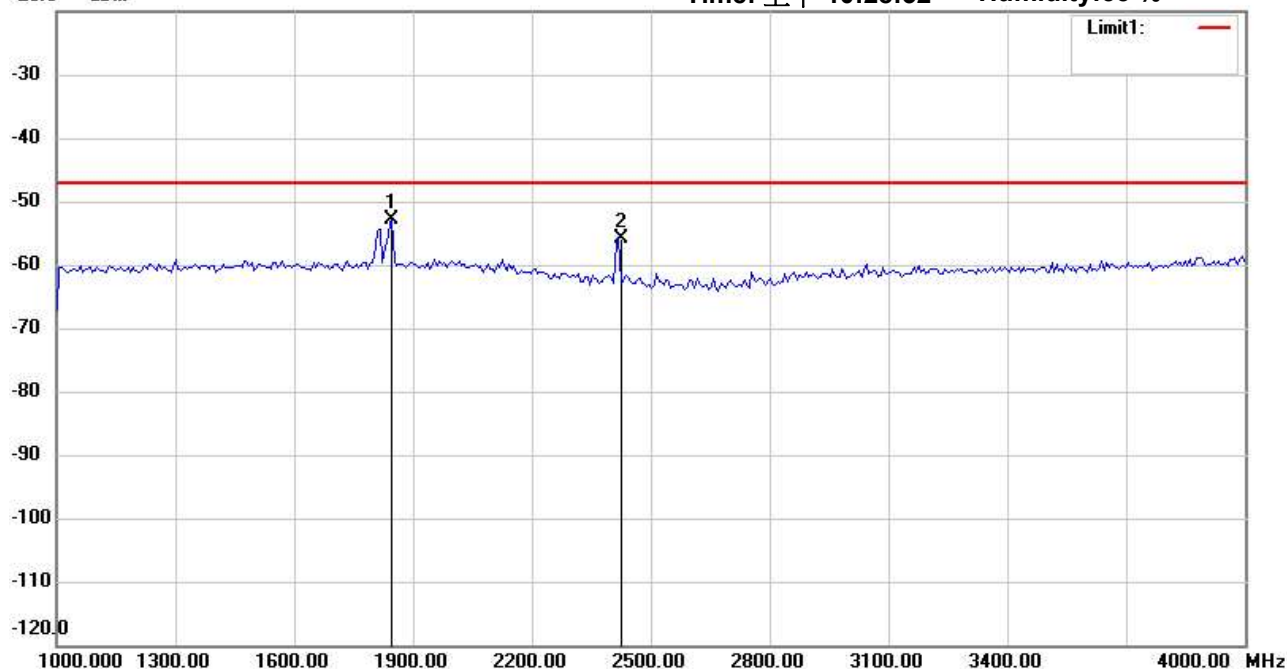

Site : 966A Chamber

Condition : ETSI EN300_422-RX_Spurious

EUT : W6M22409-23762

M/N:

Test Mode : Rx 607MHz

Note :

Polarization: Horizontal

Power : 3.7 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1847.695	-56.71	peak	3.74	-52.97	-47.00	150	115	-5.97	
	2418.838	-57.27	peak	1.42	-55.85	-47.00	150	190	-8.85	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2024/11/27

Temperature:22 °C

-20.0 dBm

Time: 上午 10:30:53

Humidity:55 %

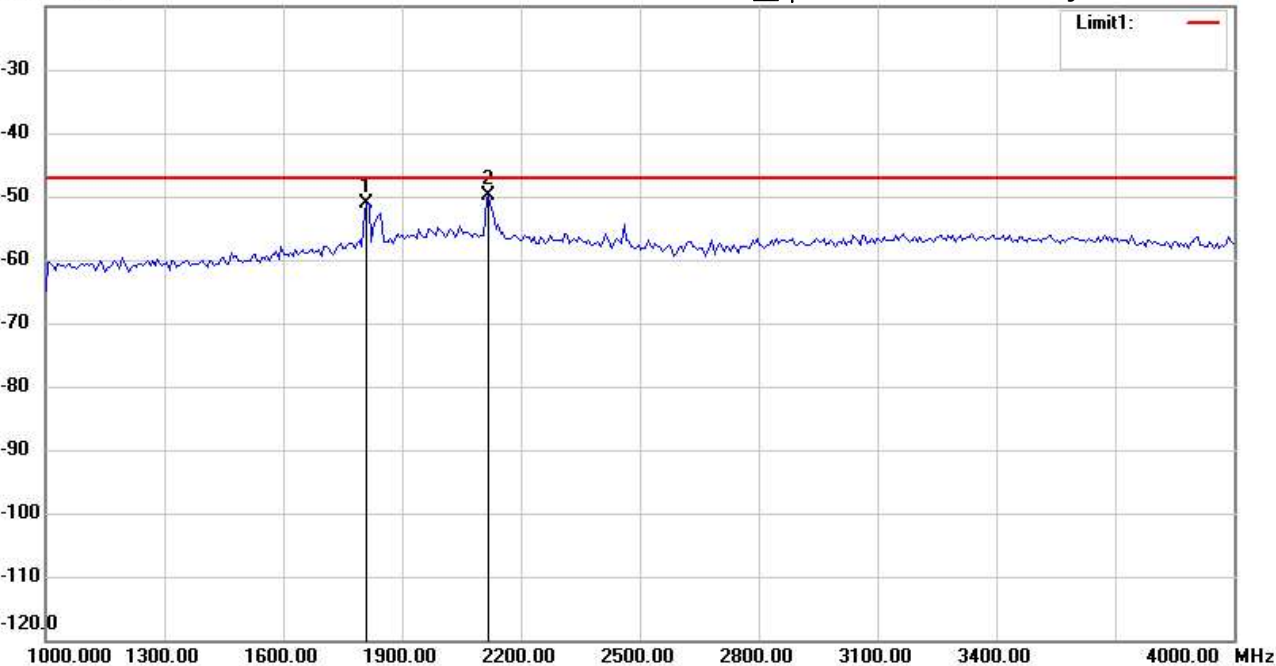

Site : 966A Chamber

Condition : ETSI EN300_422-RX_Spurious

EUT : W6M22409-23762

M/N:

Test Mode : Rx 607MHz

Note :

Polarization: Vertical

Power : 3.7 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1811.623	-57.55	peak	6.49	-51.06	-47.00	150	245	-4.06	
*	2118.236	-57.70	peak	7.79	-49.91	-47.00	150	305	-2.91	