FCC Test Report

Report No.: AGC02200141002FE08

FCC ID : 2ADNOSPB411

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: SunPort (Smart Meter)

BRAND NAME : SunPortTM

MODEL NAME : SPB411

CLIENT : Plug.Solar, LLC

DATE OF ISSUE : Nov.11,2014

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 50

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Nov.11,2014	Valid	Original Report

Page 3 of 50

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2.GENERAL INFORMATION	6
2.2 RELATED SUBMITTAL(S)/GRANT(S)	
2.3TEST METHODOLOGY	
2.4 TEST FACILITY	
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	
2.7 MEASUREMENT UNCERTAINTY	
3. SYSTEM TEST CONFIGURATION	
3.2 EQUIPMENT USED IN TESTED SYSTEM	
3.3. SUMMARY OF TEST RESULTS	
4. DESCRIPTION OF TEST MODES	
5. ANTENNA REQUIREMENT 5.1. STANDARD APPLICABLE	
5.2. TEST RESULT	
6. TEST FACILITY	
7. RADIATED EMISSION	11
7.1 MEASUREMENT PROCEDURE	
7.3 LIMITS AND MEASUREMENT RESULT	
7.3 LIMITS AND MEASUREMENT RESULT	
8. BAND EDGE EMISSION	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP	26
8.3. TEST RESULT	27
9. 6DB BANDWIDTH	
9.1. TEST PROCEDURE	
9.2. SUMMARY OF TEST RESULTS/PLOTS	
10. CONDUCTED OUTPUT POWER	33
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
10.3. LIMITS AND MEASUREMENT RESULT	
11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
11.1 MEASUREMENT PROCEDURE	0.0

Page 4 of 50

APP	ENDIX B: PHOTOGRAPHS OF EUT	45
APP	ENDIX A: PHOTOGRAPHS OF TEST SETUP	43
12	2.5 TEST RESULT OF POWER LINE	41
12	2.4 FINAL TEST PROCEDURE	40
12	2.3 PRELIMINARY PROCEDURE	40
12	2.2 TEST SETUP	39
	2.1 LIMITS	
12 F	CC LINE CONDUCTED EMISSION TEST	30
1	1.3 LIMITS AND MEASUREMENT RESULT	36
11	1.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36

Page 5 of 50

1. VERIFICATION OF COMPLIANCE

Applicant	Plug.Solar, LLC
Address	12514 Menual Blvd NE Albuquerque, NM 87112 United States of America
Manufacturer	Revogi Innovation Co., Ltd.
Address	2018,Anhui Building,No.6007,Shennan Boulevard,Shenzhen,Guangdong,China
Product Designation	SunPort (Smart Meter)
Brand Name	SunPort [™]
Test Model	SPB411
Date of test	Nov.09, 2014 to Nov.10, 2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF (2013-03-01)

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Water Zuo Nov.11,2014

Checked By

Forrest Lei Nov.11,2014

Authorized By

Solger Zhang Nov.11,2014

Page 6 of 50

2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "SunPort (Smart Meter)". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
Bluetooth Version	V4.0		
Modulation	GFSK		
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)		
Antenna Designation	PCB Antenna		
Antenna Gain	0dBi		
Hardware Version	V 0.03		
Software Version	V 1.08		
Power Supply	Input:100-120V~/60Hz/10A Output:100-120V~/60Hz/10A		

Note: The EUT is equipped with the Bluetooth Chip CC2541which complies with Bluetooth V 4.0, including the EDR function.

But for this device The EUT supports Bluetooth Low Energy Mode only.

End-user is not able to change the settings and enable any additional functionality by himself.

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ADNOSPB411** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

2.3TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The test has been referenced the KDB 558074 D01 DTS Meas Guidance v03r02

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance (Shenzhen) Co, Ltd

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China.

FCC register No.: 259865

Page 7 of 50

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 MEASUREMENT UNCERTAINTY

Radiation Emission:+/-3.2


Conduction Emission:+/-2.5

Page 8 of 50


3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration: Normal Operating



Configuration: Continuous TX



3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	SunPort	SunPort [™]	SPB411	EUT
2	PC	APPLE	A1465	A.E
3	Control box	N/A	N/A	A.E

3.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

Page 9 of 50

4. DESCRIPTION OF TEST MODES

The EUT has been operated in one modulation: GFSK.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:

- 1. All the test modes have been verified, only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Transmitting duty cycle >98%, The average correction factor is about -0.18

5. ANTENNA REQUIREMENT

5.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.

Page 10 of 50

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd				
Location 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Xixiang, Bao'an District, Shenzhen, Guangdong, China					
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.				

ALL TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/16/2014	07/15/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/16/2014	07/15/2015
EXA Signal Analyzer	Agilent	N9010A		02/28/2014	02/27/2015
Amplifier	EM	EM30180	0607030	02/28/2014	02/27/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/16/2014	07/15/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/16/2014	07/15/2015
Bilogical Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
LISN	R&S	ESH3-Z5	8389791009	07/16/2014	07/15/2015
Loop Antenna	Daze	ZN30900N	SEL0097	07/16/2014	07/15/2015
Isolation Transformer	LETEAC	LTBK		07/16/2014	07/15/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 11 of 50

7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported for above 1GHz, and the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 12 of 50

7.2 TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

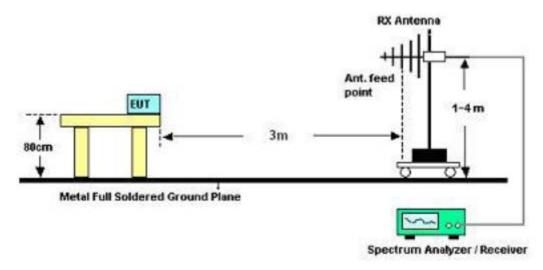

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

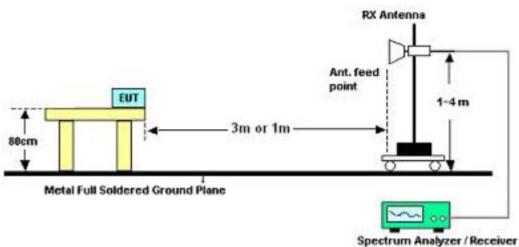

Page 13 of 50

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

7.4 TEST RESULT (Worst Modulation: GFSK)


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 14 of 50

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

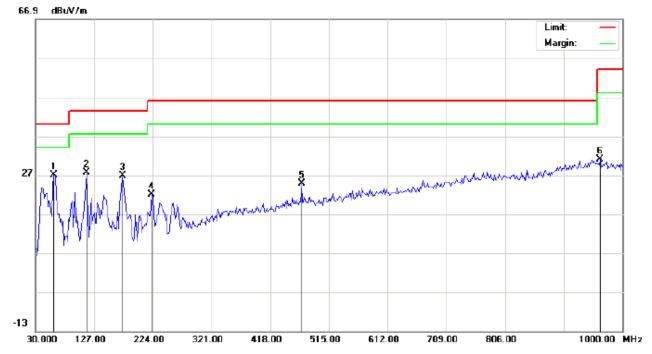

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu∀/m	dB		cm	degree	
1	*	60.7167	15.82	11.09	26.91	40.00	-13.09	peak			
2		114.0667	16.08	11.45	27.53	43.50	-15.97	peak			
3		173.8833	14.35	12.37	26.72	43.50	-16.78	peak			
4		222.3833	9.25	12.85	22.10	46.00	-23.90	peak			
5		469.7333	4.05	20.80	24.85	46.00	-21.15	peak			
6		962.8167	1.07	29.88	30.95	54.00	-23.05	peak			

Page 15 of 50

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

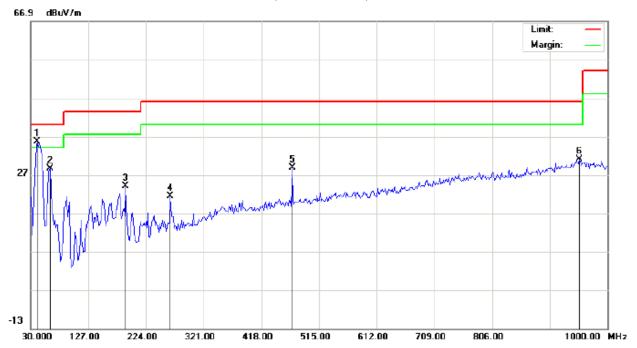

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	41.3167	26.74	8.81	35.55	40.00	-4.45	peak			
2		62.3333	21.33	7.24	28.57	40.00	-11.43	peak			
3		190.0500	12.39	11.52	23.91	43.50	-19.59	peak			
4		264.4166	7.02	14.34	21.36	46.00	-24.64	peak			
5		469.7333	8.06	20.80	28.86	46.00	-17.14	peak			
6		953.1167	1.05	29.97	31.02	46.00	-14.98	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 16 of 50

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

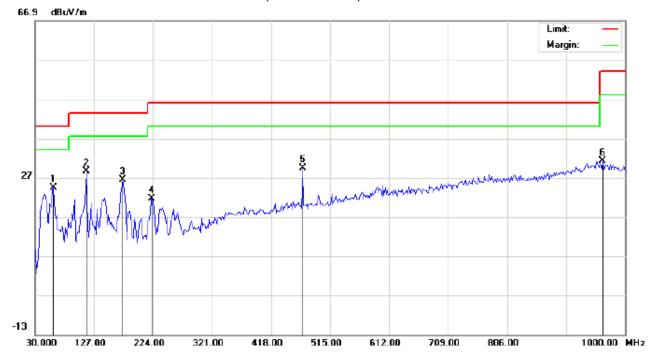

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		60.7167	13.31	11.09	24.40	40.00	-15.60	peak			
2	*	114.0667	17.13	11.45	28.58	43.50	-14.92	peak			
3		173.8833	14.08	12.37	26.45	43.50	-17.05	peak			
4		222.3833	8.82	12.85	21.67	46.00	-24.33	peak			
5		469.7333	8.52	20.80	29.32	46.00	-16.68	peak			
6		962.8167	1.33	29.88	31.21	54.00	-22.79	peak			

Page 17 of 50

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

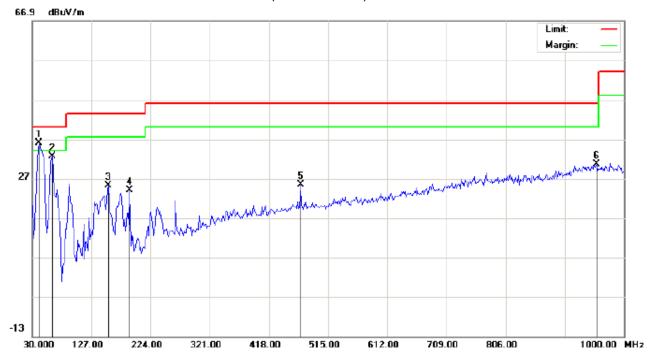

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	41.3167	27.21	8.81	36.02	40.00	-3.98	peak			
2		62.3333	25.39	7.24	32.63	40.00	-7.37	peak			
3		154.4832	9.99	15.29	25.28	43.50	-18.22	peak			
4		190.0500	12.57	11.52	24.09	43.50	-19.41	peak			
5		469.7333	4.59	20.80	25.39	46.00	-20.61	peak			
6		954.7333	0.56	29.95	30.51	46.00	-15.49	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 50

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

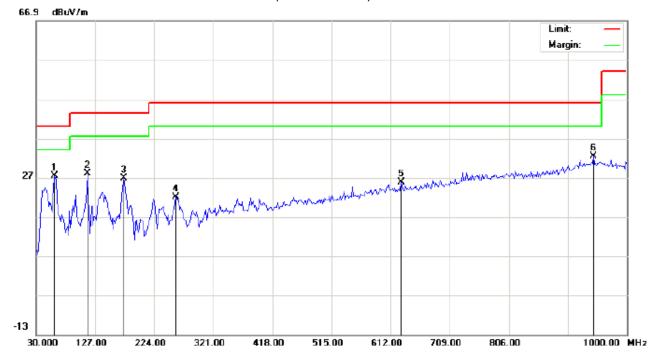

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	60.7167	16.37	11.09	27.46	40.00	-12.54	peak			
2		114.0667	16.54	11.45	27.99	43.50	-15.51	peak			
3		173.8833	14.47	12.37	26.84	43.50	-16.66	peak			
4		259.5667	7.83	14.19	22.02	46.00	-23.98	peak			
5		629.7833	2.05	23.80	25.85	46.00	-20.15	peak			
6		945.0333	2.49	29.86	32.35	46.00	-13.65	peak			

Page 19 of 50

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

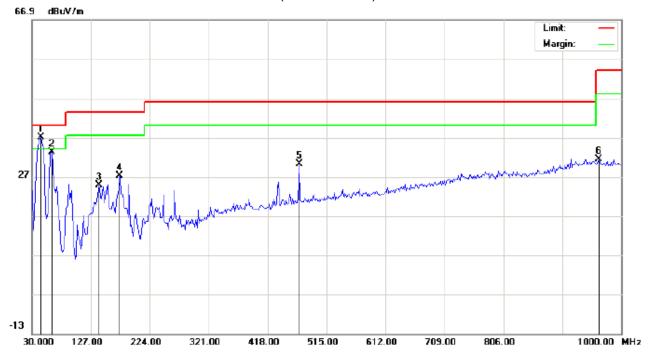

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %

EUT: SunPort Distance: 3m

M/N: SPB411

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	44.5500	28.40	8.60	37.00	40.00	-3.00	peak			
2		62.3333	25.98	7.24	33.22	40.00	-6.78	peak			
3		139.9333	9.72	15.17	24.89	43.50	-18.61	peak			
4		173.8833	12.67	14.46	27.13	43.50	-16.37	peak			
5		469.7333	9.37	20.80	30.17	46.00	-15.83	peak			
6		962.8167	1.53	29.88	31.41	54.00	-22.59	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 20 of 50

RADIATED EMISSION ABOVE 1GHz

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

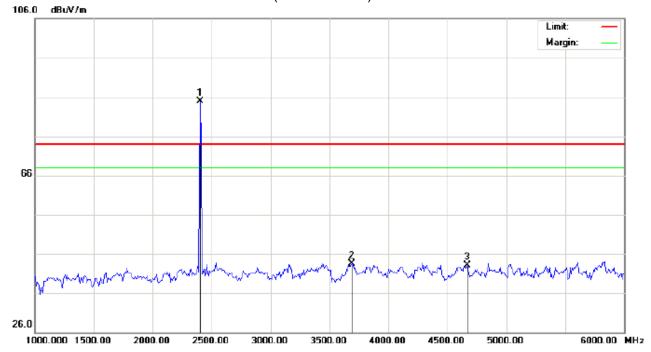

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	74.57	10.32	84.89	74.00	10.89	peak			
2		3691.667	30.19	13.29	43.48	74.00	-30.52	peak			
3		4666.667	35.70	7.33	43.03	74.00	-30.97	peak			

Page 21 of 50

RADIATED EMISSION TEST-(ABOVE 1GHZ)-LOW CHANNEL-VERTICAL

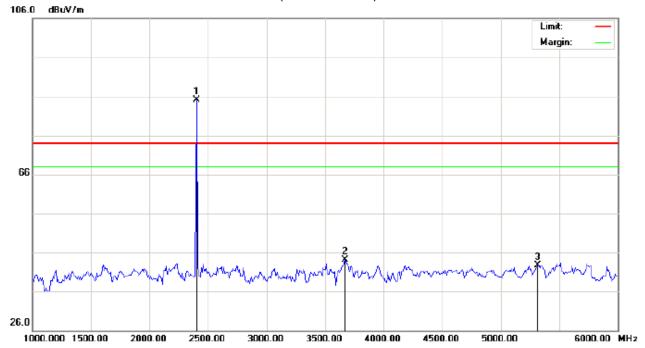

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	74.70	10.32	85.02	74.00	11.02	peak			
2		3666.667	30.91	13.14	44.05	74.00	-29.95	peak			
3		5316.667	40.93	1.86	42.79	74.00	-31.21	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 50

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

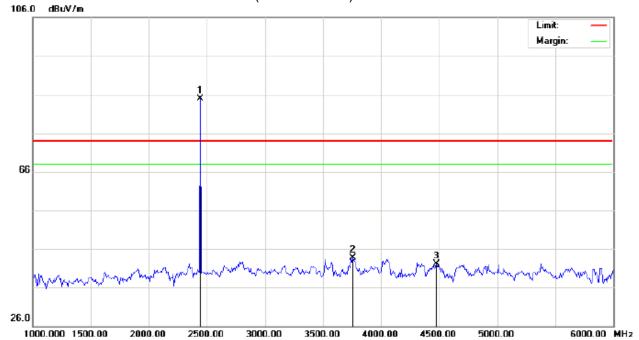

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2440.000	74.60	10.37	84.97	74.00	10.97	peak			
2		3758.333	29.95	13.70	43.65	74.00	-30.35	peak			
3		4475.000	34.75	7.30	42.05	74.00	-31.95	peak			

Page 23 of 50

RADIATED EMISSION TEST-(ABOVE 1GHZ)-MIDDLE CHANNEL-VERTICAL

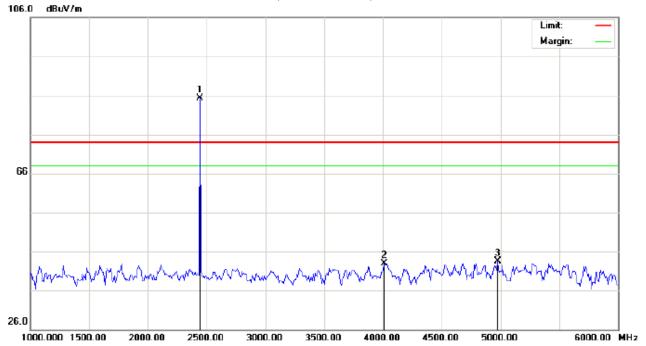

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2440.000	74.90	10.37	85.27	74.00	11.27	peak			
2		4008.333	27.92	15.05	42.97	74.00	-31.03	peak			
3		4975.000	35.35	8.13	43.48	74.00	-30.52	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 24 of 50

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

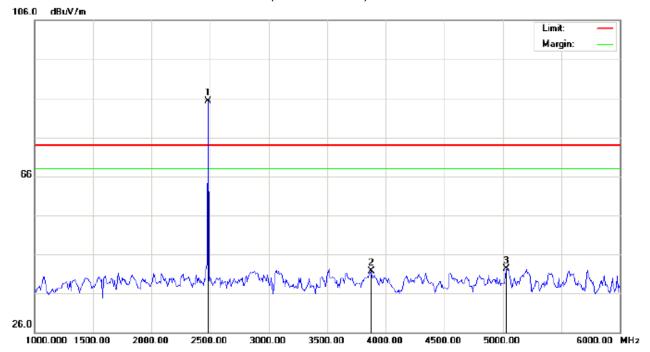

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	74.89	10.41	85.30	74.00	11.30	peak			
2		3875.000	27.25	14.42	41.67	74.00	-32.33	peak			
3		5033.333	34.80	7.53	42.33	74.00	-31.67	peak			

Page 25 of 50

RADIATED EMISSION TEST-(ABOVE 1GHZ)-HIGH CHANNEL-VERTICAL

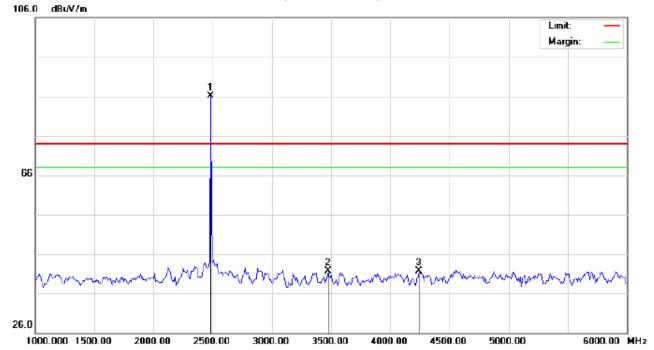

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.76	10.41	86.17	74.00	12.17	peak			
2		3475.000	29.56	12.09	41.65	74.00	-32.35	peak			
3		4241.667	30.50	11.18	41.68	74.00	-32.32	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 26 of 50

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, RBW>=100kHz, VBW>=3*RBW, Center frequency =Operation frequency
- 3. The band edges was measured and recorded.


8.2. TEST SET-UP

Radiated same as 7.2

Page 27 of 50

8.3. TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

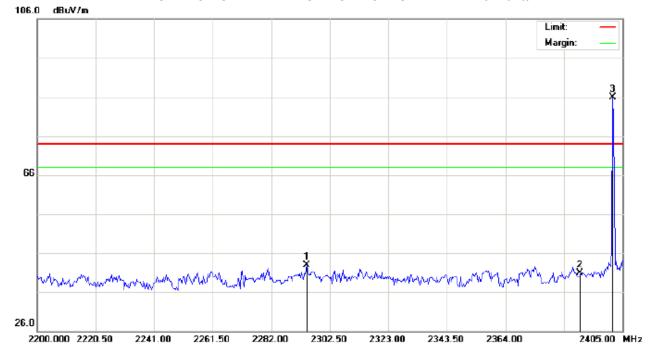

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2294.300	32.68	10.20	42.88	74.00	-31.12	peak			
2		2390.000	30.62	10.31	40.93	74.00	-33.07	peak			
3	*	2402.000	75.49	10.32	85.81	74.00	11.81	peak			

Page 28 of 50

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

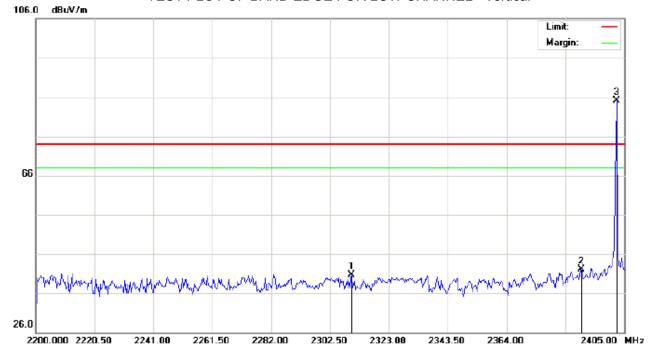

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: Low Channel TX

Note:

No.	No. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2310.017	30.51	10.22	40.73	74.00	-33.27	peak			
2		2390.000	31.85	10.31	42.16	74.00	-31.84	peak			
3	*	2402.000	74.76	10.32	85.08	74.00	11.08	peak			

Page 29 of 50

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

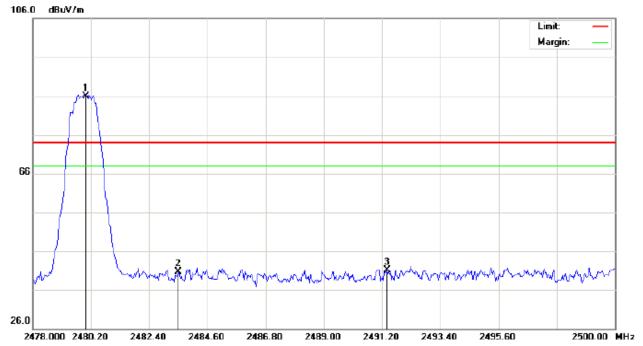

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.46	10.41	85.87	74.00	11.87	peak			
2		2483.500	30.25	10.41	40.66	74.00	-33.34	peak			
3		2491.383	30.77	10.42	41.19	74.00	-32.81	peak			

Page 30 of 50

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

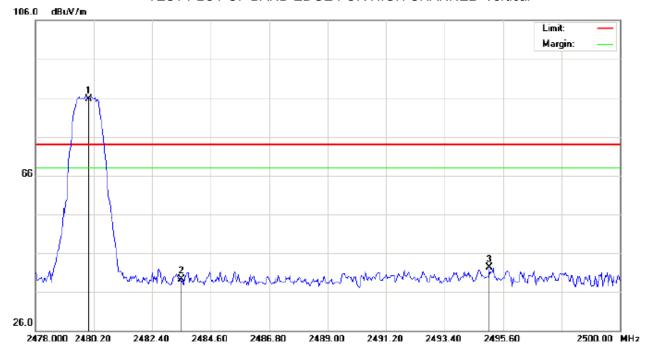

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: SunPort Distance:

M/N: SPB411

Mode: High Channel TX

Note:

No.	No. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	75.35	10.41	85.76	74.00	11.76	peak			
2		2483.500	28.87	10.41	39.28	74.00	-34.72	peak			
3		2495.087	31.92	10.42	42.34	74.00	-31.66	peak			

Page 31 of 50

9. 6DB BANDWIDTH


9.1. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥3*RBW.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. SUMMARY OF TEST RESULTS/PLOTS


Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	718.107		Pass
Middle	662.159	500KHz	Pass
High	679.058		Pass

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

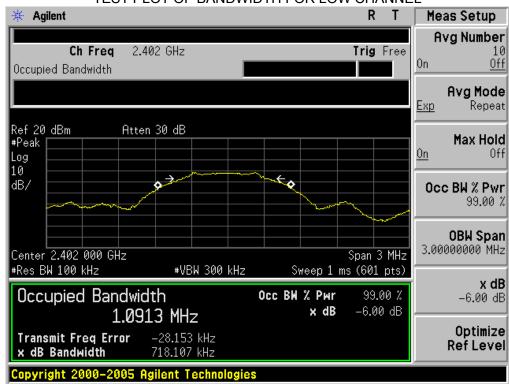


Page 32 of 50

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

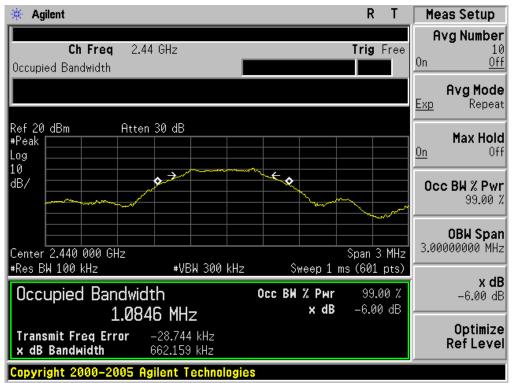

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

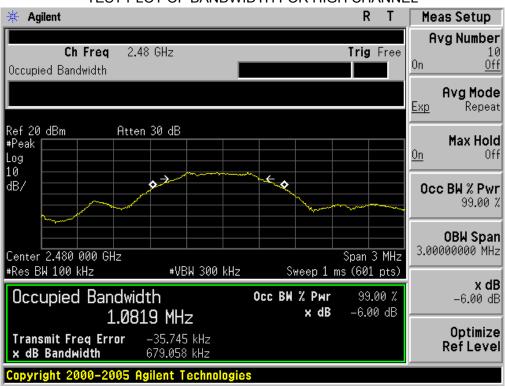

Page 33 of 50

10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE

For peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:
 - a) Set the RBW ≥ DTS bandwidth.
 - b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.
- 4. Allow the trace to stabilize.
- 5. Record the result form the Spectrum Analyzer.

For average power test:

- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 1W (30dBm).

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements


10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

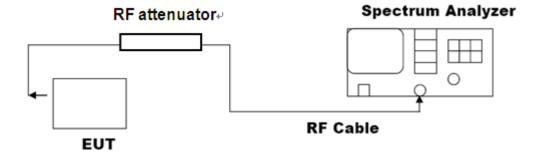


Page 34 of 50

10.3. LIMITS AND MEASUREMENT RESULT


Channel	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-11.51	-9.66	30	Pass
Middle Channel	-12.50	-10.61	30	Pass
High Channel	-11.79	-9.88	30	Pass




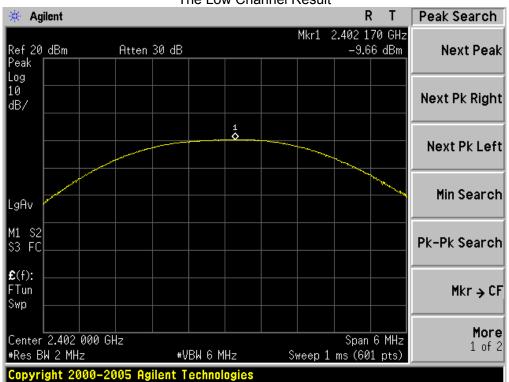

Page 35 of 50



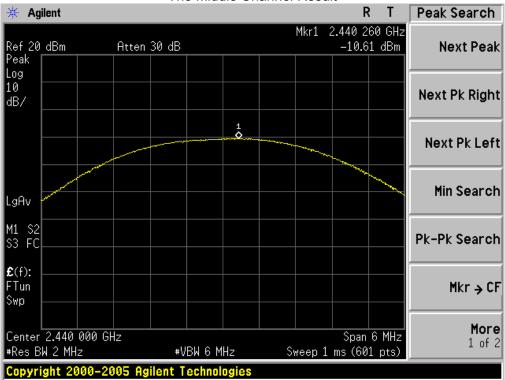

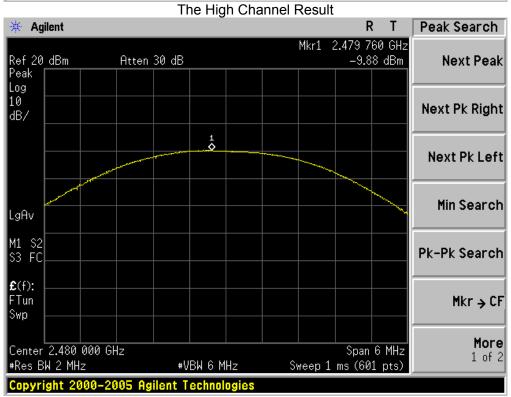


Page 36 of 50

11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY 11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the span to 1.5times the DTS bandwidth, RBW: 3kHz<=RBW<=100KHz, VBW>=3*RBW
- 4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

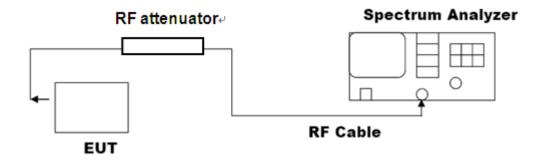


11.3 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm)	Limit (dBm)	Result	
Low Channel	-23.12	8	Pass	
Middle Channel	-23.73	8	Pass	
High Channel	-23.00	8	Pass	

Page 37 of 50

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

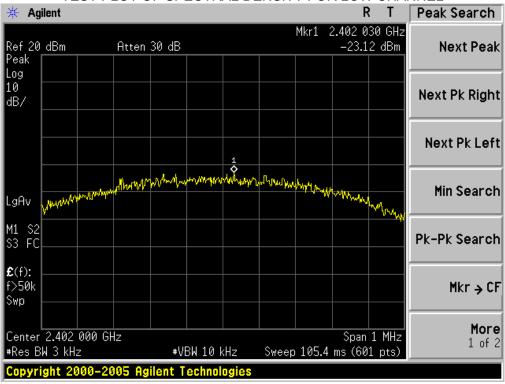




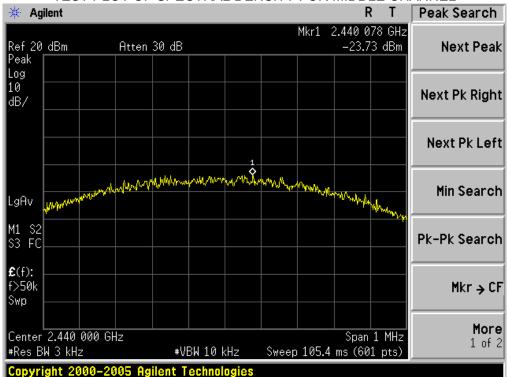

Page 38 of 50

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

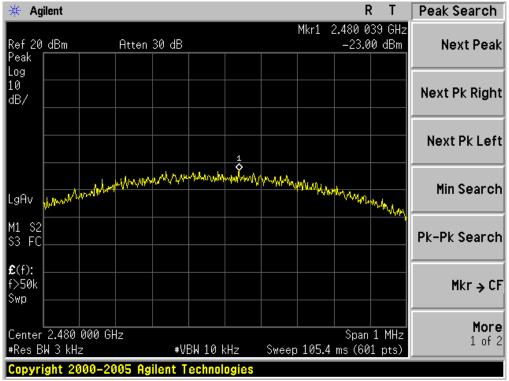

Page 39 of 50


12. FCC LINE CONDUCTED EMISSION TEST

12.1 LIMITS

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

^{**}Note: 1. The lower limit shall apply at the transition frequency.

12.2 TEST SETUP

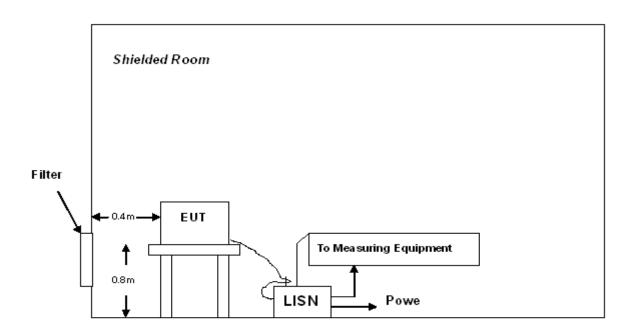

A: Powered through filter

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

Page 40 of 50

12.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by outlet which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Page 41 of 50

12.5 TEST RESULT OF POWER LINE

Line Conducted Emission Test Line 1-L

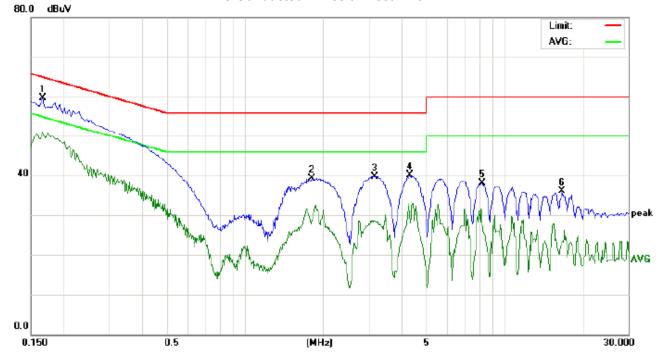

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: SunPort M/N: SPB411


Mode: Normal Operation

Note:

	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	Q.	AVG		
1	0.1660	49.44		40.83	10.18	59.62		51.01	65.15	55.15	-5.53	-4.14	Р	
2	1.8180	28.96		18.39	10.28	39.24		28.67	56.00	46.00	-16.76	-17.33	Р	
3	3.1660	29.23		17.94	10.54	39.77		28.48	56.00	46.00	-16.23	-17.52	Р	
4	4.3260	29.86		20.18	10.29	40.15		30.47	56.00	46.00	-15.85	-15.53	Р	
5	8.1980	27.72		17.98	10.35	38.07		28.33	60.00	50.00	-21.93	-21.67	Р	
6	16.6900	25.92		13.21	10.12	36.04		23.33	60.00	50.00	-23.96	-26.67	Р	

Page 42 of 50

Line Conducted Emission Test Line 2-N

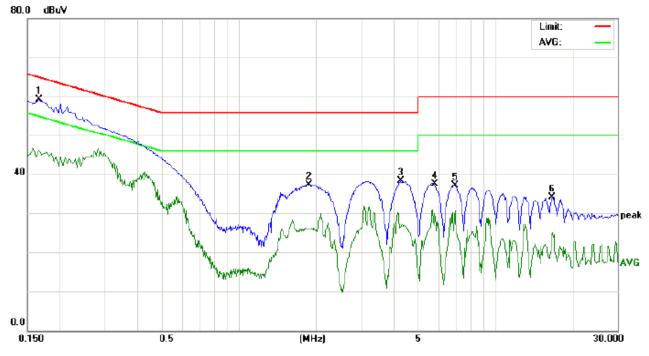

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %

EUT: SunPort M/N: SPB411

Mode: Normal Operation

Note:

LIMO I	Freq.	Reading_Level (dBuV)			Correct Factor				Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	49.19		35.97	10.18	59.37		46.15	65.15	55.15	-5.78	-9.00	Р	
2	1.8820	27.10		15.70	10.26	37.36		25.96	56.00	46.00	-18.64	-20.04	Р	
3	4.2819	27.95		16.22	10.31	38.26		26.53	56.00	46.00	-17.74	-19.47	Р	
4	5.8140	27.16		19.75	10.27	37.43		30.02	60.00	50.00	-22.57	-19.98	Р	
5	6.9620	26.69		20.24	10.36	37.05		30.60	60.00	50.00	-22.95	-19.40	Р	
6	16.6500	24.06		14.84	10.12	34.18		24.96	60.00	50.00	-25.82	-25.04	Р	


Page 43 of 50

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP





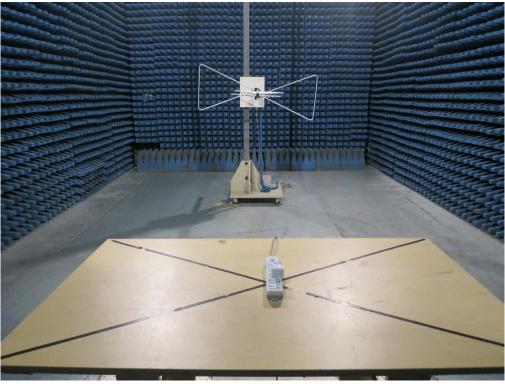

Report No.: AGC02200141002FE08 Page 44 of 50

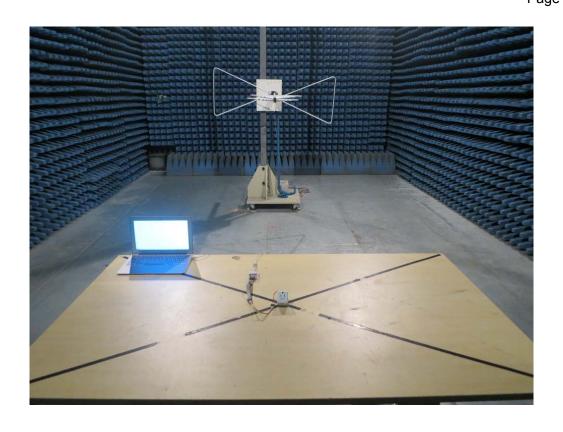

Page 45 of 50

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT




BOTTOM VIEW OF EUT




Page 46 of 50



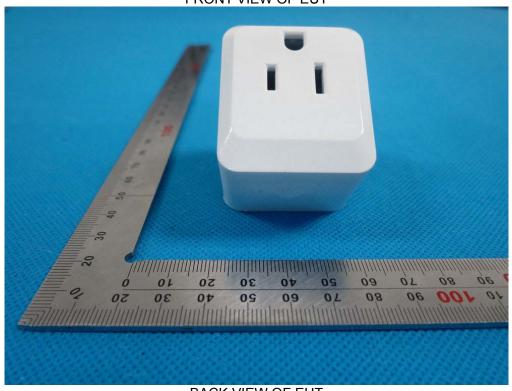




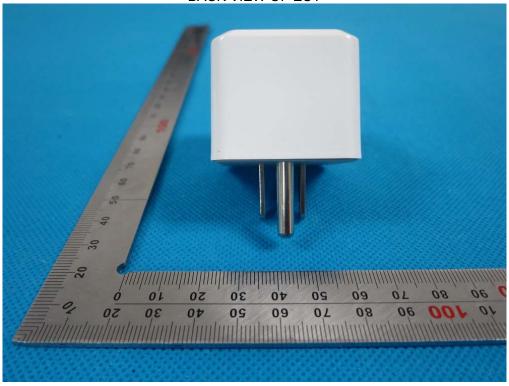


Page 47 of 50




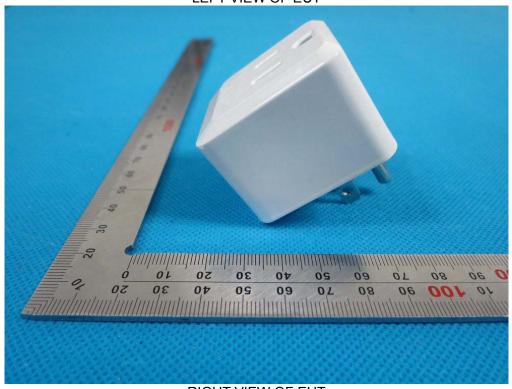




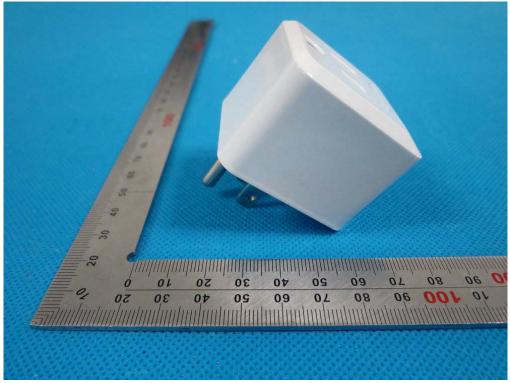



Page 48 of 50

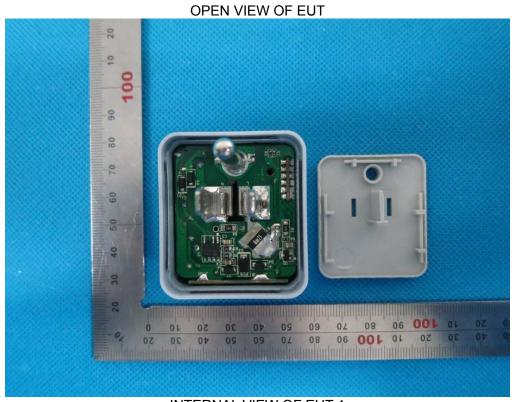

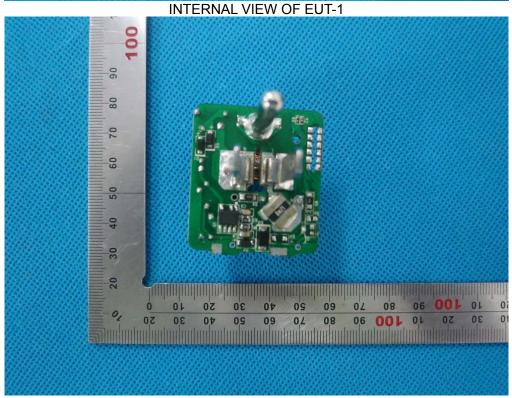



Page 49 of 50

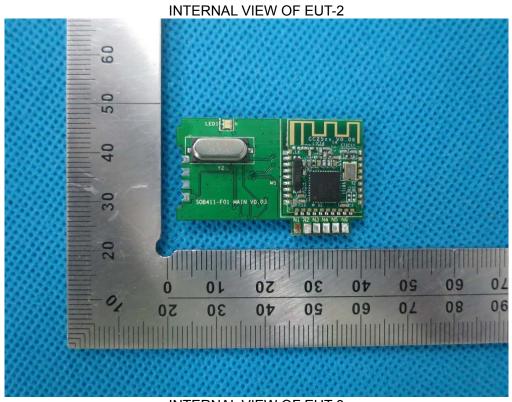

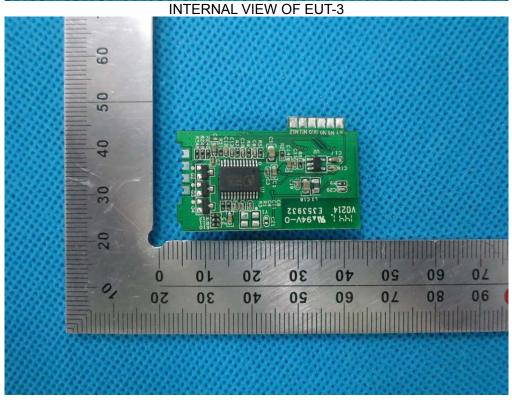

Report No.: AGC02200141002FE08 Page 50 of 50

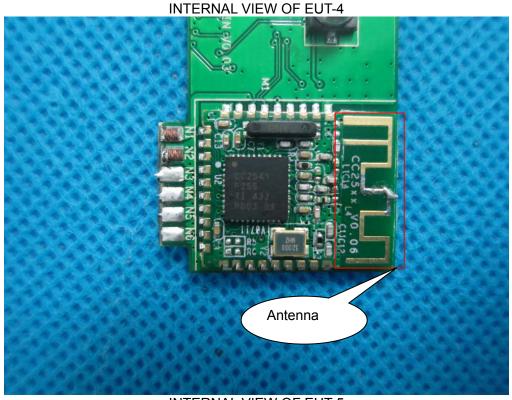

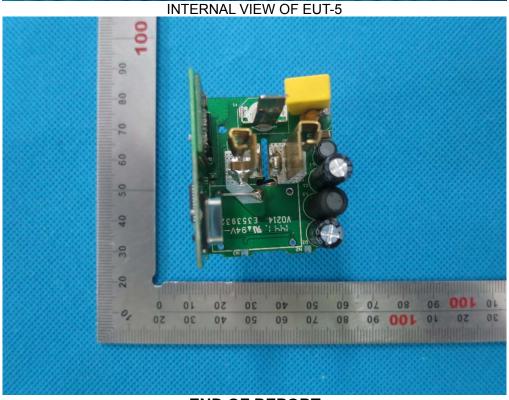

----END OF REPORT----