

APPROVAL SHEET

CrossAir™ SMD Antenna series
RoHS Compliance

PN: OA-C07


2.4 GHz ISM band antenna

FEATURES

1. Surface Mounted Devices (SMD) with a small dimension of 3.5 X 1.7 X 1.2 mm³ meet miniaturization trend.
2. Low power loss and high antenna efficiency.
3. High stability in Temperature and Humidity Change.

APPLICATIONS

1. 2.4GHz ISM band RF applications
2. Bluetooth, ZigBee, Wireless, HomeRF
3. WIFI (2.4G only)

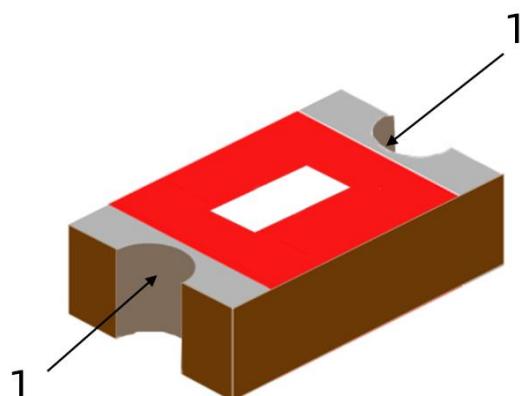CONSTRUCTION

Do not distinguish between feeding pads and fixed pads at both ends of the antenna

DIMENSIONS


Figure	Symbol	Dimension(mm)
	L	3.5±0.2
	W	1.7±0.1
	T	1.2±0.1
	a	0.4±0.1


ELECTRICAL CHARACTERISTICS

OA-C07	Specification
Working Frequency	$2450 \pm 50 \text{MHz}$
Band Width	$>100 \text{MHz}$
Impedance	50Ω
Gain(dBi)	3.74 (peak)
VSWR	<2
Operation Temperature	$-40^\circ\text{C} \sim +95^\circ\text{C}$
Power Capacity	3W


The 2.4G operating frequency of the antenna needs to be achieved through impedance matching device debugging.

Antenna pad and wiring design

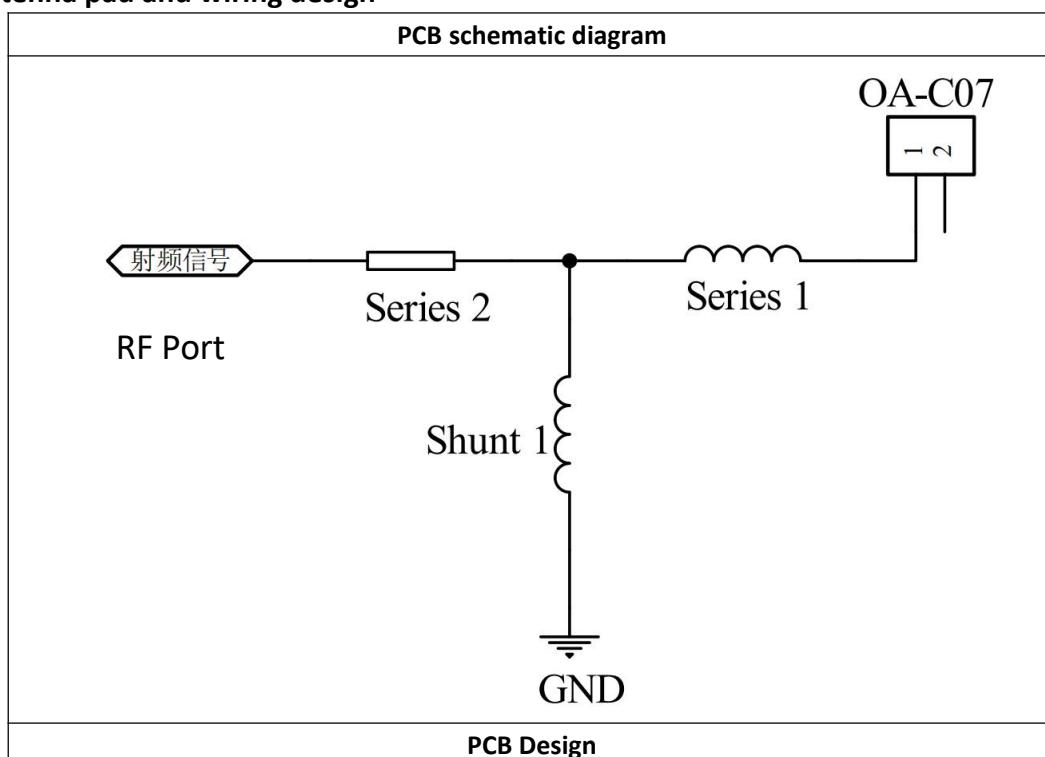


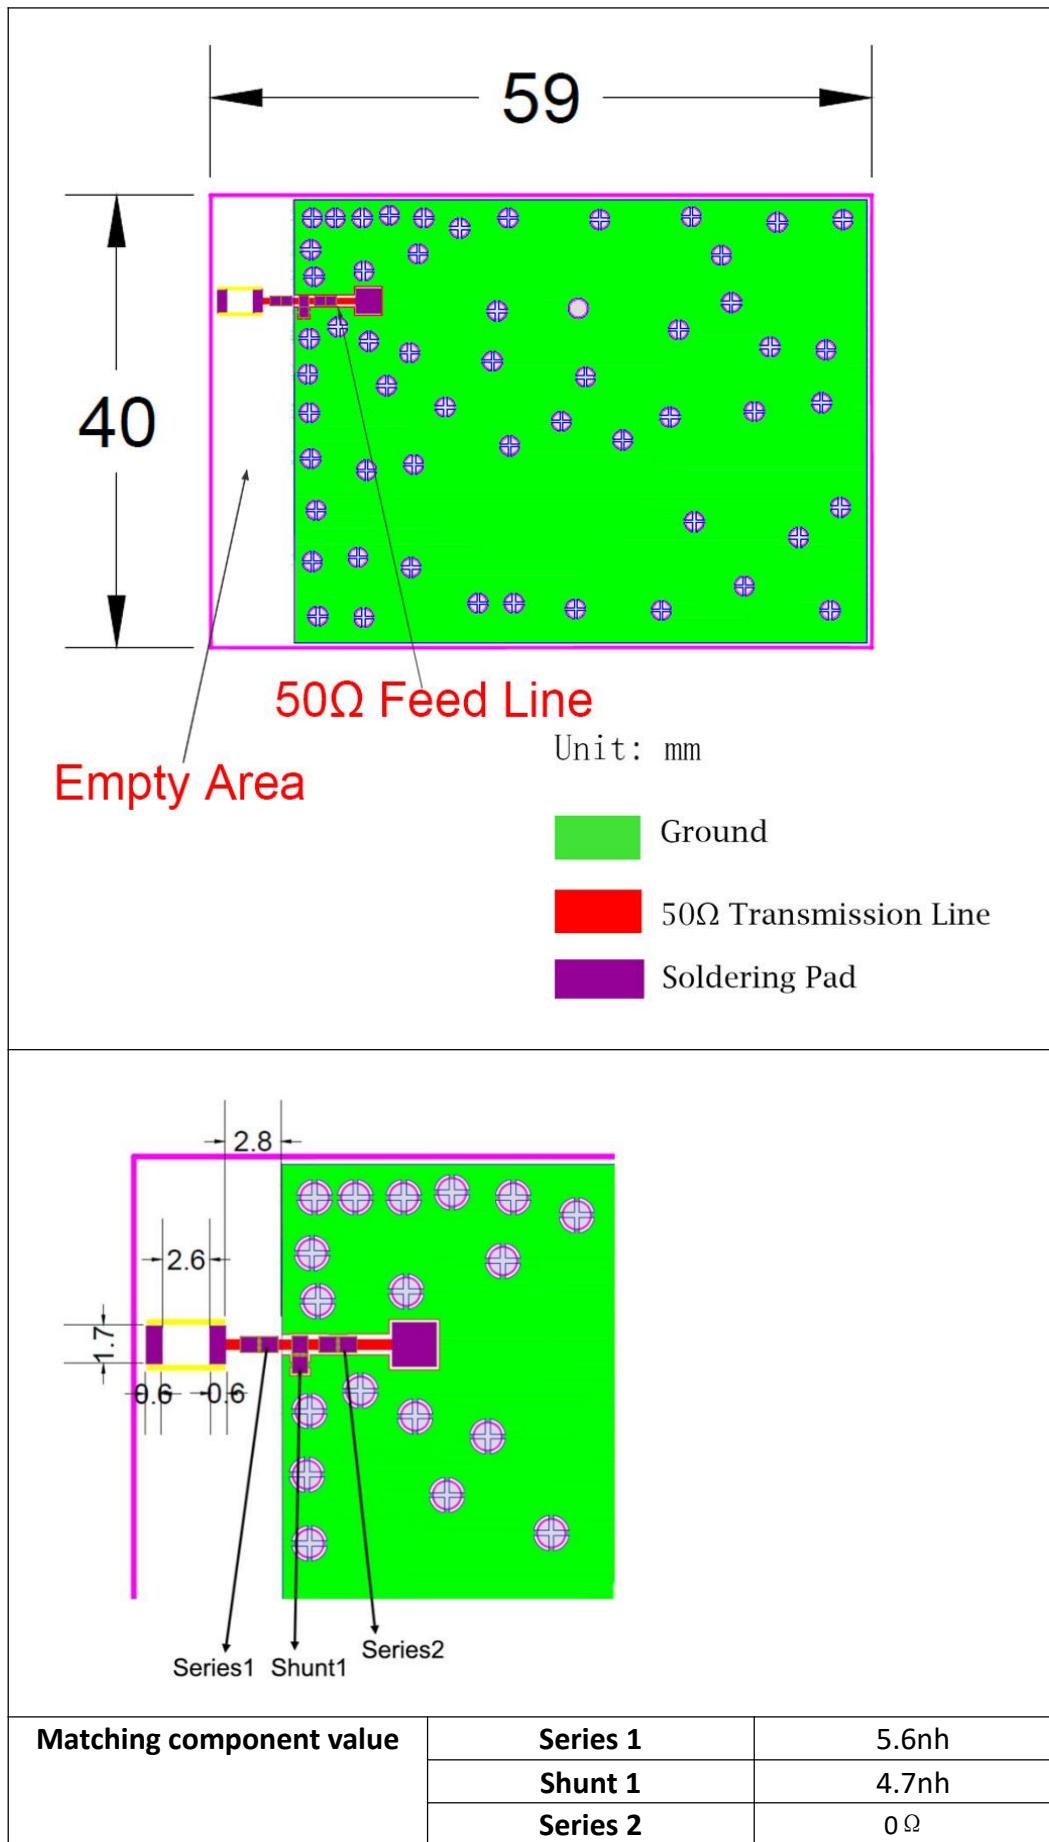


Antenna on Test Board (Thickness 1.0mm)

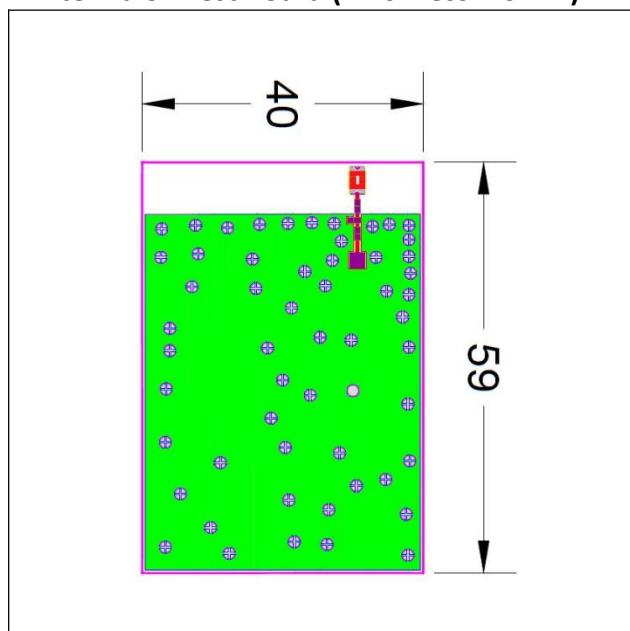

Antenna S11 on Test Board

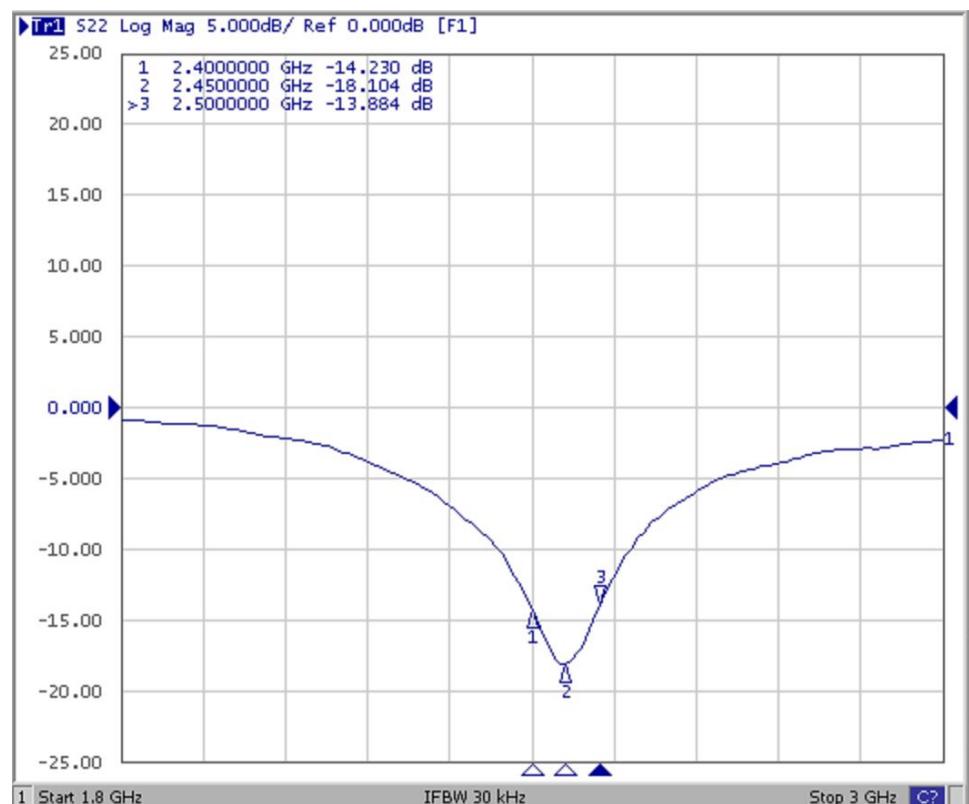

Antenna VSWR on Test Board

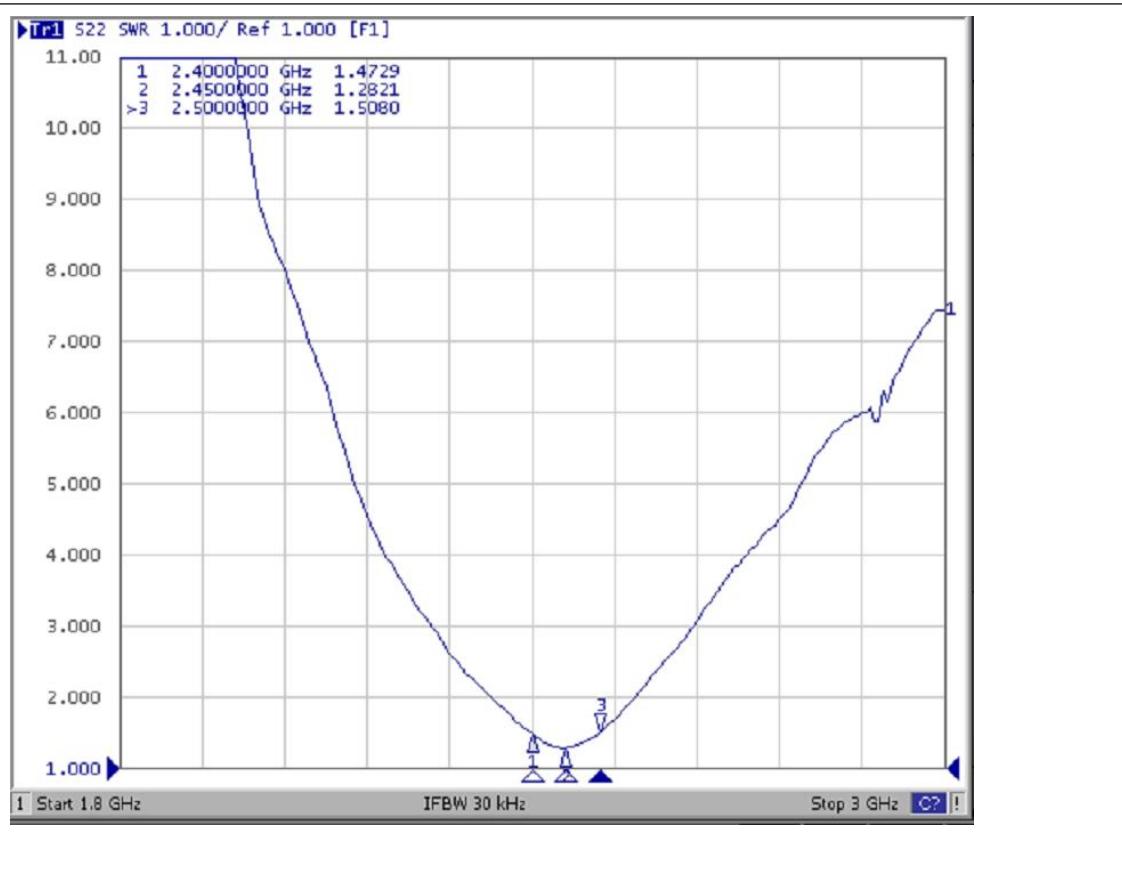


Efficiency and RADIATION PATTERN

Efficiency, Radiation Pattern and Gain were dependent on measurement board design. The specification of OA-C07 antenna was measured based on the PCB size and installation position as shown in the below figure test board. The test results were tested in ETS 3D Chamber.




Gain and Efficiency	2.4G-2.5GHz
Peak Gain	3.74dBi
Average Gain across the band	3.66dBi
Gain Range across the band	3.42dBi~3.74dBi
Peak Efficiency	58.9%
Average Efficiency across the band	55.9%
Efficiency Range across the band	53.0%~58.9%

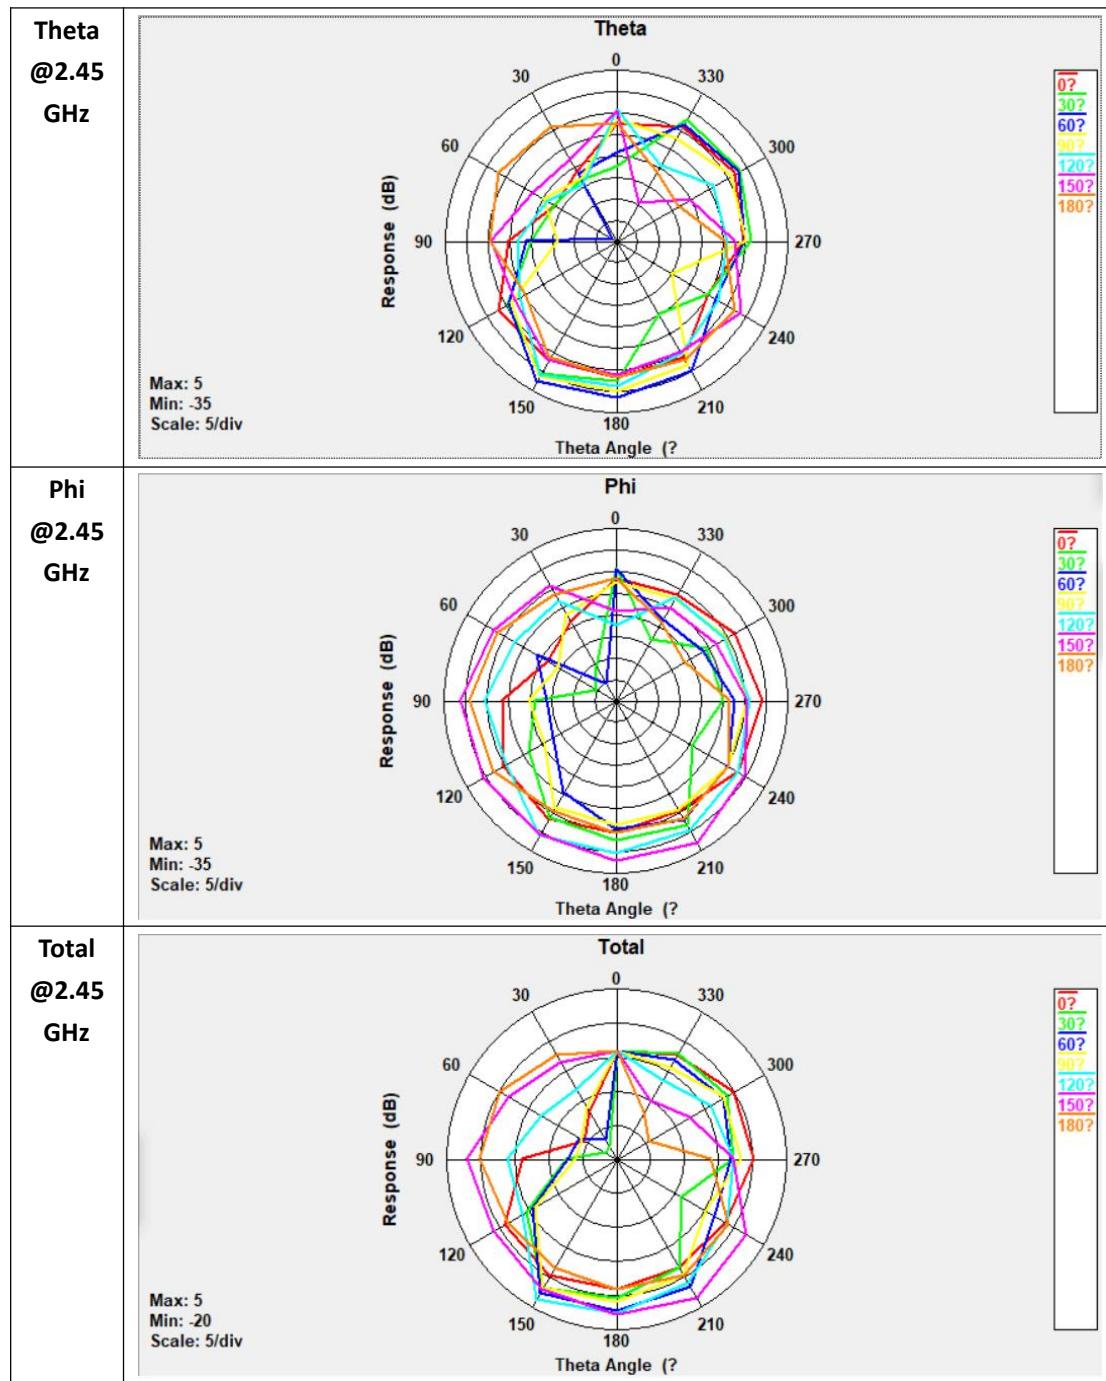


SOLDERING CONDITION

Typical examples of soldering processes that provide reliable joints without any damage is as follows:

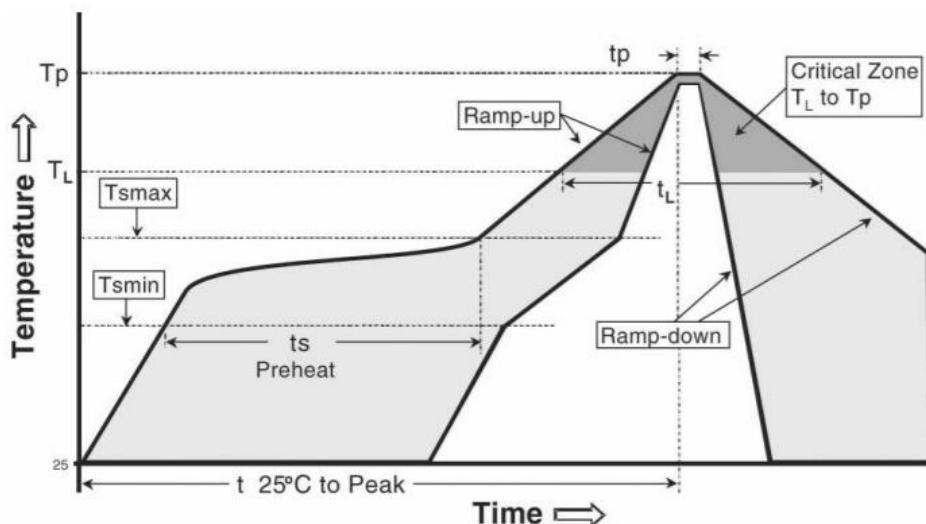

Phase	Profile features	Pb-Free assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (Tsmax to Tp)	3 °C / second (max.)
PREHEAT	<ul style="list-style-type: none"> - Temperature Min (Tsmin) - Temperature Max (Tsmax) - Time (tsmin to tsmax) 	<ul style="list-style-type: none"> 150 °C 200 °C 60-180 seconds
REFLOW	<ul style="list-style-type: none"> - Temperature (T_L) - Total Time above T_L (t_L) 	<ul style="list-style-type: none"> 217 °C 60-150 seconds
PEAK	<ul style="list-style-type: none"> - Temperature (T_p) - Time (t_p) 	<ul style="list-style-type: none"> 260 °C 20-40 seconds
RAMP-DOWN	Rate	6 °C/second max
Time from 25 °C to Peak Temperature		8 minutes max


PACKAGING

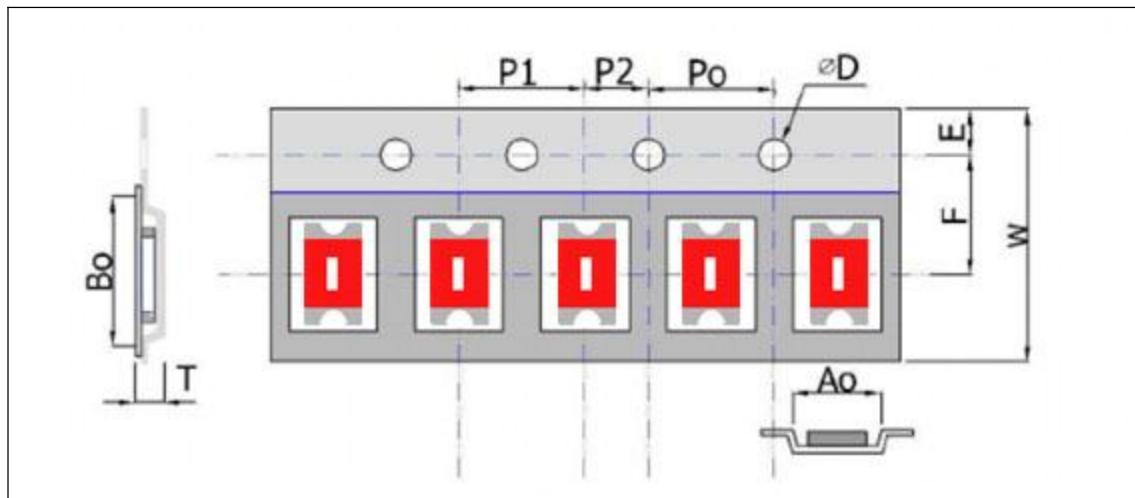

Plastic Tape specification (unit:mm)

Index	A_o	B_o	ΦD	T	W
Dimension (mm)	2.0±0.1	4.0±0.1	1.55±0.05	1.8±0.1	12±0.1
Index	E	F	P_o	P1	P2
Dimension (mm)	1.5±0.1	5.4±0.1	4.0±0.1	4.0±0.1	2.0±0.1

Reel dimensions

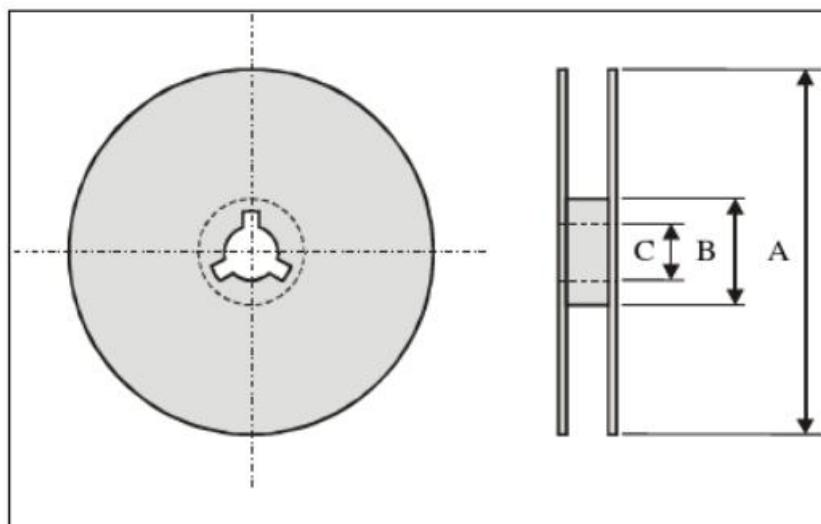

Index	A	B	C
Dimension(mm)	330	100	13.5

Typing Quantity: 3000 pieces per reel.

CAUTION OF HANDLING

Storage environment condition

Products should be storage in the warehouse on the following conditions:

Temperature : -10°C~+40°C

Humidity : 30% to 70% relative humidity

Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.

Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.

Company Name: Guangzhou Cambrian Electronic Technology Co.,Ltd

Address: Room 203, No.34, Huanxibei Road, Tianhe District, Guangzhou City, Guangdong Prov.