# **TEST REPORT**

Report Reference No.....:: PT1411198125RH

Applicant's name.....: World Assurance Group Inc.

Address.....: The Seagram Building, 375 Park Avenue, Suite 2607, New York

City NY

Manufacturer.....: Quality Technology Industrial Co., Ltd.

Address....: 201~203, 2/F, Block B3, Ming You Industrial Products

Procurement Center, #168 Bao Yuan Road, Bao'an District,

Shenzhen, China

Test item description .....: **Mobile Phone** 

Trade Mark .....: World

Model/Type reference..... WP4U

FCC ID:..... 2ADOFWP4U

ANSI C95.1-1999 Standard ....::

47CFR § 2.1093

Date of receipt of test sample..... Oct 25, 2014

Date of testing.....: Oct 25, 2014-Oct 29, 2014

Date of issue....: Nov 18, 2014

Result....: **PASS** 

Compiled by

( position+printed name+signature)..: File administrators Brown In Pow Cha Jack Yn

Supervised by

( position+printed name+signature)... **Test Engineer** 

Approved by

( position+printed name+signature)..: Manager

Shenzhen CTL Testing Technology Co., Ltd. Testing Laboratory Name .....:

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Address....:

Nanshan, Shenzhen, China

Report No.: PT1411198125RH Page 2 of 102

# **Contents**

<u>1.</u>	TEST STANDARDS	3
<u>2.</u>	SUMMARY	4
2.1.	Client Information	4
2.1. 2.2.	Product Description	4
		4
2.3.	Statement of Compliance	5
2.4.	Equipment under Test	6
2.5.	Short description of the Equipment under Test (EUT)	6
2.6.	EUT configuration	6
<u>3.</u>	TEST ENVIRONMENT	7
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	SAR Limits	7
3.5.	Equipments Used during the Test	7
<u>4.</u>	SAR MEASUREMENTS SYSTEM CONFIGURATION	9
4.1.	SAR Measurement Set-up	9
4.2.	DASY5 E-field Probe System	10
4.3.	Phantoms	11
4.4.	Device Holder	11
4.5.	Scanning Procedure	12
4.6.	Data Storage and Evaluation	12
4.7.	Tissue Dielectric Parameters for Head and Body Phantoms	14
4.8.	Tissue equivalent liquid properties	14
4.9.	System Check	15
4.10.	SAR measurement procedure	16
<u>5.</u>	TEST CONDITIONS AND RESULTS	22
5.1.	Conducted Power Results	22
5.1. 5.2.	Simultaneous TX SAR Considerations	26
5.2. 5.3.	SAR Measurement Results	29
	SAR Measurement Variability	
5.4.		32
5.5.	Measurement Uncertainty (300MHz-3GHz)	32
5.6.	System Check Results	35
5.7.	SAR Test Graph Results	41
<u>6.</u>	CALIBRATION CERTIFICATE	59
6.1.	Probe Calibration Ceriticate	59
6.2.	D835V2 Dipole Calibration Ceriticate	70
6.3.	D1900V2 Dipole Calibration Ceriticate	78
6.4.	D2450V2 Dipole Calibration Ceriticate	86
6.5.	DAE4 Calibration Certicate	94
<u>7.</u>	TEST SETUP PHOTOS	97
<u>8.</u>	EXTERNAL PHOTOS OF THE EUT	102

Report No.: PT1411198125RH Page 3 of 102

# 1. TEST STANDARDS

The tests were performed according to following standards:

<u>IEEE Std C95.1, 1999:</u> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

<u>IEEE Std 1528™-2013:</u> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

<u>KDB 447498 D01 Mobile Portable RF Exposure v05r01:</u> Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r02: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB865664 D02 SAR Reporting v01: RF Exposure Compliance Reporting and Documentation Considerations KDB248227: SAR measurement procedures for 802.112abg transmitters

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 648474 D04 Handset SAR v01r02 describes the SAR evaluation requirements for consumer cellphones and Smart phones

Report No.: PT1411198125RH Page 4 of 102

# 2. SUMMARY

# 2.1. Client Information

Applicant:	World Assurance Group Inc.				
Address:	The Seagram Building, 375 Park Avenue, Suite 2607, New York City NY				
Manufacturer:	Quality Technology Industrial Co., Ltd.				
Address:	201~203, 2/F, Block B3, Ming You Industrial Products Procurement Center, #168 Bao Yuan Road, Bao'an District, Shenzhen, China				

# 2.2. Product Description

Name of EUT	Mobile Phone
Trade Mark:	World
Model No.:	WP4U
Listed Model(s):	/
EUT Type:	production unit
Power supply:	DC 3.7V/2500mAh
Adapter information:	Input: AC 100-240V, 50/60Hz, 0.15A; Output:DC 5.0V, 1.0A
2G:	
Support Network:	GSM, GPRS, EGPRS
Support Band:	GSM850, DCS1900
Modulation:	GSM/GPRS: GMSK EGPRS: GMSK
Transmit Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz
Receive Frequency:	GSM850: 869.20MHz-893.80MHz PCS1900: 1930.20MHz-1989.80MHz
GPRS Class:	12
EGPRS Class:	12
Antenna type:	Intergal Antenna
3G:	
Operation Band:	FDD Band II and FDD Band V
Power Class:	Power Class 3
Modilation Type:	QPSK for WCDMA/HSUPA/HSDPA
WCDMA Release Version:	R7
HSDPA Release Version:	Release 10
HSUPA Release Version:	Release 6
DC-HSUPA Release Version:	Not Supported
Antenna type:	Intergal Antenna
Bluetooth	
Version:	Supported BT2.1
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
-	

Antenna type:	a type: Internal Antenna			
WIFI				
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)			
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40):OFDM			
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40):2422MHz~2452MHz			
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40):7			
Channel separation:	5MHz			

# 2.3. Statement of Compliance

The maximum of results of SAR found during testing for WP4U are follows:

Exposure Configuration	Technolohy Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
	GSM850	0.739	
Head	PCS1900	0.634	
(Separation Distance 0mm)	WCDMA Band V	0.399	PCE
(Separation Distance offin)	WCDMA Band II	0.388	
	WLAN2450	0.281	
	GSM850	0.666	
Pody worn	PCS1900	0.699	
Body-worn (Separation Distance 10mm)	WCDMA Band V	0.548	PCE
(Separation Distance Torrin)	WCDMA Band II	0.497	
	WLAN2450	0.350	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue accordintg to the ANSI C95.1-1999.

For body worn operation, this devices has been tested and meets FCC RF exposure guidelines when used with any accessory that conrtains no metal and which provides a minimum separation distance of 10 mm between this devices and the body of the user. User of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain iniform power output.

## GSM/WCDMA & WLAN Mode

Test Position	GSM850 Reported SAR1g (W/Kg)	PCS1900 Reported SAR1g (W/Kg)	WCDMA Band V Reported SAR1g (W/Kg)	WCDMA Band II Reported SAR1g (W/Kg)	WLAN Reported SAR1g (W/Kg)	Summation Reported SAR(1g) (W/kg)	Simultaneous Measurement Required?
Left Head Touch	0.710	0.634	0.399	0.314	0.281	0.991	No
Left Head Title	0.739	0.611	0.382	0.342	0.263	1.002	No
Right Head Touch	0.682	0.578	0.349	0.358	0.198	0.880	No
Right Head Title	0.698	0.570	0.360	0.388	0.185	0.883	No
Body-Back Side	0.666	0.699	0.548	0.497	0.350	1.049	No
Body-Front Side	0.582	0.627	0.483	0.419	0.285	0.912	No
Body-Left Side	0.652	0.673	0.521	0.474	0.315	0.988	No
Body-Right Side	0.591	0.660	0.481	0.397	0.239	0.899	No
Body-Top Side	0.299	0.323	0.276	0.239	0.332	0.655	No
Body-Bottom Side	0.643	0.661	0.516	0.447	0.153	0.814	No

Report No.: PT1411198125RH Page 6 of 102

#### GSM/WCDMA & BT Mode

Test Position	GSM850 Reported SAR1g (W/Kg)	PCS1900 Reported SAR1g (W/Kg)	WCDMA Band V Reported SAR1g (W/Kg)	WCDMA Band II Reported SAR1g (W/Kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(1g) (W/kg)	Simultaneous Measurement Required?
Left Head Touch	0.710	0.634	0.399	0.314	0.083	0.793	No
Left Head Title	0.739	0.611	0.382	0.342	0.083	0.822	No
Right Head Touch	0.682	0.578	0.349	0.358	0.083	0.765	No
Right Head Title	0.698	0.570	0.360	0.388	0.083	0.781	No
Body-Back Side	0.666	0.699	0.548	0.497	0.041	0.740	No
Body-Front Side	0.582	0.627	0.483	0.419	0.041	0.668	No
Body-Left Side	0.652	0.673	0.521	0.474	0.041	0.714	No
Body-Right Side	0.591	0.660	0.481	0.397	0.041	0.701	No
Body-Top Side	0.299	0.323	0.276	0.239	0.041	0.364	No
Body-Bottom Side	0.643	0.661	0.516	0.447	0.041	0.702	No

Note:1. The value with green color is the maximum values of standalone

- 2. The value with blue color is the maximum values of  $\Sigma SAR_{1g}$
- 3. Body-Rear side values was the maximum values of GPRS, EDGE and Speech with Headset. According to the above tables, the highest sum of reported SAR values is 1.002 W/Kg(1g) for Head and 1.049 W/Kg(1g) for Body.

# 2.4. Equipment under Test

#### Power supply system utilised

Power supply voltage	:	0	120V / 60 Hz	0	115V / 60Hz
		0	12 V DC	0	24 V DC
		•	Other (specified in blank below)		

#### DC 3.70V/DC 5.0V Adapter from AC 120V/60Hz

# 2.5. Short description of the Equipment under Test (EUT)

Mobile phone (Model: WP4U).

The EUT battery must be fully charged and checked periodically during the test to ascertain maximum power output.

# 2.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

0	Power Cable	Length (m):	/
		Shield:	/
		Detachable :	/
0	Multimeter	Manufacturer:	/
		Model No.:	/

Report No.: PT1411198125RH Page 7 of 102

# 3. TEST ENVIRONMENT

# 3.1. Address of the test laboratory

## Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

# 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, Dec 19, 2013

#### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

# 3.4. SAR Limits

FCC Limit (1g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

# 3.5. Equipments Used during the Test

				Calibration		
Test Equipment	Manufacturer	Type/Model	Serial Number	Last Calibration	Calibration Interval	
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2013/11/25	1	

E-field Probe	SPEAG	EX3DV4	3842	2014/06/06	1
System Validation Dipole 835V2	SPEAG	D835V2	4d134	2013/12/13	1
System Validation Dipole 1900V2	SPEAG	D1900V2	5d150	2013/12/12	1
System Validation Dipole 2450V2	SPEAG	D2450V2	884	2013/12/11	1
Dielectric Probe Kit	Agilent	85070E	US44020288	/	/
Power meter1	Agilent	E4417A	GB41292254	2013/12/26	1
Power meter2	Agilent	E4417A	GB41292259	2013/12/26	1
Power sensor1	Agilent	8481H	MY41095360	2013/12/26	1
Power sensor2	Agilent	8481H	MY41095367	2013/12/26	1
Network analyzer	Agilent	8753E	US37390562	2013/12/25	1
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	112012	2013/12/23	1

# 4. SAR Measurements System configuration

# 4.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld mobile phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

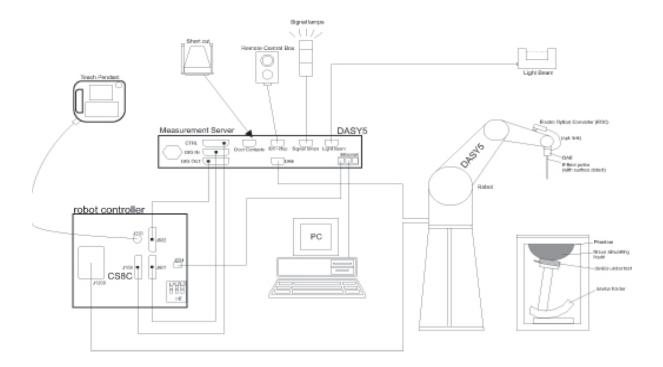

Report No.: PT1411198125RH Page 10 of 102

# 4.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

**Probe Specification** 

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.

Frequency 10 MHz to 4 GHz;

Linearity: ± 0.2 dB (30 MHz to 4 GHz)

**Directivity**  $\pm$  0.2 dB in HSL (rotation around probe axis)

± 0.3 dB in tissue material (rotation normal to probe axis)

**Dynamic Range** 5  $\mu$ W/g to > 100 mW/g;

Linearity: ± 0.2 dB

**Dimensions** Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 3.9 mm (Body: 12 mm)

Distance from probe tip to dipole centers: 2.0 mm

**Application** General dosimetry up to 4 GHz


Dosimetry in strong gradient fields Compliance tests of mobile phones

Compatibility DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

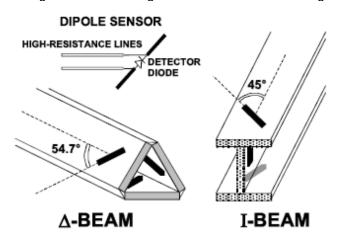



#### 4.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

#### 4.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

Report No.: PT1411198125RH Page 12 of 102

# 4.5. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.

The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm$  0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm$  30°.)

#### Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot.Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

#### Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

#### Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

#### 4.6. Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can

be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **Data Evaluation**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
·	- Conversion factor	ConvFi
	- Diode compression point Dcp	İ
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
•	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.  $SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$ 

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g Etot = total field strength in V/m = conductivity in [mho/m] or [Siemens/m] σ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

Report No.: PT1411198125RH Page 14 of 102

# 4.7. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.The table 3 and table 4 show the detail solition.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

Table 3:Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.12
Cellulose	1.0
Dielectric Paramters Target Value	f=835MHz ε=41.50 σ=0.9

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Paramters Target Value	f=1900MHz ε=40.00 σ=1.40

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.70
Glycol	36.80
Salt	0.50
Dielectric Paramters Target Value	f=2450MHz ε=39.20 σ=1.80

Table 4: Composition of the Body Tissue Equivalent Matter

	7
MIXTURE%	FREQUENCY(Brain) 835MHz
Water	52.50
Sugar	45
Salt	1.40
Preventol	0.10
Cellulose	1.00
Dielectric Paramters Target Value	f=835MHz ε=55.20 σ=0.97

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Paramters Target Value	f=1900MHz ε=53.30 σ=1.52

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	73.20
Glycol	26.70
Salt	0.10
Dielectric Paramters Target Value	f=2450MHz ε=52.70 σ=1.95

# 4.8. Tissue equivalent liquid properties

Dielectric performance of Body tissue simulating liquid

Frequency	Description	Dielectric paramenters		
rioquonoy	2000 i pilon	ε <sub>r</sub>	O,	
	Target Value ±5%	41.5	0.90	
835MHz(Head)	Target value ±5%	(39.4~43.6)	(0.86~0.95)	
033Wii 12(1 lead)	Measurement Value 2014-10-25	41.53	0.92	
	Torget Value + 5%	56.1	0.97	
835MHz(Body)	Target Value ±5%	(53.30~58.91)	(0.90~1.00)	
033Wii i2(B0dy)	Measurement Value 2014-10-25	55.95	0.96	


	Target Value $\pm 5\%$	40.0	1.40	
1900MHz(Head)	Target value ±5%	(38.0~42.0)	(1.33~1.47)	
1300Wii iz(i ieau)	Measurement Value 2014-10-27	39.83	1.45	
	Torget Value + 50/	54.00	1.45	
1900MHz(Body)	Target Value ±5%	(51.30~56.70)	(1.38~1.52)	
1900Wi 12(B0dy)	Measurement Value 2014-10-27	55.64	1.49	
	Torget Value + 5%	39.20	1.80	
2450MHz(Head)	Target Value ±5%	(37.24~41.16)	(1.71~1.89)	
2430Wii iz(i ieau)	Measurement Value 2014-10-29	40.58	1.74	
	Torget Value + 50/	52.70	1.95	
2450MHz(Body)	Target Value ±5%	(50.01~55.34)	(1.85~2.05)	
2430Wii i2(B0dy)	Measurement Value 2014-10-29	53.47	1.98	

# 4.9. System Check

The purpose of the system check is to verify that the system operates within its specifications at the decice test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system (±10 %).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

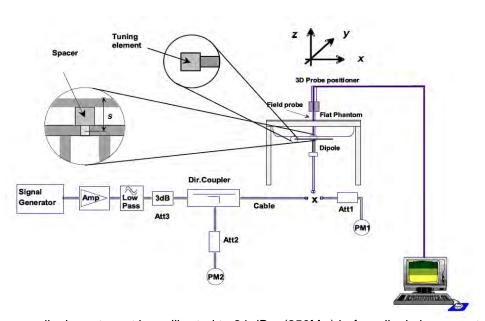

The output power on dipole port must be calibrated to 24 dBm (250Mw) before dipole is connected.



Photo of Dipole Setup

# System Validation of Head

	System validation of flead						
Measuremen	Measurement is made at temperature 22.0 °C and relative humidity 55%.						
Tissue tempe	erature 22.0 °C						
Measuremen	nt Date: 835MF	1z Oct 25 <sup>th</sup> , 20	14; 1900MHz	Oct 27 <sup>th</sup> , 2014	; 2540MHz Od	ct 29 <sup>th</sup> , 2014;	
	Frequency		t value /kg)	Measured value (W/kg)		Deviation	
Verification	(MHz)	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average
results	835	2.38	1.55	2.32	1.48	-2.52%	-4.52%
	1900	9.71	5.08	9.53	4.96	-1.85%	-2.36%
	2450	13.00	6.05	12.47	5.83	-4.08%	-3.64%

# System Validation of Body

			System valid	alloll of body			
Measuremen	nt is made at te	emperature 22	.0 °C and rela	ative humidity (	55%.		
Tissue tempe	erature 22.0 °C	C					
Measuremen	nt Date: 835MF	1z Oct 25 <sup>th</sup> , 20	14; 1900MHz	Oct 27 <sup>th</sup> , 2014	; 2540MHz O	ct 29 <sup>th</sup> , 2014;	
	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
Verification	(MHz)	1 g	10 g	1 g	10 g	1 g	10 g
		Average	Average	Average	Average	Average	Average
results	835	2.32	1.54	2.25	1.48	-3.02%	-3.90%
	1900	9.98	5.26	9.71	5.13	-2.71%	-2.47%
	2450	12.9	5.98	12.53	5.69	-2.87%	-4.85%

# 4.10. SAR measurement procedure

## 4.10.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


Step 1: The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a). all device positions (cheek and tilt, for both left and right sides of the SAM phantom;
- b). all configurations for each device position in a), e.g., antenna extended and retracted, and
- c). all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

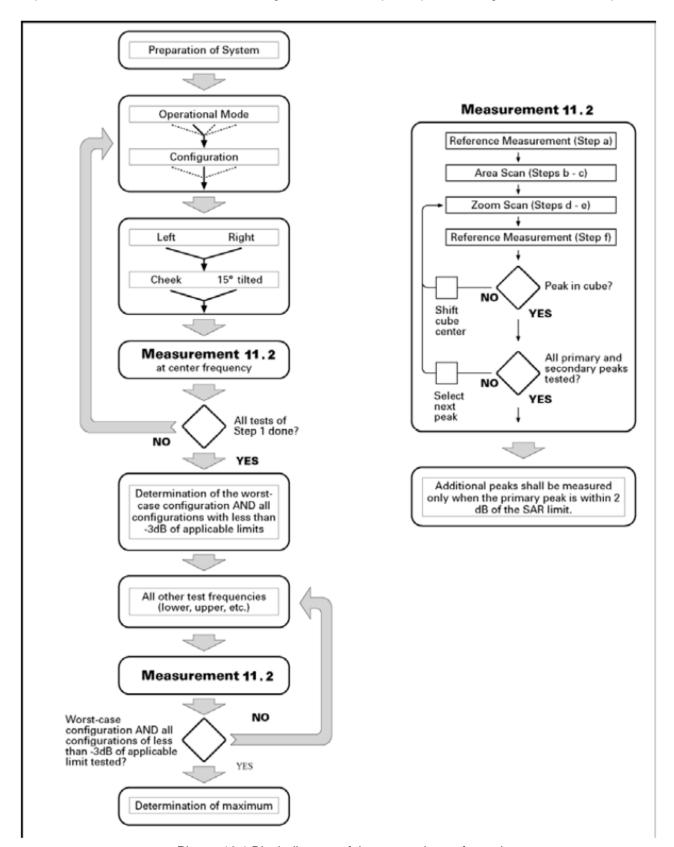

Picture 10.1 Block diagram of the tests to be performed

#### 4.10.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤3 GHz	> 3 GHz	
Maximum distance from (geometric center of pro		•	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20° ± 1°	
			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
	uniform grid: Δz <sub>Zoom</sub> (n)		3 - 4 GHz: ≤ 4 ≤ 5 mm 4 - 5 GHz: ≤ 5 5 - 6 GHz: ≤ 5		
Maximum zoom scan spatial resolution, normal to phantom surface	two po	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm	
	grid $\Delta z_{Zoom}(n>1)$ : between subsequent points		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$		
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: 5 is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

#### 4.10.3 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK. According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following: Output power of reductions:

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Report No.: PT1411198125RH

The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output	
	power (dB)	
1	0	
2	0 to 3.0	
3	1.8 to 4.8	
4	3.0 to 6.0	

#### 4.10.4 UMTS Test Configuration

#### 4.10.4.1 Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH<sub>n</sub> and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

#### 4.10.4.2 Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB( Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

#### 4.10.4.3 Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCHn, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCHn configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCH<sub>n</sub> for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

#### 4.10.4.4 HSDPA Test Configuration

SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta$ ACK,  $\Delta$ NACK,  $\Delta$ CQI) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

## Subtests for UMTS Release 5 HSDPA

Sub-set	ßc	ßd	ß <sub>d</sub> (SF)	$ m eta_c/eta_d$	ß <sub>hs</sub> (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	2/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	2/15	30/15	1.5	0.5
4	15/15	4/15	64	2/15	30/15	1.5	0.5

Note1:  $\triangle$ ACK,  $\triangle$ NACK and  $\triangle$ CQI= 8,A<sub>hs</sub> =  $\beta$ <sub>hs</sub>/ $\beta$ <sub>c</sub>=30/15,  $\beta$ <sub>hs</sub>=30/15\*  $\beta$ <sub>c</sub>

Note2:For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A,and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\triangle$ ACK and  $\triangle$ NACK= 8( A<sub>hs</sub>=30/15) with  $\beta$  <sub>hs</sub>=30/15\*  $\beta$  <sub>c</sub>,and  $\triangle$ CQI= 7( Ahs=24/15) with  $\beta$  <sub>hs</sub>=24/15\* $\beta$ <sub>c</sub>.

Note3: CM=1 for  $\beta_c/\beta_d$  =12/15,  $\beta_{hs}/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4:For subtest 2 the  $\beta_c\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to  $\beta_c$ =11/15 and  $\beta_d$ =15/15.

Settings of required H-Set 1 QPSK in HSDPA mode

9 1		
Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N <sub>INF</sub> )	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

#### 4.10.4.5 HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least  $\frac{1}{4}$  dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E- DCH configurations for HSPA should be configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

**HSUPA UE category** 

HOUFA DE Category							
UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E- DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)	
1	1	4	10	4	7110	0.7296	
2	2	8	2	4	2798	1 4500	
2	2	4	10	4	14484	1.4592	
3	2	4	10	4	14484	1.4592	
4	2	8	10	2	5772	2.9185	
4	2	4	10	2	20000	2.00	
5	2	4	10	2	20000	2.00	
6 (No	4	8	2	2 SF2 & 2	11484	5.76	
DPDCH)	4	4	10	SF4	20000	2.00	
7 (No	4	8	2	2 SF2 & 2	22996	?	
DPDCH)	4	4	10	SF4	20000	?	

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

#### 4.10.5 Wi-Fi Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set to 23 for 802.11 b mode, set to 19 for 802.11 g mode, set to 19 for 802.11 n mode by software, This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WIFI mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the highest power rate.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel;

Report No.: PT1411198125RH Page 21 of 102

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

#### 4.10.6 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. This RF signal utilized in SAR measurement has Almost 100% duty cycle and its crest factor is 1.

#### 4.10.7 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.1 to Table 14.11 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

#### 4.10.8 Area Scan Based 1-g SAR

#### 4.10.8.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq$  1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

#### 4.10.8.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale. In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

Report No.: PT1411198125RH Page 22 of 102

# 5. TEST CONDITIONS AND RESULTS

#### 5.1. Conducted Power Results

Max Conducted power measurement results and power drift from tune-up tolerance provide by manufacturer:

The conducted power measurement results for GSM850/PCS1900

Test Mode	Conducted Power (dBm)				
GSM850	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)		
GSIVIOSU	32.38	32.77	32.97		
	Channel	Channel 661	Channel		
PCS1900	810(1909.8MHz)	(1880.0MHz)	512(1850.2MHz)		
	30.08	30.15	30.21		

The conducted power measurement results for GPRS/ EGPRS

Test Mode		ured Power (		ement results i	Averaged Power (dBm)		
GSM 850		Test Channe	l	Calculation		<b>Test Channel</b>	
GPRS (GMSK)	128	190	251	(dB)	128	190	251
1 Txslot	32.83	32.74	32.56	-9.03	23.80	23.71	23.53
2 Txslot	30.84	30.97	30.55	-6.02	24.82	24.95	24.53
3 Txslot	28.25	28.27	28.25	-4.26	23.99	23.01	23.99
4 Txslot	27.00	27.03	27.05	-3.01	23.99	24.02	24.04
Test Mode	Meas	ured Power (	(dBm)		Aver	aged Power (	dBm)
GSM 850		Test Channe	l	Calculation		<b>Test Channel</b>	
EGPRS (GMSK)	128	190	251	(dB)	128	190	251
1 Txslot	32.69	32.36	32.75	-9.03	23.66	23.33	23.72
2 Txslot	30.75	30.62	30.84	-6.02	24.73	24.60	24.82
3 Txslot	28.26	28.14	28.15	-4.26	24.00	23.88	23.89
4 Txslot	26.89	26.75	26.85	-3.01	23.88	23.74	23.84
Test Mode	Meas	ured Power (	(dBm)		Averaged Power (dBi		
DCS1900		Test Channe	l	Calculation		Test Channel	
GPRS (GMSK)	512	661	810	(dB)	512	661	810
1 Txslot	30.26	30.08	30.12	-9.03	21.23	21.05	21.09
2 Txslot	28.24	28.58	28.26	-6.02	22.22	22.56	22.24
3 Txslot	26.56	26.75	26.46	-4.26	22.30	22.49	22.20
4 Txslot	24.18	24.14	24.12	-3.01	21.17	21.13	21.11
Test Mode	Meas	ured Power (	(dBm)		Aver	aged Power (	dBm)
DCS1900		Test Channe	l .	Calculation	Test Channel		
EGPRS (GMSK)	512	661	810	(dB)	512	661	810
1 Txslot	30.36	30.25	30.18	-9.03	21.33	21.22	21.15
2 Txslot	28.46	28.56	28.38	-6.02	22.44	22.54	22.36
3 Txslot	26.56	26.44	26.36	-4.26	22.30	22.18	22.10
4 Txslot	24.08	24.08	24.03	-3.01	21.07	21.07	21.02

#### NOTES:

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and GSM1900.

Note: According to the KDB941225 D03, "when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used".

<sup>1)</sup> Division Factors

To average the power, the division factor is as follows:

<sup>1</sup>TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

<sup>2</sup>TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

<sup>3</sup>TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

<sup>4</sup>TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

Report No.: PT1411198125RH Page 23 of 102

The conducted power measurement results for WCDMA

	band FDD I		and V result	(dBm)	FDD Band II result (dBm)		
Item	band	Test Channel			Test Channel		
	ARFCN	4132	4183	4233	9262	9400	9538
RMC 12.2Kbps	1	23.39	23.47	23.25	23.34	23.25	23.78
AMR 12.2Kbps		23.28	23.36	23.19	23.22	23.17	23.64
	1	23.12	23.42	23.13	23.25	23.31	23.34
5.2AA (HSDPA)	2	23.25	23.15	23.11	23.14	23.35	23.23
3.2AA (N3DFA)	3	23.25	23.34	23.31	23.17	23.36	23.42
	4	23.15	23.25	23.21	23.29	23.13	23.24
	1	23.43	23.33	23.28	23.12	23.13	23.28
5.2B	2	23.19	23.49	23.49	23.29	23.15	23.16
(HSUPA)	3	23.03	23.19	23.22	23.25	23.03	23.08
	4	23.18	23.26	23.48	23.14	23.14	23.16
	5	23.23	23.14	23.13	23.17	23.18	23.19

Note: HSUPA body SAR are not required, because maximum average output power of each RF channel with HSDPA active is not 1/4 dB higher than that measured without HSUPA and the maximum SAR for WCDMA850 and WCDMA1900 are not above 75% of the SAR limit.

The conducted power measurement results for WLAN

Mode	Channel	Frequency	Conducted AV	Test Rate Data	
Wiode	Chamilei	(MHz)	(dBm)	(mW)	Test Kale Dala
	1	2412	8.89	7.74	1 Mbps
802.11b	6	2437	9.21	8.34	1 Mbps
	11	2462	8.93	7.82	1 Mbps
	1	2412	7.56	5.70	6 Mbps
802.11g	6	2437	7.78	6.00	6 Mbps
	11	2462	7.83	6.07	6 Mbps
	1	2412	7.04	5.06	6.5 Mbps
802.11n(20MHz)	6	2437	6.94	4.94	6.5 Mbps
	11	2462	7.14	5.18	6.5 Mbps
802.11n(40MHz)	3	2422	6.67	4.65	13.5 Mbps
	6	2437	7.03	5.05	13.5 Mbps
	9	2452	6.83	4.82	13.5 Mbps

#### Bluetooth v2.1+EDR

Mode	Channel	Frequency (MHz)	Conducted AV Output Power (dBm)
	00	2402	2.54
GFSK	39	2441	2.72
	78	2480	2.34
	00	2402	2.23
π/4DQPSK	39	2441	1.92
	78	2480	2.41
	00	2402	2.65
8DPSK	39	2441	2.44
	78	2480	2.57

## Manufacturing tolerance

**GSM Speech** 

Com opocon							
	GSM 850						
Channel	Channel 251	Channel 190	Channel 190				
Target (dBm)	33.0	33.0	33.0				
Tolerance ±(dB)	1	1	1				
	GSM 1900						
Channel	Channel 810	Channel 661	Channel 512				
Target (dBm)	30.0	30.0	30.0				
Tolerance ±(dB)	1	1	1				

Report No.: PT1411198125RH Page 24 of 102

GPRS/EGPRS (GMSK Modulation)

	GFK3/	EGPRS (GMSK Modu	ilation)	
		GSM 850 GPRS		T
Cha	annel	251	190	128
1 Txslot	Target (dBm)	33.0	33.0	33.0
1 1 7 3101	Tolerance ±(dB)	1	1	1
2 Txslot	Target (dBm)	30.5	30.5	30.5
2 1 / 5101	Tolerance ±(dB)	1	1	1
3 Txslot	Target (dBm)	27.5	27.5	27.5
3 1 8 3 10 1	Tolerance ±(dB)	1	1	1
4 Txslot	Target (dBm)	27.0	27.0	27.0
4 1 XSIOL	Tolerance ±(dB)	1	1	1
		GSM 850 EGPRS		
Cha	annel	251	190	128
4 Tyolot	Target (dBm)	33.0	33.0	33.0
1 Txslot	Tolerance ±(dB)	1	1	1
O Tyrolot	Target (dBm)	30.5	30.5	30.5
2 Txslot	Tolerance ±(dB)	1	1	1
O Totalat	Target (dBm)	27.5	27.5	27.5
3 Txslot	Tolerance ±(dB)	1	1	1
4 Totalat	Target (dBm)	27.0	27.0	27.0
4 Txslot	Tolerance ±(dB)	1	1	1
		GSM 1900 GPRS		
Cha	annel	810	661	512
4 Tuelet	Target (dBm)	30.0	30.0	30.0
1 Txslot	Tolerance ±(dB)	1	1	1
O Totalat	Target (dBm)	28.5	28.5	28.5
2 Txslot	Tolerance ±(dB)	1	1	1
O Treales	Target (dBm)	27.0	27.0	27.0
3 Txslot	Tolerance ±(dB)	1	1	1
4 Tyolot	Target (dBm)	24.5	24.5	24.5
4 Txslot	Tolerance ±(dB)	1	1	1
	, ,	GSM 1900 EGPRS		
Cha	annel	810	661	512
4 Tuelet	Target (dBm)	30.0	30.0	30.0
1 Txslot	Tolerance ±(dB)	1	1	1
0 T1-1	Target (dBm)	28.5	28.5	28.5
2 Txslot	Tolerance ±(dB)	1	1	1
0.T1-1	Target (dBm)	27.0	27.0	27.0
3 Txslot	Tolerance ±(dB)	1	1	1
4 T1-1	Target (dBm)	24.5	24.5	24.5
4 Txslot	Tolerance ±(dB)	1	1	1
<u> </u>		<u> </u>		

# **WCDMA**

WCDMA Band V									
Channel	Channel 4132	Channel 4183	Channel 4233						
Target (dBm)	23.0	23.0	23.0						
Tolerance ±(dB)	1	1	1						
	WCDMA Band V I	HSDPA(sub-test 1)							
Channel	Channel 4132	Channel 4183	Channel 4233						
Target (dBm)	23.0	23.0	23.0						
Tolerance ±(dB)	1	1	1						
	WCDMA Band V I	HSDPA(sub-test 2)							
Channel	Channel 4132	Channel 4183	Channel 4233						
Target (dBm)	23.0	23.0	23.0						
Tolerance ±(dB)	1	1	1						
	WCDMA Band V I	HSDPA(sub-test 3)							
Channel	Channel 4132	Channel 4183	Channel 4233						
Target (dBm)	23.0	23.0	23.0						
Tolerance ±(dB)	1	1	1						
, , , , , , , , , , , , , , , , , , , ,	WCDMA Band V I	HSDPA(sub-test 4)	·						
Channel	Channel 4132	Channel 4183	Channel 4233						

Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
	WCDMA Band V F	ISUPA(sub-test 1)	
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
		ISUPA(sub-test 2)	
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
		ISUPA(sub-test 3)	01 1 1000
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
		ISUPA(sub-test 4)	01 1 4000
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1 MCDMA Bond VI	1	11
Channal		ISUPA(sub-test 5)	Channel 1999
Channel	Channel 4132	Channel 4183	Channel 4233
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	Donal II	11
Channel	WCDMA Channel 9262		Channal 0522
Channel		Channel 9400	Channel 9538
Target (dBm) Tolerance ±(dB)	23.0	23.0	23.0
Tolerance ±(db)	·	ISDBA(sub test 1)	l l
Channel	Channel 9262	ISDPA(sub-test 1) Channel 9400	Channel 9538
			23.0
Target (dBm) Tolerance ±(dB)	23.0	23.0	23.0
Tolerance ±(ub)	WCDMA Band II L	ISDPA(sub-test 2)	l l
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	23.0	25.0	25.0
Tolerance ±(db)	·	ISDPA(sub-test 3)	ı ı
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
Toloranoe ±(ab)	-	ISDPA(sub-test 4)	
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
	•	HSUA(sub-test 1)	·
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
_(02)	<u>-</u>	HSUA(sub-test 2)	•
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
	<u>-</u>	HSUA(sub-test 3)	
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
, ,	WCDMA Band II	HSUA(sub-test 4)	
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1
, ,	WCDMA Band II	HSUA(sub-test 5)	
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	23.0	23.0	23.0
Tolerance ±(dB)	1	1	1

Report No.: PT1411198125RH Page 26 of 102

#### **WLAN2450**

	802.11b									
Channel	Channel 1	Channel 6	Channel 11							
Target (dBm)	8.5	8.5	8.5							
Tolerance ±(dB)	1	1	1							
	802	.11g								
Channel	Channel 1	Channel 6	Channel 11							
Target (dBm)	7.0	7.0	7.0							
Tolerance ±(dB)	1	1	1							
	802.11n	(20MHz)								
Channel	Channel 1	Channel 6	Channel 11							
Target (dBm)	6.5	6.5	6.5							
Tolerance ±(dB)	1	1	1							
	802.11n	(40MHz)								
Channel	Channel 3	Channel 6	Channel 9							
Target (dBm)	6.5	6.5	6.5							
Tolerance ±(dB)	1	1	1							

#### Bluetooth v2.1+EDR

GFSK									
Channel	Channel 00	Channel 41	Channel 79						
Target (dBm)	2.0	2.0	2.0						
Tolerance ±(dB)	1	1	1						
8DPSK									
Channel	Channel 00	Channel 41	Channel 79						
Target (dBm)	1.5	1.5	1.5						
Tolerance ±(dB)	1	1	1						
· · · · ·	π/40	QPSK							
Channel	Channel 00	Channel 41	Channel 79						
Target (dBm)	2.0	2.0	2.0						
Tolerance ±(dB)	1	1	1						

# 5.2. Simultaneous TX SAR Considerations

#### 5.2.1 Introduction

The following procedures adopted from "FCC SAR Considerations for Cell Phones with Multiple Transmitters" are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For the DUT, the BT module has a antenna; GSM and WCDMA module sharing same antenna, So we can get following combination that can transmit signal simultaneously.

Air-Interface	Band (MHz)	Туре	Simultaneous Transmissions	Voice over Digital Transport(Data)					
	850	VO	Yes,WLAN or BT	N/A					
GSM	1900	VO	Tes,WLAN OF BT	IN/A					
	GPRS/EGPRS	DT	Yes,WLAN or BT	N/A					
WCDMA	Band II/Band V	DT	Yes,WLAN or BT	N/A					
BT	2441	DT	Yes,GSM,GPRS,EGPRS,WCDMA	N/A					
Note:VO-Voice Service only;DT-Digital Transport									

Report No.: PT1411198125RH Page 27 of 102

#### 5.2.2 Transmit Antenna Separation Distances

The product can support Bluetooth function, according to following picture 1 showed that the antenna position of the DUT. So accroding to KDB447498 for SAR testing.

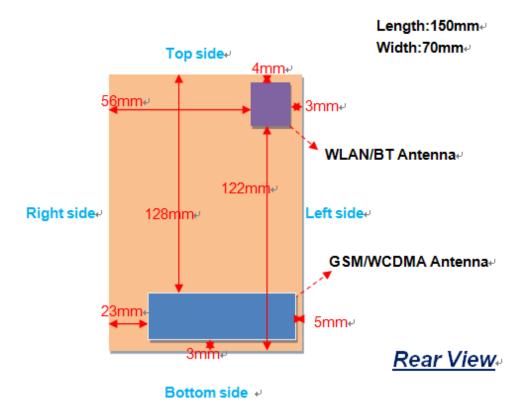


Figure 1:The antenna positions of the DUT

WWAN	WCDMA/GSM Antenna
WLAN/BT	WLAN/BT Antenna

#### 5.2.2 SAR Measurement Positions

According to KDB941225, SAR must be measured for all sides (edges) and surfaces with a transmitting antenna located at  $\leq$  25 mm from that surface or edge.

#### 5.2.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]  $\cdot$ [  $\sqrt{f(GHz)}$ ]  $\leq 3.0$  for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Report No.: PT1411198125RH Page 28 of 102

# Appendix A SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	31220
1500	12	24	37	49	61	SAR Test Exclusion
1900	11	22	33	44	54	Threshold (mW)
2450	10	19	29	38	48	The short (min)
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Picture 12.2 Power Thresholds

#### 5.2.4 Estimated SAR

When standalone SAR is not required to be measured per FCC KDB 447498 D01, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

Estimated SAR= 
$$\frac{\text{(max.power of channel,including tune-up tolerance,mW)}}{\text{(min.test separation distance,mm)}} * \frac{\sqrt{f(GHz)}}{7.5}$$

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

Ratio=
$$\frac{(SAR_1+SAR_2)^{1.5}}{(peak location separation,mm)} < 0.04$$

For Bluetooth, the Estimated SAR for Head at 5mm for estimate and 10mm to Estimated Body SAR

Estimated SAR<sub>Head</sub>=((1.99mW)/5mm)\*(1.5627/7.5)=0.083W/Kg

Estimated SAR<sub>Body</sub>=((1.99mW)/10mm)\*(1.5627/7.5)=0.041W/Kg

Report No.: PT1411198125RH Page 29 of 102

#### 5.2.5 Evaluation of Simultaneous SAR

#### GSM/WCDMA & WLAN Mode

Test Position	GSM850 Reported SAR1g (W/Kg)	PCS1900 Reported SAR1g (W/Kg)	WCDMA Band V Reported SAR1g (W/Kg)	WCDMA Band II Reported SAR1g (W/Kg)	WLAN Reported SAR1g (W/Kg)	Summation Reported SAR(1g) (W/kg)	Simultaneous Measurement Required?
Left Head Touch	0.710	0.634	0.399	0.314	0.281	0.991	No
Left Head Title	0.739	0.611	0.382	0.342	0.263	1.002	No
Right Head Touch	0.682	0.578	0.349	0.358	0.198	0.880	No
Right Head Title	0.698	0.570	0.360	0.388	0.185	0.883	No
Body-Back Side	0.666	0.699	0.548	0.497	0.350	1.049	No
Body-Front Side	0.582	0.627	0.483	0.419	0.285	0.912	No
Body-Left Side	0.652	0.673	0.521	0.474	0.315	0.988	No
Body-Right Side	0.591	0.660	0.481	0.397	0.239	0.899	No
Body-Top Side	0.299	0.323	0.276	0.239	0.332	0.655	No
Body-Bottom Side	0.643	0.661	0.516	0.447	0.153	0.814	No

## GSM/WCDMA & BT Mode

Test Position	GSM850 Reported SAR1g (W/Kg)	PCS1900 Reported SAR1g (W/Kg)	WCDMA Band V Reported SAR1g (W/Kg)	WCDMA Band II Reported SAR1g (W/Kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(1g) (W/kg)	Simultaneous Measurement Required?
Left Head Touch	0.710	0.634	0.399	0.314	0.083	0.793	No
Left Head Title	0.739	0.611	0.382	0.342	0.083	0.822	No
Right Head Touch	0.682	0.578	0.349	0.358	0.083	0.765	No
Right Head Title	0.698	0.570	0.360	0.388	0.083	0.781	No
Body-Back Side	0.666	0.699	0.548	0.497	0.041	0.740	No
Body-Front Side	0.582	0.627	0.483	0.419	0.041	0.668	No
Body-Left Side	0.652	0.673	0.521	0.474	0.041	0.714	No
Body-Right Side	0.591	0.660	0.481	0.397	0.041	0.701	No
Body-Top Side	0.299	0.323	0.276	0.239	0.041	0.364	No
Body-Bottom Side	0.643	0.661	0.516	0.447	0.041	0.702	No

Note:1. The value with green color is the maximum values of standalone

- The value with blue color is the maximum values of ∑SAR<sub>1g</sub>
   Body-Rear side values was the maximum values of GPRS,EDGE and Speech with Headset.

# 5.3. SAR Measurement Results

It is determined by user manual for the distance between the EUT and the phantom bottom. The distance is 5mm and just applied to the condition of body worn accessory.

The calculated SAR is obtained by the following formula:

Reported SAR=Measured SAR\*10<sup>(Ptarget-Pmeasured))/10</sup> Scaling factor=10<sup>(Ptarget-Pmeasured))/10</sup>

Reported SAR= Measured SAR\* Scaling factor

Where P<sub>target</sub> is the power of manufacturing upper limit;

P<sub>measured</sub> is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

**Duty Cycle** 

Duty Oy	, oic
Test Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS for GSM850/1900	1:4
WCDMA 850/1900	1:1
WiFi 2450	1:1

Report No.: PT1411198125RH Page 30 of 102

SAR Values (GSM850-Head)

	Test Frequency		Frequency Side Test		Maximum Allowed	Conducted Power	Measurement SAR over	Power	Scaling	Reported SAR over	SAR limit	Ref. Plot
(	Ch	MHz	Side	Position	Power (dBm)	(dBm)	1g(W/kg)	drift	Factor	1g(W/kg)	1g (W/kg)	#
1	90	836.60	Left	Touch	34.00	32.77	0.534	-0.15	1.33	0.710	1.60	
1	90	836.60	Left	Tilt	34.00	32.77	0.556	-0.07	1.33	0.739	1.60	1
1	90	836.60	Right	Touch	34.00	32.77	0.513	-0.11	1.33	0.682	1.60	
1	90	836.60	Right	Tilt	34.00	32.77	0.525	-0.13	1.33	0.698	1.60	

SAR Values (GSM850-Body)

Test Frequency		Mode (number of	Test	Maximum Allowed	Conducted Power	Measurement SAR	Power	Scaling	Reported SAR over	SAR limit	Ref. Plot
Ch	MHz	timeslots)	Position	Power (dBm)	(dBm)	over 1g(W/kg)	drift	Factor	1g(W/kg)	1g (W/kg)	#
190	836.60	GPRS (2)	Back	31.50	30.97	0.589	-0.01	1.13	0.666	1.60	2
190	836.60	GPRS (2)	Front	31.50	30.97	0.515	-0.06	1.13	0.582	1.60	
190	836.60	GPRS (2)	Left	31.50	30.97	0.577	0.01	1.13	0.652	1.60	
190	836.60	GPRS (2)	Right	31.50	30.97	0.523	-0.05	1.13	0.591	1.60	
190	836.60	GPRS (2)	Top	31.50	30.97	0.265	-0.07	1.13	0.299	1.60	
190	836.60	GPRS (2)	Bottom	31.50	30.97	0.569	-0.09	1.13	0.643	1.60	

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2.According to KDB447498,When the 1-g SAR for the mid-band channel,or the channel with highest output power satisfy the following conditions,testing of the other channels in the band is not required.

- ≤0.8W/Kg and transmission band ≤100MHz;
- ≤0.6W/Kg and 100MHz ≤transmission band ≤200MHz;
- ≤ 0.4W/Kg and transmission band >200MHz

SAR Values (PCS1900-Head)

OA,	Values (1	00730	o-ricau,								
	Side		Test	Maximum Allowed	Conducted Power	Measurement SAR over	Power	Scaling	Reported SAR over	SAR limit	Ref. Plot
Ch	MHz	oluc	Position	Power (dBm)	(dBm)	1g(W/kg)	drift	Factor	1g(W/kg)	1g (W/kg)	#
661	1880.0	Left	Touch	31.00	30.15	0.520	-0.03	1.22	0.634	1.60	3
661	1880.0	Left	Tilt	31.00	30.15	0.501	-0.15	1.22	0.611	1.60	
661	1880.0	Right	Touch	31.00	30.15	0.474	-0.06	1.22	0.578	1.60	
661	1880.0	Right	Tilt	31.00	30.15	0.467	-0.17	1.22	0.570	1.60	

SAR Values (PCS1900-Body)

SAN values (FCS1900-Body)											
	Test equency	Mode (number of	Test	Maximum Allowed	Conducted Power	Measurement SAR	Power	Scaling	Reported SAR over	SAR limit	Ref. Plot
Ch	MHz	timeslots)	Position	Power (dBm)	(dBm)	over 1g(W/kg)	drift	Factor	1g(W/kg)	1g (W/kg)	#
661	1880.0	GPRS (2)	Back	29.50	28.58	0.564	-0.01	1.24	0.699	1.60	4
661	1880.0	GPRS (2)	Front	29.50	28.58	0.506	-0.02	1.24	0.627	1.60	-
661	1880.0	GPRS (2)	Left	29.50	28.58	0.543	-0.16	1.24	0.673	1.60	
661	1880.0	GPRS (2)	Right	29.50	28.58	0.532	-0.07	1.24	0.660	1.60	-
661	1880.0	GPRS (2)	Тор	29.50	28.58	0.261	-0.02	1.24	0.323	1.60	
661	1880.0	GPRS (2)	Bottom	29.50	28.58	0.533	-0.11	1.24	0.661	1.60	

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2.According to KDB447498, When the 1-g SAR for the mid-band channel, or the channel with highest output power satisfy the following conditions, testing of the other channels in the band is not required.

- ≤0.8W/Kg and transmission band ≤100MHz;
- ≤0.6W/Kg and 100MHz ≤transmission band ≤200MHz;
- ≤ 0.4W/Kg and transmission band >200MHz

SAR Values (WCDMA Band V-Head)

טאווי ו	OAK Values (WODINA Bana V-Neau)													
Test F	requency		_	Maximum	Conducted	Measurement	_		Reported	SAR	Ref.			
Ch	MHz	Side	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #			
4182	836.40	Left	Touch	24.00	23.47	0.353	-0.10	1.13	0.399	1.60	5			
4182	836.40	Left	Tilt	24.00	23.47	0.338	-0.09	1.13	0.382	1.60				
4182	836.40	Right	Touch	24.00	23.47	0.309	-0.11	1.13	0.349	1.60				
4182	836.40	Right	Tilt	24.00	23.47	0.319	-0.06	1.13	0.360	1.60				

Report No.: PT1411198125RH Page 31 of 102

SAR Values (WCDMABand V-Body)

Test I	Frequency	Mode		Maximum	Conducted	Measurement			Reported	SAR	Ref.
Ch	MHz	(number of timeslots)	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #
4182	836.40	RMC	Back	24.00	23.47	0.485	-0.07	1.13	0.548	1.60	6
4182	836.40	RMC	Front	24.00	23.47	0.427	-0.07	1.13	0.483	1.60	
4182	836.40	RMC	Left	24.00	23.47	0.461	-0.15	1.13	0.521	1.60	
4182	836.40	RMC	Right	24.00	23.47	0.426	-0.06	1.13	0.481	1.60	-
4182	836.40	RMC	Тор	24.00	23.47	0.244	-0.06	1.13	0.276	1.60	
4182	836.40	RMC	Bottom	24.00	23.47	0.457	-0.03	1.13	0.516	1.60	

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2.According to KDB447498, When the 1-g SAR for the mid-band channel, or the channel with highest output power satisfy the following conditions, testing of the other channels in the band is not required.

- ≤0.8W/Kg and transmission band ≤100MHz;
- $\leq$ 0.6W/Kg and 100MHz  $\leq$ transmission band  $\leq$ 200MHz;
- ≤ 0.4W/Kg and transmission band >200MHz

SAR Values (WCDMA Band II -Head)

•	1 4.400 ( )			ouu,							
Test	Frequency		Toot	Maximum	Conducted	Measurement	Dawer	Cooling	Reported	SAR	Ref.
Ch	MHz	Side	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #
9400	1880.0	Left	Touch	24.00	23.25	0.264	-0.06	1.19	0.314	1.60	
9400	1880.0	Left	Tilt	24.00	23.25	0.287	-0.18	1.19	0.342	1.60	
9400	1880.0	Right	Touch	24.00	23.25	0.301	-0.12	1.19	0.358	1.60	
9400	1880.0	Right	Tilt	24.00	23.25	0.326	-0.07	1.19	0.388	1.60	7

SAR Values (WCDMA Band II -Body)

Test I	Frequency	Mode		Maximum	Conducted	Measurement			Reported	SAR	Ref.
Ch	MHz	(number of timeslots)	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #
9400	1880.0	RMC	Back	24.00	23.25	0.418	-0.07	1.19	0.497	1.60	8
9400	1880.0	RMC	Front	24.00	23.25	0.352	-0.00	1.19	0.419	1.60	
9400	1880.0	RMC	Left	24.00	23.25	0.398	-0.05	1.19	0.474	1.60	
9400	1880.0	RMC	Right	24.00	23.25	0.334	-0.17	1.19	0.397	1.60	
9400	1880.0	RMC	Top	24.00	23.25	0.201	-0.05	1.19	0.239	1.60	
9400	1880.0	RMC	Bottom	24.00	23.25	0.376	-0.13	1.19	0.447	1.60	

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2.According to KDB447498, When the 1-g SAR for the mid-band channel, or the channel with highest output power satisfy the following conditions, testing of the other channels in the band is not required.

- $\leq$ 0.8W/Kg and transmission band  $\leq$ 100MHz;
- ≤0.6W/Kg and 100MHz ≤transmission band ≤200MHz;
- $\leq$  0.4W/Kg and transmission band >200MHz

SAR Values (WLAN2450-Head)

SAK	SAR Values (WLAN2450-Fleau)												
Test F	Frequency			Maximum	Conducted	Measurement			Reported	SAR	Ref.		
Ch	MHz	Side	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #		
2437	6	Left	Touch	9.50	9.21	0.263	-0.08	1.07	0.281	1.60	9		
2437	6	Left	Tilt	9.50	9.21	0.246	-0.04	1.07	0.263	1.60			
2437	6	Right	Touch	9.50	9.21	0.185	-0.10	1.07	0.198	1.60			
2437	6	Right	Tilt	9.50	9.21	0.173	-0.05	1.07	0.185	1.60			

Report No.: PT1411198125RH Page 32 of 102

SAR Values (WLAN2450-Body)

Test	Frequency	Mode		Maximum	Conducted	Measurement			Reported	SAR	Ref.
Ch	MHz	(number of timeslots)	Test Position	Allowed Power (dBm)	Power (dBm)	SAR over 1g(W/kg)	Power drift	Scaling Factor	SAR over 1g(W/kg)	limit 1g (W/kg)	Plot #
2437	6	802.11b	Back	9.50	9.21	0.327	-0.09	1.07	0.350	1.60	10
2437	6	802.11b	Front	9.50	9.21	0.266	-0.06	1.07	0.285	1.60	
2437	6	802.11b	Left	9.50	9.21	0.294	-0.04	1.07	0.315	1.60	
2437	6	802.11b	Right	9.50	9.21	0.223	-0.04	1.07	0.239	1.60	
2437	6	802.11b	Top	9.50	9.21	0.310	-0.10	1.07	0.332	1.60	
2437	6	802.11b	Bottom	9.50	9.21	0.143	-0.09	1.07	0.153	1.60	

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2.According to KDB447498, When the 1-g SAR for the mid-band channel, or the channel with highest output power satisfy the following conditions, testing of the other channels in the band is not required. <0.8W/Kg and transmission band <100MHz;

≤0.6W/Kg and 100MHz ≤transmission band ≤200MHz;

≤ 0.4W/Kg and transmission band >200MHz

Note: This EUT owns two SIM cards, after we perform the pre-test for these two SIM cards; we found the SIM1 is the worst case, so only this worst result is recorded in this report.

# 5.4. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq$  0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

# 5.5. Measurement Uncertainty (300MHz-3GHz)

No.	Error Description	Typ e	Uncertain ty Value	Probably Distributio n	Div	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degre e of freedo m
Measureme	ent System									
1	Probe calibration	В	5.50%	N	1	1	1	5.50%	5.50%	∞
2	Axial isotropy	В	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	8
3	Hemispherical isotropy	В	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	8
4	Boundary Effects	В	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	8
5	Probe Linearity	В	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	В	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	$\infty$
7	RF ambient conditions-noise	В	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	8
8	RF ambient conditions-reflection	В	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	В	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	$\infty$

10	Integration time	В	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	8
11	RF ambient	В	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	В	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	8
13	Probe positioning with respect to phantom shell	В	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	8
14	Max.SAR evalation	В	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	8
Test Sampl	e Related									
15	Test sample positioning	Α	1.86%	N	1	1	1	1.86%	1.86%	∞
16	Device holder uncertainty	Α	1.70%	N	1	1	1	1.70%	1.70%	8
17	Drift of output power	В	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	8
Phantom ar	nd Set-up									
18	Phantom uncertainty	В	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	8
19	Liquid conductivity (target)	В	5.00%	R	$\sqrt{3}$	0.6 4	0.4 3	1.80%	1.20%	8
20	Liquid conductivity (meas.)	А	0.50%	N	1	0.6 4	0.4 3	0.32%	0.26%	8
21	Liquid permittivity (target)	В	5.00%	R	$\sqrt{3}$	0.6 4	0.4 3	1.80%	1.20%	8
22	Liquid cpermittivity (meas.)	Α	0.16%	N	1	0.6 4	0.4 3	0.10%	0.07%	8
Combined standard uncertaint	$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	/	10.20 %	10.00 %	8
Expanded uncertaint y (confidenc e interval of 95 %)	$u_e = 2u_c$		/	R	K= 2	/	/	20.40 %	20.00 %	8

Uncertainty for System Validation

Choortainty for Cyclon						
System Detection Limits	Uncert. value	Prob. Dist.	Div	Ci(1g)	Std. Unc. (1g)	Vi veff
Probe Calibration	±6.55 %	N	1	1	±6.55 %	1
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	1	±2.7 %	1
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0	±0 %	1
Boundary E_ects	±1.0 %	R	$\sqrt{3}$	1	±0.6 %	1
Linearity	±4.7 %	R	$\sqrt{3}$	1	±2.7 %	1
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	±0.6 %	1
Modulation Response	±0 %	R	$\sqrt{3}$	1	±0 %	1
Readout Electronics	±0.3 %	N	1	1	±0.3 %	1
Response Time	±0 %	R	$\sqrt{3}$	1	±0 %	1
Integration Time	±0 %	R	$\sqrt{3}$	1	±0 %	1
RF Ambient Noise	±1.0 %	R	$\sqrt{3}$	1	±0.6 %	1
RF Ambient Re ections	±1.0 %	R	$\sqrt{3}$	1	±0.6 %	1
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	±0.5 %	1

# Report No.: PT1411198125RH

# Page 34 of 102

Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	±3.9 %	1
Max. SAR Eval.	±2.0 %		$\sqrt{3}$	1	±1.2 %	1
Dipole Related			<b>V</b> 2			
Deviation of exp. dipole	±5.5 %	R	$\sqrt{3}$	1	±3.2 %	1
Dipole Axis to Liquid Dist.	±2.0 %	R	$\sqrt{3}$	1	±1.2 %	1
Input power & SAR drift	±3.4 %	R	$\sqrt{3}$	1	±2.0 %	1
Phantom and Setup						
Phantom Uncertainty	±4.0 %	R	$\sqrt{3}$	0.84	±2.3 %	1
SAR correction	±1.9 %	N	$\sqrt{3}$	0.72	±0.9 %	1
Liquid Conductivity (meas.)	±2.5 %	N	1	0.71	±1.8 %	1
Liquid Permittivity (meas.)	±2.5 %	R	1	0.26	±0.7 %	1
Temp. uncConductivity	±1.7 %	R	$\sqrt{3}$	0.71	±0.7 %	1
Temp. uncPermittivity	±0.3 %	N	$\sqrt{3}$	0.26	±0.0 %	8
Combined Std. Uncertainty					±10.1 %	
Expanded STD Uncertainty					±20.1 %	

Report No.: PT1411198125RH Page 35 of 102

# 5.6. System Check Results

#### System Performance Check at 835 MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Date/Time: 25/10/2014 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 835 MHz;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 41.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV3 - SN3842; ConvF(8.83, 8.83, 8.83); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.58 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.994 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 3.542 W/kg

## SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.48 mW/g

Maximum value of SAR (measured) = 2.59 mW/g

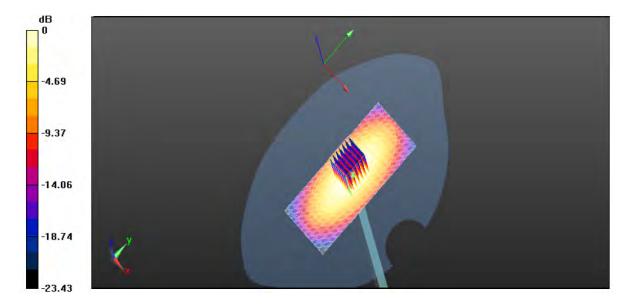

0 dB = 2.58 mW/g = 8.23 dB mW/g

Report No.: PT1411198125RH Page 36 of 102

# System Performance Check at 835 MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Date/Time: 25/10/2014 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 835 MHz;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 55.95$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(9.09, 9.09, 9.09); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.15 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.528 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.262 W/kg

SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.48 mW/g

Maximum value of SAR (measured) = 3.24 mW/g

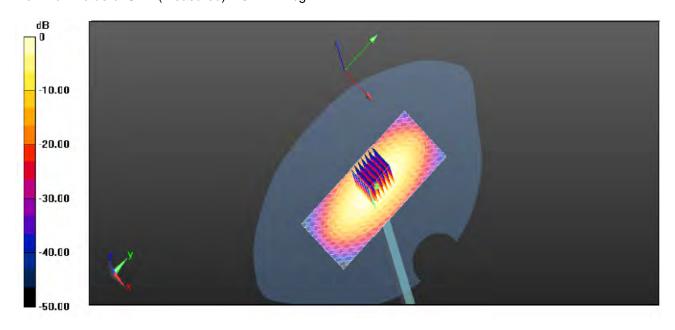

0 dB = 3.24 mW/g = 11.24 dB mW/g

Report No.: PT1411198125RH Page 37 of 102

#### System Performance Check at 1900 MHz Head

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Date/Time: 27/10/2014 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1900 MHz;  $\sigma = 1.45 \text{ S/m}$ ;  $\epsilon r = 39.83$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.55, 7.55, 7.55); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 10.65 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.818 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.352 W/kg

#### SAR(1 g) = 9.53 W/kg; SAR(10 g) = 4.96 W/kg

Maximum value of SAR (measured) = 12.43 W/kg

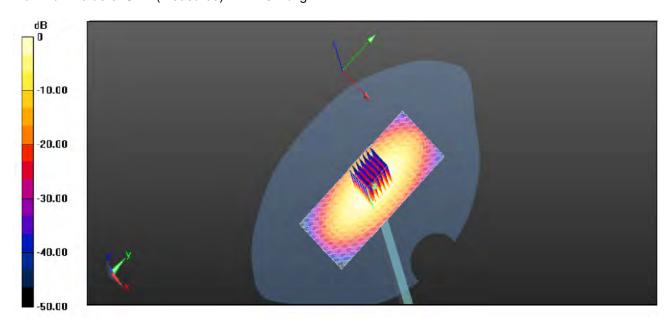

0 dB = 12.43 W/kg = 20.55 dB W/kg

Report No.: PT1411198125RH Page 38 of 102

#### System Performance Check at 1900 MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Date/Time: 27/10/2014 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 1900 MHz;  $\sigma = 1.49 \text{ S/m}$ ;  $\epsilon r = 55.64$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.43, 7.43, 7.43); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 11.46 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.816 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 16.826 W/kg

#### SAR(1 g) = 9.71 mW/g; SAR(10 g) = 5.13 mW/g

Maximum value of SAR (measured) = 16.34 mW/g

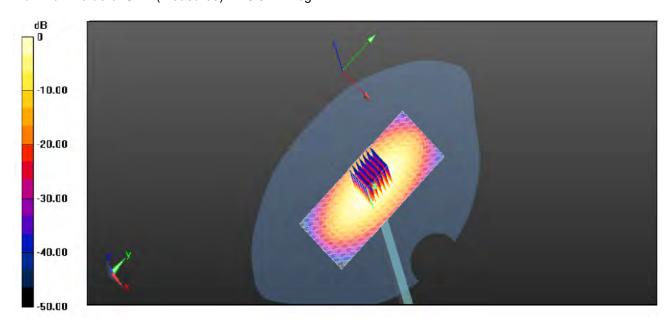

0 dB = 16.34 mW/g = 24.35 dB mW/g

Report No.: PT1411198125RH Page 39 of 102

#### System Performance Check at 2450 MHz Head

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Date/Time: 29/10/2014AM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2450 MHz;  $\sigma = 1.74 \text{S/m}$ ;  $\epsilon_r = 40.58$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.26, 7.26, 7.26); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: dx=10.00 mm, dy=10.00 mm

Maximum value of SAR (interpolated) = 14.9 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.714 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 26.08 mW/g

#### SAR(1 g) = 12.47 mW/g; SAR(10 g) = 5.83 mW/g

Maximum value of SAR (measured) = 14.8 mW/g

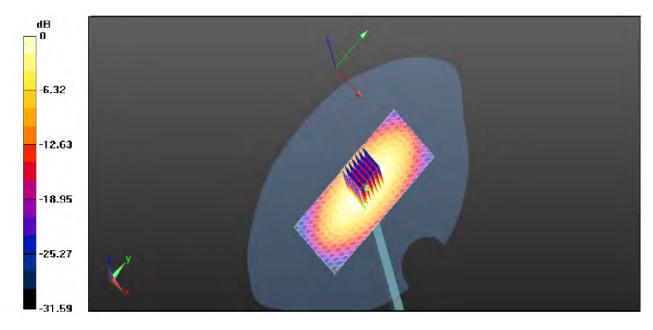

0 dB = 14.9 mW/g = 23.46 dB mW/g

System Performance Check 2450MHz Head250mW

Report No.: PT1411198125RH Page 40 of 102

#### System Performance Check at 2450 MHz Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Date/Time: 29/10/2014AM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2450 MHz;  $\sigma = 1.98 \text{S/m}$ ;  $\epsilon_r = 53.47$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(6.93, 6.93, 6.93); Calibrated: 06/06/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1):Measurement grid: dx=10.00 mm, dy=10.00 mm

Maximum value of SAR (interpolated) = 13.15 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.986 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 16.08 mW/g

#### SAR(1 g) = 12.53 mW/g; SAR(10 g) = 5.69 mW/g

Maximum value of SAR (measured) = 16.08 mW/g

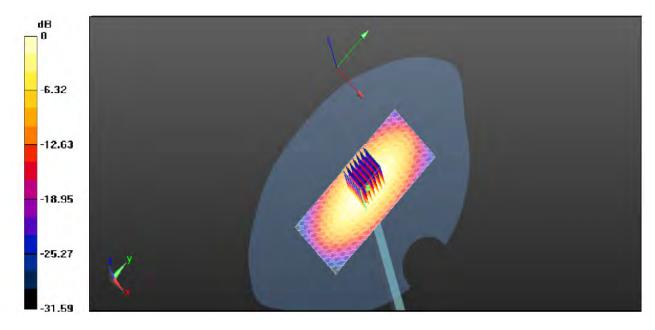

0 dB = 16.08 mW/g = 24.67 dB mW/g

System Performance Check 2450MHz Body250mW

Report No.: PT1411198125RH Page 41 of 102

#### 5.7. SAR Test Graph Results

#### **GSM850 Left Head Tilt Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz;Duty Cycle:1:8.3

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.93 \text{ S/m}$ ;  $\varepsilon_r = 42.55$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Head Section

Probe: EX3DV3 - SN3842; ConvF(8.83, 8.83, 8.83); Calibrated: 06/06/2014;

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.634 W/kg


Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.575 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.754 W/kg


SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 0.754 W/kg

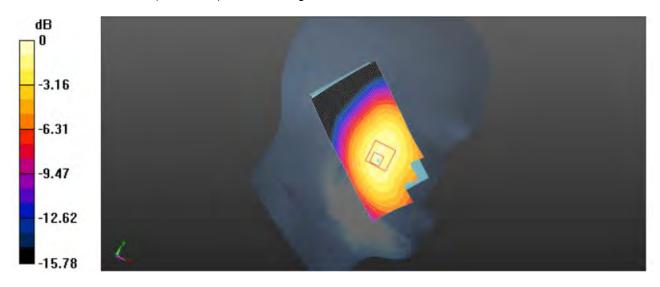

0dB = 0.466 W/kg = -5.34 dBW/kg

Plot 1: Left Head Title (GSM850 Middle Channel)

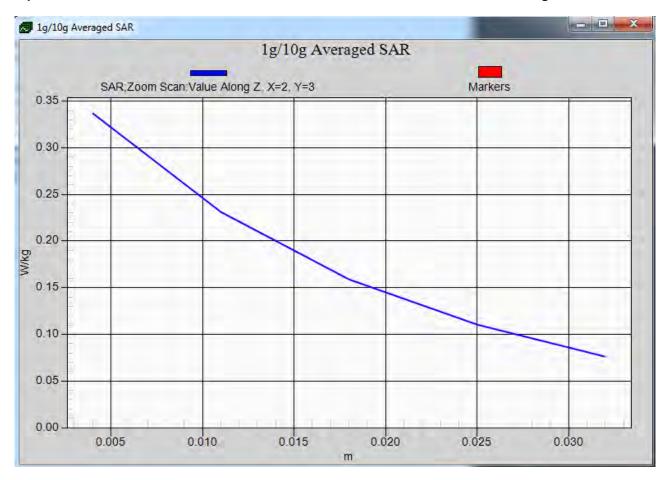

Z-Scan at power reference point- Left Head Tilt (GSM850 Middle Channel)

Report No.: PT1411198125RH Page 43 of 102

#### GSM850 GPRS 4TS Body Back Side Middle Channel

Communication System: Customer System; Frequency: 836.6 MHz;Duty Cycle:1:4

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 55.13$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Body-worn

Probe: EX3DV4 - SN3842; ConvF(9.09, 9.09, 9.09); Calibrated: 06/06/2014;

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.562 W/kg


Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.347 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.647 W/kg


SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

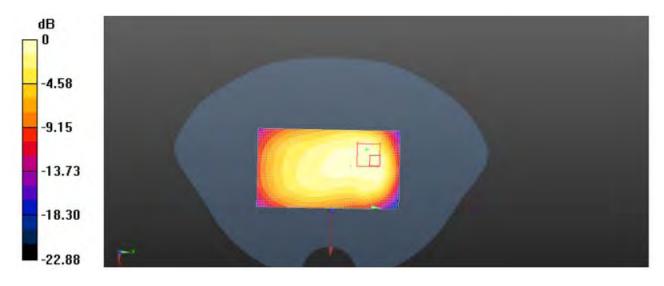

0dB = 0.730 W/kg = -1.27 dBW/kg

Plot 2: Body Back Side (GSM850 GPRS 4TS Middle Channel)

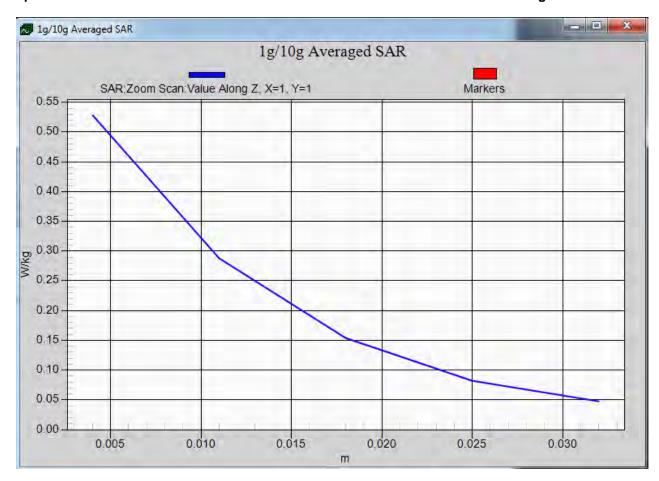

Z-Scan at power reference point-Body Back Side (GSM850 GPRS 4TS Middle Channel)

Report No.: PT1411198125RH Page 45 of 102

#### **PCS1900 Left Head Touch Middle Channel**

Communication System: Customer System; Frequency: 1880.0 MHz;Duty Cycle:1:8.3

Medium parameters used (interpolated): f = 1880.0 MHz;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 40.90$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section : Left Head Section

Probe: EX3DV4 - SN3842; ConvF(7.55, 7.55, 7.55); Calibrated: 06/06/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) =0.623 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.436 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.763 W/kg


SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.763 W/kg



0dB = 0.463 W/kg = -5.26 dBW/kg

Plot 3: Left Head Touch (PCS1900 Middle Channel)

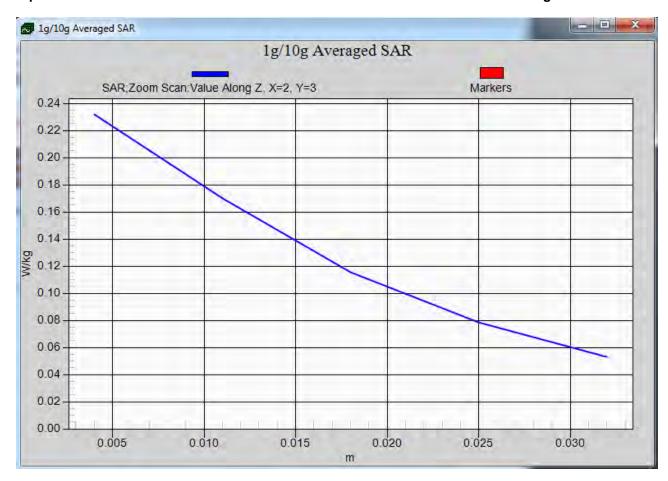

Z-Scan at power reference point- Left Head Touch (PCS1900 Middle Channel)

Report No.: PT1411198125RH Page 47 of 102

#### PCS1900 GPRS 4TS Body Back Side Middle Channel

Communication System: Customer System; Frequency: 1880.0 MHz;Duty Cycle:1:4

Medium parameters used (interpolated): f = 1880.0 MHz;  $\sigma = 1.53 \text{ S/m}$ ;  $\epsilon_r = 53.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Body-worn

Probe: EX3DV4 - SN3842; ConvF(7.43, 7.43, 7.43); Calibrated: 06/06/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.643 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.325 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.668 W/kg


SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 0.669 W/kg

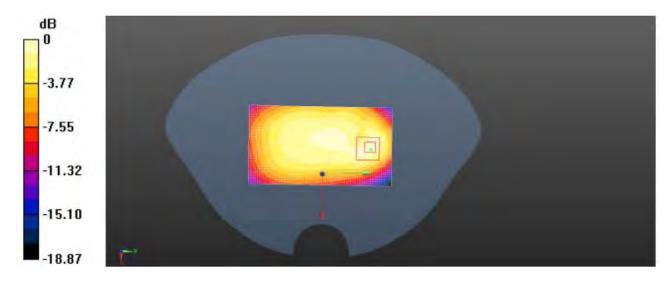

0dB = 0.457 W/kg = -3.86 dBW/kg

Plot 4: Body Back Side (PCS1900 GPRS 4TS Middle Channel)

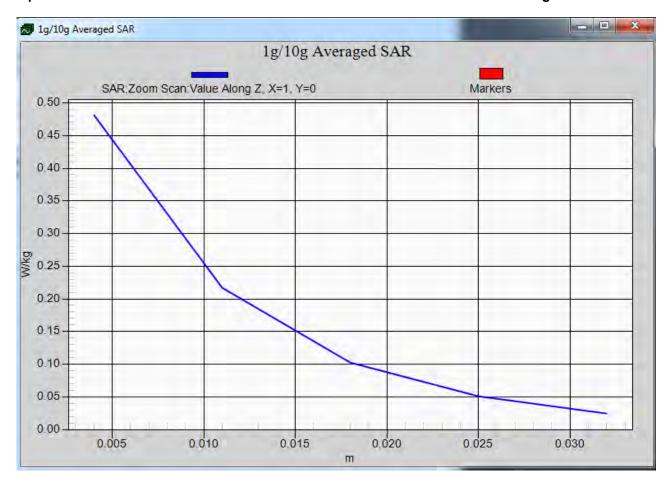

Z-Scan at power reference point- Body Back Side (PCS1900 GPRS 4TS Middle Channel)

Report No.: PT1411198125RH Page 49 of 102

#### WCDMA Band V Left Head Touch Middle Channel

Communication System: Customer System; Frequency: 836.4 MHz; Duty Cycle:1:1

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.90 \text{ S/m}$ ;  $\varepsilon_r = 42.02$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Head Section

Probe: EX3DV4 - SN3842; ConvF(8.83, 8.83, 8.83); Calibrated: 06/06/2014;

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.371 W/kg


Zoom Scan (6x6x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.365 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.483 W/kg


SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.483 W/kg

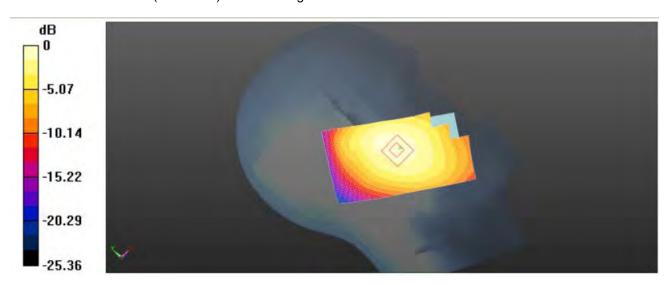

0dB = 0.289 W/kg = -5.14 dBW/kg

Plot 5: Left Head Touch (WCDMA Band V Middle Channel)

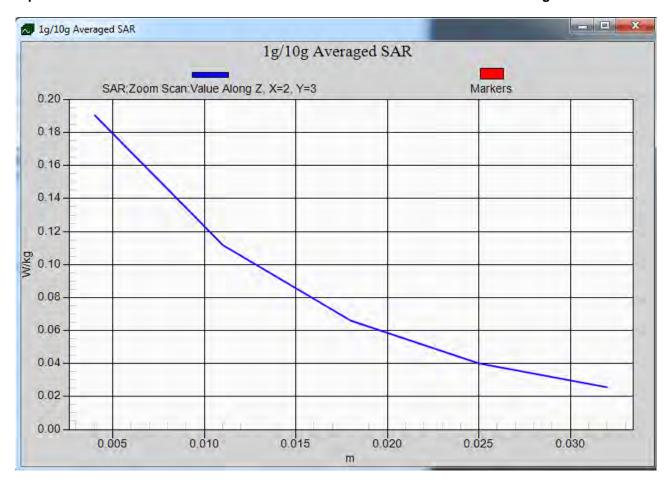

Z-Scan at power reference point- Left Head Touch (WCDMA Band V Middle Channel)

Report No.: PT1411198125RH Page 51 of 102

#### WCDMA Band V RMC Body Back Side Middle Channel

Communication System: Customer System; Frequency: 836.4 MHz; Duty Cycle:1:1

Medium parameters used (interpolated): f = 836.4 MHz;  $\sigma = 0.95 \text{ S/m}$ ;  $\varepsilon_r = 55.52$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Body-worn

Probe: EX3DV4 - SN3842; ConvF(9.09, 9.09, 9.09); Calibrated: 06/06/2014;

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.557 W/kg


Zoom Scan (6x6x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.526 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.635 W/kg


SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 0.635 W/kg

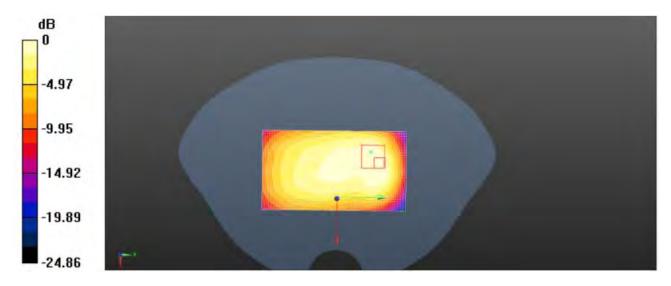

0dB = 0.412 W/kg = -5.14 dBW/kg

Plot 6: Body Back Side (WCDMA Band V RMC Middle Channel)

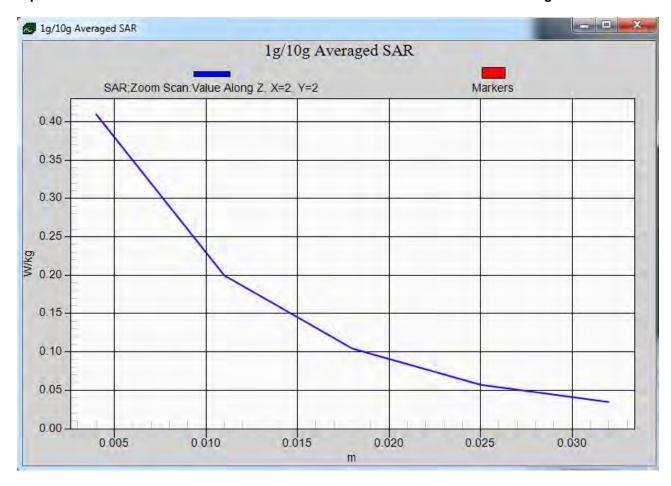

Z-Scan at power reference point- Body Back Side (WCDMA Band V RMC Middle Channel)

Report No.: PT1411198125RH Page 53 of 102

#### WCDMA Band II Right Head Tilt Middle Channel

Communication System: Customer System; Frequency: 1880.0 MHz;Duty Cycle:1:1

Medium parameters used (interpolated): f = 1880.0 MHz;  $\sigma = 1.37 \text{ S/m}$ ;  $\epsilon_r = 40.12$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section : Right Head Section

Probe: EX3DV4 - SN3842; ConvF(7.55, 7.55, 7.55); Calibrated: 06/06/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.446 W/kg


Zoom Scan (6x6x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.637 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.524 W/kg


SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

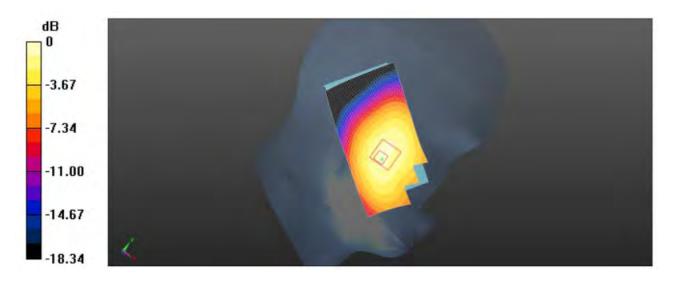

0dB = 0.282 W/kg = -7.16 dBW/kg

Plot 7: Right Head Tilt (WCDMA Band II Middle Channel)

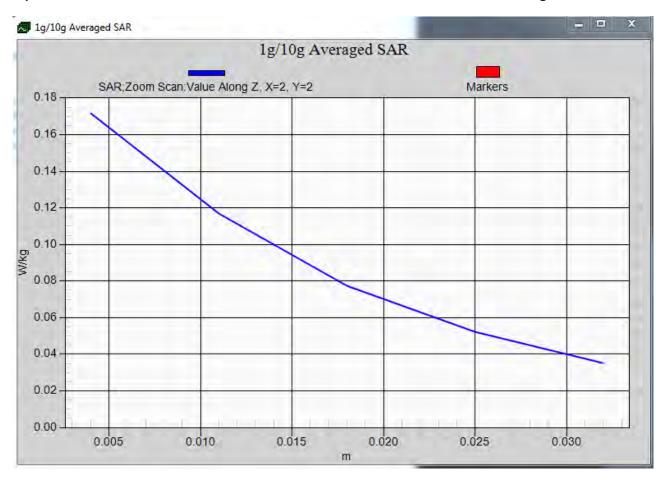

Z-Scan at power reference point- Left Head Touch (WCDMA Band II Middle Channel)

Report No.: PT1411198125RH Page 55 of 102

#### WCDMA Band II RMC Body Back Side Middle Channel

Communication System: Customer System; Frequency: 1880.0 MHz;Duty Cycle:1:1

Medium parameters used (interpolated): f = 1880.0 MHz;  $\sigma = 1.54 \text{ S/m}$ ;  $\epsilon_r = 53.27$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Body-worn

Probe: EX3DV4 - SN3842; ConvF(7.43, 7.43, 7.43); Calibrated: 06/06/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (81x101x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.585 W/kg


Zoom Scan (6x6x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.446 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.884 W/kg


SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

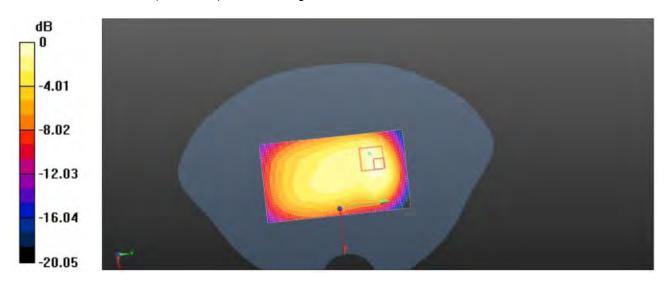

0dB = 0.425 W/kg = -5.39 dBW/kg

Plot 8: Body Back Side (WCDMA Band II RMC Middle Channel)

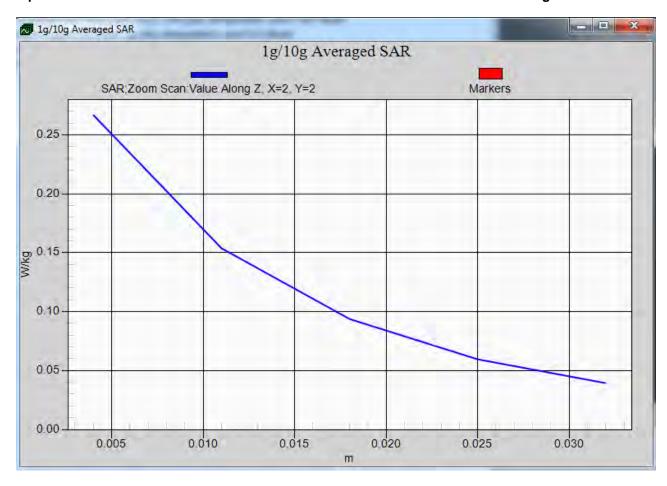

Z-Scan at power reference point- Body Back Side (WCDMA Band II RMC Middle Channel)

Report No.: PT1411198125RH Page 57 of 102

#### Left Head Cheek (WLAN2450 Middle Channel)

Communication System: Customer System; Frequency: 2437.0 MHz;Duty Cycle:1:1

Medium parameters used (interpolated): f = 2437.0 MHz;  $\sigma = 1.82 \text{ S/m}$ ;  $\epsilon_r = 38.80$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Head Section:

Probe: ES3DV3 - SN3842; ConvF(7.26, 7.26, 7.26); Calibrated: 06/06/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (91x51x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.364 W/kg


Zoom Scan (6x6x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.265 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

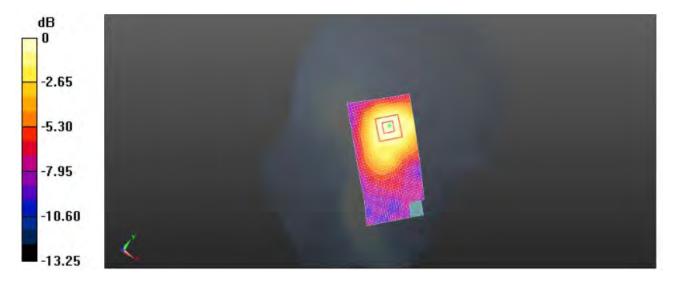

Plot 9: Left Head Cheek (WLAN2450 Middle Channel)

Report No.: PT1411198125RH Page 58 of 102

#### **Body- worn Rear side (WLAN 802.11b Middle Channel)**

Communication System: Customer System; Frequency: 2437.0 MHz;Duty Cycle:1:1

Medium parameters used (interpolated): f = 2437.0 MHz;  $\sigma = 1.82 \text{ S/m}$ ;  $\epsilon_r = 38.80$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Body-worn

Probe: ES3DV3 - SN3842; ConvF(6.93, 6.93, 6.93); Calibrated: 06/06/2013;

Electronics: DAE4 Sn1315; Calibrated: 25/11/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (61x81x1): Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.368 mW/g

Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.334 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

Zoom Scan (5x5x5)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.334 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.180 W/kg



Plot 10: Body- worn Rear side (WLAN802.11b Middle Channel)

Report No.: PT1411198125RH Page 59 of 102

## 6. Calibration Certificate

#### 6.1. Probe Calibration Ceriticate

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

CIQ-SZ (Auden)

Certificate No: EX3-3842\_Jun13

Accreditation No.: SCS 108

#### CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3842

Calibration procedure(s)

QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4

Calibration procedure for dosimetric E-field probes

Calibration date:

June 6, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:

Certificate No: EX3-3842\_Jun13

Name Jeton Kastrati Function Laboratory Technician

Approved by

Katja Pokovic Technical Manager

Issued: June 6, 2014

Signature

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid
NORMx,y,z sensitivity in free space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty\_cycle) of the RF signal A, B, C, D modulation dependent linearization parameters

Polarization o o rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

#### Calibration is Performed According to the Following Standards:

 IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2013

Techniques", December 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 3 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax.y,z; Bx.y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Report No.: PT1411198125RH Page 61 of 102

EX3DV4 - SN:3842 June 6, 2014

# Probe EX3DV4

SN:3842

Manufactured: October 25, 2011 Repaired: June 3, 2014 Calibrated: June 6, 2014

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3842\_Jun13

Page 3 of 11

EX3DV4-SN:3842

June 6, 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3842

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.35	0.52	0.42	± 10.1 %
DCP (mV) <sup>B</sup>	104.7	100.4	100.5	

#### **Modulation Calibration Parameters**

UID	Communication System Name		Α	В	С	D	VR	Unc <sup>E</sup>
			dB	dB√μV		dB	mV	(k=2)
0	CW	X	0.0	0.0	1.0	0.00	132.3	±3.5 %
		Y	0.0	0.0	1.0		162.7	
		Z	0.0	0.0	1.0		147.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3842\_Jun13

A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4-SN:3842 June 6, 2014

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3842

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	10.00	10.00	10.00	0.15	1.10	± 13.4 %
835	41.5	0.91	8.83	8.83	8.83	0.28	1.07	± 12.0 %
900	41.5	0.97	8.78	8.78	8.78	0.32	1.00	± 12.0 %
1810	40.0	1.40	7.68	7.68	7.68	0.38	0.88	± 12.0 %
1900	40.0	1.40	7.55	7.55	7.55	0.50	0.77	± 12.0 %
2450	39.2	1.80	7.26	7.26	7.26	0.71	0.63	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4-SN:3842

June 6, 2014

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3842

#### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	10.34	10.34	10.34	0.09	1.00	± 13.4 %
835	55.2	0.98	9.09	9.09	9.09	0.42	0.84	± 12.0 %
900	55.0	1.05	9.16	9.16	9.16	0.47	0.79	± 12.0 %
1810	53.3	1.52	7.78	7.78	7.78	0.50	0.81	± 12.0 %
1900	53.3	1.52	7.43	7.43	7.43	0.29	1.07	± 12.0 %
2450	52.7	1.95	6.93	6.93	6.93	0.80	0.59	± 12.0 %

 $<sup>^{\</sup>rm C}$  Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4-SN:3842 June 6, 2014


# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

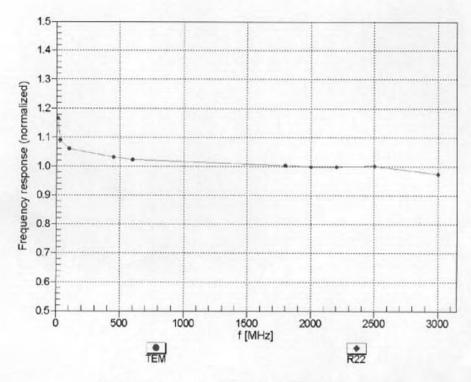


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


EX3DV4-SN:3842 June 6, 2014

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

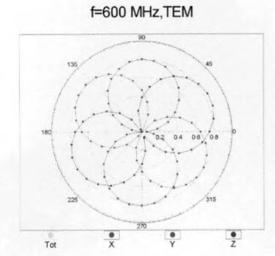

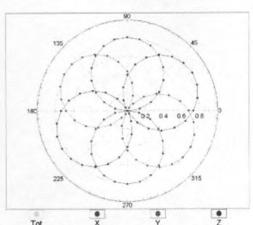

f=1800 MHz,R22

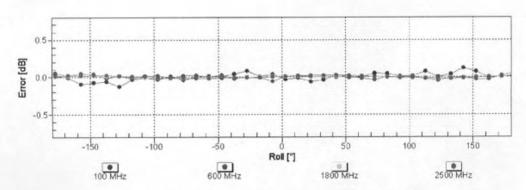



Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

EX3DV4-SN:3842


June 6, 2014

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f = 900 MHz)

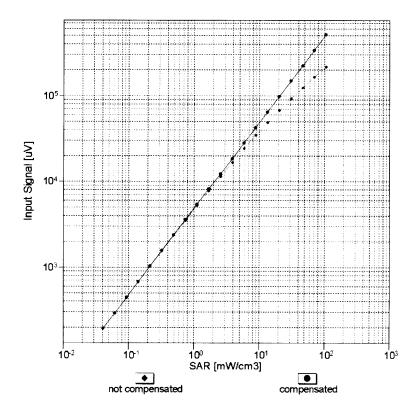

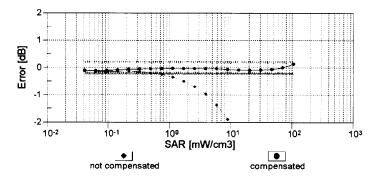

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

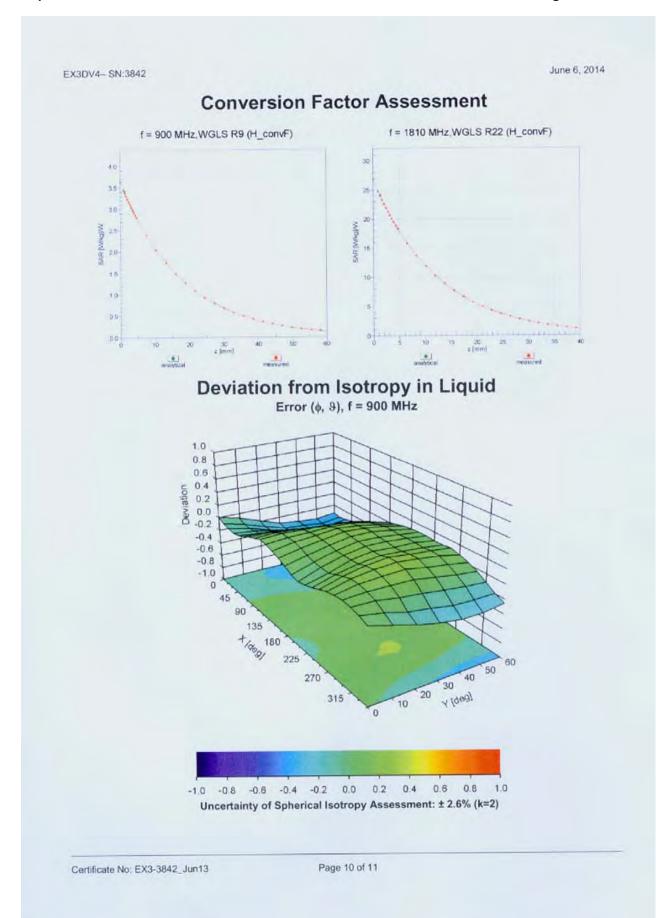

Report No.: PT1411198125RH Page 69 of 102

EX3DV4- SN:3842 June 6, 2014

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3842

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-117.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Certificate No: EX3-3842\_Jun13 Page 11 of 11

Report No.: PT1411198125RH Page 70 of 102

#### 6.2. D835V2 Dipole Calibration Ceriticate



In Collaboration with

CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com





Client

CIQ SZ (Auden)

Certificate No: J13-2-3049

#### CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d134

Calibration Procedure(s) TMC-OS-E-02-194

Calibration procedure for dipole validation kits

Calibration date:

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

December 13, 2013

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Scheduled Calibration **Primary Standards** ID# Cal Date(Calibrated by, Certificate No.)

Power Meter NRVD 102083 11-Sep-13 (TMC, No.JZ13-443) Sep-14 Power sensor NRV-Z5 100595 11-Sep-13 (TMC, No. JZ13-443) Sep - 14 Reference Probe ES3DV3 5- Sep-13 (SPEAG, No.ES3-3149\_Sep13) SN 3149 Sep-14 SN 777 22-Feb-13 (SPEAG, DAE4-777 Feb13) Feb -14 MY49070393 Nov-14 Signal Generator E4438C 13-Nov-13 (TMC, No.JZ13-394) Oct-14 Network Analyzer E8362B MY43021135 19-Oct-13 (TMC, No.JZ13-278)

Name

Function

Signature

Calibrated by:

Zhao Jing

SAR Test Engineer

Reviewed by:

Qi Dianyuan

SAR Project Leader

Approved by:

Lu Bingsong

Deputy Director of the laboratory

Issued: December 17, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J13-2-3049

Page 1 of 8



In Collaboration with

e CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com

Glossary:

N/A

TSL ConvF tissue simulating liquid

sensitivity in TSL / NORMx, v, z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held. devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)". February 2005
- c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: J13-2-3049

Page 2 of 8



In Collaboration with

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

#### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.7.1137
Extrapolation	Advanced Extrapolation	
Phantom	Twin Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

**Head TSL parameters** 

meters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.7 ± 6 %	0.88 mho/m ± 6 %
Head TSL temperature change during test	<0.5 °C	_	-

SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.66 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.55 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.27 mW /g ± 20.4 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.3 ± 6 %	0.97 mho/m ± 6 %
Body TSL temperature change during test	<0.5 °C		-

SAR result with Body TSL

Certificate No: J13-2-3049

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.32 mW/g
SAR for nominal Body TSL parameters	normalized to 1W	9.36 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.54 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.20 mW /g ± 20.4 % (k=2)

Report No.: PT1411198125RH Page 73 of 102



In Collaboration with CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

#### **Appendix**

## Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.5\Omega + 3.14j\Omega$	
Return Loss	- 28.1dB	

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2Ω + 2.90jΩ	
Return Loss	- 30.4dB	

## General Antenna Parameters and Design

1.241 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Maria actarca by	



In Collaboration with

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

### DASY5 Validation Report for Head TSL

Test Laboratory: TMC, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d134

Communication System: CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz;  $\sigma = 0.884 \text{ mho/m}$ ;  $\epsilon r = 41.65$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Date: 12.11.2013

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

- Probe: ES3DV3 SN3149; ConvF(6.21,6.21,6.21); Calibrated: 2013/9/5
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: SAM 1186;Type: QD000P40CC;
- Measurement SW: DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

## Dipole Calibration for Head Tissue/Pin=250mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.581 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

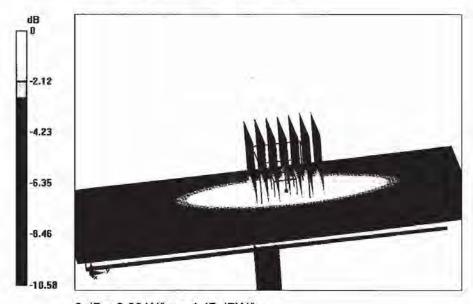

0 dB = 2.80 W/kg = 4.47 dBW/kg

Certificate No: J13-2-3049

Page 5 of 8




In Collaboration with

## e a CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbel Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Head TSL

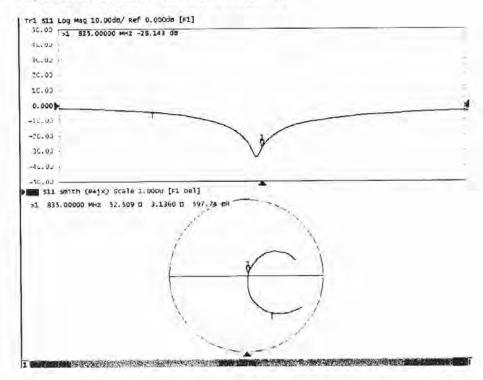



In Collaboration with e CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com

#### DASY5 Validation Report for Body TSL

Test Laboratory: TMC, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d134

Communication System: CW; Frequency: 835 MHz;

Medium parameters used: f = 835 MHz;  $\sigma = 0.965 \text{ mho/m}$ ;  $\epsilon r = 56.32$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Date: 12.13.2013

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

- Probe: ES3DV3 SN3149; ConvF(5.98,5.98,5.98); Calibrated: 2013/9/5
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: SAM 1186; Type: QD000P40CC;
- Measurement SW: DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

## Dipole Calibration for Body Tissue/Pin=250mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.271 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

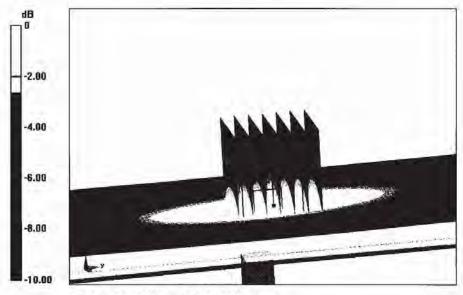

0 dB = 2.69 W/kg = 4.30 dBW/kg

Certificate No: J13-2-3049

Page 7 of 8




In Collaboration with p e CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Body TSL

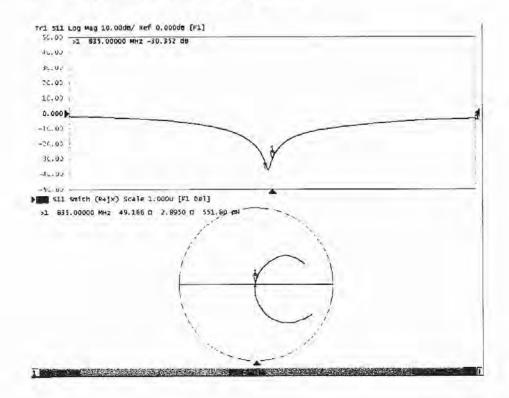

Report No.: PT1411198125RH Page 78 of 102

## 6.3. D1900V2 Dipole Calibration Ceriticate



In Collaboration with

CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com





Client

CIQ SZ (Auden)

Certificate No: J13-2-3052

## CALIBRATION CERTIFICATE

Object

D1900V2 - SN: 5d150

Calibration Procedure(s)

TMC-OS-E-02-194

Calibration procedure for dipole validation kits

Calibration date:

December 12, 2013

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)\*C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

**Primary Standards** 

Cal Date(Calibrated by, Certificate No.)

Scheduled Calibration

Power Meter NRVD	102083	11-Sep-13 (TMC, No.JZ13-443)	Sep-14
Power sensor NRV-Z5	100595	11-Sep-13 (TMC, No. JZ13-443)	Sep -14
Reference Probe ES3DV3	SN 3149	5- Sep-13 (SPEAG, No.ES3-3149_Sep13)	Sep-14
DAE4	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb -14
Signal Generator E4438C	MY49070393	13-Nov-13 (TMC, No.JZ13-394)	Nov-14
Network Analyzer E8362B	MY43021135	19-Oct-13 (TMC, No.JZ13-278)	Oct-14

Name

Function

Signature

Calibrated by:

Zhao Jing

**SAR Test Engineer** 

Reviewed by:

Qi Dianyuan

SAR Project Leader

Approved by:

Lu Bingsong

Deputy Director of the laboratory

Issued: December 17, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J13-2-3052

Page 1 of 8

Report No.: PT1411198125RH Page 79 of 102



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORMx,y,z
N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms
  oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the
  dipole positioned under the liquid filled phantom. The impedance stated is transformed
  from the measurement at the SMA connector to the feed point. The Return Loss
  ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

## p e CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haldian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.7.1137
Extrapolation	Advanced Extrapolation	
Phantom	Twin Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.9 ± 6 %	1.42 mho/m ± 6 %
Head TSL temperature change during test	<0.5 °C		-

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.71 mW/g
SAR for nominal Head TSL parameters	normalized to 1W	38.3 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.08 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.2 mW /g ± 20.4 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.7 ± 6 %	1.53 mho/m ± 6 %
Body TSL temperature change during test	<0.5 °C	almose.	

SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.98 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.9 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.26 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.0 mW /g ± 20.4 % (k=2)



E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Appendix

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.3Ω+ 3.17jΩ
Return Loss	- 30.0dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8Ω+ 3.92jΩ
Return Loss	- 27,7dB

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.048 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

r to the second	
Manufactured by	SPEAG



In Collaboration with

S D E A G

CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## **DASY5 Validation Report for Head TSL**

Test Laboratory: TMC, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d150

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz;  $\sigma = 1.416 \text{ mho/m}$ ;  $\epsilon r = 38.91$ ;  $\rho = 1000 \text{ mHz}$ 

Date: 12.12.2013

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

- Probe: ES3DV3 SN3149; ConvF(5.06,5.06,5.06); Calibrated: 2013/9/5
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: SAM 1186; Type: QD000P40CC;
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)


## Dipole Calibration for Head Tissue/Pin=250mW, d=10mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.054 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.71 W/kg; SAR(10 g) = 5.08 W/kg Maximum value of SAR (measured) = 11.8 W/kg

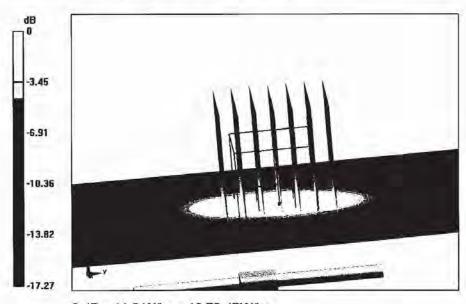

0 dB = 11.8 W/kg = 10.72 dBW/kg




In Collaboration with

S D C A G

CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Head TSL

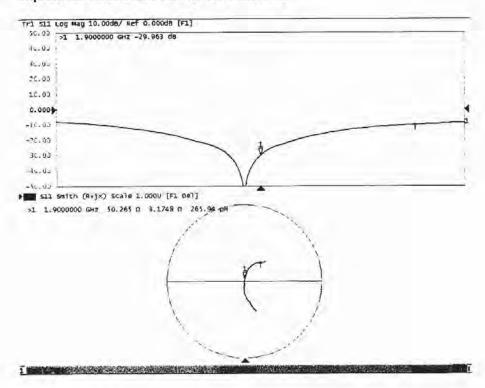



In Collaboration with e CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com

## **DASY5 Validation Report for Body TSL**

Test Laboratory: TMC, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d150

Communication System: CW; Frequency: 1900 MHz;

Medium parameters used: f = 1900 MHz;  $\sigma = 1.528$  mho/m;  $\epsilon r = 53.74$ ;  $\rho = 1000$ 

Date: 12.10.2013

kg/m3

Phantom section: Flat Phantom

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

- Probe: ES3DV3 SN3149; ConvF(4.72,4.72,4.72); Calibrated: 2013/9/5
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: SAM1186; Type: QD000P40CC;
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)


## Dipole Calibration for Body Tissue/Pin=250mW, d=10mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.606 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.26 W/kg Maximum value of SAR (measured) = 12.1 W/kg

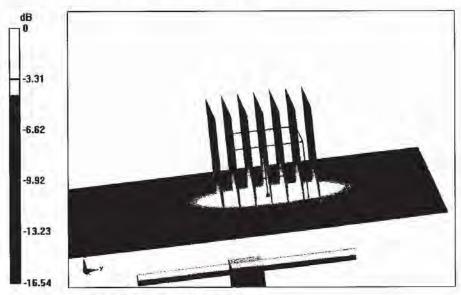

0 dB = 12.1 W/kg = 10.83 dBW/kg




In Collaboration with e CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Body TSL

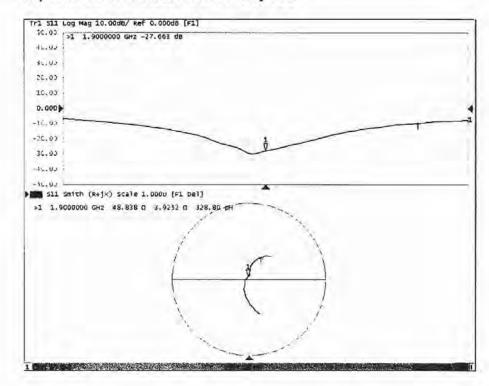

Report No.: PT1411198125RH Page 86 of 102

## 6.4. D2450V2 Dipole Calibration Ceriticate



In Collaboration with

CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com





Client

CIQ SZ (Auden)

Certificate No: J13-2-3053

## CALIBRATION CERTIFICAT

Object

D2450V2 - SN: 884

Calibration Procedure(s)

TMC-OS-E-02-194

Calibration procedure for dipole validation kits

Calibration date:

December 11, 2013

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

**Primary Standards** ID# Cal Date(Calibrated by, Certificate No.) Scheduled Calibration

Power Meter NRVD	102083	11-Sep-13 (TMC, No.JZ13-443)	Sep-14
Power sensor NRV-Z5	100595	11-Sep-13 (TMC, No. JZ13-443)	Sep -14
Reference Probe ES3DV3	SN 3149	5- Sep-13 (SPEAG, No.ES3-3149_Sep13)	Sep-14
DAE4	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb -14
Signal Generator E4438C	MY49070393	13-Nov-13 (TMC, No.JZ13-394)	Nov-14
Network Analyzer E8362B	MY43021135	19-Oct-13 (TMC, No.JZ13-278)	Oct-14

Name

Function

Calibrated by:

Zhao Jing

SAR Test Engineer

Reviewed by:

Qi Dianyuan

SAR Project Leader

Approved by:

Lu Bingsong

Deputy Director of the laboratory

Issued: December 17, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: J13-2-3053

Page 1 of 8

Report No.: PT1411198125RH Page 87 of 102



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORMx,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms
  oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: J13-2-3053

Page 2 of 8



In Collaboration with

# e

Add: No.52 Huayuanbel Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.7.1137
Extrapolation	Advanced Extrapolation	
Phantom	Twin Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	
	2000	

Head TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.82 mho/m ± 6 %
Head TSL temperature change during test	<0.5 °C	-	

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	51.7 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.05 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.1 mW /g ± 20.4 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

,	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.8 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature change during test	<0.5 °C	4-4	-

SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	51.8 mW /g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.98 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.0 mW /g ± 20.4 % (k=2)

Certificate No: J13-2-3053

Page 3 of 8



E-mail: Info@emcite.com

Add: No.52 Huayuanbel Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

### Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	46.8Ω+ 3.76jΩ
Return Loss	- 25.9dB

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	55.2Ω+ 2.38jΩ	
Return Loss	- 25.4dB	

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Certificate No: J13-2-3053

Page 4 of 8



In Collaboration with

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com

## DASY5 Validation Report for Head TSL

Test Laboratory: TMC, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 884

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.817$  mho/m;  $\epsilon r = 38.96$ ;  $\rho = 1000$ 

Date: 12.10,2013

kg/m3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

- Probe: ES3DV3 SN3149; ConvF(4.48,4.48,4.48); Calibrated: 2013/9/5
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: SAM 1593; Type: QD000P40CC;
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)


## Dipole Calibration for Head Tissue/Pin=250mW, d=10mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.529 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.05 W/kg Maximum value of SAR (measured) = 16.2 W/kg

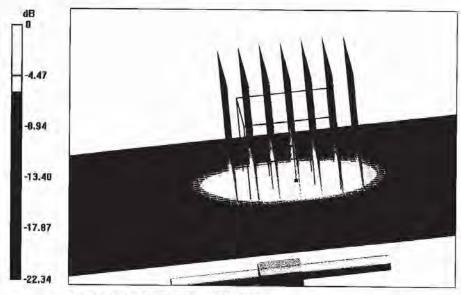

0 dB = 16.2 W/kg = 12.10 dBW/kg




in Collaboration with p e CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Head TSL

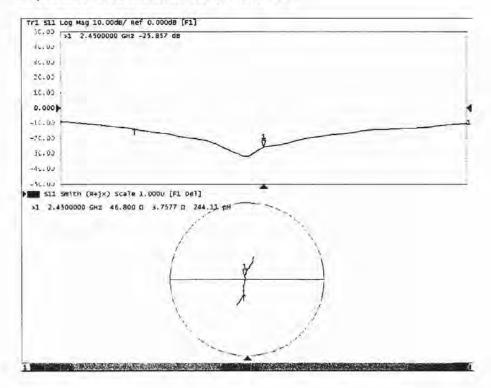



In Collaboration with e CALIBRATION LABORATORY

Tel: +86-10-62304633-2079 E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Fax: +86-10-62304633-2504 Http://www.emcite.com

## DASY5 Validation Report for Body TSL

Test Laboratory: TMC, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 884

Communication System: CW; Frequency: 2450 MHz;

Medium parameters used: f = 2450 MHz;  $\sigma = 1.939$  mho/m;  $\epsilon r = 52.97$ ;  $\rho = 1000$ 

Date: 12.11.2013

kg/m3

Phantom section: Flat Phantom

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

Probe: ES3DVS - SN3149; ConvF(4.21,4.21,4.21); Calibrated: 2013/9/5

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn777; Calibrated: 22/2/2013

Phantom: SAM1186; Type: QD000P40CC;

DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)


## Dipole Calibration for Body Tissue/Pin=250mW, d=10mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.687 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.98 W/kg Maximum value of SAR (measured) = 16.0 W/kg

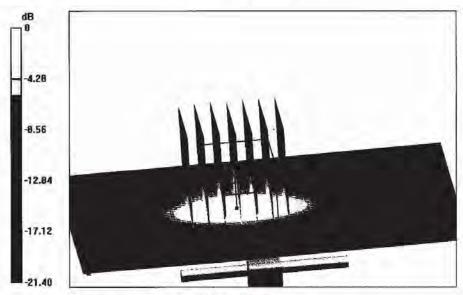

0 dB = 16.0 W/kg = 12.04 dBW/kg




In Collaboration with p e a CALIBRATION LABORATORY

E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

## Impedance Measurement Plot for Body TSL

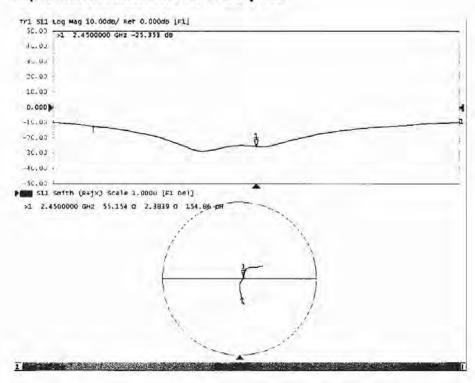

Page 8 of 8

Report No.: PT1411198125RH Page 94 of 102

## 6.5. DAE4 Calibration Ceriticate







E-mail: Info@emcite.com

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

Client :

CIQ SZ (Auden)

Certificate No: J13-2-3048

## CALIBRATION CERTIFICATE

Object

DAE4 - SN: 1315

Calibration Procedure(s)

TMC-OS-E-01-198

Calibration Procedure for the Data Acquisition Electronics

(DAEx)

Calibration date:

November 25, 2013

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3) and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

**Primary Standards** ID# Cal Date(Calibrated by, Certificate No.) Scheduled Calibration Documenting Process Calibrator 753 1971018 01-July-13 (TMC, No:JW13-049) July-14

Name

Function

Calibrated by:

Yu zongying

SAR Test Engineer

Reviewed by:

Qi Dianyuan

SAR Project Leader

Approved by:

Lu Bingsong

Deputy Director of the laboratory

Issued: November 25, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratoty.

Certificate No: J13-2-3048

Page 1 of 3

Report No.: PT1411198125RH Page 95 of 102



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 Http://www.emcite.com

Glossary:

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X

to the robot coordinate system.

## Methods Applied and Interpretation of Parameters:

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

Page 2 of 3

Certificate No: J13-2-3048



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel; +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: Info@emcite.com Http://www.emcite.com E-mail: Info@emcite.com

DC Voltage Measurement
A/D - Converter Resolution nominal
High Range: 1LSB = 6 6.1μV , 61πV , -100...+300 mV full range = Low Range: 1LSB = 61nV, full range = -1......+3mV
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	x	Y	Z
High Range	403.915 ± 0.15% (k=2)	405.171 ± 0.15% (k=2)	404.667 ± 0.15% (k=2)
Low Range	3.98903 ± 0.7% (k=2)	3.94180 ± 0.7% (k=2)	3.93862 ± 0.7% (k=2)

## **Connector Angle**


Connector Angle to be used in DASY system	162.5° ± 1 °

Report No.: PT1411198125RH Page 97 of 102

# 7. Test Setup Photos




Photograph of the depth in the Head Phantom (835MHz)

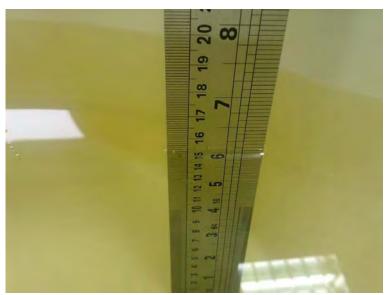

Photograph of the depth in the Body Phantom (835MHz)



Photograph of the depth in the Head Phantom (1900MHz)

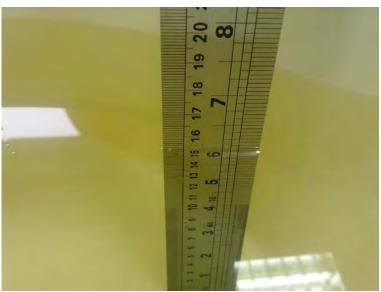


Photograph of the depth in the Body Phantom (1900MHz)




Photograph of the depth in the Head Phantom (2450MHz)




Photograph of the depth in the Body Phantom (2450MHz)

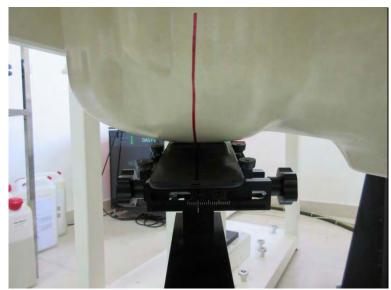


Right Head Tilt Setup Photo

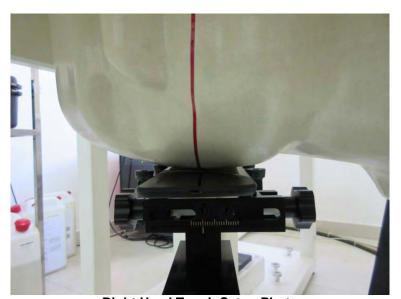

Right Head Touch Setup Photo

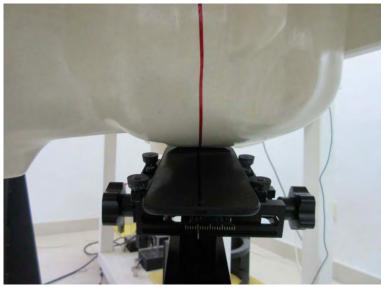


Left Head Tilt Setup Photo

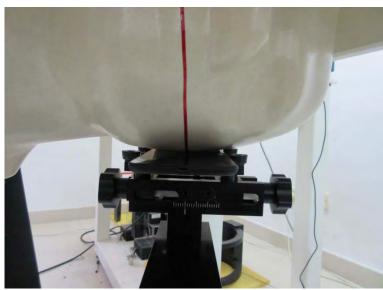

Left Head Touch Setup Photo



10mm Body-worn Rear Side Setup Photo

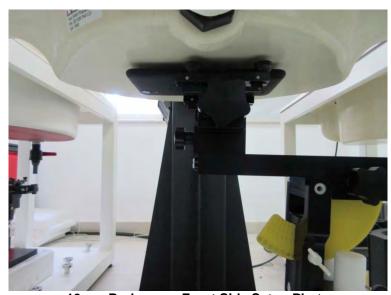

10mm Body-worn Front Side Setup Photo



10mm Body-worn Top Side Setup Photo



10mm Body-worn Bottom Side Setup Photo



10mm Body-worn Left Side Setup Photo

Report No.: PT1411198125RH Page 102 of 102



10mm Body-worn Right Side Setup Photo

# 8. External Photos of the EUT

**External photos of the EUT** 

End	of	Report
-----	----	--------