



REPORT No. : SZ14120072S01

RF EXPOSURE EVALUATION REPORT

APPLICANT : Shenzhen Guogee Intelligent Technology Limited

PRODUCT NAME : ISmart IOT module V2.02

MODEL NAME : F1RV0202

TRADE NAME : GUOGEE

BRAND NAME : N/A

FCC ID : 2ADT8-F1RV0202

STANDARD(S) : 47CFR 2.1091
KDB 447498-D01 General RF Exposure Guidance
v05r02

ISSUE DATE : 2014-12-25



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No 8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	3
1. TECHNICAL INFORMATION	4
1.1. IDENTIFICATION OF APPLICANT	4
1.2. IDENTIFICATION OF MANUFACTURER	4
1.3. EQUIPMENT UNDER TEST (EUT)	4
1.3.1. PHOTOGRAPHS OF THE EUT	5
1.3.2. IDENTIFICATION OF ALL USED EUT	6
1.4. APPLIED REFERENCE DOCUMENTS	6
2. DEVICE CATEGORY AND RF EXPOSURE LIMIT	7
3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER	8
4. RF EXPOSURE EVALUATION	9
ANNEX C GENERAL INFORMATION	10

Change History		
Issue	Date	Reason for change
1.0	2014-12-25	First edition



REPORT No. : SZ14120164S01

TEST REPORT DECLARATION

Applicant	TCT Mobile Limited		
Applicant Address	5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203		
Manufacturer	TCL COMMUNICATION TECHNOLOGY HOLDINGS LIMITED		
Manufacturer Address	70 Hufeng 4rd, ZhongKai Hi-tech Development District ,Huizhou, Guangdong 516006 P.R.China(TCL Mobile Communication Co.,LTD.Huizhou)		
Product Name	3G AP		
Model Name	One Touch Y580D		
Brand Name	Alcatel		
HW Version	PIO		
SW Version	S1_B15001S_1110000_B10001S		
Test Standards	1999/519/EC; EN 50566: 2013; EN 62209-2: 2010;		
Test Date	2014-12-24		
Max SAR	Body	0.371W/kg	Limit(W/kg): 2.0W/kg

Tested by : Liu JunReviewed by : Peng HuaruiApproved by : Zeng Dexin



1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

1.1. Identification of Applicant

Company Name:	Shenzhen Guogee Intelligent Technology Limited
Address:	Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, Bao'an District, 518102, Shenzhen, P.R.China

1.2. Identification of Manufacturer

Company Name:	Shenzhen Guogee Intelligent Technology Limited
Address:	Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, Bao'an District, 518102, Shenzhen, P.R.China

1.3. Equipment Under Test (EUT)


Model Name:	F1RV0202
Trade Name:	GUOGEE
Brand Name:	GUOGEE
Hardware Version:	V2.02
Software Version:	N/A
Frequency Bands:	2405-2475MHz
Modulation Mode:	GFSK
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype

Note:

The EUT is ISmart IOT module V2.02, it contain RF module (IEEE 802.15.4) operating at 2.4GHz ISM band.

1.3.1. Photographs of the EUT

1. EUT front view

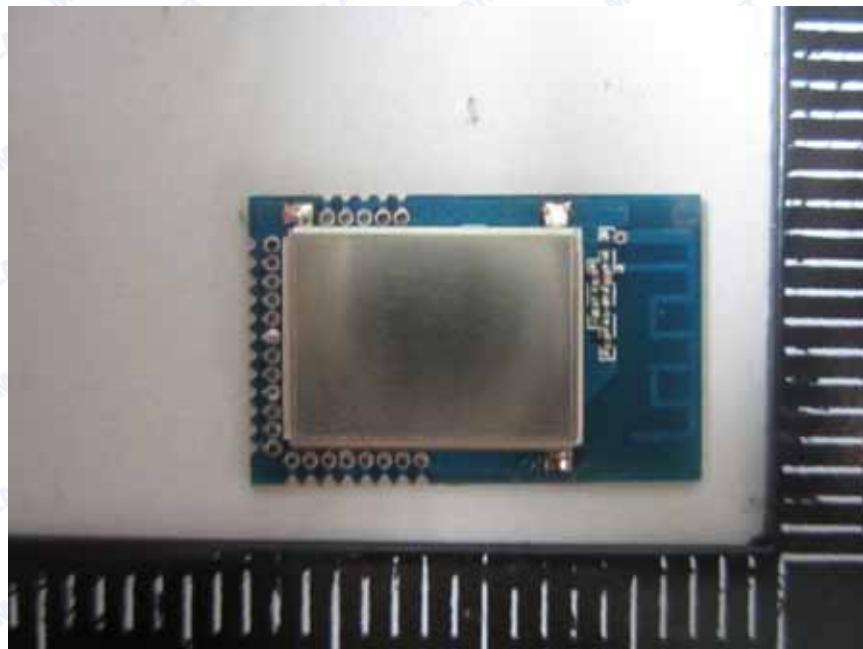

2. EUT rear view





1.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	V2.02	N/A

1.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1091	Radiofrequency Radiation Exposure Evaluation: mobile devices
2	KDB 447498 D01v05r02	General RF Exposure Guidance



2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, this device is a RF module (IEEE 802.15.4).Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density



3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. RF module (IEEE 802.15.4) Conducted Average Output Power

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
2.4G	0	2405	14.91
	8	2440	14.36
	15	2475	13.47



REPORT No. : SZ14120072S01

4. RF EXPOSURE EVALUATION

Standalone transmission MPE evaluation

Bands	Frequency (MHz)	Antenna Gain (dBi)	Conducted Average Power (dBm)	Time-averaging EIRP (mW)	Power density (mW/cm ²)	Limit for MPE (mW/cm ²)
2.4G	2405	1	14.91	38.99	0.008	1.0

Note:

1. MPE calculation method

$$\text{Power Density} = \text{EIRP}/4\pi R^2$$

Where: EIRP = P·G

P = Peak out power

G = Antenna gain

R = Separation distance (20cm)



ANNEX C GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

***** END OF REPORT *****