




Mode: 12 V_802.11b (1 Mbps)
Channel 11
Distance of measurement: 3 meter


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 057.69	42.36	Peak	H	-10.85	-	31.51	74.00	42.49
1 080.09	44.14	Peak	V	-10.73	-	33.41	74.00	40.59
1 188.08	44.05	Peak	V	-10.16	-	33.89	74.00	40.11
1 713.83	42.29	Peak	H	-6.76	-	35.53	74.00	38.47
4 923.60	50.24	Peak	H	5.73	-	55.97	74.00	18.03
4 923.60	45.69	Average	H	5.73	-	52.09	54.00	1.91
4 923.60	40.07	Peak	V	5.73	-	45.80	74.00	28.20

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 485.12	49.06	Peak	V	-2.39	-	46.67	74.00	27.33
2 486.72	48.77	Peak	V	-2.39	-	47.05	74.00	26.95
2 487.32	49.72	Peak	H	-2.38	-	47.34	74.00	26.66
2 489.90	49.86	Peak	H	-2.37	-	47.49	74.00	26.51

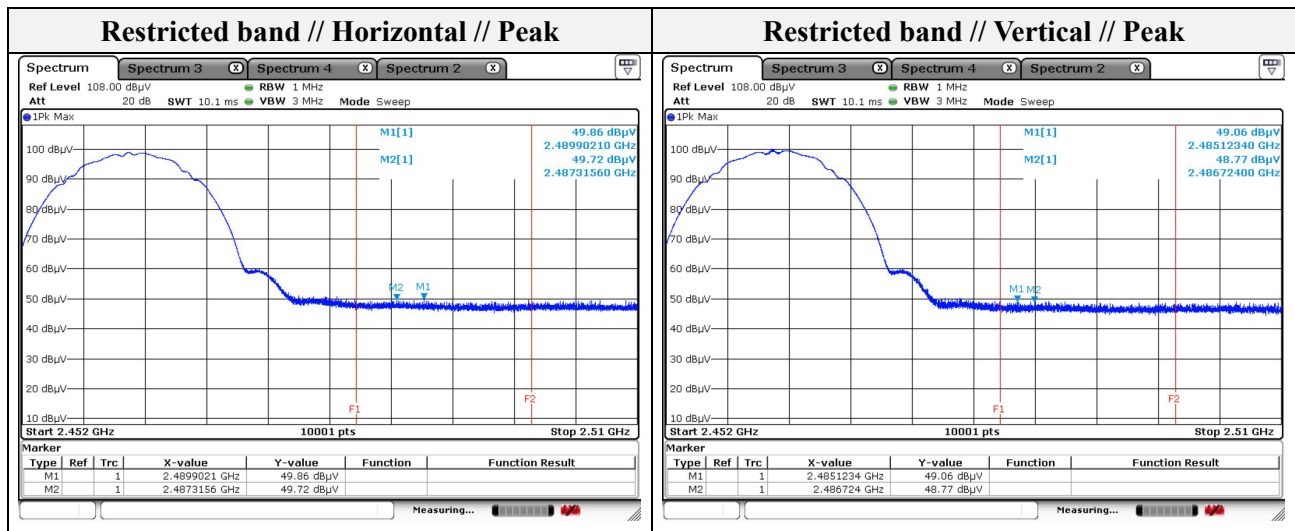

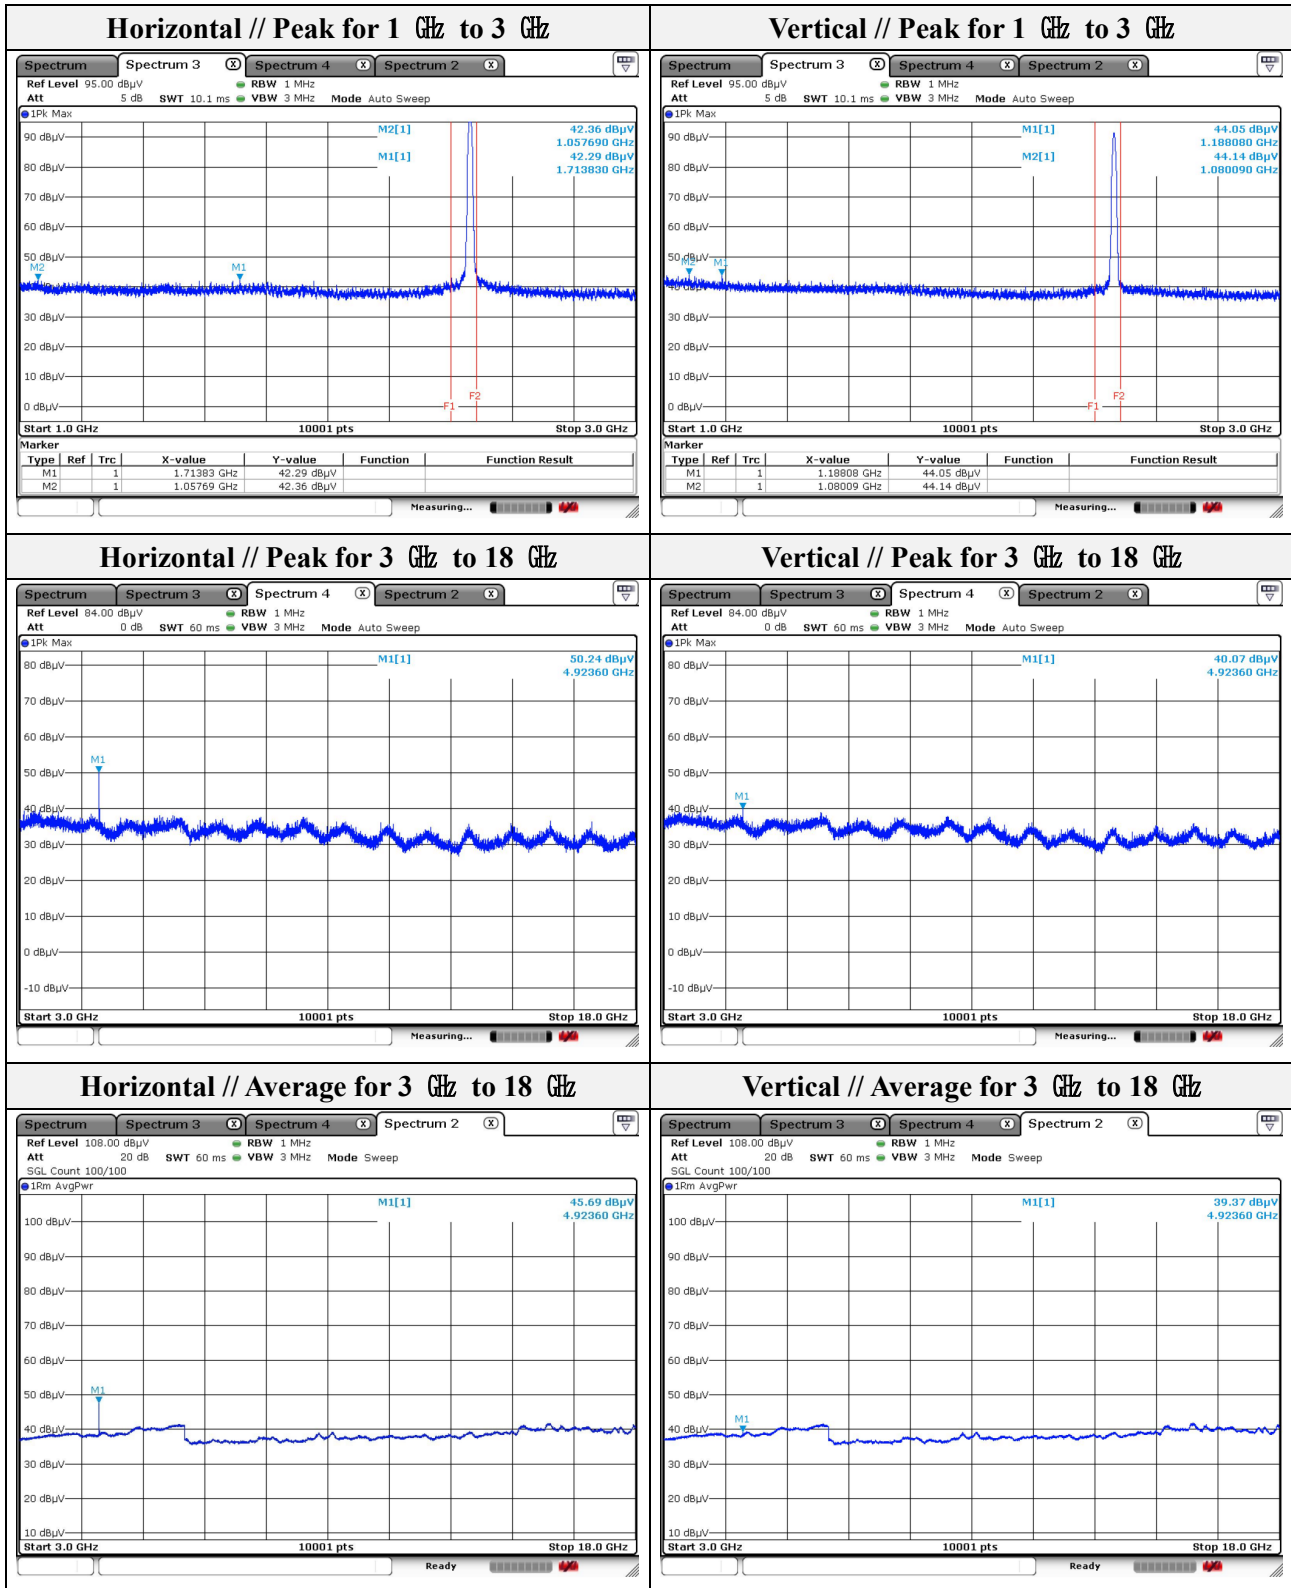

Note.

1. Average test would be performed if the peak result were greater than the average limit.




Mode: 24 V_802.11b (1 Mbps)
Channel 01
Distance of measurement: 3 meter


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 027.50	40.97	Peak	H	-11.01	-	29.96	74.00	44.04
1 034.30	42.47	Peak	V	-10.98	-	31.49	74.00	42.51
1 059.49	41.57	Peak	H	-10.84	-	30.73	74.00	43.27
1 188.48	42.47	Peak	V	-10.16	-	32.31	74.00	41.69
4 824.60	44.95	Peak	H	5.01	-	49.96	74.00	24.04
4 824.60	45.23	Peak	V	5.01	-	50.24	74.00	23.76

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 382.32	48.92	Peak	V	-2.80	-	46.12	74.00	27.88
2 383.17	49.16	Peak	V	-2.79	-	46.37	74.00	27.63
2 385.87	49.99	Peak	H	-2.78	-	47.21	74.00	26.79
2 387.89	50.32	Peak	H	-2.77	-	47.55	74.00	26.45

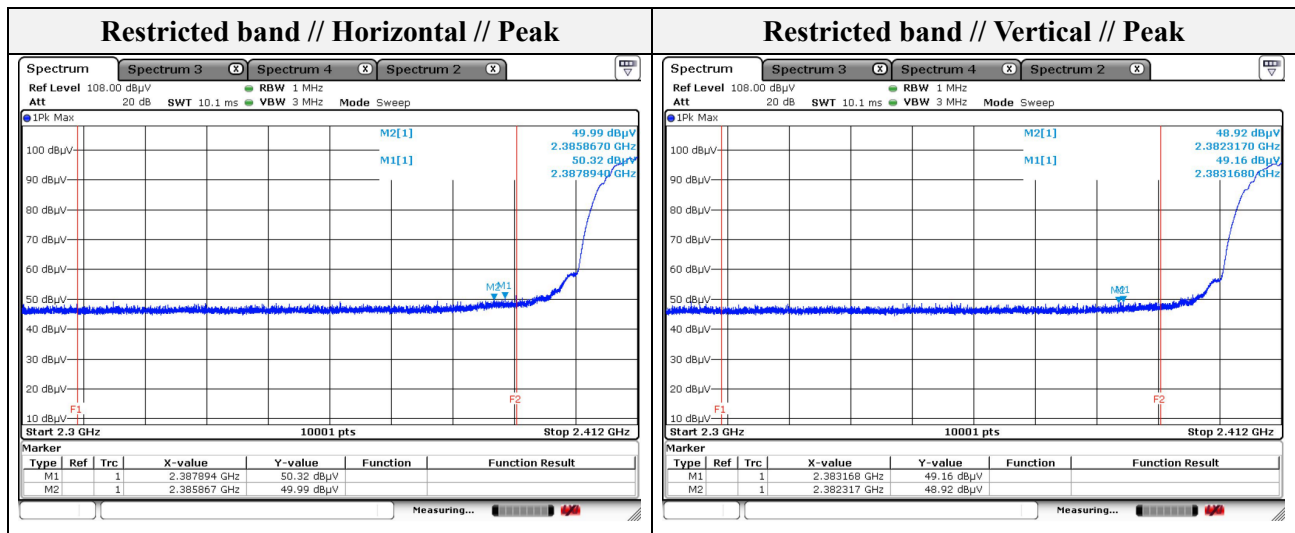

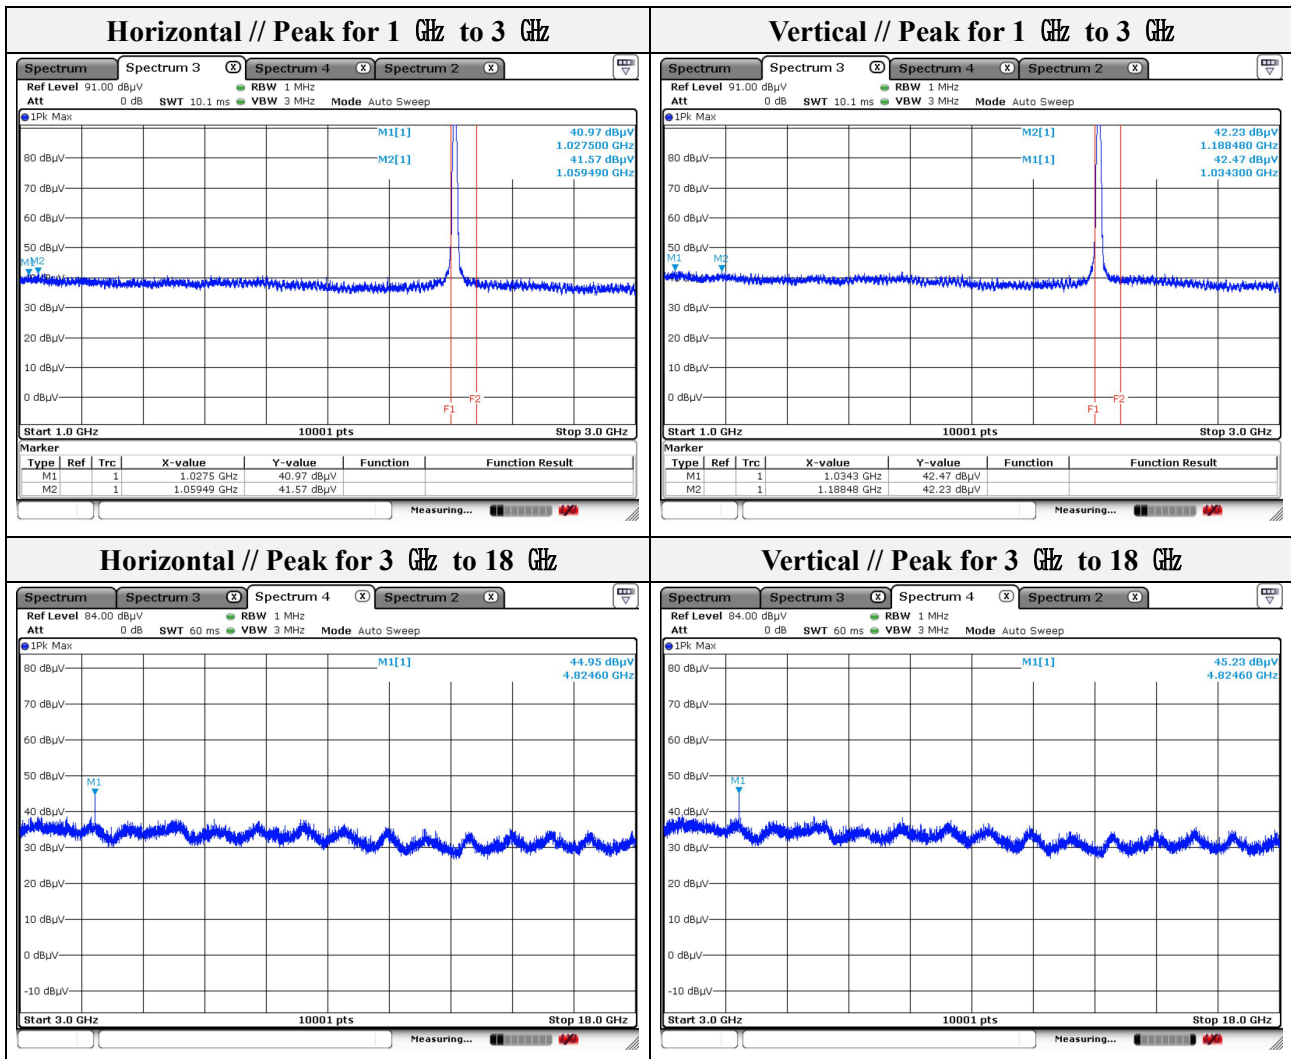

Note.


1. Average test would be performed if the peak result were greater than the average limit.



Mode: 24 V_802.11b (1 Mbps)
Channel 06
Distance of measurement: 3 meter

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 013.70	42.53	Peak	H	-11.09	-	31.44	74.00	42.56
1 026.10	42.56	Peak	H	-11.02	-	31.54	74.00	42.46
1 071.09	41.66	Peak	V	-10.78	-	30.88	74.00	43.12
1 079.69	42.09	Peak	V	-10.74	-	31.35	74.00	42.65
4 874.10	45.89	Peak	H	5.37	-	51.26	74.00	22.74
4 874.10	42.31	Peak	V	5.37	-	47.68	74.00	26.32

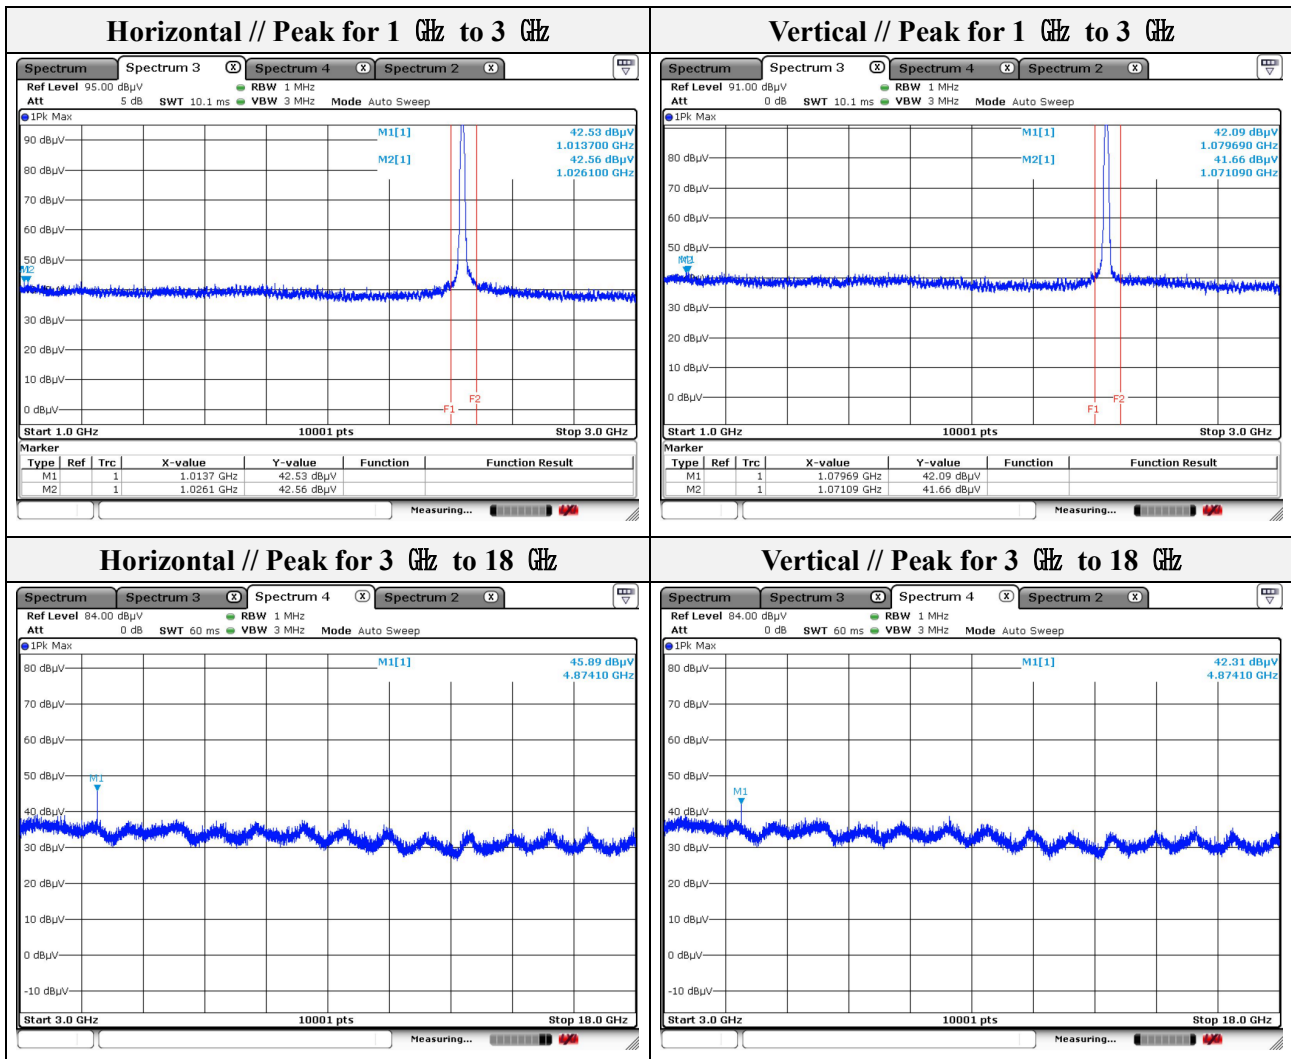

Note.

1. Average test would be performed if the peak result were greater than the average limit.




Mode: 24 V_802.11b (1 Mbps)
Channel 11
Distance of measurement: 3 meter


- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 017.50	42.04	Peak	H	-11.07	-	30.97	74.00	43.03
1 057.89	44.17	Peak	V	-10.85	-	33.32	74.00	40.68
1 187.28	43.87	Peak	V	-10.17	-	33.70	74.00	40.30
1 187.88	41.59	Peak	H	-10.16	-	31.43	74.00	42.57
4 923.60	49.61	Peak	H	5.73	-	55.34	74.00	18.66
4 923.60	45.64	Average	H	5.73	-	52.04	54.00	1.96
4 923.60	38.98	Peak	V	5.73	-	44.71	74.00	29.29

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 486.09	49.39	Peak	H	-2.39	-	47.00	74.00	27.00
2 487.41	50.16	Peak	H	-2.38	-	47.78	74.00	26.22
2 490.01	48.95	Peak	V	-2.37	-	47.25	74.00	26.75
2 491.68	48.79	Peak	V	-2.37	-	46.42	74.00	27.58

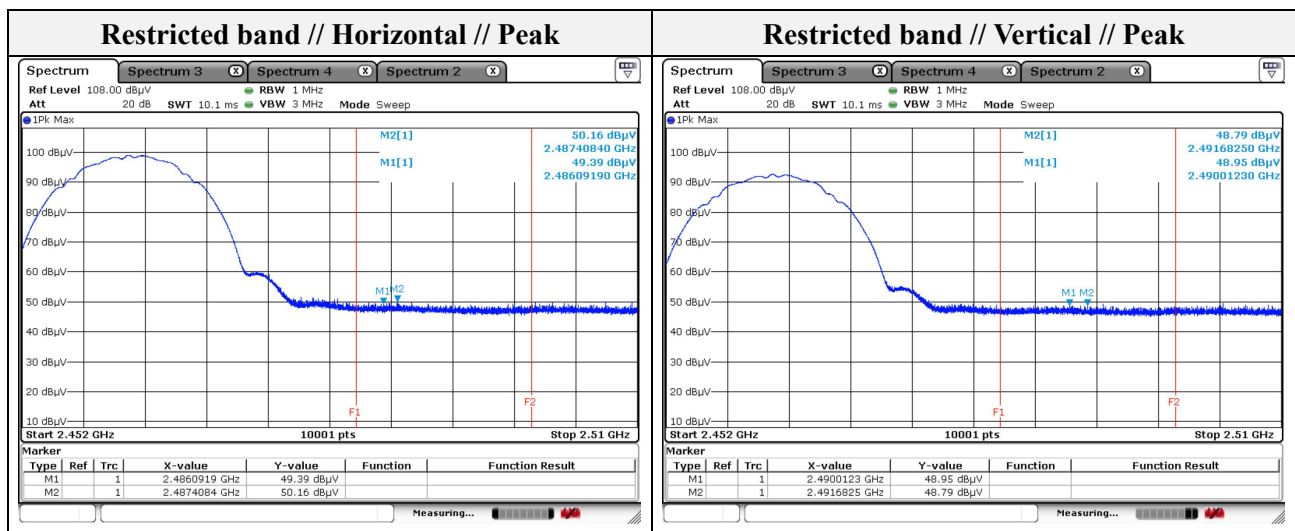

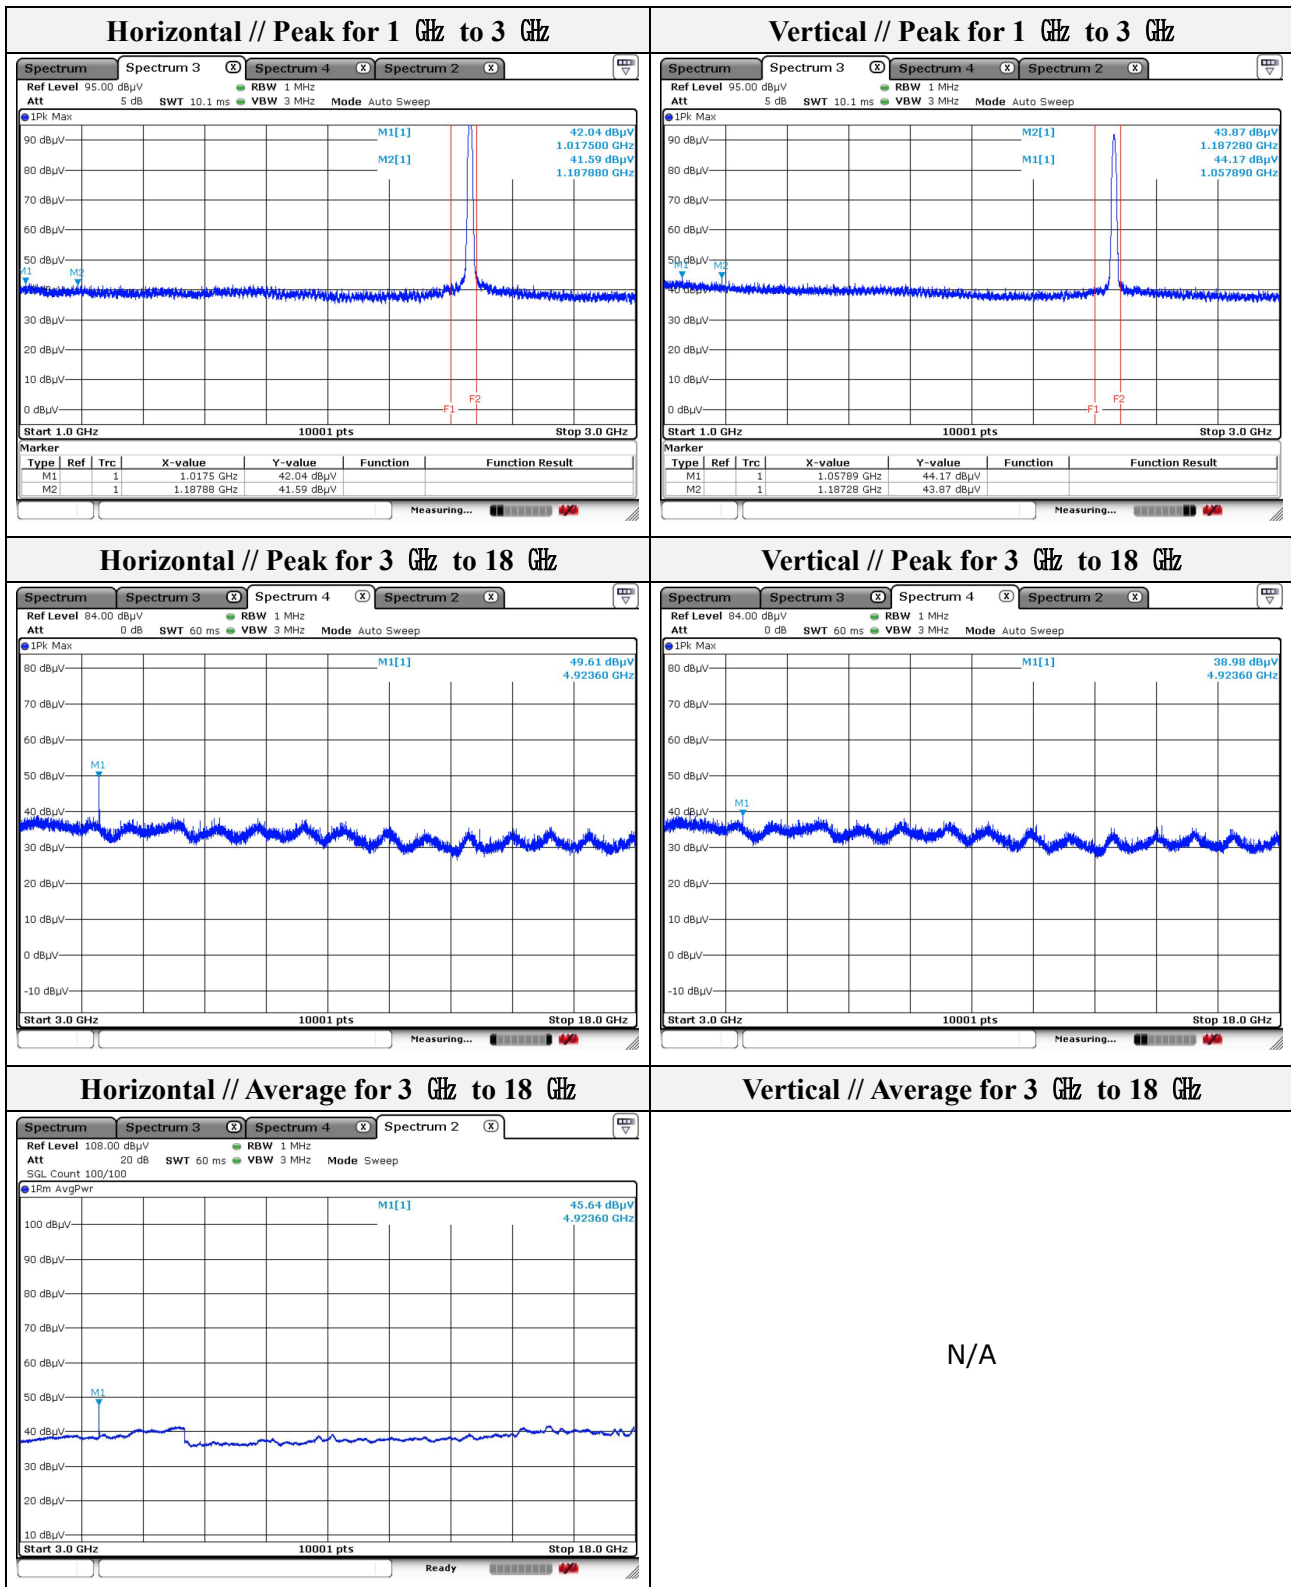

Note.

1. Average test would be performed if the peak result were greater than the average limit.