



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Songjiang District, Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM141200318002
Page: 1 of 155

1 Cover Page

RF TEST REPORT

Application No.:	SHEM1412003180RF
Applicant:	Shanghai Xunzhao Communication Technology Co., Ltd
FCC ID:	2ADY6WC18R2211
Equipment Under Test (EUT):	
NOTE: The following sample(s) was/were submitted and identified by the client as	
Product Name:	WiFi Modular
Model No.(EUT):	WC18R2211
Standards:	FCC PART 15 Subpart C: 2014
Date of Receipt:	December 11, 2014
Date of Test:	December 24, 2014 to January 15, 2015
Date of Issue:	April 28, 2015
Test Result:	Pass*

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Parlam Zhan
E&E Section Manager
SGS-CSTC (Shanghai) Co., Ltd.


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	April 28, 2015	/	Original

Authorized for issue by:			
Engineer		Eddy Zong <hr/> Print Name	 <hr/>
Clerk		Susie Liu <hr/> Print Name	 <hr/>
Reviewer		Keny Xu <hr/> Print Name	 <hr/>

3 Test Summary

Test Item	FCC Requirement	Test method	Result
Antenna Requirement	FCC Part 15, Subpart C Section 15.203/15.247 (c)	---	PASS
AC Power Line Conducted Emission	FCC Part 15, Subpart C Section 15.207	ANSI C63.10 (2009) Section 6.2	PASS
Minimum 6dB Bandwidth	FCC Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 (2009) Section 6.9.1	PASS
Conducted Peak Output Power	FCC Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 (2009) Section 6.10.2	PASS
Power Spectrum Density	FCC Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 (2009) Section 6.11.2	PASS
RF Conducted Spurious Emissions and Band-edge	FCC Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009) Section 7.7.9&7.7.10	PASS
Radiated Spurious Emissions and Band-edge	FCC Part 15, Subpart C Section 15.209&15.205	ANSI C63.10 (2009) Section 6.5&6.6&6.7	PASS

4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS.....	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T	5
5.3 TECHNICAL SPECIFICATIONS.....	5
5.4 TEST MODE.....	6
5.5 TEST CHANNEL	6
5.6 DESCRIPTION OF SUPPORT UNITS	6
5.7 TEST LOCATION	6
5.8 TEST FACILITY	7
5.9 MEASUREMENT UNCERTAINTY	7
6 EQUIPMENTS USED DURING TEST.....	8
7 TEST RESULTS	9
7.1 E.U.T. TEST CONDITIONS	9
7.2 ANTENNA REQUIREMENT.....	10
7.3 CONDUCTED EMISSIONS ON MAINS TERMINALS	11
7.4 6dB OCCUPIED BANDWIDTH.....	15
7.5 CONDUCTED PEAK OUTPUT POWER	28
7.6 PEAK POWER SPECTRAL DENSITY.....	42
7.7 CONDUCTED SPURIOUS EMISSIONS AND BAND-EDGE	80
7.7.1 <i>Conducted spurious emission</i>	81
7.7.2 <i>Conducted Band-edge</i>	105
7.8 RADIATED SPURIOUS EMISSIONS AND BAND-EDGE	113
7.8.1 <i>Radiated Spurious Emissions</i>	116
7.8.2 <i>Radiated Band edge</i>	127
8 TEST SETUP PHOTOGRAPHS.....	155
9 EUT CONSTRUCTIONAL DETAILS	155

5 General Information

5.1 Client Information

Applicant: Shanghai Xunzhao Communication Technology Co., Ltd
Address of Applicant: 1759 Jinshajiang road putuo district of Shanghai
Manufacturer: Shanghai Xunzhao Communication Technology Co., Ltd
Address of Manufacturer: 1759 Jinshajiang road putuo district of Shanghai
Factory: Shanghai Xunzhao Communication Technology Co., Ltd
Address of Factory: 1759 Jinshajiang road putuo district of Shanghai

5.2 General Description of E.U.T.

Product Description: 802.11 a/b/g/n/ac 2T/2R Dual Band USB Module
Brand Name: EBD
Power Supply: DC 5V from USB Interface

5.3 Technical Specifications

Operation Frequency: 802.11 b/g/n20: 2412MHz-2462MHz
802.11 n40: 2422MHz-2452MHz
Modulation Technique: 802.11 b DSSS(CCK, DQPSK, DBPSK)
802.11 g/n20/n40 OFDM(64QAM, 16QAM, QPSK, BPSK)
Number of Channel: 802.11 b/g/n20: 11
802.11 n40: 7
Data Rate: 802.11b: 1/2/5.5/11Mbps,
802.11g: 6/9/12/18/24/36/48/54Mbps
802.11n20/n40: MCS 0-7 up to 300Mbps
Antenna Model: GKZS-2.4G&5.8GXJ-SMAZ3
Antenna Type: Monopole Antenna
2*2 MIMO without 802.11 beam forming function
2.4G and 5G technology cannot transmit at the same time.
Antenna Gain: 3dBi

b. The device employs MIMO technology. Below are the possible configurations.

Antenna Configurations		Single Input Single Output		Spatial Diversity Multiplexing-MIMO function	
		Antenna A	Antenna B	Antenna A	Antenna B
2.4GHz	11b	☒	☒	☐	☐
	11g	☒	☒	☐	☐
	11n(HT20)	☒	☒	☒	☒
	11n(HT40)	☒	☒	☒	☒

5.4 Test Mode

Test Mode	Description of Test Mode						
Engineering mode	Using test software to control EUT working in continuous transmitting, and select channel and modulation type.						

5.5 Test Channel

	Channel	Frequency	Data rate			802.11 n40		
			b	g	n20	Channel	Frequency	Data rate
			1Mbps	6Mbps	MCS0			
lowest channel	CH01	2412MHz	1Mbps	6Mbps	MCS0	CH03	2422MHz	MCS0
Middle channel	CH06	2437MHz	1Mbps	6Mbps	MCS0	CH06	2437MHz	MCS0
Highest channel	CH11	2462MHz	1Mbps	6Mbps	MCS0	CH09	2452MHz	MCS0

Remark: Preliminary tests were performed in all tests in different data rates and antenna configurations at lowest channel, the data rates of worse case as above were chosen for final test.

5.6 Description of Support Units

The EUT has been tested with support equipments as below.


Description	Manufacturer	Model No.	Supplied By
Laptop	Lenovo	ThinkPad X100e	SGS
Digital Video Recorder (Host Device)	Hikvision	iDS-9004HMFI-N/IPC/GW	Client

Note: The DVR (Host device) can connect to the Wi-Fi networks via the WiFi modular and upload files

Software name	Manufacturer	Version	Supplied By
RTL8812A USB Software	Realtek	0.0059.20130716	Client

Cable Type	Length, m	Shield	Ferrite
USB	0.8	Yes	No

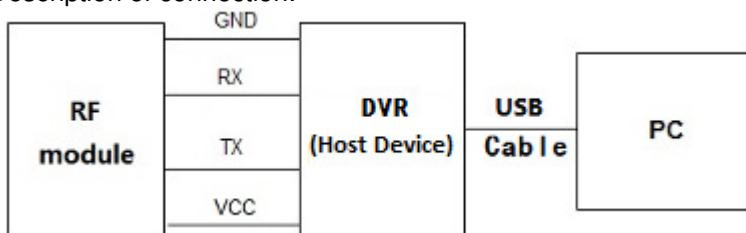Description of connection:



5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.
Tel: +86 21 6191 5666
Fax: +86 21 6191 5678

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

5.9 Measurement Uncertainty

No.	Parameter	Measurement Uncertainty
1	Radio Frequency	$< \pm 1 \times 10^{-5}$
2	Total RF power, conducted	$< \pm 1.5$ dB
3	RF power density, conducted	$< \pm 3$ dB
4	Spurious emissions, conducted	$< \pm 3$ dB
5	All emissions, radiated	$< \pm 6$ dB (30MHz – 1GHz) $< \pm 6$ dB (above 1GHz)
6	Temperature	$< \pm 1^\circ\text{C}$
7	Humidity	$< \pm 5$ %
8	DC and low frequency voltages	$< \pm 3$ %

6 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2015-01-22	2016-01-21
2	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127490	2015-01-22	2016-01-21
3	Line impedance stabilization network	ETS	3816/2	00034161	2015-01-22	2016-01-21
4	Spectrum Analyzer	Rohde & Schwarz	FSP-30	2705121009	2015-01-22	2016-01-21
5	EMI test receiver	Rohde & Schwarz	ESU40	100109	2015-02-13	2016-02-12
6	Active Loop Antenna (9kHz to 30MHz)	Schwarzbeck - Mess-Elektronik	FMZB 1519	1519-034	2015-02-07	2016-02-06
7	Broadband UHF-VHF ANTENNA (25MHz to 2GHz)	SCHWARZBECK	VULB9168	9168-313	2015-02-07	2016-02-06
8	Ultra broadband antenna (25MHz to 3GHz)	Rohde & Schwarz	HL562	100227	2014-08-30	2015-08-29
9	Horn Antenna (1GHz to 18GHz)	Rohde & Schwarz	HF906	100284	2015-02-07	2016-02-06
10	Horn Antenna (1GHz to 18GHz)	SCHWARZBECK	BBHA9120D	9120D-679	2015-02-07	2016-02-06
11	Horn Antenna (14GHz to 40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170373	2015-02-13	2016-02-12
12	Pre-amplifier (9KHz – 2GHz)	LNA6900	TESEQ	71033	2014-12-27	2015-12-27
13	Pre-amplifier (1GHz – 26.5GHz)	Rohde & Schwarz	SCU-F0118-G40-BZ4-CSS(F)	10001	2015-01-22	2016-01-21
14	Pre-amplifier (14GHz – 40GHz)	Rohde & Schwarz	SCU-F1840-G35-BZ3-CSS(F)	10001	2015-01-22	2016-01-21
15	Tunable Notch Filter	Wainwright Instruments GmbH	WRCT800.0/880.0-0.2/40-5SSK	9170397	/	/
16	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	/	/
17	High-low temperature cabinet	Suzhou Zhihe	TL-40	50110050	2014-09-11	2015-09-10
18	AC power stabilizer	WOCEN	6100	51122	2015-01-02	2016-01-01
19	DC power	QJE	QJ30003SII	611145	2015-01-02	2016-01-01
20	Splitter	Anritsu	MA1612A	M12265	/	/
21	Coupler	e-meca	803-S-1	900-M01	/	/

7 Test Results

7.1 E.U.T. test conditions

Test Power: DC 5V

Requirements: 15.31(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Operating Environment:

Temperature:	20.0 -25.0 °C
Humidity:	35-75 % RH
Atmospheric Pressure:	99.2 -102 kPa

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Pursuant to Part 15.31(c) For swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

7.2 Antenna Requirement

Standard requirement:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Plug-in antenna with 3 meters wire length RG-174 cable. The gain is less than 3 dBi. The intentional radiators that must be professionally installed.



7.3 Conducted Emissions on Mains Terminals

Frequency Range: 150 KHz to 30 MHz

Class/Severity: Class B

Limit:

Frequency range MHz	Class B Limits: dB (μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

Note2: The lower limit is applicable at the transition frequency.

Test site/setup:

Test instrumentation set-up:

Frequency Range	Detector	RBW	VBW
9KHz to 150Hz	Quasi-peak	200Hz	500Hz
150KHz to 30MHz	Quasi-peak	9kHz	30kHz

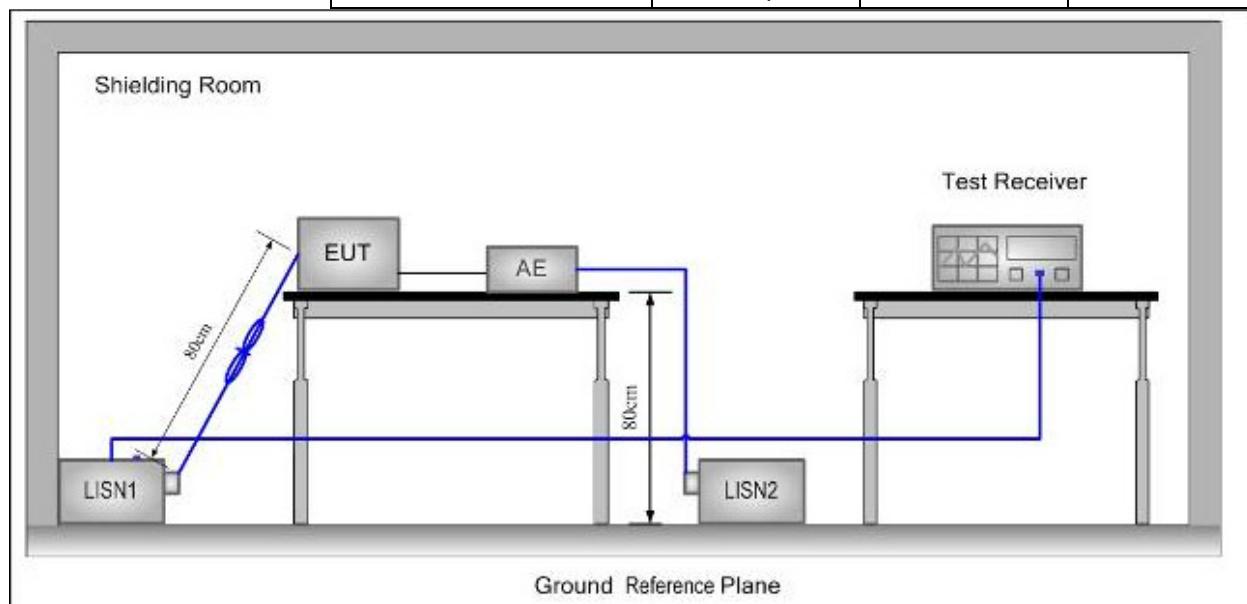

Test Procedure:

- 1) The mains terminal disturbance voltage was measured with the EUT in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference

plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.


- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment were at least 0.8 m from the LISN.

Remark: Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected. Pretest under all modes; choose the worst case mode (802.11b in Middle channel) record on the report. Please see the attached Quasi-peak and Average test results.

Test Result: Pass


Test Data:

Test Mode:	802.11b	Test Channel:	Middle
Test Port:	AC Live Line		

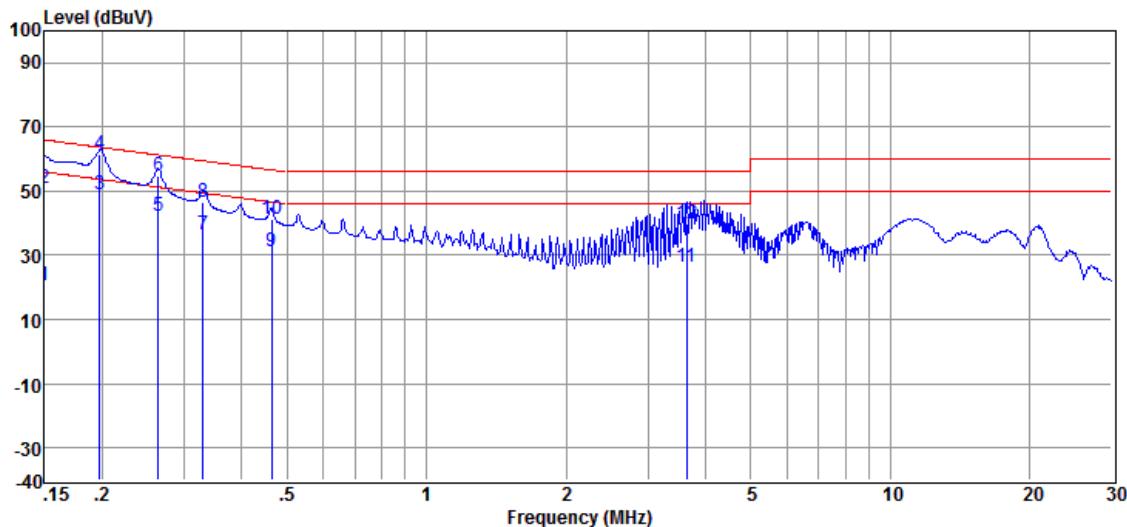

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dB μ V)	(dB)	(dB)	(dB μ V)	(dB μ V)	(dB)	
1	0.150	20.27	0.33	0.10	20.70	56.00	-35.30	Average
2	0.150	50.61	0.33	0.10	51.04	66.00	-14.96	QP
3	0.198	48.40	0.26	0.10	48.76	53.71	-4.95	Average
4	0.198	60.95	0.26	0.10	61.31	63.71	-2.40	QP
5	0.264	41.82	0.26	0.10	42.18	51.29	-9.11	Average
6	0.264	54.35	0.26	0.10	54.71	61.29	-6.58	QP
7	0.330	36.14	0.25	0.10	36.49	49.44	-12.95	Average
8	0.330	46.26	0.25	0.10	46.61	59.44	-12.83	QP
9	0.464	31.06	0.25	0.10	31.41	46.63	-15.22	Average
10	0.464	40.99	0.25	0.10	41.34	56.63	-15.29	QP
11	3.642	26.08	0.38	0.17	26.63	46.00	-19.37	Average
12	3.642	39.27	0.38	0.17	39.82	56.00	-16.18	QP

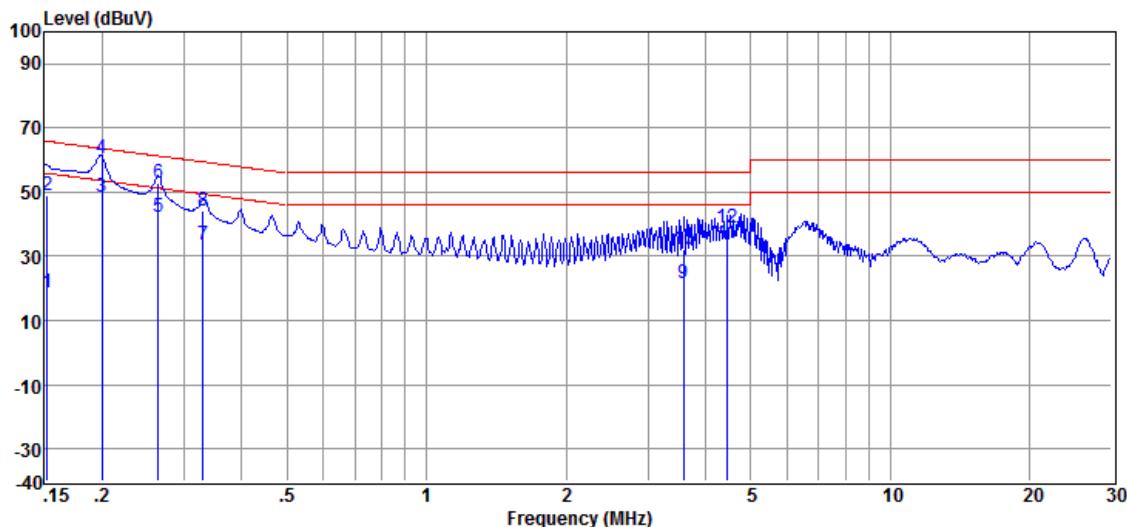Test Port: AC Neutral Line




Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dB μ V)	(dB)	(dB)	(dB μ V)	(dB μ V)	(dB)	
1	0.152	18.38	0.34	0.10	18.82	55.87	-37.05	Average
2	0.152	48.71	0.34	0.10	49.15	65.87	-16.72	QP
3	0.200	48.20	0.29	0.10	48.59	53.62	-5.03	Average
4	0.200	59.95	0.29	0.10	60.34	63.62	-3.28	QP
5	0.264	41.77	0.29	0.10	42.16	51.29	-9.13	Average
6	0.264	52.46	0.29	0.10	52.85	61.29	-8.44	QP
7	0.330	33.38	0.30	0.10	33.78	49.44	-15.66	Average
8	0.330	43.87	0.30	0.10	44.27	59.44	-15.17	QP
9	3.584	20.95	0.63	0.16	21.74	46.00	-24.26	Average
10	3.584	31.60	0.63	0.16	32.39	56.00	-23.61	QP
11	4.454	33.37	0.49	0.19	34.05	46.00	-11.95	Average
12	4.454	38.33	0.49	0.19	39.01	56.00	-16.99	QP

Remark: Level = Read Level + LISN/ISN Factor + Cable Loss.

7.4 6dB Occupied Bandwidth

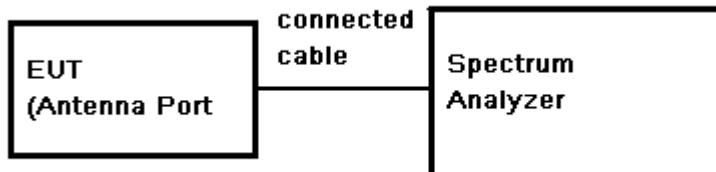Test Configuration:



Test Procedure:



- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3). Set the spectrum analyzer as RBW=300KHz, VBW≥3* RBW, Span=30/50MHz, Sweep=auto
- 4). Mark the peak frequency and -6dB (upper and lower) frequency.
- 5). Repeat above procedures until all frequency measured was complete.

Limit: ≥ 500 kHz


Test Result: Pass

Test Data:


Test Mode	Test Frequency (MHz)	Bandwidth (MHz)		Limit (KHz)	Result
		Antenna A	Antenna B		
802.11b	2412	10.71	10.68	500	Pass
	2437	10.62	10.68		Pass
	2462	10.62	10.71		Pass
802.11g	2412	16.44	16.74	500	Pass
	2437	16.74	16.77		Pass
	2462	16.74	16.71		Pass
802.11n20	2412	17.82	17.88	500	Pass
	2437	17.88	17.91		Pass
	2462	17.88	17.91		Pass
802.11n40	2422	36.80	36.76	500	Pass
	2437	36.64	36.58		Pass
	2452	36.88	36.80		Pass

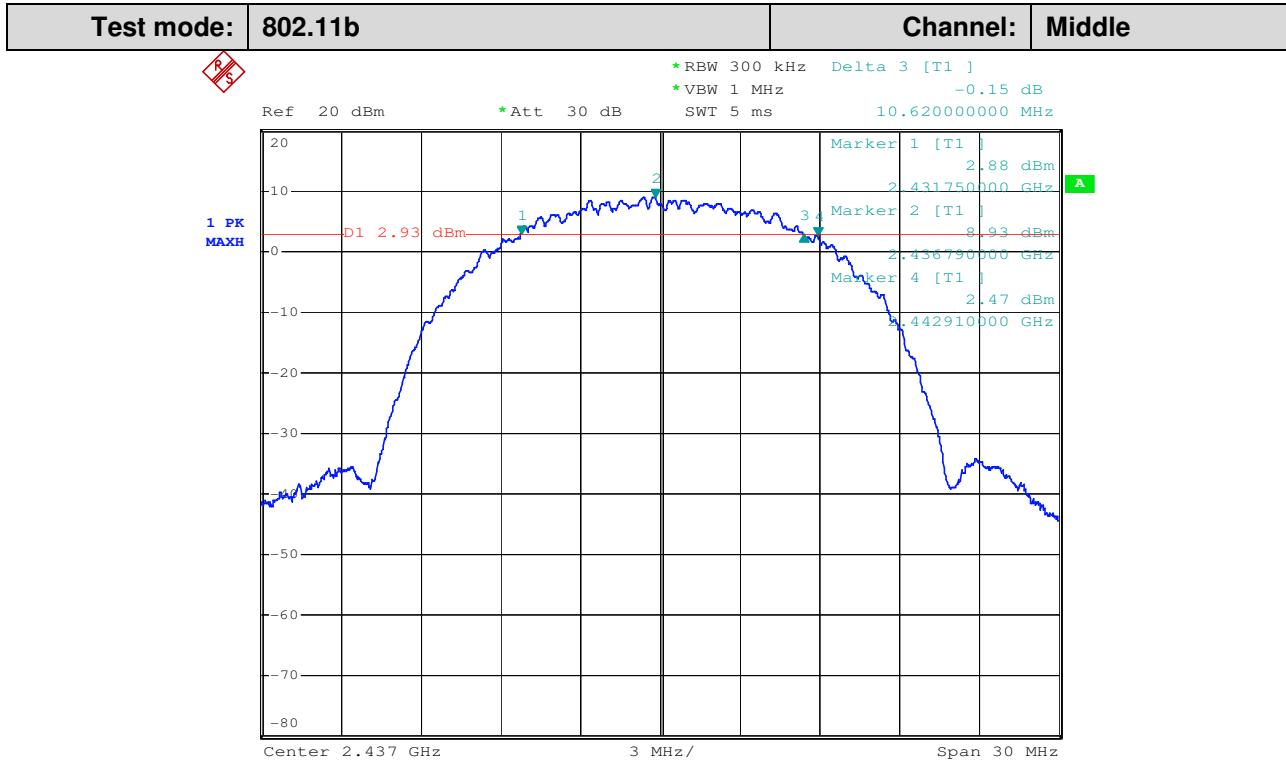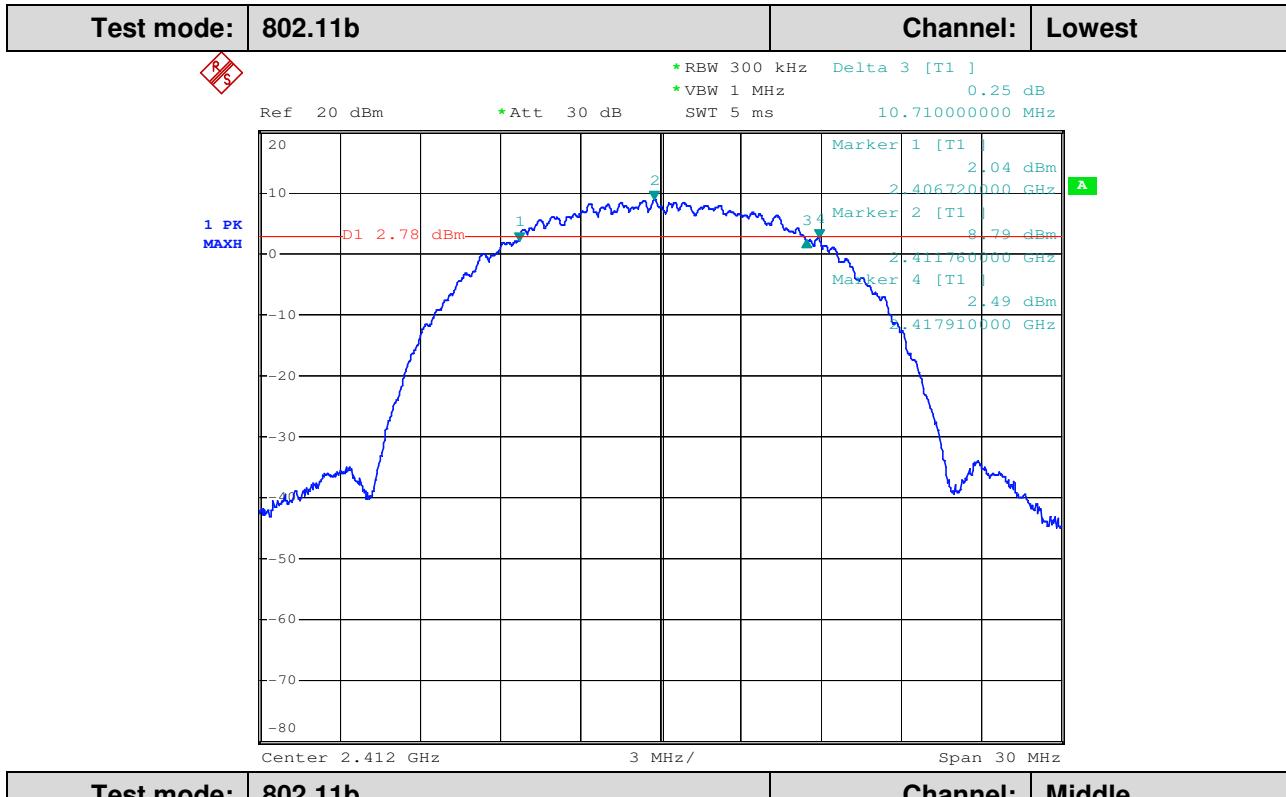Test plot as follows:
Antenna A:

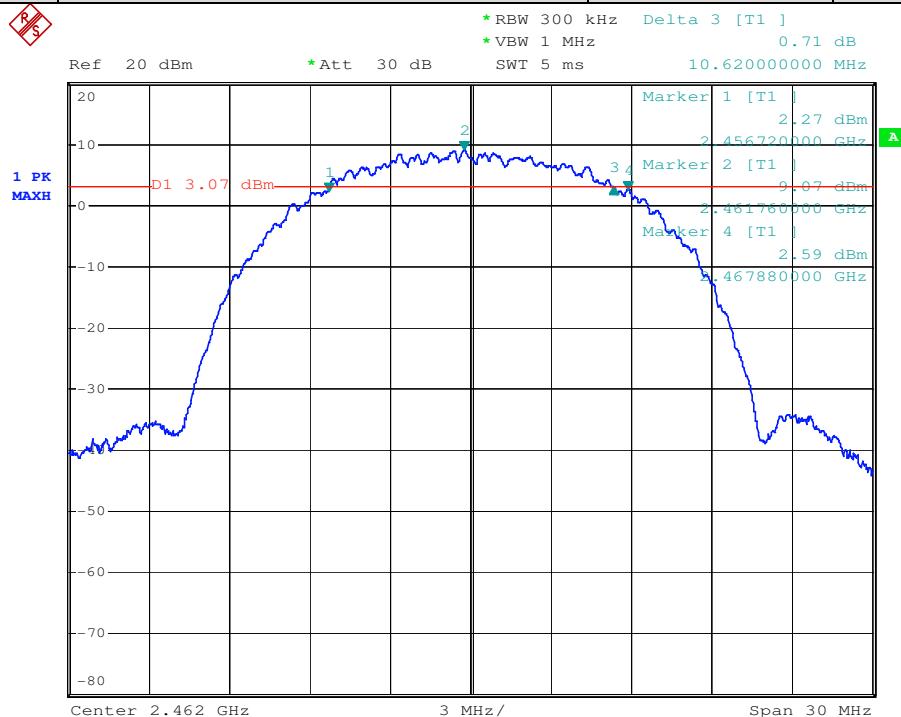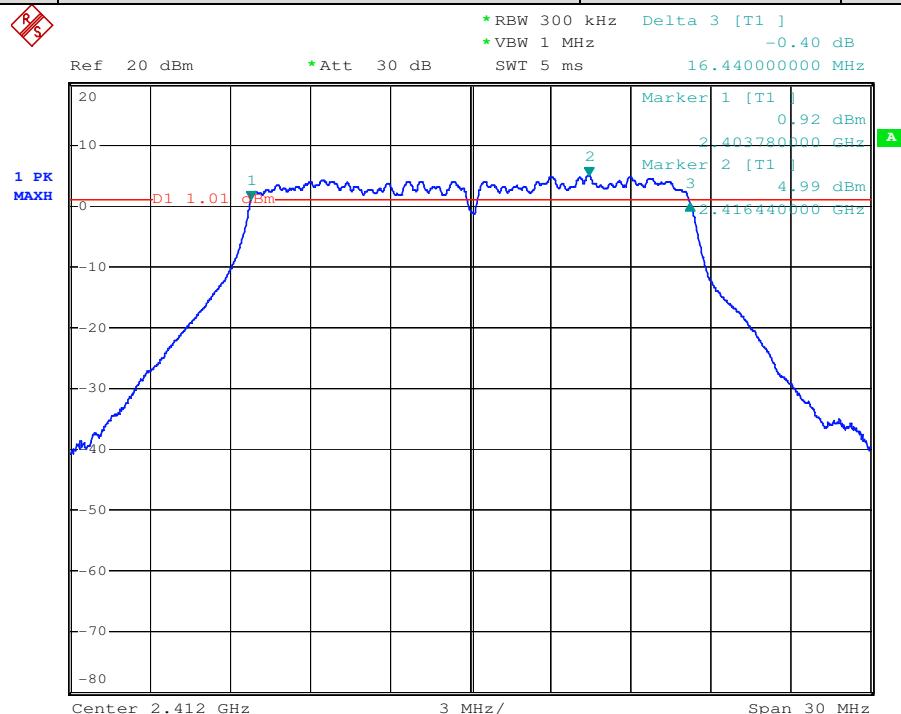
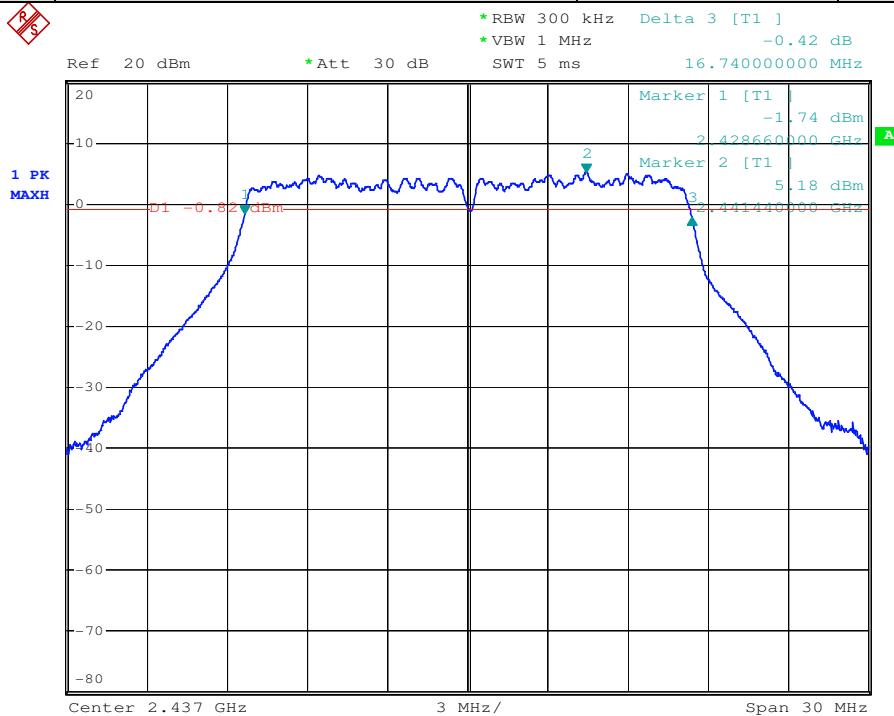
Test mode:	802.11b	Channel:	Highest
------------	---------	----------	---------




Test mode:	802.11g	Channel:	Lowest
------------	---------	----------	--------




Test mode:	802.11g	Channel:	Middle
-------------------	----------------	-----------------	---------------




Test mode:	802.11g	Channel:	Highest
-------------------	----------------	-----------------	----------------

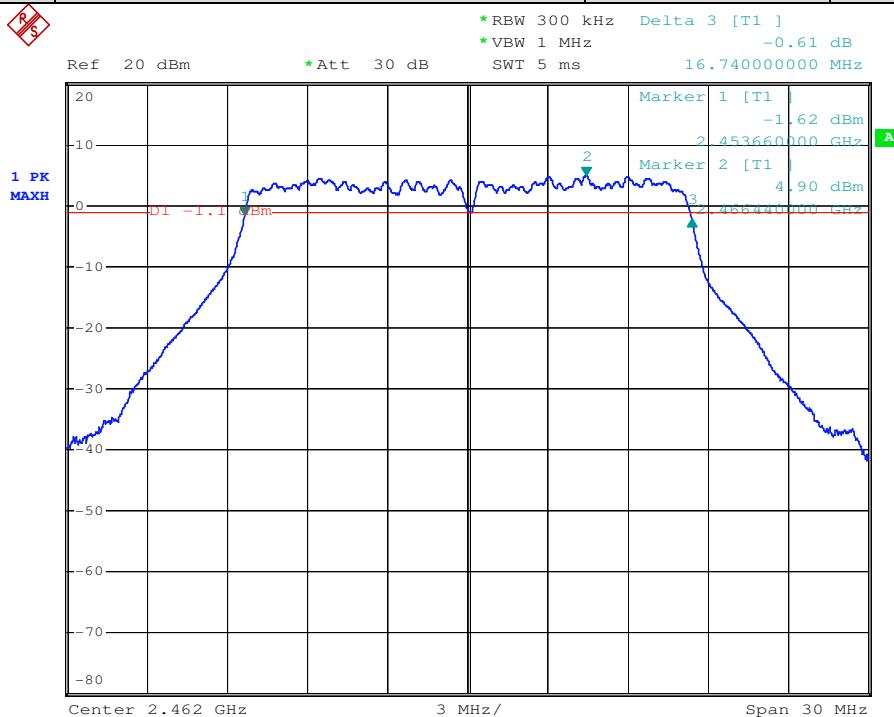


Test mode:	802.11n20	Channel:	Lowest
-------------------	------------------	-----------------	---------------

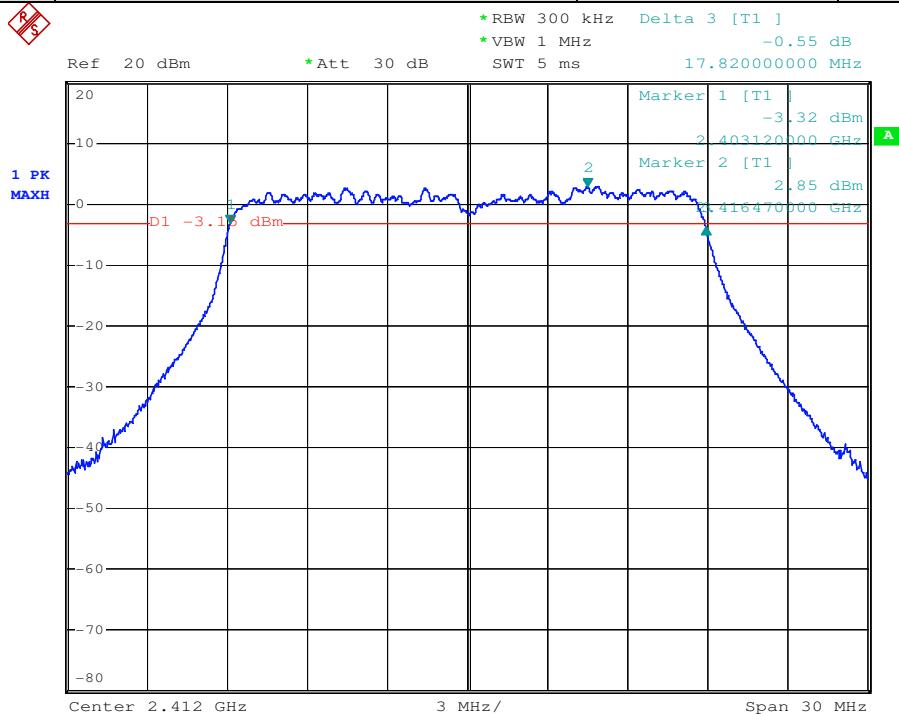


Test mode:	802.11n20	Channel:	Middle
-------------------	------------------	-----------------	---------------

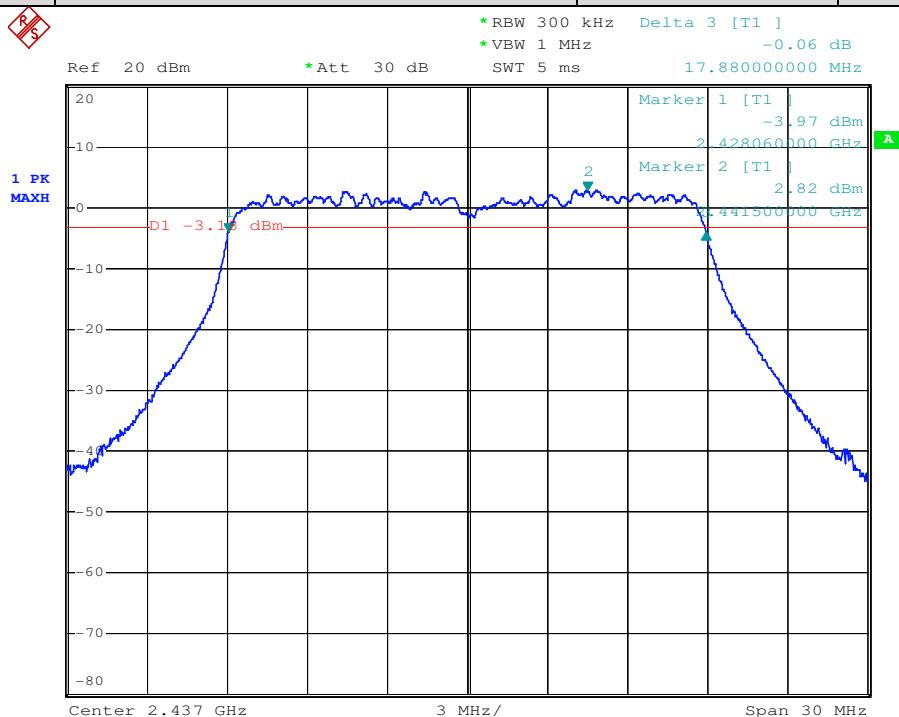


Test mode:	802.11n20	Channel:	Highest
------------	-----------	----------	---------

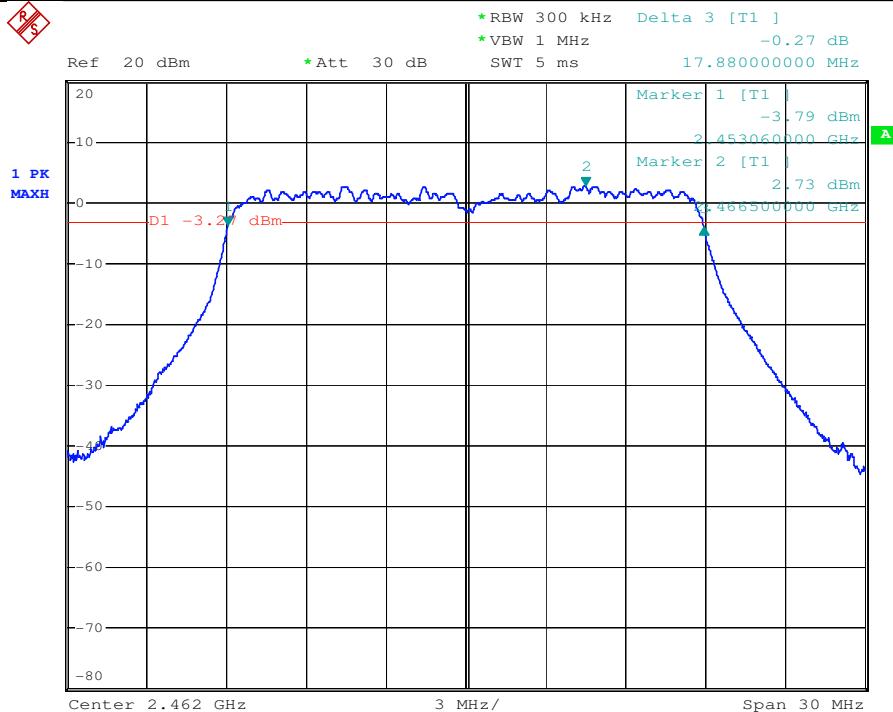


Test mode:	802.11n40	Channel:	Lowest
------------	-----------	----------	--------

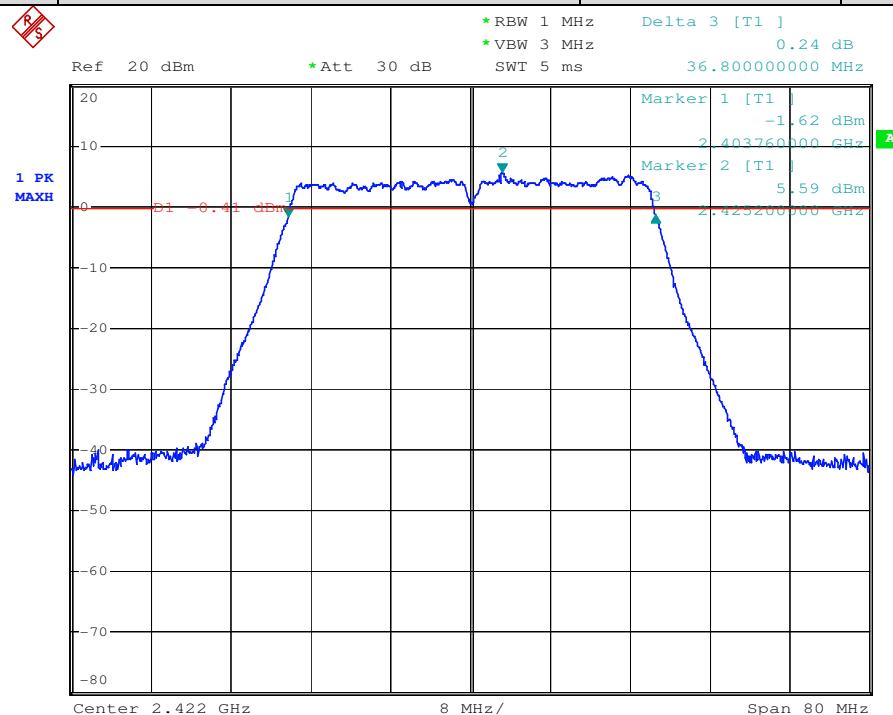

Test mode:	802.11n40	Channel:	Middle
------------	-----------	----------	--------

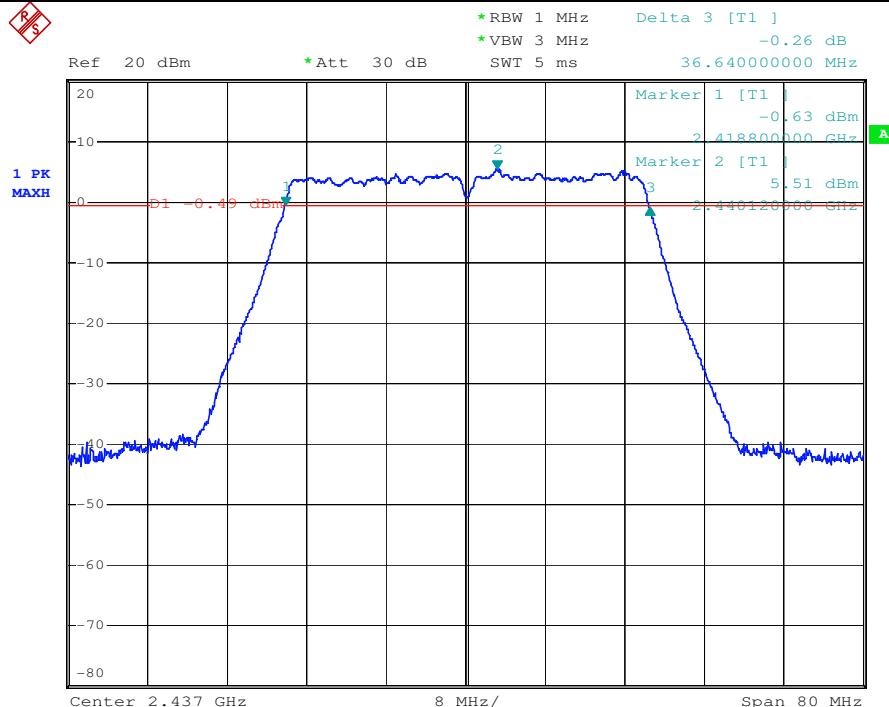


Test mode:	802.11n40	Channel:	Highest
------------	-----------	----------	---------

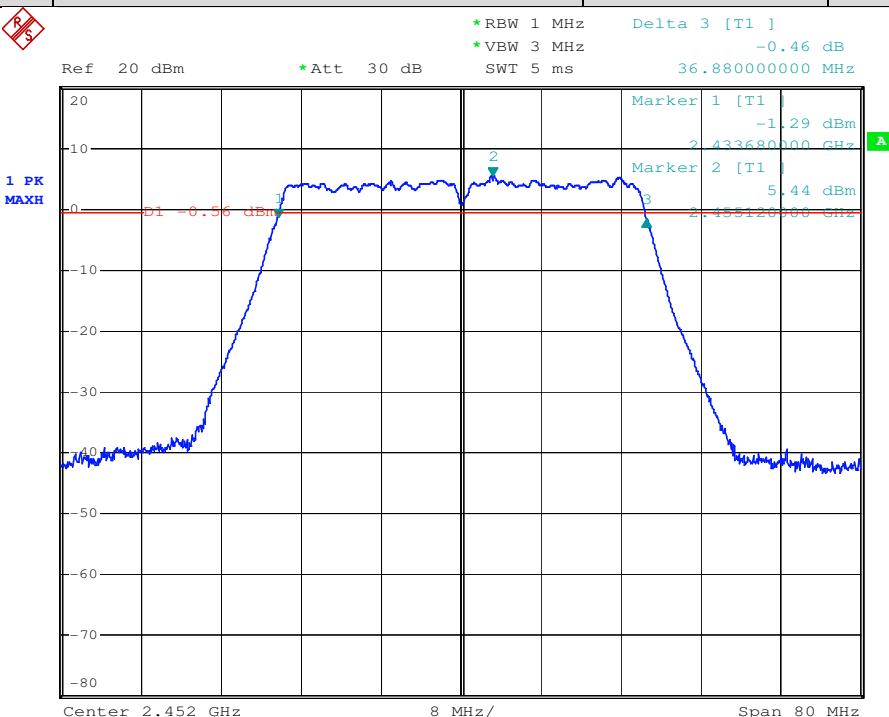


Antenna B:


Test mode:	802.11b	Channel:	Lowest
------------	---------	----------	--------

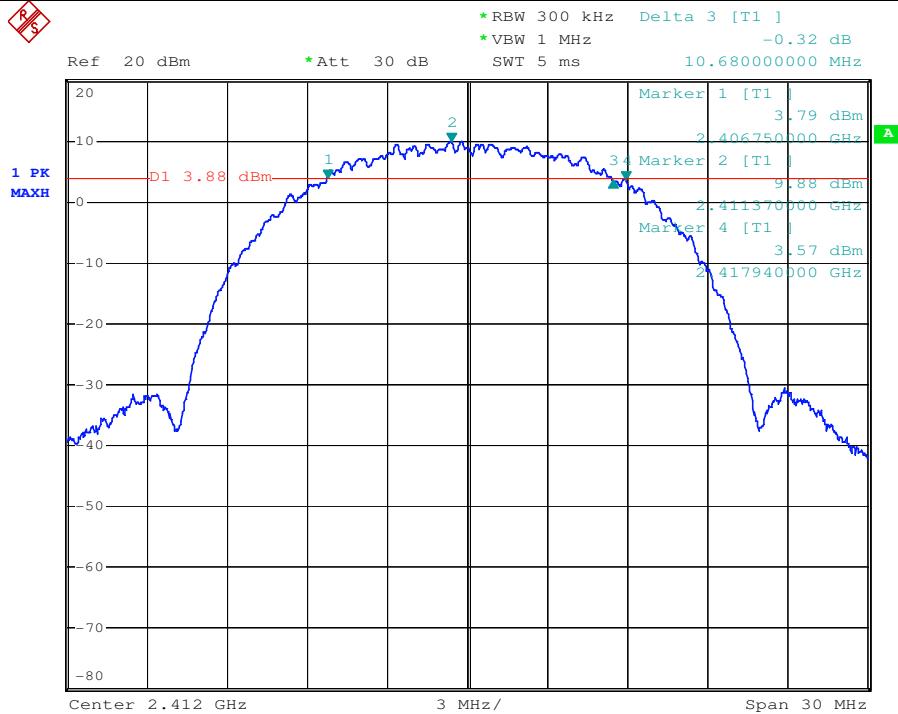


Test mode:	802.11b	Channel:	Middle
------------	---------	----------	--------

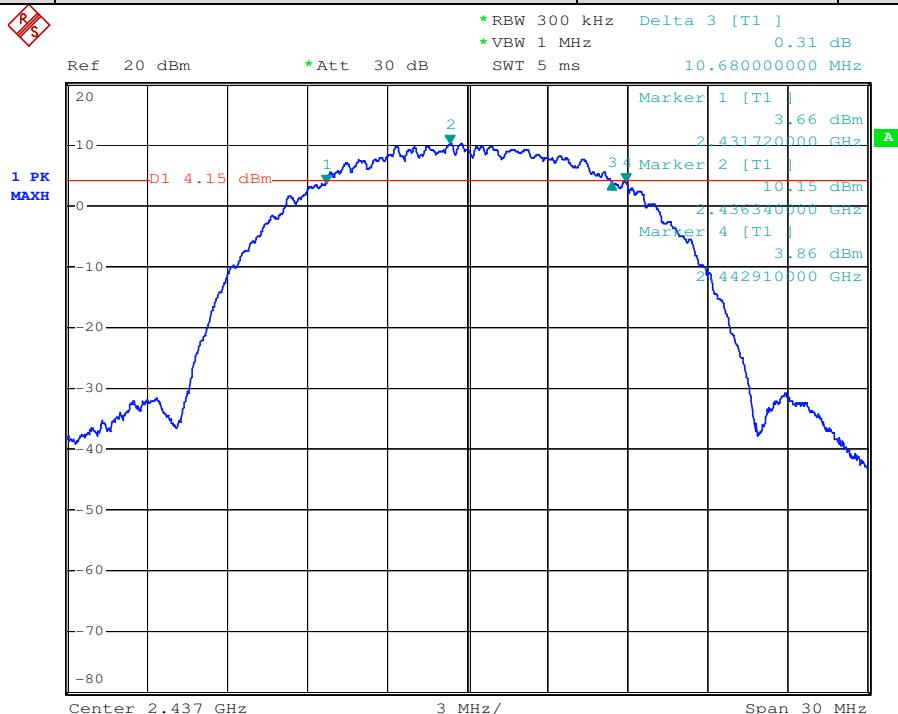


Test mode:	802.11b	Channel:	Highest
------------	---------	----------	---------

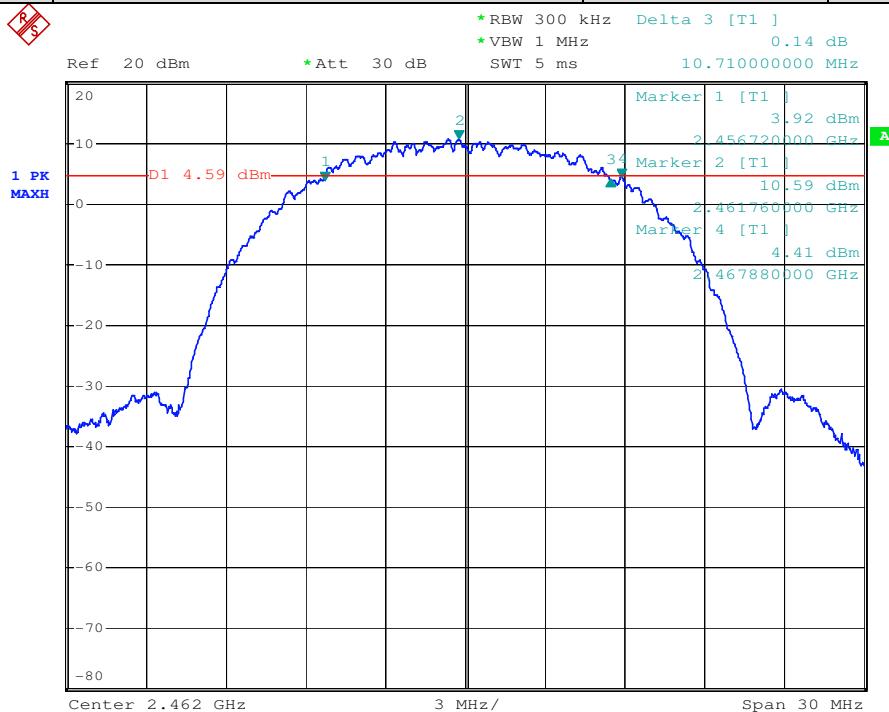


Test mode:	802.11g	Channel:	Lowest
------------	---------	----------	--------

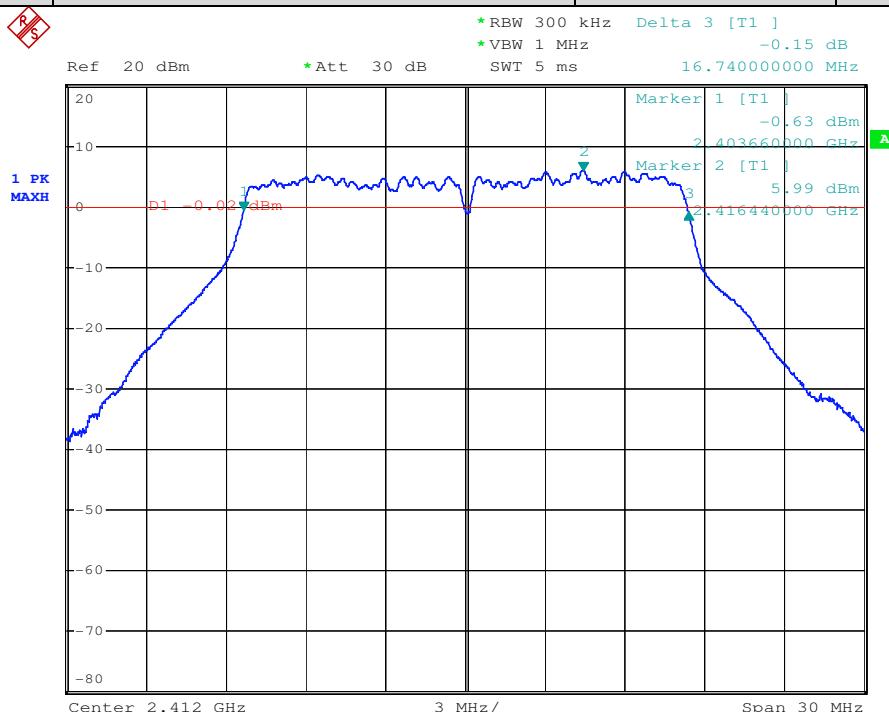


Test mode:	802.11g	Channel:	Middle
-------------------	----------------	-----------------	---------------

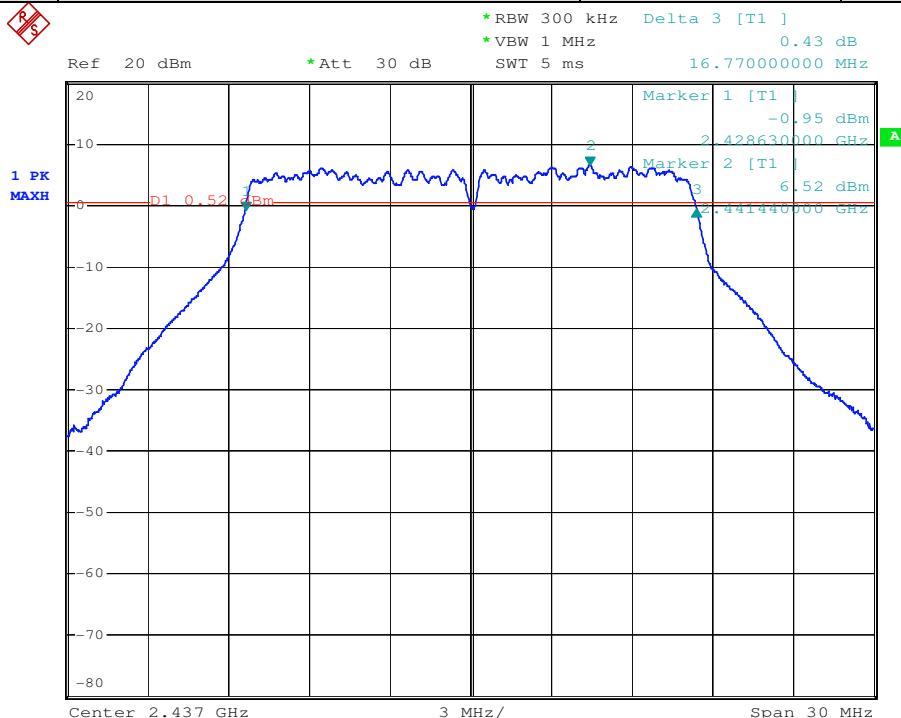


Test mode:	802.11g	Channel:	Highest
-------------------	----------------	-----------------	----------------

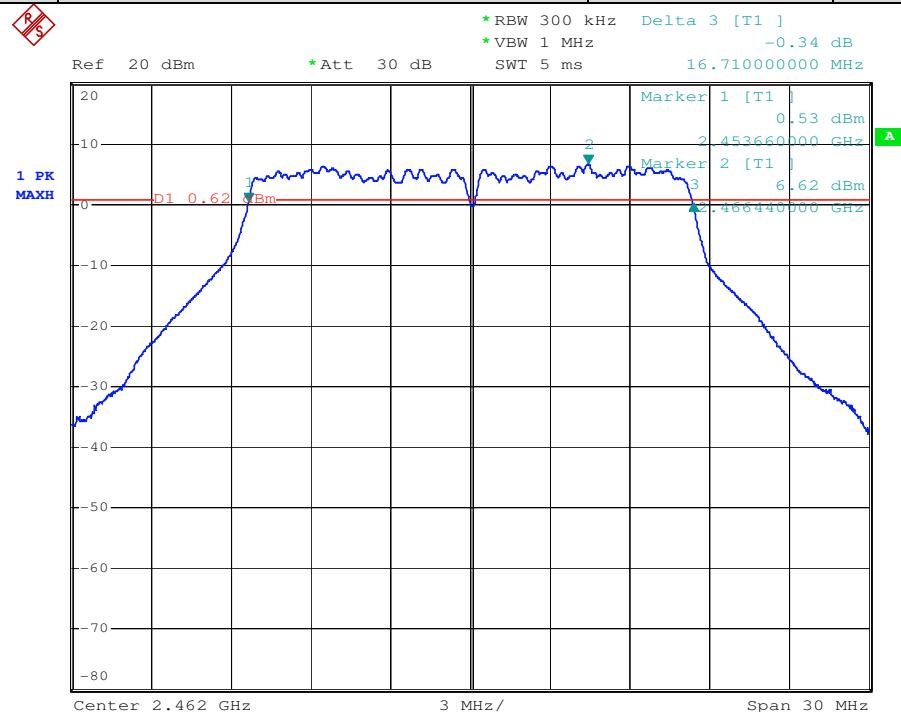


Test mode:	802.11n20	Channel:	Lowest
------------	-----------	----------	--------

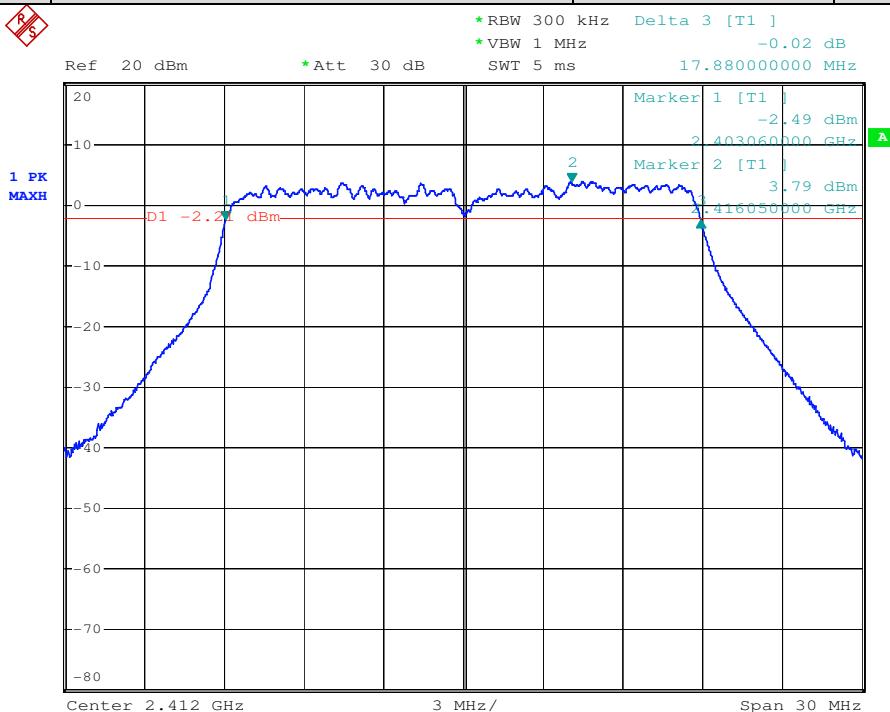


Test mode:	802.11n20	Channel:	Middle
------------	-----------	----------	--------

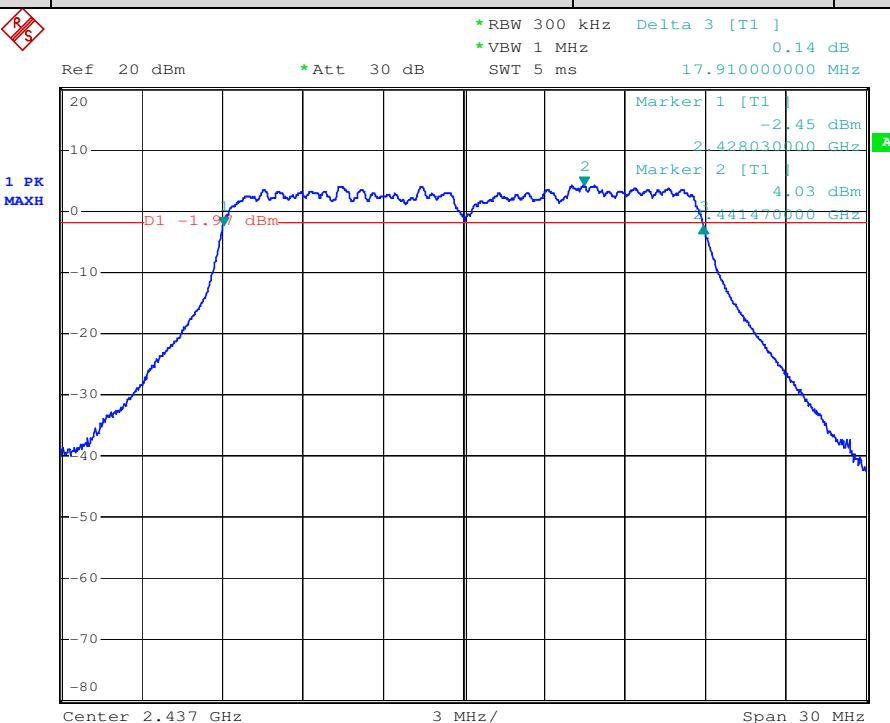


Test mode:	802.11n20	Channel:	Highest
------------	-----------	----------	---------

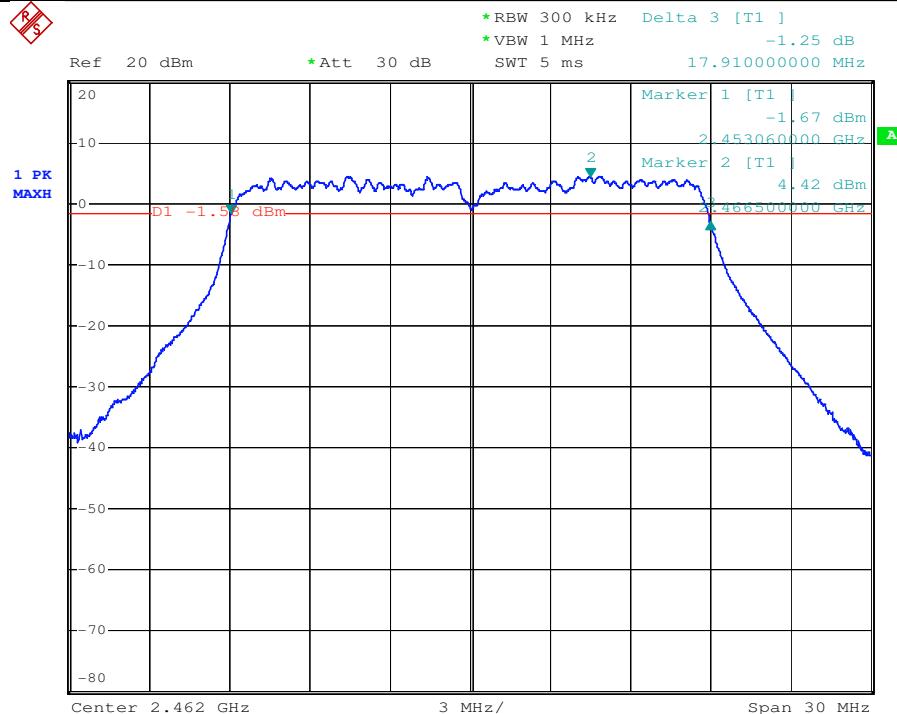


Test mode:	802.11n40	Channel:	Lowest
------------	-----------	----------	--------

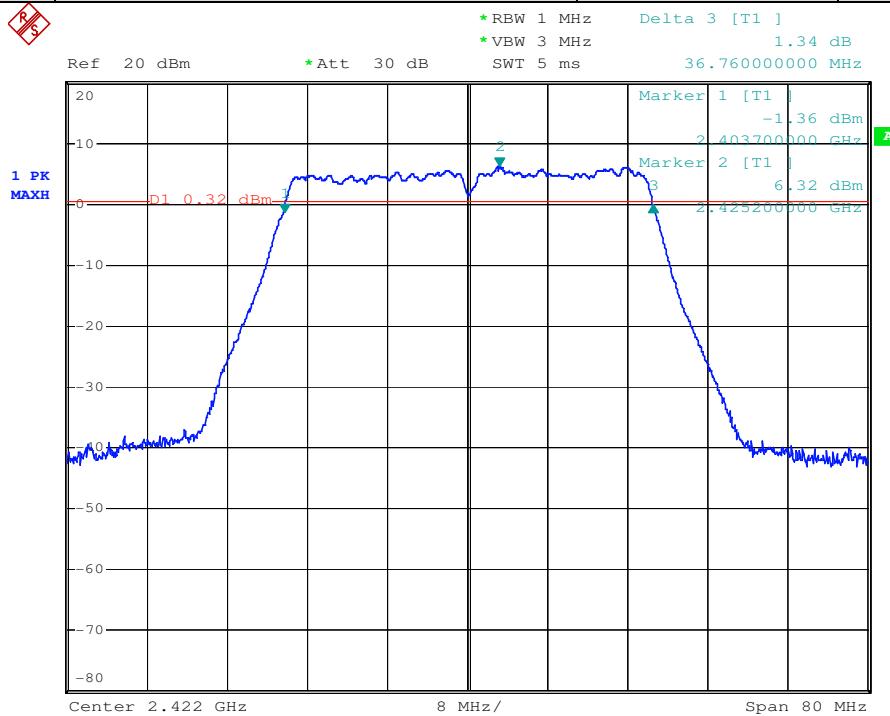

Test mode:	802.11n40	Channel:	Middle
------------	-----------	----------	--------

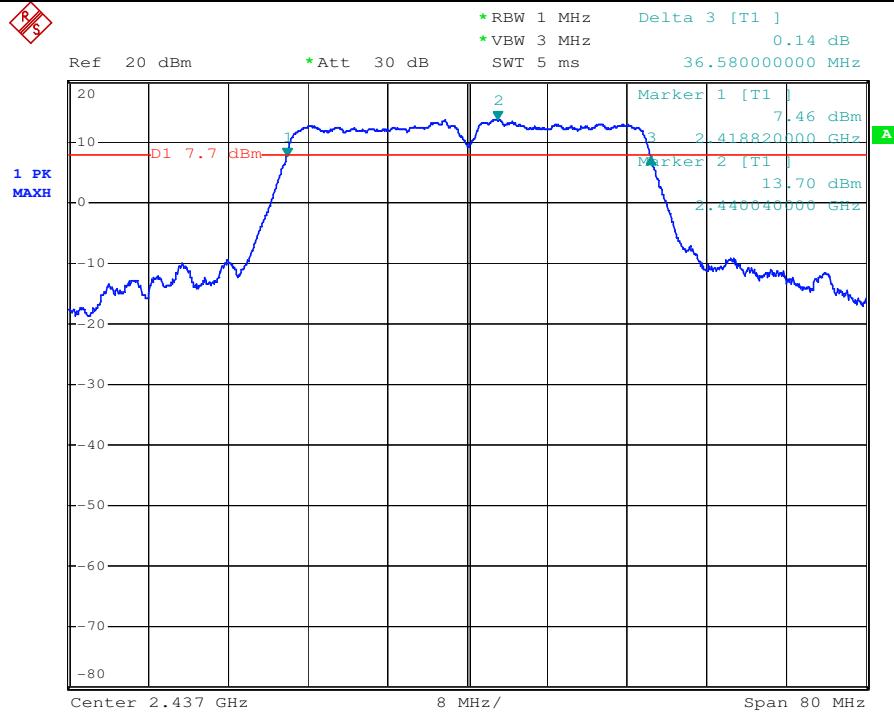


Test mode:	802.11n40	Channel:	Highest
------------	-----------	----------	---------

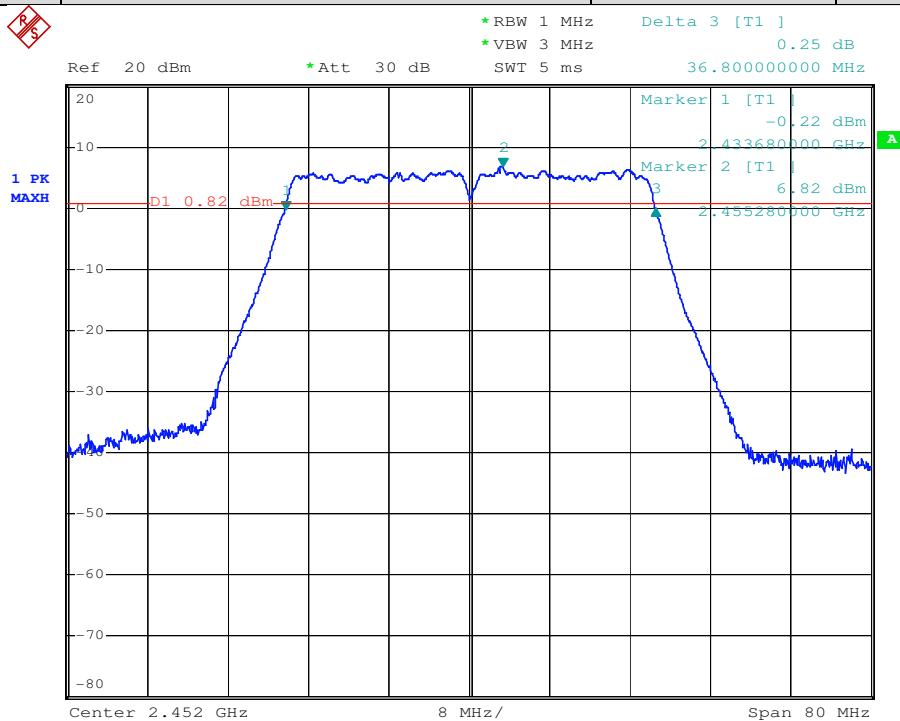

7.5 Conducted Peak Output Power

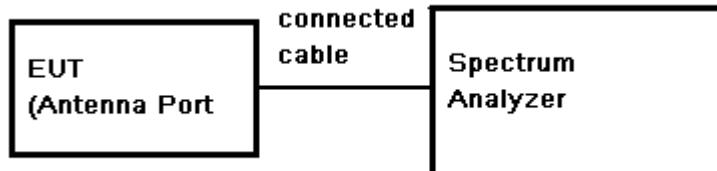Test Configuration:



Test Procedure:

- 1) Place the EUT on the table and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.
- 3) Set the occur band to the entire emission 6dB bandwidth of the signal.
- 4) Record the max. Power channel reading.
- 5) Repeat above procedures until all the frequency measured were complete.

Test Limit: 30dBm

Test Result: Pass

Test Data:

a. Single Input Single Output mode:

Test mode	Test Channel	Reading Power (dBm)		Output Power (dBm)		Limit (dBm)	Result
		Antenna A	Antenna B	Antenna A	Antenna B		
802.11b	2412	20.43	21.84	20.93	22.34	30	Pass
	2437	20.59	22.14	21.09	22.64		Pass
	2462	20.93	22.23	21.43	22.73		Pass
802.11g	2412	21.01	22.28	21.51	22.78	30	Pass
	2437	21.12	22.35	21.62	22.85		Pass
	2462	21.33	22.72	21.83	23.22		Pass
802.11n20	2412	18.78	20.19	19.28	20.69	30	Pass
	2437	18.94	20.27	19.44	20.77		Pass
	2462	19.25	20.57	19.75	21.07		Pass
802.11n40	2422	18.41	19.62	18.91	20.12	30	Pass
	2437	18.70	19.92	19.20	20.42		Pass
	2452	18.94	20.07	19.44	20.57		Pass

b. Spatial Diversity Multiplexing-MIMO function mode:

Test mode	Test Channel	Reading Power (dBm)		Output Power (dBm)			Limit (dBm)	Result
		Antenna A	Antenna B	Antenna A	Antenna B	MIMO		
802.11n20	2412	18.45	18.09	18.95	18.59	21.78	30	Pass
	2437	18.57	17.03	19.07	17.53	21.38		Pass
	2462	17.93	17.79	18.43	18.29	21.37		Pass
802.11n40	2422	16.26	16.17	16.76	16.67	19.73		Pass
	2437	16.89	17.32	17.39	17.82	20.62		Pass
	2452	16.44	16.50	16.94	17.00	19.98		Pass


Remark: 1) Output Peak Power = Reading Peak Power + Cable loss

2) Cable loss=0.5dB


3) Per KDB 662911, the conducted powers at Antenna A and Antenna B were first measured separately during MIMO transmission as shown in section above. The measured values were then summed in linear power units then converted back to dBm.

Single Input Single Output mode test plot as follows:


802.11 b	Antenna A	Channel: 2412
----------	-----------	---------------

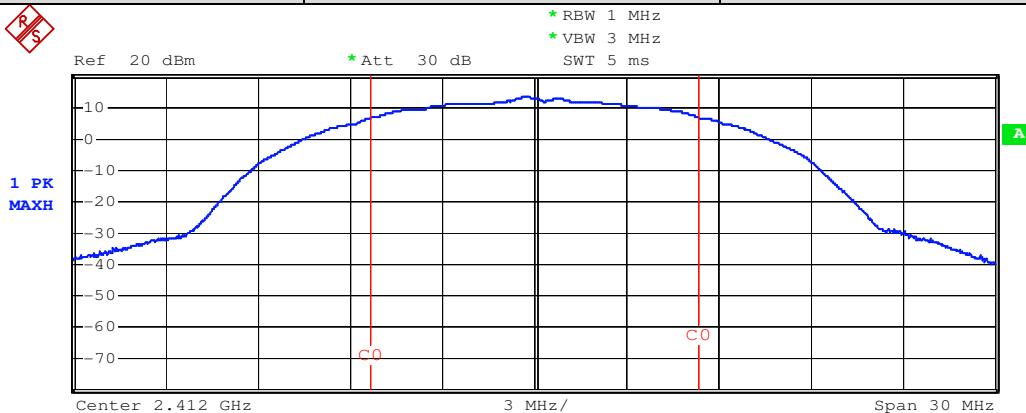


802.11 b	Antenna A	Channel: 2437
----------	-----------	---------------

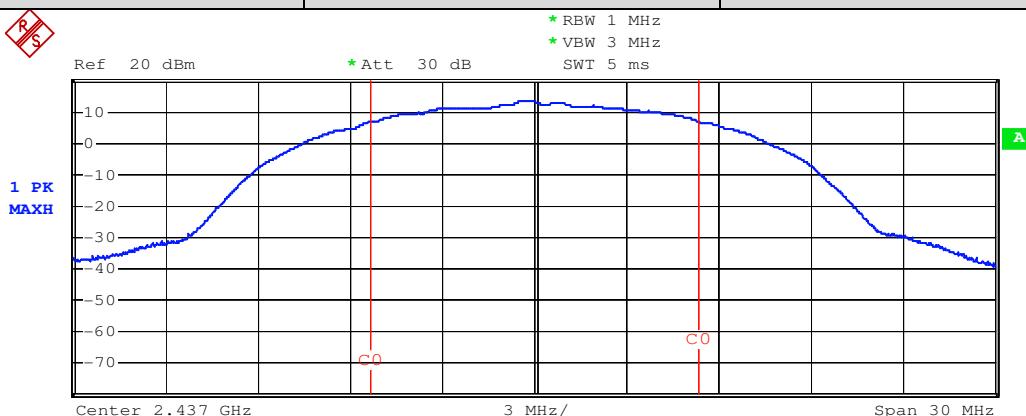


802.11 b	Antenna A	Channel: 2462
----------	-----------	---------------

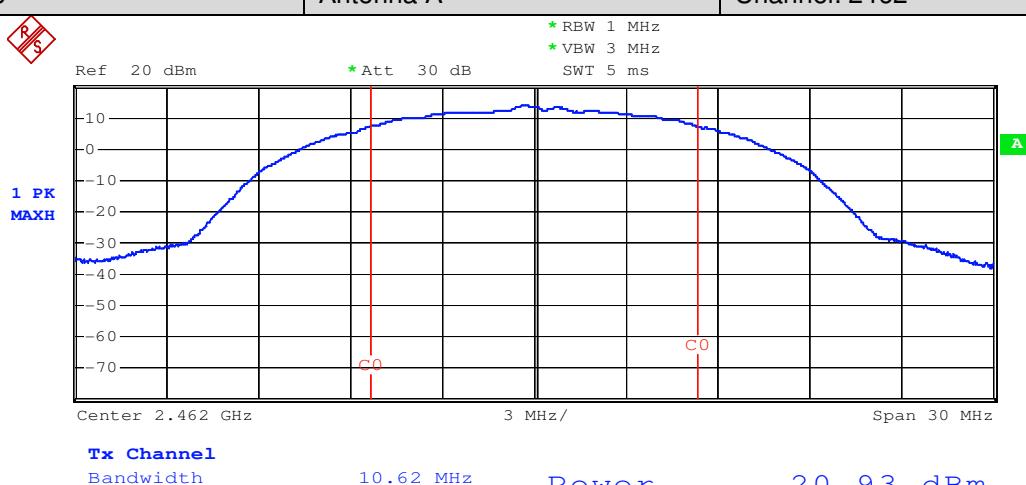


802.11 g	Antenna A	Channel: 2412
----------	-----------	---------------

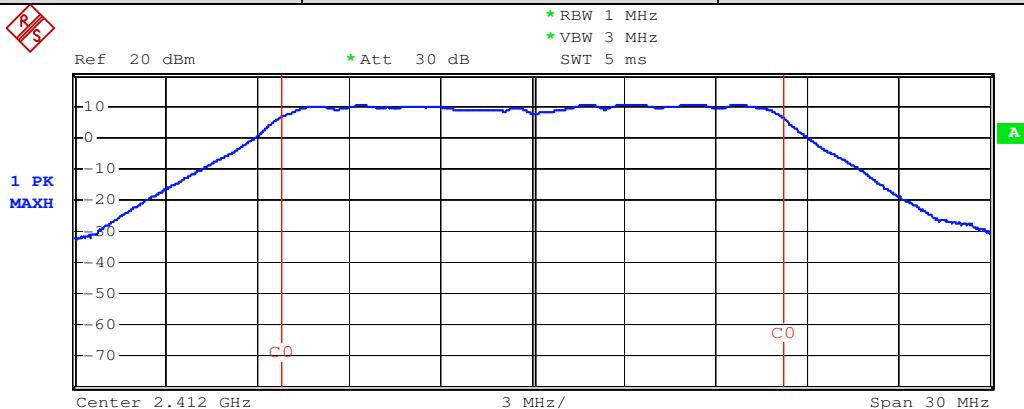


802.11 g	Antenna A	Channel: 2437
----------	-----------	---------------

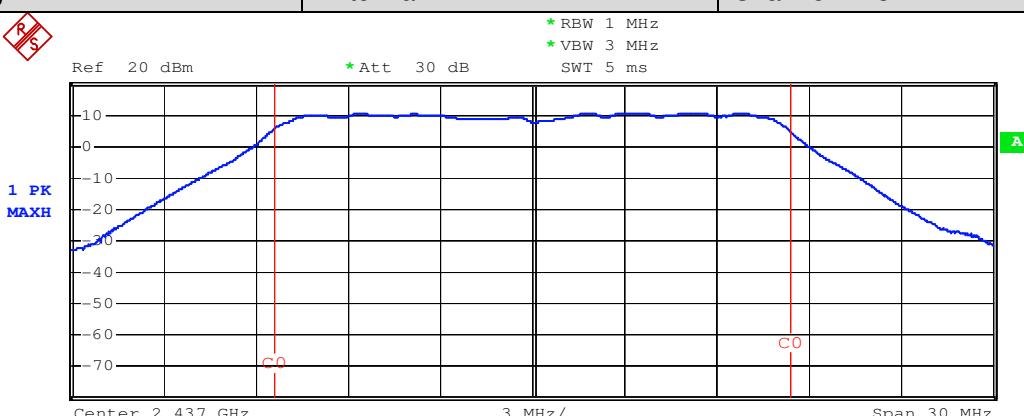


802.11 g	Antenna A	Channel: 2462
----------	-----------	---------------

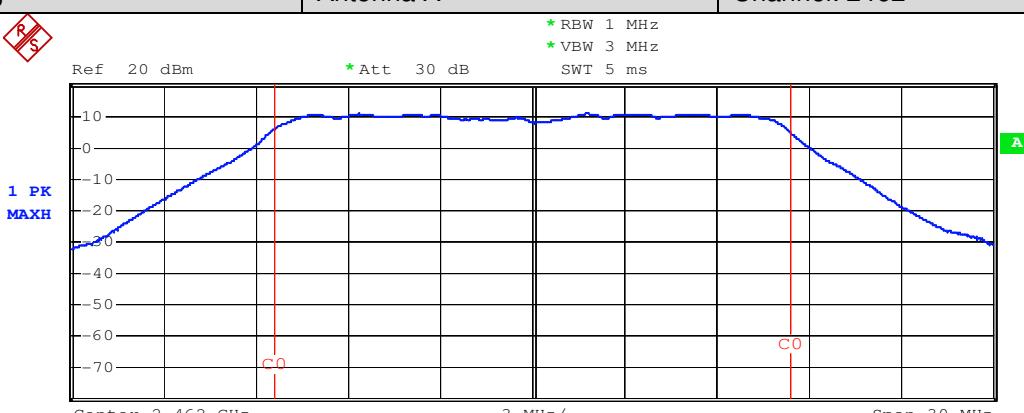


802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

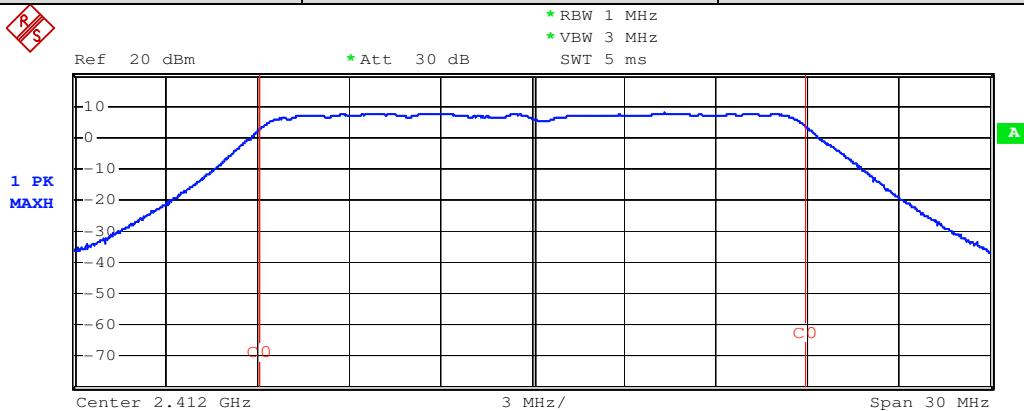


802.11 n20	Antenna A	Channel: 2437
------------	-----------	---------------

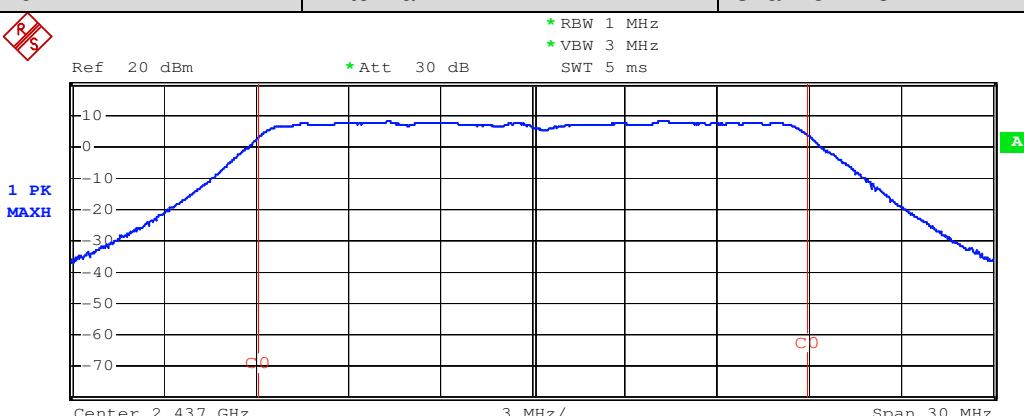

802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

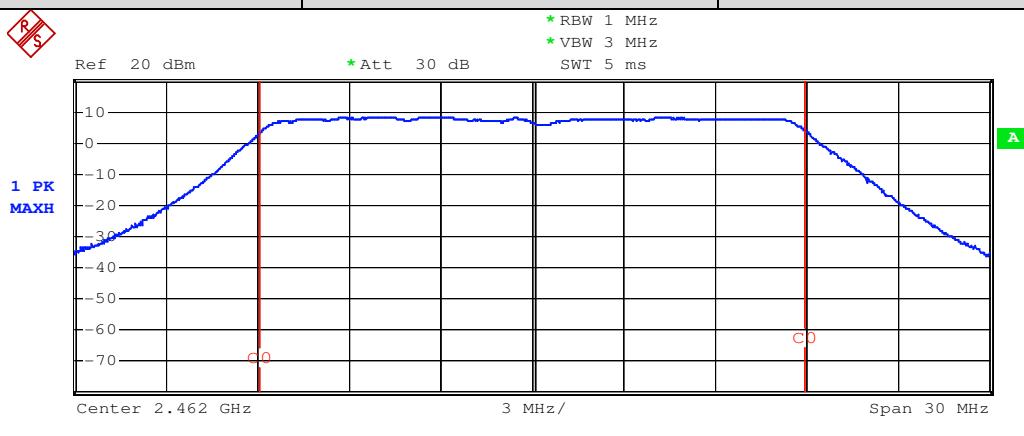


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

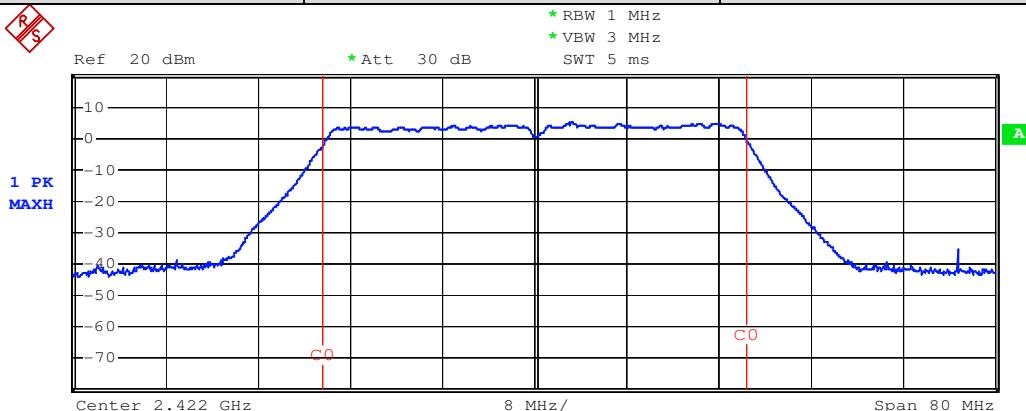


Tx Channel
Bandwidth 36.8 MHz **Power** 18.41 dBm

802.11 n40	Antenna A	Channel: 2437
------------	-----------	---------------

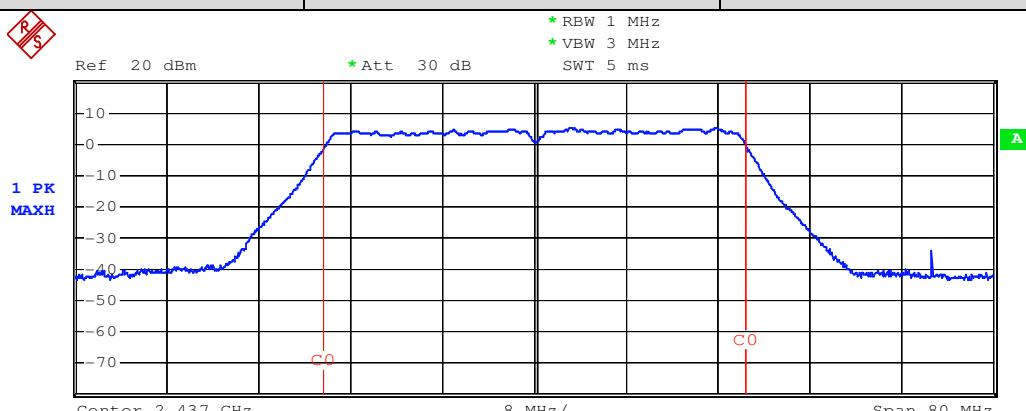


Tx Channel
Bandwidth 36.64 MHz **Power** 18.70 dBm

802.11 n40	Antenna A	Channel: 2452
------------	-----------	---------------

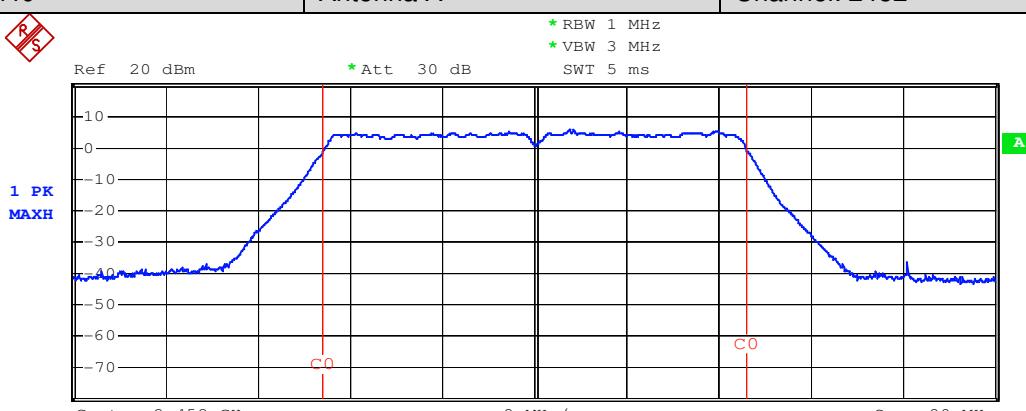


Tx Channel
Bandwidth 36.88 MHz **Power** 18.94 dBm


802.11 b	Antenna B	Channel: 2412
----------	-----------	---------------

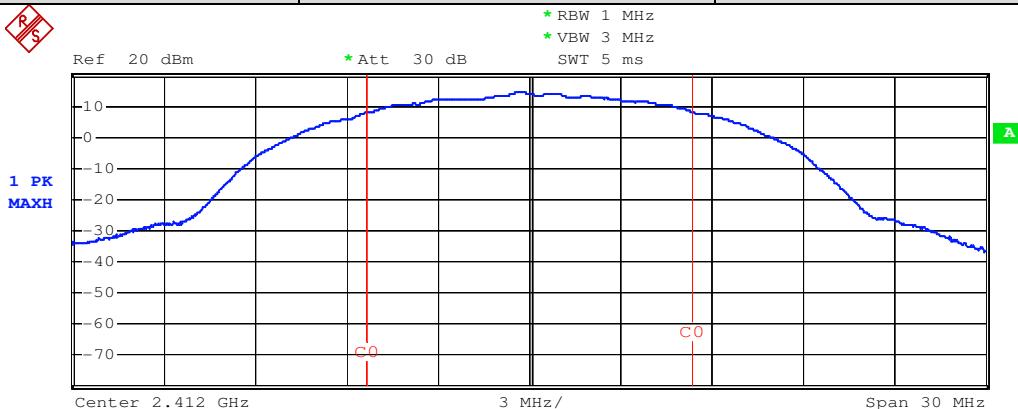


802.11 b	Antenna B	Channel: 2437
----------	-----------	---------------

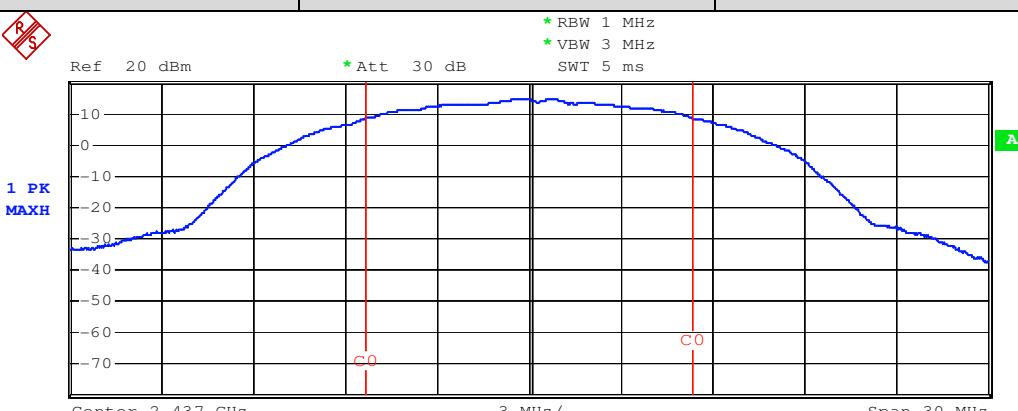

802.11 b	Antenna B	Channel: 2462
----------	-----------	---------------

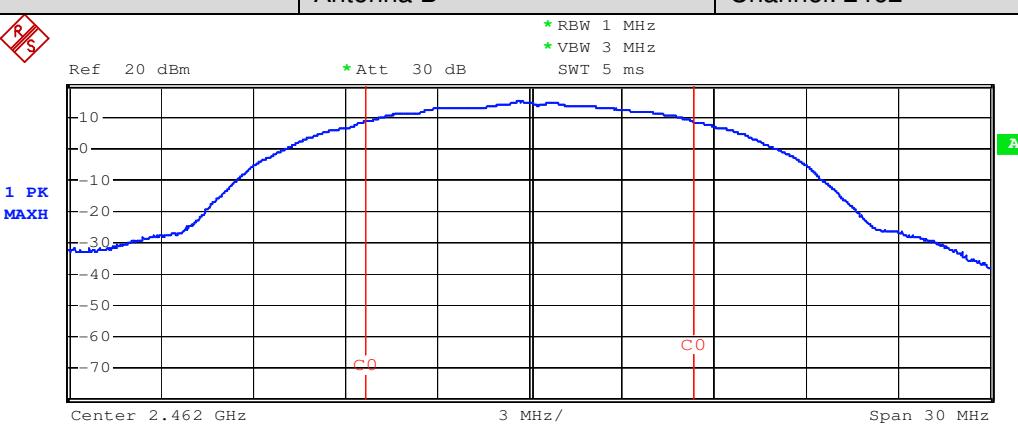


802.11 g	Antenna B	Channel: 2412
----------	-----------	---------------

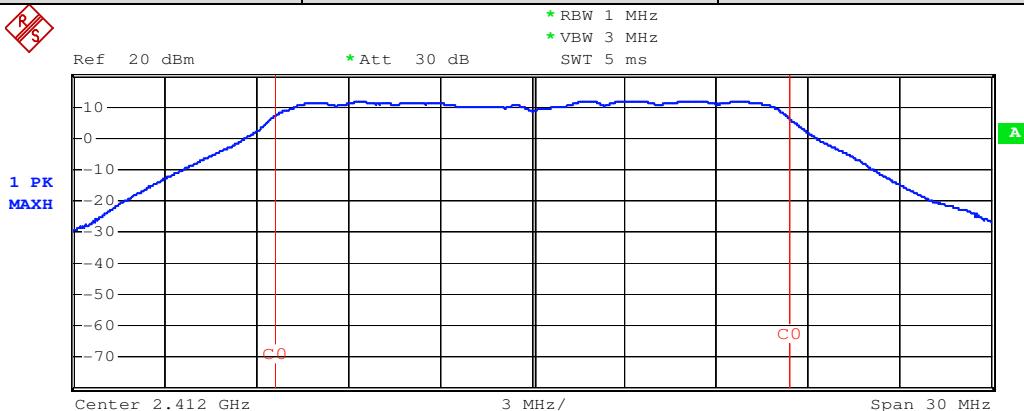


Tx Channel
Bandwidth 16.74 MHz Power 22.28 dBm

802.11 g	Antenna B	Channel: 2437
----------	-----------	---------------

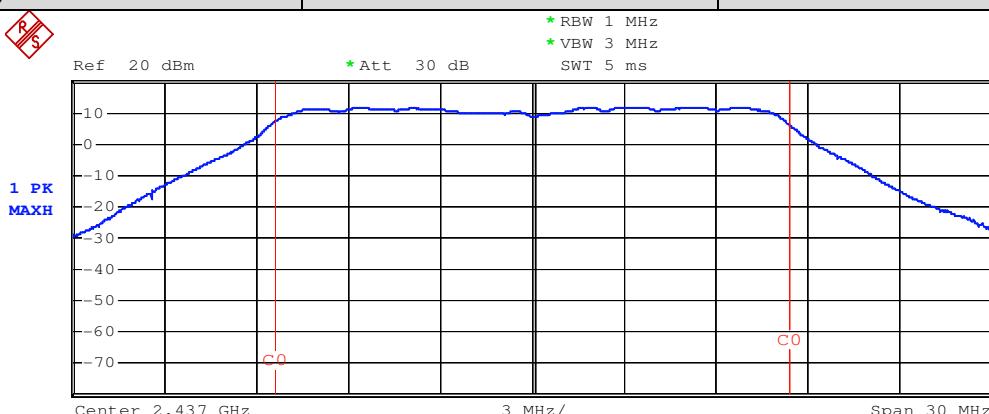


Tx Channel
Bandwidth 16.77 MHz Power 22.35 dBm

802.11 g	Antenna B	Channel: 2462
----------	-----------	---------------

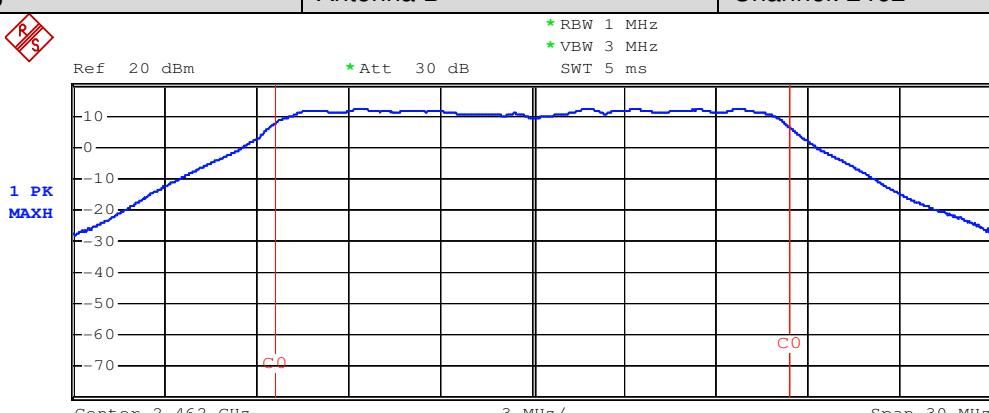


Tx Channel
Bandwidth 16.71 MHz Power 22.72 dBm

802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

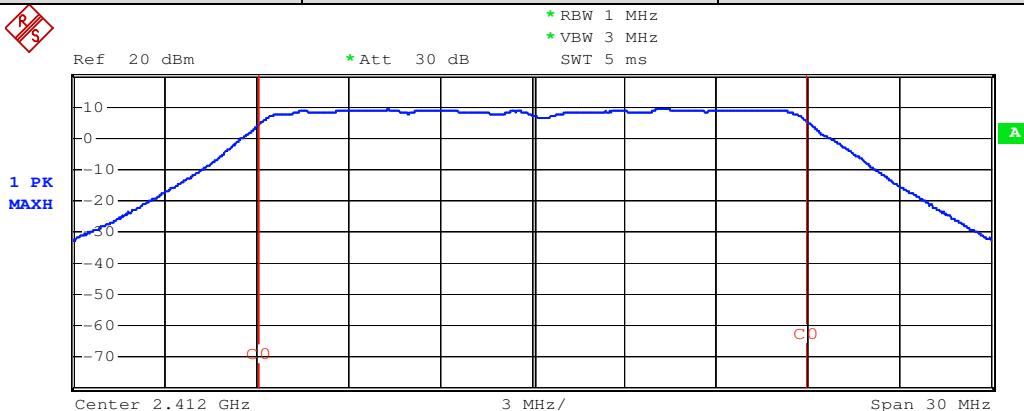


Tx Channel
Bandwidth 17.88 MHz Power 20.19 dBm

802.11 n20	Antenna B	Channel: 2437
------------	-----------	---------------

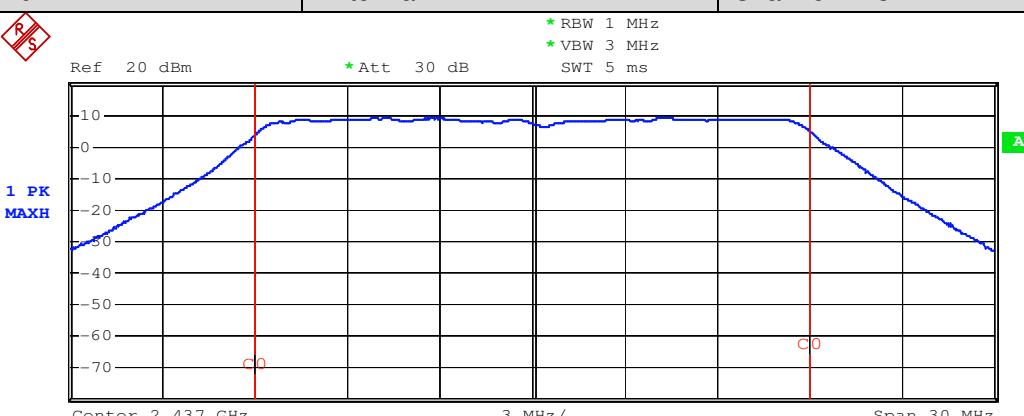


Tx Channel
Bandwidth 17.91 MHz Power 20.27 dBm

802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

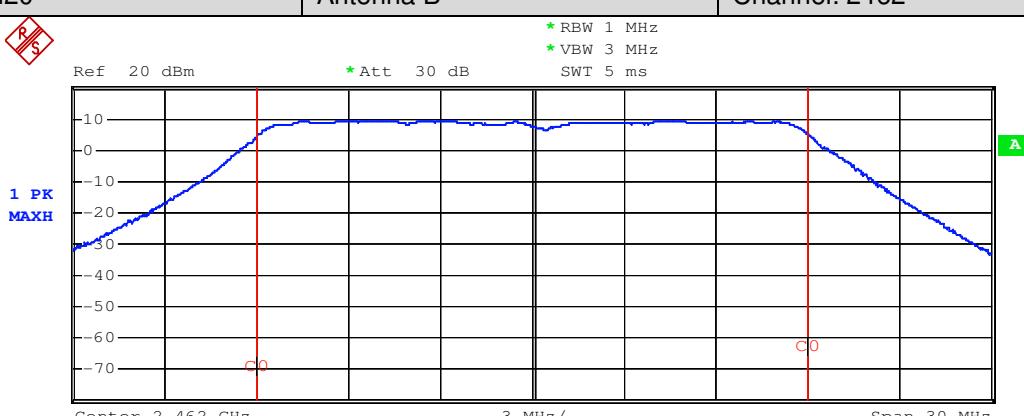


Tx Channel
Bandwidth 17.91 MHz Power 20.57 dBm


802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

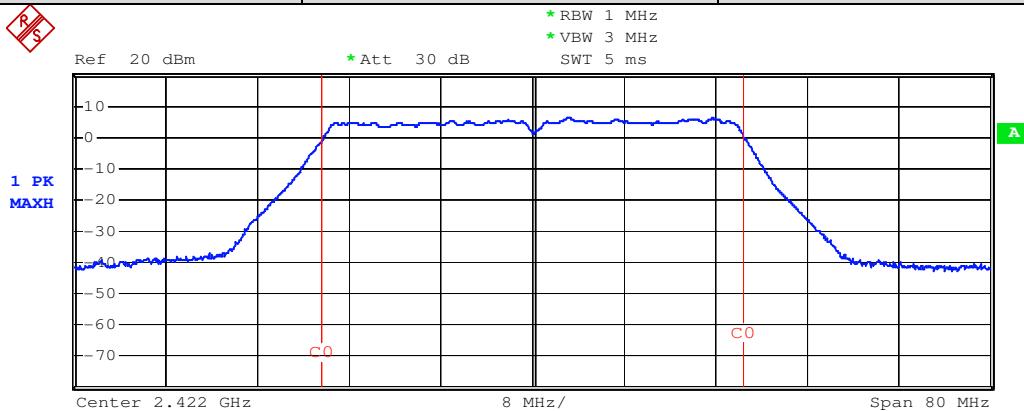

802.11 n40	Antenna B	Channel: 2437
------------	-----------	---------------

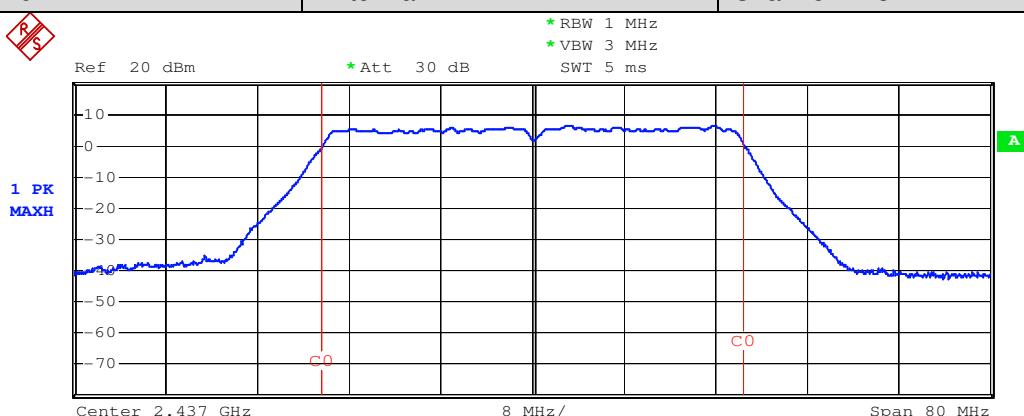


802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

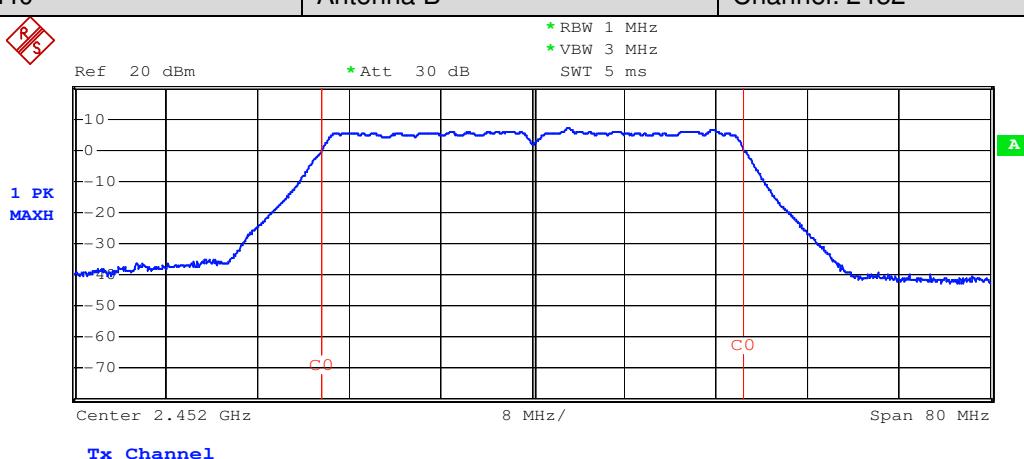


Spatial Diversity Multiplexing-MIMO function mode test plot as follows:


802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

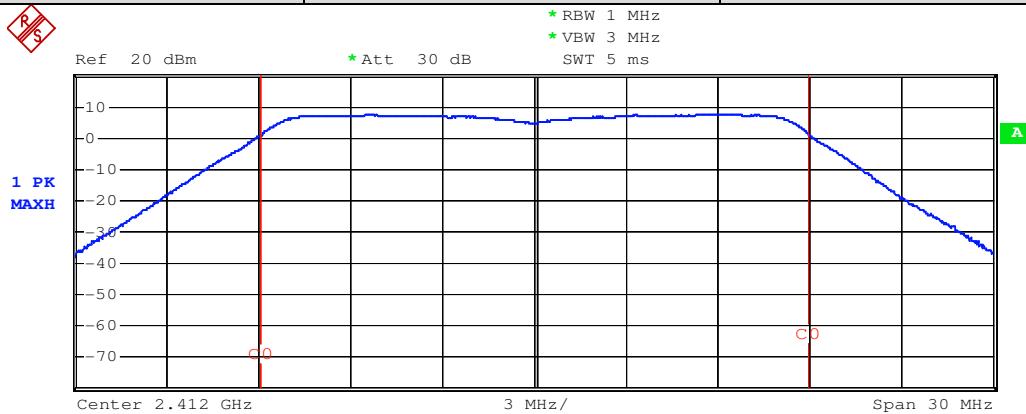


802.11 n20	Antenna A	Channel: 2437
------------	-----------	---------------

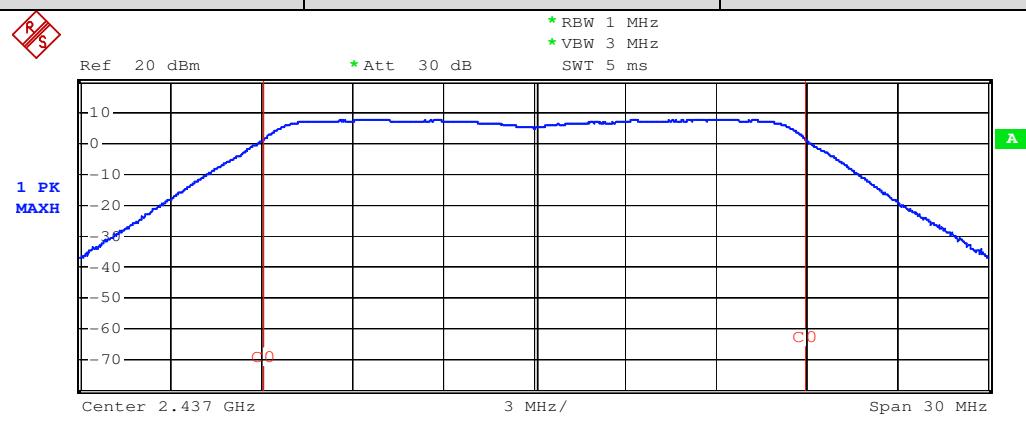


802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

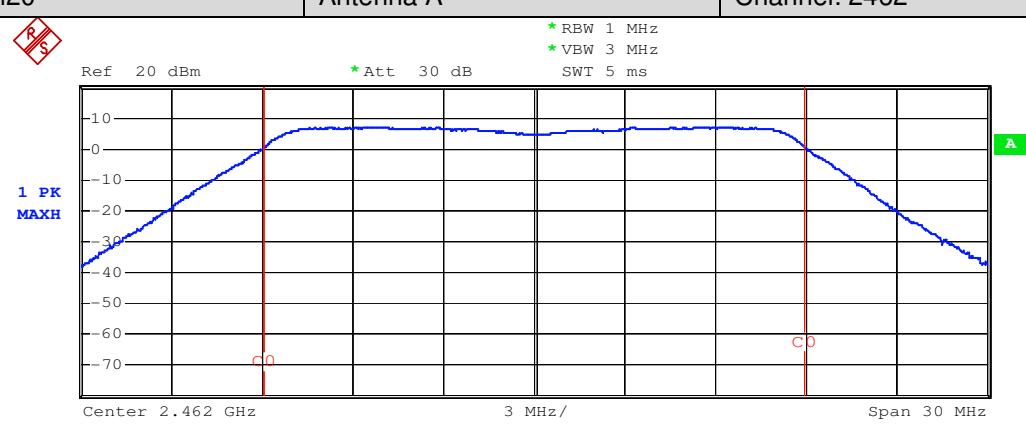


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

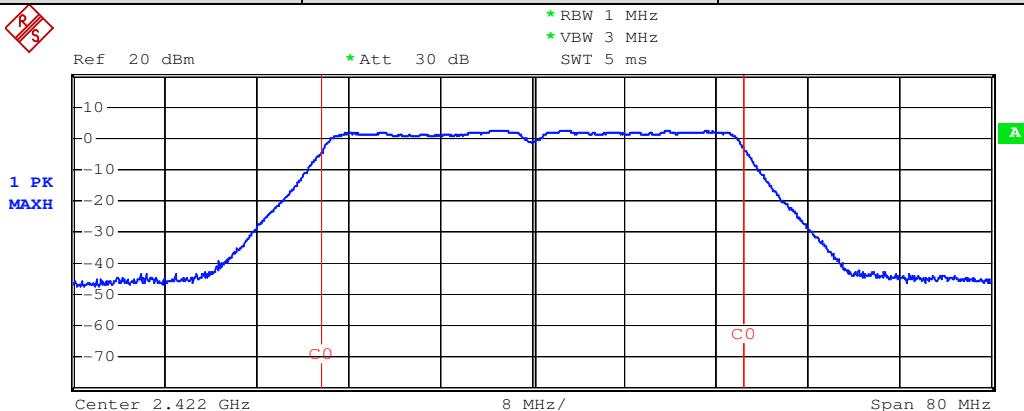


802.11 n40	Antenna A	Channel: 2437
------------	-----------	---------------

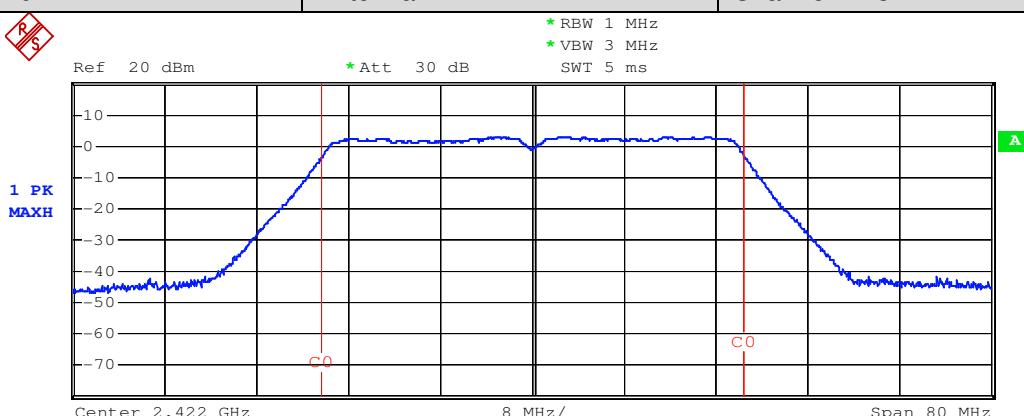


802.11 n40	Antenna A	Channel: 2452
------------	-----------	---------------

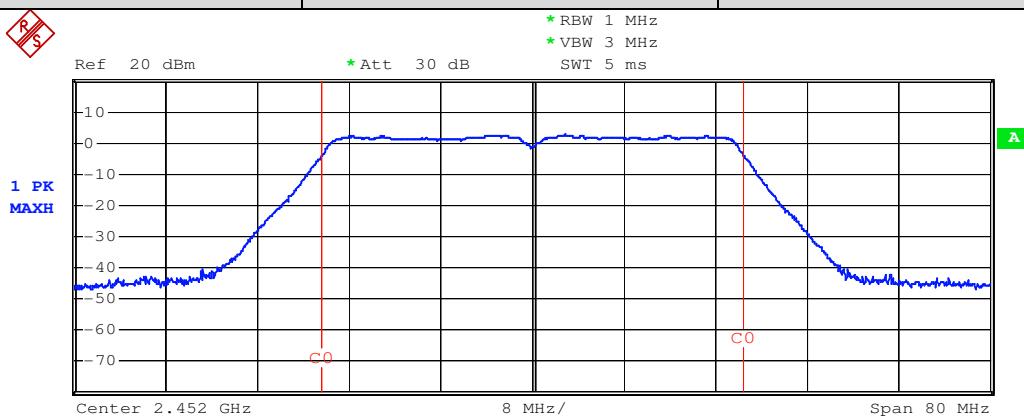


802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

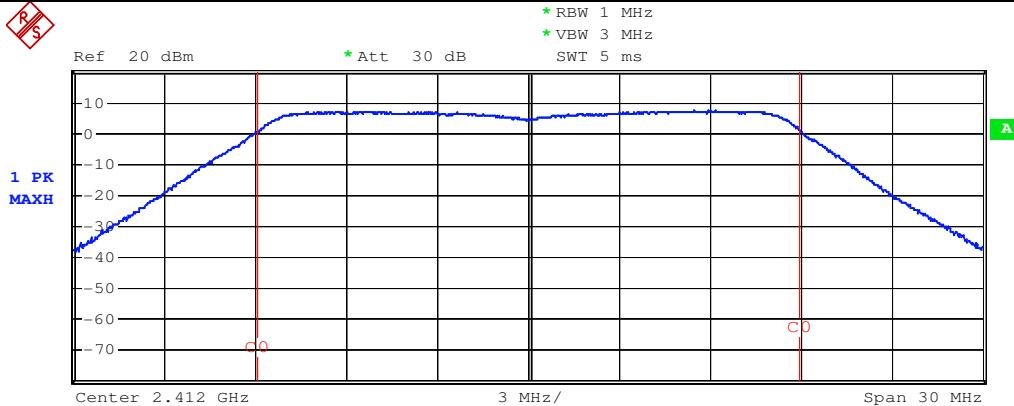


802.11 n20	Antenna B	Channel: 2437
------------	-----------	---------------

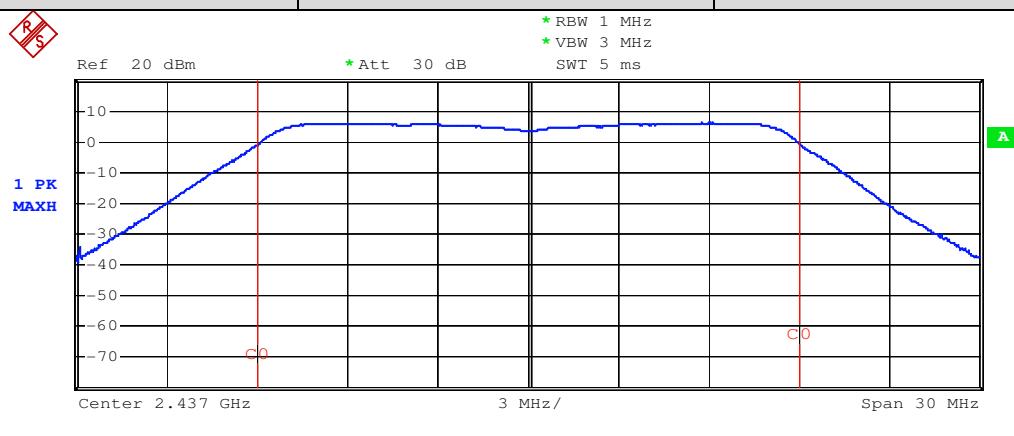


802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

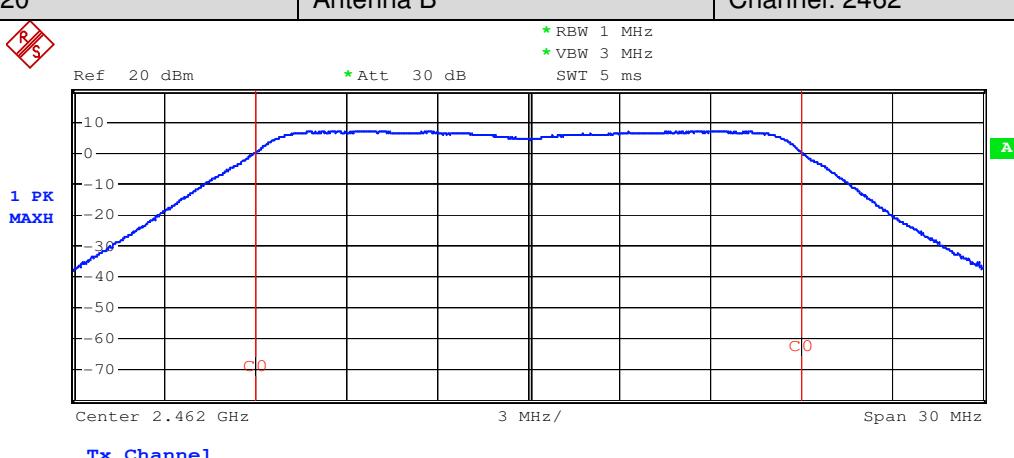


802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

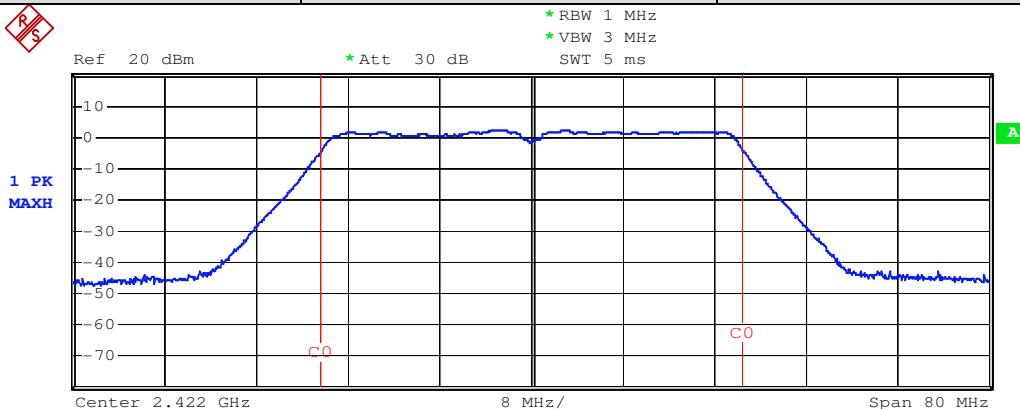


802.11 n40	Antenna B	Channel: 2437
------------	-----------	---------------

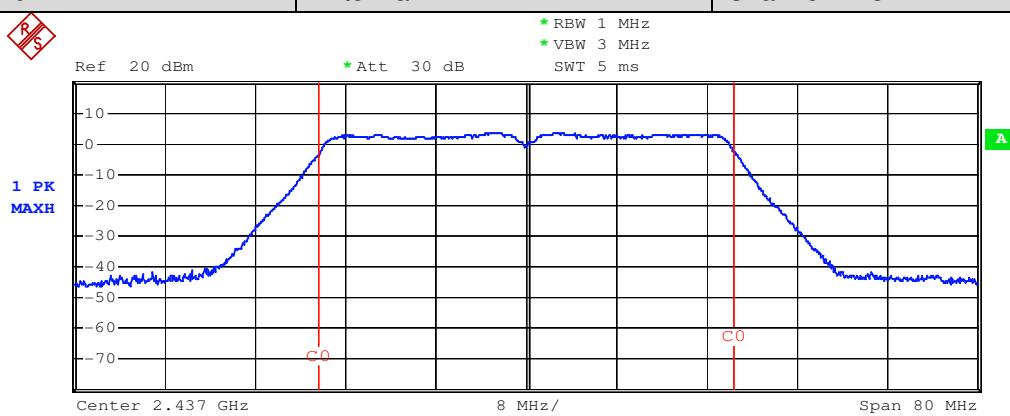

802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

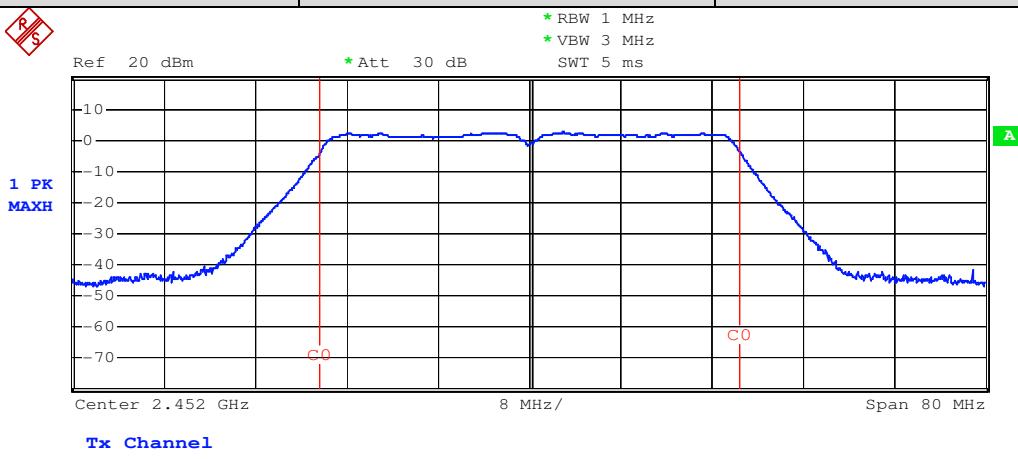

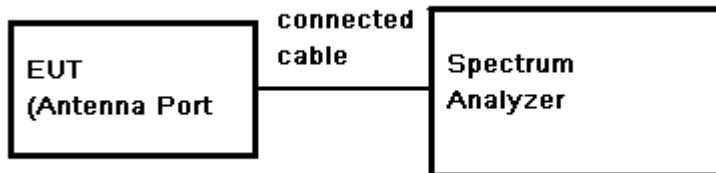7.6 Peak Power Spectral Density

Test Configuration:**Test Procedure:**

- 1) Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: Center Frequency= Channel Frequency, RBW = 3 kHz VBW = 10 kHz. Span= fully encompass the bandwidth, Sweep = auto; Detector Function = Peak; Trace mode=max hold, MKR=Center Frequency, Trace=Clear Write.
- 3) Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.
- 4) Adjust the Span = 300 kHz, Sweep Time=100s, Trace=Max Hold, MKR=Peak Search.
- 5) Record the marker level for the particular mode.
- 6) Repeat these steps for other channel and device modes.

Test Limit:

8dBm/3kHz

Test Result:

Pass

Test Data:**a. Single Input Single Output mode:**

Test mode	Test Channel	Reading PSD (dBm)		PSD (dBm)		Limit (dBm/3KHz)	Result
		Antenna A	Antenna B	Antenna A	Antenna B		
802.11b	2412	-8.29	-7.92	-7.79	-7.42	8	Pass
	2437	-7.20	-7.81	-6.70	-7.31		Pass
	2462	-7.33	-7.68	-6.83	-7.18		Pass
802.11g	2412	-14.01	-13.29	-13.51	-12.79	8	Pass
	2437	-12.85	-13.19	-12.35	-12.69		Pass
	2462	-13.79	-13.08	-13.29	-12.58		Pass
802.11n20	2412	-16.58	-15.27	-16.08	-14.77	8	Pass
	2437	-16.64	-15.77	-16.14	-15.27		Pass
	2462	-16.45	-15.69	-15.95	-15.19		Pass
802.11n40	2422	-17.83	-17.40	-17.33	-16.90	8	Pass
	2437	-17.00	-17.45	-16.5	-16.95		Pass
	2452	-17.18	-18.42	-16.68	-17.92		Pass

b. Spatial Diversity Multiplexing-MIMO function mode:

Test mode	Test Channel	Reading PSD (dBm)		PSD (dBm)			Limit (dBm/3KHz)	Result
		Antenna A	Antenna B	Antenna A	Antenna B	MIMO		
802.11n20	2412	-17.84	-20.08	-17.34	-19.58	-15.31	8	Pass
	2437	-18.39	-19.81	-17.89	-19.31	-15.53		Pass
	2462	-18.08	-18.96	-17.58	-18.46	-14.99		Pass
802.11n40	2422	-22.01	-19.51	-21.51	-19.01	-17.07	8	Pass
	2437	-20.92	-19.11	-20.42	-18.61	-16.41		Pass
	2452	-12.63	-19.01	-12.13	-18.51	-11.23		Pass



Remark: 1) Output Peak Power = Reading Peak Power + Cable loss

2) Cable loss=0.5dB



3) Per KDB 662911, the conducted powers at Antenna A and Antenna B were first measured separately during MIMO transmission as shown in section above. The measured values were then summed in linear power units then converted back to dBm.

Single Input Single Output mode test plot as follows:



802.11 b	Antenna A	Channel: 2412
----------	-----------	---------------

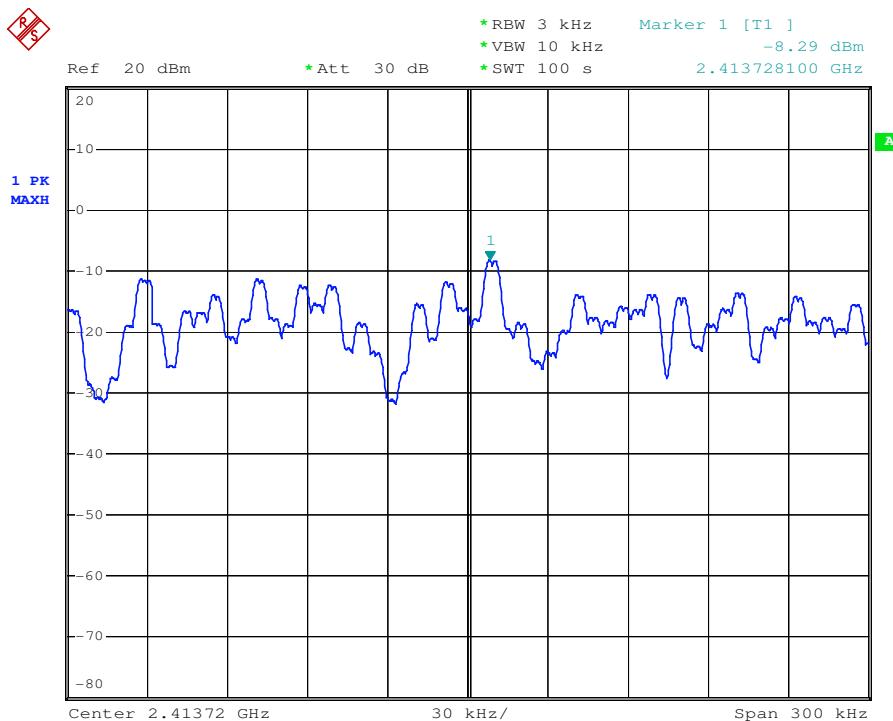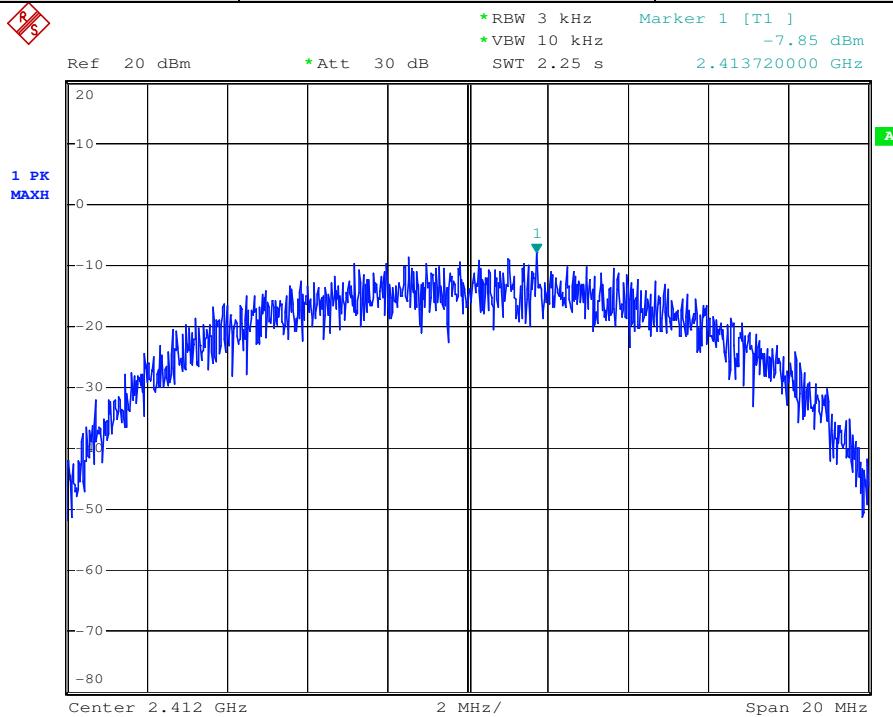



802.11 b	Antenna A	Channel: 2437
----------	-----------	---------------

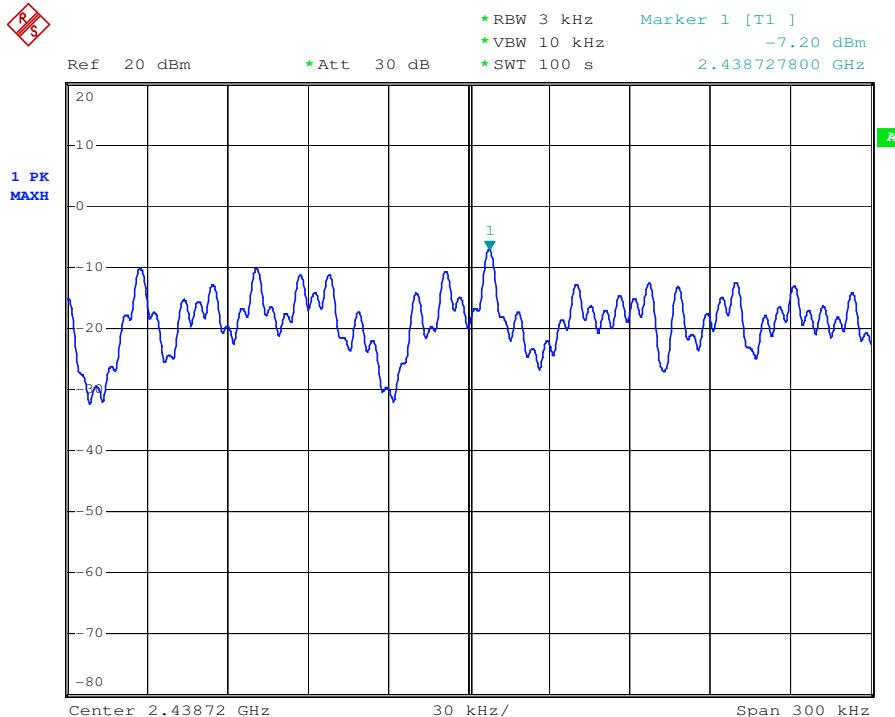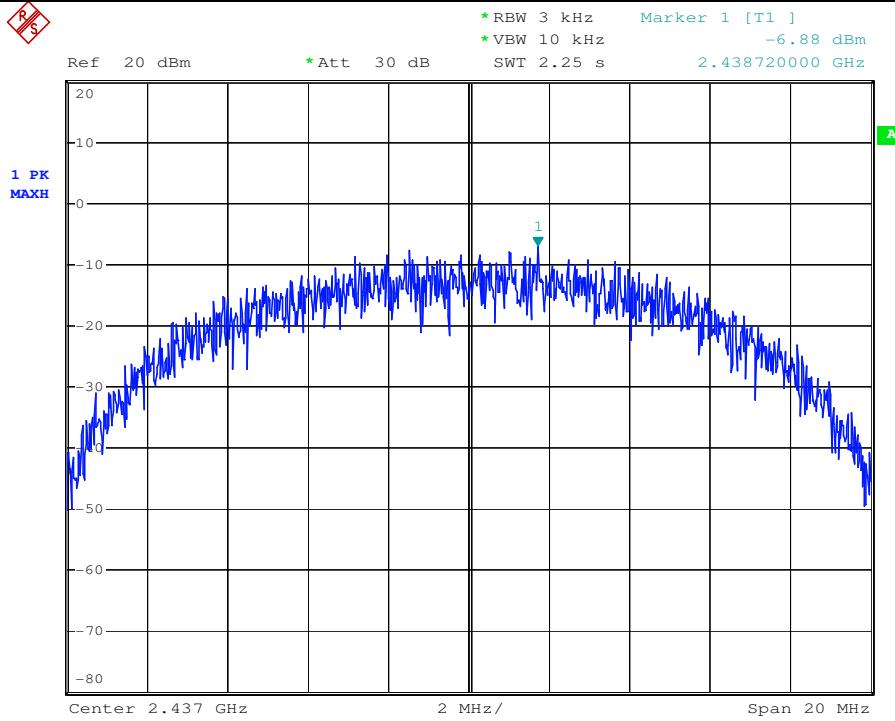



802.11 b	Antenna A	Channel: 2462
----------	-----------	---------------

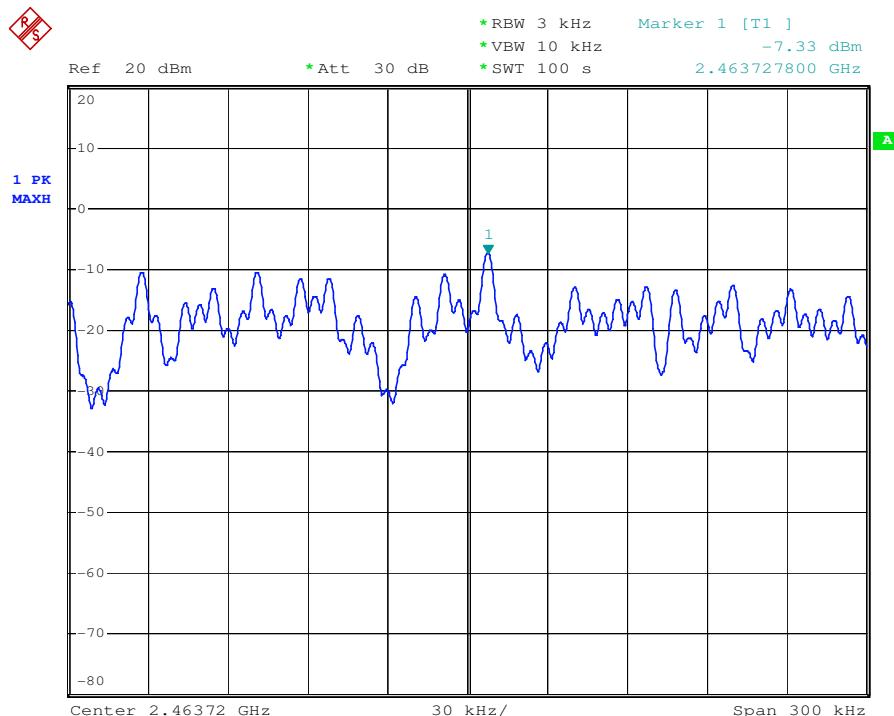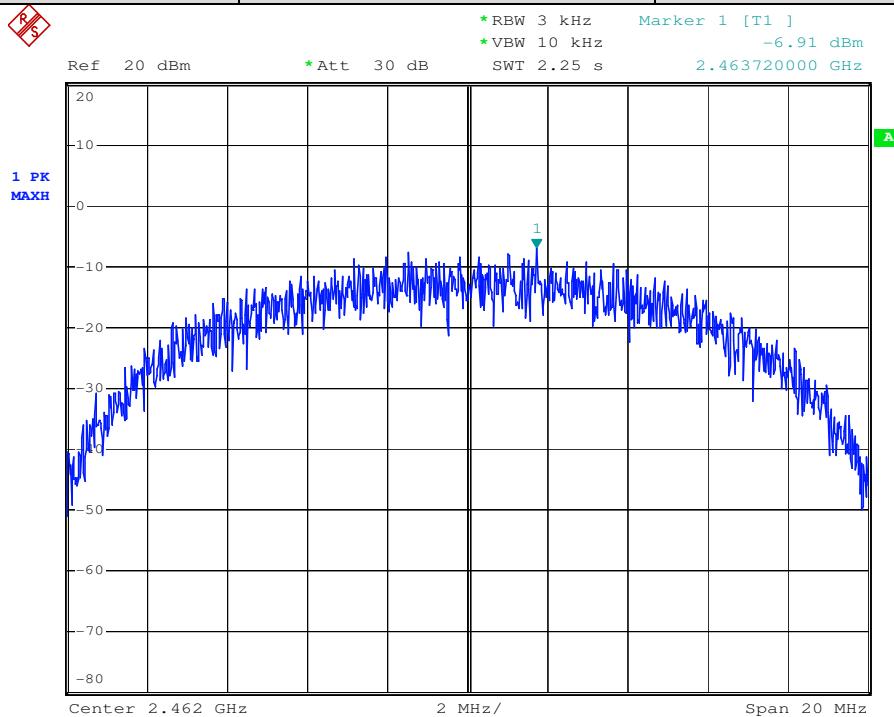



802.11 g	Antenna A	Channel: 2412
----------	-----------	---------------

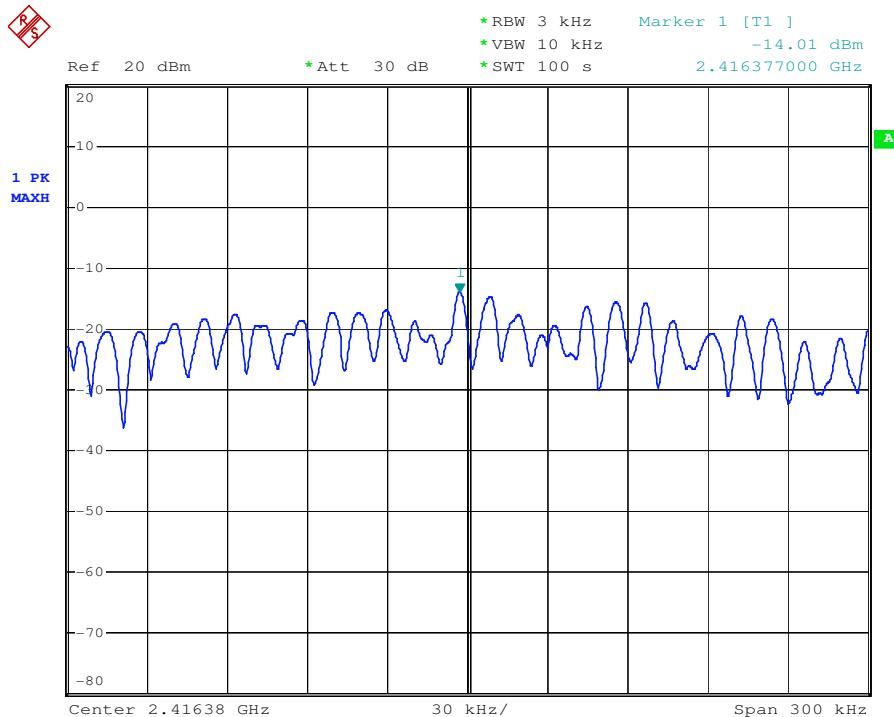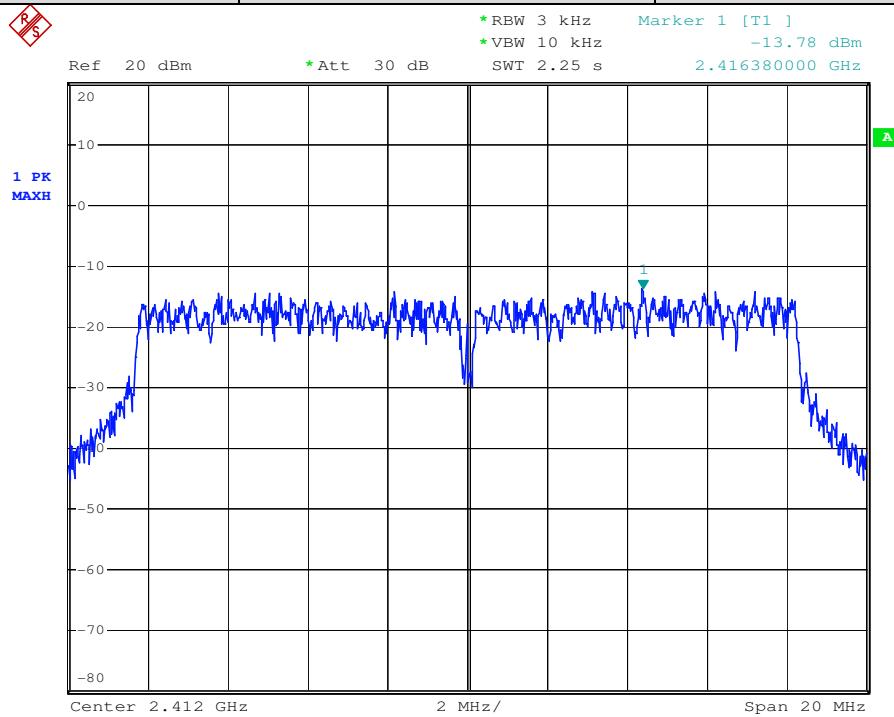



802.11 g	Antenna A	Channel: 2437
----------	-----------	---------------

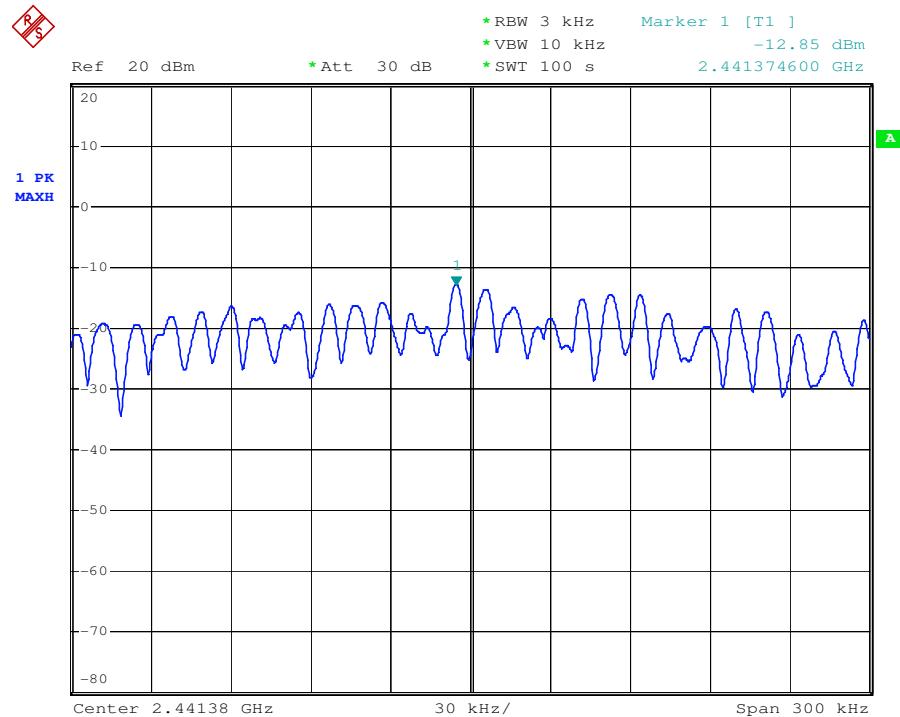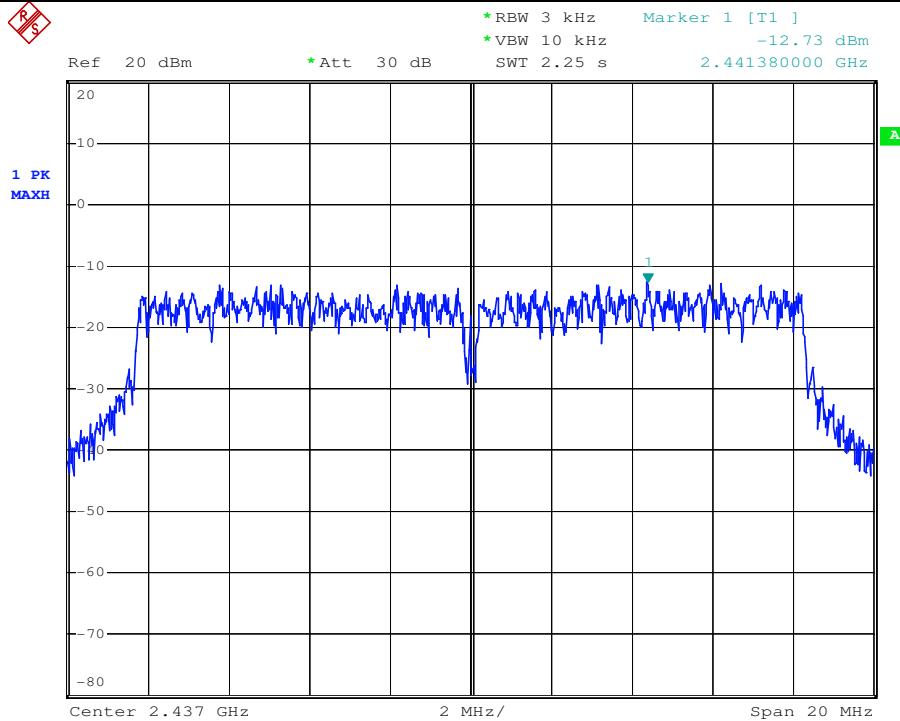



802.11 g	Antenna A	Channel: 2462
----------	-----------	---------------

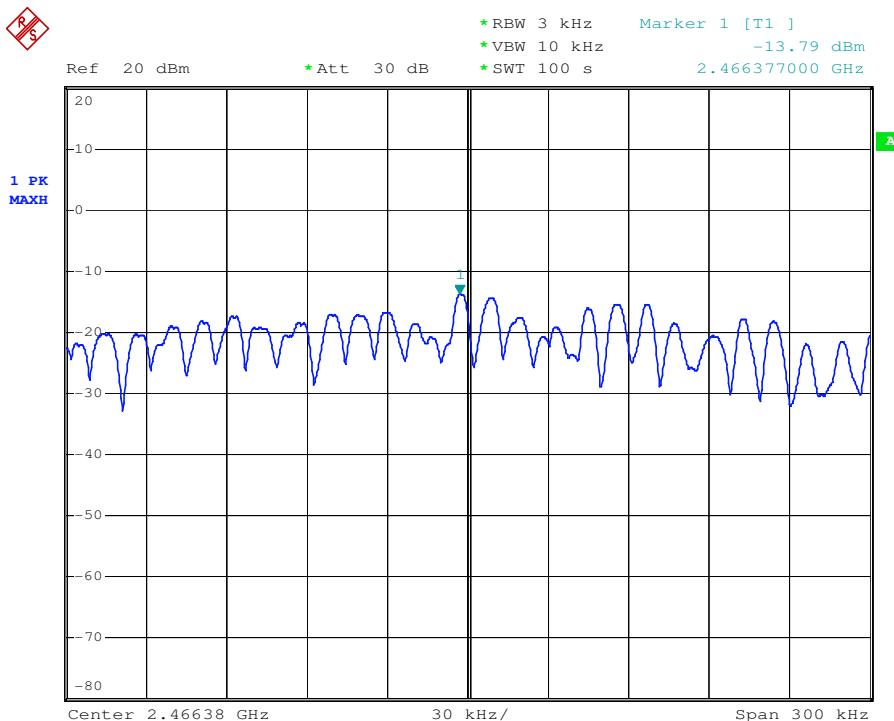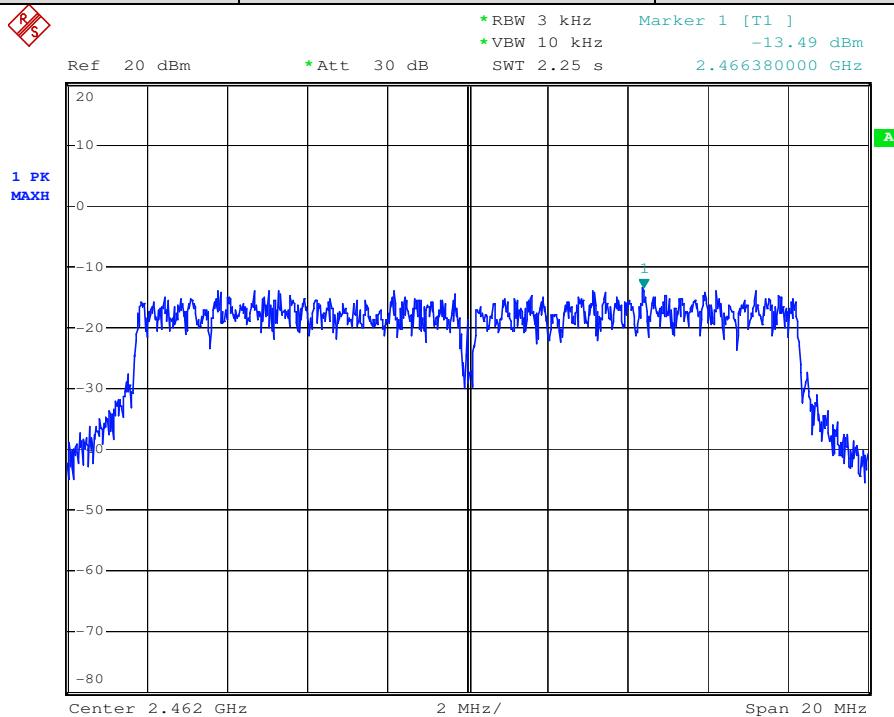



802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

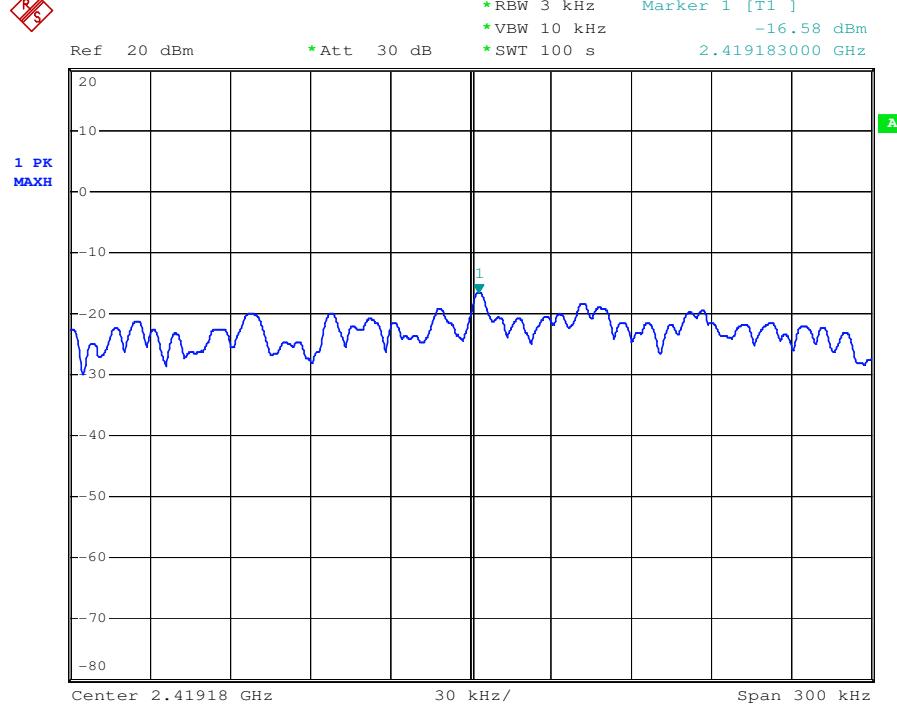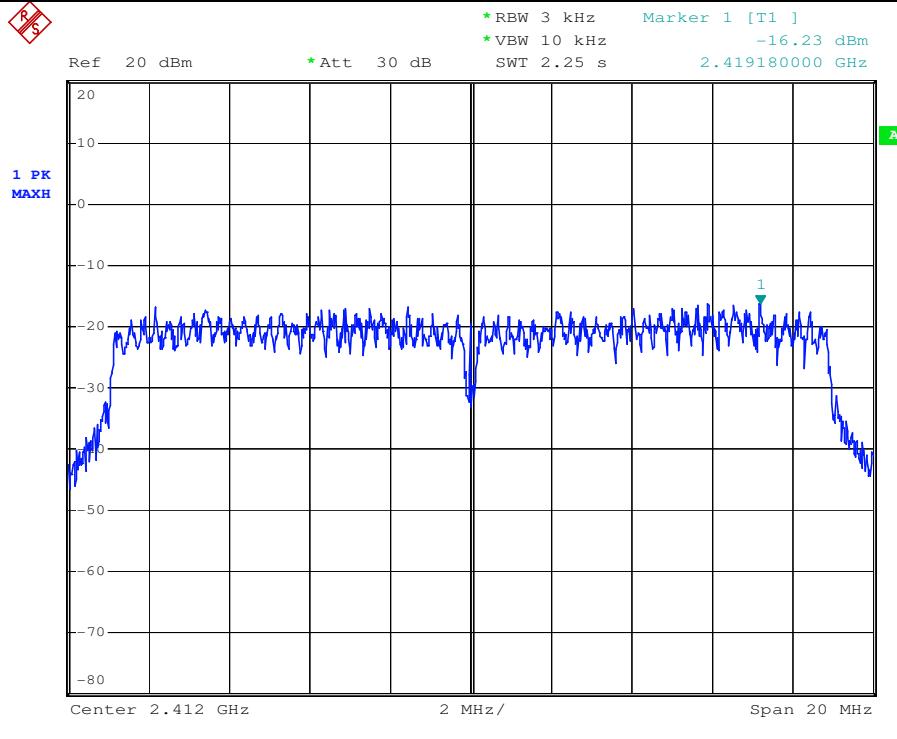



802.11 n20	Antenna A	Channel: 2437
------------	-----------	---------------

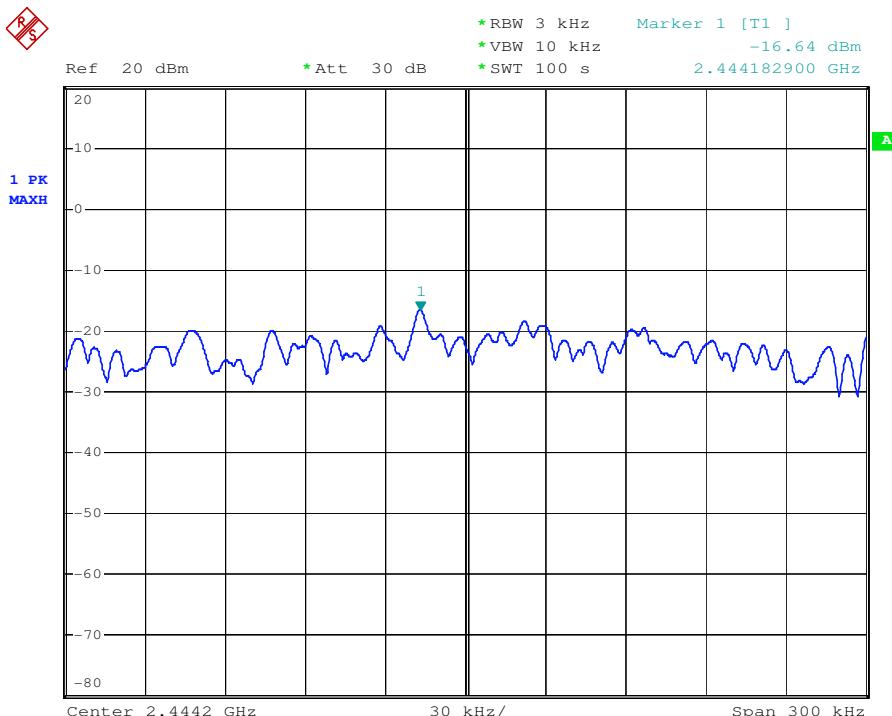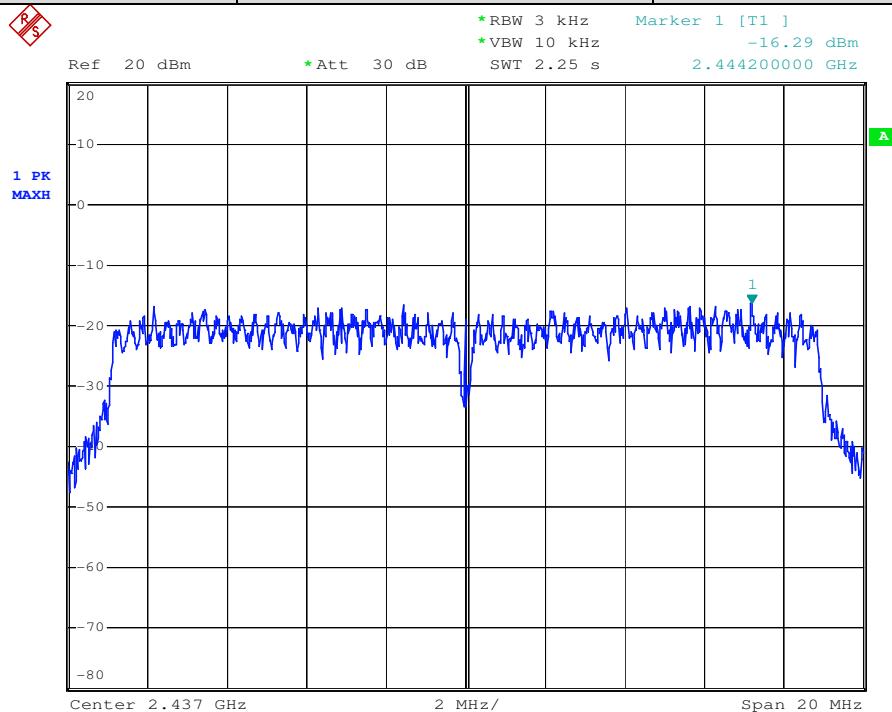



802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

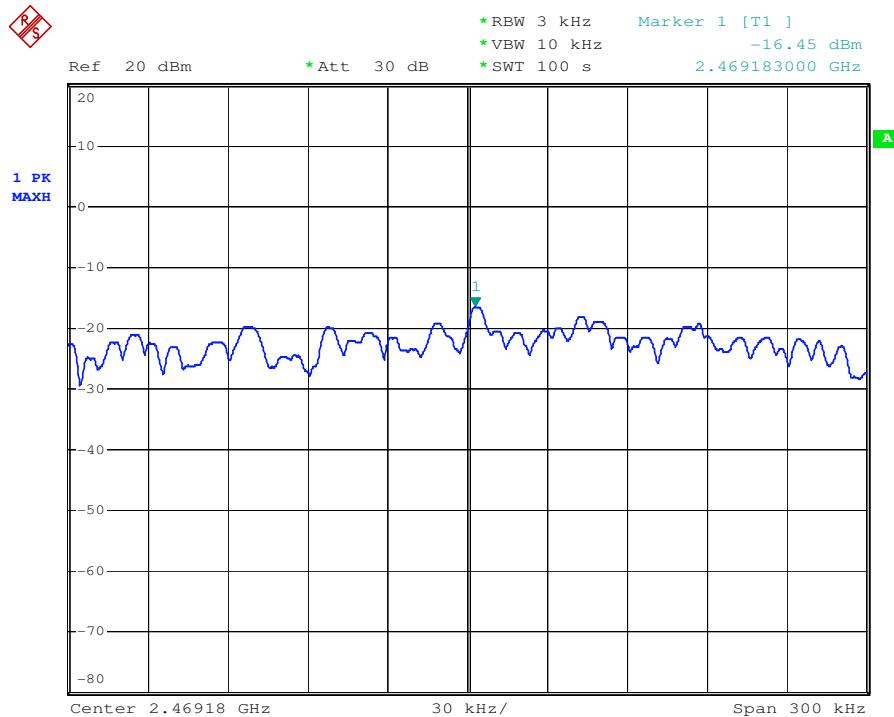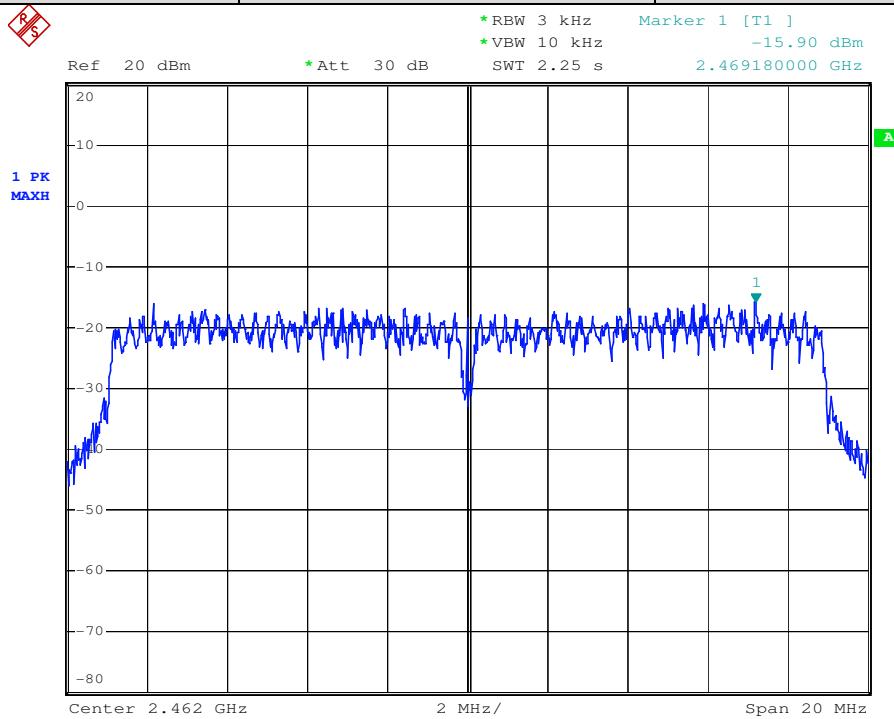


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

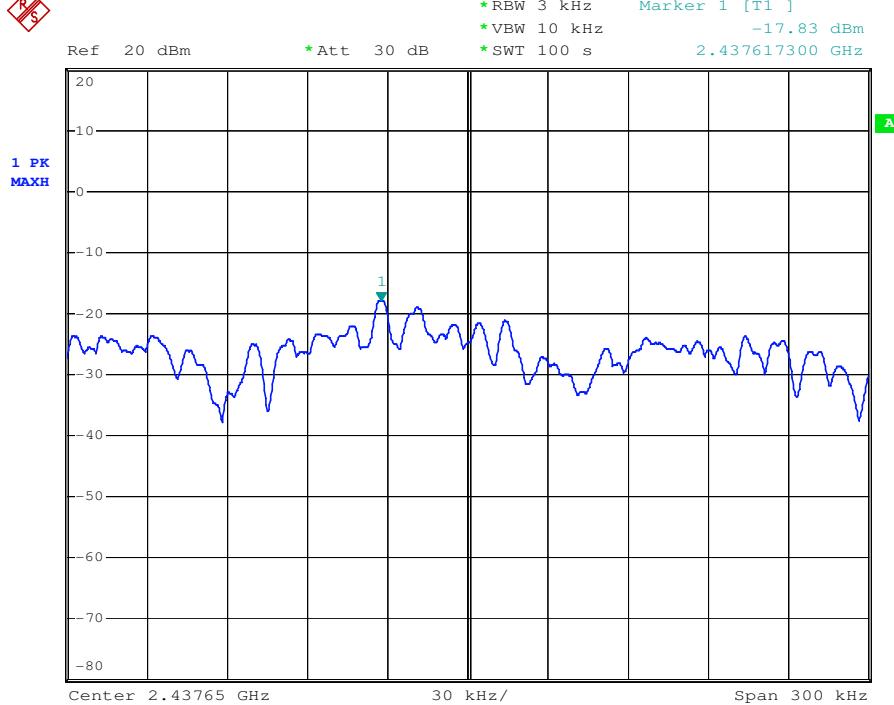
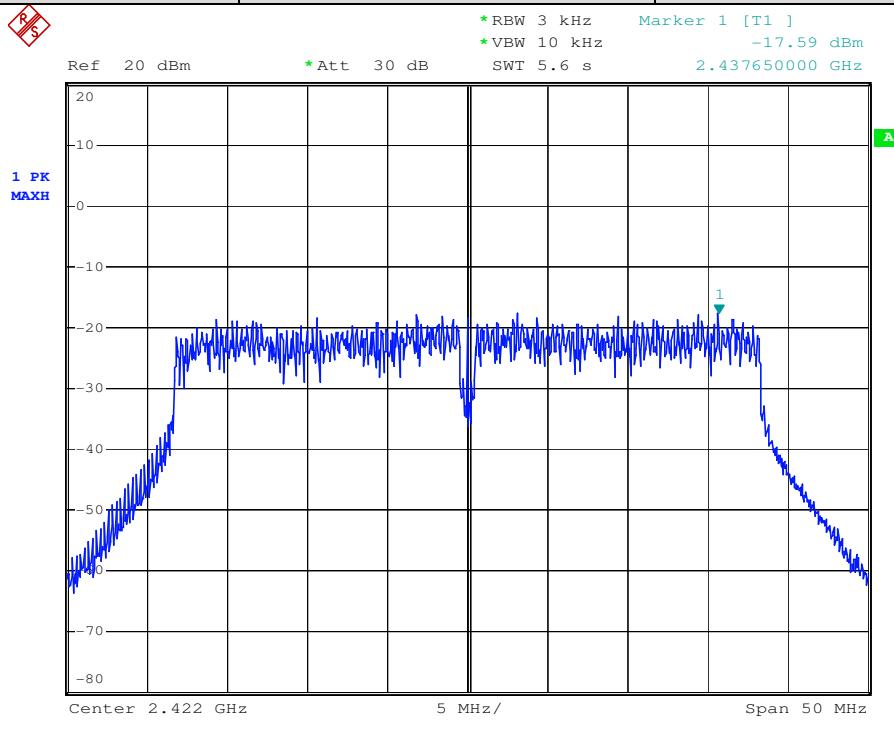


802.11 n40	Antenna A	Channel: 2437
------------	-----------	---------------

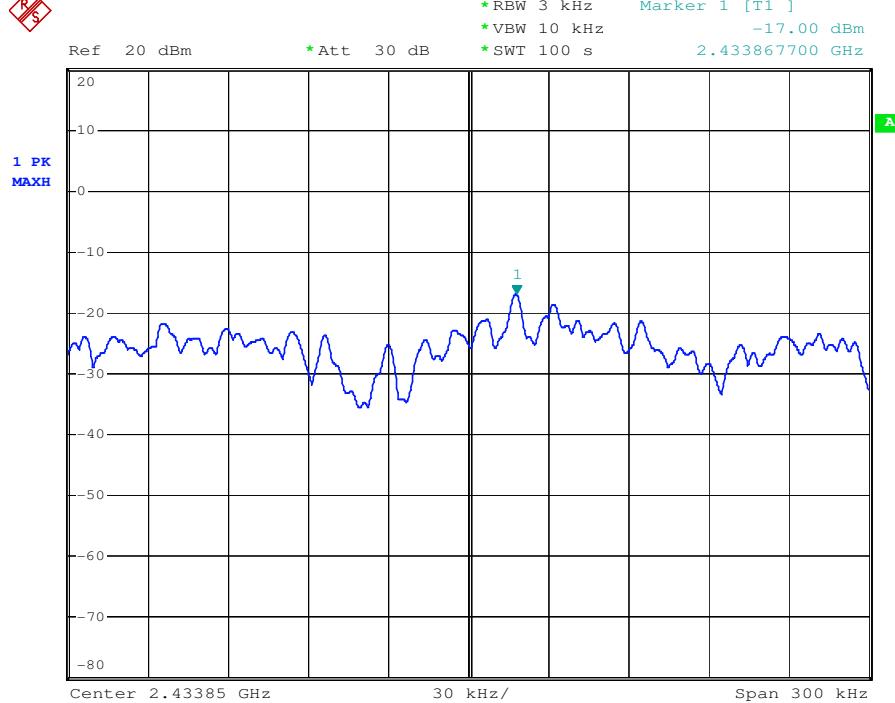
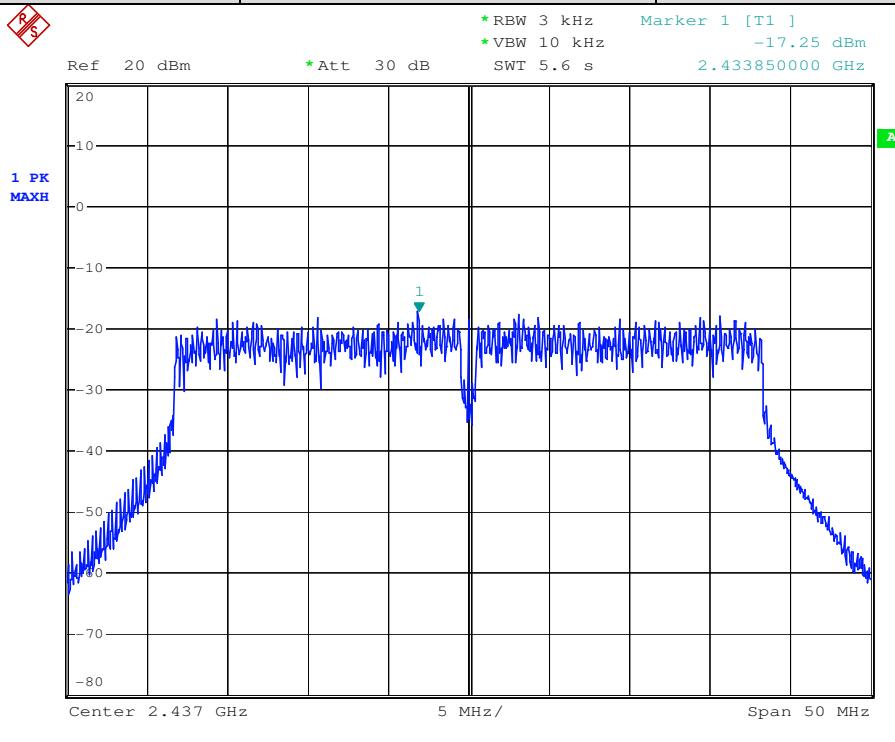


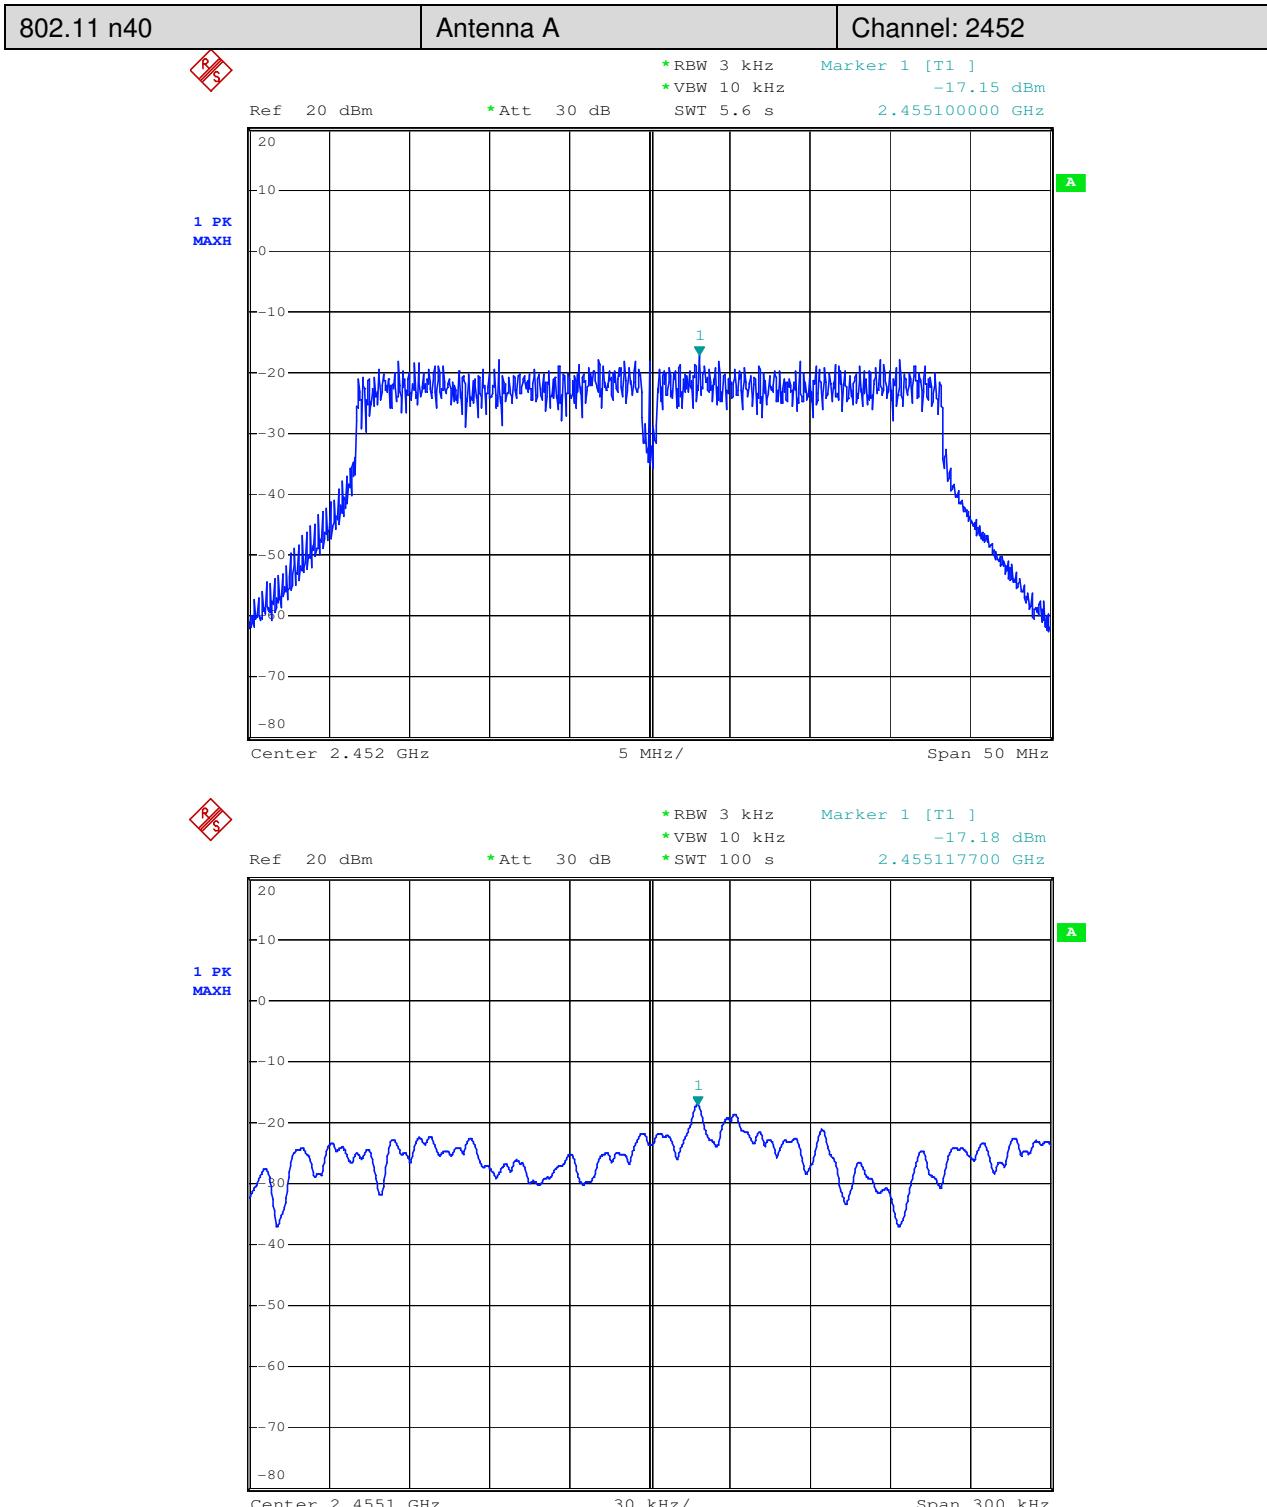



802.11 b	Antenna B	Channel: 2412
----------	-----------	---------------

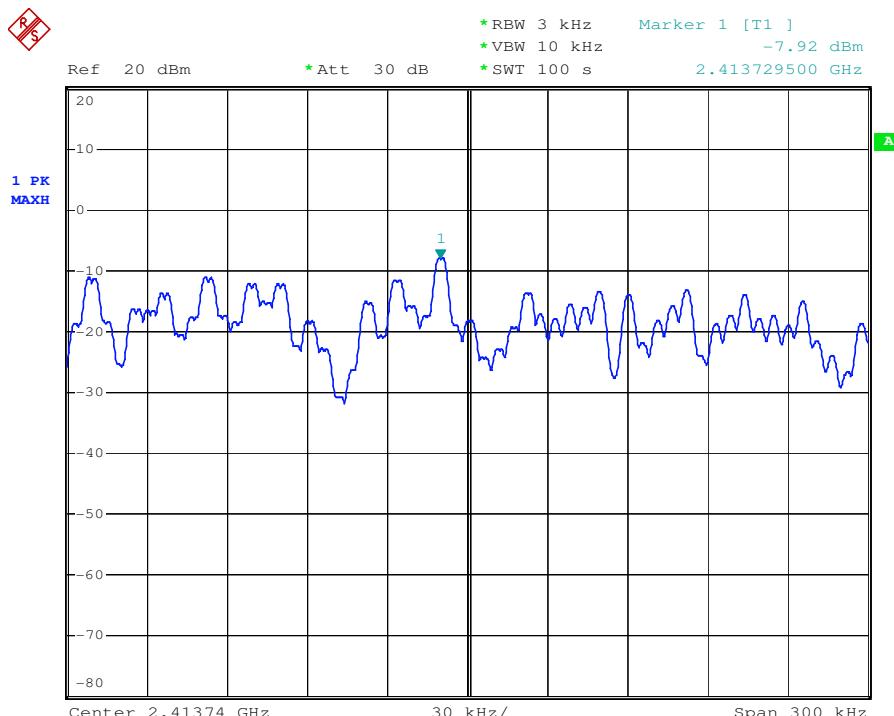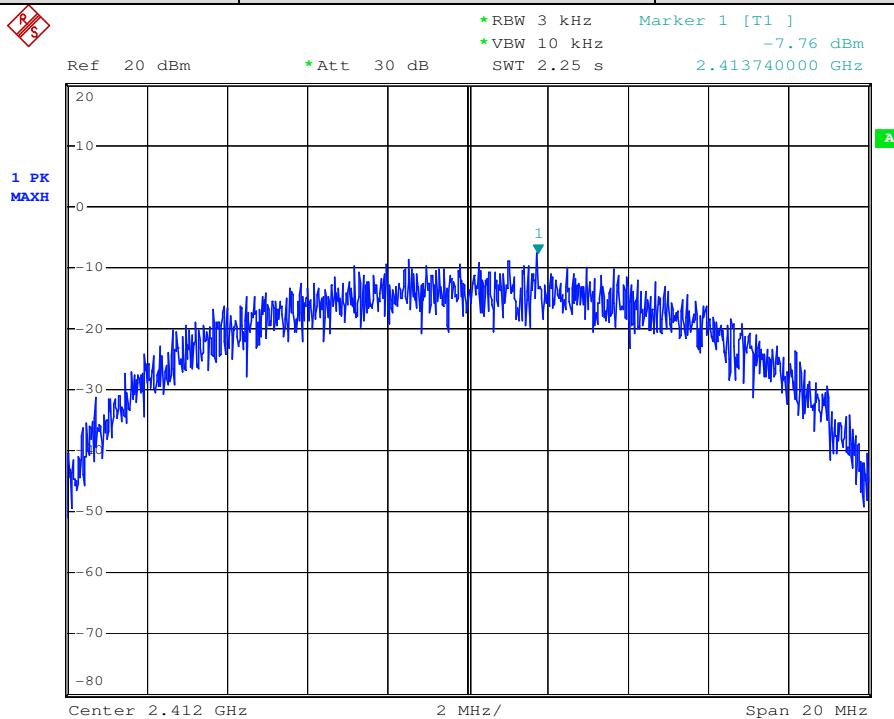



802.11 b	Antenna B	Channel: 2437
----------	-----------	---------------

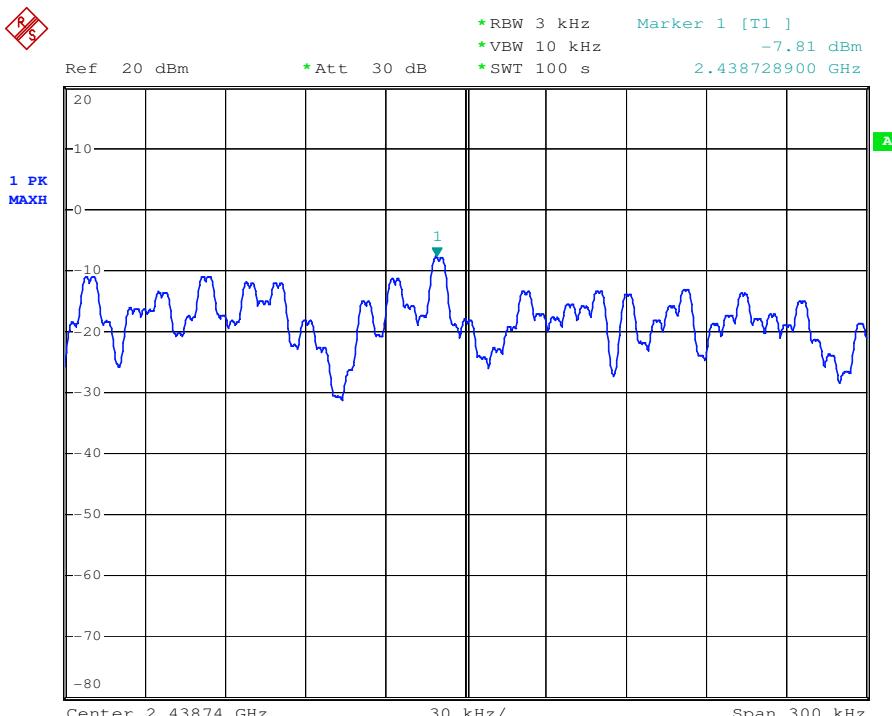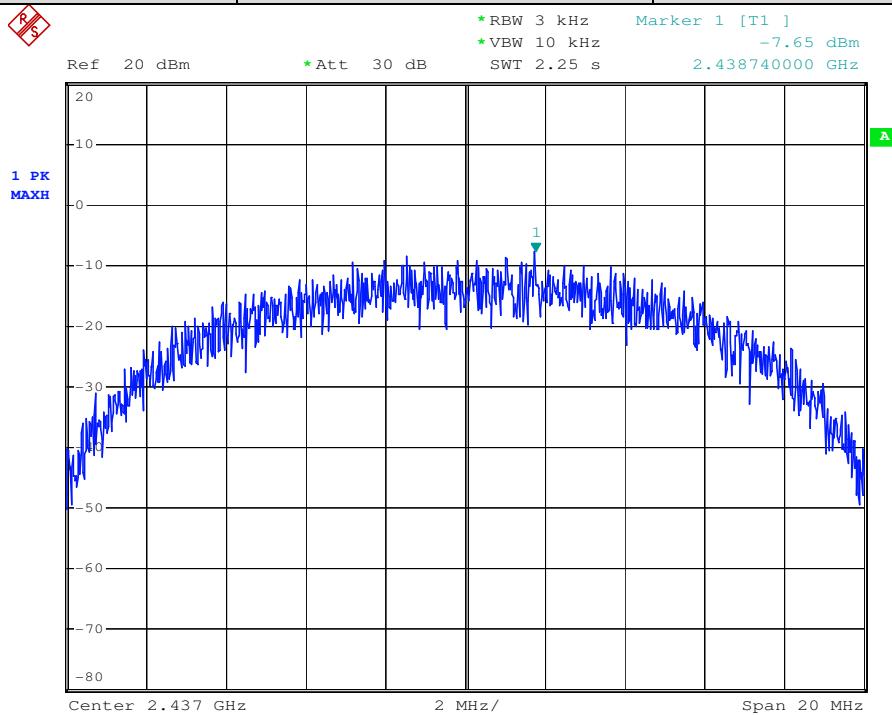



802.11 b	Antenna B	Channel: 2462
----------	-----------	---------------

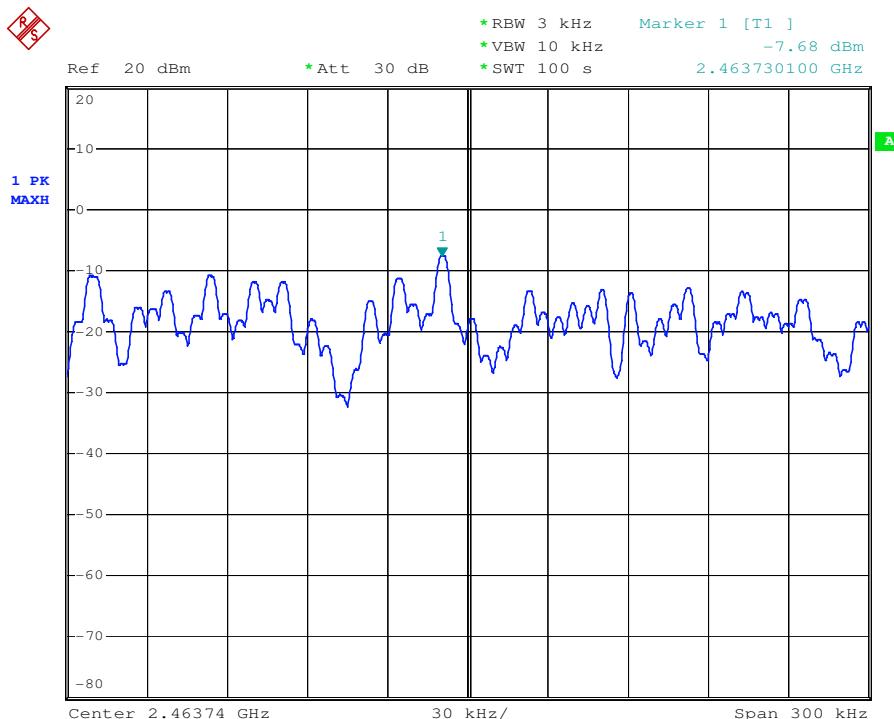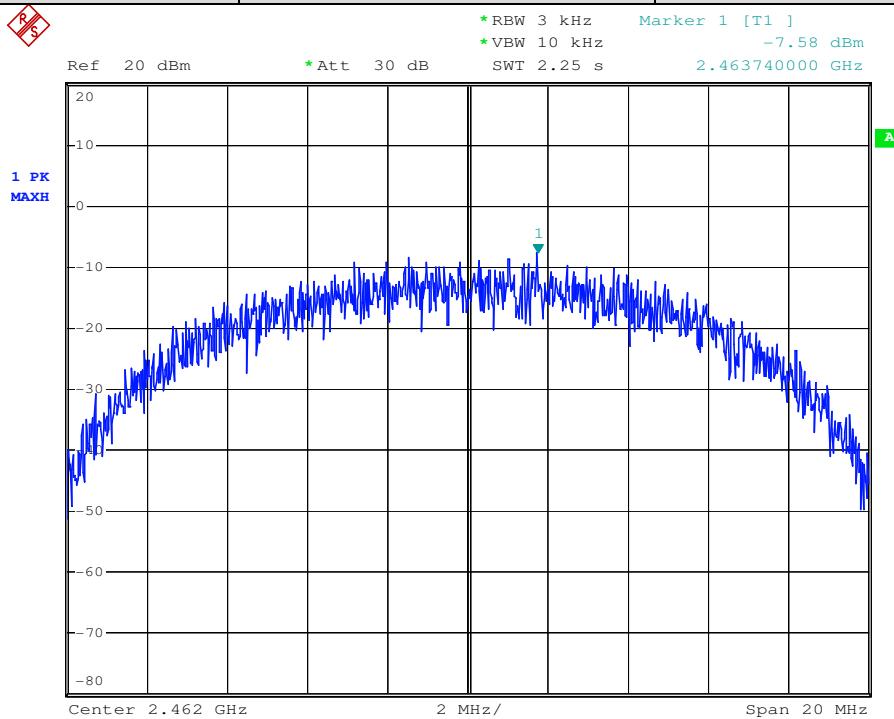



802.11 g	Antenna B	Channel: 2412
----------	-----------	---------------

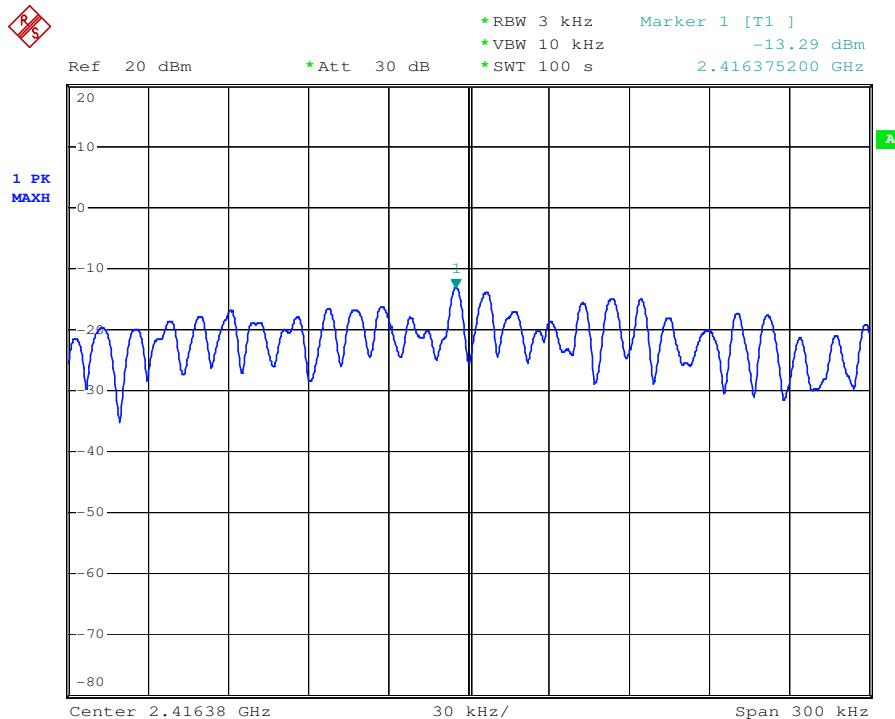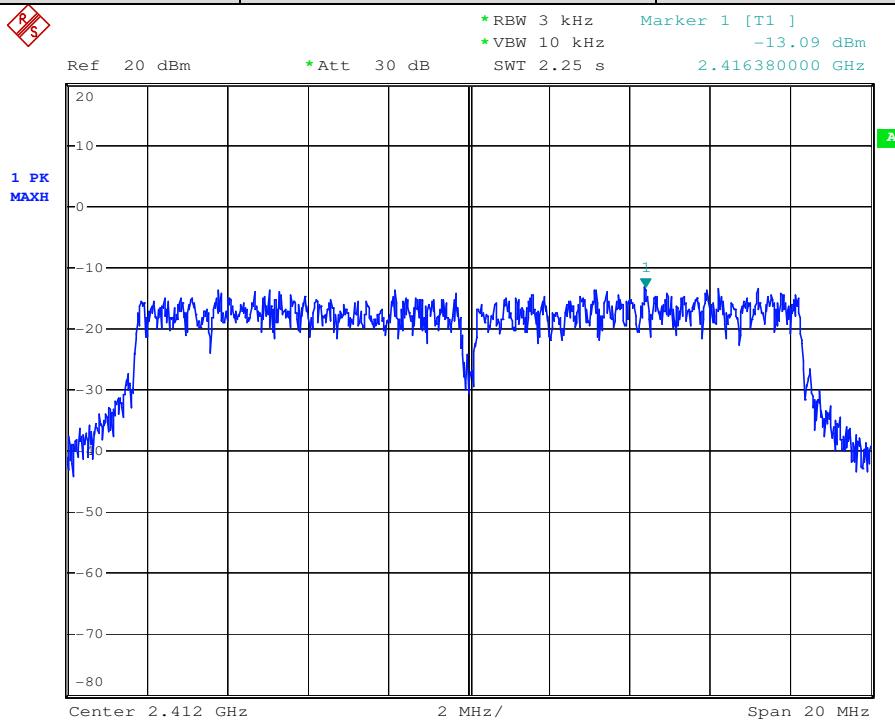



802.11 g	Antenna B	Channel: 2437
----------	-----------	---------------

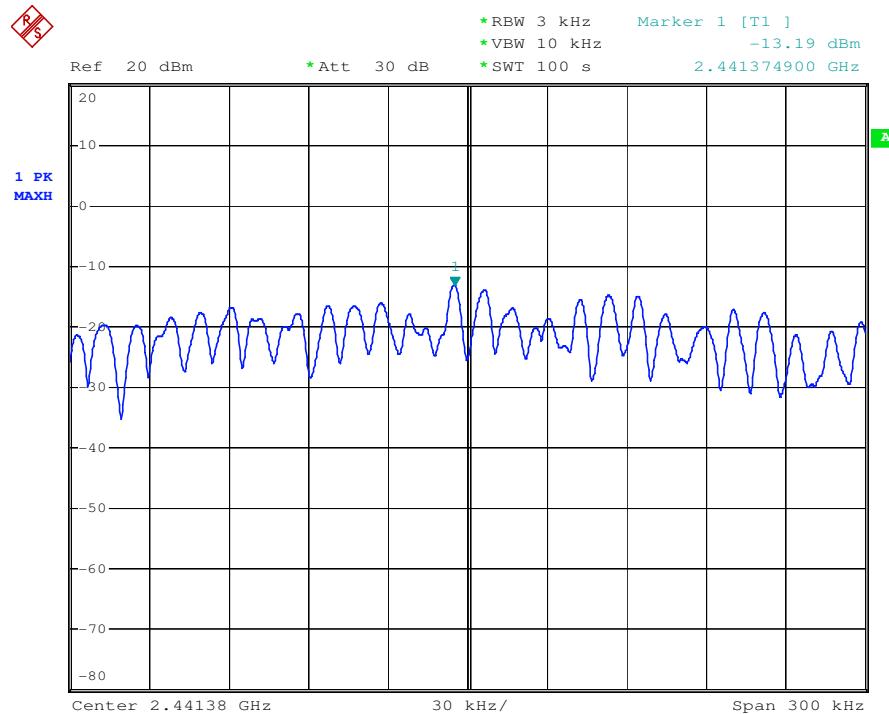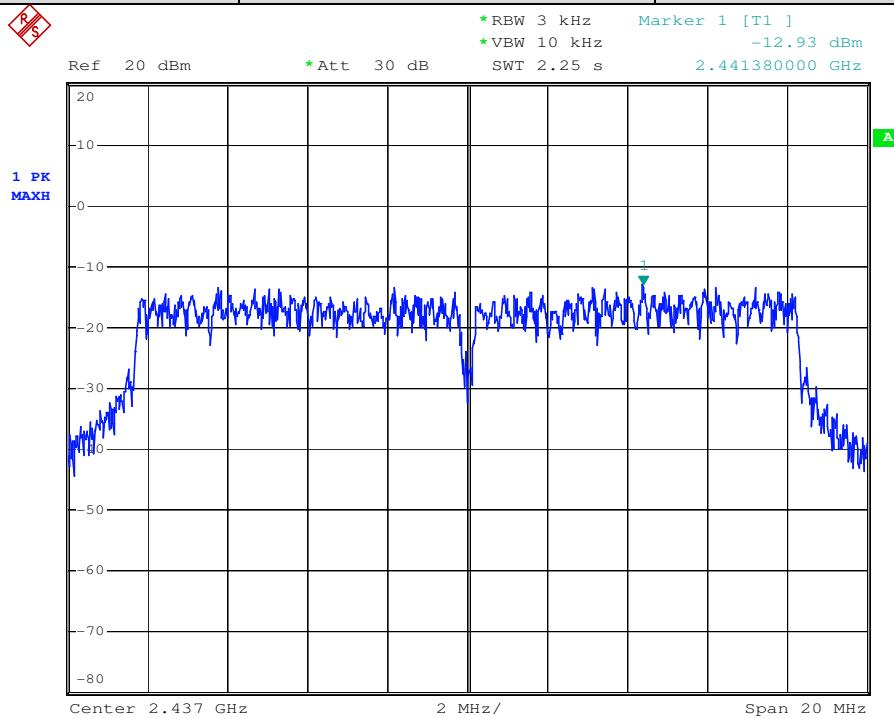


802.11 g	Antenna B	Channel: 2462
----------	-----------	---------------

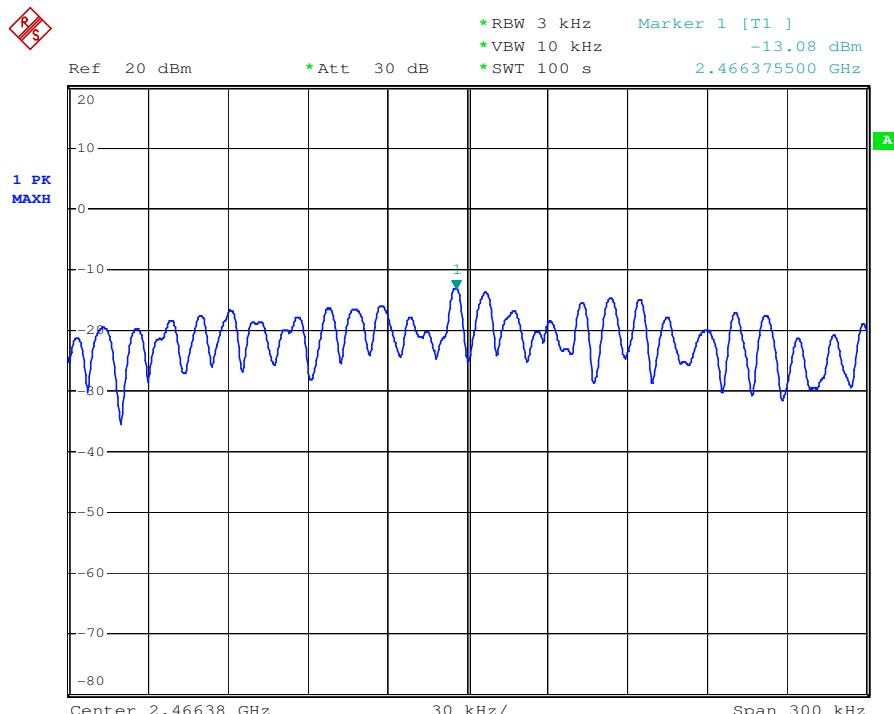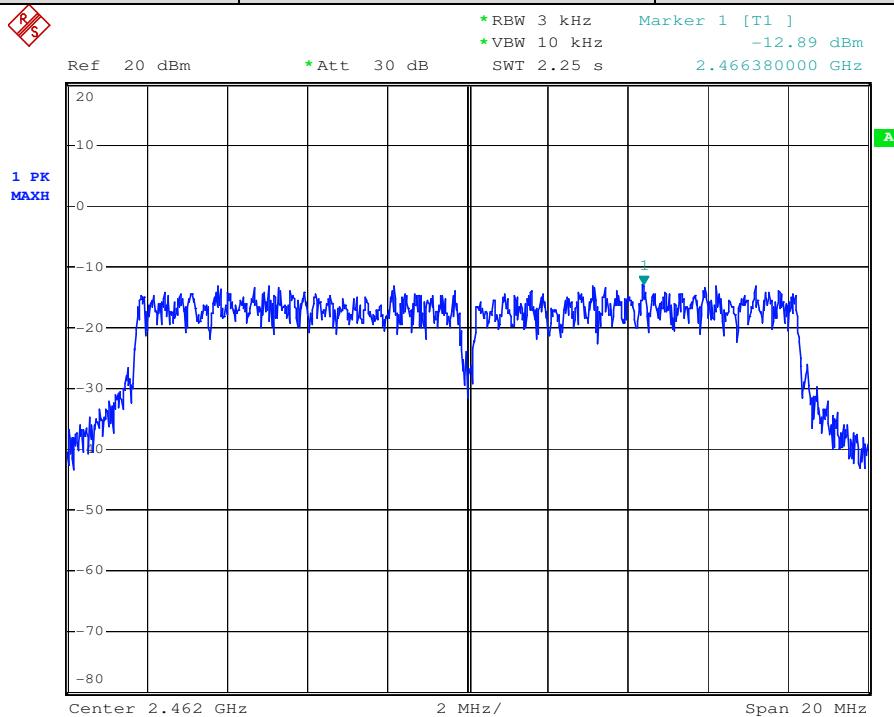



802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

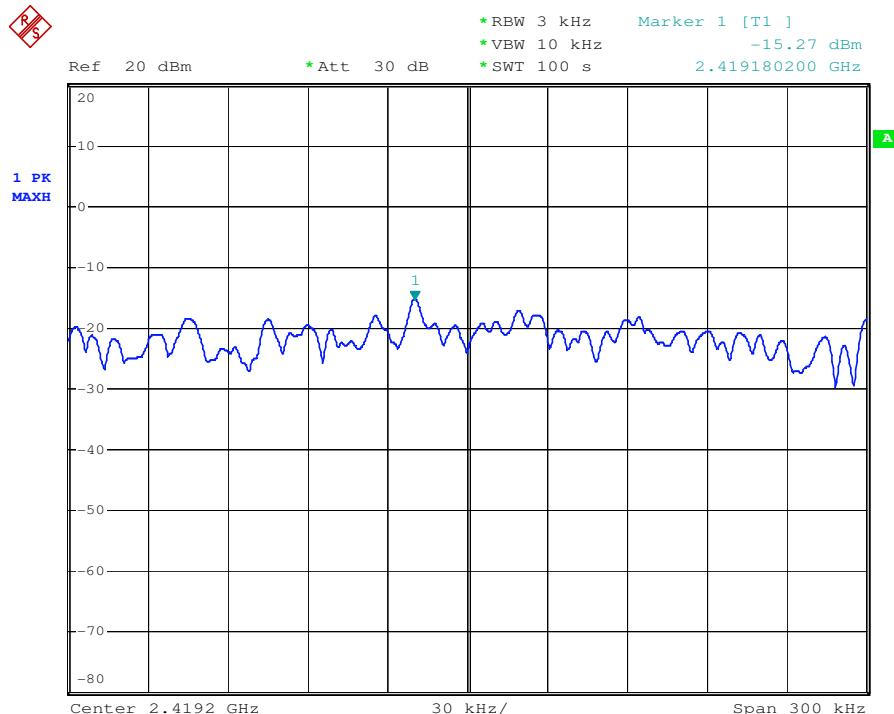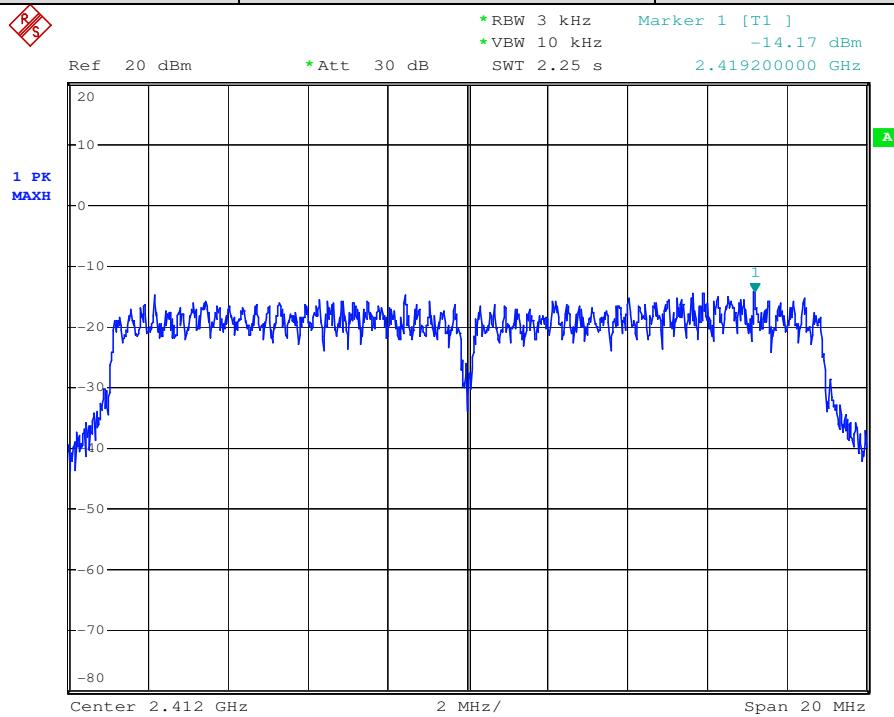



802.11 n20	Antenna B	Channel: 2437
------------	-----------	---------------

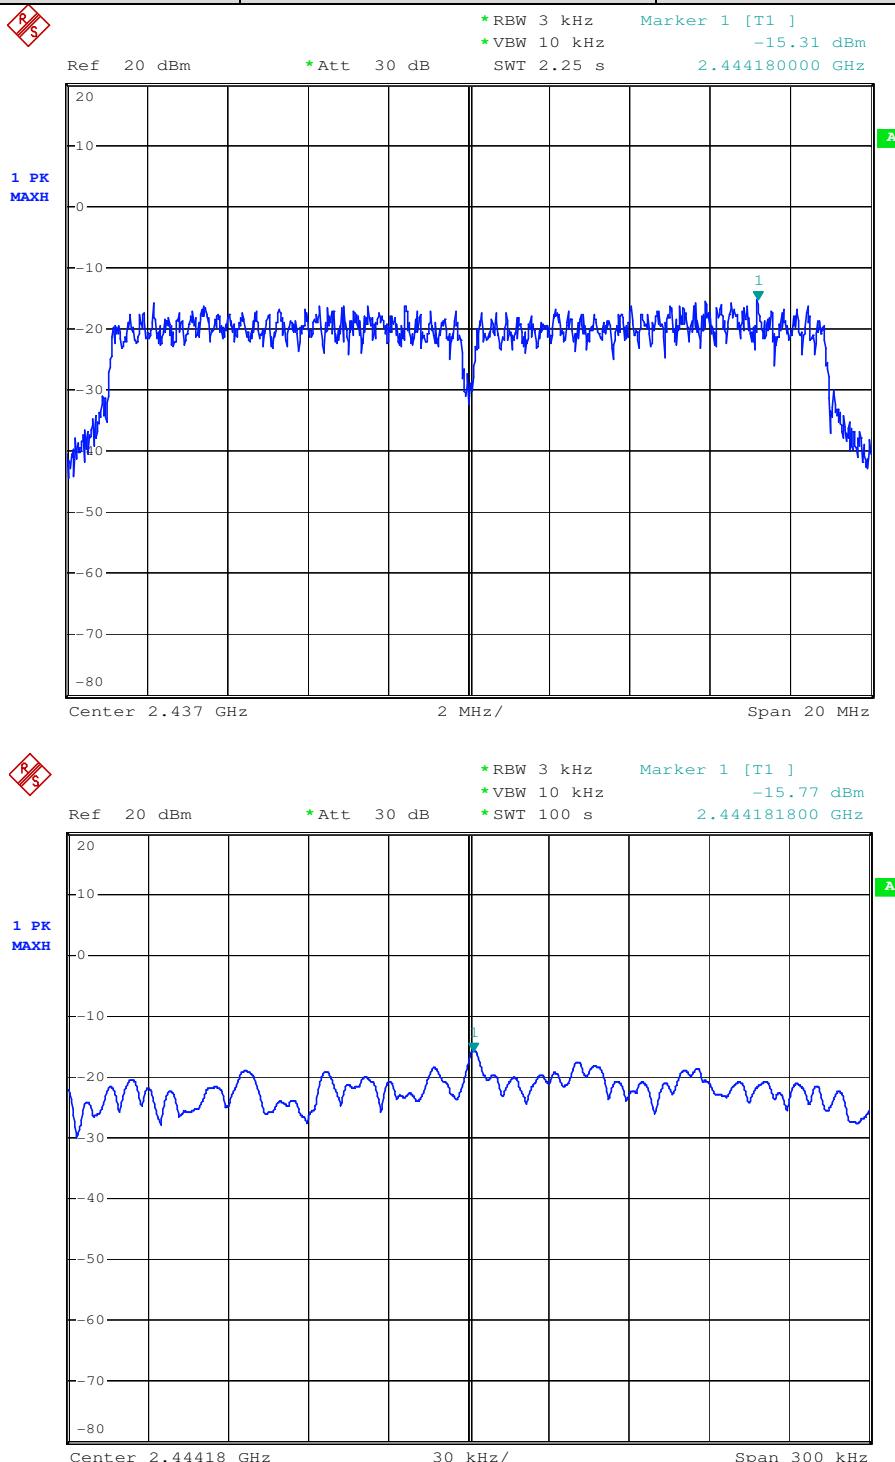



802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

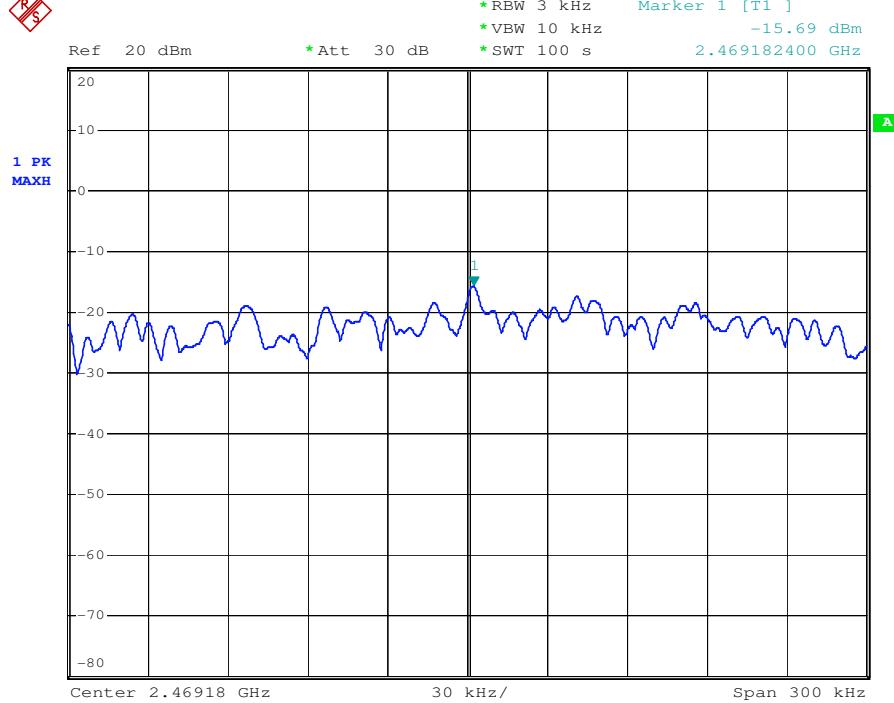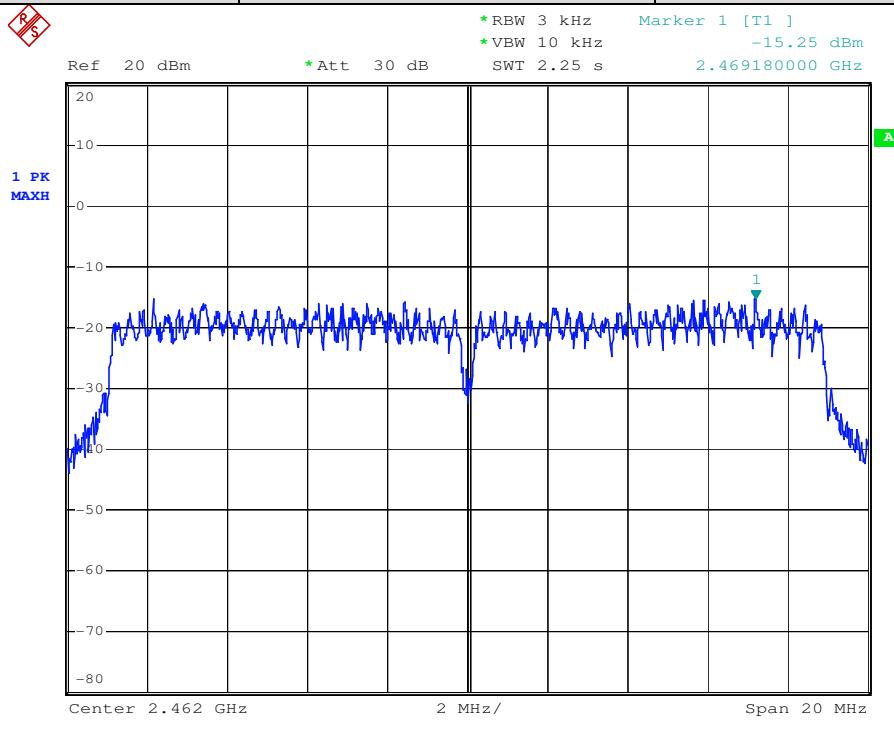



802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

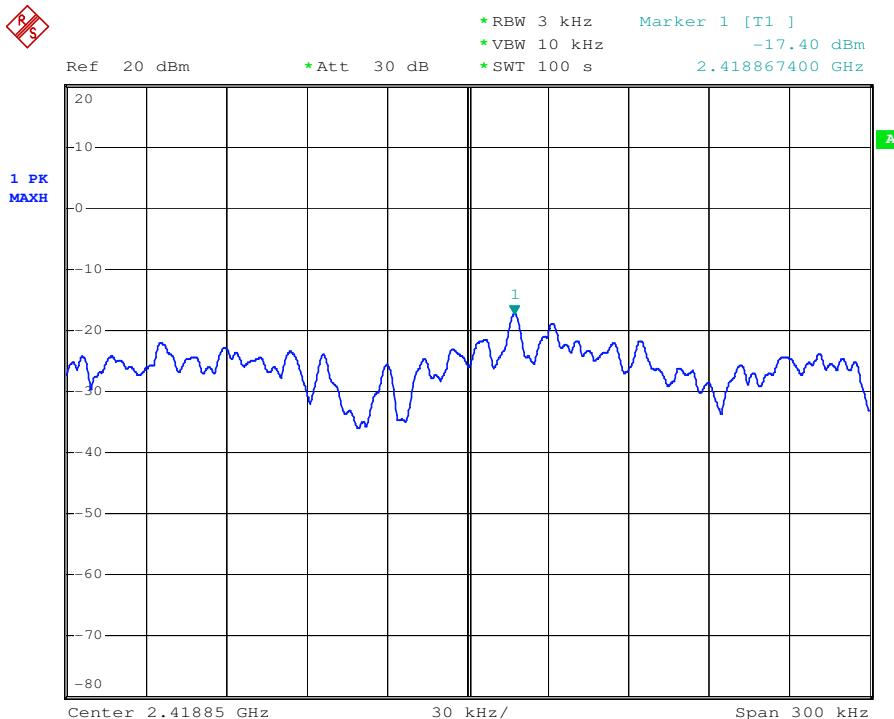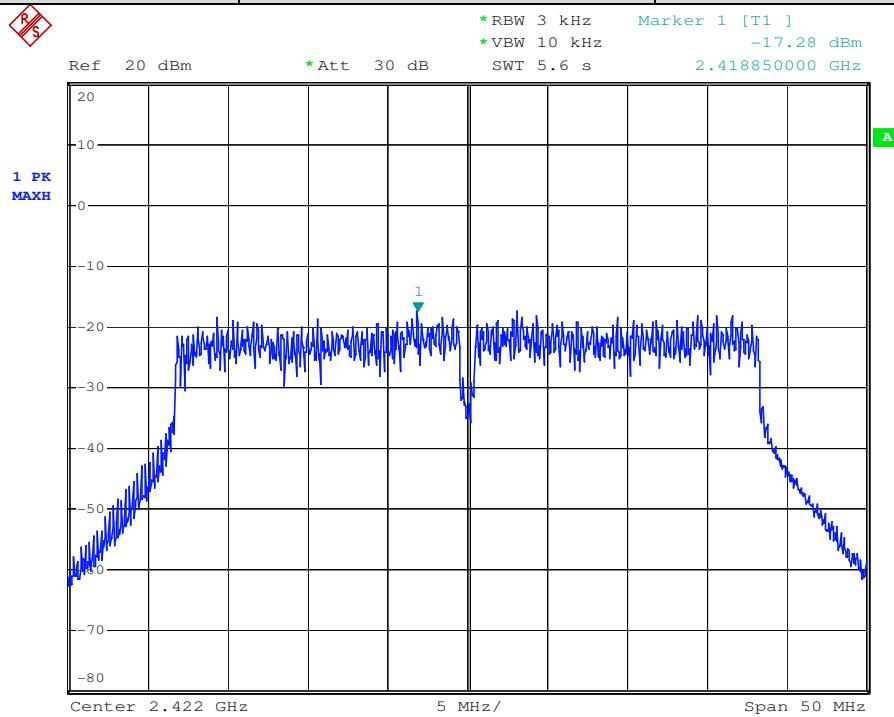

802.11 n40	Antenna B	Channel: 2437
------------	-----------	---------------

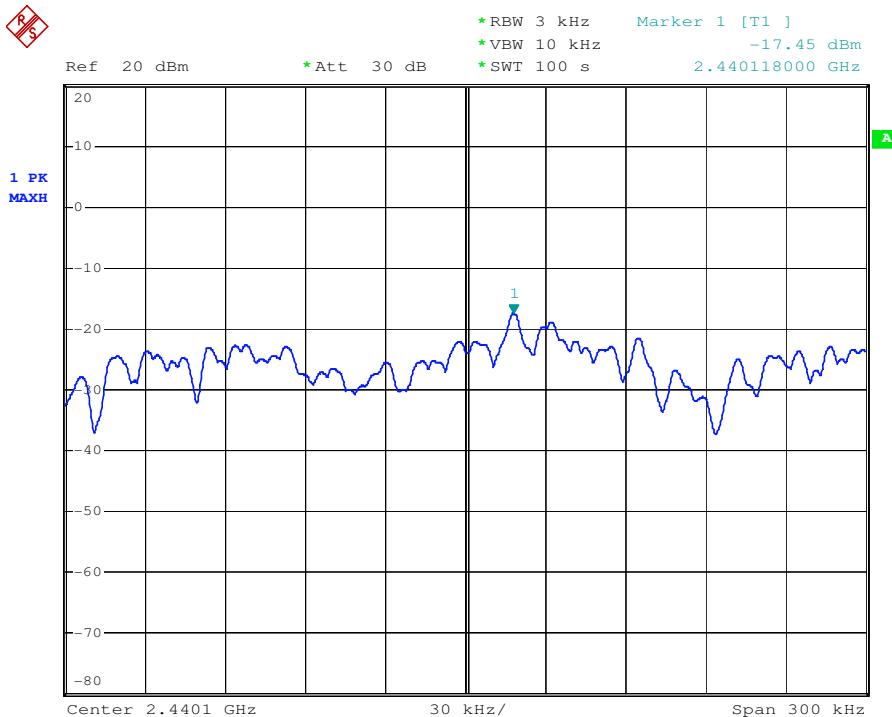
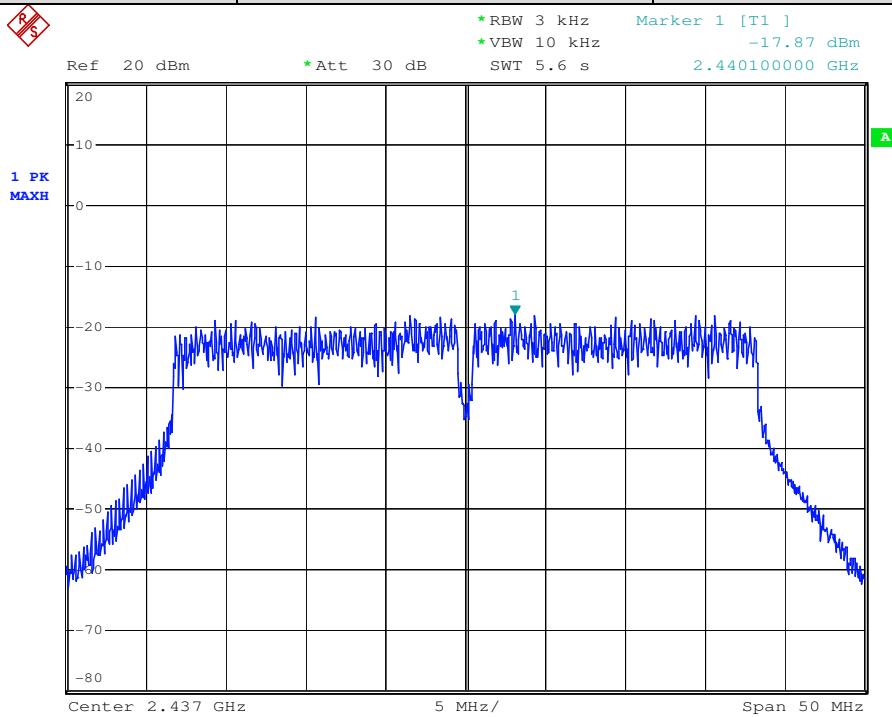


802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

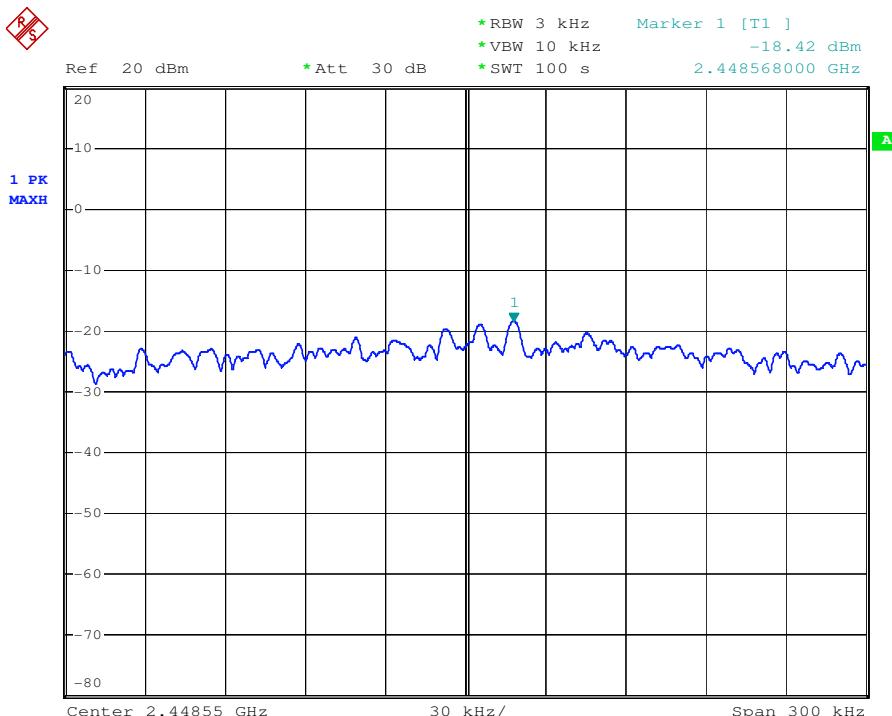
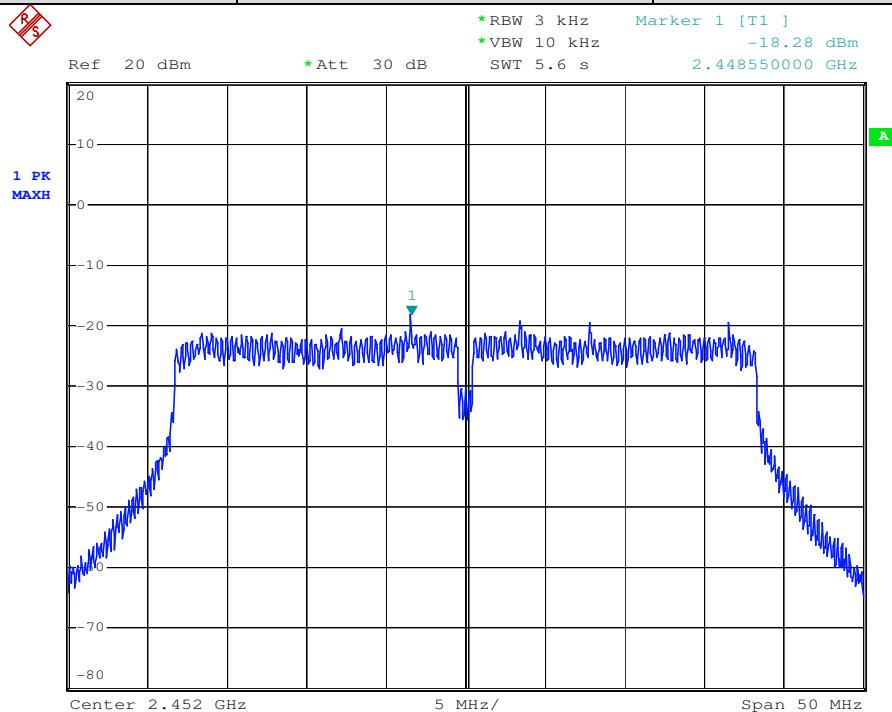


Spatial Diversity Multiplexing-MIMO function mode test plot as follows:



802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

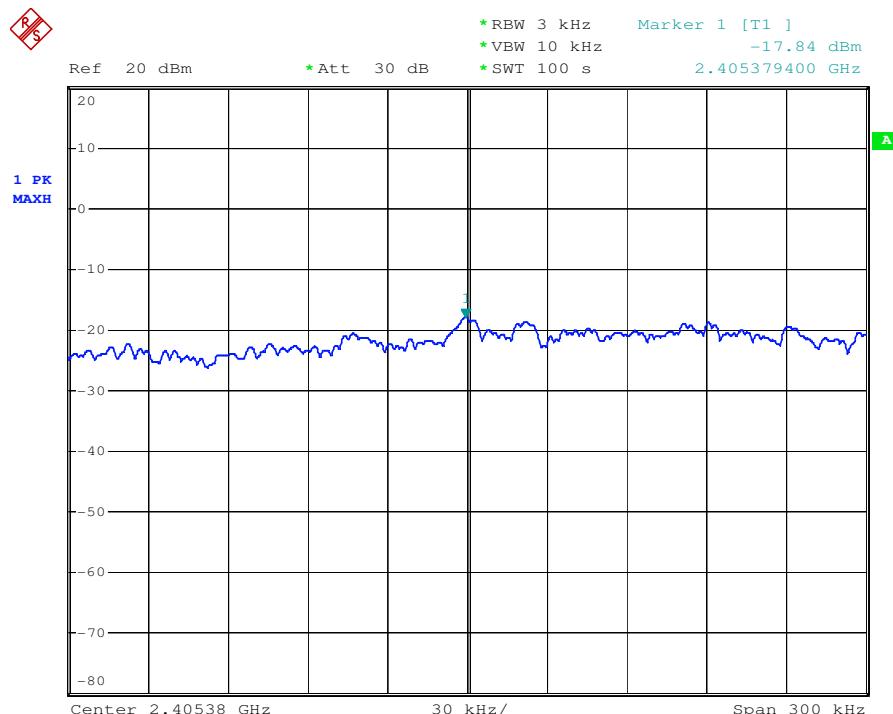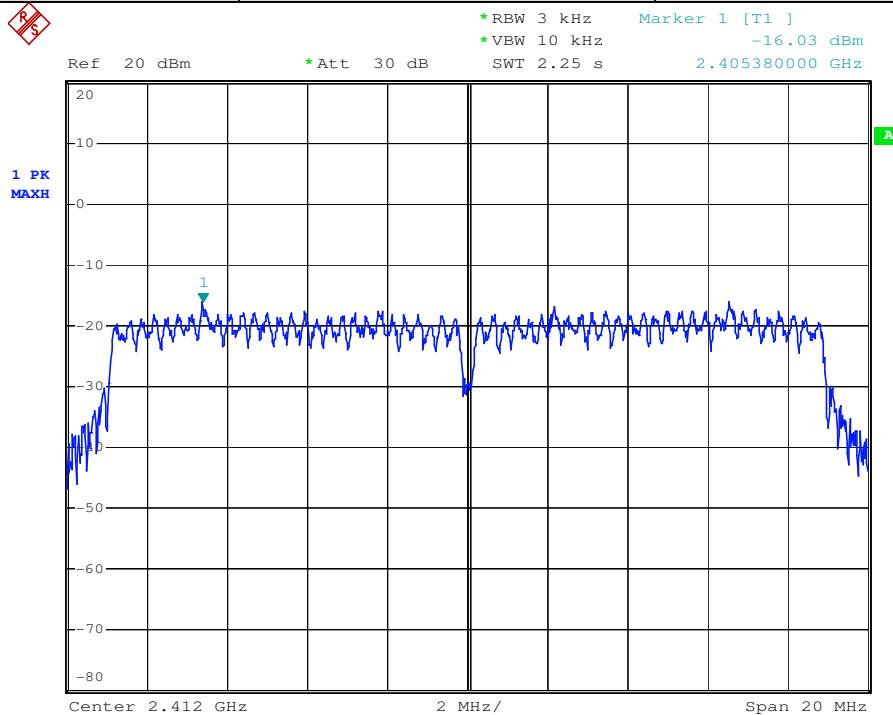



802.11 n20	Antenna A	Channel: 2437
------------	-----------	---------------

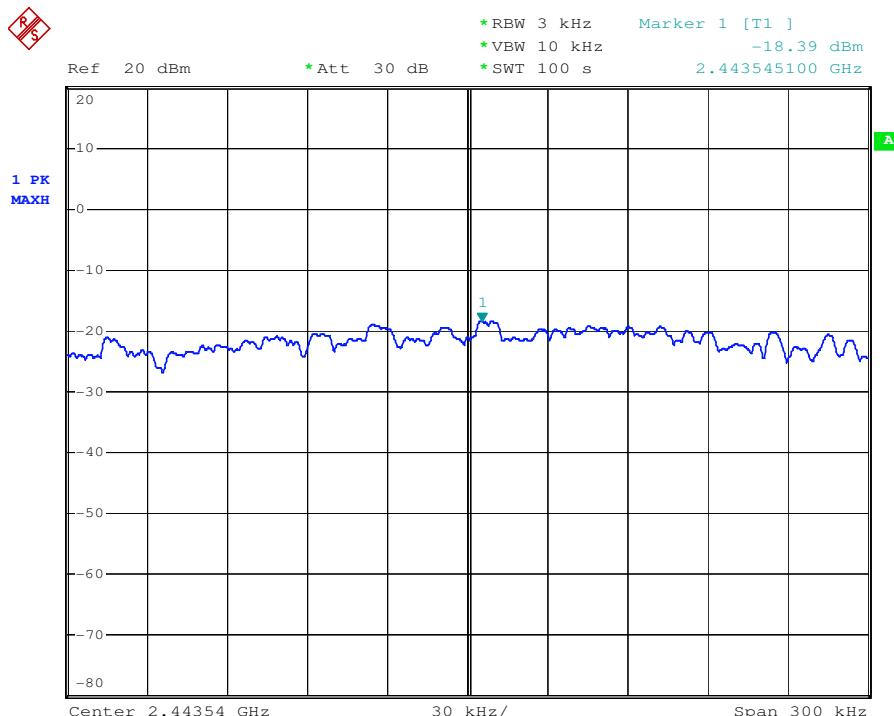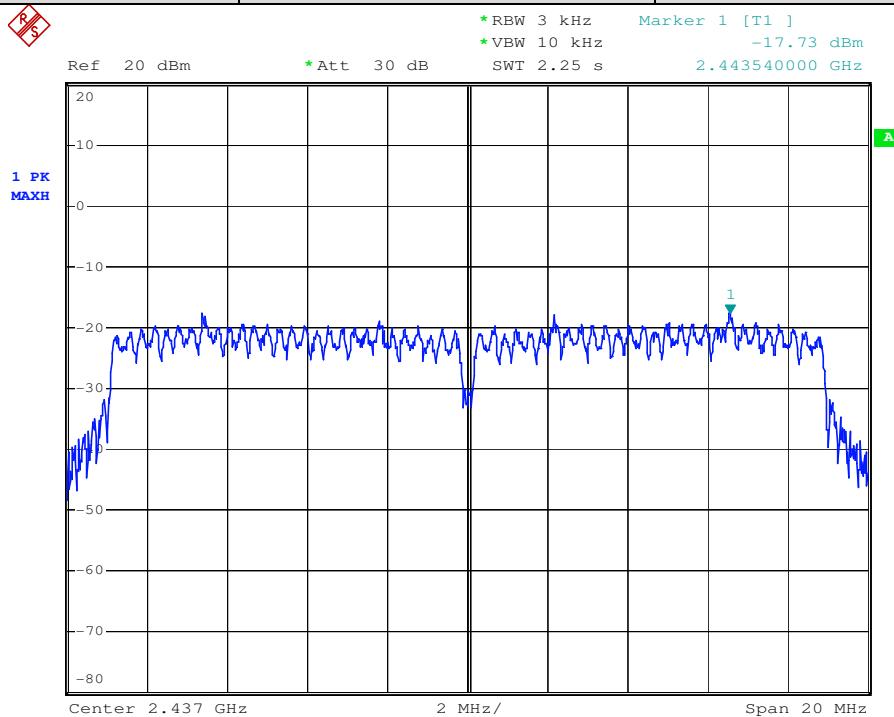



802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

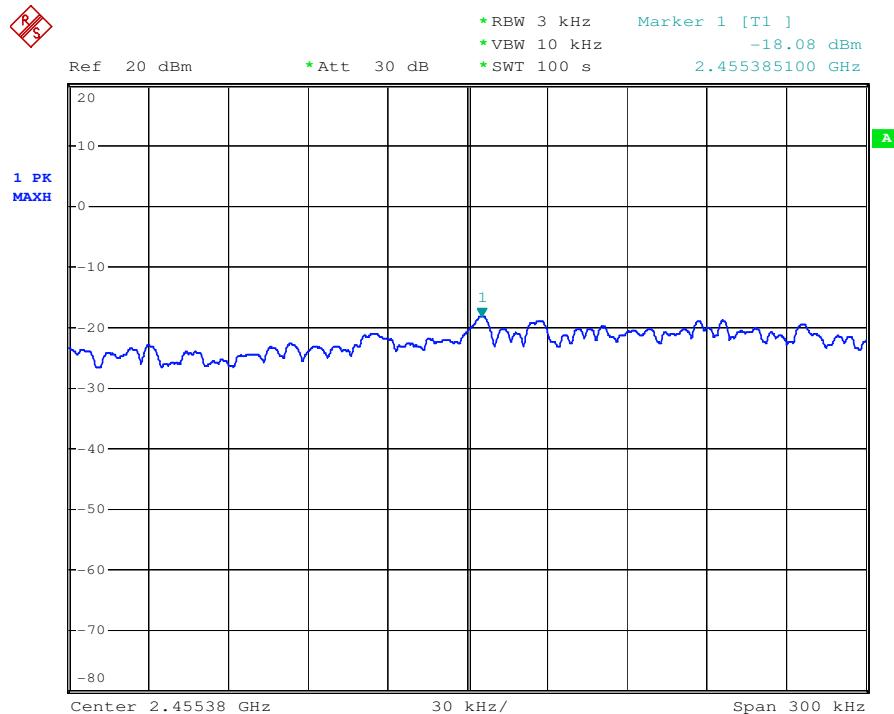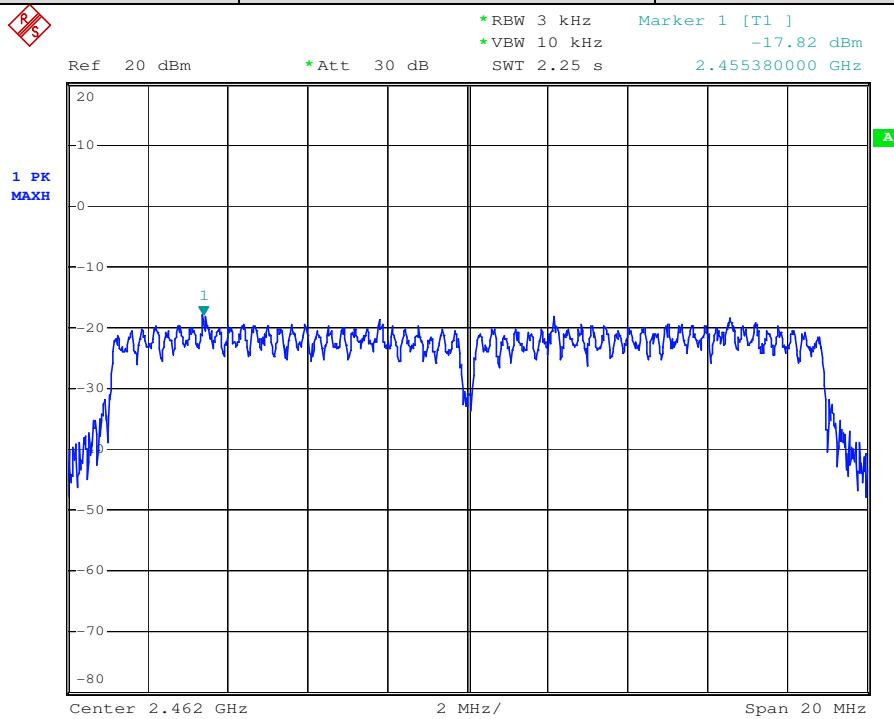


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

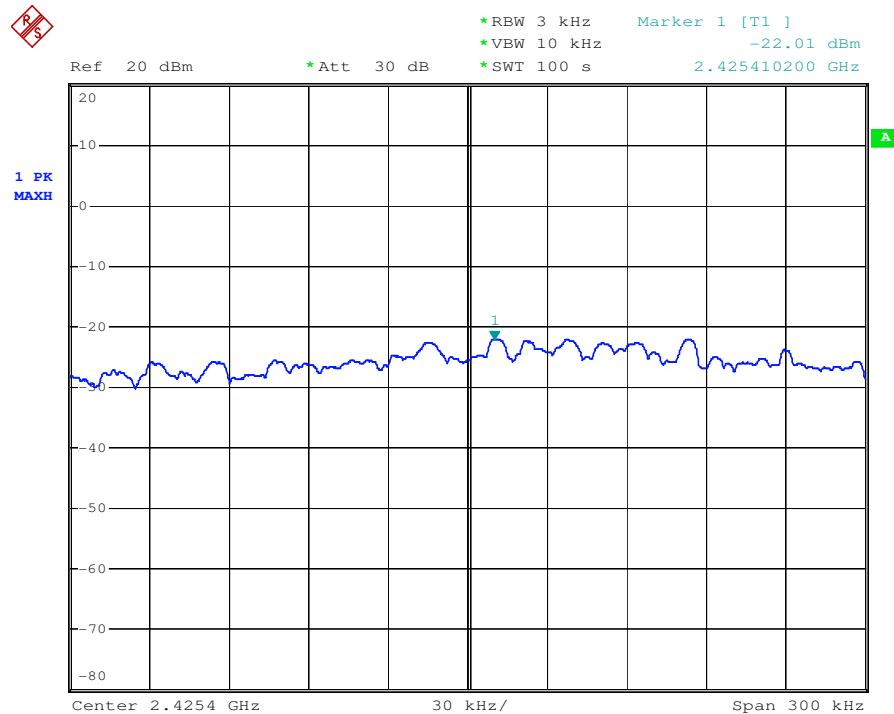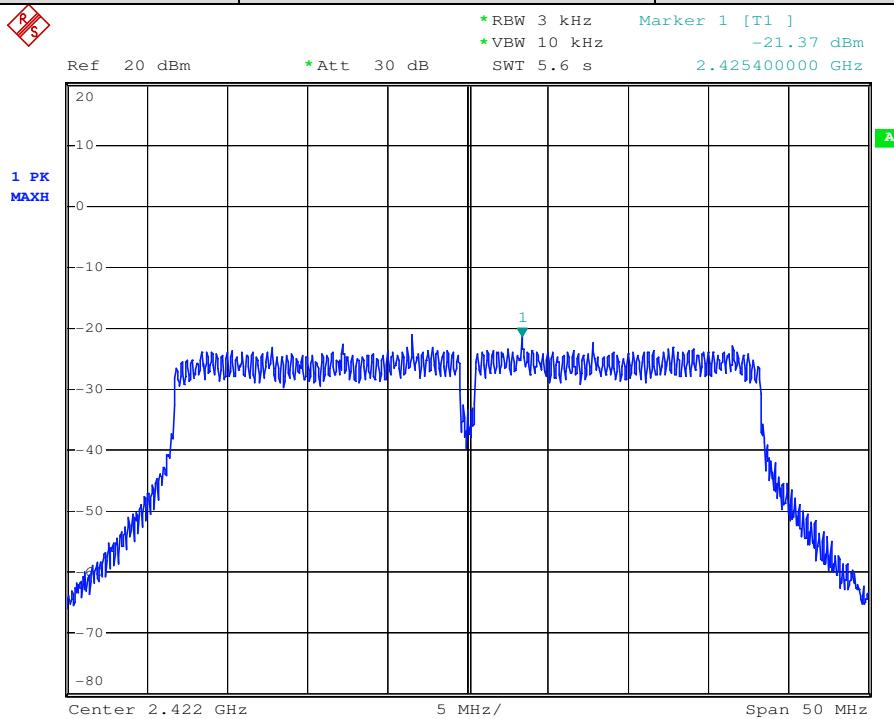



802.11 n40	Antenna A	Channel: 2437
------------	-----------	---------------

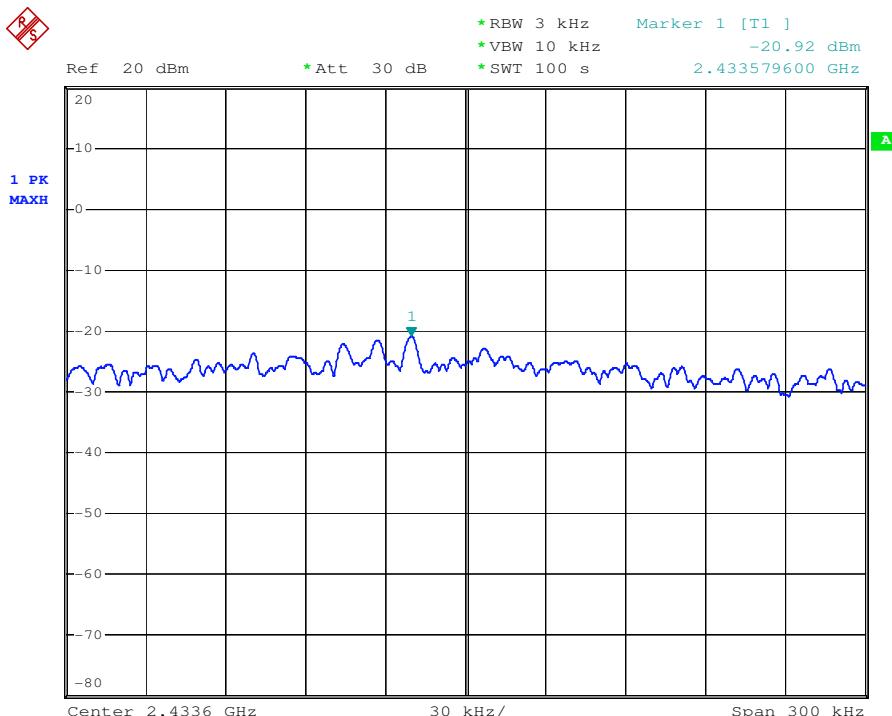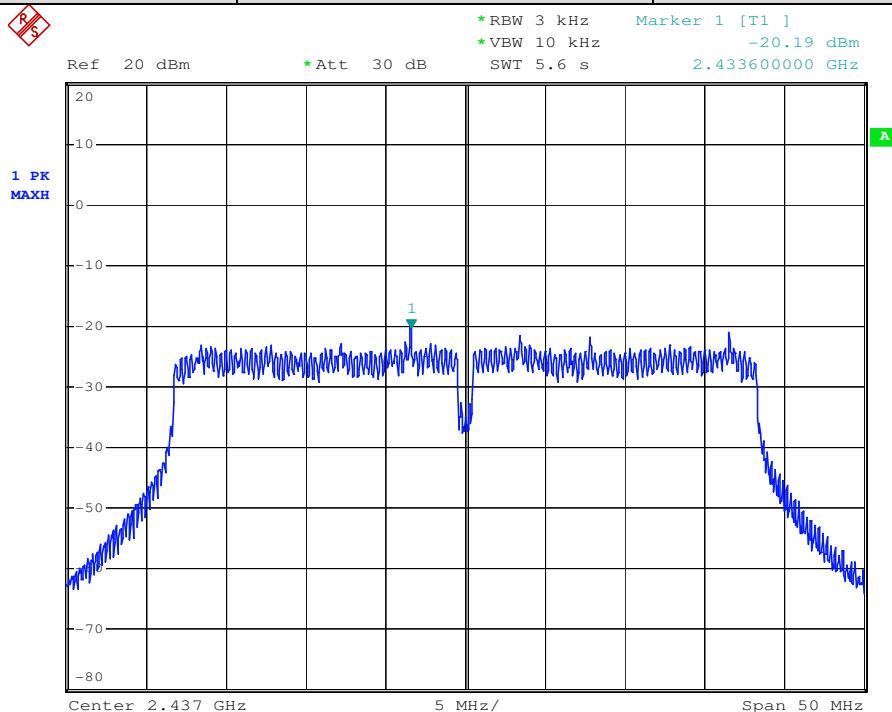



802.11 n40	Antenna A	Channel: 2452
------------	-----------	---------------

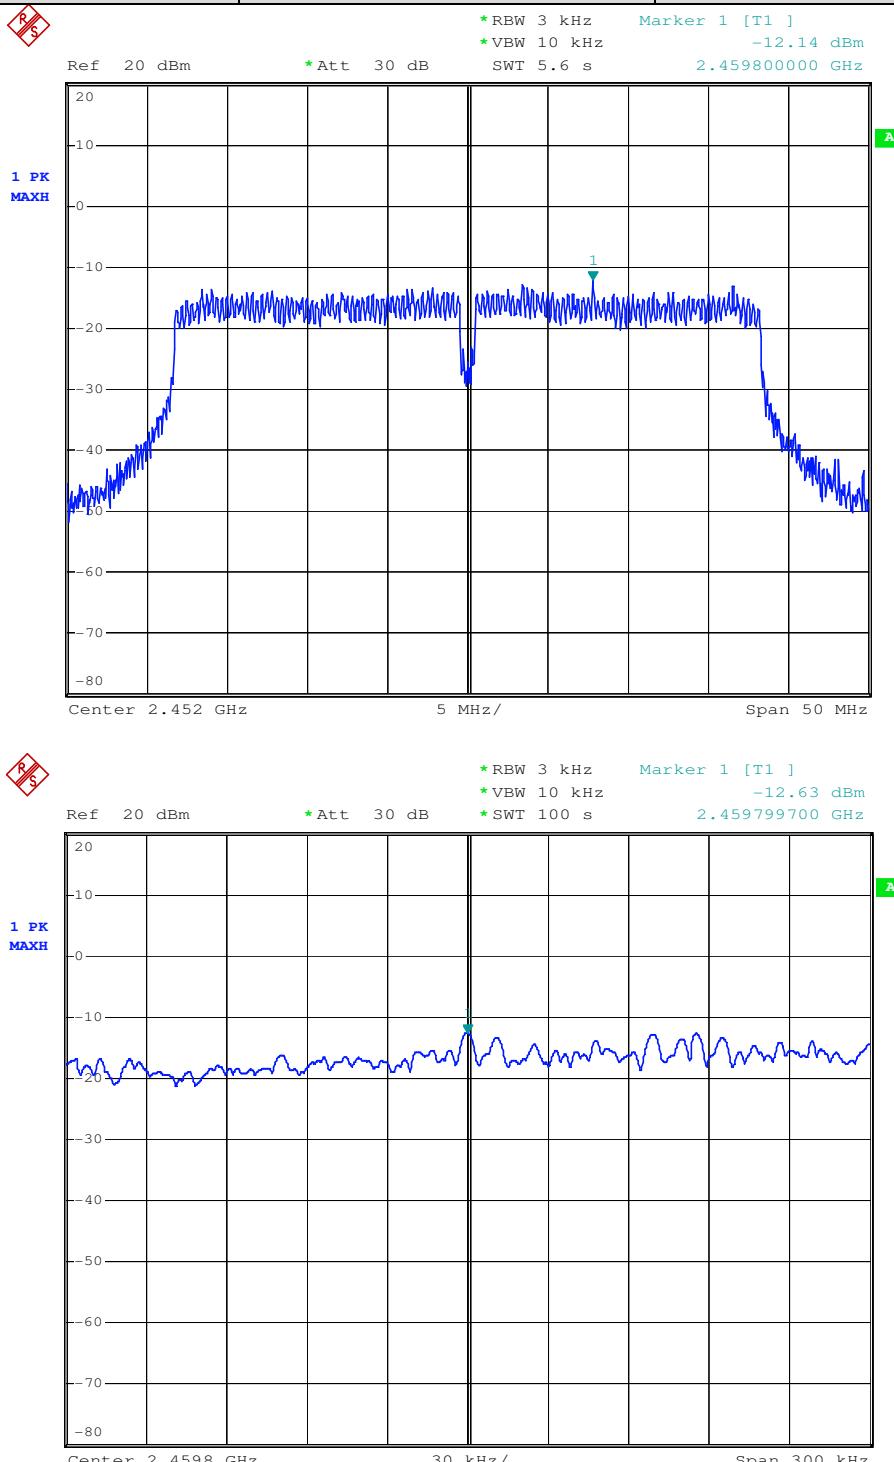



802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

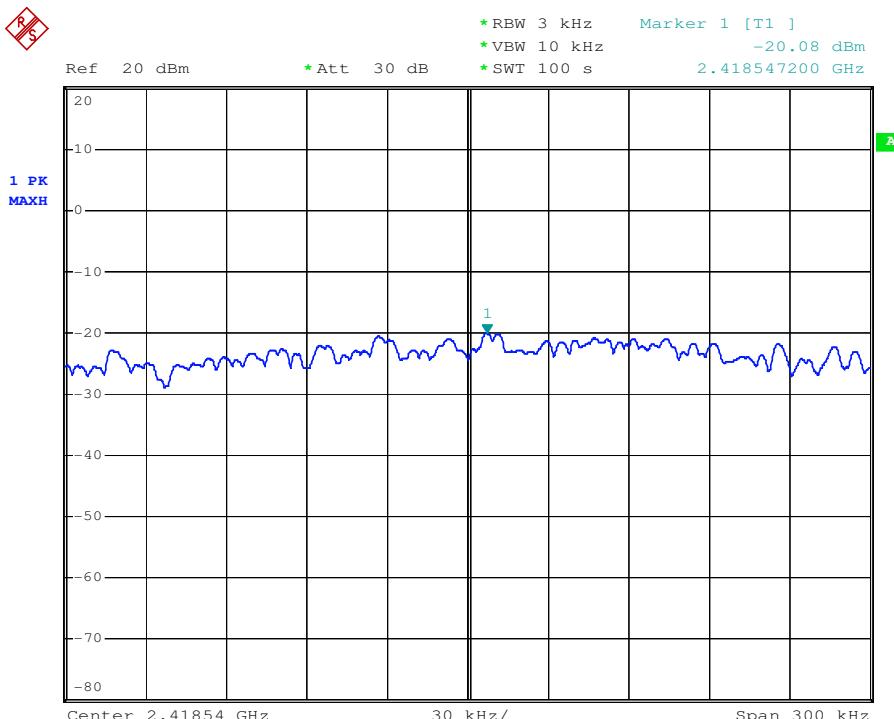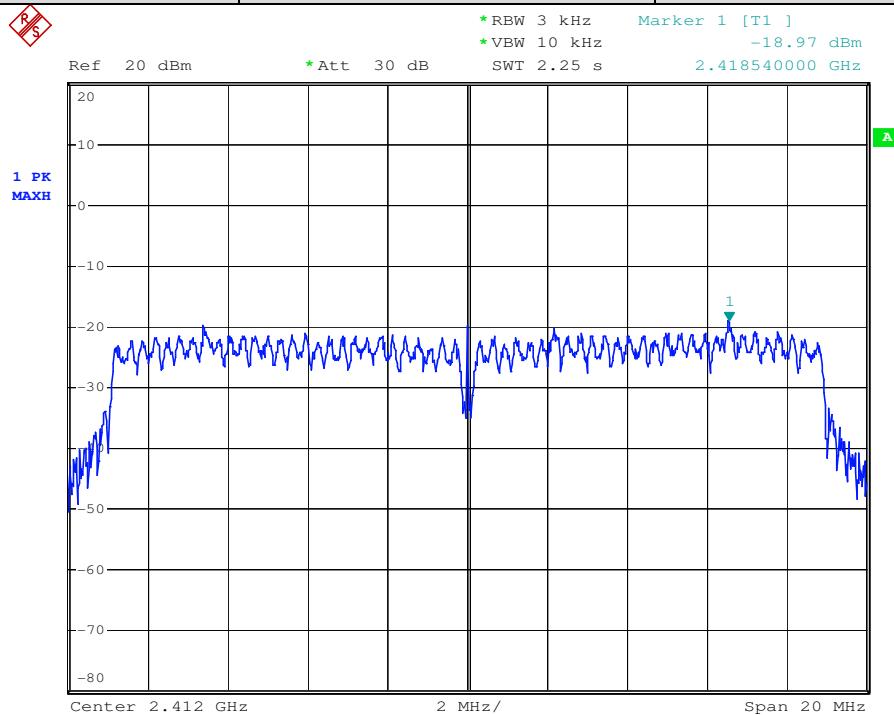



802.11 n20	Antenna B	Channel: 2437
------------	-----------	---------------

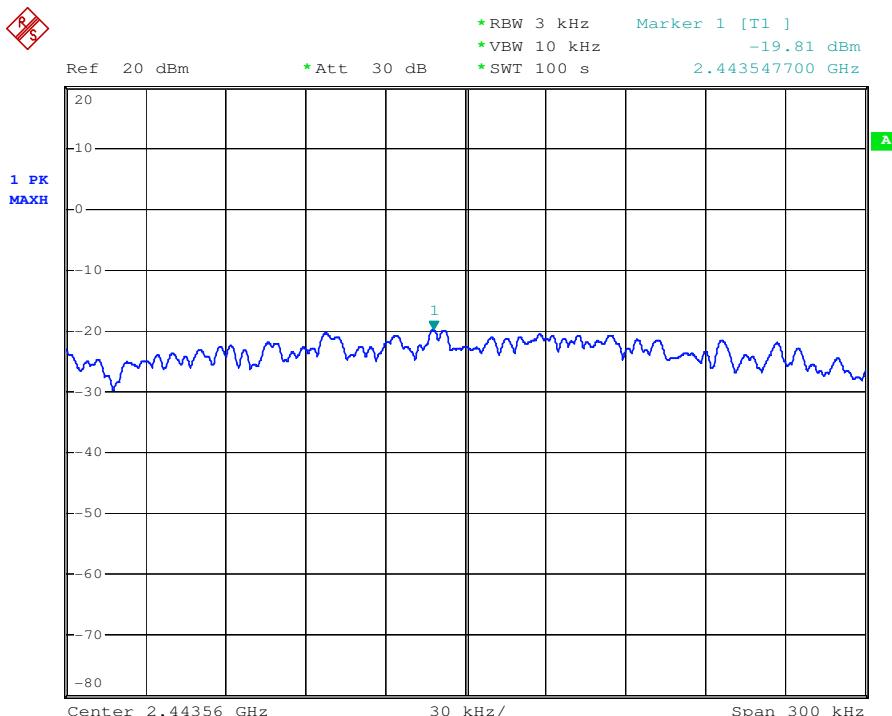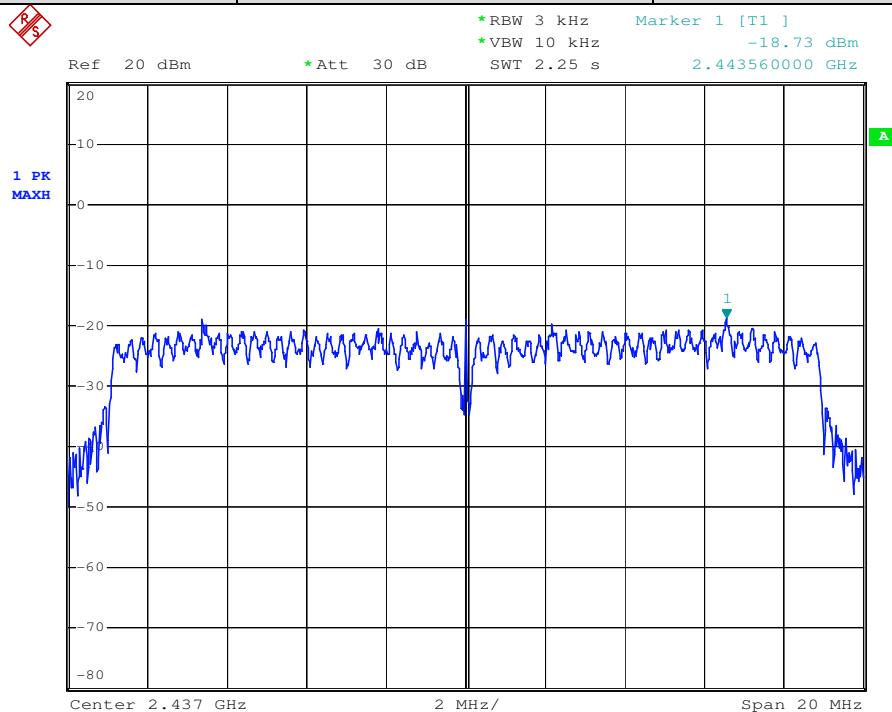



802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

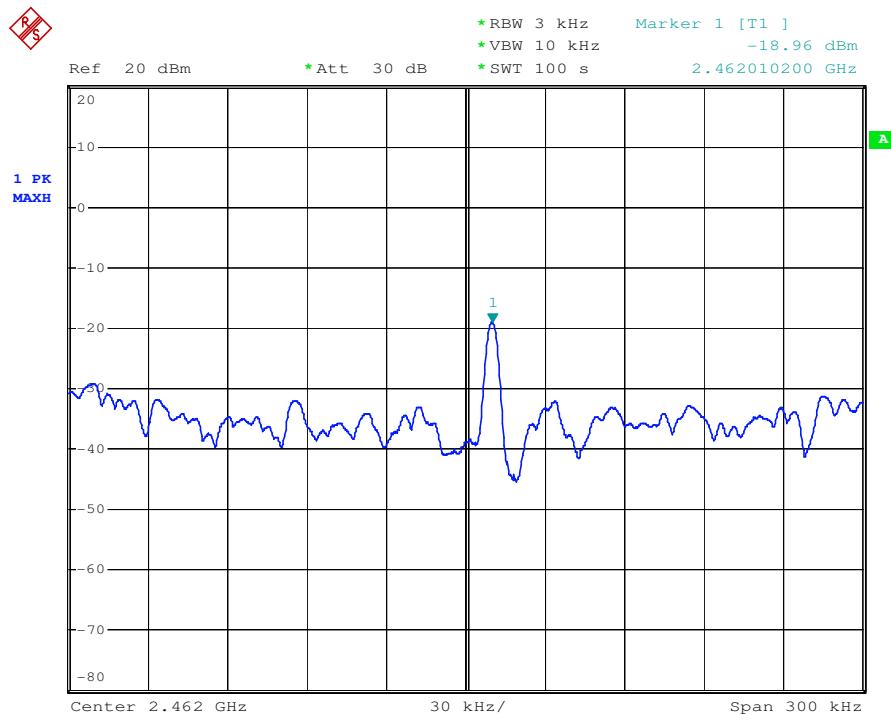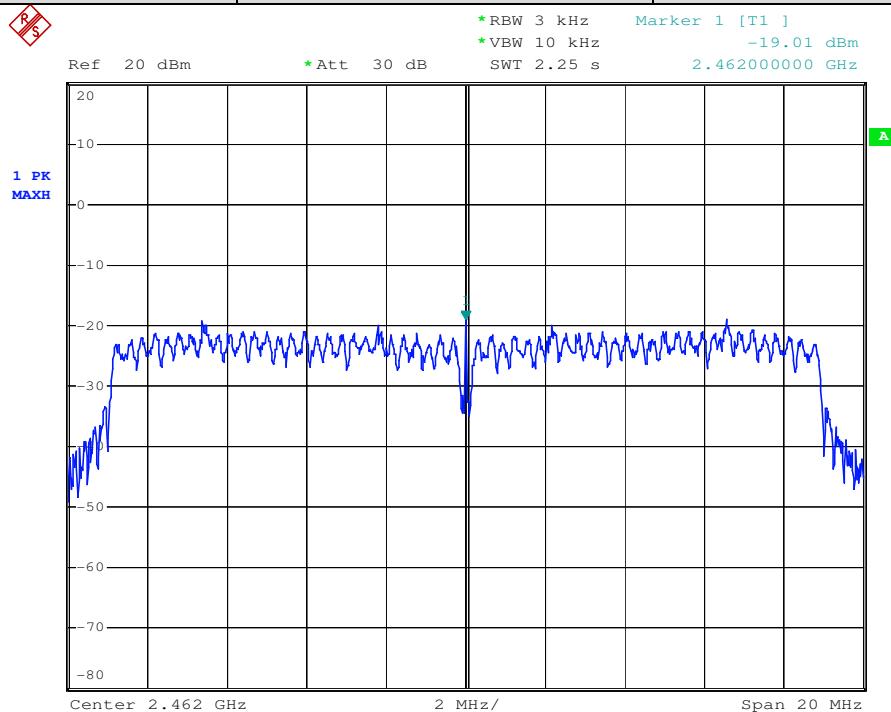


802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

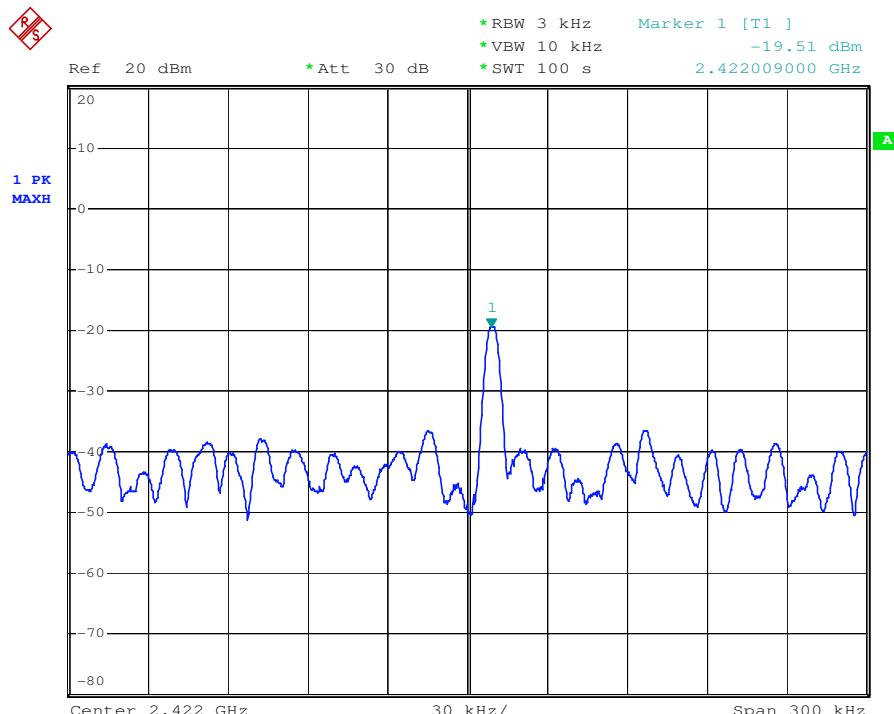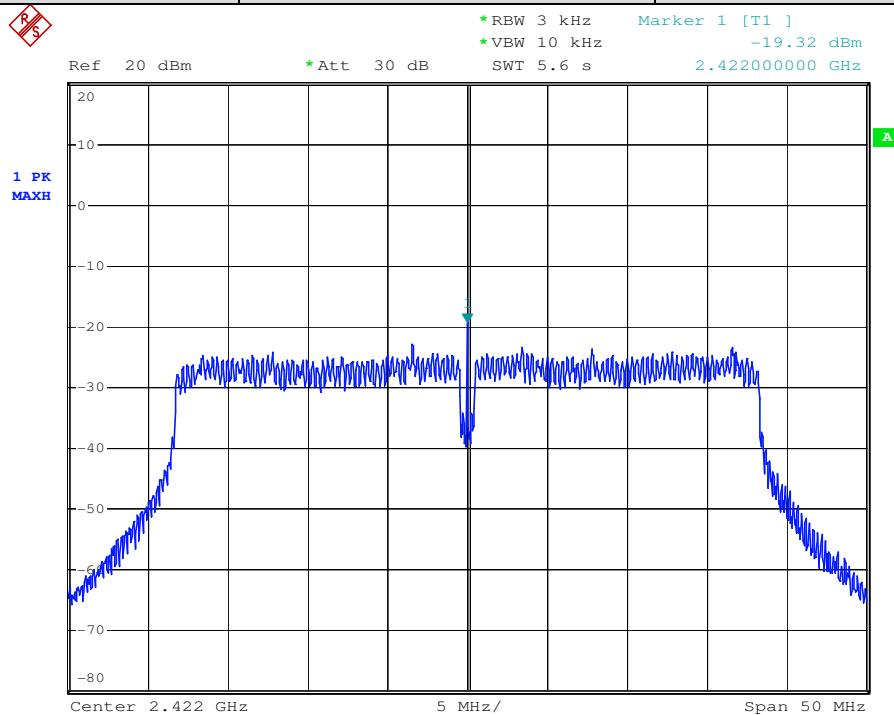


802.11 n40	Antenna B	Channel: 2437
------------	-----------	---------------

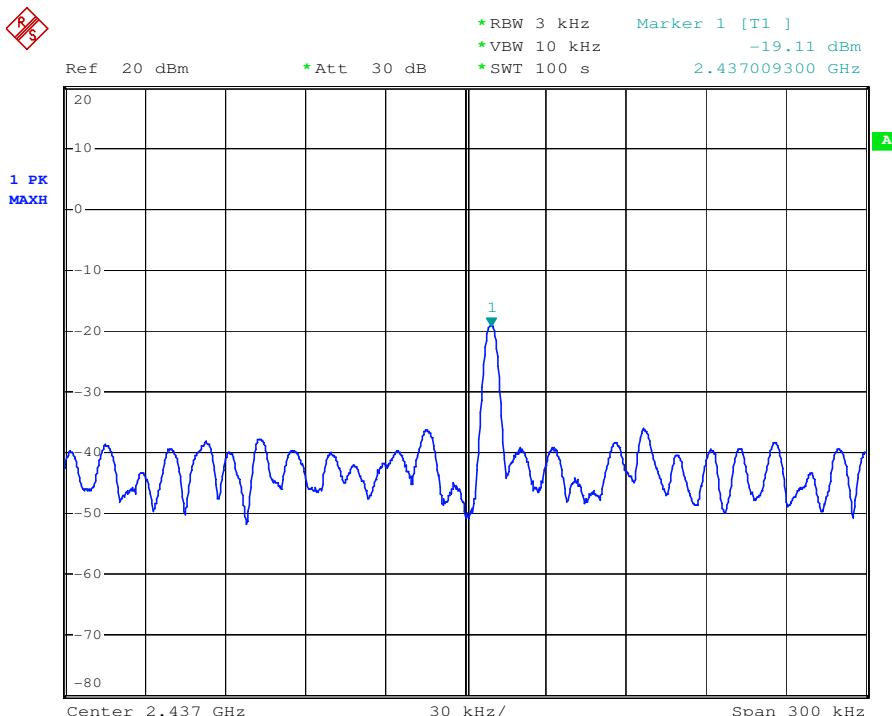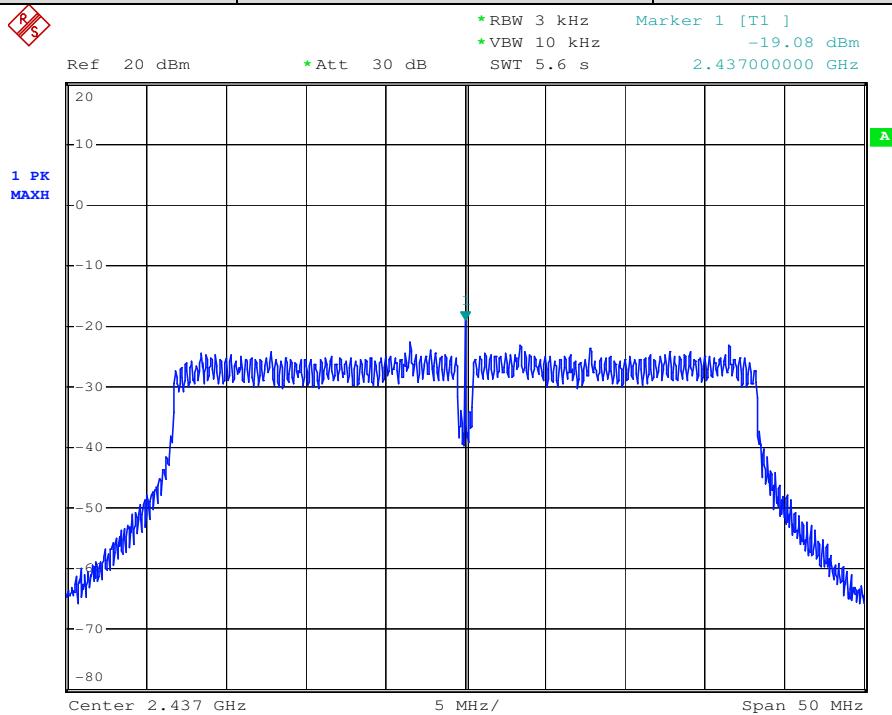

802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

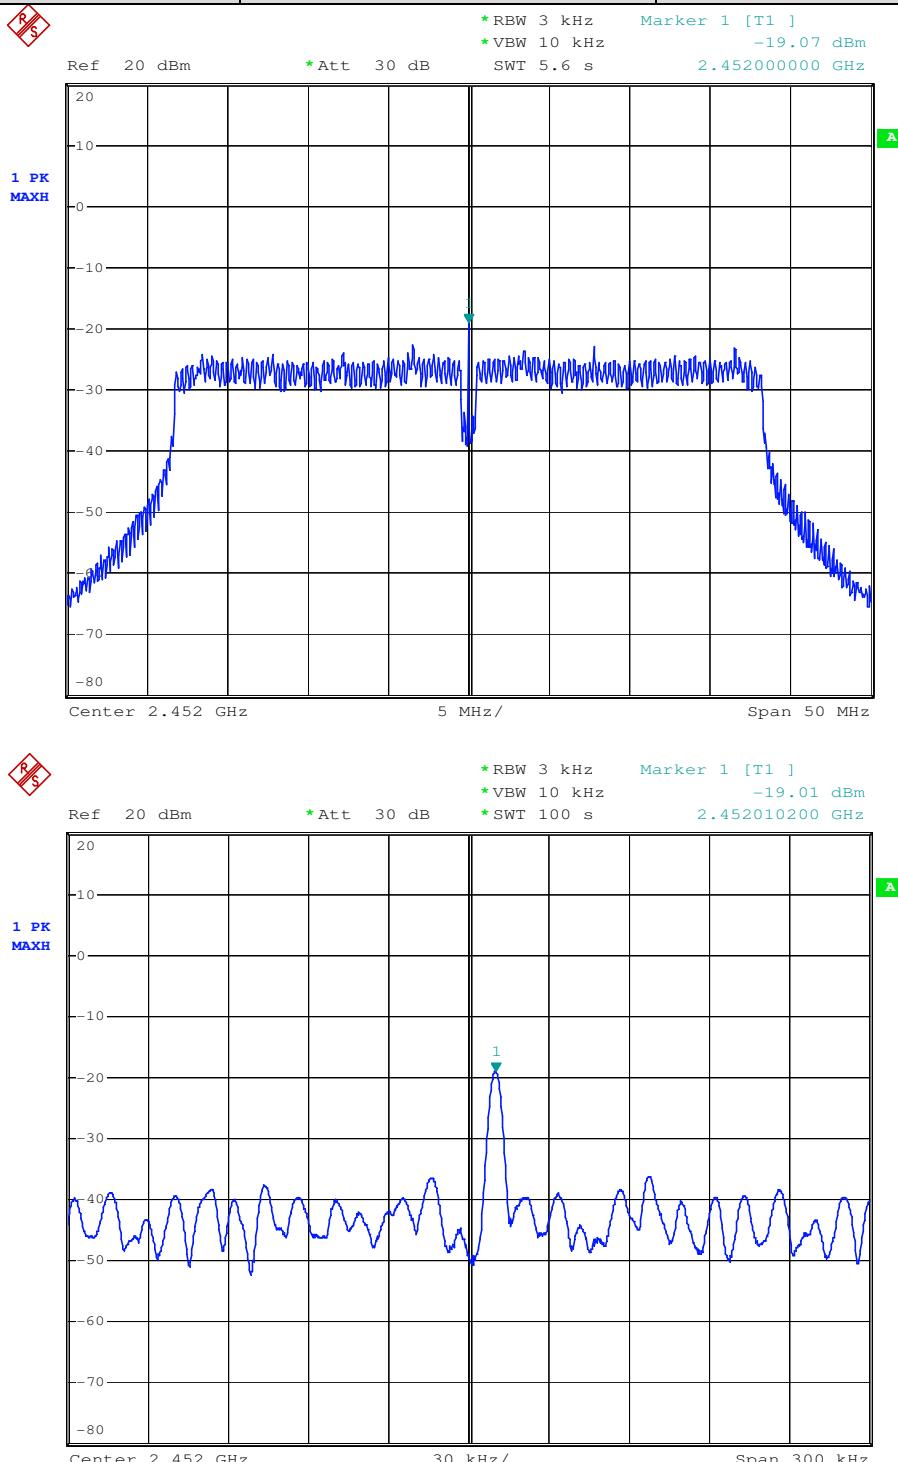

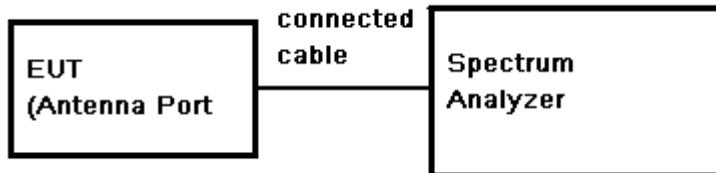7.7 Conducted Spurious Emissions and Band-edge

Test Configuration:**Test Procedure:**

- 1). Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2). Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).
- 3). Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst emissions. Since the emissions produced from MIMO operation were found to be more than 20 dB below the limit, the MIMO emissions are not report.

Limit:

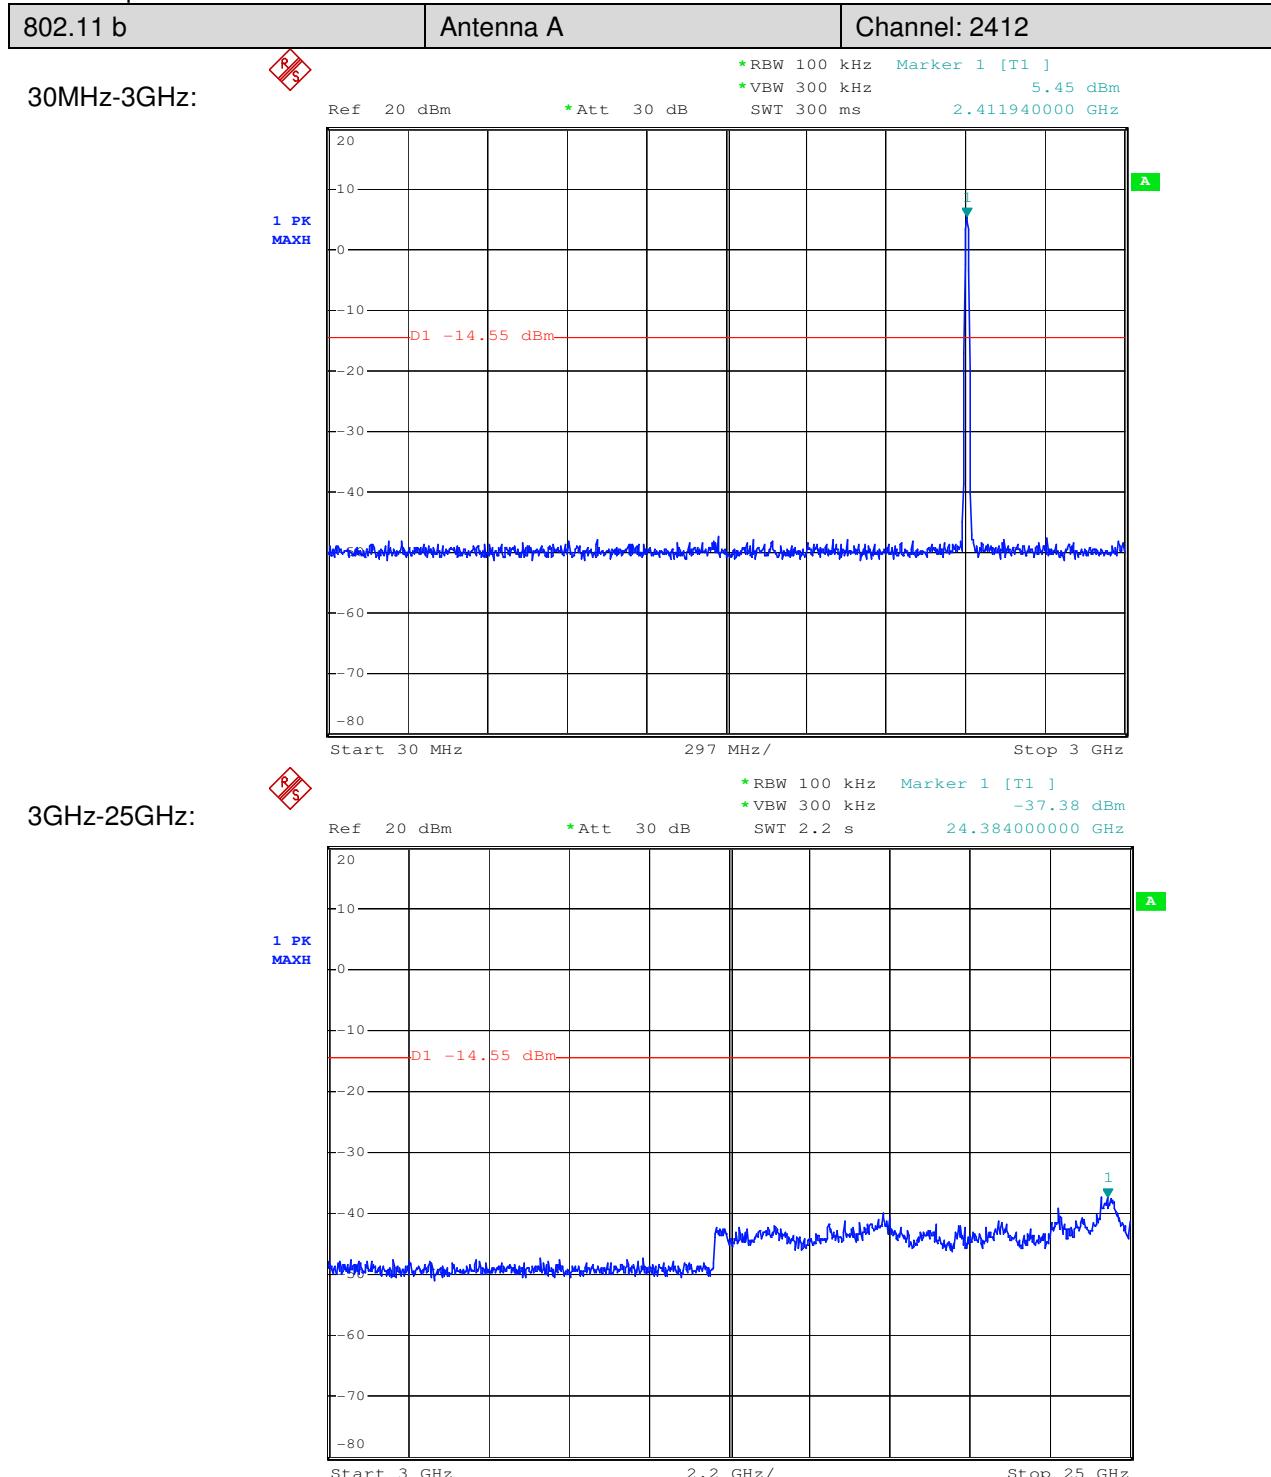
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the Highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Result:

Pass


7.7.1 Conducted spurious emission

Test plot as follows:




802.11 b	Antenna A	Channel: 2437
----------	-----------	---------------


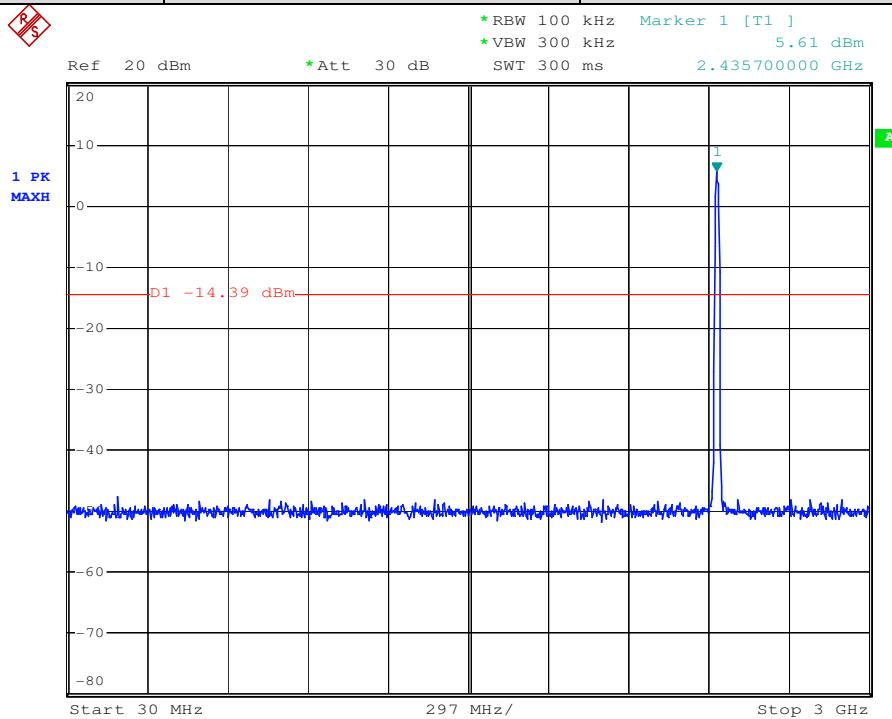
30MHz-3GHz:



3GHz-25GHz:

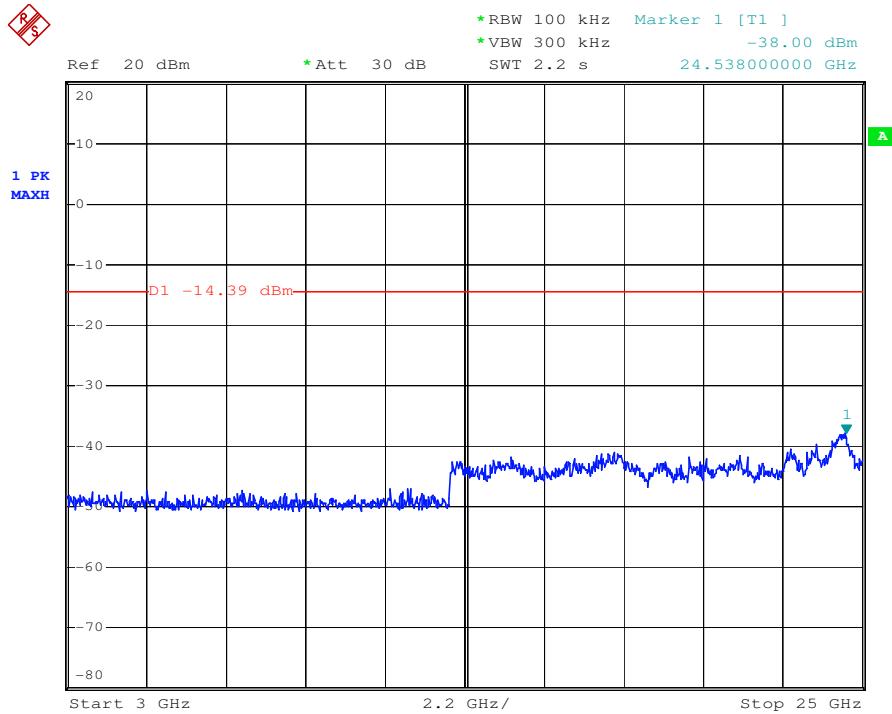


802.11 b	Antenna A	Channel: 2462
----------	-----------	---------------

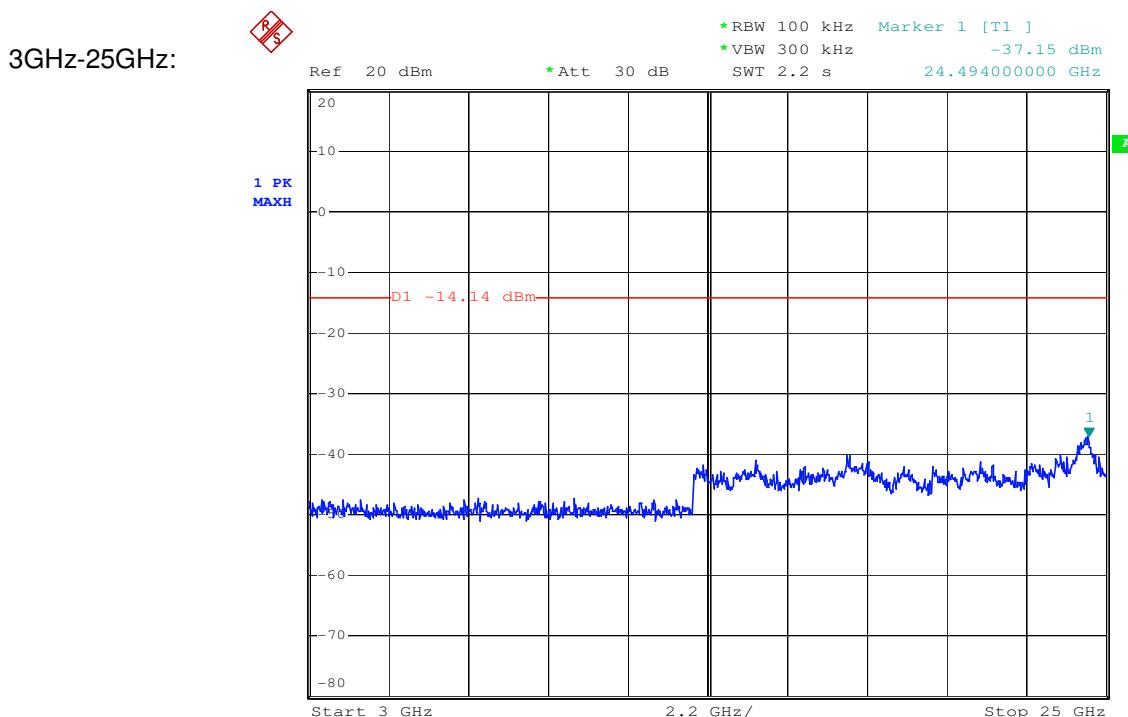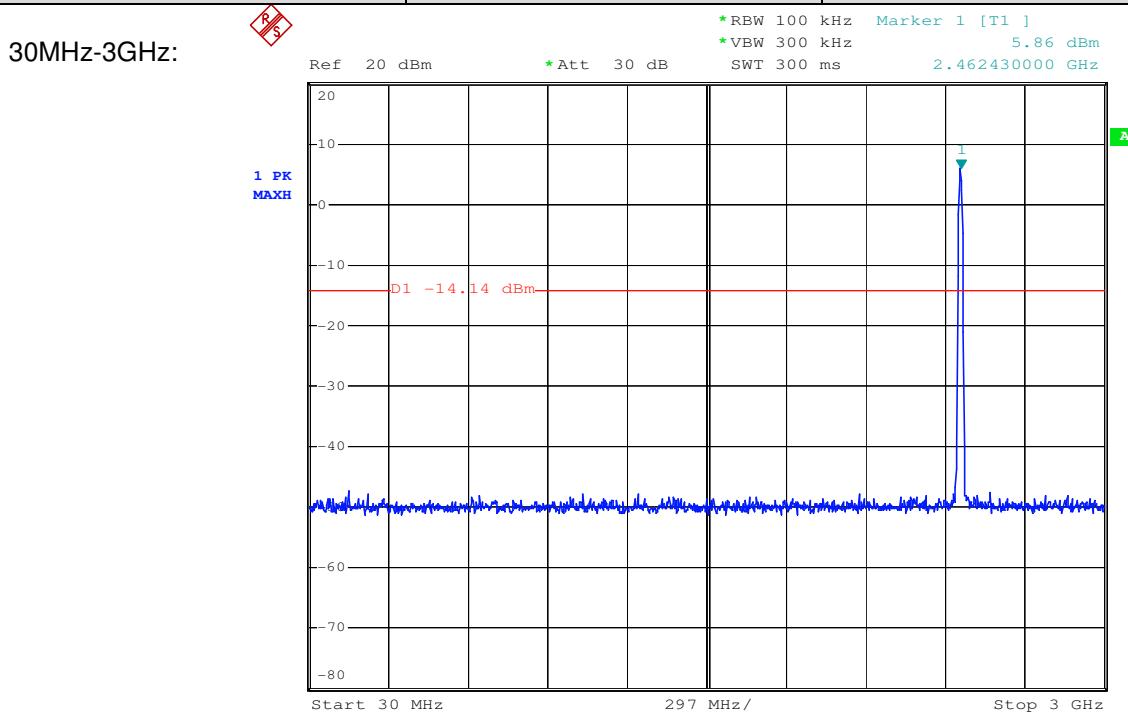


802.11 g	Antenna A	Channel: 2412
----------	-----------	---------------

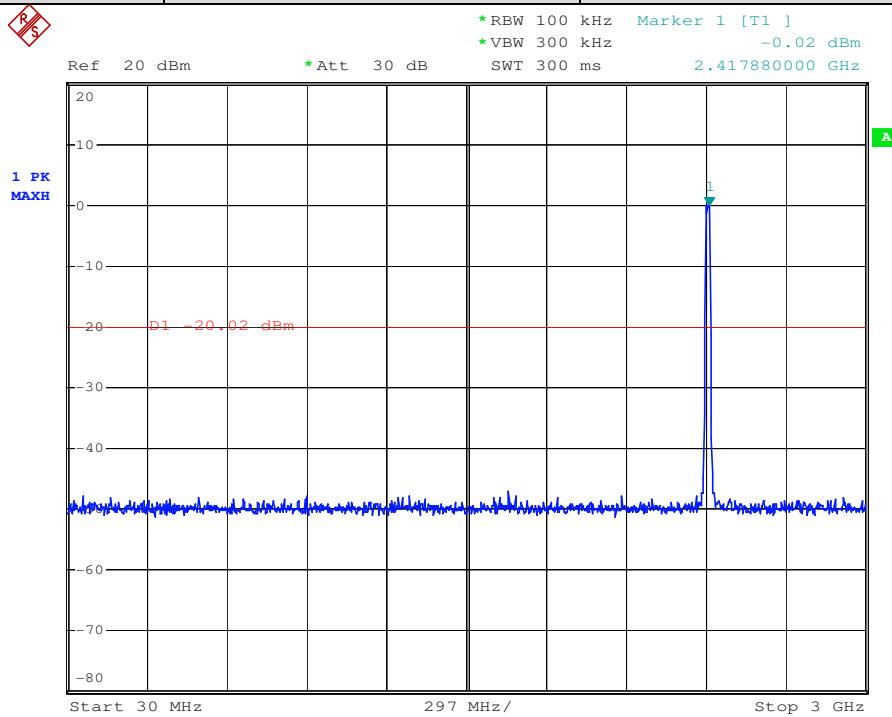30MHz-3GHz:




3GHz-25GHz:

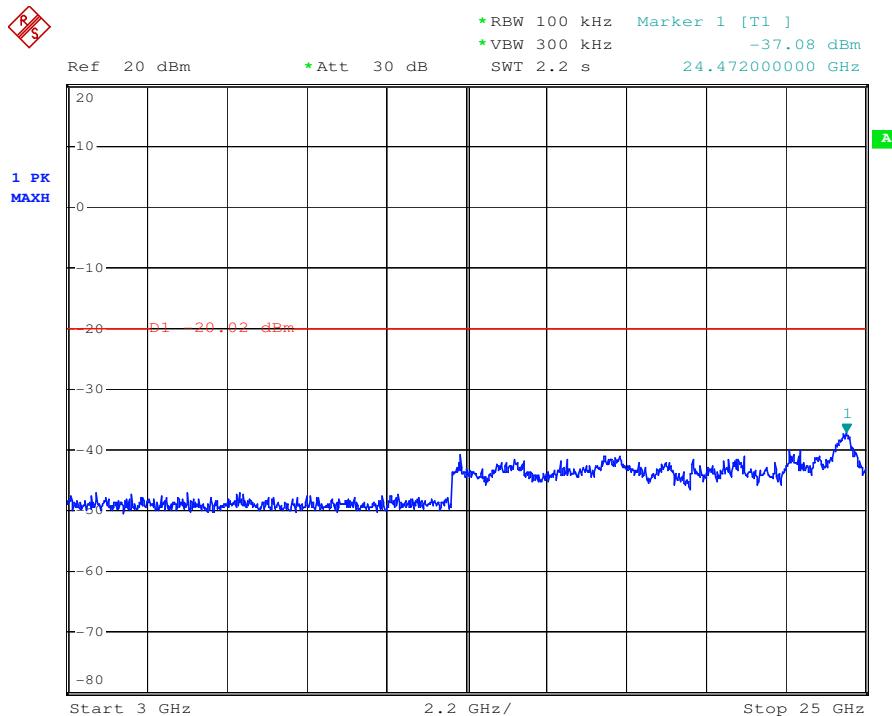


802.11 g	Antenna A	Channel: 2437
----------	-----------	---------------

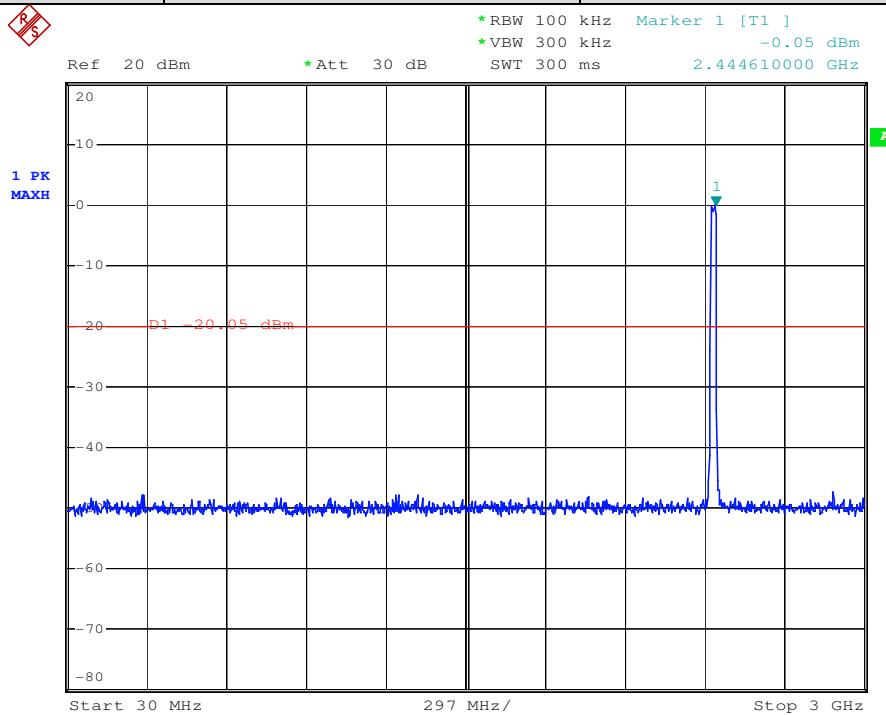30MHz-3GHz:




3GHz-25GHz:

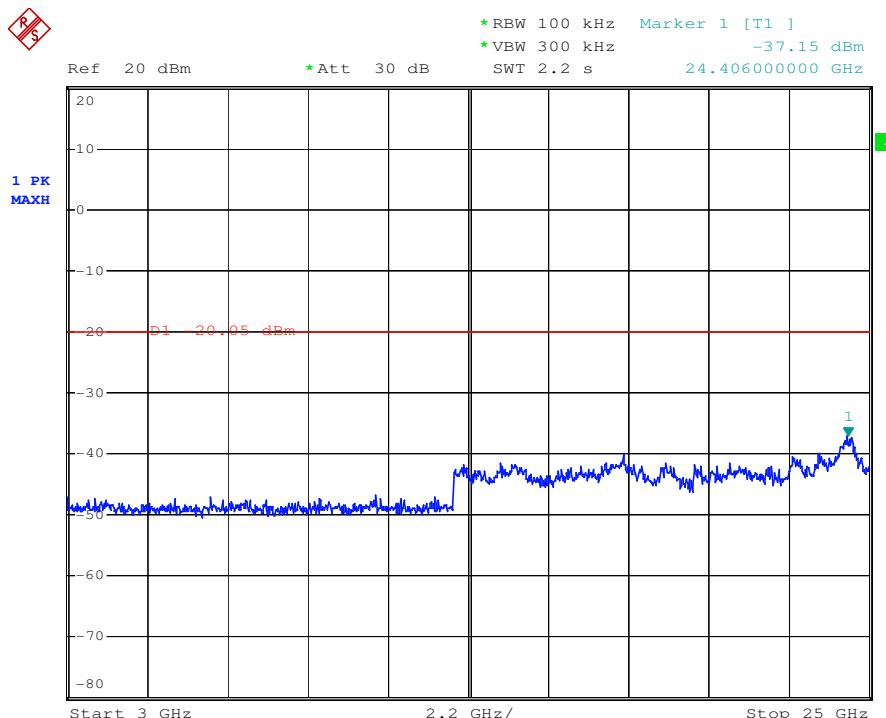


802.11 g	Antenna A	Channel: 2462
----------	-----------	---------------

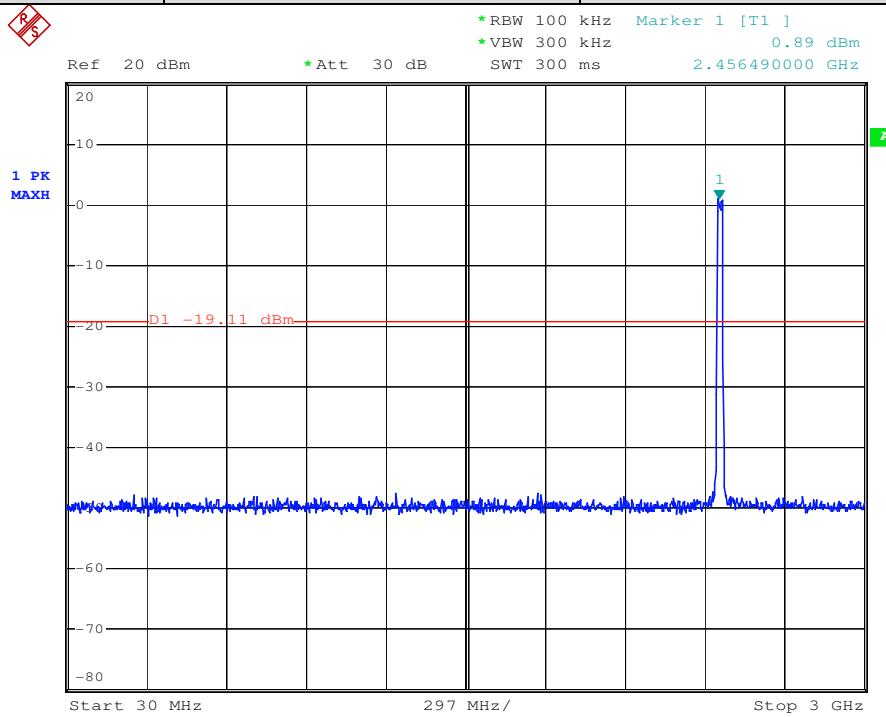30MHz-3GHz:




3GHz-25GHz:

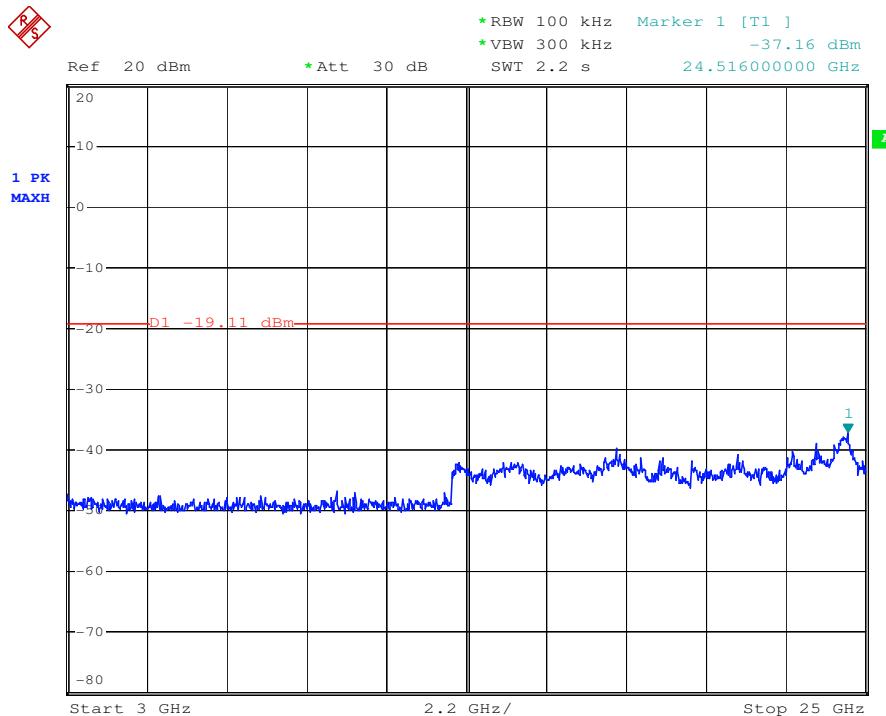


802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

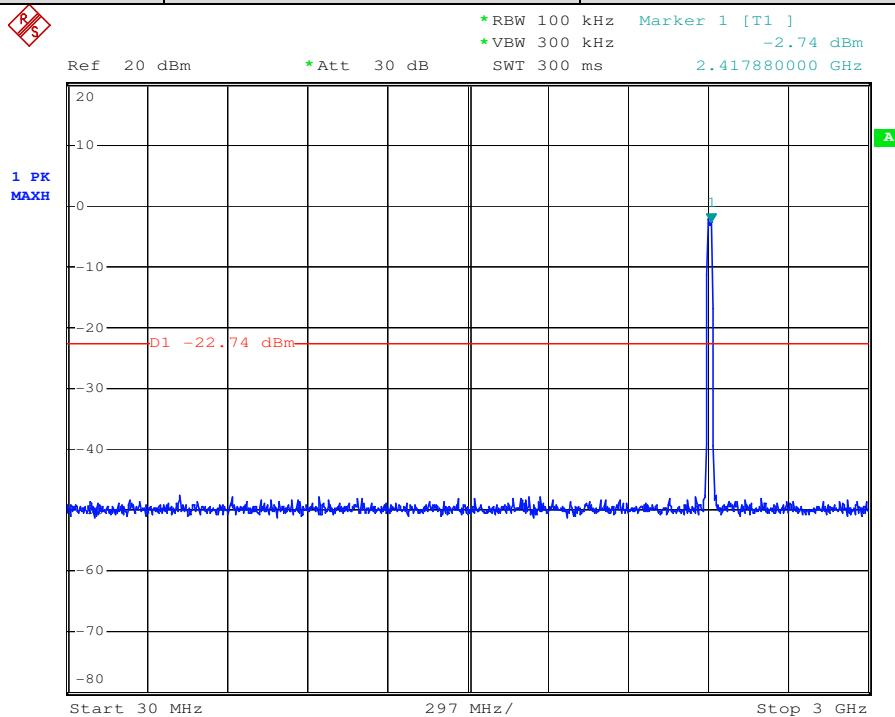30MHz-3GHz:




3GHz-25GHz:

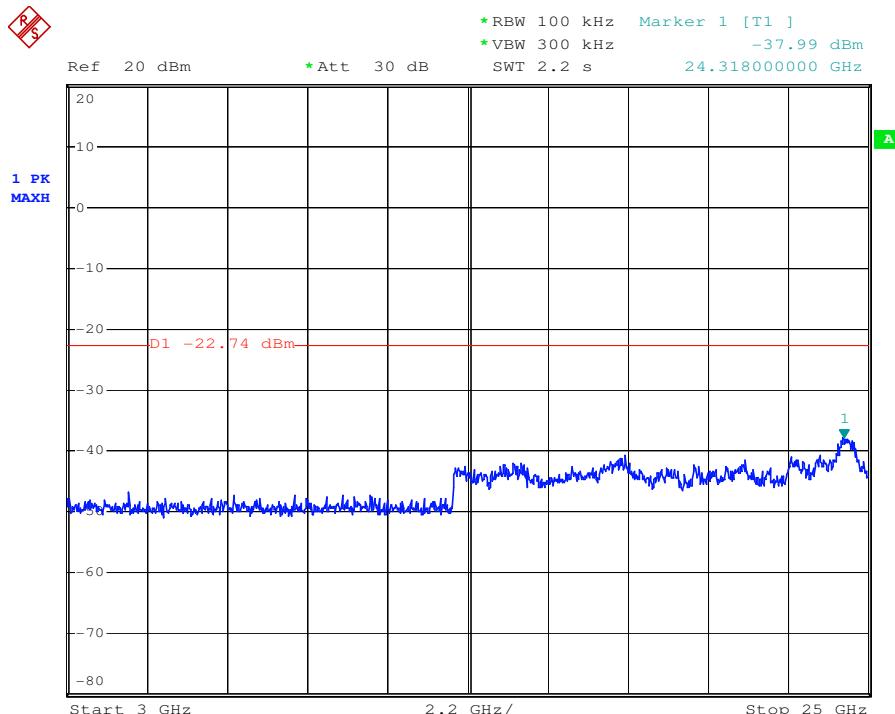


802.11 n20	Antenna A	Channel: 2437
------------	-----------	---------------

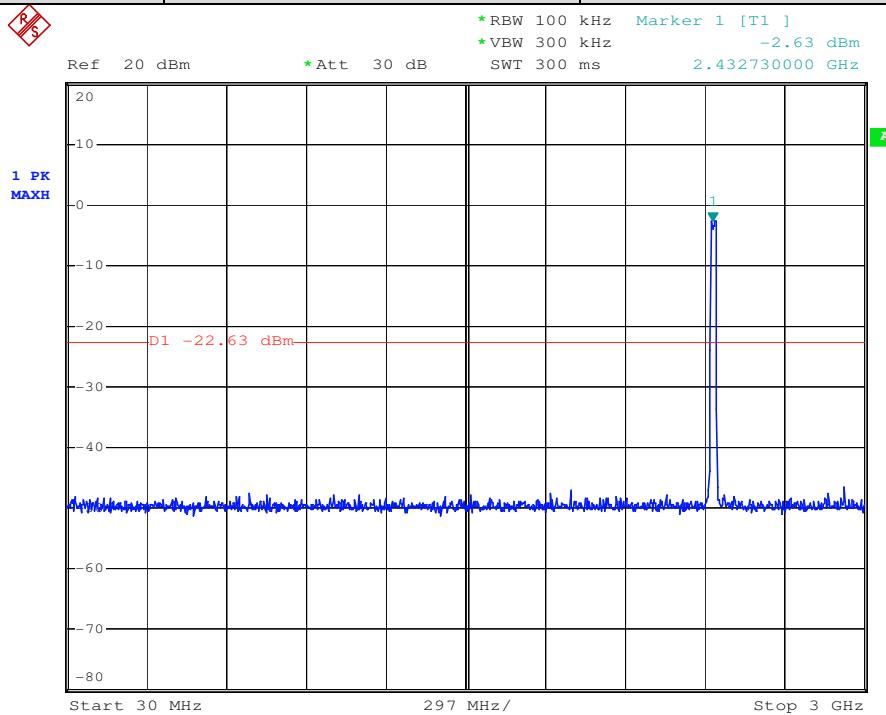30MHz-3GHz:




3GHz-25GHz:

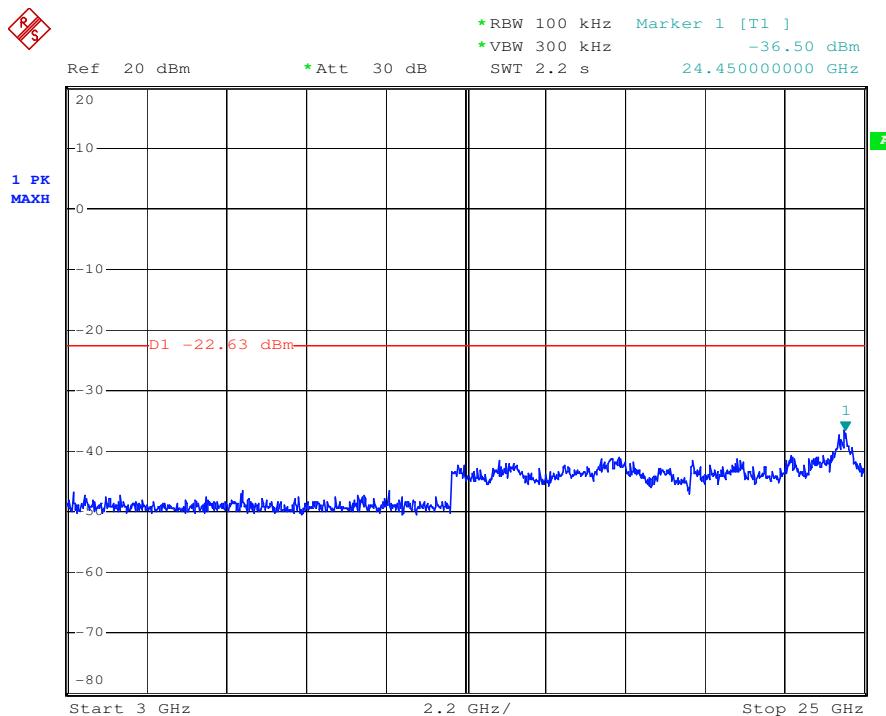


802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

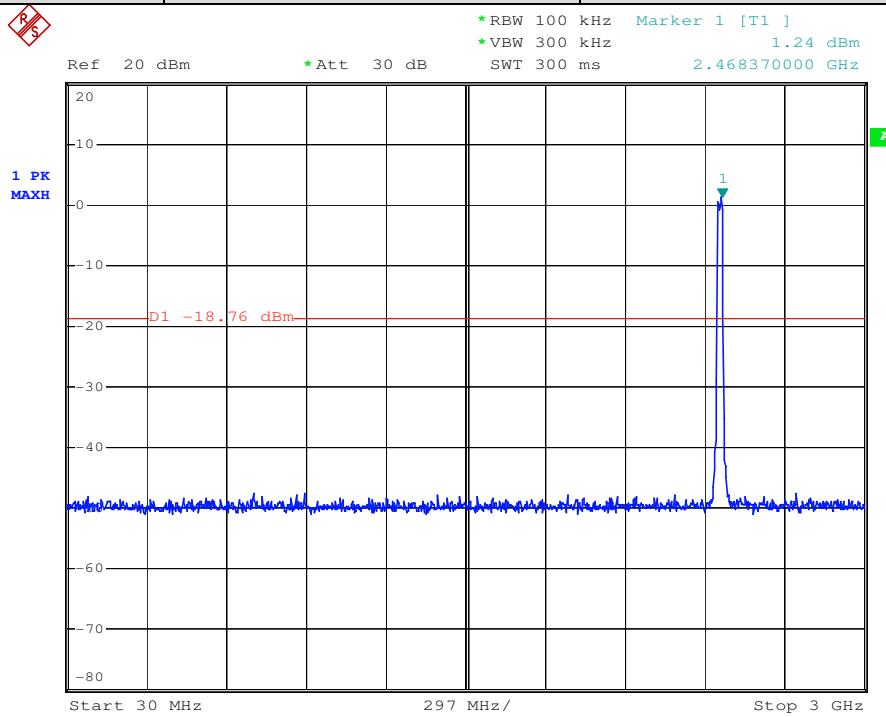30MHz-3GHz:




3GHz-25GHz:

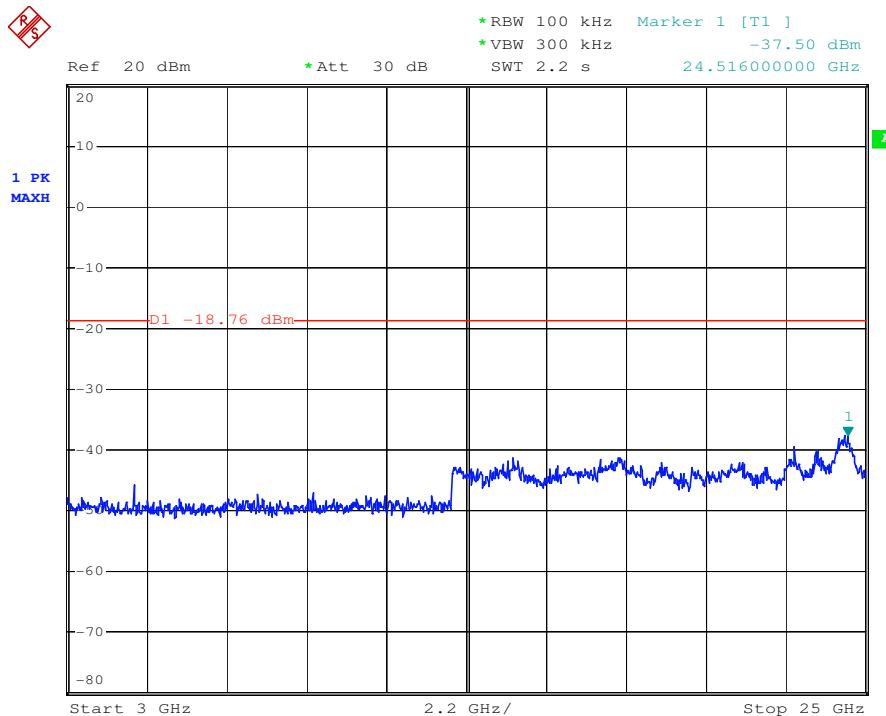


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

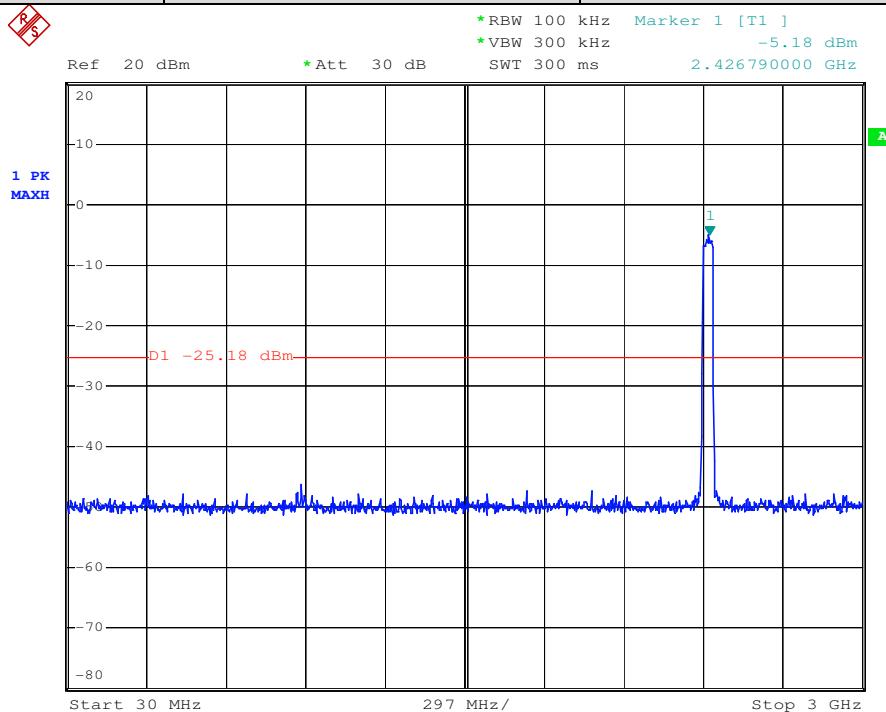30MHz-3GHz:




3GHz-25GHz:

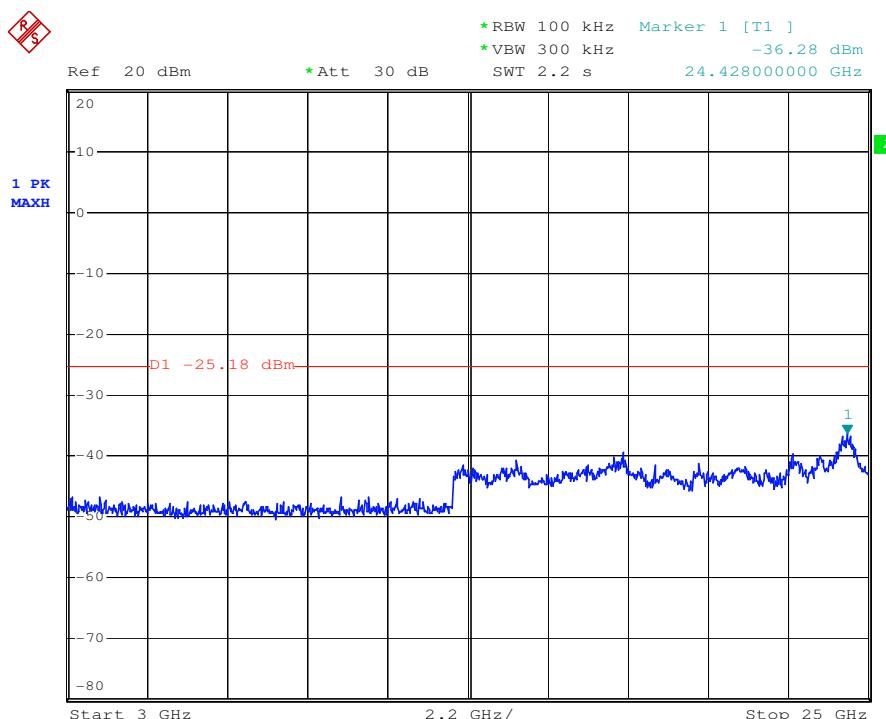


802.11 n40	Antenna A	Channel: 2437
------------	-----------	---------------

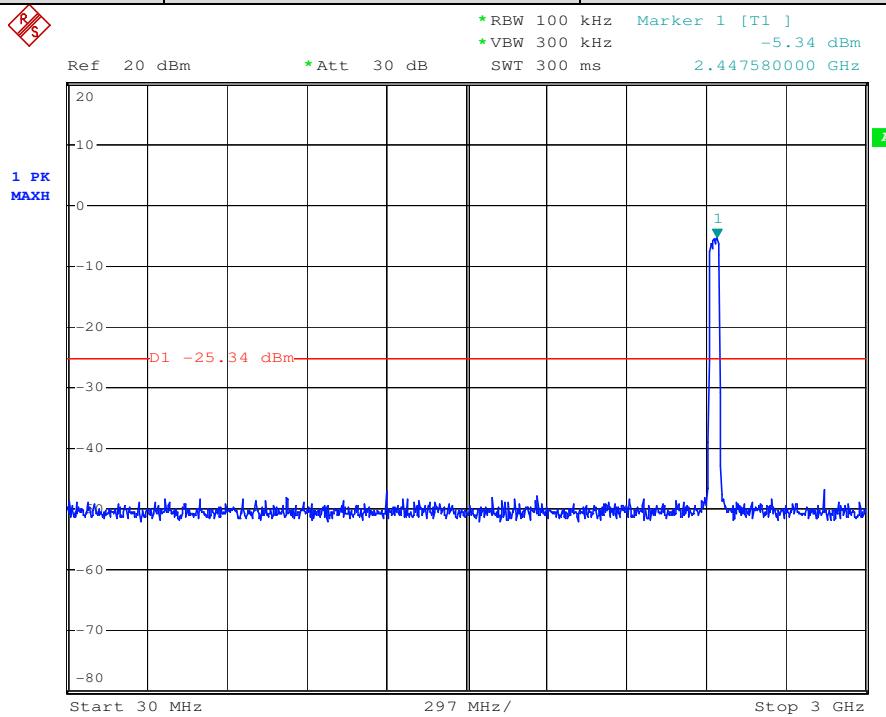30MHz-3GHz:




3GHz-25GHz:

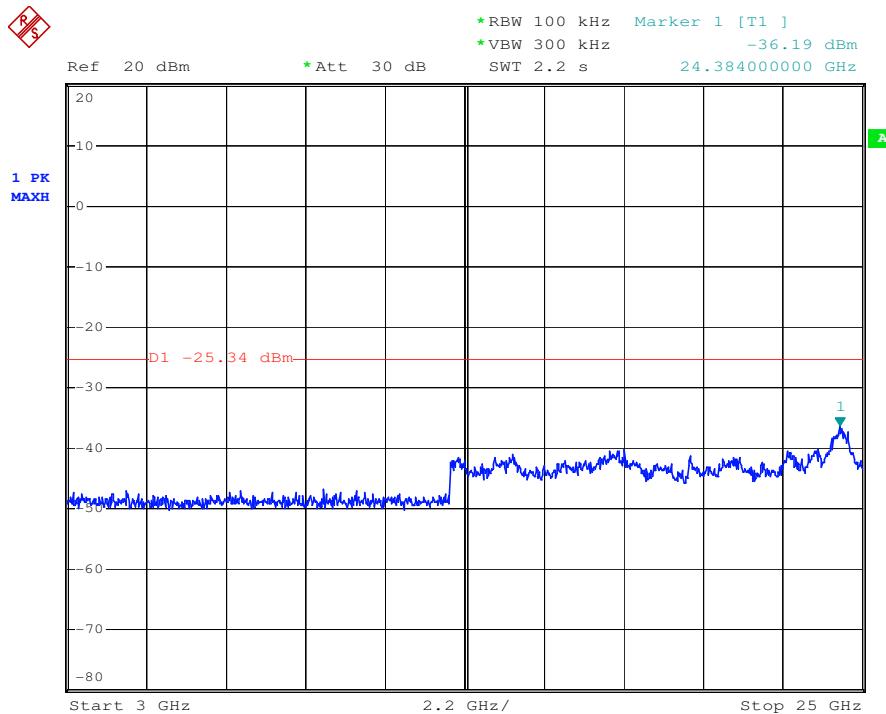


802.11 n40	Antenna A	Channel: 2452
------------	-----------	---------------


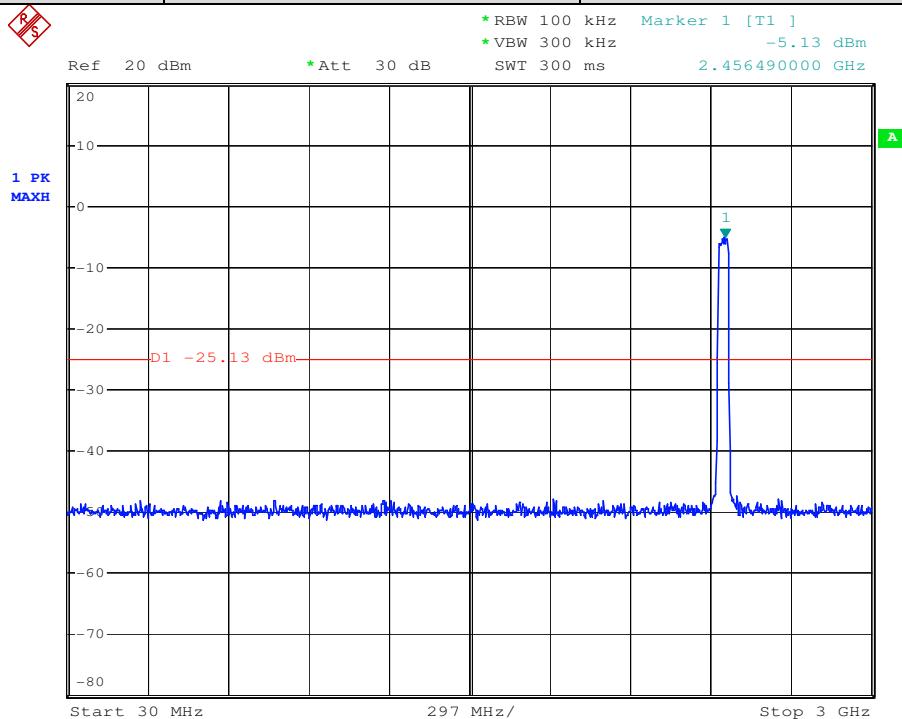
30MHz-3GHz:



3GHz-25GHz:

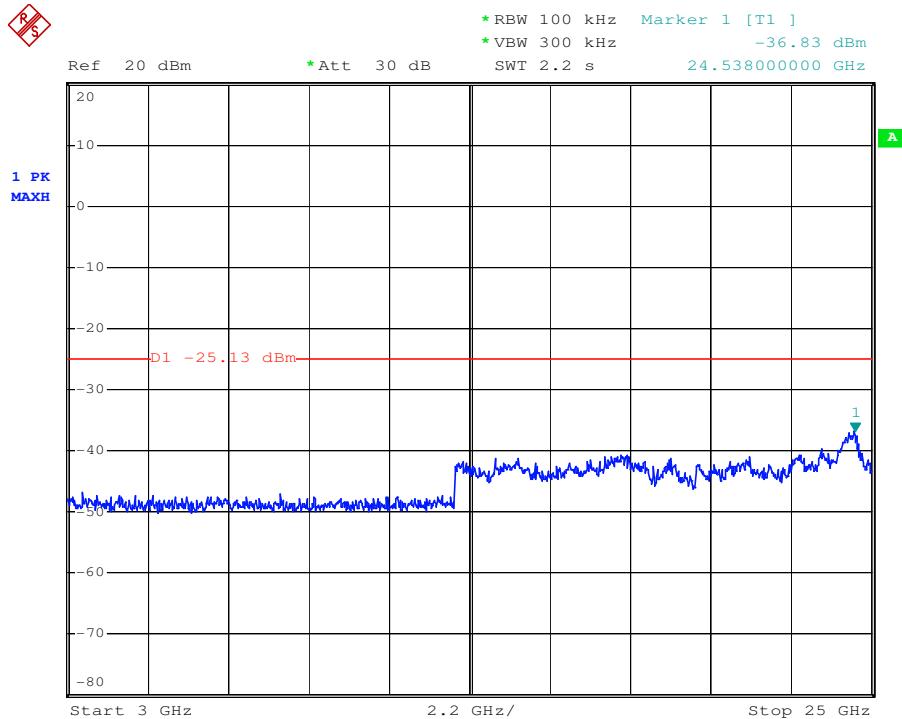


802.11 b	Antenna B	Channel: 2412
----------	-----------	---------------

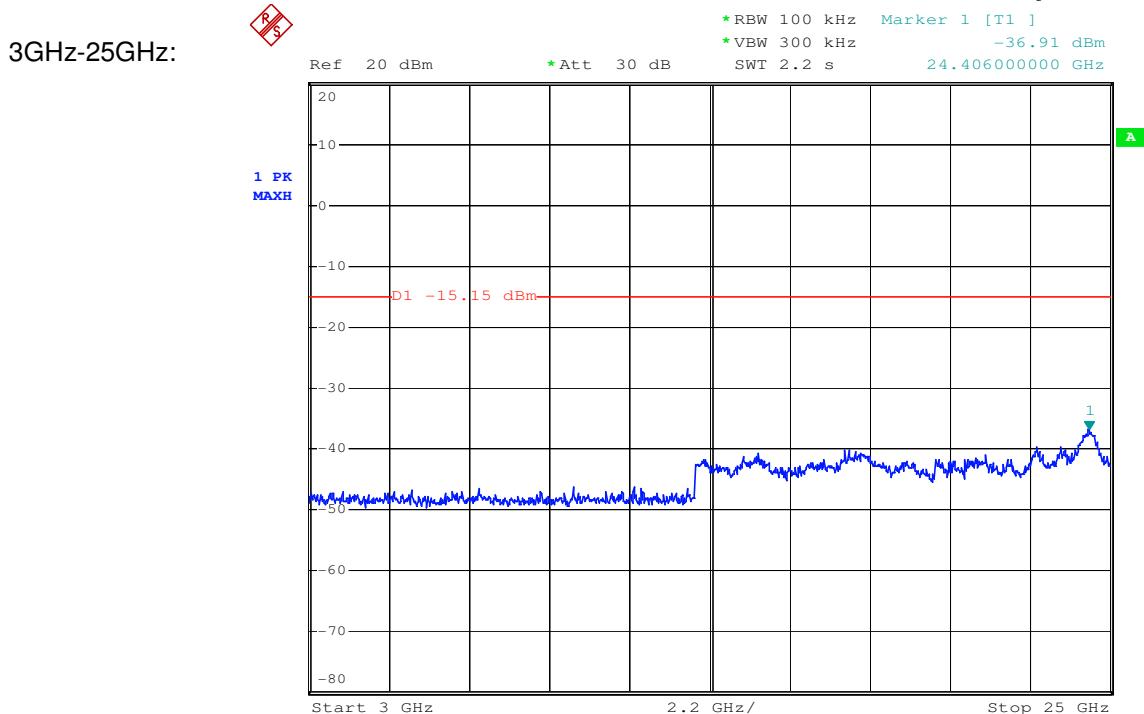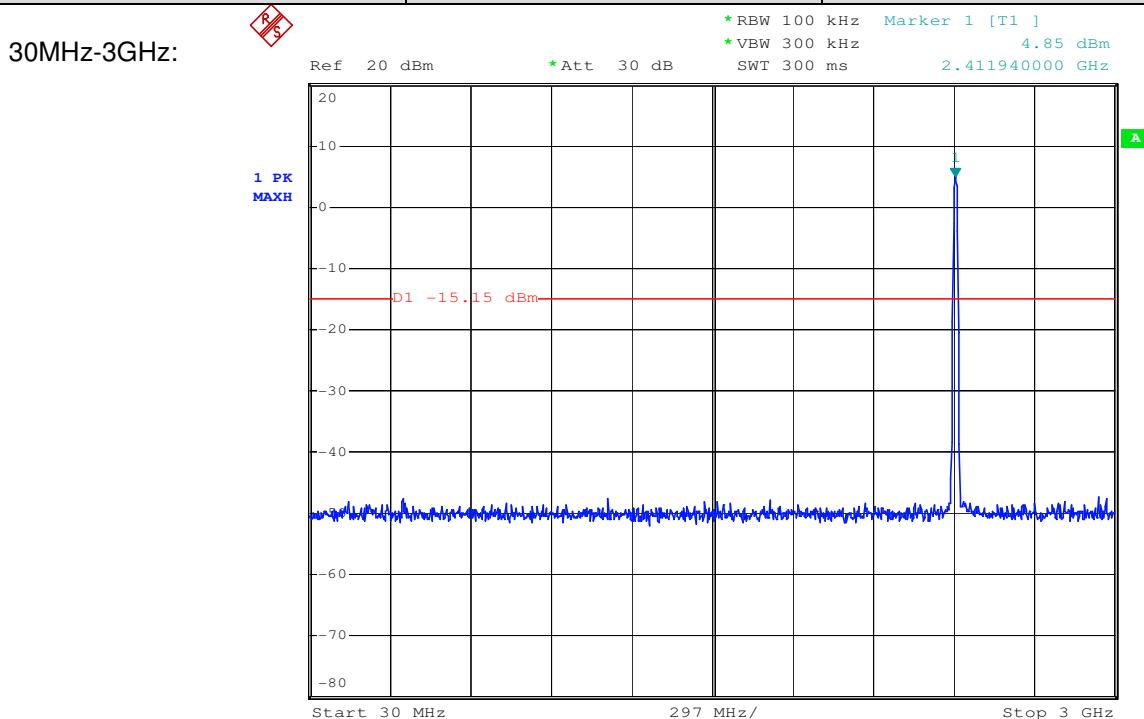


802.11 b	Antenna B	Channel: 2437
----------	-----------	---------------

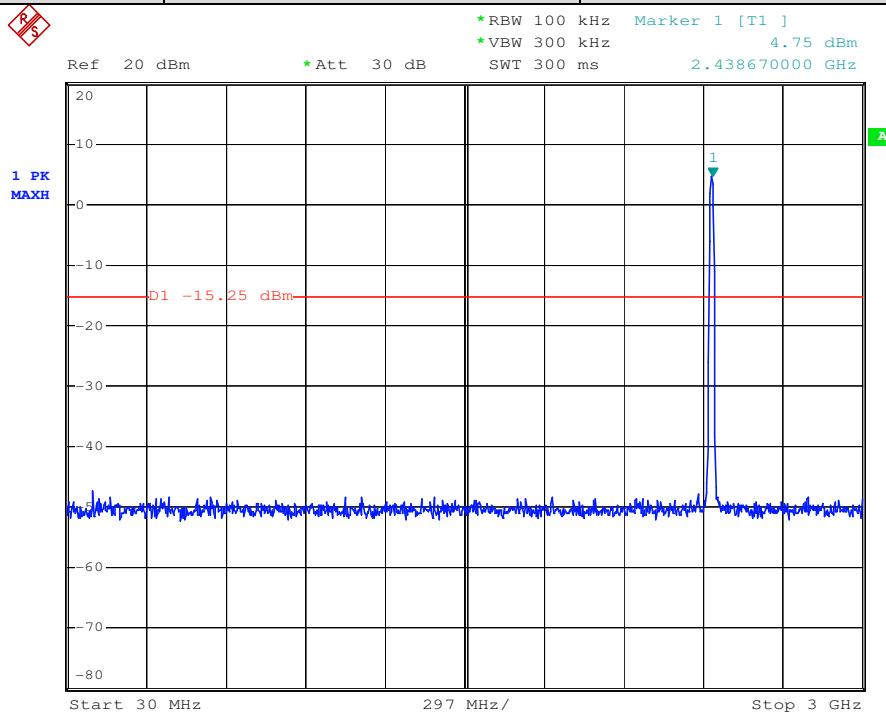30MHz-3GHz:




3GHz-25GHz:

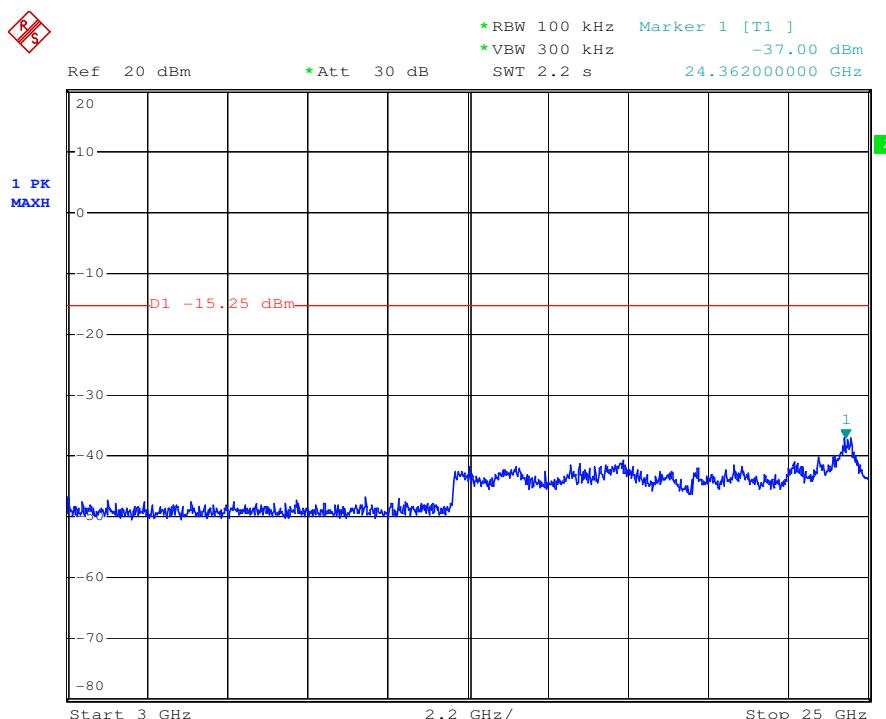


802.11 b	Antenna B	Channel: 2462
----------	-----------	---------------

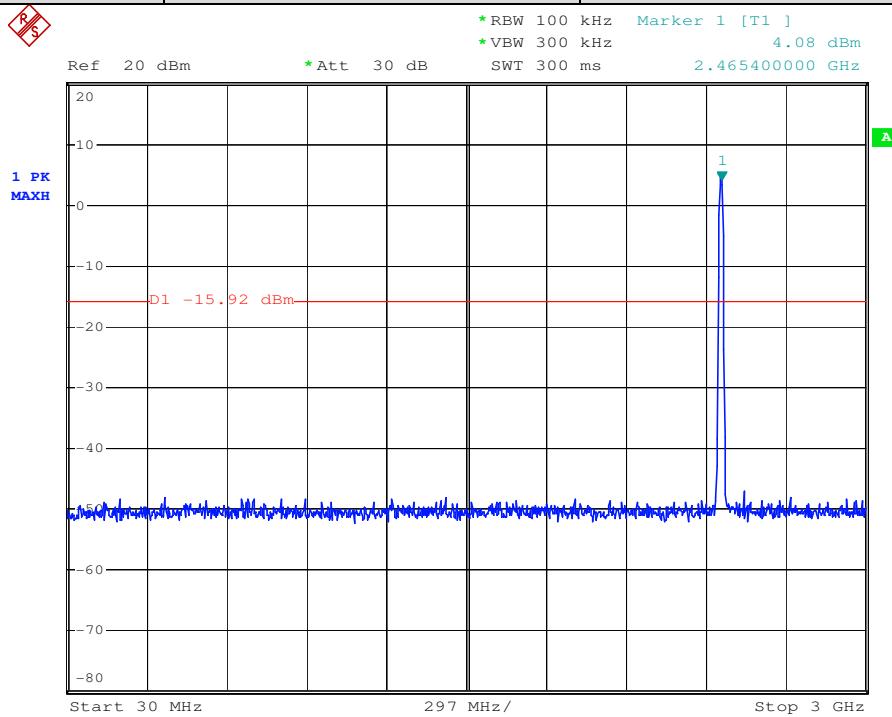30MHz-3GHz:




3GHz-25GHz:

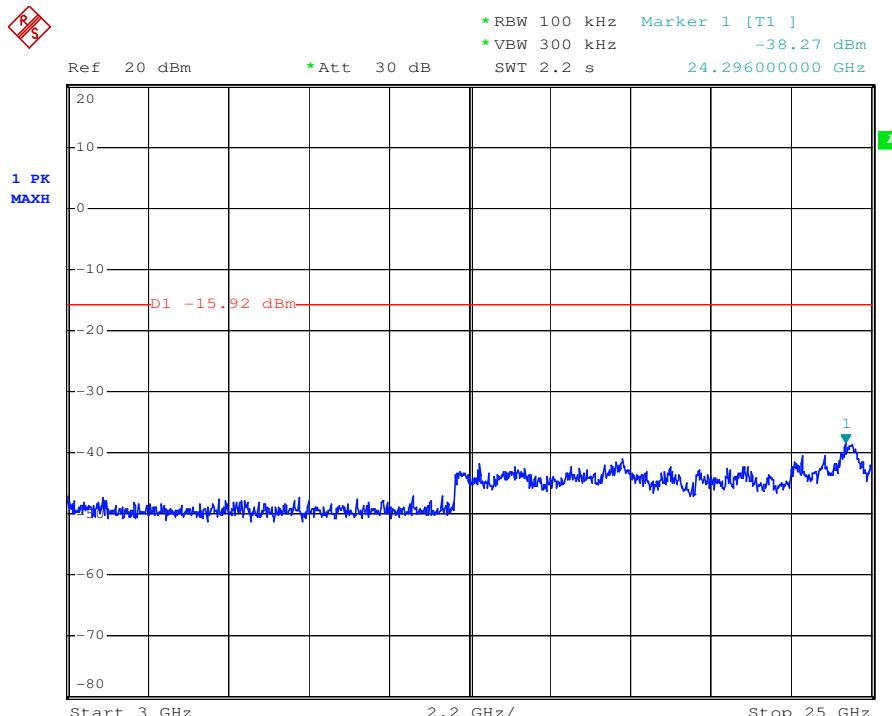


802.11 g	Antenna B	Channel: 2412
----------	-----------	---------------

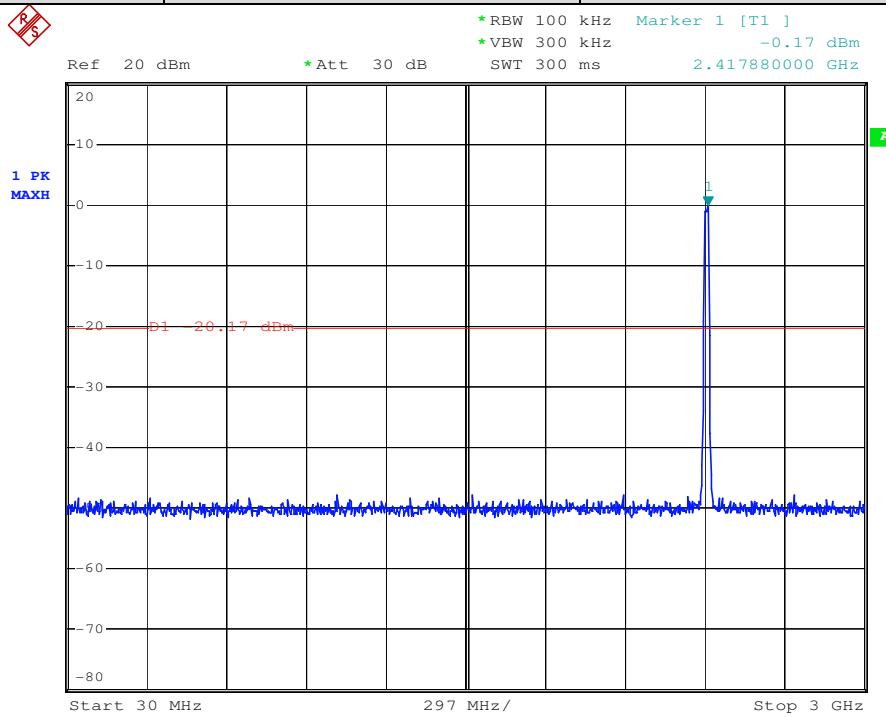30MHz-3GHz:




3GHz-25GHz:

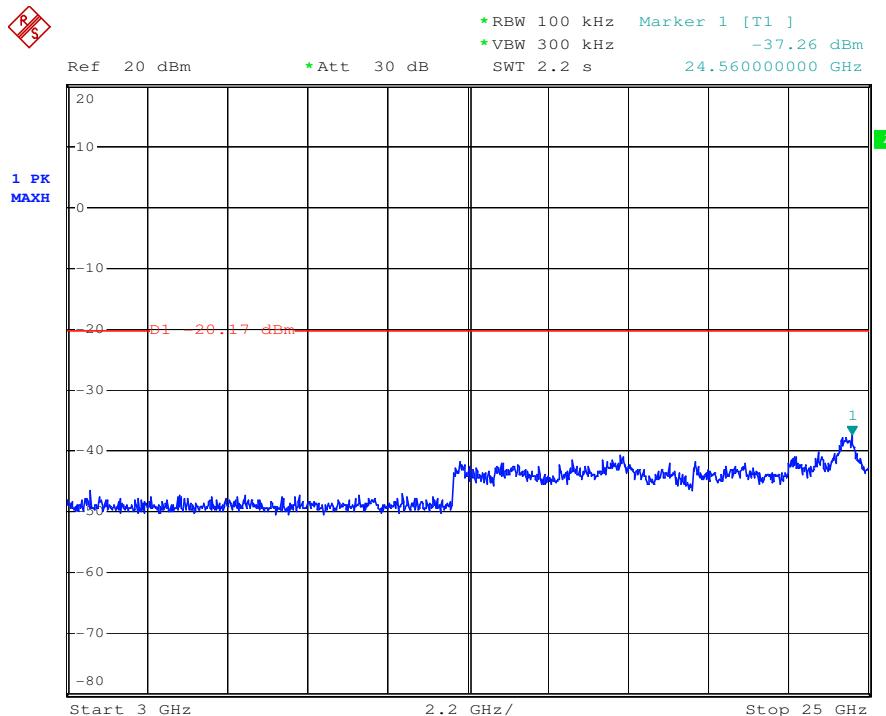


802.11 g	Antenna B	Channel: 2437
----------	-----------	---------------

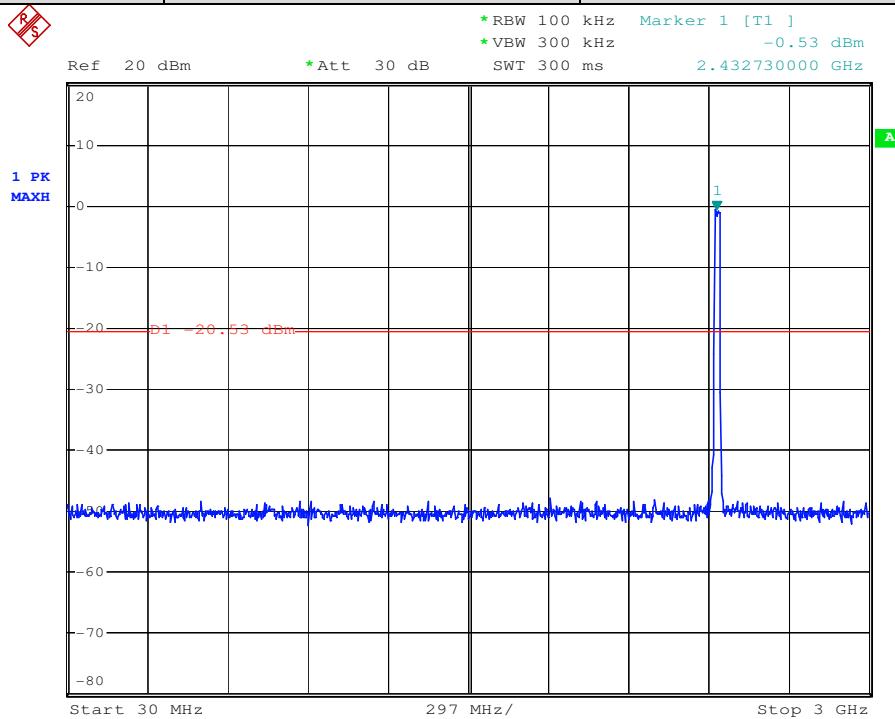30MHz-3GHz:




3GHz-25GHz:

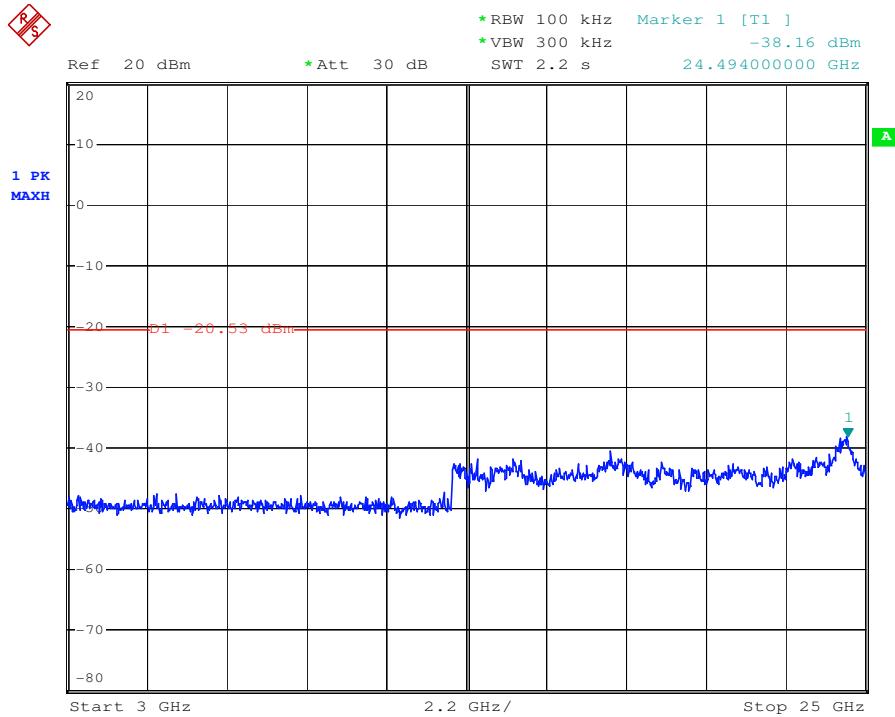


802.11 g	Antenna B	Channel: 2462
----------	-----------	---------------

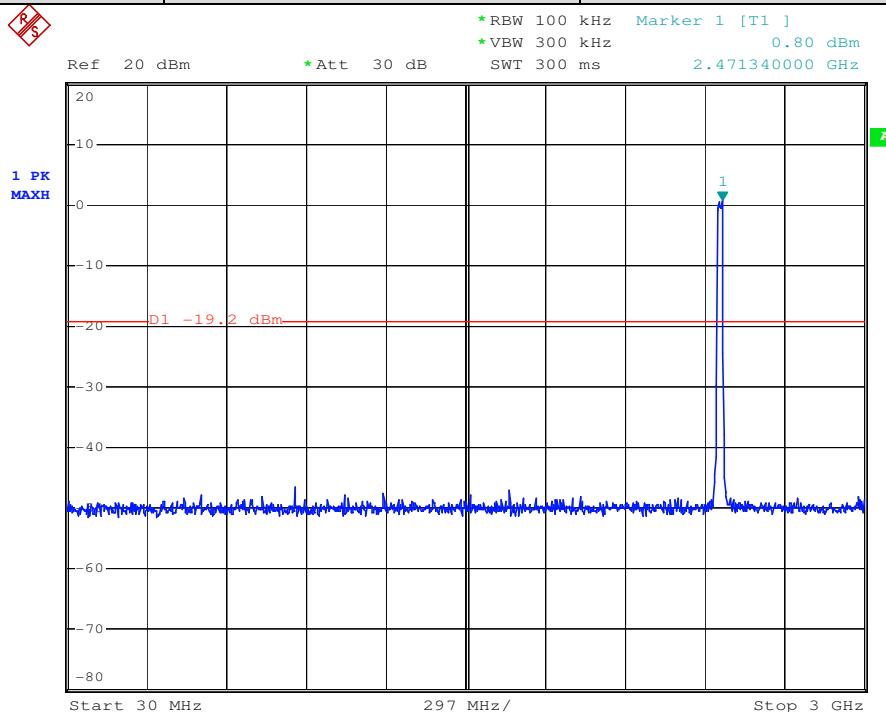30MHz-3GHz:




3GHz-25GHz:

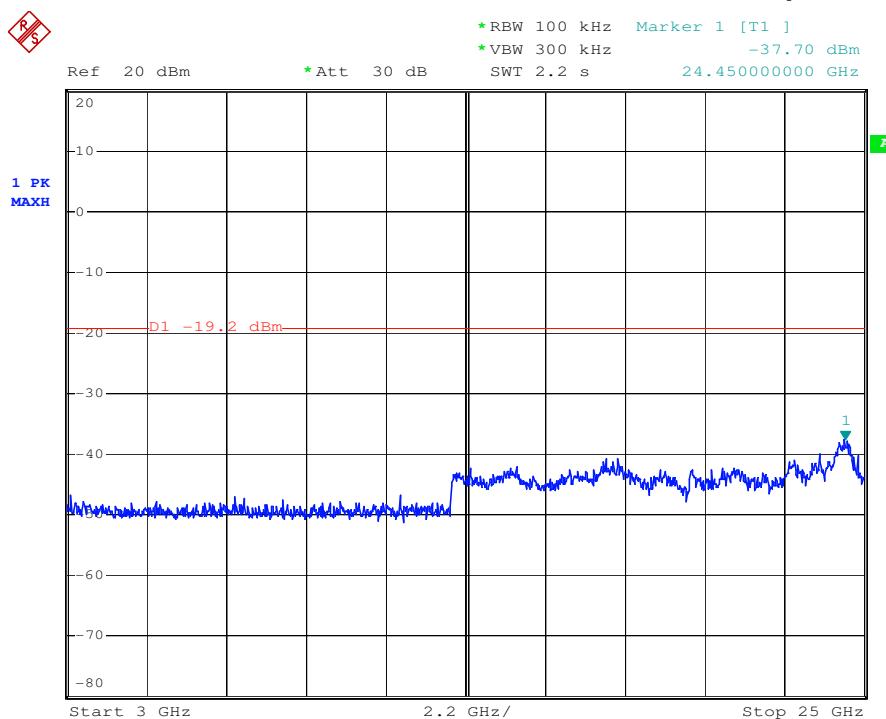


802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

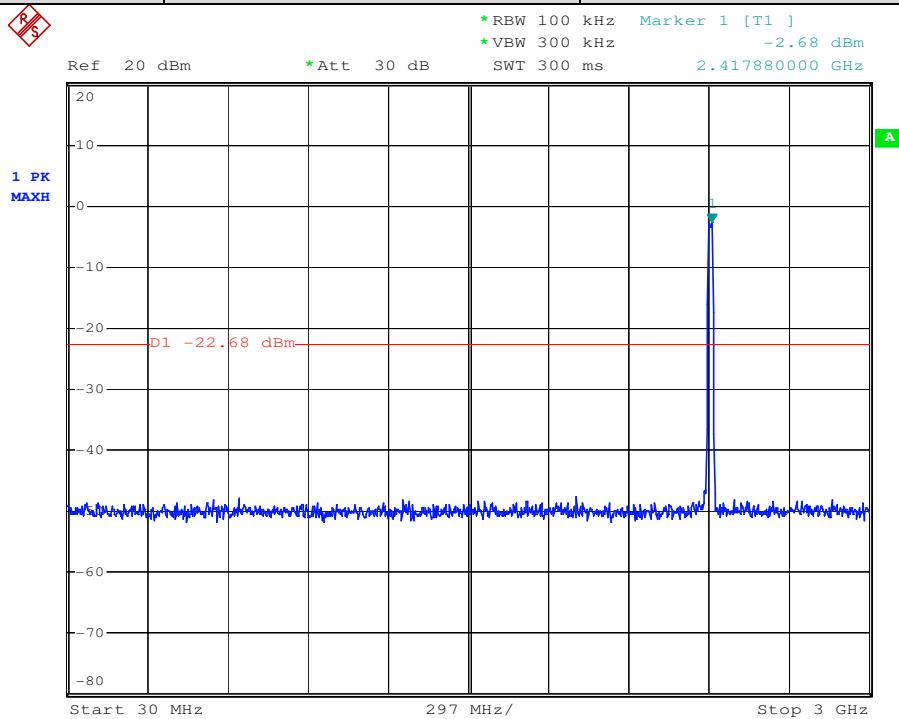30MHz-3GHz:




3GHz-25GHz:

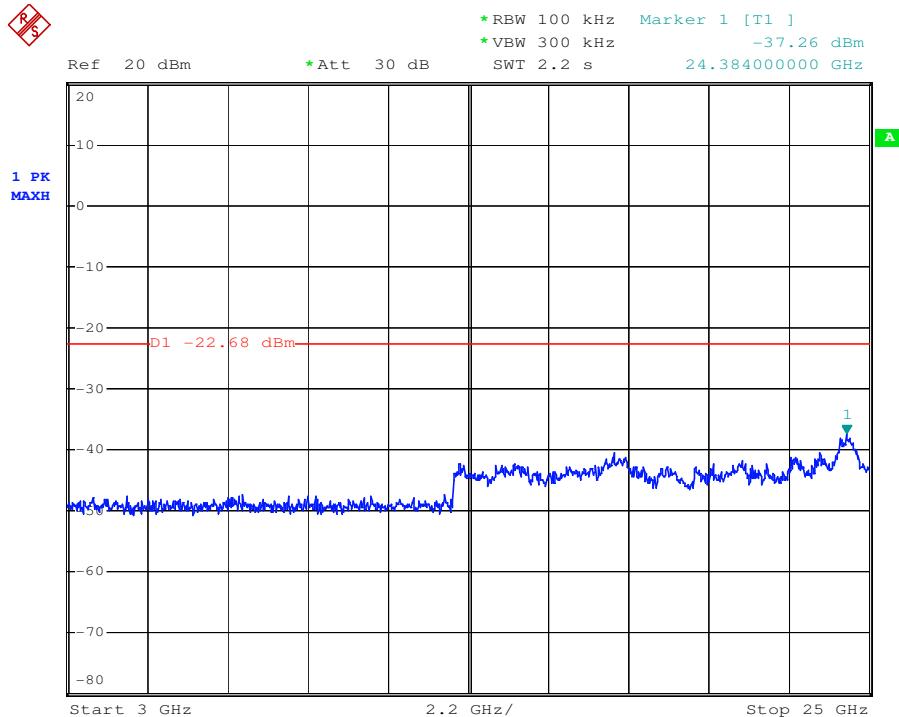


802.11 n20	Antenna B	Channel: 2437
------------	-----------	---------------

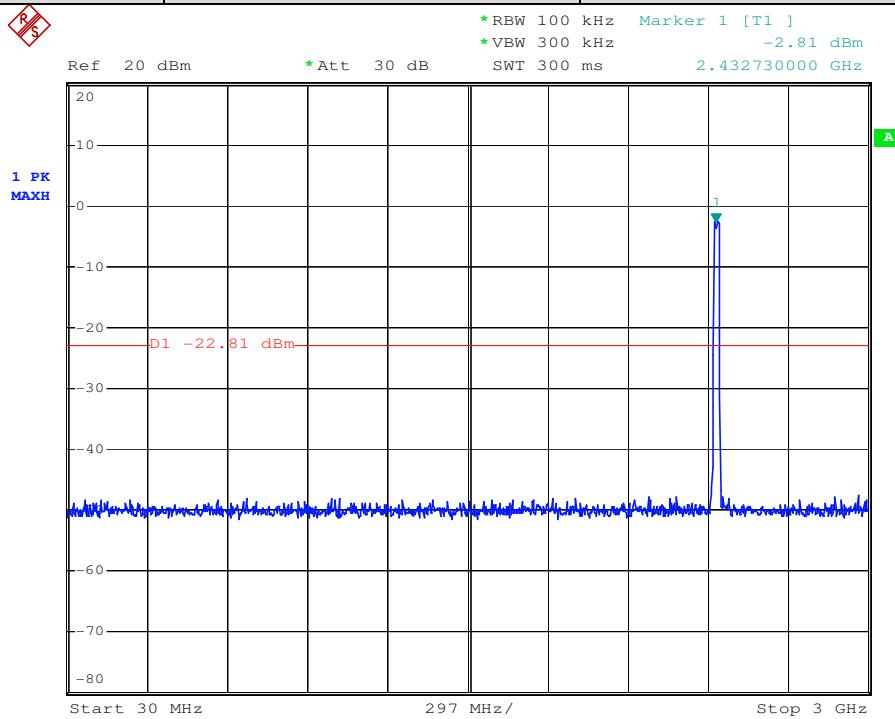30MHz-3GHz:




3GHz-25GHz:

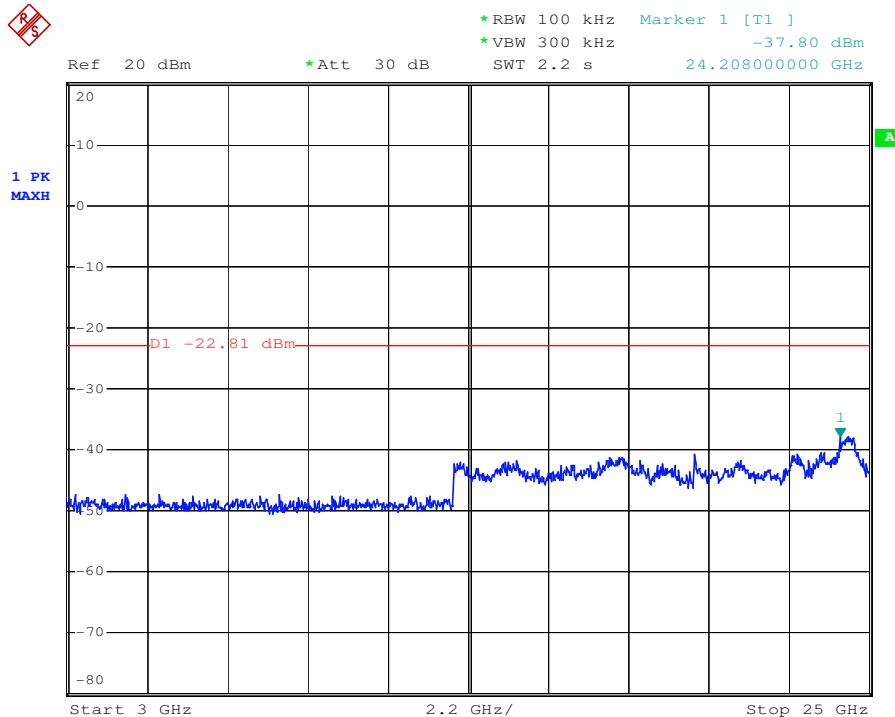


802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

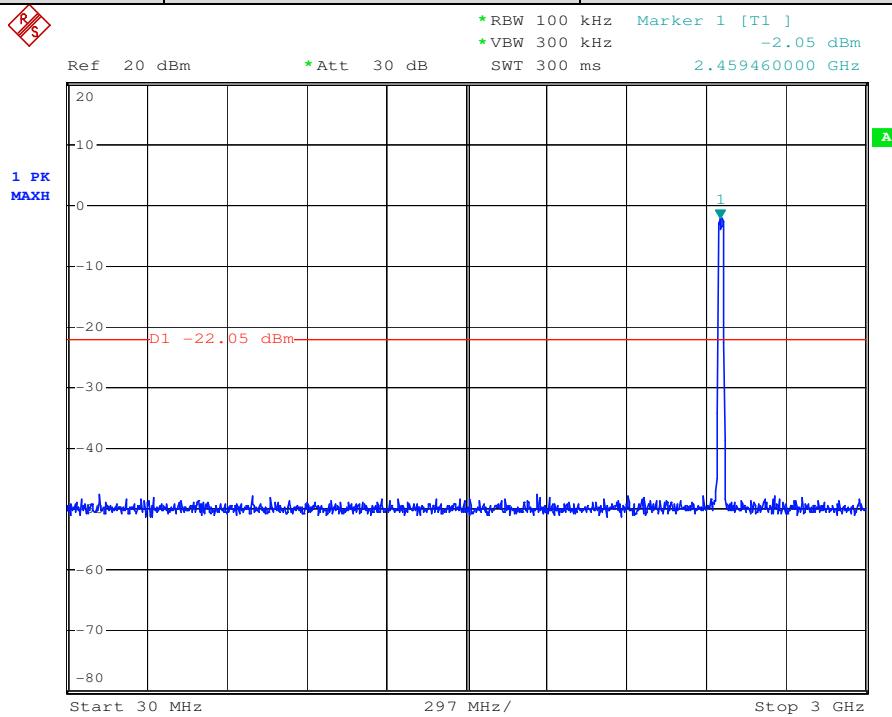30MHz-3GHz:




3GHz-25GHz:

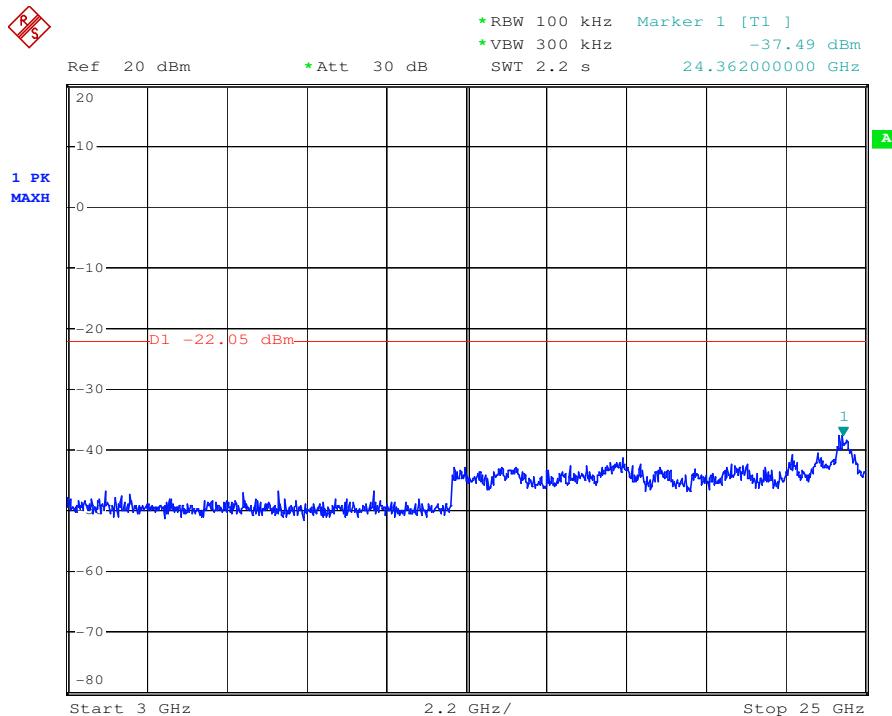


802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

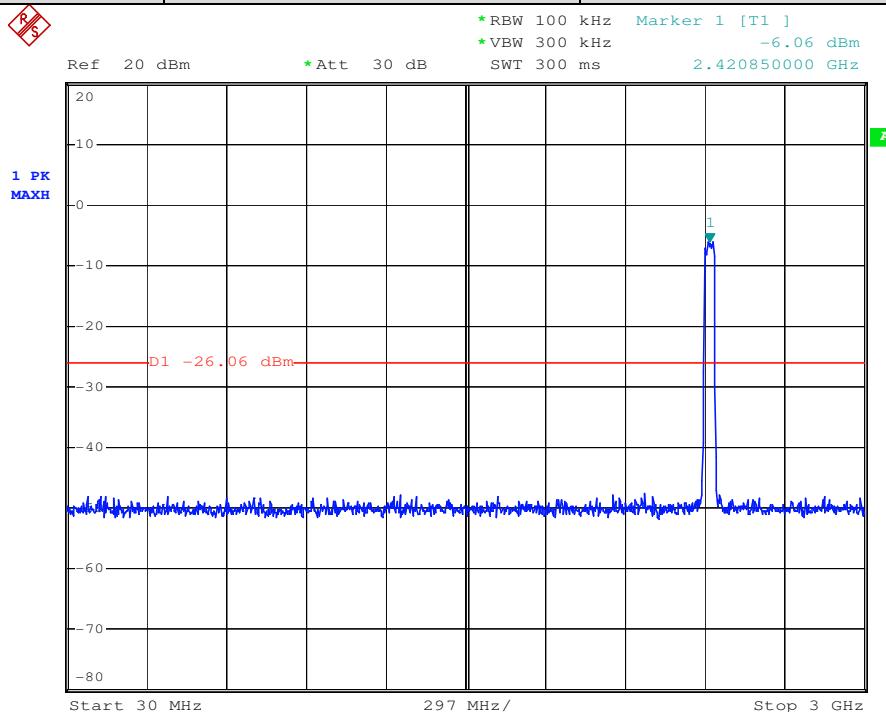30MHz-3GHz:




3GHz-25GHz:

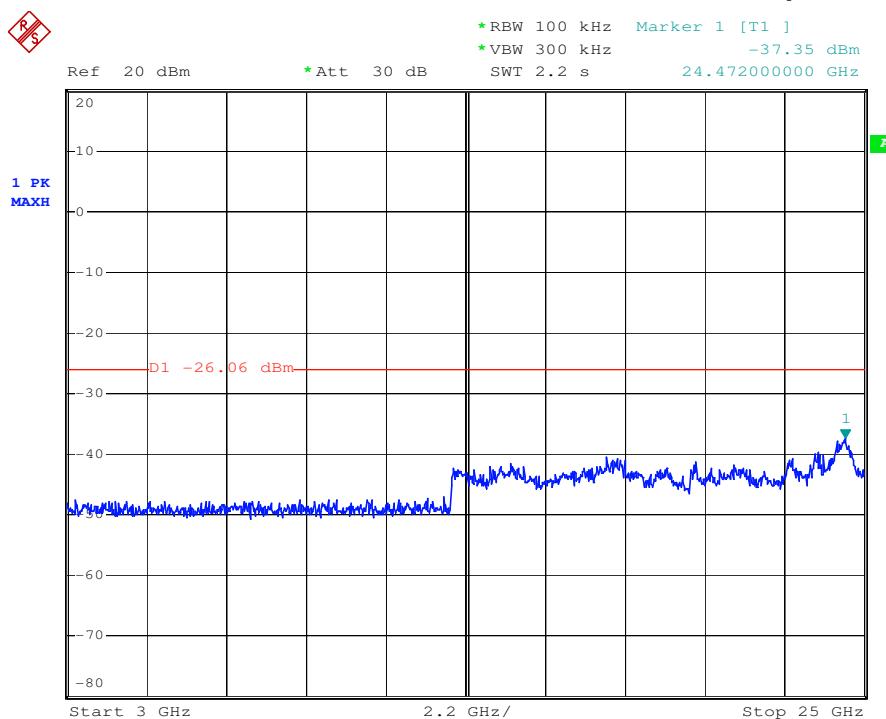


802.11 n40	Antenna B	Channel: 2437
------------	-----------	---------------

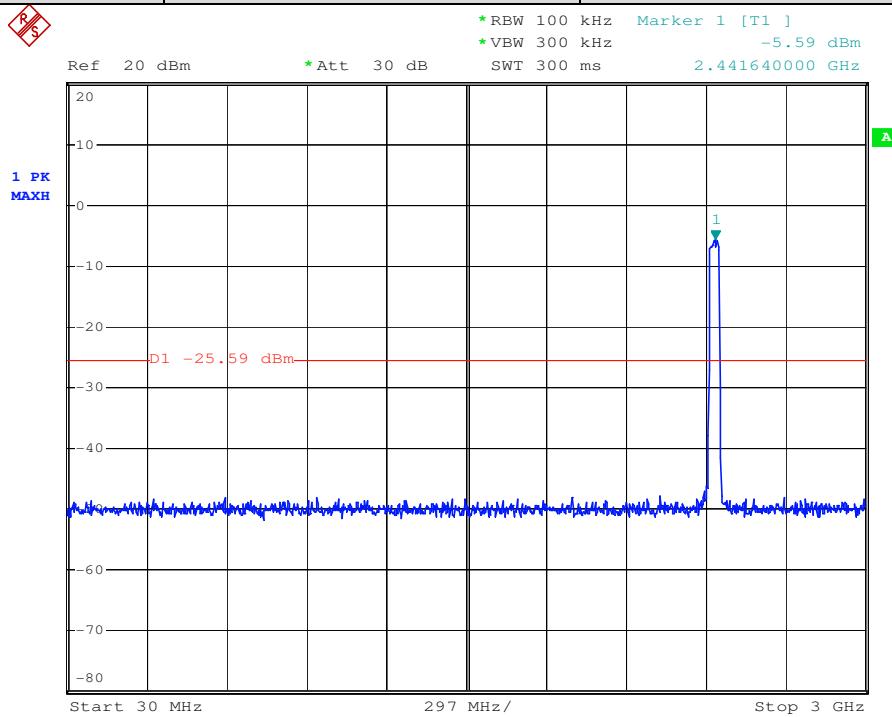30MHz-3GHz:




3GHz-25GHz:

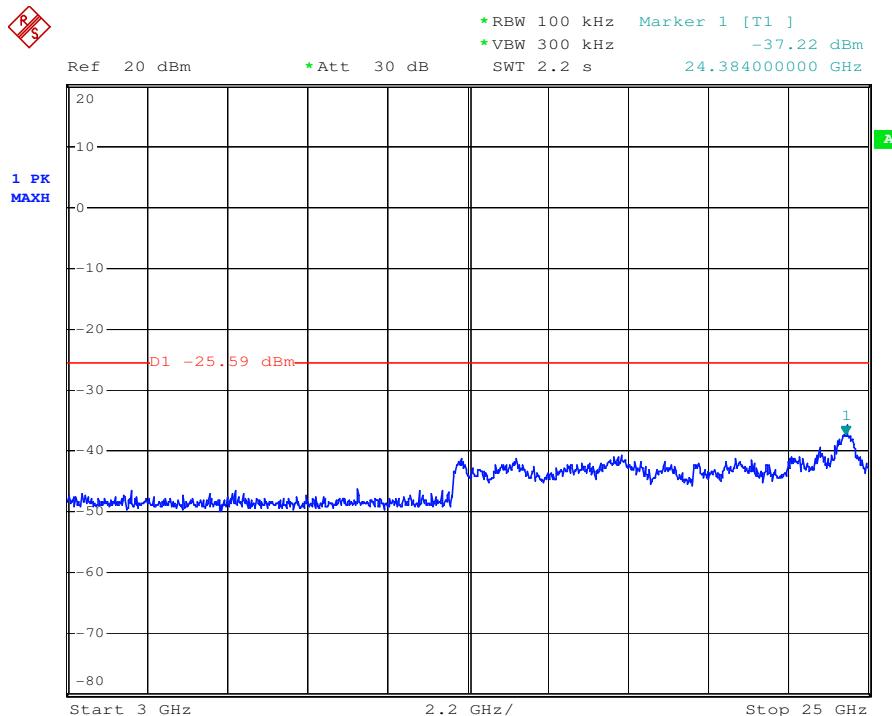


802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

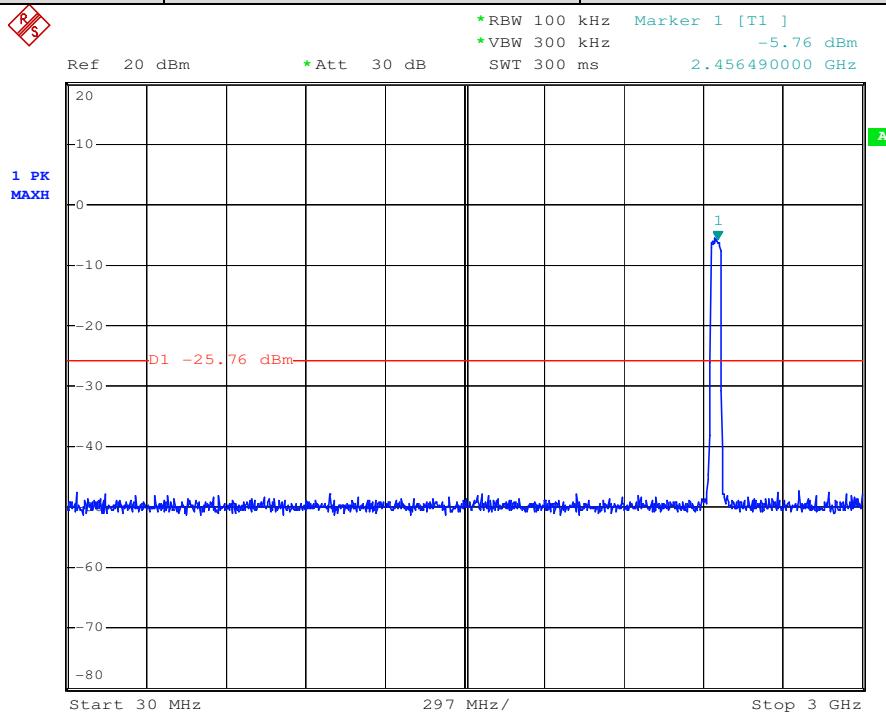30MHz-3GHz:




3GHz-25GHz:

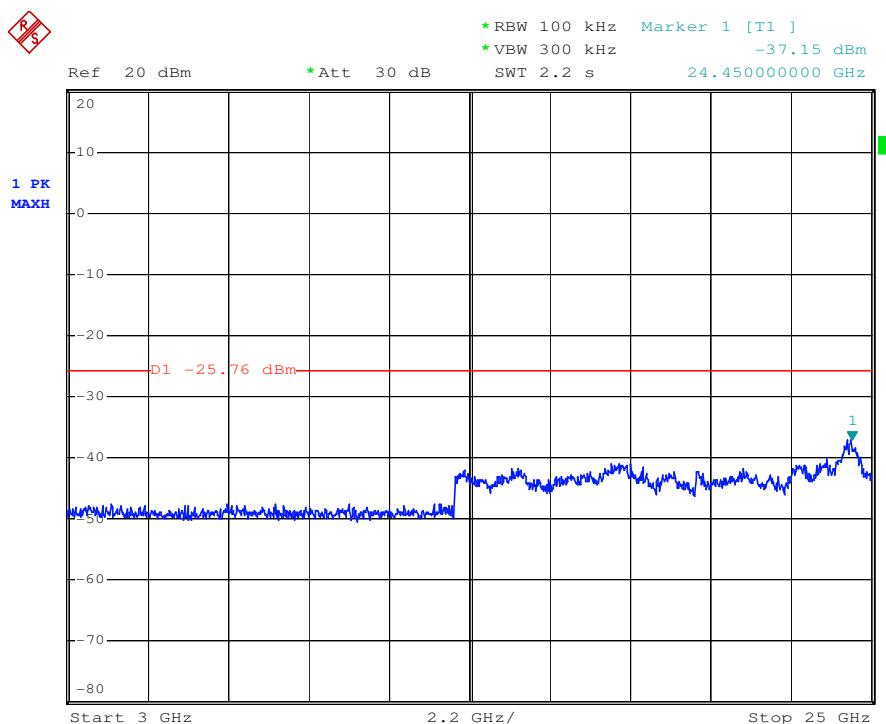


7.7.2 Conducted Band-edge

Test plot as follows:


802.11 b	Antenna A	Channel: 2412
----------	-----------	---------------

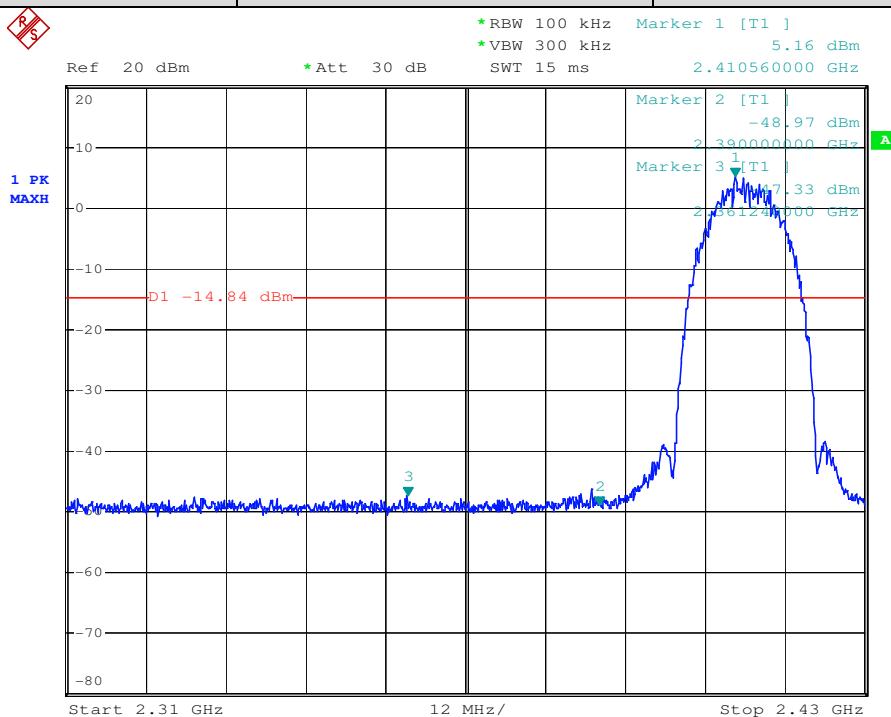


802.11 b	Antenna A	Channel: 2462
----------	-----------	---------------

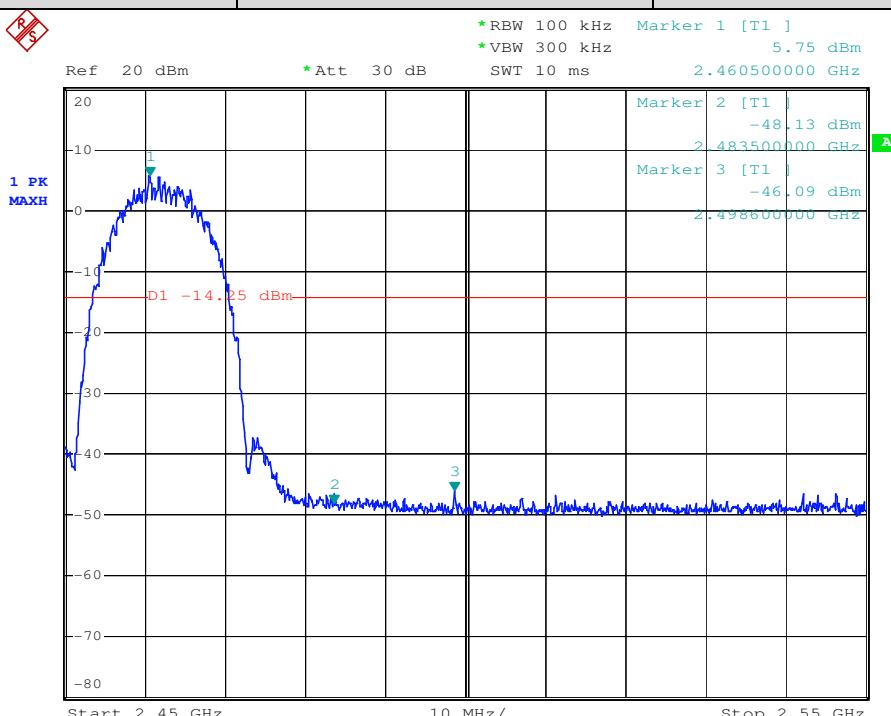


802.11 g	Antenna A	Channel: 2412
----------	-----------	---------------

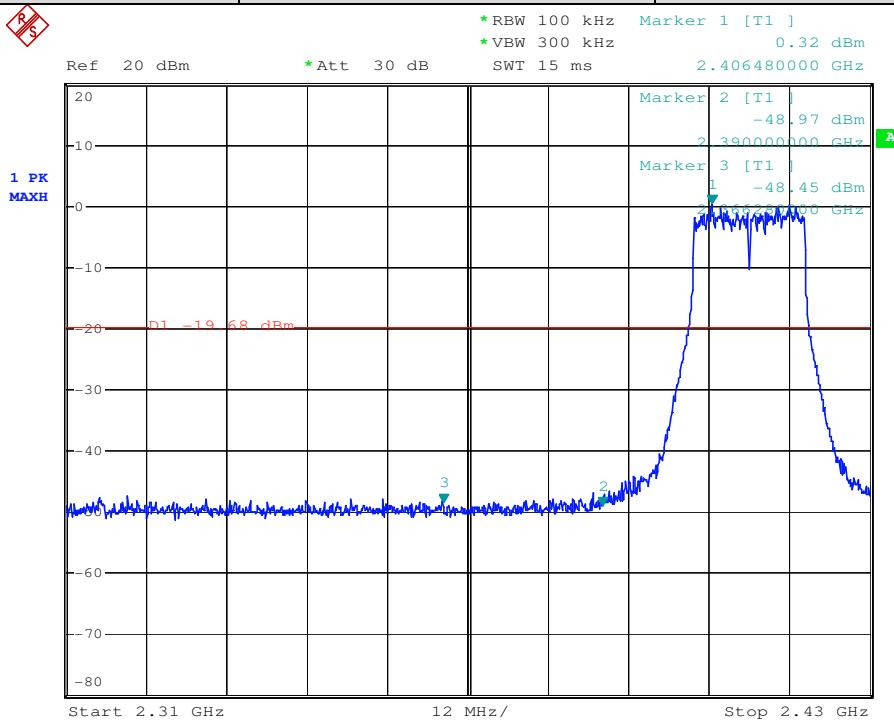


802.11 g	Antenna A	Channel: 2462
----------	-----------	---------------

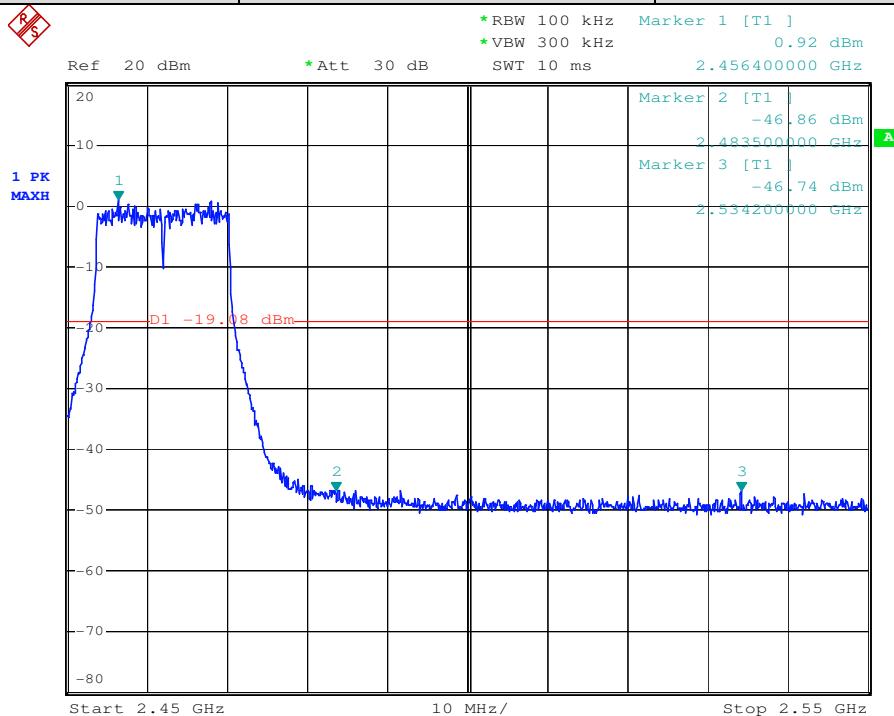


802.11 n20	Antenna A	Channel: 2412
------------	-----------	---------------

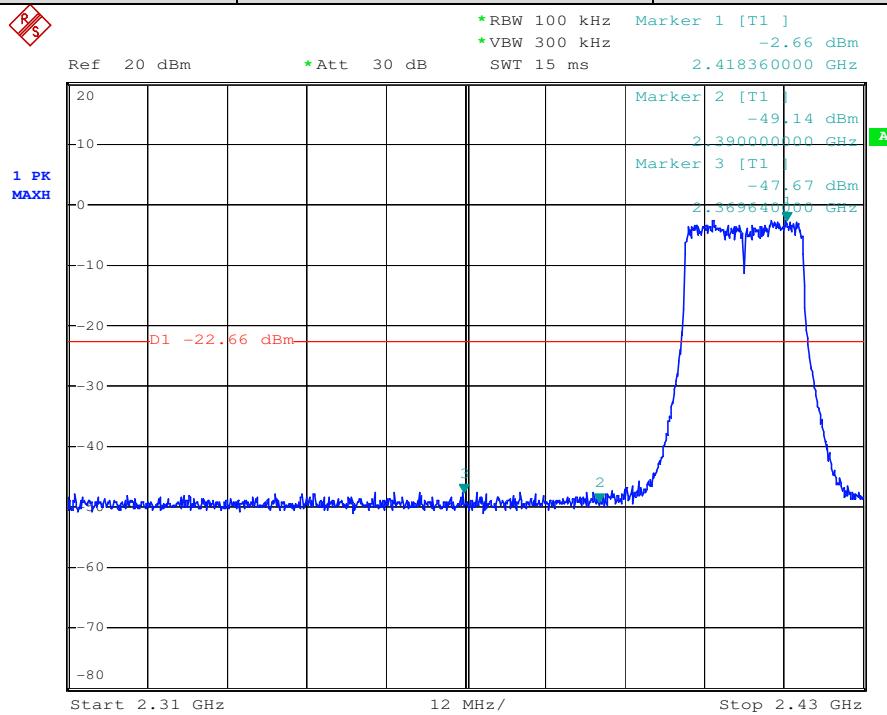


802.11 n20	Antenna A	Channel: 2462
------------	-----------	---------------

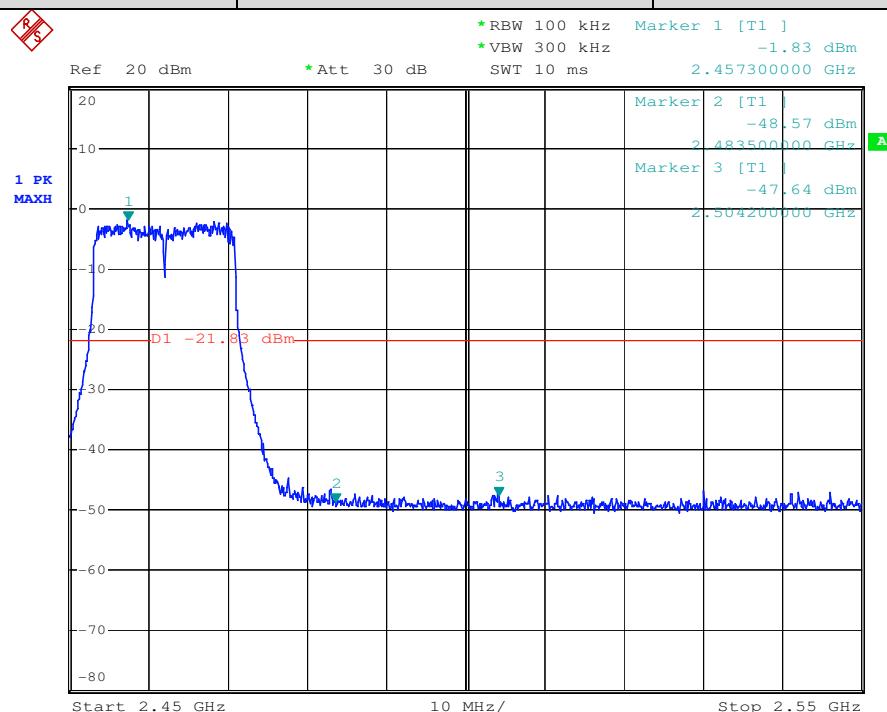


802.11 n40	Antenna A	Channel: 2422
------------	-----------	---------------

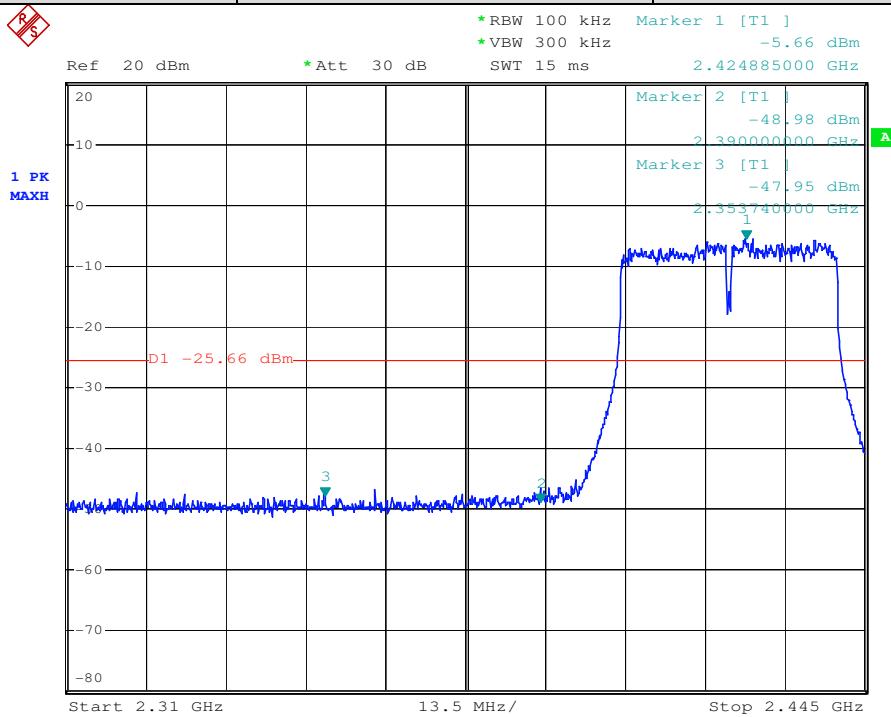


802.11 n40	Antenna A	Channel: 2452
------------	-----------	---------------

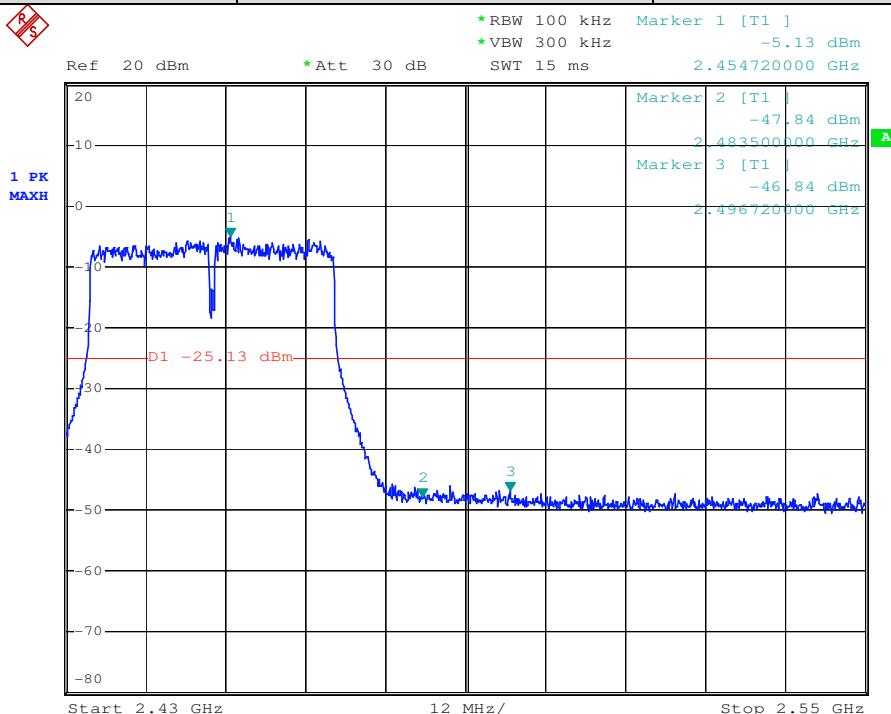


802.11 b	Antenna B	Channel: 2412
----------	-----------	---------------

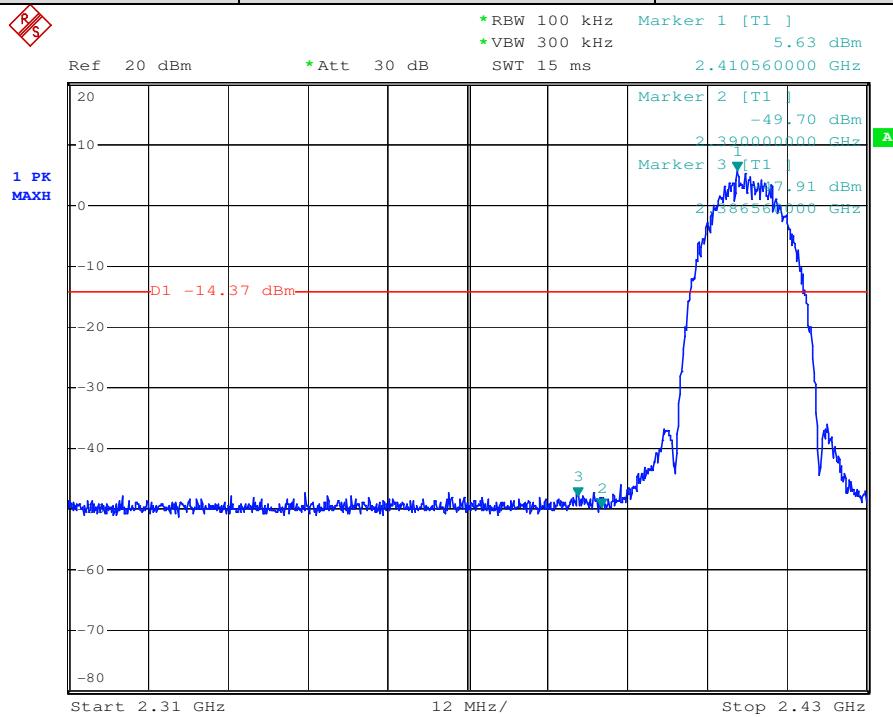


802.11 b	Antenna B	Channel: 2462
----------	-----------	---------------

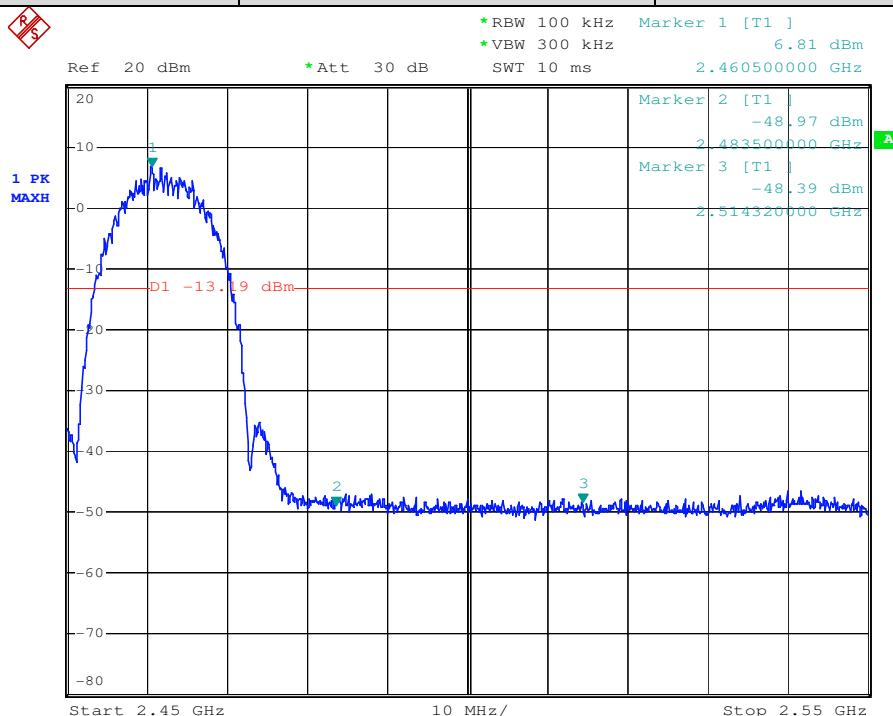


802.11 g	Antenna B	Channel: 2412
----------	-----------	---------------

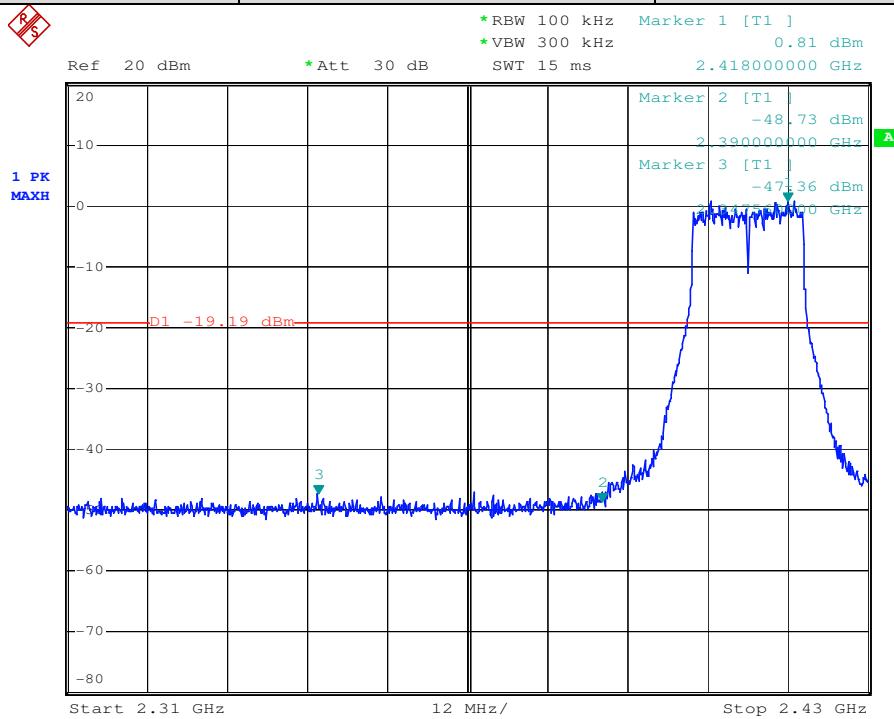


802.11 g	Antenna B	Channel: 2462
----------	-----------	---------------

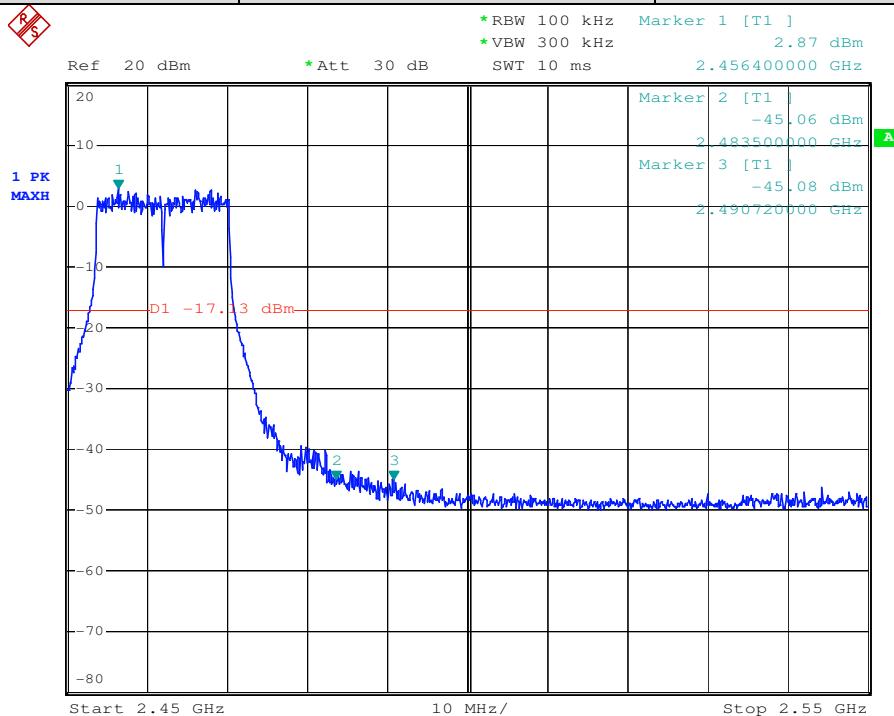


802.11 n20	Antenna B	Channel: 2412
------------	-----------	---------------

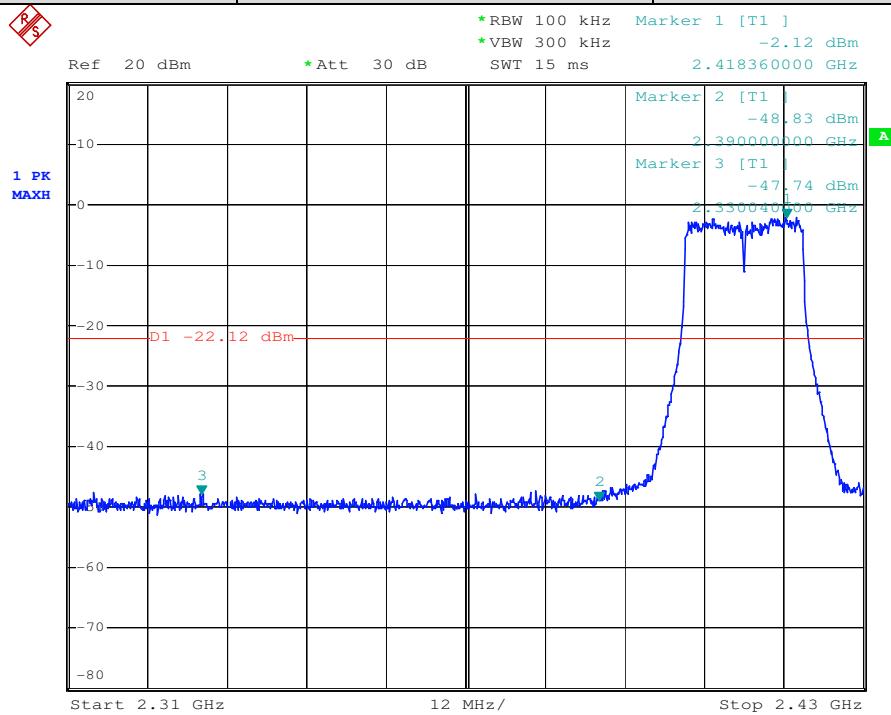


802.11 n20	Antenna B	Channel: 2462
------------	-----------	---------------

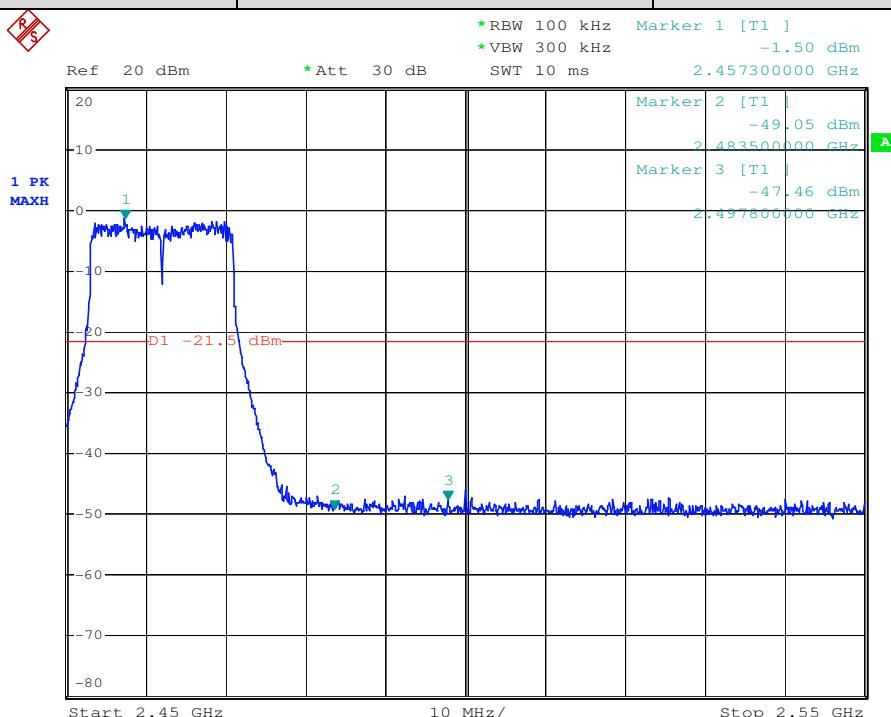

802.11 n40	Antenna B	Channel: 2422
------------	-----------	---------------

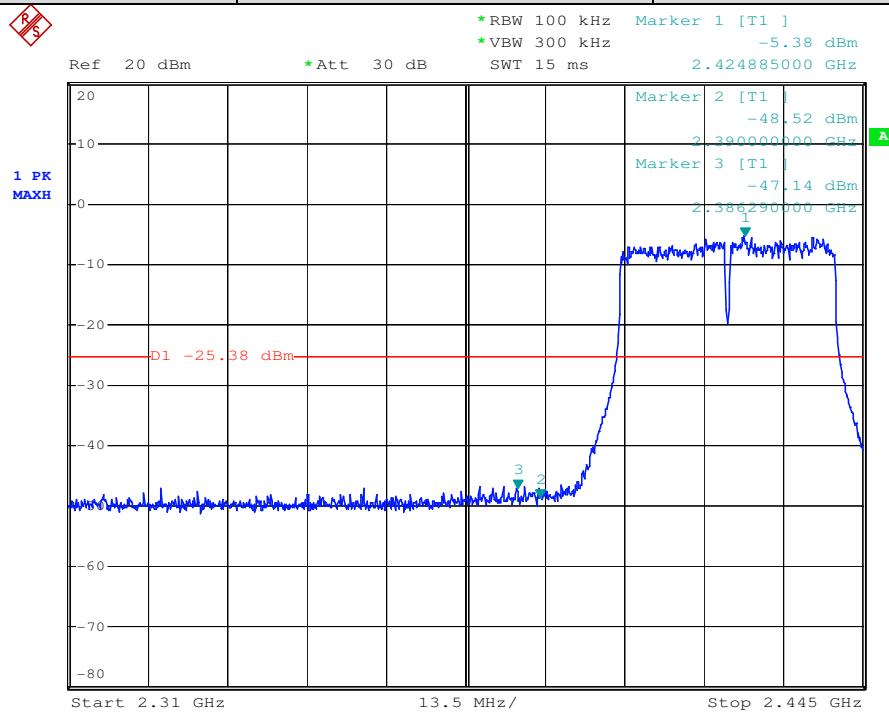

802.11 n40	Antenna B	Channel: 2452
------------	-----------	---------------

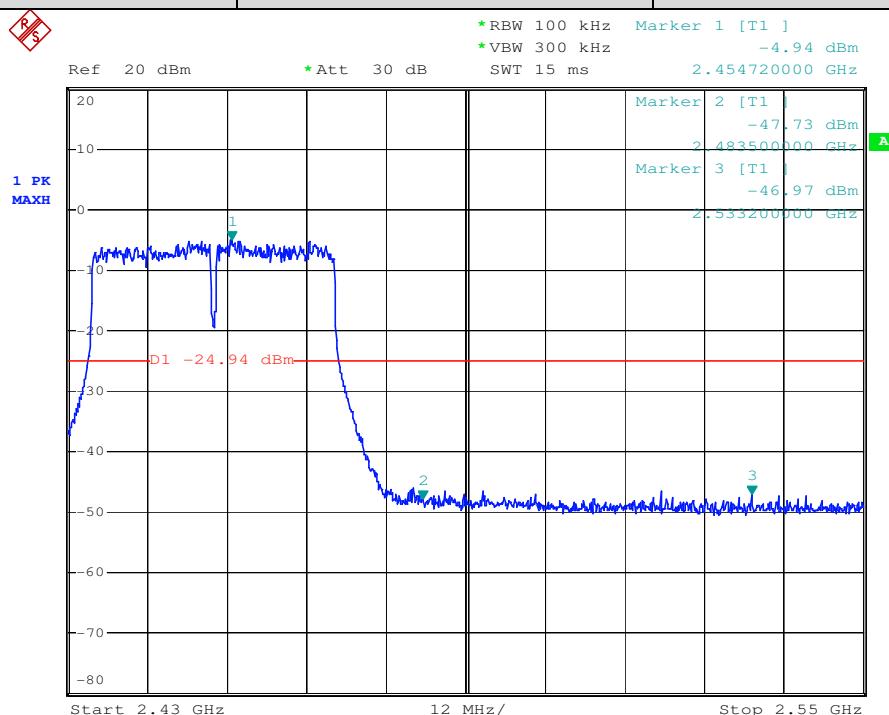

7.8 Radiated Spurious Emissions and Band-edge

Frequency Range: 9KHz to 25GHz

Test site/setup: Measurement Distance: 3m (Semi-Anechoic Chamber)
Test instrumentation set-up:




Frequency Range	Detector	RBW	VBW
0.009MHz-0.090MHz	Peak	10kHz	30kHz
0.009MHz-0.090MHz	Average	10kHz	30kHz
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz
0.110MHz-0.490MHz	Peak	10kHz	30kHz
0.110MHz-0.490MHz	Average	10kHz	30kHz
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz
30MHz-1GHz	Quasi-peak	100kHz	300kHz
Above 1GHz	Peak	RBW=1MHz	VBW≥RBW
	Average		VBW=10Hz

Sweep=Auto

15.209 Limit:

Frequency	Limit (dBuV/m)
0.009MHz-0.490MHz	128.5 ~ 93.8
0.490MHz-1.705MHz	73.8 ~ 63.0
1.705MHz-30MHz	69.5
30MHz-88MHz	40.0
88MHz-216MHz	43.5
216MHz-960MHz	46.0
960MHz-1GHz	54.0
Above 1GHz	54.0

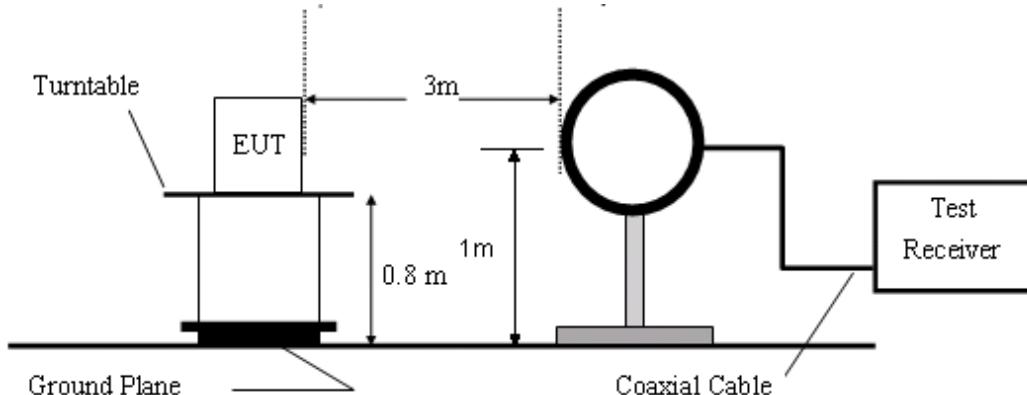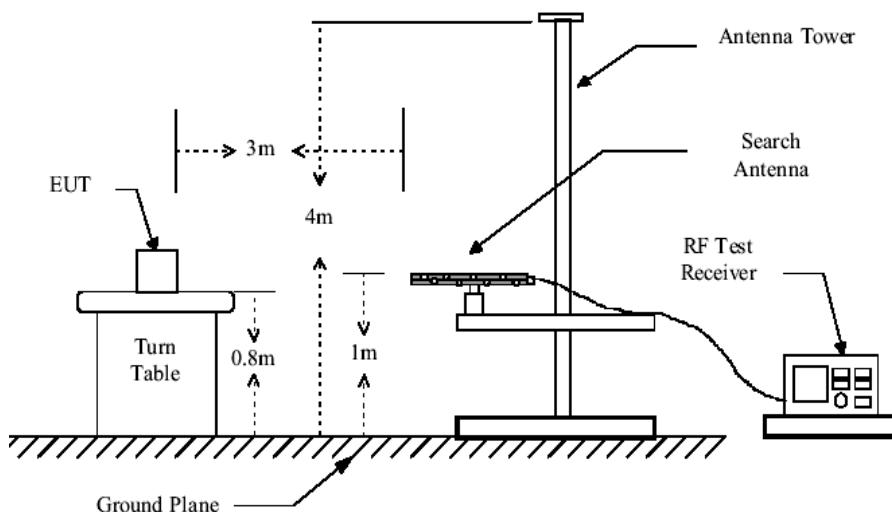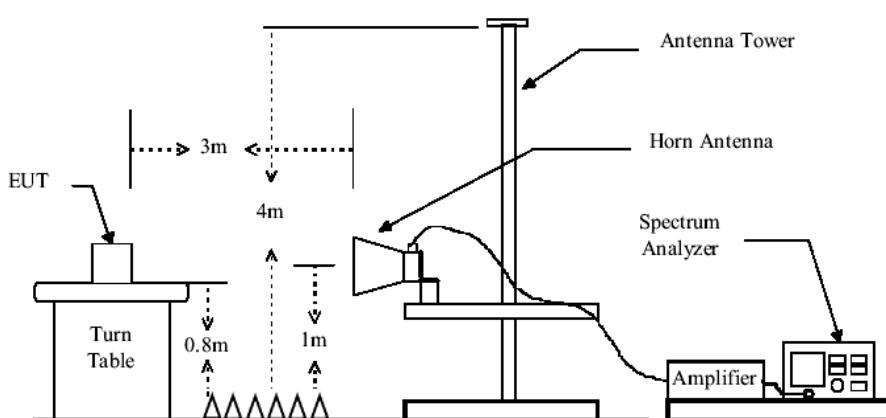Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Configuration:

Figure1. Below 30MHz radiated emissions test configuration

Figure2. 30MHz to 1GHz radiated emissions test configuration

Figure3. Above 1GHz radiated emissions test configuration

Test Procedure:

- 1) The procedure used was ANSI Standard C63.10. The receiver was scanned from 9 KHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.
- 2) Low noise amplifier was used below 1GHz, High pass Filter was used above 3GHz. We did not use any amplifier or filter between 1G and 3GHz.
- 3) Test were performed for their spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was submitted.
 - a) For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.
 - b) As shown in Section, for frequencies above 1000MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 4) Pretest under all modes on Antenna A and Antenna B below 1GHz; choose the worst case mode (802.11a on Antenna A) record on the report.
- 5) Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst emissions. Since the emissions produced from MIMO operation were found to be more than 20 dB below the limit, the MIMO emissions are not report.
- 6) No spurious emissions were detected within 20dB of limit below 30MHz.

Test Result:

Pass

7.8.1 Radiated Spurious Emissions

30MHz-1GHz:

lowest Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		
1	145.35	39.01	12.04	23.64	1.16	28.57	43.50	-14.93	QP	Horizontal
2	201.39	45.29	9.28	23.62	1.40	32.35	43.50	-11.15	QP	Horizontal
3	237.48	47.51	9.94	23.64	1.52	35.33	46.00	-10.67	QP	Horizontal
4	399.03	33.57	14.29	23.70	2.18	26.34	46.00	-19.66	QP	Horizontal
5	640.61	26.05	19.53	23.84	2.82	24.56	46.00	-21.44	QP	Horizontal
6	729.36	26.72	20.90	23.89	3.04	26.77	46.00	-19.23	QP	Horizontal
1	145.35	39.01	12.04	23.64	1.16	28.57	43.50	-14.93	QP	Vertical
2	40.70	29.34	13.10	23.70	0.27	19.01	40.00	-20.99	QP	Vertical
3	87.73	29.44	8.45	23.67	0.79	15.01	40.00	-24.99	QP	Vertical
4	207.12	31.74	9.15	23.62	1.43	18.70	43.50	-24.80	QP	Vertical
5	244.23	34.18	10.18	23.64	1.54	22.26	46.00	-23.74	QP	Vertical
6	390.72	28.76	14.23	23.70	2.14	21.43	46.00	-24.57	QP	Vertical

Middle Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		
1	33.095	39.63	12.56	23.71	0.15	28.63	40.00	-11.37	QP	Horizontal
2	121.976	48.67	11.18	23.65	1.04	37.24	43.50	-6.26	QP	Horizontal
3	204.955	47.25	9.19	23.62	1.41	34.23	43.50	-9.27	QP	Horizontal
4	519.065	44.93	16.88	23.75	2.48	40.54	46.00	-5.46	QP	Horizontal
5	543.274	45.34	17.25	23.77	2.56	41.38	46.00	-4.62	QP	Horizontal
6	711.673	40.69	20.55	23.88	2.99	40.35	46.00	-5.65	QP	Horizontal
1	32.749	43.30	12.56	23.71	0.15	32.30	40.00	-7.70	QP	Vertical
2	264.746	39.35	10.79	23.65	1.66	28.15	46.00	-17.85	QP	Vertical
3	519.065	41.51	16.88	23.75	2.48	37.12	46.00	-8.88	QP	Vertical
4	663.473	43.38	19.88	23.85	2.87	42.28	46.00	-3.72	QP	Vertical
5	711.673	42.76	20.55	23.88	2.99	42.42	46.00	-3.58	QP	Vertical
6	734.491	42.71	20.95	23.89	3.06	42.83	46.00	-3.17	QP	Vertical


Highest Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		
1	32.864	39.83	12.56	23.71	0.15	28.83	40.00	-11.17	QP	Horizontal
2	122.404	48.60	11.17	23.65	1.04	37.16	43.50	-6.34	QP	Horizontal
3	144.335	43.79	11.96	23.64	1.16	33.27	43.50	-10.23	QP	Horizontal
4	264.746	46.30	10.79	23.65	1.66	35.10	46.00	-10.90	QP	Horizontal
5	519.065	45.54	16.88	23.75	2.48	41.15	46.00	-4.85	QP	Horizontal
6	663.473	42.30	19.88	23.85	2.87	41.20	46.00	-4.80	QP	Horizontal
1	33.562	38.13	12.57	23.71	0.16	27.15	40.00	-12.85	QP	Vertical
2	207.123	39.87	9.15	23.62	1.43	26.83	43.50	-16.67	QP	Vertical
3	361.714	37.58	13.65	23.69	2.01	29.55	46.00	-16.45	QP	Vertical
4	494.198	44.20	16.20	23.73	2.42	39.09	46.00	-6.91	QP	Vertical
5	663.473	43.40	19.88	23.85	2.87	42.30	46.00	-3.70	QP	Vertical
6	734.491	42.44	20.95	23.89	3.06	42.56	46.00	-3.44	QP	Vertical


Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Below is the plot of worst case on lowest channel:

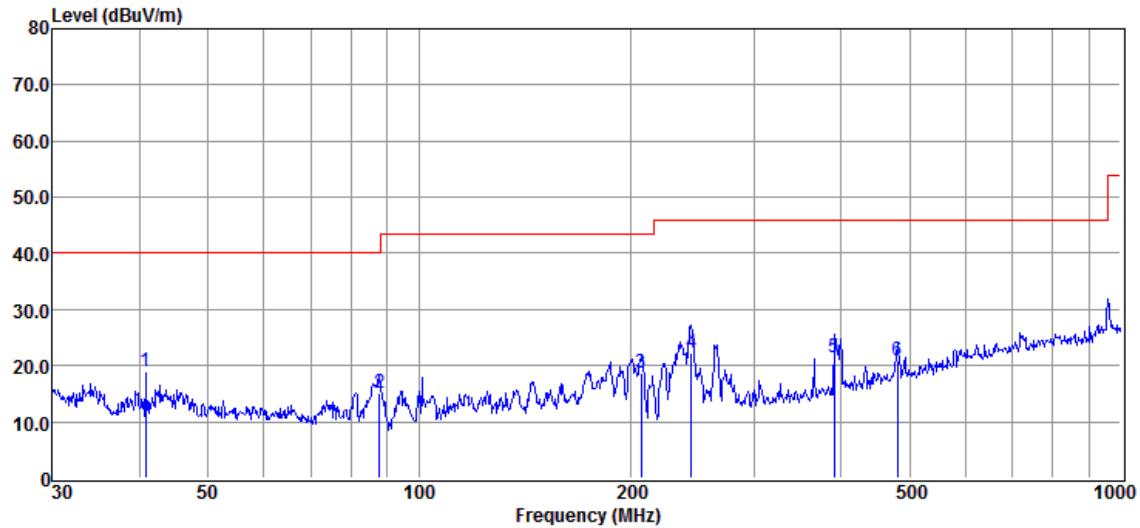Vertical:



Horizontal:

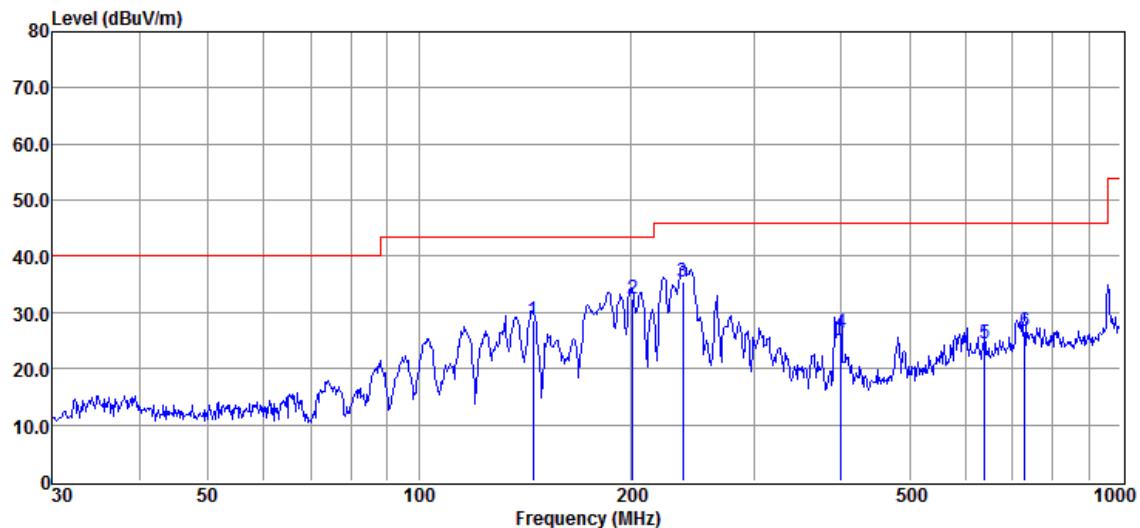

Above 1GHz:

Antenna A			Test mode: 802.11b			Channel: 2412		
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	34.85	6.40	41.25	54	-12.75	peak	Horizontal
2	7236	33.29	10.76	44.05	54	-9.95	peak	Horizontal
3	9648	31.86	14.37	46.23	54	-7.77	peak	Horizontal
4	4824	34.43	6.40	40.83	54	-13.17	peak	Vertical
5	7236	33.02	10.76	43.78	54	-10.22	peak	Vertical
6	9648	31.98	14.37	46.35	54	-7.65	peak	Vertical

Antenna A			Test mode: 802.11b			Channel: 2437		
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	34.21	6.92	41.13	54	-12.87	peak	Horizontal
2	7311	34.03	11.08	45.11	54	-8.89	peak	Horizontal
3	9748	32.10	14.36	46.46	54	-7.54	peak	Horizontal
4	4874	33.59	6.92	40.51	54	-13.49	peak	Vertical
5	7311	34.01	11.08	45.09	54	-8.91	peak	Vertical
6	9748	32.11	14.36	46.47	54	-7.53	peak	Vertical

Antenna A			Test mode: 802.11b			Channel: 2462		
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	33.98	7.31	41.29	54	-12.71	peak	Horizontal
2	7386	35.86	11.41	47.27	54	-6.73	peak	Horizontal
3	9848	32.87	14.38	47.25	54	-6.75	peak	Horizontal
4	4924	34.11	7.31	41.42	54	-12.58	peak	Vertical
5	7386	33.91	11.41	45.32	54	-8.68	peak	Vertical
6	9848	32.76	14.38	47.14	54	-6.86	peak	Vertical

Antenna A**Test mode: 802.11g****Channel: 2412**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	34.16	6.40	40.56	54	-13.44	peak	Horizontal
2	7236	33.26	10.76	44.02	54	-9.98	peak	Horizontal
3	9648	32.36	14.37	46.73	54	-7.27	peak	Horizontal
4	4824	33.80	6.40	40.20	54	-13.80	peak	Vertical
5	7236	32.33	10.76	43.09	54	-10.91	peak	Vertical
6	9648	32.82	14.37	47.19	54	-6.81	peak	Vertical

Antenna A**Test mode: 802.11g****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	34.17	6.92	41.09	54	-12.91	peak	Horizontal
2	7311	35.05	11.08	46.13	54	-7.87	peak	Horizontal
3	9748	32.12	14.36	46.48	54	-7.52	peak	Horizontal
4	4874	32.82	6.92	39.74	54	-14.26	peak	Vertical
5	7311	33.15	11.08	44.23	54	-9.77	peak	Vertical
6	9748	32.66	14.36	47.02	54	-6.98	peak	Vertical

Antenna A**Test mode: 802.11g****Channel: 2462**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	35.87	7.31	43.18	54	-10.82	peak	Horizontal
2	7386	35.54	11.41	46.95	54	-7.05	peak	Horizontal
3	9848	32.62	14.38	47.00	54	-7.00	peak	Horizontal
4	4924	34.69	7.31	42.00	54	-12.00	peak	Vertical
5	7386	34.79	11.41	46.20	54	-7.80	peak	Vertical
6	9848	33.47	14.38	47.85	54	-6.15	peak	Vertical

Antenna A**Test mode: 802.11n20****Channel: 2412**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	34.84	6.40	41.24	54	-12.76	peak	Horizontal
2	7236	33.22	10.76	43.98	54	-10.02	peak	Horizontal
3	9648	32.22	14.37	46.59	54	-7.41	peak	Horizontal
4	4824	33.63	6.40	40.03	54	-13.97	peak	Vertical
5	7236	32.83	10.76	43.59	54	-10.41	peak	Vertical
6	9648	32.80	14.37	47.17	54	-6.83	peak	Vertical

Antenna A**Test mode: 802.11n20****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	34.52	6.92	41.44	54	-12.56	peak	Horizontal
2	7311	34.70	11.08	45.78	54	-8.22	peak	Horizontal
3	9748	32.82	14.36	47.18	54	-6.82	peak	Horizontal
4	4874	33.10	6.92	40.02	54	-13.98	peak	Vertical
5	7311	33.09	11.08	44.17	54	-9.83	peak	Vertical
6	9748	32.78	14.36	47.14	54	-6.86	peak	Vertical

Antenna A**Test mode: 802.11n20****Channel: 2462**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	34.45	7.31	41.76	54	-12.24	peak	Horizontal
2	7386	35.39	11.41	46.80	54	-7.20	peak	Horizontal
3	9848	32.72	14.38	47.10	54	-6.90	peak	Horizontal
4	4924	33.51	7.31	40.82	54	-13.18	peak	Vertical
5	7386	34.14	11.41	45.55	54	-8.45	peak	Vertical
6	9848	33.28	14.38	47.66	54	-6.34	peak	Vertical

Antenna A**Test mode: 802.11n40****Channel: 2422**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4844	31.19	6.60	37.79	54	-16.21	peak	Horizontal
2	7266	31.92	10.89	42.81	54	-11.19	peak	Horizontal
3	9688	30.62	14.35	44.97	54	-9.03	peak	Horizontal
4	4844	33.23	6.60	39.83	54	-14.17	peak	Vertical
5	7266	32.23	10.89	43.12	54	-10.88	peak	Vertical
6	9688	31.95	14.35	46.30	54	-7.70	peak	Vertical

Antenna A**Test mode: 802.11n40****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	32.64	6.92	39.56	54	-14.44	peak	Horizontal
2	7311	32.85	11.08	43.93	54	-10.07	peak	Horizontal
3	9748	31.19	14.36	45.55	54	-8.45	peak	Horizontal
4	4874	32.95	6.92	39.87	54	-14.13	peak	Vertical
5	7311	34.22	11.08	45.30	54	-8.70	peak	Vertical
6	9748	33.37	14.36	47.73	54	-6.27	peak	Vertical

Antenna A**Test mode: 802.11n40****Channel: 2452**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4904	32.48	7.22	39.70	54	-14.3	peak	Horizontal
2	7356	33.02	11.28	44.30	54	-9.70	peak	Horizontal
3	9808	31.22	14.37	45.59	54	-8.41	peak	Horizontal
4	4904	33.14	7.22	40.36	54	-13.64	peak	Vertical
5	7356	34.53	11.28	45.81	54	-8.19	peak	Vertical
6	9808	32.83	14.37	47.20	54	-6.80	peak	Vertical

Antenna B**Test mode: 802.11b****Channel: 2412**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	34.85	6.40	41.25	54	-12.75	peak	Horizontal
2	7236	33.29	10.76	44.05	54	-9.95	peak	Horizontal
3	9648	31.86	14.37	46.23	54	-7.77	peak	Horizontal
4	4824	38.47	6.40	44.87	54	-9.13	peak	Vertical
5	7236	36.29	10.76	47.05	54	-6.95	peak	Vertical
6	9648	34.96	14.37	49.33	54	-4.67	peak	Vertical

Antenna B**Test mode: 802.11b****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	36.63	6.92	43.55	54	-10.45	peak	Horizontal
2	7311	39.05	11.08	50.13	54	-3.87	peak	Horizontal
3	9748	35.20	14.36	49.56	54	-4.44	peak	Horizontal
4	4874	37.38	6.92	44.30	54	-9.70	peak	Vertical
5	7311	37.80	11.08	48.88	54	-5.12	peak	Vertical
6	9748	36.06	14.36	50.42	54	-3.58	peak	Vertical

Antenna B**Test mode: 802.11b****Channel: 2462**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	37.74	7.31	45.05	54	-8.95	peak	Horizontal
2	7386	39.44	11.41	50.85	54	-3.15	peak	Horizontal
3	9848	36.30	14.38	50.68	54	-3.32	peak	Horizontal
4	4924	38.57	7.31	45.88	54	-8.12	peak	Vertical
5	7386	38.00	11.41	49.41	54	-4.59	peak	Vertical
6	9848	35.38	14.38	49.76	54	-4.24	peak	Vertical

Antenna B**Test mode: 802.11g****Channel: 2412**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	37.87	6.40	44.27	54	-9.73	peak	Horizontal
2	7236	37.52	10.76	48.28	54	-5.72	peak	Horizontal
3	9648	36.13	14.37	50.50	54	-3.50	peak	Horizontal
4	4824	37.75	6.40	44.15	54	-9.85	peak	Vertical
5	7236	36.88	10.76	47.64	54	-6.36	peak	Vertical
6	9648	35.16	14.37	49.53	54	-4.47	peak	Vertical

Antenna B**Test mode: 802.11g****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	36.50	6.92	43.42	54	-10.58	peak	Horizontal
2	7311	37.55	11.08	48.63	54	-5.37	peak	Horizontal
3	9748	34.73	14.36	49.09	54	-4.91	peak	Horizontal
4	4874	37.60	6.92	44.52	54	-9.48	peak	Vertical
5	7311	38.64	11.08	49.72	54	-4.28	peak	Vertical
6	9748	35.89	14.36	50.25	74	-23.75	peak	Vertical

Antenna B**Test mode: 802.11g****Channel: 2462**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	37.92	7.31	45.23	54	-8.77	peak	Horizontal
2	7386	36.59	11.41	48.00	54	-6.00	peak	Horizontal
3	9848	33.81	14.38	48.19	54	-5.81	peak	Horizontal
4	4924	37.53	7.31	44.84	54	-9.16	peak	Vertical
5	7386	37.86	11.41	49.27	54	-4.73	peak	Vertical
6	9848	35.42	14.38	49.80	54	-4.20	peak	Vertical

Antenna B**Test mode: 802.11n20****Channel: 2412**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4824	36.36	6.40	42.76	54	-11.24	peak	Horizontal
2	7236	36.21	10.76	46.97	54	-7.03	peak	Horizontal
3	9648	35.63	14.37	50.00	54	-4.00	peak	Horizontal
4	4824	38.12	6.40	44.52	54	-9.48	peak	Vertical
5	7236	36.04	10.76	46.80	54	-7.20	peak	Vertical
6	9648	35.11	14.37	49.48	54	-4.52	peak	Vertical

Antenna B**Test mode: 802.11n20****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	35.37	6.92	42.29	54	-11.71	peak	Horizontal
2	7311	37.57	11.08	48.65	54	-5.35	peak	Horizontal
3	9748	35.20	14.36	49.56	54	-4.44	peak	Horizontal
4	4874	37.11	6.92	44.03	54	-9.97	peak	Vertical
5	7311	38.57	11.08	49.65	54	-4.35	peak	Vertical
6	9748	36.37	14.36	50.73	54	-3.27	peak	Vertical

Antenna B**Test mode: 802.11n20****Channel: 2462**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4924	38.82	7.31	46.13	54	-7.87	peak	Horizontal
2	7386	37.61	11.41	49.02	54	-4.98	peak	Horizontal
3	9848	36.04	14.38	50.42	54	-3.58	peak	Horizontal
4	4924	37.21	7.31	44.52	54	-9.48	peak	Vertical
5	7386	38.45	11.41	49.86	54	-4.14	peak	Vertical
6	9848	35.24	14.38	49.62	54	-4.38	peak	Vertical

Antenna B**Test mode: 802.11n40****Channel: 2422**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4844	38.23	6.60	44.83	54	-9.17	peak	Horizontal
2	7266	37.43	10.89	48.32	54	-5.68	peak	Horizontal
3	9688	34.01	14.35	48.36	54	-5.64	peak	Horizontal
4	4844	38.07	6.60	44.67	54	-9.33	peak	Vertical
5	7266	37.17	10.89	48.06	54	-5.94	peak	Vertical
6	9688	34.55	14.35	48.90	54	-5.10	peak	Vertical

Antenna B**Test mode: 802.11n40****Channel: 2437**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874	35.66	6.92	42.58	54	-11.42	peak	Horizontal
2	7311	38.07	11.08	49.15	54	-4.85	peak	Horizontal
3	9748	34.45	14.36	48.81	54	-5.19	peak	Horizontal
4	4874	36.25	6.92	43.17	54	-10.83	peak	Vertical
5	7311	39.02	11.08	50.10	54	-3.90	peak	Vertical
6	9748	35.58	14.36	49.94	54	-4.06	peak	Vertical

Antenna B**Test mode: 802.11n40****Channel: 2452**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4904	37.10	7.22	44.32	54	-9.68	peak	Horizontal
2	7356	37.96	11.28	49.24	54	-4.76	peak	Horizontal
3	9808	34.16	14.37	48.53	54	-5.47	peak	Horizontal
4	4904	36.97	7.22	44.19	54	-9.81	peak	Vertical
5	7356	38.45	11.28	49.73	54	-4.27	peak	Vertical
6	9808	34.94	14.37	49.31	54	-4.69	peak	Vertical

Remark: 1). Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

2). No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.

3). If the Peak value below the AV Limit, the AV test doesn't perform for this submission.


7.8.2 Radiated Band edge

802.11b
Antenna A
Channel: 2412

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2385.96	46.02	-3.88	42.14	54	-11.86	Peak	Horizontal
2	2390	42.80	-3.89	38.91	54	-15.09	Peak	Horizontal
3	2412	95.81	-3.93	91.88	54	37.88	Peak	Horizontal
1	2375.04	54.88	-3.83	51.05	54	-2.95	Peak	Vertical
2	2390	53.62	-3.89	49.73	54	-4.27	Peak	Vertical
3	2412	109.49	-3.93	105.56	54	51.56	Peak	Vertical


110.0 dBuV/m

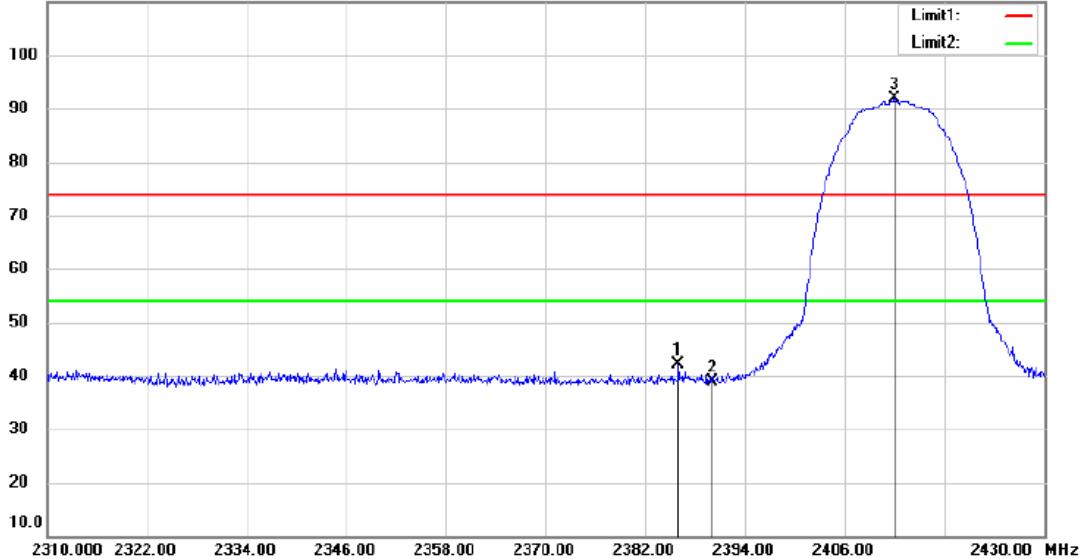Horizontal




110.0 dBuV/m

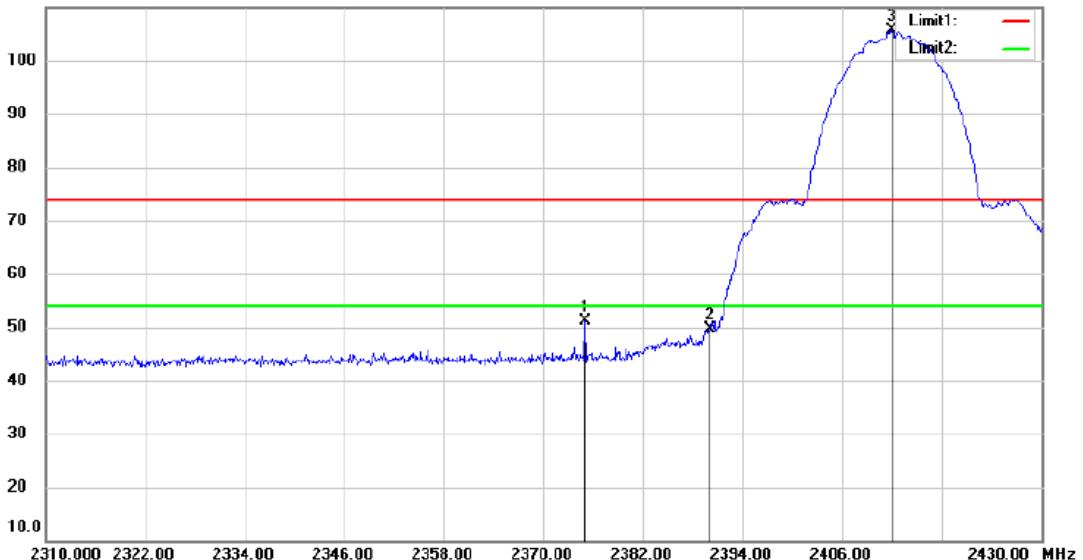Vertical




802.11b
Antenna A
Channel: 2462

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2461.76	97.96	-3.99	93.97	54	39.97	Peak	Horizontal
2	2483.5	43.79	-4.01	39.78	54	-14.22	Peak	Horizontal
3	2529.6	50.80	-3.70	47.10	54	-6.90	Peak	Horizontal
1	2461.66	110.35	-3.99	106.36	54	52.36	Peak	Vertical
2	2483.5	57.06	-4.01	53.05	54	-0.95	Peak	Vertical
3	2514.53	57.22	-3.86	53.36	54	-0.64	Peak	Vertical

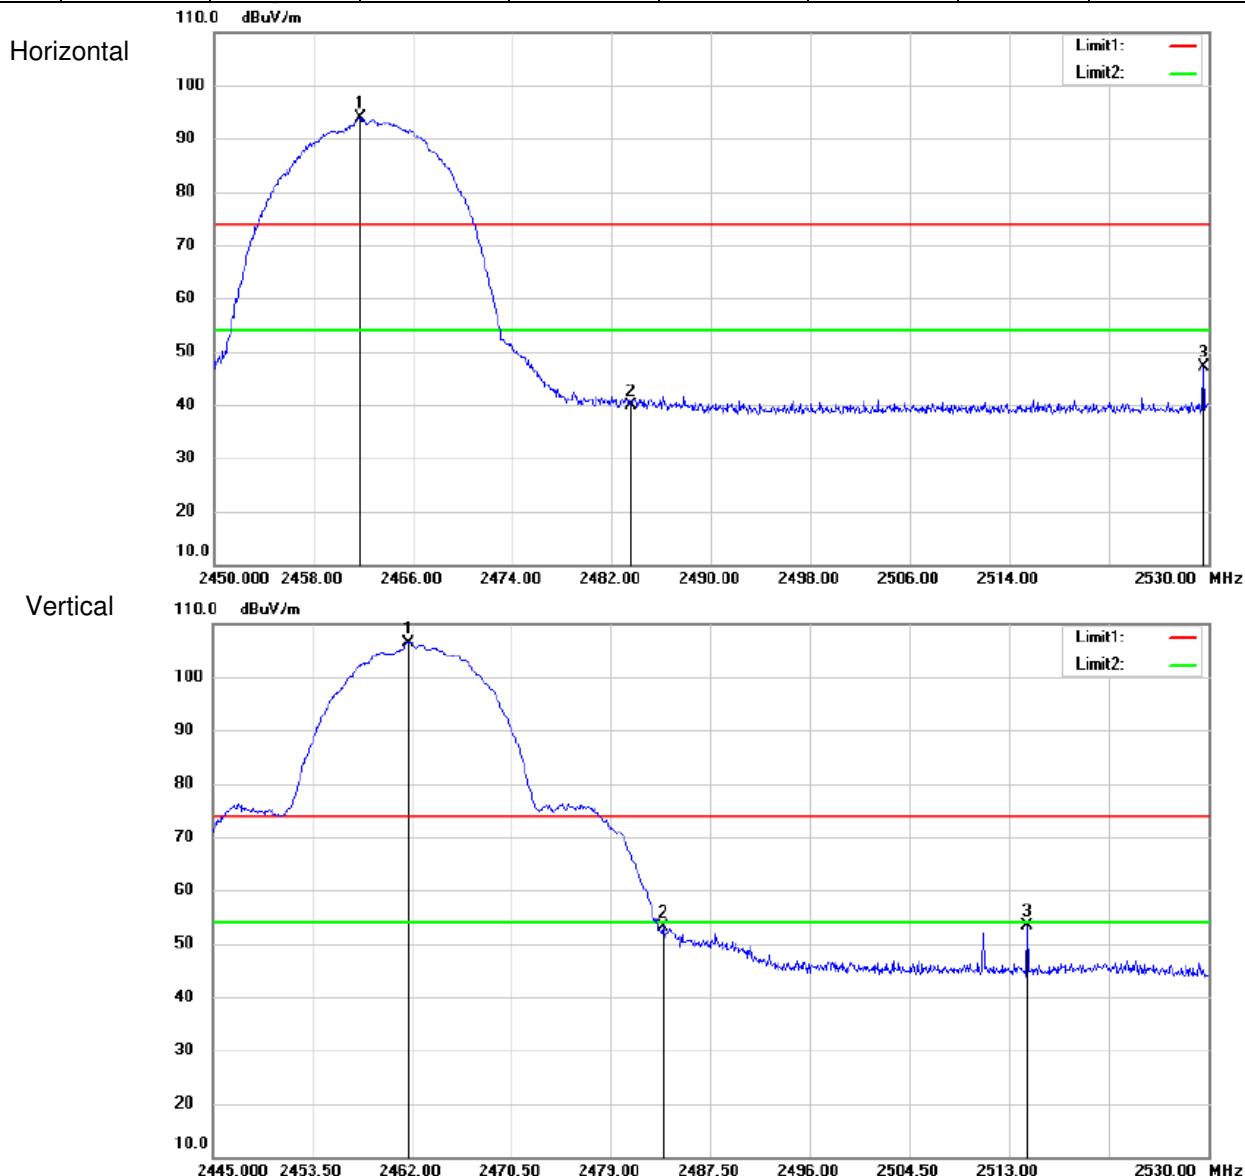


802.11g
Antenna A
Channel: 2412

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2347.44	45.38	-3.76	41.62	54	-12.38	Peak	Horizontal
2	2390	43.22	-3.89	39.33	54	-14.67	Peak	Horizontal
3	2406.6	90.72	-3.93	86.79	54	32.79	Peak	Horizontal
1	2325.84	49.04	-3.69	45.35	54	-8.65	Peak	Vertical
2	2390	54.62	-3.89	50.73	54	-3.27	Peak	Vertical
3	2413.8	102.64	-3.93	98.71	54	44.71	Peak	Vertical

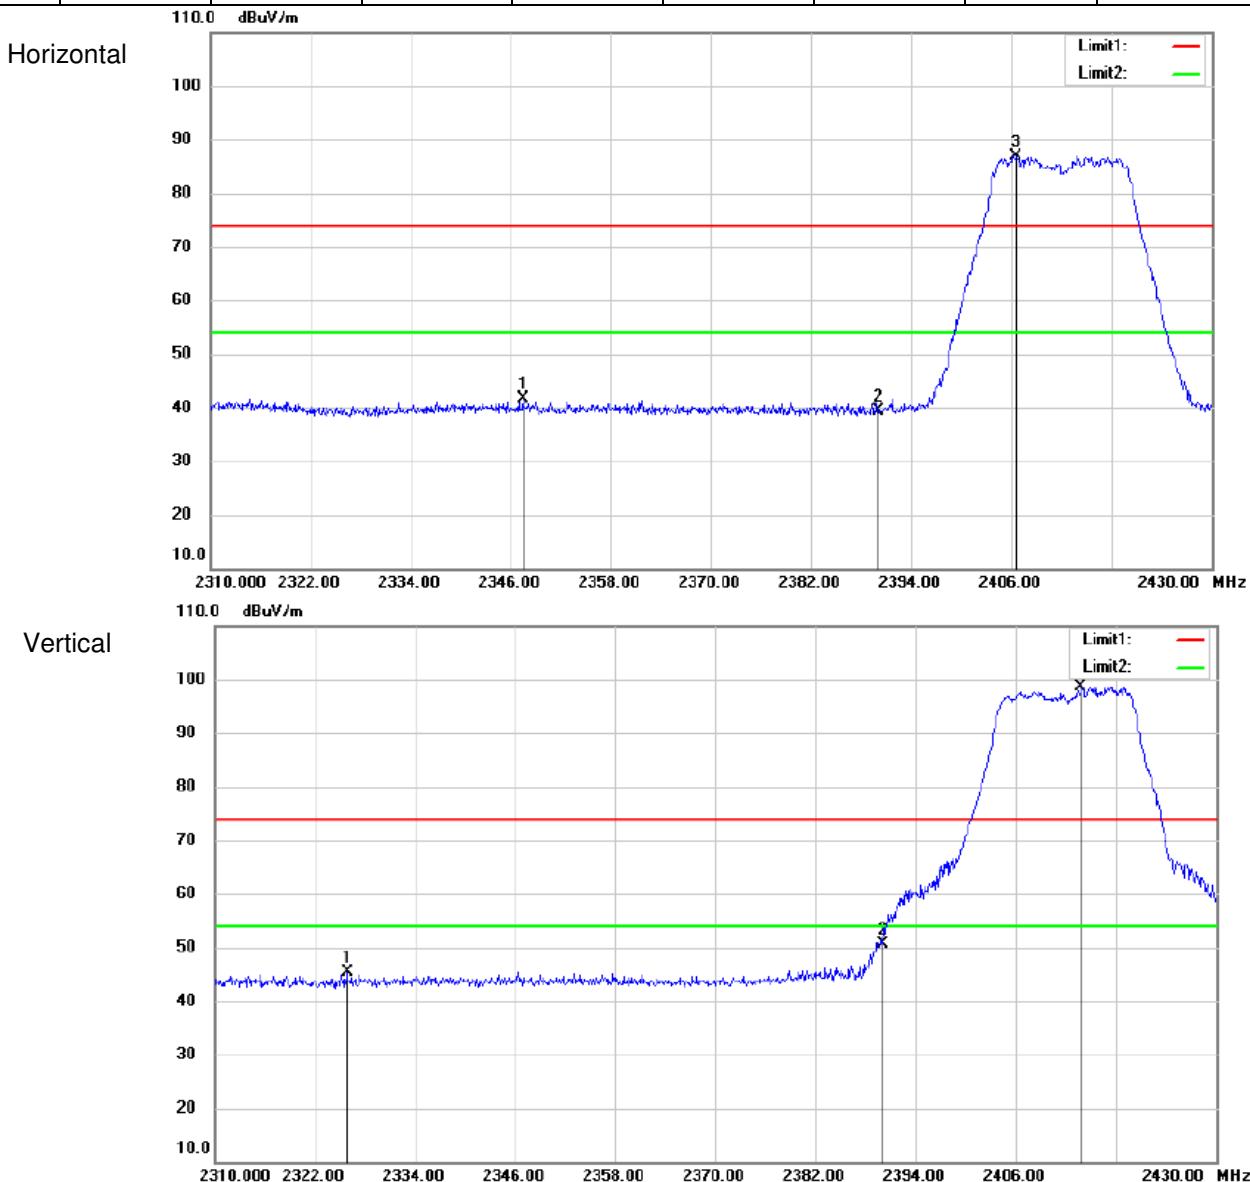


802.11g**Antenna A****Channel: 2462**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2465.44	92.34	-3.99	88.35	54	34.35	Peak	Horizontal
2	2483.5	43.98	-4.01	39.97	54	-14.03	Peak	Horizontal

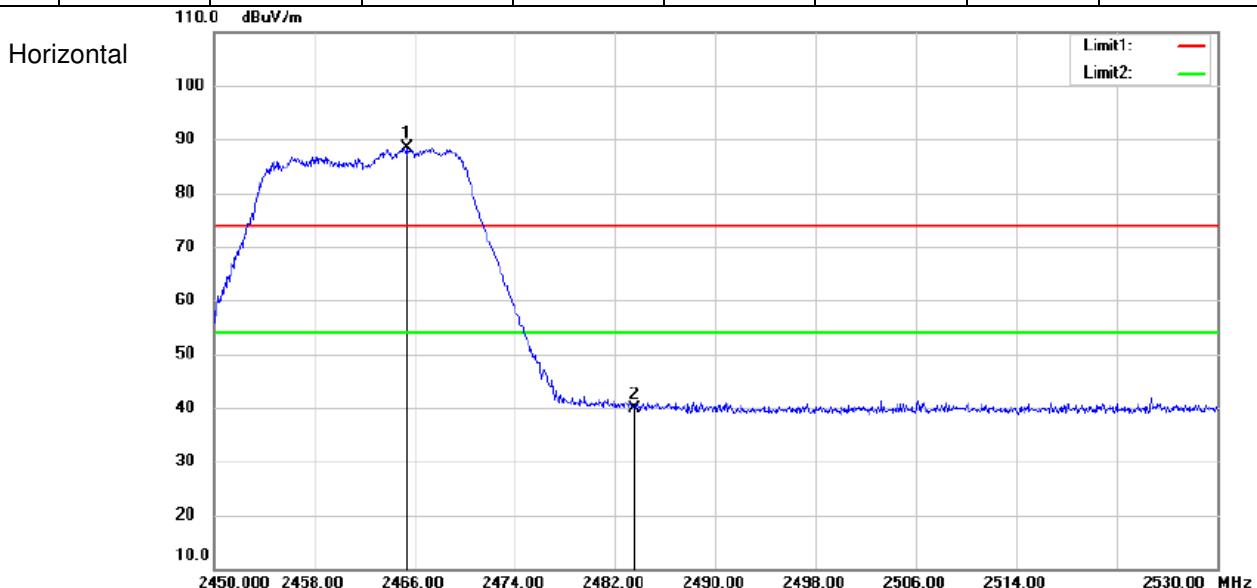

802.11g
Antenna A
Channel: 2462


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2468.715	104.48	-3.99	100.49	74	26.49	Peak	Vertical
2	2483.5	63.52	-4.01	59.51	74	-14.49	Peak	Vertical
3	2490.73	55.96	-4.02	51.94	74	-22.06	Peak	Vertical
1	2468.545	88.22	-3.99	84.23	54	30.23	Average	Vertical
2	2483.5	38.41	-4.01	34.4	54	-19.6	Average	Vertical

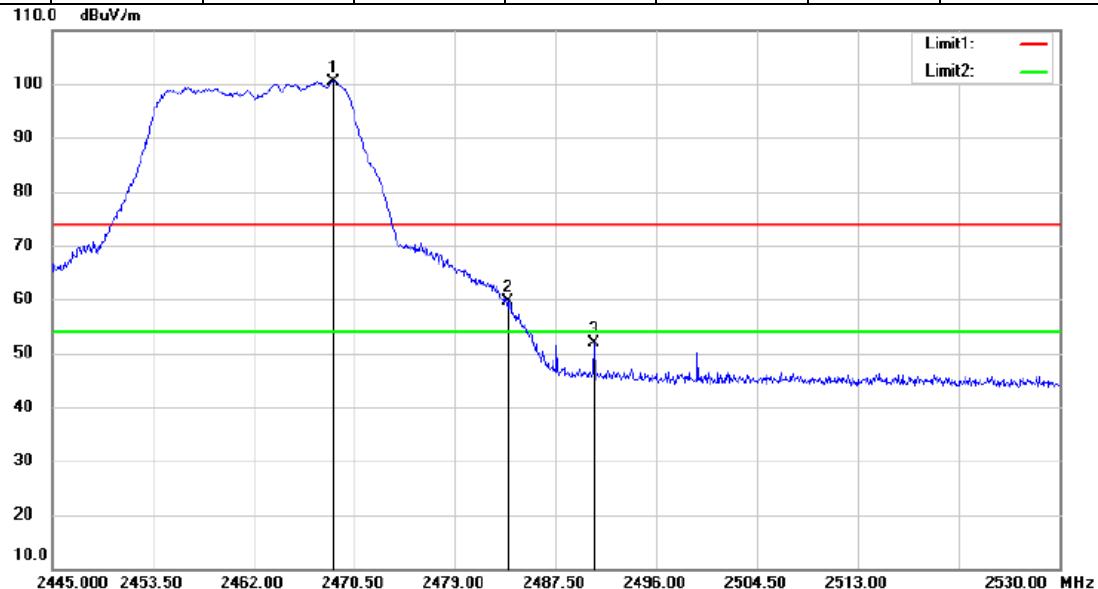Peak

Average


802.11 n20**Antenna A****Channel: 2412**


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2359.32	45.76	-3.79	41.97	54	-12.03	Peak	Horizontal
2	2390	43.10	-3.89	39.21	54	-14.79	Peak	Horizontal
3	2406.6	90.55	-3.93	86.62	54	32.62	Peak	Horizontal

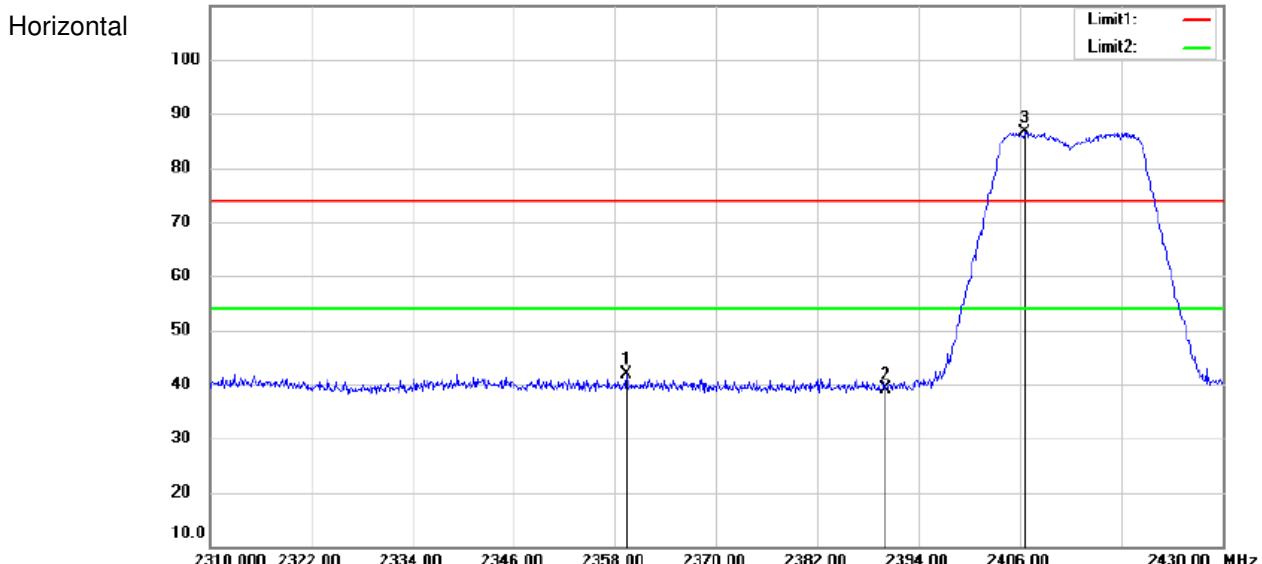110.0 dBuV/m




802.11 n20
Antenna A
Channel: 2412

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2390	69.02	-3.89	65.13	74	-8.87	Peak	Vertical
2	2417.52	103.77	-3.94	99.83	74	25.83	Peak	Vertical
1	2390	46.40	-3.89	42.51	54	-11.49	Average	Vertical
2	2406.6	92.83	-3.93	88.90	54	34.90	Average	Vertical

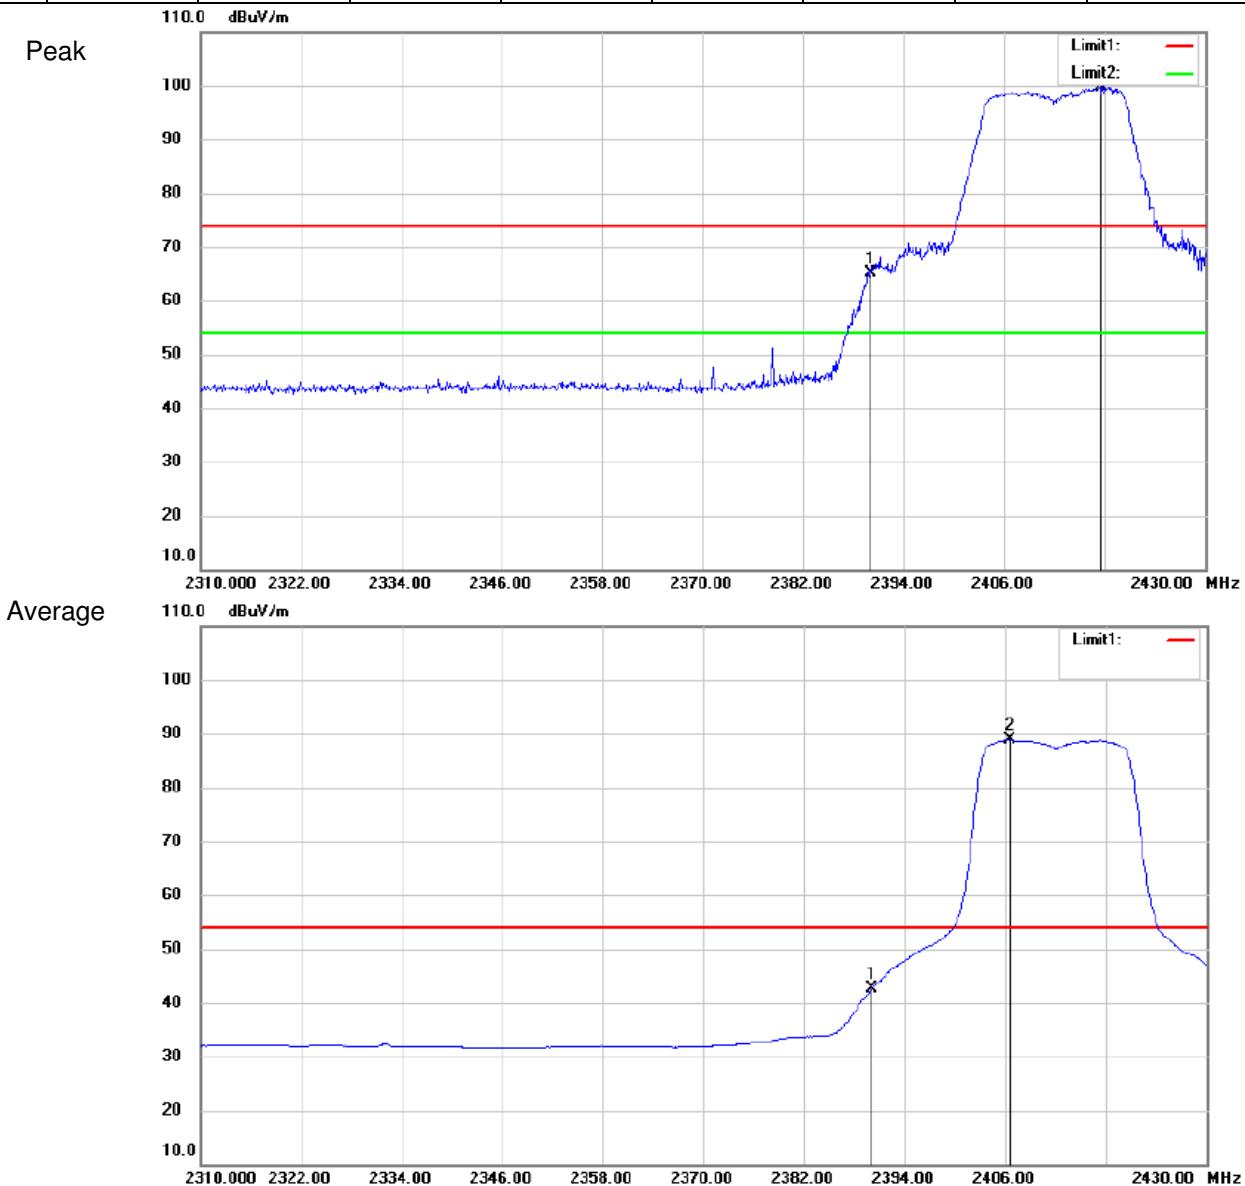


802.11 n20**Antenna A****Channel: 2462**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2467.76	91.94	-4.00	87.94	54	33.94	Peak	Horizontal
2	2483.5	44.56	-4.01	40.55	54	-13.45	Peak	Horizontal

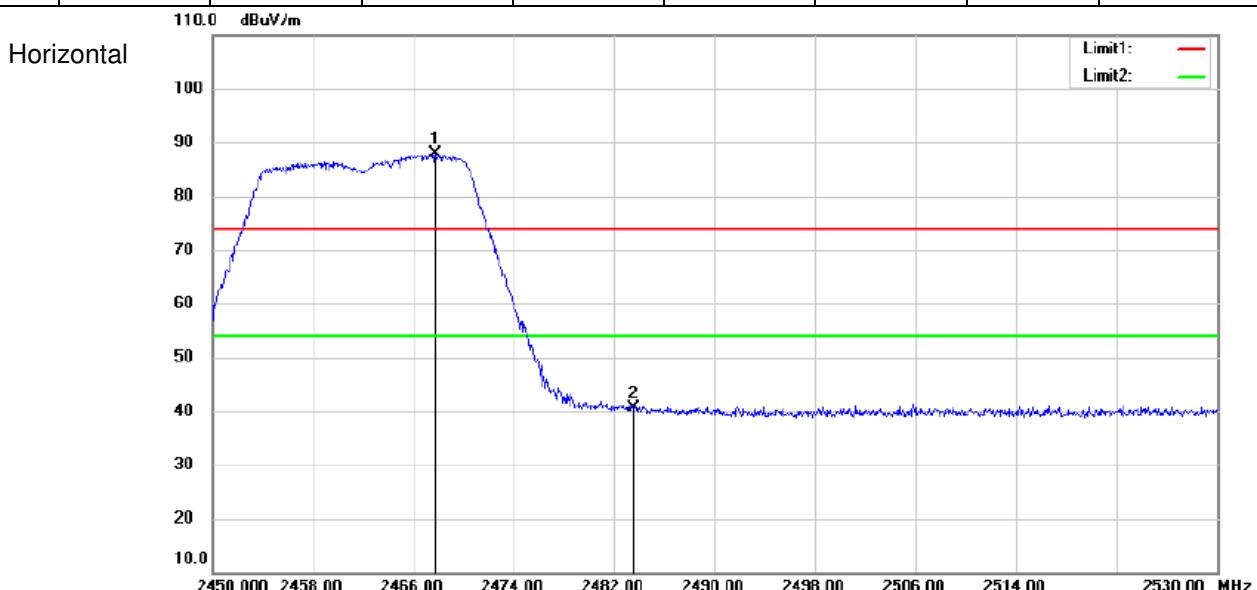

802.11 n20
Antenna A
Channel: 2462

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2467.61	105.24	-4.00	101.24	74	27.24	Peak	Vertical
2	2483.5	73.34	-4.01	69.33	74	-4.67	Peak	Vertical
3	2485.545	69.47	-4.01	65.46	74	-8.54	Peak	Vertical
1	2483.5	52.47	-4.01	48.46	54	-5.54	Average	Vertical

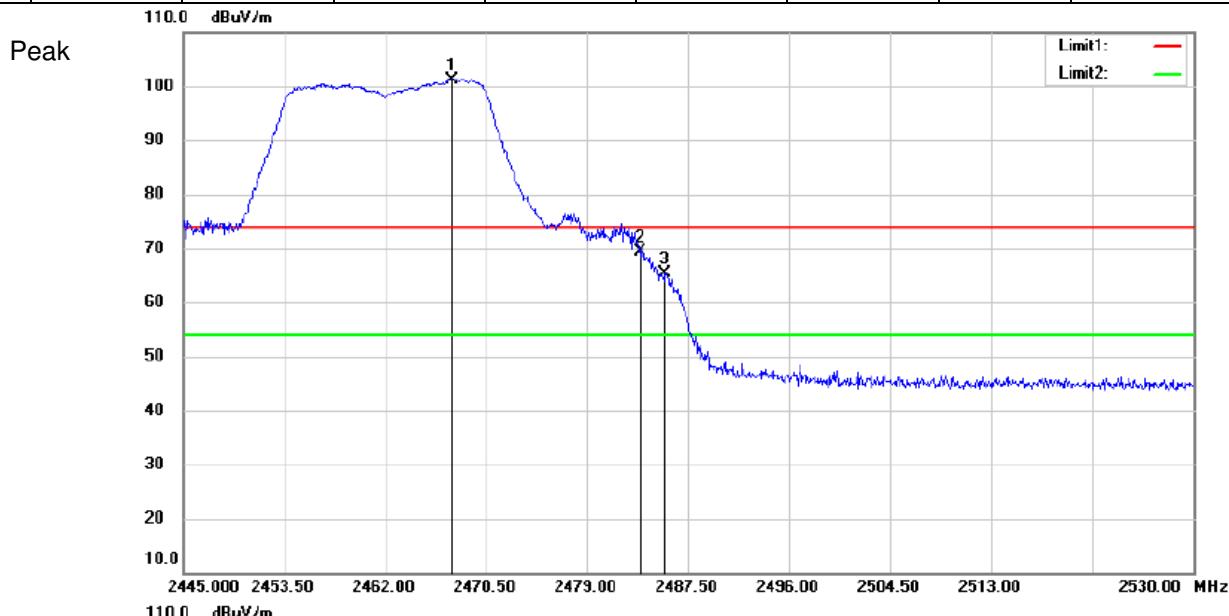


802.11 n40**Antenna A****Channel: 2422**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2339.87	44.51	-3.74	40.77	54	-13.23	Peak	Horizontal
2	2390	43.02	-3.89	39.13	54	-14.87	Peak	Horizontal
3	2418.895	85.68	-3.94	81.74	54	27.74	Peak	Horizontal


110.0 dBuV/m

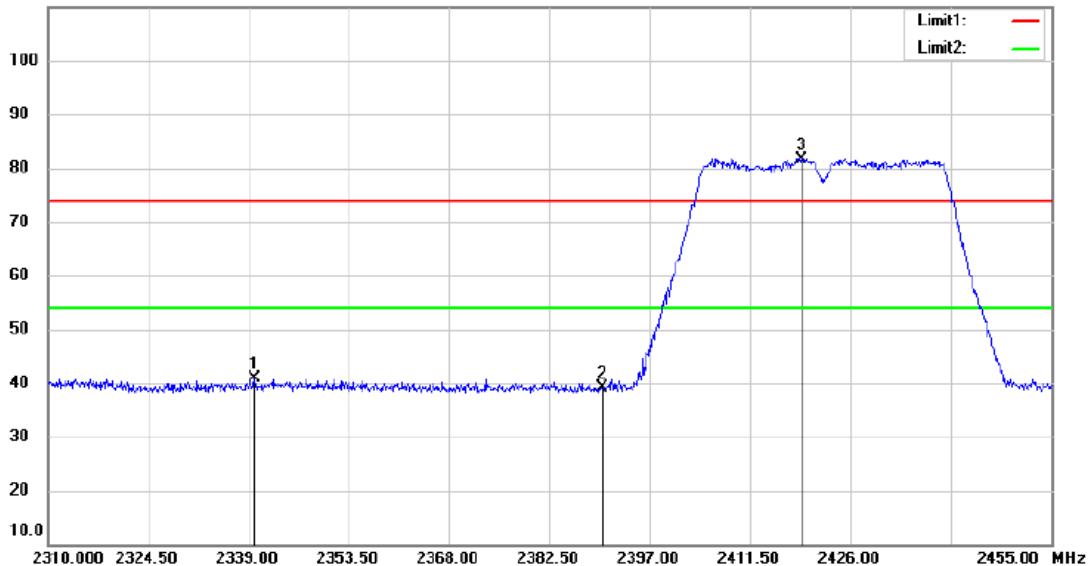Horizontal



802.11 n40
Antenna A
Channel: 2422

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2381.92	62.87	-3.87	59.00	74	-15.00	Peak	Vertical
2	2390	64.01	-3.89	60.12	74	-13.88	Peak	Vertical
3	2437.745	100.06	-3.95	96.11	74	22.11	Peak	Vertical
1	2390	47.55	-3.89	43.66	54	-10.34	Average	Vertical
2	2408.745	88.93	-3.92	85.01	54	31.01	Average	Vertical

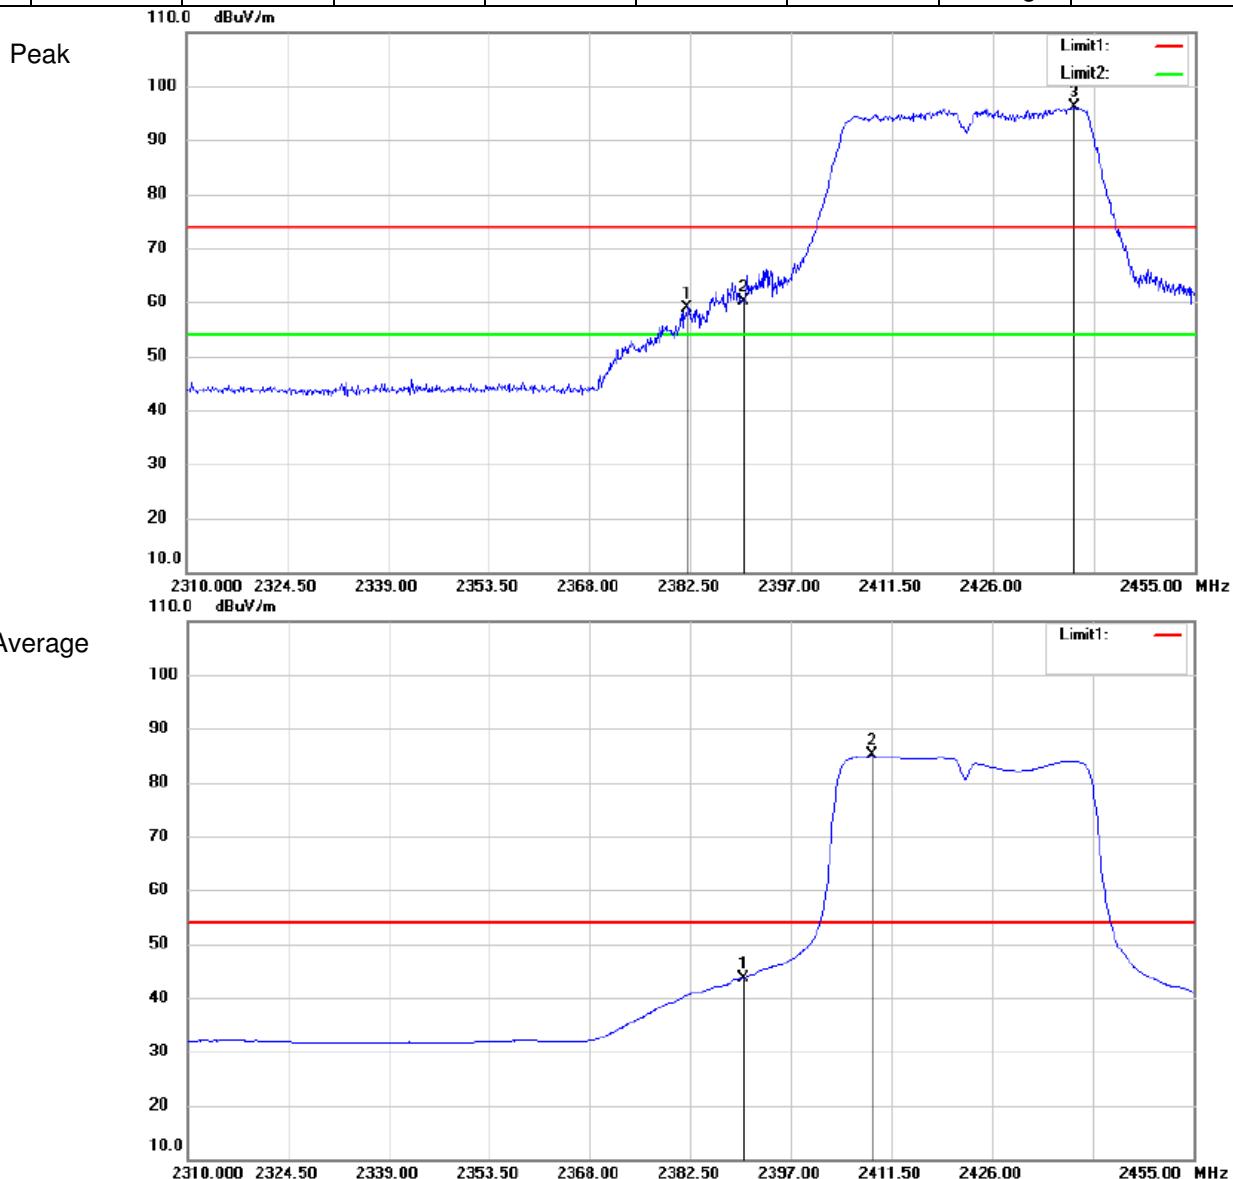


802.11 n40

Antenna A


Channel: 2452

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2467.2	87.39	-4.00	83.39	54	29.39	Peak	Horizontal
2	2483.5	43.87	-4.01	39.86	54	-14.14	Peak	Horizontal

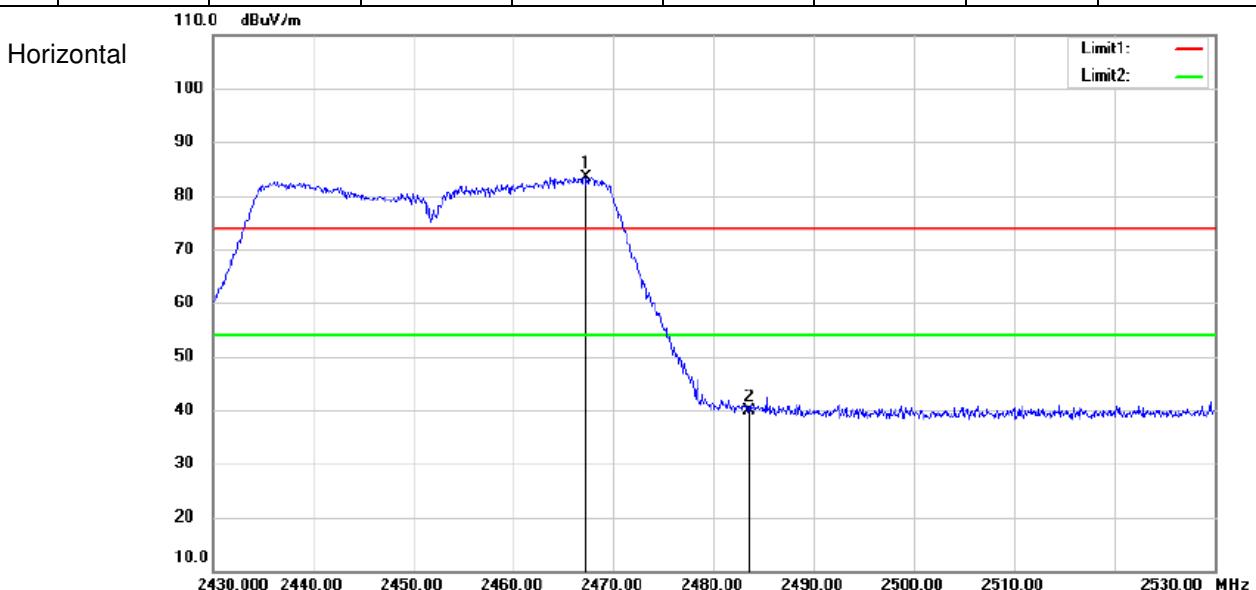

802.11 n40
Antenna A
Channel: 2452

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2467.8	100.40	-4.00	96.4	74	22.40	Peak	Vertical
2	2483.5	67.98	-4.01	63.97	74	-10.03	Peak	Vertical
3	2487.4	67.89	-4.02	63.87	74	-10.13	Peak	Vertical
4	2496.3	63.75	-4.03	59.72	74	-14.28	Peak	Vertical
1	2467.3	91.53	-4.00	87.53	54	33.53	Average	Vertical
2	2483.5	51.64	-4.01	47.63	54	-6.37	Average	Vertical

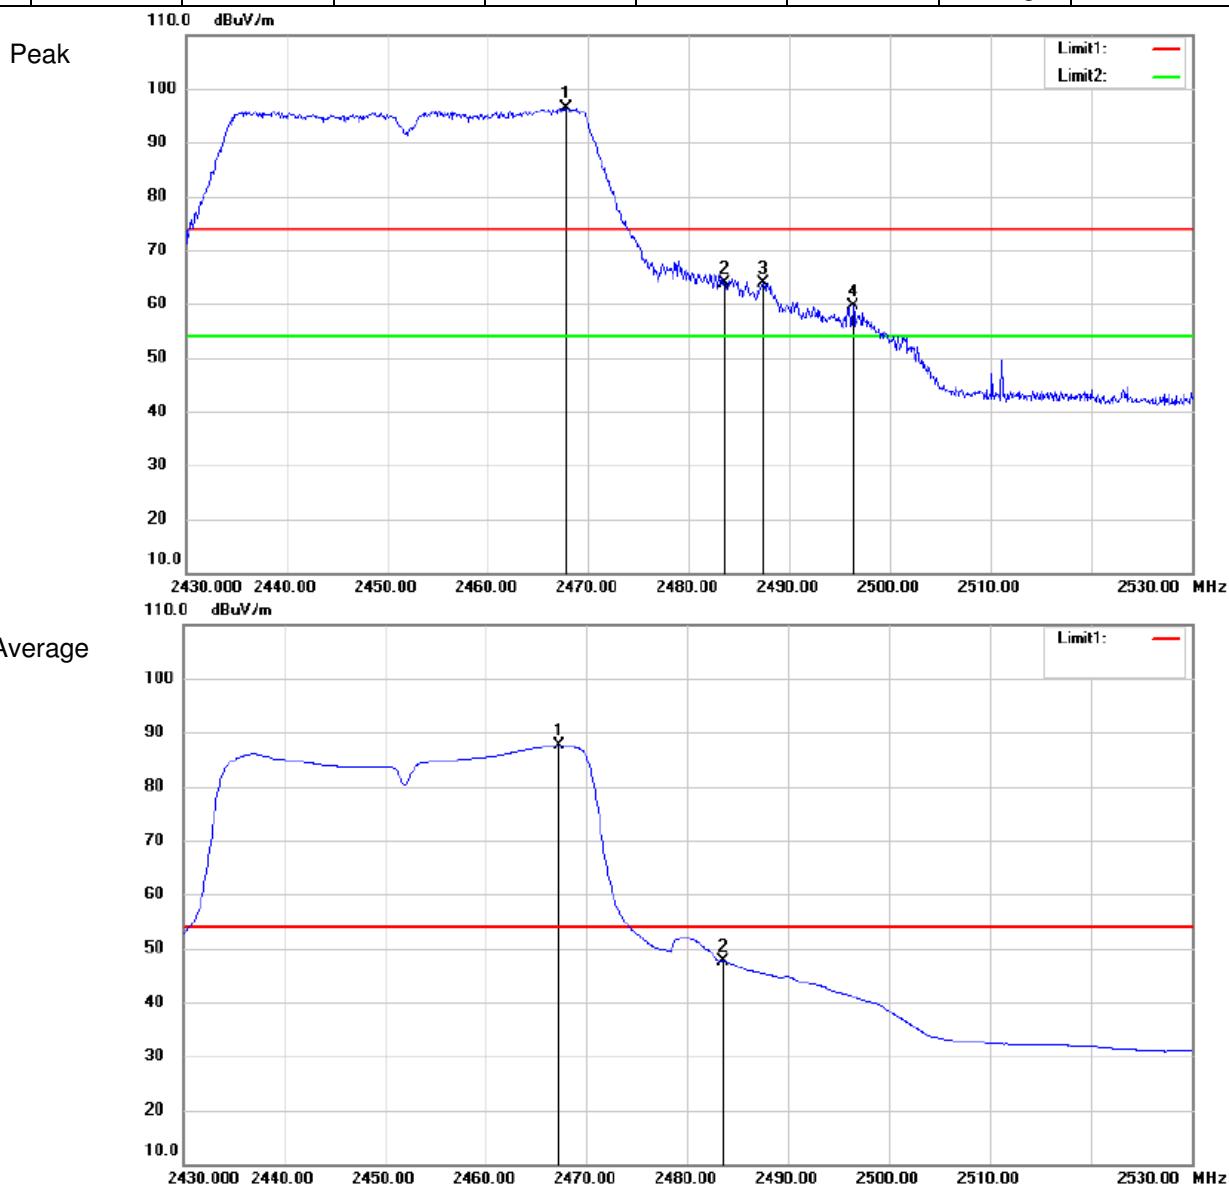


802.11 b
Antenna B
Channel: 2412


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2368.56	48.76	-3.83	44.93	54	-9.07	Peak	Horizontal
2	2390	46.73	-3.89	42.84	54	-11.16	Peak	Horizontal
3	2412.84	97.42	-3.93	93.49	54	39.49	Peak	Horizontal
1	2355.24	51.16	-3.79	47.37	54	-6.63	Peak	Vertical
2	2390	55.73	-3.89	51.84	54	-2.16	Peak	Vertical
3	2411.76	109.45	-3.93	105.52	54	51.52	Peak	Vertical

110.0 dBuV/m

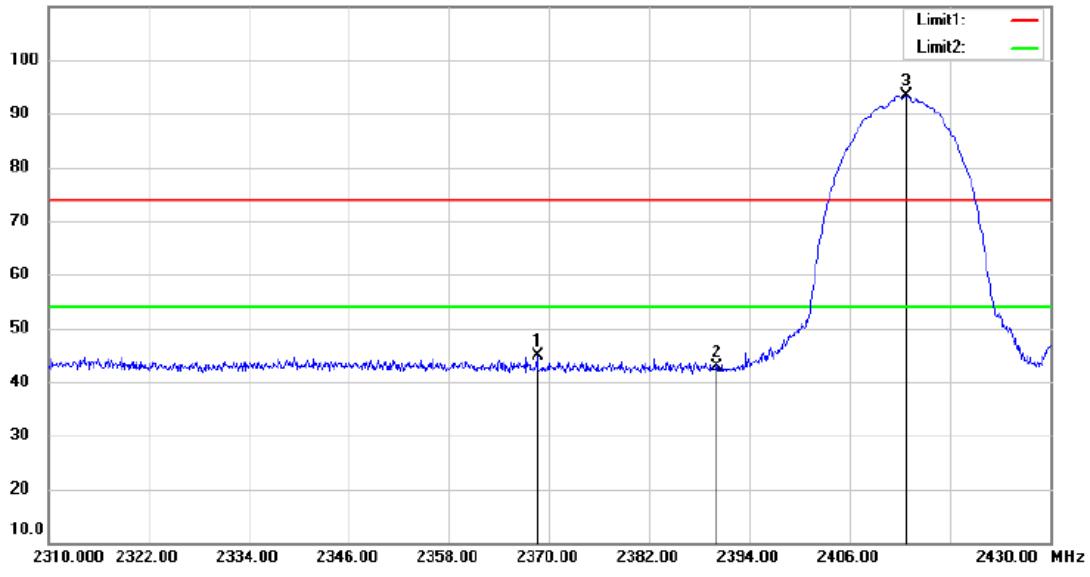Horizontal





Vertical

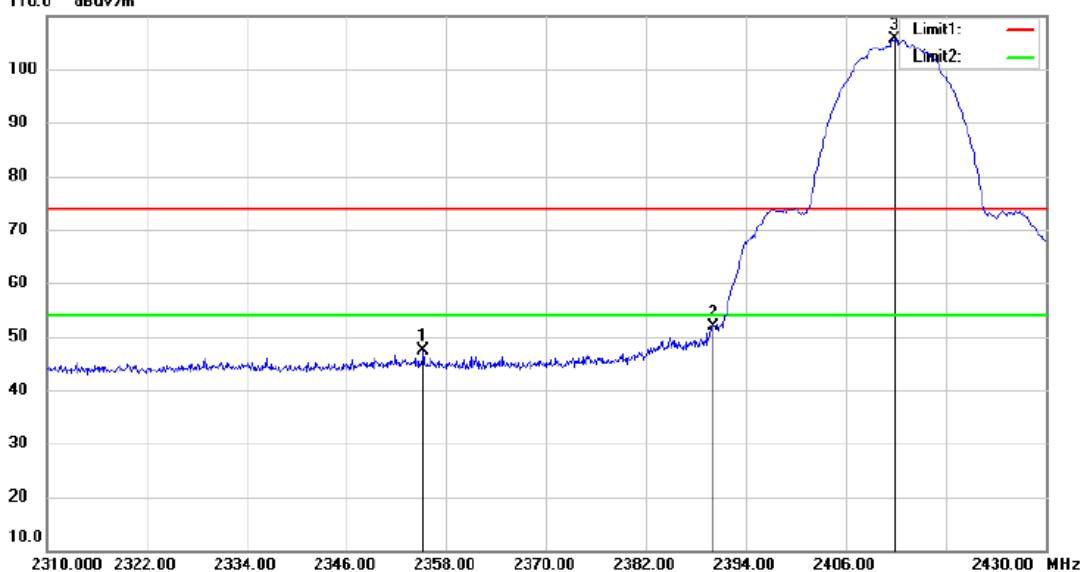


802.11 b
Antenna B
Channel: 2462

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2461.76	97.49	-3.99	93.50	54	39.50	Peak	Horizontal
2	2483.5	47.98	-4.01	43.97	54	-10.03	Peak	Horizontal
1	2461.66	110.10	-3.99	106.11	54	52.11	Peak	Vertical
2	2483.5	55.83	-4.01	51.82	54	-2.18	Peak	Vertical

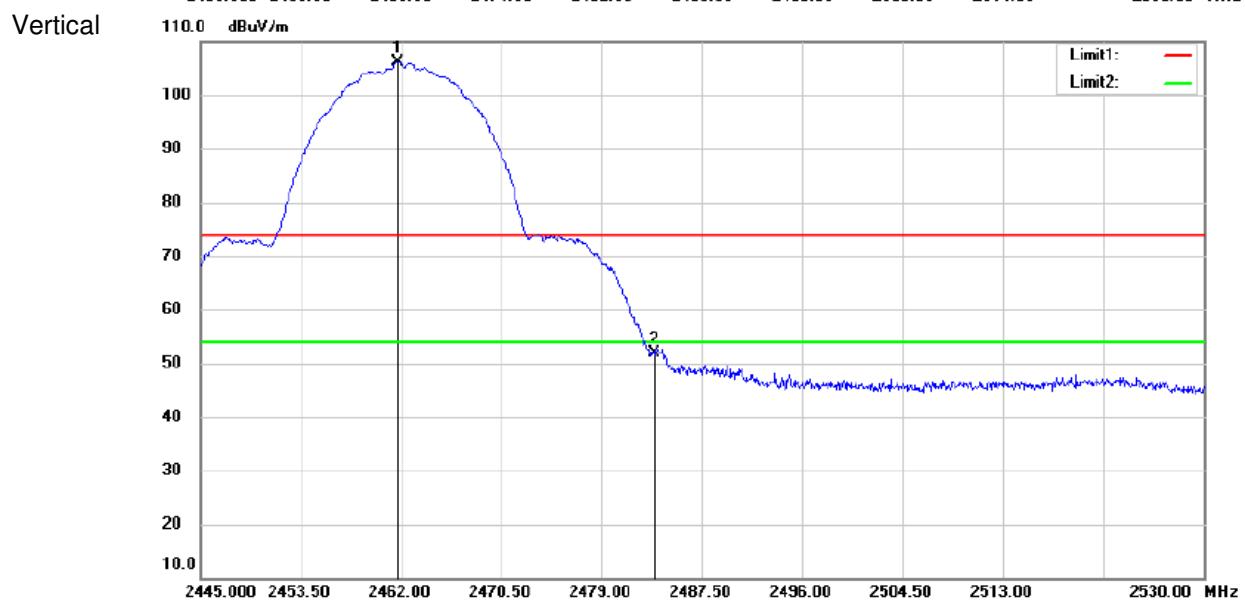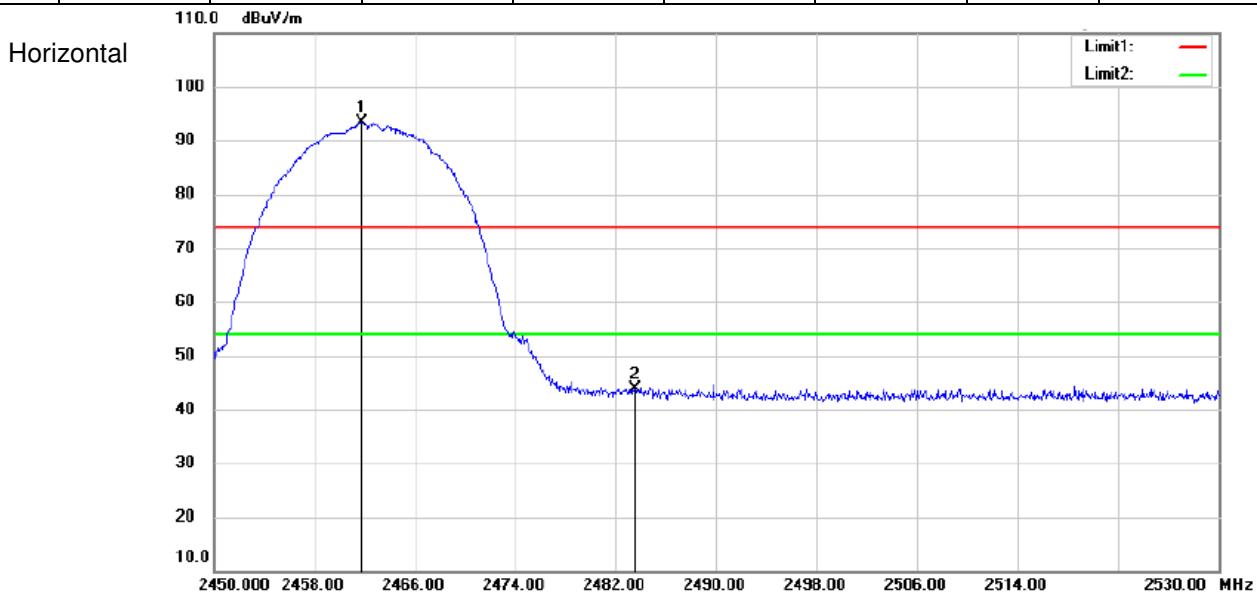



802.11 g**Antenna B****Channel: 2412**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2352.36	49.33	-3.78	45.55	54	-8.45	Peak	Horizontal
2	2390	46.00	-3.89	42.11	54	-11.89	Peak	Horizontal
3	2415.36	90.07	-3.93	86.14	54	32.14	Peak	Horizontal

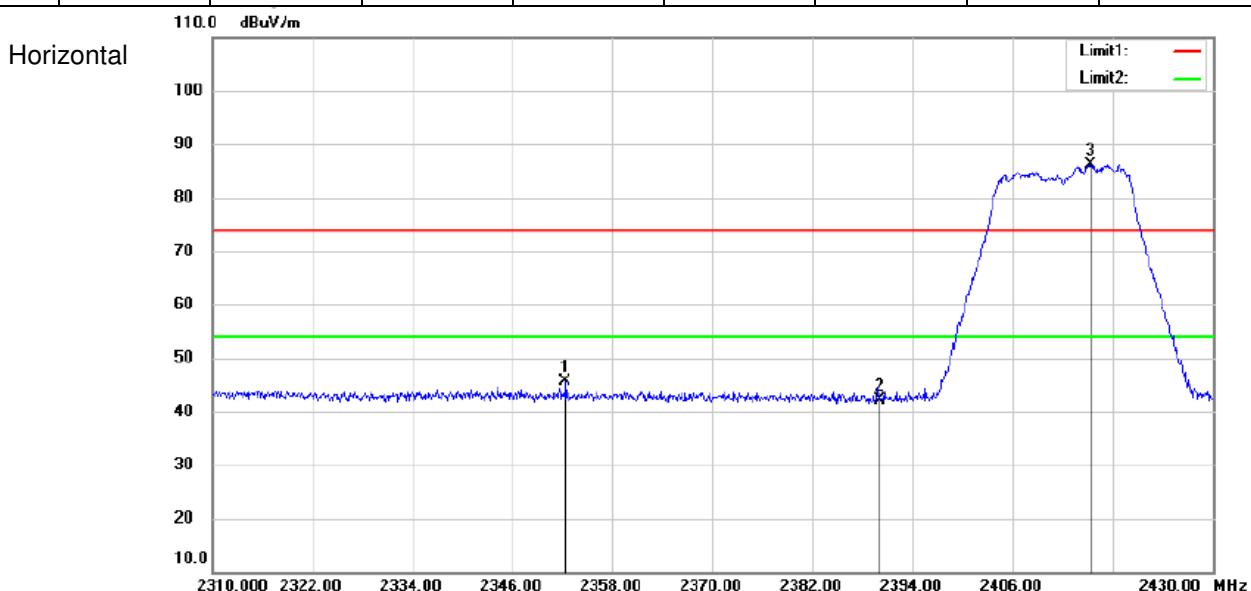

802.11 g
Antenna B
Channel: 2412

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2377.44	49.45	-3.85	45.60	74	-28.40	Peak	Vertical
2	2390	59.04	-3.89	55.15	74	-18.85	Peak	Vertical
3	2413.8	102.17	-3.93	98.24	74	24.24	Peak	Vertical
1	2390	41.86	-3.89	37.97	54	-16.03	Average	Vertical
2	2418.6	92.09	-3.93	88.16	54	34.16	Average	Vertical

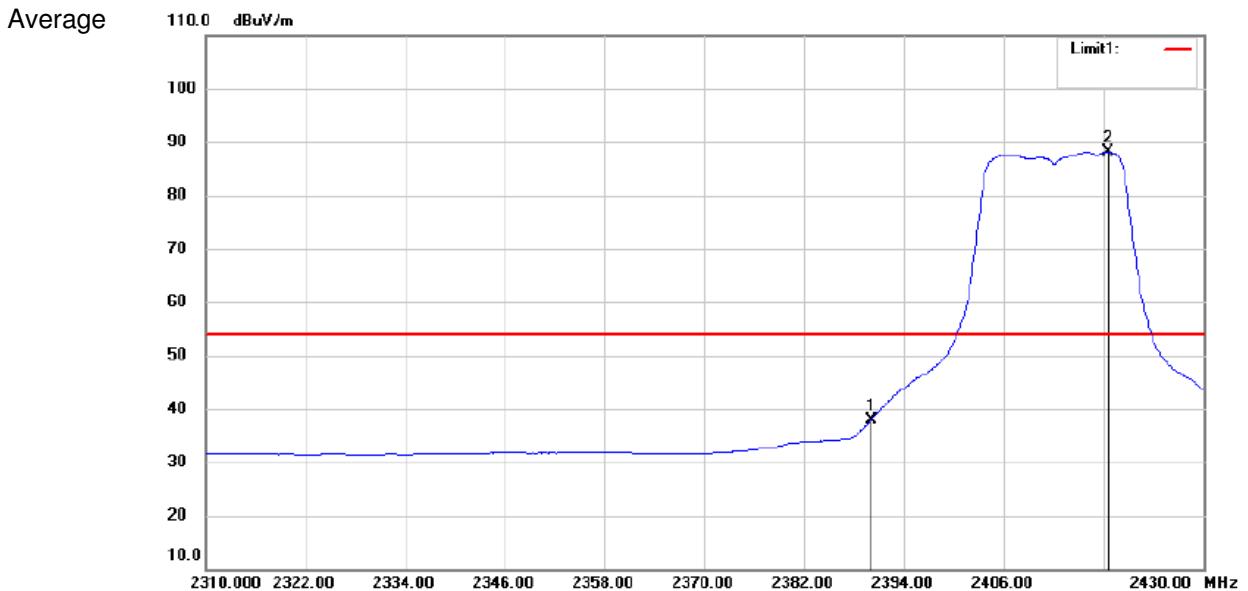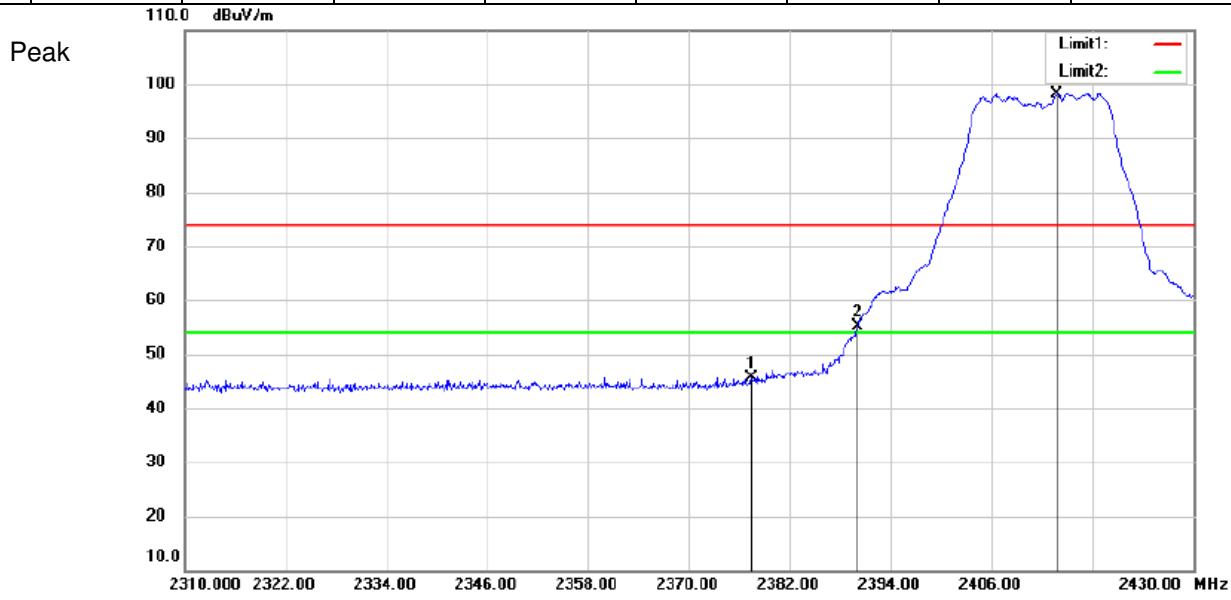


802.11 g

Antenna B



Channel: 2462

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2468.8	90.65	-3.99	86.66	54	32.66	Peak	Horizontal
2	2483.5	46.45	-4.01	42.44	54	-11.56	Peak	Horizontal

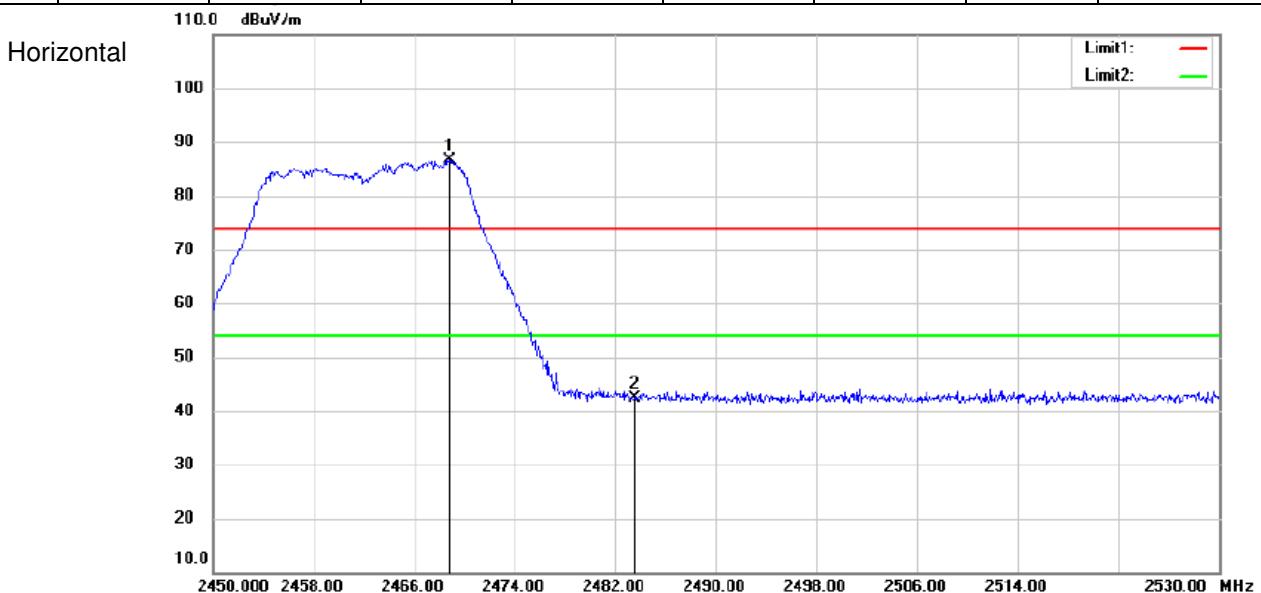

802.11 g
Antenna B
Channel: 2462


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2468.8	104.00	-3.99	100.01	74	26.01	Peak	Vertical
2	2483.5	61.13	-4.01	57.12	74	-16.88	Peak	Vertical
1	2468.715	94.06	-3.99	90.07	54	36.07	Average	Vertical
2	2483.5	46.12	-4.01	42.11	54	-11.89	Average	Vertical

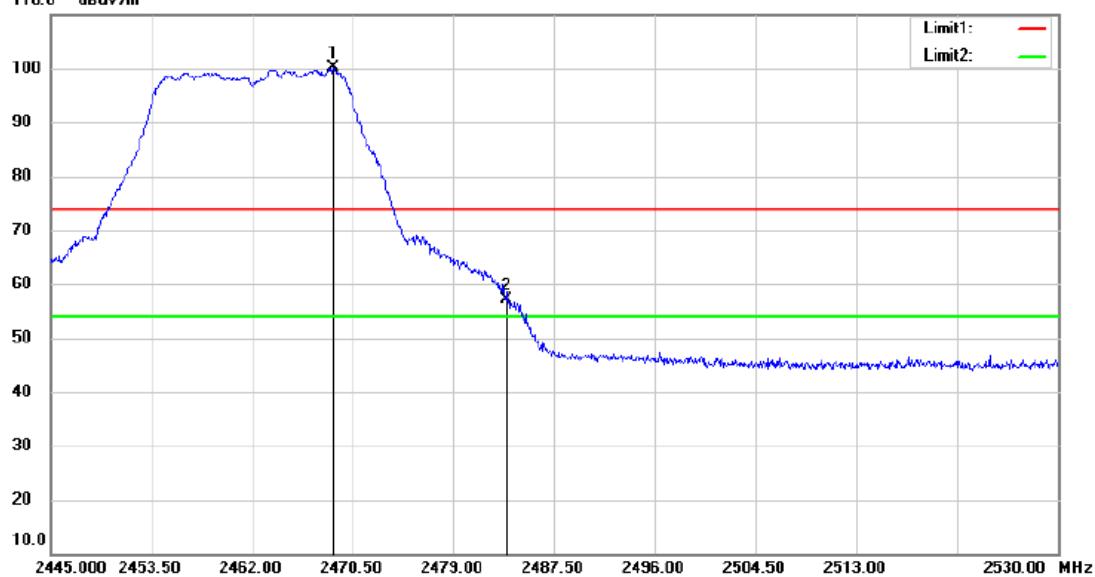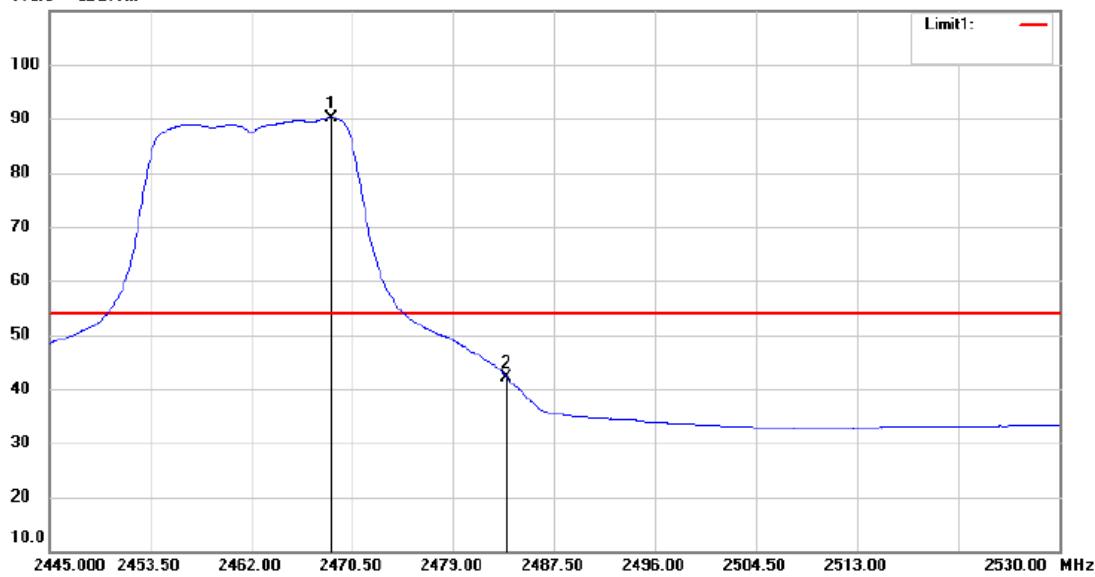Peak

Average


802.11 n20**Antenna B****Channel: 2412**


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2313.12	48.35	-3.66	44.69	54	-9.31	Peak	Horizontal
2	2390	46.31	-3.89	42.42	54	-11.58	Peak	Horizontal
3	2418.36	91.40	-3.93	87.47	54	33.47	Peak	Horizontal

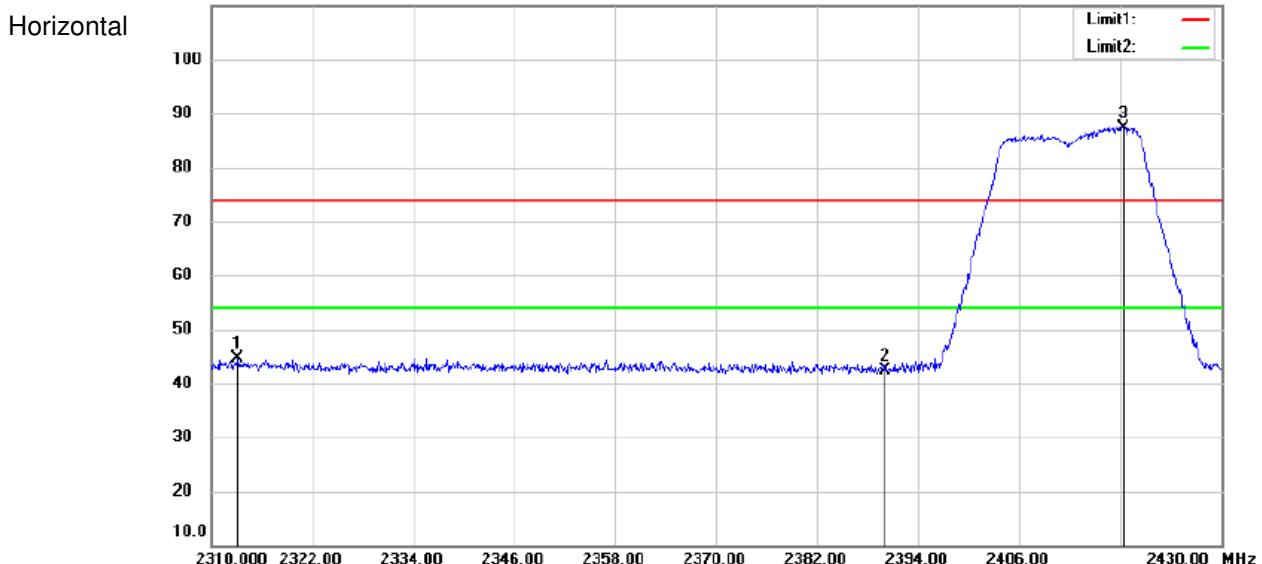110.0 dBuV/m




802.11 n20
Antenna B
Channel: 2412

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2343.36	49.54	-3.75	45.79	74	-28.21	Peak	Vertical
2	2390	71.07	-3.89	67.18	74	-6.82	Peak	Vertical
3	2417.52	102.83	-3.94	98.89	74	24.89	Peak	Vertical
1	2376.48	36.04	-3.85	32.19	54	-21.81	Average	Vertical
2	2390	43.30	-3.89	39.41	54	-14.59	Average	Vertical
3	2418.84	91.14	-3.93	87.21	54	33.21	Average	Vertical

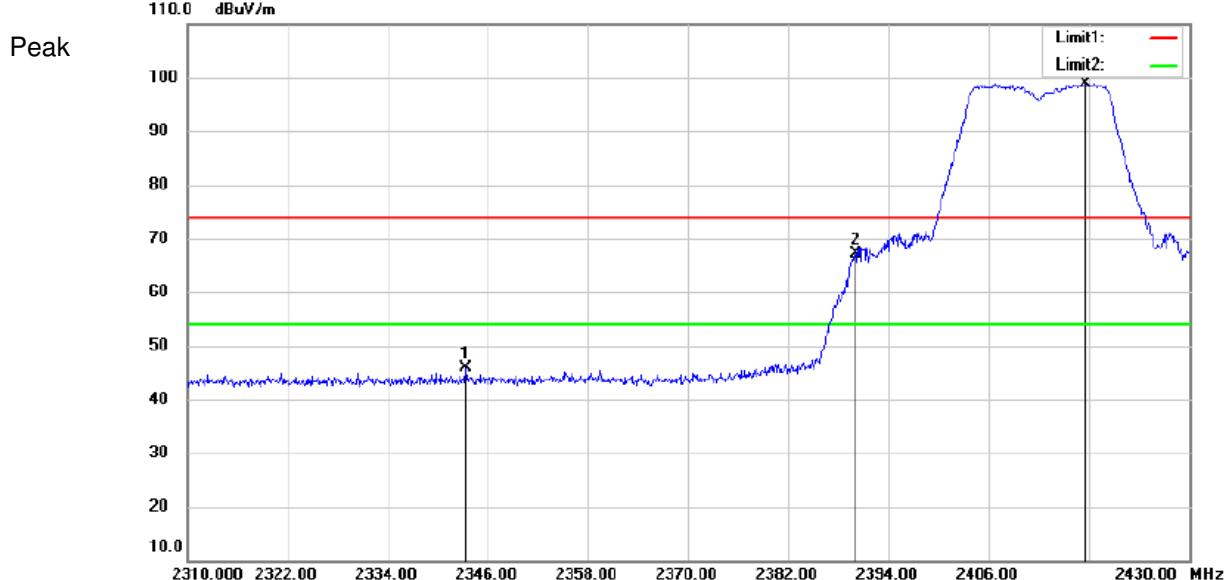



802.11 n20**Antenna B****Channel: 2462**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2469.36	91.55	-4.00	87.55	54	33.55	Peak	Horizontal
2	2483.5	46.22	-4.01	42.21	54	-11.79	Peak	Horizontal

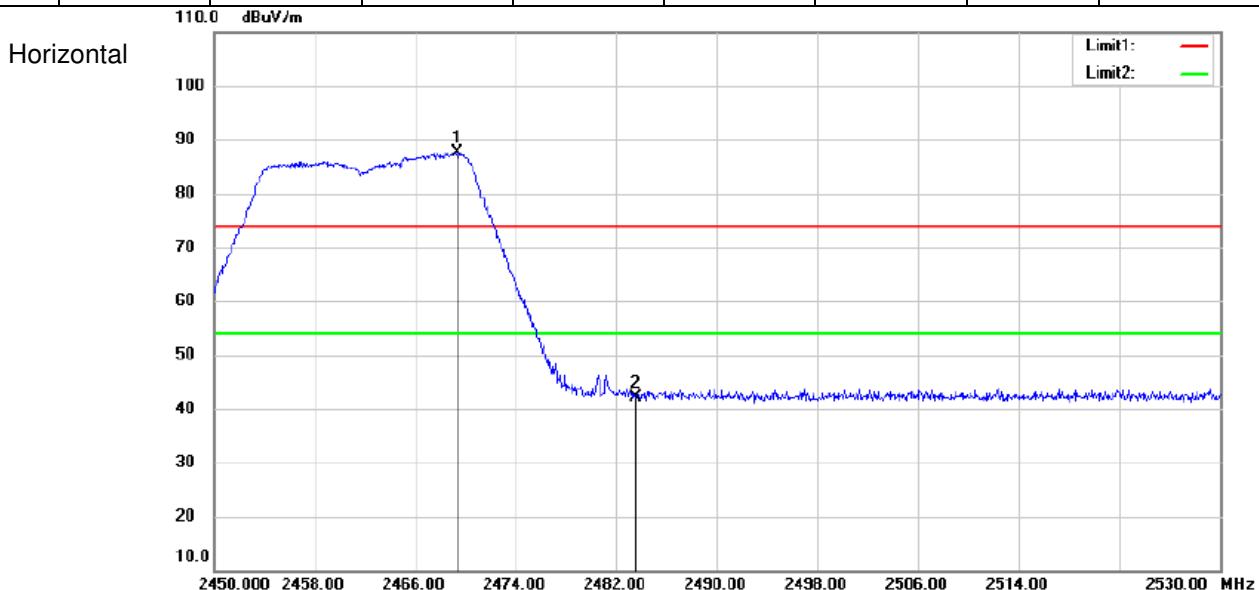


802.11 n20
Antenna B
Channel: 2462

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2469.31	104.98	-4.00	100.98	74	26.98	Peak	Vertical
2	2483.5	73.59	-4.01	69.58	74	-4.42	Peak	Vertical
1	2467.44	93.61	-4.00	89.61	54	35.61	Average	Vertical
2	2483.5	48.73	-4.01	44.72	54	-9.28	Average	Vertical

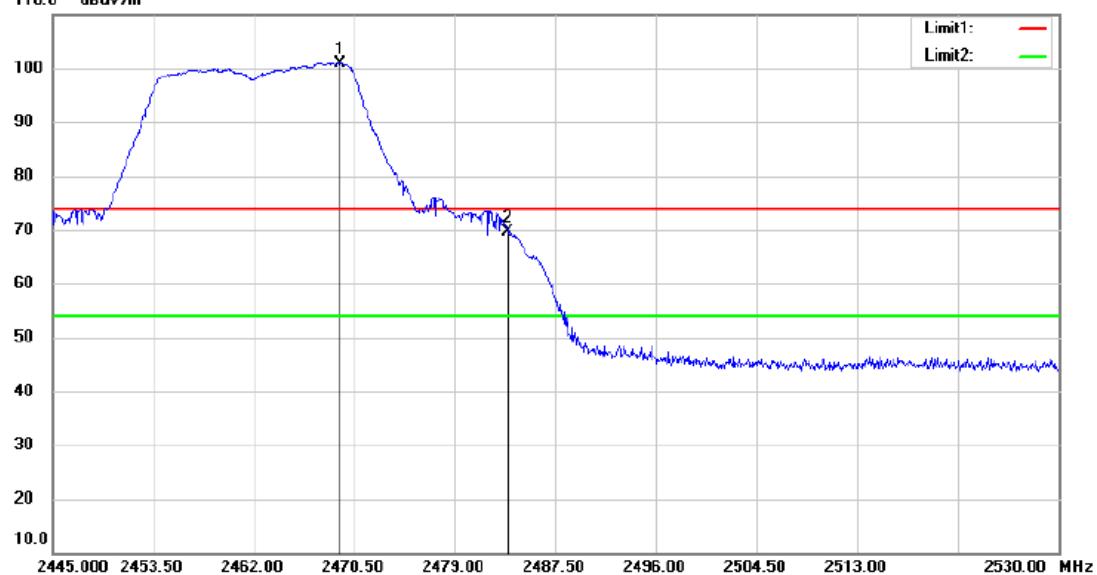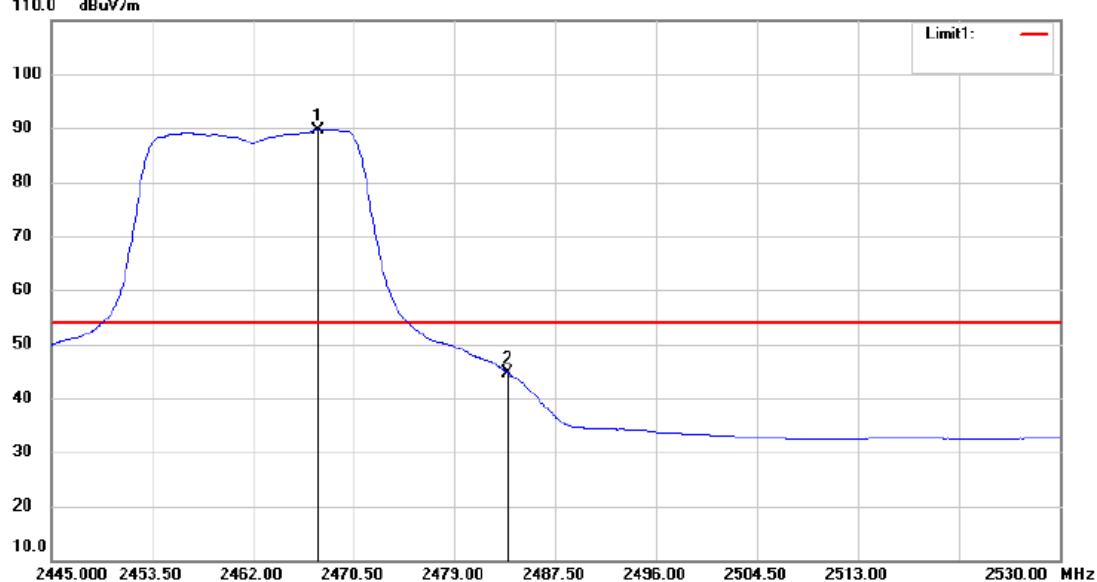Peak

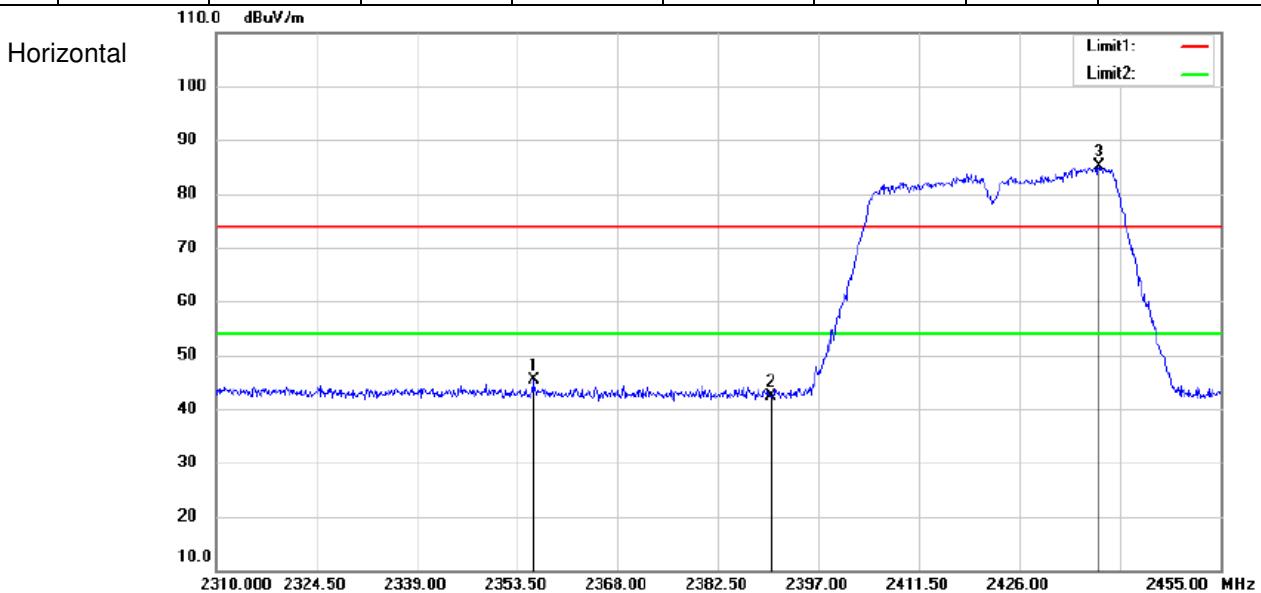Average


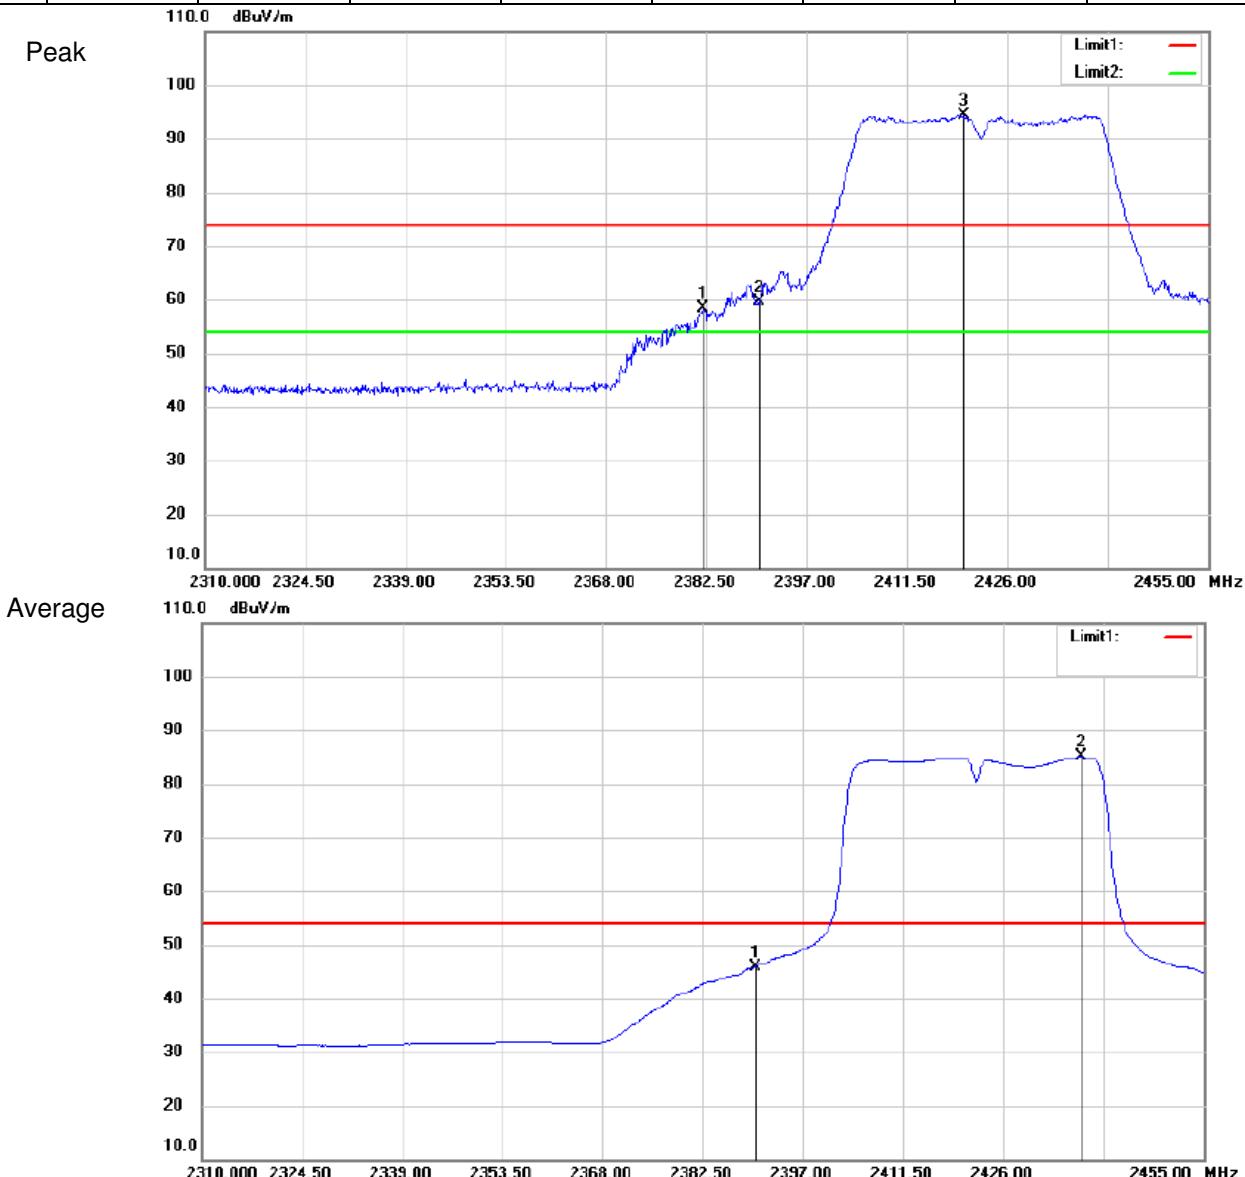
802.11 n40**Antenna B****Channel: 2422**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2355.82	49.07	-3.79	45.28	54	-8.72	Peak	Horizontal
2	2390	46.17	-3.89	42.28	54	-11.72	Peak	Horizontal
3	2437.455	89.00	-3.96	85.04	54	31.04	Peak	Horizontal




802.11 n40
Antenna B
Channel: 2422

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2381.92	62.28	-3.87	58.41	74	-15.59	Peak	Vertical
2	2390	63.40	-3.89	59.51	74	-14.49	Peak	Vertical
3	2419.62	98.40	-3.94	94.46	74	20.46	Peak	Vertical
1	2390	49.77	-3.89	45.88	54	-8.12	Average	Vertical
2	2437.31	88.99	-3.96	85.03	54	31.03	Average	Vertical





802.11 n40**Antenna B****Channel: 2452**

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2436.4	88.36	-3.96	84.40	54	30.40	Peak	Horizontal
2	2483.5	46.44	-4.01	42.43	54	-11.57	Peak	Horizontal

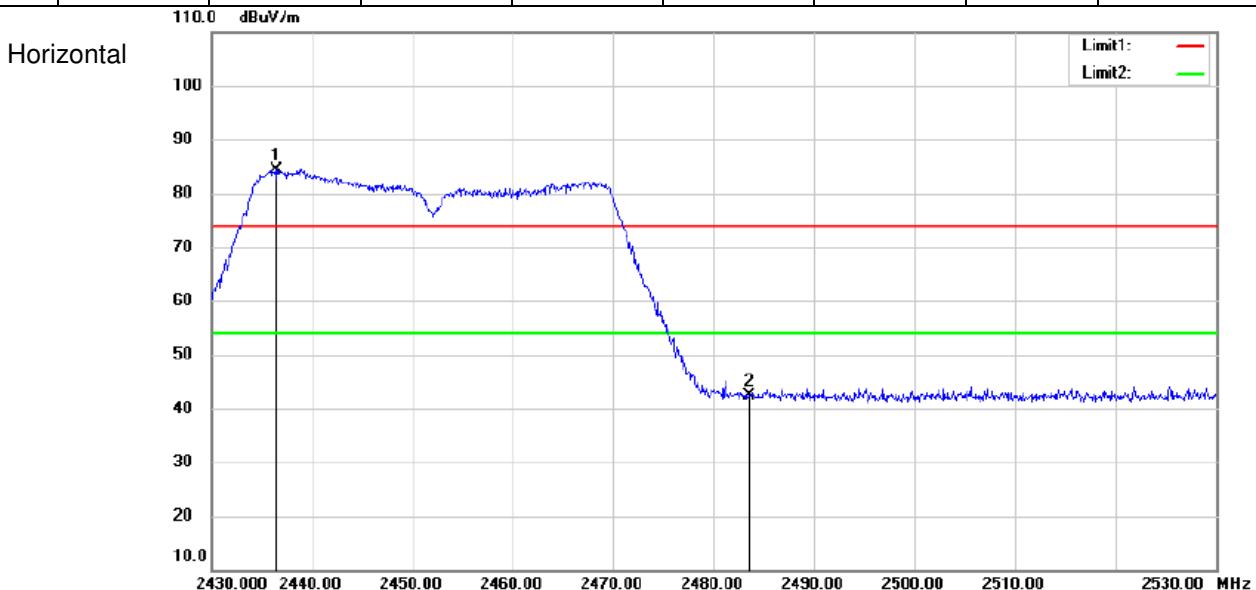

802.11 n40
Antenna B
Channel: 2452

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2467.6	100.32	-4.00	96.32	74	22.32	Peak	Vertical
2	2483.5	64.82	-4.01	60.81	74	-13.19	Peak	Vertical
1	2438.8	90.11	-3.96	86.15	54	32.15	Average	Vertical
2	2483.5	47.02	-4.01	43.01	54	-10.99	Average	Vertical

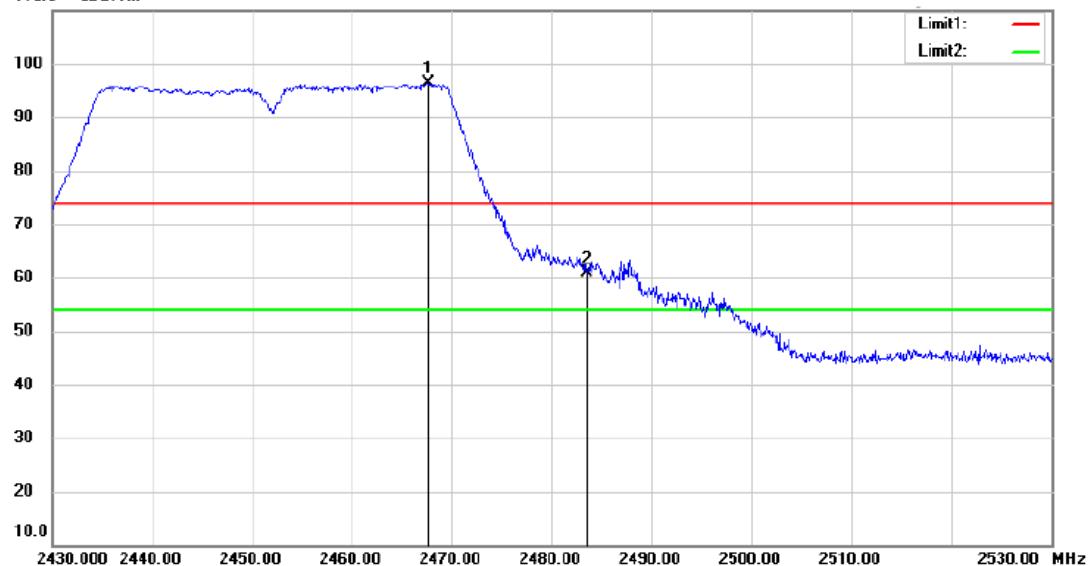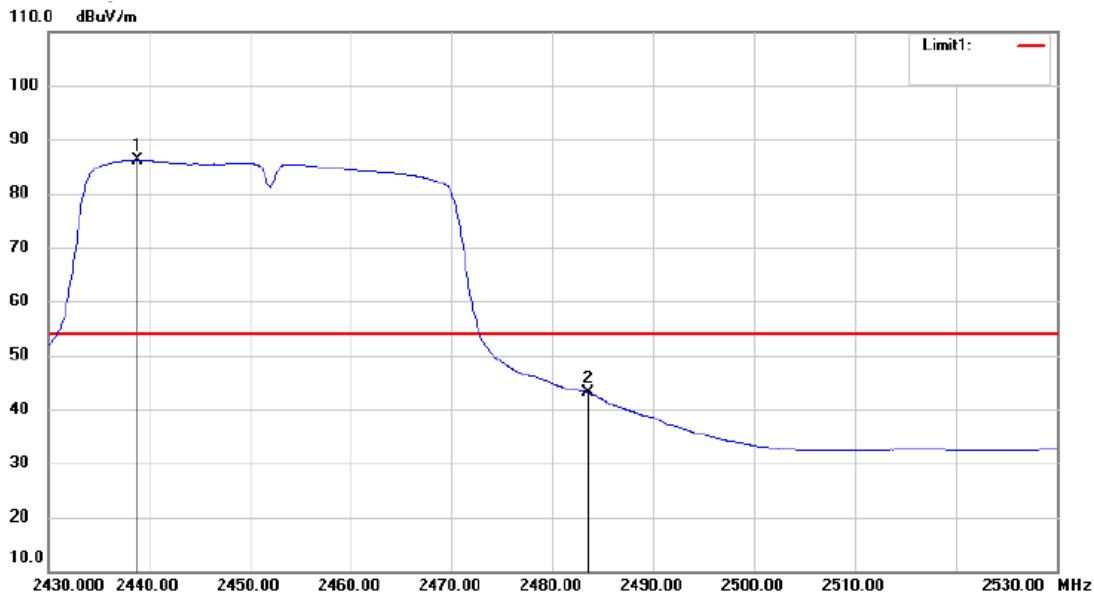Peak

Average


Remark: 1. Test Level = Receiver Reading + Antenna Factor + Cable Loss- Preamplifier Factor
2. No any other emission which falls in restricted bands can be detected and be reported.
3. If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205

Restricted bands of operation.

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

FCC Part 15, Subpart C Section 15.205 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.5 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

8 Test Setup Photographs

Refer to the < WC18R2211 _Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < WC18R2211 _External Photos-FCC > & < WC18R2211 _Internal Photos-FCC>.

--End of the Report--