

# FCC Radio Test Report

## FCC ID: 2ADYO-SL170X

### Original Grant

**Report No.** : TB-FCC164760

**Applicant** : Sensoro Co., Ltd.

#### Equipment Under Test (EUT)

**EUT Name** : SENSORO LENS

**Model No.** : SL1701

**Serial Model No.** : SL170X

**Brand Name** : SENSORO

**Receipt Date** : 2019-03-13

**Test Date** : 2019-03-13 to 2019-04-20

**Issue Date** : 2019-04-23

**Standards** : FCC Part 15, Subpart E (15.407)

**Test Method** : ANSI C63.10: 2013

**Conclusions** : PASS

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC and IC requirements

**Test/Witness Engineer** : *Ivan Su*

**Approved&  
Authorized** : *Leysha*

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT .....</b>	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units .....	7
1.5 Description of Test Mode.....	8
1.6 Description of Test Software Setting .....	8
1.7 Test Facility.....	10
<b>2. TEST SUMMARY.....</b>	<b>11</b>
<b>3. TEST EQUIPMENT.....</b>	<b>12</b>
<b>4. CONDUCTED EMISSION TEST .....</b>	<b>13</b>
4.1 Test Standard and Limit.....	13
4.2 Test Setup.....	13
4.3 Test Procedure.....	14
4.4 EUT Operating Mode .....	14
4.5 Test Data.....	14
<b>5. RADIATED EMISSION TEST .....</b>	<b>15</b>
5.1 Test Standard and Limit.....	15
5.2 Test Setup.....	16
5.3 Test Procedure.....	17
5.4 EUT Operating Condition .....	18
5.5 Test Data.....	18
<b>6. RESTRICTED BANDS AND BAND-EDGE TEST .....</b>	<b>19</b>
6.1 Test Standard and Limit.....	19
6.2 Test Setup.....	19
6.3 Test Procedure.....	20
6.4 EUT Operating Condition .....	20
6.5 Test Data.....	20
<b>7. BANDWIDTH TEST.....</b>	<b>21</b>
7.1 Test Standard and Limit.....	21
7.2 Test Setup.....	21
7.3 Test Procedure.....	21
7.4 EUT Operating Condition .....	22
7.5 Test Data.....	22
<b>8. OUTPUT POWER TEST.....</b>	<b>23</b>
8.1 Test Standard and Limit.....	23
8.2 Test Setup.....	23
8.3 Test Procedure.....	23

---

8.4 EUT Operating Condition .....	23
8.5 Test Date.....	23
<b>9. POWER SPECTRAL DENSITY TEST .....</b>	<b>24</b>
9.1 Test Standard and Limit.....	24
9.2 Test Setup.....	24
9.3 Test Procedure.....	24
9.4 EUT Operating Condition .....	25
9.5 Test Data.....	25
<b>10. FREQUENCY STABILITY MEASUREMENT .....</b>	<b>26</b>
10.1 Test Standard and Limit .....	26
10.2 Test Setup.....	26
10.3 Test Procedure.....	26
10.4 EUT Operating Condition .....	26
10.5 Test Data.....	27
<b>11. ANTENNA REQUIREMENT.....</b>	<b>28</b>
11.1 Standard Requirement.....	28
11.2 Antenna Connected Construction .....	28
11.3 Result.....	28
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>29</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>31</b>
<b>ATTACHMENT C-- BAND EDGE EMISSIONS TEST DATA .....</b>	<b>35</b>
<b>ATTACHMENT D-- BANDWIDTH TEST DATA.....</b>	<b>63</b>
<b>ATTACHMENT E-- OUTPUT POWER TEST DATA.....</b>	<b>74</b>
<b>ATTACHMENT F-- POWER SPECTRAL DENSITY TEST DATA.....</b>	<b>79</b>
<b>ATTACHMENT G-- FREQUENCY STABILITY MEASUREMENT TEST DATA.....</b>	<b>89</b>

## Revision History

## 1. General Information about EUT

### 1.1 Client Information

**Applicant** : Sensoro Co., Ltd.  
**Address** : Room 2807, Building 1B, Wangjing SOHO, No. 10 Wangjing Street, Chaoyang District, Beijing, China  
**Manufacturer** : Hangzhou Xiongmai Technology Co., Ltd.  
**Address** : No2 Dongqiao Rd Dongzhou Functional Zone, Dongzhou Street Fuyang District, Hangzhou, China

### 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	: SENSORO LENS				
<b>Models No.</b>	: SL1701,SL170X				
<b>Model Difference</b>	: All these models are identical in the same PCB layout and electrical circuit, The only difference is the difference Appearance of the color and model.				
<b>Product Description</b>	Operation Frequency: U-NII-3: 5745MHz~5825MHz				
	Antenna Gain:	5 dBi FPC Antenna			
	Modulation Type:	802.11a: OFDM (QPSK, BPSK, 16QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM)			
	Bit Rate of Transmitter:	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 150Mbps 802.11ac: at most 433.3 Mbps			
<b>Power Supply</b>	: DC Voltage supplied by AC/DC Adapter				
<b>Power Rating</b>	: AC/DC Adapter (SLU2808): Input: AC 100~240V, 50/60Hz, 0.6A. Output: DC 5V, 2A.				
<b>Software Version</b>	: V1.03				
<b>Hardware Version</b>	: V1.4x				
<b>Connecting I/O Port(S)</b>	: Please refer to the User's Manual				
<b>Note:</b> More detailed features description, please refer to the manufacturer's specifications or the User's Manual.					

**Note:**

(1) This Test Report is FCC Part 15, Subpart E(15.407) for 802.11a/n/ac, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.


## (2) Channel List:

5G Band 5745~5825 MHz(U-NII-3)				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5745~5825 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

Remark:  
For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165.  
For 40 MHz Bandwidth, use channel 151, 159.  
For 80 MHz Bandwidth, use channel 155

## 1.3 Block Diagram Showing the Configuration of System Tested

## Adapter +TX Mode

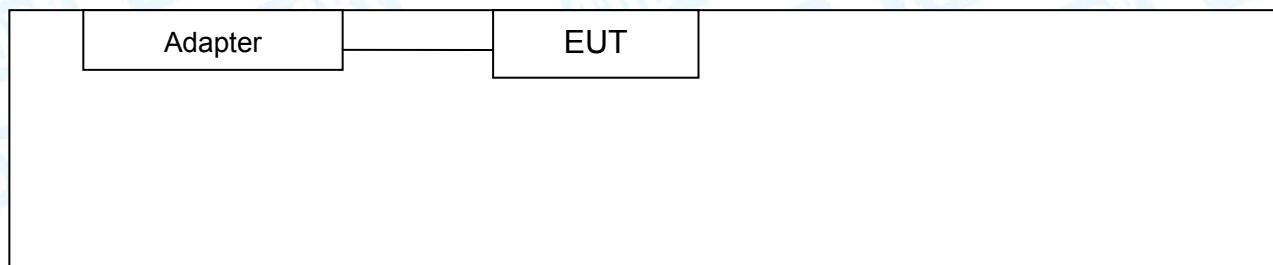

## 1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used "✓"
---	---	---	---	
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
---	---	---	---	

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode	Description	
Mode 1	TX 802.11a Mode	
For Radiated Test		
Test Band	Final Test Mode	Description
U-NII-3	Mode 2	TX Mode 802.11a Mode Channel 149/157/165
	Mode 3	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 4	TX Mode 802.11n(HT40) Mode Channel 151/159
	Mode 5	TX Mode 802.11ac(VHT20) Mode Channel 149/157/165
	Mode 6	TX Mode 802.11ac(VHT40) Mode Channel 151/159
	Mode 7	TX Mode 802.11ac(VHT80) Mode Channel 155

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

802.11a Mode: OFDM (6 Mbps)

802.11n (HT20) Mode: MCS 8

802.11n (HT40) Mode: MCS 8

802.11ac(VHT20) Mode: MCS 1/Nss2

802.11ac(VHT40) Mode: MCS 1/Nss2

802.11ac(VHT80) Mode: MCS 1/Nss2

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software Version	Ampak RF Test Tool		
<b>U-NII-3</b>			
Mode:	5745MHz	5785MHz	5825MHz
IEEE 802.11a	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
IEEE 802.11ac (VHT20)	DEF	DEF	DEF
Mode:	5755MHz	5795MHz	
IEEE 802.11n (HT40)	DEF	DEF	
IEEE 802.11ac (VHT40)	DEF	DEF	
Mode:	5775MHz		
IEEE 802.11ac (80)	DEF		

## 1.7 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.

FCC Accredited Test Site Number: 854351.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

FCC Part 15 Subpart E(15.407)/RSS-210: 2010				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	N/A
15.407(b)	RSS-GEN 7.2.2	Band Edge Emissions	PASS	N/A
15.407(a)	RSS-24 A.9.2	26dB Bandwidth&99% Bandwidth	PASS	N/A
15.407(e)	RSS-210 A.9.2	6dB Bandwidth( <b>only for UNII-3</b> )	PASS	N/A
15.407(a)	RSS-210 A.9.2	Peak Output Power	PASS	N/A
15.407(a)	RSS-210 A.9.2	Power Spectral Density	PASS	N/A
15.407(b)	RSS-210 A.9.2	Transmitter Radiated Spurious Emission	PASS	N/A
15.407(a)	RSS-210 A.9.2	Peak Excursion	PASS	N/A
15.407(g)	RSS-210 A.9.2	Frequency Stability	PASS	N/A

**Note:** "/" for no requirement for this test item.  
N/A is an abbreviation for Not Applicable.

### 3. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul.18, 2018	Jul. 17, 2019
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul.18, 2018	Jul. 17, 2019
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul.18, 2018	Jul. 17, 2019
LISN	Rohde & Schwarz	ENV216	101131	Jul.18, 2018	Jul. 17, 2019
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul.18, 2018	Jul. 17, 2019
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul.18, 2018	Jul. 17, 2019
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Jan. 27, 2019	Jan. 26, 2020
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Jan. 27, 2019	Jan. 26, 2020
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.03, 2019	Mar. 02, 2020
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar.03, 2019	Mar. 02, 2020
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 14, 2018	Jul.13, 2019
Pre-amplifier	Sonoma	310N	185903	Mar.04, 2019	Mar. 03, 2020
Pre-amplifier	HP	8449B	3008A00849	Mar.03, 2019	Mar. 02, 2020
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.03, 2019	Mar. 02, 2020
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul.18, 2018	Jul. 17, 2019
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul.18, 2018	Jul. 17, 2019
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 15, 2018	Sep. 14, 2019
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 15, 2018	Sep. 14, 2019
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 15, 2018	Sep. 14, 2019
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 15, 2018	Sep. 14, 2019
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 15, 2018	Sep. 14, 2019
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 15, 2018	Sep. 14, 2019
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 15, 2018	Sep. 14, 2019

## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

4.1.1 Test Standard  
FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

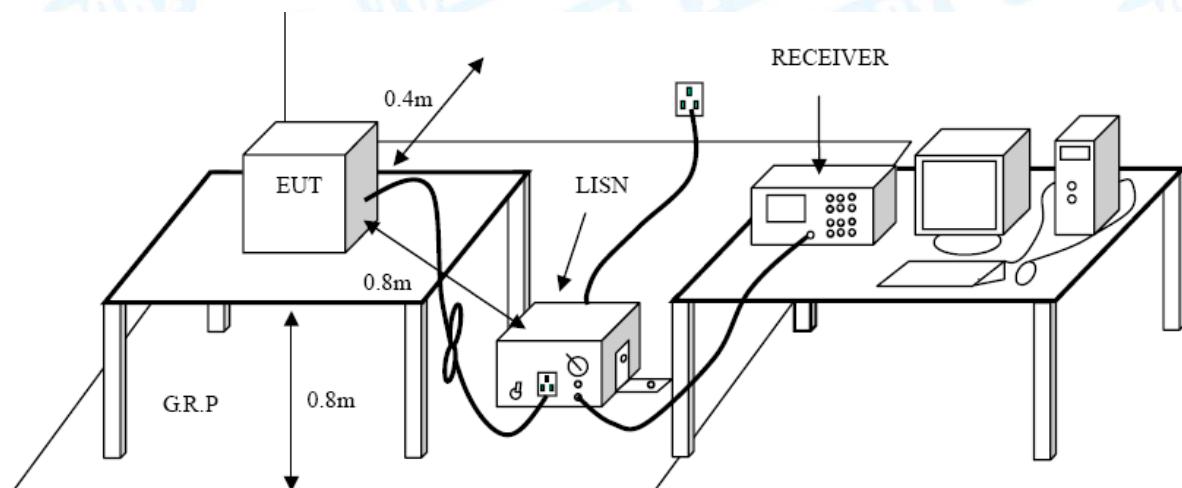

#### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

#### 4.4 EUT Operating Mode

Please refer to the description of test mode.

#### 4.5 Test Data

Please refer to the Attachment A.

## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

5.1.1 Test Standard  
FCC Part 15.209

5.1.2 Test Limit

#### Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54

**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
	-27(Note 2)	68.2
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.2


## NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where } P \text{ is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


## 5.2 Test Setup

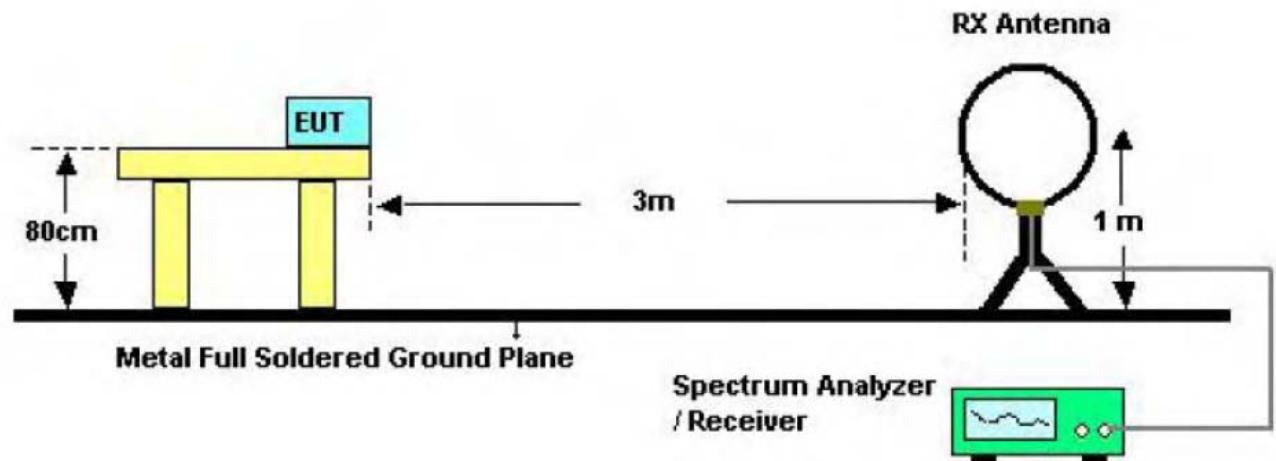

Below 30MHz Test Setup

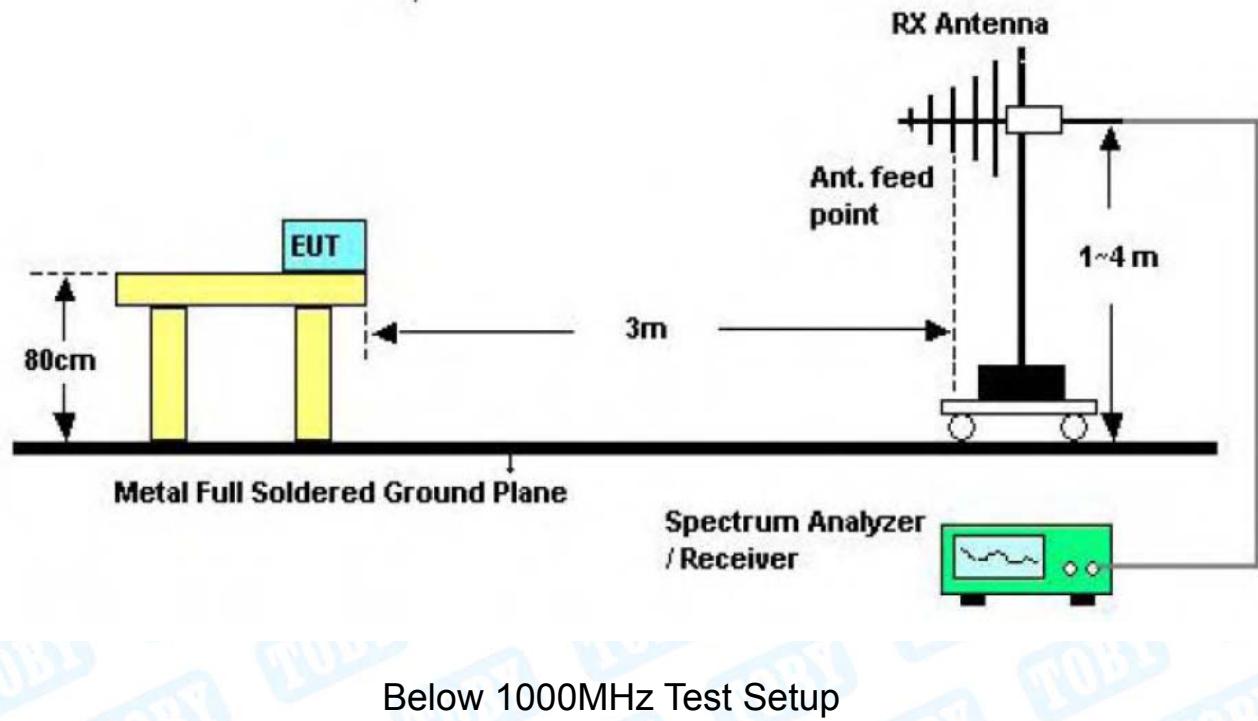

Below 1000MHz Test Setup

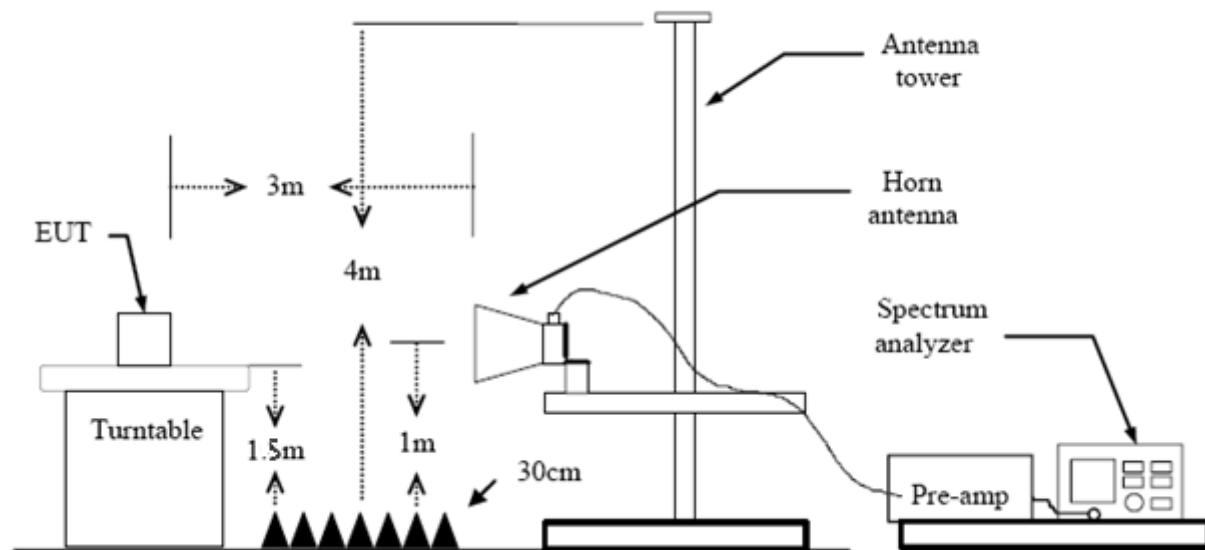

Above 1GHz Test Setup

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by

3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use  $VBW=120$  kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use  $RBW=1$  MHz and  $VBW=3$  MHz with Peak Detector for Peak Values, and use  $RBW=1$  MHz and  $VBW=10$  Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use  $RBW=1$  MHz and  $VBW=3$  MHz with Peak Detector for Peak Values, and use  $RBW=1$  MHz and  $VBW=10$  Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

## 6. Restricted Bands and Band-edge test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.407(b)

#### 6.1.2 Test Limit

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.2


NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where } P \text{ is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

### 6.2 Test Setup

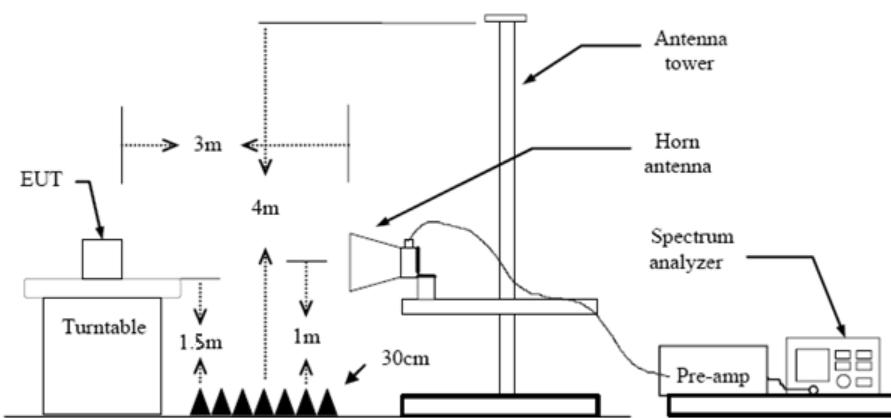

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

### 6.5 Test Data

Please refer to the Attachment C.

## 7. Bandwidth Test


### 7.1 Test Standard and Limit

7.1.1 Test Standard  
FCC Part 15.407

7.1.2 Test Limit

FCC Part 15 Subpart C(15.407)/RSS-210		
Test Item	Limit	Frequency Range (MHz)
26 Bandwidth	N/A	5150~5250
6 dB Bandwidth	>500kHz	5725~5850

### 7.2 Test Setup

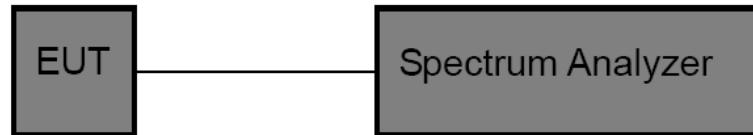

### 7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The setting of the spectrum analyser as below:

26dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$VBW \geq 3 \times RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	$\geq 3RBW$
Detector	Peak
Trace	Max Hold

## 7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

## 7.5 Test Data

Please refer to the Attachment D.

## 8. Output Power Test

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.407 (a)

#### 8.1.2 Test Limit

FCC Part 15 Subpart E(15.407)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Conducted Output Power	Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm)	5150~5250
	1 Watt (30dBm)	5725~5850

### 8.2 Test Setup

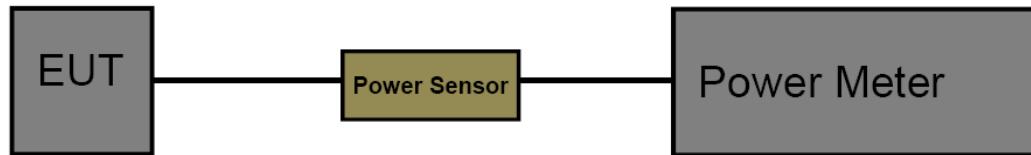

### 8.3 Test Procedure

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

The EUT was connected to RF power meter via a broadband power sensor as show the block above.

### 8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

### 8.5 Test Date

Please refer to the Attachment E.

## 9. Power Spectral Density Test

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.407 (a)

#### 9.1.2 Test Limit

FCC Part 15 Subpart E(15.407)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	Other than Mobile and Portable : 17dBm/MHz Mobile and Portable : 11dBm/MHz	5150~5250
	30dBm/510kHz	5725~5850

### 9.2 Test Setup

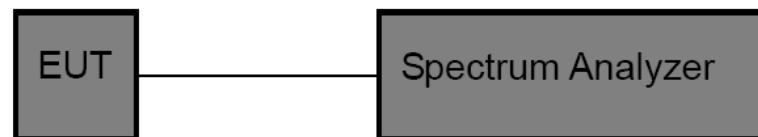

### 9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW)(alternatively, the entire 99% OBW) of the signal.
- (4) Set the RBW to: 1 MHz
- (5) Set the VBW to: 3 MHz
- (6) Detector: RMS
- (7) Trace: Max Hold
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) User the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.

## 9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

## 9.5 Test Data

Please refer to the Attachment F.

## 10. Frequency Stability Measurement

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

FCC Part 15.407

#### 10.1.2 Test Limit

FCC Part 15 Subpart C(15.407)		
Test Item	Limit	Frequency Range(MHz)
Peak Excursion Measurement	Specified in the user's manual, the transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5725~5850

### 10.2 Test Setup

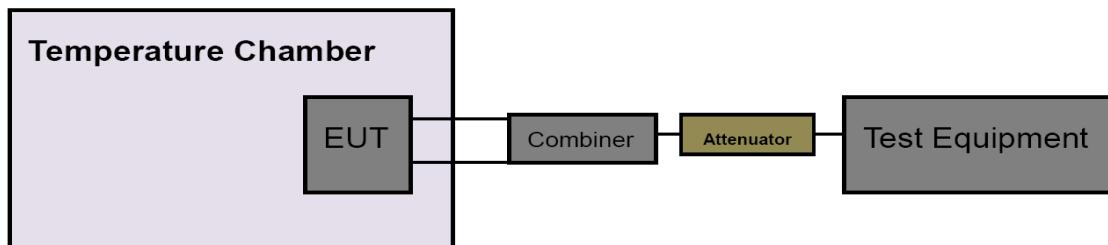

### 10.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 10 kHz, VBW=10 kHz with peak detector and maxhold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- (6) Extreme temperature is 0°C~50°C

### 10.4 EUT Operating Condition

The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

## 10.5 Test Data

Please refer to the Attachment G.

## 11. Antenna Requirement

### 11.1 Standard Requirement

#### 11.1.1 Standard

FCC Part 15.203

#### 11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 5dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


### 11.3 Result

The EUT antennas are FPC Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

## Attachment A-- Conducted Emission Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	TX 802.11a Mode CH149 5745MHz		
Remark:	Only worse case is reported		

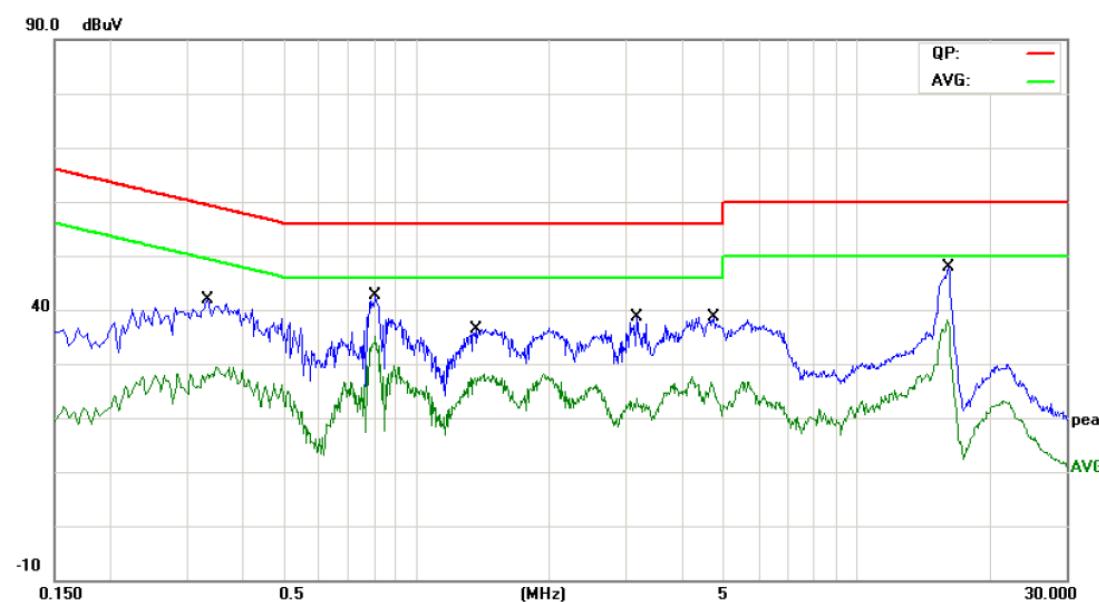


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.3339	27.54	9.59	37.13	59.35	-22.22	QP
2		0.3339	16.72	9.59	26.31	49.35	-23.04	AVG
3		0.8059	30.44	9.61	40.05	56.00	-15.95	QP
4	*	0.8059	24.72	9.61	34.33	46.00	-11.67	AVG
5		1.3619	22.39	9.60	31.99	56.00	-24.01	QP
6		1.3619	16.94	9.60	26.54	46.00	-19.46	AVG
7		3.1700	20.92	9.65	30.57	56.00	-25.43	QP
8		3.1700	11.36	9.65	21.01	46.00	-24.99	AVG
9		4.7340	22.25	9.72	31.97	56.00	-24.03	QP
10		4.7340	11.59	9.72	21.31	46.00	-24.69	AVG
11		16.1460	33.10	10.48	43.58	60.00	-16.42	QP
12		16.1460	25.59	10.48	36.07	50.00	-13.93	AVG

\*:Maximum data    x:Over limit    !:over margin

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	TX 802.11a Mode CH149 5745MHz		
Remark:	Only worse case is reported		

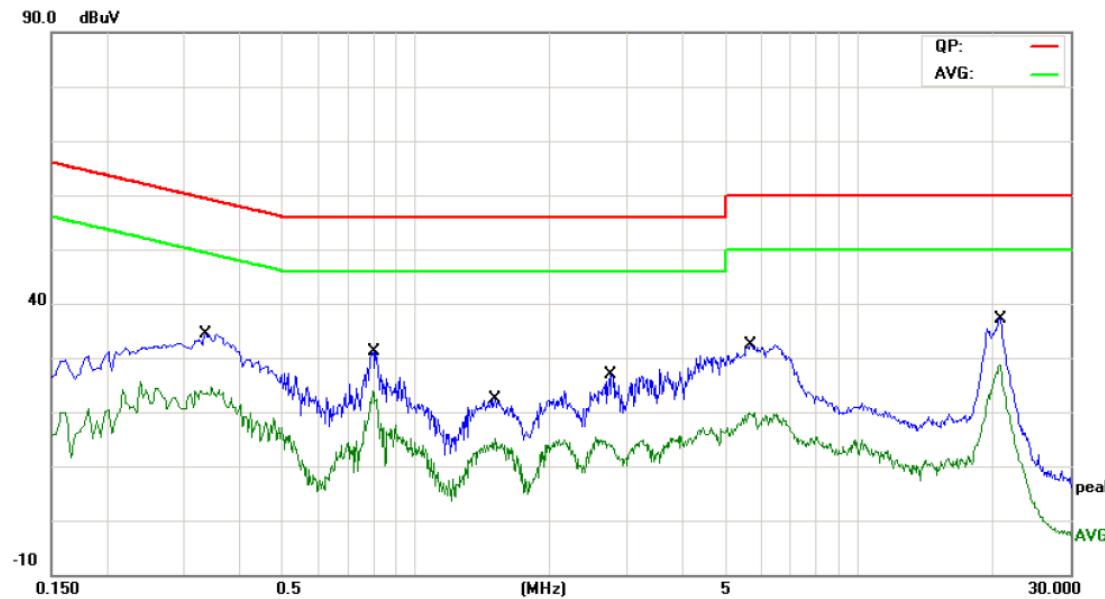

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over	Detector
			Level		ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.3339	30.37	0.03	30.40	59.35	-28.95	QP	
2	0.3339	21.54	0.03	21.57	49.35	-27.78	AVG	
3	0.8020	28.79	0.01	28.80	56.00	-27.20	QP	
4	*	0.8020	23.30	0.01	23.31	46.00	-22.69	AVG
5	1.5060	18.54	0.02	18.56	56.00	-37.44	QP	
6	1.5060	13.20	0.02	13.22	46.00	-32.78	AVG	
7	2.7580	19.54	0.02	19.56	56.00	-36.44	QP	
8	2.7580	12.52	0.02	12.54	46.00	-33.46	AVG	
9	5.6979	27.44	0.02	27.46	60.00	-32.54	QP	
10	5.6979	16.79	0.02	16.81	50.00	-33.19	AVG	
11	20.8420	33.57	0.20	33.77	60.00	-26.23	QP	
12	20.8420	26.60	0.20	26.80	50.00	-23.20	AVG	

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

**Remark: All channels have been tested and Shows only the worst channels.**

## Attachment B-- Radiated Emission Test Data


### 9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		
Remark:	Only worse case is reported		

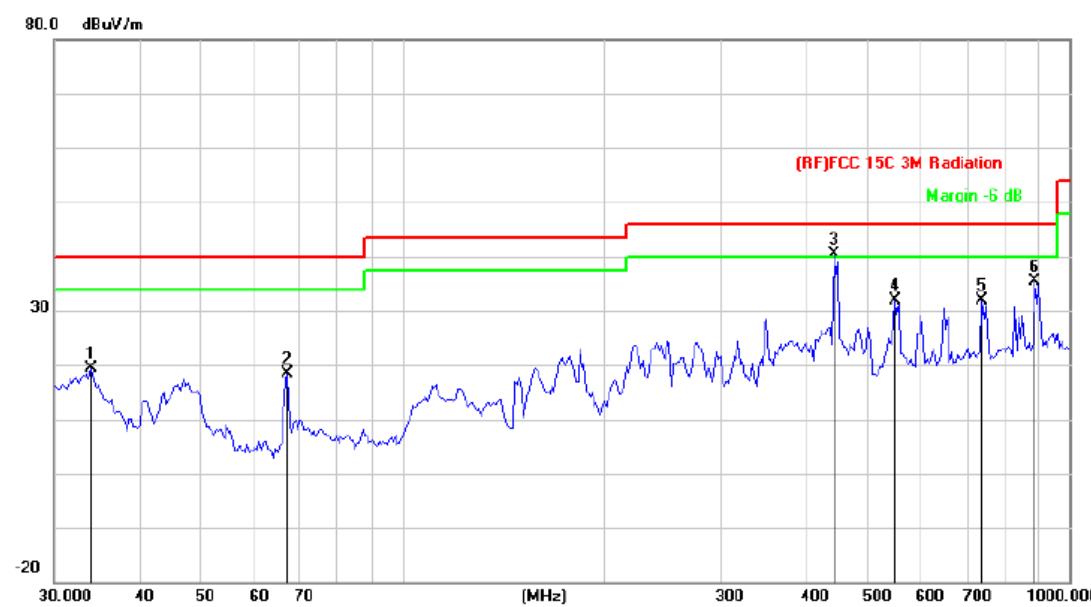


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Over
			Level	Factor	ment			
1		34.0365	35.41	-16.03	19.38	40.00	-20.62	QP
2		67.2022	41.91	-23.62	18.29	40.00	-21.71	QP
3	*	443.2943	52.08	-11.59	40.49	46.00	-5.51	QP
4		547.0977	40.61	-8.70	31.91	46.00	-14.09	QP
5		739.6604	38.08	-6.22	31.86	46.00	-14.14	QP
6		887.6099	39.42	-4.03	35.39	46.00	-10.61	QP

\*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		
Remark:	Only worse case is reported		

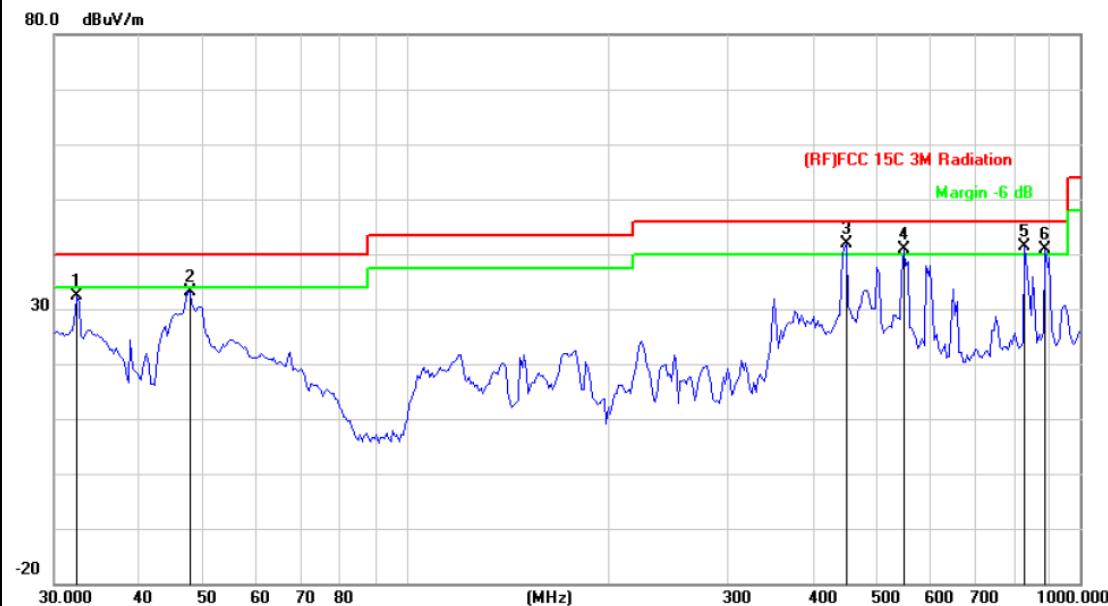

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		32.4059	47.26	-14.81	32.45	40.00	-7.55	QP
2		47.6586	55.42	-22.36	33.06	40.00	-6.94	QP
3	*	449.5558	53.52	-11.55	41.97	46.00	-4.03	QP
4	!	547.0977	49.61	-8.70	40.91	46.00	-5.09	QP
5	!	827.4934	46.73	-5.28	41.45	46.00	-4.55	QP
6	!	887.6099	44.99	-4.03	40.96	46.00	-5.04	QP

\*:Maximum data    x:Over limit    !:over margin

Emission Level= Read Level+ Correct Factor

**Above 1GHz**

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 AC80 Mode 5775MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11550.452	33.25	16.75	50.00	54.00	-4.00	AVG
2		11550.488	46.73	16.75	63.48	68.30	-4.82	peak

**Emission Level= Read Level+ Correct Factor**

Temperature:	25°C	Relative Humidity:	55%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11 AC80 Mode 5775MHz							
Remark:	No report for the emission which more than 10 dB below the prescribed limit.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11550.044	31.36	16.75	48.11	54.00	-5.89	AVG
2		11550.158	45.39	16.75	62.14	68.30	-6.16	peak

**Emission Level= Read Level+ Correct Factor**


Note:


1. Emission Level= Read Level+ Correct Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
4. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
5. All modes are tested, showing only the worst patterns in the report.

## Attachment C-- Band Edge Emissions Test Data


### (1) Radiation Test

a/n(20)/ac(VHT20)

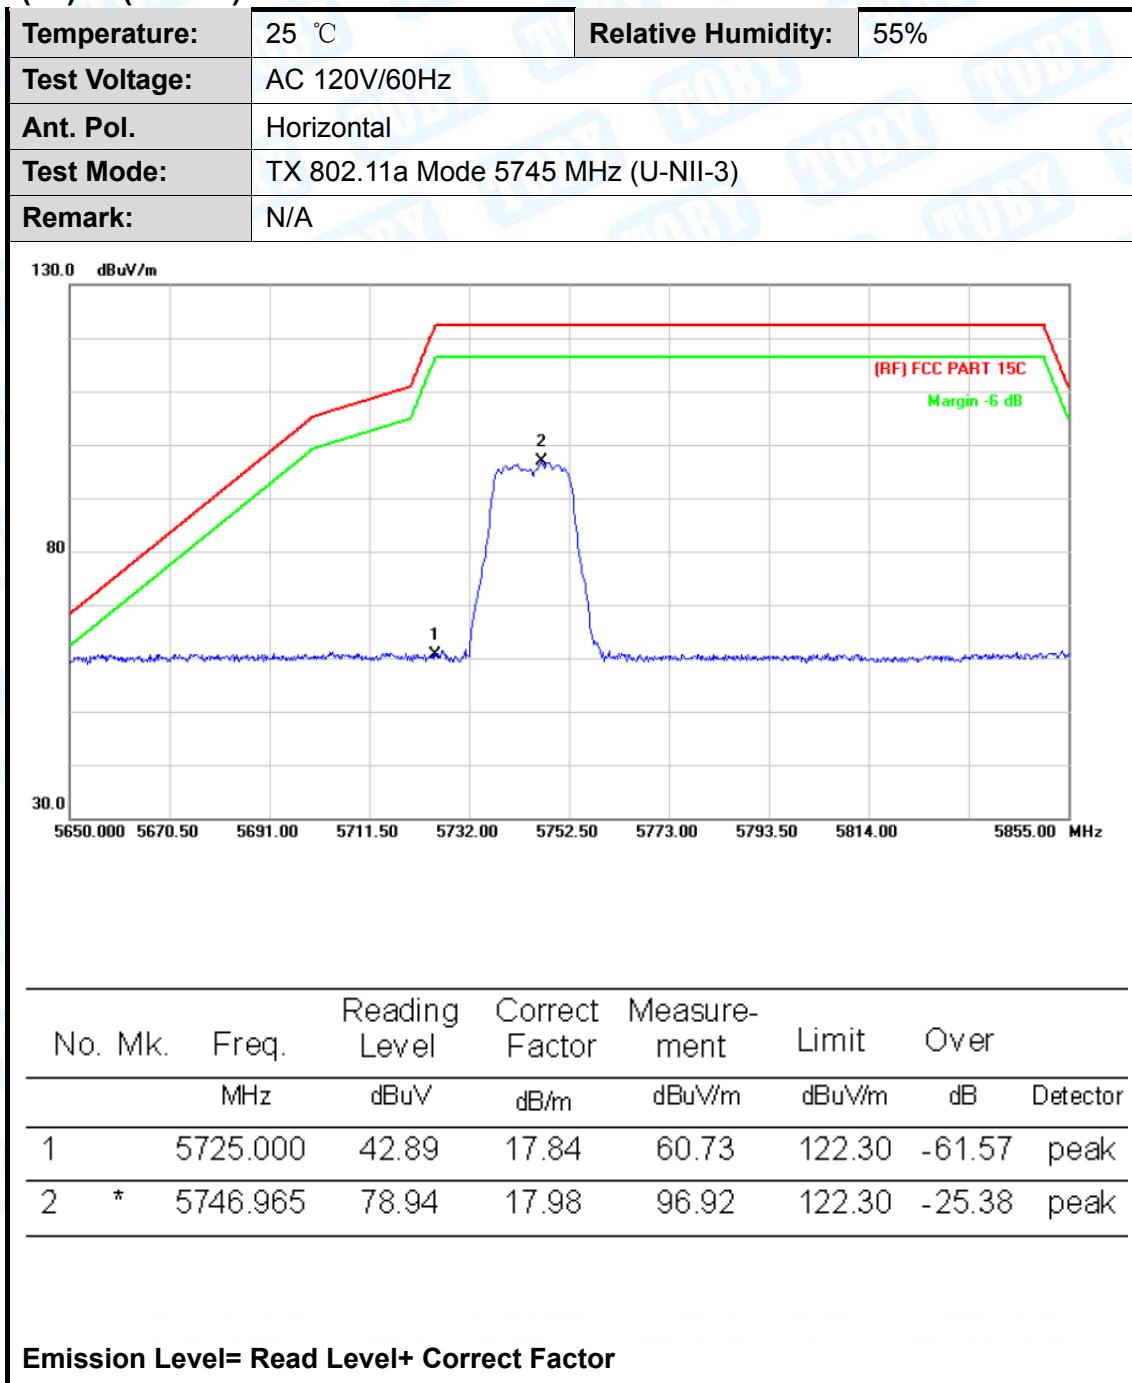

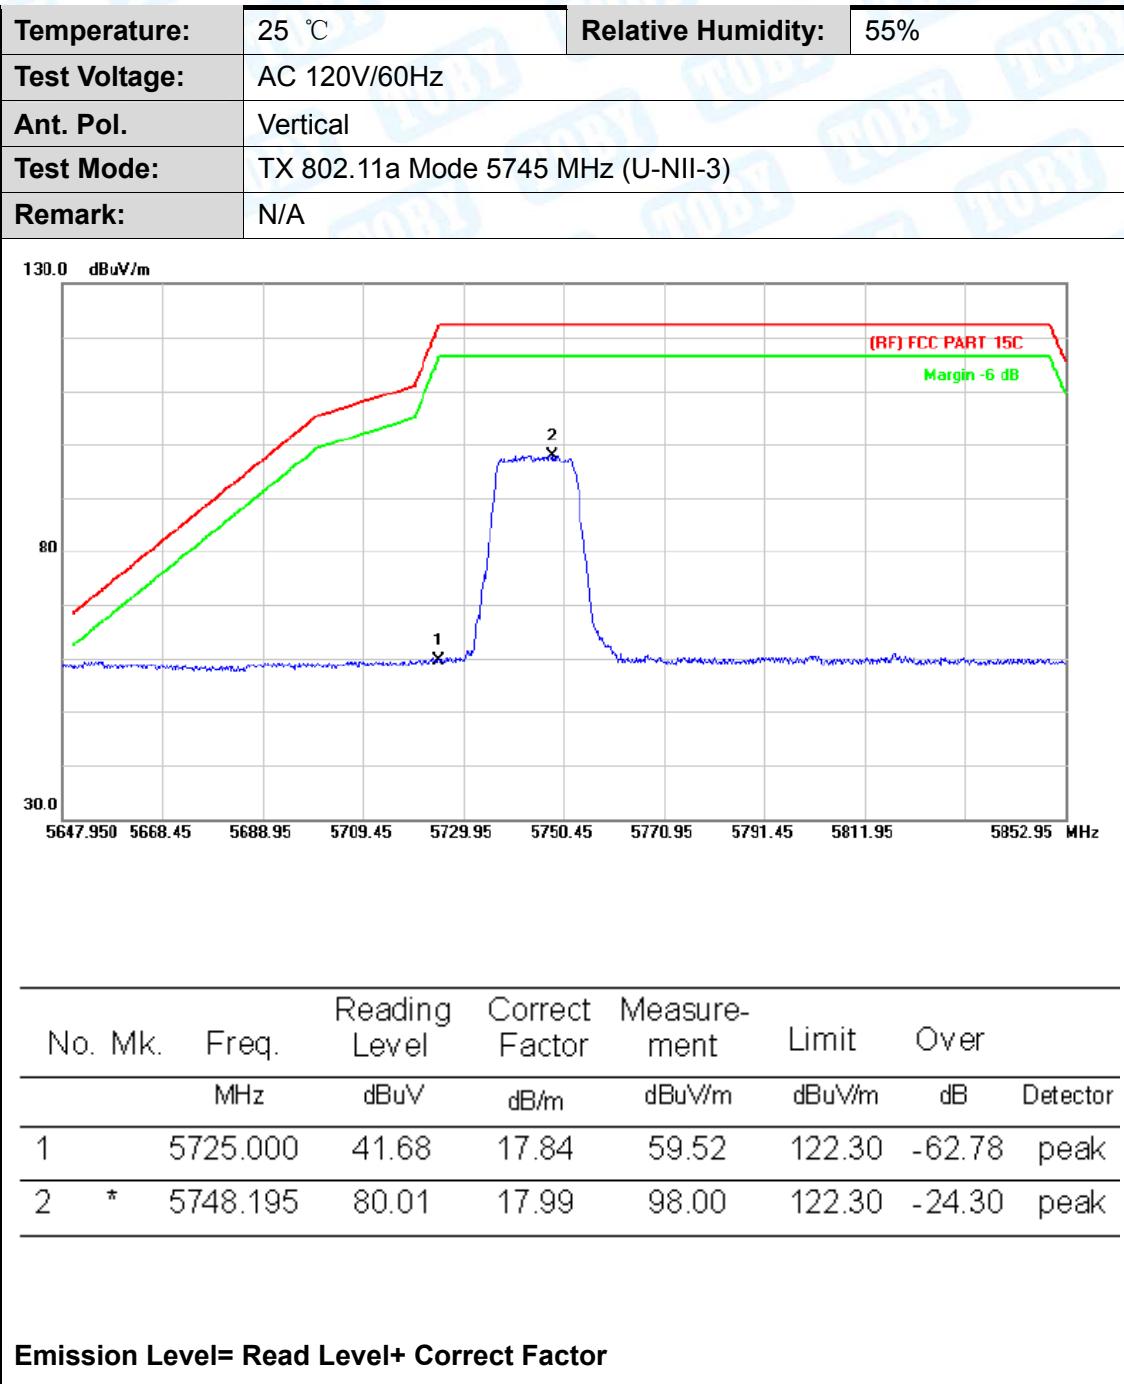



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

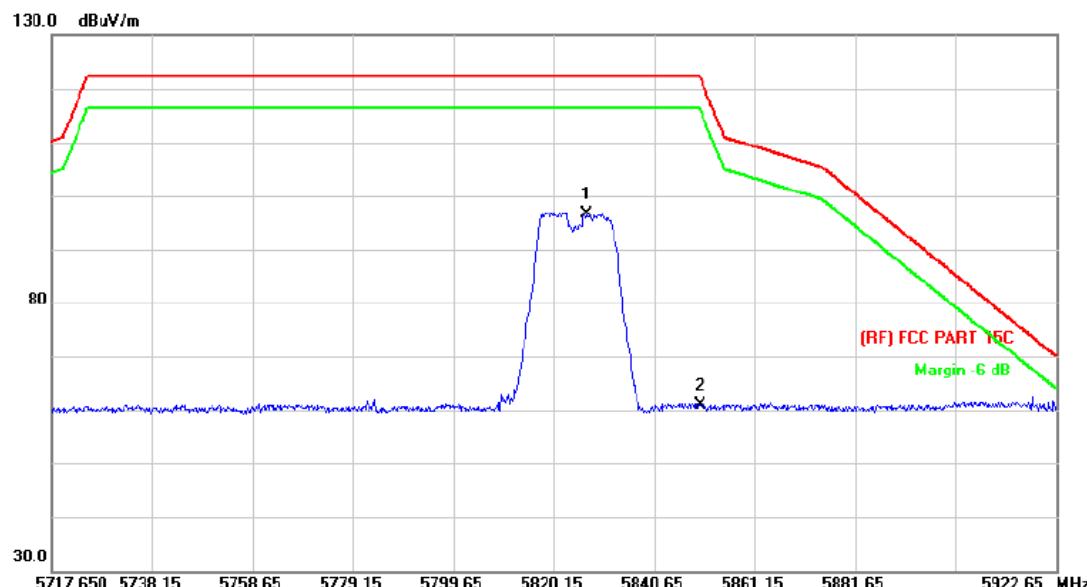


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB <sub>uV</sub>	dB/m	dB <sub>uV/m</sub>	dB	Detector
1	*	5826.710	78.21	18.48	96.69	122.30	-25.61 peak
2		5850.000	42.33	18.62	60.95	122.30	-61.35 peak

Emission Level= Read Level+ Correct Factor

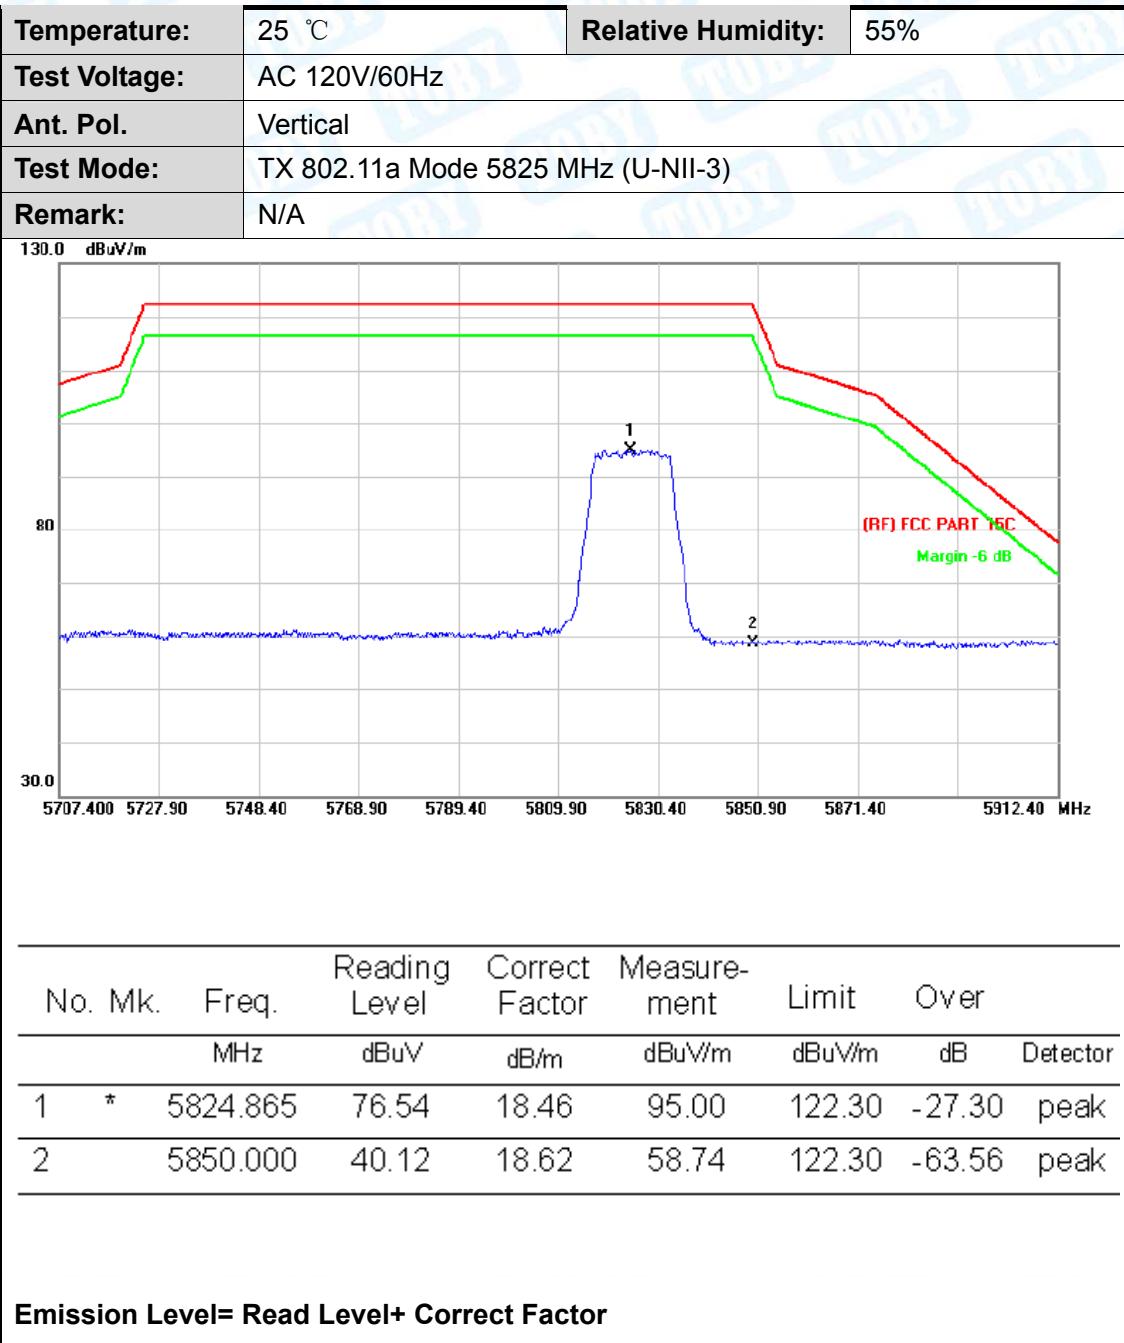

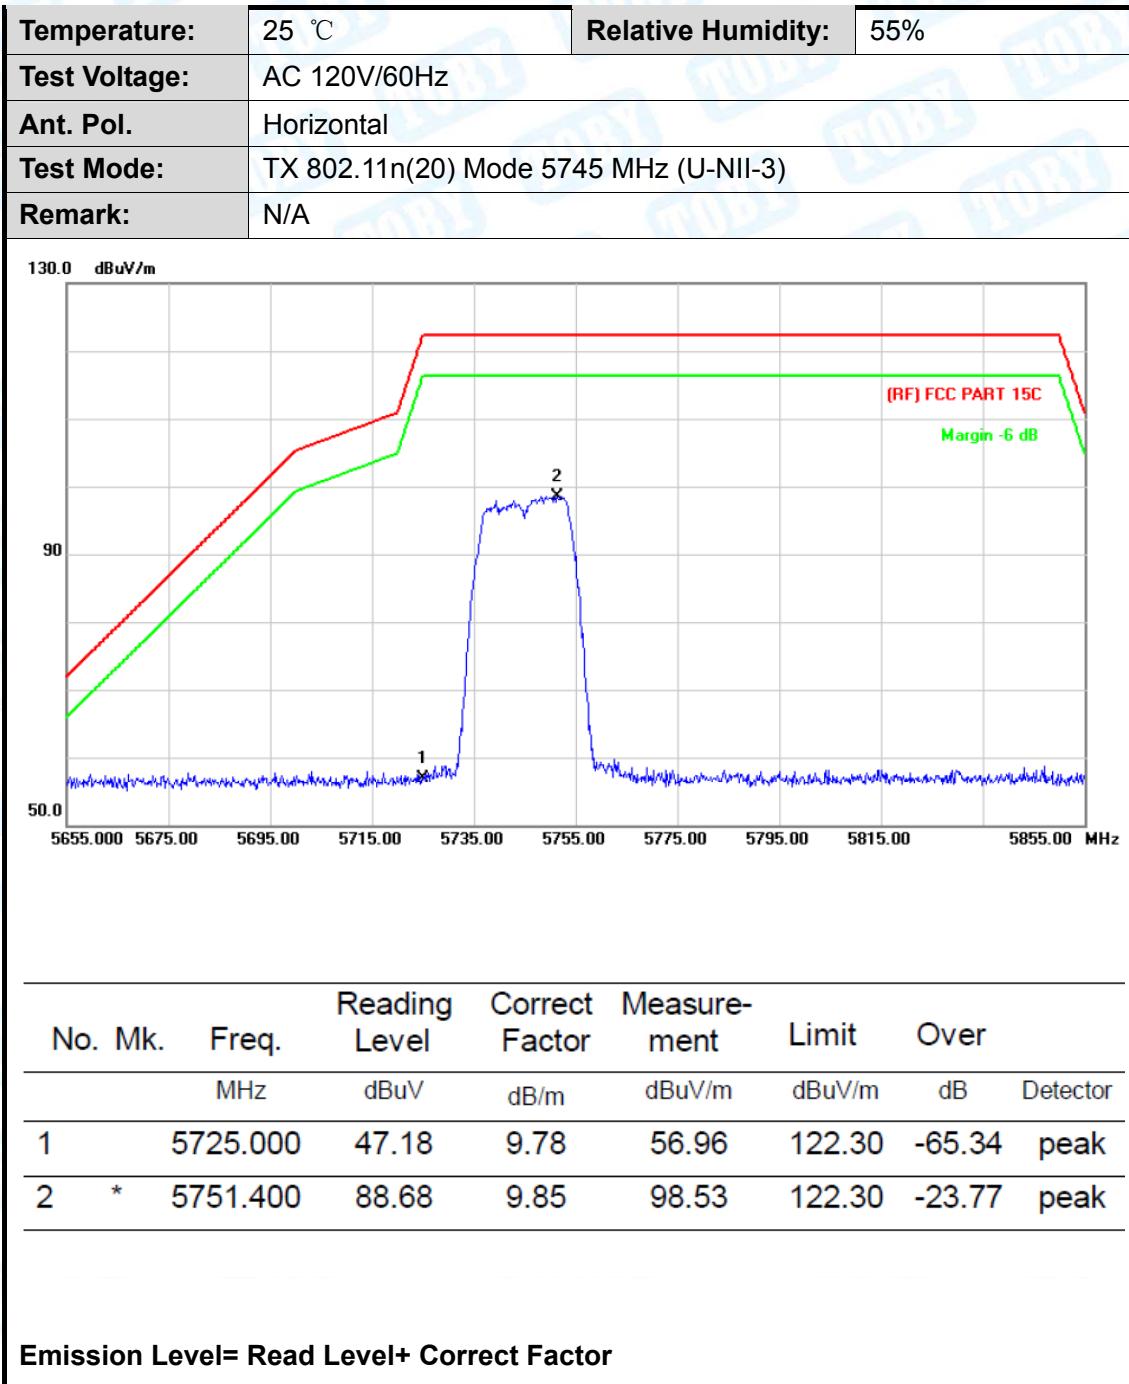


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

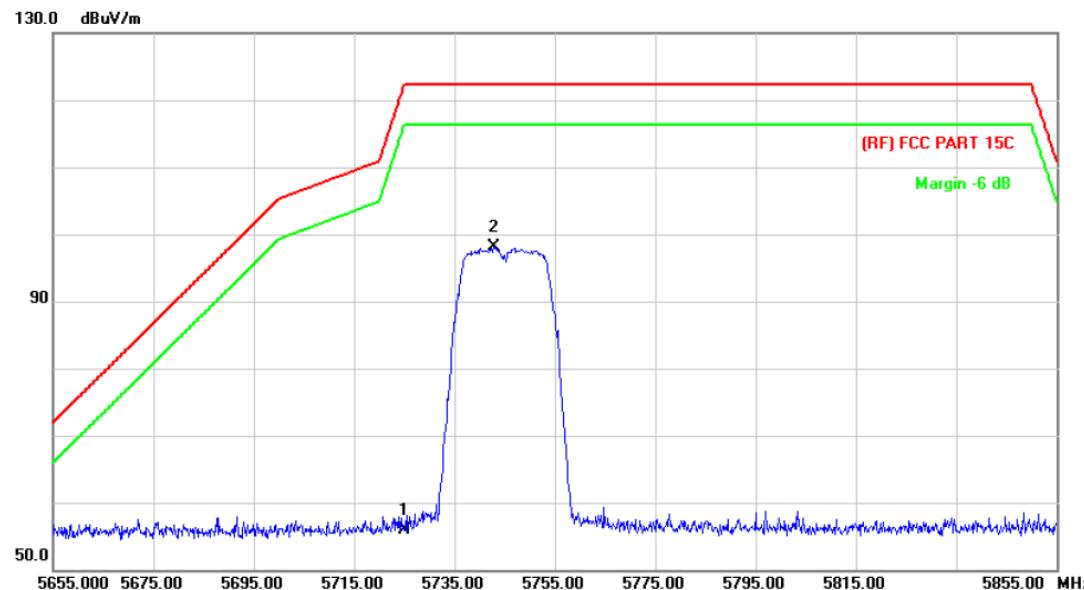


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1		5725.000	46.15	9.78	55.93	122.30	-66.37 peak
2	*	5742.800	88.32	9.83	98.15	122.30	-24.15 peak

Emission Level= Read Level+ Correct Factor

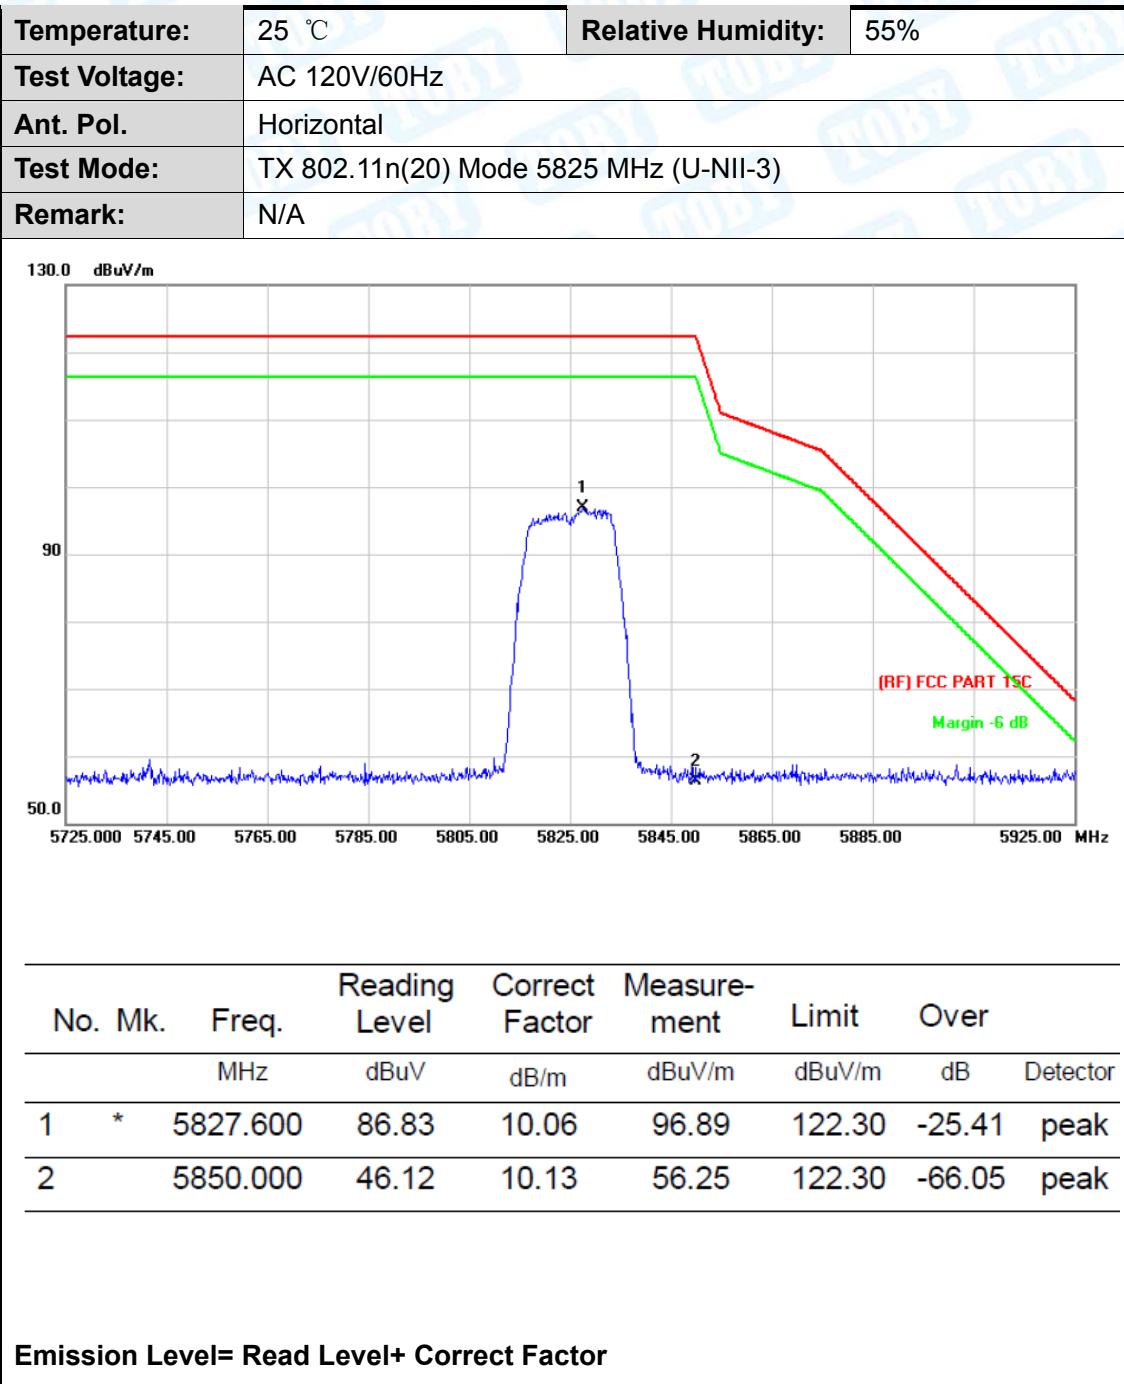


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

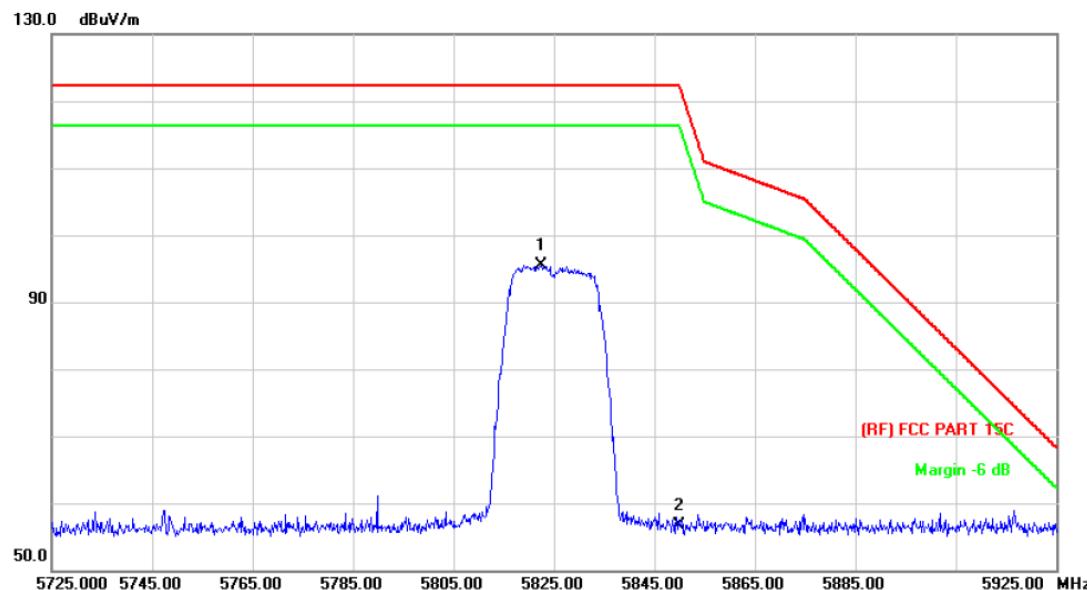

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5822.400	85.54	10.05	95.59	122.30	-26.71	peak
2		5850.000	46.57	10.13	56.70	122.30	-65.60	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

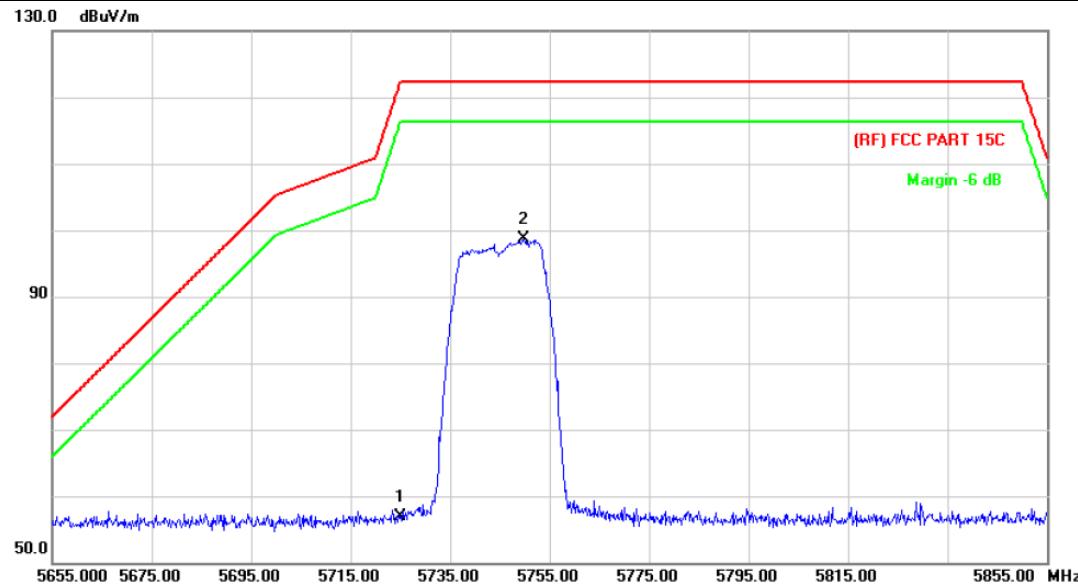


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		5725.000	47.21	9.78	56.99	122.30	-65.31 peak
2	*	5749.800	88.84	9.84	98.68	122.30	-23.62 peak

Emission Level= Read Level+ Correct Factor

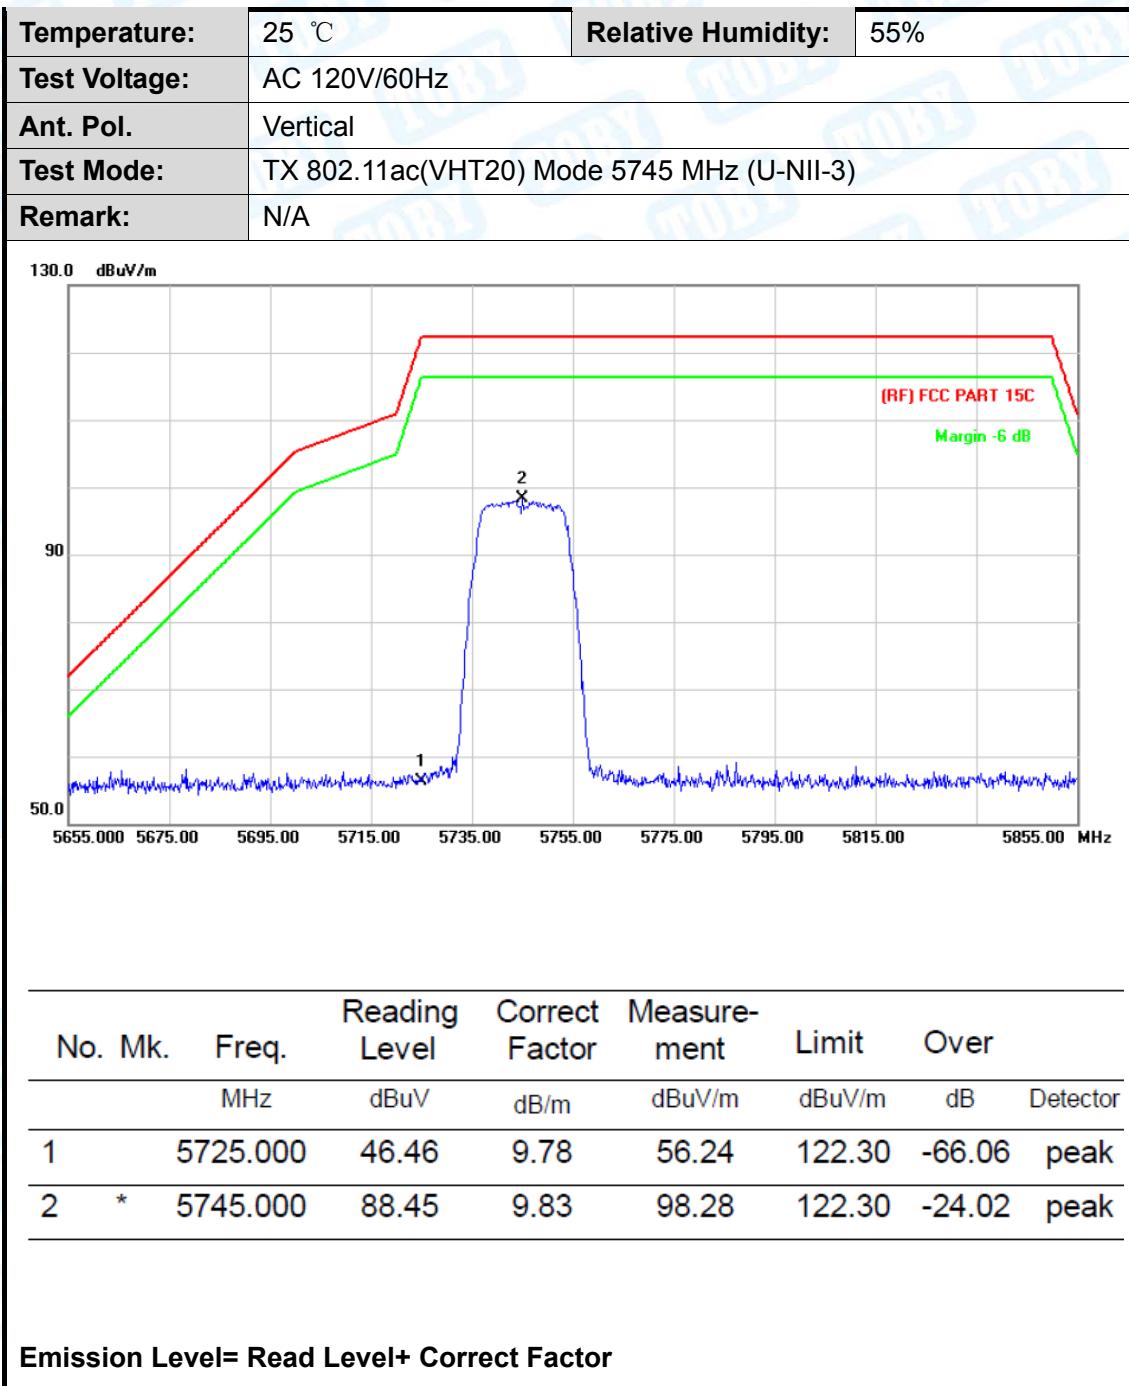


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

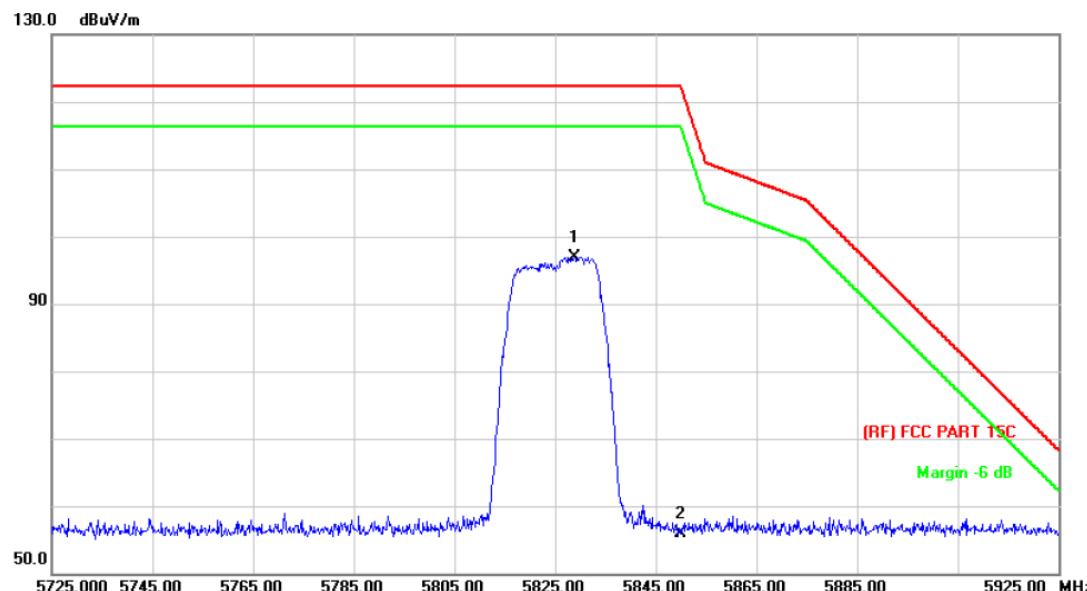


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	5828.800	86.92	10.07	96.99	122.30	-25.31
2		5850.000	45.68	10.13	55.81	122.30	-66.49

Emission Level= Read Level+ Correct Factor

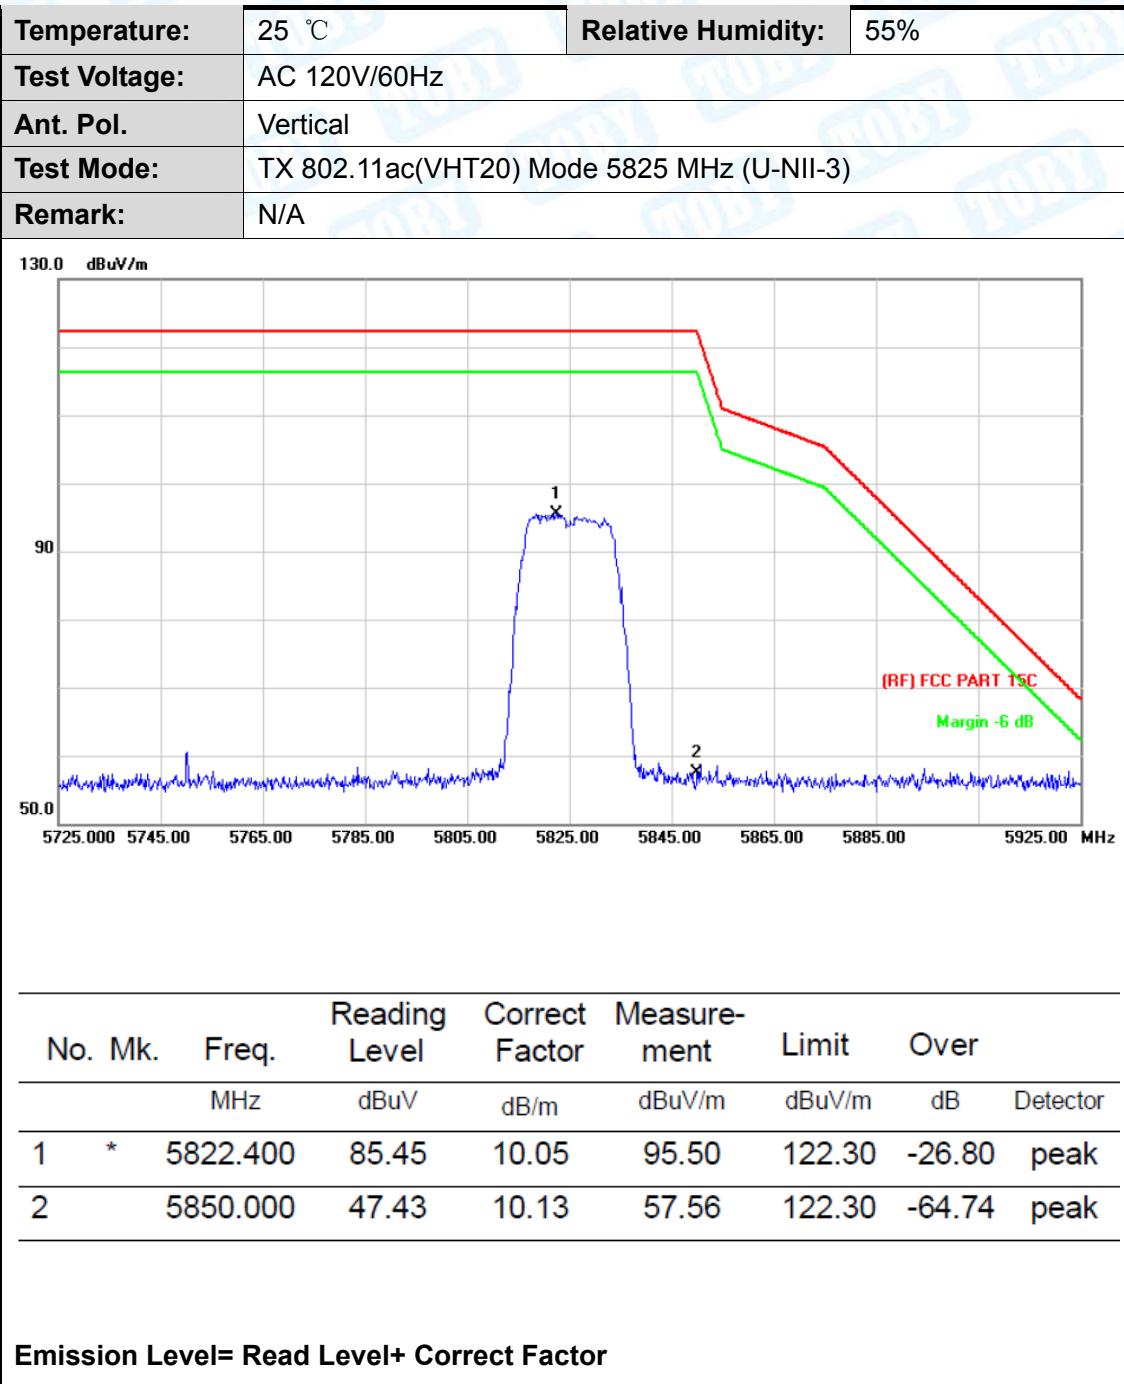

## n(40)/ac(VHT40)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

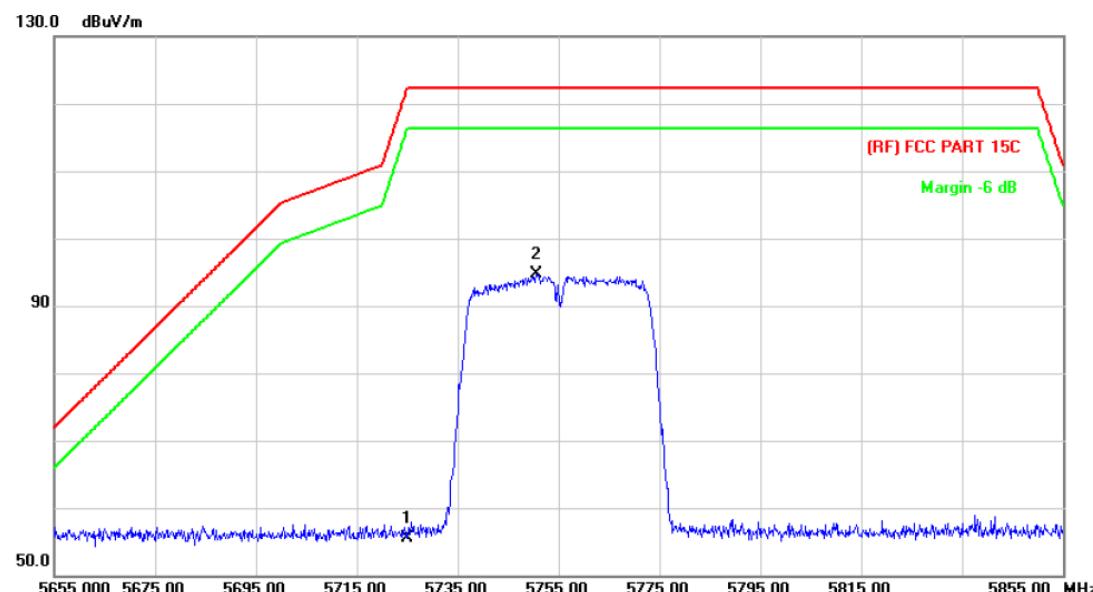

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dB	Detector
1	*	5725.000	45.68	9.78	55.46	122.30	-66.84 peak
2	*	5750.600	84.78	9.85	94.63	122.30	-27.67 peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

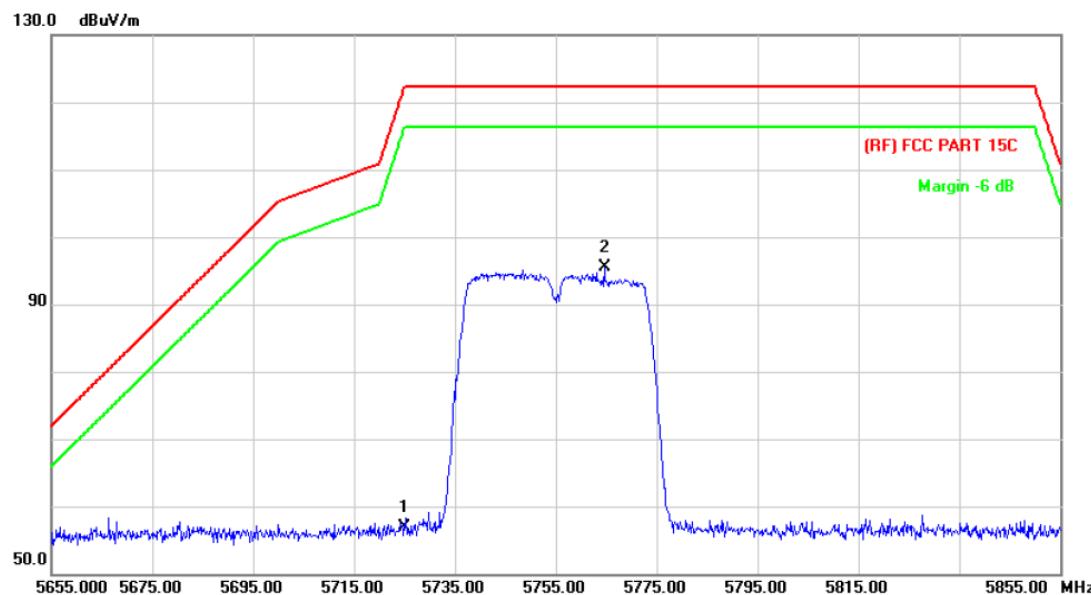

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	5725.000	47.08	9.78	56.86	122.30	-65.44 peak
2	*	5764.600	85.54	9.89	95.43	122.30	-26.87 peak

Emission Level= Read Level+ Correct Factor



