

AppendixA: Effective (Isotropic) Radiated Power Output Data

Test Result(WCDMA)

Band	Type	Channel	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	Voice	9262	23.24	20.74	33.01	PASS
Band2	TestMode	9262	23.23	20.73	33.01	PASS
Band2	TestMode	9400	23.25	20.75	33.01	PASS
Band2	Voice	9400	23.28	20.78	33.01	PASS
Band2	TestMode	9538	23.56	21.06	33.01	PASS
Band2	Voice	9538	23.52	21.02	33.01	PASS
Band4	Voice	1312	23.41	21.31	30.00	PASS
Band4	TestMode	1312	23.45	21.35	30.00	PASS
Band4	TestMode	1413	23.45	21.35	30.00	PASS
Band4	Voice	1413	23.46	21.36	30.00	PASS
Band4	Voice	1513	23.55	21.45	30.00	PASS
Band4	TestMode	1513	23.52	21.42	30.00	PASS
Band5	TestMode	4132	23.37	14.33	38.45	PASS
Band5	Voice	4132	23.38	14.34	38.45	PASS
Band5	TestMode	4183	23.39	14.35	38.45	PASS
Band5	Voice	4183	23.36	14.32	38.45	PASS
Band5	Voice	4233	23.2	14.16	38.45	PASS
Band5	TestMode	4233	23.23	14.19	38.45	PASS

Test Result(HSDPA)

Band	Channel	SubTest	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	9262	1	22.78	20.28	33.01	PASS
Band2	9262	2	22.74	20.24	33.01	PASS
Band2	9262	3	22.75	20.25	33.01	PASS
Band2	9262	4	23.33	20.83	33.01	PASS
Band2	9400	1	22.75	20.25	33.01	PASS
Band2	9400	2	22.7	20.20	33.01	PASS
Band2	9400	3	22.77	20.27	33.01	PASS
Band2	9400	4	23.63	21.13	33.01	PASS
Band2	9538	1	23.05	20.55	33.01	PASS
Band2	9538	2	23.04	20.54	33.01	PASS
Band2	9538	3	23.08	20.58	33.01	PASS
Band2	9538	4	22.78	20.28	33.01	PASS

Band4	1312	1	23.51	21.41	30.00	PASS
Band4	1312	2	22.93	20.83	30.00	PASS
Band4	1312	3	22.98	20.88	30.00	PASS
Band4	1312	4	22.91	20.81	30.00	PASS
Band4	1413	1	23.50	21.4	30.00	PASS
Band4	1413	2	22.91	20.81	30.00	PASS
Band4	1413	3	22.96	20.86	30.00	PASS
Band4	1413	4	22.92	20.82	30.00	PASS
Band4	1513	1	23.60	21.5	30.00	PASS
Band4	1513	2	23.03	20.93	30.00	PASS
Band4	1513	3	23.04	20.94	30.00	PASS
Band4	1513	4	23.01	20.91	30.00	PASS
Band5	4132	1	23.4	14.36	38.5	PASS
Band5	4132	2	22.83	13.79	38.5	PASS
Band5	4132	3	22.84	13.8	38.5	PASS
Band5	4132	4	22.83	13.79	38.5	PASS
Band5	4183	1	23.41	14.37	38.5	PASS
Band5	4183	2	22.87	13.83	38.5	PASS
Band5	4183	3	22.86	13.82	38.5	PASS
Band5	4183	4	22.84	13.8	38.5	PASS
Band5	4233	1	23.25	14.21	38.5	PASS
Band5	4233	2	22.69	13.65	38.5	PASS
Band5	4233	3	22.71	13.67	38.5	PASS
Band5	4233	4	22.65	13.61	38.5	PASS

Test Result(HSUPA)

Band	Channel	SubTest	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	9262	1	21.25	18.75	33.01	PASS
Band2	9262	2	21.71	19.21	33.01	PASS
Band2	9262	3	22.19	19.69	33.01	PASS
Band2	9262	4	21.22	18.72	33.01	PASS
Band2	9262	5	23.21	20.71	33.01	PASS
Band2	9400	1	21.24	18.74	33.01	PASS
Band2	9400	2	21.7	19.20	33.01	PASS
Band2	9400	3	22.23	19.73	33.01	PASS
Band2	9400	4	21.24	18.74	33.01	PASS
Band2	9400	5	23.22	20.72	33.01	PASS
Band2	9538	1	21.49	18.99	33.01	PASS
Band2	9538	2	21.98	19.48	33.01	PASS
Band2	9538	3	22.51	20.01	33.01	PASS

Band2	9538	4	21.5	19.00	33.01	PASS
Band2	9538	5	23.49	20.99	33.01	PASS
Band4	1312	1	21.44	19.34	30.00	PASS
Band4	1312	2	21.92	19.82	30.00	PASS
Band4	1312	3	22.44	20.34	30.00	PASS
Band4	1312	4	21.48	19.38	30.00	PASS
Band4	1312	5	23.46	21.36	30.00	PASS
Band4	1413	1	21.43	19.33	30.00	PASS
Band4	1413	2	21.94	19.84	30.00	PASS
Band4	1413	3	22.43	20.33	30.00	PASS
Band4	1413	4	21.44	19.34	30.00	PASS
Band4	1413	5	23.44	21.34	30.00	PASS
Band4	1513	1	21.51	19.41	30.00	PASS
Band4	1513	2	21.99	19.89	30.00	PASS
Band4	1513	3	22.51	20.41	30.00	PASS
Band4	1513	4	21.48	19.38	30.00	PASS
Band4	1513	5	23.52	21.42	30.00	PASS
Band5	4132	1	21.36	12.32	38.5	PASS
Band5	4132	2	21.83	12.79	38.5	PASS
Band5	4132	3	22.38	13.34	38.5	PASS
Band5	4132	4	21.44	12.4	38.5	PASS
Band5	4132	5	23.38	14.34	38.5	PASS
Band5	4183	1	21.39	12.35	38.5	PASS
Band5	4183	2	21.86	12.82	38.5	PASS
Band5	4183	3	22.4	13.36	38.5	PASS
Band5	4183	4	21.43	12.39	38.5	PASS
Band5	4183	5	23.41	14.37	38.5	PASS
Band5	4233	1	21.2	12.16	38.5	PASS
Band5	4233	2	21.71	12.67	38.5	PASS
Band5	4233	3	22.21	13.17	38.5	PASS
Band5	4233	4	21.27	12.23	38.5	PASS
Band5	4233	5	23.24	14.2	38.5	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For Band2)
ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For Band5)


AppendixB:Peak-to-Average Ratio

Test Result(WCDMA)

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9400	3.07	13	PASS
Band4	1413	3.12	13	PASS
Band5	4183	2.81	13	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs(WCDMA)

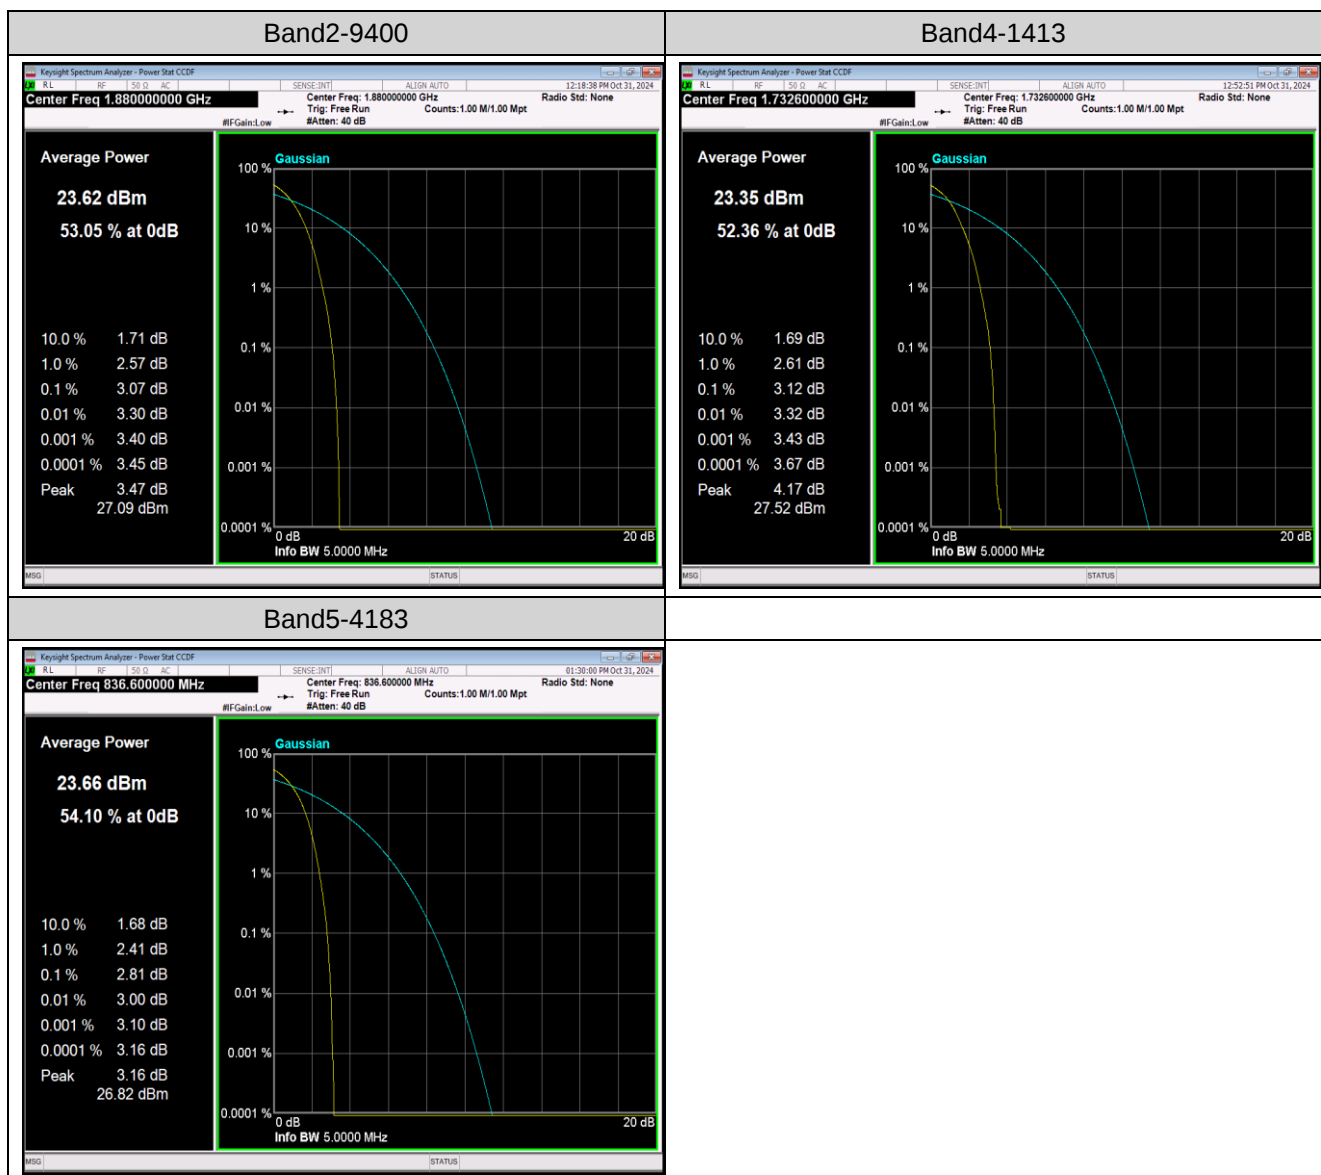


AppendixC:26dB Bandwidth andOccupied Bandwidth

Test Result(WCDMA)

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band2	9262	4.1569	4.697	---	PASS
Band2	9400	4.1497	4.683	---	PASS
Band2	9538	4.1558	4.696	---	PASS
Band4	1312	4.1564	4.689	---	PASS
Band4	1413	4.1587	4.685	---	PASS
Band4	1513	4.1580	4.684	---	PASS
Band5	4132	4.1512	4.698	---	PASS
Band5	4183	4.1590	4.708	---	PASS
Band5	4233	4.1613	4.691	---	PASS

Test Graphs(WCDMA)

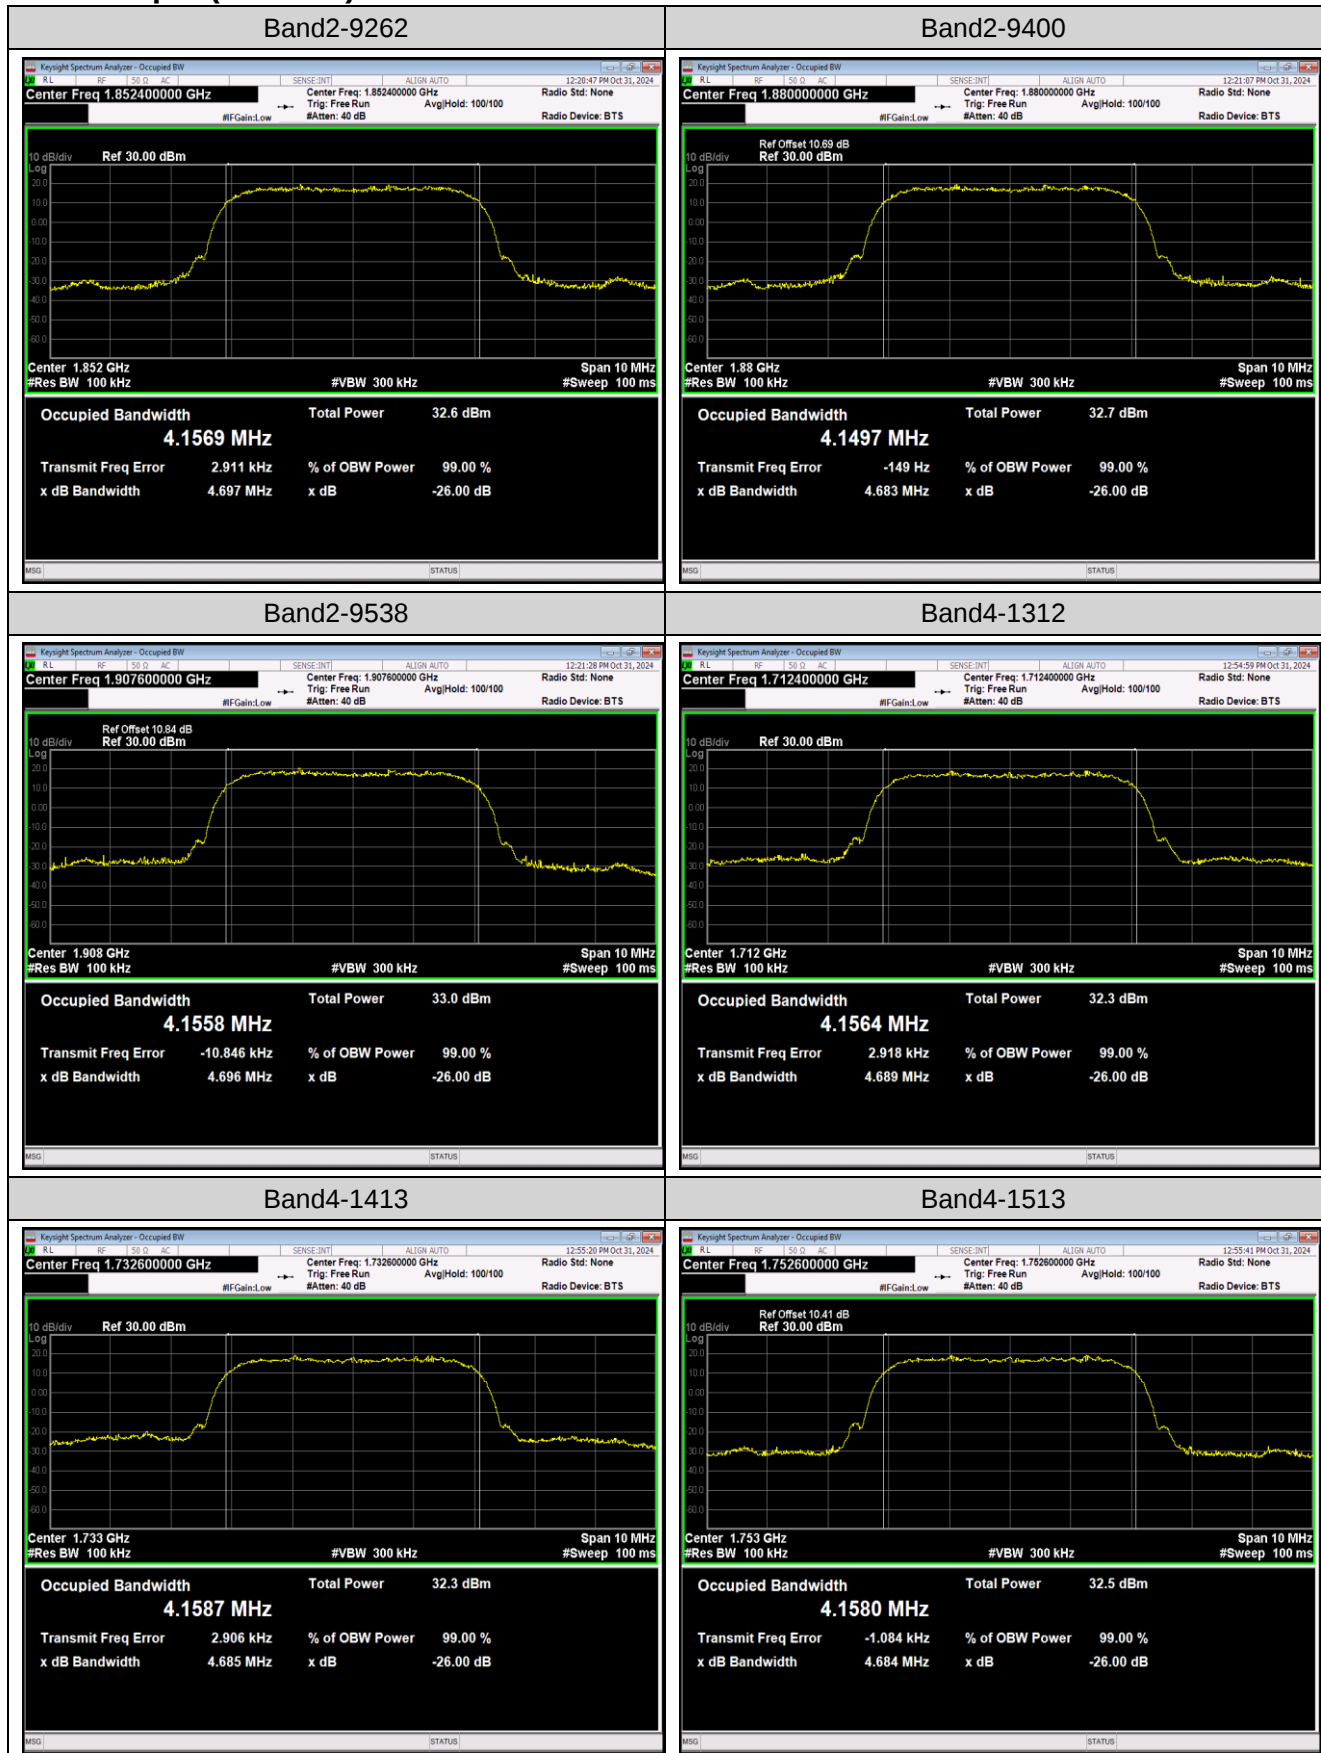




AppendixD:Band Edge

Test Result(WCDMA)

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-20.50	-13	PASS
Band2	9538	1910.00	-20.34	-13	PASS
Band4	1312	1710.00	-22.98	-13	PASS
Band4	1513	1755.00	-22.67	-13	PASS
Band5	4132	824.00	-19.96	-13	PASS
Band5	4233	849.00	-20.77	-13	PASS

Test Graphs(WCDMA)

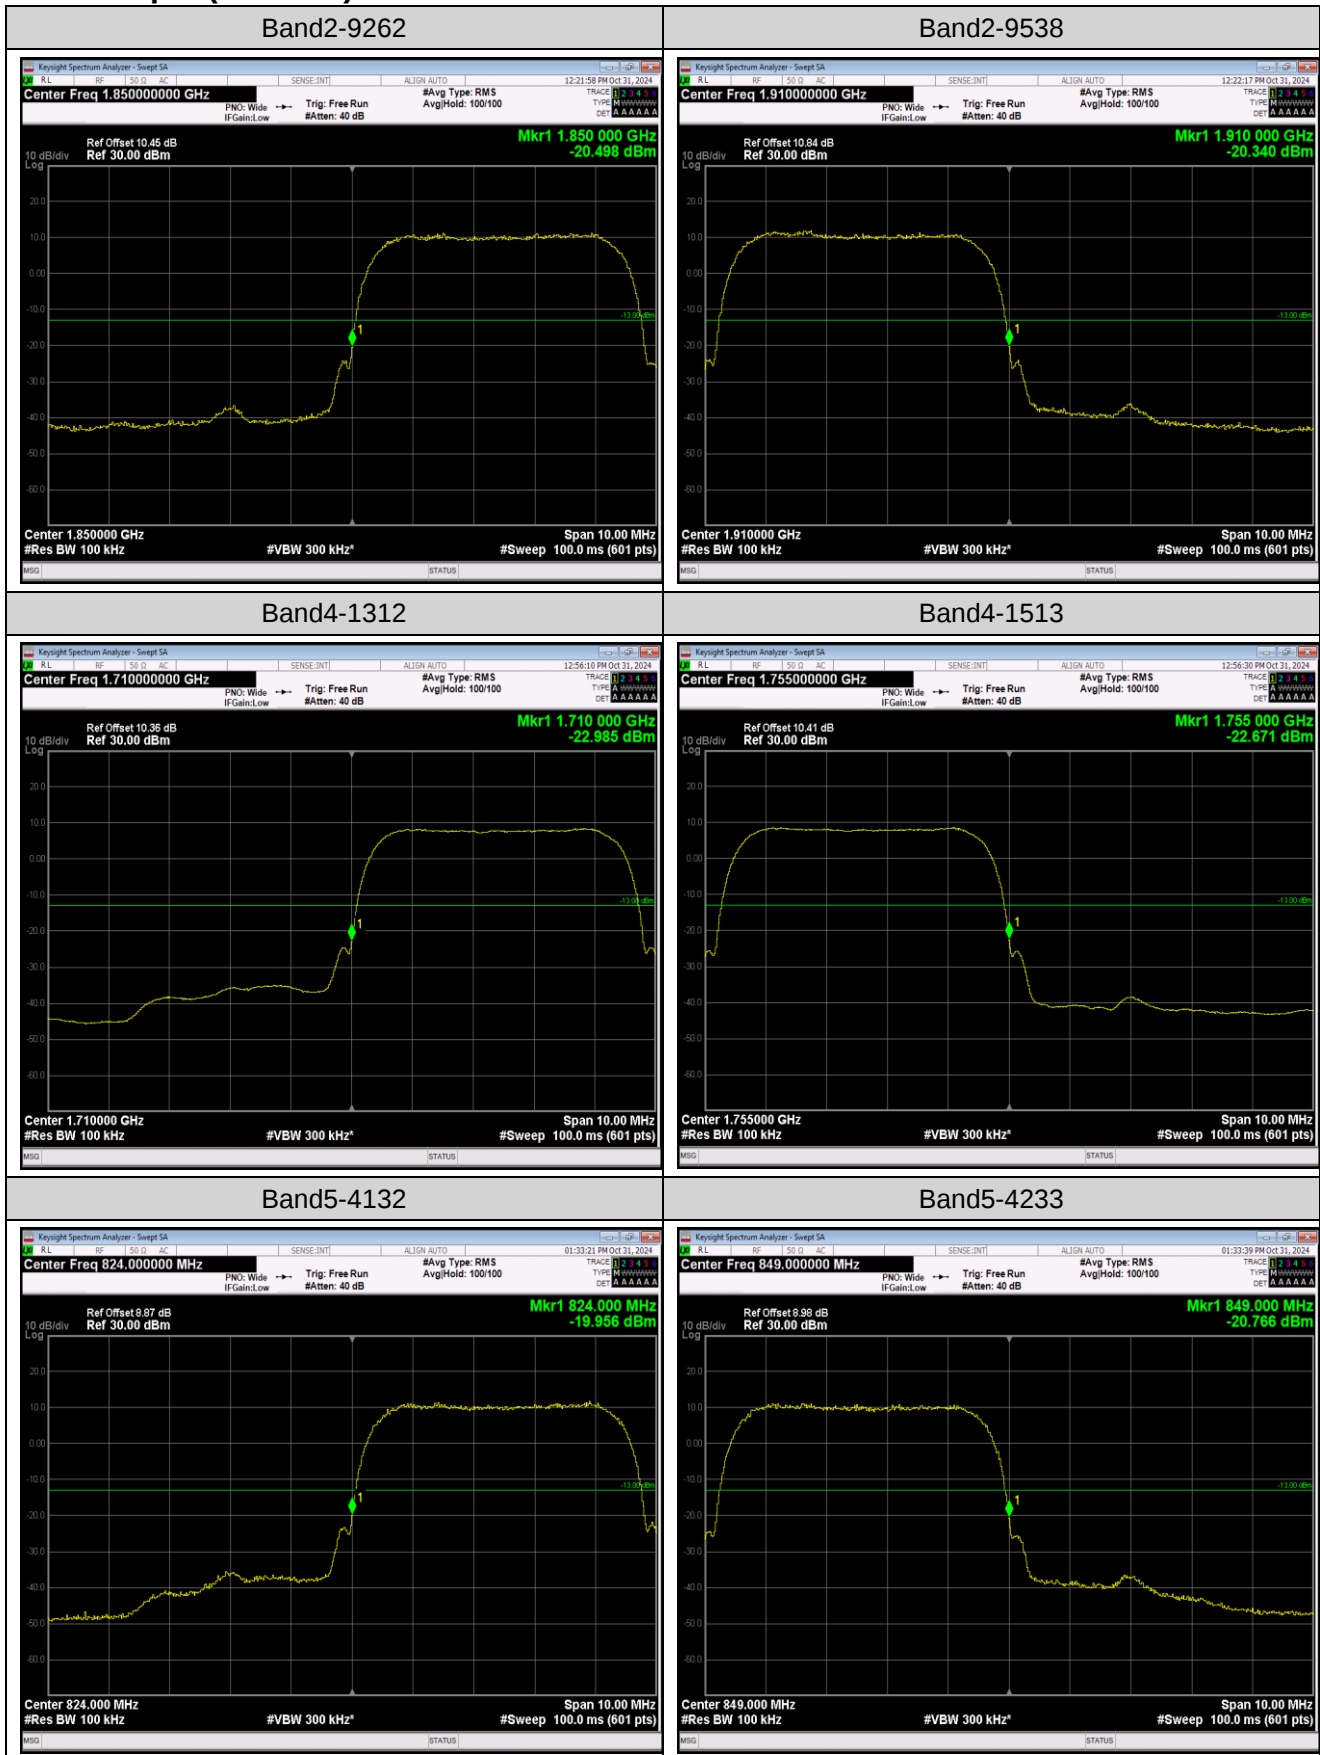

JianYan Testing Group Shenzhen Co., Ltd.

No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366


Project No.: JYTSZR2410035


AppendixE:Conducted SpuriousEmission


Test Result(WCDMA)


Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.009~0.15MHz	0.01	-54.02	-43	PASS
Band2	9262	0.15~30MHz	0.15	-49	-23	PASS
Band2	9262	30~1000MHz	797.79	-46.09	-13	PASS
Band2	9262	1000~20000MHz	19938.57	-30.11	-13	PASS
Band2	9400	0.009~0.15MHz	0.01	-52.55	-43	PASS
Band2	9400	0.15~30MHz	0.15	-47.27	-23	PASS
Band2	9400	30~1000MHz	894.69	-44.7	-13	PASS
Band2	9400	1000~20000MHz	19906.9	-30.5	-13	PASS
Band2	9538	0.009~0.15MHz	0.01	-56.31	-43	PASS
Band2	9538	0.15~30MHz	0.15	-46.39	-23	PASS
Band2	9538	30~1000MHz	921.2	-45.43	-13	PASS
Band2	9538	1000~20000MHz	19899.93	-30.17	-13	PASS
Band4	1312	0.009~0.15MHz	0.01	-53.34	-43	PASS
Band4	1312	0.15~30MHz	0.15	-45.24	-23	PASS
Band4	1312	30~1000MHz	749.61	-45.07	-13	PASS
Band4	1312	1000~20000MHz	19882.83	-31.03	-13	PASS
Band4	1413	0.009~0.15MHz	0.01	-56.05	-43	PASS
Band4	1413	0.15~30MHz	0.16	-46.05	-23	PASS
Band4	1413	30~1000MHz	929.38	-44.72	-13	PASS
Band4	1413	1000~20000MHz	19924.63	-30.1	-13	PASS
Band4	1513	0.009~0.15MHz	0.01	-54.88	-43	PASS
Band4	1513	0.15~30MHz	0.15	-45.45	-23	PASS
Band4	1513	30~1000MHz	105.69	-45.28	-13	PASS
Band4	1513	1000~20000MHz	19960.1	-30.41	-13	PASS
Band5	4132	0.009~0.15MHz	0.01	-51.98	-33	PASS
Band5	4132	0.15~30MHz	0.16	-49.09	-13	PASS
Band5	4132	30~1000MHz	993.15	-54.62	-13	PASS
Band5	4132	1000~10000MHz	3023.8	-37.22	-13	PASS
Band5	4183	0.009~0.15MHz	0.01	-55.61	-33	PASS
Band5	4183	0.15~30MHz	0.15	-47.93	-13	PASS
Band5	4183	30~1000MHz	957	-54.06	-13	PASS
Band5	4183	1000~10000MHz	3152.8	-37.33	-13	PASS
Band5	4233	0.009~0.15MHz	0.01	-54.89	-33	PASS
Band5	4233	0.15~30MHz	0.15	-45.97	-13	PASS
Band5	4233	30~1000MHz	263.83	-54.88	-13	PASS
Band5	4233	1000~10000MHz	2630.2	-36.77	-13	PASS


Test Graphs(WCDMA)

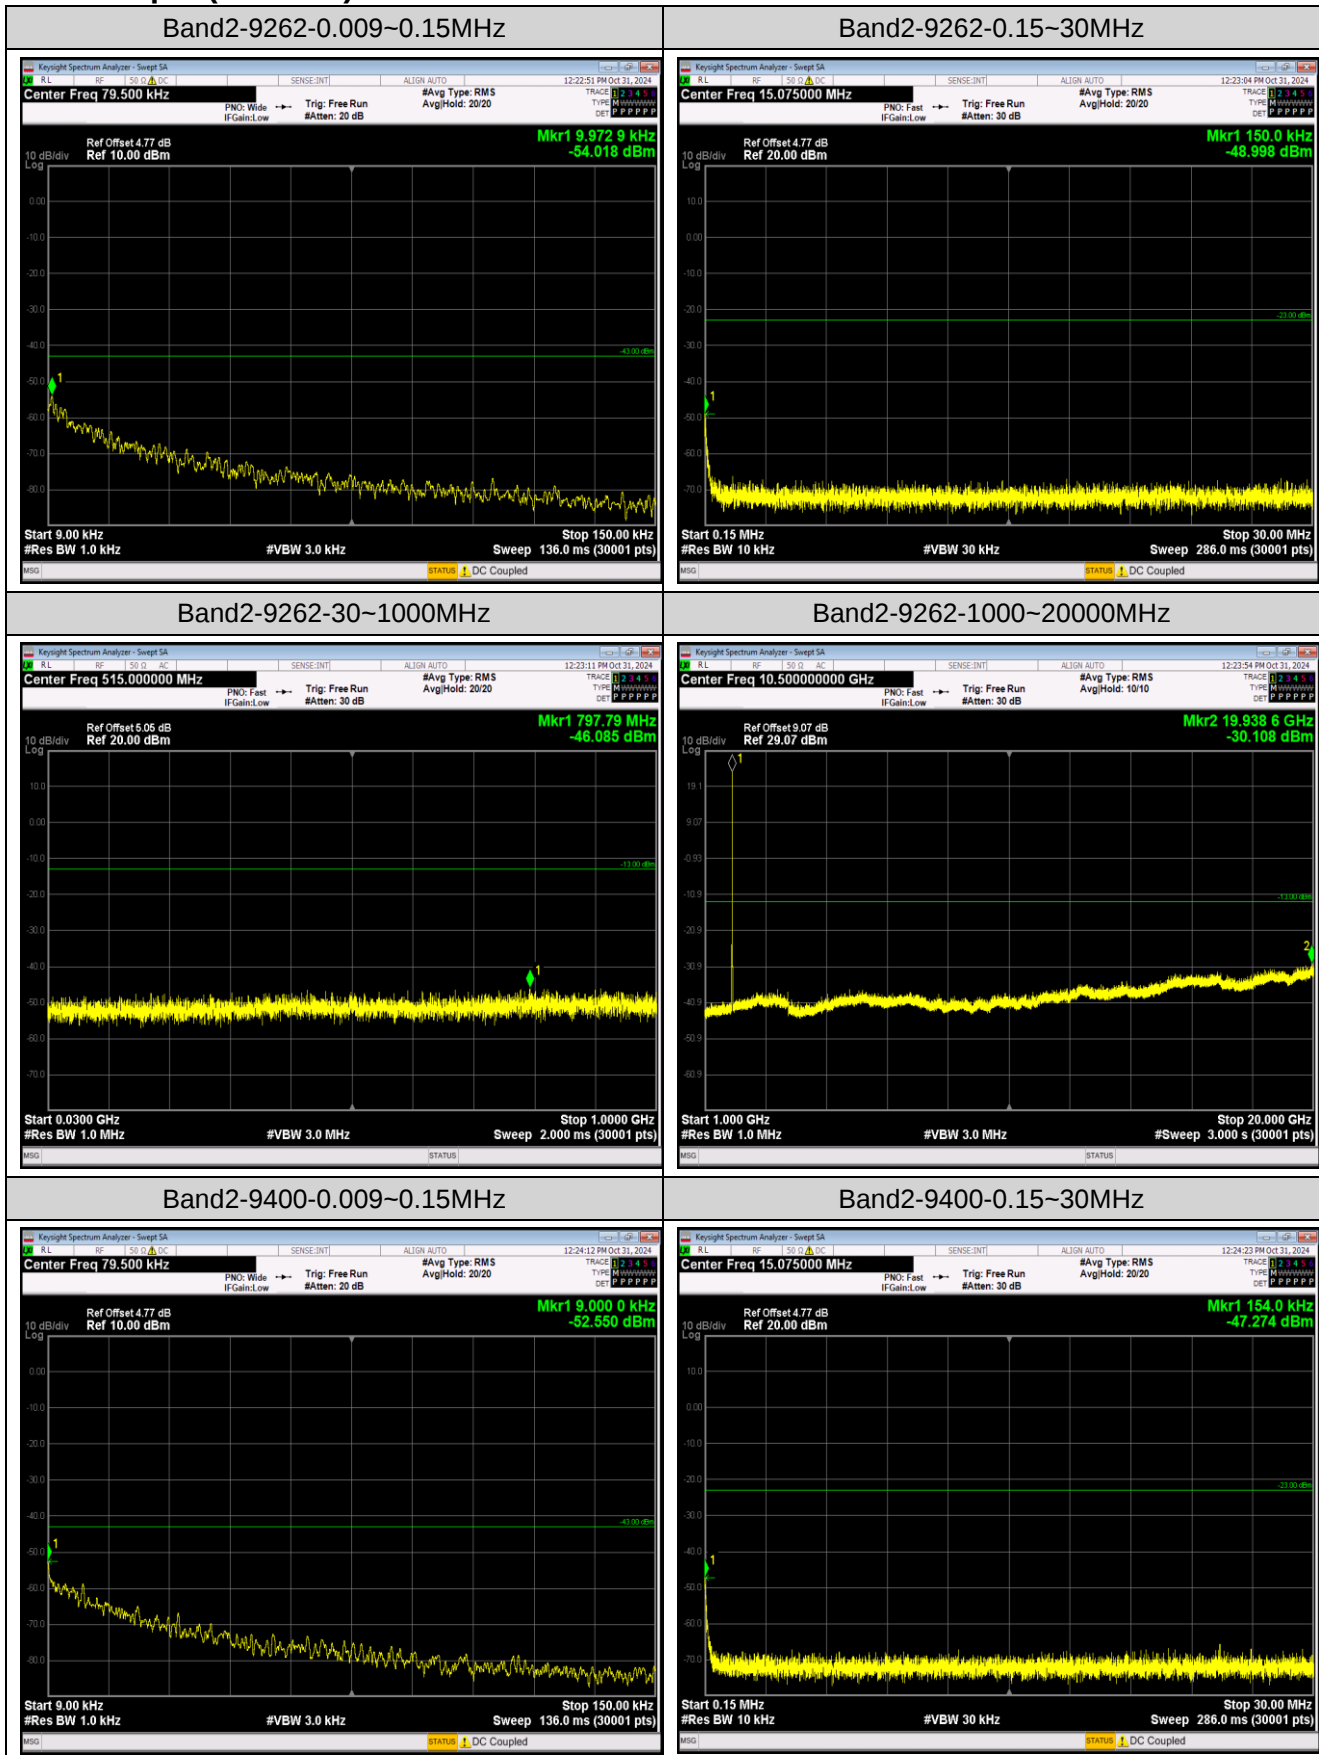


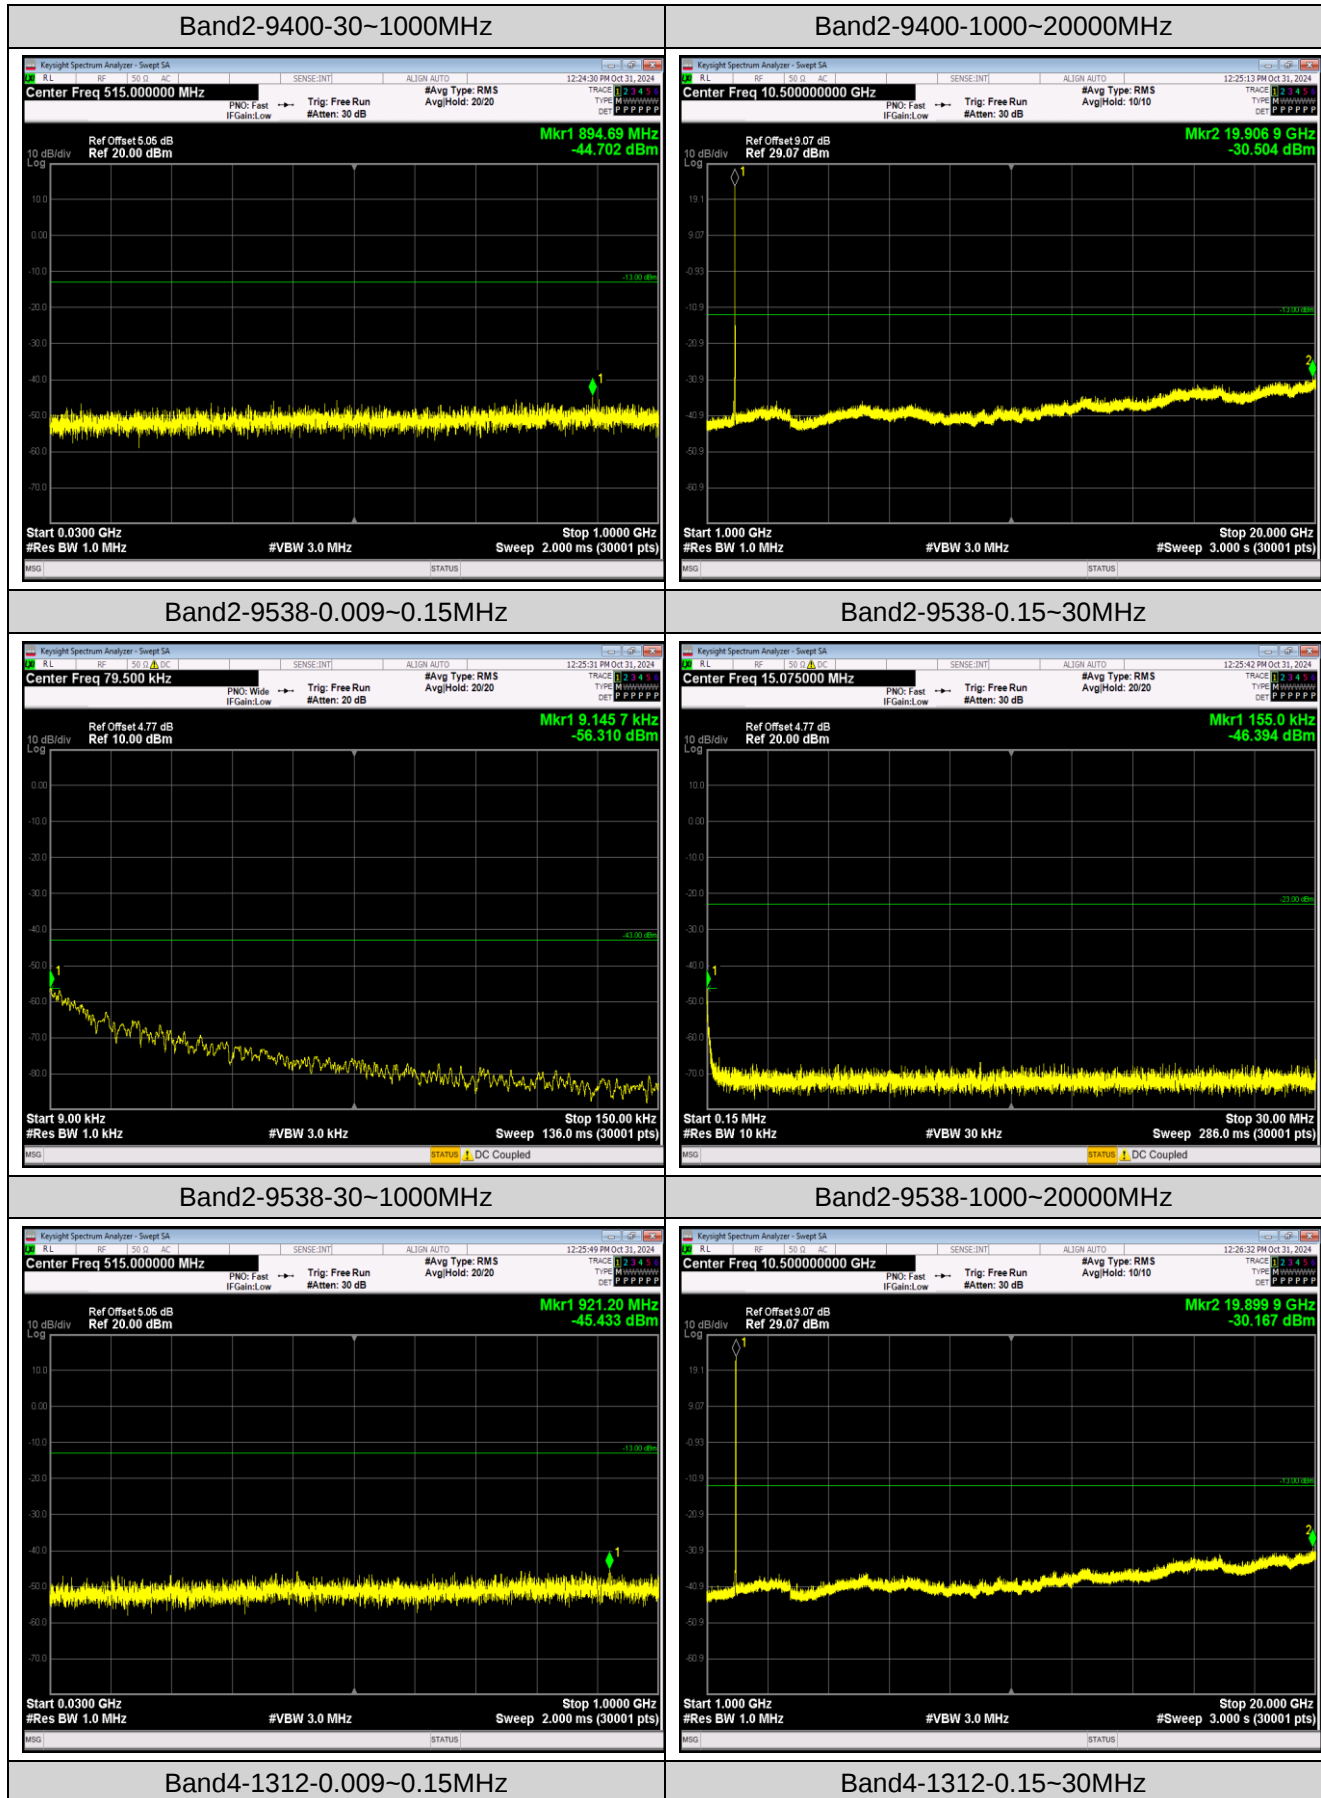

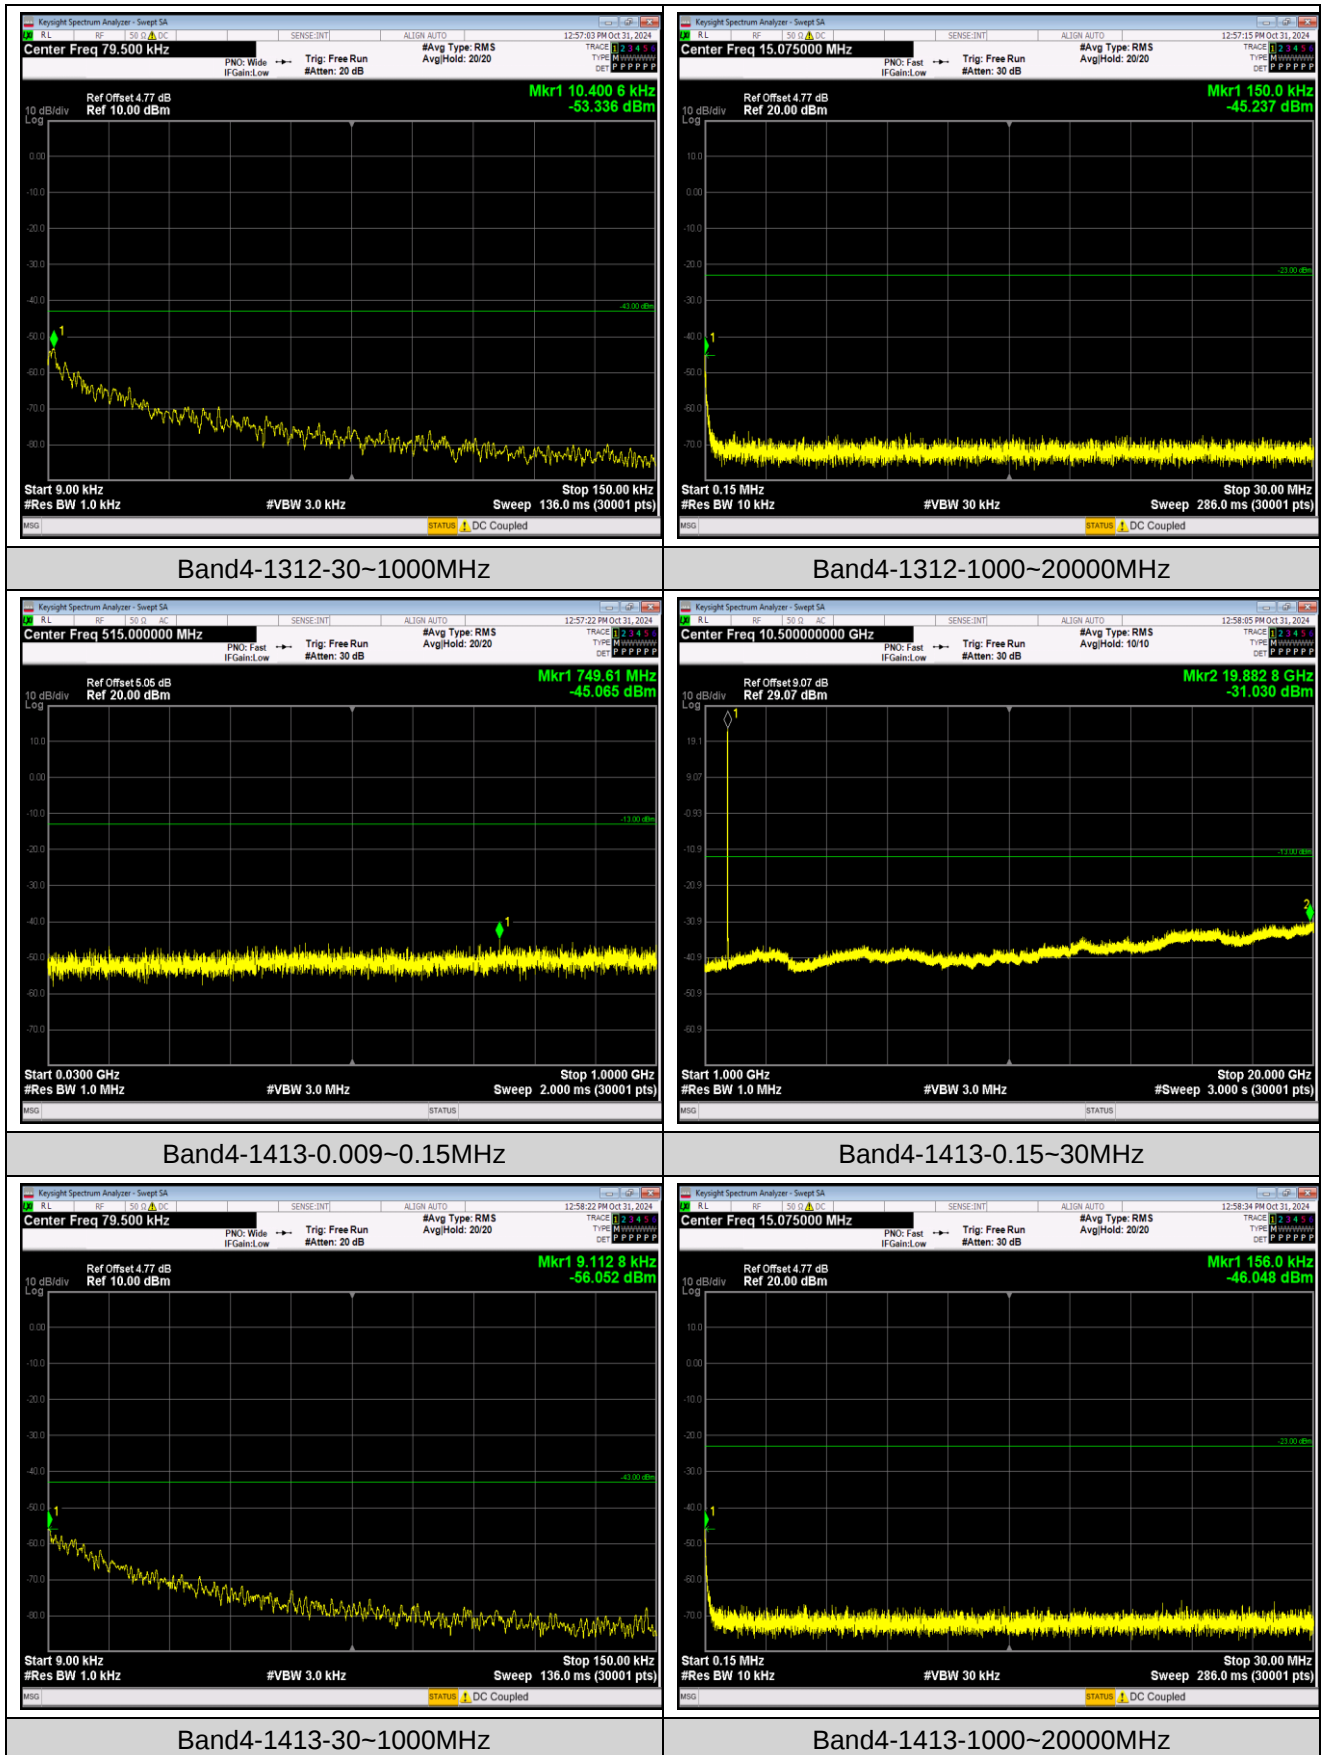

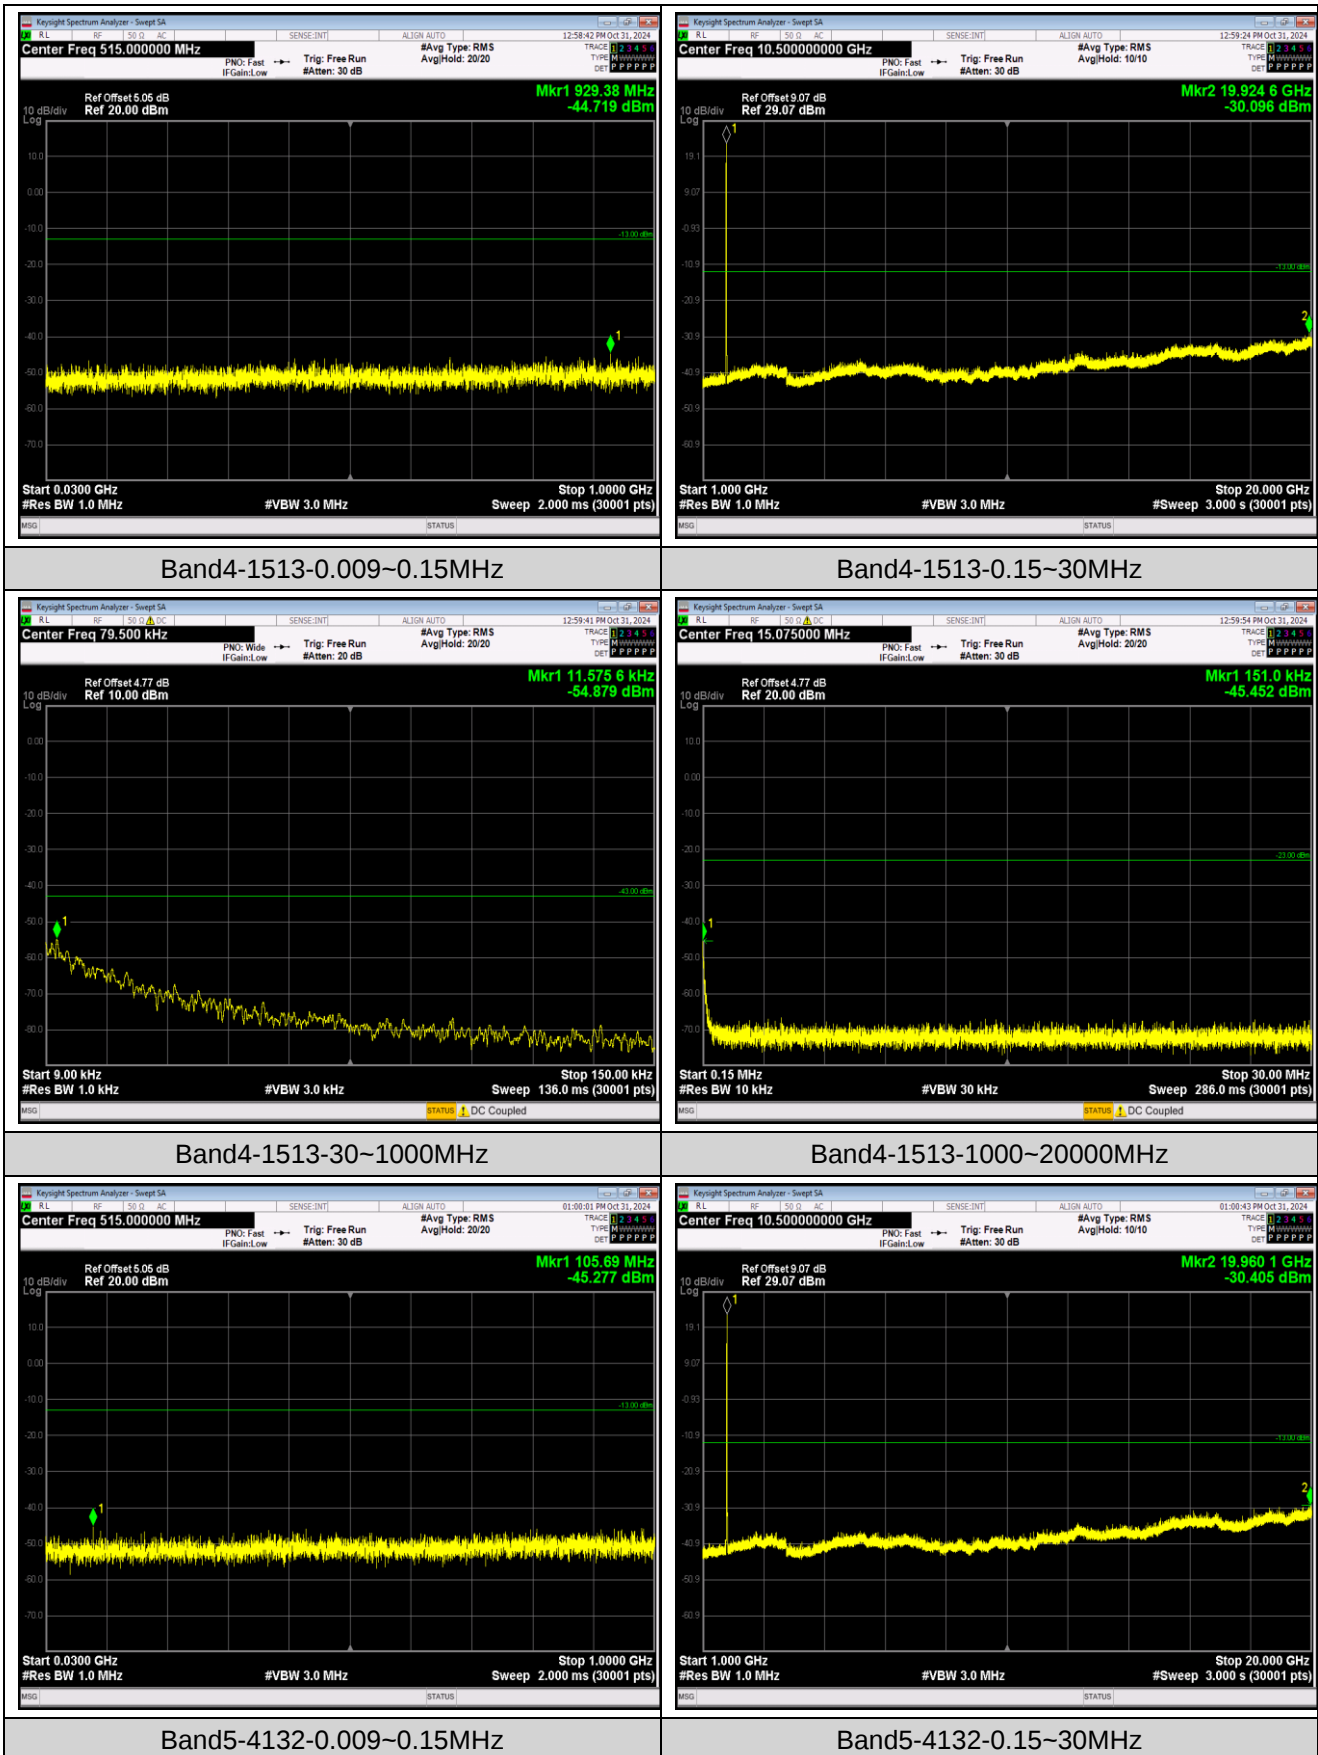

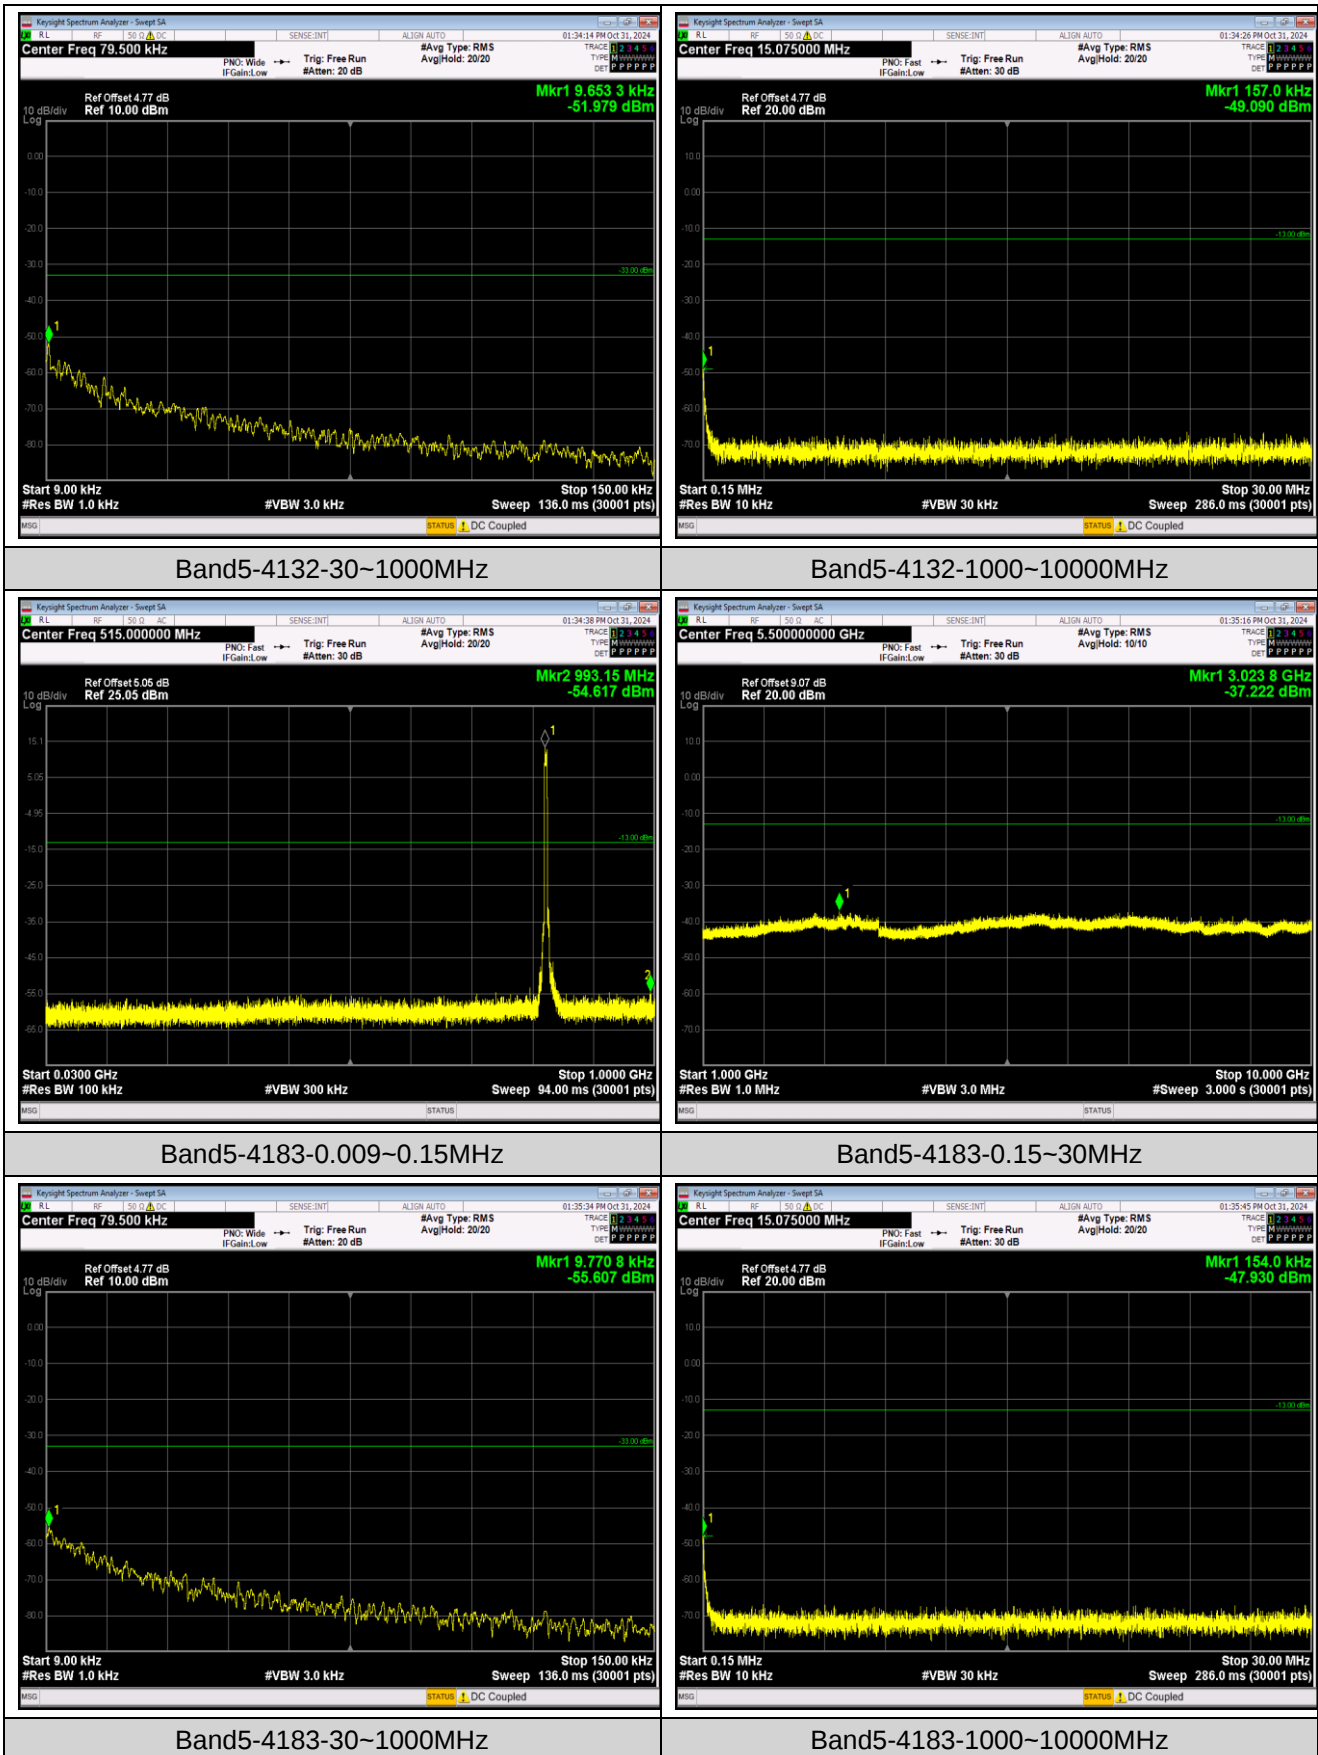

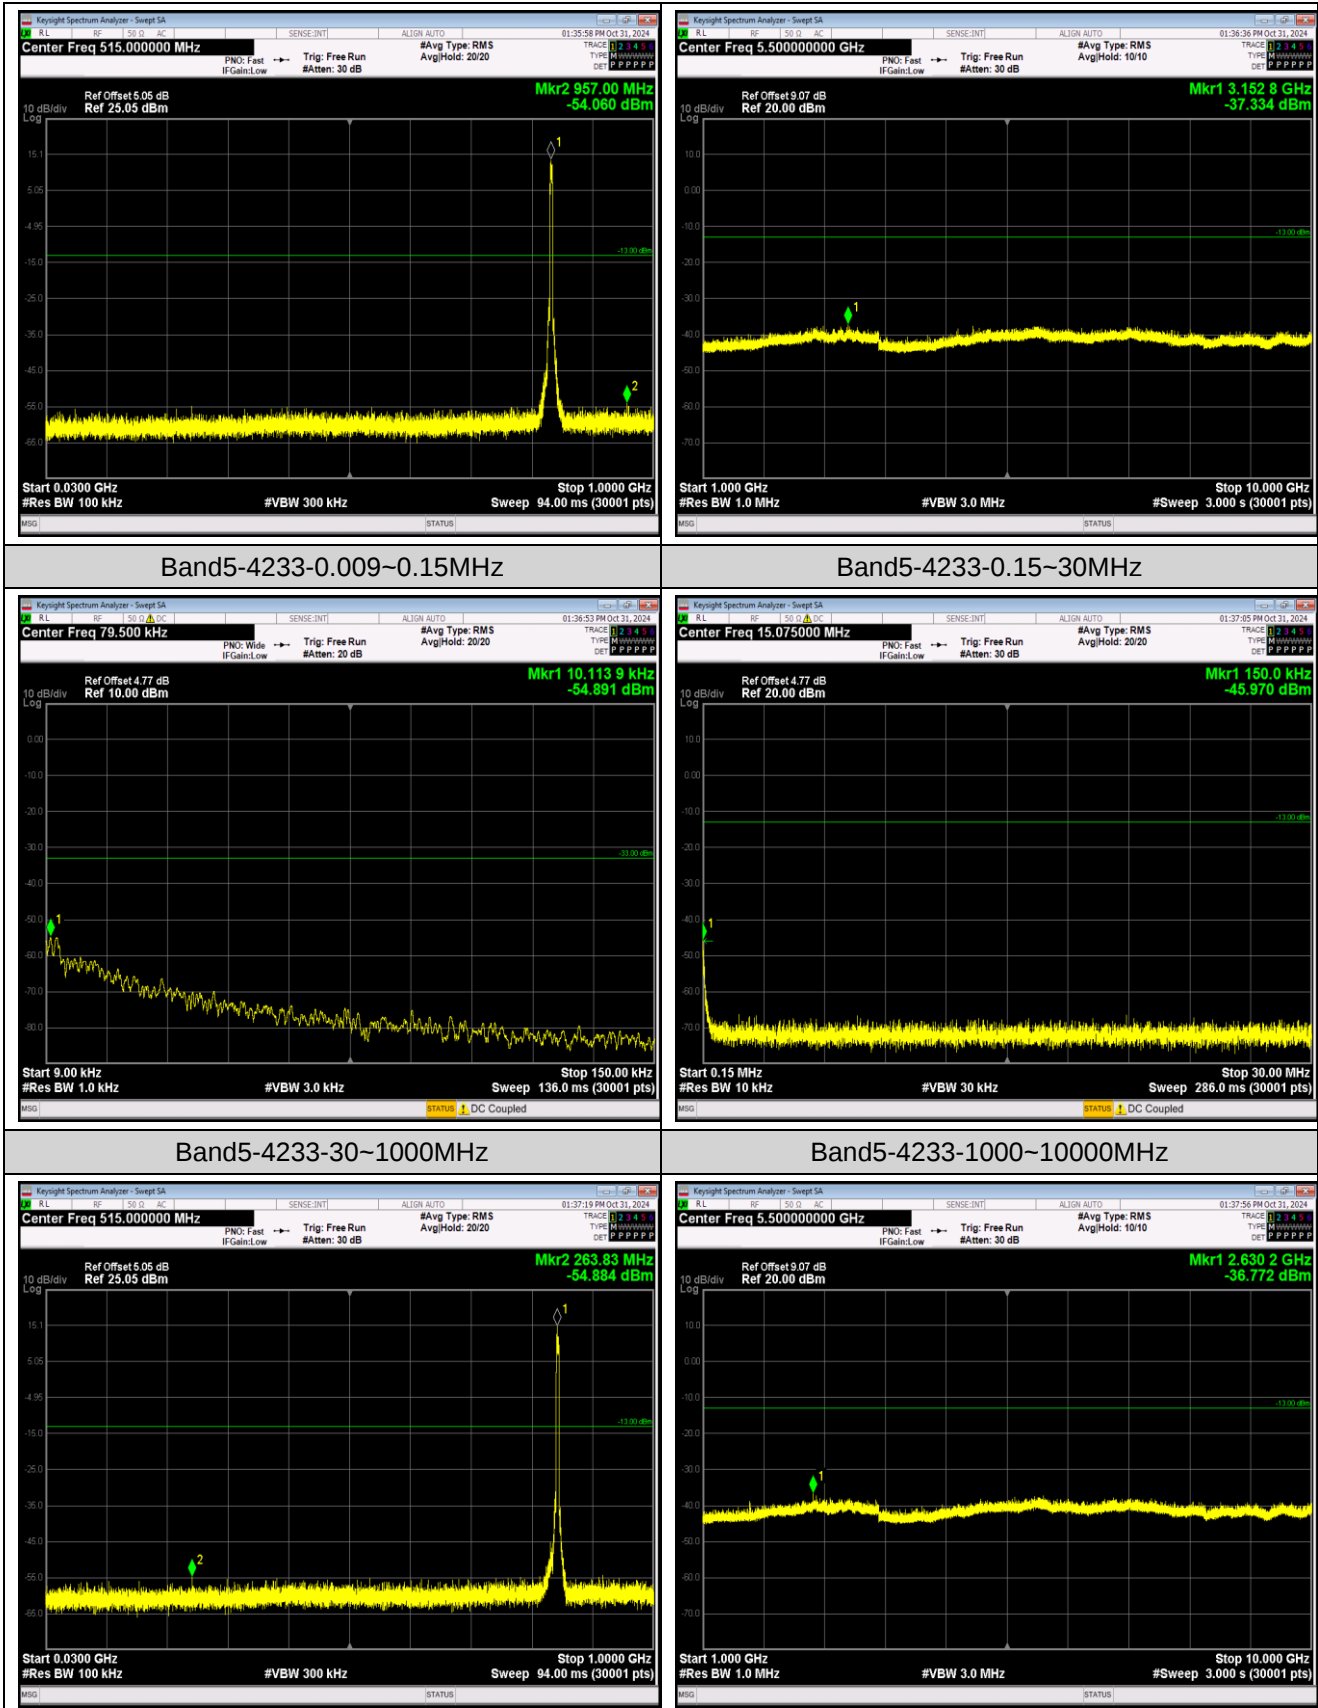

AppendixF:Frequency Stability

Test Result

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-3.58	-0.004279	±2.5	Pass
	-20	-4.47	-0.005343		
	-10	-4.57	-0.005463		
	0	-3.41	-0.004076		
	10	-3.88	-0.004638		
	20	-2.86	-0.003419		
	30	-4.41	-0.005271		
	40	-3.91	-0.004674		
	50	-4.71	-0.005630		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-5.82	-0.006957	±2.5	Pass
	3.91	-2.66	-0.003180		
	4.50	-2.70	-0.003227		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: WCDMA BAND IV 12.2k RMC Middle Frequency=1413 channel=1732.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-7.81	-0.004508	Within authorized band for BAND IV	Pass
	-20	-9.62	-0.005552		
	-10	-8.58	-0.004952		
	0	-8.01	-0.004623		
	10	-4.68	-0.002701		
	20	-5.94	-0.003428		
	30	-3.93	-0.002268		
	40	-6.68	-0.003855		
	50	-4.30	-0.002482		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-9.58	-0.005529	Within authorized band for BAND IV	Pass
	3.91	-9.15	-0.005281		
	4.50	-6.58	-0.003798		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: WCDMA BAND II 12.2k RMC Middle Frequency=9400 channel=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.91	-30	-1.42	-0.000755	Within authorized band for BAND II	Pass
	-20	-4.35	-0.002314		
	-10	-1.63	-0.000867		
	0	-1.50	-0.000798		
	10	-3.18	-0.001691		
	20	0.37	0.000197		
	30	-2.04	-0.001085		
	40	-2.70	-0.001436		
	50	-3.79	-0.002016		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-2.45	-0.001303	Within authorized band for BAND II	Pass
	3.91	-4.63	-0.002463		
	4.50	-3.31	-0.001761		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
Band2	9400	PASS	PASS
Band4	1413	PASS	PASS
Band5	4183	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

