

FCC Part 15E Measurement and Test Report

For

ThinPAD Technology (ShenZhen) Co., Ltd.

Room 2305, Xingji Tower, Xinsha Road, Shajing Town, Baoan, Shenzhen,

Guangdong, China

FCC ID: 2ADZ7MGS101033160

FCC Rule(s):	<u>FCC Part 15E</u>
Product Description:	<u>carbon Baytrail-M</u>
Tested Model:	<u>MGS101-03</u>
Report No.:	<u>STRD1504040I-4</u>
Tested Date:	<u>2015-04-11 to 2015-09-24</u>
Issued Date:	<u>2015-09-24</u>
Tested By:	<u>Lebron Wang/ Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	

Lebron Wang

Lahm peng

Jandyso

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	6
1.6 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. CONDUCTED EMISSIONS	11
5.1 MEASUREMENT UNCERTAINTY	11
5.2 TEST PROCEDURE	11
5.3 BASIC TEST SETUP BLOCK DIAGRAM	11
5.4 ENVIRONMENTAL CONDITIONS	12
5.5 TEST RECEIVER SETUP	12
5.6 SUMMARY OF TEST RESULTS/PLOTS	12
5.7 CONDUCTED EMISSIONS TEST DATA	12
6. POWER SPECTRAL DENSITY	15
6.1 STANDARD APPLICABLE	15
6.2 TEST PROCEDURE	15
6.3 ENVIRONMENTAL CONDITIONS	16
6.4 SUMMARY OF TEST RESULTS/PLOTS	16
7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	27
7.1 STANDARD APPLICABLE	27
7.2 TEST PROCEDURE	27
7.3 ENVIRONMENTAL CONDITIONS	29
7.4 SUMMARY OF TEST RESULTS/PLOTS	29
8. MAXIMUM CONDUCTED OUTPUT POWER	44
8.1 STANDARD APPLICABLE	44
8.2 TEST PROCEDURE	44
8.3 ENVIRONMENTAL CONDITIONS	45
8.4 SUMMARY OF TEST RESULTS/PLOTS	45
9. CONDUCTED SPURIOUS EMISSIONS	56
9.1 STANDARD APPLICABLE	56
9.2 TEST PROCEDURE	56
9.3 ENVIRONMENTAL CONDITIONS	56
9.4 SUMMARY OF TEST RESULTS/PLOTS	56
10. RADIATED EMISSIONS	75
10.1 MEASUREMENT UNCERTAINTY	75
10.2 STANDARD APPLICABLE	75
10.3 TEST PROCEDURE	75
10.4 TEST RECEIVER SETUP	76
10.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	76
10.6 ENVIRONMENTAL CONDITIONS	76
10.7 SUMMARY OF TEST RESULTS/PLOTS	76
11. FREQUENCY STABILITY	155
11.1 STANDARD APPLICABLE	155
11.2 TEST PROCEDURE	155

11.3 ENVIRONMENTAL CONDITIONS156

11.4 SUMMARY OF TEST RESULTS/PLOTS156

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ThinPAD Technology (ShenZhen) Co., Ltd.
Address of applicant: Room 2305, Xingji Tower, Xinsha Road, Shajing Town,
Baoan, Shenzhen, Guangdong, China
Manufacturer: ThinPAD Technology (ShenZhen) Co., Ltd.
Address of manufacturer: Room 2305, Xingji Tower, Xinsha Road, Shajing Town,
Baoan, Shenzhen, Guangdong, China

General Description of EUT	
Product Name:	carbon Baytrail-M
Trade Name:	TPtech
Model No.:	MGS101-03
Adding Model:	/
Hardware Version:	MGS101-03 X01
Software Version:	Windows Embedded 8.1
Rated Voltage:	DC 7.4V Li-ion Battery
Battery:	16000mAh
Power Adapter Model:	WSC1304WB Input 100-240V, 50/60Hz, Output DC 12V/4A
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(HT80)
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	14.69dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM
Data Rate:	6-54Mbps, up to 433Mbps
Channel Separation:	20/40/80MHz
Type of Antenna:	Integral
Antenna Gain:	2dBi
Lowest Internal Frequency	32.768kHz

Center Frequency of Each Channel for 802.11a & 802.11n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180MHz	Channel 149:	5745MHz	Channel 165:	5825MHz
Channel 40:	5200MHz	Channel 153:	5765MHz	/	/
Channel 44:	5220MHz	Channel 157:	5785MHz	/	/
Channel 48:	5240MHz	Channel 161:	5805MHz	/	/

Center Frequency of Each Channel for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190MHz	/	/	/	/
Channel 46:	5230MHz	/	/	/	/
Channel 153:	5765MHz	/	/	/	/
Channel 57:	5795MHz	/	/	/	/

Center Frequency of Each Channel for 802.11ac:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 42:	5210MHz	/	/	/	/
Channel 157:	5785MHz	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/

1.2 Test Standards

The following report is prepared on behalf of the ThinPAD Technology (ShenZhen) Co., Ltd in accordance with FCC Part 15, Subpart E, and section 15.203, 15.205, 15.207, 15.209 and 15.407 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.407 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 789033 D02 v01 for Unlicensed National Information Infrastructure (U-NII) Devices shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz,5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz,5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5765MHz,5785MHz
TM4	802.11ac-HT80	5210MHz, 5785MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Adapter Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Earphone	1.2	Unshielded	Without Ferrite
USB Cable	0.3	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.403(i)	26 dB Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(a)(6)	Peak Excursion	Compliant
§ 15.407(b)(1),(2),(3)	Conducted Spurious Emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Conducted Emissions

5.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.


5.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

5.3 Basic Test Setup Block Diagram

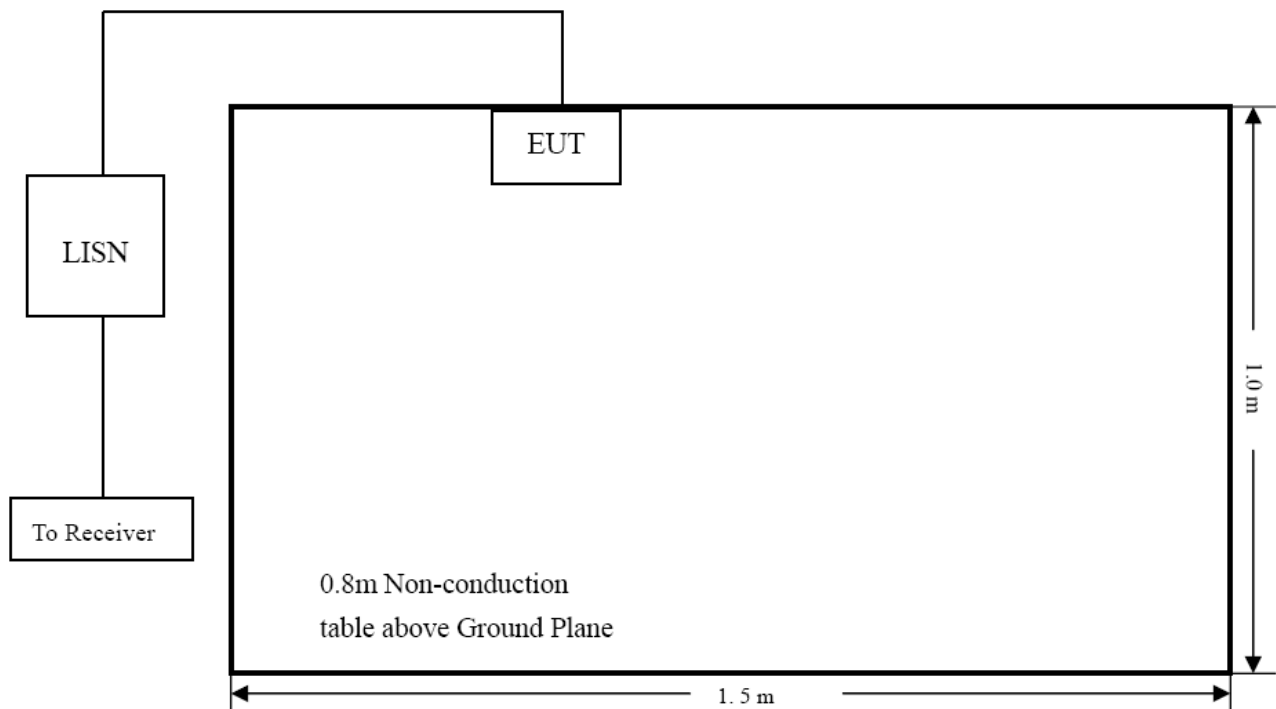

5.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

5.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

5.6 Summary of Test Results/Plots

According to the data in section 5.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

-8.89 dB at 17.9820 MHz in the Line, Average detector, 0.15-30MHz

5.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: carbon Baytrail-M

Tested Model: MGS101-03

Operating Condition: Transmitting


Comment: AC 120V/60Hz; DC 12V/4A

Test Specification: Neutral

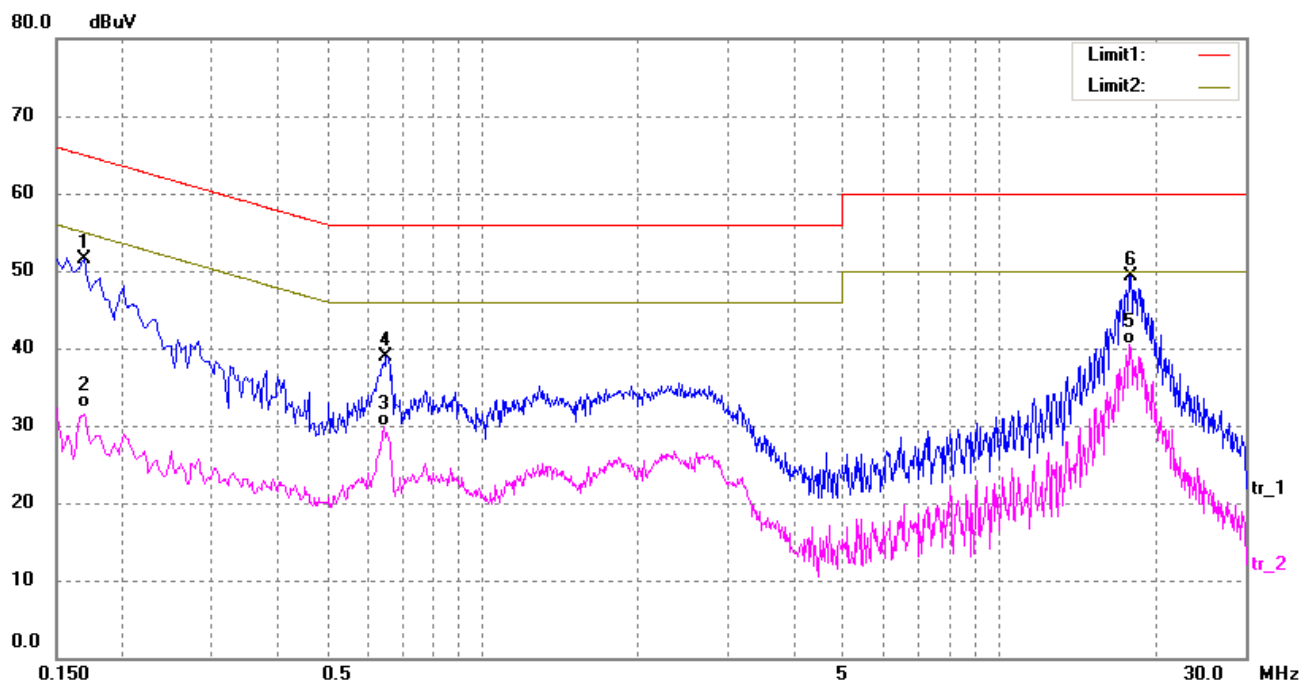

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	42.06	9.50	51.56	64.96	-13.40	peak
2	0.1700	22.75	9.50	32.25	54.96	-22.71	AVG
3	0.6460	20.20	9.65	29.85	46.00	-16.15	AVG
4	0.6540	29.32	9.65	38.97	56.00	-17.03	peak
5	17.9420	28.99	11.59	40.58	50.00	-9.42	AVG
6	17.9460	37.74	11.59	49.33	60.00	-10.67	peak

Test Specification: Line

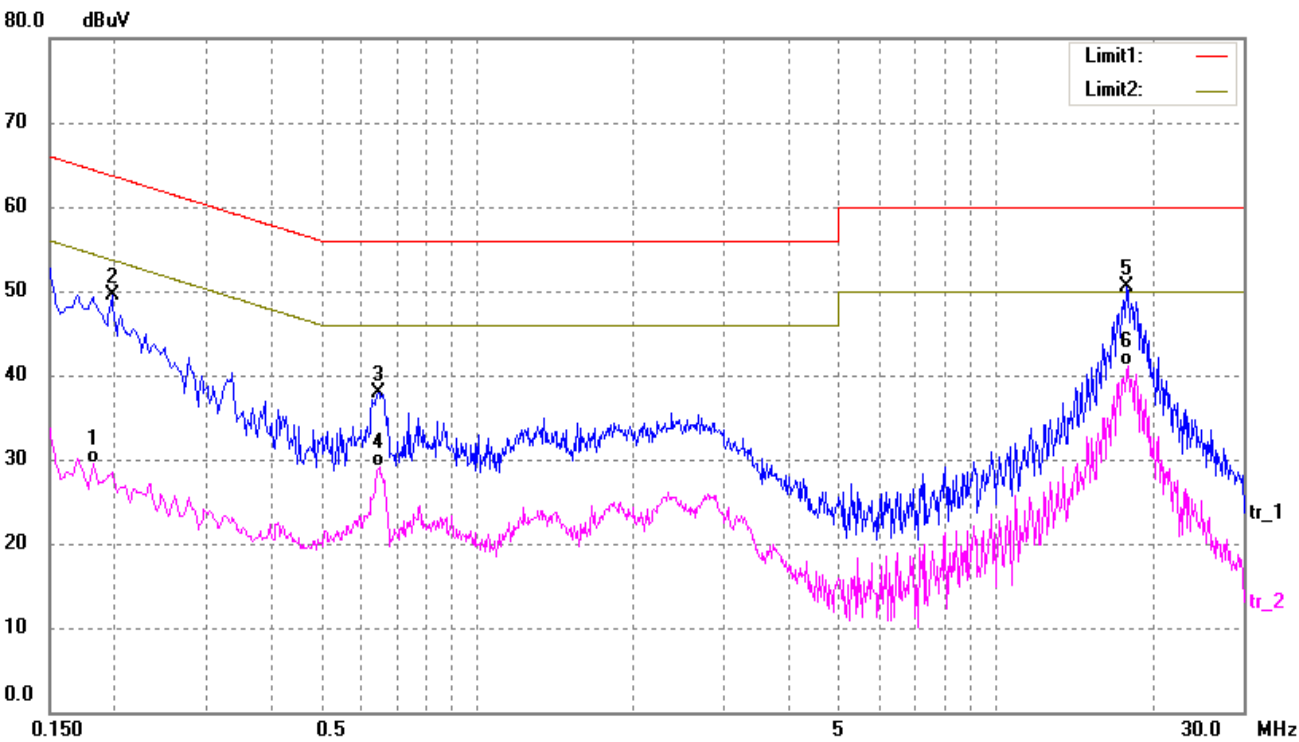

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1820	20.04	9.50	29.54	54.39	-24.85	AVG
2	0.1980	39.91	9.50	49.41	63.69	-14.28	peak
3	0.6460	28.33	9.65	37.98	56.00	-18.02	peak
4	0.6500	19.36	9.65	29.01	46.00	-16.99	AVG
5	17.9140	38.86	11.58	50.44	60.00	-9.56	peak
6	17.9820	29.51	11.60	41.11	50.00	-8.89	AVG

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v01 section F, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).

- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

6.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.4 Summary of Test Results/Plots

5150-5250MHz


Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	3.522	11
	5200	2.917	11
	5240	3.302	11
802.11n-HT20	5180	3.605	11
	5200	3.428	11
	5240	3.451	11
802.11n-HT40	5190	0.279	11
	5230	0.956	11
802.11ac-HT80	5210	-0.745	11

5725-5850MHz


Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Power Spectral Density dBm/500kHz	Limit (dBm/MHz)
802.11a	5745	-4.226	-2.008	30
	5785	-3.863	-1.645	30
	5805	-3.519	-1.301	30
802.11n-HT20	5745	-4.555	-2.337	30
	5785	-4.386	-2.168	30
	5805	-3.841	-1.623	30
802.11n-HT40	5765	-6.946	-4.728	30
	5785	-6.029	-3.811	30
802.11ac-HT80	5785	-7.996	-5.778	30

Note1: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Test Mode: 802.11a
5180MHz

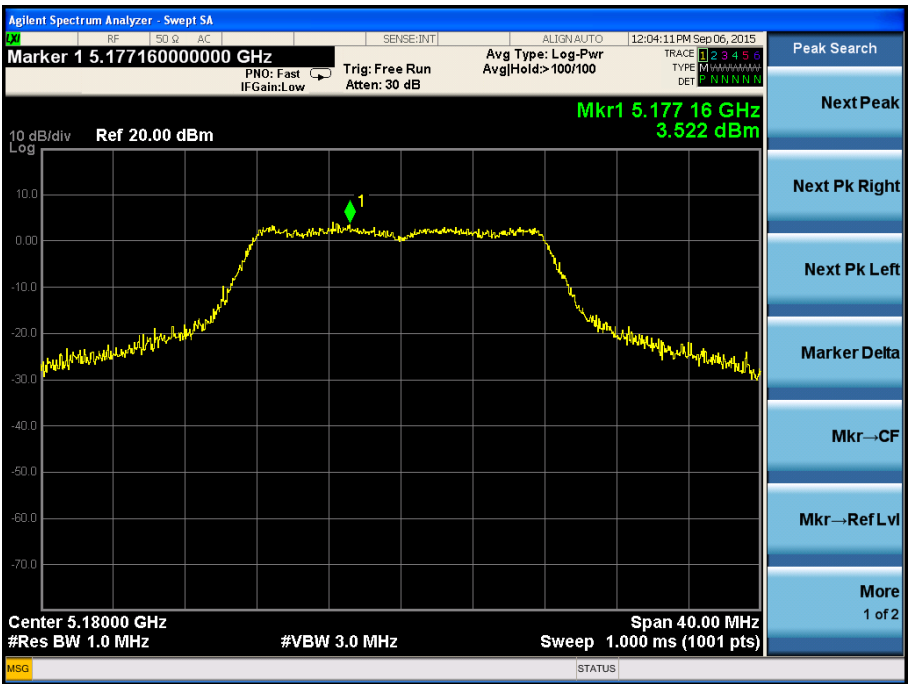

5200MHz

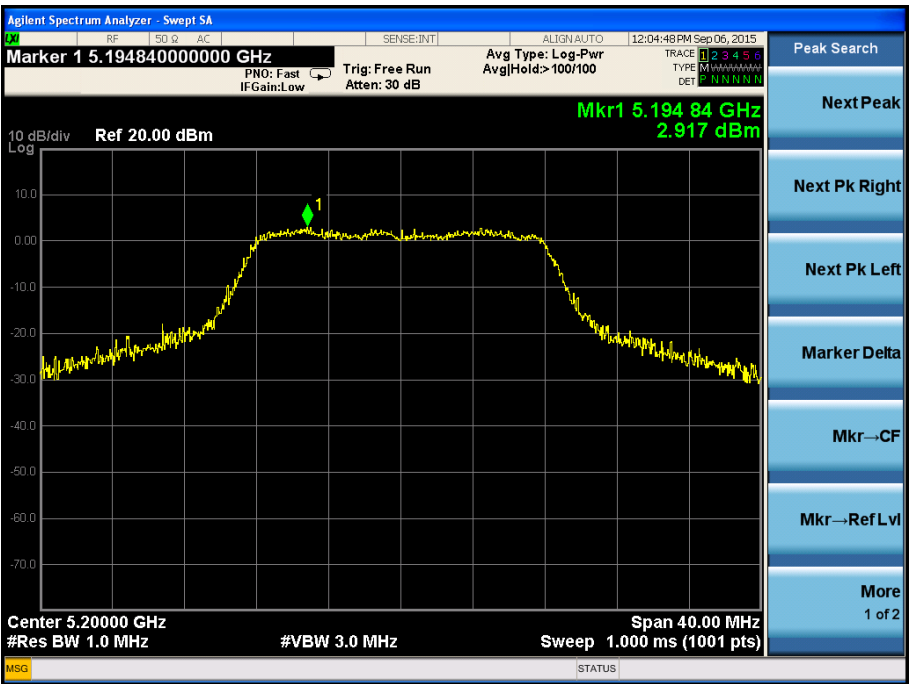

Agilent Spectrum Analyzer - Swept SA

RF SO Q AC SENSE:INT ALIGN: AUTO 12:05:09 PM Sep 06, 2015

Marker 1 5.238200000000 GHz PNO: Fast IFGain: Low Trig: Free Run Avg Type: Log-Pwr Avg/Hold: >100/100

TRACE 1 2 3 4 5 6
TYPE M H H H H H H H
DET N N N N N N

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF

Mkr→Ref Lvl

More

1 of 2

10 dB/div Log

Ref 20.00 dBm

Center 5.24000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Span 40.00 MHz

Sweep 1.000 ms (1001 pts)

MSG

STATUS

Agilent Spectrum Analyzer - Swept SA

Marker 1 5.749360000000 GHz

PNO: Fast IFGain: Low Trig: Free Run Atten: 30 dB

Avg Type: Log-Pwr AvgHld: 100/100

TRACE 1 2 3 4 5 6
TYPE M
DET P NNNNN

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF

Mkr→Ref Lvl

More

1 of 2


10 dB/div Log Ref 20.00 dBm

Center 5.7450 GHz #Res BW 300 kHz #VBW 1.0 MHz Span 40.00 MHz Sweep 1.000 ms (1001 pts)


5785MHz




5805MHz

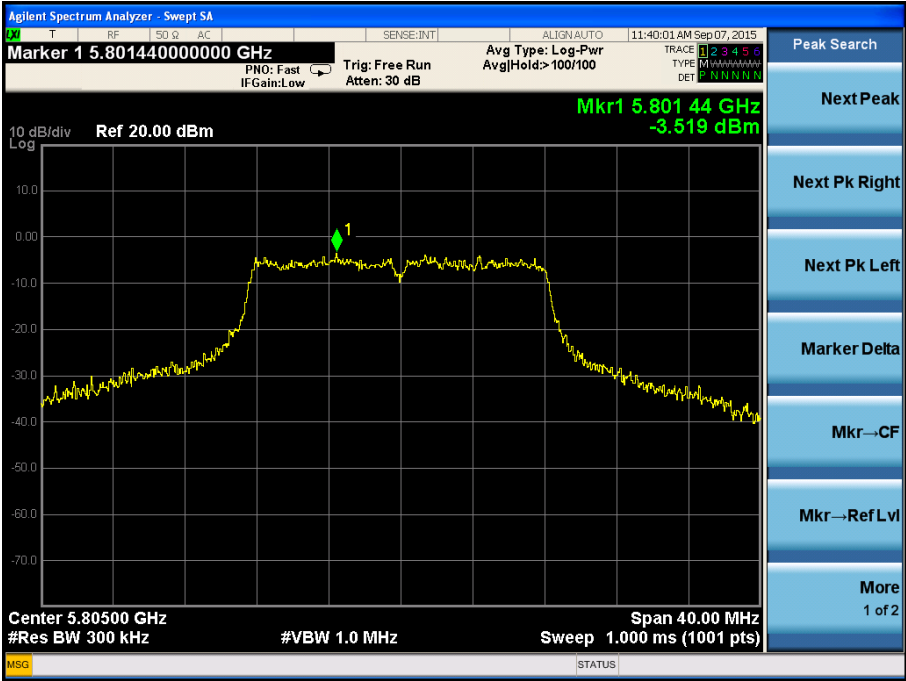


Test Mode: 802.11n-HT20
5180MHz

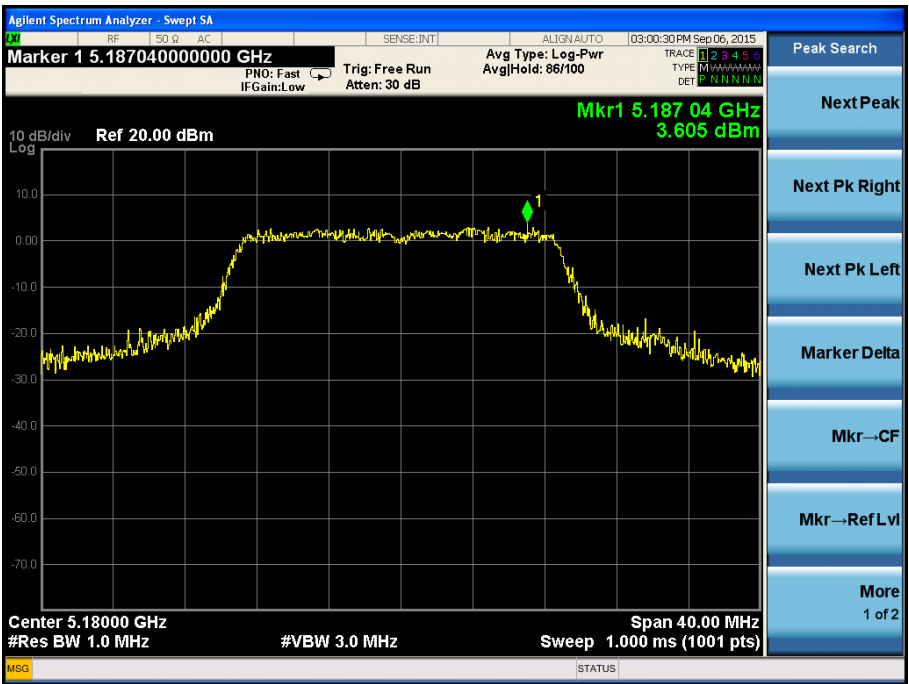

5200MHz

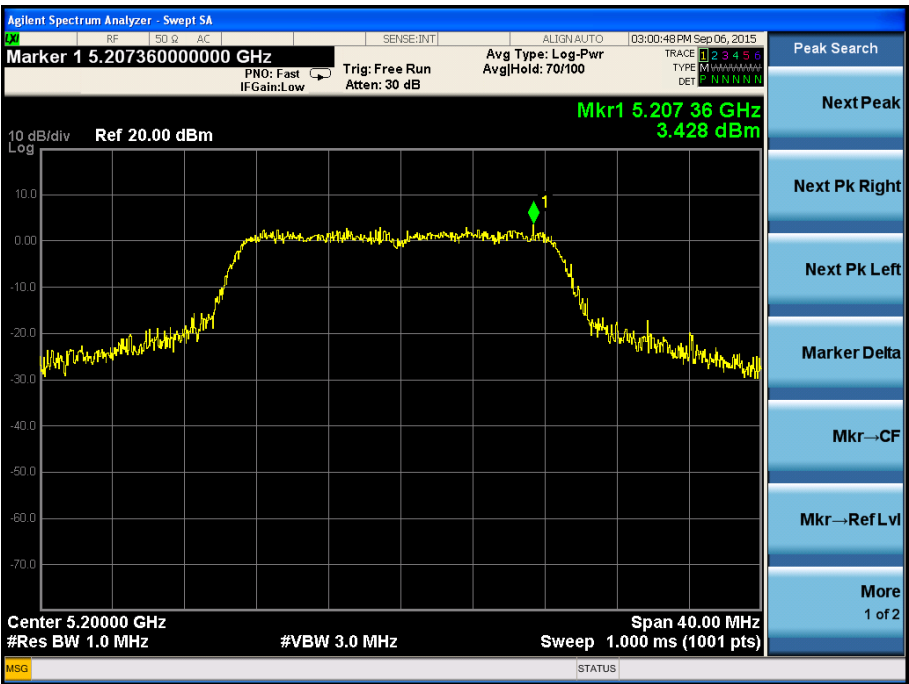


5240MHz

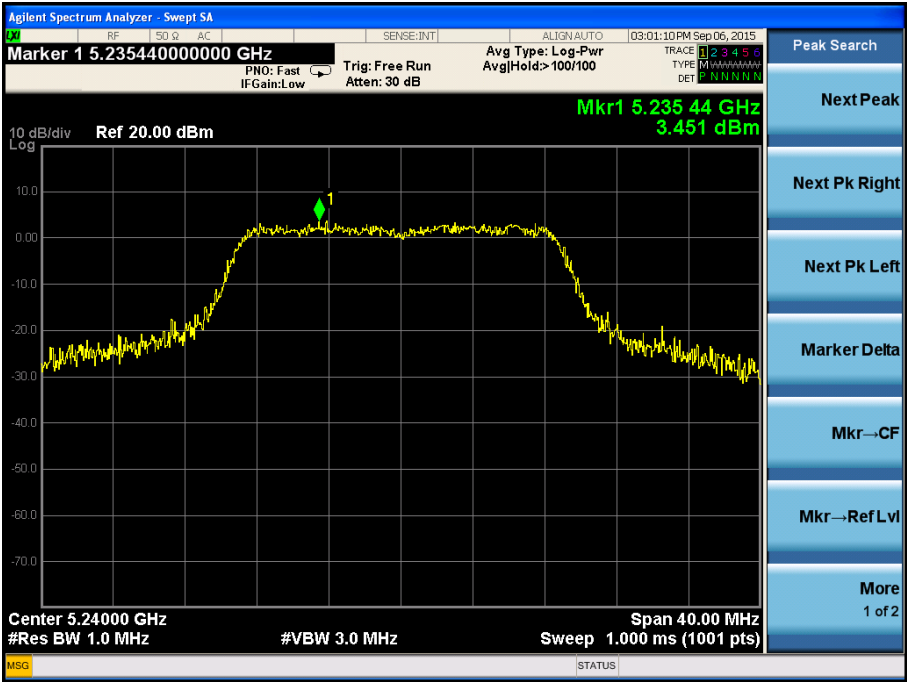


5745MHz



5785MHz

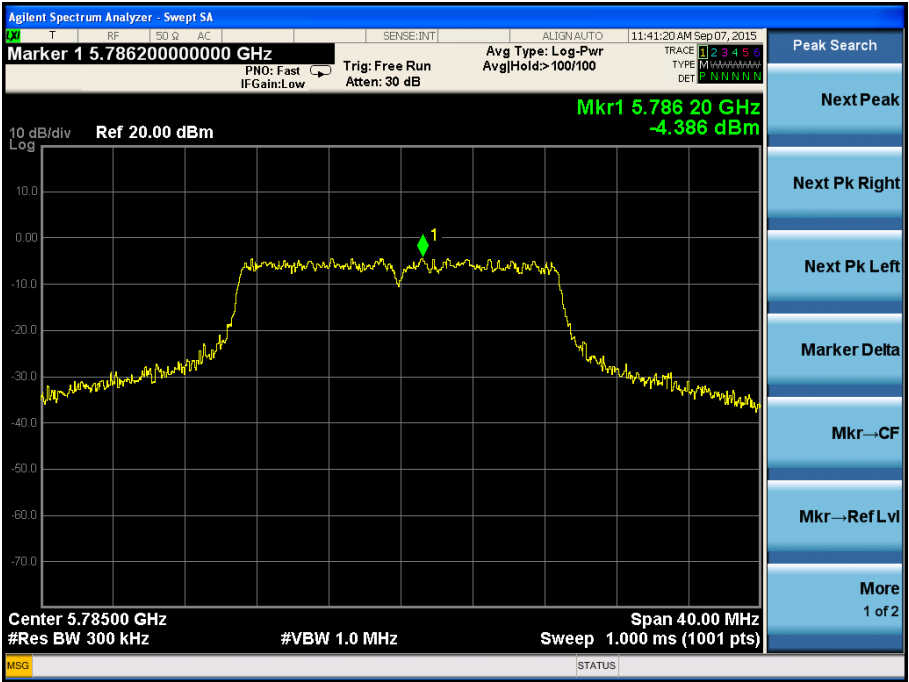

5805MHz

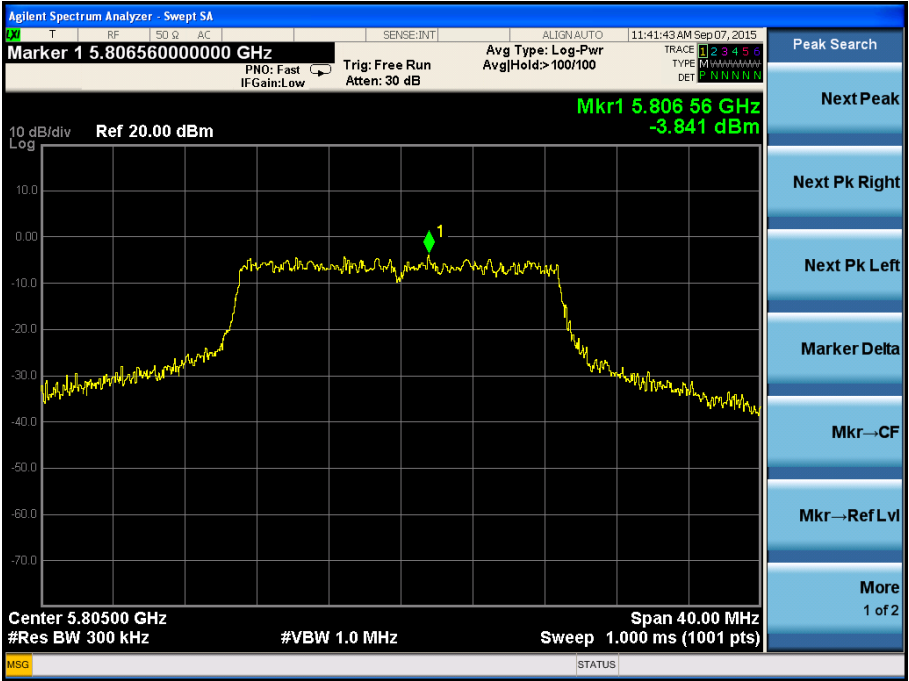


Test Mode: 802.11n-HT40
5190MHz



5230MHz



5765MHz

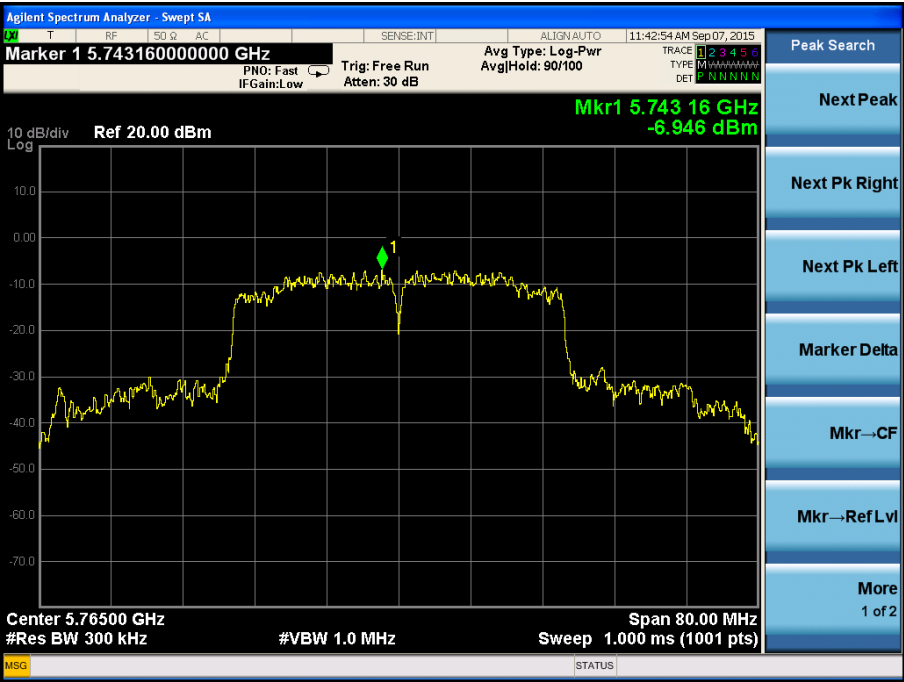

5785MHz



Test Mode: 802.11ac-HT80
5210MHz



5785MHz



7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407 (a).

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW

ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.3 Environmental Conditions

Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

7.4 Summary of Test Results/Plots


5150-5250MHz

Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Result
802.11a	5180	21.50	16.687	Pass
	5200	20.93	16.591	Pass
	5240	21.15	16.641	Pass
802.11n-HT20	5180	21.38	17.786	Pass
	5200	21.33	17.793	Pass
	5240	21.31	17.715	Pass
802.11n-HT40	5190	55.38	36.321	Pass
	5230	53.36	36.198	Pass
802.11ac-HT80	5210	85.39	75.358	Pass


5725-5850MHz

Test Mode	Test Channel MHz	26 dB Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11a	5745	20.60	16.48	16.582	≥500
	5785	20.66	16.45	16.581	≥500
	5805	20.51	16.47	16.606	≥500
802.11n-HT20	5745	21.73	17.69	17.760	≥500
	5785	21.28	17.67	17.717	≥500
	5805	21.41	17.68	17.785	≥500
802.11n-HT40	5765	55.50	35.10	36.218	≥500
	5785	53.36	35.07	36.266	≥500
802.11ac-HT80	5785	89.46	73.83	75.203	≥500


Test mode: 802.11a
5180MHz

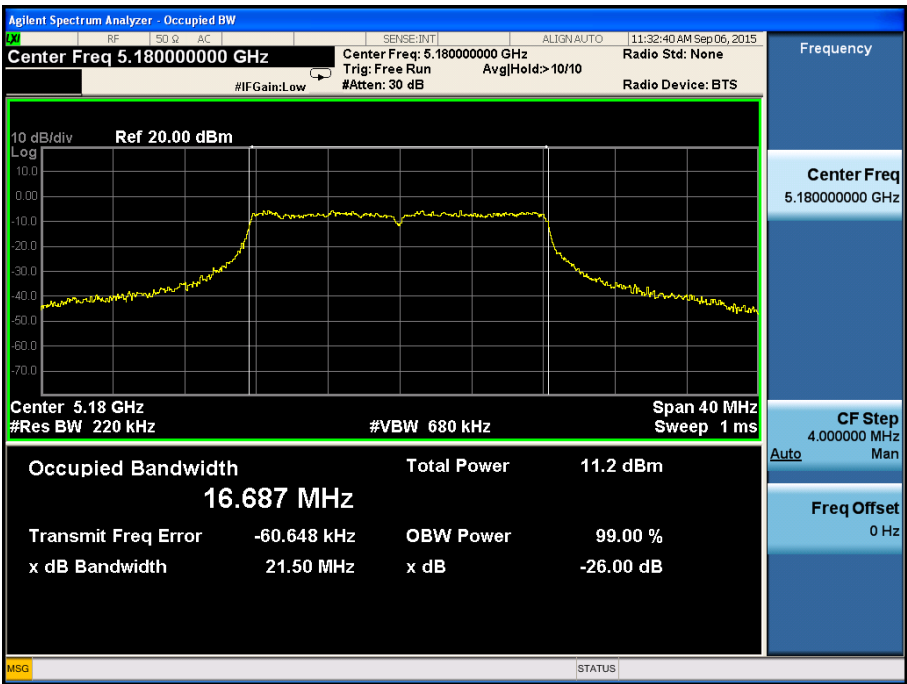

5200MHz

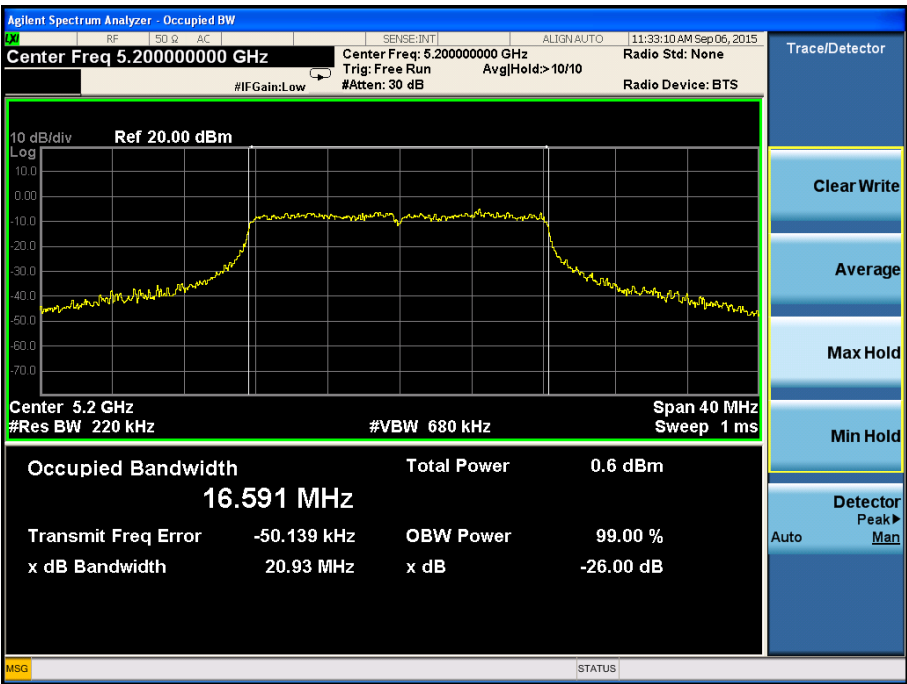


5240MHz

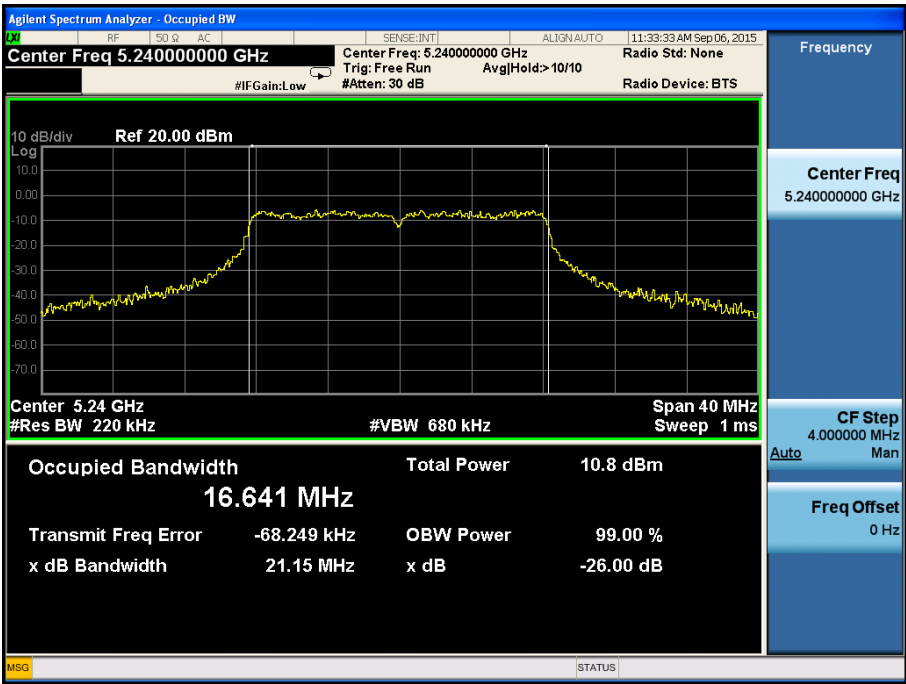


5745MHz

26dB and 99% bandwidth

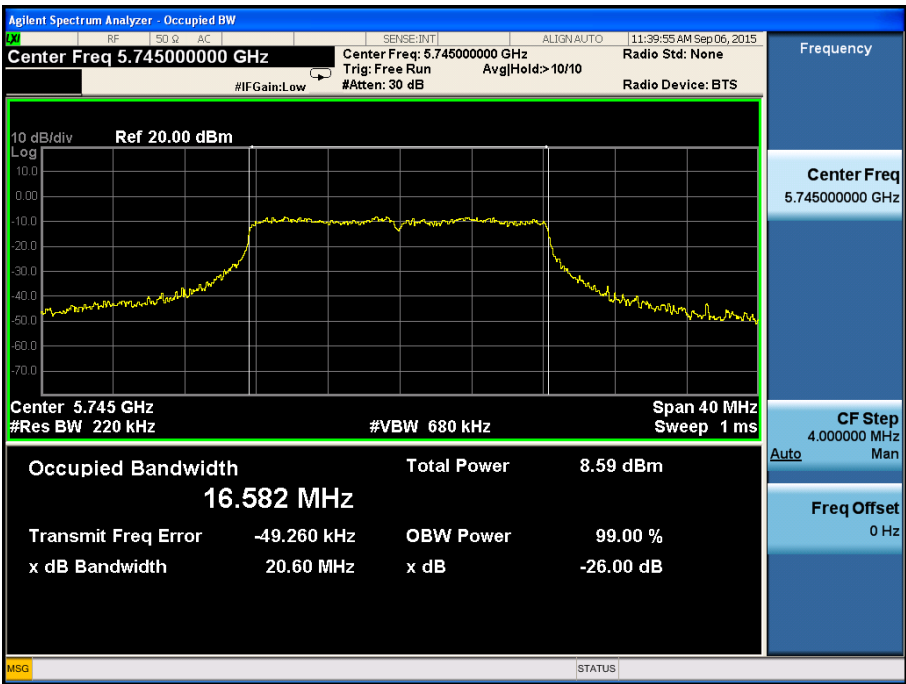


6dB bandwidht

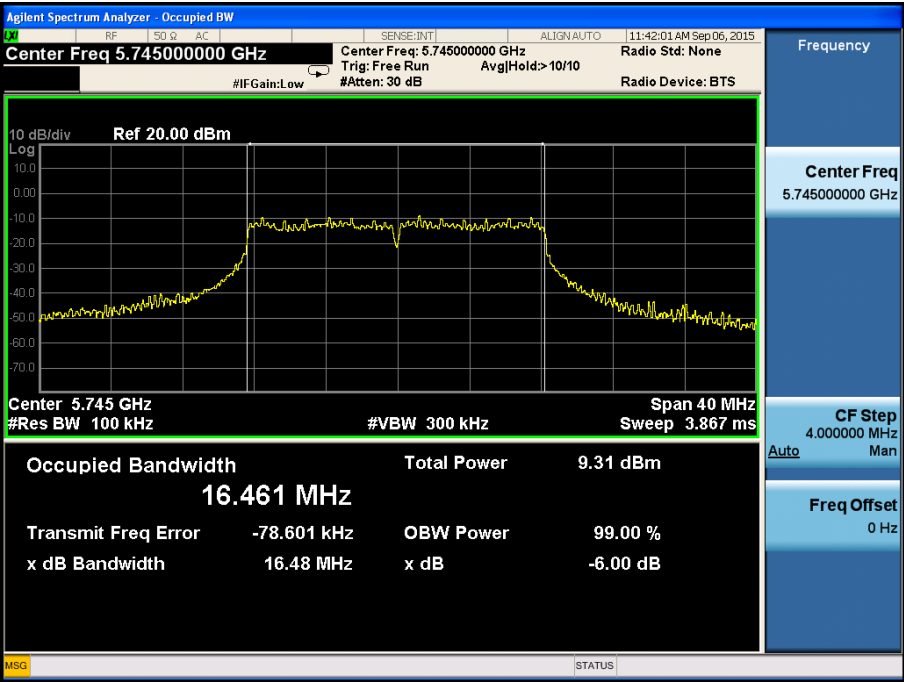


5785MHz

26dB and 99% bandwidth

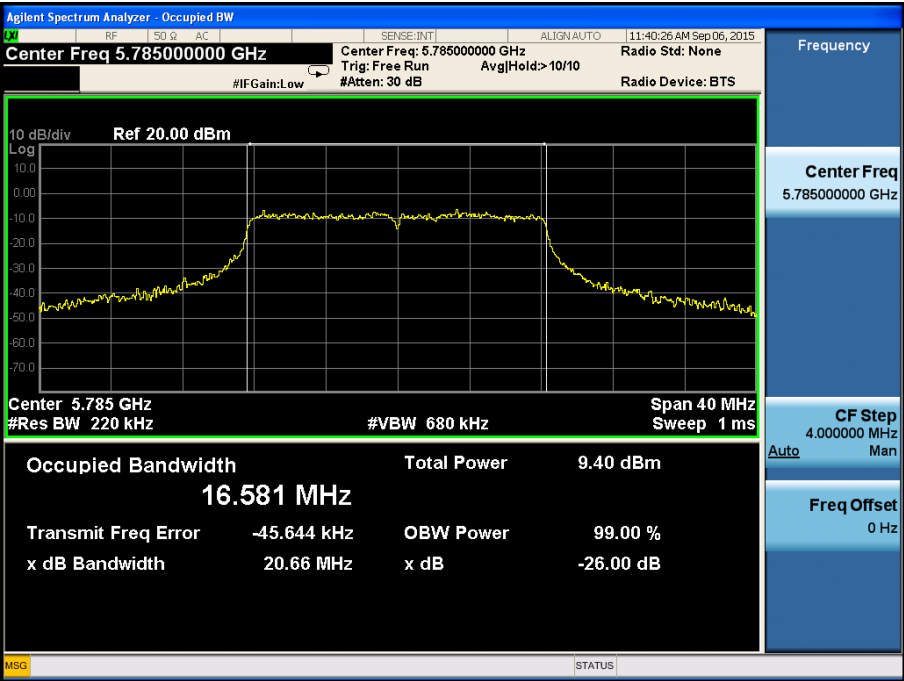


6dB bandwidht

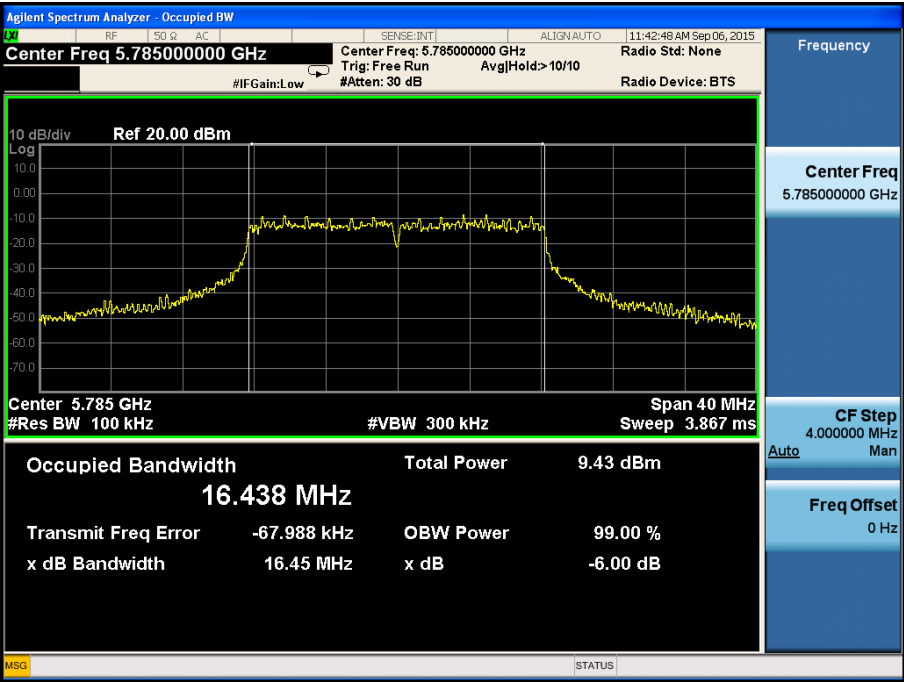


5805MHz

26dB and 99% bandwidth

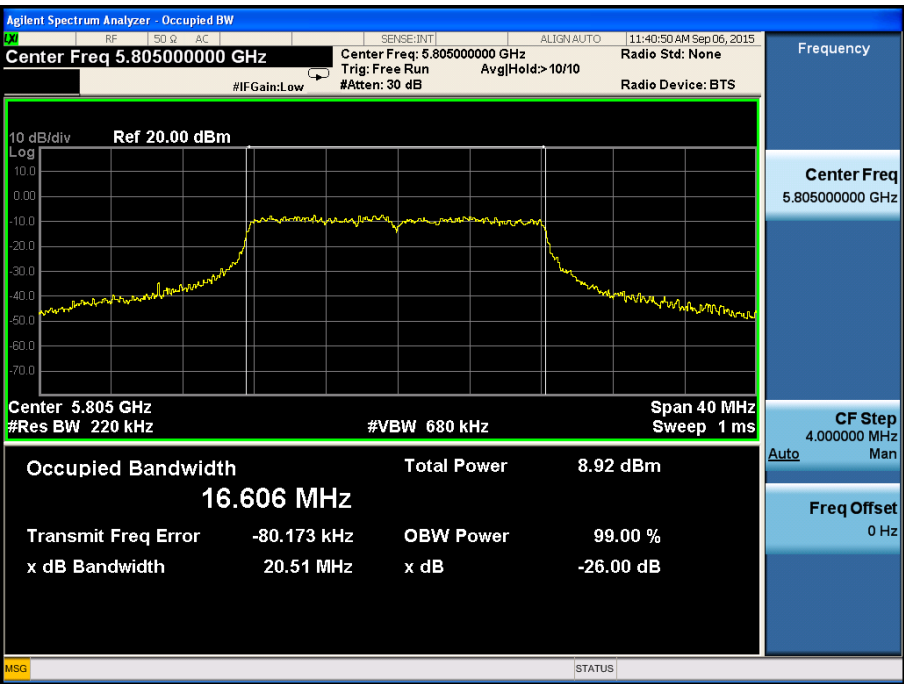


6dB bandwidht

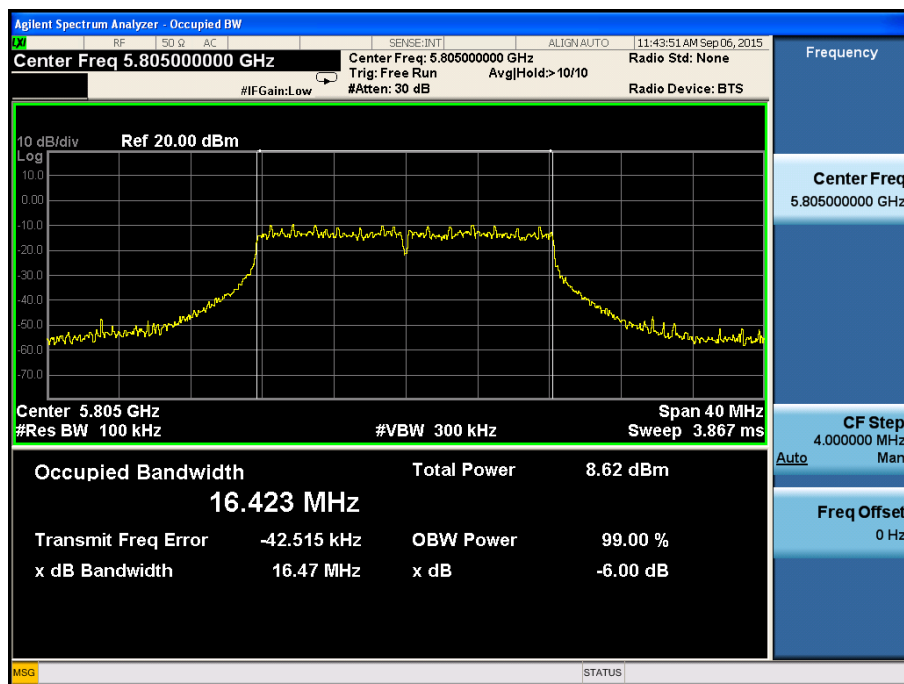


Test mode: 802.11n-HT20


5180MHz

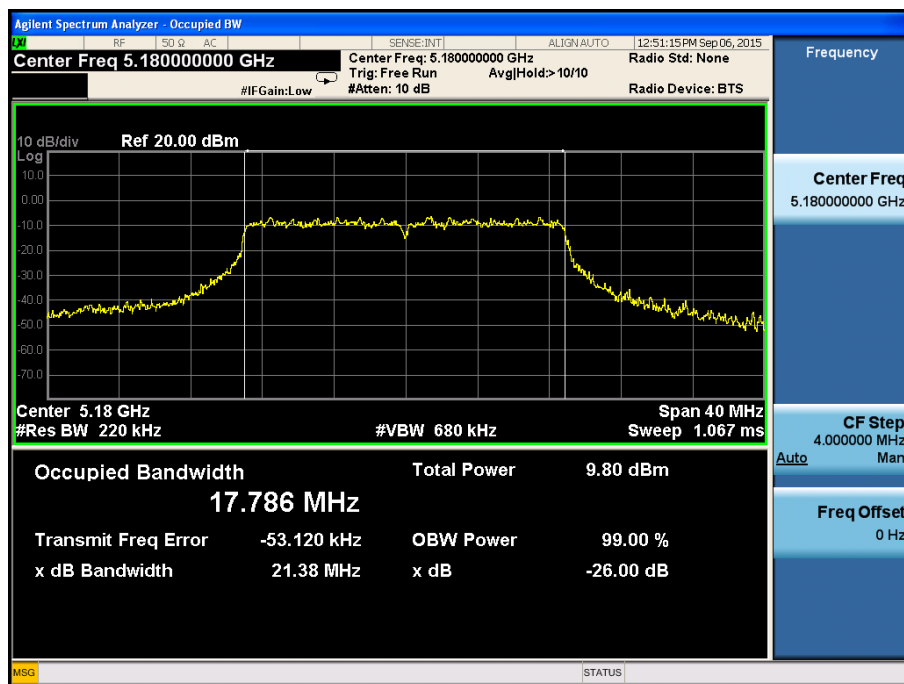


5200MHz

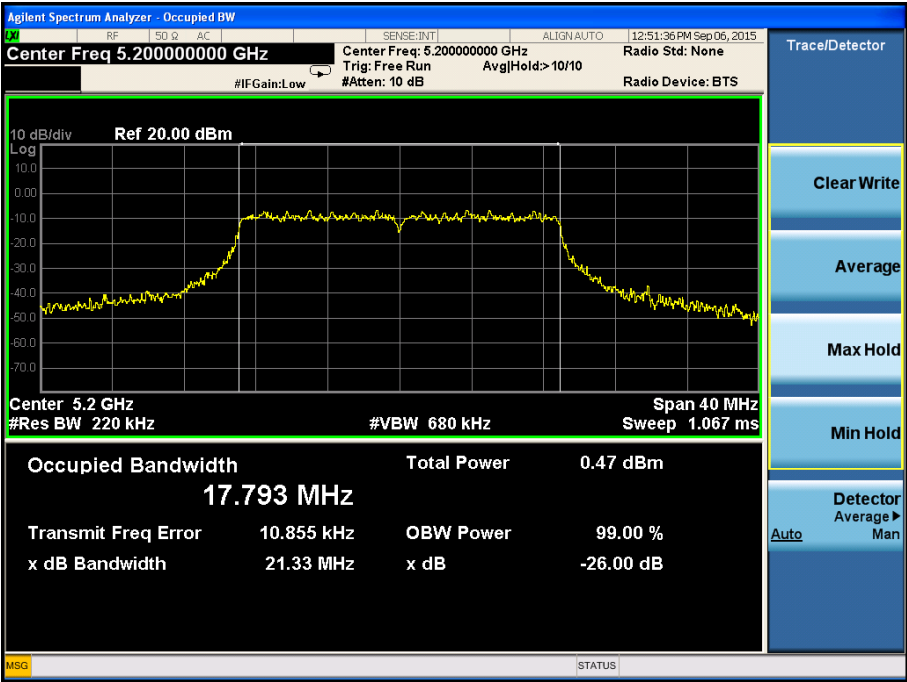


5240MHz

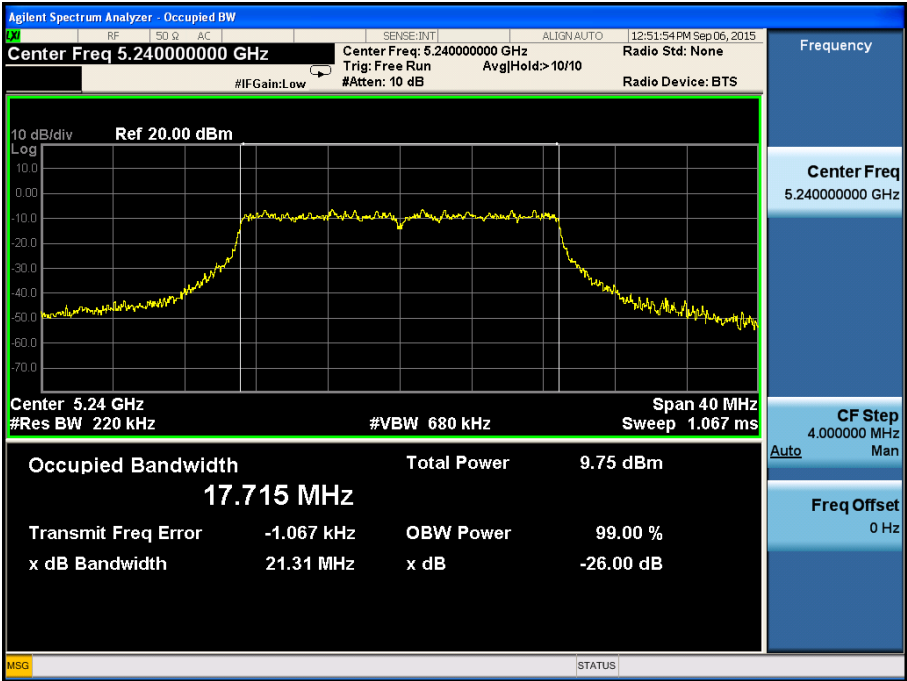


5745MHz
26dB and 99% bandwidth

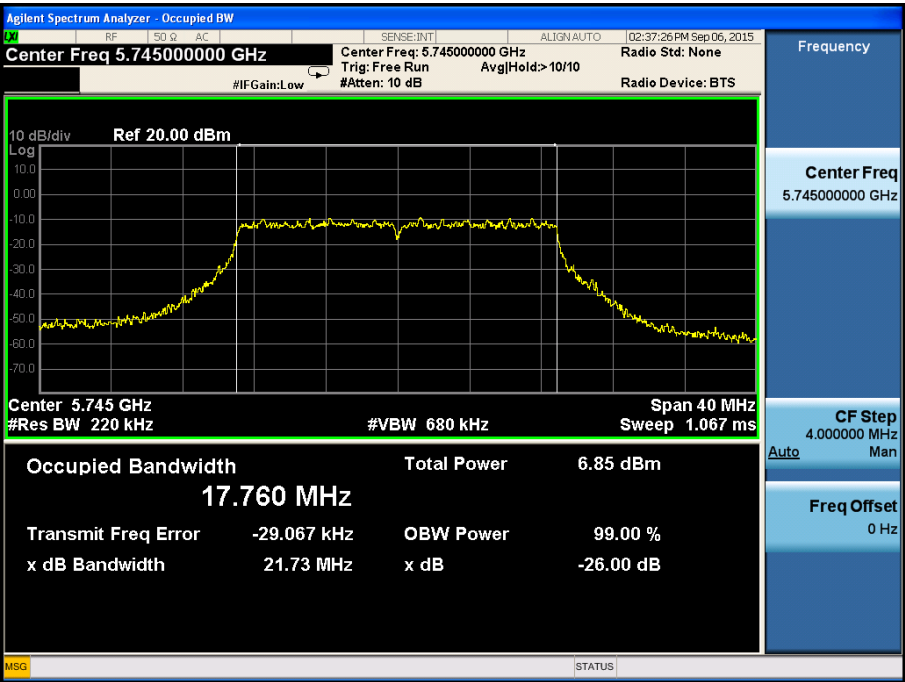


6dB bandwidth

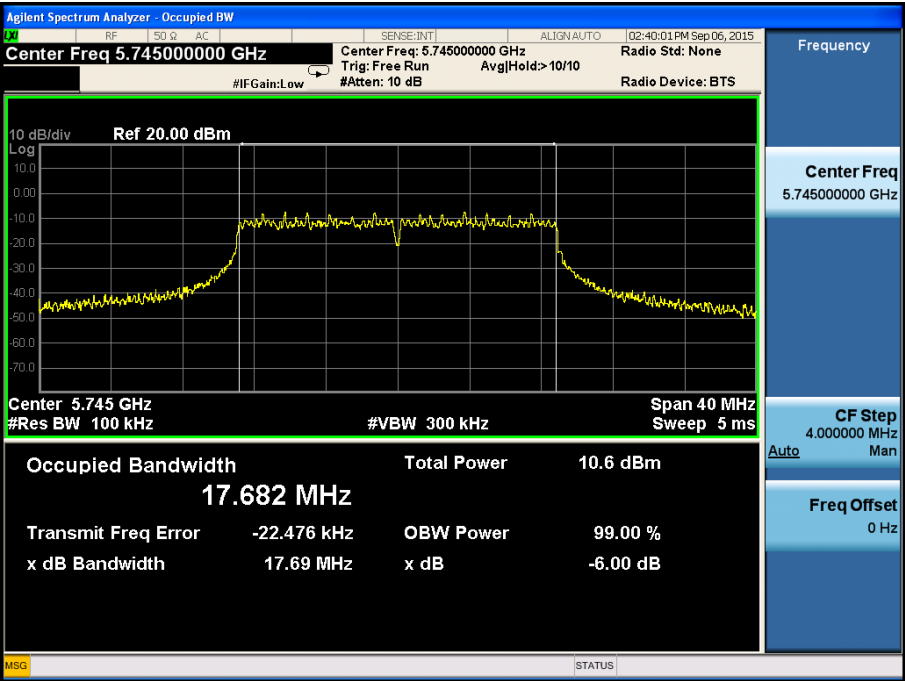


5785MHz
26dB and 99% bandwidth

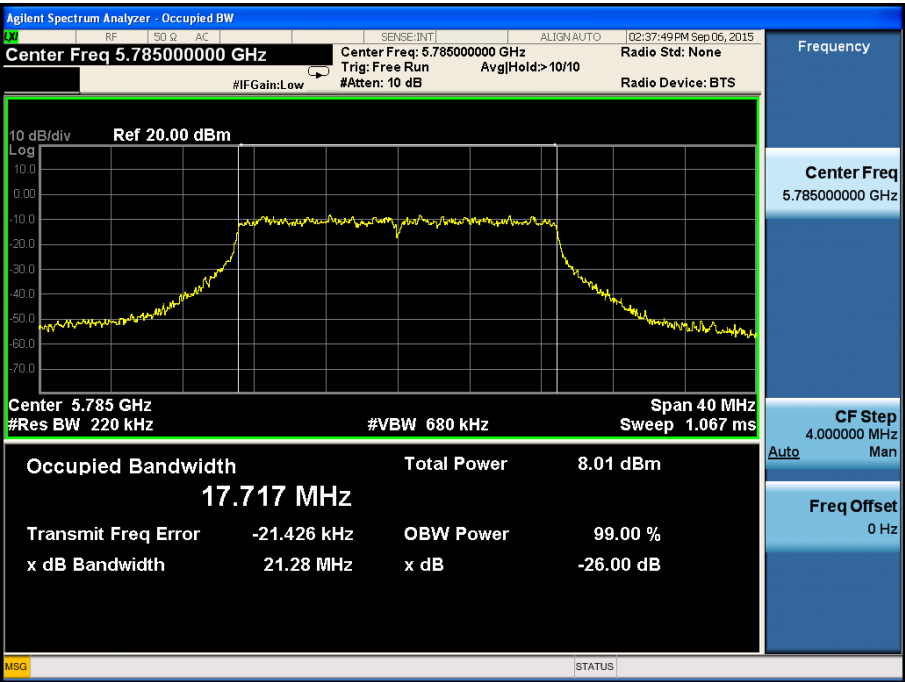


6dB bandwidth

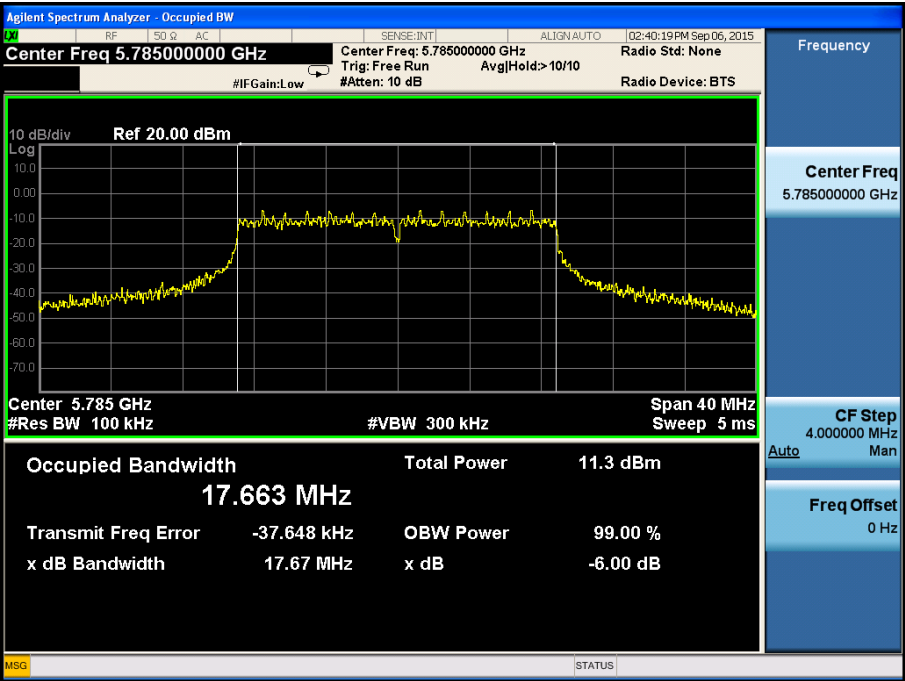


5805MHz
26dB and 99% bandwidth

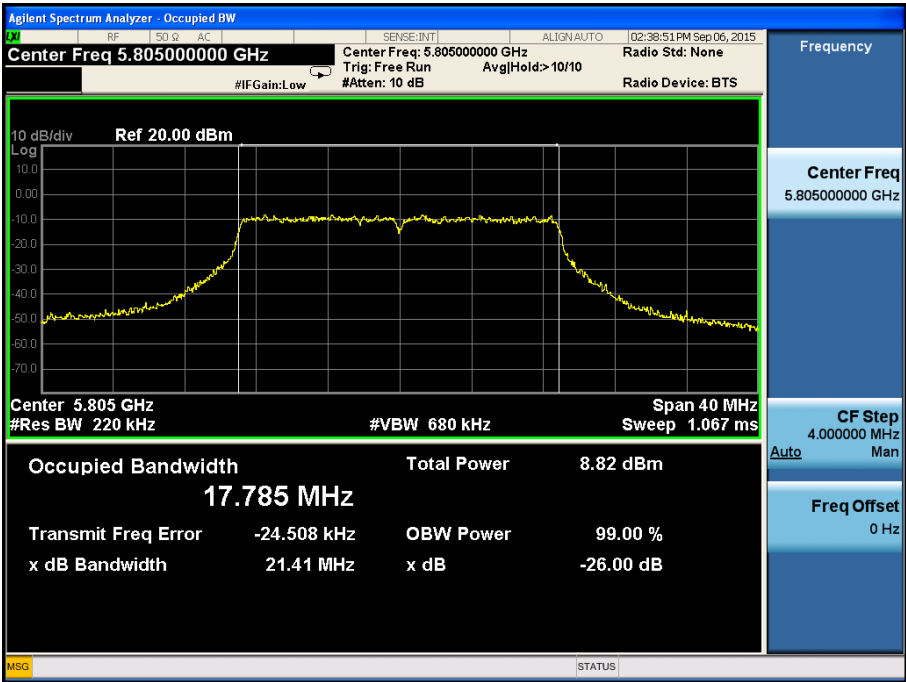

6dB bandwidth

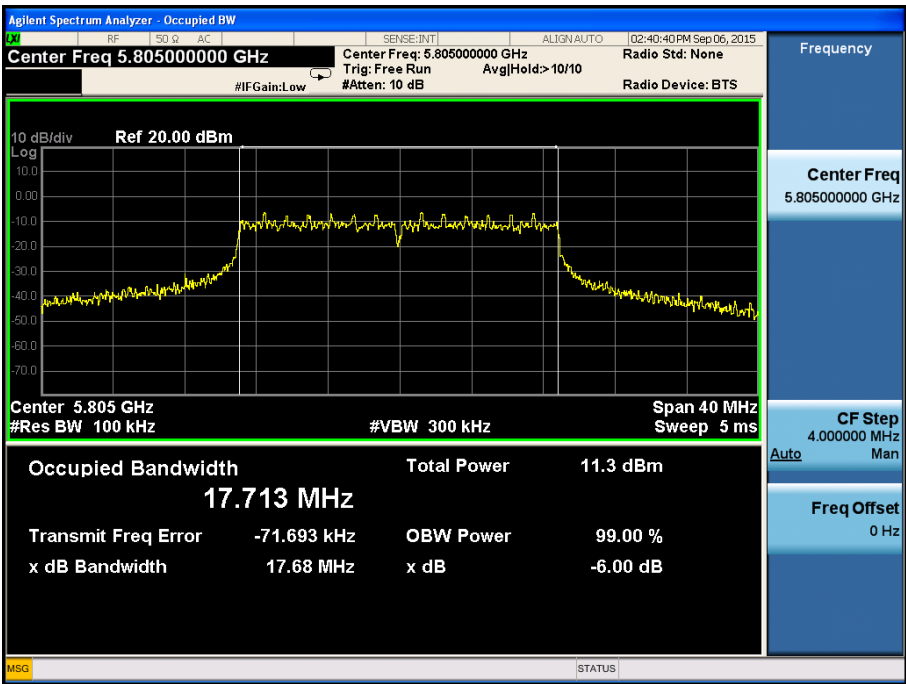


Test mode: 802.11n-HT40
5190MHz

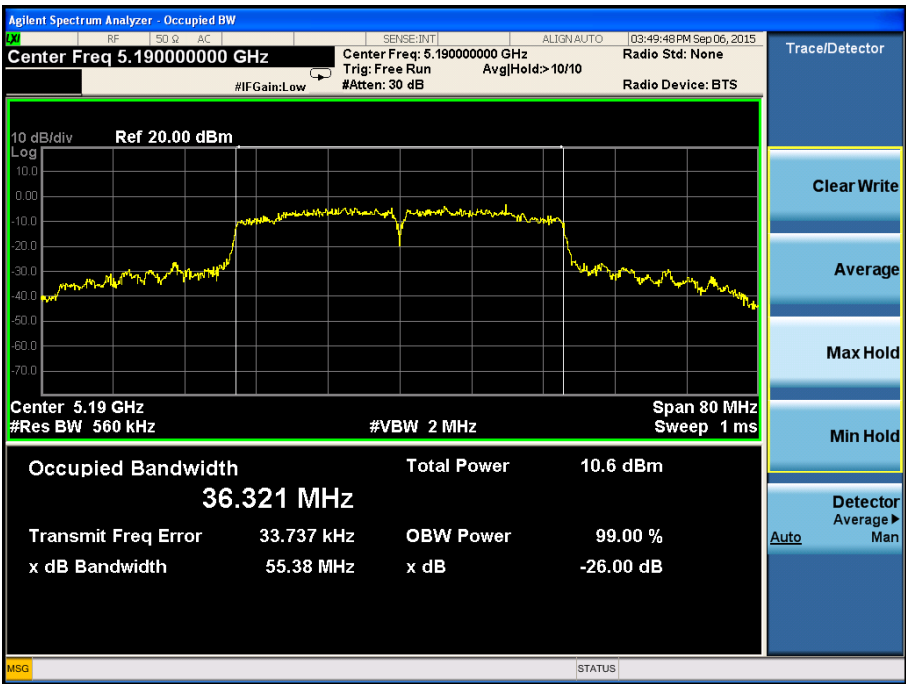


5230MHz




5765MHz
26dB and 99% bandwidth

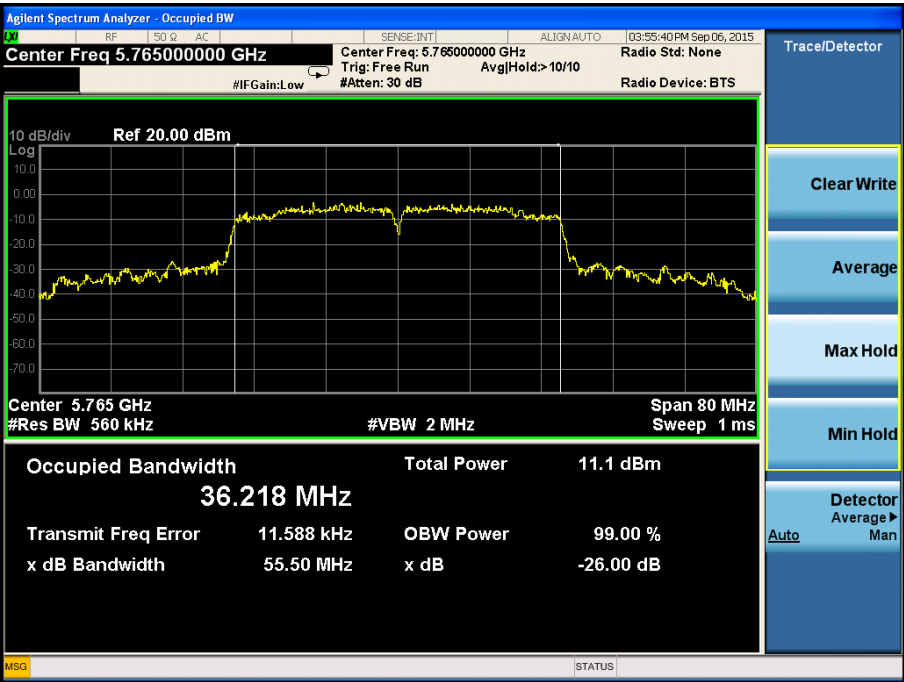


6dB bandwidth

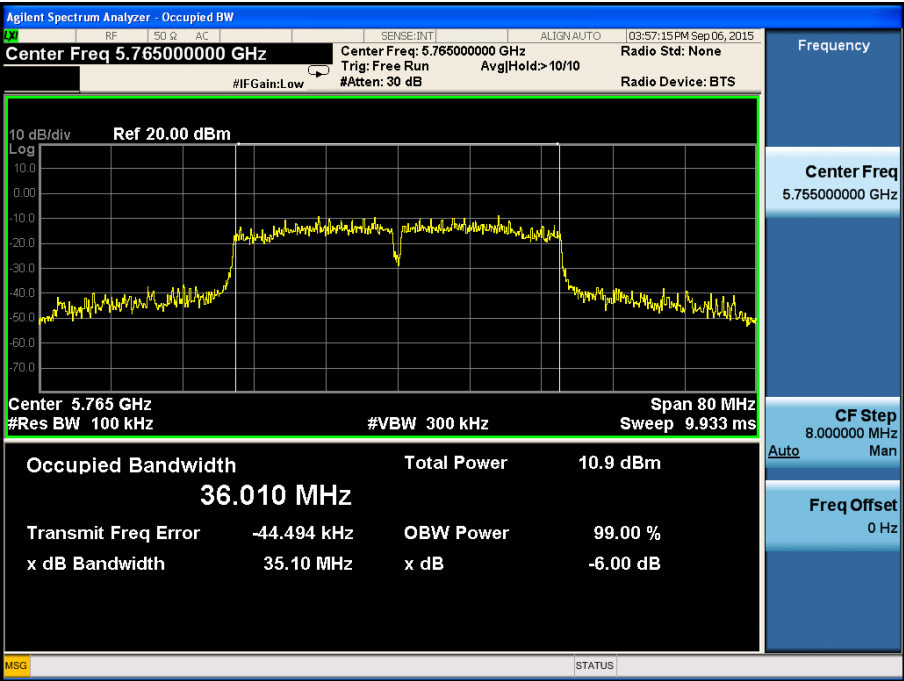

5785MHz
26dB and 99% bandwidth

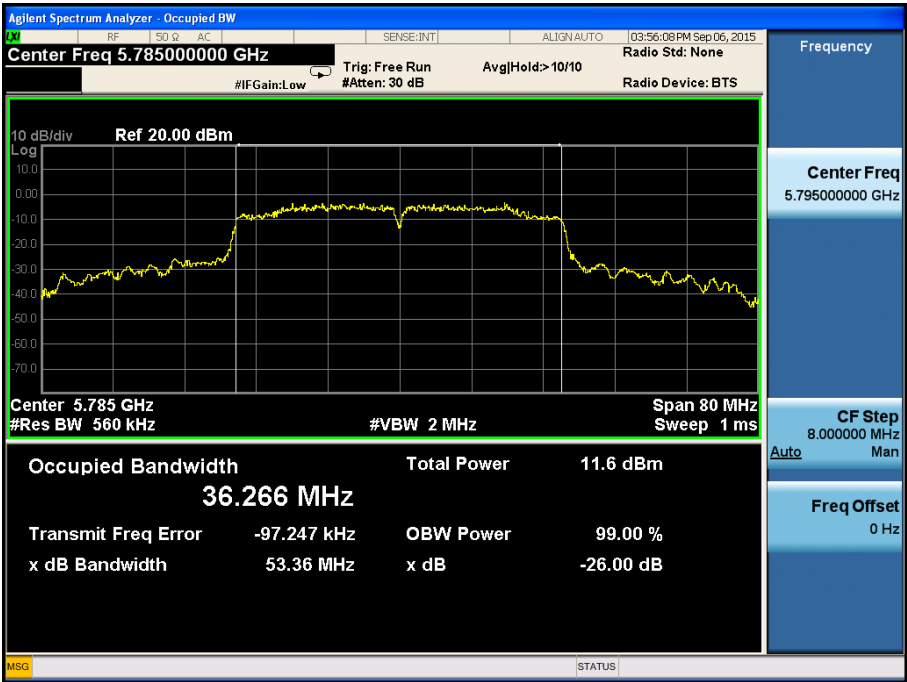


6dB bandwidth

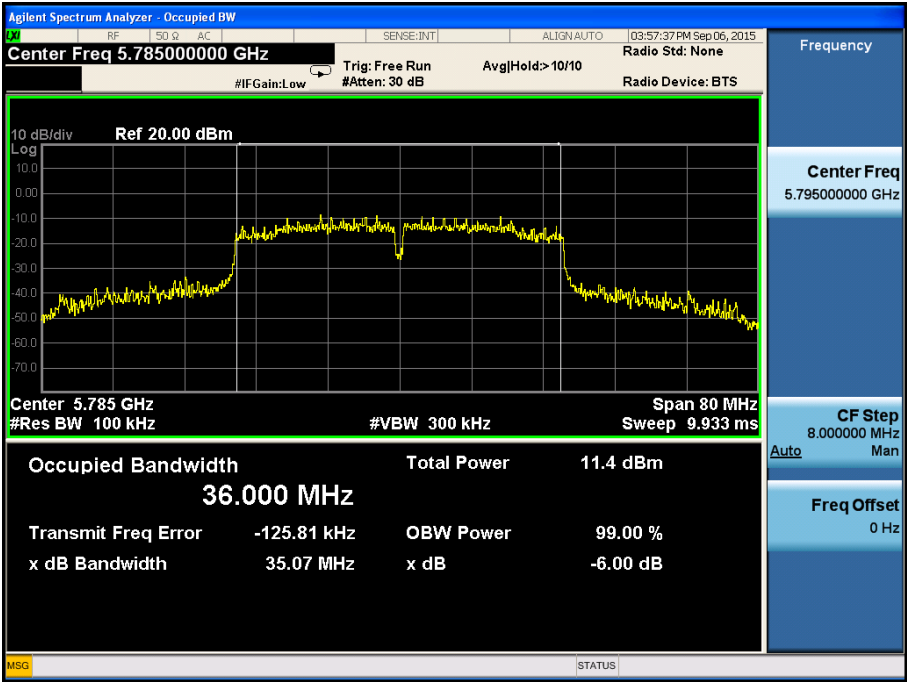


Test mode: 802.11ac-HT80
5210MHz



5785MHz
26dB and 99% bandwidth

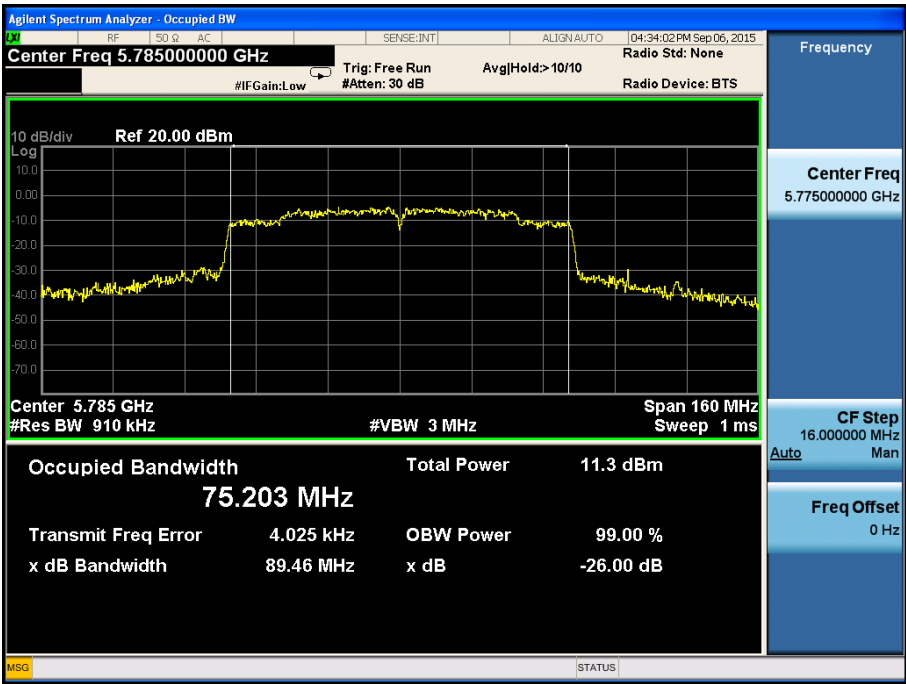

6dB bandwidth

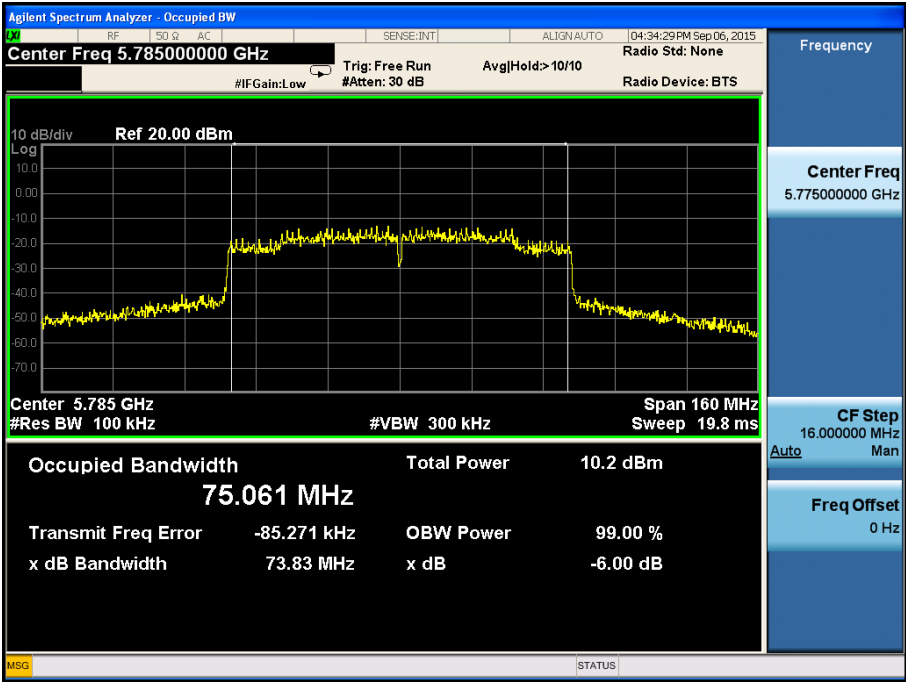

8. Maximum Conducted Output Power

8.1 Standard Applicable

According to 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.

- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

8.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	65%
ATM Pressure:	1011 mbar


8.4 Summary of Test Results/Plots

Only the worst case was reported


For the frequency band 5.15-5.25GHz /5725-5850MHz

Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a (6Mbps)	5180	11.67	14.69	250
	5200	11.17	13.09	250
	5240	11.43	13.90	250
	5745	11.15	13.03	1000
	5785	11.34	13.61	1000
	5805	11.19	13.15	1000
802.11n-HT20 (MCS0)	5180	11.17	13.09	250
	5200	10.64	11.59	250
	5240	11.09	12.85	250
	5745	11.29	13.46	1000
	5785	11.12	12.94	1000
	5805	11.22	13.24	1000
802.11n-HT40 (MCS0)	5190	11.38	13.74	250
	5230	11.50	14.13	250
	5765	11.31	13.52	1000
	5785	11.45	13.96	1000
802.11ac-HT80 (MCS0)	5210	11.34	13.61	250
	5785	11.55	14.29	1000


Test Mode: 802.11a
5180MHz

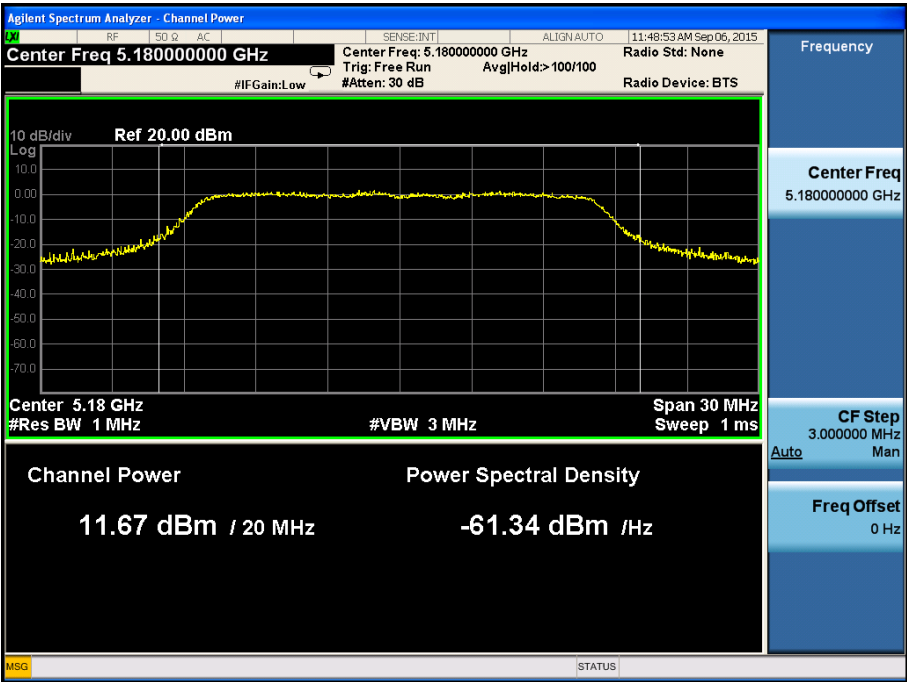


5200MHz

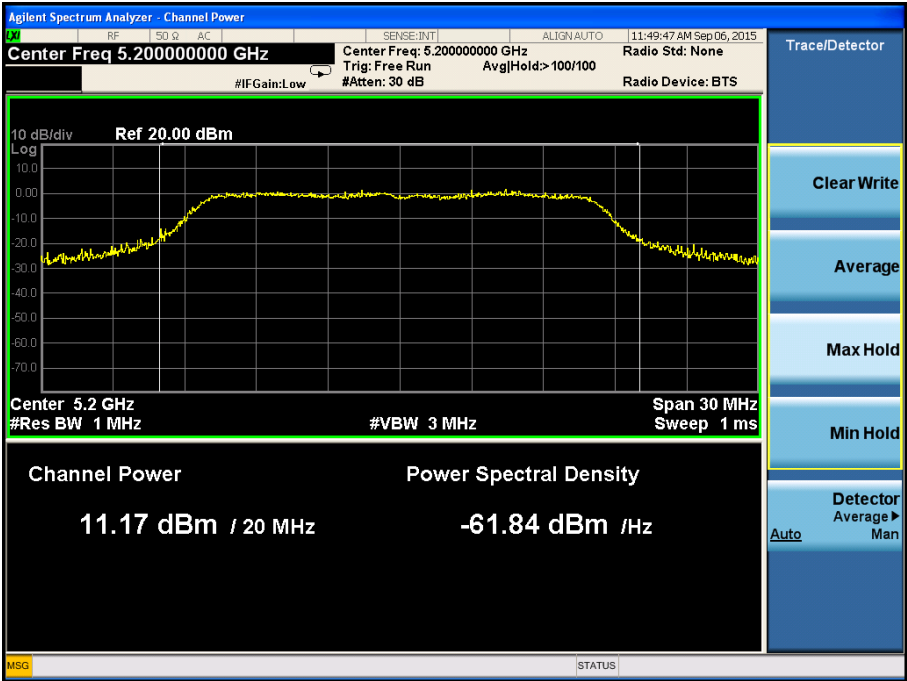

5240MHz

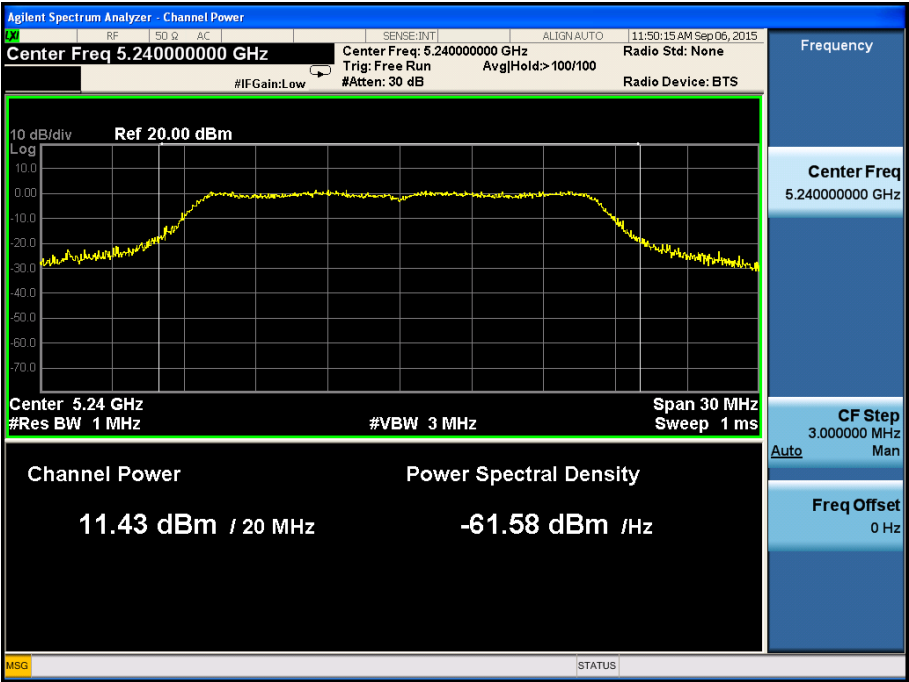

5745MHz

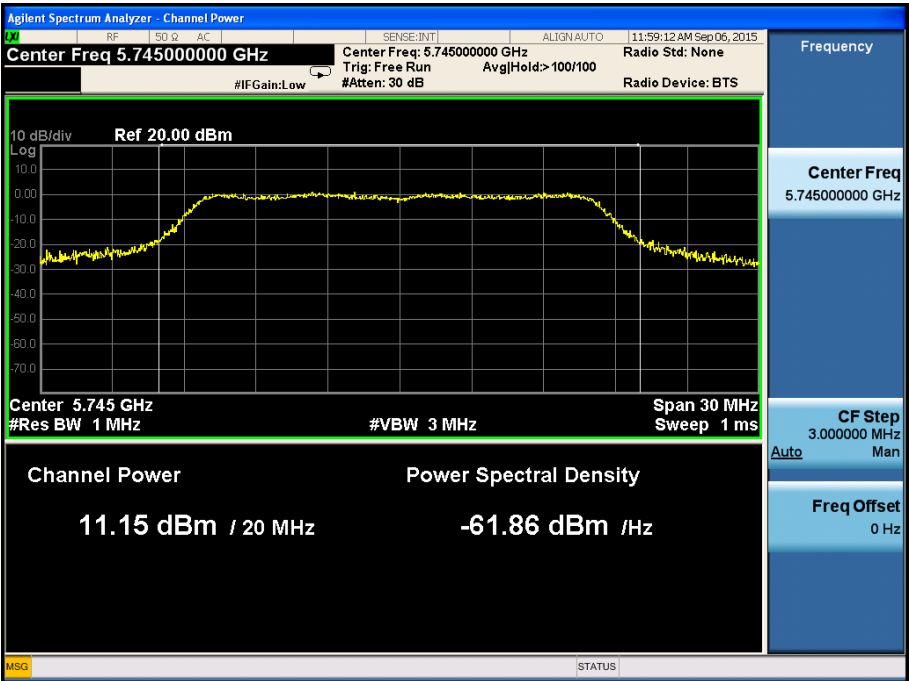

Agilent Spectrum Analyzer - Channel Power

RF 50 Ω AC SENSE:INT ALIGN: AUTO 11:59:47 AM Sep 06, 2015

Center Freq 5.785000000 GHz Center Freq: 5.785000000 GHz Radio Std: None
Trig: Free Run Avg|Hold: > 100/100
#IFGain: Low #Atten: 30 dB Radio Device: BTS

10 dB/div Ref 20.00 dBm

Log

Center 5.785 GHz Span 30 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms

Channel Power 11.34 dBm / 20 MHz
Power Spectral Density -61.67 dBm / Hz

MSG STATUS

Agilent Spectrum Analyzer - Channel Power

RF 50 Q AC SENSE:INT ALIGN: AUTO 12:00:42 PM Sep 06, 2015
Center Freq 5.805000000 GHz Center Freq: 5.805000000 GHz Radio Std: None
 Trig: Free Run Avg|Hold: > 100/100
 #IFGain: Low #Atten: 30 dB Radio Device: BTS

10 dB/div Ref 20.00 dBm

Log


Center 5.805 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms

Channel Power Power Spectral Density


11.19 dBm / 20 MHz -61.82 dBm /Hz

MSG STATUS


Test Mode: 802.11n-HT20
5180MHz

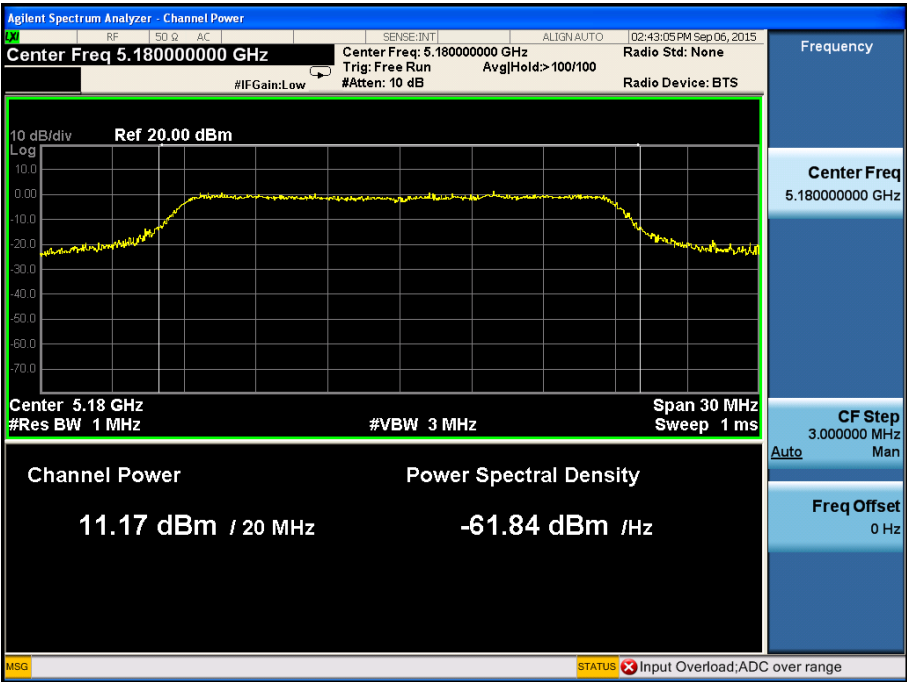


5200MHz

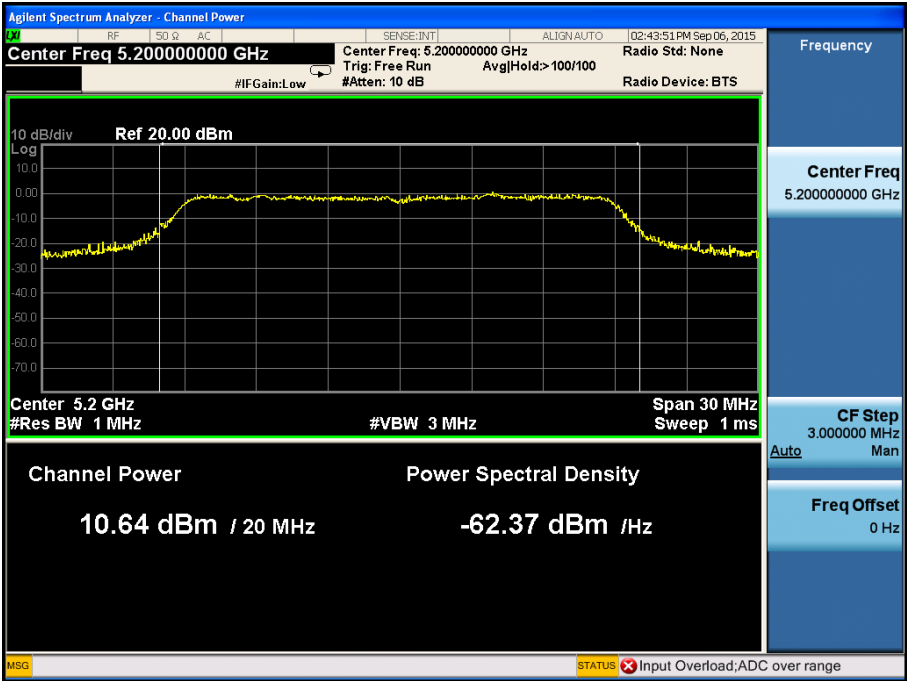


5240MHz

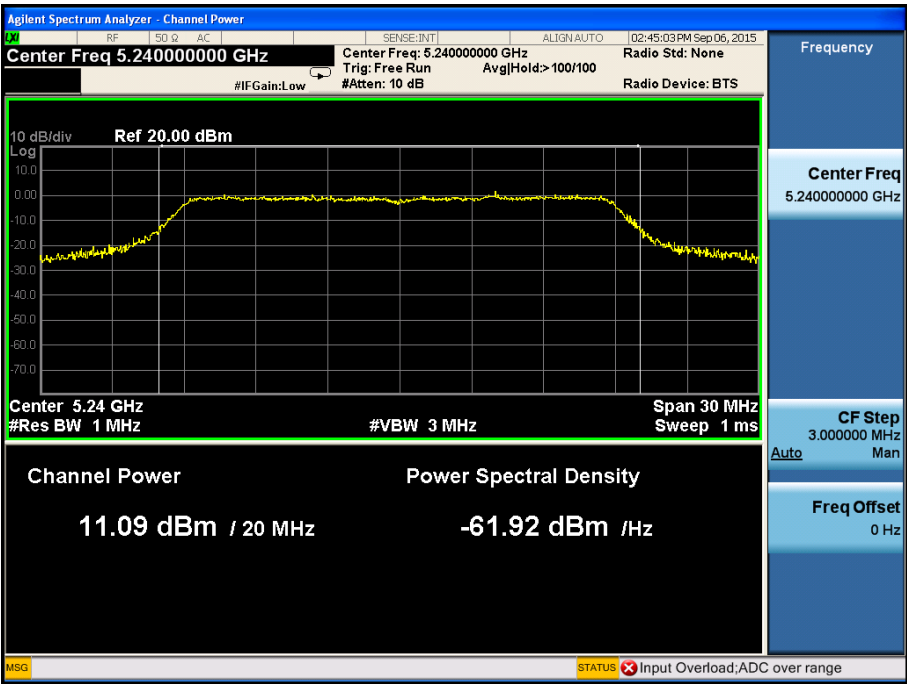


5745MHz

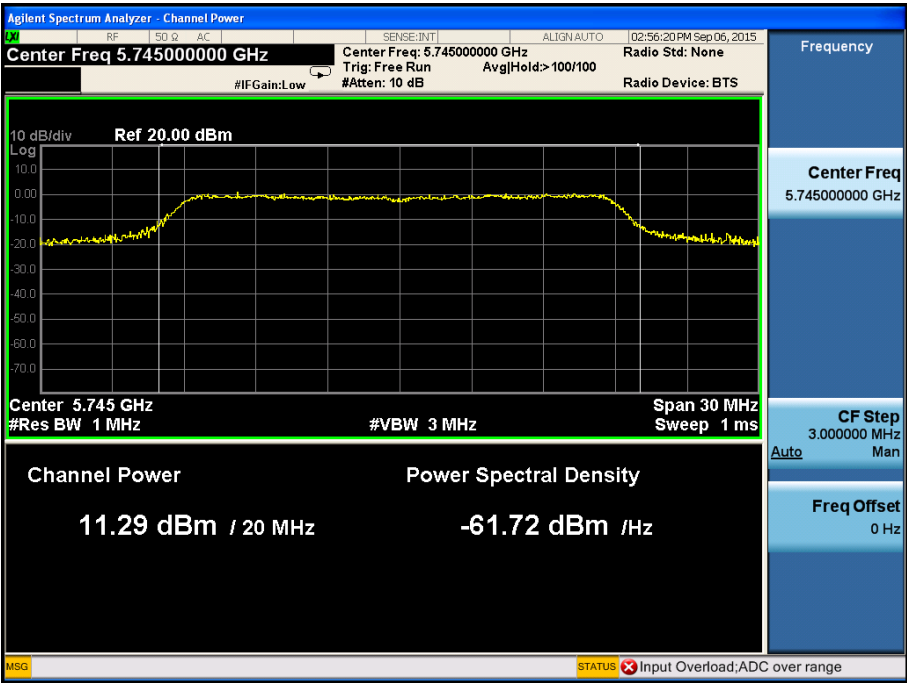


5785MHz

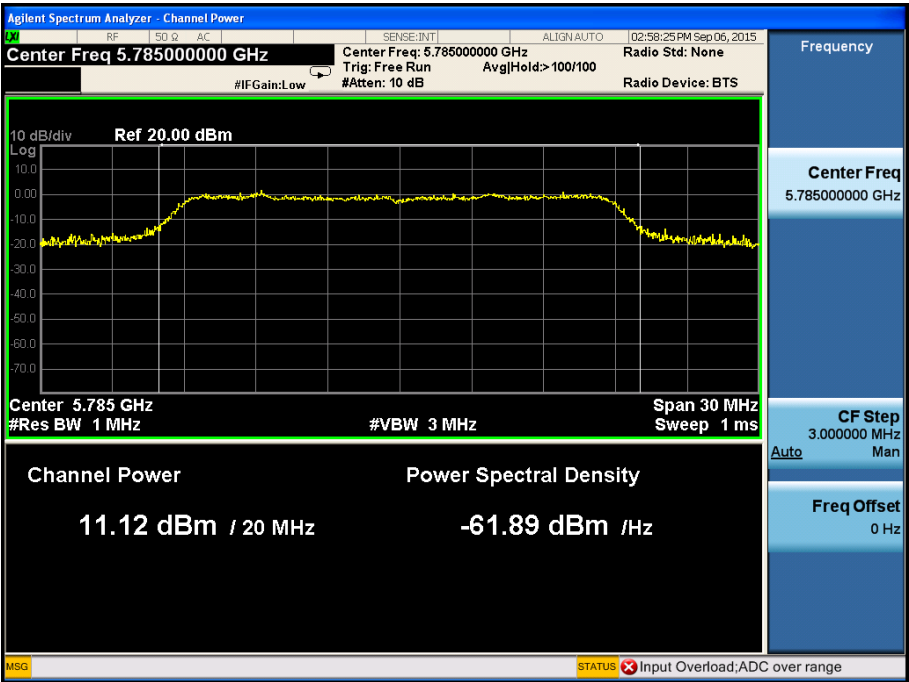


5805MHz

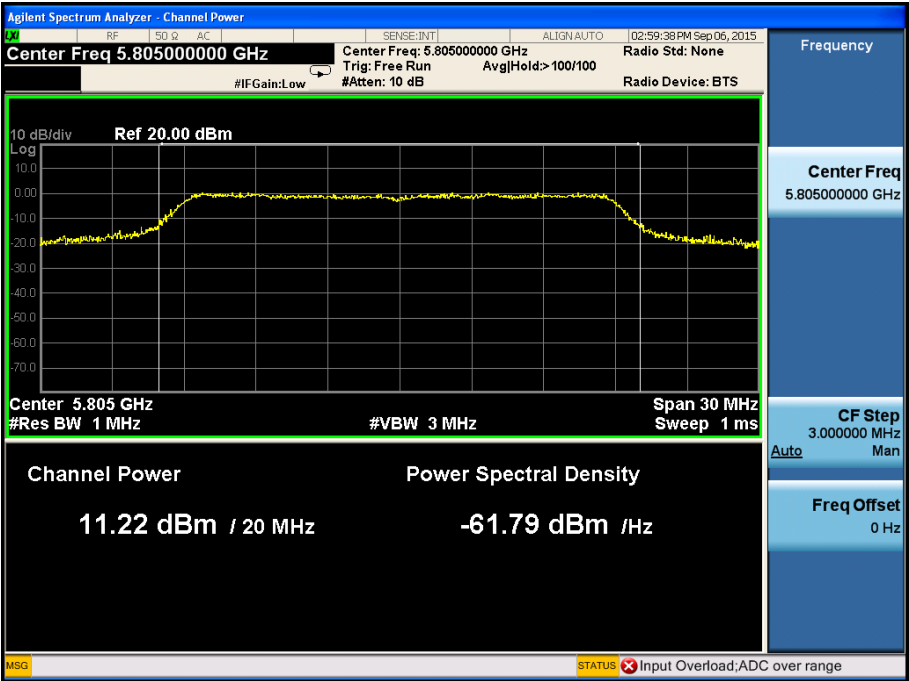


Test Mode: 802.11n-HT40
5190MHz

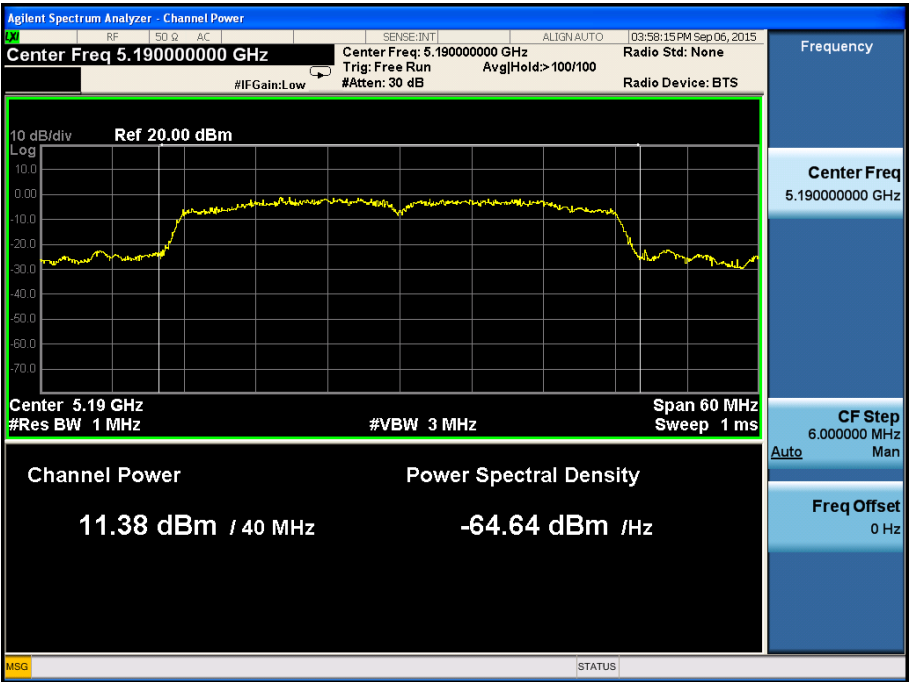


5230MHz

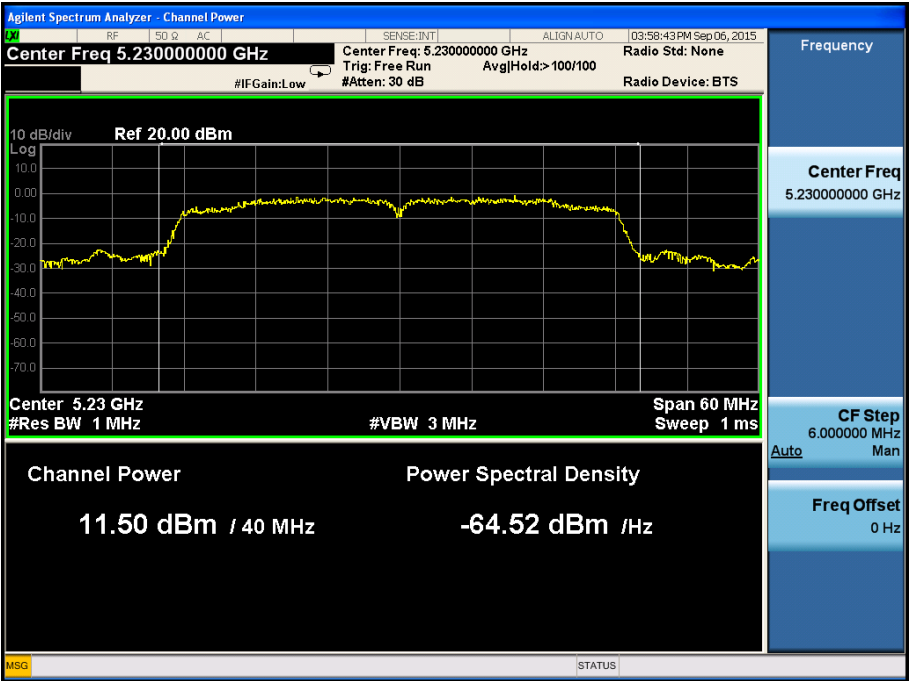


5765MHz

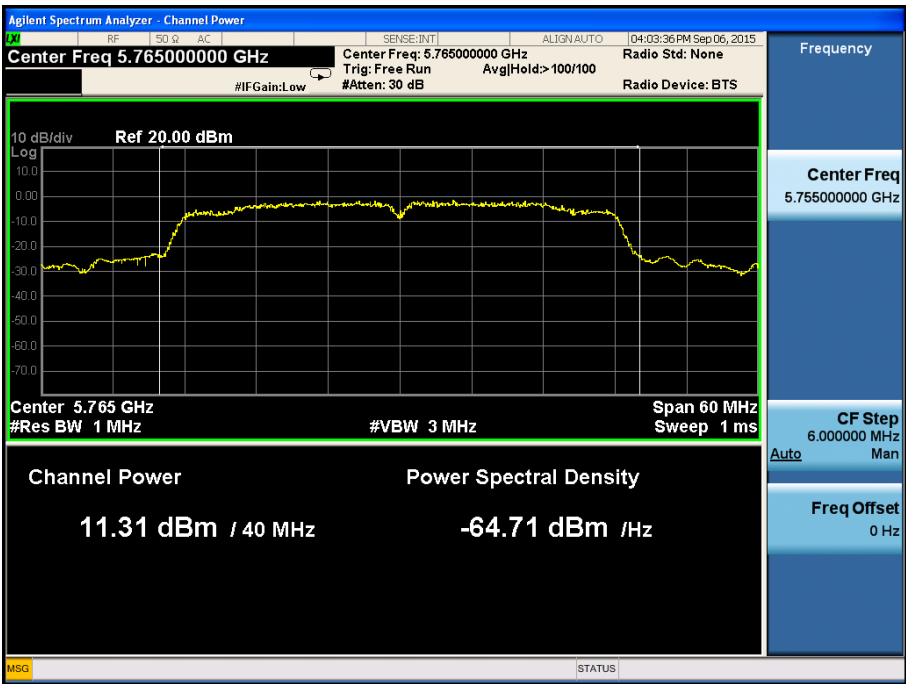


5785MHz

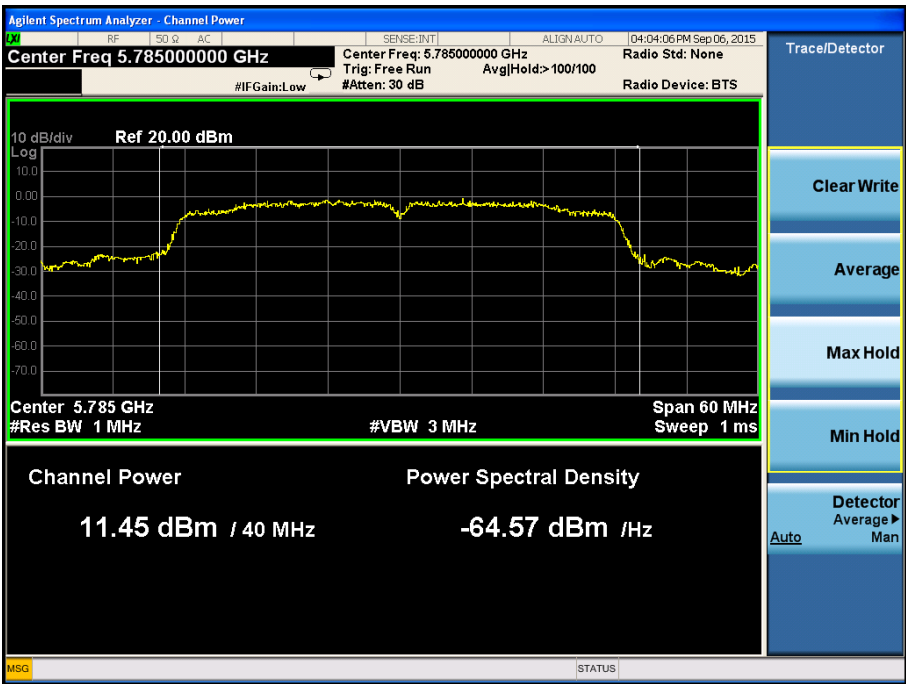

Test Mode: 802.11ac-HT80
5210MHz

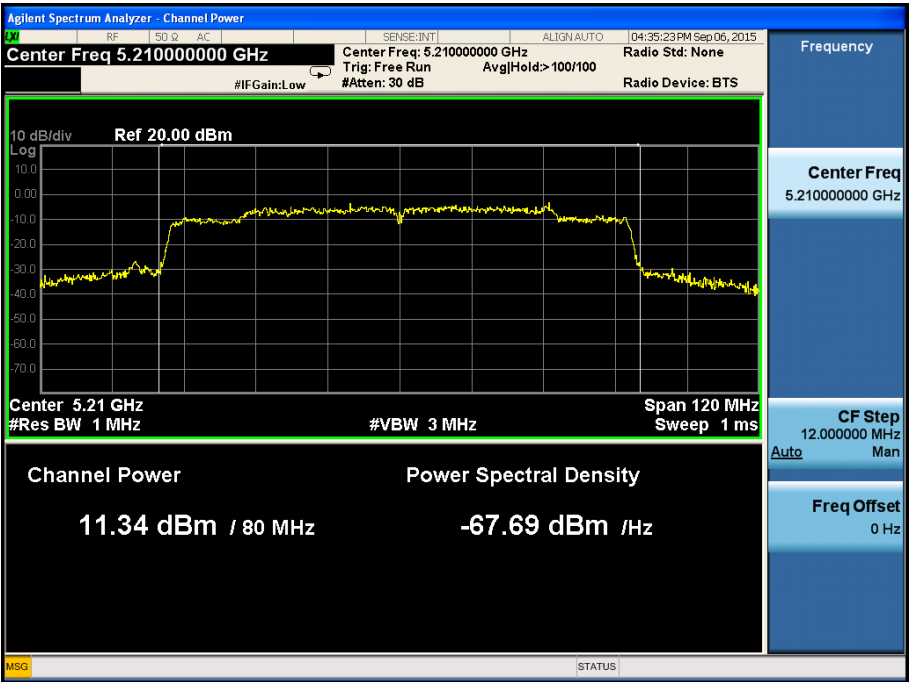

5785MHz

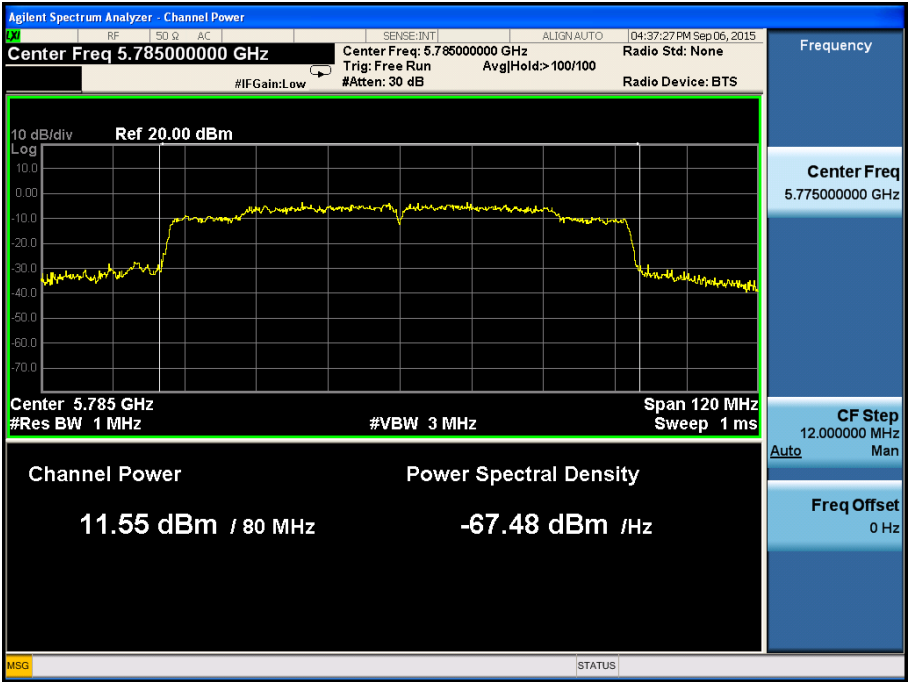

9. Conducted Spurious Emissions

9.1 Standard Applicable

According to §15.407 (b) (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

9.2 Test Procedure


1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer via a RF combiner.
2. Set the spectrum analyzer as RBW = 100kHz/1MHz, VBW=300kHz/3MHz, Sweep = auto
3. Set the Lowest, Middle and Highest Transmitting Channel, observed the outside band of 30MHz to 40GHz, then mark the higher-level emission for comparing with the FCC rules.

9.3 Environmental Conditions



Temperature:	21° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots



5180MHz

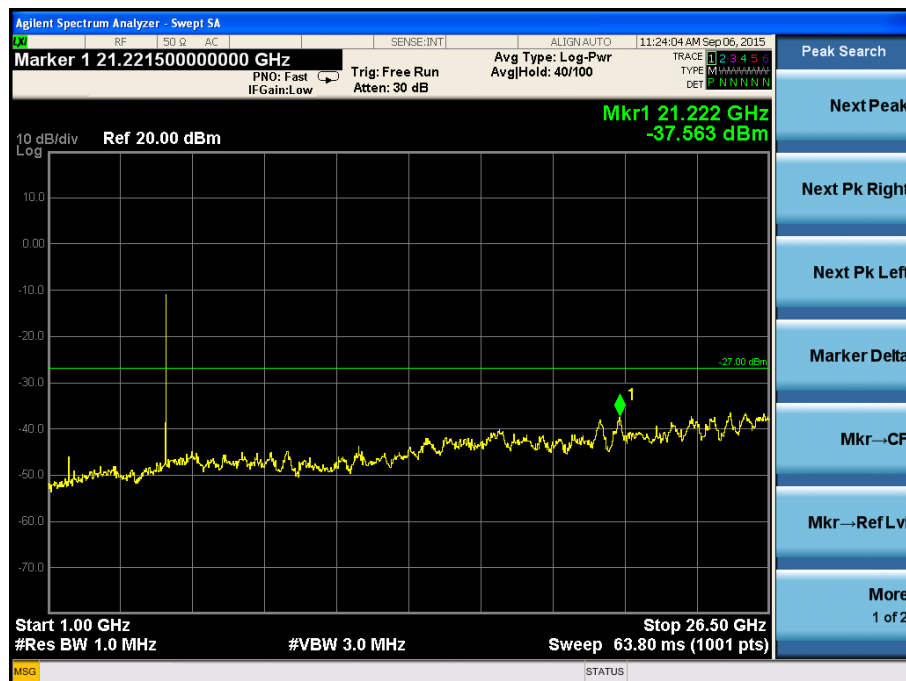



5200MHz

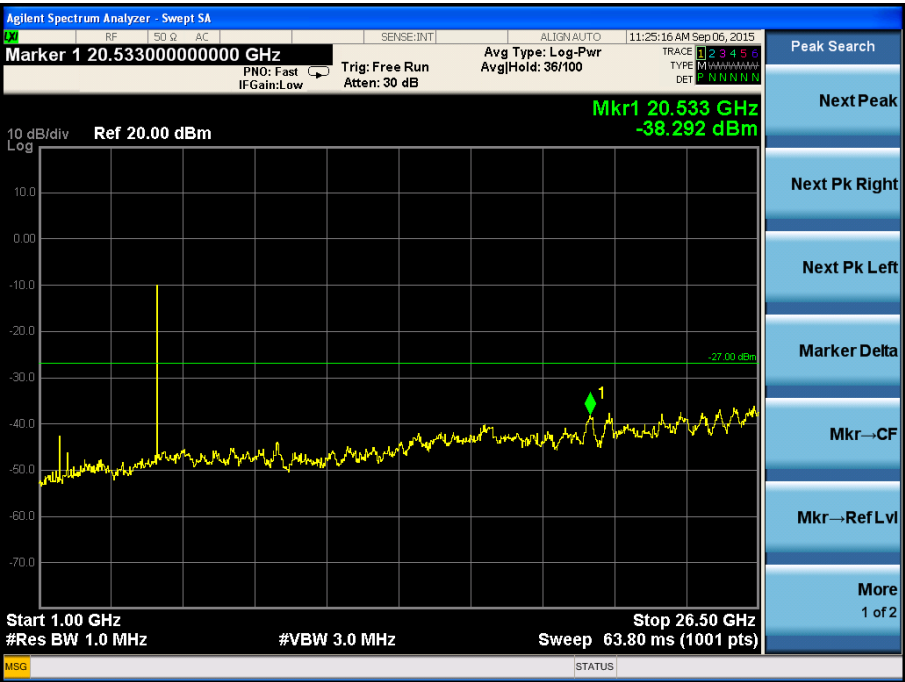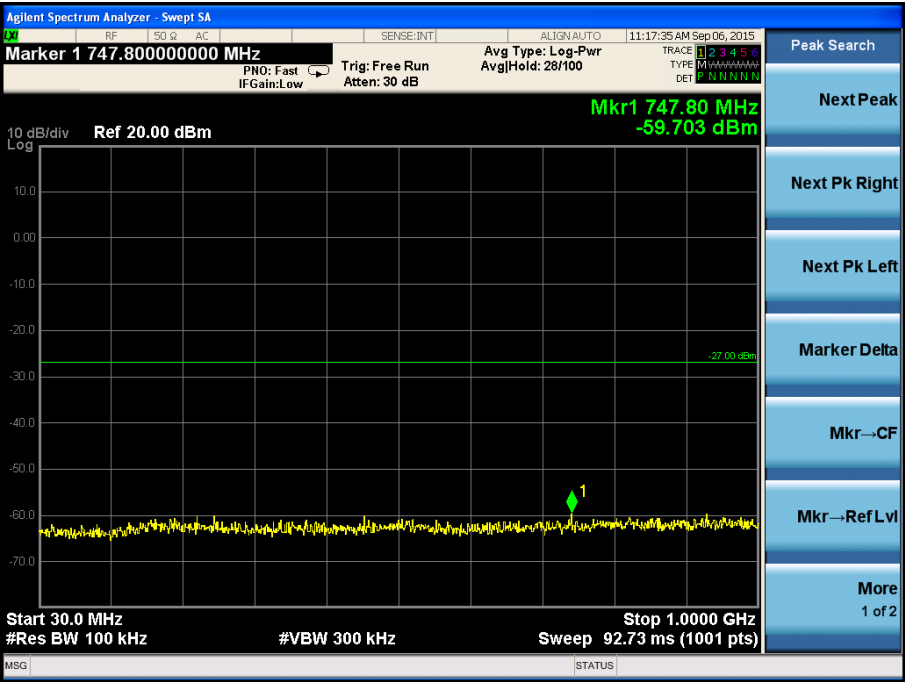



5240MHz

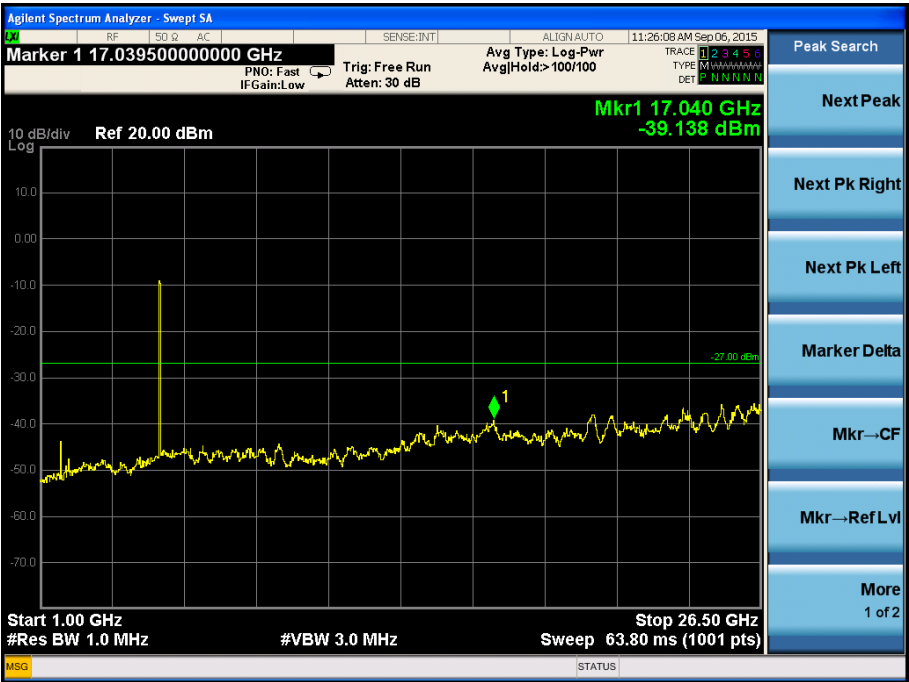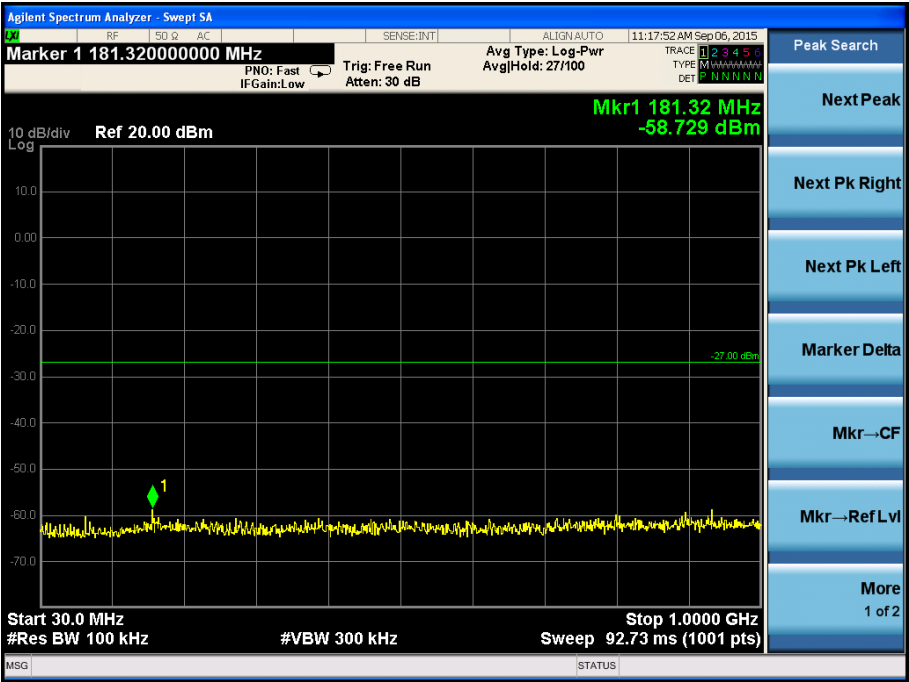



5745MHz

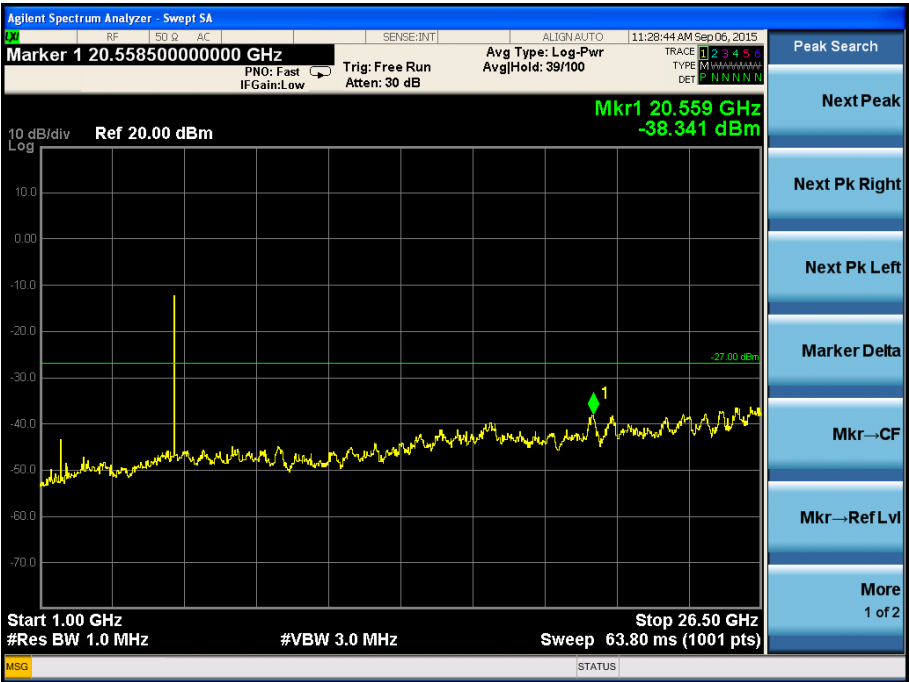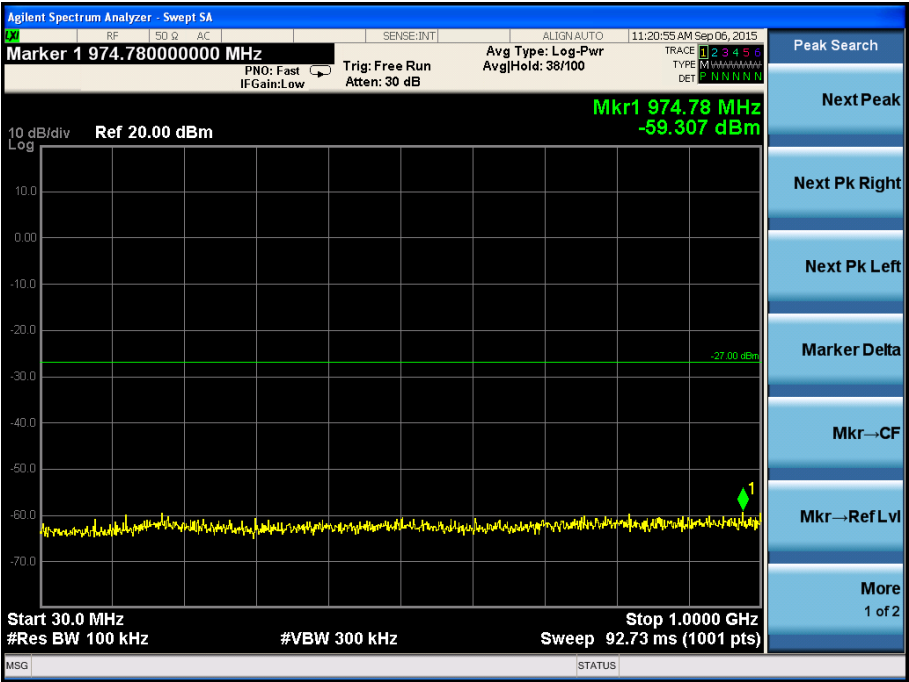



5785MHz

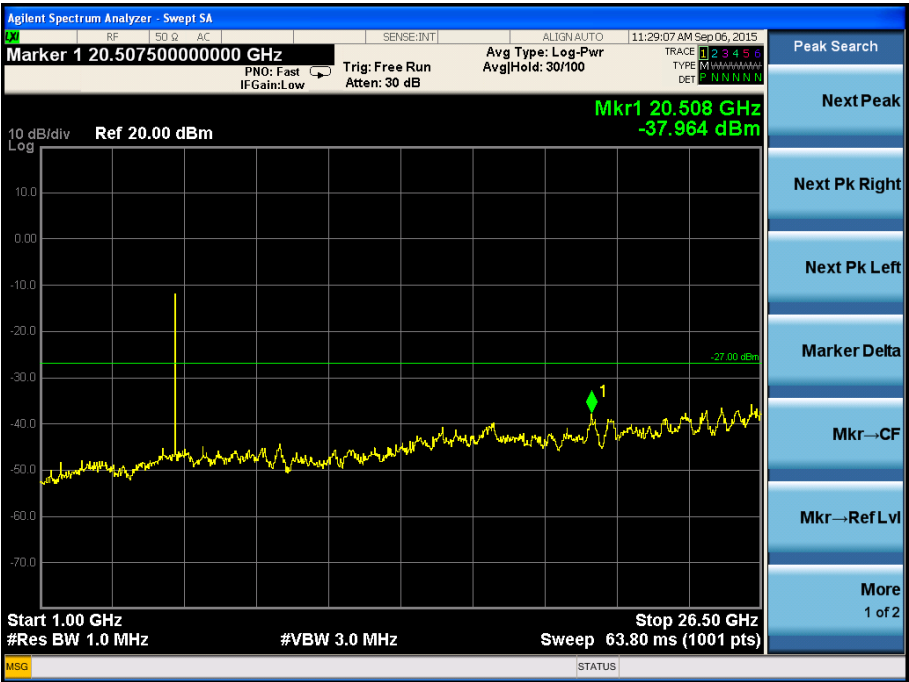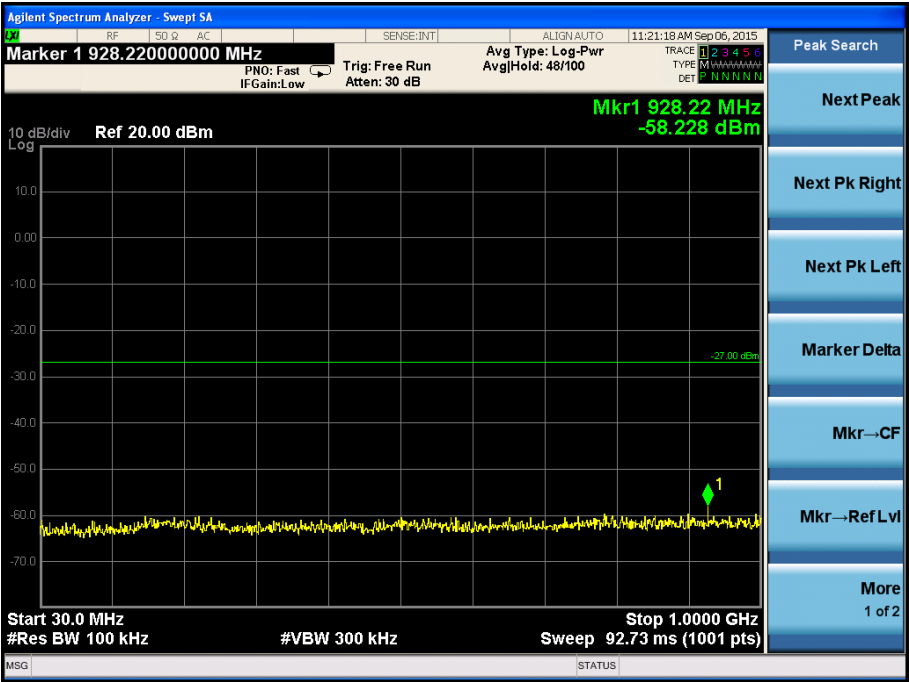



5805MHz

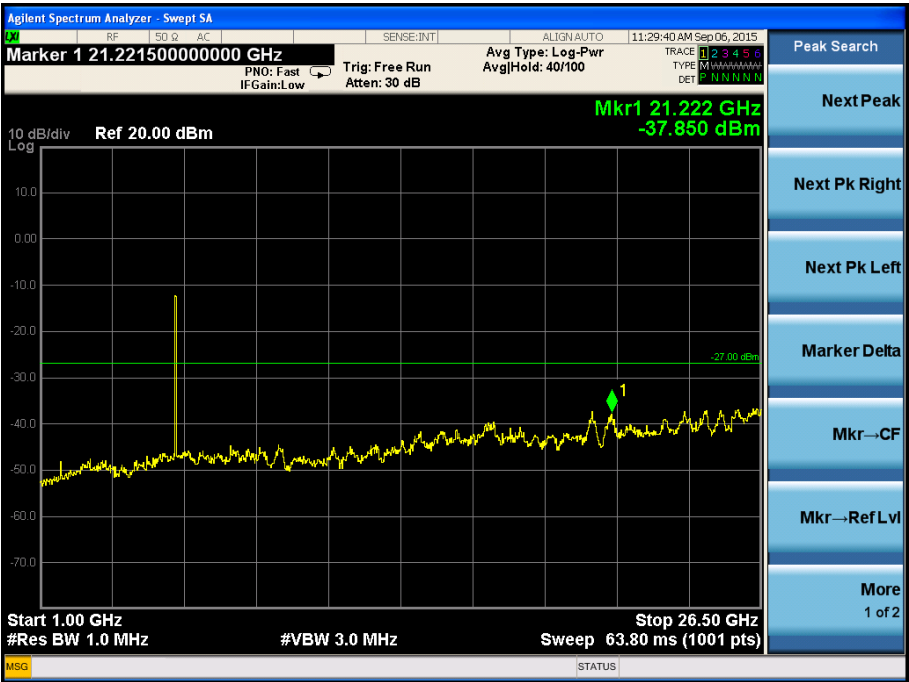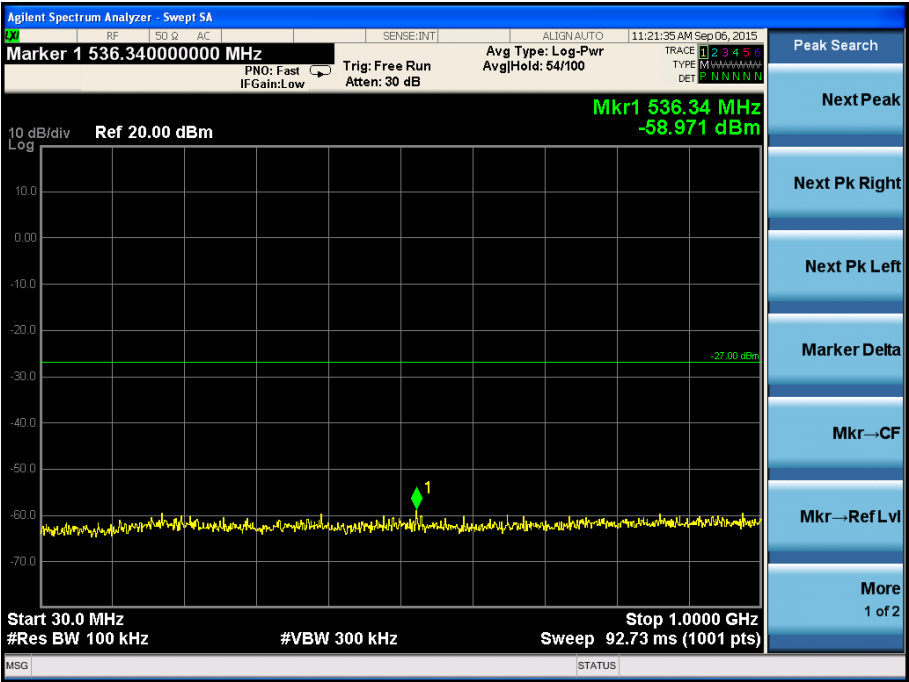



802.11n HT20
5180MHz

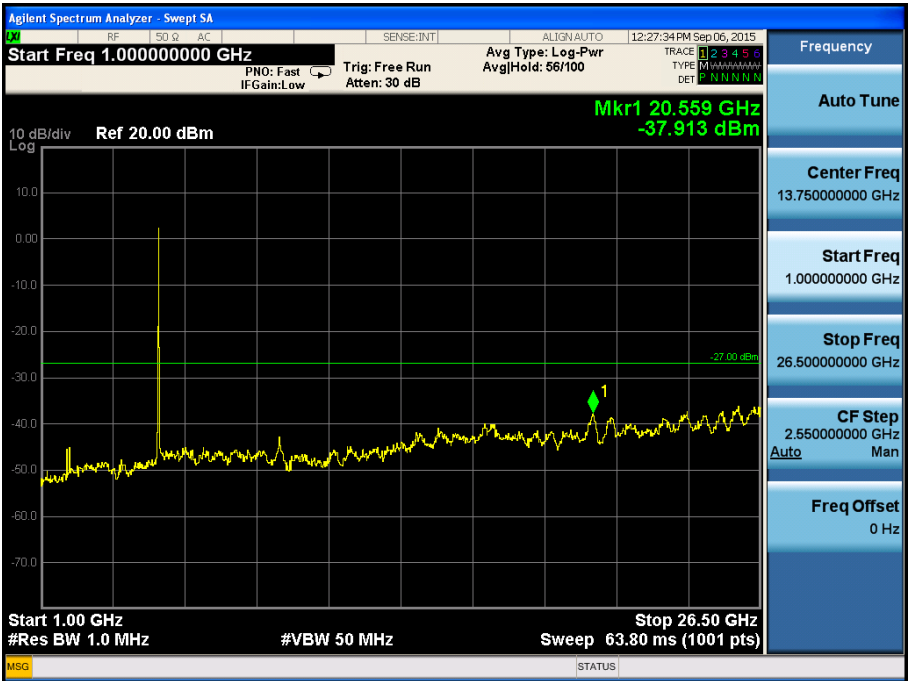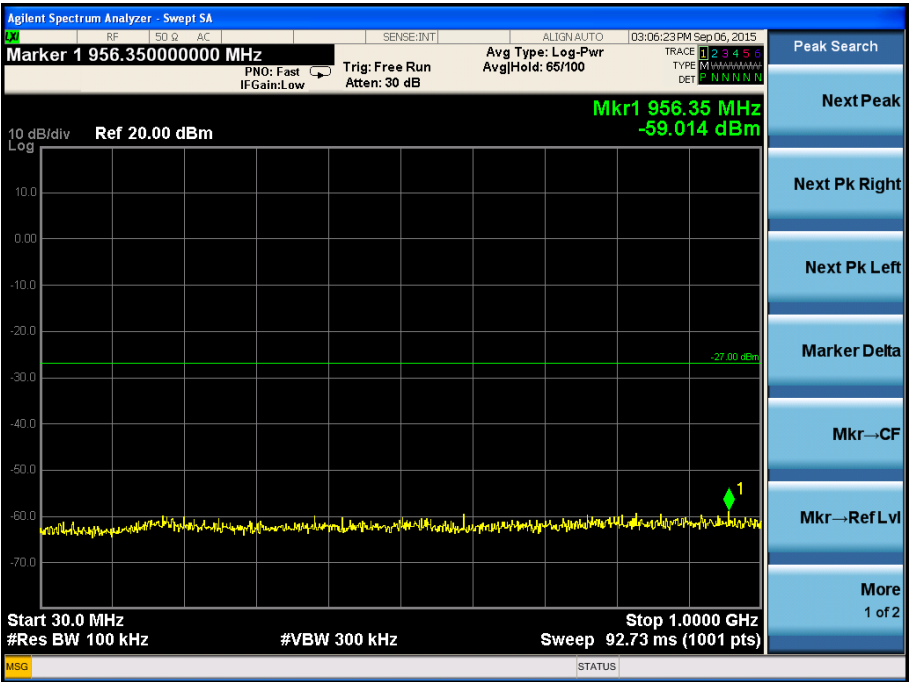



5200MHz

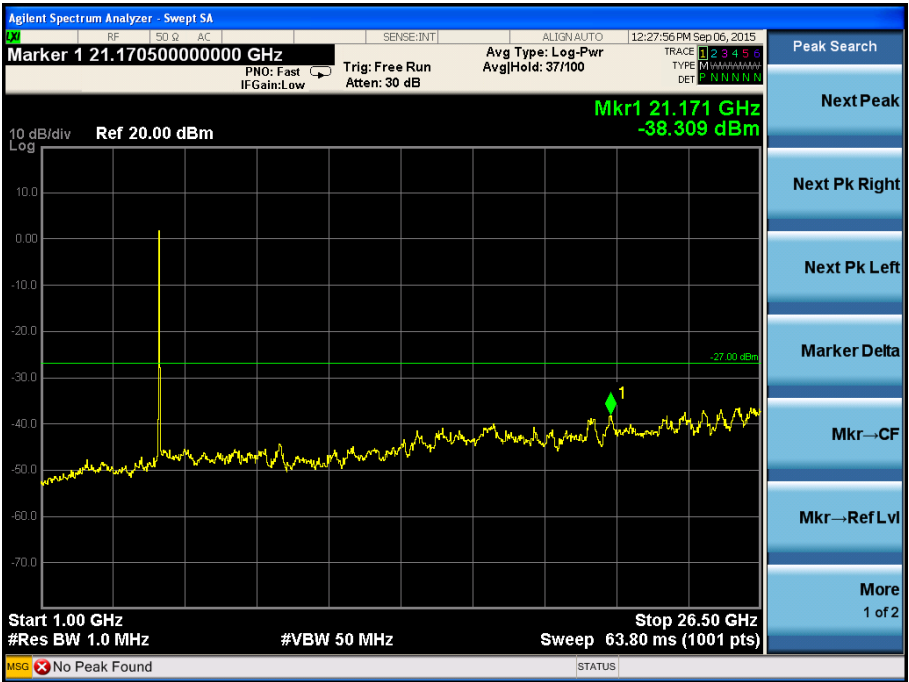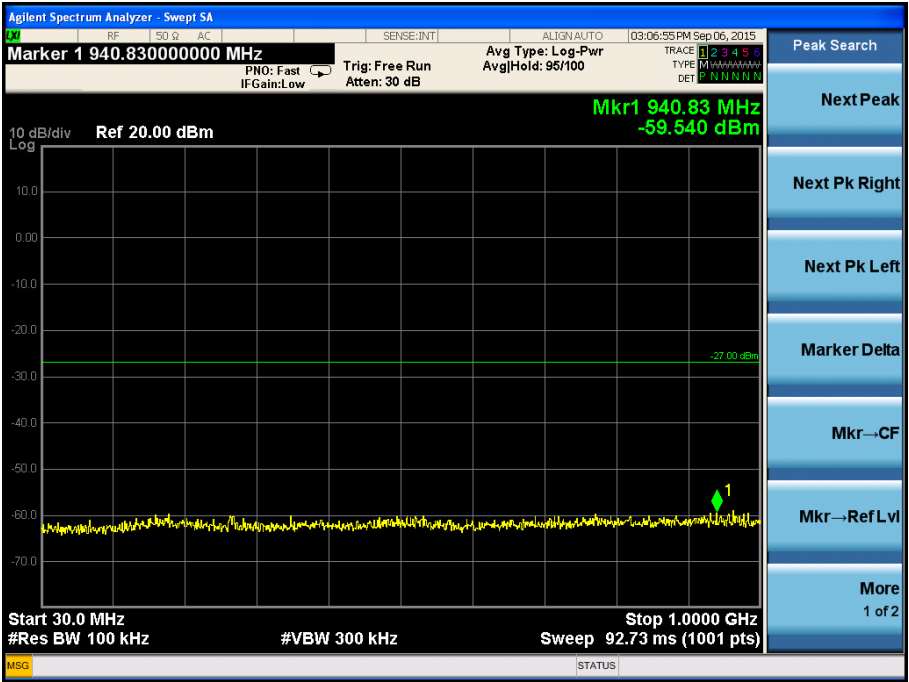



5240MHz

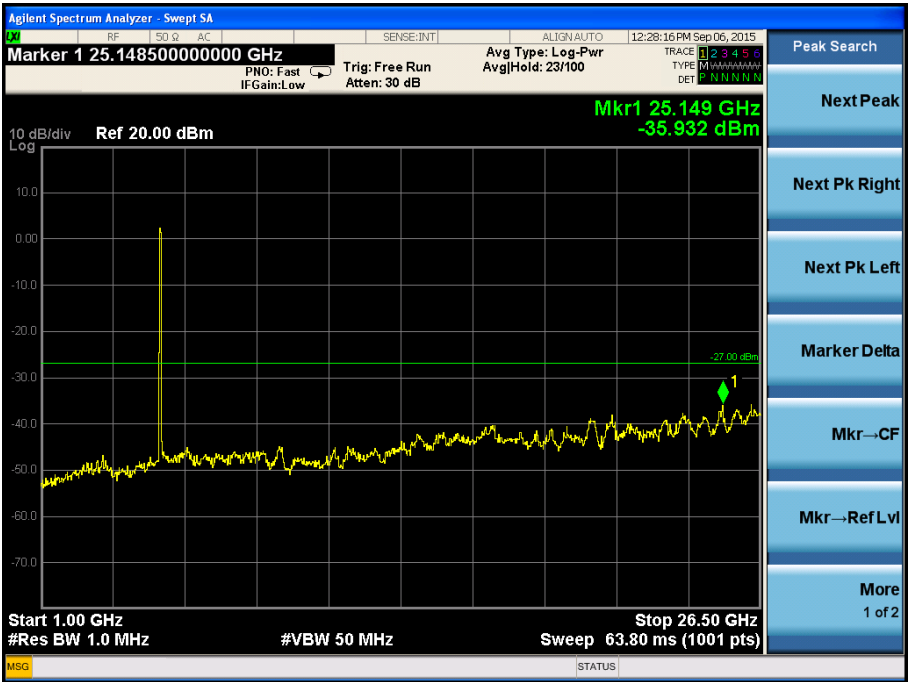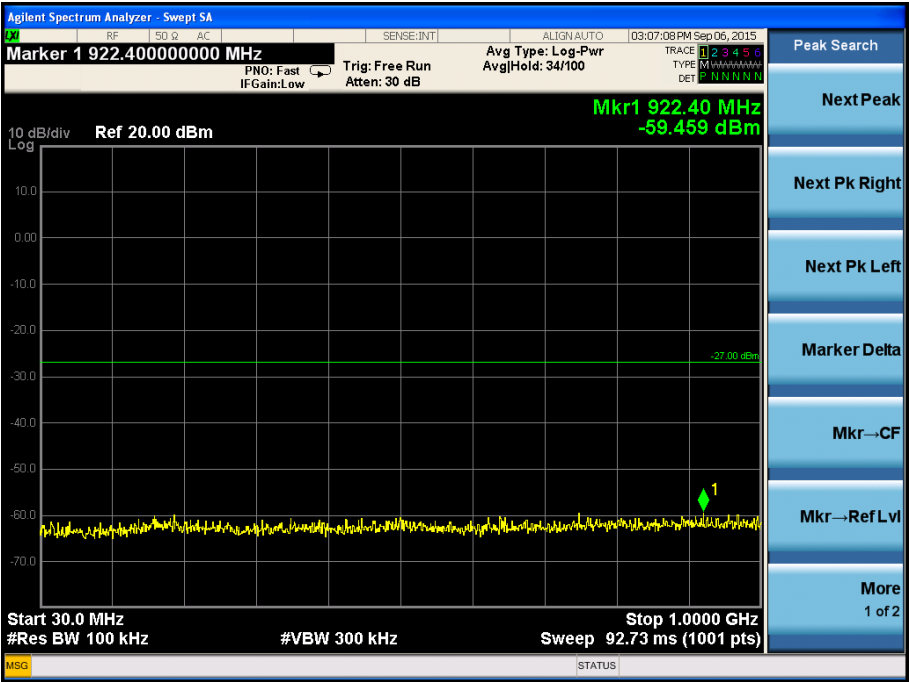



5745MHz

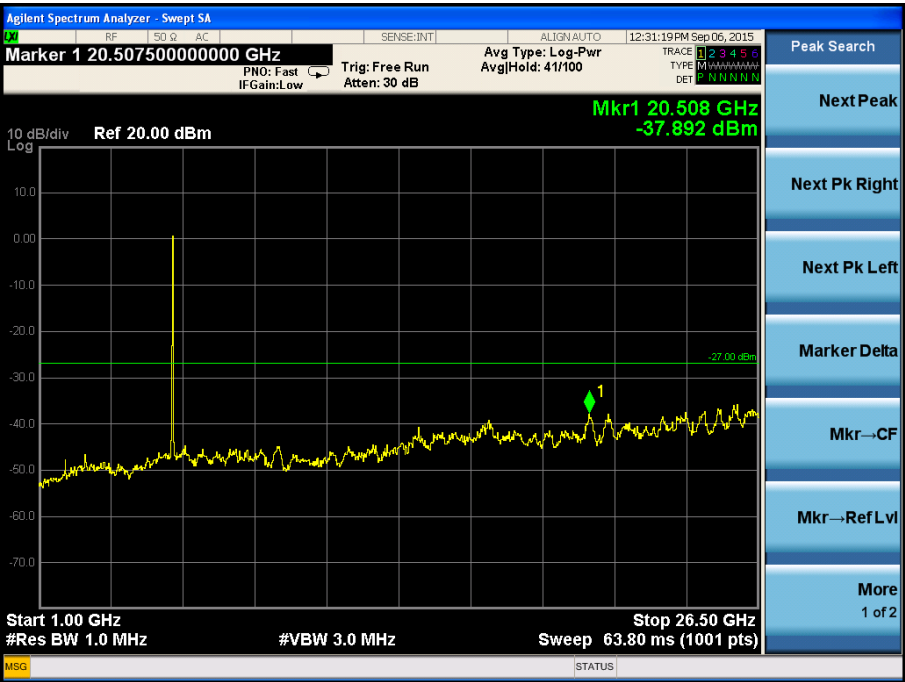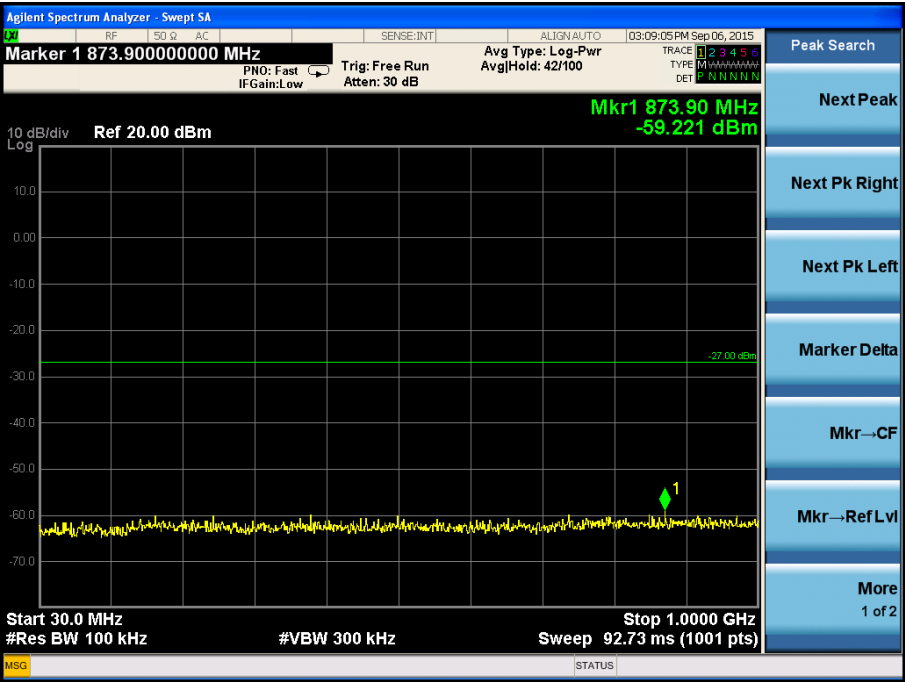



5785MHz

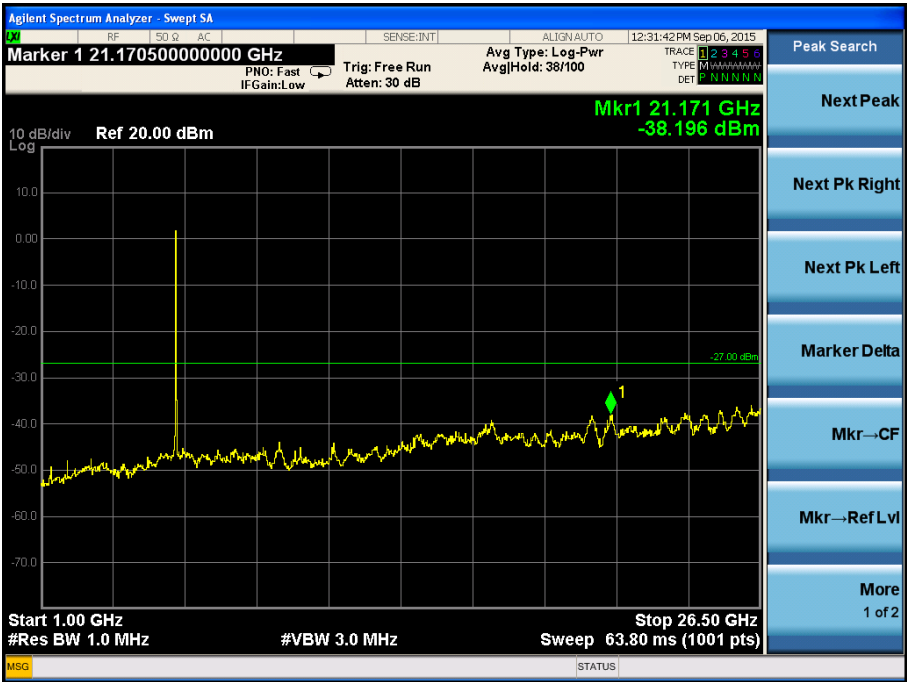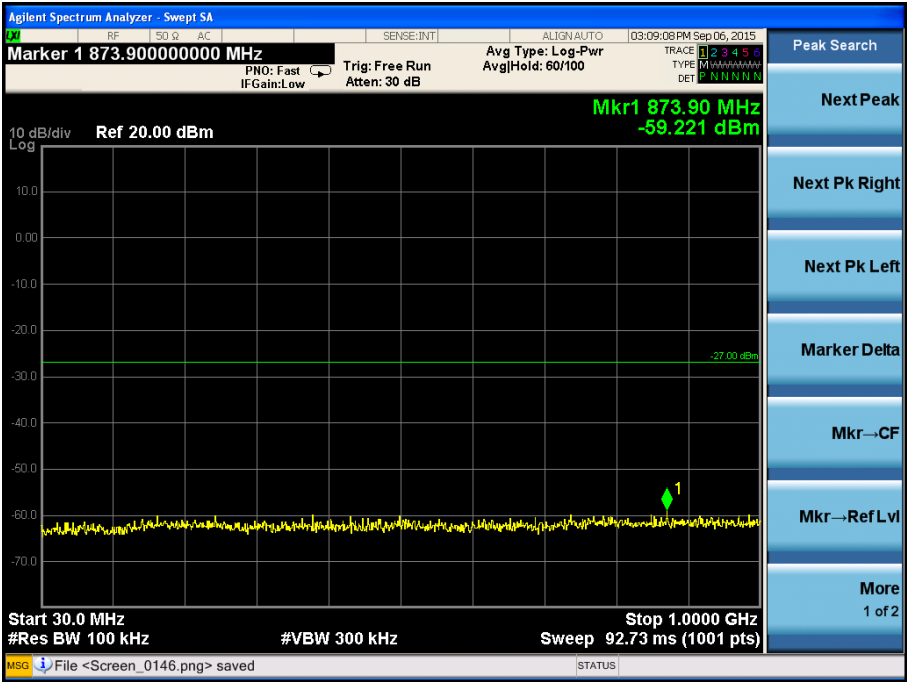



5805MHz

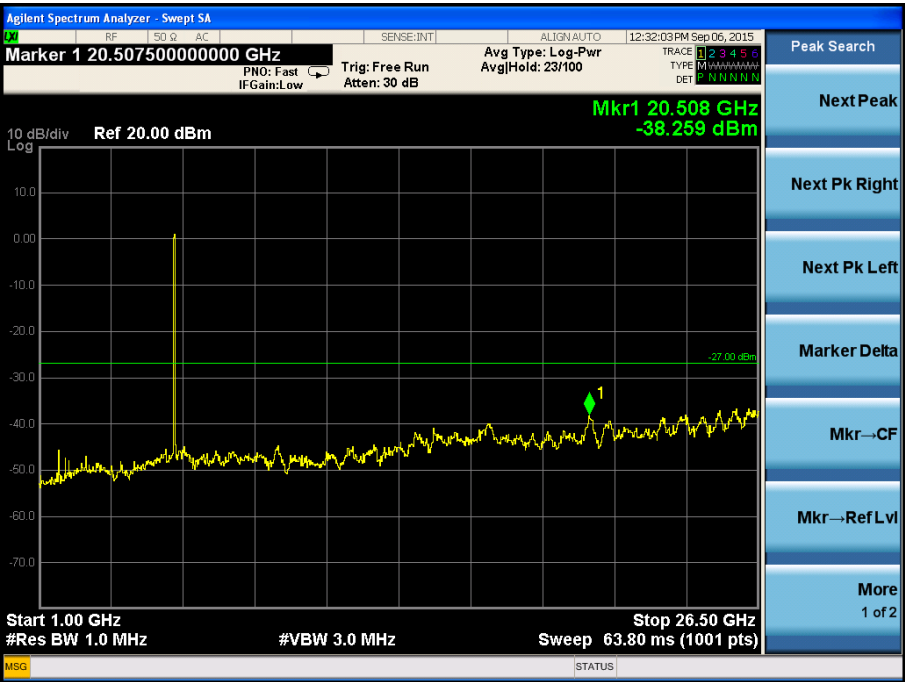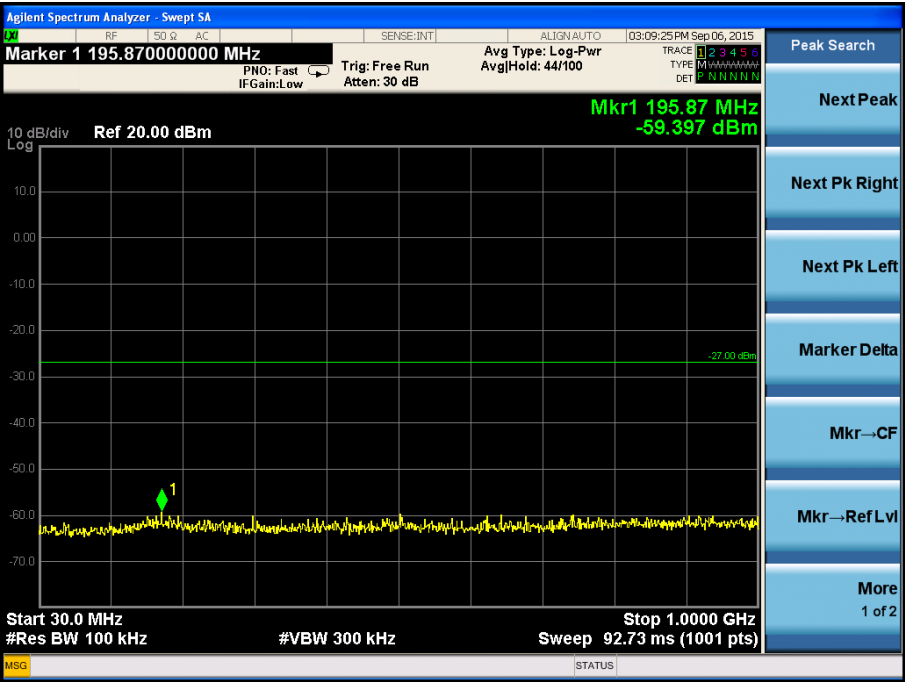



802.11n HT40
5190MHz

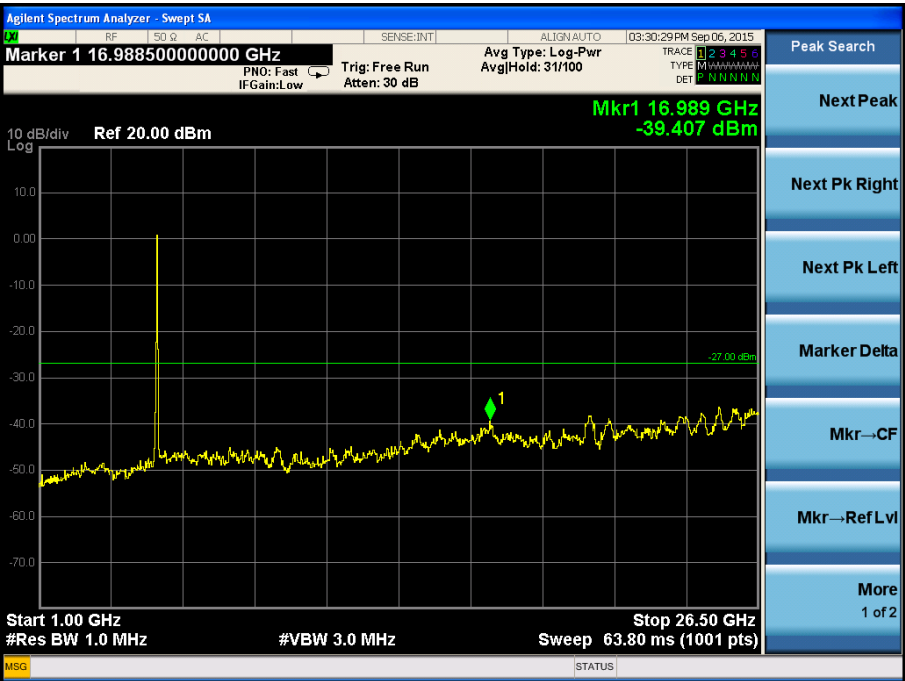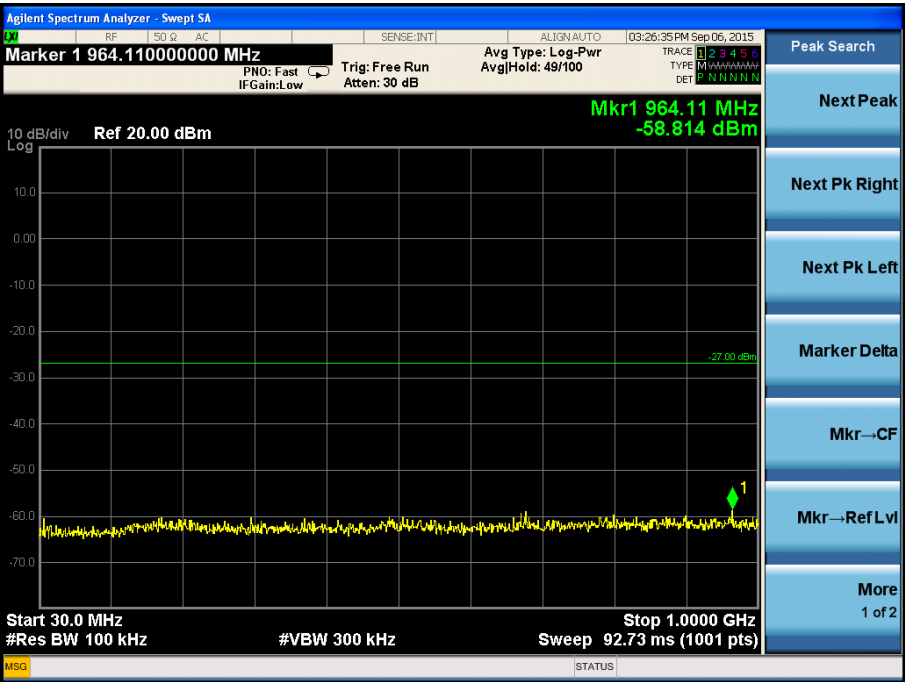



5230MHz

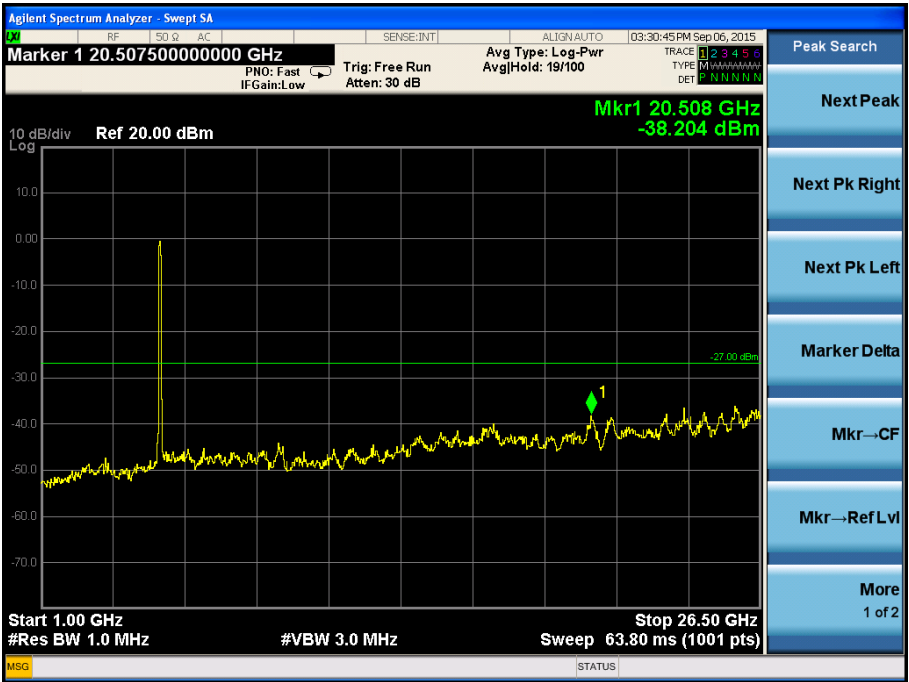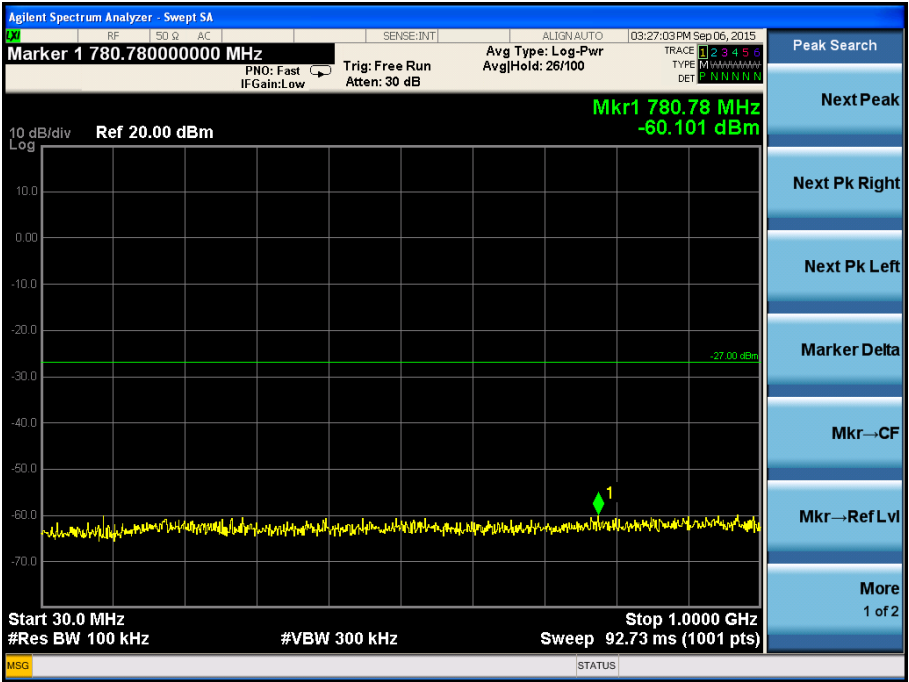



5765MHz

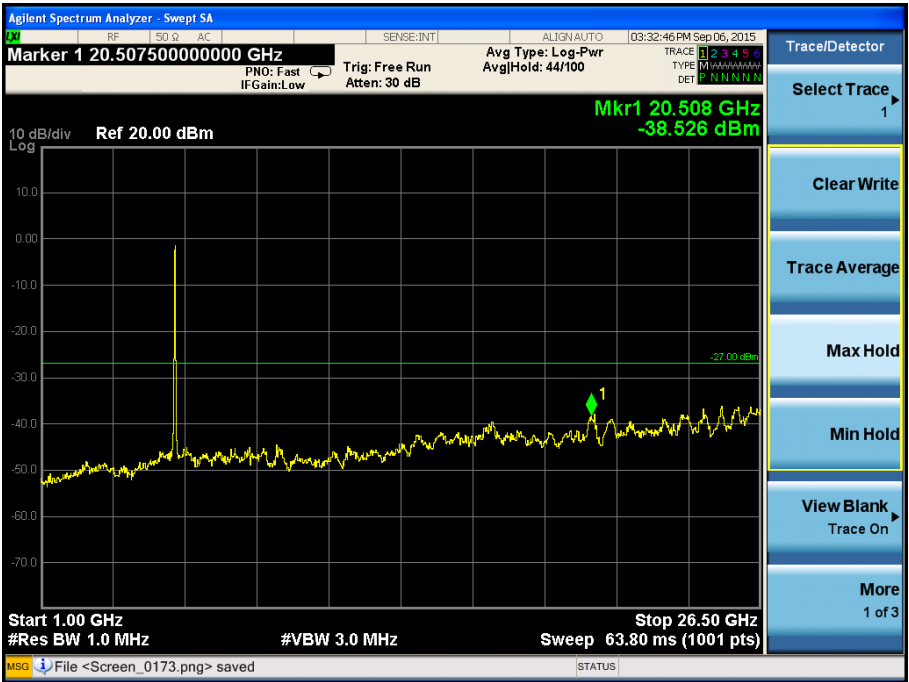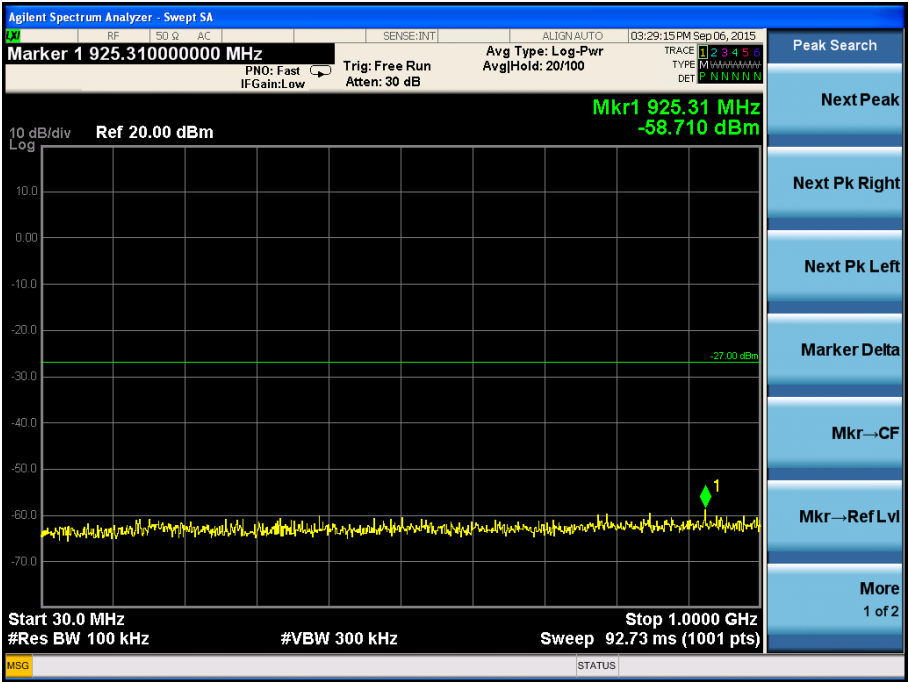



5785MHz

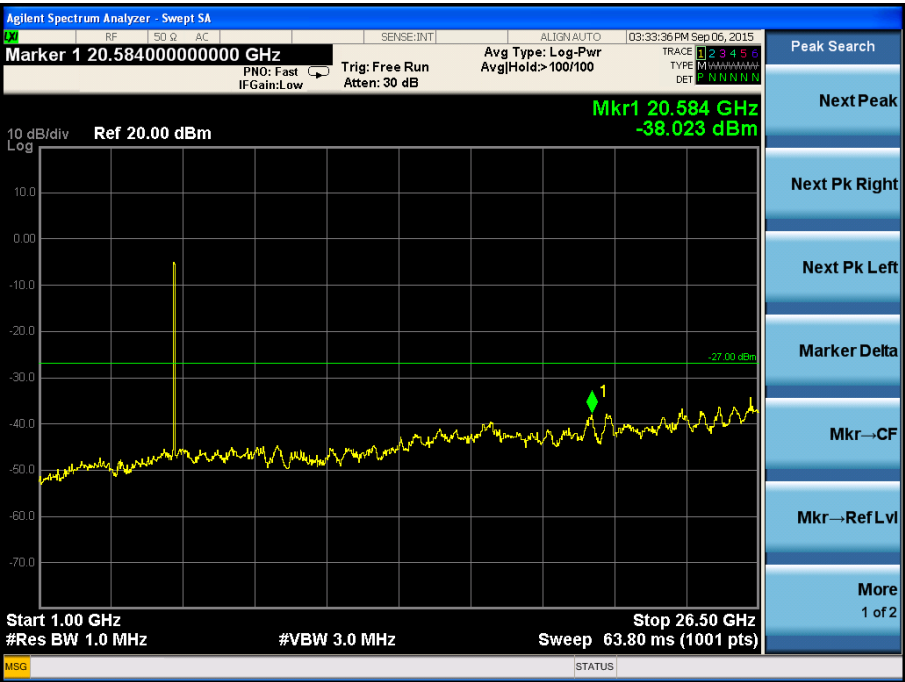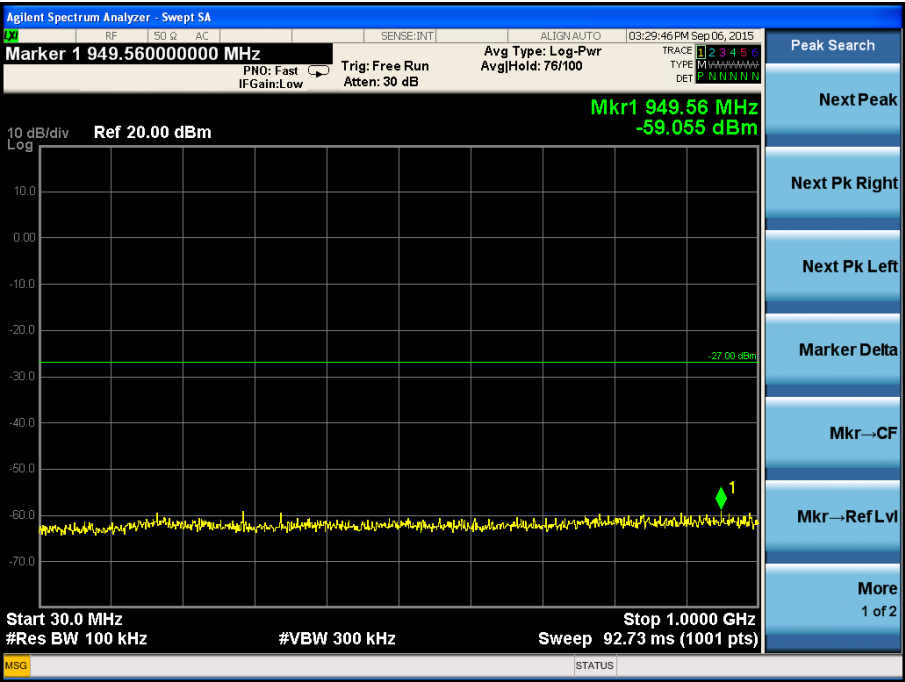

802.1ac HT80
5210MHz

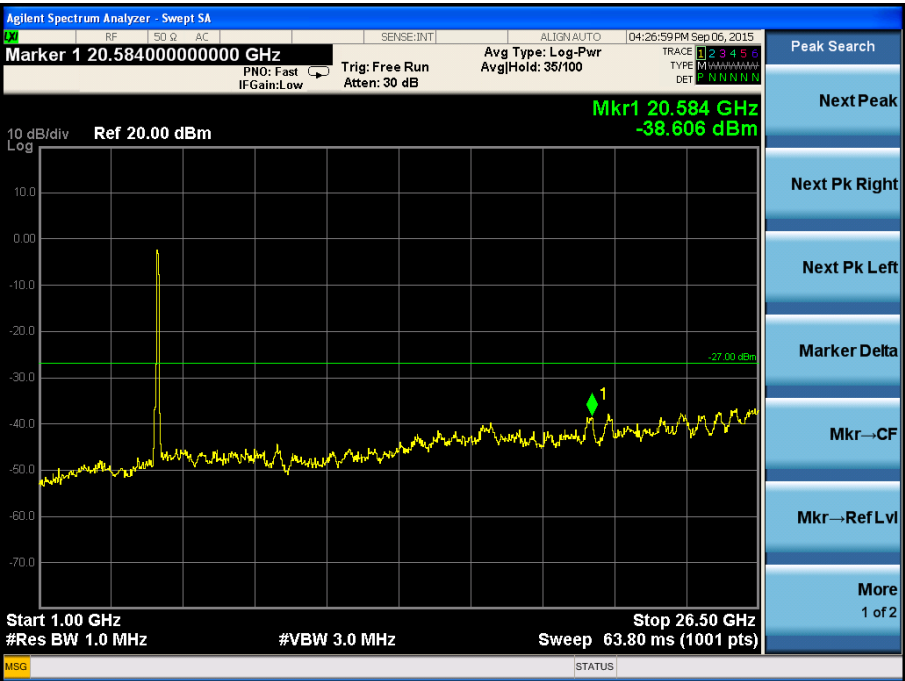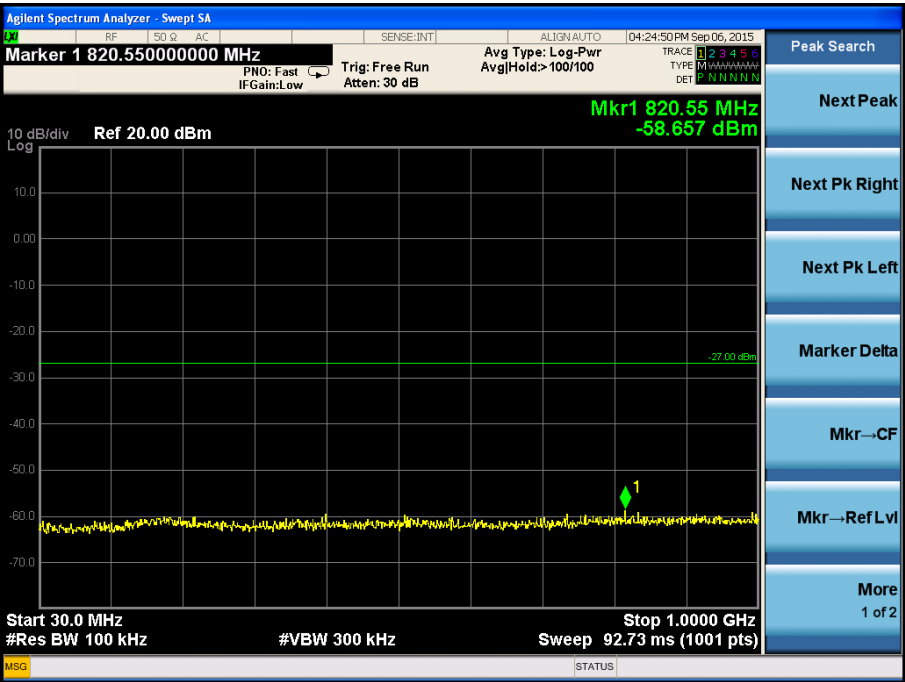

5785MHz

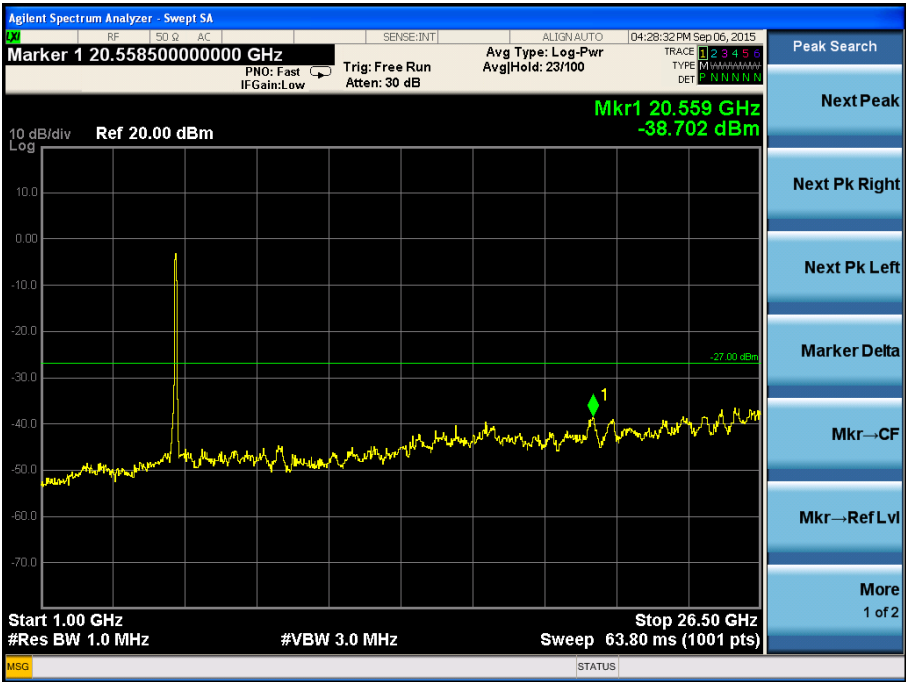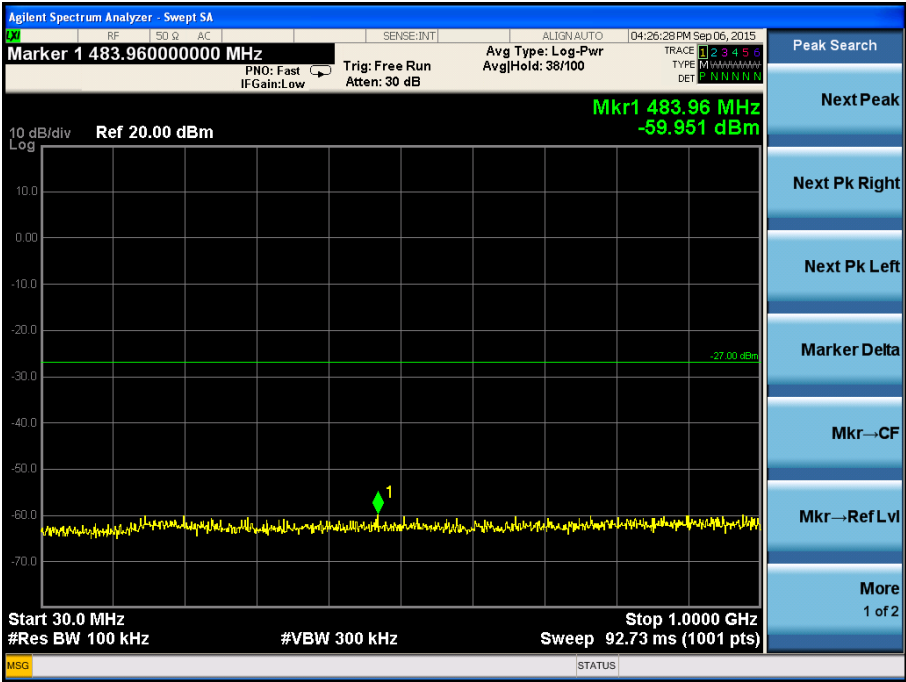

10. Radiated Emissions

10.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

10.2 Standard Applicable

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

According to §15.407(b)(7), The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

According KDB789033 H2 D If radiated measurements are performed, field strength is then converted to EIRP as follows:

$EIRP = ((E \cdot d)^2) / 30$ where: E is the field strength in V/m; d is the measurement distance in meters;


EIRP is the equivalent isotropically radiated power in watts.

10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

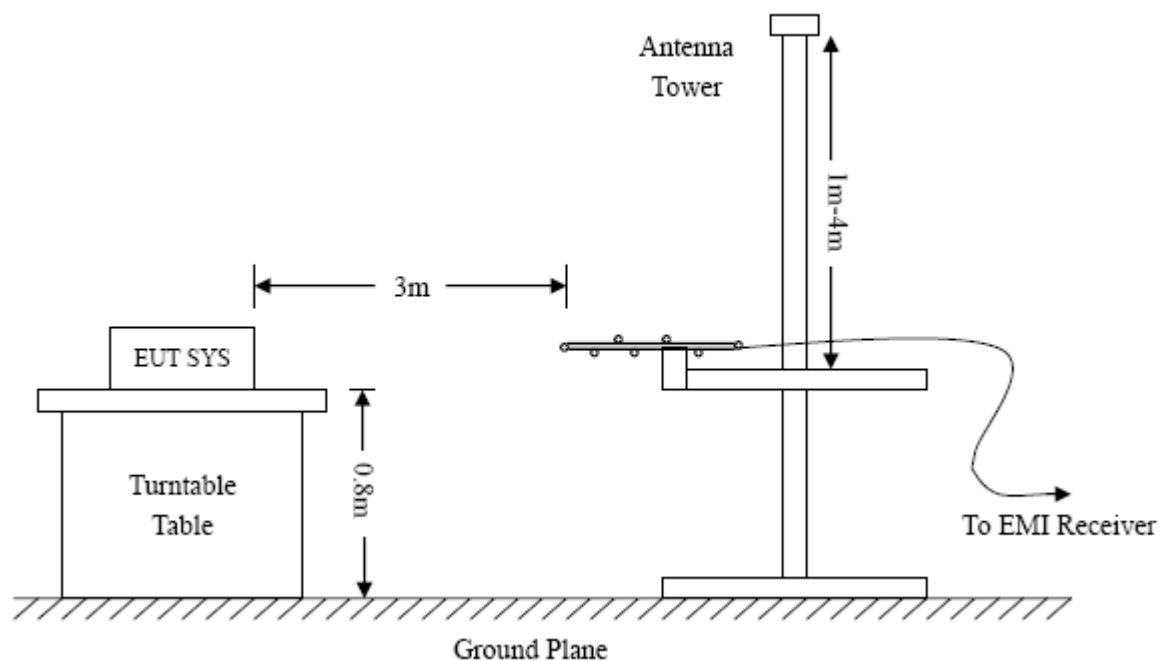

10.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

10.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

10.6 Environmental Conditions

Temperature:	22° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.407(b)(6) standards, and had the worst margin of:


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

For 802.11a

Spurious Emission From 30 MHz to 1 GHz


Test mode: Transmitting Channel 5180MHz

Horizontal

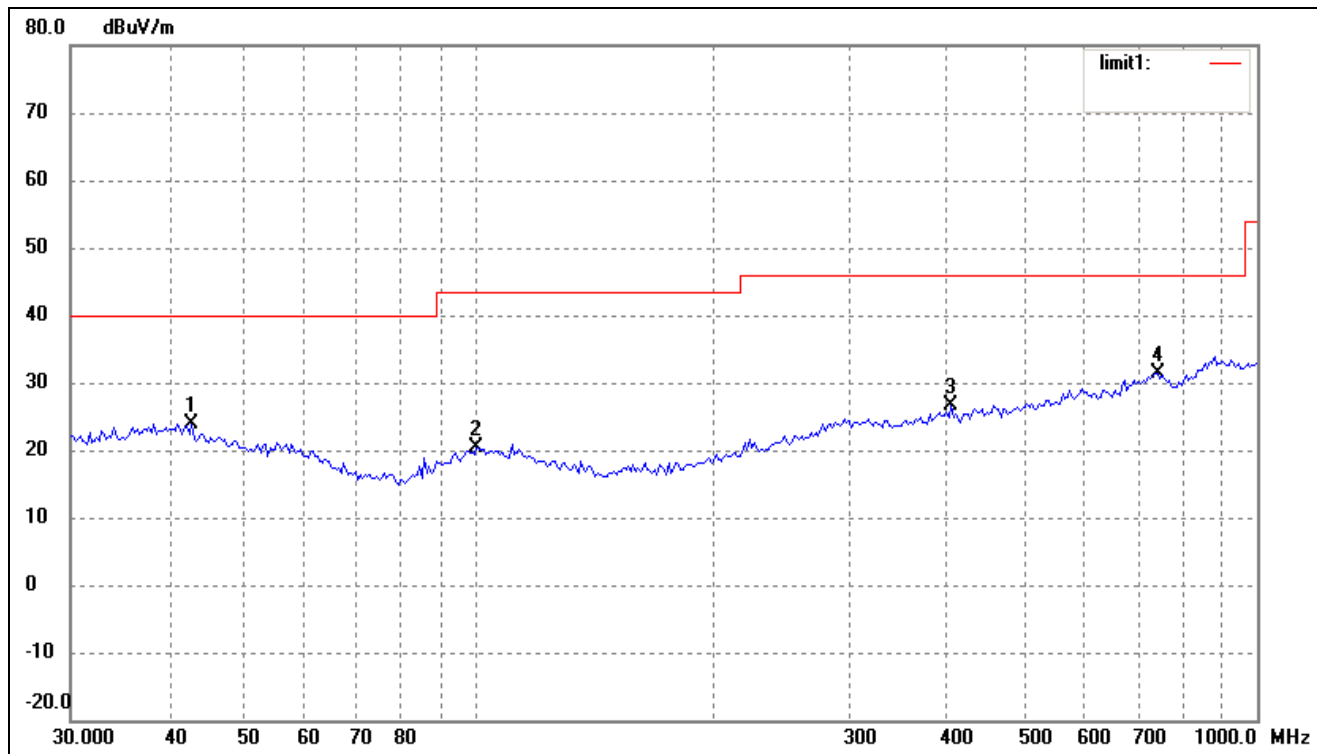


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	42.8998	15.54	8.38	23.92	40.00	-16.08	114	100	peak
2	99.5281	14.42	6.01	20.43	43.50	-23.07	270	100	peak
3	404.6665	16.56	9.96	26.52	46.00	-19.48	360	100	peak
4	744.8661	16.07	15.33	31.40	46.00	-14.60	116	100	peak

Test Specification: Vertical

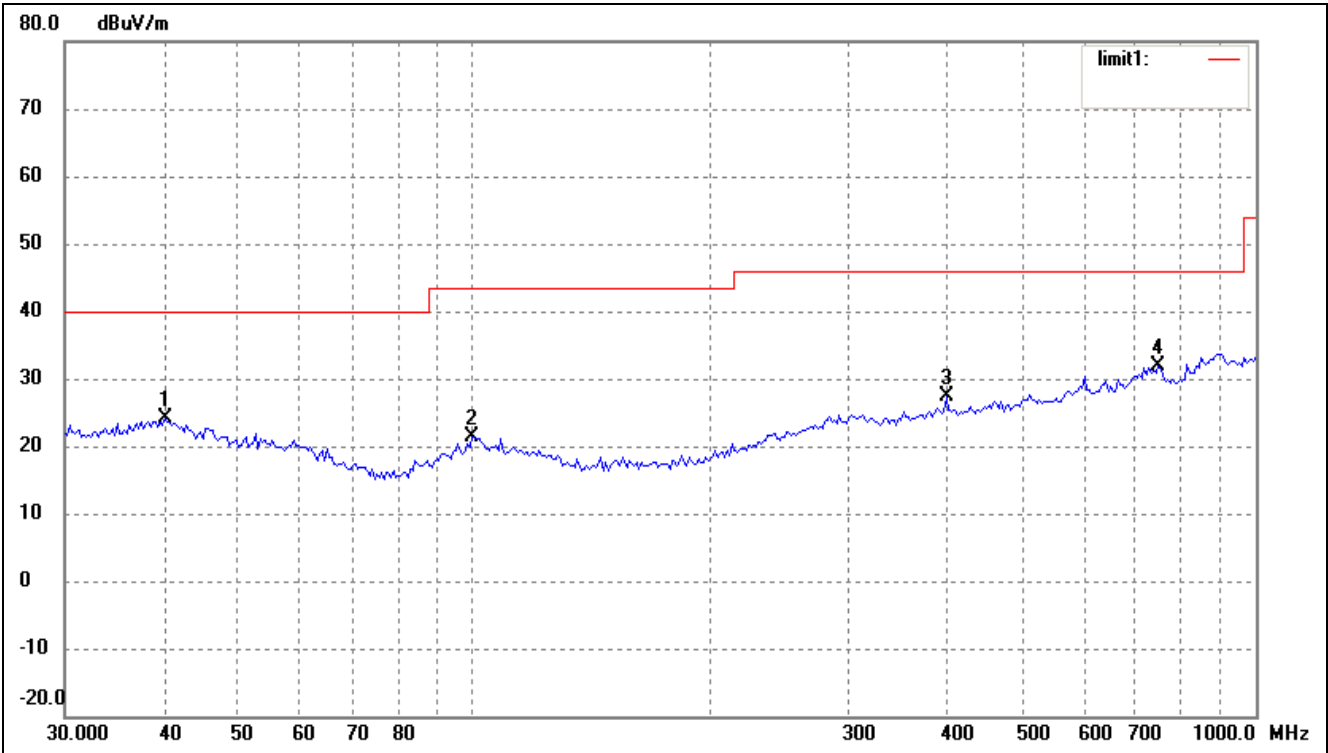


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	40.2757	14.85	9.17	24.02	40.00	-15.98	178	100	peak
2	99.5281	15.34	6.01	21.35	43.50	-22.15	224	100	peak
3	401.8385	17.34	10.06	27.40	46.00	-18.60	160	100	peak
4	750.1083	16.70	15.09	31.79	46.00	-14.21	290	100	peak

Test mode: Transmitting Channel 5200MHz
Horizontal

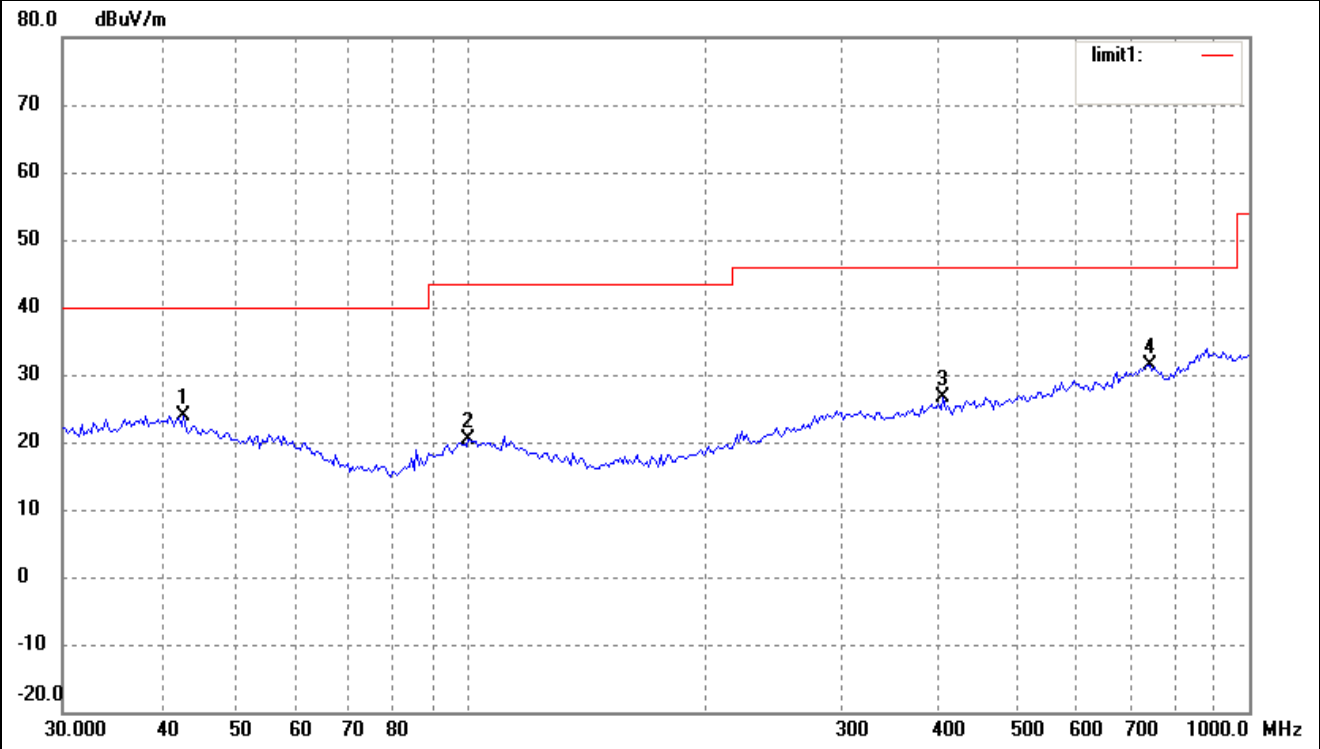


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	42.8998	15.54	8.38	23.92	40.00	-16.08	114	100	peak
2	99.5281	14.42	6.01	20.43	43.50	-23.07	270	100	peak
3	404.6665	16.56	9.96	26.52	46.00	-19.48	360	100	peak
4	744.8661	16.07	15.33	31.40	46.00	-14.60	116	100	peak

Test Specification: Vertical

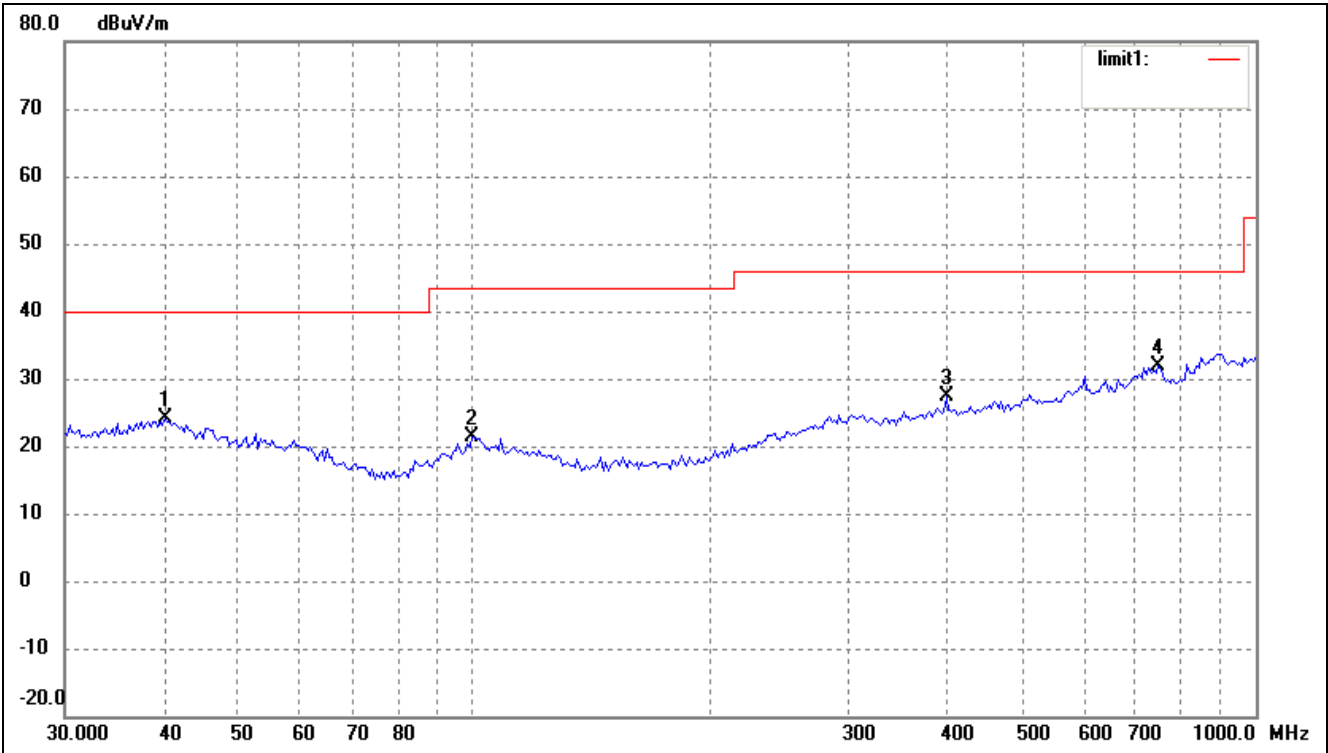


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	40.2757	14.85	9.17	24.02	40.00	-15.98	178	100	peak
2	99.5281	15.34	6.01	21.35	43.50	-22.15	224	100	peak
3	401.8385	17.34	10.06	27.40	46.00	-18.60	160	100	peak
4	750.1083	16.70	15.09	31.79	46.00	-14.21	290	100	peak

Test mode: Transmitting Channel 5240MHz
Horizontal

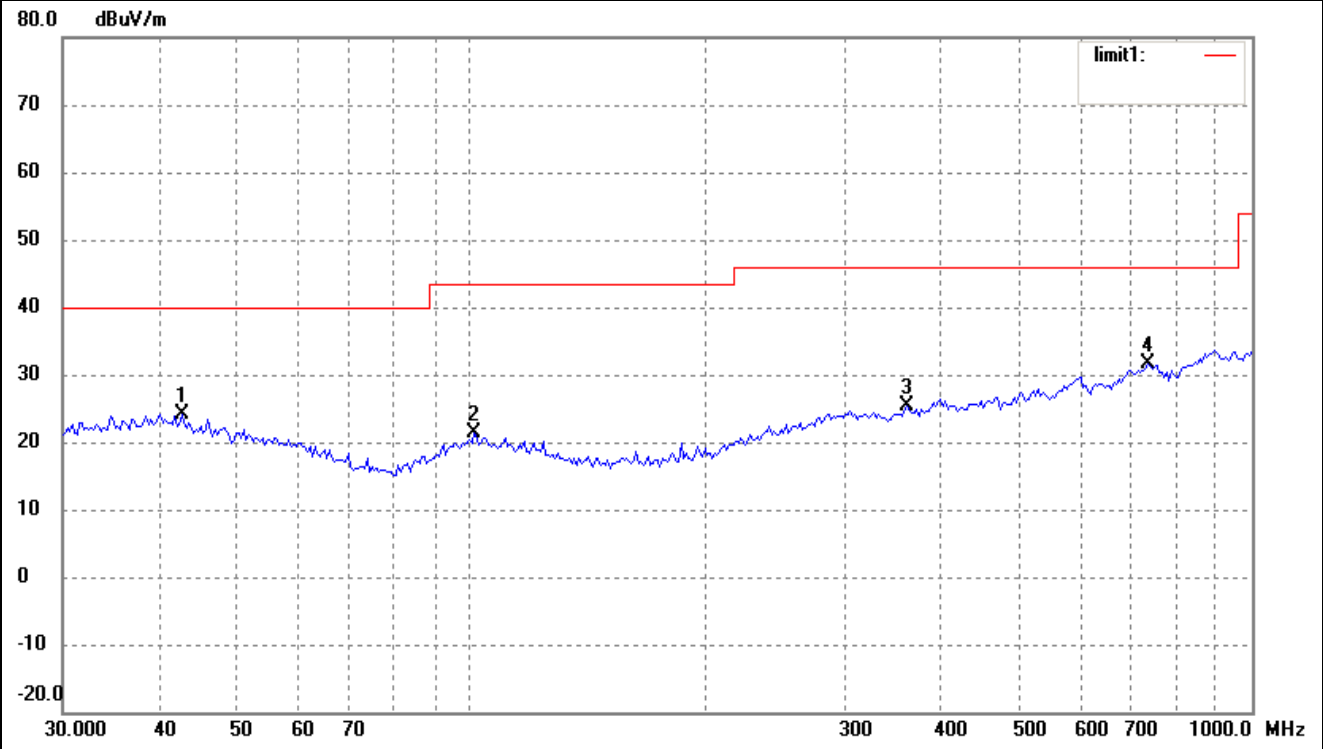

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	42.6000	15.76	8.47	24.23	40.00	-15.77	256	100	peak
2	100.9339	15.43	6.03	21.46	43.50	-22.04	360	100	peak
3	361.7139	16.18	9.24	25.42	46.00	-20.58	360	100	peak
4	734.4913	16.40	15.22	31.62	46.00	-14.38	360	100	peak


Test Specification: Vertical

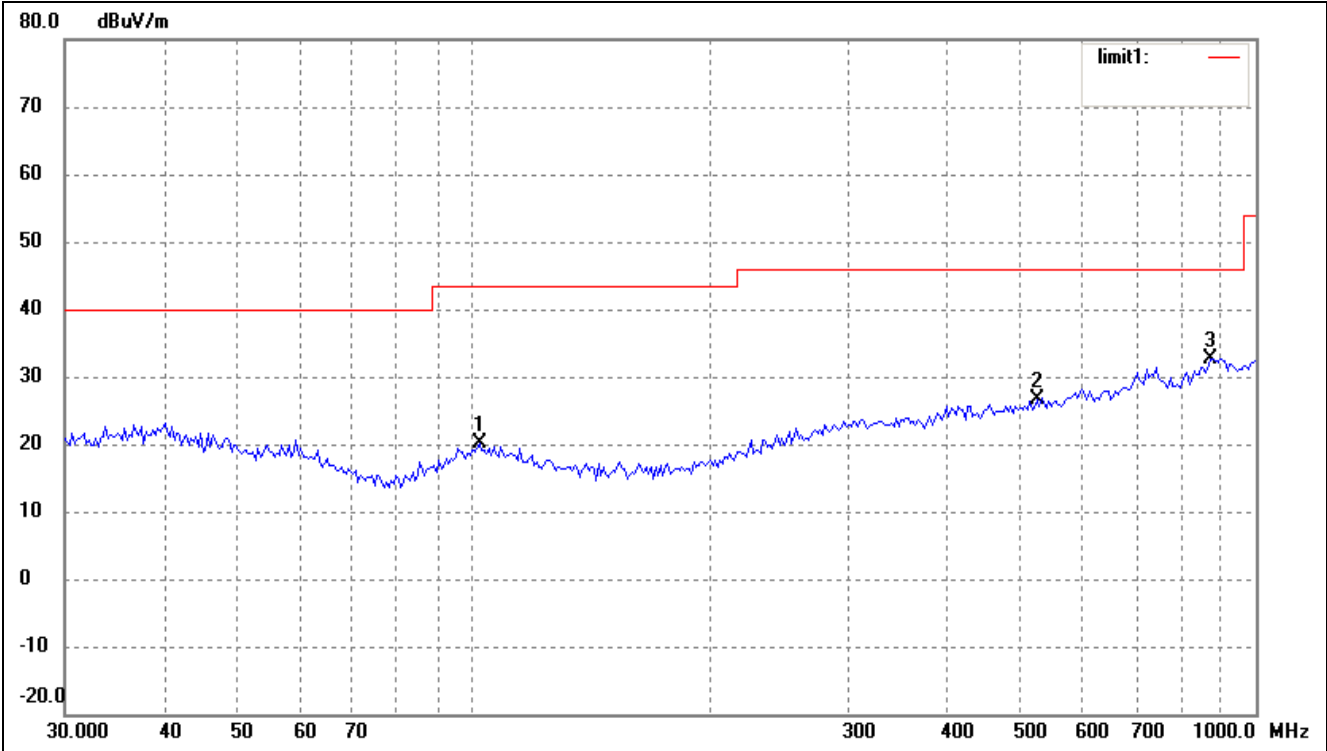

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	101.6443	14.15	5.95	20.10	43.50	-23.40	176	100	peak
2	524.5541	15.21	11.36	26.57	46.00	-19.43	255	100	peak
3	875.2470	16.03	16.70	32.73	46.00	-13.27	360	100	peak


Test mode: Transmitting Channel 5745MHz

Horizontal

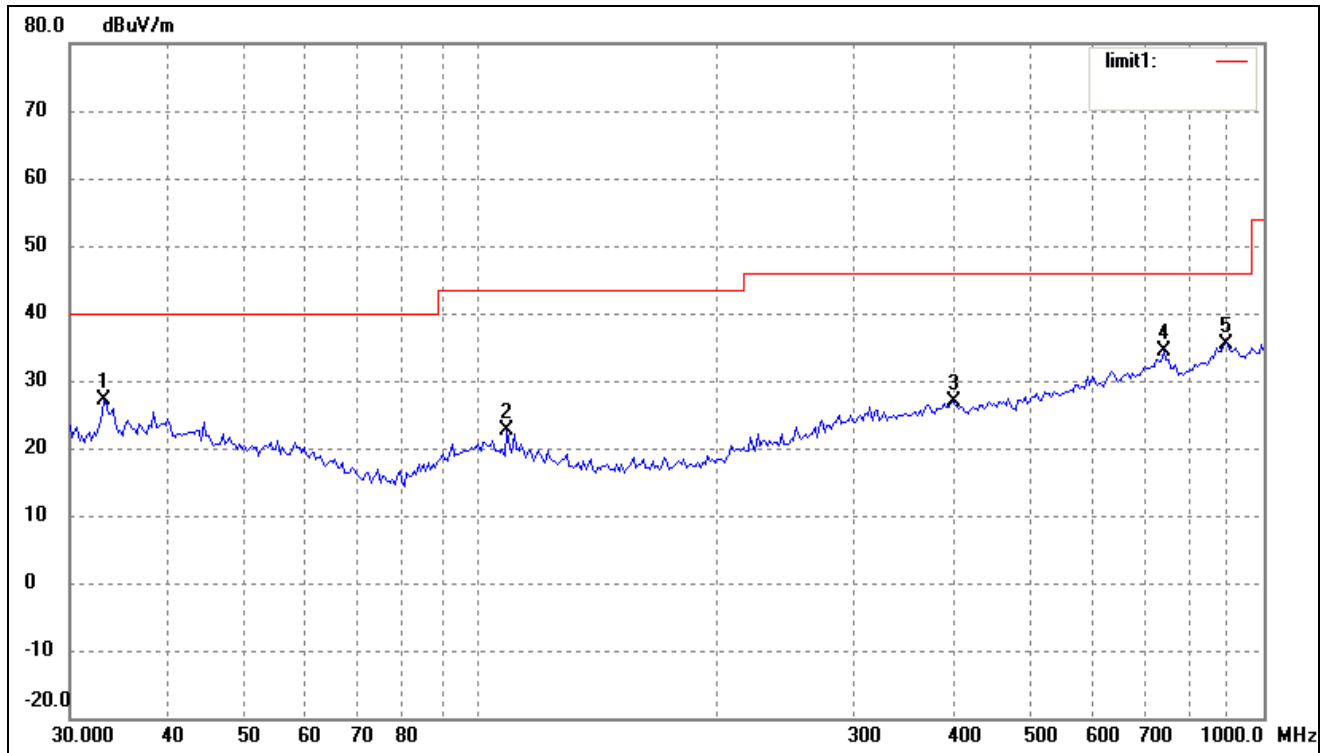


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	18.58	8.56	27.14	40.00	-12.86	254	100	peak
2	108.2667	16.51	6.02	22.53	43.50	-20.97	113	100	peak
3	401.8385	15.51	11.47	26.98	46.00	-19.02	284	100	peak
4	744.8661	16.35	17.95	34.30	46.00	-11.70	360	100	peak
5	893.8567	16.23	19.27	35.50	46.00	-10.50	100	100	peak

Test Specification: Vertical

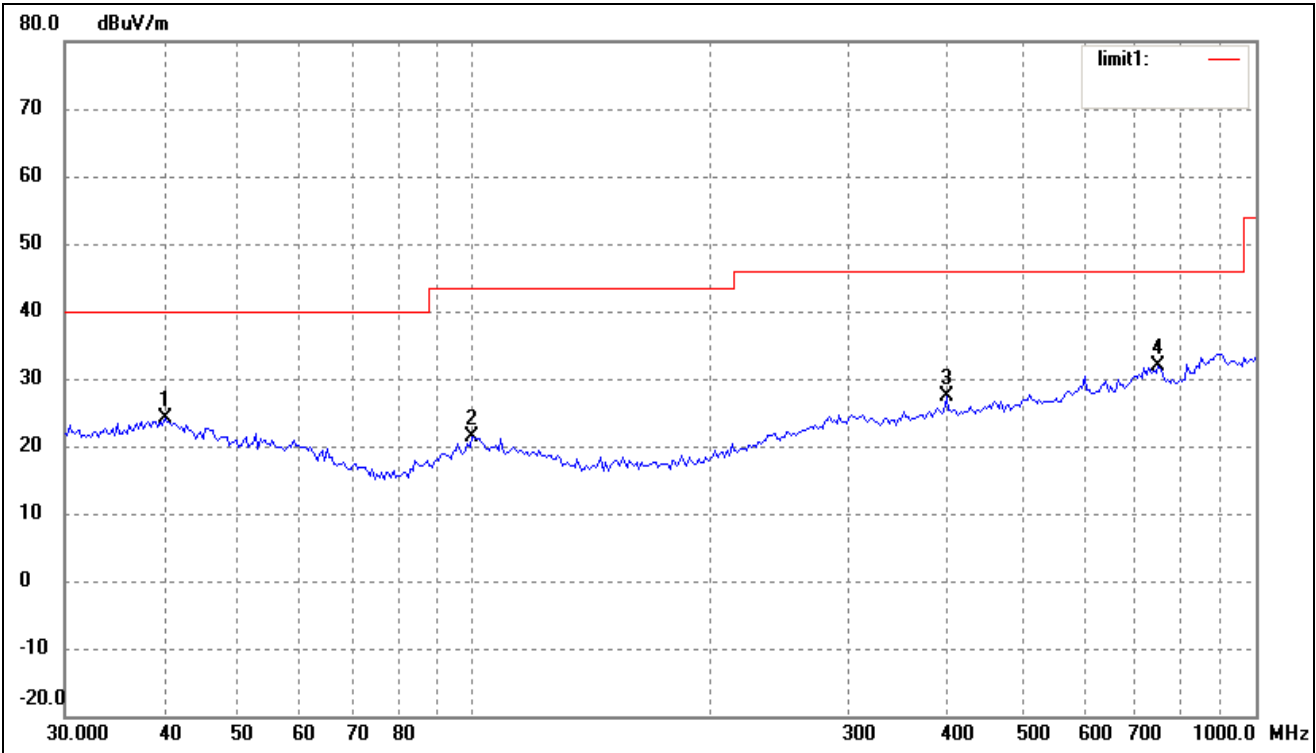


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	40.2757	14.85	9.17	24.02	40.00	-15.98	178	100	peak
2	99.5281	15.34	6.01	21.35	43.50	-22.15	224	100	peak
3	401.8385	17.34	10.06	27.40	46.00	-18.60	160	100	peak
4	750.1083	16.70	15.09	31.79	46.00	-14.21	290	100	peak

Test mode: Transmitting Channel 5785MHz
Horizontal

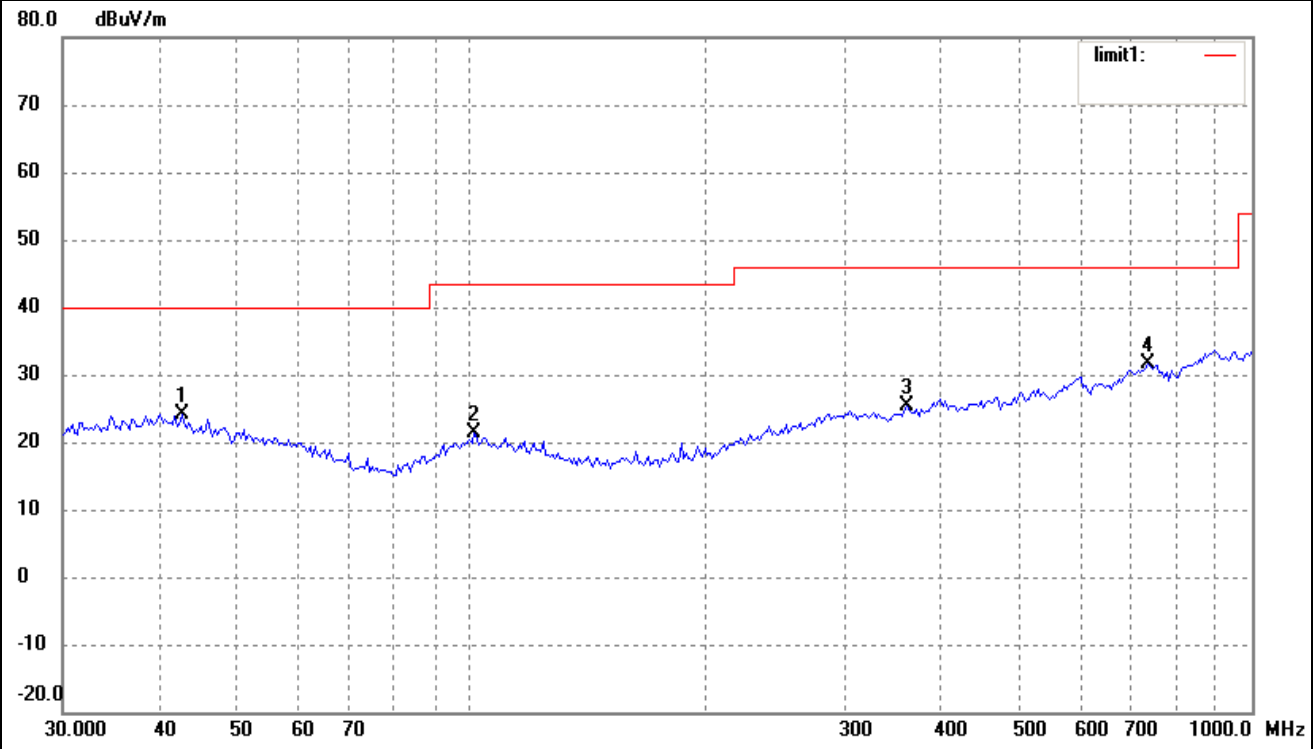


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	42.6000	15.76	8.47	24.23	40.00	-15.77	256	100	peak
2	100.9339	15.43	6.03	21.46	43.50	-22.04	360	100	peak
3	361.7139	16.18	9.24	25.42	46.00	-20.58	360	100	peak
4	734.4913	16.40	15.22	31.62	46.00	-14.38	360	100	peak

Test Specification: Vertical

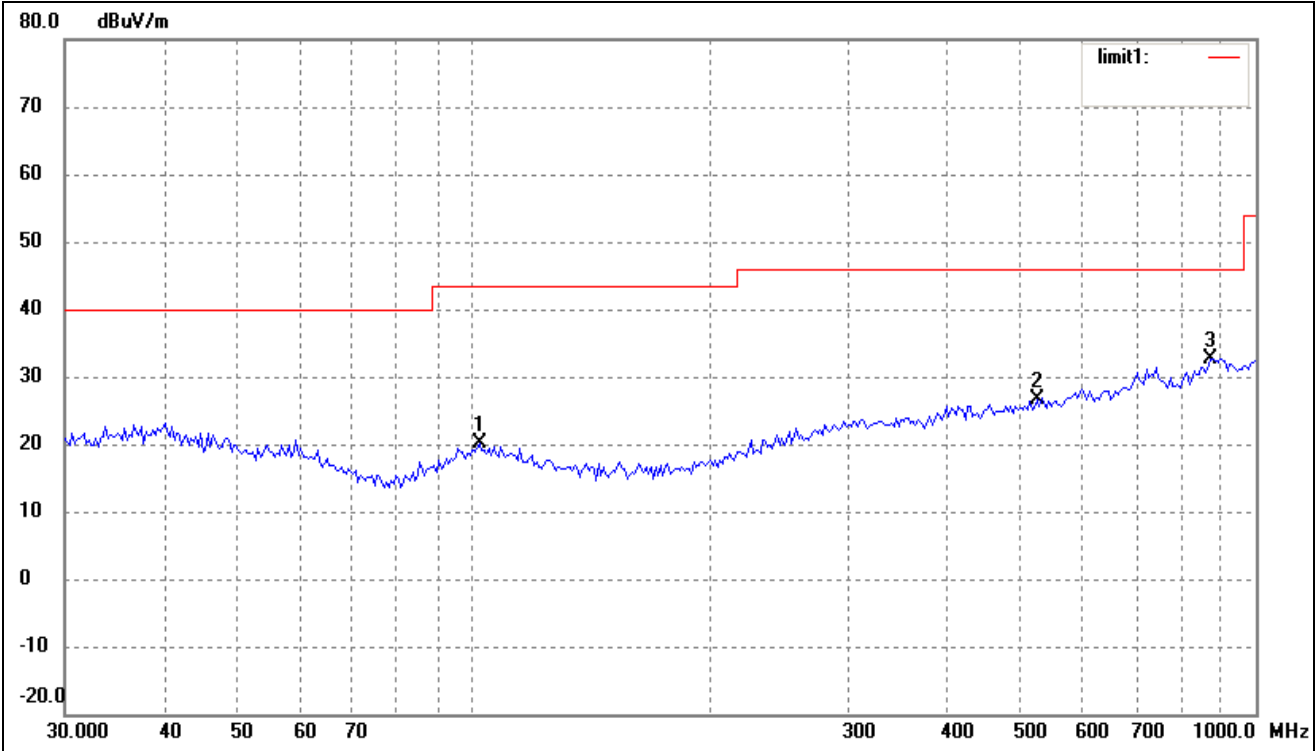


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	101.6443	14.15	5.95	20.10	43.50	-23.40	176	100	peak
2	524.5541	15.21	11.36	26.57	46.00	-19.43	255	100	peak
3	875.2470	16.03	16.70	32.73	46.00	-13.27	360	100	peak

Test mode: Transmitting Channel 5805MHz
Horizontal

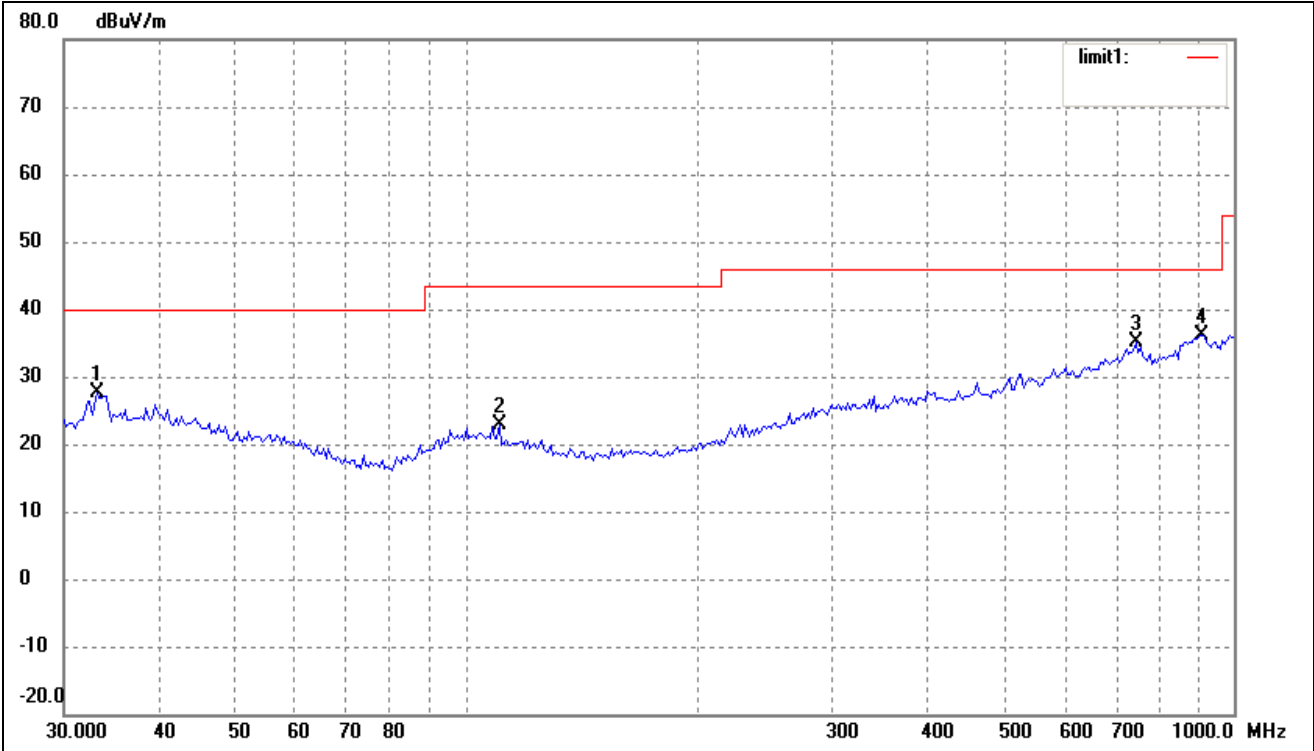

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	33.0950	19.05	8.56	27.61	40.00	-12.39	176	100	peak
2	110.5687	16.99	5.80	22.79	43.50	-20.71	255	100	peak
3	744.8661	17.06	17.95	35.01	46.00	-10.99	360	100	peak
4	906.4824	16.94	19.15	36.09	46.00	-9.91	178	100	peak

Test Specification: Vertical

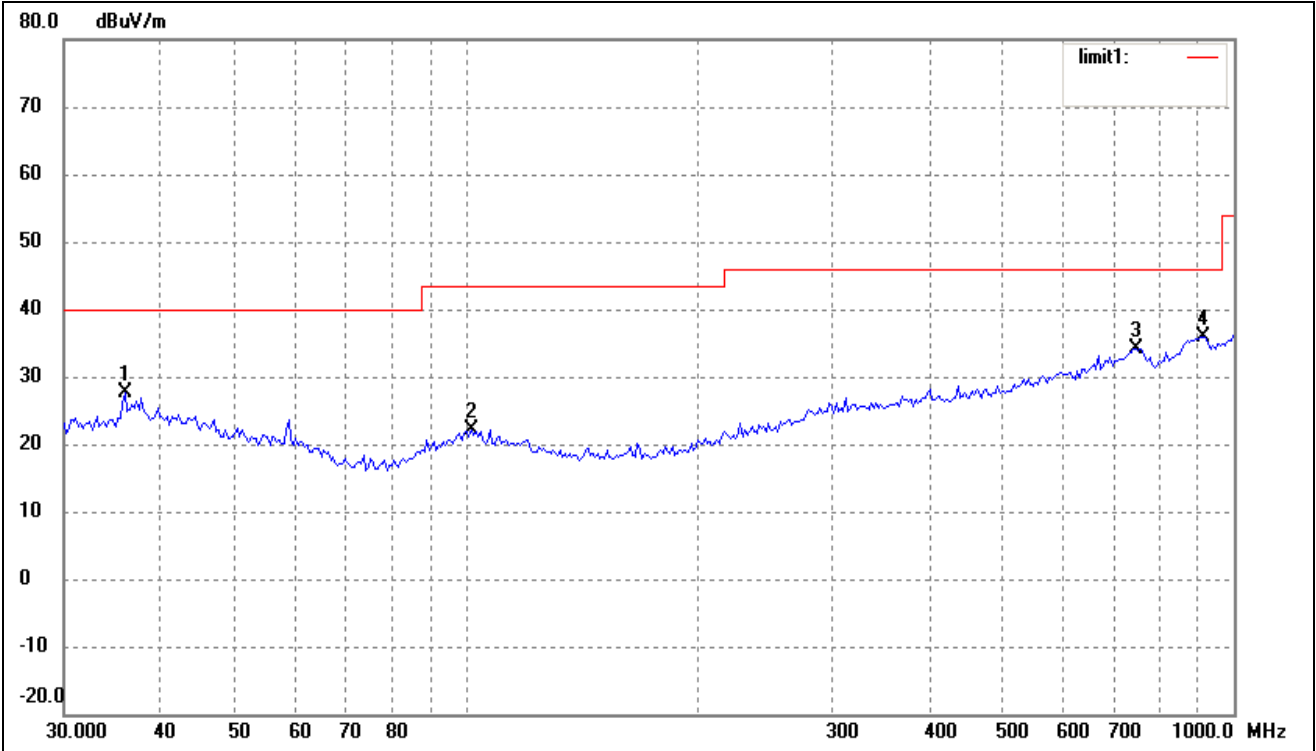


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	36.0007	18.59	9.04	27.63	40.00	-12.37	360	100	peak
2	101.6443	15.50	6.67	22.17	43.50	-21.33	225	100	peak
3	744.8661	16.16	17.95	34.11	46.00	-11.89	160	100	peak
4	912.8620	16.92	18.93	35.85	46.00	-10.15	310	100	peak

For 802.11n-HT20


Test mode: Transmitting Channel 5180MHz

Horizontal:

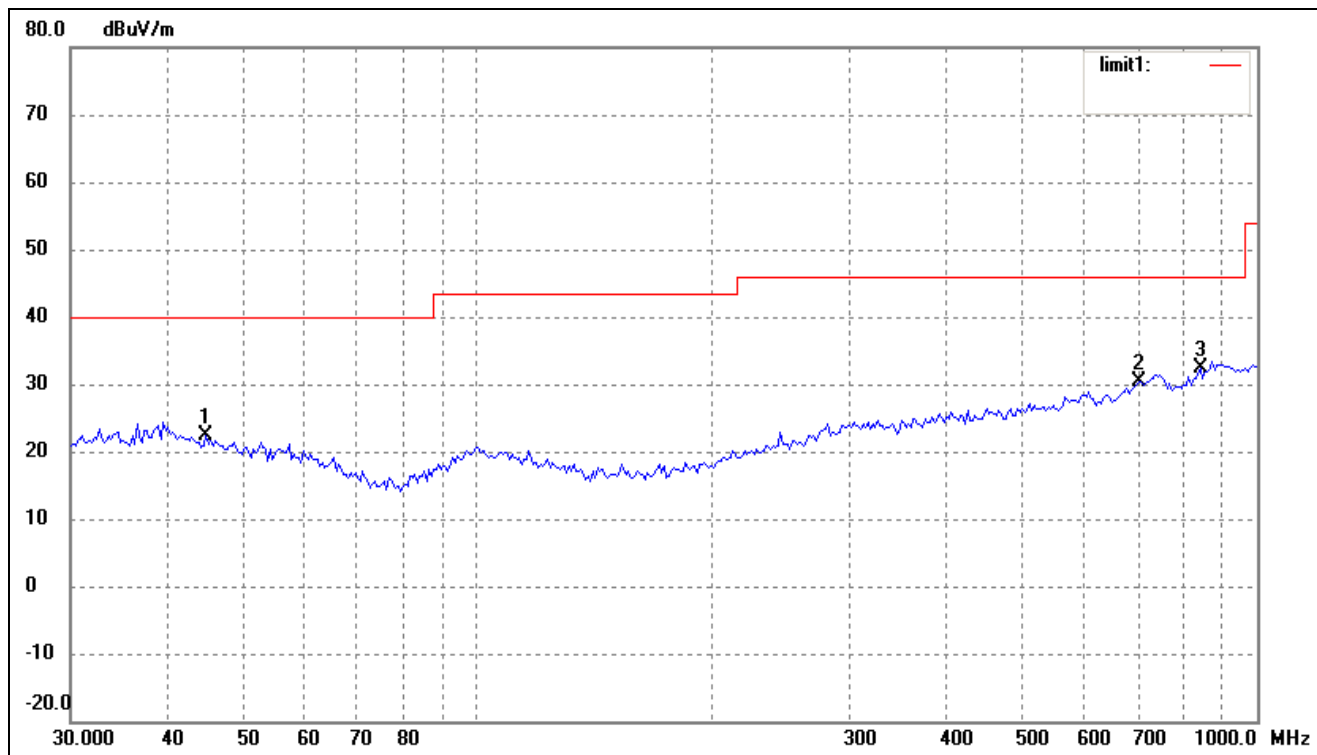


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	44.7434	14.58	7.84	22.42	40.00	-17.58	155	100	peak
2	704.2261	16.46	13.91	30.37	46.00	-15.63	197	100	peak
3	845.0878	16.51	15.75	32.26	46.00	-13.74	310	100	peak

Test Specification: Vertical

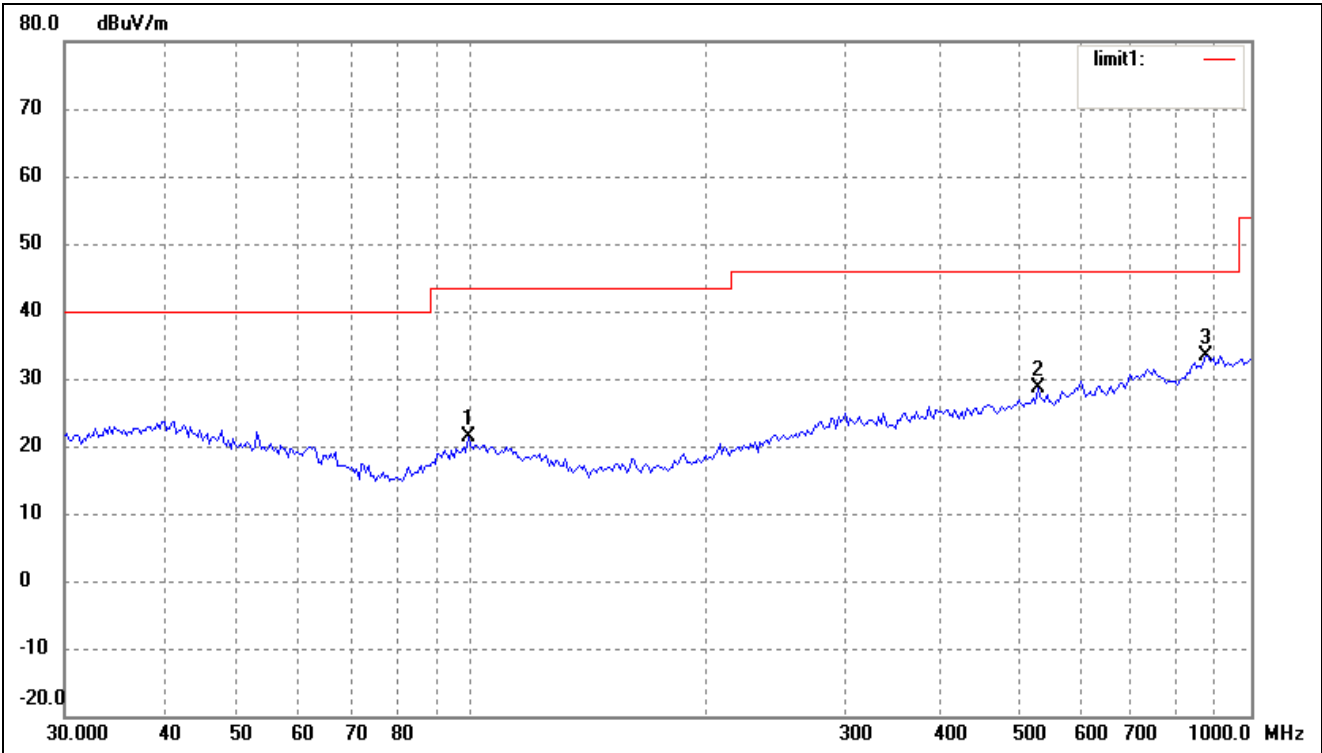


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	98.8326	15.53	5.84	21.37	43.50	-22.13	274	100	peak
2	531.9635	17.31	11.32	28.63	46.00	-17.37	116	100	peak
3	875.2470	16.71	16.70	33.41	46.00	-12.59	82	100	peak

Test mode: Transmitting Channel 5200MHz
Horizontal

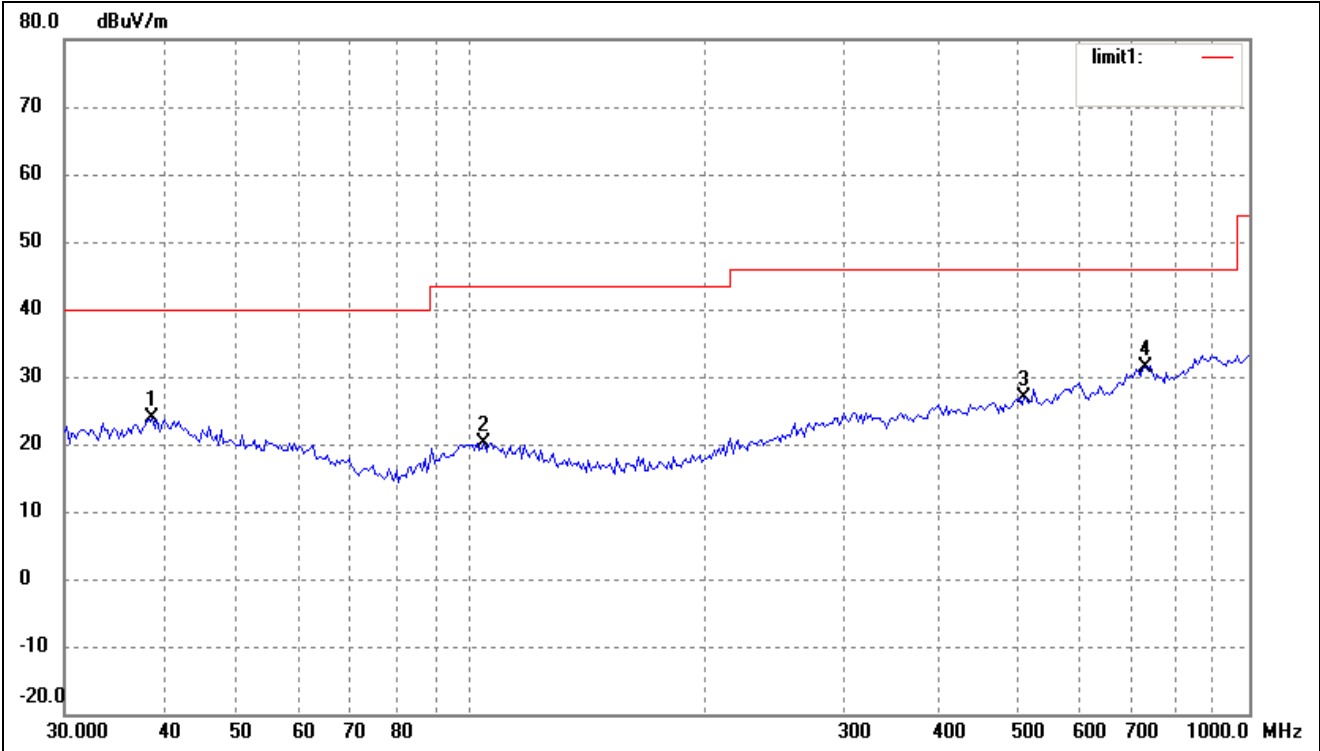


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.8879	14.75	9.06	23.81	40.00	-16.19	177	100	peak
2	103.8055	14.46	5.73	20.19	43.50	-23.31	90	100	peak
3	513.6331	15.58	11.21	26.79	46.00	-19.21	336	100	peak
4	734.4913	16.04	15.22	31.26	46.00	-14.74	360	100	peak

Test Specification: Vertical

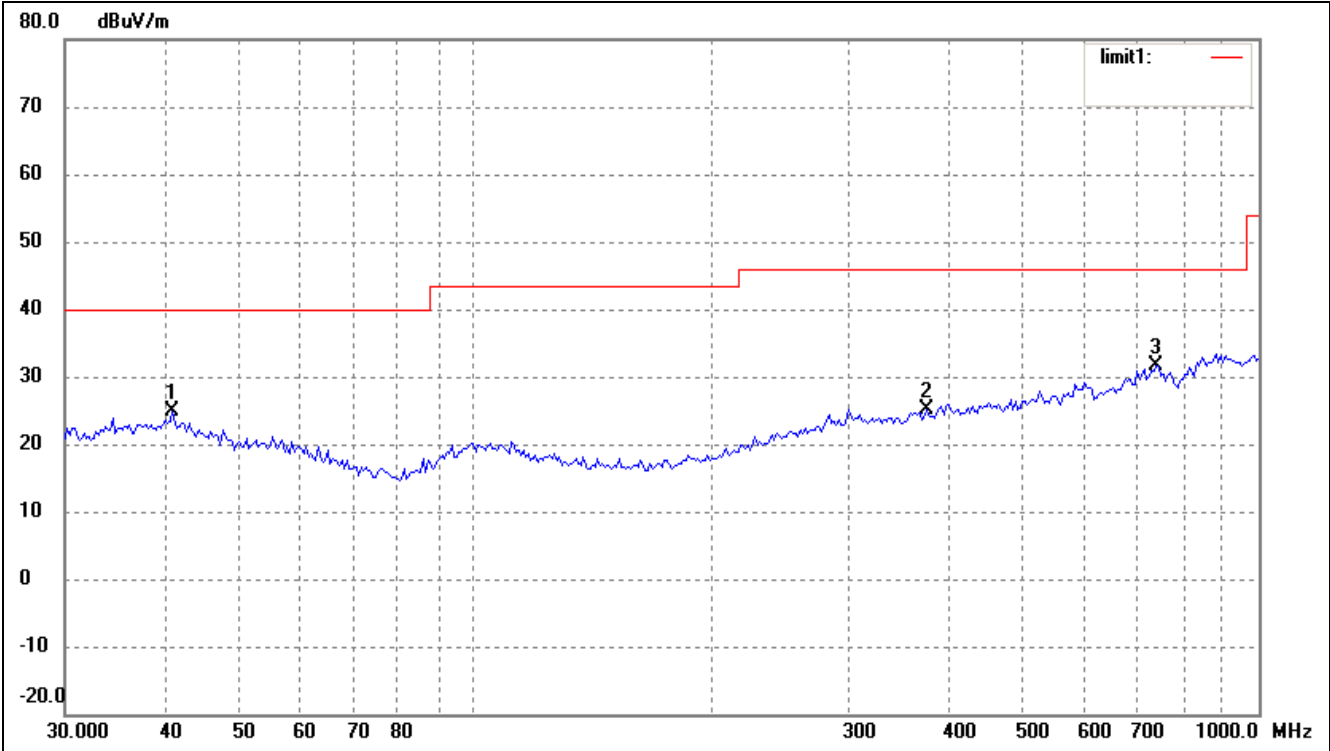


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	41.1320	15.91	8.91	24.82	40.00	-15.18	270	100	peak
2	377.2591	16.03	9.20	25.23	46.00	-20.77	164	100	peak
3	739.6605	16.06	15.53	31.59	46.00	-14.41	228	200	peak

Test mode: Transmitting Channel 5240MHz
Horizontal

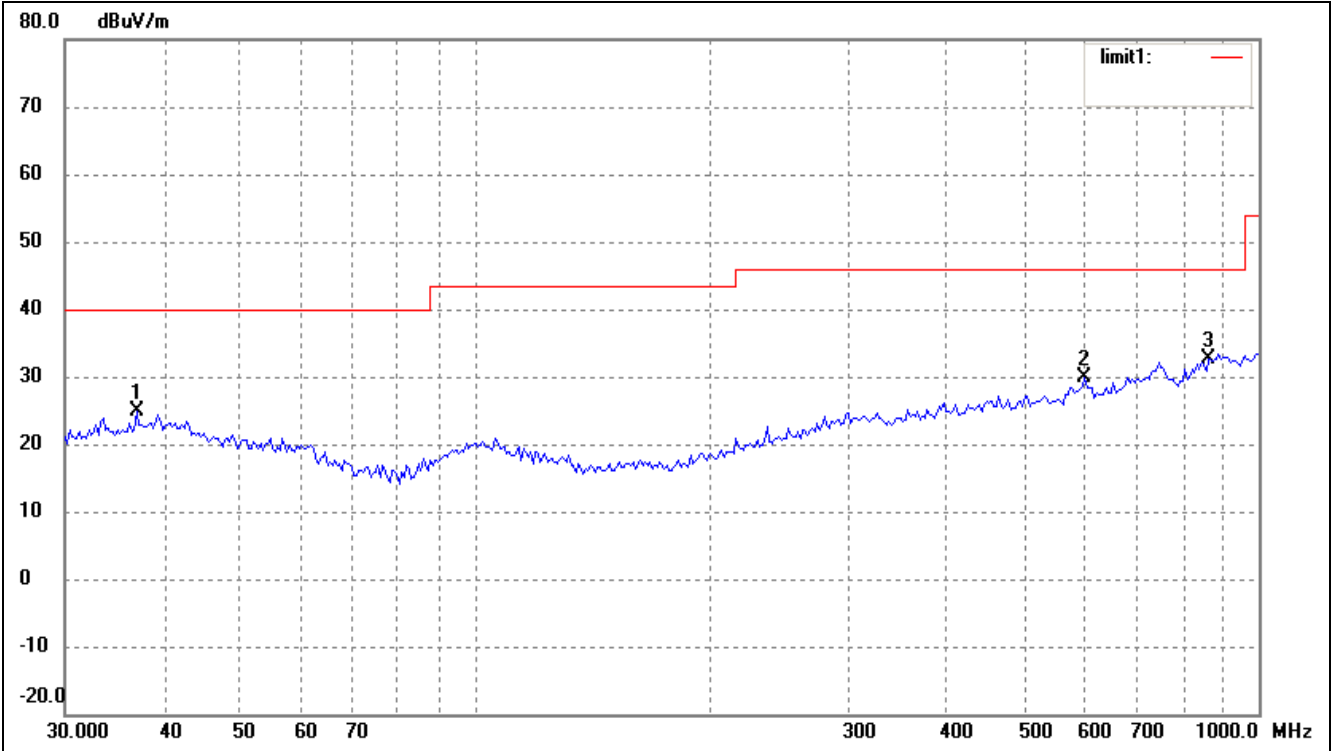


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	37.0249	16.07	8.74	24.81	40.00	-15.19	264	100	peak
2	599.3213	16.46	13.30	29.76	46.00	-16.24	110	100	peak
3	863.0562	16.29	16.38	32.67	46.00	-13.33	136	100	peak

Test Specification: Vertical

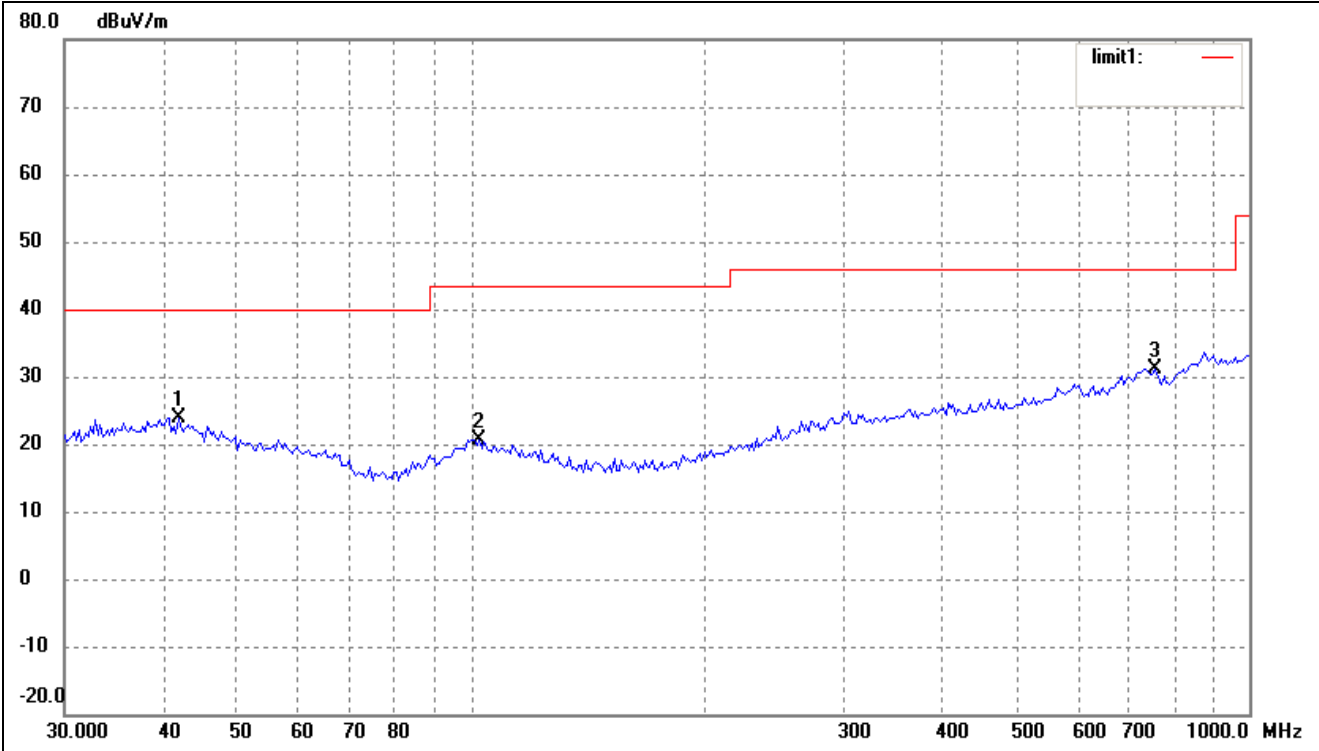


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	42.0066	15.29	8.65	23.94	40.00	-16.06	360	100	peak
2	102.3597	14.80	5.88	20.68	43.50	-22.82	112	100	peak
3	755.3873	16.28	14.86	31.14	46.00	-14.86	180	200	peak

Test mode: Transmitting Channel 5745MHz
Horizontal

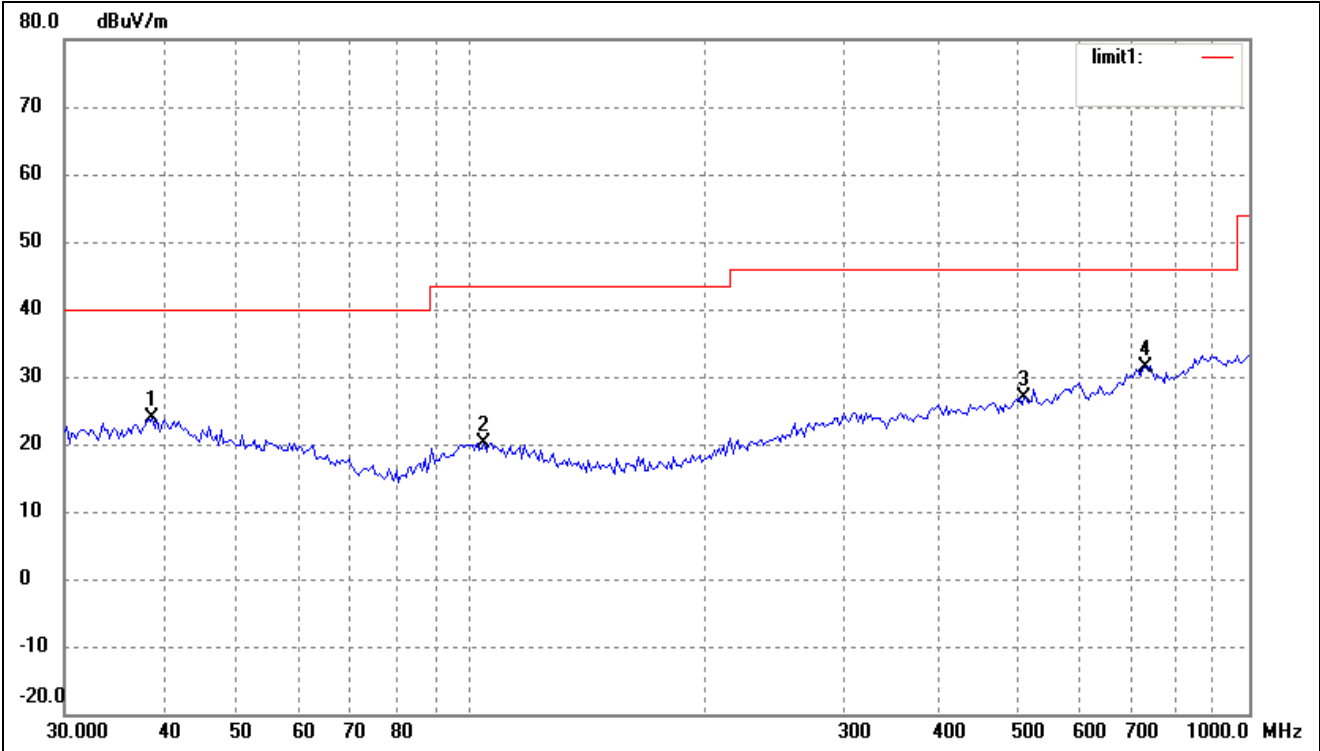


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.8879	14.75	9.06	23.81	40.00	-16.19	177	100	peak
2	103.8055	14.46	5.73	20.19	43.50	-23.31	90	100	peak
3	513.6331	15.58	11.21	26.79	46.00	-19.21	336	100	peak
4	734.4913	16.04	15.22	31.26	46.00	-14.74	360	100	peak

Test Specification: Vertical

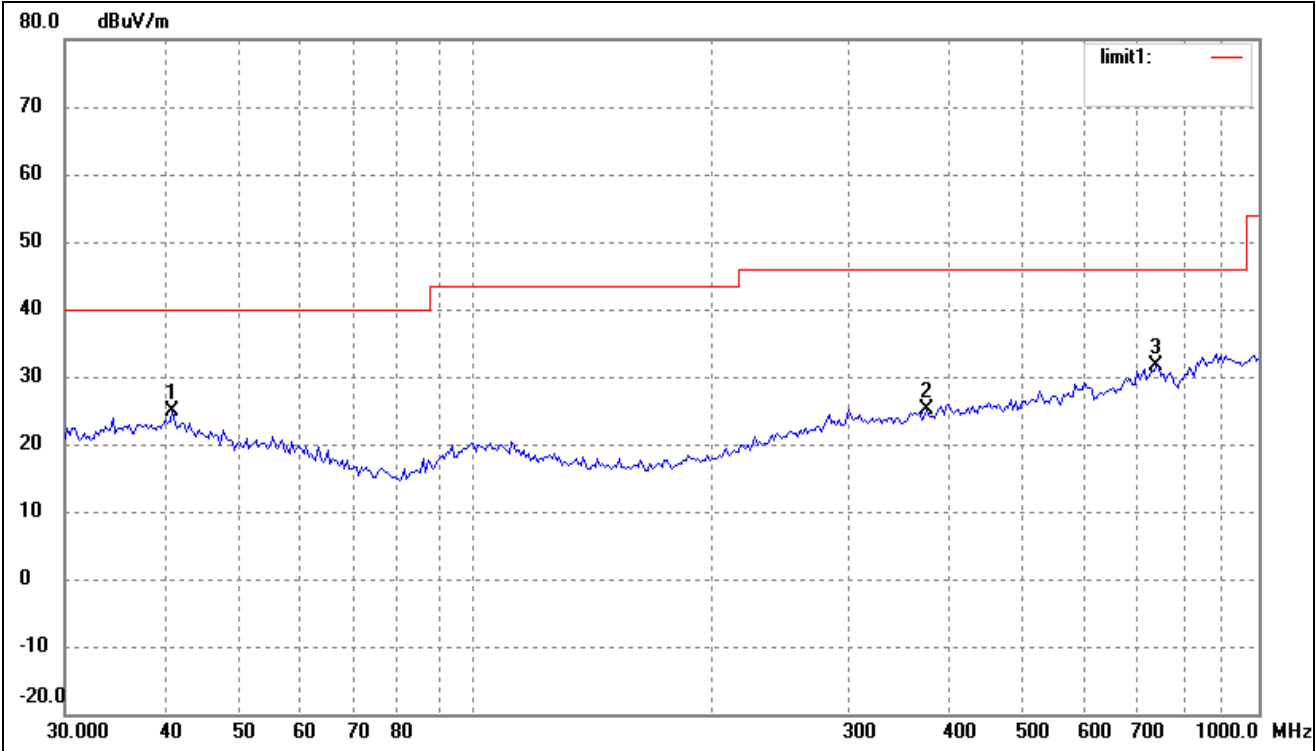


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	41.1320	15.91	8.91	24.82	40.00	-15.18	270	100	peak
2	377.2591	16.03	9.20	25.23	46.00	-20.77	164	100	peak
3	739.6605	16.06	15.53	31.59	46.00	-14.41	228	200	peak

Test mode: Transmitting Channel 5785MHz
Horizontal

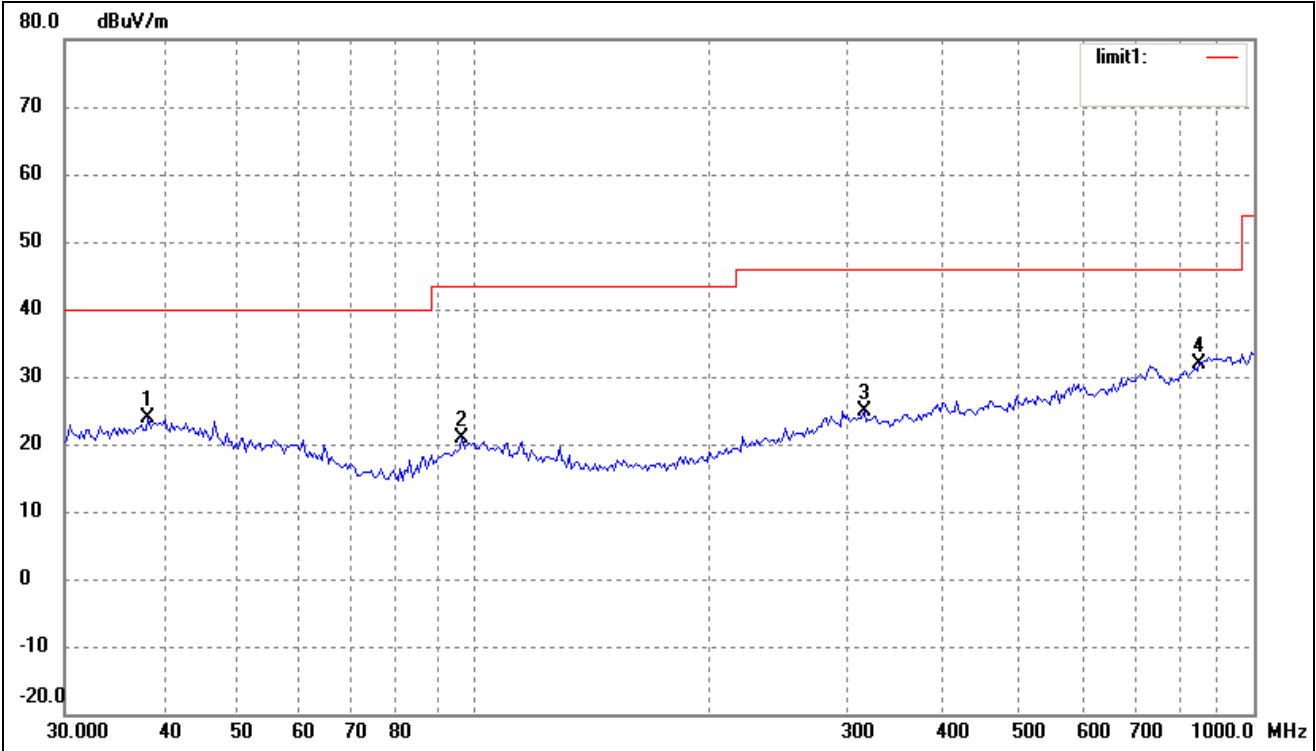


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.3462	14.80	8.97	23.77	40.00	-16.23	270	100	peak
2	96.7749	15.52	5.32	20.84	43.50	-22.66	51	200	peak
3	316.5890	15.66	9.28	24.94	46.00	-21.06	360	200	peak
4	851.0353	15.81	15.97	31.78	46.00	-14.22	360	100	peak

Test Specification: Vertical

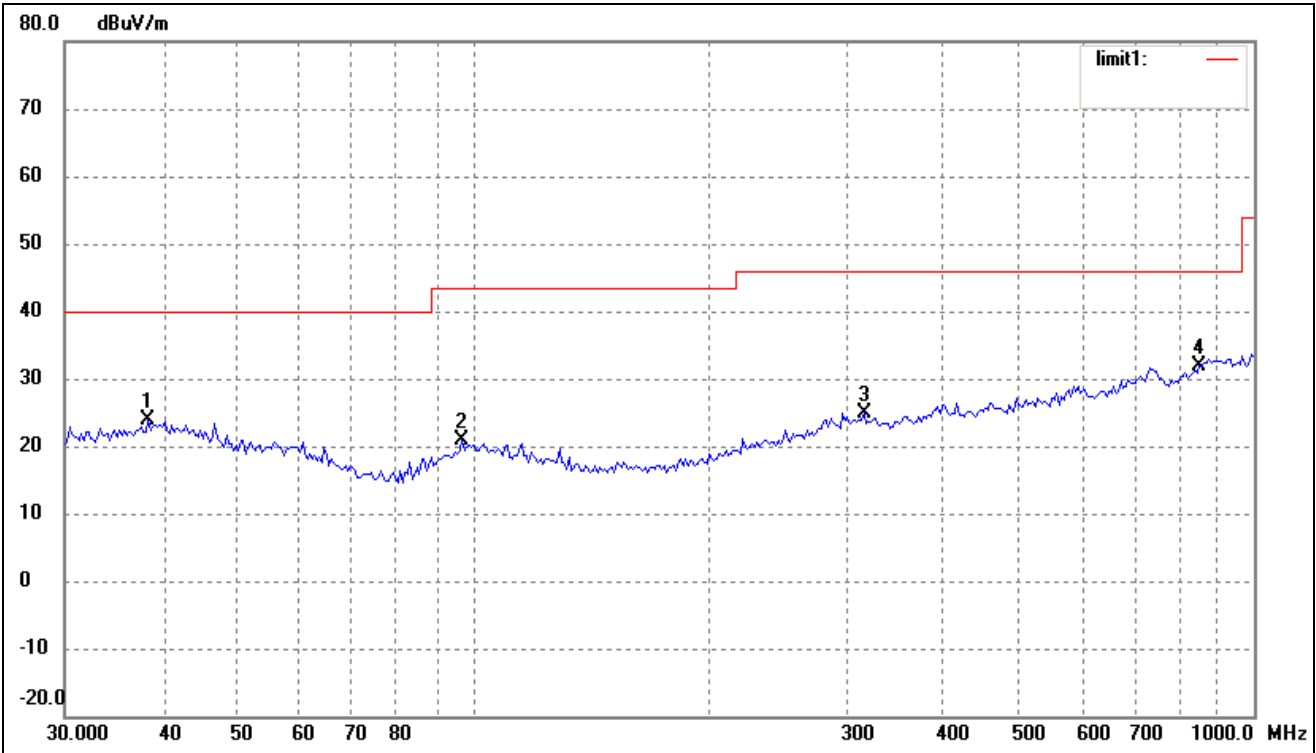


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.3462	14.80	8.97	23.77	40.00	-16.23	270	100	peak
2	96.7749	15.52	5.32	20.84	43.50	-22.66	51	200	peak
3	316.5890	15.66	9.28	24.94	46.00	-21.06	360	200	peak
4	851.0353	15.81	15.97	31.78	46.00	-14.22	360	100	peak

Test mode: Transmitting Channel 5805MHz
Horizontal

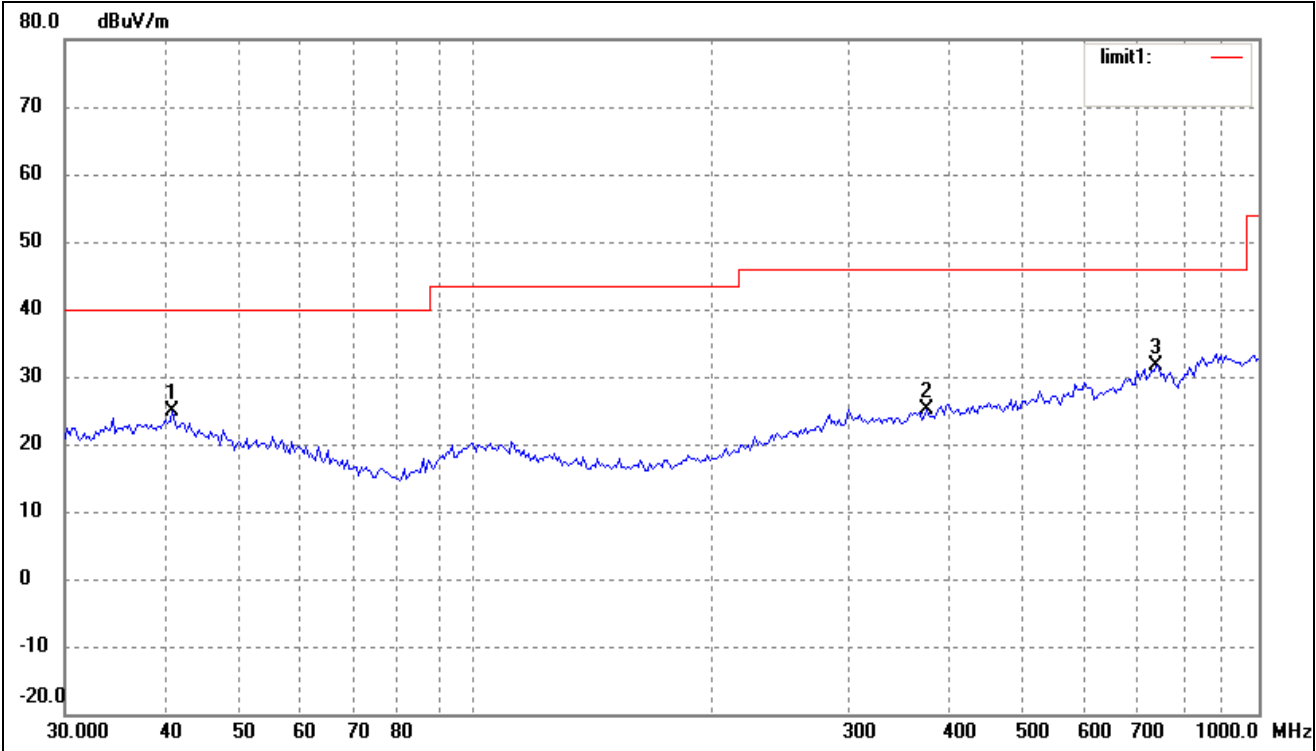

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	41.1320	15.91	8.91	24.82	40.00	-15.18	270	100	peak
2	377.2591	16.03	9.20	25.23	46.00	-20.77	164	100	peak
3	739.6605	16.06	15.53	31.59	46.00	-14.41	228	200	peak

Test Specification: Vertical

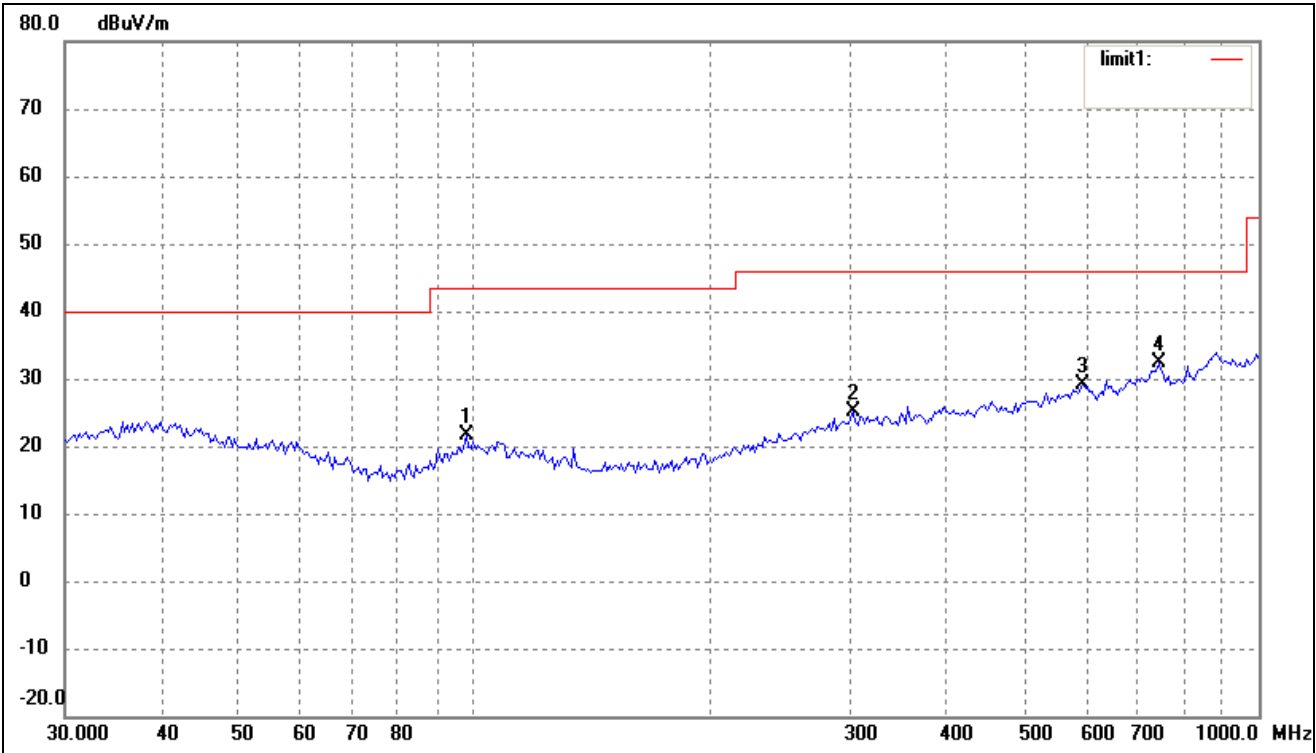

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	97.4560	16.14	5.49	21.63	43.50	-21.87	260	100	peak
2	303.5437	15.82	9.19	25.01	46.00	-20.99	131	200	peak
3	595.1329	15.93	13.14	29.07	46.00	-16.93	285	200	peak
4	744.8661	16.95	15.33	32.28	46.00	-13.72	224	100	peak